



# **RADIO TEST REPORT**

**FCC ID** : MSQ-RTAXE4P00  
**Equipment** : AXE11000 Tri Band WiFi Router  
**Brand Name** : ASUS  
**Model Name** : ET12, ZenWiFi ET12, ASUS ZenWiFi ET12  
**Applicant** : ASUSTeK COMPUTER INC.  
1F., No. 15, Lide Rd., Beitou, Taipei 112, Taiwan  
**Manufacturer (1)** : Compal Networking (KunShan) Co., LTD.  
No. 520, Nanbang Rd., Economic & Technical  
Development Zone Kunshan, Jiangsu Province  
China  
**Manufacturer (2)** : ARCADYAN TECHNOLOGY (VIETNAM) CO., LTD.  
Ba Thien Industrial Park, Ba Hien commune, Binh  
Xuyen district, Vinh Phuc Province  
**Standard** : 47 CFR FCC Part 15.407

The product was received on Jul. 19, 2021, and testing was started from Jul. 21, 2021 and completed on Oct. 19, 2021. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Cliff Chang

**Sporton International Inc. Hsinchu Laboratory**

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>History of this test report.....</b>                              | <b>3</b>  |
| <b>Summary of Test Result.....</b>                                   | <b>4</b>  |
| <b>1 General Description .....</b>                                   | <b>5</b>  |
| 1.1 Information.....                                                 | 5         |
| 1.2 Applicable Standards .....                                       | 10        |
| 1.3 Testing Location Information .....                               | 10        |
| 1.4 Measurement Uncertainty .....                                    | 11        |
| <b>2 Test Configuration of EUT.....</b>                              | <b>12</b> |
| 2.1 Test Channel Mode .....                                          | 12        |
| 2.2 The Worst Case Measurement Configuration.....                    | 14        |
| 2.3 EUT Operation during Test .....                                  | 15        |
| 2.4 Accessories .....                                                | 16        |
| 2.5 Support Equipment.....                                           | 16        |
| 2.6 Test Setup Diagram .....                                         | 18        |
| <b>3 Transmitter Test Result .....</b>                               | <b>22</b> |
| 3.1 AC Power-line Conducted Emissions .....                          | 22        |
| 3.2 Emission Bandwidth .....                                         | 24        |
| 3.3 Maximum Output Power .....                                       | 25        |
| 3.4 Power Spectral Density .....                                     | 28        |
| 3.5 Unwanted Emissions.....                                          | 31        |
| <b>4 Test Equipment and Calibration Data .....</b>                   | <b>36</b> |
| <b>Appendix A. Test Results of AC Power-line Conducted Emissions</b> |           |
| <b>Appendix B. Test Results of Emission Bandwidth</b>                |           |
| <b>Appendix C. Test Results of Maximum Output Power</b>              |           |
| <b>Appendix D. Test Results of Power Spectral Density</b>            |           |
| <b>Appendix E. Test Results of Unwanted Emissions</b>                |           |
| <b>Appendix F. Test Results of Radiated Emission Co-location</b>     |           |
| <b>Appendix G. Test Photos</b>                                       |           |
| <b>Photographs of EUT v01</b>                                        |           |



TEL : 886-3-656-9065  
FAX : 886-3-656-9085  
Report Template No.: CB-A12\_1 Ver1.4



## Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items                        | Result (PASS/FAIL) | Remark |
|---------------|-----------------|-----------------------------------|--------------------|--------|
| 1.1.2         | 15.203          | Antenna Requirement               | PASS               | -      |
| 3.1           | 15.207          | AC Power-line Conducted Emissions | PASS               | -      |
| 3.2           | 15.407(a)       | Emission Bandwidth                | PASS               | -      |
| 3.3           | 15.407(a)       | Maximum Output Power              | PASS               | -      |
| 3.4           | 15.407(a)       | Power Spectral Density            | PASS               | -      |
| 3.5           | 15.407(b)       | Unwanted Emissions                | PASS               | -      |

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sam Chen**

**Report Producer: Wendy Pan**

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

| Frequency Range (MHz) | IEEE Std. 802.11                       | Ch. Frequency (MHz) | Channel Number |
|-----------------------|----------------------------------------|---------------------|----------------|
| 5150-5250             | a, n (HT20), ac (VHT20),<br>ax (HEW20) | 5180-5240           | 36-48 [4]      |
| 5725-5850             |                                        | 5745-5825           | 149-165 [5]    |
| 5150-5250             | n (HT40), ac (VHT40),<br>ax (HEW40)    | 5190-5230           | 38-46 [2]      |
| 5725-5850             |                                        | 5755-5795           | 151-159 [2]    |
| 5150-5250             | ac (VHT80), ax (HEW80)                 | 5210                | 42 [1]         |
| 5725-5850             |                                        | 5775                | 155 [1]        |

| Band          | Mode              | BWch (MHz) | Nant |
|---------------|-------------------|------------|------|
| 5.15-5.25GHz  | 802.11a           | 20         | 4    |
| 5.15-5.25GHz  | 802.11n HT20      | 20         | 4    |
| 5.15-5.25GHz  | 802.11n HT20-BF   | 20         | 4    |
| 5.15-5.25GHz  | 802.11ac VHT20    | 20         | 4    |
| 5.15-5.25GHz  | 802.11ac VHT20-BF | 20         | 4    |
| 5.15-5.25GHz  | 802.11ax HEW20    | 20         | 4    |
| 5.15-5.25GHz  | 802.11ax HEW20-BF | 20         | 4    |
| 5.15-5.25GHz  | 802.11n HT40      | 40         | 4    |
| 5.15-5.25GHz  | 802.11n HT40-BF   | 40         | 4    |
| 5.15-5.25GHz  | 802.11ac VHT40    | 40         | 4    |
| 5.15-5.25GHz  | 802.11ac VHT40-BF | 40         | 4    |
| 5.15-5.25GHz  | 802.11ax HEW40    | 40         | 4    |
| 5.15-5.25GHz  | 802.11ax HEW40-BF | 40         | 4    |
| 5.15-5.25GHz  | 802.11ac VHT80    | 80         | 4    |
| 5.15-5.25GHz  | 802.11ac VHT80-BF | 80         | 4    |
| 5.15-5.25GHz  | 802.11ax HEW80    | 80         | 4    |
| 5.15-5.25GHz  | 802.11ax HEW80-BF | 80         | 4    |
| 5.725-5.85GHz | 802.11a           | 20         | 4    |
| 5.725-5.85GHz | 802.11n HT20      | 20         | 4    |
| 5.725-5.85GHz | 802.11n HT20-BF   | 20         | 4    |
| 5.725-5.85GHz | 802.11ac VHT20    | 20         | 4    |
| 5.725-5.85GHz | 802.11ac VHT20-BF | 20         | 4    |
| 5.725-5.85GHz | 802.11ax HEW20    | 20         | 4    |
| 5.725-5.85GHz | 802.11ax HEW20-BF | 20         | 4    |
| 5.725-5.85GHz | 802.11n HT40      | 40         | 4    |



| Band          | Mode              | BWch (MHz) | Nant |
|---------------|-------------------|------------|------|
| 5.725-5.85GHz | 802.11n HT40-BF   | 40         | 4    |
| 5.725-5.85GHz | 802.11ac VHT40    | 40         | 4    |
| 5.725-5.85GHz | 802.11ac VHT40-BF | 40         | 4    |
| 5.725-5.85GHz | 802.11ax HEW40    | 40         | 4    |
| 5.725-5.85GHz | 802.11ax HEW40-BF | 40         | 4    |
| 5.725-5.85GHz | 802.11ac VHT80    | 80         | 4    |
| 5.725-5.85GHz | 802.11ac VHT80-BF | 80         | 4    |
| 5.725-5.85GHz | 802.11ax HEW80    | 80         | 4    |
| 5.725-5.85GHz | 802.11ax HEW80-BF | 80         | 4    |

**Note:**

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40, HEW80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

| Ant. | Port        |           |           |           | Brand  | Model Name        | Antenna Type | Connector | Gain (dBi) |
|------|-------------|-----------|-----------|-----------|--------|-------------------|--------------|-----------|------------|
|      | WLAN 2.4GHz | WLAN 5GHz | WLAN 6GHz | Bluetooth |        |                   |              |           |            |
| 1    | -           | -         | 3         | -         | WHA YU | C660-510565-A     | PIFA         | I-PEX     | Note1      |
| 2    | -           | -         | 2         | -         | WHA YU | C660-510565-A     | PIFA         | I-PEX     |            |
| 3    | -           | -         | 1         | -         | WHA YU | C660-510565-A     | PIFA         | I-PEX     |            |
| 4    | -           | -         | 4         | -         | WHA YU | C660-510565-A     | PIFA         | I-PEX     |            |
| 5    | 3           | 2         | -         | -         | WHA YU | C660-510565-A     | PIFA         | I-PEX     |            |
| 6    | 4           | 1         | -         | -         | WHA YU | C660-510565-A     | PIFA         | I-PEX     |            |
| 7    | 1           | 4         | -         | -         | WHA YU | C660-510565-A     | PIFA         | I-PEX     |            |
| 8    | 2           | 3         | -         | -         | WHA YU | C660-510565-A     | PIFA         | I-PEX     |            |
| 9    | -           | -         | -         | 1         | YAGEO  | ANT3216A063R2400A | Chip         | N/A       |            |

**Note1:**

| Ant. | Port        |           |           |           | Antenna Gain (dBi) |           |        |           |        |        |        |           |
|------|-------------|-----------|-----------|-----------|--------------------|-----------|--------|-----------|--------|--------|--------|-----------|
|      | WLAN 2.4GHz | WLAN 5GHz | WLAN 6GHz | Bluetooth | WLAN 2.4GHz        | WLAN 5GHz |        | WLAN 6GHz |        |        |        | Bluetooth |
|      |             |           |           |           |                    | UNII 1    | UNII 3 | UNII 5    | UNII 6 | UNII 7 | UNII 8 |           |
| 1    | -           | -         | 3         | -         | -                  | -         | -      | 0.97      | 0.81   | 1.07   | 1.14   | -         |
| 2    | -           | -         | 2         | -         | -                  | -         | -      |           |        |        |        | -         |
| 3    | -           | -         | 1         | -         | -                  | -         | -      |           |        |        |        | -         |
| 4    | -           | -         | 4         | -         | -                  | -         | -      |           |        |        |        | -         |

| Ant. | Port        |           |           |           | Antenna Gain (dBi) |           |        |           |        |        |        |           |
|------|-------------|-----------|-----------|-----------|--------------------|-----------|--------|-----------|--------|--------|--------|-----------|
|      | WLAN 2.4GHz | WLAN 5GHz | WLAN 6GHz | Bluetooth | WLAN 2.4GHz        | WLAN 5GHz |        | WLAN 6GHz |        |        |        | Bluetooth |
|      |             |           |           |           |                    | UNII 1    | UNII 3 | UNII 5    | UNII 6 | UNII 7 | UNII 8 |           |
| 5    | 3           | 2         | -         | -         | 3.03               | 3.63      | 4.44   | -         | -      | -      | -      | -         |
| 6    | 4           | 1         | -         | -         | 2.13               | 4.04      | 3.14   | -         | -      | -      | -      | -         |
| 7    | 1           | 4         | -         | -         | 2.34               | 2.76      | 3.46   | -         | -      | -      | -      | -         |
| 8    | 2           | 3         | -         | -         | 3.67               | 4.17      | 4.94   | -         | -      | -      | -      | -         |
| 9    | -           | -         | -         | 1         | -                  | -         | -      | -         | -      | -      | -      | 1.69      |

| Directional Gain (dBi) |      |                  |      |                  |      |
|------------------------|------|------------------|------|------------------|------|
| WLAN 2.4GHz            |      | WLAN 5GHz UNII 1 |      | WLAN 5GHz UNII 3 |      |
| 4T1S                   | 4T2S | 4T1S             | 4T2S | 4T1S             | 4T2S |
| 6.66                   | 3.67 | 4.32             | 4.17 | 5.09             | 4.94 |

Note2: The above information was declared by manufacturer.

WLAN 6GHz: The directional gain is calculated which follows the procedure of KDB 662911 D01.

WLAN 2.4GHz/5GHz: The directional gain is measured which follows the procedure of KDB 662911 D03.

The antenna report is provided in the operational description for this application.

**For 2.4GHz function:**

**For IEEE 802.11b/g/n/VHT/ax (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

**For 5GHz function:**

**For IEEE 802.11a/n/ac/ax (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

**For 6GHz function:**

**For IEEE 802.11ax (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

**For Bluetooth Function:**

**For Bluetooth mode (1TX/1RX)**

Only Port 1 can be use as transmit and receive antenna.



**1.1.3 Mode Test Duty Cycle**

| Mode                     | DC    | DCF(dB) | T(s)   | VBW(Hz) ≥ 1/T |
|--------------------------|-------|---------|--------|---------------|
| 802.11a (4T1S)           | 0.958 | 0.19    | 2.064m | 1k            |
| 802.11ax HEW20-BF (4T1S) | 0.956 | 0.2     | 2.926m | 1k            |
| 802.11ax HEW40-BF (4T1S) | 0.96  | 0.18    | 4.36m  | 300           |
| 802.11ax HEW40-BF (4T2S) | 0.962 | 0.17    | 5.085m | 300           |
| 802.11ax HEW80-BF (4T1S) | 0.955 | 0.2     | 4.145m | 300           |
| 802.11ax HEW80-BF (4T2S) | 0.965 | 0.15    | 5.198m | 300           |

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.4 EUT Operational Condition**

|                              |                                                                                              |                  |                                     |                     |
|------------------------------|----------------------------------------------------------------------------------------------|------------------|-------------------------------------|---------------------|
| <b>EUT Power Type</b>        | From Power Adapter                                                                           |                  |                                     |                     |
| <b>Beamforming Function</b>  | <input checked="" type="checkbox"/>                                                          | With beamforming | <input type="checkbox"/>            | Without beamforming |
|                              | The product has beamforming function for n/VHT/ax in 2.4GHz, n/ac/ax in 5GHz and ax in 6GHz. |                  |                                     |                     |
| <b>Function</b>              | <input type="checkbox"/>                                                                     | Outdoor P2M      | <input checked="" type="checkbox"/> | Indoor P2M          |
|                              | <input type="checkbox"/>                                                                     | Fixed P2P        | <input type="checkbox"/>            | Client              |
| <b>Test Software Version</b> | accessMTool(ver 3.2.1.3), DOS [6.1.7601]                                                     |                  |                                     |                     |

Note: The above information was declared by manufacturer.

**1.1.5 Table for Multiple Listing**

| Brand Name | Model Name        | Description                                                                             |
|------------|-------------------|-----------------------------------------------------------------------------------------|
| ASUS       | ET12              | All the models are identical, the different model names served as a marketing strategy. |
|            | ZenWiFi ET12      |                                                                                         |
|            | ASUS ZenWiFi ET12 |                                                                                         |

Note: From the above model: ET12 was selected as representative model for the test and its data was recorded in this report.

The above information was declared by manufacturer.

**1.1.6 Table for components source information**

| Items                  | Main Source                       | Second Source                      |
|------------------------|-----------------------------------|------------------------------------|
| Transceiver (2.5G LAN) | Brand: MAXLINEAR<br>Model: GPY211 | Brand: Broadcom<br>Model: BCM50991 |

Note: The above information was declared by manufacturer.



**1.1.7 Table for EUT Supports Function**

| Function  | Support Type                  | Remark                   |
|-----------|-------------------------------|--------------------------|
| AP Router | Master                        | Support 2.4GHz/5GHz/6GHz |
| Bridge    | Slave without radar detection | Support 2.4GHz/5GHz      |
| Repeater  | Master                        | Support 2.4GHz/5GHz      |
| Mesh      | Master                        | Support 2.4GHz/5GHz/6GHz |

Note: From the above, AP Router (Master) has been selected to test AC power-line conducted emissions and Unwanted Emissions below 1GHz items.

The above information was declared by manufacturer.



## 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

## 1.3 Testing Location Information

| Testing Location Information                              |                                                                                    |
|-----------------------------------------------------------|------------------------------------------------------------------------------------|
| Test Lab. : Sporton International Inc. Hsinchu Laboratory |                                                                                    |
| Hsinchu                                                   | ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) |
| (TAF: 3787)                                               | TEL: 886-3-656-9065 FAX: 886-3-656-9085                                            |
|                                                           | Test site Designation No. TW3787 with FCC.                                         |
|                                                           | Conformity Assessment Body Identifier (CABID) TW3787 with ISED.                    |

| Test Condition       | Test Site No. | Test Engineer | Test Environment<br>(°C / %) | Test Date                        |
|----------------------|---------------|---------------|------------------------------|----------------------------------|
| RF Conducted         | TH01-CB       | Lucas Huang   | 22.4-22.8 / 55~60            | Sep. 28, 2021~<br>Oct. 06, 2021  |
| Radiated<1GHz        | 03CH05-CB     | Stim Sung     | 23.5-24.6 / 55-59            | Oct. 14, 2021 ~<br>Oct. 19, 2021 |
| Radiated>1GHz        | 03CH06-CB     | Stim Sung     | 24.4-25.5 / 55-58            | Jul. 21, 2021 ~<br>Sep. 30, 2021 |
| Radiated Co-location | 03CH05-CB     | Stim Sung     | 23.5-24.6 / 55-59            | Oct. 04, 2021                    |
| AC Conduction        | CO01-CB       | Peter Wu      | 22~24 / 58~60                | Sep. 09, 2021                    |



## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Test Items                           | Uncertainty | Remark                   |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz)  | 2.0 dB      | Confidence levels of 95% |
| Radiated Emission (9kHz ~ 30MHz)     | 4.2 dB      | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 5.5 dB      | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz)     | 4.7 dB      | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz)    | 4.2 dB      | Confidence levels of 95% |
| Conducted Emission                   | 2.5 dB      | Confidence levels of 95% |
| Output Power Measurement             | 1.3 dB      | Confidence levels of 95% |
| Power Density Measurement            | 2.5 dB      | Confidence levels of 95% |
| Bandwidth Measurement                | 0.9%        | Confidence levels of 95% |



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

For 4T1S:

| Mode                              | Power Setting |
|-----------------------------------|---------------|
| 802.11a_Nss1,(6Mbps)_4TX          | -             |
| 5180MHz                           | 99            |
| 5200MHz                           | 99            |
| 5240MHz                           | 100           |
| 5745MHz                           | 99            |
| 5785MHz                           | 100           |
| 5825MHz                           | 100           |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | -             |
| 5180MHz                           | 98            |
| 5200MHz                           | 98            |
| 5240MHz                           | 99            |
| 5745MHz                           | 98            |
| 5785MHz                           | 98            |
| 5825MHz                           | 96            |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | -             |
| 5190MHz                           | 92            |
| 5230MHz                           | 98            |
| 5755MHz                           | 96            |
| 5795MHz                           | 97            |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | -             |
| 5210MHz                           | 92            |
| 5775MHz                           | 93            |

**For 4T2S:**

| Mode                              | Power Setting |
|-----------------------------------|---------------|
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | -             |
| 5190MHz                           | 95            |
| 5230MHz                           | 97            |
| 5755MHz                           | 96            |
| 5795MHz                           | 97            |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | -             |
| 5210MHz                           | 91            |
| 5775MHz                           | 94            |

- ♦ Note1: There are two modes of EUT for n/VHT/ax in 2.4GHz and n/ac/ax in 5GHz. One is beamforming mode, and the other is non-beamforming mode, after evaluating, beamforming mode has been evaluated to be the worst case, so it was selected to test and record in this test report.
- ♦ Note2: Evaluated HEW20/HEW40 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40 mode are the same or lower than HEW20/HEW40.

## 2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests                                                                           |                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                                                                                             | AC power-line conducted emissions                                                       |
| <b>Condition</b>                                                                                                              | AC power-line conducted measurement for line and neutral<br>Test Voltage: 120Vac / 60Hz |
| <b>Operating Mode</b>                                                                                                         | Normal Link                                                                             |
| 1                                                                                                                             | EUT + 2.5G-PHY(Main source) + Adapter 1                                                 |
| 2                                                                                                                             | EUT + 2.5G-PHY(Main source) + Adapter 2                                                 |
| Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode. |                                                                                         |
| 3                                                                                                                             | EUT + 2.5G-PHY (Second source) + Adapter 1                                              |
| For operating mode 3 is the worst case and it was record in this test report.                                                 |                                                                                         |

| The Worst Case Mode for Following Conformance Tests |                                                                      |
|-----------------------------------------------------|----------------------------------------------------------------------|
| <b>Tests Item</b>                                   | Emission Bandwidth<br>Maximum Output Power<br>Power Spectral Density |
| <b>Test Condition</b>                               | Conducted measurement at transmit chains                             |
| 1                                                   | EUT + 2.5G-PHY(Main source)                                          |

| The Worst Case Mode for Following Conformance Tests                                                                           |                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                                                                                             | Unwanted Emissions                                                                                                                                                                                                                                  |
| <b>Test Condition</b>                                                                                                         | Radiated measurement<br>If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| <b>Operating Mode &lt; 1GHz</b>                                                                                               | Normal Link                                                                                                                                                                                                                                         |
|                                                                                                                               | The EUT was performed at X axis, Y axis and Z axis position for Unwanted Emissions above 1GHz test, and the worst case was found at Z axis. So the measurement will follow this same test configuration.                                            |
| 1                                                                                                                             | EUT in Y axis + 2.5G-PHY(Main source) + Adapter 1                                                                                                                                                                                                   |
| 2                                                                                                                             | EUT in Y axis + 2.5G-PHY(Main source) + Adapter 2                                                                                                                                                                                                   |
| Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode. |                                                                                                                                                                                                                                                     |
| 3                                                                                                                             | EUT in Y axis + 2.5G-PHY (Second source) + Adapter 1                                                                                                                                                                                                |
| For operating mode 3 is the worst case and it was record in this test report.                                                 |                                                                                                                                                                                                                                                     |
| <b>Operating Mode &gt; 1GHz</b>                                                                                               | The EUT was performed at X axis, Y axis and Z axis position, and the worst case was found at Y axis. So the measurement will follow this same test configuration.                                                                                   |
|                                                                                                                               | CTX - EUT in Y axis + 2.5G-PHY(Main source)                                                                                                                                                                                                         |



| The Worst Case Mode for Following Conformance Tests    |                                                                                                                                                                   |
|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tests Item                                             | Simultaneous Transmission Analysis - Radiated Emission Co-location                                                                                                |
| Test Condition                                         | Radiated measurement                                                                                                                                              |
| Operating Mode                                         | Normal Link                                                                                                                                                       |
|                                                        | The EUT was performed at X axis, Y axis and Z axis position, and the worst case was found at Y axis. So the measurement will follow this same test configuration. |
| 1                                                      | EUT in Y axis + 2.5G-PHY(Main source) / WLAN 2.4GHz + WLAN 5GHz                                                                                                   |
| Refer to Appendix G for Radiated Emission Co-location. |                                                                                                                                                                   |

| The Worst Case Mode for Following Conformance Tests                                |                                                                               |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Tests Item                                                                         | Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation       |
| Operating Mode                                                                     |                                                                               |
| 1                                                                                  | EUT + 2.5G-PHY(Main source) / WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Bluetooth |
| Refer to Sporton Test Report No.: FA0D2518 for Co-location RF Exposure Evaluation. |                                                                               |

## 2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS(ver 6.1.7601).
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by RX Device and transmit duty cycle no less than 98%.

For Normal Link Mode:

During the test, the EUT operation to normal function.





## 2.4 Accessories

| Accessories                                                            |            |            |                                                              |                                                   |
|------------------------------------------------------------------------|------------|------------|--------------------------------------------------------------|---------------------------------------------------|
| Equipment Name                                                         | Brand Name | Model Name | Rating                                                       | Remark                                            |
| Adapter 1                                                              | DELTA      | ADP-45FE   | INPUT: 100-240V~1.2A, 50-60Hz<br>OUTPUT: 19.0V, 2.37A, 45.0W | With the DC<br>Power cable:<br>Non-shielded, 1.5m |
| Adapter 2                                                              | AcBel      | ADH011     | INPUT: 100-240V~1.4A, 50-60Hz<br>OUTPUT: 19.5V, 2.31A, 45.0W | With the DC<br>Power cable:<br>Non-shielded, 1.5m |
| Others                                                                 |            |            |                                                              |                                                   |
| Power cable*1: Non-shielded, 0.9m<br>RJ-45 cable*1: Non-shielded, 1.5m |            |            |                                                              |                                                   |

## 2.5 Support Equipment

For AC Conduction:

| Support Equipment |             |            |            |               |
|-------------------|-------------|------------|------------|---------------|
| No.               | Equipment   | Brand Name | Model Name | FCC ID        |
| A                 | 2.5G WAN PC | DELL       | T3400      | N/A           |
| B                 | 2.5G LAN PC | DELL       | T3400      | N/A           |
| C                 | LAN1 NB     | DELL       | E6430      | N/A           |
| D                 | LAN2 NB     | DELL       | E6430      | N/A           |
| E                 | 2G NB       | DELL       | E6430      | N/A           |
| F                 | 5G NB       | DELL       | E6430      | N/A           |
| G                 | 6G Device   | ASUS       | ET12       | MSQ-RTAXE4P00 |
| H                 | Device NB   | DELL       | E6430      | N/A           |

For Radiated (below 1GHz):

| Support Equipment |             |            |            |               |
|-------------------|-------------|------------|------------|---------------|
| No.               | Equipment   | Brand Name | Model Name | FCC ID        |
| A                 | 2.5G WAN PC | DELL       | E4300      | N/A           |
| B                 | 2.5G LAN PC | DELL       | E4300      | N/A           |
| C                 | 6G NB       | DELL       | E4300      | N/A           |
| D                 | 2G NB       | DELL       | E4300      | N/A           |
| E                 | 5G NB       | DELL       | E4300      | N/A           |
| F                 | 6G Device   | ASUS       | ET12       | MSQ-RTAXE4P00 |
| G                 | LAN1 NB     | DELL       | E4300      | N/A           |
| H                 | LAN2 NB     | DELL       | E4300      | N/A           |



**For Radiated (above 1GHz):**  
**For Non-beamforming mode:**

| Support Equipment |           |            |            |        |
|-------------------|-----------|------------|------------|--------|
| No.               | Equipment | Brand Name | Model Name | FCC ID |
| A                 | Notebook  | DELL       | E4300      | N/A    |


**For Beamforming mode:**


| Support Equipment |           |            |            |               |
|-------------------|-----------|------------|------------|---------------|
| No.               | Equipment | Brand Name | Model Name | FCC ID        |
| A                 | Notebook  | DELL       | E4300      | N/A           |
| B                 | RX Device | ASUS       | ET12       | MSQ-RTAXE4P00 |
| C                 | Notebook  | DELL       | E4300      | N/A           |

**For RF Conducted:**


| Support Equipment |           |            |            |        |
|-------------------|-----------|------------|------------|--------|
| No.               | Equipment | Brand Name | Model Name | FCC ID |
| A                 | Notebook  | DELL       | E4300      | N/A    |

## 2.6 Test Setup Diagram

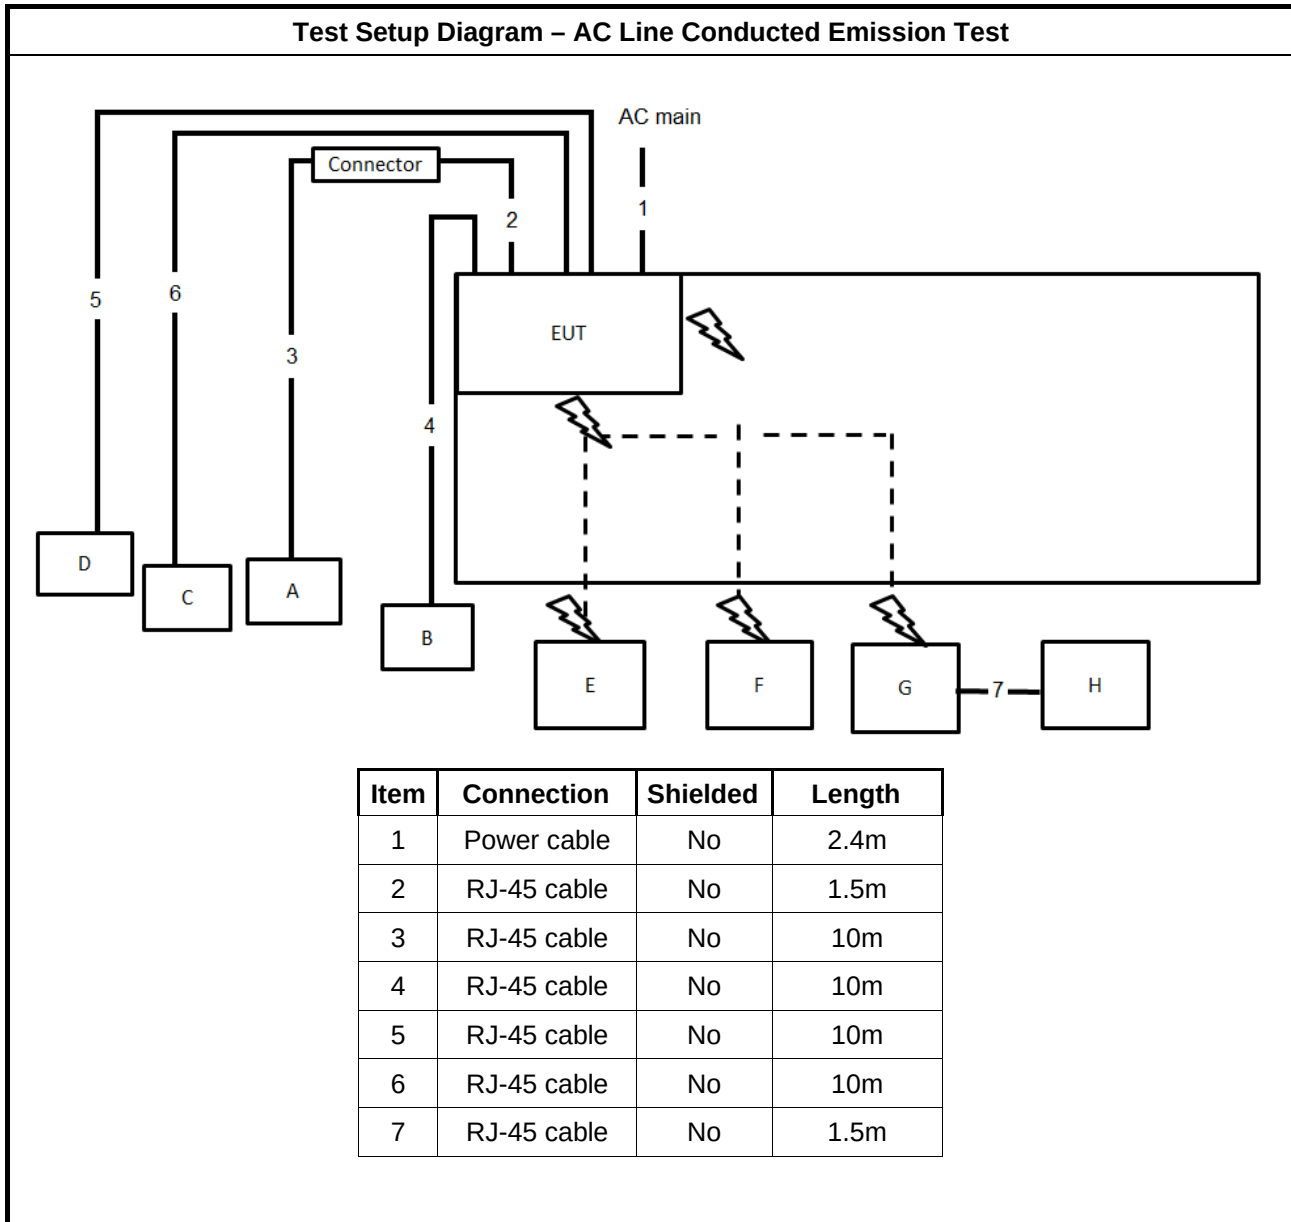


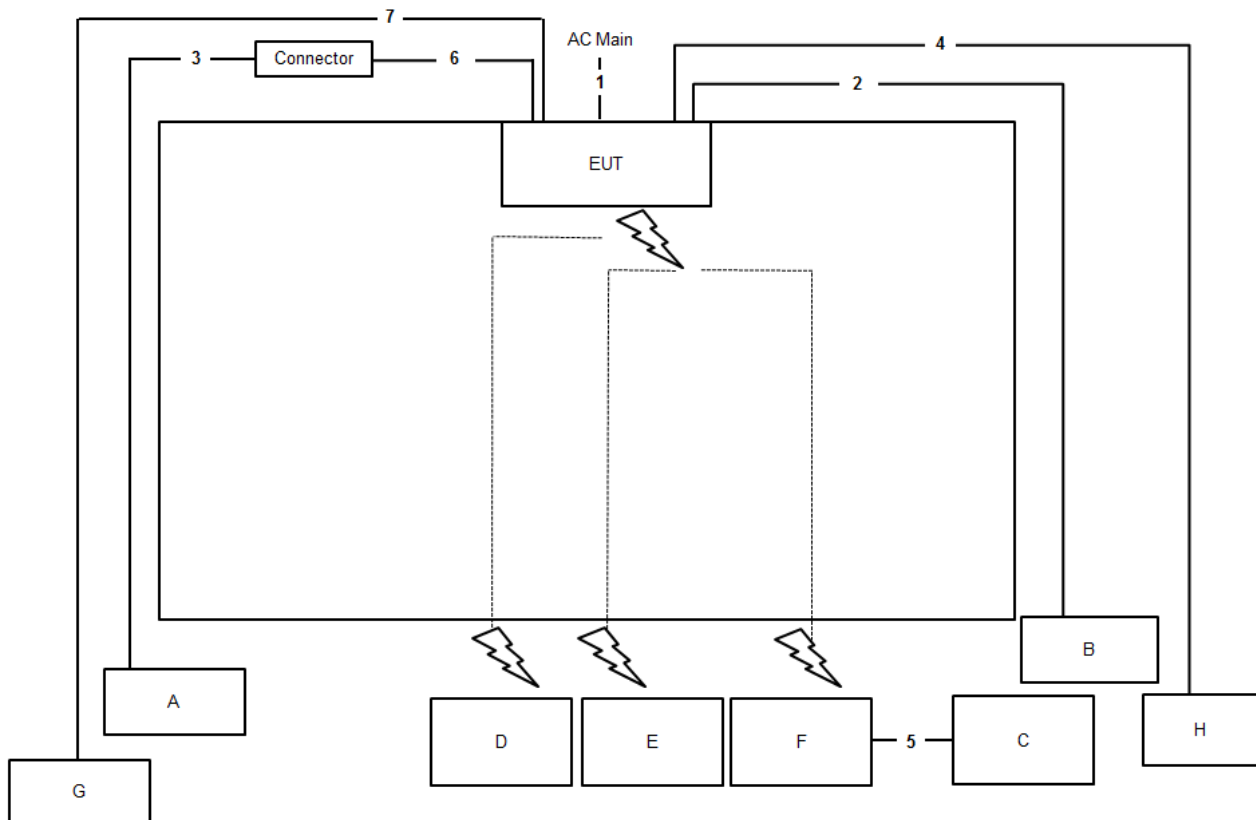**Test Setup Diagram - Radiated Test < 1GHz**


| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 2.4m   |
| 2    | RJ-45 cable | No       | 10m    |
| 3    | RJ-45 cable | No       | 10m    |
| 4    | RJ-45 cable | No       | 10m    |
| 5    | RJ-45 cable | No       | 1.5m   |
| 6    | RJ-45 cable | No       | 1.5m   |
| 7    | RJ-45 cable | No       | 10m    |

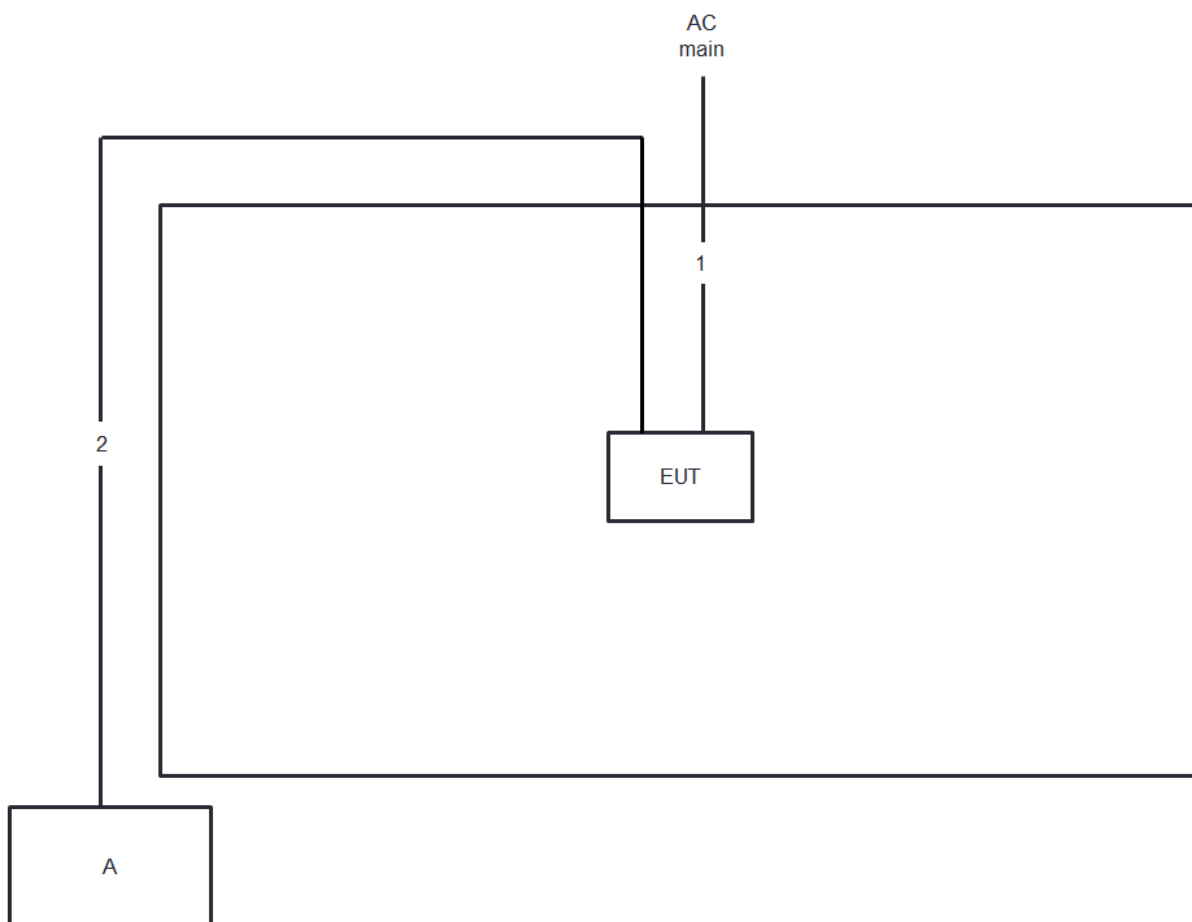**Test Setup Diagram - Radiated Test > 1GHz / Non-beamforming mode**


| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 2.4m   |
| 2    | RJ-45 cable | No       | 10m    |

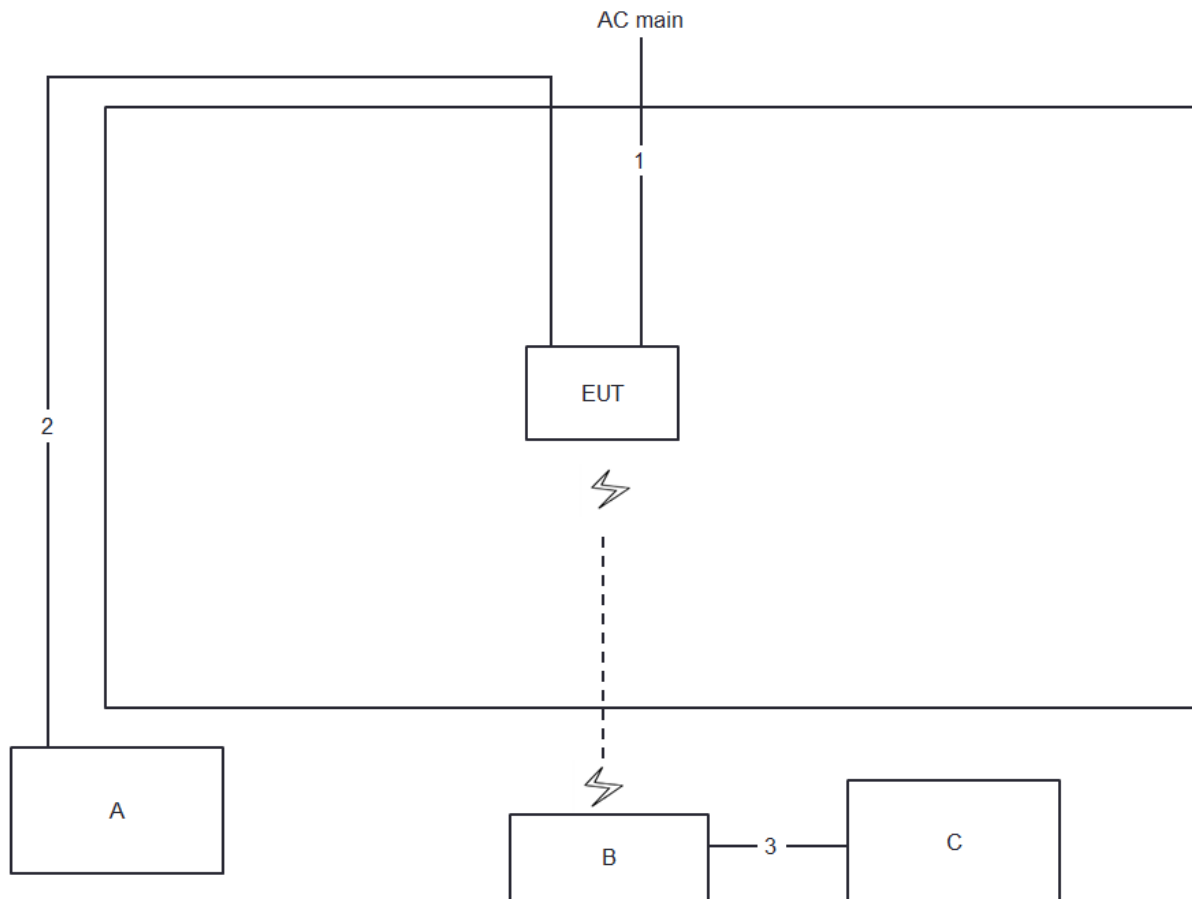**Test Setup Diagram - Radiated Test > 1GHz / beamforming mode**


| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 2.4m   |
| 2    | RJ-45 cable | No       | 10m    |
| 3    | RJ-45 cable | No       | 1.5m   |



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit |            |           |
|-----------------------------------------|------------|-----------|
| Frequency Emission (MHz)                | Quasi-Peak | Average   |
| 0.15-0.5                                | 66 - 56 *  | 56 - 46 * |
| 0.5-5                                   | 56         | 46        |
| 5-30                                    | 60         | 50        |

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

| Test Method                                                                                                      |
|------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions. |

### 3.1.4 Test Setup

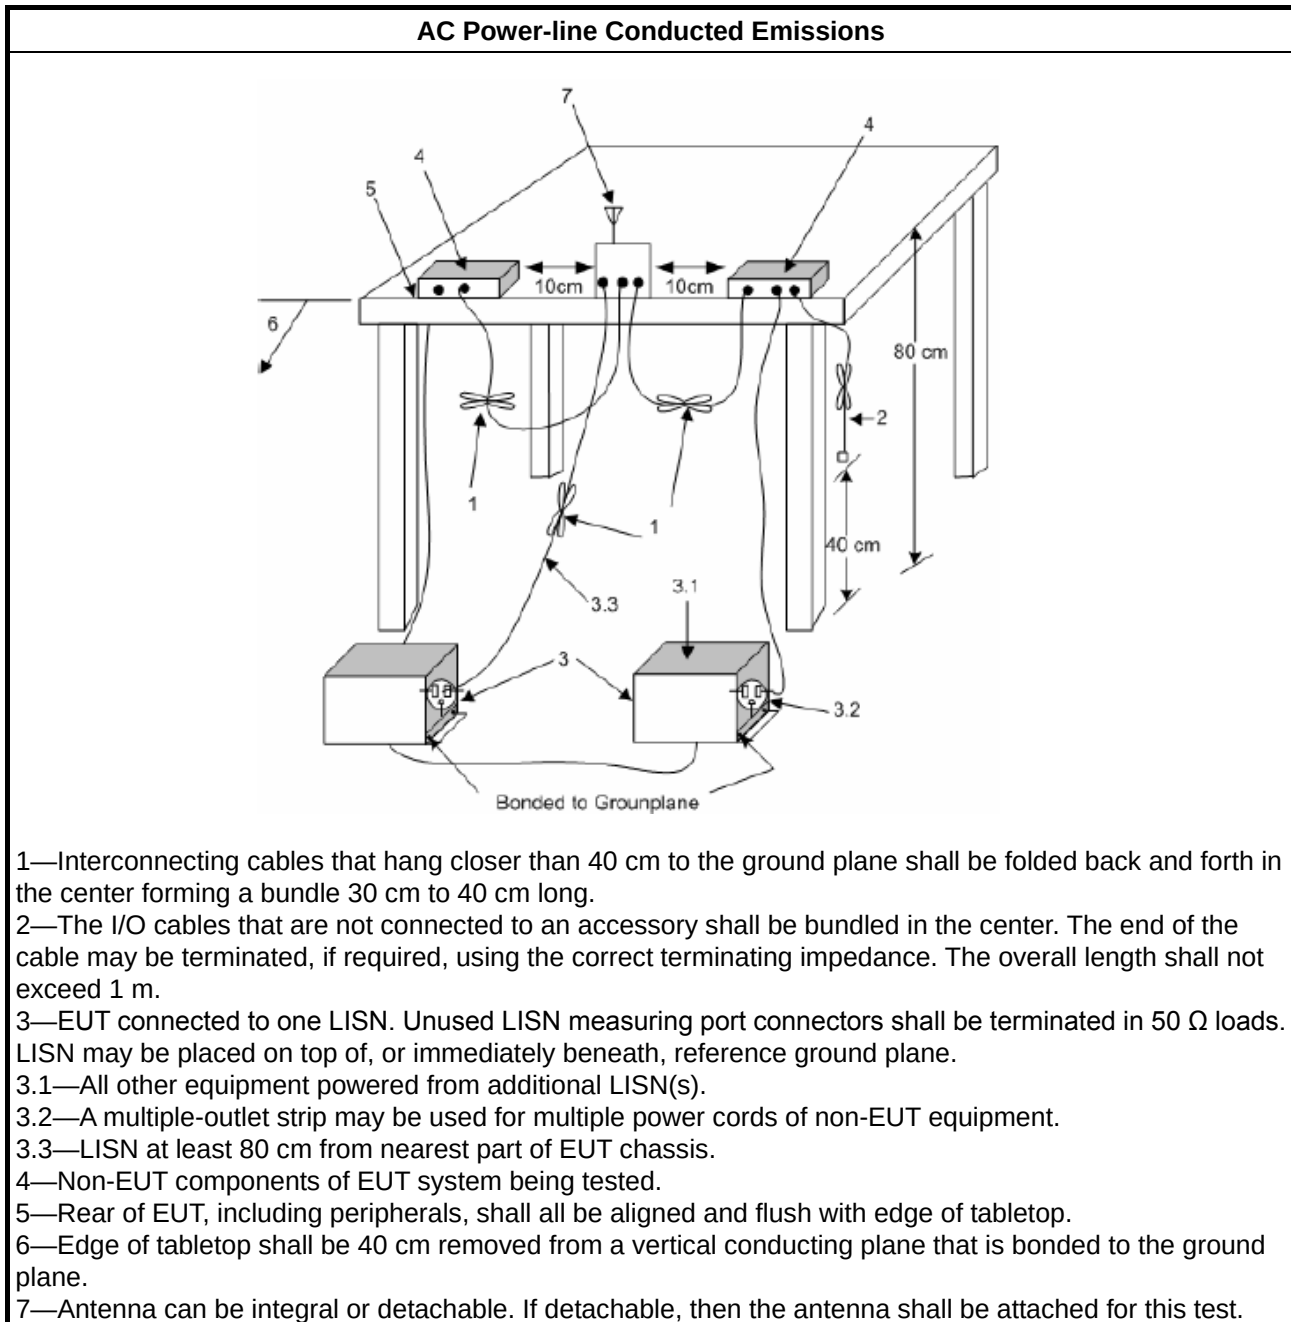

### 3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

### 3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A



## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

| Emission Bandwidth Limit            |                                                                                                                                                                                       |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                 |                                                                                                                                                                                       |
| <input checked="" type="checkbox"/> | For the 5.15-5.25 GHz band, N/A                                                                                                                                                       |
| <input type="checkbox"/>            | For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.            |
| <input type="checkbox"/>            | For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.           |
| <input checked="" type="checkbox"/> | For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.                                                                                                                   |
| <input type="checkbox"/>            | For the 5.85-5.895 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.                                                                                                                   |
| <b>LE-LAN Devices</b>               |                                                                                                                                                                                       |
| <input type="checkbox"/>            | For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.                      |
| <input type="checkbox"/>            | For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz                        |
| <input type="checkbox"/>            | For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz |
| <input type="checkbox"/>            | For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.                                                                                                                   |


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

| Test Method                                                                                                                    |                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>For the emission bandwidth shall be measured using one of the options below:</li> </ul> |                                                                             |
| <input checked="" type="checkbox"/>                                                                                            | Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement. |
| <input type="checkbox"/>                                                                                                       | Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.          |
| <input type="checkbox"/>                                                                                                       | Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.                      |

### 3.2.4 Test Setup

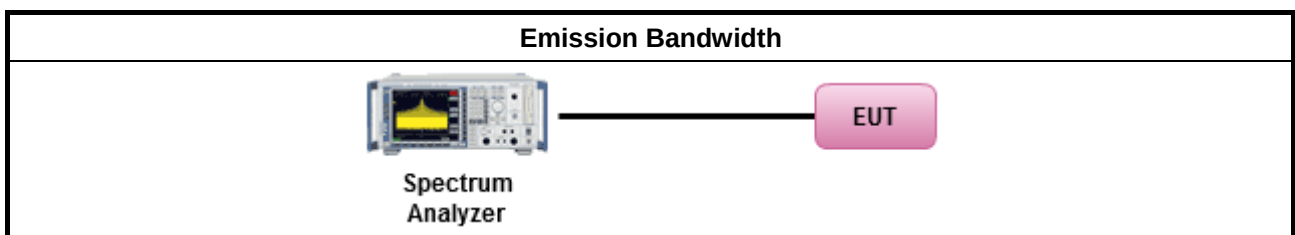

### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



### 3.3 Maximum Output Power

#### 3.3.1 Limit

| Maximum Output Power Limit                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>                                         | <ul style="list-style-type: none"><li>Outdoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>. e.i.r.p. at any elevation angle above 30 degrees <math>\leq 125</math>mW [21dBm]</li><li>Indoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math></li><li>Point-to-point AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 23)</math>.</li><li>Mobile or Portable Client: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 250 mW. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li></ul> |
| <input type="checkbox"/>                                         | For the 5.25-5.35 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <input type="checkbox"/>                                         | For the 5.47-5.725 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <input checked="" type="checkbox"/> For the 5.725-5.85 GHz band: |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>                                         | <ul style="list-style-type: none"><li>Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li><li>Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Maximum EIRP Limit</b>                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/> For the 5.85-5.895 GHz band:            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>                                         | <ul style="list-style-type: none"><li>Indoor AP &amp; subordinate device &lt; 36 dBm</li><li>Client device &lt; 30 dBm</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>LE-LAN Devices</b>                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>                                         | For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <input type="checkbox"/>                                         | For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <input type="checkbox"/>                                         | For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.725-5.85 GHz band:            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>                                         | <ul style="list-style-type: none"><li>Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li><li>Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



$P_{\text{Out}}$  = maximum conducted output power in dBm,  
 $G_{\text{TX}}$  = the maximum transmitting antenna directional gain in dBi.


### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                            |                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Maximum Conducted Output Power</li> </ul>                                                                                                                                                                                                                                                                                       |                                                                                          |
|                                                                                                                                                                                                                                                                                                                                                                        | Average over on/off periods with duty factor                                             |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).                |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed) |
|                                                                                                                                                                                                                                                                                                                                                                        | Wideband RF power meter and average over on/off periods with duty factor                 |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                    | Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).         |
| <ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>                                                                                                                                                                                                                                                                                           |                                                                                          |
| <ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below:<br/>Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul> |                                                                                          |
| <ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP calculation could be following as methods:<br/> <math>P_{total} = P_1 + P_2 + \dots + P_n</math><br/> (calculated in linear unit [mW] and transfer to log unit [dBm])<br/> <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>                                                             |                                                                                          |

### 3.3.4 Test Setup

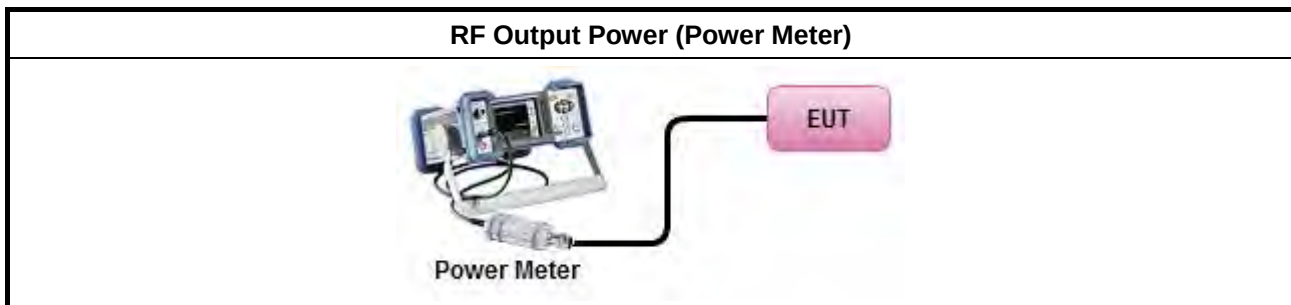

### 3.3.5 Test Result of Maximum Output Power

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Limit

| Peak Power Spectral Density Limit                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                        | <ul style="list-style-type: none"><li>Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li><li>Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li><li>Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 23)</math>.</li><li>Mobile or Portable Client: the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li></ul> |
| <input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ . |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                        | <ul style="list-style-type: none"><li>Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li><li>Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>EIRP Power Spectral Density Limit</b>                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.85-5.895 GHz band:                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                        | <ul style="list-style-type: none"><li>Indoor AP &amp; subordinate device <math>&lt; 20</math>dBm/MHz</li><li>Client device <math>&lt; 14</math>dBm/MHz</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>LE-LAN Devices</b>                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) $\leq 10$ dBm/MHz.                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz.                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                        | <ul style="list-style-type: none"><li>e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where <math>\theta</math> is the angle above the local horizontal plane (of the Earth) as shown below:<br/>-13 dBW/MHz for <math>0^\circ \leq \theta &lt; 8^\circ</math> ; -13 - 0.716 (<math>\theta</math>-8) dBW/MHz for <math>8^\circ \leq \theta &lt; 40^\circ</math><br/>-35.9 - 1.22 (<math>\theta</math>-40) dBW/MHz for <math>40^\circ \leq \theta \leq 45^\circ</math> ; -42 dBW/MHz for <math>\theta &gt; 45^\circ</math></li></ul>                                                                                                                                                                                                                          |
| <input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz.                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.725-5.85 GHz band:                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                        | <ul style="list-style-type: none"><li>Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li><li>Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>PPSD</b> = peak power spectral density that he same method as used to determine the conducted output                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



power shall be used to determine the power spectral density. And power spectral density in dBm/MHz  
 $G_{TX}$  = the maximum transmitting antenna directional gain in dBi.


### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.4.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:</li></ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                      | Refer as FCC KDB 789033, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| [duty cycle ≥ 98% or external video / power trigger]                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                           | Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                      | Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| duty cycle < 98% and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                           | Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                      | Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"><li>For conducted measurement.</li></ul>                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <ul style="list-style-type: none"><li>If the EUT supports multiple transmit chains using options given below:</li></ul>                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                           | Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                      | Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,                                                                                                                                                                                                         |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                      | Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.                                                                                                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"><li>If multiple transmit chains, EIRP PPSD calculation could be following as methods:<br/><math>PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n</math><br/>(calculated in linear unit [mW] and transfer to log unit [dBm])<br/><math>EIRP_{total} = PPSD_{total} + DG</math></li></ul>                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

### 3.4.4 Test Setup

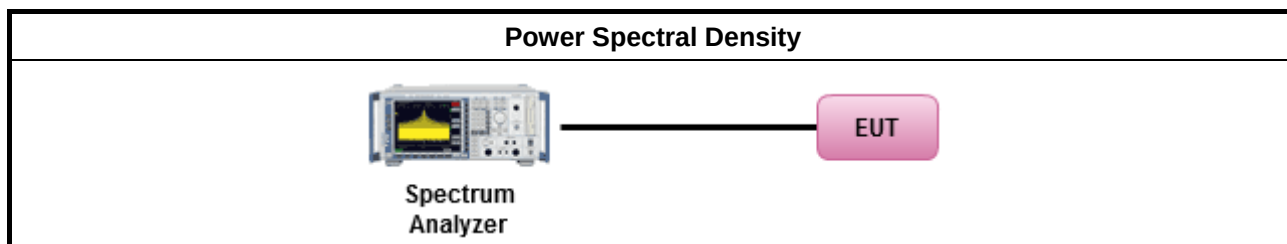

### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D



### 3.5 Unwanted Emissions

#### 3.5.1 Transmitter Unwanted Emissions Limit

| Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit |                       |                         |                      |
|-------------------------------------------------------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz)                                                         | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490                                                                   | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |
| 0.490~1.705                                                                   | 24000/F(kHz)          | 33.8 - 23               | 30                   |
| 1.705~30.0                                                                    | 30                    | 29                      | 30                   |
| 30~88                                                                         | 100                   | 40                      | 3                    |
| 88~216                                                                        | 150                   | 43.5                    | 3                    |
| 216~960                                                                       | 200                   | 46                      | 3                    |
| Above 960                                                                     | 500                   | 54                      | 3                    |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.





| Un-restricted band emissions above 1GHz Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Band                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input checked="" type="checkbox"/> 5.15 - 5.25 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input type="checkbox"/> 5.25 - 5.35 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input type="checkbox"/> 5.47 - 5.725 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/> 5.725 - 5.85 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.                                                                                                                                                                                                                                                                                                                                                              |
| <input type="checkbox"/> 5.85 - 5.895 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | (i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of - 7 dBm/MHz at or above 5.925 GHz.<br>(ii) For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.<br>(iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/ MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz. |
| Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |


### 3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

**3.5.3 Test Procedures**

| Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).</li></ul> |                                                                                                                                                  |
| <ul style="list-style-type: none"><li>The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                  |
| <ul style="list-style-type: none"><li>For the transmitter unwanted emissions shall be measured using following options below:</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.</li></ul>           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.</li></ul>               |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input checked="" type="checkbox"/> Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).                                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.                                                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.                                       |
| <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                  |
| <ul style="list-style-type: none"><li>For radiated measurement.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.</li></ul>    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.</li></ul> |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li></ul>                              |
| <ul style="list-style-type: none"><li>The any unwanted emissions level shall not exceed the fundamental emission level.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                  |
| <ul style="list-style-type: none"><li>All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                  |

### 3.5.4 Test Setup

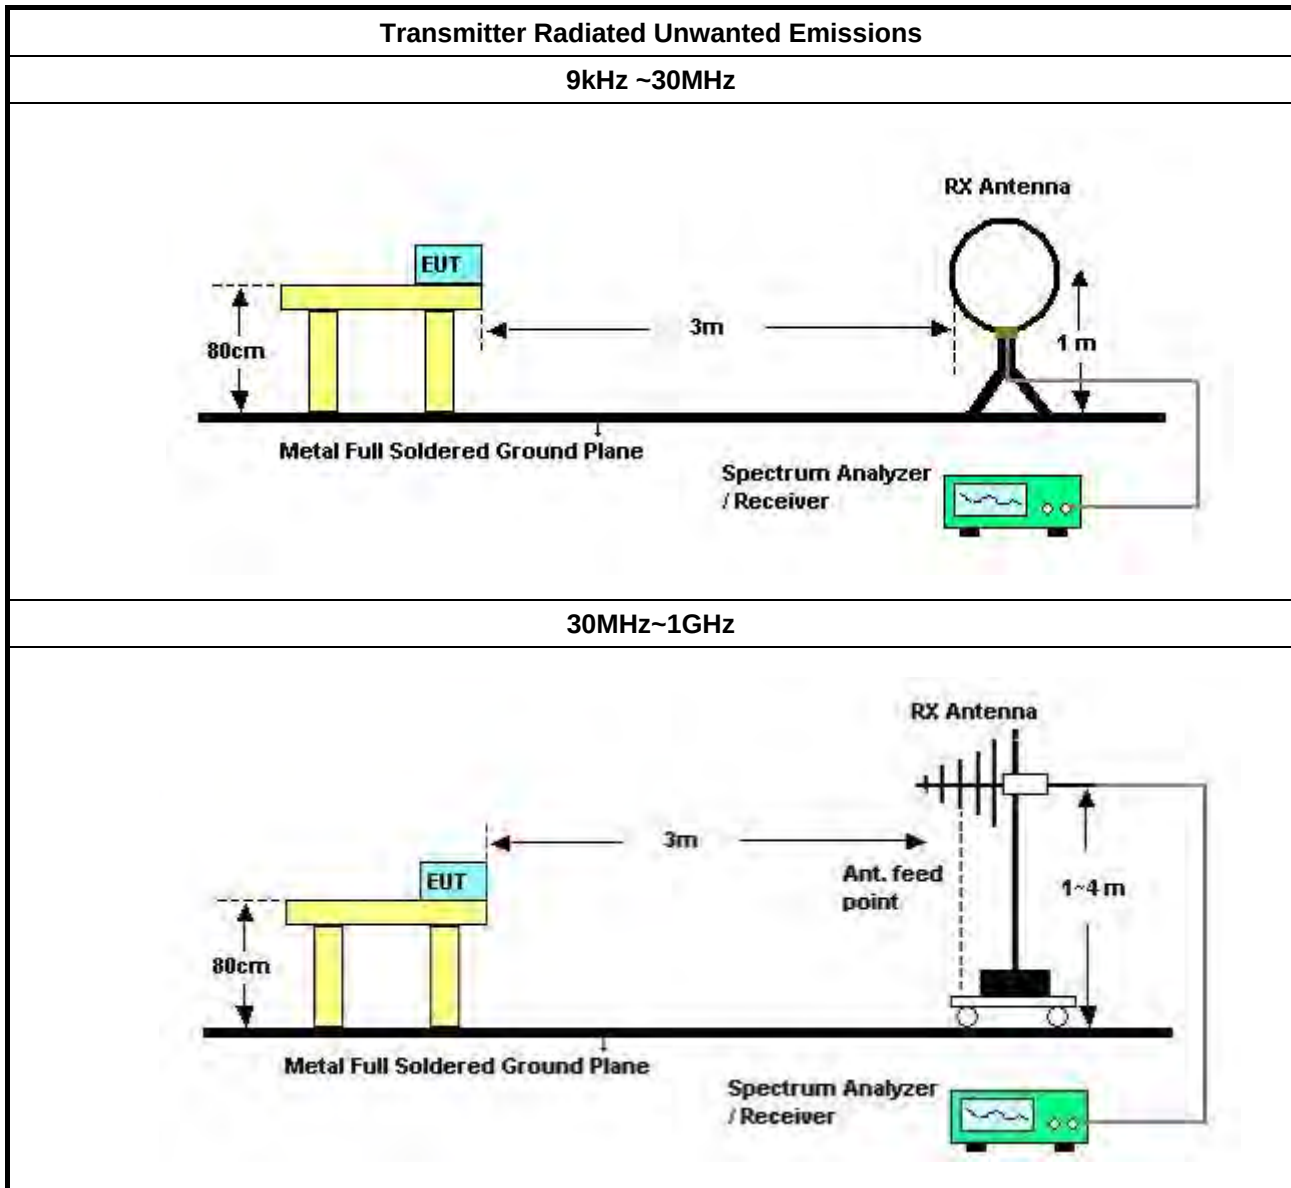

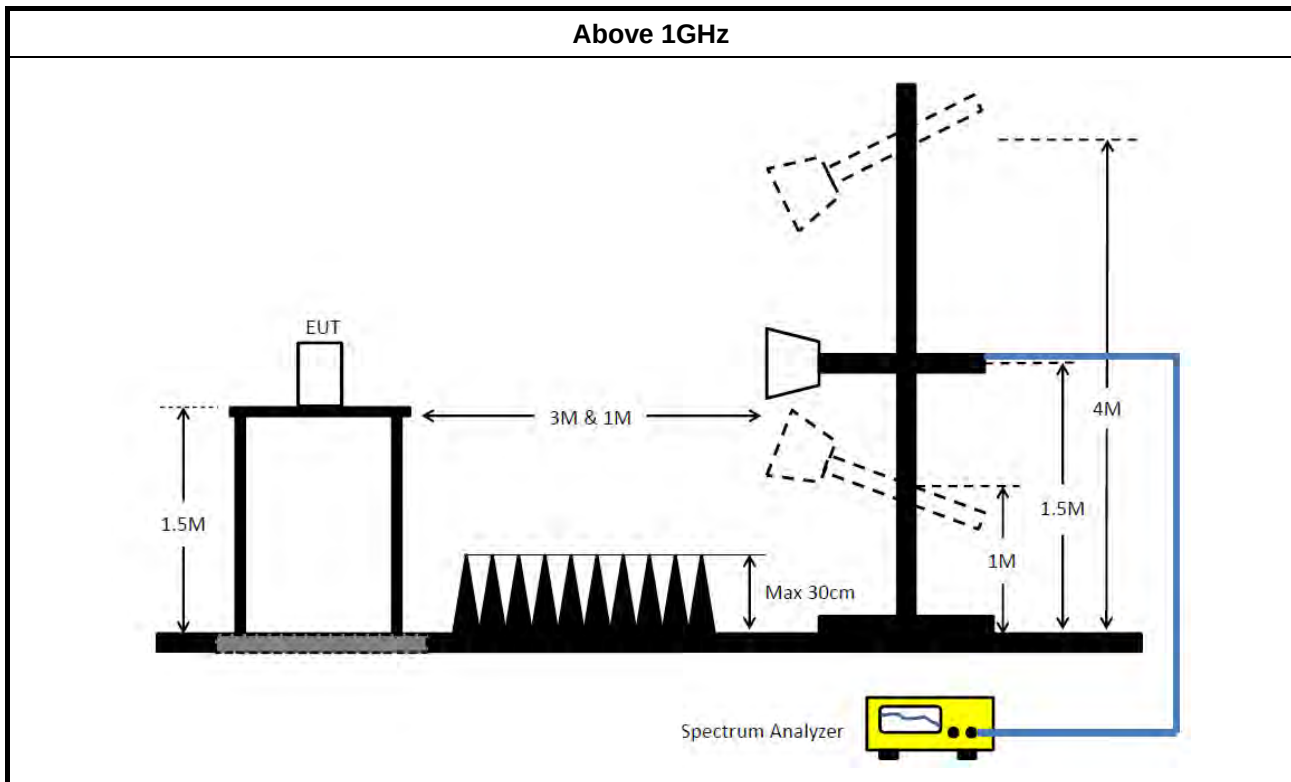

### 3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

### 3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

### 3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



## 4 Test Equipment and Calibration Data

| Instrument                        | Brand         | Model No.          | Serial No.       | Characteristics | Calibration Date | Calibration Due Date | Remark                |
|-----------------------------------|---------------|--------------------|------------------|-----------------|------------------|----------------------|-----------------------|
| EMI Receiver                      | Agilent       | N9038A             | My52260123       | 9kHz ~ 8.4GHz   | Mar. 03, 2021    | Mar. 02, 2022        | Conduction (CO01-CB)  |
| LISN                              | F.C.C.        | FCC-LISN-50-16-2   | 04083            | 150kHz ~ 100MHz | Jan. 06, 2021    | Jan. 05, 2022        | Conduction (CO01-CB)  |
| LISN                              | Schwarzbeck   | NSLK 8127          | 8127647          | 9kHz ~ 30MHz    | Mar. 07, 2021    | Mar. 06, 2022        | Conduction (CO01-CB)  |
| Pulse Limiter                     | Rohde&Schwarz | ESH3-Z2            | 100430           | 9kHz ~ 30MHz    | Jan. 30, 2021    | Jan. 29, 2022        | Conduction (CO01-CB)  |
| COND Cable                        | Woken         | Cable              | Low cable-CO01   | 9kHz ~ 30MHz    | May 19, 2021     | May 18, 2022         | Conduction (CO01-CB)  |
| Software                          | SPORTON       | SENSE              | V5.10            | -               | N.C.R.           | N.C.R.               | Conduction (CO01-CB)  |
| Loop Antenna                      | Teseq         | HLA 6120           | 24155            | 9kHz - 30 MHz   | Apr. 14, 2021    | Apr. 13, 2022        | Radiation (03CH05-CB) |
| 3m Semi Anechoic Chamber NSA      | TDK           | SAC-3M             | 03CH05-CB        | 30 MHz ~ 1 GHz  | Aug. 09, 2021    | Aug. 08, 2022        | Radiation (03CH05-CB) |
| 3m Semi Anechoic Chamber VSWR     | TDK           | SAC-3M             | 03CH05-CB        | 1GHz ~18GHz 3m  | Nov. 08, 2020    | Nov. 07, 2021        | Radiation (03CH05-CB) |
| Bilog Antenna with 6dB Attenuator | TESEQ & EMCI  | CBL 6112D & N-6-06 | 35236 & AT-N0610 | 30MHz ~ 2GHz    | Mar. 26, 2021    | Mar. 25, 2022        | Radiation (03CH05-CB) |
| Horn Antenna                      | SCHWARZBECK   | BBHA 9120 D        | BBHA 9120 D 1370 | 1GHz~18GHz      | Sep. 14, 2021    | Sep. 13, 2022        | Radiation (03CH05-CB) |
| Horn Antenna                      | Schwarzbeck   | BBHA 9170          | BBHA9170252      | 15GHz ~ 40GHz   | Aug. 05, 2021    | Aug. 04, 2022        | Radiation (03CH05-CB) |
| Pre-Amplifier                     | EMCI          | EMC330N            | 980331           | 20MHz ~ 3GHz    | Apr. 27, 2021    | Apr. 26, 2022        | Radiation (03CH05-CB) |
| Pre-Amplifier                     | EMCI          | EMC12630SE         | 980287           | 1GHz ~ 26.5GHz  | Jul. 02, 2021    | Jul. 01, 2022        | Radiation (03CH05-CB) |
| Pre-Amplifier                     | MITEQ         | TTA1840-35-H G     | 1864479          | 18GHz ~ 40GHz   | Jul. 13, 2021    | Jul. 12, 2022        | Radiation (03CH05-CB) |
| Spectrum Analyzer                 | R&S           | FSP40              | 100304           | 9kHz ~ 40GHz    | Nov. 10, 2020    | Nov. 09, 2021        | Radiation (03CH05-CB) |
| EMI Test Receiver                 | R&S           | ESCS               | 826547/017       | 9kHz ~ 2.75GHz  | Jun. 21, 2021    | Jun. 20, 2022        | Radiation (03CH05-CB) |
| RF Cable-low                      | Woken         | RG402              | Low Cable-04+23  | 30MHz~1GHz      | Oct. 04, 2021    | Oct. 03, 2022        | Radiation (03CH05-CB) |
| RF Cable-high                     | Woken         | RG402              | High Cable-28    | 1GHz~18GHz      | Oct. 04, 2021    | Oct. 03, 2022        | Radiation (03CH05-CB) |
| RF Cable-high                     | Woken         | RG402              | High Cable-04+28 | 1GHz~18GHz      | Oct. 04, 2021    | Oct. 03, 2022        | Radiation (03CH05-CB) |
| RF Cable-high                     | Woken         | RG402              | High Cable-40G#1 | 18GHz ~ 40 GHz  | Jul. 15, 2021    | Jul. 14, 2022        | Radiation (03CH05-CB) |



| Instrument                    | Brand       | Model No.      | Serial No.       | Characteristics  | Calibration Date | Calibration Due Date | Remark                |
|-------------------------------|-------------|----------------|------------------|------------------|------------------|----------------------|-----------------------|
| RF Cable-high                 | Woken       | RG402          | High Cable-40G#2 | 18GHz ~ 40 GHz   | Jul. 15, 2021    | Jul. 14, 2022        | Radiation (03CH05-CB) |
| Test Software                 | SPORTON     | SENSE          | V5.10            | -                | N.C.R.           | N.C.R.               | Radiation (03CH05-CB) |
| 3m Semi Anechoic Chamber VSWR | TDK         | SAC-3M         | 03CH06-CB        | 1GHz~18GHz 3m    | Oct. 02, 2020    | Oct. 01, 2021        | Radiation (03CH06-CB) |
| Horn Antenna                  | SCHWARZBECK | BBHA 9120 D    | BBHA 9120 D 1370 | 1GHz~18GHz       | Sep. 21, 2020    | Sep. 20, 2021        | Radiation (03CH06-CB) |
| Horn Antenna                  | SCHWARZBECK | BBHA9120D      | BBHA 9120D-1292  | 1GHz~18GHz       | Aug. 04, 2021    | Aug. 03, 2022        | Radiation (03CH06-CB) |
| Horn Antenna                  | SCHWARZBECK | BBHA 9170      | BBHA9170507      | 15GHz ~ 40GHz    | Jun. 18, 2021    | Jun. 17, 2022        | Radiation (03CH06-CB) |
| Horn Antenna                  | Schwarzbeck | BBHA 9170      | BBHA9170252      | 15GHz ~ 40GHz    | Aug. 05, 2021    | Aug. 04, 2022        | Radiation (03CH06-CB) |
| Pre-Amplifier                 | Agilent     | 83017A         | MY53270064       | 0.5GHz ~ 26.5GHz | May 06, 2021     | May 05, 2022         | Radiation (03CH06-CB) |
| Pre-Amplifier                 | MITEQ       | TTA1840-35-H G | 1864479          | 18GHz ~ 40GHz    | Jul. 13, 2021    | Jul. 12, 2022        | Radiation (03CH06-CB) |
| Spectrum analyzer             | R&S         | FSP40          | 100080           | 9kHz~40GHz       | Dec. 15, 2020    | Dec. 14, 2021        | Radiation (03CH06-CB) |
| RF Cable-high                 | Woken       | RG402          | High Cable-05    | 1GHz~18GHz       | Oct. 05, 2020    | Oct. 04, 2021        | Radiation (03CH06-CB) |
| RF Cable-high                 | Woken       | RG402          | High Cable-05+24 | 1GHz~18GHz       | Oct. 05, 2020    | Oct. 04, 2021        | Radiation (03CH06-CB) |
| RF Cable-high                 | Woken       | RG402          | High Cable-40G#1 | 18GHz ~ 40 GHz   | Jul. 15, 2021    | Jul. 14, 2022        | Radiation (03CH06-CB) |
| RF Cable-high                 | Woken       | RG402          | High Cable-40G#2 | 18GHz ~ 40 GHz   | Jul. 15, 2021    | Jul. 14, 2022        | Radiation (03CH06-CB) |
| Test Software                 | SPORTON     | SENSE          | V5.10            | -                | N.C.R.           | N.C.R.               | Radiation (03CH06-CB) |
| Spectrum analyzer             | R&S         | FSV40          | 100979           | 9kHz~40GHz       | May 21, 2021     | May 20, 2022         | Conducted (TH01-CB)   |
| RF Cable-high                 | Woken       | RG402          | High Cable-06    | 1 GHz ~26.5 GHz  | Oct. 05, 2020    | Oct. 04, 2021        | Conducted (TH01-CB)   |
| RF Cable-high                 | Woken       | RG402          | High Cable-06    | 1 GHz ~ 26.5 GHz | Oct. 04, 2021    | Oct. 03, 2022        | Conducted (TH01-CB)   |
| RF Cable-high                 | Woken       | RG402          | High Cable-07    | 1 GHz ~26.5 GHz  | Oct. 05, 2020    | Oct. 04, 2021        | Conducted (TH01-CB)   |
| RF Cable-high                 | Woken       | RG402          | High Cable-07    | 1 GHz ~26.5 GHz  | Oct. 04, 2021    | Oct. 03, 2022        | Conducted (TH01-CB)   |
| RF Cable-high                 | Woken       | RG402          | High Cable-08    | 1 GHz ~26.5 GHz  | Oct. 05, 2020    | Oct. 04, 2021        | Conducted (TH01-CB)   |
| RF Cable-high                 | Woken       | RG402          | High Cable-08    | 1 GHz ~26.5 GHz  | Oct. 04, 2021    | Oct. 03, 2022        | Conducted (TH01-CB)   |
| RF Cable-high                 | Woken       | RG402          | High Cable-09    | 1 GHz ~26.5 GHz  | Oct. 05, 2020    | Oct. 04, 2021        | Conducted (TH01-CB)   |
| RF Cable-high                 | Woken       | RG402          | High Cable-09    | 1 GHz ~26.5 GHz  | Oct. 04, 2021    | Oct. 03, 2022        | Conducted (TH01-CB)   |



| Instrument    | Brand   | Model No. | Serial No.    | Characteristics | Calibration Date | Calibration Due Date | Remark              |
|---------------|---------|-----------|---------------|-----------------|------------------|----------------------|---------------------|
| RF Cable-high | Woken   | RG402     | High Cable-10 | 1 GHz –26.5 GHz | Oct. 05, 2020    | Oct. 04, 2021        | Conducted (TH01-CB) |
| RF Cable-high | Woken   | RG402     | High Cable-10 | 1 GHz –26.5 GHz | Oct. 04, 2021    | Oct. 03, 2022        | Conducted (TH01-CB) |
| RF Cable-high | Woken   | RG402     | High Cable-30 | 1 GHz –26.5 GHz | Oct. 05, 2020    | Oct. 04, 2021        | Conducted (TH01-CB) |
| RF Cable-high | Woken   | RG402     | High Cable-30 | 1 GHz –26.5 GHz | Oct. 04, 2021    | Oct. 03, 2022        | Conducted (TH01-CB) |
| Power Sensor  | Agilent | E9327A    | US40442088    | 50MHz~18GHz     | Feb. 23, 2021    | Feb. 22, 2022        | Conducted (TH01-CB) |
| Power Meter   | Agilent | E4416A    | GB41291199    | 50MHz~18GHz     | Feb. 23, 2021    | Feb. 22, 2022        | Conducted (TH01-CB) |
| Test Software | SPORTON | SENSE     | V5.10         | -               | N.C.R.           | N.C.R.               | Conducted (TH01-CB) |

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.



## Conducted Emissions at Powerline

## Appendix A


### Summary

| Mode   | Result | Type | Freq<br>(Hz) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Condition |
|--------|--------|------|--------------|-----------------|-----------------|----------------|-----------|
| Mode 3 | Pass   | AV   | 442.5k       | 37.48           | 47.01           | -9.53          | Neutral   |



### Mode 3


09/09/2021

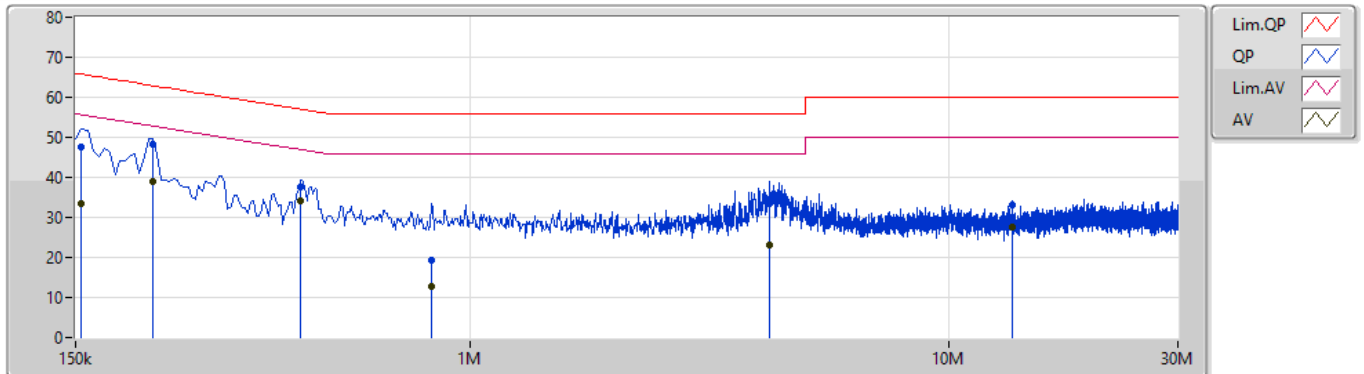

| Type | Freq<br>(Hz) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Factor<br>(dB) | Condition | Comment | Raw<br>(dBuV) | LISN<br>(dB) | CL<br>(dB) | AT<br>(dB) |  |  |  |
|------|--------------|-----------------|-----------------|----------------|----------------|-----------|---------|---------------|--------------|------------|------------|--|--|--|
| QP   | 154.5k       | 47.74           | 65.75           | -18.01         | 9.89           | Line      | -       | 37.85         | 0.04         | 0.04       | 9.81       |  |  |  |
| AV   | 154.5k       | 33.52           | 55.75           | -22.23         | 9.89           | Line      | -       | 23.63         | 0.04         | 0.04       | 9.81       |  |  |  |
| QP   | 217.5k       | 48.24           | 62.92           | -14.68         | 9.89           | Line      | -       | 38.35         | 0.04         | 0.04       | 9.81       |  |  |  |
| AV   | 217.5k       | 39.13           | 52.92           | -13.79         | 9.89           | Line      | -       | 29.24         | 0.04         | 0.04       | 9.81       |  |  |  |
| QP   | 442.5k       | 37.71           | 57.01           | -19.30         | 9.90           | Line      | -       | 27.81         | 0.04         | 0.04       | 9.82       |  |  |  |
| AV   | 442.5k       | 34.12           | 47.01           | -12.89         | 9.90           | Line      | "Worst" | 24.22         | 0.04         | 0.04       | 9.82       |  |  |  |
| QP   | 829.5k       | 19.48           | 56.00           | -36.52         | 9.93           | Line      | -       | 9.55          | 0.06         | 0.04       | 9.83       |  |  |  |
| AV   | 829.5k       | 12.63           | 46.00           | -33.37         | 9.93           | Line      | -       | 2.70          | 0.06         | 0.04       | 9.83       |  |  |  |
| QP   | 4.209M       | 33.50           | 56.00           | -22.50         | 10.12          | Line      | -       | 23.38         | 0.13         | 0.12       | 9.87       |  |  |  |
| AV   | 4.209M       | 23.21           | 46.00           | -22.79         | 10.12          | Line      | -       | 13.09         | 0.13         | 0.12       | 9.87       |  |  |  |
| QP   | 13.56M       | 33.17           | 60.00           | -26.83         | 10.34          | Line      | -       | 22.83         | 0.26         | 0.17       | 9.91       |  |  |  |
| AV   | 13.56M       | 27.59           | 50.00           | -22.41         | 10.34          | Line      | -       | 17.25         | 0.26         | 0.17       | 9.91       |  |  |  |

### Mode 3

09/09/2021

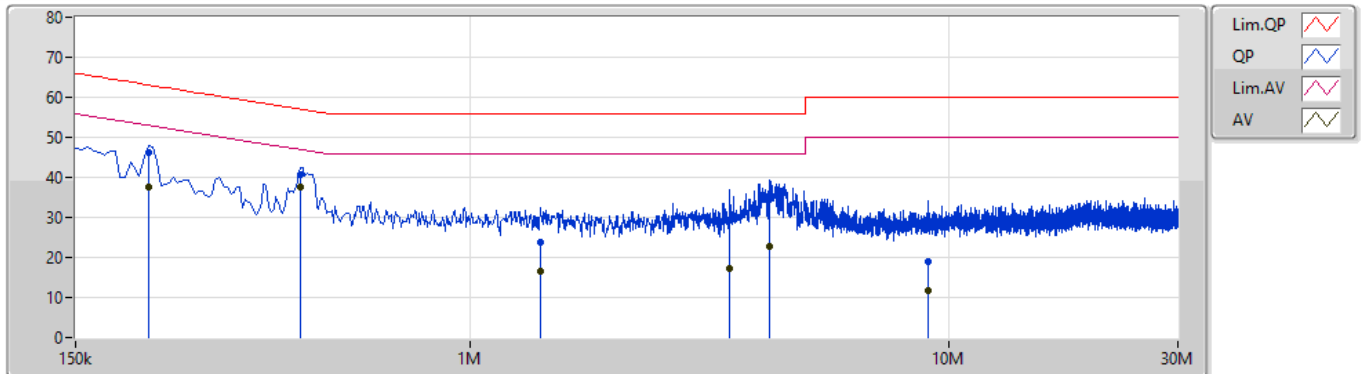

| Type | Freq<br>(Hz) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Factor<br>(dB) | Condition | Comment | Raw<br>(dBuV) | LISN<br>(dB) | CL<br>(dB) | AT<br>(dB) |  |  |  |
|------|--------------|-----------------|-----------------|----------------|----------------|-----------|---------|---------------|--------------|------------|------------|--|--|--|
| QP   | 213k         | 46.13           | 63.09           | -16.96         | 9.88           | Neutral   | -       | 36.25         | 0.03         | 0.04       | 9.81       |  |  |  |
| AV   | 213k         | 37.59           | 53.09           | -15.50         | 9.88           | Neutral   | -       | 27.71         | 0.03         | 0.04       | 9.81       |  |  |  |
| QP   | 442.5k       | 40.77           | 57.01           | -16.24         | 9.89           | Neutral   | -       | 30.88         | 0.03         | 0.04       | 9.82       |  |  |  |
| AV   | 442.5k       | 37.48           | 47.01           | -9.53          | 9.89           | Neutral   | "Worst" | 27.59         | 0.03         | 0.04       | 9.82       |  |  |  |
| QP   | 1.406M       | 23.72           | 56.00           | -32.28         | 9.94           | Neutral   | -       | 13.78         | 0.06         | 0.05       | 9.83       |  |  |  |
| AV   | 1.406M       | 16.57           | 46.00           | -29.43         | 9.94           | Neutral   | -       | 6.63          | 0.06         | 0.05       | 9.83       |  |  |  |
| QP   | 3.476M       | 29.14           | 56.00           | -26.86         | 10.06          | Neutral   | -       | 19.08         | 0.09         | 0.11       | 9.86       |  |  |  |
| AV   | 3.476M       | 17.30           | 46.00           | -28.70         | 10.06          | Neutral   | -       | 7.24          | 0.09         | 0.11       | 9.86       |  |  |  |
| QP   | 4.227M       | 34.46           | 56.00           | -21.54         | 10.10          | Neutral   | -       | 24.36         | 0.11         | 0.12       | 9.87       |  |  |  |
| AV   | 4.227M       | 22.73           | 46.00           | -23.27         | 10.10          | Neutral   | -       | 12.63         | 0.11         | 0.12       | 9.87       |  |  |  |
| QP   | 9.006M       | 18.89           | 60.00           | -41.11         | 10.25          | Neutral   | -       | 8.64          | 0.19         | 0.16       | 9.90       |  |  |  |
| AV   | 9.006M       | 11.89           | 50.00           | -38.11         | 10.25          | Neutral   | -       | 1.64          | 0.19         | 0.16       | 9.90       |  |  |  |

**Summary**

| Mode                     | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW<br>(Hz) |
|--------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.15-5.25GHz             | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_4TX | 27.87M           | 17.601M         | 17M6D1D  | 22.8M            | 17.271M         |
| 5.725-5.85GHz            | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_4TX | 16.56M           | 18.681M         | 18M7D1D  | 15.42M           | 17.571M         |

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
Min-OBW = Minimum 99% occupied bandwidth


**Result**

| Mode                     | Result | Limit<br>(Hz) | Port 1-N dB<br>(Hz) | Port 1-OBW<br>(Hz) | Port 2-N dB<br>(Hz) | Port 2-OBW<br>(Hz) | Port 3-N dB<br>(Hz) | Port 3-OBW<br>(Hz) | Port 4-N dB<br>(Hz) | Port 4-OBW<br>(Hz) |
|--------------------------|--------|---------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|
| 802.11a_Nss1.(6Mbps)_4TX | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5180MHz                  | Pass   | Inf           | 27.03M              | 17.391M            | 24.48M              | 17.481M            | 27.21M              | 17.601M            | 27.87M              | 17.421M            |
| 5200MHz                  | Pass   | Inf           | 23.79M              | 17.361M            | 23.7M               | 17.331M            | 24.69M              | 17.451M            | 24.09M              | 17.331M            |
| 5240MHz                  | Pass   | Inf           | 23.79M              | 17.361M            | 22.8M               | 17.331M            | 23.85M              | 17.391M            | 23.55M              | 17.271M            |
| 5745MHz                  | Pass   | 500k          | 16.05M              | 17.871M            | 15.42M              | 17.811M            | 16.32M              | 17.961M            | 16.29M              | 17.781M            |
| 5785MHz                  | Pass   | 500k          | 16.26M              | 18.051M            | 16.56M              | 17.721M            | 16.29M              | 17.781M            | 16.56M              | 17.571M            |
| 5825MHz                  | Pass   | 500k          | 16.35M              | 18.261M            | 16.02M              | 17.841M            | 15.69M              | 18.681M            | 16.02M              | 17.991M            |


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band  
Port X-OBW = Port X 99% occupied bandwidth

**802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**5180MHz**

28/09/2021

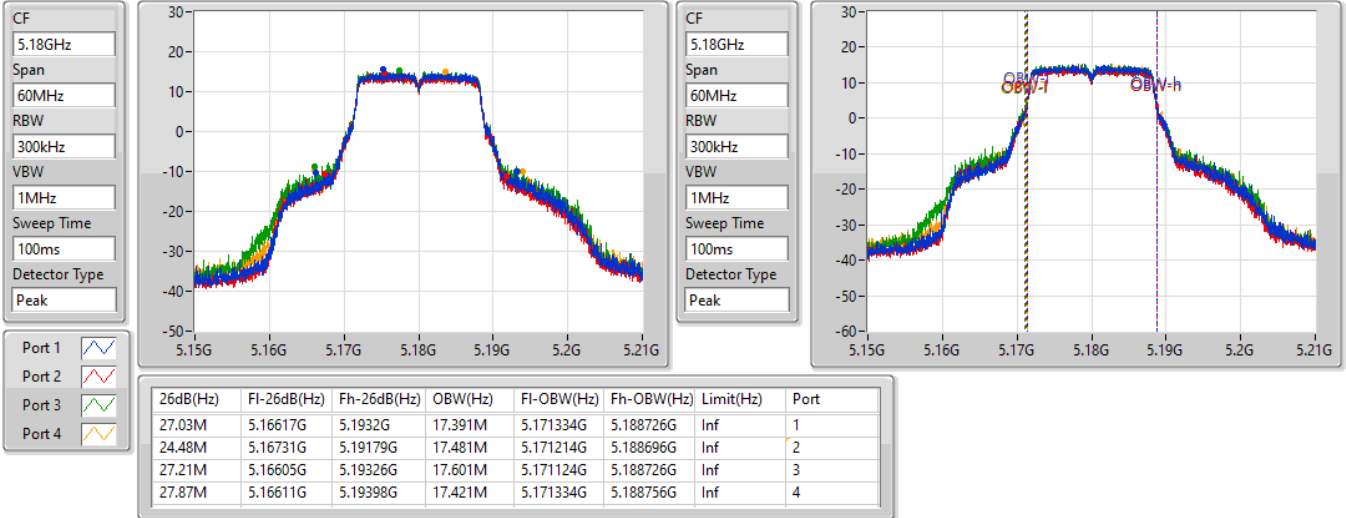

**802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**5200MHz**

28/09/2021

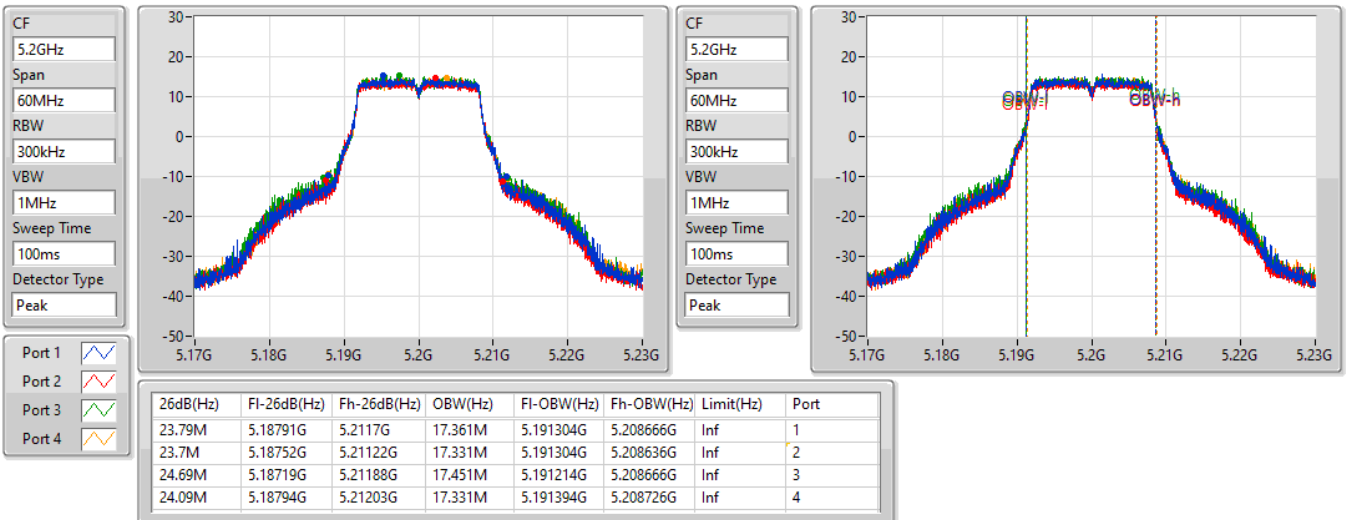


**802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**5240MHz**

28/09/2021

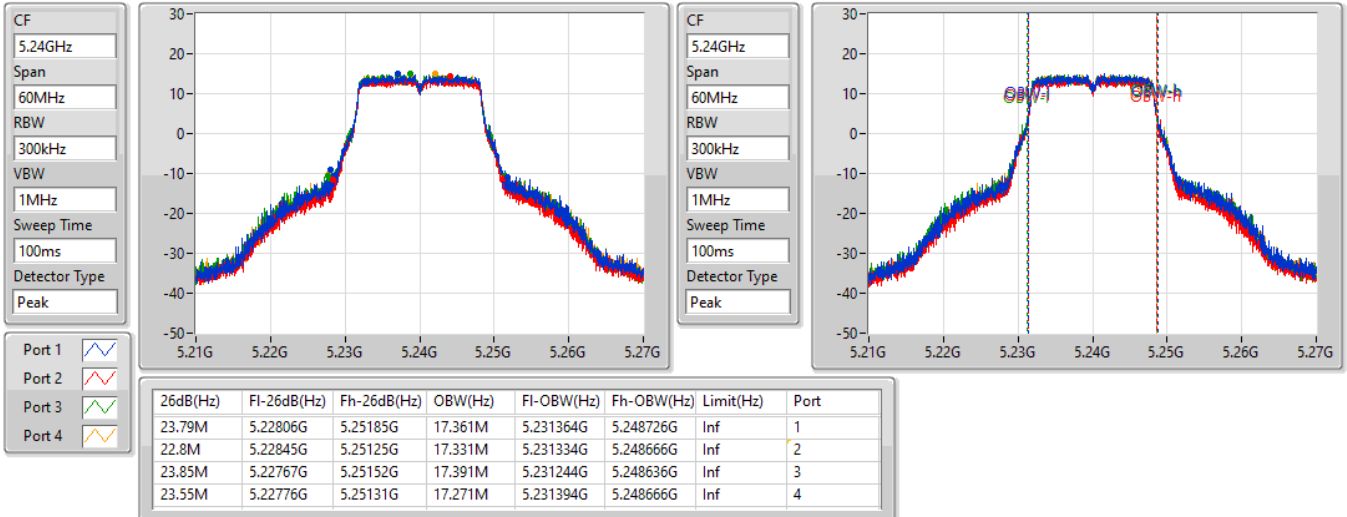

**802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**5745MHz**

28/09/2021

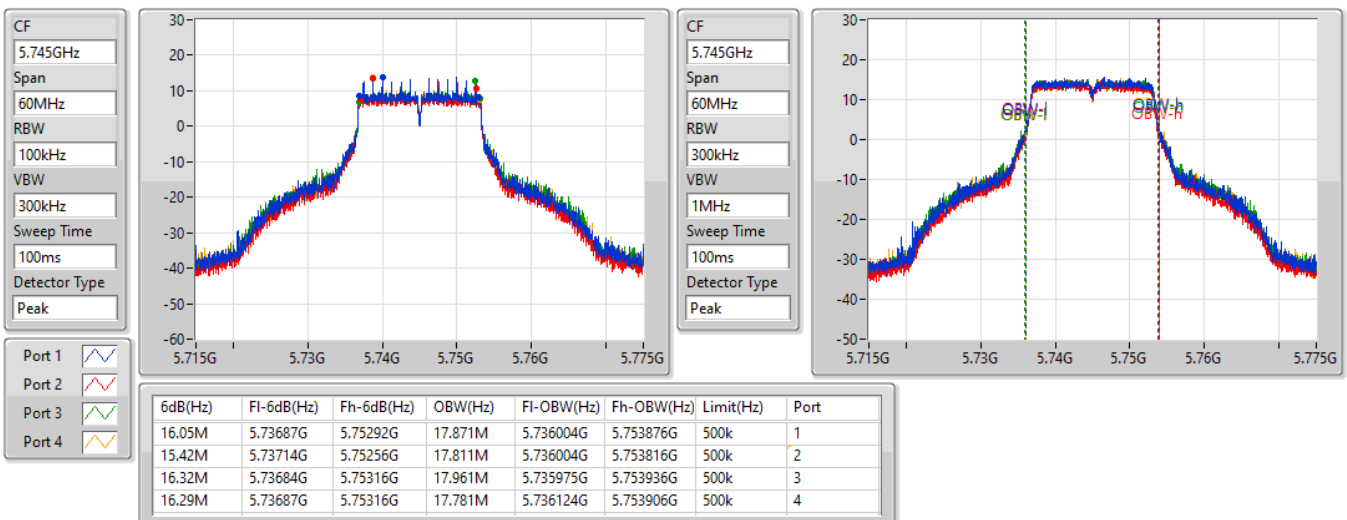


**802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**5785MHz**

28/09/2021

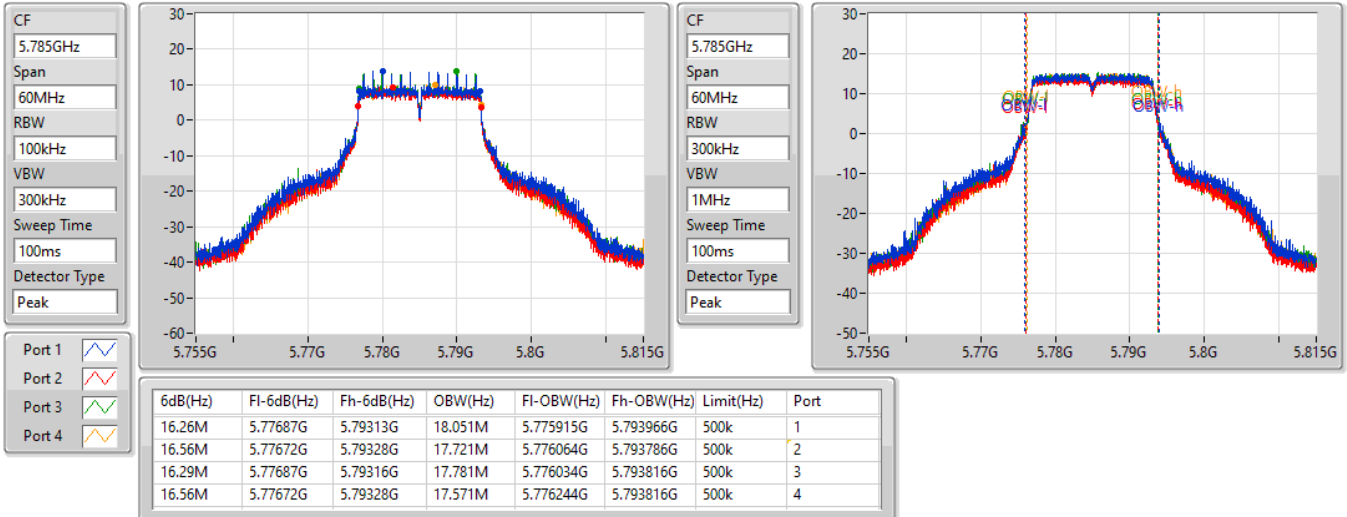
**802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**5825MHz**

28/09/2021

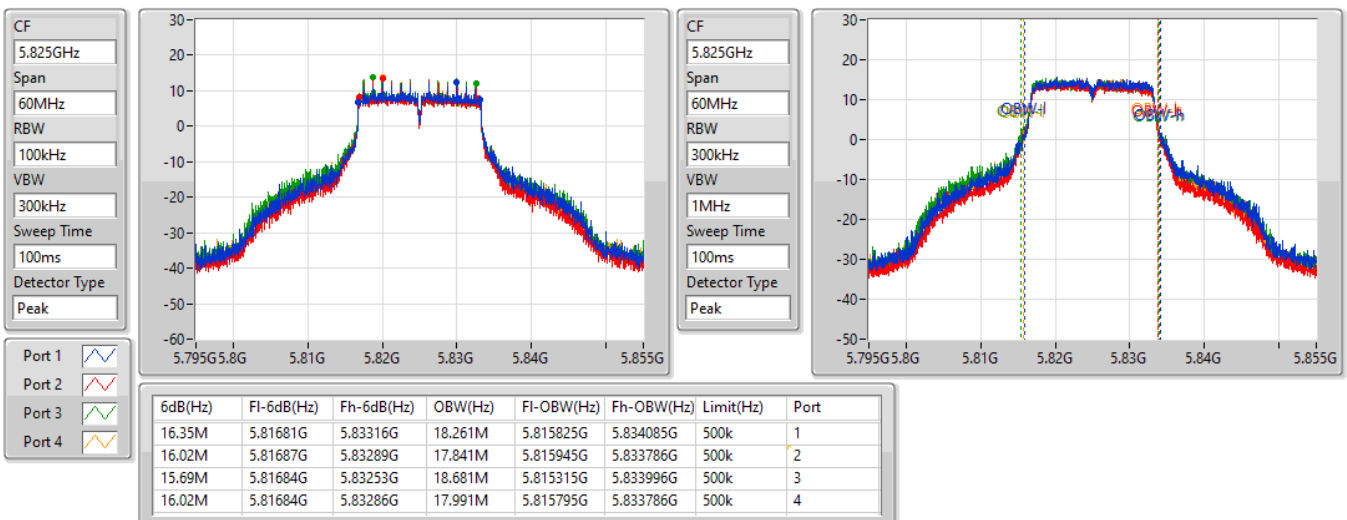

**Summary**

| Mode                              | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW<br>(Hz) |
|-----------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.15-5.25GHz                      | -                | -               | -        | -                | -               |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 31.56M           | 19.34M          | 19M3D1D  | 23.49M           | 19.22M          |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 51.42M           | 38.261M         | 38M3D1D  | 41.4M            | 38.081M         |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 87M              | 78.081M         | 78M1D1D  | 83.52M           | 77.841M         |
| 5.725-5.85GHz                     | -                | -               | -        | -                | -               |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 18.9M            | 19.52M          | 19M5D1D  | 17.94M           | 19.28M          |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 37.5M            | 38.441M         | 38M4D1D  | 36.54M           | 38.261M         |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 76.32M           | 78.561M         | 78M6D1D  | 75.12M           | 77.841M         |

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
 Max-OBW = Maximum 99% occupied bandwidth;  
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
 Min-OBW = Minimum 99% occupied bandwidth




**Result**

| Mode                              | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) | Port 3-N dB (Hz) | Port 3-OBW (Hz) | Port 4-N dB (Hz) | Port 4-OBW (Hz) |
|-----------------------------------|--------|------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 5180MHz                           | Pass   | Inf        | 27.9M            | 19.34M          | 30.66M           | 19.28M          | 31.56M           | 19.28M          | 26.7M            | 19.25M          |
| 5200MHz                           | Pass   | Inf        | 24.3M            | 19.25M          | 25.62M           | 19.22M          | 25.17M           | 19.31M          | 29.55M           | 19.22M          |
| 5240MHz                           | Pass   | Inf        | 25.53M           | 19.25M          | 26.88M           | 19.22M          | 23.91M           | 19.22M          | 23.49M           | 19.22M          |
| 5745MHz                           | Pass   | 500k       | 18.69M           | 19.37M          | 18.9M            | 19.37M          | 18.66M           | 19.4M           | 18.6M            | 19.37M          |
| 5785MHz                           | Pass   | 500k       | 18.51M           | 19.34M          | 18.36M           | 19.34M          | 18.87M           | 19.31M          | 17.94M           | 19.28M          |
| 5825MHz                           | Pass   | 500k       | 18.18M           | 19.37M          | 18.69M           | 19.28M          | 18.78M           | 19.52M          | 18.03M           | 19.37M          |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 5190MHz                           | Pass   | Inf        | 41.4M            | 38.081M         | 48.96M           | 38.201M         | 51.42M           | 38.201M         | 43.38M           | 38.141M         |
| 5230MHz                           | Pass   | Inf        | 41.64M           | 38.201M         | 42.06M           | 38.141M         | 47.16M           | 38.261M         | 47.16M           | 38.141M         |
| 5755MHz                           | Pass   | 500k       | 37.02M           | 38.381M         | 37.44M           | 38.381M         | 36.54M           | 38.441M         | 37.5M            | 38.381M         |
| 5795MHz                           | Pass   | 500k       | 37.26M           | 38.381M         | 37.2M            | 38.261M         | 36.66M           | 38.321M         | 37.2M            | 38.261M         |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | -      | -          | -                | -               | -                | -               | -                | -               | -                | -               |
| 5210MHz                           | Pass   | Inf        | 86.76M           | 77.961M         | 87M              | 78.081M         | 86.04M           | 77.841M         | 83.52M           | 77.961M         |
| 5775MHz                           | Pass   | 500k       | 76.32M           | 78.561M         | 75.96M           | 78.321M         | 76.32M           | 78.081M         | 75.12M           | 77.841M         |

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band  
Port X-OBW = Port X 99% occupied bandwidth

**802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5180MHz**

28/09/2021

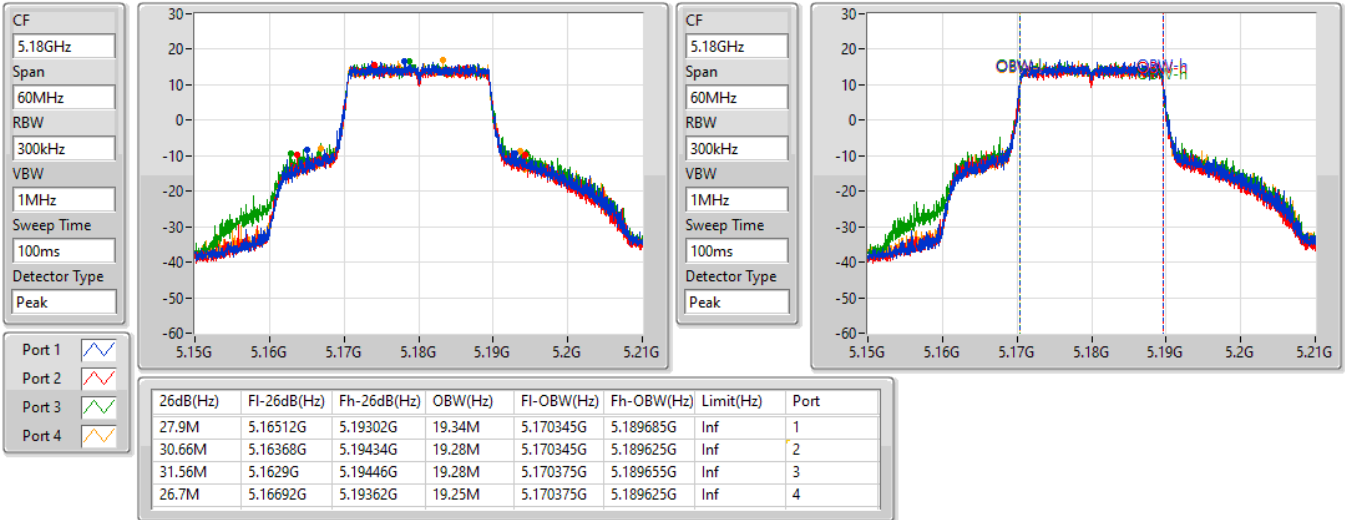

**802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5200MHz**

28/09/2021




**802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5240MHz**

28/09/2021

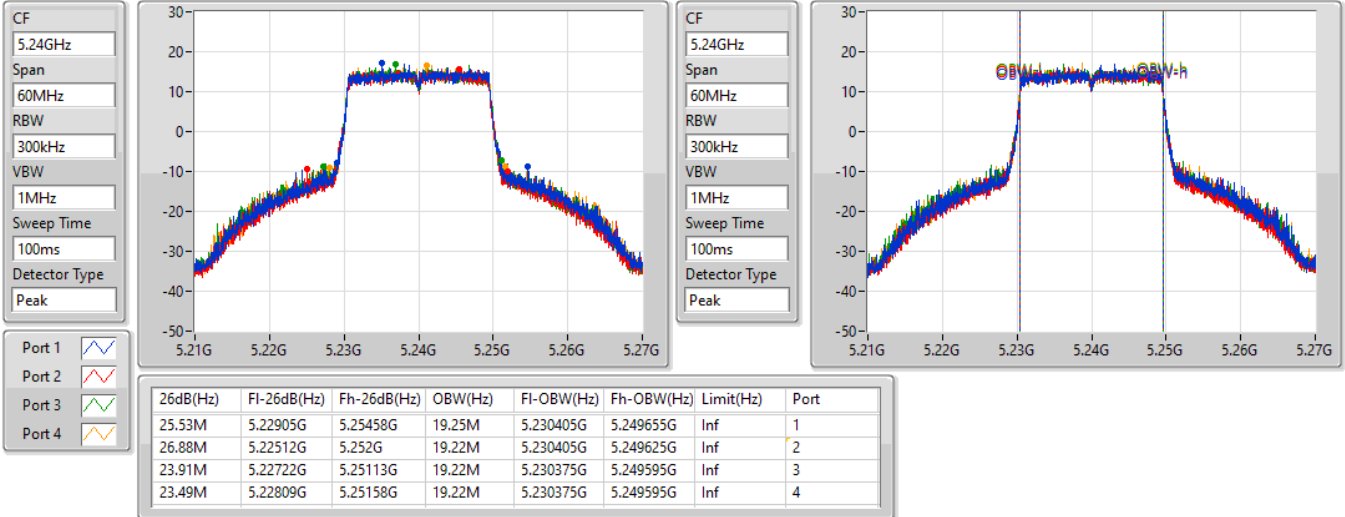

**802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5745MHz**

28/09/2021

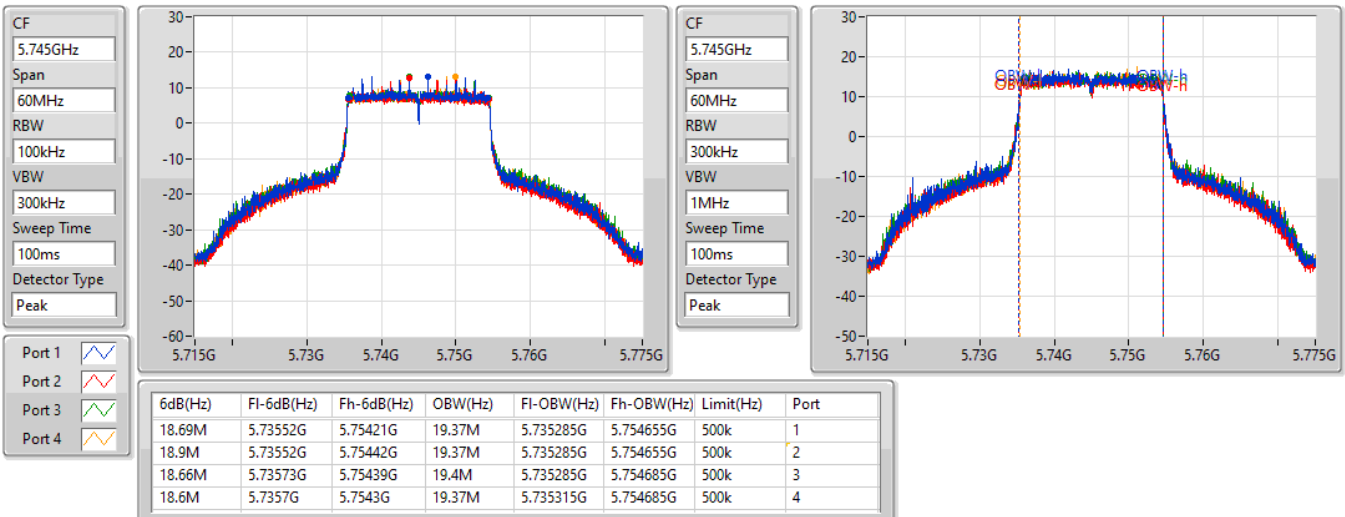


**802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5785MHz**

28/09/2021

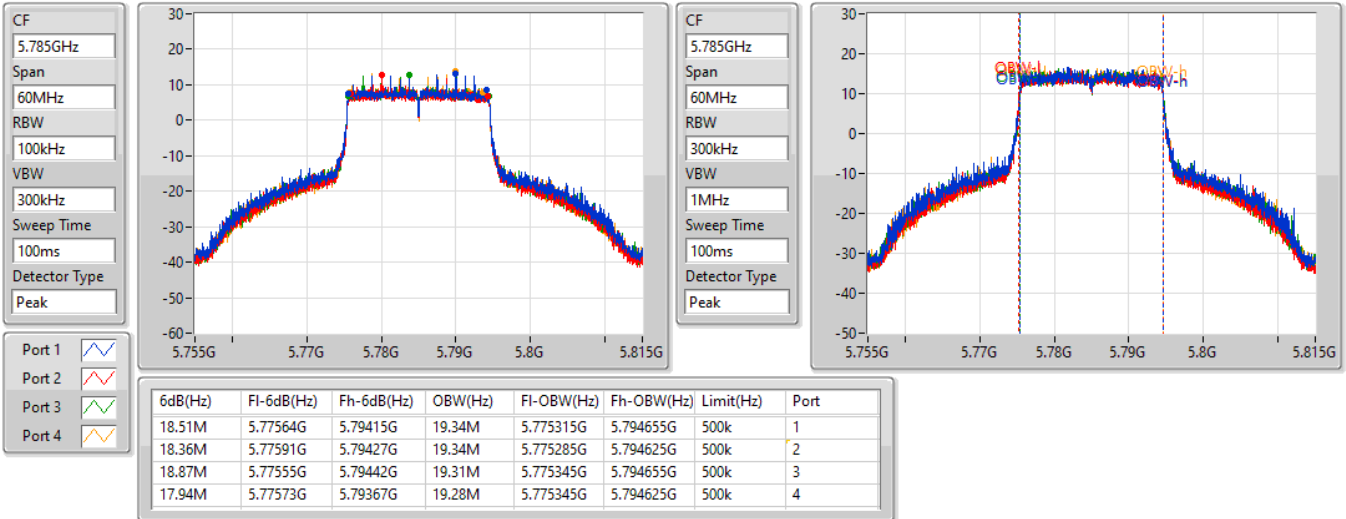

**802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5825MHz**

28/09/2021

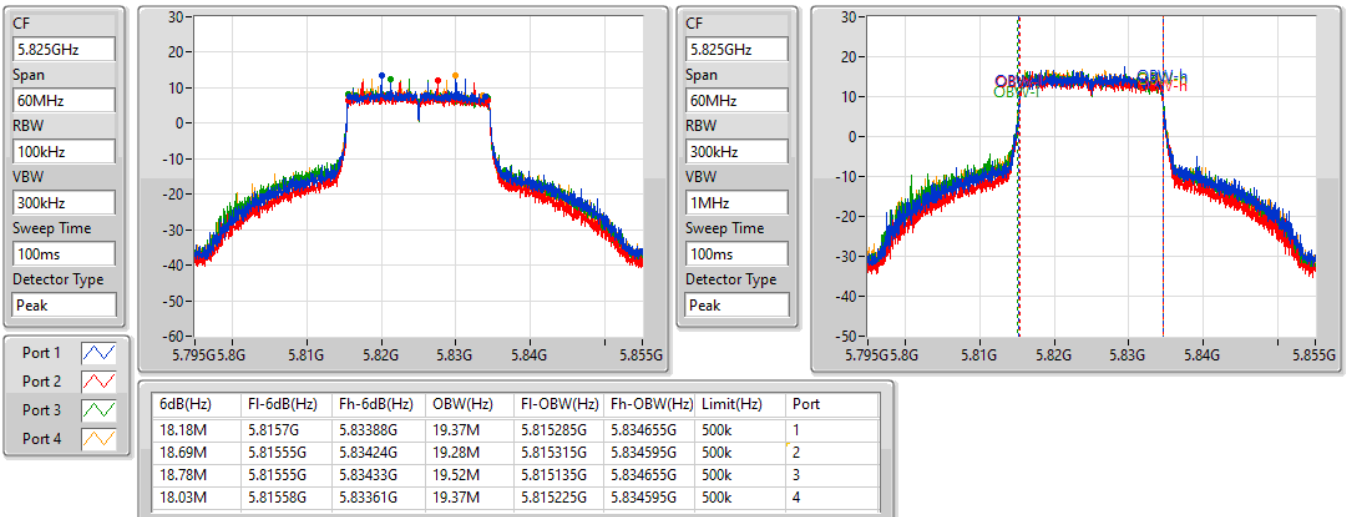


**802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5190MHz**

28/09/2021

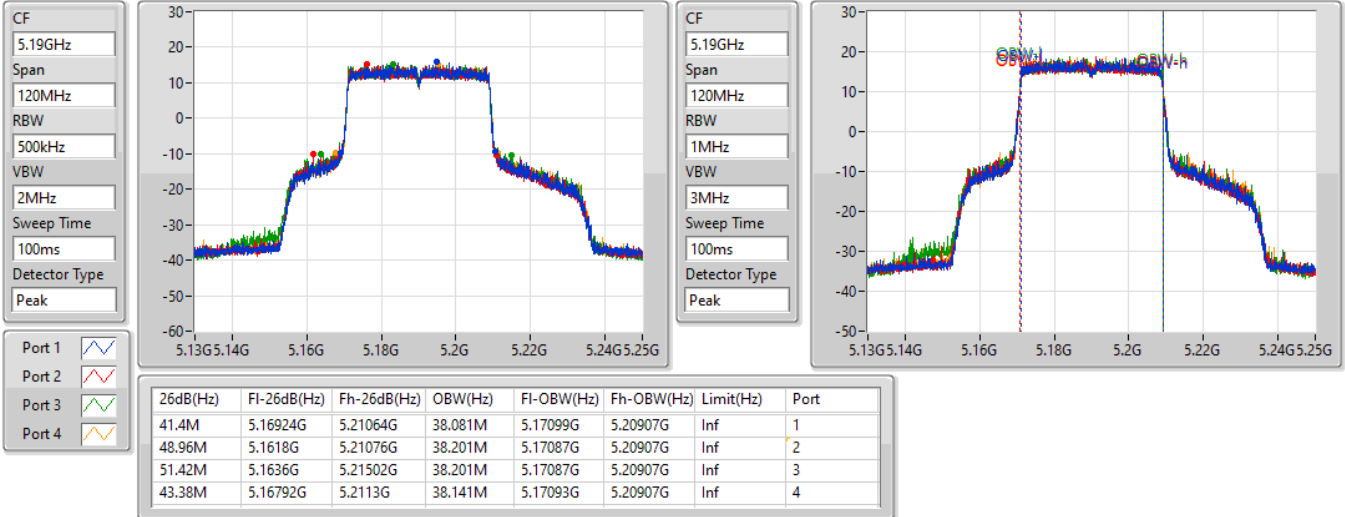

**802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5230MHz**

28/09/2021

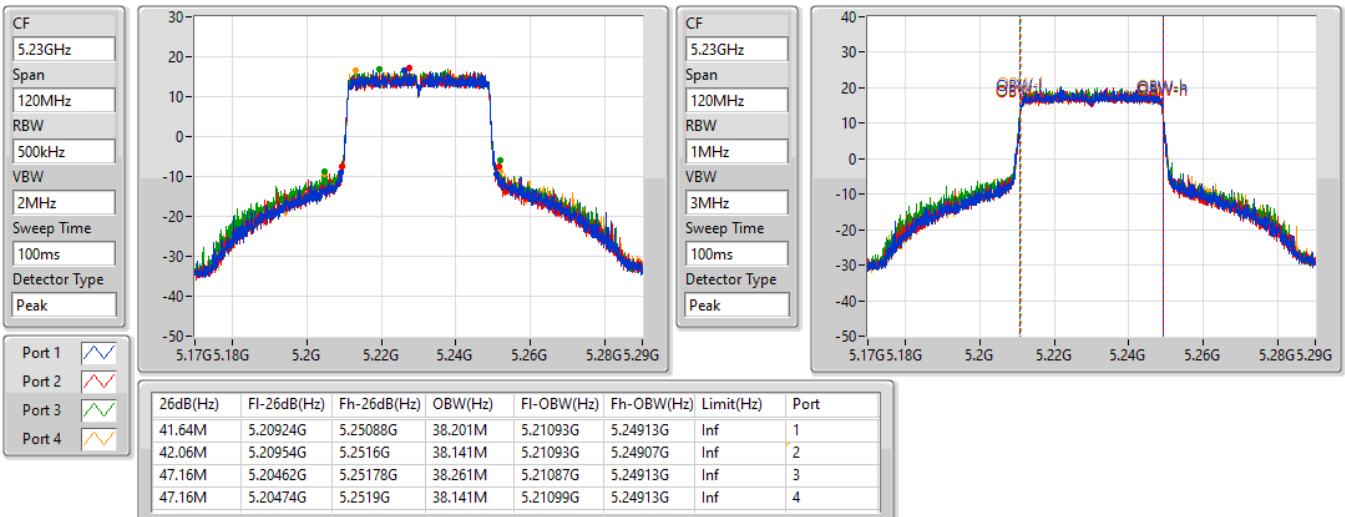


**802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5755MHz**

28/09/2021

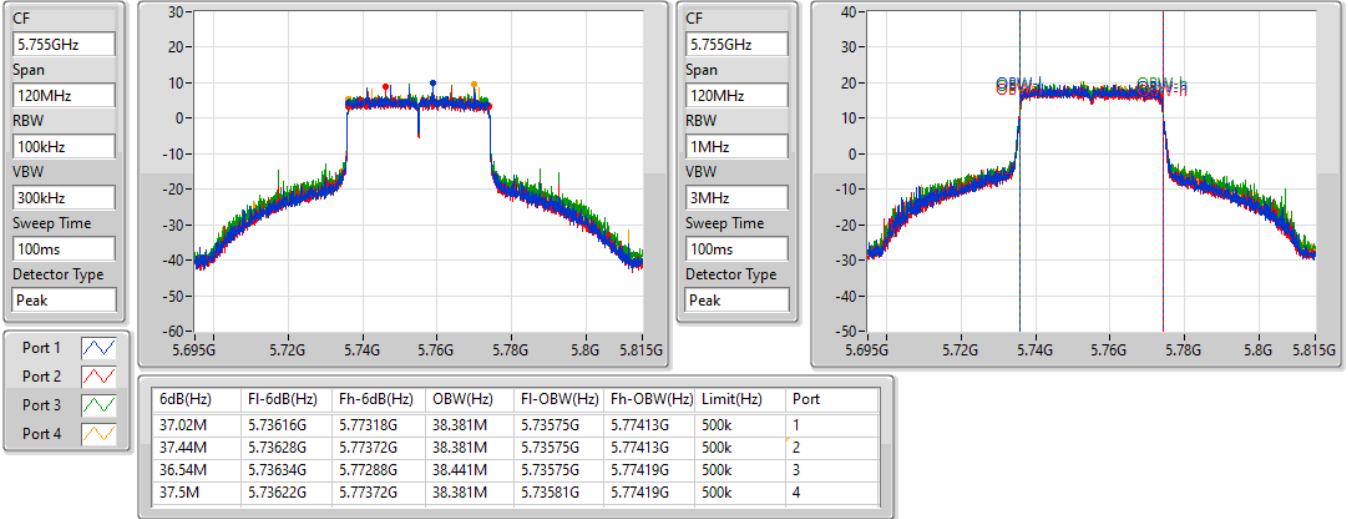

**802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5795MHz**

28/09/2021

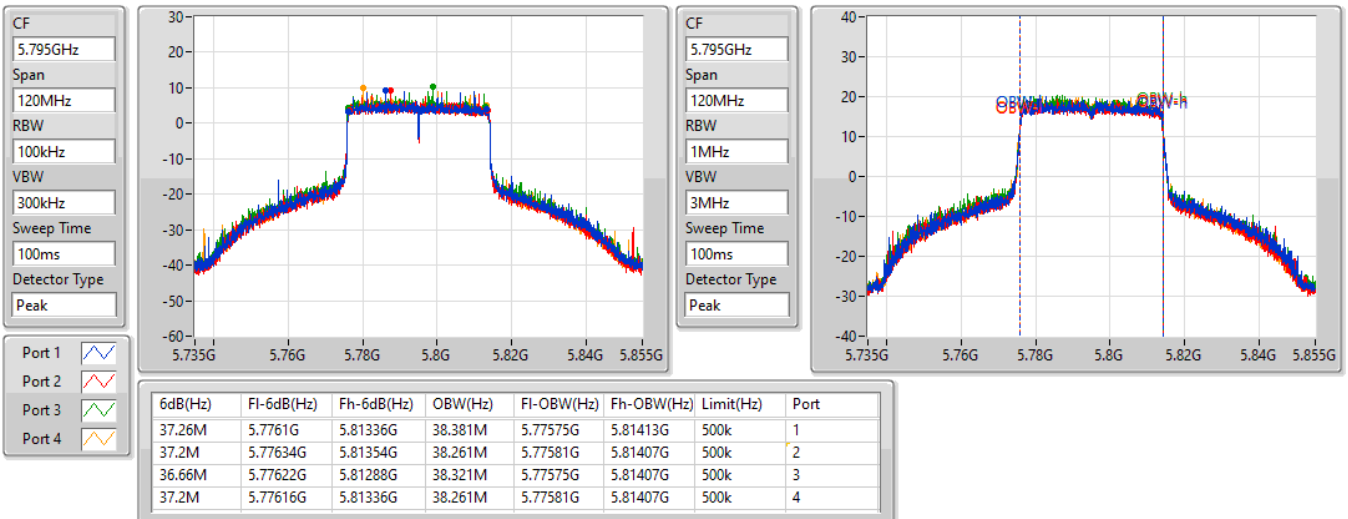


**802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5210MHz**

28/09/2021

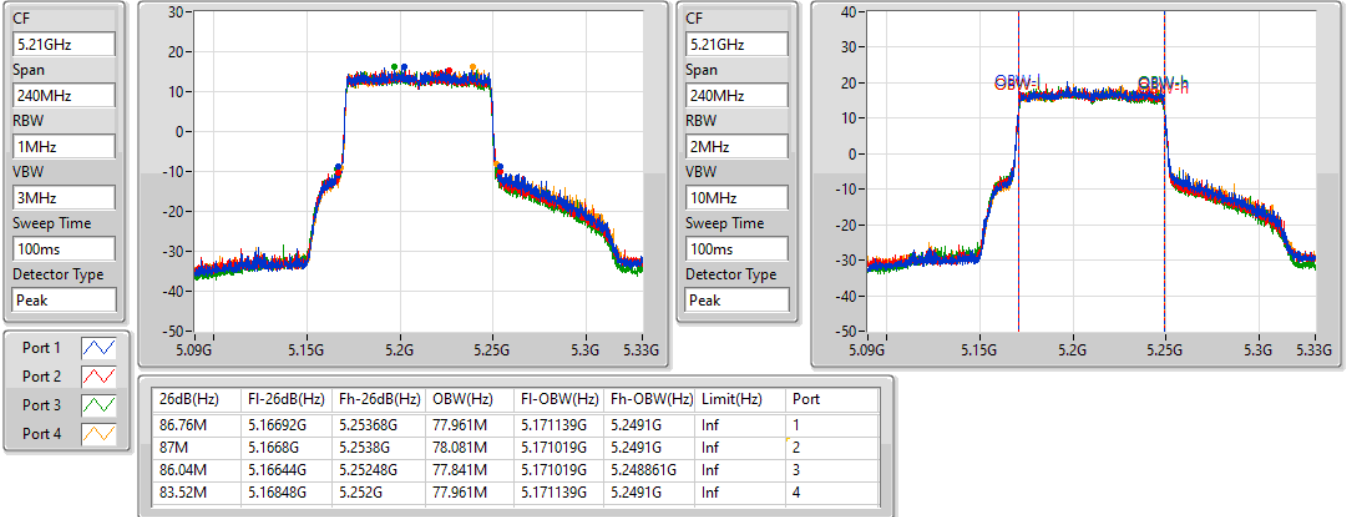
**802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5775MHz**

28/09/2021

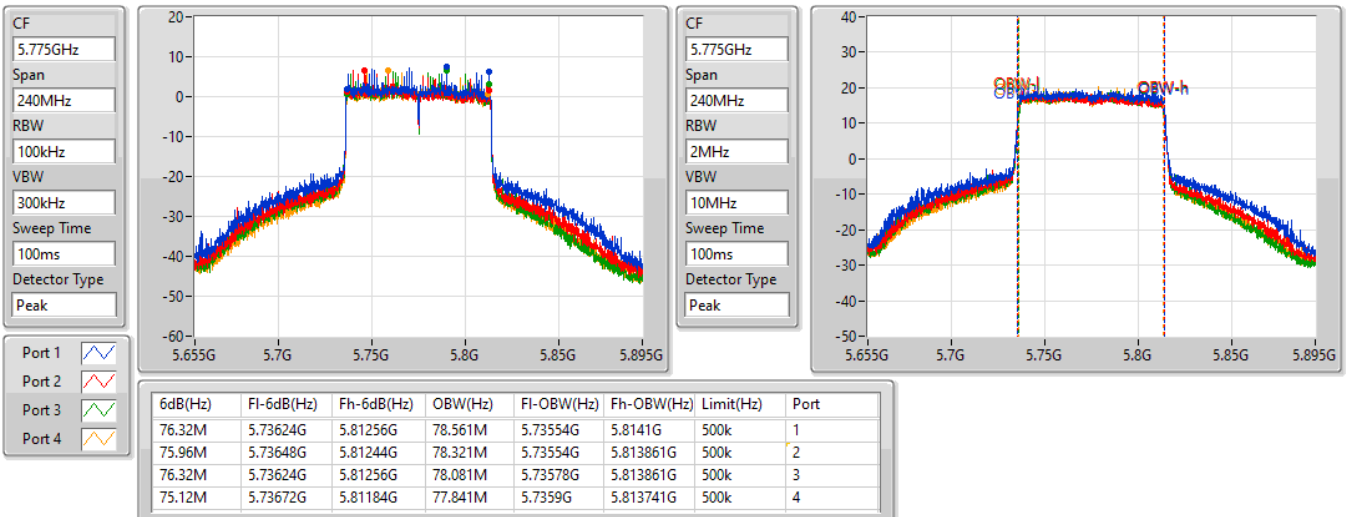

**Summary**

| Mode                              | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW<br>(Hz) |
|-----------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.15-5.25GHz                      | -                | -               | -        | -                | -               |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | 48.66M           | 38.201M         | 38M2D1D  | 42.18M           | 38.081M         |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | 85.2M            | 78.201M         | 78M2D1D  | 83.64M           | 77.841M         |
| 5.725-5.85GHz                     | -                | -               | -        | -                | -               |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | 37.62M           | 38.501M         | 38M5D1D  | 36.6M            | 38.261M         |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | 75.72M           | 78.681M         | 78M7D1D  | 70.68M           | 78.081M         |

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
Min-OBW = Minimum 99% occupied bandwidth




**Result**

| Mode                              | Result | Limit<br>(Hz) | Port 1-N dB<br>(Hz) | Port 1-OBW<br>(Hz) | Port 2-N dB<br>(Hz) | Port 2-OBW<br>(Hz) | Port 3-N dB<br>(Hz) | Port 3-OBW<br>(Hz) | Port 4-N dB<br>(Hz) | Port 4-OBW<br>(Hz) |
|-----------------------------------|--------|---------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5190MHz                           | Pass   | Inf           | 42.3M               | 38.141M            | 46.08M              | 38.201M            | 45.96M              | 38.201M            | 48.66M              | 38.201M            |
| 5230MHz                           | Pass   | Inf           | 43.2M               | 38.201M            | 42.18M              | 38.141M            | 45.6M               | 38.201M            | 42.24M              | 38.081M            |
| 5755MHz                           | Pass   | 500k          | 37.32M              | 38.321M            | 36.6M               | 38.261M            | 37.62M              | 38.501M            | 37.38M              | 38.321M            |
| 5795MHz                           | Pass   | 500k          | 36.84M              | 38.441M            | 37.02M              | 38.321M            | 36.78M              | 38.441M            | 37.56M              | 38.261M            |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5210MHz                           | Pass   | Inf           | 85.08M              | 78.201M            | 85.2M               | 77.961M            | 84.48M              | 77.841M            | 83.64M              | 77.961M            |
| 5775MHz                           | Pass   | 500k          | 75.72M              | 78.681M            | 70.68M              | 78.441M            | 75.72M              | 78.081M            | 75.6M               | 78.321M            |

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band  
Port X-OBW = Port X 99% occupied bandwidth

**802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5190MHz**

28/09/2021

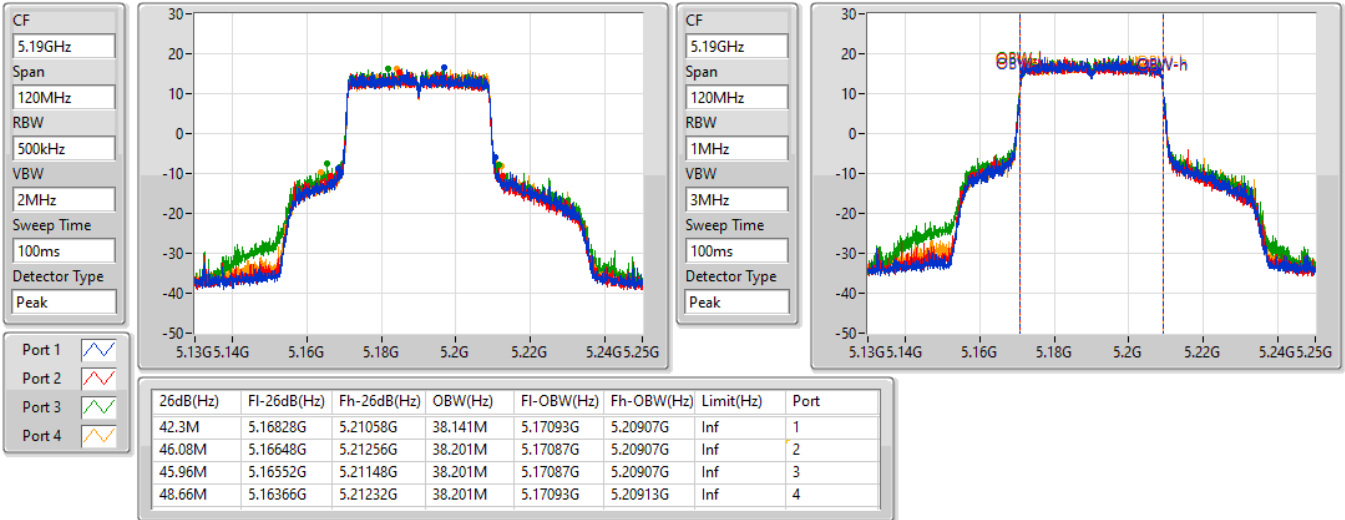

**802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5230MHz**

28/09/2021




**802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5755MHz**

28/09/2021

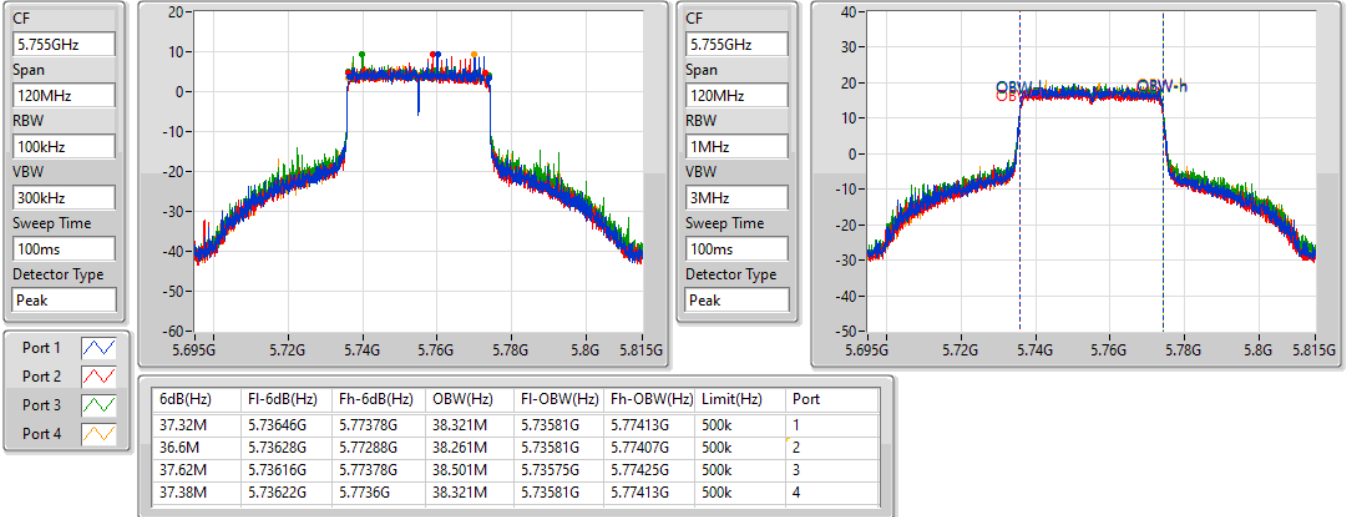

**802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5795MHz**

28/09/2021

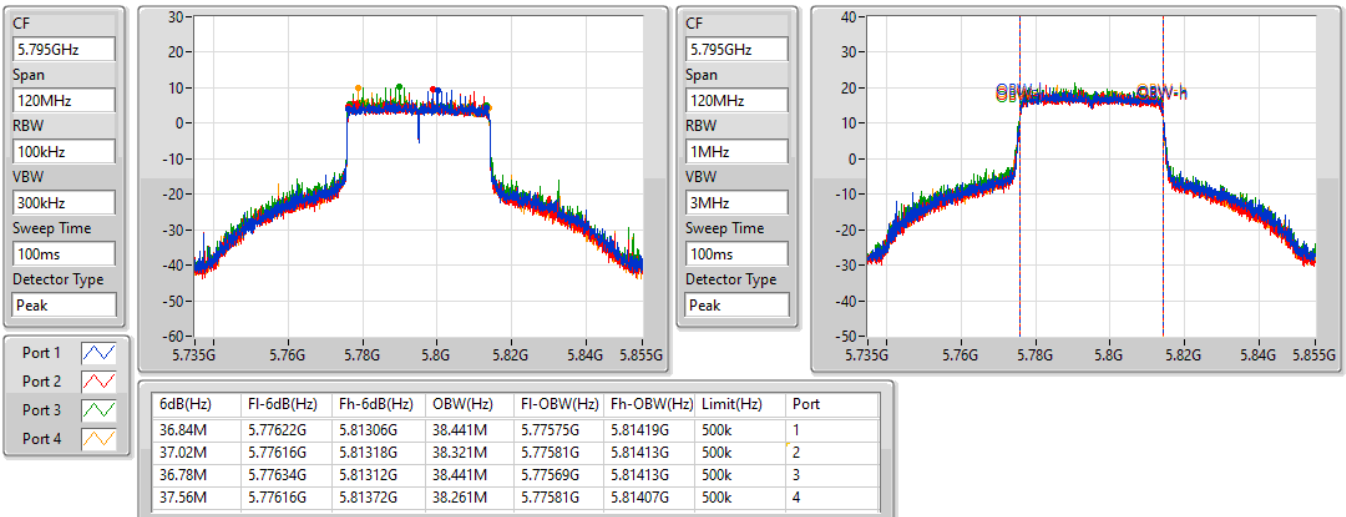


**802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5210MHz**

28/09/2021

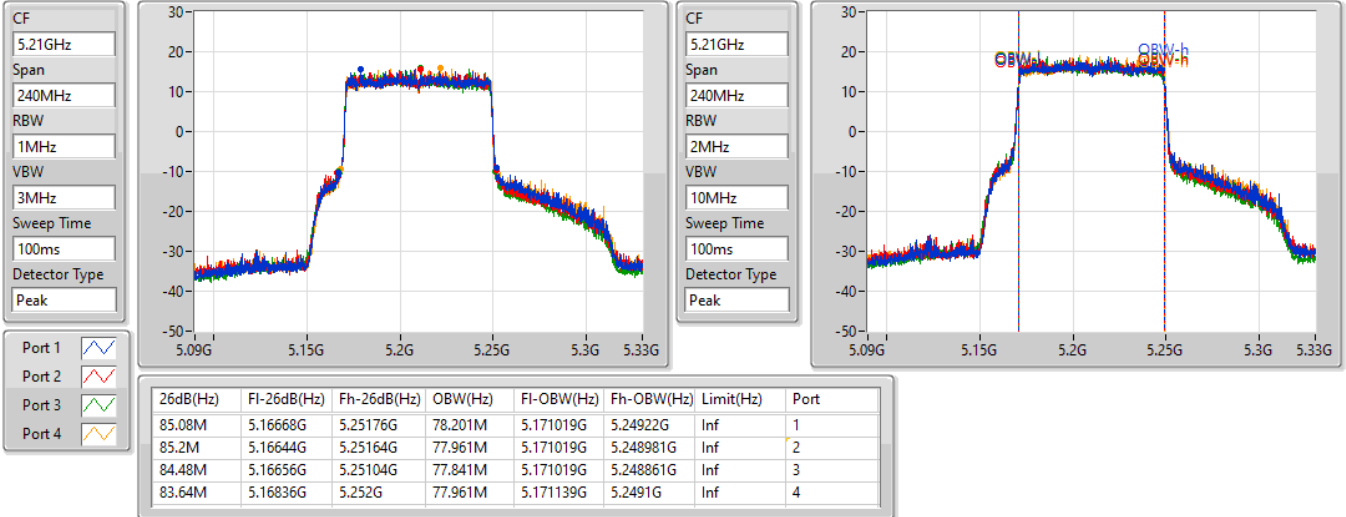
**802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5775MHz**

28/09/2021

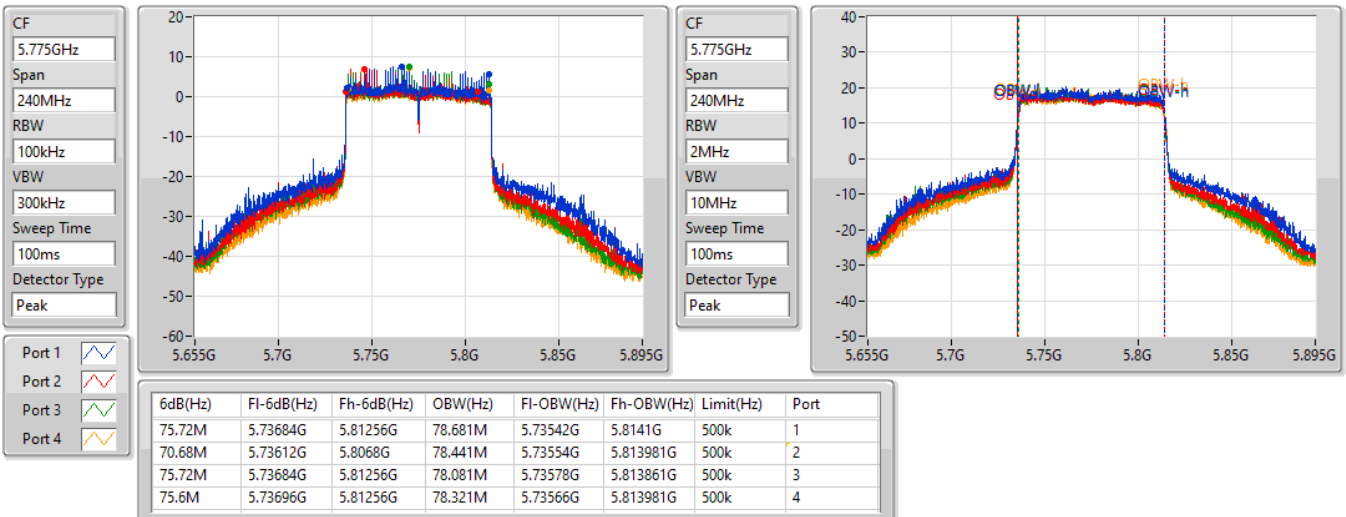



## Average Power\_4T1S

## Appendix C.1

### Summary

| Mode                     | Total Power<br>(dBm) | Total Power<br>(W) |
|--------------------------|----------------------|--------------------|
| 5.15-5.25GHz             | -                    | -                  |
| 802.11a_Nss1,(6Mbps)_4TX | 29.91                | 0.97949            |
| 5.725-5.85GHz            | -                    | -                  |
| 802.11a_Nss1,(6Mbps)_4TX | 29.89                | 0.97499            |



## Average Power\_4T1S

## Appendix C.1

### Result

| Mode                     | Result | DG<br>(dBi) | Port 1<br>(dBm) | Port 2<br>(dBm) | Port 3<br>(dBm) | Port 4<br>(dBm) | Total Power<br>(dBm) | Power Limit<br>(dBm) |
|--------------------------|--------|-------------|-----------------|-----------------|-----------------|-----------------|----------------------|----------------------|
| 802.11a_Nss1,(6Mbps)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5180MHz                  | Pass   | 4.17        | 24.07           | 23.55           | 24.06           | 23.87           | 29.91                | 30.00                |
| 5200MHz                  | Pass   | 4.17        | 23.92           | 23.39           | 23.80           | 23.83           | 29.76                | 30.00                |
| 5240MHz                  | Pass   | 4.17        | 23.79           | 23.34           | 23.83           | 23.93           | 29.75                | 30.00                |
| 5745MHz                  | Pass   | 4.94        | 24.15           | 23.43           | 23.96           | 23.92           | 29.89                | 30.00                |
| 5785MHz                  | Pass   | 4.94        | 24.07           | 23.29           | 23.97           | 23.97           | 29.86                | 30.00                |
| 5825MHz                  | Pass   | 4.94        | 24.11           | 23.31           | 24.00           | 24.03           | 29.89                | 30.00                |

DG = Directional Gain; Port X = Port X output power



**Summary**

| Mode                              | Total Power<br>(dBm) | Total Power<br>(W) |
|-----------------------------------|----------------------|--------------------|
| 5.15-5.25GHz                      | -                    | -                  |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 29.97                | 0.99312            |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 29.95                | 0.98855            |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 28.76                | 0.75162            |
| 5.725-5.85GHz                     | -                    | -                  |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 29.97                | 0.99312            |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 29.86                | 0.96828            |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 29.32                | 0.85507            |

### Result

| Mode                              | Result | DG<br>(dBi) | Port 1<br>(dBm) | Port 2<br>(dBm) | Port 3<br>(dBm) | Port 4<br>(dBm) | Total Power<br>(dBm) | Power Limit<br>(dBm) |
|-----------------------------------|--------|-------------|-----------------|-----------------|-----------------|-----------------|----------------------|----------------------|
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5180MHz                           | Pass   | 4.32        | 24.15           | 23.75           | 24.05           | 23.82           | 29.97                | 30.00                |
| 5200MHz                           | Pass   | 4.32        | 24.00           | 23.46           | 23.89           | 24.09           | 29.89                | 30.00                |
| 5240MHz                           | Pass   | 4.32        | 24.01           | 23.59           | 23.98           | 24.13           | 29.95                | 30.00                |
| 5745MHz                           | Pass   | 5.09        | 24.27           | 23.55           | 23.96           | 23.98           | 29.97                | 30.00                |
| 5785MHz                           | Pass   | 5.09        | 23.91           | 23.35           | 23.85           | 23.82           | 29.76                | 30.00                |
| 5825MHz                           | Pass   | 5.09        | 24.02           | 23.37           | 23.89           | 24.09           | 29.87                | 30.00                |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5190MHz                           | Pass   | 4.32        | 22.56           | 22.48           | 22.59           | 22.65           | 28.59                | 30.00                |
| 5230MHz                           | Pass   | 4.32        | 23.71           | 23.66           | 24.35           | 23.95           | 29.95                | 30.00                |
| 5755MHz                           | Pass   | 5.09        | 23.86           | 23.44           | 24.01           | 23.82           | 29.81                | 30.00                |
| 5795MHz                           | Pass   | 5.09        | 23.70           | 23.33           | 24.18           | 24.10           | 29.86                | 30.00                |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5210MHz                           | Pass   | 4.32        | 22.90           | 22.72           | 22.56           | 22.79           | 28.76                | 30.00                |
| 5775MHz                           | Pass   | 5.09        | 23.91           | 23.13           | 23.05           | 23.06           | 29.32                | 30.00                |

DG = Directional Gain; Port X = Port X output power



**Summary**

| Mode                              | Total Power<br>(dBm) | Total Power<br>(W) |
|-----------------------------------|----------------------|--------------------|
| 5.15-5.25GHz                      | -                    | -                  |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | 29.77                | 0.94842            |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | 28.48                | 0.70469            |
| 5.725-5.85GHz                     | -                    | -                  |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | 29.83                | 0.96161            |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | 29.53                | 0.89743            |

**Result**

| Mode                              | Result | DG<br>(dBi) | Port 1<br>(dBm) | Port 2<br>(dBm) | Port 3<br>(dBm) | Port 4<br>(dBm) | Total Power<br>(dBm) | Power Limit<br>(dBm) |
|-----------------------------------|--------|-------------|-----------------|-----------------|-----------------|-----------------|----------------------|----------------------|
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5190MHz                           | Pass   | 4.17        | 23.32           | 23.17           | 23.72           | 23.53           | 29.46                | 30.00                |
| 5230MHz                           | Pass   | 4.17        | 23.62           | 23.40           | 24.06           | 23.89           | 29.77                | 30.00                |
| 5755MHz                           | Pass   | 4.94        | 23.90           | 23.37           | 24.10           | 23.83           | 29.83                | 30.00                |
| 5795MHz                           | Pass   | 4.94        | 23.70           | 23.48           | 24.07           | 23.95           | 29.83                | 30.00                |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5210MHz                           | Pass   | 4.17        | 22.67           | 22.37           | 22.19           | 22.61           | 28.48                | 30.00                |
| 5775MHz                           | Pass   | 4.94        | 24.02           | 23.43           | 23.36           | 23.17           | 29.53                | 30.00                |

DG = Directional Gain; Port X = Port X output power



Summary

| Mode                     | PD<br>(dBm/RBW) |
|--------------------------|-----------------|
| 5.15-5.25GHz             | -               |
| 802.11a_Nss1,(6Mbps)_4TX | 16.38           |
| 5.725-5.85GHz            | -               |
| 802.11a_Nss1,(6Mbps)_4TX | 15.05           |

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

| Mode                     | Result | DG<br>(dBi) | Port 1<br>(dBm/RBW) | Port 2<br>(dBm/RBW) | Port 3<br>(dBm/RBW) | Port 4<br>(dBm/RBW) | PD<br>(dBm/RBW) | PD Limit<br>(dBm/RBW) |
|--------------------------|--------|-------------|---------------------|---------------------|---------------------|---------------------|-----------------|-----------------------|
| 802.11a_Nss1,(6Mbps)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5180MHz                  | Pass   | 4.32        | 10.74               | 9.93                | 10.62               | 10.57               | 16.38           | 17.00                 |
| 5200MHz                  | Pass   | 4.32        | 10.47               | 9.87                | 10.62               | 10.52               | 16.27           | 17.00                 |
| 5240MHz                  | Pass   | 4.32        | 10.35               | 9.91                | 10.42               | 10.55               | 16.17           | 17.00                 |
| 5745MHz                  | Pass   | 5.09        | 9.43                | 8.76                | 9.20                | 9.22                | 15.02           | 30.00                 |
| 5785MHz                  | Pass   | 5.09        | 9.36                | 8.72                | 9.27                | 9.37                | 15.05           | 30.00                 |
| 5825MHz                  | Pass   | 5.09        | 9.52                | 8.60                | 9.32                | 9.23                | 15.00           | 30.00                 |


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;  
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

## 802.11a\_Nss1,(6Mbps)\_4TX

## PSD

5180MHz

28/09/2021

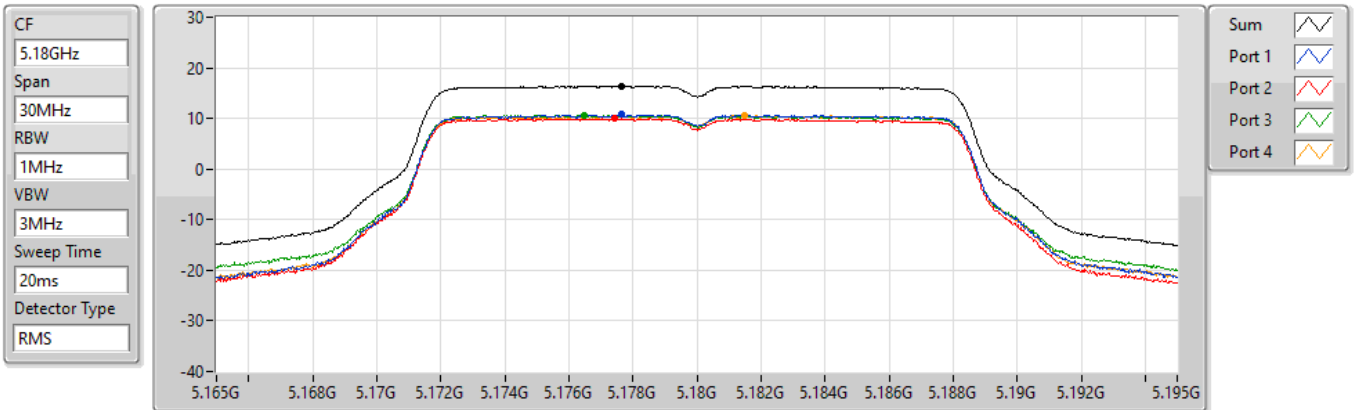


| Sum       | PD        | Port 1    | Port 2    | Port 3    | Port 4    |
|-----------|-----------|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 16.38     | 16.38     | 10.74     | 9.93      | 10.62     | 10.57     |

## 802.11a\_Nss1,(6Mbps)\_4TX

## PSD

5200MHz

28/09/2021

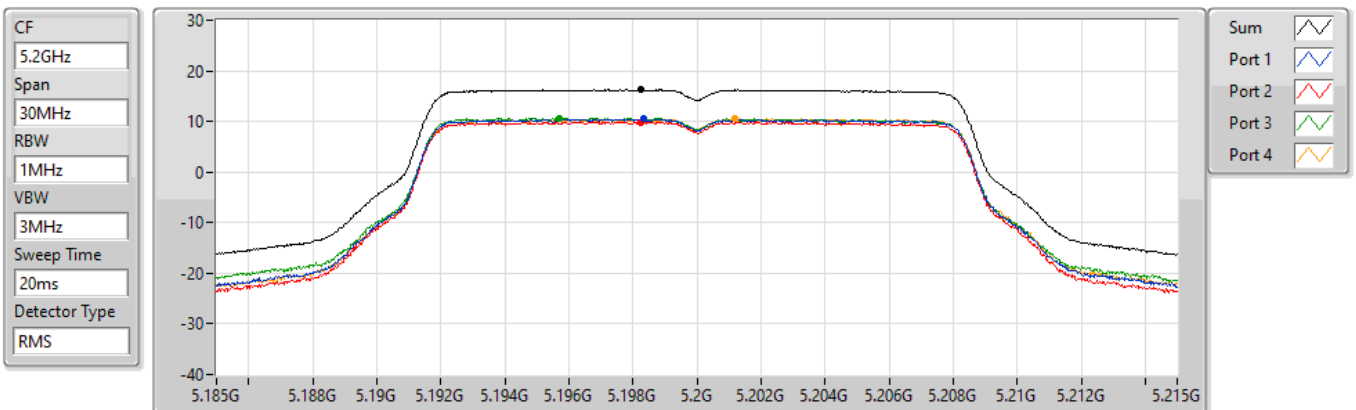


| Sum       | PD        | Port 1    | Port 2    | Port 3    | Port 4    |
|-----------|-----------|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 16.27     | 16.27     | 10.47     | 9.87      | 10.62     | 10.52     |

## 802.11a\_Nss1,(6Mbps)\_4TX

## PSD

5240MHz

28/09/2021

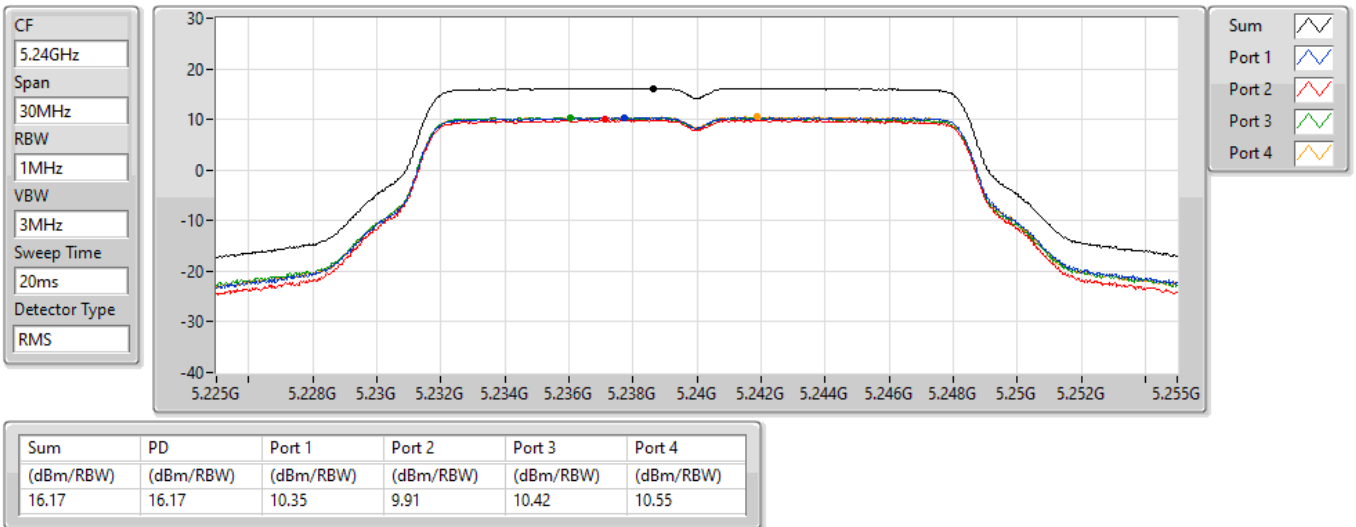


## 802.11a\_Nss1,(6Mbps)\_4TX

## PSD

5745MHz

28/09/2021

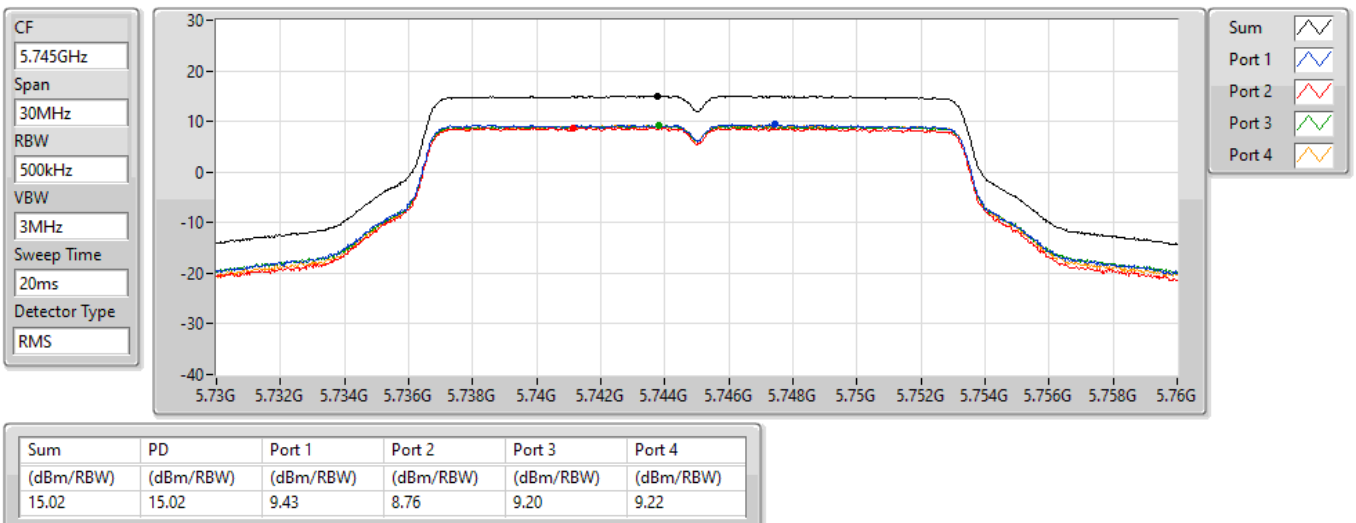


## 802.11a\_Nss1,(6Mbps)\_4TX

## PSD

5785MHz

28/09/2021

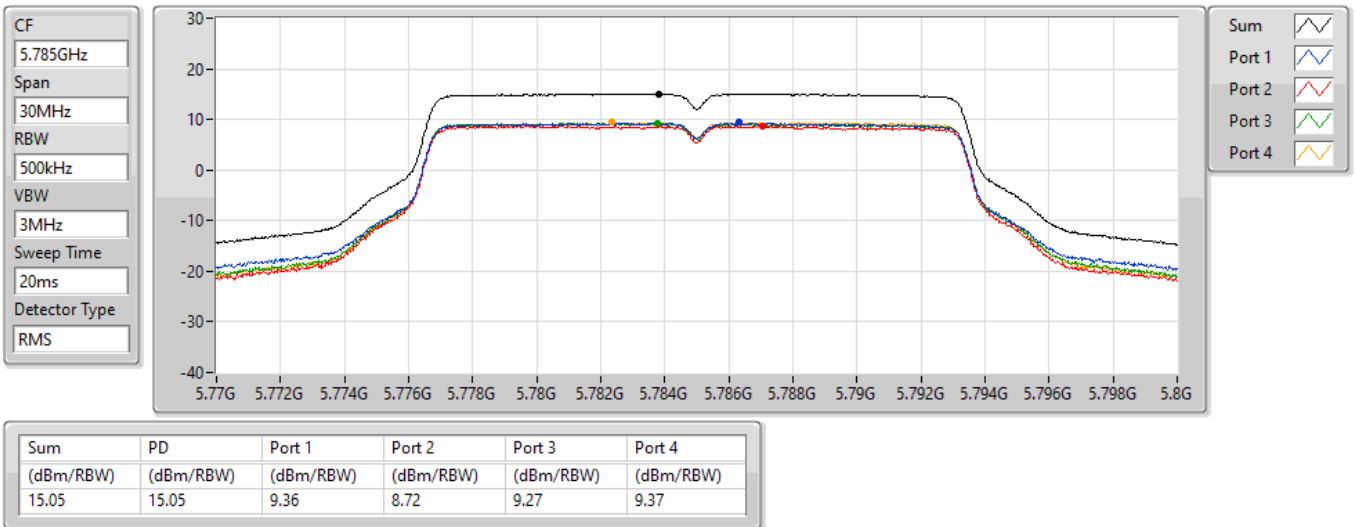


## 802.11a\_Nss1,(6Mbps)\_4TX

## PSD

5825MHz

28/09/2021

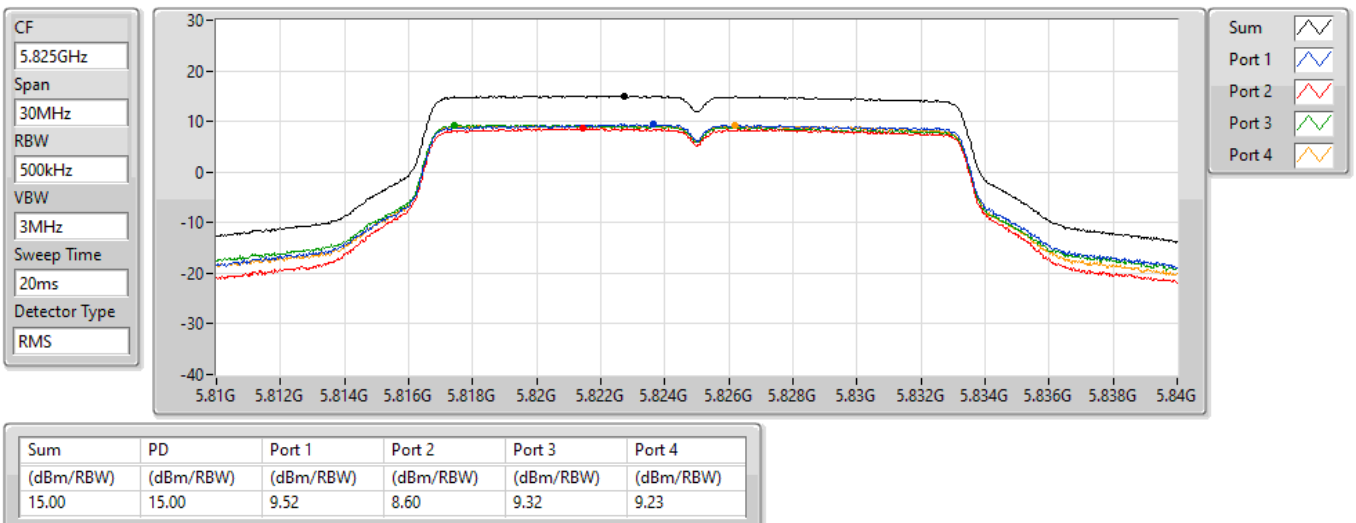

**Summary**

| Mode                              | PD<br>(dBm/RBW) |
|-----------------------------------|-----------------|
| 5.15-5.25GHz                      | -               |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 15.92           |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 13.03           |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 9.04            |
| 5.725-5.85GHz                     | -               |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 14.58           |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 11.67           |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 8.28            |

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**Result**

| Mode                              | Result | DG<br>(dBi) | Port 1<br>(dBm/RBW) | Port 2<br>(dBm/RBW) | Port 3<br>(dBm/RBW) | Port 4<br>(dBm/RBW) | PD<br>(dBm/RBW) | PD Limit<br>(dBm/RBW) |
|-----------------------------------|--------|-------------|---------------------|---------------------|---------------------|---------------------|-----------------|-----------------------|
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5180MHz                           | Pass   | 4.32        | 10.09               | 9.67                | 10.15               | 10.06               | 15.92           | 17.00                 |
| 5200MHz                           | Pass   | 4.32        | 10.01               | 9.56                | 9.92                | 10.17               | 15.86           | 17.00                 |
| 5240MHz                           | Pass   | 4.32        | 9.93                | 9.70                | 9.90                | 10.04               | 15.84           | 17.00                 |
| 5745MHz                           | Pass   | 5.09        | 9.00                | 8.26                | 8.63                | 8.80                | 14.58           | 30.00                 |
| 5785MHz                           | Pass   | 5.09        | 8.72                | 8.10                | 8.55                | 8.71                | 14.42           | 30.00                 |
| 5825MHz                           | Pass   | 5.09        | 8.63                | 7.93                | 8.76                | 9.09                | 14.46           | 30.00                 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5190MHz                           | Pass   | 4.32        | 5.86                | 5.66                | 5.84                | 5.98                | 11.78           | 17.00                 |
| 5230MHz                           | Pass   | 4.32        | 6.79                | 6.80                | 7.54                | 7.17                | 13.03           | 17.00                 |
| 5755MHz                           | Pass   | 5.09        | 5.68                | 5.08                | 5.86                | 5.56                | 11.48           | 30.00                 |
| 5795MHz                           | Pass   | 5.09        | 5.51                | 5.30                | 6.02                | 6.02                | 11.67           | 30.00                 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5210MHz                           | Pass   | 4.32        | 3.26                | 2.96                | 2.93                | 3.28                | 9.04            | 17.00                 |
| 5775MHz                           | Pass   | 5.09        | 2.98                | 2.15                | 2.24                | 2.02                | 8.28            | 30.00                 |


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;  
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## PSD

5180MHz

28/09/2021

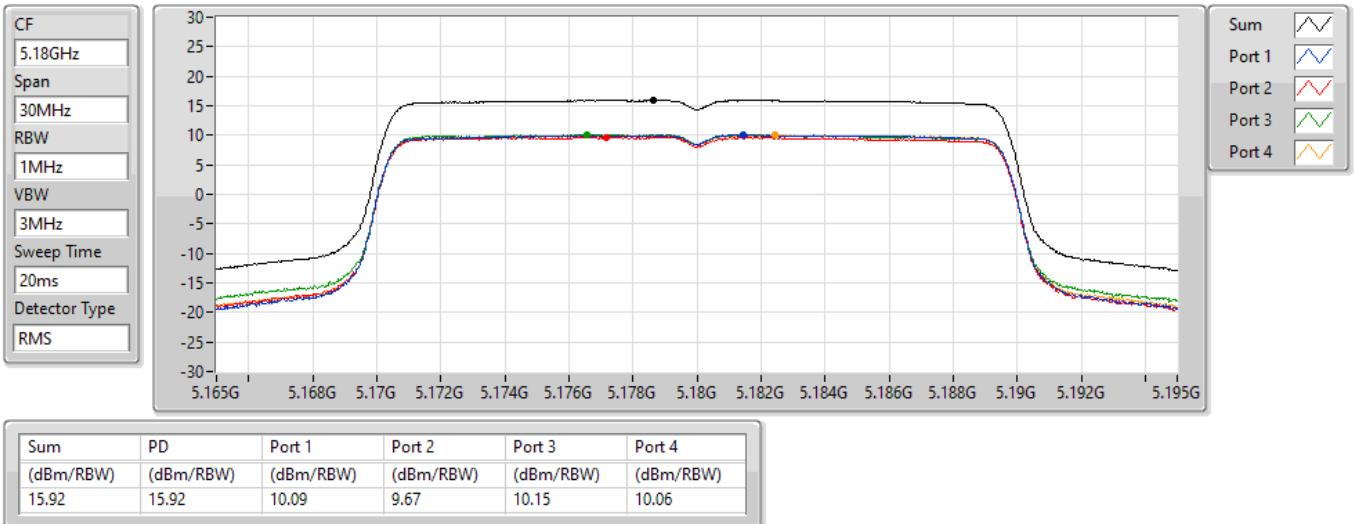


## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## PSD

5200MHz

28/09/2021

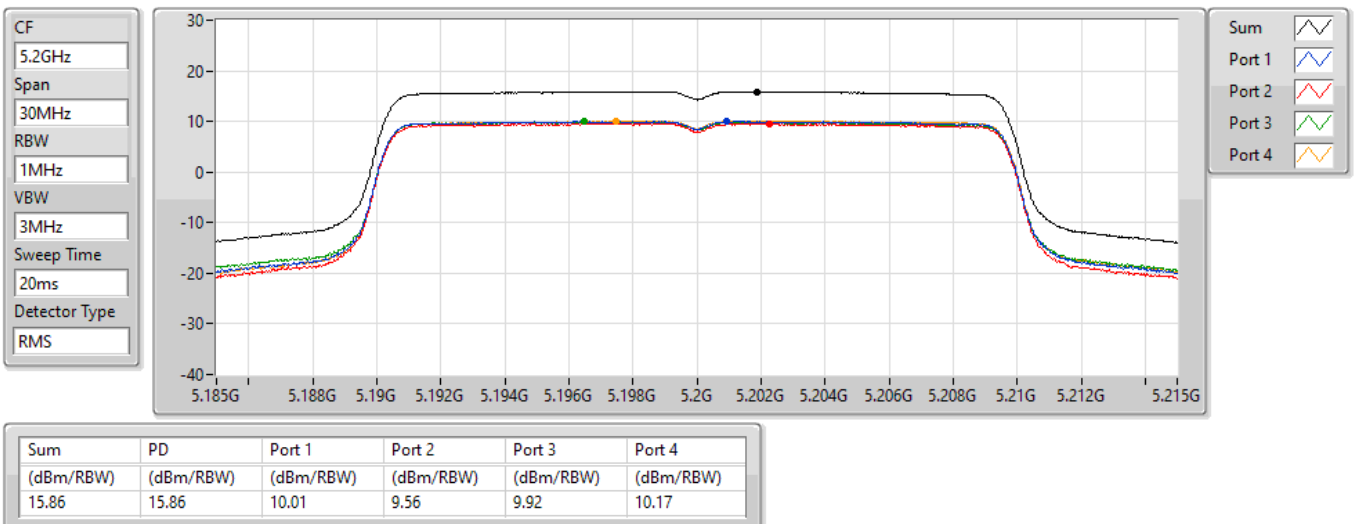


## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## PSD

5240MHz

28/09/2021

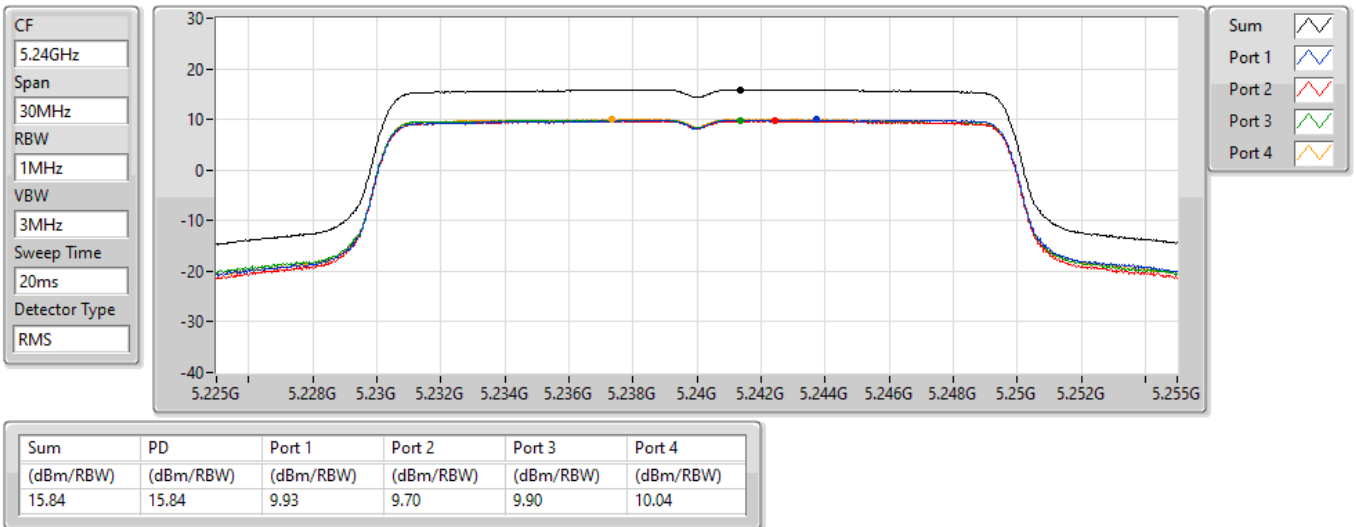


## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## PSD

5745MHz

28/09/2021

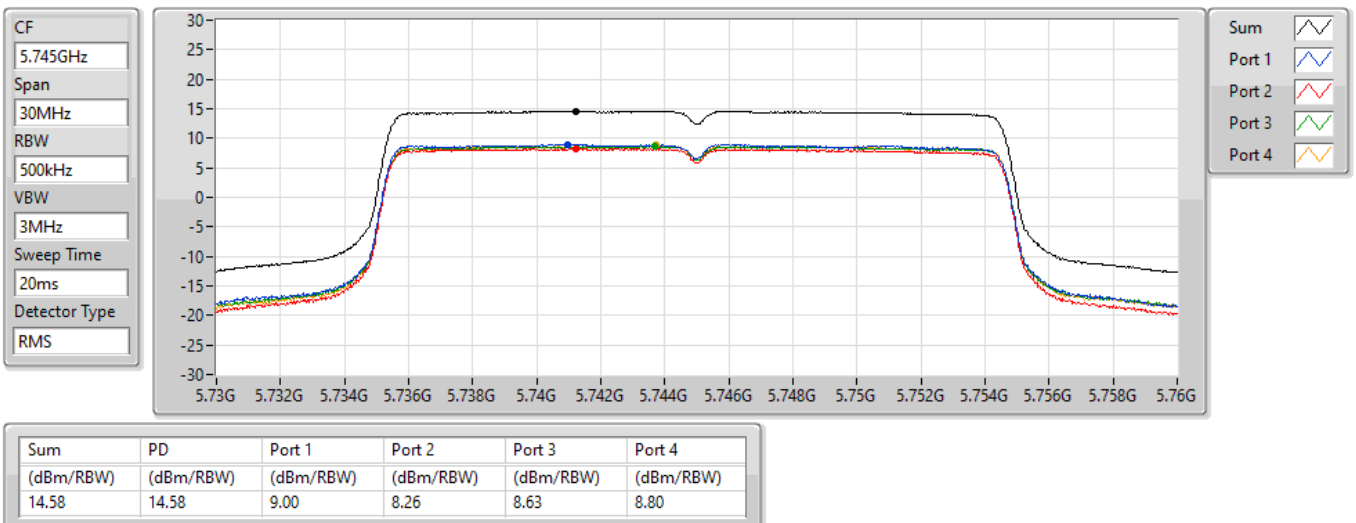


## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## PSD

5785MHz

28/09/2021

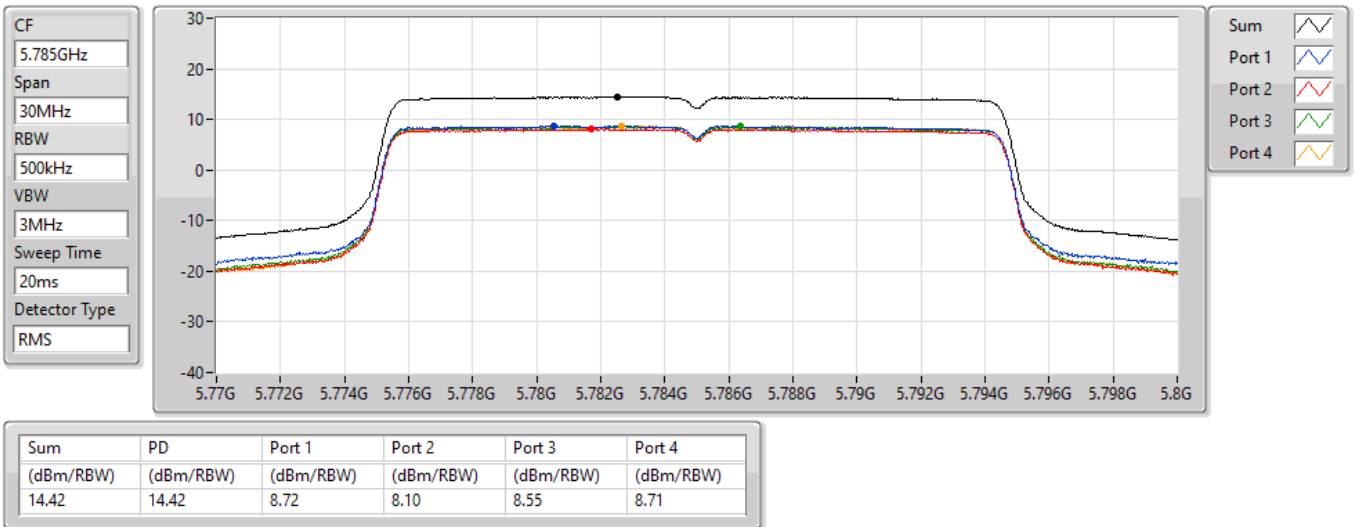


## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## PSD

5825MHz

28/09/2021

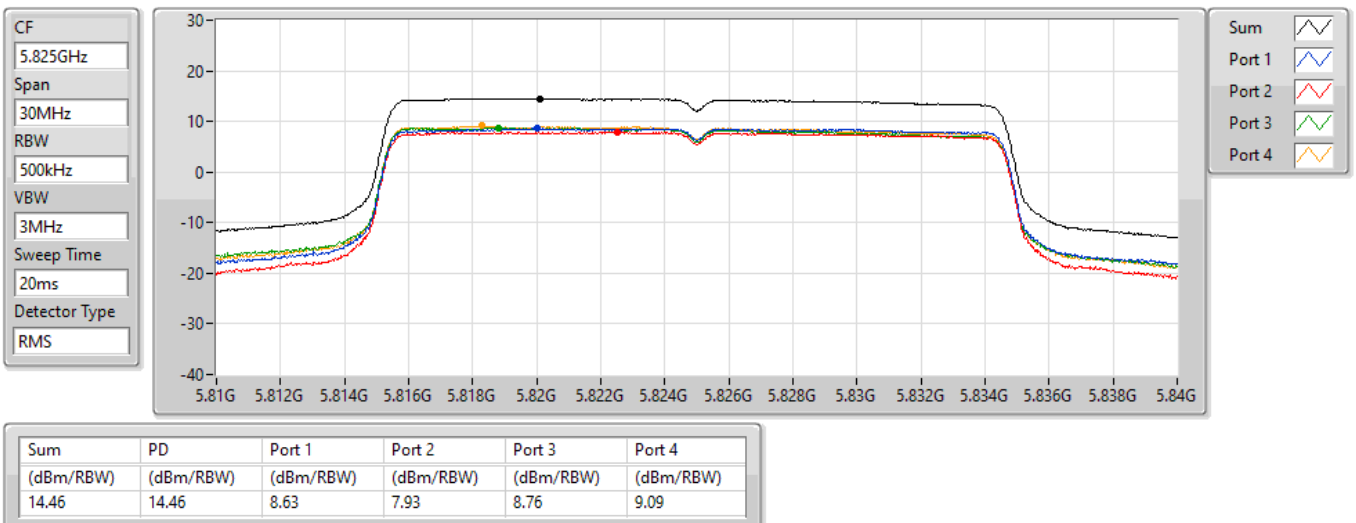


## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## PSD

5190MHz

28/09/2021

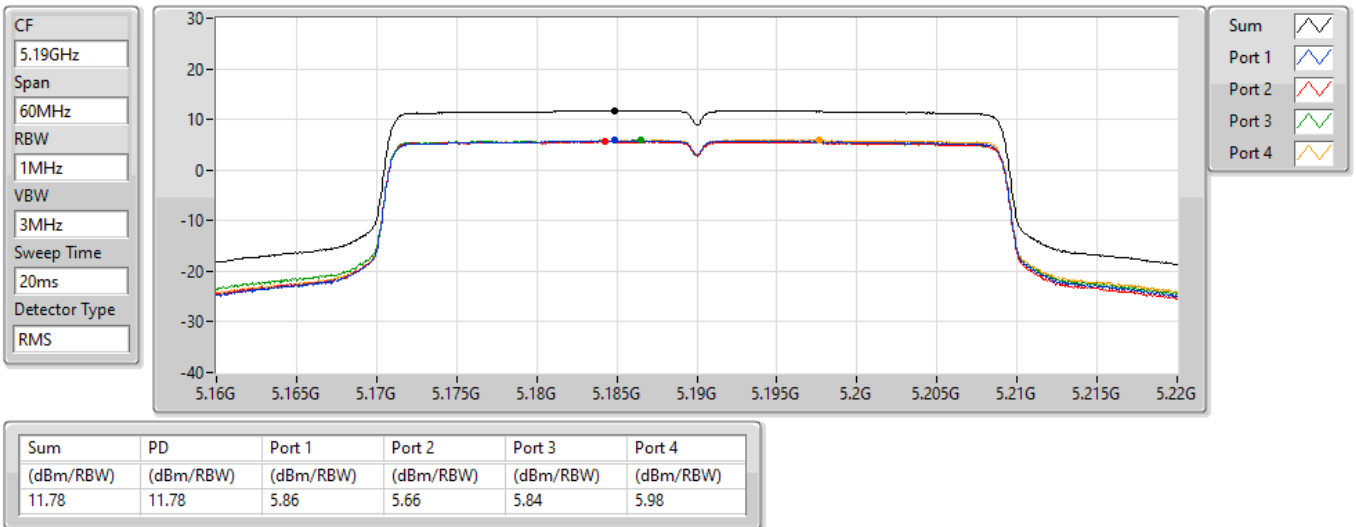


## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## PSD

5230MHz

28/09/2021

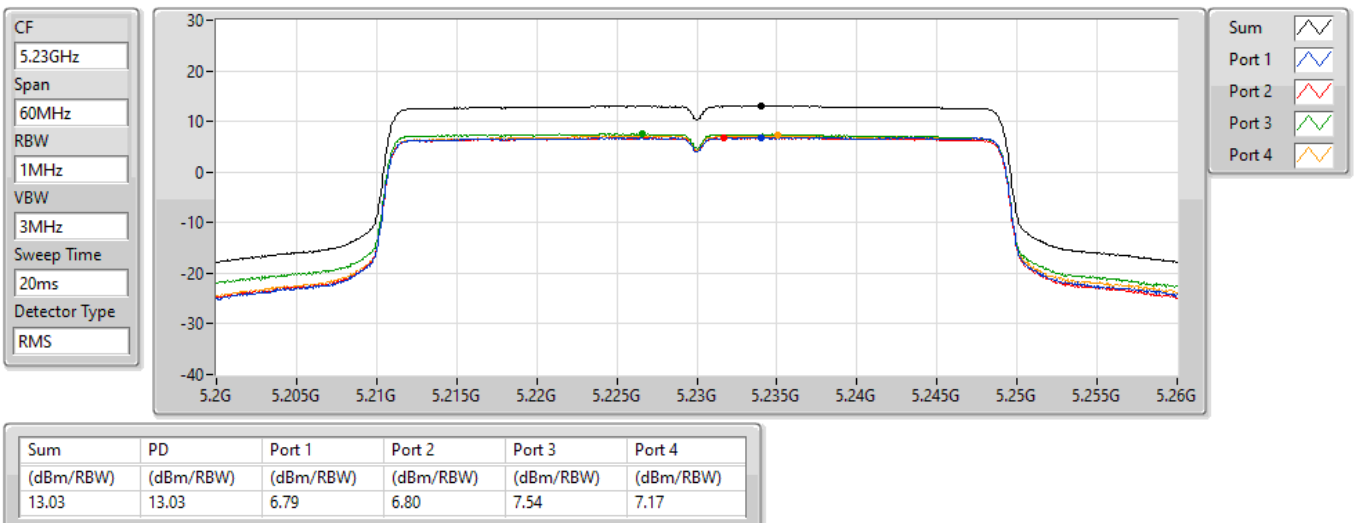


## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## PSD

5755MHz

28/09/2021

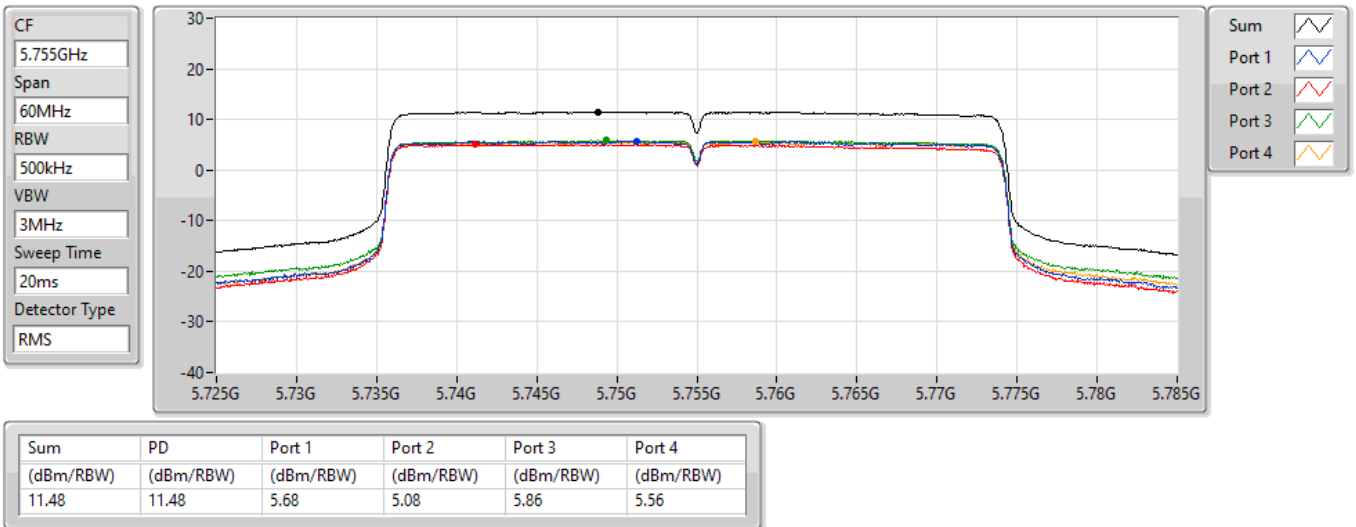


## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## PSD

5795MHz

28/09/2021

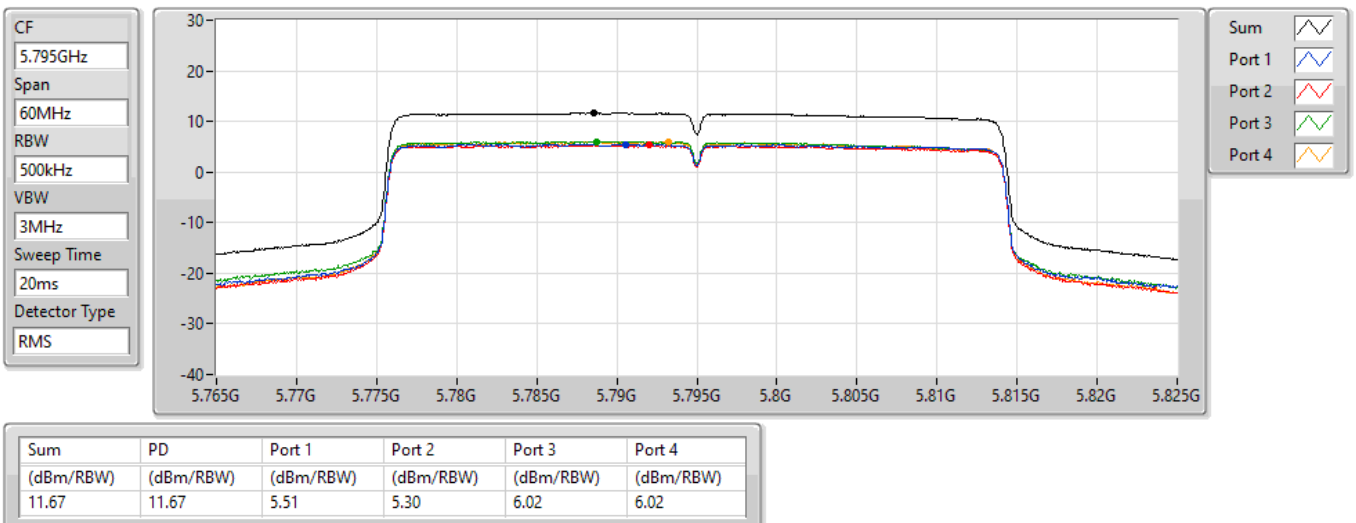


## 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

## PSD

5210MHz

28/09/2021

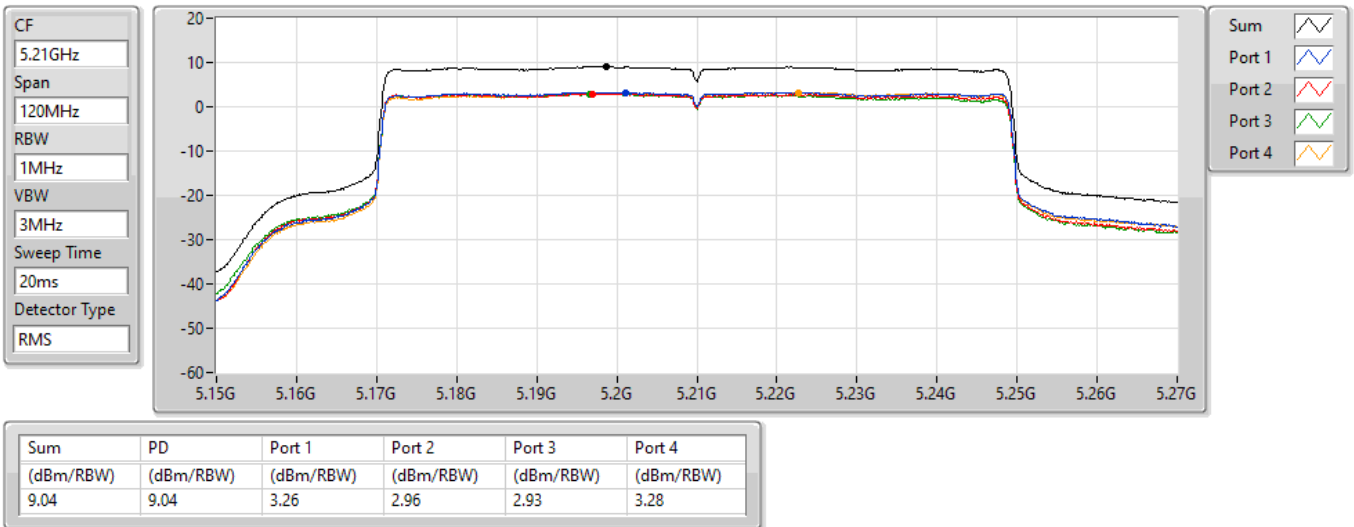


## 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

## PSD

5775MHz

28/09/2021

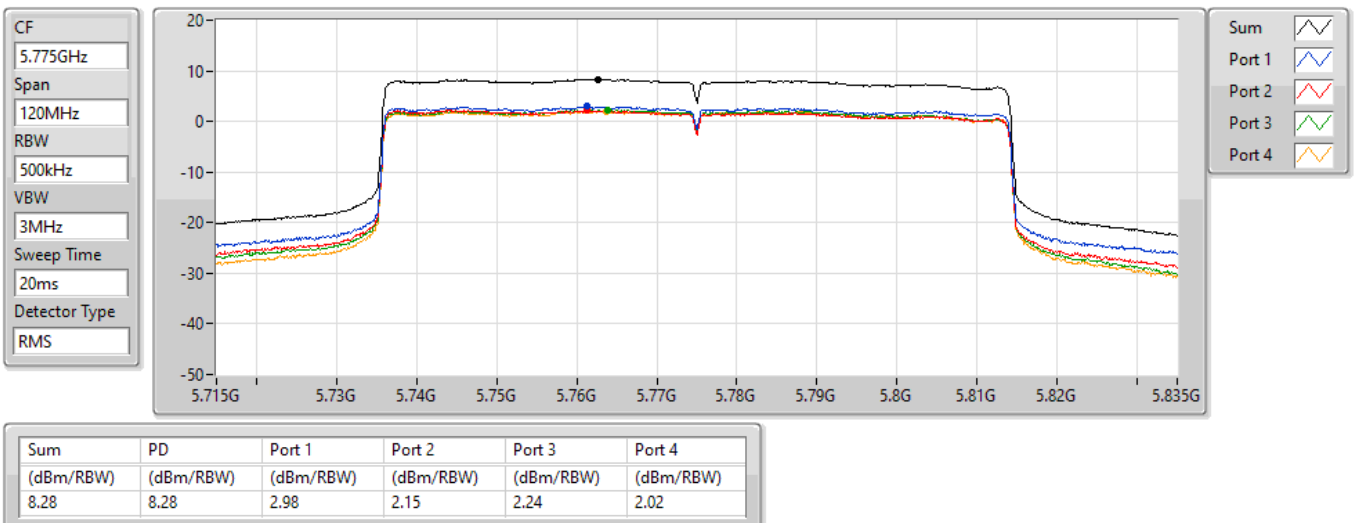

**Summary**

| Mode                              | PD<br>(dBm/RBW) |
|-----------------------------------|-----------------|
| 5.15-5.25GHz                      | -               |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | 12.89           |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | 8.81            |
| 5.725-5.85GHz                     | -               |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | 11.72           |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | 8.64            |

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**Result**

| Mode                              | Result | DG<br>(dBi) | Port 1<br>(dBm/RBW) | Port 2<br>(dBm/RBW) | Port 3<br>(dBm/RBW) | Port 4<br>(dBm/RBW) | PD<br>(dBm/RBW) | PD Limit<br>(dBm/RBW) |
|-----------------------------------|--------|-------------|---------------------|---------------------|---------------------|---------------------|-----------------|-----------------------|
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5190MHz                           | Pass   | 4.17        | 6.62                | 6.38                | 6.99                | 6.72                | 12.58           | 17.00                 |
| 5230MHz                           | Pass   | 4.17        | 6.66                | 6.69                | 7.42                | 7.13                | 12.89           | 17.00                 |
| 5755MHz                           | Pass   | 4.94        | 5.62                | 5.36                | 6.07                | 5.63                | 11.56           | 30.00                 |
| 5795MHz                           | Pass   | 4.94        | 5.59                | 5.27                | 6.29                | 6.06                | 11.72           | 30.00                 |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5210MHz                           | Pass   | 4.17        | 3.07                | 2.86                | 2.70                | 3.12                | 8.81            | 17.00                 |
| 5775MHz                           | Pass   | 4.94        | 3.28                | 2.67                | 2.51                | 2.21                | 8.64            | 30.00                 |


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;  
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

## 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## PSD

5190MHz

28/09/2021

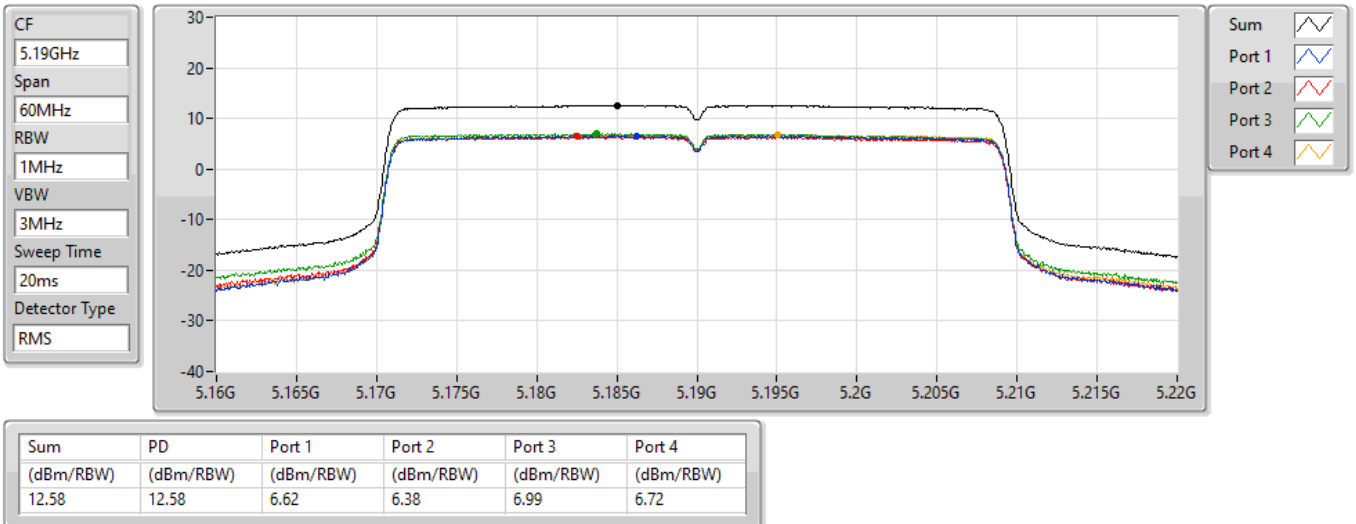


## 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## PSD

5230MHz

28/09/2021

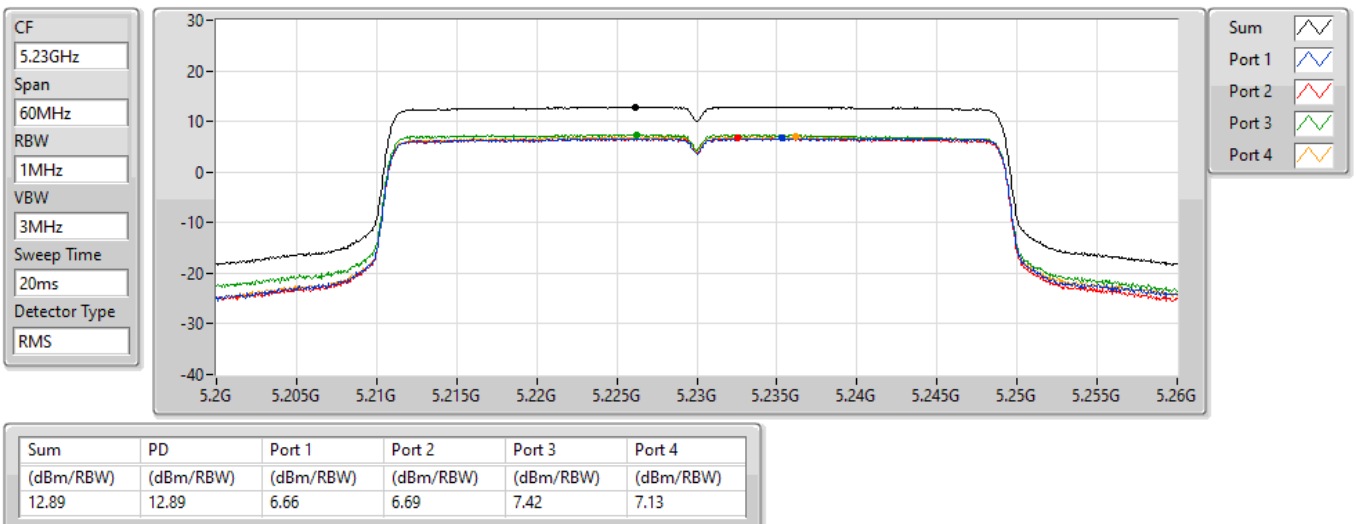


## 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## PSD

5755MHz

28/09/2021

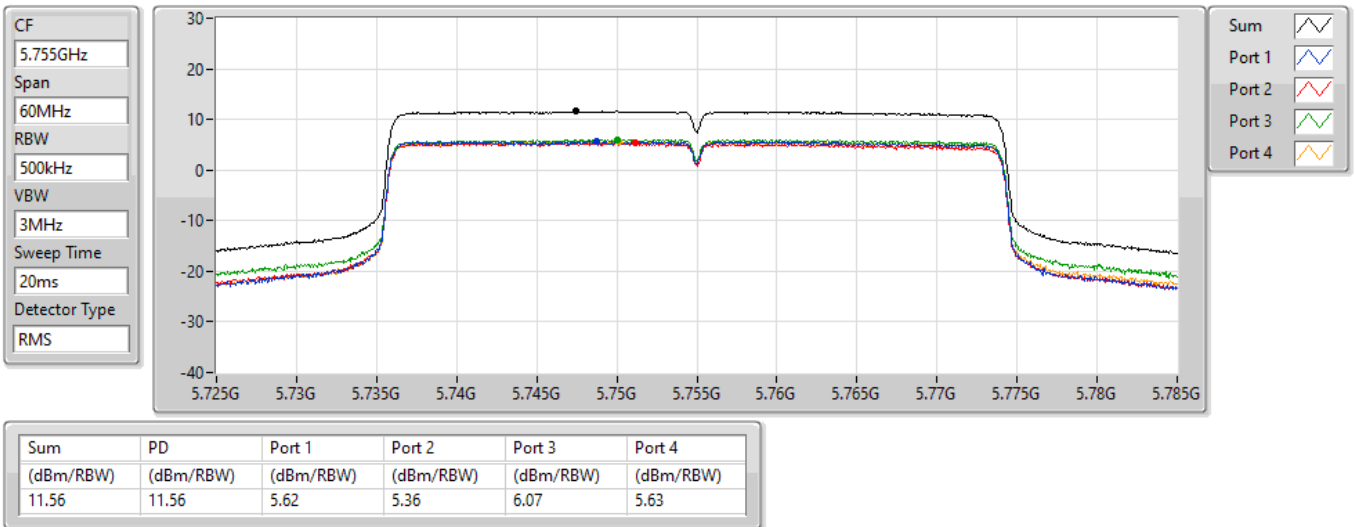


## 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## PSD

5795MHz

28/09/2021

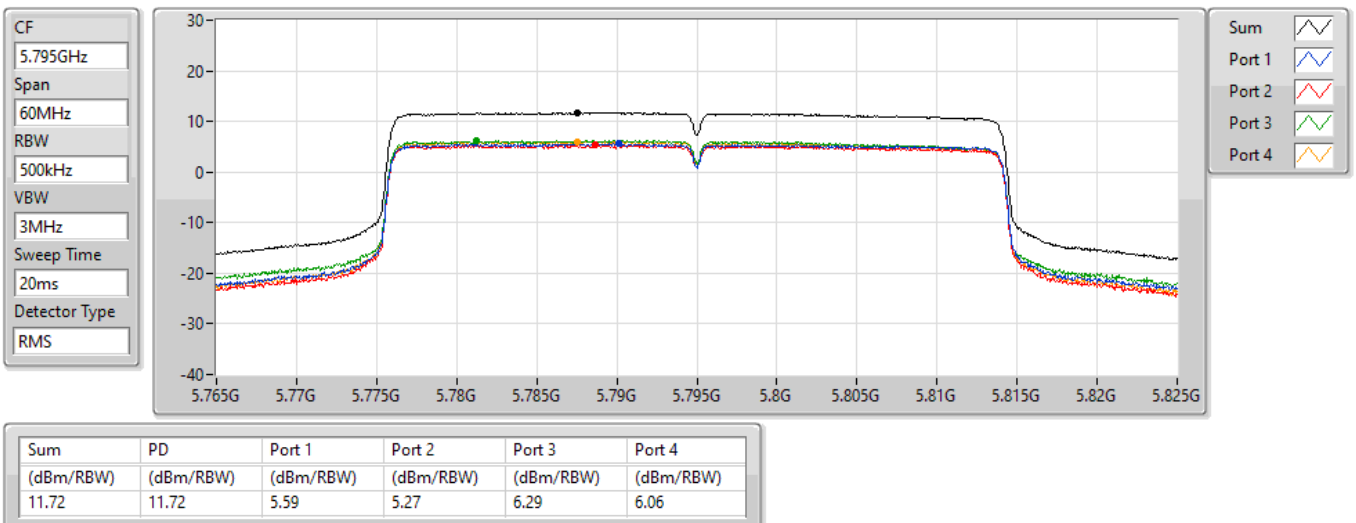


## 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

## PSD

5210MHz

28/09/2021

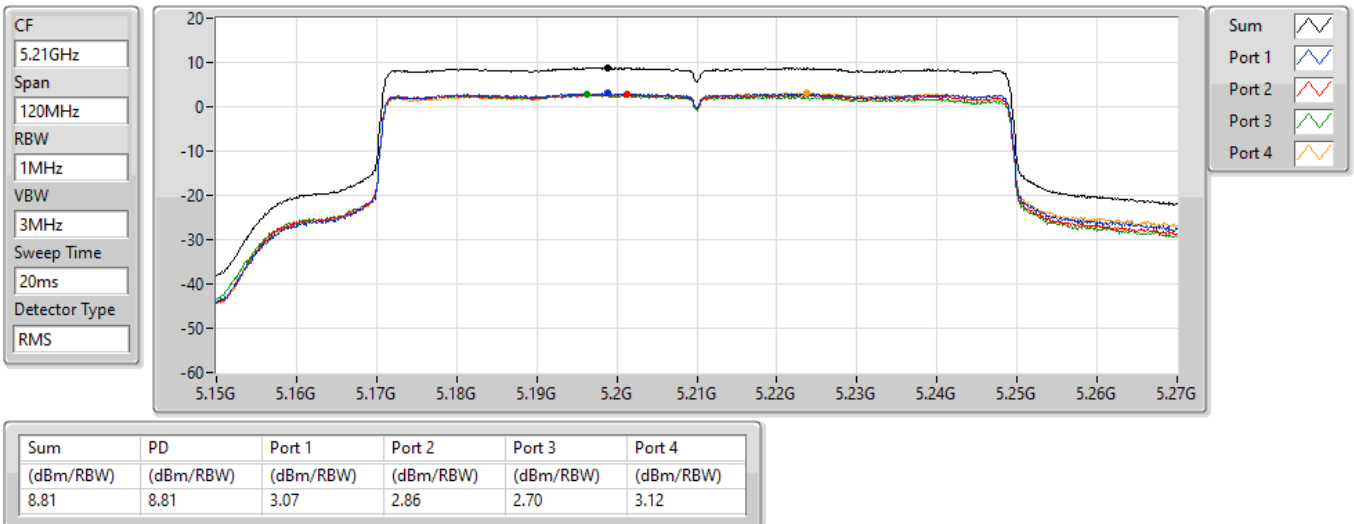


## 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

## PSD

5775MHz

28/09/2021

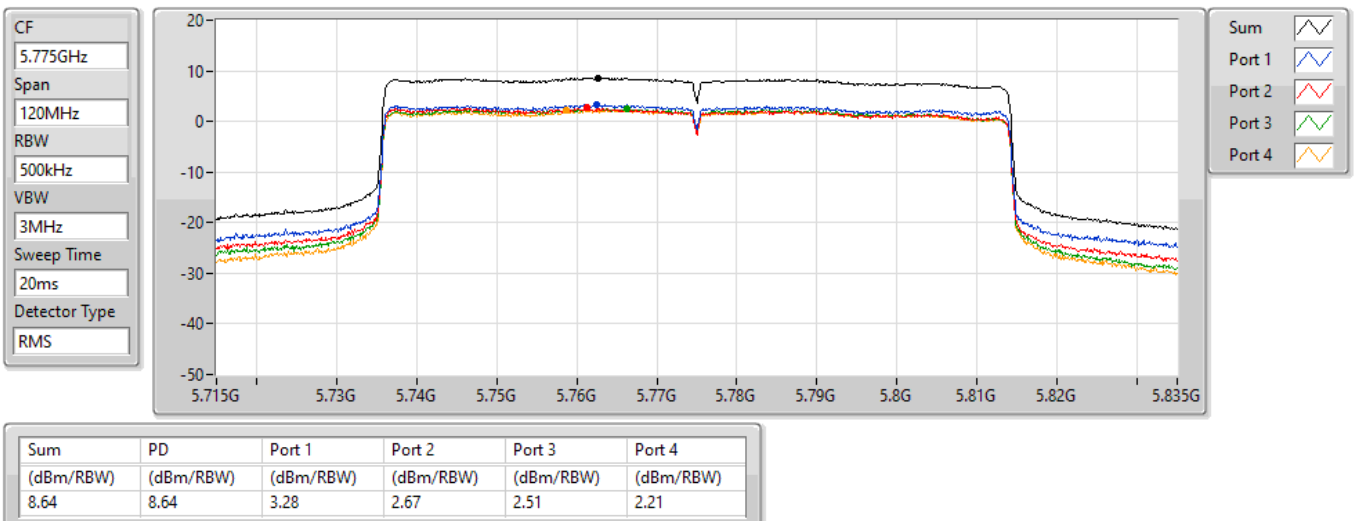




## ***Radiated Emissions below 1GHz***

## ***Appendix E.1***

### **Summary**


| Mode   | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Condition |
|--------|--------|------|--------------|-------------------|-------------------|----------------|-----------|
| Mode 3 | Pass   | QP   | 278.32M      | 41.84             | 46.00             | -4.16          | Vertical  |

### Mode 3

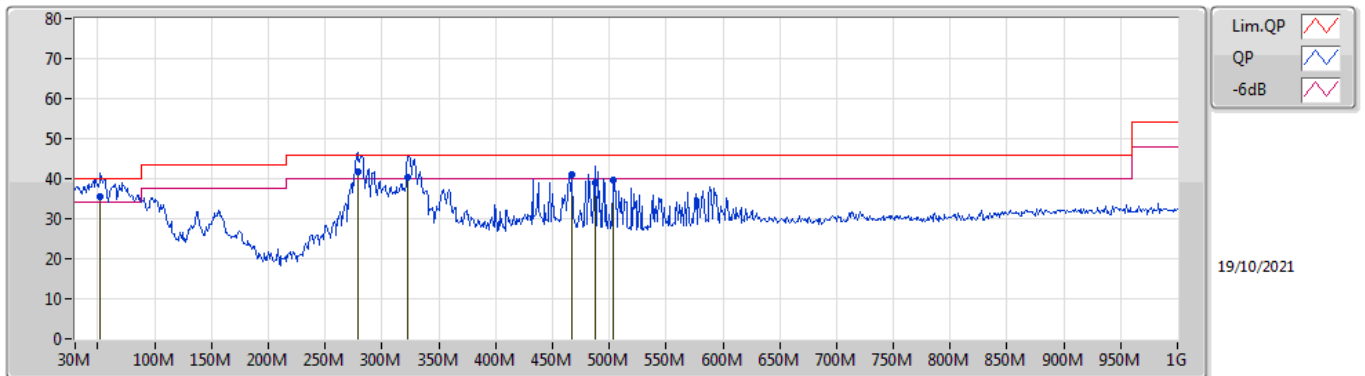

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB/m) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV/m) | AF<br>(dB/m) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|------------------|-------------|-----------|----------------|---------------|---------|-----------------|--------------|------------|------------|
| QP   | 52.31M       | 35.62             | 40.00             | -4.38          | -17.48           | 3           | Vertical  | 358            | 1.50          | "Worst" | 53.10           | 13.25        | 1.05       | 31.78      |
| PK   | 467.47M      | 41.13             | 46.00             | -4.87          | -5.95            | 3           | Vertical  | 166            | 1.25          | -       | 47.08           | 22.98        | 3.37       | 32.30      |
| QP   | 487.84M      | 39.10             | 46.00             | -6.90          | -5.71            | 3           | Vertical  | 151            | 1.00          | -       | 44.81           | 23.16        | 3.45       | 32.32      |
| QP   | 278.32M      | 41.84             | 46.00             | -4.16          | -10.86           | 3           | Vertical  | 198            | 1.50          | -       | 52.70           | 18.62        | 2.57       | 32.05      |
| PK   | 503.36M      | 39.76             | 46.00             | -6.24          | -5.66            | 3           | Vertical  | 249            | 1.00          | -       | 45.42           | 23.17        | 3.51       | 32.34      |
| QP   | 322.94M      | 40.50             | 46.00             | -5.50          | -9.80            | 3           | Vertical  | 215            | 1.50          | -       | 50.30           | 19.50        | 2.79       | 32.09      |

### Mode 3

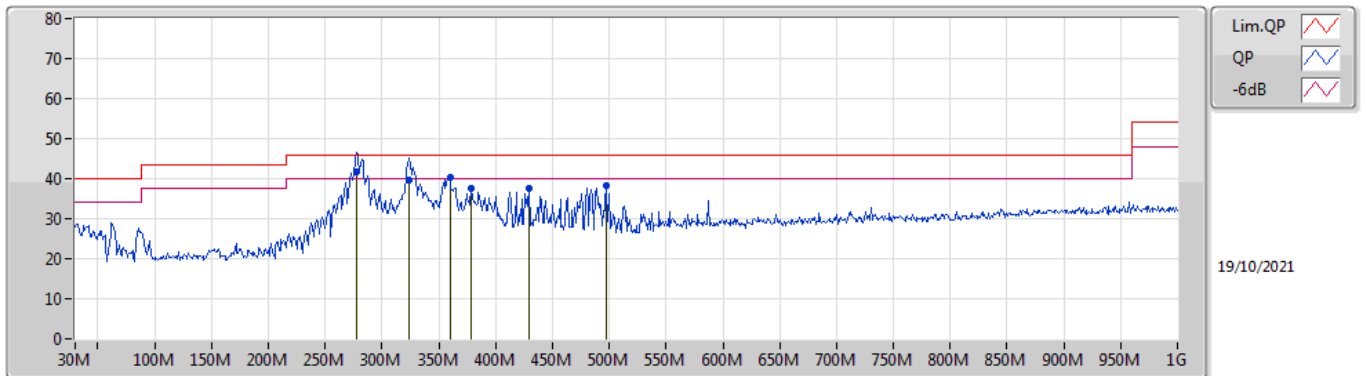

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB/m) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV/m) | AF<br>(dB/m) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|------------------|-------------|------------|----------------|---------------|---------|-----------------|--------------|------------|------------|
| QP   | 277.35M      | 41.61             | 46.00             | -4.39          | -10.89           | 3           | Horizontal | 119            | 1.00          | "Worst" | 52.50           | 18.60        | 2.56       | 32.05      |
| QP   | 323.91M      | 39.53             | 46.00             | -6.47          | -9.77            | 3           | Horizontal | 357            | 1.25          | -       | 49.30           | 19.52        | 2.80       | 32.09      |
| PK   | 359.8M       | 40.25             | 46.00             | -5.75          | -8.54            | 3           | Horizontal | 171            | 1.00          | -       | 48.79           | 20.65        | 2.94       | 32.13      |
| PK   | 378.23M      | 37.50             | 46.00             | -8.50          | -8.32            | 3           | Horizontal | 232            | 1.00          | -       | 45.82           | 20.83        | 3.01       | 32.16      |
| PK   | 429.64M      | 37.65             | 46.00             | -8.35          | -6.56            | 3           | Horizontal | 128            | 2.00          | -       | 44.21           | 22.46        | 3.22       | 32.24      |
| PK   | 497.54M      | 38.13             | 46.00             | -7.87          | -5.66            | 3           | Horizontal | 276            | 2.00          | -       | 43.79           | 23.18        | 3.49       | 32.33      |




**Summary**

| Mode                           | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comments |
|--------------------------------|--------|------|--------------|-------------------|-------------------|----------------|-------------|-----------|----------------|---------------|----------|
| 5.15-5.25GHz                   | -      | -    | -            | -                 | -                 | -              | -           | -         | -              | -             | -        |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | Pass   | AV   | 5.138G       | 53.84             | 54.00             | -0.16          | 3           | Vertical  | 80             | 1.91          | -        |



# 802.11a\_Nss1,(6Mbps)\_4TX

## 5180MHz\_TnomVnom

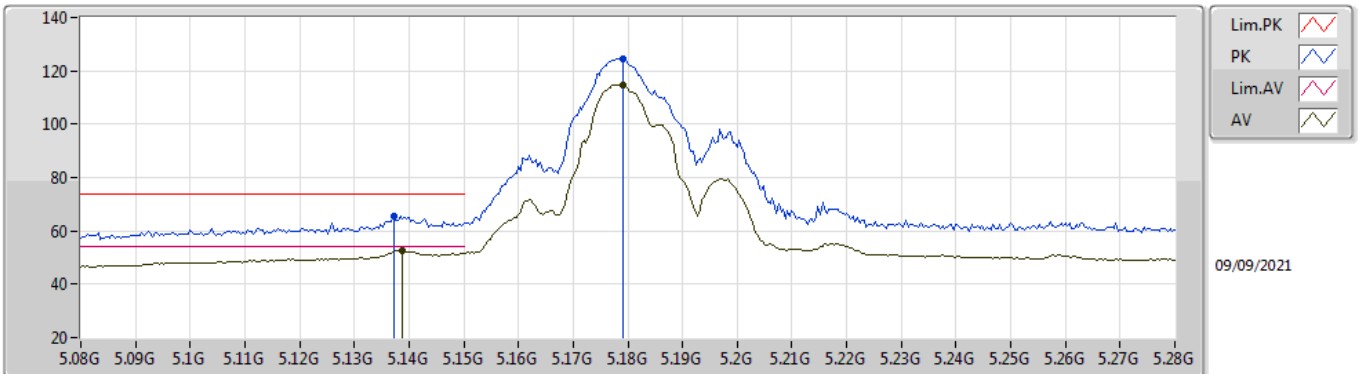


EUT\_Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.1372G      | 65.66             | 74.00             | -8.34          | 60.85         | 3           | Vertical  | 251            | 2.08          | -       | 31.78      | 5.00       | 31.97      |
| AV   | 5.1388G      | 52.77             | 54.00             | -1.23          | 47.97         | 3           | Vertical  | 251            | 2.08          | -       | 31.77      | 5.00       | 31.97      |
| PK   | 5.1792G      | 124.73            | Inf               | -Inf           | 120.20        | 3           | Vertical  | 251            | 2.08          | -       | 31.52      | 5.00       | 31.99      |
| AV   | 5.1792G      | 114.90            | Inf               | -Inf           | 110.37        | 3           | Vertical  | 251            | 2.08          | -       | 31.52      | 5.00       | 31.99      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5180MHz\_TnomVnom

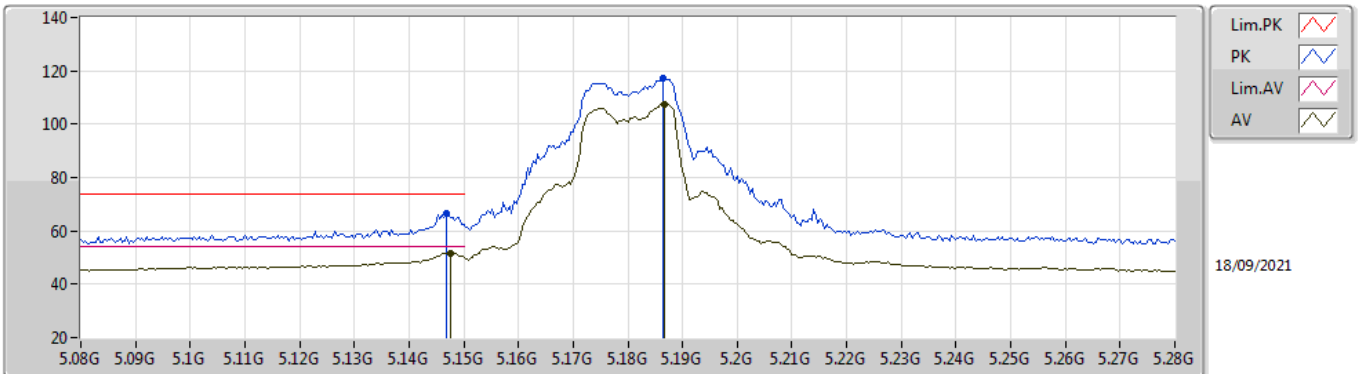


EUT\_Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.1468G      | 66.39             | 74.00             | -7.61          | 61.64         | 3           | Horizontal | 276            | 1.80          | -       | 31.72      | 5.00       | 31.97      |  |
| AV   | 5.1476G      | 51.79             | 54.00             | -2.21          | 47.05         | 3           | Horizontal | 276            | 1.80          | -       | 31.71      | 5.00       | 31.97      |  |
| PK   | 5.1864G      | 117.17            | Inf               | -Inf           | 112.68        | 3           | Horizontal | 276            | 1.80          | -       | 31.48      | 5.00       | 31.99      |  |
| AV   | 5.1868G      | 107.46            | Inf               | -Inf           | 102.97        | 3           | Horizontal | 276            | 1.80          | -       | 31.48      | 5.00       | 31.99      |  |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5180MHz\_TnomVnom

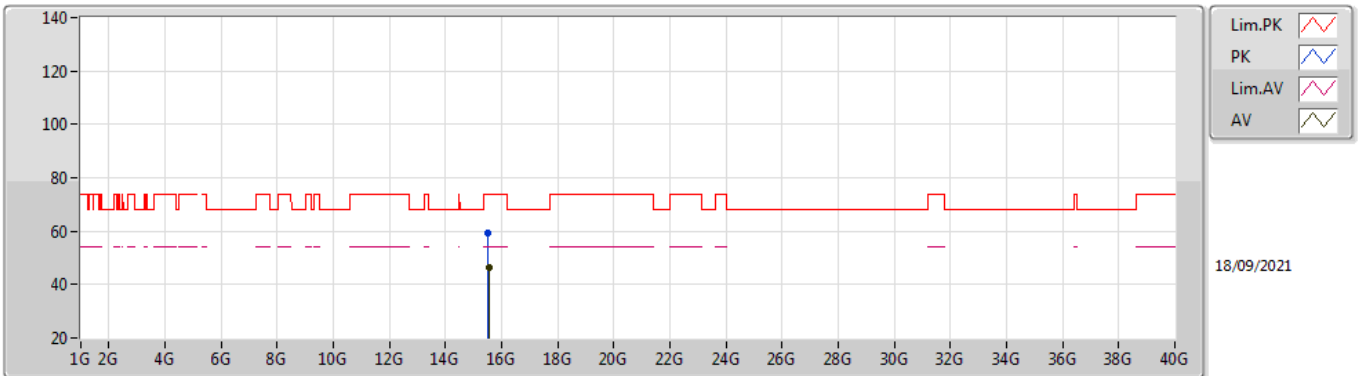


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.5326G     | 59.45             | 74.00             | -14.55         | 44.77         | 3           | Vertical  | 114            | 1.15          | -       | 38.54      | 10.37      | 34.23      |
| AV   | 15.54552G    | 46.48             | 54.00             | -7.52          | 31.88         | 3           | Vertical  | 114            | 1.15          | -       | 38.47      | 10.37      | 34.24      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5180MHz\_TnomVnom

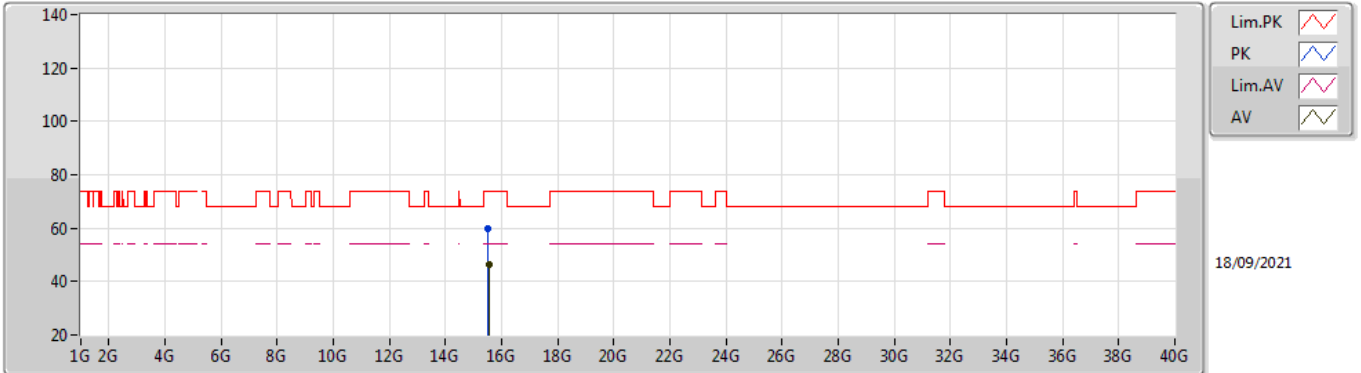


EUT\_Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.53184G    | 59.73             | 74.00             | -14.27         | 45.05         | 3           | Horizontal | 299            | 2.99          | -       | 38.54      | 10.37      | 34.23      |
| AV   | 15.54152G    | 46.24             | 54.00             | -7.76          | 31.62         | 3           | Horizontal | 299            | 2.99          | -       | 38.49      | 10.37      | 34.24      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5200MHz\_TnomVnom

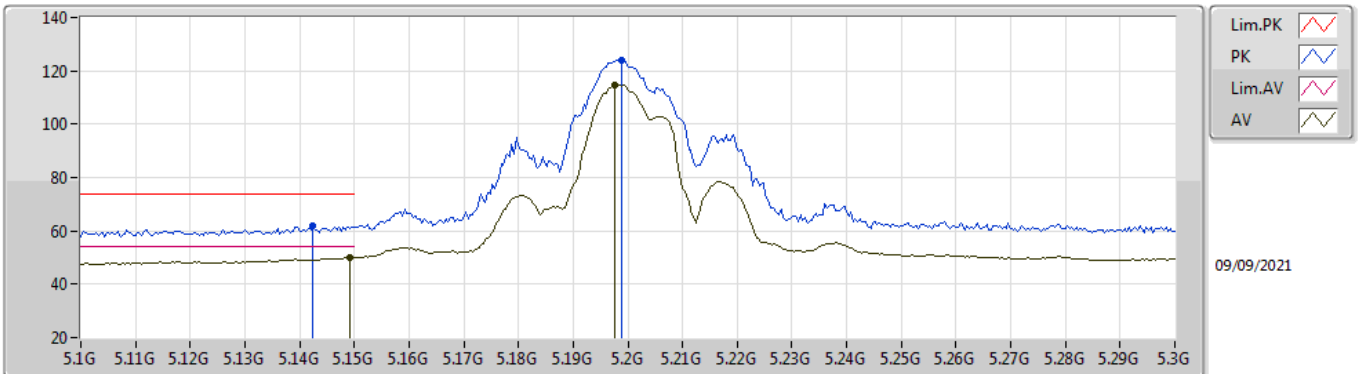


EUT\_Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.1424G      | 62.05             | 74.00             | -11.95         | 57.27         | 3           | Vertical  | 249            | 2.11          | -       | 31.75      | 5.00       | 31.97      |  |
| AV   | 5.1492G      | 50.09             | 54.00             | -3.91          | 45.37         | 3           | Vertical  | 249            | 2.11          | -       | 31.70      | 5.00       | 31.98      |  |
| PK   | 5.1988G      | 124.13            | Inf               | -Inf           | 119.72        | 3           | Vertical  | 249            | 2.11          | -       | 31.41      | 5.00       | 32.00      |  |
| AV   | 5.1976G      | 114.76            | Inf               | -Inf           | 110.35        | 3           | Vertical  | 249            | 2.11          | -       | 31.41      | 5.00       | 32.00      |  |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5200MHz\_TnomVnom

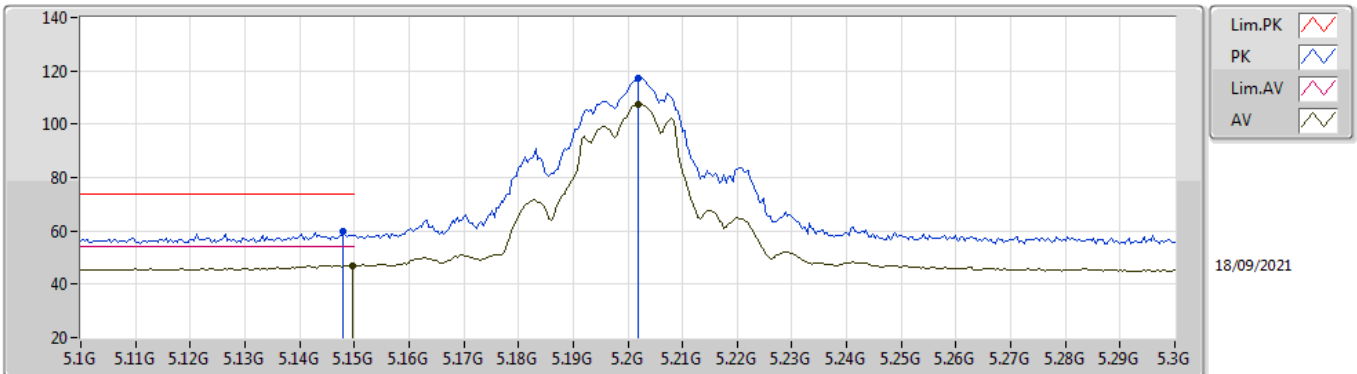


EUT\_Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.148G       | 59.62             | 74.00             | -14.38         | 54.89         | 3           | Horizontal | 241            | 1.93          | -       | 31.71      | 5.00       | 31.98      |
| AV   | 5.1496G      | 47.01             | 54.00             | -6.99          | 42.29         | 3           | Horizontal | 241            | 1.93          | -       | 31.70      | 5.00       | 31.98      |
| PK   | 5.202G       | 117.06            | Inf               | -Inf           | 112.67        | 3           | Horizontal | 241            | 1.93          | -       | 31.39      | 5.00       | 32.00      |
| AV   | 5.202G       | 107.53            | Inf               | -Inf           | 103.14        | 3           | Horizontal | 241            | 1.93          | -       | 31.39      | 5.00       | 32.00      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5200MHz\_TnomVnom

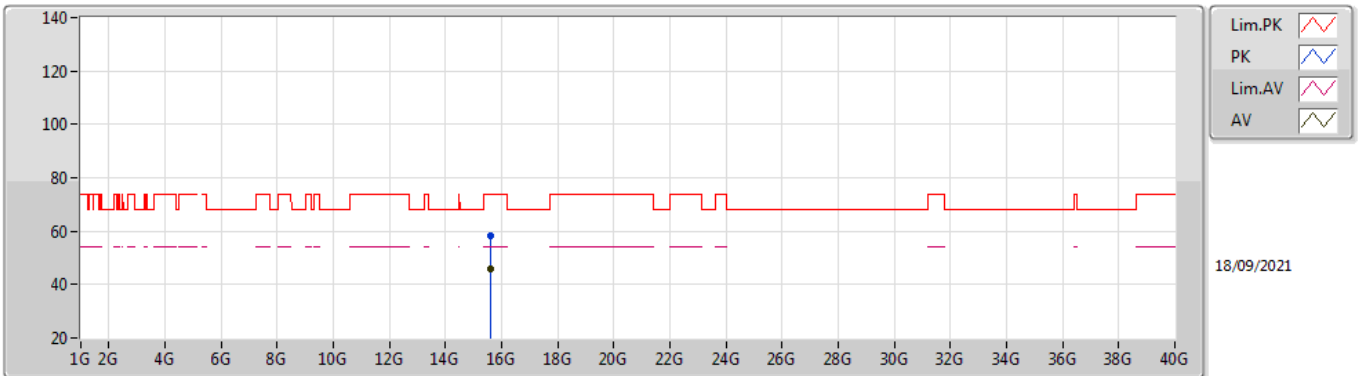


EUT\_Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.60332G    | 58.37             | 74.00             | -15.63         | 44.04         | 3           | Vertical  | 79             | 1.75          | -       | 38.19      | 10.40      | 34.26      |
| AV   | 15.59596G    | 45.66             | 54.00             | -8.34          | 31.30         | 3           | Vertical  | 79             | 1.75          | -       | 38.22      | 10.40      | 34.26      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5200MHz\_TnomVnom

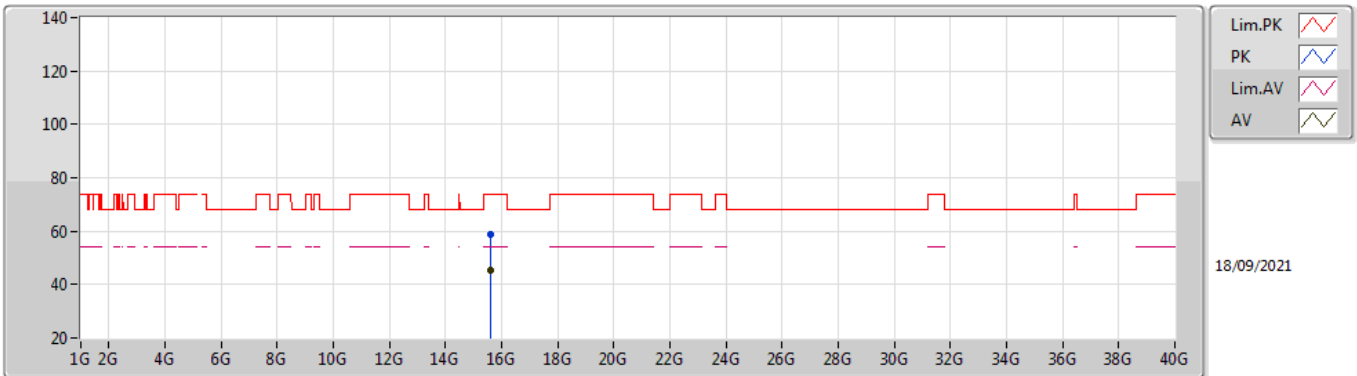


EUT\_V\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq      | Level    | Limit    | Margin | Raw    | Dist | Condition  | Azimuth | Height | Comment | AF    | CL    | PA    |
|------|-----------|----------|----------|--------|--------|------|------------|---------|--------|---------|-------|-------|-------|
|      | (Hz)      | (dBuV/m) | (dBuV/m) | (dB)   | (dBuV) | (m)  |            | (°)     | (m)    |         | (dB)  | (dB)  | (dB)  |
| PK   | 15.60716G | 58.62    | 74.00    | -15.38 | 44.31  | 3    | Horizontal | 182     | 1.66   | -       | 38.17 | 10.40 | 34.26 |
| AV   | 15.5904G  | 45.58    | 54.00    | -8.42  | 31.19  | 3    | Horizontal | 182     | 1.66   | -       | 38.25 | 10.40 | 34.26 |



# 802.11a\_Nss1,(6Mbps)\_4TX

## 5240MHz\_TnomVnom

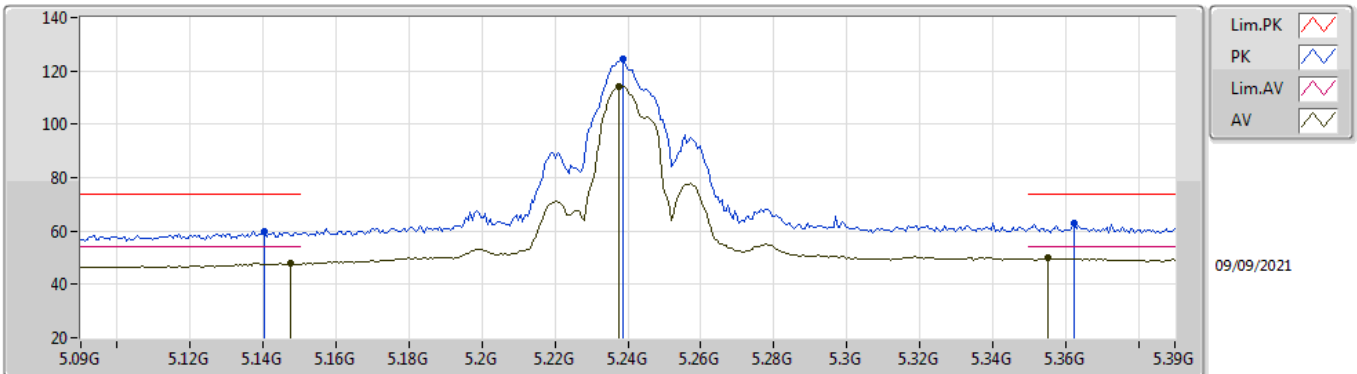


EUT\_V\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.1404G      | 59.83             | 74.00             | -14.17         | 55.04         | 3           | Vertical  | 251            | 1.99          | -       | 31.76      | 5.00       | 31.97      |
| AV   | 5.1476G      | 47.83             | 54.00             | -6.17          | 43.09         | 3           | Vertical  | 251            | 1.99          | -       | 31.71      | 5.00       | 31.97      |
| PK   | 5.2388G      | 124.36            | Inf               | -Inf           | 120.21        | 3           | Vertical  | 251            | 1.99          | -       | 31.17      | 5.00       | 32.02      |
| AV   | 5.2376G      | 114.18            | Inf               | -Inf           | 110.02        | 3           | Vertical  | 251            | 1.99          | -       | 31.17      | 5.00       | 32.01      |
| PK   | 5.3624G      | 62.95             | 74.00             | -11.05         | 58.85         | 3           | Vertical  | 251            | 1.99          | -       | 31.17      | 5.00       | 32.07      |
| AV   | 5.3552G      | 49.80             | 54.00             | -4.20          | 45.74         | 3           | Vertical  | 251            | 1.99          | -       | 31.13      | 5.00       | 32.07      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5240MHz\_TnomVnom

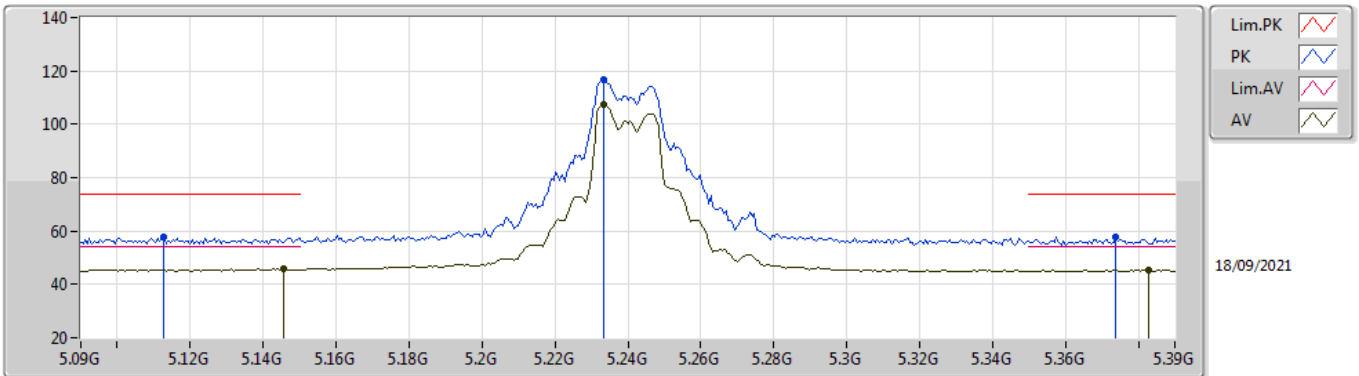


EUT\_V\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.1128G      | 57.61             | 74.00             | -16.39         | 52.65         | 3           | Horizontal | 264            | 1.79          | -       | 31.92      | 5.00       | 31.96      |
| AV   | 5.1458G      | 45.76             | 54.00             | -8.24          | 41.00         | 3           | Horizontal | 264            | 1.79          | -       | 31.73      | 5.00       | 31.97      |
| PK   | 5.2334G      | 116.98            | Inf               | -Inf           | 112.79        | 3           | Horizontal | 264            | 1.79          | -       | 31.20      | 5.00       | 32.01      |
| AV   | 5.2334G      | 107.16            | Inf               | -Inf           | 102.97        | 3           | Horizontal | 264            | 1.79          | -       | 31.20      | 5.00       | 32.01      |
| PK   | 5.3738G      | 57.61             | 74.00             | -16.39         | 53.44         | 3           | Horizontal | 264            | 1.79          | -       | 31.24      | 5.00       | 32.07      |
| AV   | 5.3828G      | 45.28             | 54.00             | -8.72          | 41.06         | 3           | Horizontal | 264            | 1.79          | -       | 31.30      | 5.00       | 32.08      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5240MHz\_TnomVnom

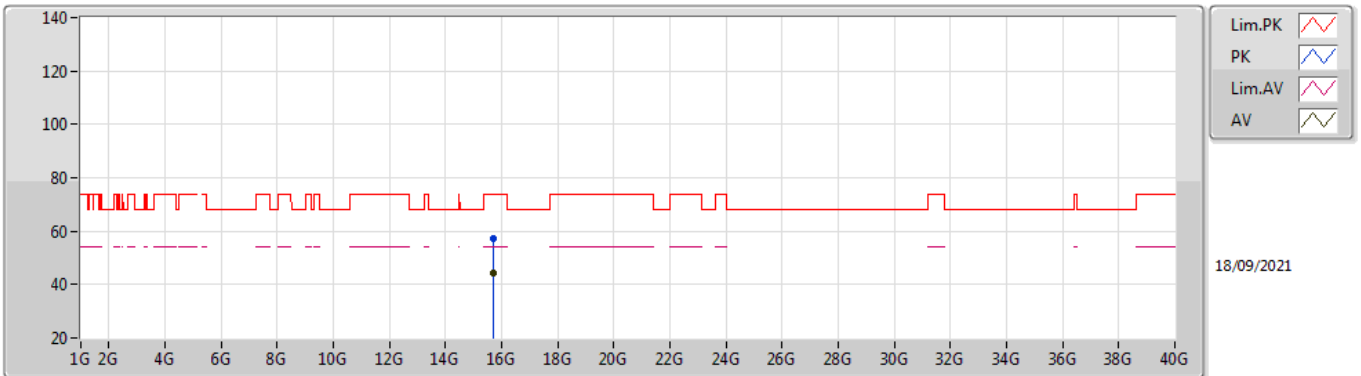


EUT\_Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.71168G    | 57.31             | 74.00             | -16.69         | 43.35         | 3           | Vertical  | 39             | 2.63          | -       | 37.80      | 10.46      | 34.30      |
| AV   | 15.7212G     | 44.19             | 54.00             | -9.81          | 30.24         | 3           | Vertical  | 39             | 2.63          | -       | 37.80      | 10.46      | 34.31      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5240MHz\_TnomVnom

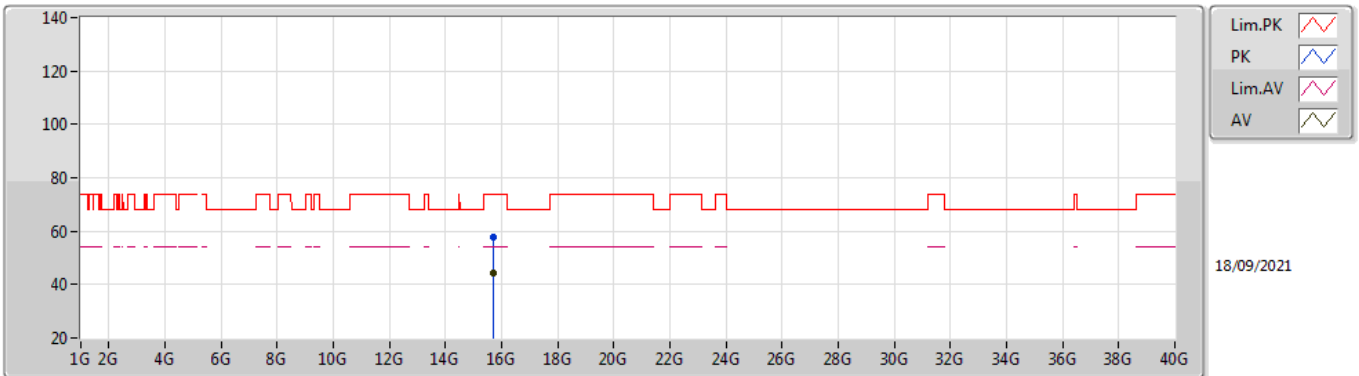


EUT\_Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.71096G    | 57.65             | 74.00             | -16.35         | 43.69         | 3           | Horizontal | 30             | 2.29          | -       | 37.80      | 10.46      | 34.30      |
| AV   | 15.72156G    | 44.24             | 54.00             | -9.76          | 30.29         | 3           | Horizontal | 30             | 2.29          | -       | 37.80      | 10.46      | 34.31      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5745MHz\_TnomVnom

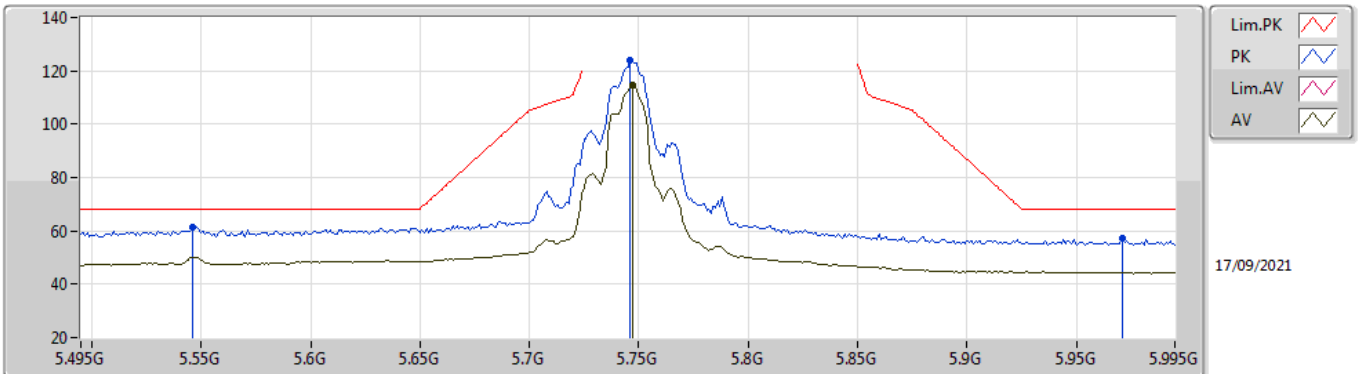


EUT\_Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.546G       | 61.32             | 68.20             | -6.88          | 56.83         | 3           | Vertical  | 290            | 2.03          | -       | 31.50      | 5.15       | 32.16      |
| PK   | 5.746G       | 123.87            | Inf               | -Inf           | 118.90        | 3           | Vertical  | 290            | 2.03          | -       | 31.98      | 5.27       | 32.28      |
| AV   | 5.747G       | 114.40            | Inf               | -Inf           | 109.42        | 3           | Vertical  | 290            | 2.03          | -       | 31.99      | 5.27       | 32.28      |
| PK   | 5.971G       | 57.00             | 68.20             | -11.20         | 51.74         | 3           | Vertical  | 290            | 2.03          | -       | 32.20      | 5.47       | 32.41      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5745MHz\_TnomVnom

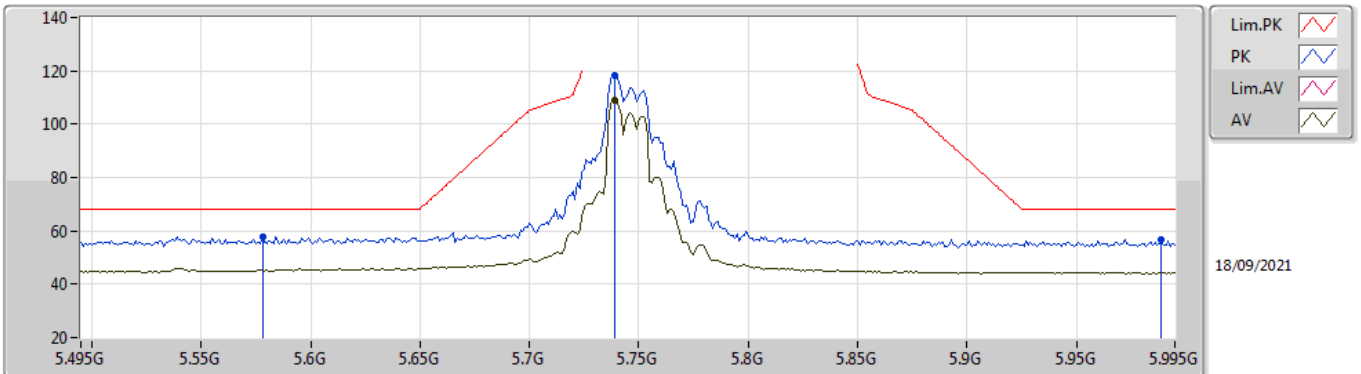


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.578G       | 57.98             | 68.20             | -10.22         | 53.42         | 3           | Horizontal | 307            | 1.56          | -       | 31.56      | 5.18       | 32.18      |  |
| PK   | 5.739G       | 118.31            | Inf               | -Inf           | 113.35        | 3           | Horizontal | 307            | 1.56          | -       | 31.96      | 5.27       | 32.27      |  |
| AV   | 5.739G       | 108.87            | Inf               | -Inf           | 103.91        | 3           | Horizontal | 307            | 1.56          | -       | 31.96      | 5.27       | 32.27      |  |
| PK   | 5.989G       | 56.70             | 68.20             | -11.50         | 51.43         | 3           | Horizontal | 307            | 1.56          | -       | 32.20      | 5.49       | 32.42      |  |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5745MHz\_TnomVnom

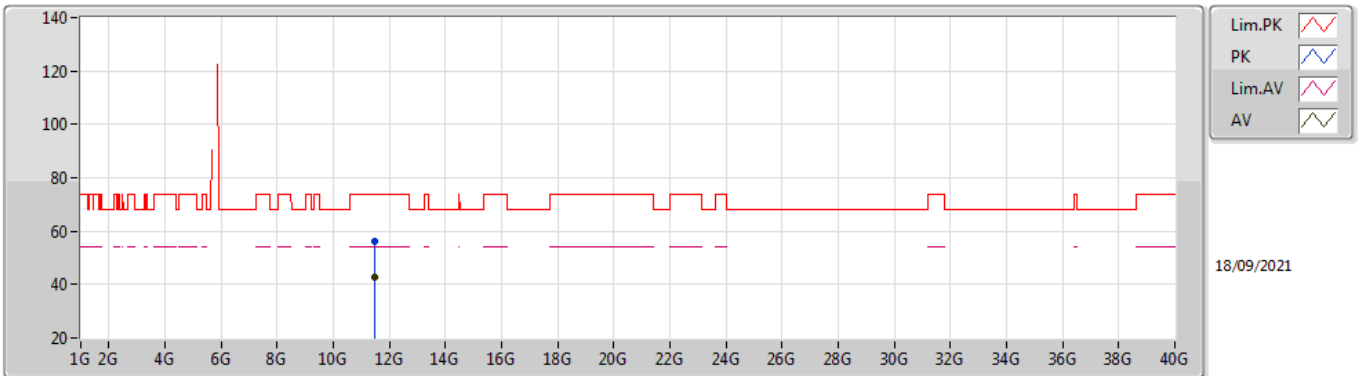


EUT\_V\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.48966G    | 56.10             | 74.00             | -17.90         | 42.49         | 3           | Vertical  | 308            | 2.15          | -       | 39.62      | 8.30       | 34.31      |
| AV   | 11.48524G    | 42.73             | 54.00             | -11.27         | 29.12         | 3           | Vertical  | 308            | 2.15          | -       | 39.63      | 8.29       | 34.31      |

## 802.11a\_Nss1,(6Mbps)\_4TX

### 5745MHz\_TnomVnom

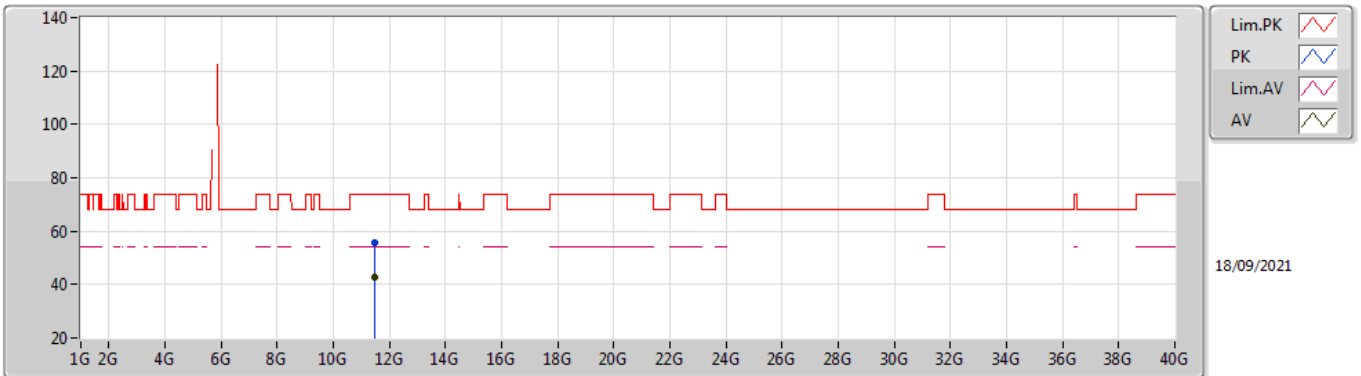


EUT\_V\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.4931G     | 55.56             | 74.00             | -18.44         | 41.96         | 3           | Horizontal | 247            | 2.67          | -       | 39.61      | 8.30       | 34.31      |
| AV   | 11.48502G    | 42.90             | 54.00             | -11.10         | 29.29         | 3           | Horizontal | 247            | 2.67          | -       | 39.63      | 8.29       | 34.31      |



# 802.11a\_Nss1,(6Mbps)\_4TX

## 5785MHz\_TnomVnom

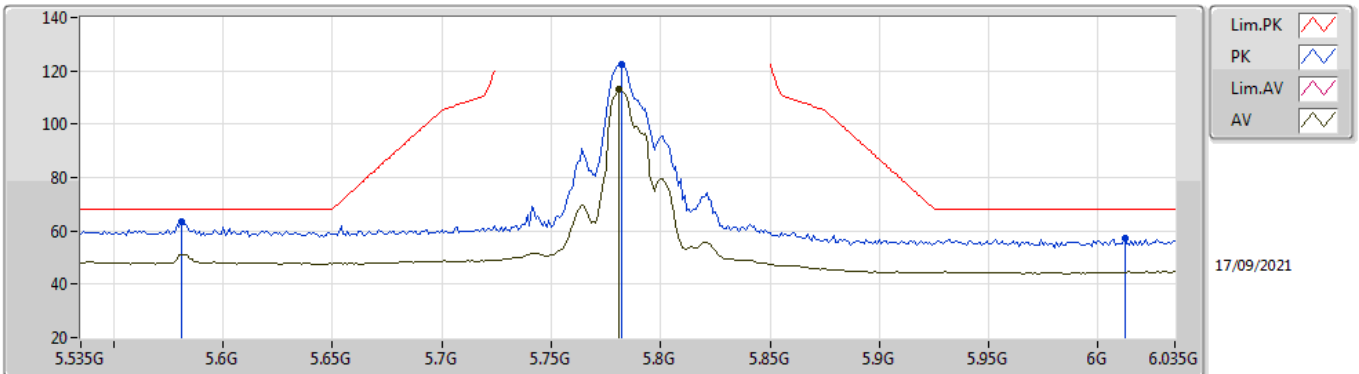


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.581G       | 63.24             | 68.20             | -4.96          | 58.68         | 3           | Vertical  | 255            | 2.12          | -       | 31.56      | 5.18       | 32.18      |  |
| PK   | 5.782G       | 122.42            | Inf               | -Inf           | 117.43        | 3           | Vertical  | 255            | 2.12          | -       | 32.00      | 5.29       | 32.30      |  |
| AV   | 5.781G       | 112.86            | Inf               | -Inf           | 107.87        | 3           | Vertical  | 255            | 2.12          | -       | 32.00      | 5.29       | 32.30      |  |
| PK   | 6.012G       | 57.15             | 68.20             | -11.05         | 51.82         | 3           | Vertical  | 255            | 2.12          | -       | 32.27      | 5.50       | 32.44      |  |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5785MHz\_TnomVnom

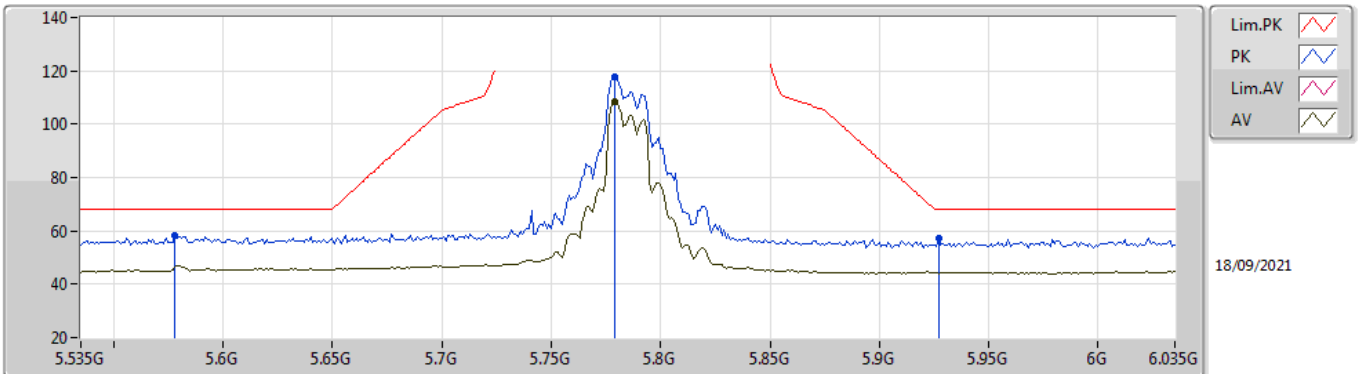


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.578G       | 58.15             | 68.20             | -10.05         | 53.59         | 3           | Horizontal | 310            | 1.55          | -       | 31.56      | 5.18       | 32.18      |  |
| PK   | 5.779G       | 117.73            | Inf               | -Inf           | 112.74        | 3           | Horizontal | 310            | 1.55          | -       | 32.00      | 5.29       | 32.30      |  |
| AV   | 5.779G       | 108.29            | Inf               | -Inf           | 103.30        | 3           | Horizontal | 310            | 1.55          | -       | 32.00      | 5.29       | 32.30      |  |
| PK   | 5.927G       | 57.33             | 68.20             | -10.87         | 52.14         | 3           | Horizontal | 310            | 1.55          | -       | 32.15      | 5.43       | 32.39      |  |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5785MHz\_TnomVnom

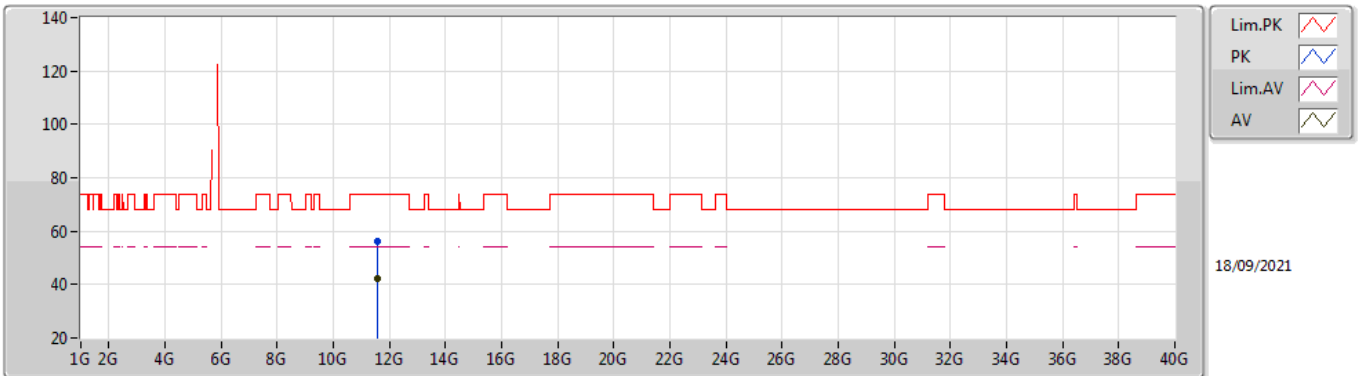


EUT\_V\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 11.5699G     | 55.97             | 74.00             | -18.03         | 42.41         | 3           | Vertical  | 50             | 1.25          | -       | 39.53      | 8.33       | 34.30      |  |
| AV   | 11.57336G    | 42.39             | 54.00             | -11.61         | 28.83         | 3           | Vertical  | 50             | 1.25          | -       | 39.53      | 8.33       | 34.30      |  |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5785MHz\_TnomVnom

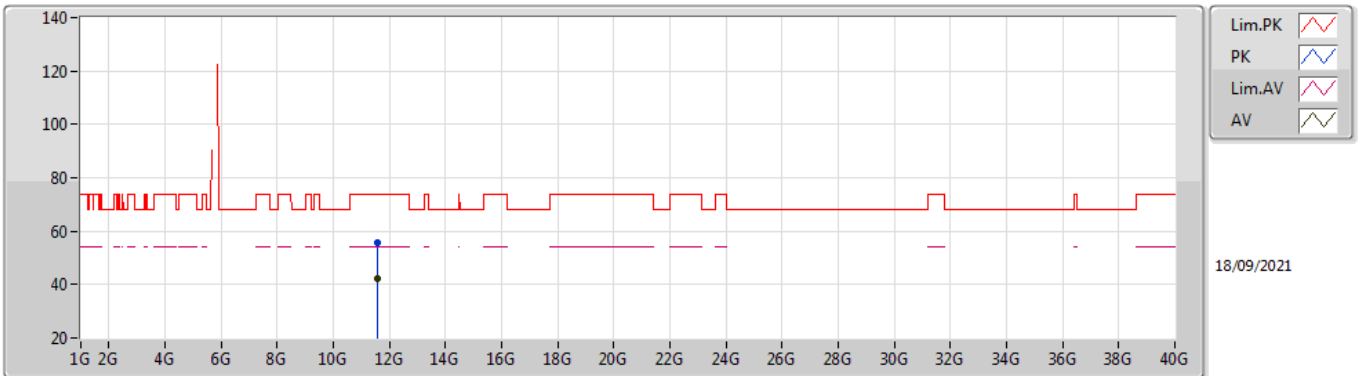


EUT\_Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 11.57468G    | 55.49             | 74.00             | -18.51         | 41.93         | 3           | Horizontal | 218            | 2.68          | -       | 39.53      | 8.33       | 34.30      |  |
| AV   | 11.56852G    | 42.43             | 54.00             | -11.57         | 28.87         | 3           | Horizontal | 218            | 2.68          | -       | 39.53      | 8.33       | 34.30      |  |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5825MHz\_TnomVnom

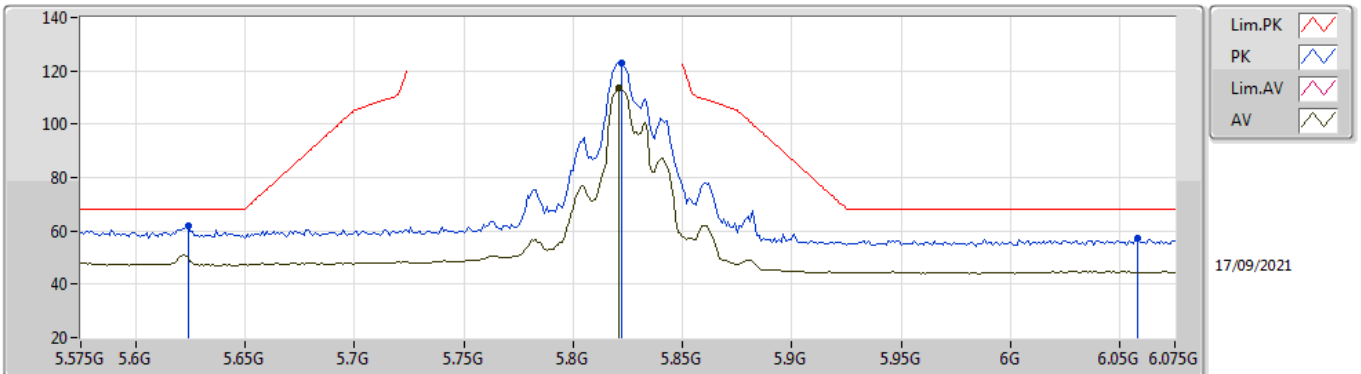


EUT\_Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.624G       | 61.75             | 68.20             | -6.45          | 57.14         | 3           | Vertical  | 255            | 2.38          | -       | 31.60      | 5.21       | 32.20      |  |
| PK   | 5.822G       | 123.08            | Inf               | -Inf           | 118.08        | 3           | Vertical  | 255            | 2.38          | -       | 32.00      | 5.32       | 32.32      |  |
| AV   | 5.821G       | 113.57            | Inf               | -Inf           | 108.57        | 3           | Vertical  | 255            | 2.38          | -       | 32.00      | 5.32       | 32.32      |  |
| PK   | 6.058G       | 57.18             | 68.20             | -11.02         | 51.66         | 3           | Vertical  | 255            | 2.38          | -       | 32.48      | 5.50       | 32.46      |  |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5825MHz\_TnomVnom

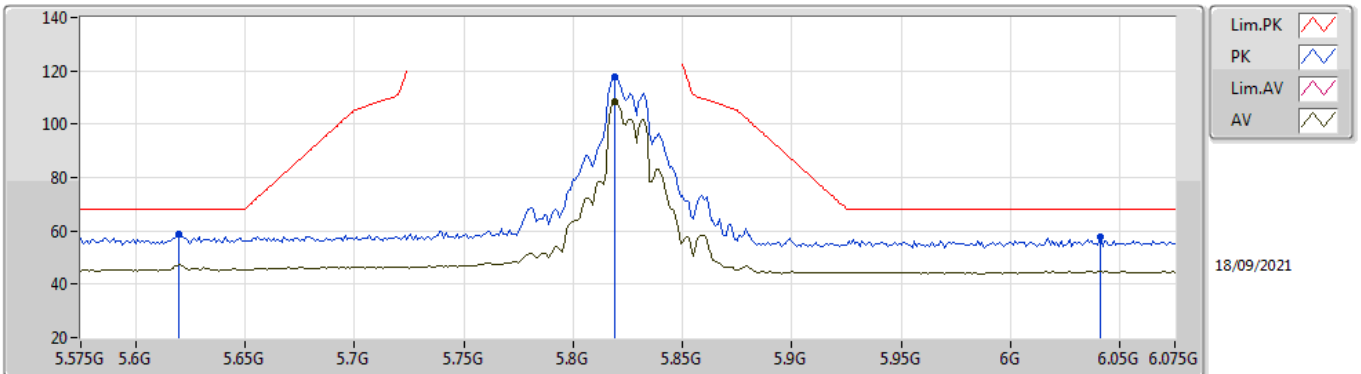


EUT V\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.62G        | 59.04             | 68.20             | -9.16          | 54.43         | 3           | Horizontal | 312            | 1.64          | -       | 31.60      | 5.21       | 32.20      |
| PK   | 5.819G       | 117.77            | Inf               | -Inf           | 112.77        | 3           | Horizontal | 312            | 1.64          | -       | 32.00      | 5.32       | 32.32      |
| AV   | 5.819G       | 108.31            | Inf               | -Inf           | 103.31        | 3           | Horizontal | 312            | 1.64          | -       | 32.00      | 5.32       | 32.32      |
| PK   | 6.041G       | 57.66             | 68.20             | -10.54         | 52.16         | 3           | Horizontal | 312            | 1.64          | -       | 32.45      | 5.50       | 32.45      |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5825MHz\_TnomVnom

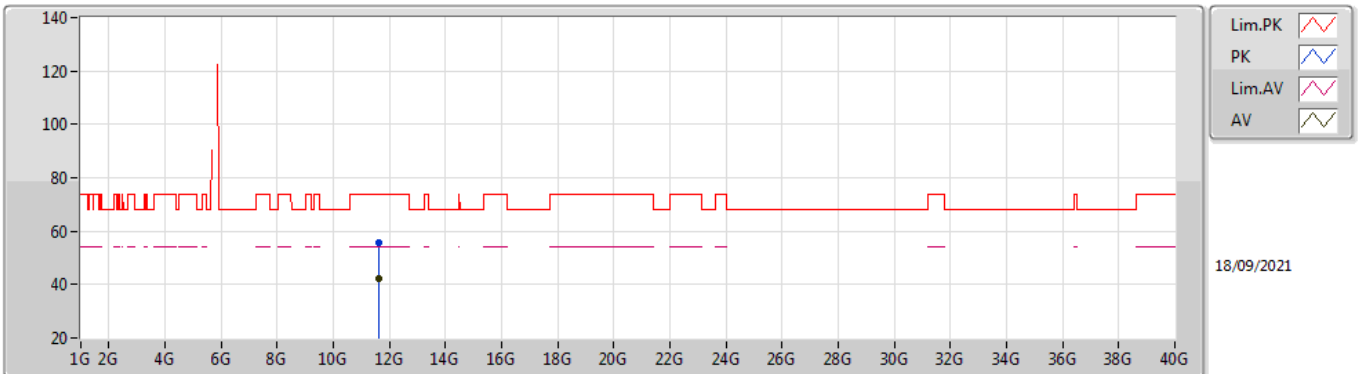


EUT\_V\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 11.6467G     | 55.48             | 74.00             | -18.52         | 42.04         | 3           | Vertical  | 102            | 1.76          | -       | 39.36      | 8.36       | 34.28      |  |
| AV   | 11.64578G    | 42.26             | 54.00             | -11.74         | 28.82         | 3           | Vertical  | 102            | 1.76          | -       | 39.36      | 8.36       | 34.28      |  |

# 802.11a\_Nss1,(6Mbps)\_4TX

## 5825MHz\_TnomVnom

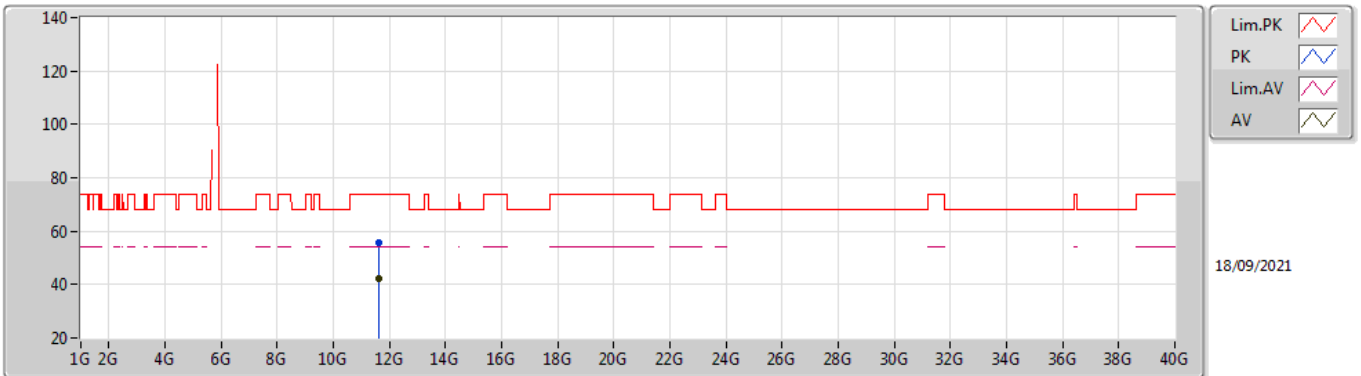

EUT\_Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 11.64646G    | 55.55             | 74.00             | -18.45         | 42.11         | 3           | Horizontal | 219            | 1.49          | -       | 39.36      | 8.36       | 34.28      |  |
| AV   | 11.64684G    | 42.28             | 54.00             | -11.72         | 28.84         | 3           | Horizontal | 219            | 1.49          | -       | 39.36      | 8.36       | 34.28      |  |






**Summary**

| Mode                              | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comments |
|-----------------------------------|--------|------|--------------|-------------------|-------------------|----------------|-------------|-----------|----------------|---------------|----------|
| 5.15-5.25GHz                      | -      | -    | -            | -                 | -                 | -              | -           | -         | -              | -             | -        |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | Pass   | AV   | 5.1468G      | 53.94             | 54.00             | -0.06          | 3           | Vertical  | 70.6           | 1.80          | -        |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5180MHz\_TnomVnom

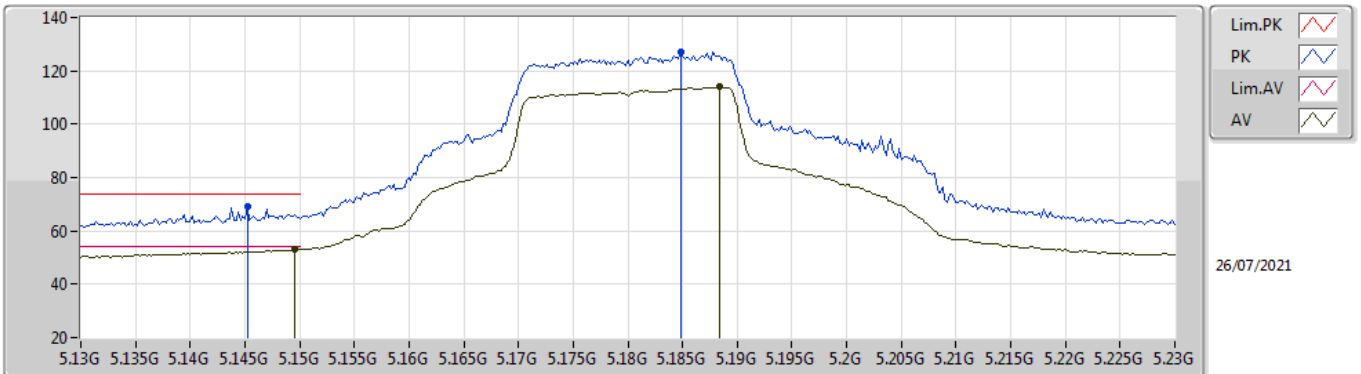


EUT Y\_4TX  
Setting 99  
06-E-B-4-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.1452G      | 69.31             | 74.00             | -4.69          | 64.46         | 3           | Vertical  | 82             | 2.02          | -       | 31.82      | 5.00       | 31.97      |  |
| AV   | 5.1496G      | 53.10             | 54.00             | -0.90          | 48.28         | 3           | Vertical  | 82             | 2.02          | -       | 31.80      | 5.00       | 31.98      |  |
| PK   | 5.1848G      | 127.25            | Inf               | -Inf           | 122.58        | 3           | Vertical  | 82             | 2.02          | -       | 31.66      | 5.00       | 31.99      |  |
| AV   | 5.1884G      | 113.89            | Inf               | -Inf           | 109.23        | 3           | Vertical  | 82             | 2.02          | -       | 31.65      | 5.00       | 31.99      |  |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5180MHz\_TnomVnom

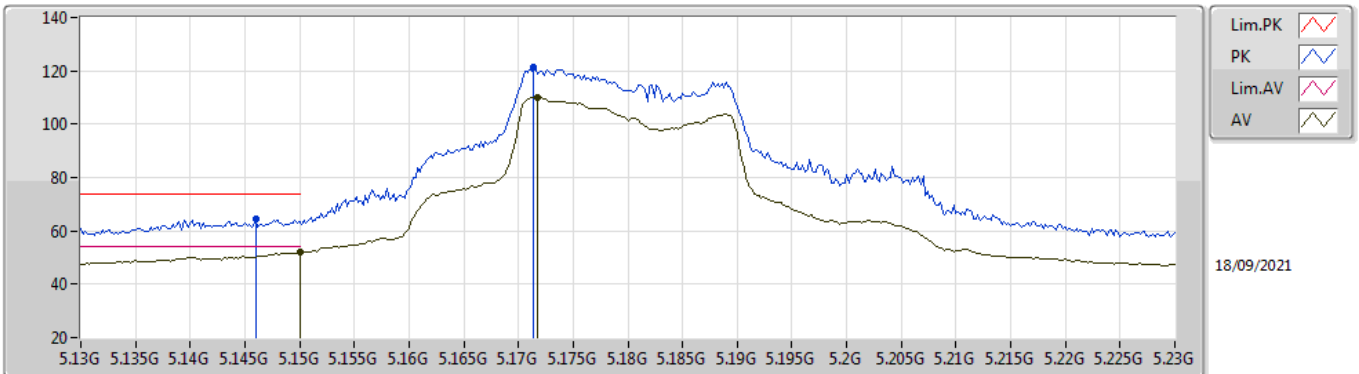


EUT Y\_4TX  
Setting 99  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.146G       | 64.24             | 74.00             | -9.76          | 59.49         | 3           | Horizontal | 280            | 1.24          | -       | 31.72      | 5.00       | 31.97      |  |
| AV   | 5.15G        | 51.87             | 54.00             | -2.13          | 47.15         | 3           | Horizontal | 280            | 1.24          | -       | 31.70      | 5.00       | 31.98      |  |
| PK   | 5.1714G      | 121.37            | Inf               | -Inf           | 116.79        | 3           | Horizontal | 280            | 1.24          | -       | 31.57      | 5.00       | 31.99      |  |
| AV   | 5.1718G      | 110.05            | Inf               | -Inf           | 105.47        | 3           | Horizontal | 280            | 1.24          | -       | 31.57      | 5.00       | 31.99      |  |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5180MHz\_TnomVnom

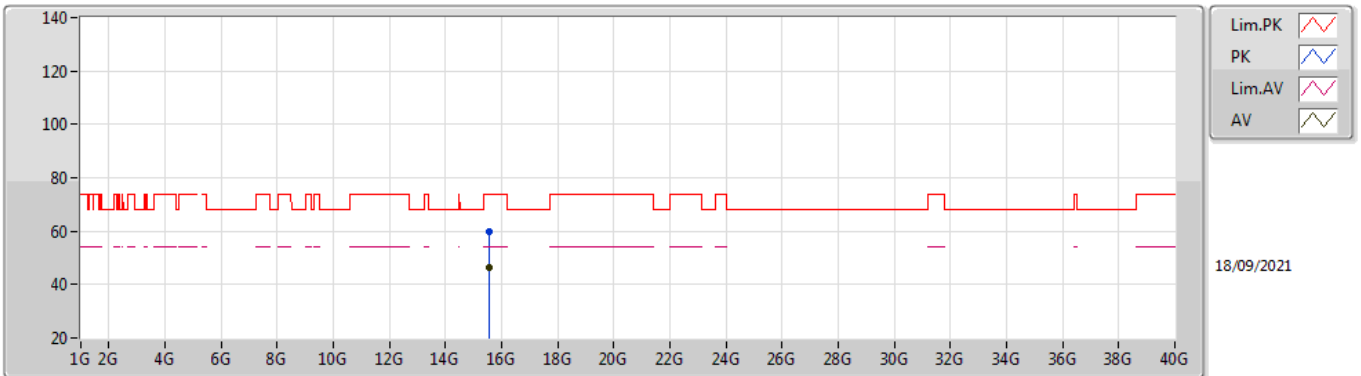


EUT Y\_4TX  
Setting 99  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq      | Level    | Limit    | Margin | Raw    | Dist | Condition | Azimuth | Height | Comment | AF    | CL    | PA    |
|------|-----------|----------|----------|--------|--------|------|-----------|---------|--------|---------|-------|-------|-------|
|      | (Hz)      | (dBuV/m) | (dBuV/m) | (dB)   | (dBuV) | (m)  |           | (°)     | (m)    |         | (dB)  | (dB)  | (dB)  |
| PK   | 15.53824G | 59.72    | 74.00    | -14.28 | 45.08  | 3    | Vertical  | 294     | 2.62   | -       | 38.51 | 10.37 | 34.24 |
| AV   | 15.53424G | 46.57    | 54.00    | -7.43  | 31.90  | 3    | Vertical  | 294     | 2.62   | -       | 38.53 | 10.37 | 34.23 |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5180MHz\_TnomVnom

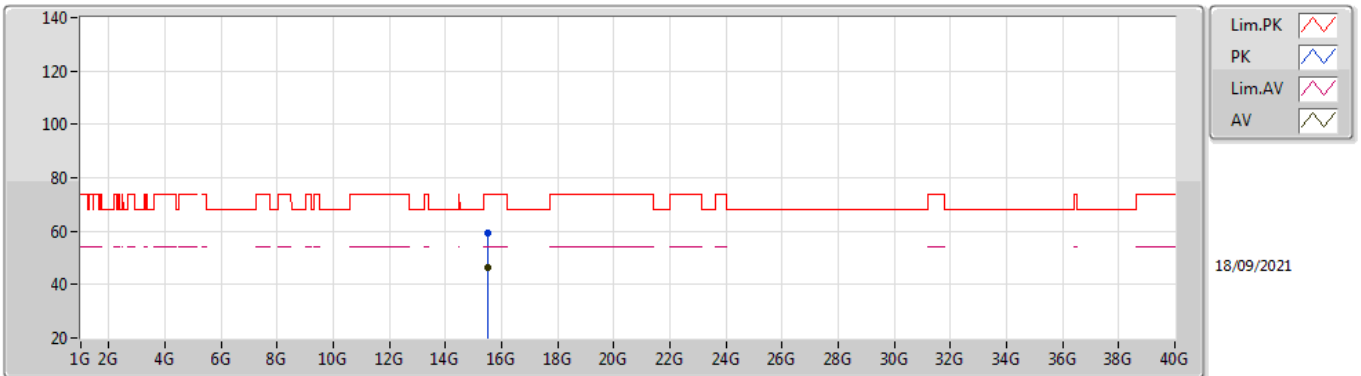


EUT Y\_4TX  
Setting 99  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.53156G    | 59.54             | 74.00             | -14.46         | 44.86         | 3           | Horizontal | 183            | 1.87          | -       | 38.54      | 10.37      | 34.23      |
| AV   | 15.532G      | 46.52             | 54.00             | -7.48          | 31.84         | 3           | Horizontal | 183            | 1.87          | -       | 38.54      | 10.37      | 34.23      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5200MHz\_TnomVnom

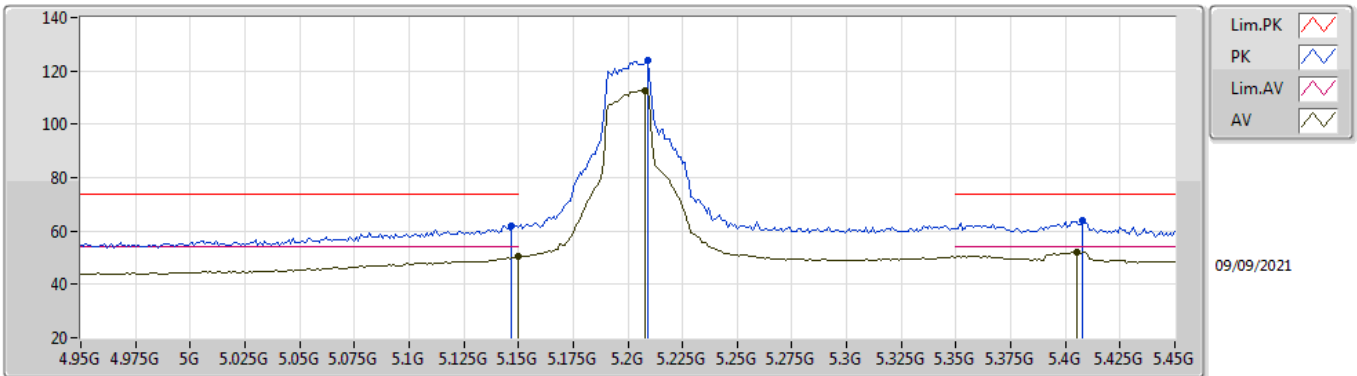


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.147G       | 62.01             | 74.00             | -11.99         | 57.26         | 3           | Vertical  | 259            | 2.38          | -       | 31.72      | 5.00       | 31.97      |
| AV   | 5.15G        | 50.42             | 54.00             | -3.58          | 45.70         | 3           | Vertical  | 259            | 2.38          | -       | 31.70      | 5.00       | 31.98      |
| PK   | 5.209G       | 124.14            | Inf               | -Inf           | 119.79        | 3           | Vertical  | 259            | 2.38          | -       | 31.35      | 5.00       | 32.00      |
| AV   | 5.208G       | 112.73            | Inf               | -Inf           | 108.38        | 3           | Vertical  | 259            | 2.38          | -       | 31.35      | 5.00       | 32.00      |
| PK   | 5.408G       | 63.79             | 74.00             | -10.21         | 59.45         | 3           | Vertical  | 259            | 2.38          | -       | 31.42      | 5.01       | 32.09      |
| AV   | 5.405G       | 52.03             | 54.00             | -1.97          | 47.71         | 3           | Vertical  | 259            | 2.38          | -       | 31.41      | 5.00       | 32.09      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5200MHz\_TnomVnom

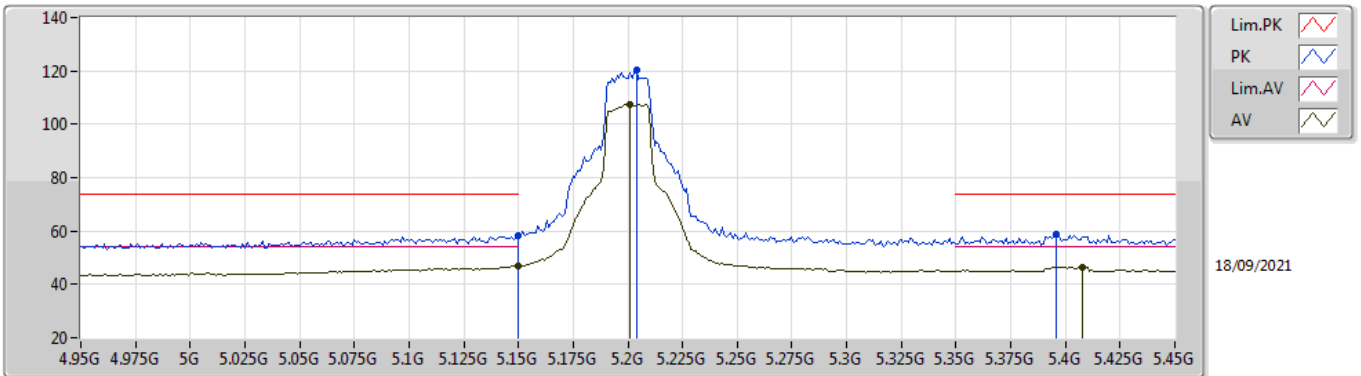


EUT V\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.15G        | 58.52             | 74.00             | -15.48         | 53.80         | 3           | Horizontal | 80             | 2.39          | -       | 31.70      | 5.00       | 31.98      |
| AV   | 5.15G        | 47.03             | 54.00             | -6.97          | 42.31         | 3           | Horizontal | 80             | 2.39          | -       | 31.70      | 5.00       | 31.98      |
| PK   | 5.204G       | 120.41            | Inf               | -Inf           | 116.03        | 3           | Horizontal | 80             | 2.39          | -       | 31.38      | 5.00       | 32.00      |
| AV   | 5.201G       | 107.59            | Inf               | -Inf           | 103.20        | 3           | Horizontal | 80             | 2.39          | -       | 31.39      | 5.00       | 32.00      |
| PK   | 5.396G       | 58.61             | 74.00             | -15.39         | 54.31         | 3           | Horizontal | 80             | 2.39          | -       | 31.38      | 5.00       | 32.08      |
| AV   | 5.408G       | 46.56             | 54.00             | -7.44          | 42.22         | 3           | Horizontal | 80             | 2.39          | -       | 31.42      | 5.01       | 32.09      |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

### 5200MHz\_TnomVnom

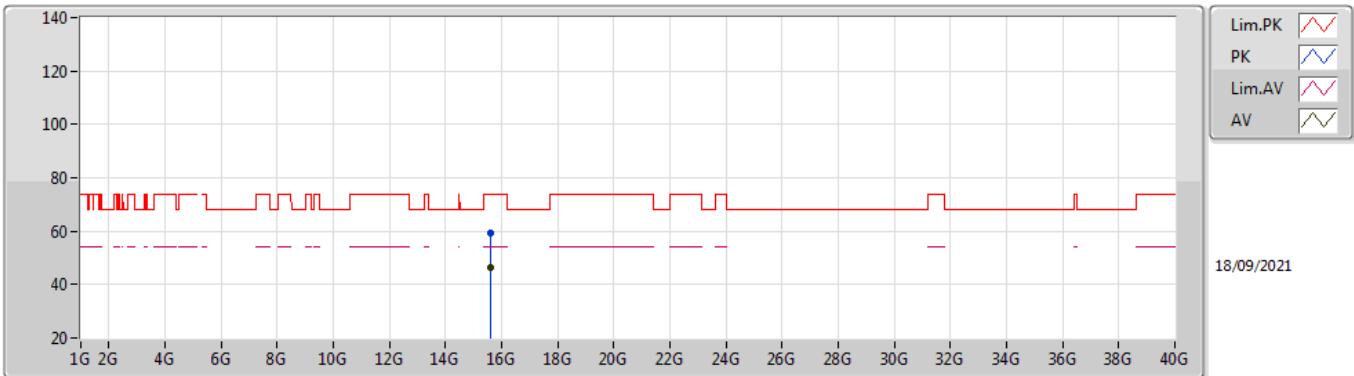


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.59964G    | 59.36             | 74.00             | -14.64         | 45.02         | 3           | Vertical  | 35             | 2.48          | -       | 38.20      | 10.40      | 34.26      |
| AV   | 15.59676G    | 46.16             | 54.00             | -7.84          | 31.80         | 3           | Vertical  | 35             | 2.48          | -       | 38.22      | 10.40      | 34.26      |



## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

### 5200MHz\_TnomVnom

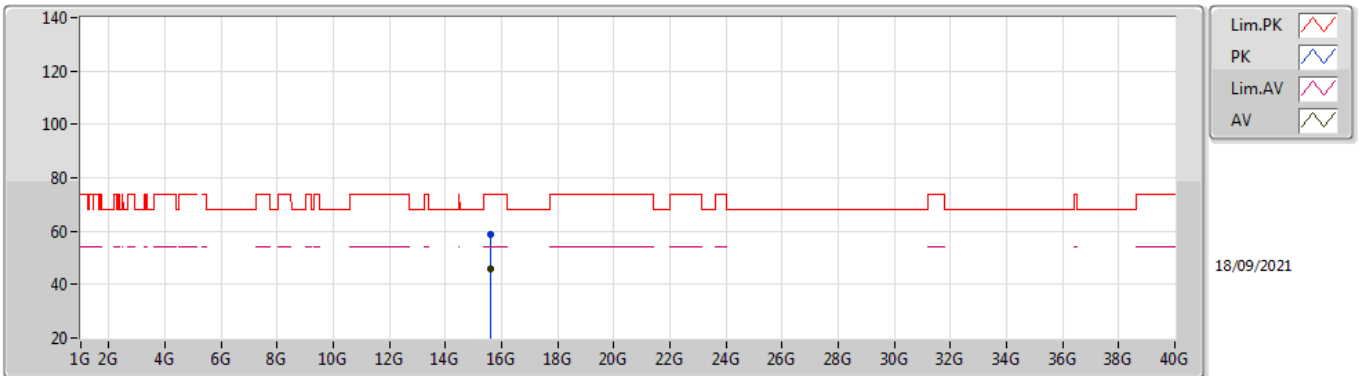


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.59694G    | 58.93             | 74.00             | -15.07         | 44.57         | 3           | Horizontal | 181            | 2.73          | -       | 38.22      | 10.40      | 34.26      |
| AV   | 15.59622G    | 45.98             | 54.00             | -8.02          | 31.62         | 3           | Horizontal | 181            | 2.73          | -       | 38.22      | 10.40      | 34.26      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5240MHz\_TnomVnom

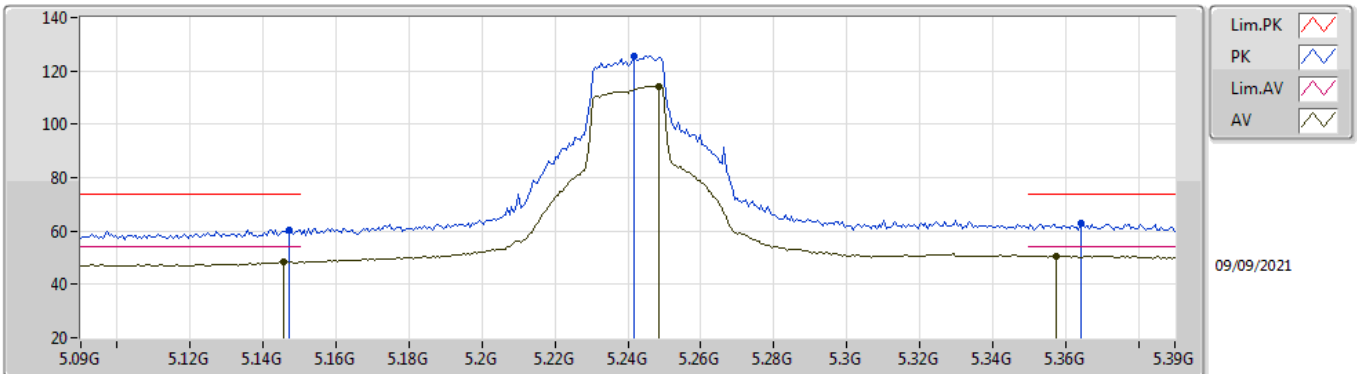


EUT V\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.147G       | 60.43             | 74.00             | -13.57         | 55.68         | 3           | Vertical  | 250            | 1.95          | -       | 31.72      | 5.00       | 31.97      |
| AV   | 5.1458G      | 48.44             | 54.00             | -5.56          | 43.68         | 3           | Vertical  | 250            | 1.95          | -       | 31.73      | 5.00       | 31.97      |
| PK   | 5.2418G      | 125.73            | Inf               | -Inf           | 121.60        | 3           | Vertical  | 250            | 1.95          | -       | 31.15      | 5.00       | 32.02      |
| AV   | 5.2484G      | 114.20            | Inf               | -Inf           | 110.11        | 3           | Vertical  | 250            | 1.95          | -       | 31.11      | 5.00       | 32.02      |
| PK   | 5.3642G      | 63.05             | 74.00             | -10.95         | 58.93         | 3           | Vertical  | 250            | 1.95          | -       | 31.19      | 5.00       | 32.07      |
| AV   | 5.3576G      | 50.73             | 54.00             | -3.27          | 46.65         | 3           | Vertical  | 250            | 1.95          | -       | 31.15      | 5.00       | 32.07      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5240MHz\_TnomVnom

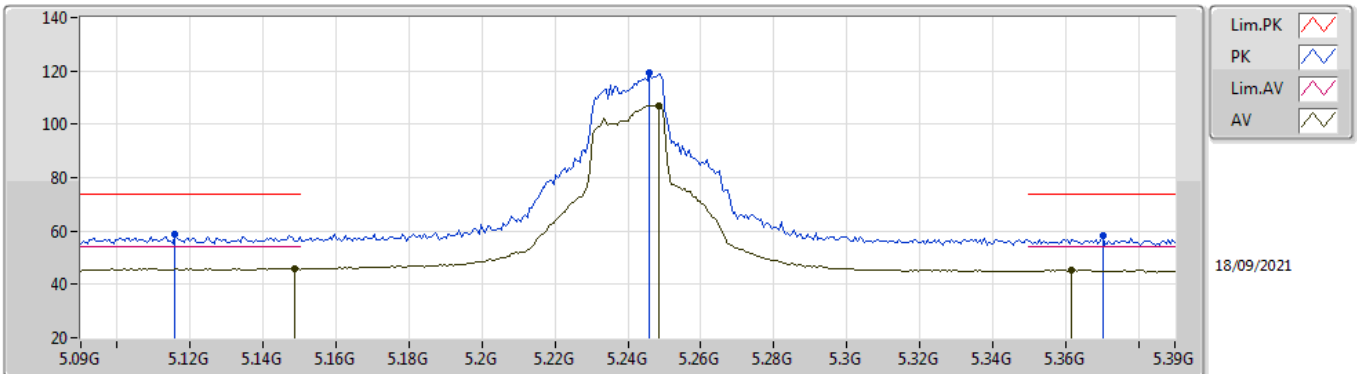


EUT\_V\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.1158G      | 58.95             | 74.00             | -15.05         | 54.00         | 3           | Horizontal | 282            | 1.30          | -       | 31.91      | 5.00       | 31.96      |
| AV   | 5.1488G      | 46.02             | 54.00             | -7.98          | 41.29         | 3           | Horizontal | 282            | 1.30          | -       | 31.71      | 5.00       | 31.98      |
| PK   | 5.246G       | 119.31            | Inf               | -Inf           | 115.21        | 3           | Horizontal | 282            | 1.30          | -       | 31.12      | 5.00       | 32.02      |
| AV   | 5.2484G      | 106.83            | Inf               | -Inf           | 102.74        | 3           | Horizontal | 282            | 1.30          | -       | 31.11      | 5.00       | 32.02      |
| PK   | 5.3702G      | 58.05             | 74.00             | -15.95         | 53.90         | 3           | Horizontal | 282            | 1.30          | -       | 31.22      | 5.00       | 32.07      |
| AV   | 5.3618G      | 45.32             | 54.00             | -8.68          | 41.22         | 3           | Horizontal | 282            | 1.30          | -       | 31.17      | 5.00       | 32.07      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5240MHz\_TnomVnom

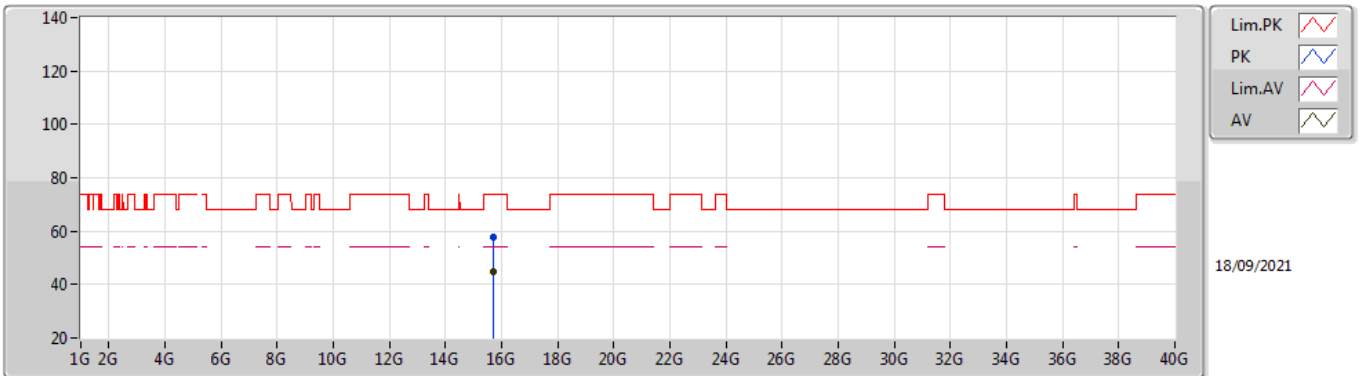


EUT Y\_4TX  
Setting 100  
06-E-B-4  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.72264G    | 57.54             | 74.00             | -16.46         | 43.59         | 3           | Vertical  | 7              | 1.15          | -       | 37.80      | 10.46      | 34.31      |
| AV   | 15.72326G    | 44.96             | 54.00             | -9.04          | 31.01         | 3           | Vertical  | 7              | 1.15          | -       | 37.80      | 10.46      | 34.31      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5240MHz\_TnomVnom

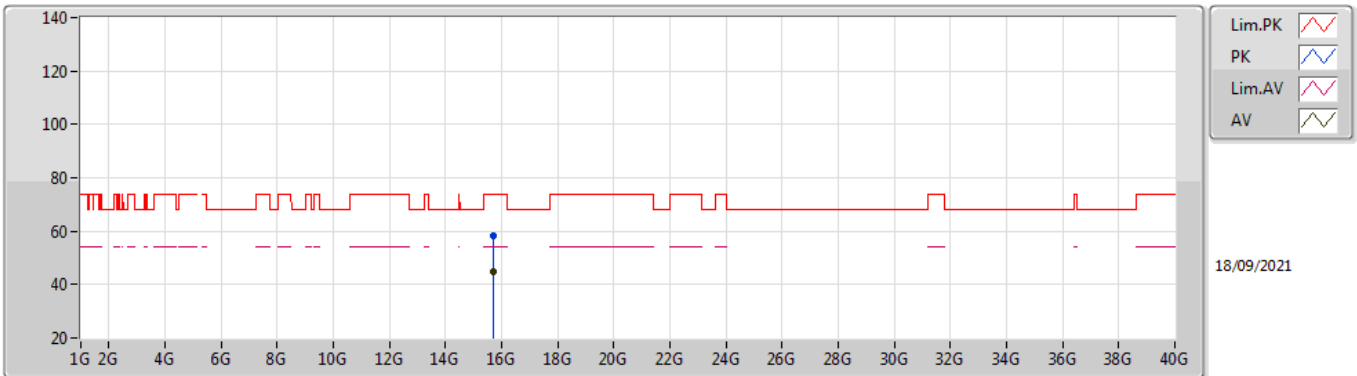


EUT Y\_4TX  
Setting 100  
06-E-B-4  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.72062G    | 58.13             | 74.00             | -15.87         | 44.18         | 3           | Horizontal | 310            | 1.57          | -       | 37.80      | 10.46      | 34.31      |
| AV   | 15.7184G     | 44.69             | 54.00             | -9.31          | 30.74         | 3           | Horizontal | 310            | 1.57          | -       | 37.80      | 10.46      | 34.31      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5745MHz\_TnomVnom

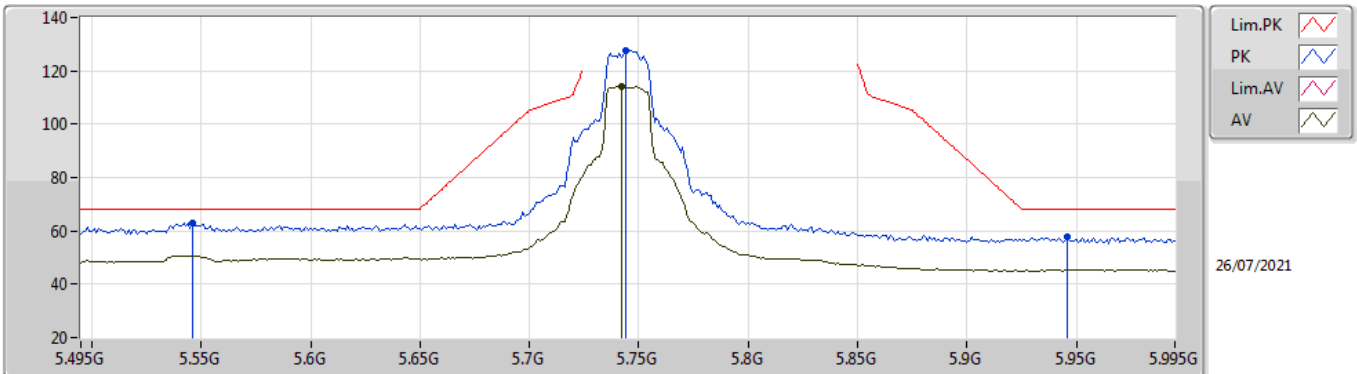


EUT\_Y\_4TX  
Setting 100  
06-E-B-4-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.546G       | 63.05             | 68.20             | -5.15          | 58.45         | 3           | Vertical  | 286            | 2.04          | -       | 31.61      | 5.15       | 32.16      |
| PK   | 5.744G       | 127.56            | Inf               | -Inf           | 122.68        | 3           | Vertical  | 286            | 2.04          | -       | 31.89      | 5.27       | 32.28      |
| AV   | 5.742G       | 114.35            | Inf               | -Inf           | 109.48        | 3           | Vertical  | 286            | 2.04          | -       | 31.88      | 5.27       | 32.28      |
| PK   | 5.946G       | 57.82             | 68.20             | -10.38         | 52.49         | 3           | Vertical  | 286            | 2.04          | -       | 32.28      | 5.45       | 32.40      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5745MHz\_TnomVnom

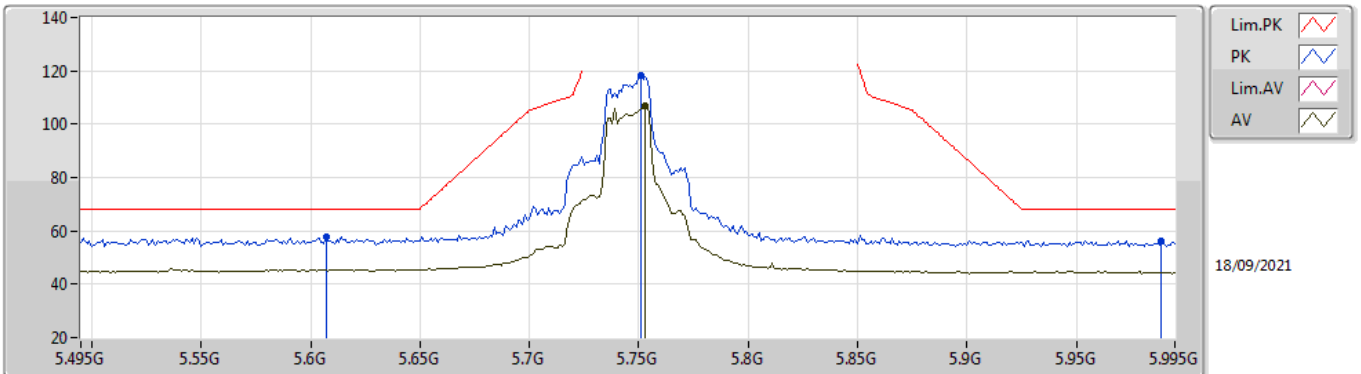


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.607G       | 57.74             | 68.20             | -10.46         | 53.13         | 3           | Horizontal | 306            | 1.69          | -       | 31.60      | 5.20       | 32.19      |  |
| PK   | 5.751G       | 118.33            | Inf               | -Inf           | 113.43        | 3           | Horizontal | 306            | 1.69          | -       | 31.90      | 5.28       | 32.28      |  |
| AV   | 5.753G       | 106.95            | Inf               | -Inf           | 102.05        | 3           | Horizontal | 306            | 1.69          | -       | 31.90      | 5.28       | 32.28      |  |
| PK   | 5.989G       | 56.38             | 68.20             | -11.82         | 51.09         | 3           | Horizontal | 306            | 1.69          | -       | 32.22      | 5.49       | 32.42      |  |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5745MHz\_TnomVnom

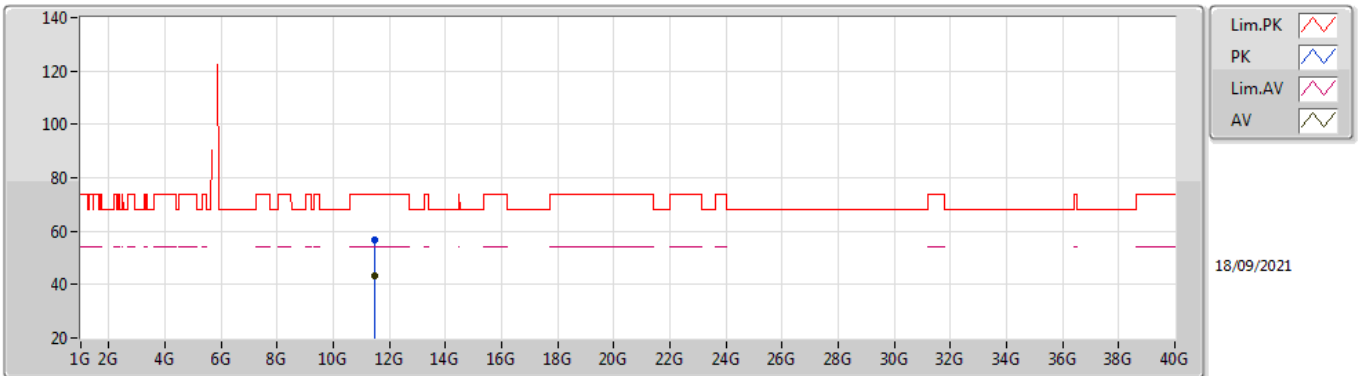


EUT\_Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.49048G    | 56.95             | 74.00             | -17.05         | 43.34         | 3           | Vertical  | 80             | 2.54          | -       | 39.62      | 8.30       | 34.31      |
| AV   | 11.48586G    | 43.20             | 54.00             | -10.80         | 29.59         | 3           | Vertical  | 80             | 2.54          | -       | 39.63      | 8.29       | 34.31      |



## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

### 5745MHz\_TnomVnom

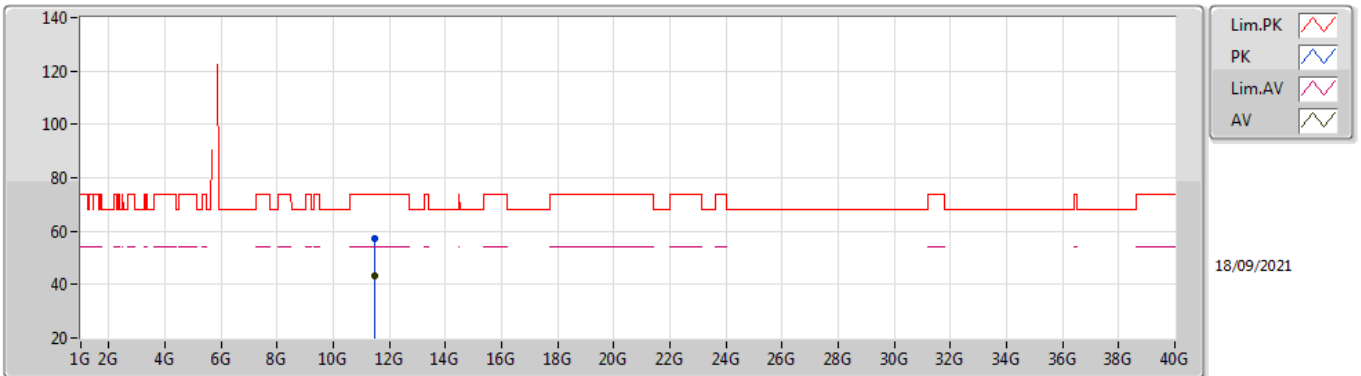


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.494G      | 57.50             | 74.00             | -16.50         | 43.90         | 3           | Horizontal | 5              | 2.69          | -       | 39.61      | 8.30       | 34.31      |
| AV   | 11.4855G     | 43.03             | 54.00             | -10.97         | 29.42         | 3           | Horizontal | 5              | 2.69          | -       | 39.63      | 8.29       | 34.31      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5785MHz\_TnomVnom

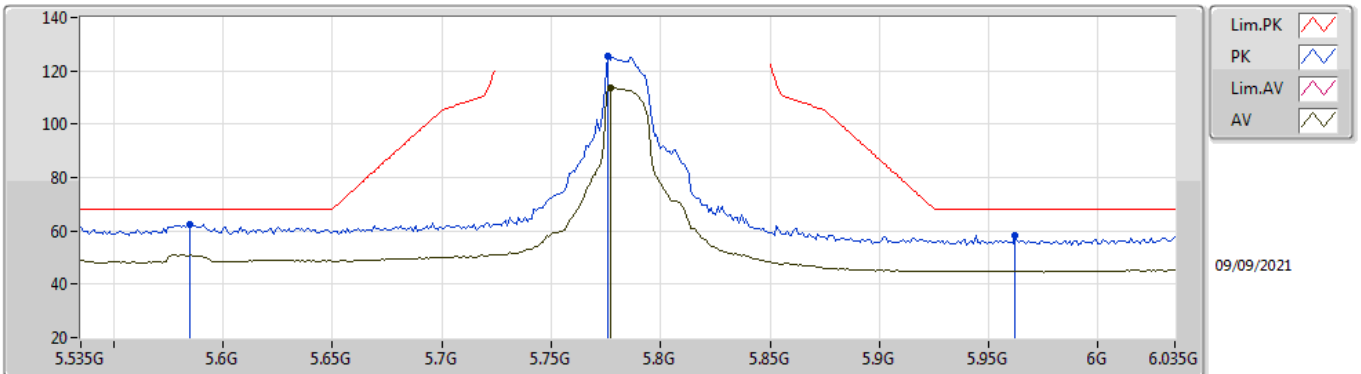


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.585G       | 62.42             | 68.20             | -5.78          | 57.84         | 3           | Vertical  | 288            | 2.09          | -       | 31.57      | 5.19       | 32.18      |  |
| PK   | 5.776G       | 125.66            | Inf               | -Inf           | 120.67        | 3           | Vertical  | 288            | 2.09          | -       | 32.00      | 5.29       | 32.30      |  |
| AV   | 5.777G       | 113.73            | Inf               | -Inf           | 108.74        | 3           | Vertical  | 288            | 2.09          | -       | 32.00      | 5.29       | 32.30      |  |
| PK   | 5.962G       | 58.30             | 68.20             | -9.90          | 53.05         | 3           | Vertical  | 288            | 2.09          | -       | 32.20      | 5.46       | 32.41      |  |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5785MHz\_TnomVnom

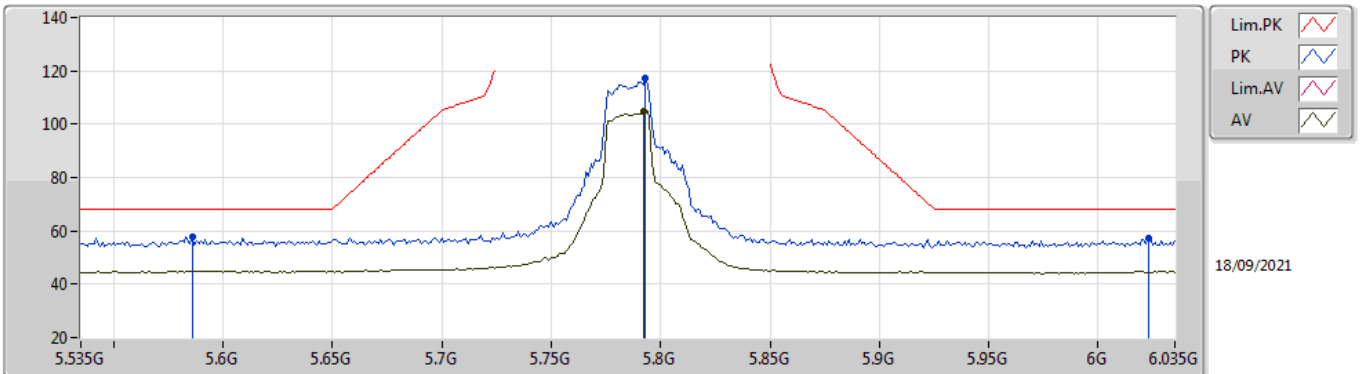


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.586G       | 57.87             | 68.20             | -10.33         | 53.29         | 3           | Horizontal | 345.4          | 1.80          | -       | 31.57      | 5.19       | 32.18      |
| PK   | 5.793G       | 117.01            | Inf               | -Inf           | 112.02        | 3           | Horizontal | 345.4          | 1.80          | -       | 32.00      | 5.30       | 32.31      |
| AV   | 5.792G       | 104.85            | Inf               | -Inf           | 99.86         | 3           | Horizontal | 345.4          | 1.80          | -       | 32.00      | 5.30       | 32.31      |
| PK   | 6.023G       | 57.38             | 68.20             | -10.82         | 51.98         | 3           | Horizontal | 345.4          | 1.80          | -       | 32.34      | 5.50       | 32.44      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5785MHz\_TnomVnom

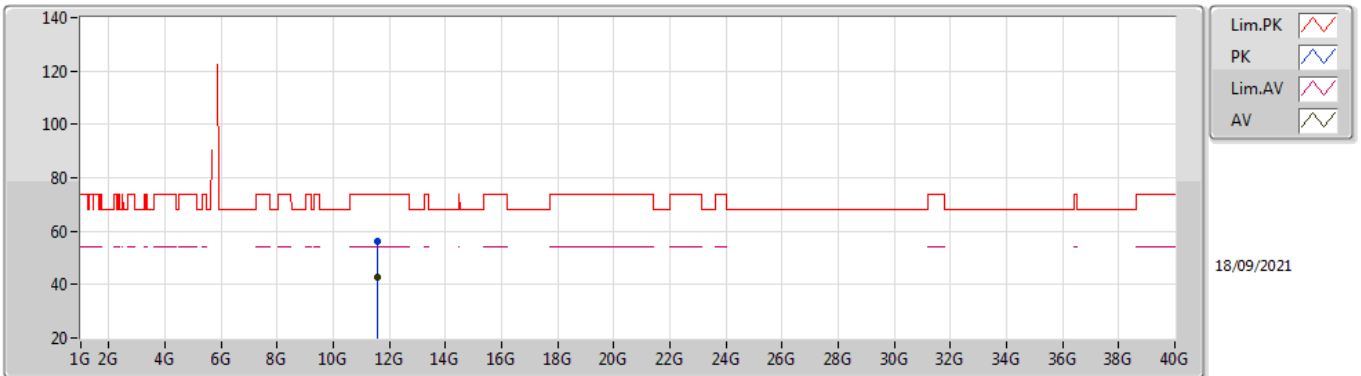


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq      | Level    | Limit    | Margin | Raw    | Dist | Condition | Azimuth | Height | Comment | AF    | CL   | PA    |  |
|------|-----------|----------|----------|--------|--------|------|-----------|---------|--------|---------|-------|------|-------|--|
|      | (Hz)      | (dBuV/m) | (dBuV/m) | (dB)   | (dBuV) | (m)  |           | (°)     | (m)    |         | (dB)  | (dB) | (dB)  |  |
| PK   | 11.57214G | 56.30    | 74.00    | -17.70 | 42.74  | 3    | Vertical  | 201     | 1.34   | -       | 39.53 | 8.33 | 34.30 |  |
| AV   | 11.567G   | 42.70    | 54.00    | -11.30 | 29.14  | 3    | Vertical  | 201     | 1.34   | -       | 39.53 | 8.33 | 34.30 |  |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5785MHz\_TnomVnom

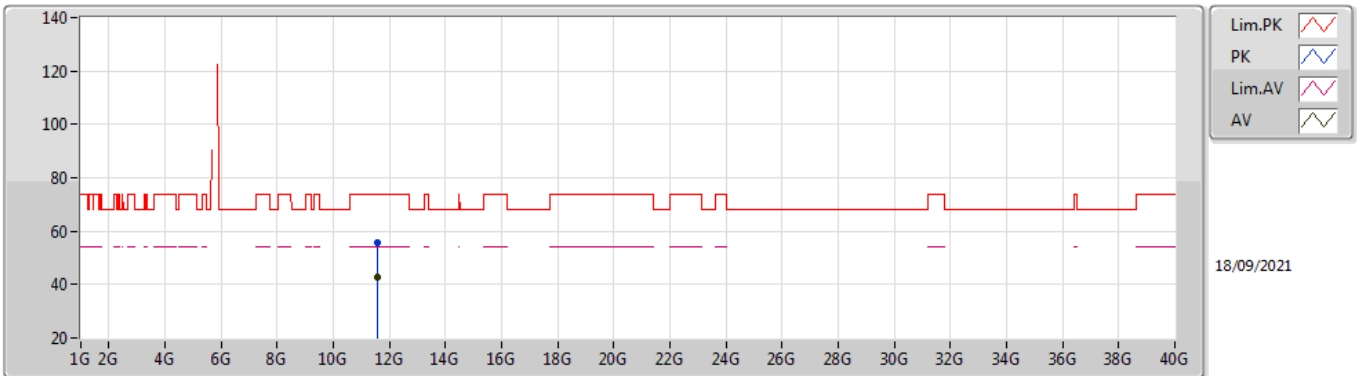


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.56652G    | 55.58             | 74.00             | -18.42         | 42.02         | 3           | Horizontal | 181            | 1.50          | -       | 39.53      | 8.33       | 34.30      |
| AV   | 11.57196G    | 42.84             | 54.00             | -11.16         | 29.28         | 3           | Horizontal | 181            | 1.50          | -       | 39.53      | 8.33       | 34.30      |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5825MHz\_TnomVnom

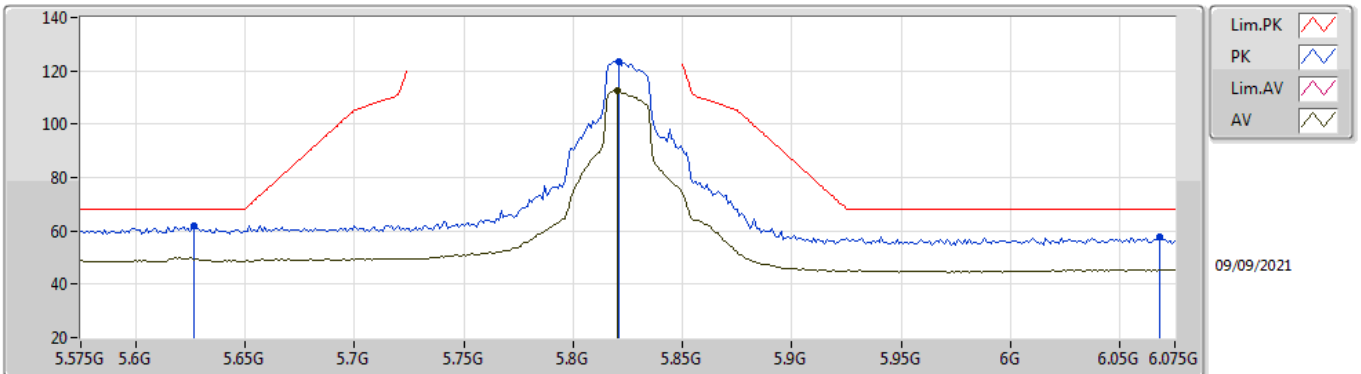


EUT\_Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.627G       | 61.69             | 68.20             | -6.51          | 57.09         | 3           | Vertical  | 287            | 2.22          | -       | 31.60      | 5.21       | 32.21      |  |
| PK   | 5.821G       | 123.33            | Inf               | -Inf           | 118.33        | 3           | Vertical  | 287            | 2.22          | -       | 32.00      | 5.32       | 32.32      |  |
| AV   | 5.82G        | 112.66            | Inf               | -Inf           | 107.66        | 3           | Vertical  | 287            | 2.22          | -       | 32.00      | 5.32       | 32.32      |  |
| PK   | 6.068G       | 57.67             | 68.20             | -10.53         | 52.17         | 3           | Vertical  | 287            | 2.22          | -       | 32.46      | 5.50       | 32.46      |  |

# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5825MHz\_TnomVnom

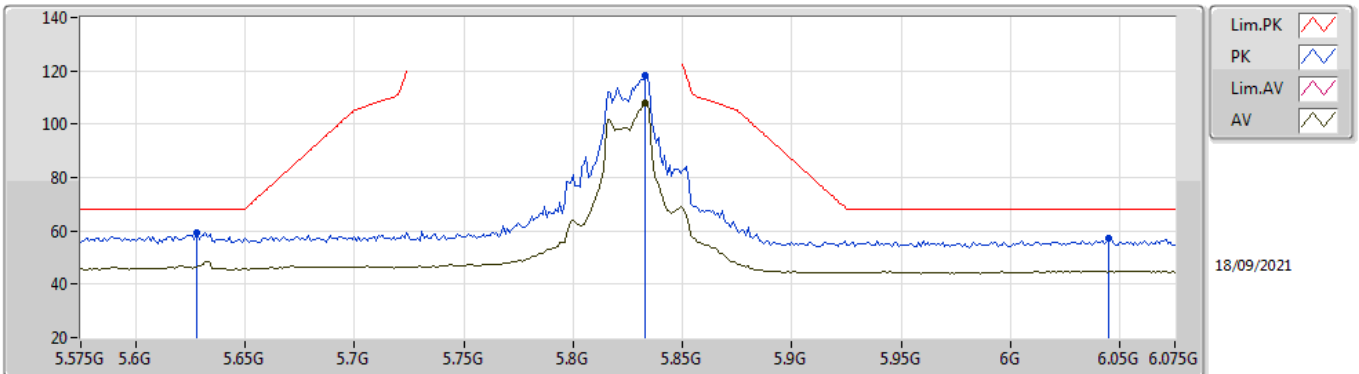


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.628G       | 59.31             | 68.20             | -8.89          | 54.71         | 3           | Horizontal | 256            | 1.11          | -       | 31.60      | 5.21       | 32.21      |  |
| PK   | 5.833G       | 118.14            | Inf               | -Inf           | 113.14        | 3           | Horizontal | 256            | 1.11          | -       | 32.00      | 5.33       | 32.33      |  |
| AV   | 5.833G       | 107.97            | Inf               | -Inf           | 102.97        | 3           | Horizontal | 256            | 1.11          | -       | 32.00      | 5.33       | 32.33      |  |
| PK   | 6.045G       | 57.07             | 68.20             | -11.13         | 51.55         | 3           | Horizontal | 256            | 1.11          | -       | 32.47      | 5.50       | 32.45      |  |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

### 5825MHz\_TnomVnom

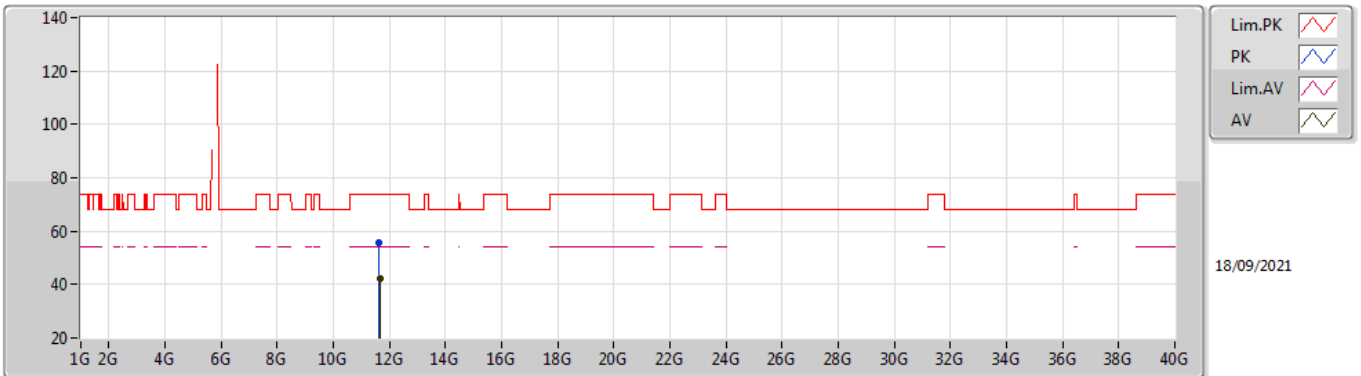


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.64604G    | 55.51             | 74.00             | -18.49         | 42.07         | 3           | Vertical  | 232            | 2.11          | -       | 39.36      | 8.36       | 34.28      |
| AV   | 11.65236G    | 42.46             | 54.00             | -11.54         | 29.04         | 3           | Vertical  | 232            | 2.11          | -       | 39.34      | 8.36       | 34.28      |



# 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

## 5825MHz\_TnomVnom

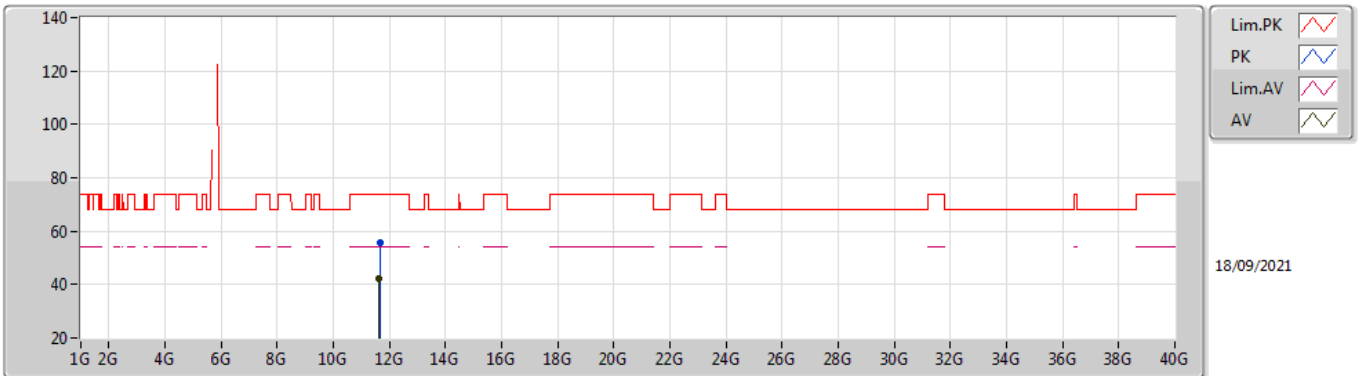


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 11.648G      | 55.93             | 74.00             | -18.07         | 42.49         | 3           | Horizontal | 312            | 3.00          | -       | 39.36      | 8.36       | 34.28      |  |
| AV   | 11.64514G    | 42.34             | 54.00             | -11.66         | 28.90         | 3           | Horizontal | 312            | 3.00          | -       | 39.36      | 8.36       | 34.28      |  |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5190MHz\_TnomVnom

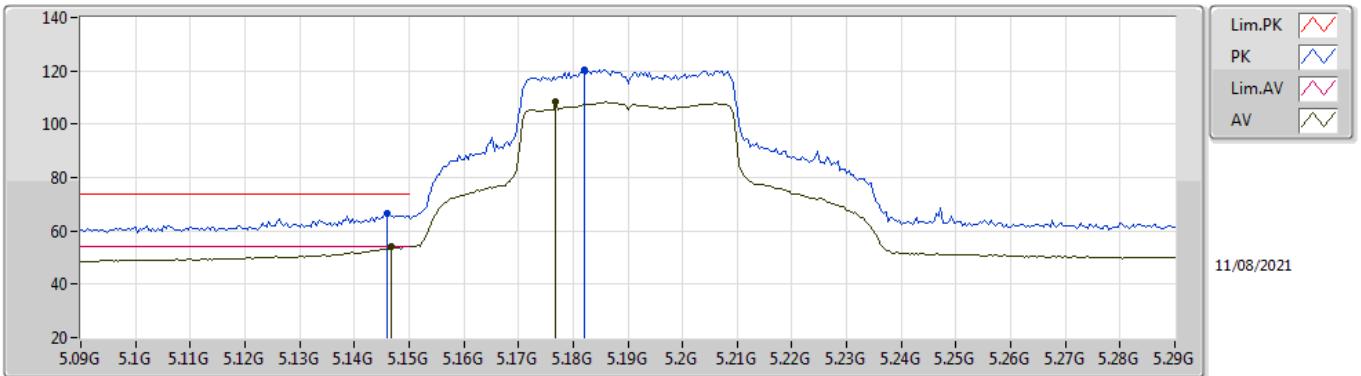


EUT Y\_4TX  
Setting 92  
06-E-B-4-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.146G       | 66.69             | 74.00             | -7.31          | 61.84         | 3           | Vertical  | 70.6           | 1.80          | -       | 31.82      | 5.00       | 31.97      |  |
| AV   | 5.1468G      | 53.94             | 54.00             | -0.06          | 49.10         | 3           | Vertical  | 70.6           | 1.80          | -       | 31.81      | 5.00       | 31.97      |  |
| PK   | 5.182G       | 120.26            | Inf               | -Inf           | 115.58        | 3           | Vertical  | 70.6           | 1.80          | -       | 31.67      | 5.00       | 31.99      |  |
| AV   | 5.1768G      | 108.30            | Inf               | -Inf           | 103.60        | 3           | Vertical  | 70.6           | 1.80          | -       | 31.69      | 5.00       | 31.99      |  |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5190MHz\_TnomVnom

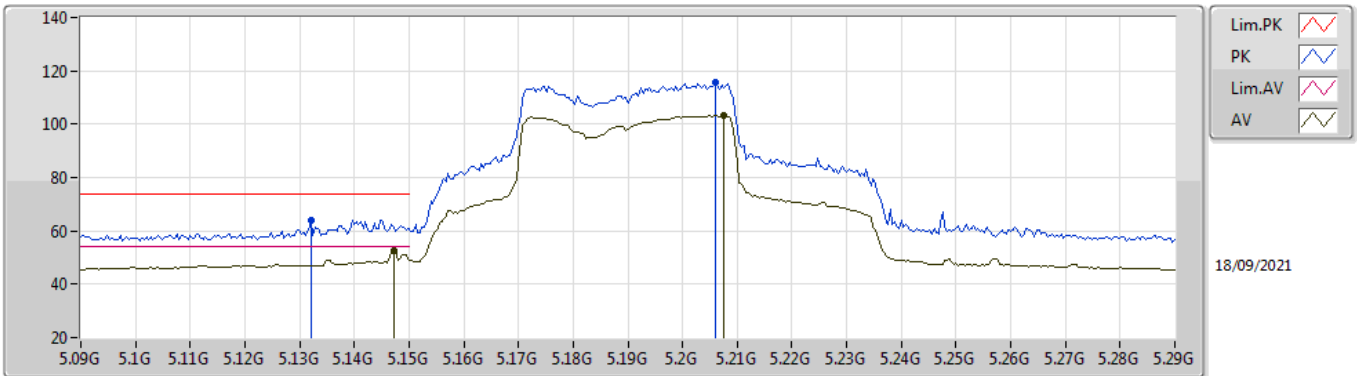


EUT Y\_4TX  
Setting 92  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.132G       | 64.04             | 74.00             | -9.96          | 59.14         | 3           | Horizontal | 80             | 2.43          | -       | 31.87      | 5.00       | 31.97      |
| AV   | 5.1472G      | 52.44             | 54.00             | -1.56          | 47.60         | 3           | Horizontal | 80             | 2.43          | -       | 31.81      | 5.00       | 31.97      |
| PK   | 5.206G       | 115.44            | Inf               | -Inf           | 110.86        | 3           | Horizontal | 80             | 2.43          | -       | 31.58      | 5.00       | 32.00      |
| AV   | 5.2076G      | 103.25            | Inf               | -Inf           | 98.68         | 3           | Horizontal | 80             | 2.43          | -       | 31.57      | 5.00       | 32.00      |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5190MHz\_TnomVnom

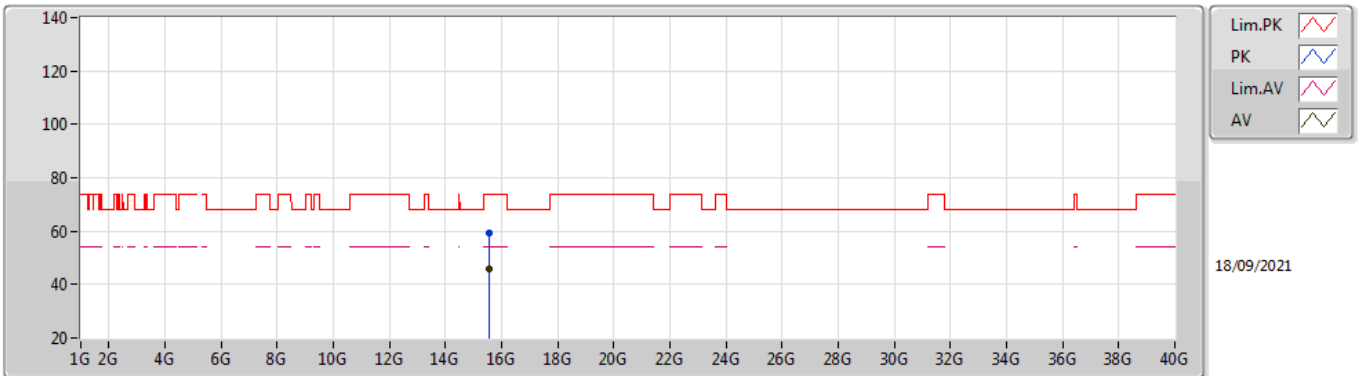


EUT Y\_4TX  
Setting 92  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.56744G    | 59.53             | 74.00             | -14.47         | 45.04         | 3           | Vertical  | 305            | 2.44          | -       | 38.36      | 10.38      | 34.25      |
| AV   | 15.56772G    | 45.84             | 54.00             | -8.16          | 31.35         | 3           | Vertical  | 305            | 2.44          | -       | 38.36      | 10.38      | 34.25      |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5190MHz\_TnomVnom

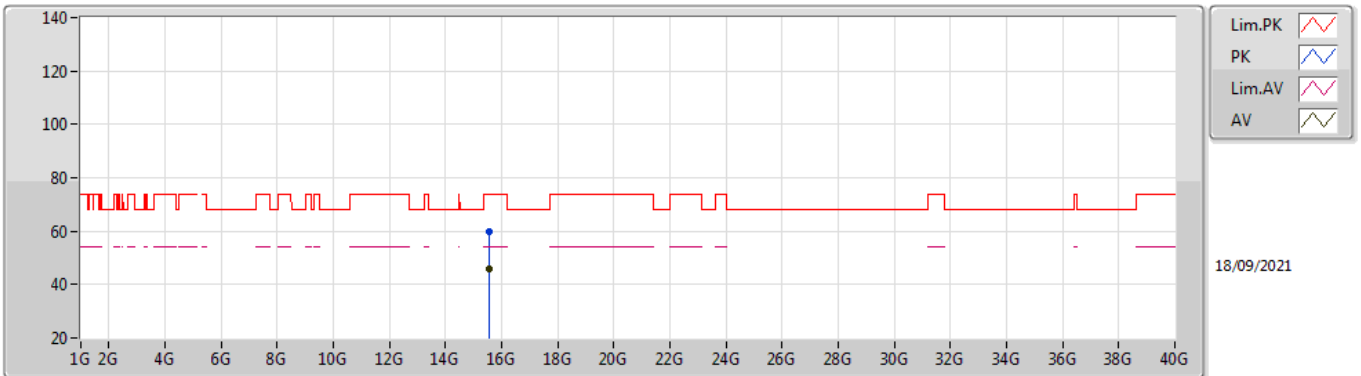


EUT Y\_4TX  
Setting 92  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.56958G    | 59.81             | 74.00             | -14.19         | 45.33         | 3           | Horizontal | 274            | 2.29          | -       | 38.35      | 10.38      | 34.25      |
| AV   | 15.57182G    | 45.78             | 54.00             | -8.22          | 31.30         | 3           | Horizontal | 274            | 2.29          | -       | 38.34      | 10.39      | 34.25      |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5230MHz\_TnomVnom

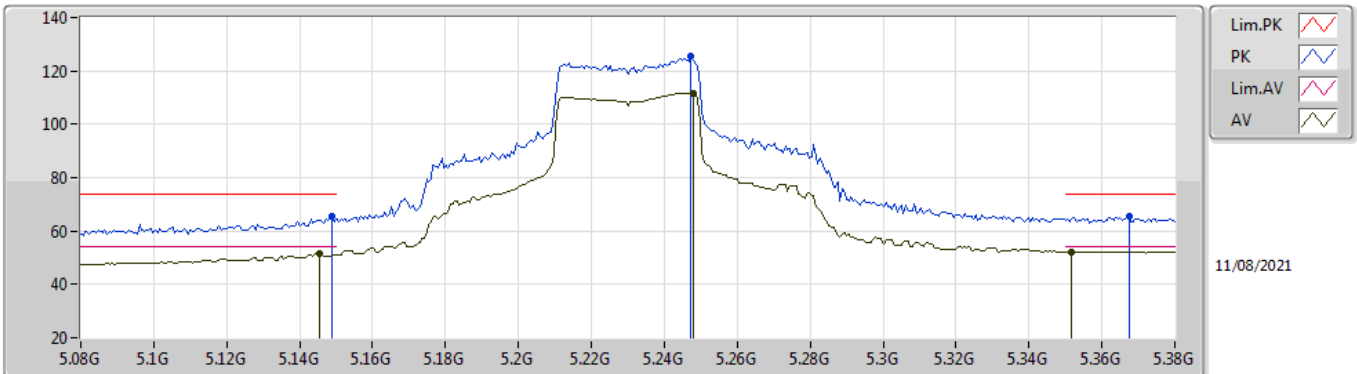


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.149G       | 65.61             | 74.00             | -8.39          | 60.79         | 3           | Vertical  | 250.4          | 1.88          | -       | 31.80      | 5.00       | 31.98      |
| AV   | 5.1454G      | 51.43             | 54.00             | -2.57          | 46.58         | 3           | Vertical  | 250.4          | 1.88          | -       | 31.82      | 5.00       | 31.97      |
| PK   | 5.2474G      | 125.42            | Inf               | -Inf           | 121.03        | 3           | Vertical  | 250.4          | 1.88          | -       | 31.41      | 5.00       | 32.02      |
| AV   | 5.248G       | 111.76            | Inf               | -Inf           | 107.37        | 3           | Vertical  | 250.4          | 1.88          | -       | 31.41      | 5.00       | 32.02      |
| PK   | 5.3674G      | 65.26             | 74.00             | -8.74          | 60.89         | 3           | Vertical  | 250.4          | 1.88          | -       | 31.44      | 5.00       | 32.07      |
| AV   | 5.3518G      | 52.19             | 54.00             | -1.81          | 47.94         | 3           | Vertical  | 250.4          | 1.88          | -       | 31.31      | 5.00       | 32.06      |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5230MHz\_TnomVnom

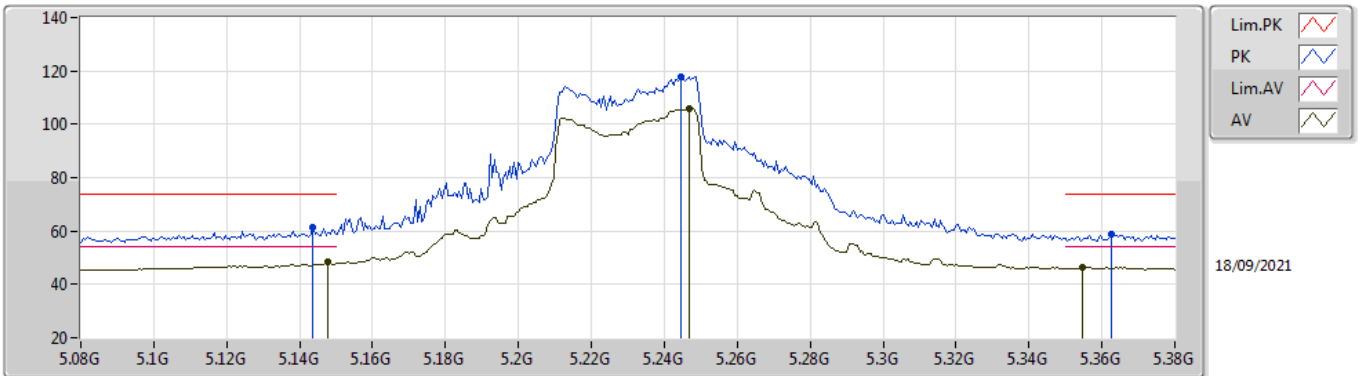


EUT V\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.1436G      | 61.53             | 74.00             | -12.47         | 56.67         | 3           | Horizontal | 287            | 1.30          | -       | 31.83      | 5.00       | 31.97      |
| AV   | 5.1478G      | 48.57             | 54.00             | -5.43          | 43.74         | 3           | Horizontal | 287            | 1.30          | -       | 31.81      | 5.00       | 31.98      |
| PK   | 5.2444G      | 117.80            | Inf               | -Inf           | 113.40        | 3           | Horizontal | 287            | 1.30          | -       | 31.42      | 5.00       | 32.02      |
| AV   | 5.2468G      | 105.88            | Inf               | -Inf           | 101.49        | 3           | Horizontal | 287            | 1.30          | -       | 31.41      | 5.00       | 32.02      |
| PK   | 5.3626G      | 58.63             | 74.00             | -15.37         | 54.30         | 3           | Horizontal | 287            | 1.30          | -       | 31.40      | 5.00       | 32.07      |
| AV   | 5.3548G      | 46.32             | 54.00             | -7.68          | 42.05         | 3           | Horizontal | 287            | 1.30          | -       | 31.34      | 5.00       | 32.07      |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5230MHz\_TnomVnom

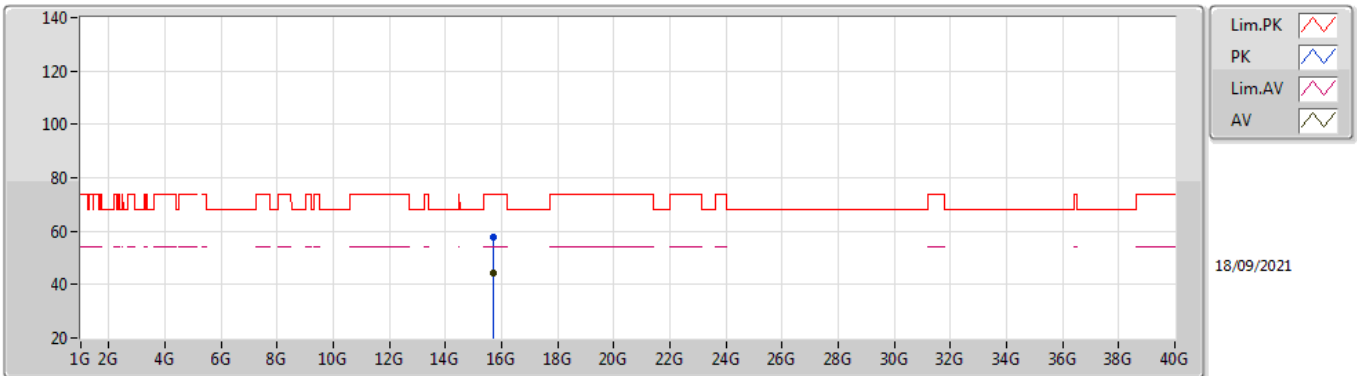


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.6935G     | 57.61             | 74.00             | -16.39         | 43.63         | 3           | Vertical  | 206            | 2.55          | -       | 37.83      | 10.45      | 34.30      |
| AV   | 15.69374G    | 44.54             | 54.00             | -9.46          | 30.56         | 3           | Vertical  | 206            | 2.55          | -       | 37.83      | 10.45      | 34.30      |



# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5230MHz\_TnomVnom

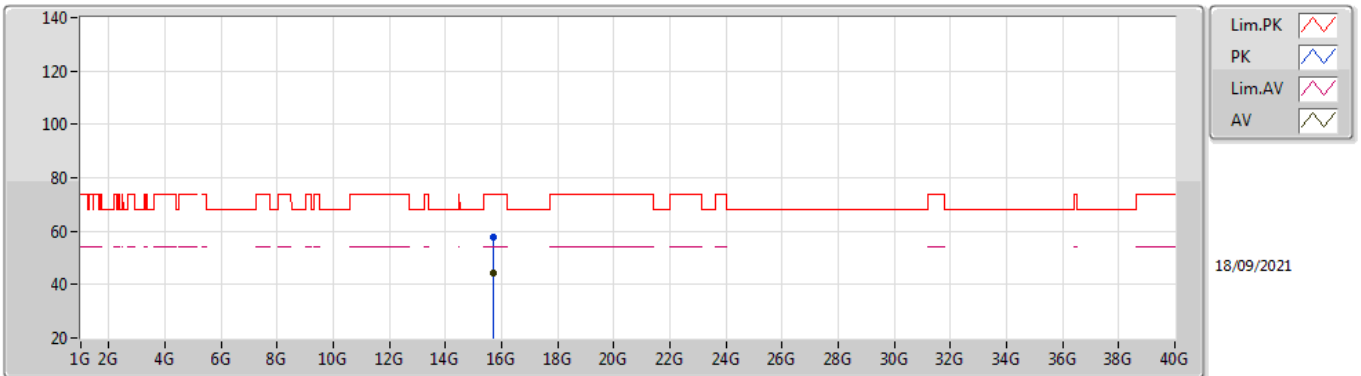


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.68882G    | 57.53             | 74.00             | -16.47         | 43.55         | 3           | Horizontal | 89             | 2.14          | -       | 37.84      | 10.44      | 34.30      |
| AV   | 15.68612G    | 44.52             | 54.00             | -9.48          | 30.51         | 3           | Horizontal | 89             | 2.14          | -       | 37.86      | 10.44      | 34.29      |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5755MHz\_TnomVnom

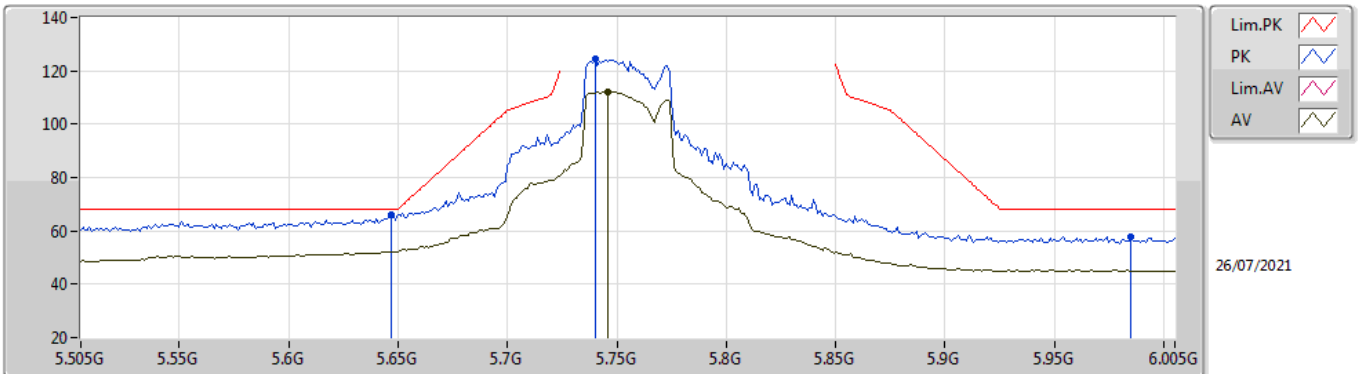


EUT Y\_4TX  
Setting 100  
06-E-B-4-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.647G       | 66.17             | 68.20             | -2.03          | 61.57         | 3           | Vertical  | 288            | 2.10          | -       | 31.60      | 5.22       | 32.22      |
| PK   | 5.74G        | 124.52            | Inf               | -Inf           | 119.64        | 3           | Vertical  | 288            | 2.10          | -       | 31.88      | 5.27       | 32.27      |
| AV   | 5.746G       | 112.01            | Inf               | -Inf           | 107.13        | 3           | Vertical  | 288            | 2.10          | -       | 31.89      | 5.27       | 32.28      |
| PK   | 5.985G       | 57.88             | 68.20             | -10.32         | 52.58         | 3           | Vertical  | 288            | 2.10          | -       | 32.23      | 5.49       | 32.42      |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5755MHz\_TnomVnom

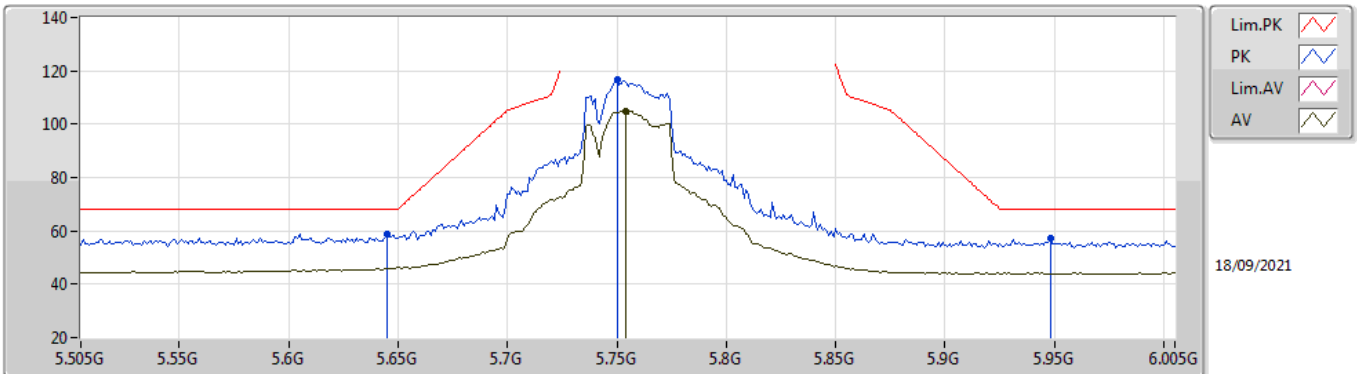


EUT\_Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.645G       | 58.72             | 68.20             | -9.48          | 54.12         | 3           | Horizontal | 287            | 1.91          | -       | 31.60      | 5.22       | 32.22      |
| PK   | 5.75G        | 116.78            | Inf               | -Inf           | 111.88        | 3           | Horizontal | 287            | 1.91          | -       | 31.90      | 5.28       | 32.28      |
| AV   | 5.754G       | 104.89            | Inf               | -Inf           | 99.99         | 3           | Horizontal | 287            | 1.91          | -       | 31.90      | 5.28       | 32.28      |
| PK   | 5.948G       | 57.19             | 68.20             | -11.01         | 51.85         | 3           | Horizontal | 287            | 1.91          | -       | 32.29      | 5.45       | 32.40      |

## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

### 5755MHz\_TnomVnom

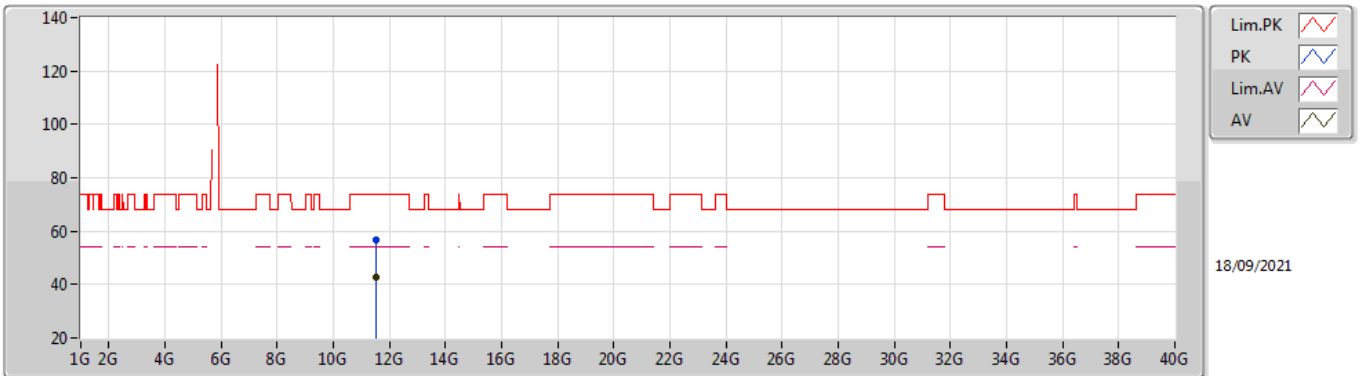


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 11.50948G    | 56.52             | 74.00             | -17.48         | 42.94         | 3           | Vertical  | 85             | 2.96          | -       | 39.59      | 8.30       | 34.31      |  |
| AV   | 11.50534G    | 42.56             | 54.00             | -11.44         | 28.98         | 3           | Vertical  | 85             | 2.96          | -       | 39.59      | 8.30       | 34.31      |  |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5755MHz\_TnomVnom

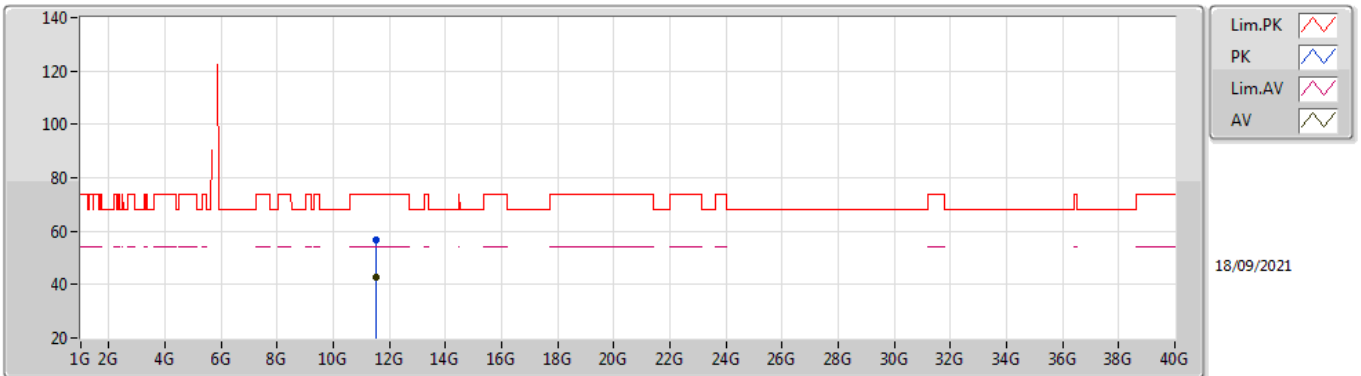


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 11.51492G    | 56.94             | 74.00             | -17.06         | 43.35         | 3           | Horizontal | 325            | 1.51          | -       | 39.59      | 8.31       | 34.31      |  |
| AV   | 11.51122G    | 42.51             | 54.00             | -11.49         | 28.93         | 3           | Horizontal | 325            | 1.51          | -       | 39.59      | 8.30       | 34.31      |  |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5795MHz\_TnomVnom

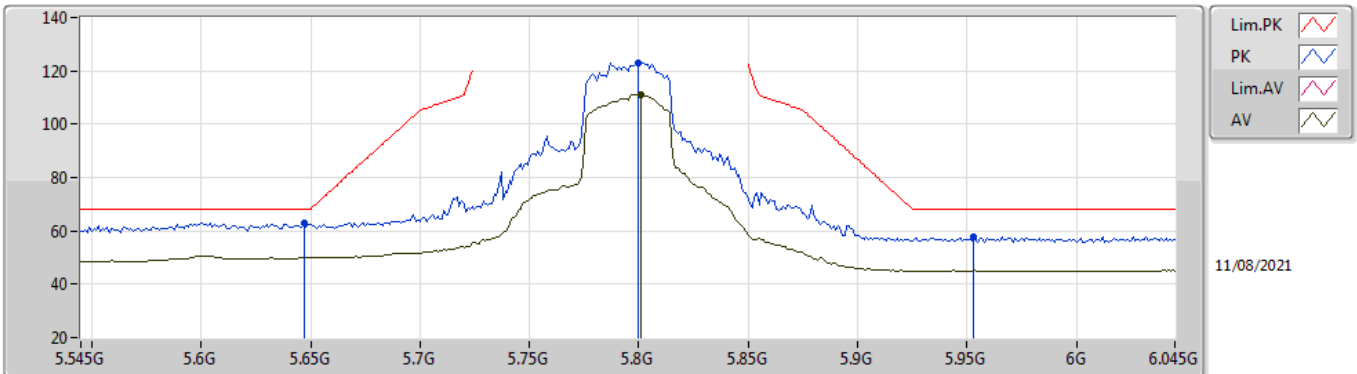


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.647G       | 63.08             | 68.20             | -5.12          | 58.48         | 3           | Vertical  | 289            | 2.21          | -       | 31.60      | 5.22       | 32.22      |  |
| PK   | 5.8G         | 123.18            | Inf               | -Inf           | 118.29        | 3           | Vertical  | 289            | 2.21          | -       | 31.90      | 5.30       | 32.31      |  |
| AV   | 5.801G       | 111.12            | Inf               | -Inf           | 106.23        | 3           | Vertical  | 289            | 2.21          | -       | 31.90      | 5.30       | 32.31      |  |
| PK   | 5.953G       | 57.99             | 68.20             | -10.21         | 52.65         | 3           | Vertical  | 289            | 2.21          | -       | 32.29      | 5.45       | 32.40      |  |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5795MHz\_TnomVnom

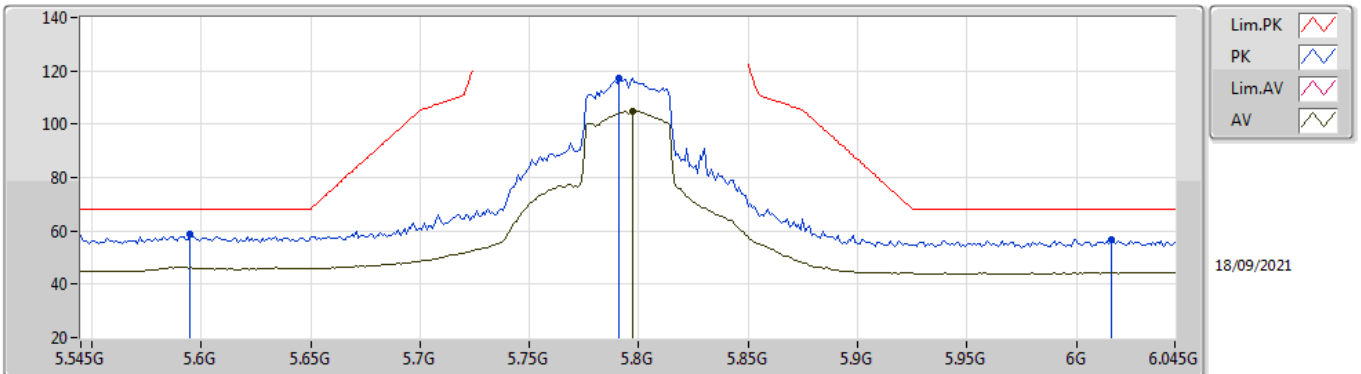


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.595G       | 58.62             | 68.20             | -9.58          | 54.02         | 3           | Horizontal | 315            | 1.62          | -       | 31.59      | 5.20       | 32.19      |
| PK   | 5.791G       | 117.48            | Inf               | -Inf           | 112.48        | 3           | Horizontal | 315            | 1.62          | -       | 32.00      | 5.30       | 32.30      |
| AV   | 5.797G       | 104.88            | Inf               | -Inf           | 99.89         | 3           | Horizontal | 315            | 1.62          | -       | 32.00      | 5.30       | 32.31      |
| PK   | 6.016G       | 56.54             | 68.20             | -11.66         | 51.18         | 3           | Horizontal | 315            | 1.62          | -       | 32.30      | 5.50       | 32.44      |

# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5795MHz\_TnomVnom

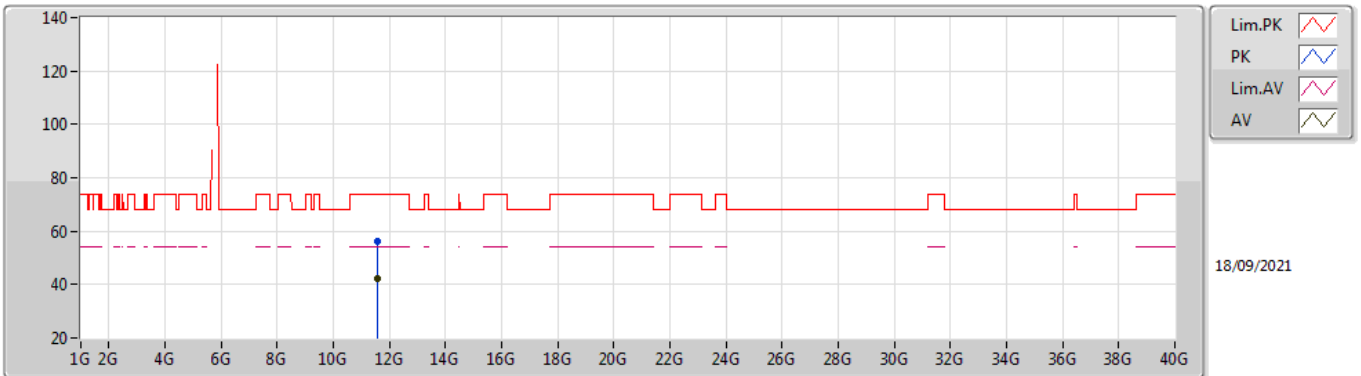


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq      | Level    | Limit    | Margin | Raw    | Dist | Condition | Azimuth | Height | Comment | AF    | CL   | PA    |  |
|------|-----------|----------|----------|--------|--------|------|-----------|---------|--------|---------|-------|------|-------|--|
|      | (Hz)      | (dBuV/m) | (dBuV/m) | (dB)   | (dBuV) | (m)  |           | (°)     | (m)    |         | (dB)  | (dB) | (dB)  |  |
| PK   | 11.58582G | 55.98    | 74.00    | -18.02 | 42.43  | 3    | Vertical  | 87      | 1.96   | -       | 39.51 | 8.33 | 34.29 |  |
| AV   | 11.59326G | 42.15    | 54.00    | -11.85 | 28.59  | 3    | Vertical  | 87      | 1.96   | -       | 39.51 | 8.34 | 34.29 |  |



# 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

## 5795MHz\_TnomVnom

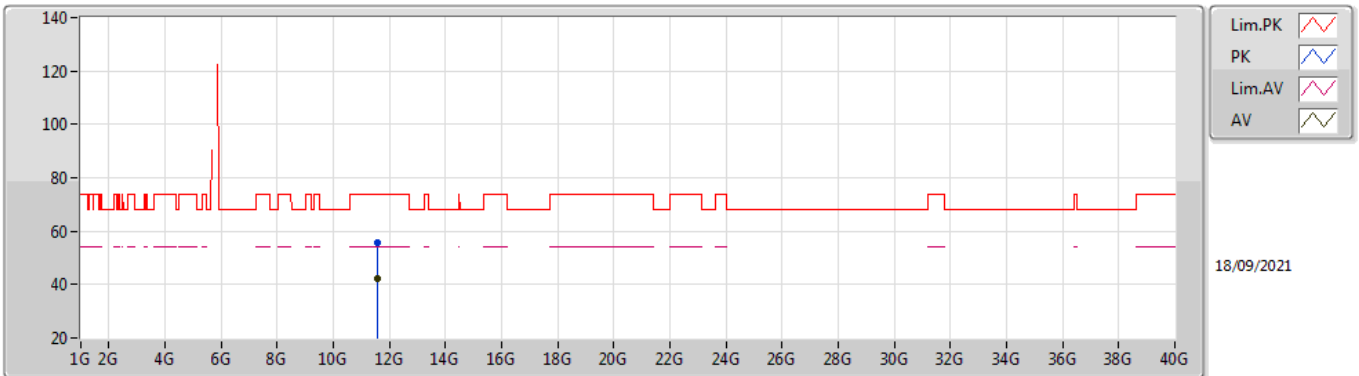


EUT Y\_4TX  
Setting 100  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 11.59246G    | 55.76             | 74.00             | -18.24         | 42.20         | 3           | Horizontal | 102            | 2.37          | -       | 39.51      | 8.34       | 34.29      |  |
| AV   | 11.59398G    | 42.18             | 54.00             | -11.82         | 28.62         | 3           | Horizontal | 102            | 2.37          | -       | 39.51      | 8.34       | 34.29      |  |

# 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

## 5210MHz\_TnomVnom

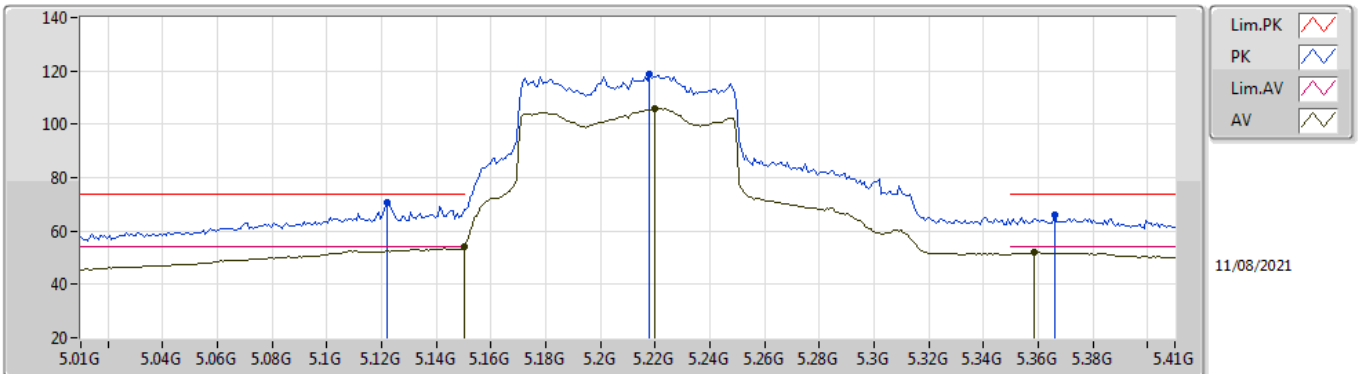


EUT\_V\_4TX  
Setting 92  
06-E-B-4-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.122G       | 70.93             | 74.00             | -3.07          | 65.98         | 3           | Vertical  | 352.3          | 1.80          | -       | 31.91      | 5.00       | 31.96      |
| AV   | 5.15G        | 53.91             | 54.00             | -0.09          | 49.09         | 3           | Vertical  | 352.3          | 1.80          | -       | 31.80      | 5.00       | 31.98      |
| PK   | 5.218G       | 118.57            | Inf               | -Inf           | 114.05        | 3           | Vertical  | 352.3          | 1.80          | -       | 31.53      | 5.00       | 32.01      |
| AV   | 5.2196G      | 105.83            | Inf               | -Inf           | 101.32        | 3           | Vertical  | 352.3          | 1.80          | -       | 31.52      | 5.00       | 32.01      |
| PK   | 5.366G       | 65.90             | 74.00             | -8.10          | 61.54         | 3           | Vertical  | 352.3          | 1.80          | -       | 31.43      | 5.00       | 32.07      |
| AV   | 5.3588G      | 51.98             | 54.00             | -2.02          | 47.68         | 3           | Vertical  | 352.3          | 1.80          | -       | 31.37      | 5.00       | 32.07      |

# 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

## 5210MHz\_TnomVnom

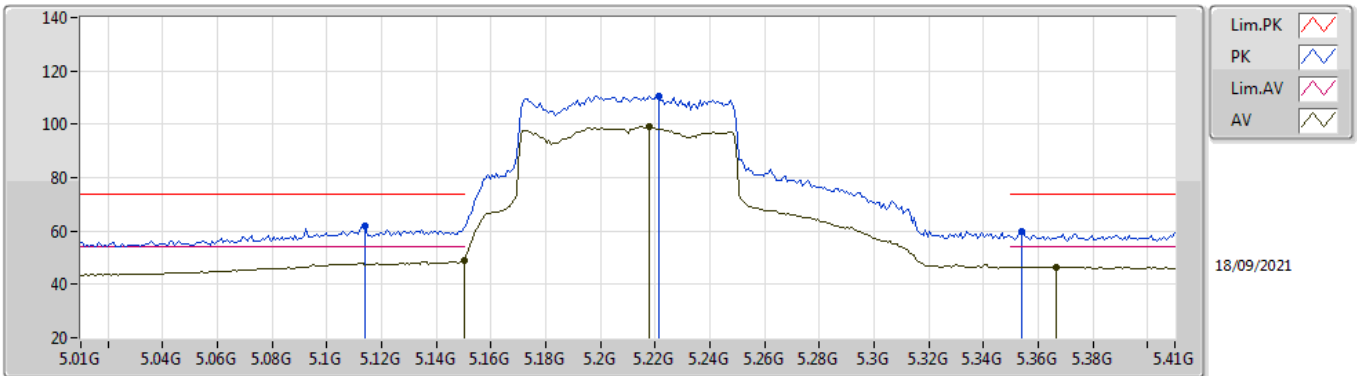


EUT\_V\_4TX  
Setting 92  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.114G       | 62.07             | 74.00             | -11.93         | 57.11         | 3           | Horizontal | 80.9           | 1.98          | -       | 31.92      | 5.00       | 31.96      |
| AV   | 5.15G        | 48.87             | 54.00             | -5.13          | 44.15         | 3           | Horizontal | 80.9           | 1.98          | -       | 31.70      | 5.00       | 31.98      |
| PK   | 5.2212G      | 110.56            | Inf               | -Inf           | 106.30        | 3           | Horizontal | 80.9           | 1.98          | -       | 31.27      | 5.00       | 32.01      |
| AV   | 5.218G       | 98.95             | Inf               | -Inf           | 94.67         | 3           | Horizontal | 80.9           | 1.98          | -       | 31.29      | 5.00       | 32.01      |
| PK   | 5.354G       | 59.60             | 74.00             | -14.40         | 55.55         | 3           | Horizontal | 80.9           | 1.98          | -       | 31.12      | 5.00       | 32.07      |
| AV   | 5.3668G      | 46.53             | 54.00             | -7.47          | 42.40         | 3           | Horizontal | 80.9           | 1.98          | -       | 31.20      | 5.00       | 32.07      |

# 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

## 5210MHz\_TnomVnom

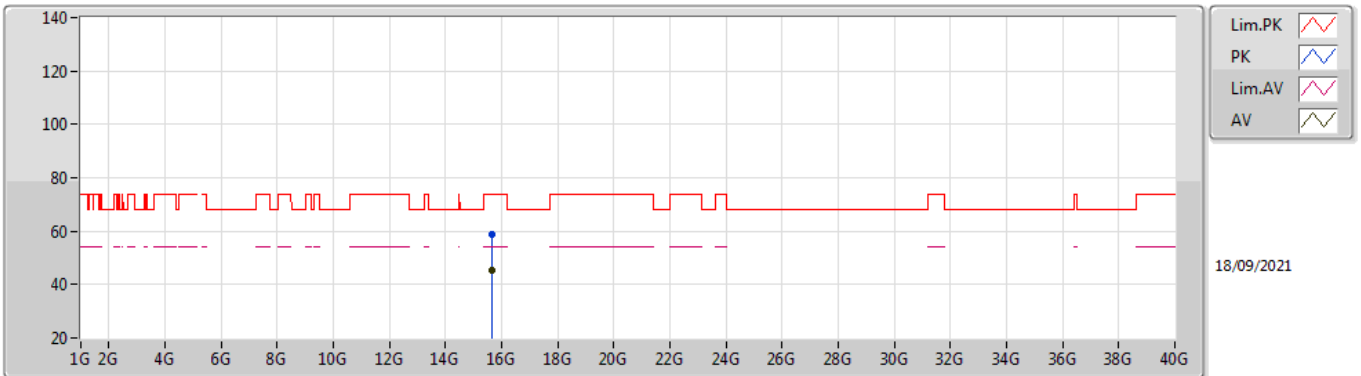


EUT Y\_4TX  
Setting 92  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.63186G    | 58.70             | 74.00             | -15.30         | 44.48         | 3           | Vertical  | 232            | 1.60          | -       | 38.07      | 10.42      | 34.27      |
| AV   | 15.63116G    | 45.47             | 54.00             | -8.53          | 31.24         | 3           | Vertical  | 232            | 1.60          | -       | 38.08      | 10.42      | 34.27      |

# 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

## 5210MHz\_TnomVnom

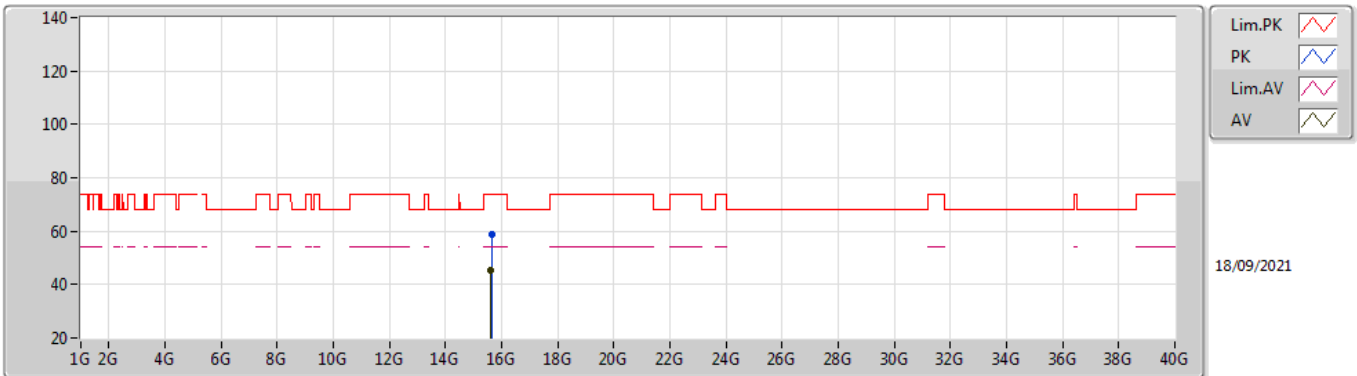


EUT Y\_4TX  
Setting 92  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.63332G    | 58.87             | 74.00             | -15.13         | 44.65         | 3           | Horizontal | 39             | 2.50          | -       | 38.07      | 10.42      | 34.27      |
| AV   | 15.62656G    | 45.43             | 54.00             | -8.57          | 31.20         | 3           | Horizontal | 39             | 2.50          | -       | 38.09      | 10.41      | 34.27      |

# 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

## 5775MHz\_TnomVnom

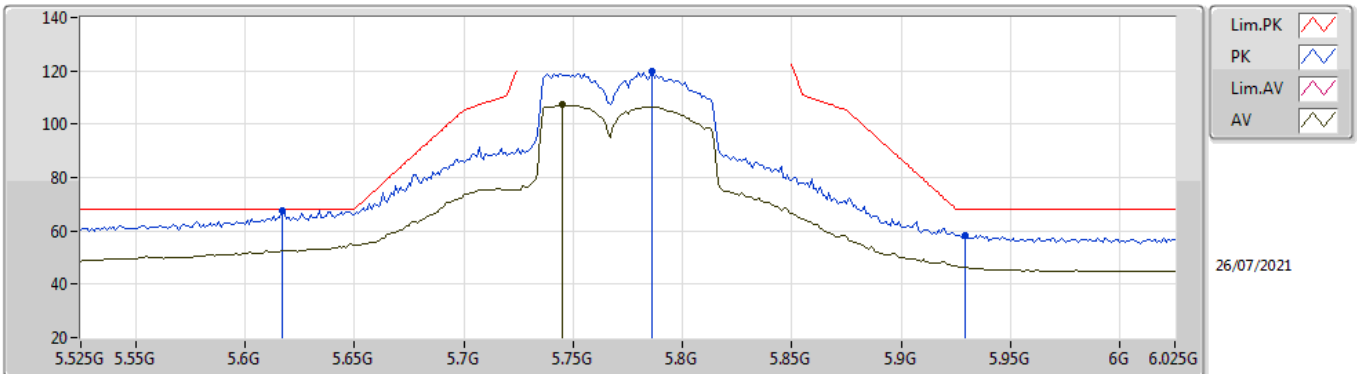


EUT Y\_4TX  
Setting 93  
06-E-B-4-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.617G       | 67.62             | 68.20             | -0.58          | 63.01         | 3           | Vertical  | 290            | 2.12          | -       | 31.60      | 5.21       | 32.20      |
| PK   | 5.786G       | 120.08            | Inf               | -Inf           | 115.19        | 3           | Vertical  | 290            | 2.12          | -       | 31.90      | 5.29       | 32.30      |
| AV   | 5.745G       | 107.24            | Inf               | -Inf           | 102.36        | 3           | Vertical  | 290            | 2.12          | -       | 31.89      | 5.27       | 32.28      |
| PK   | 5.929G       | 58.51             | 68.20             | -9.69          | 53.25         | 3           | Vertical  | 290            | 2.12          | -       | 32.22      | 5.43       | 32.39      |

# 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

## 5775MHz\_TnomVnom

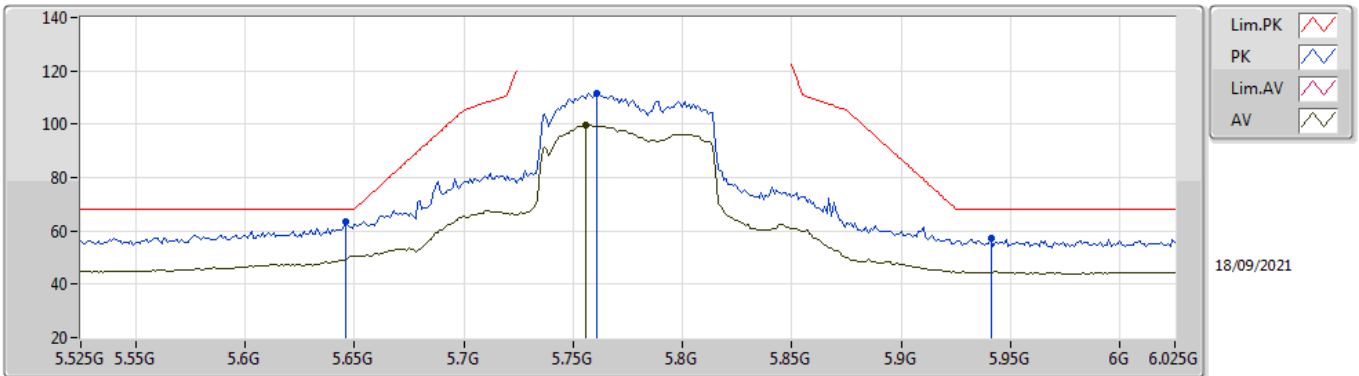


EUT Y\_4TX  
Setting 93  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.646G       | 63.23             | 68.20             | -4.97          | 58.63         | 3           | Horizontal | 305.5          | 1.70          | -       | 31.60      | 5.22       | 32.22      |  |
| PK   | 5.761G       | 111.69            | Inf               | -Inf           | 106.70        | 3           | Horizontal | 305.5          | 1.70          | -       | 32.00      | 5.28       | 32.29      |  |
| AV   | 5.756G       | 99.75             | Inf               | -Inf           | 94.75         | 3           | Horizontal | 305.5          | 1.70          | -       | 32.00      | 5.28       | 32.28      |  |
| PK   | 5.941G       | 57.09             | 68.20             | -11.11         | 51.86         | 3           | Horizontal | 305.5          | 1.70          | -       | 32.18      | 5.44       | 32.39      |  |

# 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

## 5775MHz\_TnomVnom

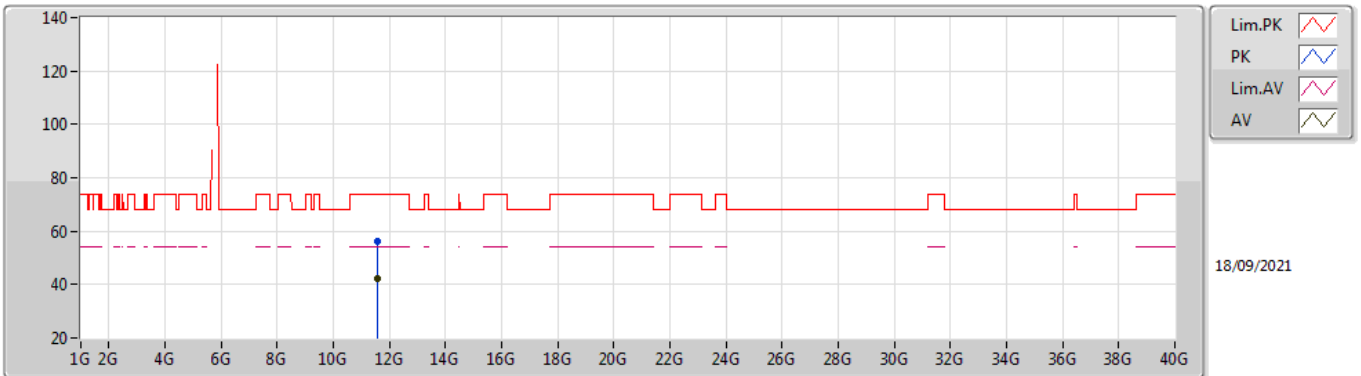


EUT Y\_4TX  
Setting 93  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq      | Level    | Limit    | Margin | Raw    | Dist | Condition | Azimuth | Height | Comment | AF    | CL   | PA    |  |
|------|-----------|----------|----------|--------|--------|------|-----------|---------|--------|---------|-------|------|-------|--|
|      | (Hz)      | (dBuV/m) | (dBuV/m) | (dB)   | (dBuV) | (m)  |           | (°)     | (m)    |         | (dB)  | (dB) | (dB)  |  |
| PK   | 11.55478G | 56.24    | 74.00    | -17.76 | 42.67  | 3    | Vertical  | 68      | 2.98   | -       | 39.55 | 8.32 | 34.30 |  |
| AV   | 11.5505G  | 42.31    | 54.00    | -11.69 | 28.74  | 3    | Vertical  | 68      | 2.98   | -       | 39.55 | 8.32 | 34.30 |  |



# 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

## 5775MHz\_TnomVnom

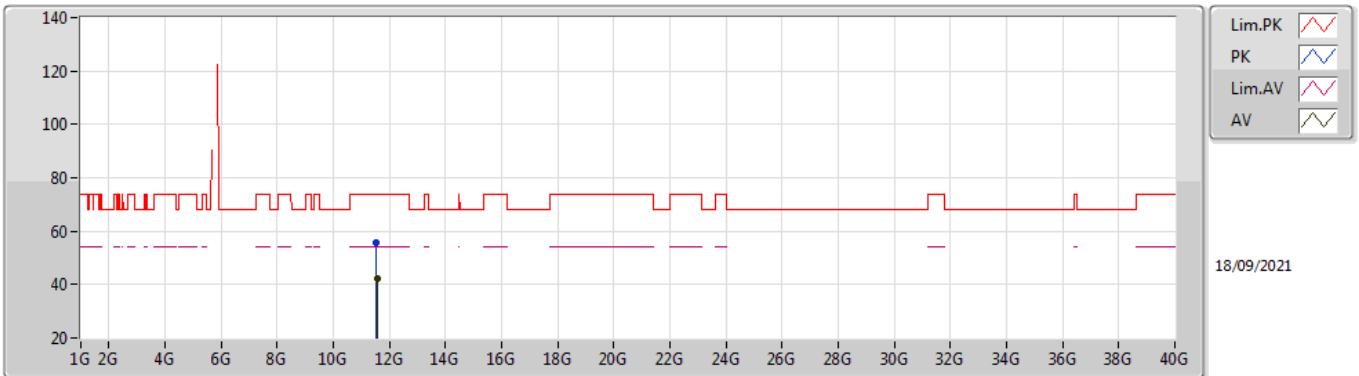

EUT\_Y\_4TX  
Setting 93  
06-E-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.54718G    | 55.85             | 74.00             | -18.15         | 42.28         | 3           | Horizontal | 210            | 2.47          | -       | 39.55      | 8.32       | 34.30      |
| AV   | 11.55418G    | 42.26             | 54.00             | -11.74         | 28.69         | 3           | Horizontal | 210            | 2.47          | -       | 39.55      | 8.32       | 34.30      |




**Summary**

| Mode                              | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comments |
|-----------------------------------|--------|------|--------------|-------------------|-------------------|----------------|-------------|-----------|----------------|---------------|----------|
| 5.725-5.85GHz                     | -      | -    | -            | -                 | -                 | -              | -           | -         | -              | -             | -        |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | Pass   | PK   | 5.633G       | 68.12             | 68.20             | -0.08          | 3           | Vertical  | 288.3          | 1.80          | -        |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5190MHz\_TnomVnom

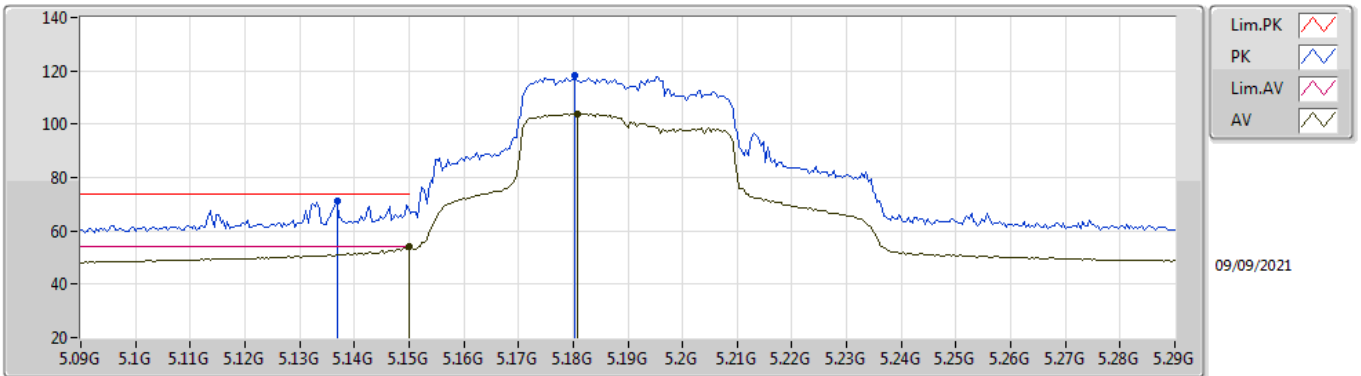


EUT Y\_4TX  
Setting 95  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.1368G      | 71.13             | 74.00             | -2.87          | 66.32         | 3           | Vertical  | 360            | 1.80          | -       | 31.78      | 5.00       | 31.97      |  |
| AV   | 5.15G        | 53.88             | 54.00             | -0.12          | 49.16         | 3           | Vertical  | 360            | 1.80          | -       | 31.70      | 5.00       | 31.98      |  |
| PK   | 5.1804G      | 118.22            | Inf               | -Inf           | 113.69        | 3           | Vertical  | 360            | 1.80          | -       | 31.52      | 5.00       | 31.99      |  |
| AV   | 5.1808G      | 104.00            | Inf               | -Inf           | 99.47         | 3           | Vertical  | 360            | 1.80          | -       | 31.52      | 5.00       | 31.99      |  |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5190MHz\_TnomVnom

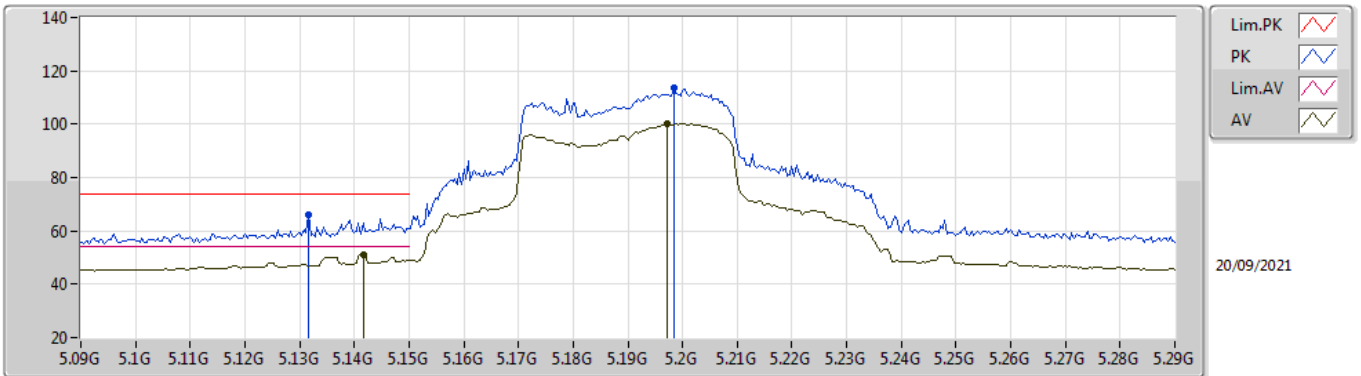


EUT Y\_4TX  
Setting 95  
06-F-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.1316G      | 65.97             | 74.00             | -8.03          | 61.13         | 3           | Horizontal | 233.7          | 1.60          | -       | 31.81      | 5.00       | 31.97      |  |
| AV   | 5.1416G      | 51.08             | 54.00             | -2.92          | 46.30         | 3           | Horizontal | 233.7          | 1.60          | -       | 31.75      | 5.00       | 31.97      |  |
| PK   | 5.1984G      | 113.67            | Inf               | -Inf           | 109.26        | 3           | Horizontal | 233.7          | 1.60          | -       | 31.41      | 5.00       | 32.00      |  |
| AV   | 5.1972G      | 100.09            | Inf               | -Inf           | 95.67         | 3           | Horizontal | 233.7          | 1.60          | -       | 31.42      | 5.00       | 32.00      |  |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5190MHz\_TnomVnom

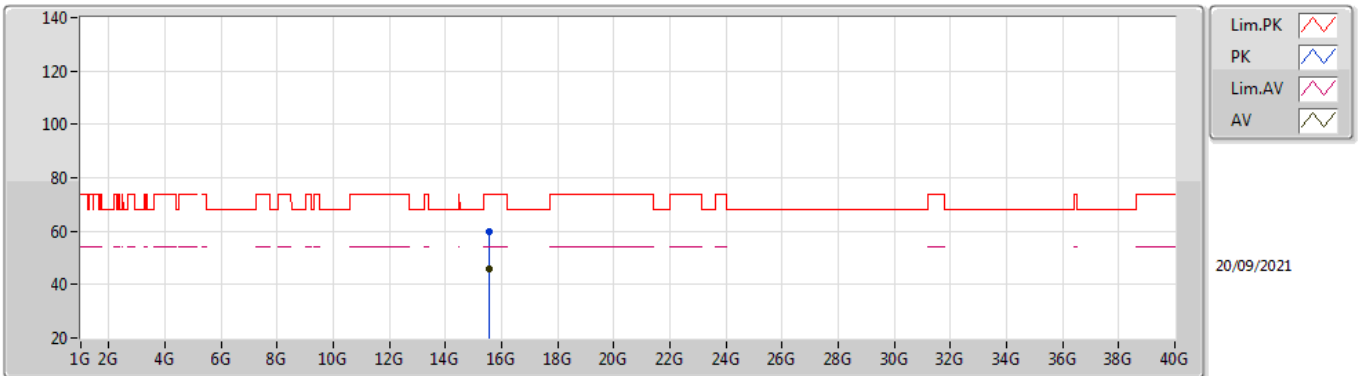


EUT Y\_4TX  
Setting 95  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 15.5656G     | 59.64             | 74.00             | -14.36         | 45.14         | 3           | Vertical  | 253            | 1.01          | -       | 38.37      | 10.38      | 34.25      |  |
| AV   | 15.5683G     | 45.94             | 54.00             | -8.06          | 31.45         | 3           | Vertical  | 253            | 1.01          | -       | 38.36      | 10.38      | 34.25      |  |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5190MHz\_TnomVnom

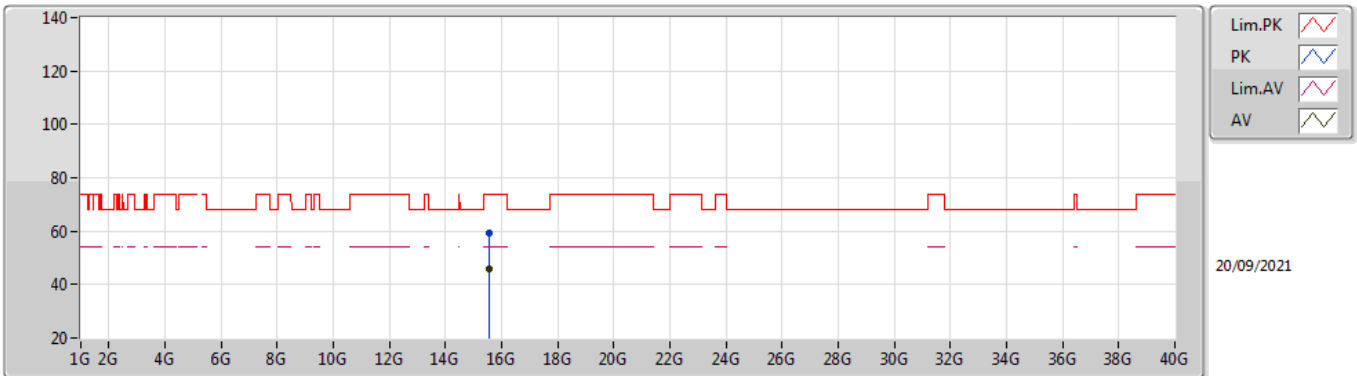


EUT Y\_4TX  
Setting 95  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 15.56864G    | 59.38             | 74.00             | -14.62         | 44.89         | 3           | Horizontal | 78             | 2.06          | -       | 38.36      | 10.38      | 34.25      |  |
| AV   | 15.57036G    | 45.97             | 54.00             | -8.03          | 31.48         | 3           | Horizontal | 78             | 2.06          | -       | 38.35      | 10.39      | 34.25      |  |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5230MHz\_TnomVnom

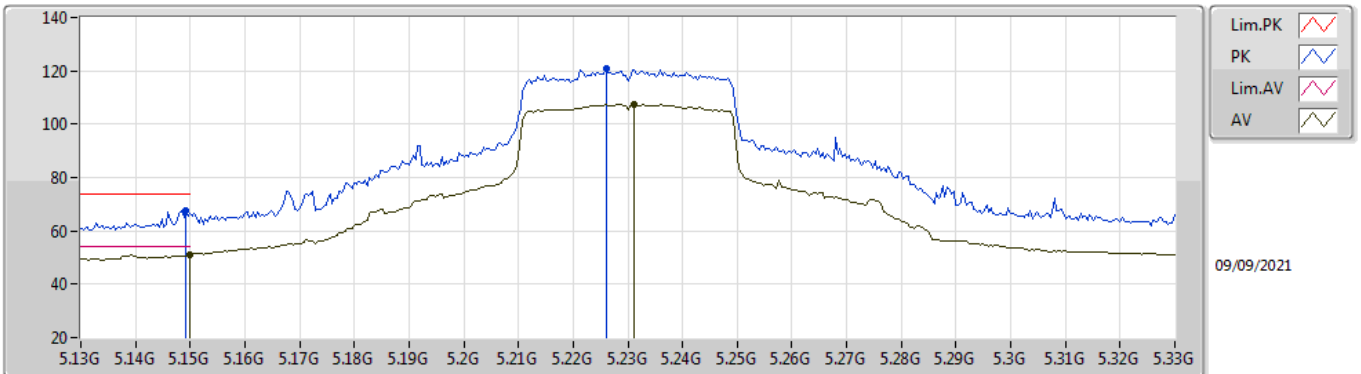


EUT\_Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.1492G      | 67.61             | 74.00             | -6.39          | 62.89         | 3           | Vertical  | 247.9          | 2.72          | -       | 31.70      | 5.00       | 31.98      |  |
| AV   | 5.15G        | 51.01             | 54.00             | -2.99          | 46.29         | 3           | Vertical  | 247.9          | 2.72          | -       | 31.70      | 5.00       | 31.98      |  |
| PK   | 5.226G       | 120.92            | Inf               | -Inf           | 116.69        | 3           | Vertical  | 247.9          | 2.72          | -       | 31.24      | 5.00       | 32.01      |  |
| AV   | 5.2312G      | 107.48            | Inf               | -Inf           | 103.28        | 3           | Vertical  | 247.9          | 2.72          | -       | 31.21      | 5.00       | 32.01      |  |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5230MHz\_TnomVnom

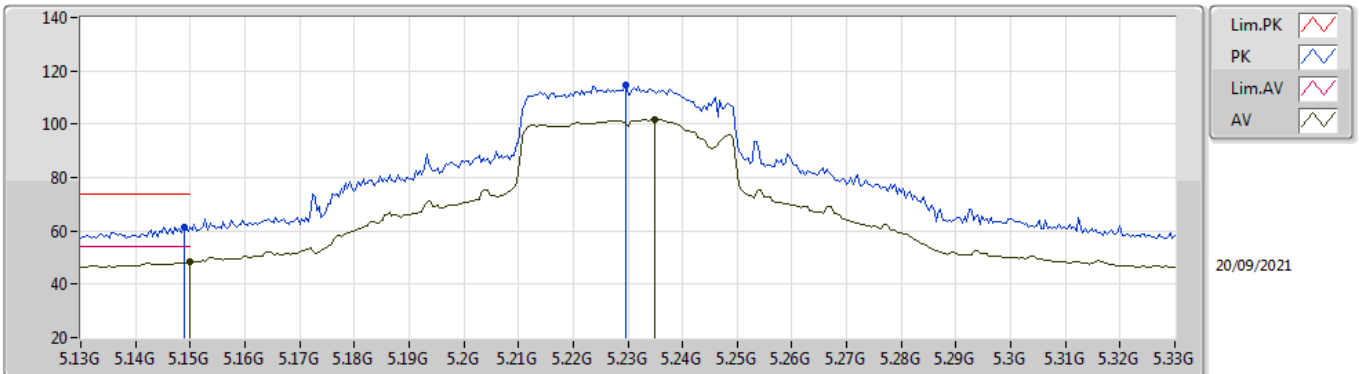


EUT Y\_4TX  
Setting 100  
06-F-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.1488G      | 61.43             | 74.00             | -12.57         | 56.70         | 3           | Horizontal | 242            | 2.46          | -       | 31.71      | 5.00       | 31.98      |  |
| AV   | 5.15G        | 48.22             | 54.00             | -5.78          | 43.50         | 3           | Horizontal | 242            | 2.46          | -       | 31.70      | 5.00       | 31.98      |  |
| PK   | 5.2296G      | 114.43            | Inf               | -Inf           | 110.22        | 3           | Horizontal | 242            | 2.46          | -       | 31.22      | 5.00       | 32.01      |  |
| AV   | 5.2348G      | 101.67            | Inf               | -Inf           | 97.49         | 3           | Horizontal | 242            | 2.46          | -       | 31.19      | 5.00       | 32.01      |  |



# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5230MHz\_TnomVnom

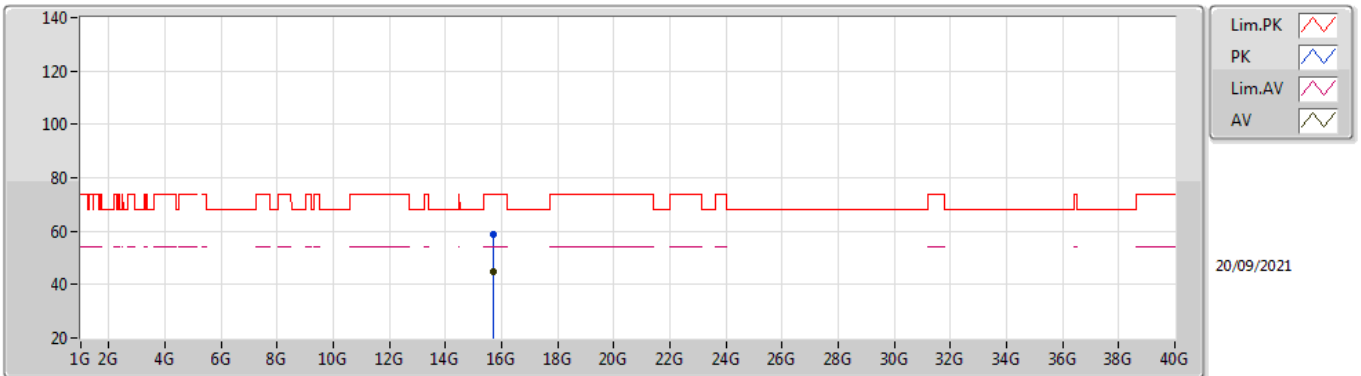


EUT Y\_4TX  
Setting 100  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.68522G    | 58.68             | 74.00             | -15.32         | 44.67         | 3           | Vertical  | 111            | 1.01          | -       | 37.86      | 10.44      | 34.29      |
| AV   | 15.68984G    | 44.91             | 54.00             | -9.09          | 30.93         | 3           | Vertical  | 111            | 1.01          | -       | 37.84      | 10.44      | 34.30      |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5230MHz\_TnomVnom

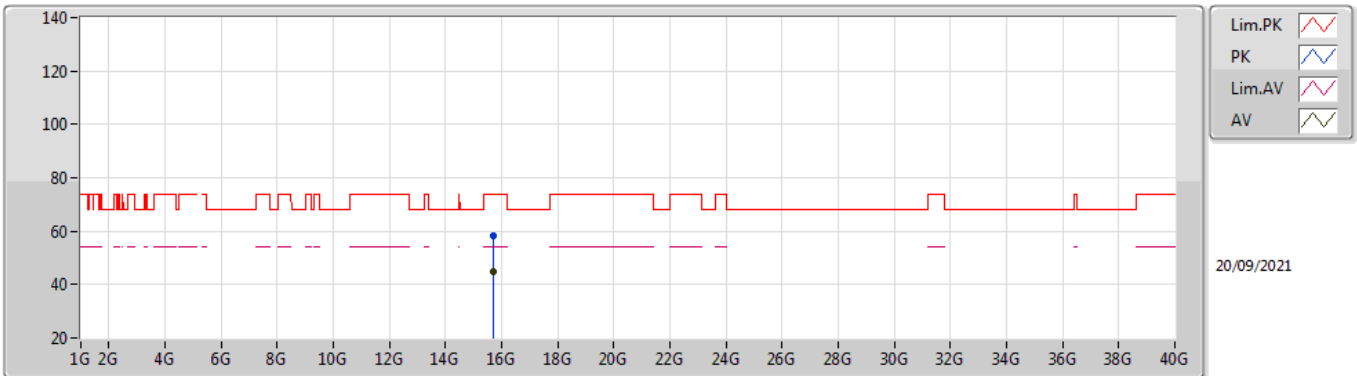


EUT Y\_4TX  
Setting 100  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 15.6865G     | 58.13             | 74.00             | -15.87         | 44.13         | 3           | Horizontal | 17             | 1.98          | -       | 37.85      | 10.44      | 34.29      |
| AV   | 15.68992G    | 44.92             | 54.00             | -9.08          | 30.94         | 3           | Horizontal | 17             | 1.98          | -       | 37.84      | 10.44      | 34.30      |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5755MHz\_TnomVnom

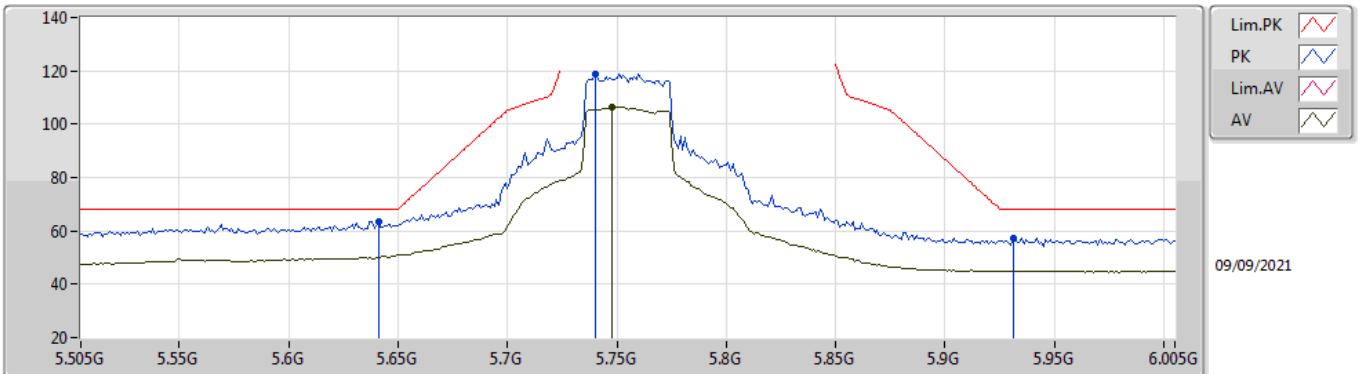


EUT\_Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.641G       | 63.49             | 68.20             | -4.71          | 58.88         | 3           | Vertical  | 79             | 2.30          | -       | 31.60      | 5.22       | 32.21      |  |
| PK   | 5.74G        | 118.95            | Inf               | -Inf           | 113.99        | 3           | Vertical  | 79             | 2.30          | -       | 31.96      | 5.27       | 32.27      |  |
| AV   | 5.748G       | 106.52            | Inf               | -Inf           | 101.54        | 3           | Vertical  | 79             | 2.30          | -       | 31.99      | 5.27       | 32.28      |  |
| PK   | 5.931G       | 57.50             | 68.20             | -10.70         | 52.30         | 3           | Vertical  | 79             | 2.30          | -       | 32.16      | 5.43       | 32.39      |  |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5755MHz\_TnomVnom

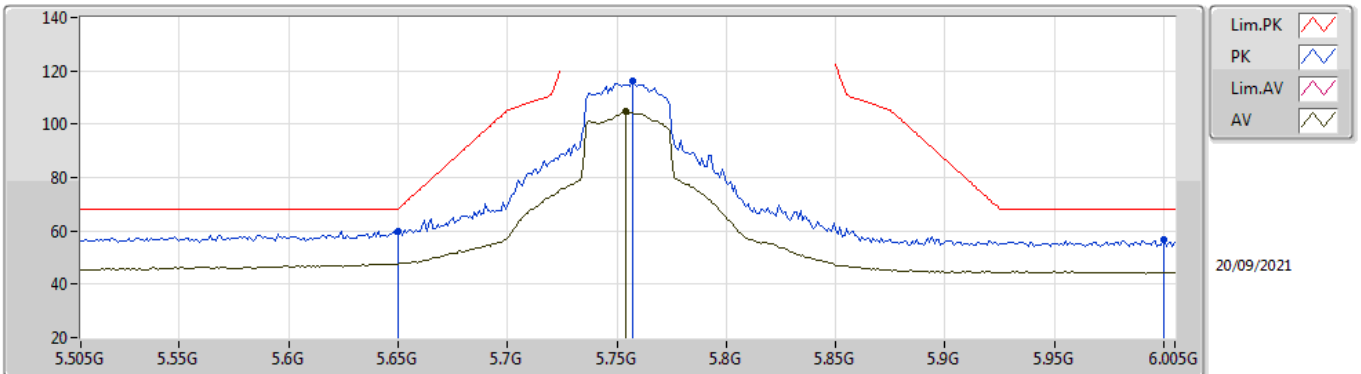


EUT Y\_4TX  
Setting 100  
06-F-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.65G        | 60.05             | 68.20             | -8.15          | 55.45         | 3           | Horizontal | 255            | 1.04          | -       | 31.60      | 5.22       | 32.22      |  |
| PK   | 5.757G       | 116.18            | Inf               | -Inf           | 111.18        | 3           | Horizontal | 255            | 1.04          | -       | 32.00      | 5.28       | 32.28      |  |
| AV   | 5.754G       | 104.59            | Inf               | -Inf           | 99.59         | 3           | Horizontal | 255            | 1.04          | -       | 32.00      | 5.28       | 32.28      |  |
| PK   | 6G           | 56.84             | 68.20             | -11.36         | 51.57         | 3           | Horizontal | 255            | 1.04          | -       | 32.20      | 5.50       | 32.43      |  |

## 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

### 5755MHz\_TnomVnom

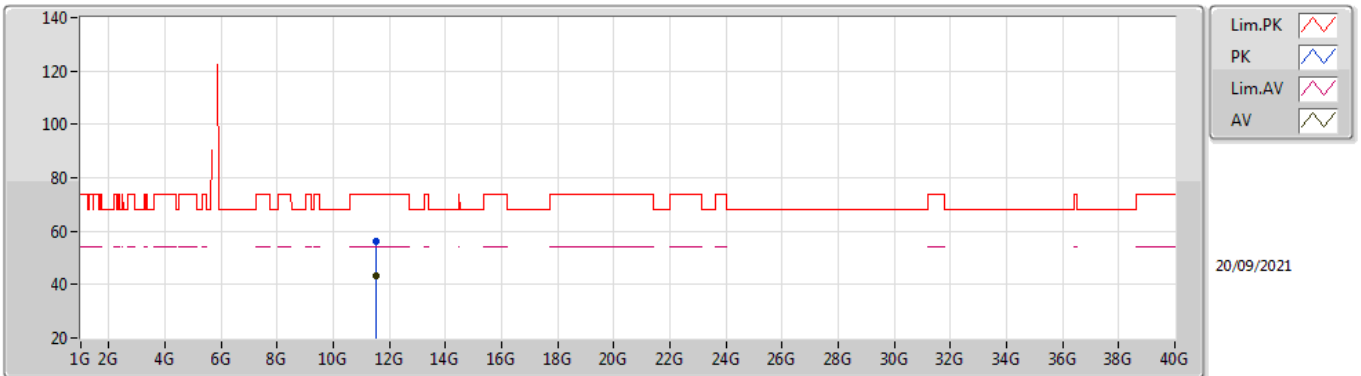


EUT\_Y\_4TX  
Setting 100  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 11.51128G    | 56.33             | 74.00             | -17.67         | 42.75         | 3           | Vertical  | 46             | 2.89          | -       | 39.59      | 8.30       | 34.31      |  |
| AV   | 11.5115G     | 43.17             | 54.00             | -10.83         | 29.59         | 3           | Vertical  | 46             | 2.89          | -       | 39.59      | 8.30       | 34.31      |  |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5755MHz\_TnomVnom

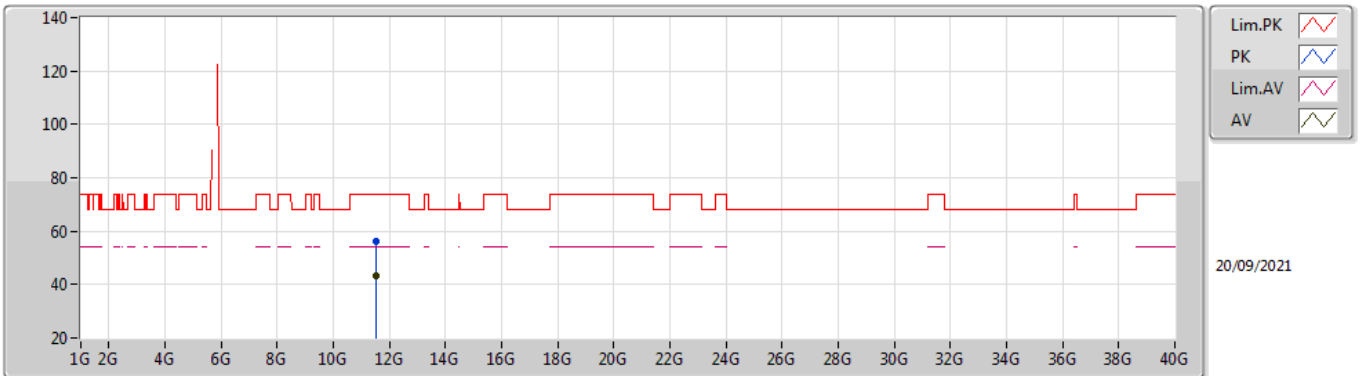


EUT Y\_4TX  
Setting 100  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.50858G    | 56.07             | 74.00             | -17.93         | 42.49         | 3           | Horizontal | 247            | 2.08          | -       | 39.59      | 8.30       | 34.31      |
| AV   | 11.51354G    | 43.07             | 54.00             | -10.93         | 29.48         | 3           | Horizontal | 247            | 2.08          | -       | 39.59      | 8.31       | 34.31      |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5795MHz\_TnomVnom

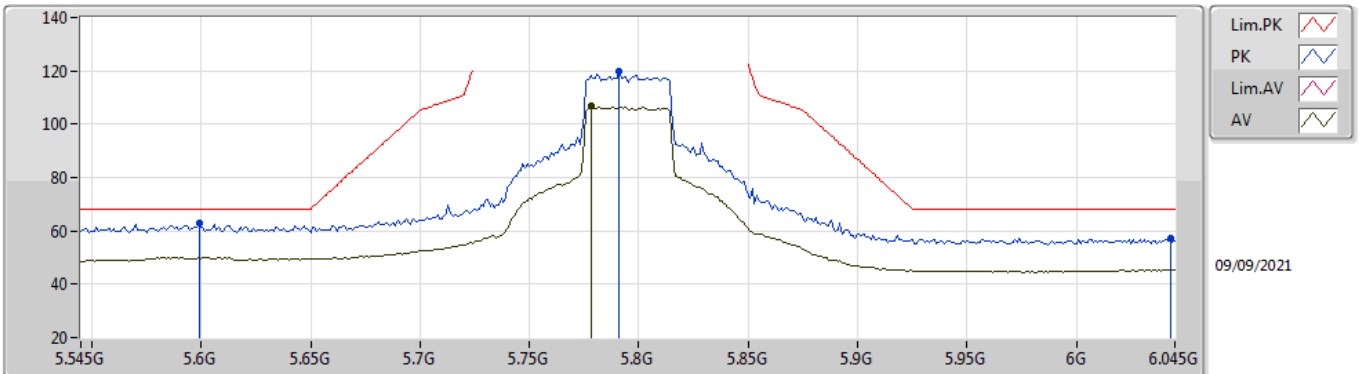


EUT Y\_4TX  
Setting 100  
06-E-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.599G       | 62.90             | 68.20             | -5.30          | 58.29         | 3           | Vertical  | 254            | 1.80          | -       | 31.60      | 5.20       | 32.19      |  |
| PK   | 5.791G       | 119.97            | Inf               | -Inf           | 114.97        | 3           | Vertical  | 254            | 1.80          | -       | 32.00      | 5.30       | 32.30      |  |
| AV   | 5.778G       | 107.00            | Inf               | -Inf           | 102.01        | 3           | Vertical  | 254            | 1.80          | -       | 32.00      | 5.29       | 32.30      |  |
| PK   | 6.043G       | 57.40             | 68.20             | -10.80         | 51.89         | 3           | Vertical  | 254            | 1.80          | -       | 32.46      | 5.50       | 32.45      |  |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5795MHz\_TnomVnom

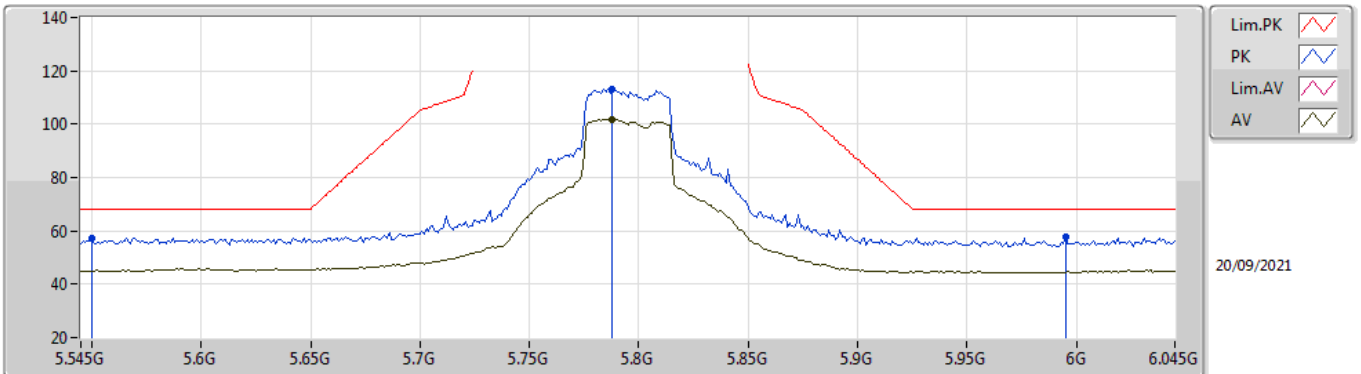


EUT Y\_4TX  
Setting 100  
06-F-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.55G        | 57.40             | 68.20             | -10.80         | 52.91         | 3           | Horizontal | 262            | 1.80          | -       | 31.50      | 5.15       | 32.16      |  |
| PK   | 5.788G       | 113.18            | Inf               | -Inf           | 108.19        | 3           | Horizontal | 262            | 1.80          | -       | 32.00      | 5.29       | 32.30      |  |
| AV   | 5.788G       | 101.84            | Inf               | -Inf           | 96.85         | 3           | Horizontal | 262            | 1.80          | -       | 32.00      | 5.29       | 32.30      |  |
| PK   | 5.995G       | 57.56             | 68.20             | -10.64         | 52.29         | 3           | Horizontal | 262            | 1.80          | -       | 32.20      | 5.50       | 32.43      |  |



# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5795MHz\_TnomVnom

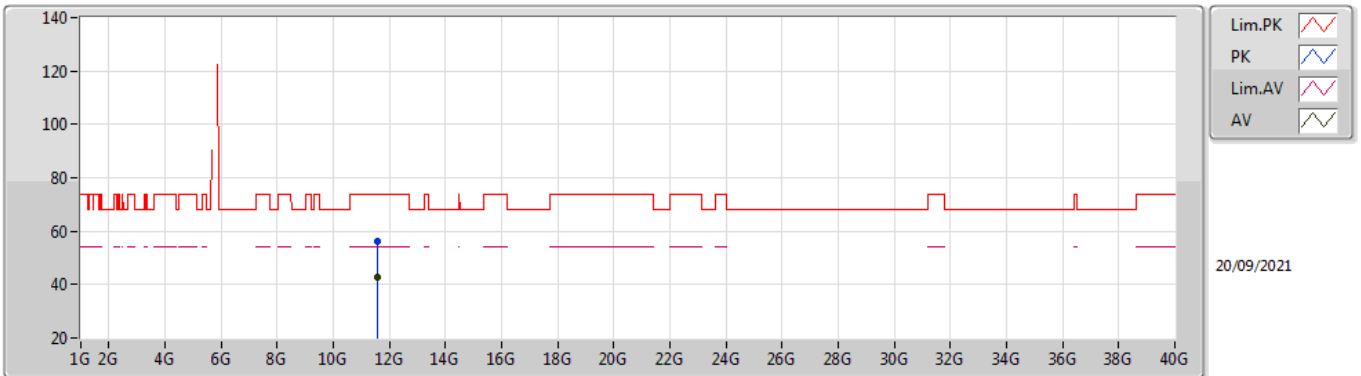


EUT Y\_4TX  
Setting 100  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.58946G    | 56.12             | 74.00             | -17.88         | 42.56         | 3           | Vertical  | 309            | 1.18          | -       | 39.51      | 8.34       | 34.29      |
| AV   | 11.59052G    | 42.59             | 54.00             | -11.41         | 29.03         | 3           | Vertical  | 309            | 1.18          | -       | 39.51      | 8.34       | 34.29      |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

## 5795MHz\_TnomVnom

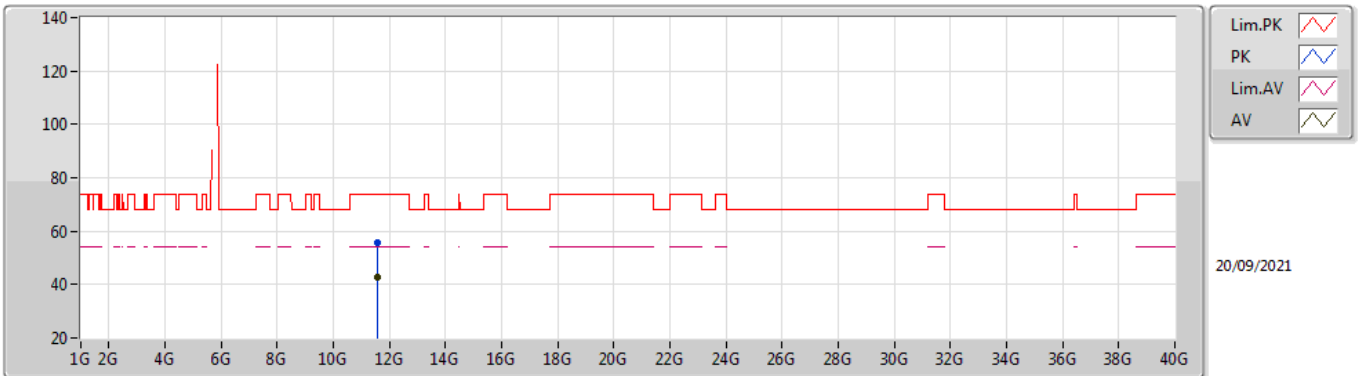


EUT Y\_4TX  
Setting 100  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.59346G    | 55.67             | 74.00             | -18.33         | 42.11         | 3           | Horizontal | 15             | 2.83          | -       | 39.51      | 8.34       | 34.29      |
| AV   | 11.58822G    | 42.72             | 54.00             | -11.28         | 29.16         | 3           | Horizontal | 15             | 2.83          | -       | 39.51      | 8.34       | 34.29      |

# 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

## 5210MHz\_TnomVnom

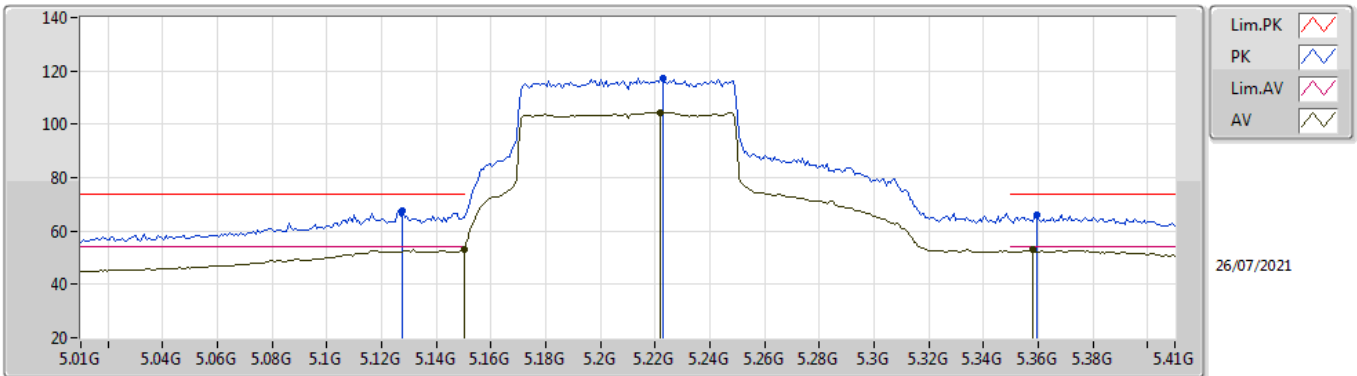


EUT V\_4TX  
Setting 91  
06-E-B-4-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.1276G      | 67.70             | 74.00             | -6.30          | 62.78         | 3           | Vertical  | 247            | 2.04          | -       | 31.89      | 5.00       | 31.97      |
| AV   | 5.15G        | 53.14             | 54.00             | -0.86          | 48.32         | 3           | Vertical  | 247            | 2.04          | -       | 31.80      | 5.00       | 31.98      |
| PK   | 5.2228G      | 117.45            | Inf               | -Inf           | 112.95        | 3           | Vertical  | 247            | 2.04          | -       | 31.51      | 5.00       | 32.01      |
| AV   | 5.222G       | 104.50            | Inf               | -Inf           | 100.00        | 3           | Vertical  | 247            | 2.04          | -       | 31.51      | 5.00       | 32.01      |
| PK   | 5.3596G      | 65.91             | 74.00             | -8.09          | 61.60         | 3           | Vertical  | 247            | 2.04          | -       | 31.38      | 5.00       | 32.07      |
| AV   | 5.358G       | 52.91             | 54.00             | -1.09          | 48.62         | 3           | Vertical  | 247            | 2.04          | -       | 31.36      | 5.00       | 32.07      |

# 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

## 5210MHz\_TnomVnom

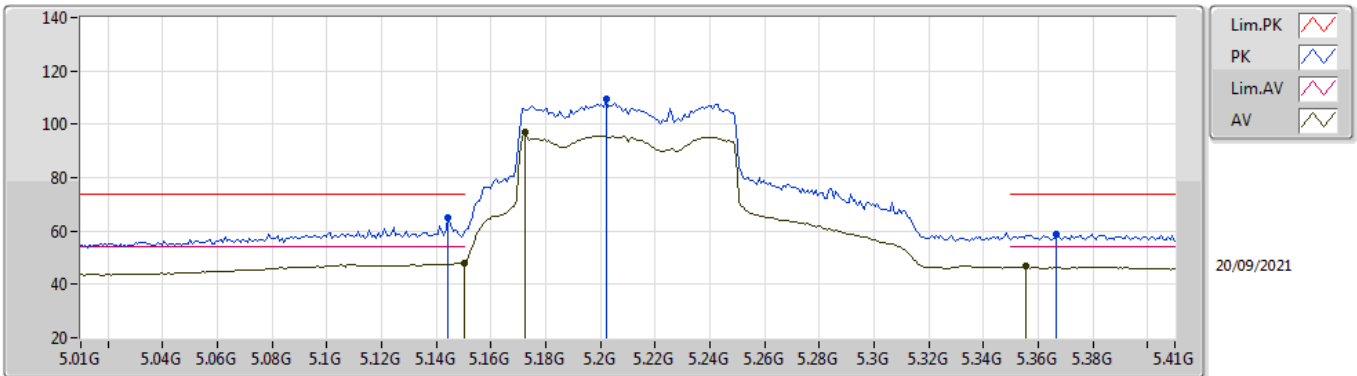


EUT Y\_4TX  
Setting 91  
06-F-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.1444G      | 64.76             | 74.00             | -9.24          | 60.00         | 3           | Horizontal | 260            | 1.80          | -       | 31.73      | 5.00       | 31.97      |
| AV   | 5.15G        | 48.06             | 54.00             | -5.94          | 43.34         | 3           | Horizontal | 260            | 1.80          | -       | 31.70      | 5.00       | 31.98      |
| PK   | 5.202G       | 109.73            | Inf               | -Inf           | 105.34        | 3           | Horizontal | 260            | 1.80          | -       | 31.39      | 5.00       | 32.00      |
| AV   | 5.1724G      | 97.19             | Inf               | -Inf           | 92.61         | 3           | Horizontal | 260            | 1.80          | -       | 31.57      | 5.00       | 31.99      |
| PK   | 5.3668G      | 58.76             | 74.00             | -15.24         | 54.63         | 3           | Horizontal | 260            | 1.80          | -       | 31.20      | 5.00       | 32.07      |
| AV   | 5.3556G      | 46.75             | 54.00             | -7.25          | 42.69         | 3           | Horizontal | 260            | 1.80          | -       | 31.13      | 5.00       | 32.07      |

# 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

## 5210MHz\_TnomVnom

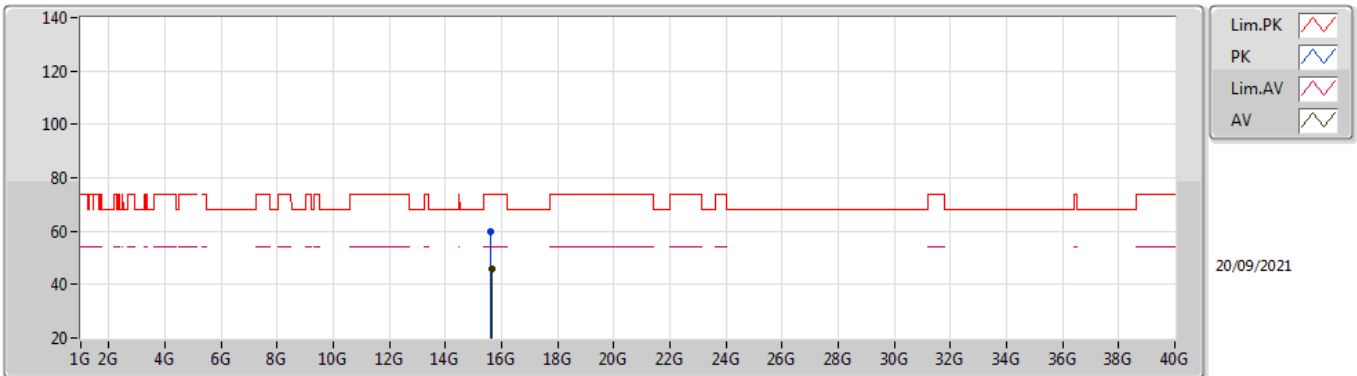


EUT\_Y\_4TX  
Setting 91  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 15.62766G    | 59.79             | 74.00             | -14.21         | 45.56         | 3           | Vertical  | 325            | 2.36          | -       | 38.09      | 10.41      | 34.27      |  |
| AV   | 15.63186G    | 45.79             | 54.00             | -8.21          | 31.57         | 3           | Vertical  | 325            | 2.36          | -       | 38.07      | 10.42      | 34.27      |  |

# 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

## 5210MHz\_TnomVnom

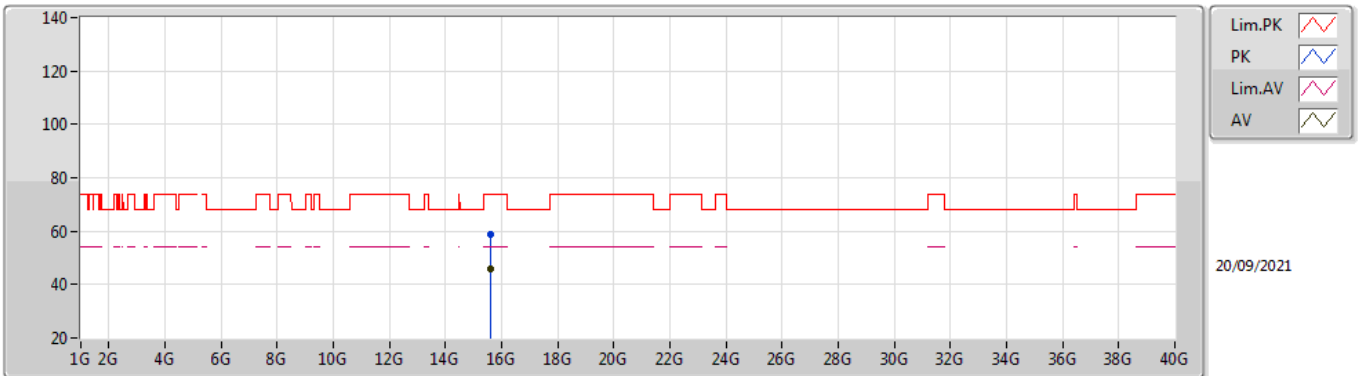


EUT\_Y\_4TX  
Setting 91  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 15.62816G    | 58.99             | 74.00             | -15.01         | 44.76         | 3           | Horizontal | 179            | 2.14          | -       | 38.09      | 10.41      | 34.27      |  |
| AV   | 15.63002G    | 45.72             | 54.00             | -8.28          | 31.49         | 3           | Horizontal | 179            | 2.14          | -       | 38.08      | 10.42      | 34.27      |  |

# 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

## 5775MHz\_TnomVnom

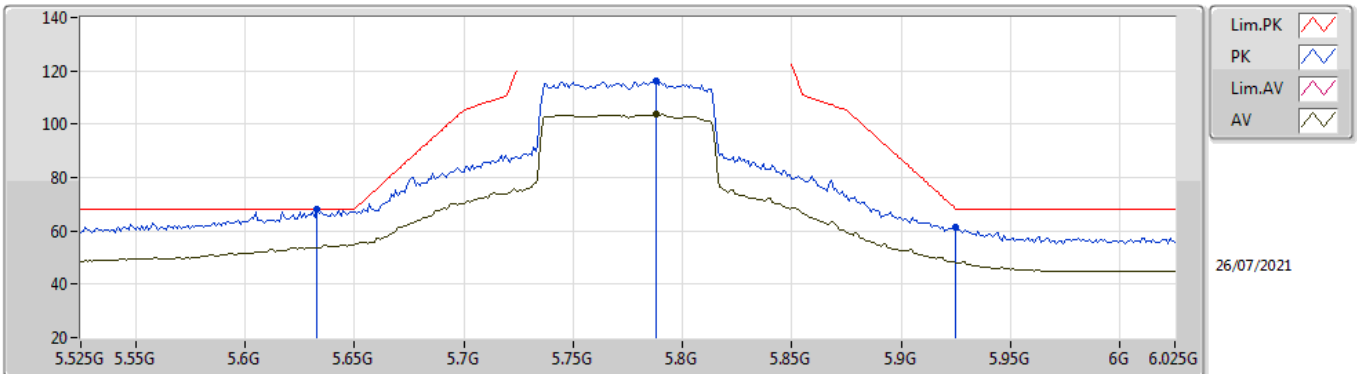


EUT Y\_4TX  
Setting 94  
06-E-B-4-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.633G       | 68.12             | 68.20             | -0.08          | 63.51         | 3           | Vertical  | 288.3          | 1.80          | -       | 31.60      | 5.22       | 32.21      |
| PK   | 5.788G       | 116.21            | Inf               | -Inf           | 111.32        | 3           | Vertical  | 288.3          | 1.80          | -       | 31.90      | 5.29       | 32.30      |
| AV   | 5.788G       | 103.64            | Inf               | -Inf           | 98.75         | 3           | Vertical  | 288.3          | 1.80          | -       | 31.90      | 5.29       | 32.30      |
| PK   | 5.925G       | 61.38             | 68.20             | -6.82          | 56.14         | 3           | Vertical  | 288.3          | 1.80          | -       | 32.20      | 5.42       | 32.38      |

# 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

## 5775MHz\_TnomVnom

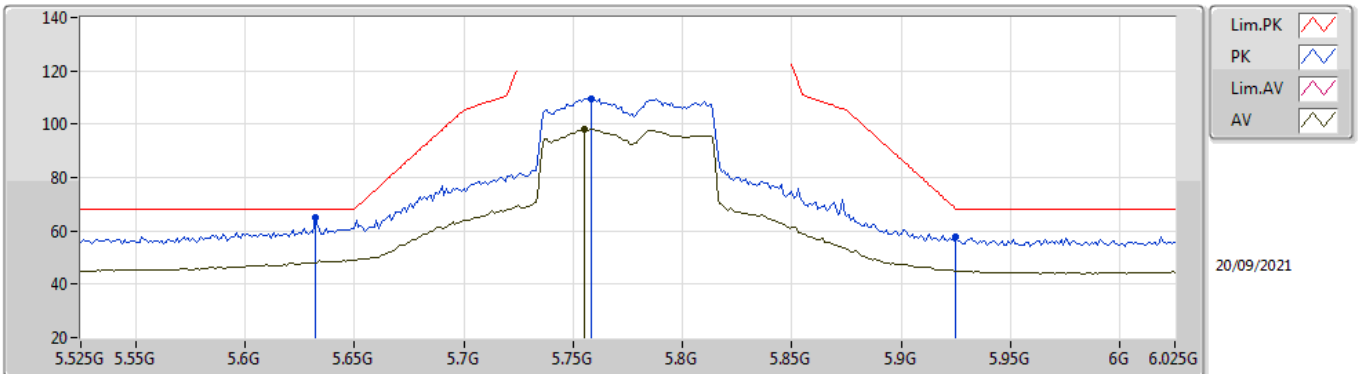


EUT\_Y\_4TX  
Setting 94  
06-F-S-5-10  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|
| PK   | 5.632G       | 64.89             | 68.20             | -3.31          | 60.28         | 3           | Horizontal | 254            | 1.80          | -       | 31.60      | 5.22       | 32.21      |  |
| PK   | 5.758G       | 109.73            | Inf               | -Inf           | 104.73        | 3           | Horizontal | 254            | 1.80          | -       | 32.00      | 5.28       | 32.28      |  |
| AV   | 5.755G       | 98.04             | Inf               | -Inf           | 93.04         | 3           | Horizontal | 254            | 1.80          | -       | 32.00      | 5.28       | 32.28      |  |
| PK   | 5.925G       | 57.77             | 68.20             | -10.43         | 52.58         | 3           | Horizontal | 254            | 1.80          | -       | 32.15      | 5.42       | 32.38      |  |



## 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

### 5775MHz\_TnomVnom

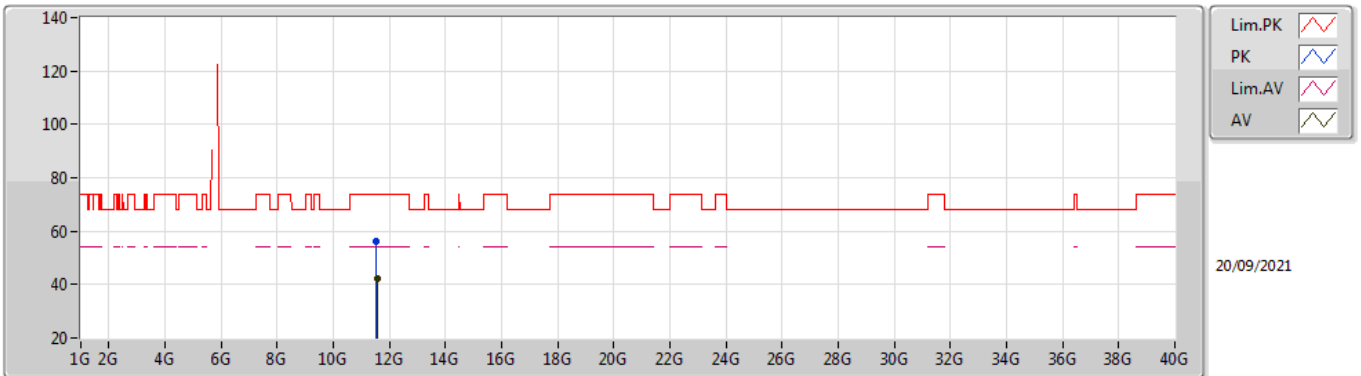


EUT Y\_4TX  
Setting 94  
06-F-S-5  
PCB35  
ANT WU0514

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.54558G    | 56.22             | 74.00             | -17.78         | 42.65         | 3           | Vertical  | 300            | 2.12          | -       | 39.55      | 8.32       | 34.30      |
| AV   | 11.55018G    | 42.37             | 54.00             | -11.63         | 28.80         | 3           | Vertical  | 300            | 2.12          | -       | 39.55      | 8.32       | 34.30      |

# 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

## 5775MHz\_TnomVnom

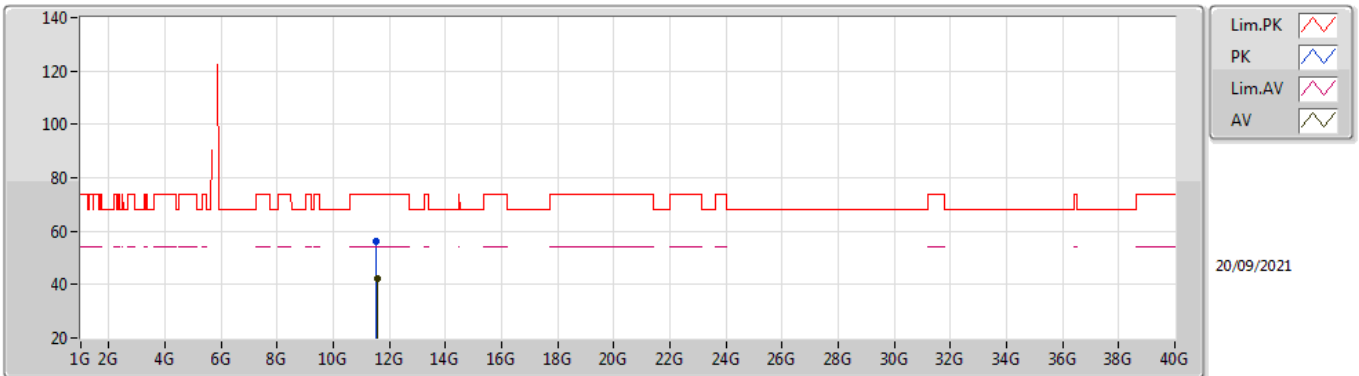

EUT Y\_4TX  
Setting 94  
06-F-S-5  
PCB35  
ANT WU0514


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.5465G     | 56.33             | 74.00             | -17.67         | 42.76         | 3           | Horizontal | 111            | 2.05          | -       | 39.55      | 8.32       | 34.30      |
| AV   | 11.54996G    | 42.37             | 54.00             | -11.63         | 28.80         | 3           | Horizontal | 111            | 2.05          | -       | 39.55      | 8.32       | 34.30      |



**Summary**


| Mode   | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Condition |
|--------|--------|------|--------------|-------------------|-------------------|----------------|-----------|
| Mode 1 | Pass   | AV   | 1.91153G     | 32.42             | 54.00             | -21.58         | Vertical  |

### Mode 1

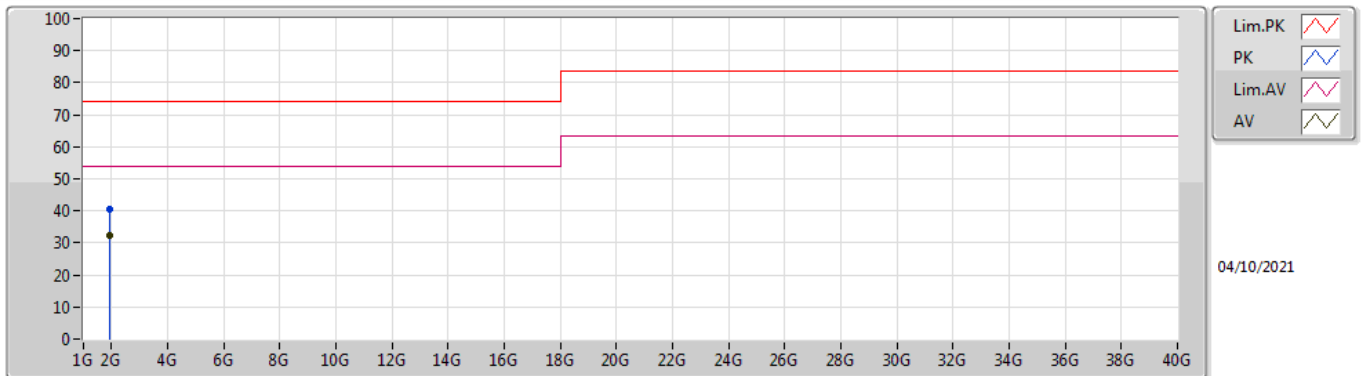

| Type | Freq     | Level    | Limit    | Margin | Factor | Dist | Condition | Azimuth | Height | Comment | Raw      | AF     | CL   | PA    |
|------|----------|----------|----------|--------|--------|------|-----------|---------|--------|---------|----------|--------|------|-------|
|      | (Hz)     | (dBuV/m) | (dBuV/m) | (dB)   | (dB/m) | (m)  |           | (°)     | (m)    |         | (dBuV/m) | (dB/m) | (dB) | (dB)  |
| PK   | 1.9182G  | 40.36    | 74.00    | -33.64 | -7.51  | 3    | Vertical  | 199     | 1.78   | -       | 47.87    | 25.97  | 3.72 | 37.20 |
| AV   | 1.91153G | 32.42    | 54.00    | -21.58 | -7.55  | 3    | Vertical  | 199     | 1.78   | "Worst" | 39.97    | 25.95  | 3.71 | 37.21 |

### Mode 1

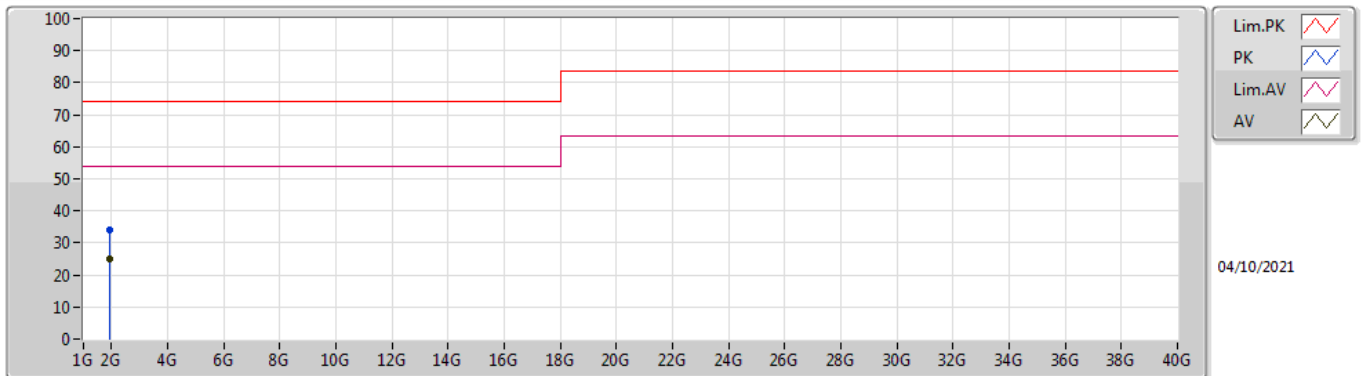

| Type | Freq     | Level    | Limit    | Margin | Factor | Dist | Condition  | Azimuth | Height | Comment | Raw      | AF     | CL   | PA    |
|------|----------|----------|----------|--------|--------|------|------------|---------|--------|---------|----------|--------|------|-------|
|      | (Hz)     | (dBuV/m) | (dBuV/m) | (dB)   | (dB/m) | (m)  |            | (°)     | (m)    |         | (dBuV/m) | (dB/m) | (dB) | (dB)  |
| PK   | 1.92005G | 34.15    | 74.00    | -39.85 | -7.50  | 3    | Horizontal | 208     | 1.00   | -       | 41.65    | 25.98  | 3.72 | 37.20 |
| AV   | 1.91523G | 25.20    | 54.00    | -28.80 | -7.53  | 3    | Horizontal | 208     | 1.00   | "Worst" | 32.73    | 25.96  | 3.72 | 37.21 |