




# RADIO EXPOSURE TEST REPORT

**FCC ID** : MSQ-RTBE6X00  
**Equipment** : BE30000 Quad Band WiFi Router  
**Brand Name** : ASUS  
**Model Name** : BQ16 Pro  
**Applicant** : ASUSTeK COMPUTER INC.  
1F., No. 15, Lide Rd., Beitou, Taipei City 112, Taiwan  
**Standard** : 47 CFR Part 2.1091

The product was received on Jul. 31, 2023, and testing was started from Jul. 31, 2023 and completed on Oct. 25, 2023. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

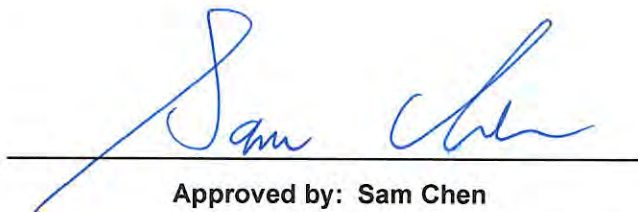

Approved by: Sam Chen

**Sporton International Inc. Hsinchu Laboratory**  
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 EUT General Information .....	5
1.2 Antenna Information .....	6
1.3 Table for Radio Function .....	7
1.4 Table for EUT supports functions.....	7
1.5 Accessories .....	8
1.6 Applicable Standards .....	8
1.7 Testing Location .....	8
<b>2 Maximum Permissible Exposure .....</b>	<b>9</b>
2.1 Limit of Maximum Permissible Exposure .....	9
2.2 MPE Calculation Method .....	9
2.3 MPE Exemption.....	10
2.4 Calculated Result and Limit.....	11

### Photographs of EUT v01



## History of this test report

Report No.	Version	Description	Issued Date
FA351907	01	Initial issue of report	Nov. 03, 2023



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Sam Chen**

**Report Producer: Sophia Shiung**



# 1 General Description

## 1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) VHT: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11be: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)
5GHz WLAN	5150-5250 5250-5350 5470-5725 5725-5850	5180-5250 5260-5320 5500-5720 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11be: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)
6GHz WLAN	5925-6425 6525-7125	5955-6415 6595-7095	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11be: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)



## 1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Walsin	RFDPA220510IMLB901	Dipole	I-PEX	Note 1
2	Walsin	RFDPA220513IMLB901	Dipole	I-PEX	
3	Walsin	RFPCA180916IMLB901	Dipole	I-PEX	
4	Walsin	RFPCA251813IMLB901	Dipole	I-PEX	
5	Walsin	RFDPA100504IM6B901	Dipole	I-PEX	
6	Walsin	RFDPA100514IM6B901	Dipole	I-PEX	
7	Walsin	RFDPA100509IM6B901	Dipole	I-PEX	
8	Walsin	RFDPA100507IM6B901	Dipole	I-PEX	
9	Walsin	RFDPA100506IM6B901	Dipole	I-PEX	
10	Walsin	RFDPA100506IM6B902	Dipole	I-PEX	
11	Walsin	RFDPA100505IM6B901	Dipole	I-PEX	
12	Walsin	RFDPA100512IM6B901	Dipole	I-PEX	
13	Walsin	RFPCA180915IMLB901	Dipole	I-PEX	

Note 1:

Ant.	Port		Antenna Gain (dBi)				
	WLAN 2.4GHz	WLAN 5GHz	WLAN 2.4GHz	WLAN 5GHz			
				UNII 1	UNII 2A	UNII 2C	UNII 3
1	1	1	2.48	2.10	2.16	2.31	2.30
2	2	2	2.46	3.09	3.47	2.84	3.65
3	3	3	2.80	2.67	2.36	2.36	2.39
4	4	4	2.04	2.15	2.42	2.50	2.01

Ant.	Port		Antenna Gain (dBi)		
	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7~8	WLAN 6GHz		
			UNII 5	UNII 7	UNII 8
5	3	-	1.72	-	-
6	2	-	1.68	-	-
7	1	-	2.77	-	-
8	4	-	2.08	-	-
9	-	2	-	2.27	1.82
10	-	1	-	1.52	1.70
11	-	3	-	3.71	3.40
12	-	4	-	2.11	2.23
13	-	-	-	-	-

Item	Directional gain (dBi)							
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz		
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 7	UNII 8
4T1S	4.60	4.94	4.51	4.43	4.70	4.13	4.23	4.84
4T2S	2.80	3.09	3.47	2.84	3.65	2.77	3.71	3.40
4T4S	2.80	3.09	3.47	2.84	3.65	2.77	3.71	3.40

Note 2: The above information (except antenna gain and directional gain) was declared by manufacturer.

Note 3: The antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03.



**Note 4: For 2.4GHz function:**

**For IEEE 802.11 b/g/n/VHT/ax/be (4TX/4RX):**

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

**For 5GHz function:**

**For IEEE 802.11 a/n/ac/ax/be (4TX/4RX):**

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

**For Zero-wait function (1RX):**

Only Ant. 13 can be used as receiving antenna.

**For 6GHz function:**

**For IEEE 802.11 ax/be (4TX/4RX):**

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

### 1.3 Table for Radio Function

Radio (R)	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7~8
R1	V (20/40MHz)	-	-	-
R2	-	V (20/40/80/160MHz)	-	-
R3	-	-	V (20/40/80/160/320MHz)	-
R4	-	-	-	V (20/40/80/160/320MHz)

Note: The above information was declared by manufacturer.

### 1.4 Table for EUT supports functions

Function
AP Router
Mesh

Note: The above information was declared by manufacturer.



### 1.5 Accessories

Accessories				
Equipment Name	Brand Name	Model Name	Rating	Remark
Adapter 1	AcBel	ADD011	Input: 100-240V~, 1.7A, 50-60Hz Output: +19.5V, 3.33A, 65.0W MAX.	DC power cable: Non-shielded, 1.5m
Adapter 2	LEI	MU60B3120500-A1	Input: 100-240V~50/60Hz, 1.5A Output: 12.0V, 5.0A	-
Others				
Power cord*1: Non-shielded, 0.8m (for Adapter 1 use)				
RJ-45 cable*1: Shielded, 1.5m				

### 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2.1091
- KDB 447498 D04 Interim General RF Exposure Guidance v01

The following reference test guidance is not within the scope of accreditation of TAF.

- 47 CFR Part 1.1307
- 47 CFR Part 1.1310

### 1.7 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065      FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.





## 2 Maximum Permissible Exposure

### 2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 2.2 MPE Calculation Method

The MPE was calculated at 53 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



### 2.3 MPE Exemption

Option (A): 1.1307(b)(3)(i)(A): Available maximum time-averaged power is < 1 mW

Option (B): 1.1307(b)(3)(i)(B): Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, <= Pth.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Option (C): 1.1307(b)(3)(i)(C): ERP is below a threshold calculated based on the distance R between the person and the antenna / radiating structure, where  $R > \lambda / 2 \pi$ .

Single RF Sources Subject to Routine Environmental Evaluation	
RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	1,920 R <sup>2</sup> .
1.34-30	3,450 R <sup>2</sup> /f <sup>2</sup> .
30-300	3.83 R <sup>2</sup> .
300-1,500	0.0128 R <sup>2</sup> f.
1,500-100,000	19.2R <sup>2</sup> .

Note: R is in meters, f is in MHz.



## 2.4 Calculated Result and Limit

### Exposure Environment: General Population / Uncontrolled Exposure

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Distance (cm)	S (mW/cm <sup>2</sup> )	S Limit (mW/cm <sup>2</sup> )	Option	TL EIRP (dBm)	TL Ratio
2.4G;D1D	4.60	29.95	34.55	0.50	35.05	53	0.09062	1.00000	C	39.467	0.3617
5.2G;D1D	4.94	29.84	34.78	0.50	35.28	53	0.09555	1.00000	C	39.467	0.3813
5.3G;D1D	4.51	23.92	28.43	0.50	28.93	53	0.02214	1.00000	C	39.467	0.0884
5.6G;D1D	4.43	23.96	28.39	0.50	28.89	53	0.02194	1.00000	C	39.467	0.0876
5.8G;D1D	4.70	29.97	34.67	0.50	35.17	53	0.09316	1.00000	C	39.467	0.3718
6.2G;D1D	2.77	27.21	29.98	0.01	29.99	53	0.02826	1.00000	C	39.467	0.1128
6.7G;D1D	3.71	26.10	29.81	0.18	29.99	53	0.02826	1.00000	C	39.467	0.1128
7.0G;D1D	4.84	25.14	29.98	0.01	29.99	53	0.02826	1.00000	C	39.467	0.1128

### Simultaneous Transmission Analysis Mode:

#### WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz UNII 5 + WLAN 6GHz UNII 7~8

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Distance (cm)	S (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )	Option	TL EIRP (dBm)	TL Ratio
2.4G;D1D	4.60	29.95	34.55	0.50	35.05	53	0.09062	1.00000	C	39.467	0.3617
5.2G;D1D	4.94	29.84	34.78	0.50	35.28	53	0.09555	1.00000	C	39.467	0.3813
6.2G;D1D	2.77	27.21	29.98	0.01	29.99	53	0.02826	1.00000	C	39.467	0.1128
7.0G;D1D	4.84	25.14	29.98	0.01	29.99	53	0.02826	1.00000	C	39.467	0.1128
Sum TL Ratio_C	0.9686										
Ratio Limit	1										

—————THE END—————