



RADIO TEST REPORT

FCC ID : MSQ-RTBE8T00
Equipment : TUF Gaming BE9400 Tri Band WiFi 7 Router
Brand Name : ASUS
Model Name : TUF-BE9400
Applicant : ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou, Taipei City 112, Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on Mar. 13, 2025, and testing was started from Mar. 31, 2025 and completed on Jun. 30, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Applicable Standards10

1.3 Testing Location Information10

1.4 Measurement Uncertainty11

2 Test Configuration of EUT12

2.1 Test Channel Mode12

2.2 The Worst Case Measurement Configuration14

2.3 EUT Operation during Test16

2.4 Accessories16

2.5 Support Equipment.....17

2.6 Test Setup Diagram18

3 Transmitter Test Result22

3.1 AC Power-line Conducted Emissions22

3.2 Emission Bandwidth24

3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)25

3.4 Peak Power Spectral Density (E.I.R.P.)28

3.5 Unwanted Emissions.....31

3.6 Contention Based Protocol.....36

4 Test Equipment and Calibration Data37

Appendix A. Test Results of AC Power-line Conducted Emissions

Appendix B. Test Results of Emission Bandwidth

Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)

Appendix E. Test Results of Unwanted Emissions

Appendix F. Test Results of Contention-Based Protocol

Appendix G. Test Photos

Photographs of EUT v01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Non-Dual Client Device or non-Standard Client Device w/o test
-	15.407(a)	Transmit Power Control	N/A	Non-Very Low Power Device w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen
Report Producer: Cathy Chiu



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-7125	a, ax (HEW20), be (EHT20)	5955-7055	1-221 [56]
5925-7125	ax (HEW40), be (EHT40)	5965-7045	3-219 [28]
5925-7125	ax (HEW80), be (EHT80)	5985-7025	7-215 [14]
5925-7125	ax (HEW160), be (EHT160)	6025-6985	15-207 [7]
5925-7125	be (EHT320)	6105-6905	31-191 [6]

Band	Mode	BWch (MHz)	Nant
5.925-7.125GHz	802.11a	20	2TX
5.925-7.125GHz	802.11ax HEW20	20	2TX
5.925-7.125GHz	802.11ax HEW20-BF	20	2TX
5.925-7.125GHz	802.11be EHT20	20	2TX
5.925-7.125GHz	802.11be EHT20-BF	20	2TX
5.925-7.125GHz	802.11ax HEW40	40	2TX
5.925-7.125GHz	802.11ax HEW40-BF	40	2TX
5.925-7.125GHz	802.11be EHT40	40	2TX
5.925-7.125GHz	802.11be EHT40-BF	40	2TX
5.925-7.125GHz	802.11ax HEW80	80	2TX
5.925-7.125GHz	802.11ax HEW80-BF	80	2TX
5.925-7.125GHz	802.11be EHT80	80	2TX
5.925-7.125GHz	802.11be EHT80-BF	80	2TX
5.925-7.125GHz	802.11ax HEW160	160	2TX
5.925-7.125GHz	802.11ax HEW160-BF	160	2TX
5.925-7.125GHz	802.11be EHT160	160	2TX
5.925-7.125GHz	802.11be EHT160-BF	160	2TX
5.925-7.125GHz	802.11be EHT320	320	2TX
5.925-7.125GHz	802.11be EHT320-BF	320	2TX

Note:

- ♦ 11a use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	Port			Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz					
1	1	-	-	RFlink	3020202219	Dipole Antenna	I-PEX	Note 1
2	2	-	-	RFlink	3020202220	Dipole Antenna	I-PEX	
3	-	1	-	RFlink	3020202222	Dipole Antenna	I-PEX	
4	-	2	-	RFlink	3020202221	Dipole Antenna	I-PEX	
5	-	-	1	RFlink	3020202223	Dipole Antenna	I-PEX	
6	-	-	2	RFlink	3020202224	Dipole Antenna	I-PEX	

Note 1

Ant.	Antenna Gain (dBi)								
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz			
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8
1	2.55	-	-	-	-	-	-	-	-
2	2.25	-	-	-	-	-	-	-	-
3	-	2.89	2.28	2.67	2.74	-	-	-	-
4	-	2.37	2.68	2.85	2.48	-	-	-	-
5	-	-	-	-	-	2.05	1.97	2.39	2.37
6	-	-	-	-	-	1.97	1.97	2.17	2.56

Note 2: The above information was declared by manufacturer.



Note3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} \xi_{j,k} \right]^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} \xi_{j,k} \right]^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} \xi_{j,k} \right]^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} \xi_{j,k} \right]^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] => 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

$$2.4G \ G1= 2.55 \text{ dBi} ; G2= 2.25 \text{ dBi} ; DG= 5.41 \text{ dBi}$$

$$5G \ \text{UNII-1} \ G1= 2.89 \text{ dBi} ; G2= 2.37 \text{ dBi} ; DG= 5.64 \text{ dBi}$$

$$5G \ \text{UNII-2A} \ G1= 2.28 \text{ dBi} ; G2= 2.68 \text{ dBi} ; DG= 5.49 \text{ dBi}$$

$$5G \ \text{UNII-2C} \ G1= 2.67 \text{ dBi} ; G2= 2.85 \text{ dBi} ; DG= 5.77 \text{ dBi}$$

$$5G \ \text{UNII-3} \ G1= 2.74 \text{ dBi} ; G2= 2.48 \text{ dBi} ; DG= 5.62 \text{ dBi}$$

$$6G \ \text{UNII-5} \ G1= 2.05 \text{ dBi} ; G2= 1.97 \text{ dBi} ; DG= 5.02 \text{ dBi}$$

$$6G \ \text{UNII-6} \ G1= 1.97 \text{ dBi} ; G2= 1.97 \text{ dBi} ; DG= 4.98 \text{ dBi}$$

$$6G \ \text{UNII-7} \ G1= 2.39 \text{ dBi} ; G2= 2.17 \text{ dBi} ; DG= 5.29 \text{ dBi}$$

$$6G \ \text{UNII-8} \ G1= 2.37 \text{ dBi} ; G2= 2.56 \text{ dBi} ; DG= 5.48 \text{ dBi}$$

For 2.4GHz function:

For IEEE 802.11b/g/n/VHT/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 a/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.



1.1.3 Mode Test Duty Cycle

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss 1,(6D)	0.993	0.03	1.98m	10Hz (DC>=0.98)
802.11be EHT20-BF_Nss 1,(M0)	0.949	0.23	2.981m	500
802.11be EHT40-BF_Nss 1,(M0)	0.947	0.24	3.706m	300
802.11be EHT80-BF_Nss 1,(M0)	0.946	0.24	4.075m	300
802.11be EHT160-BF_Nss 1,(M0)	0.935	0.29	3.888m	300
802.11be EHT320-BF_Nss 1,(M0)	0.802	0.96	1.9m	1k

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter	
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.	
Device Type	<input checked="" type="checkbox"/> Indoor Access Point	<input checked="" type="checkbox"/> Subordinate
	<input type="checkbox"/> Indoor Client	<input type="checkbox"/> Standard Power Access Point
	<input type="checkbox"/> Dual Client	<input type="checkbox"/> Standard Client
	<input type="checkbox"/> Fixed Client	<input type="checkbox"/> Very Low Power
Condition of EUT	<input checked="" type="checkbox"/> Indoor	<input type="checkbox"/> Outdoor
Channel Puncturing Function	<input type="checkbox"/> Supported Static Puncturing	
	<input type="checkbox"/> Supported Dynamic Puncturing (Reduce BW)	
	<input checked="" type="checkbox"/> Unsupported	
Note: The EUT doesn't support puncturing for CBP		
Support RU	<input checked="" type="checkbox"/> Full RU	<input type="checkbox"/> Partial RU
Test Software Version	For Non-beamforming mode: QSPR Version 6.00.00209.1 For Beamforming mode: DOS [ver 6.1.7601]	
Software / Firmware Version for CBP	9.0.0.6.102_57931-gccd5db0_845-gdaec9_Q7MB	

Note: The above information was declared by manufacturer.



1.1.5 Table for EUT supports function

Function	Supports type
AP Router	Master
Bridge	Slave without radar detection
Repeater	Master
Mesh	Master

Note 1: After evaluating, AP Router mode was selected to test and recorded in the report.

Note 2: The USB port on this device supports both storage and WWAN functionality.

Note 3: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15.407
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ◆ FCC KDB 987594 D02 v03
- ◆ FCC KDB 662911 D01 v02r01
- ◆ FCC KDB 412172 D01 v01r01
- ◆ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (For other tests)	TH02-CB	Brian Sun	21~22.1 / 59~62	May 07, 2025~ Jun. 21, 2025
Radiated (Below 1GHz)	03CH05-CB	Viola Huang	21.5~22.9 / 57~60	Mar. 31, 2025~ Jun. 30, 2025
Radiated (Above 1GHz_for 802.11be)	03CH01-CB	Viola Huang	21.3~22.3 / 58~61	Mar. 31, 2025~ Jun. 30, 2025
	03CH02-CB		21.5~23.3 / 58~61	
Radiated (Above 1GHz_for 802.11a)	03CH03-CB	Viola Huang	21.6~23.1 / 58~62	Mar. 31, 2025~ Jun. 30, 2025
AC Conduction	CO01-CB	Tim Chen	22~23 / 58~60	Apr. 23, 2025
RF Conducted (Contention-Based Protocol test)	DF02-CB	Simmon Cheng	21.2~22.8 / 56~62	Jun. 24, 2025~ Jun. 26, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Test Date: Date Before May 28, 2025

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%

Test Date: Date After May 27, 2025

Test Items	Uncertainty	Remark
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11a_Nss1,(6Mbps)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6975MHz
7055MHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6975MHz
7055MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz
6565MHz
6685MHz
6885MHz
6925MHz
7005MHz
7045MHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz



6465MHz
6545MHz
6625MHz
6705MHz
6785MHz
6865MHz
6945MHz
7025MHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6505MHz
6665MHz
6825MHz
6985MHz
802.11be EHT320-BF_Nss1,(MCS0)_2TX
6105MHz
6265MHz
6425MHz
6585MHz
6745MHz
6905MHz

Note:

- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.
- ♦ The EUT supports non-beamforming and beamforming modes, after evaluating, the beamforming mode has been selected to test.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	AP Router Mode + WAN Mode with 2.5G LAN1(GAMING PORT) + 2.5G WAN + USB (R/W) + Adapter 1
2	AP Router Mode + WWAN Mode with 2.5G LAN1(GAMING PORT) + 2.5G WAN + USB (WWAN) + Adapter 1
Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	AP Router Mode + WAN Mode with 2.5G LAN1(GAMING PORT) + 2.5G WAN + USB (R/W) + Adapter 2
For operating mode 3 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.)
Test Condition	Conducted measurement at transmit chains
1	EUT_Non-beamforming mode
2	EUT_Beamforming mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Contention Based Protocol
Test Condition	Conducted measurement at transmit chains



The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
<p>For WLAN 2.4GHz: After evaluating, and the worst case was found at X axis from Emissions in Restricted Frequency Bands above 1GHz test, so it was selected to perform test and its test result was written in the report.</p> <p>For WLAN 5GHz: After evaluating, and the worst case was found at Z axis from Unwanted Emissions above 1GHz test, so it was selected to perform test and its test result was written in the report.</p> <p>For WLAN 6GHz: After evaluating, and the worst case was found at Y axis from Unwanted Emissions above 1GHz test, so it was selected to perform test and its test result was written in the report.</p>	
1	EUT in X axis + WLAN 2.4GHz + Adapter 1
2	EUT in X axis + WLAN 2.4GHz + Adapter 2
Mode 2 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.	
3	EUT in Z axis + WLAN 5GHz + Adapter 2
4	EUT in Y axis + WLAN 6GHz + Adapter 2
For operating mode 3 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Y axis_Non-beamforming mode
2	EUT in Y axis_Beamforming mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains
1	EUT_Non-beamforming mode
2	EUT_Beamforming mode



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz
2	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + WWAN dongle
Refer to Sporton Test Report No.: FA531325 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

During the test, the following programs under WIN 10 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Wireless AP and transmit duty cycle no less than 98%.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter 1	Frecom	F30L10-120250SPAU	Input: 100-240V~50/60Hz, 1.25A Output: 12.0V, 2.5A, 30.0W
Adapter 2	SOY	SOY-1200250US-540	Input: 100-240V~50/60Hz, 0.9A Max. Output: 12.0V, 2.5A
Other			
RJ-45 cable*1, Non-Shielded, 1.5m			



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	USB 3.0	Transcend	JetFlash-703	N/A
B	2.5G WAN PC	ASUS	S300TA	TX2-RTL8821CE
C	2.5G LAN1 (GAMING PORT) PC	ASUS	S300TA	TX2-RTL8821CE
D	2.5G LAN3 PC	ASUS	S300TA	TX2-RTL8821CE
E	2.4G NB	Lenovo	X260	N/A
F	5G NB	Lenovo	X260	N/A
G	6G NB	Lenovo	ThinkBook 15 G4 IAP	PD9AX211NG

For Radiated (below 1GHz), Radiated (above 1GHz) / Non-beamforming mode and RF Conducted (Other tests) / Non-beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A


For Radiated (above 1GHz) / Beamforming mode and RF Conducted (Other tests) / Beamforming mode:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	WLAN AP	ASUS	TUF-BE9400	N/A
C	NB	DELL	E4300	N/A

For RF Conducted (Contention Based Protocol test):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E6230	N/A
B	NB	Lenovo	L440	N/A
C	WLAN AP	ASUS	TUF-BE9400	N/A


2.6 Test Setup Diagram

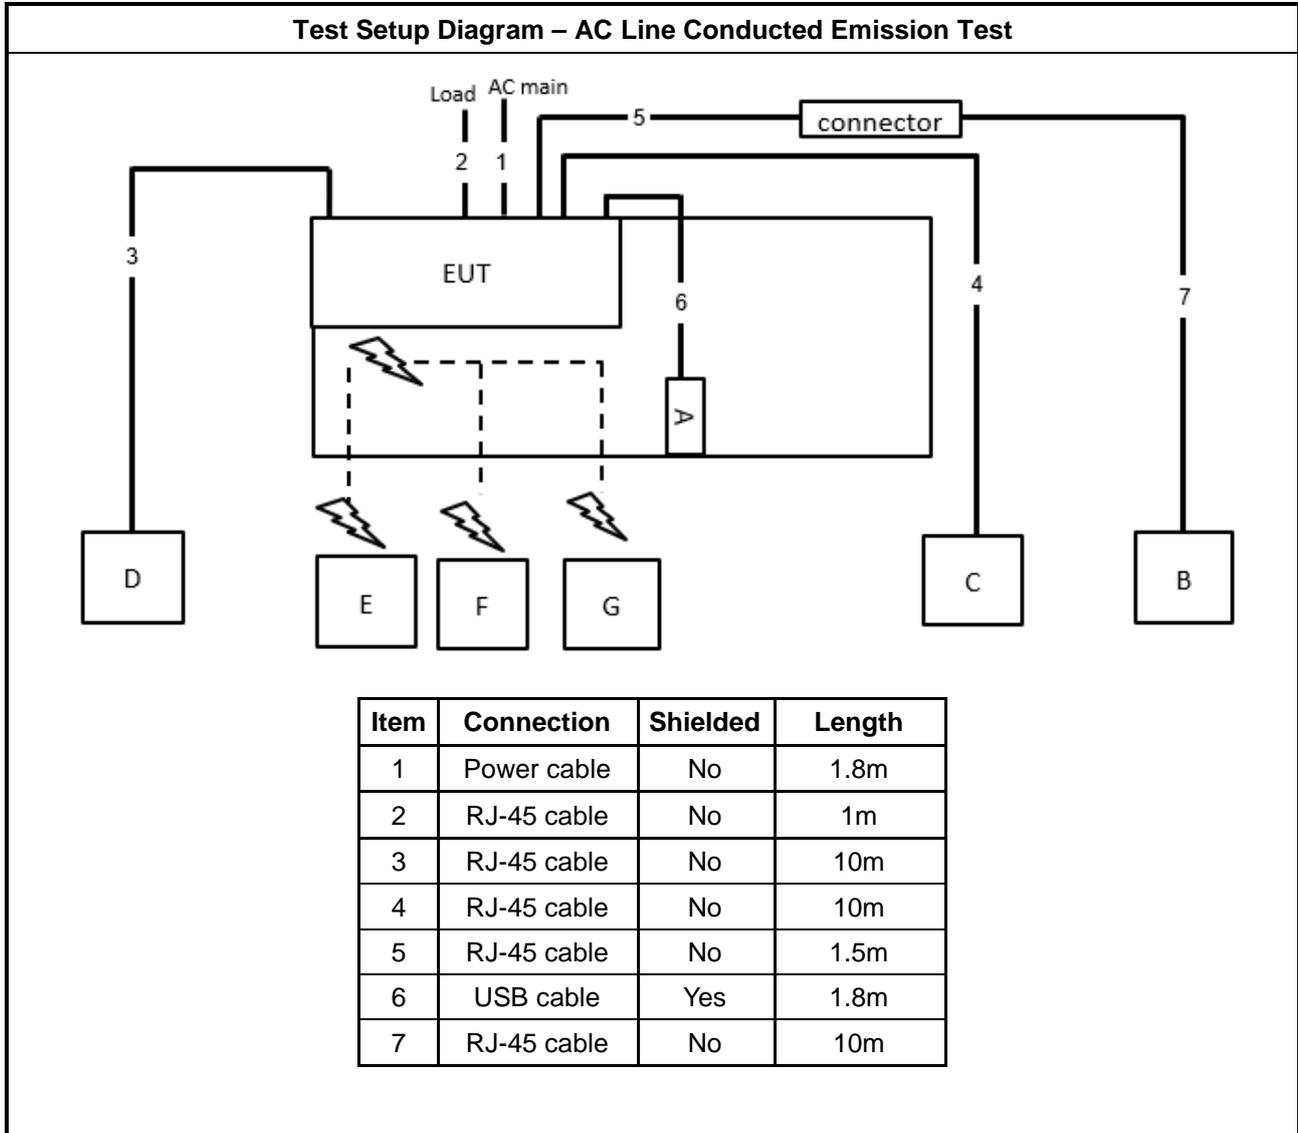

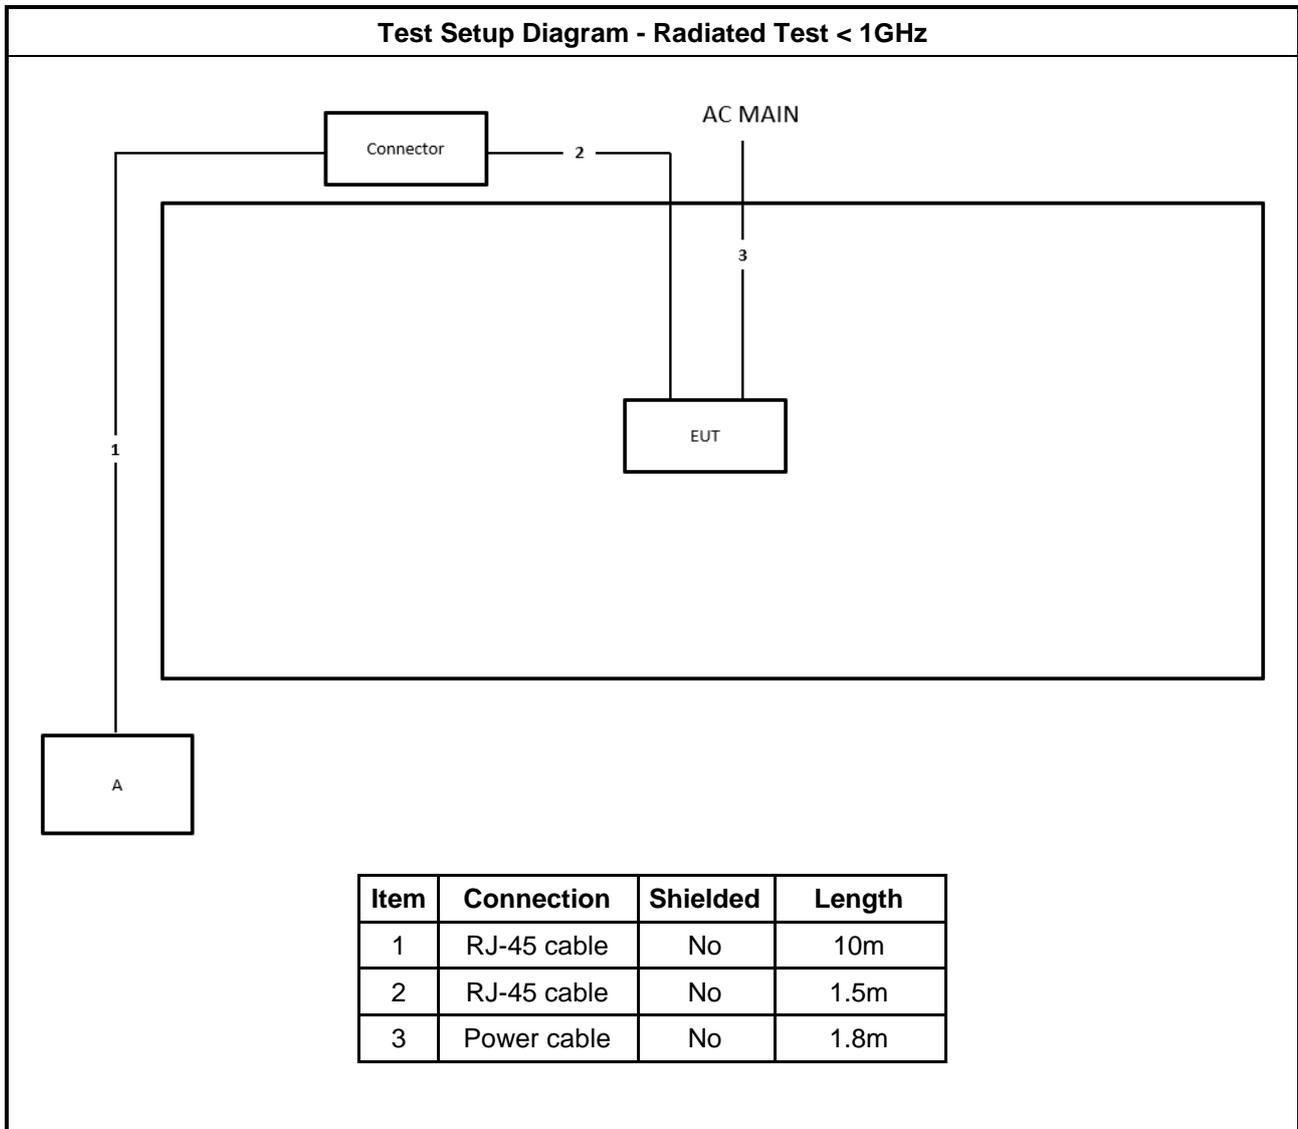




Test Setup Diagram - Radiated Test > 1GHz / Non-beamforming mode

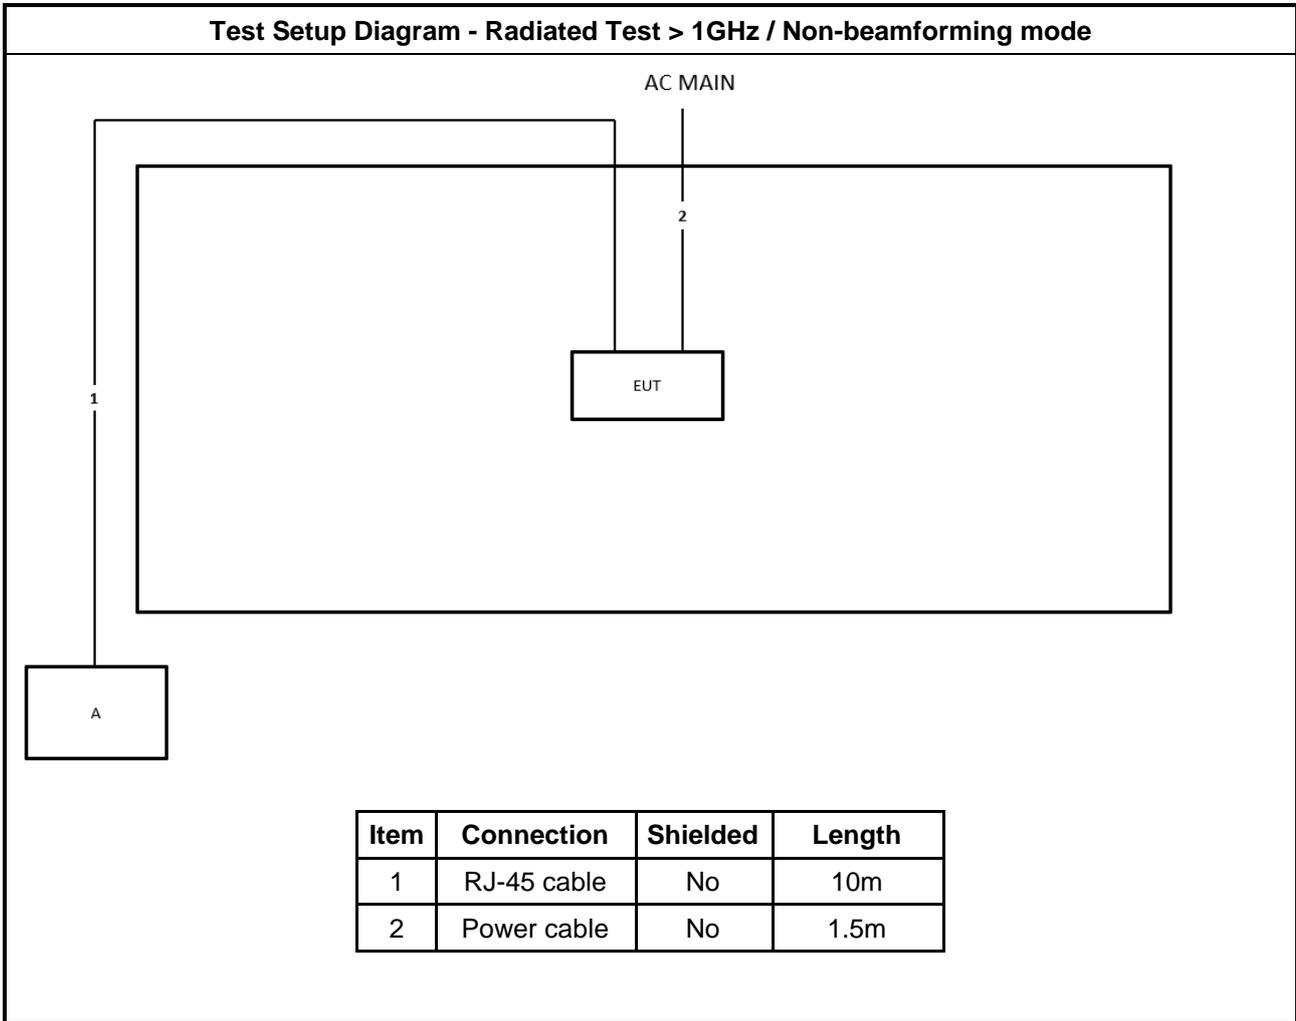

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m

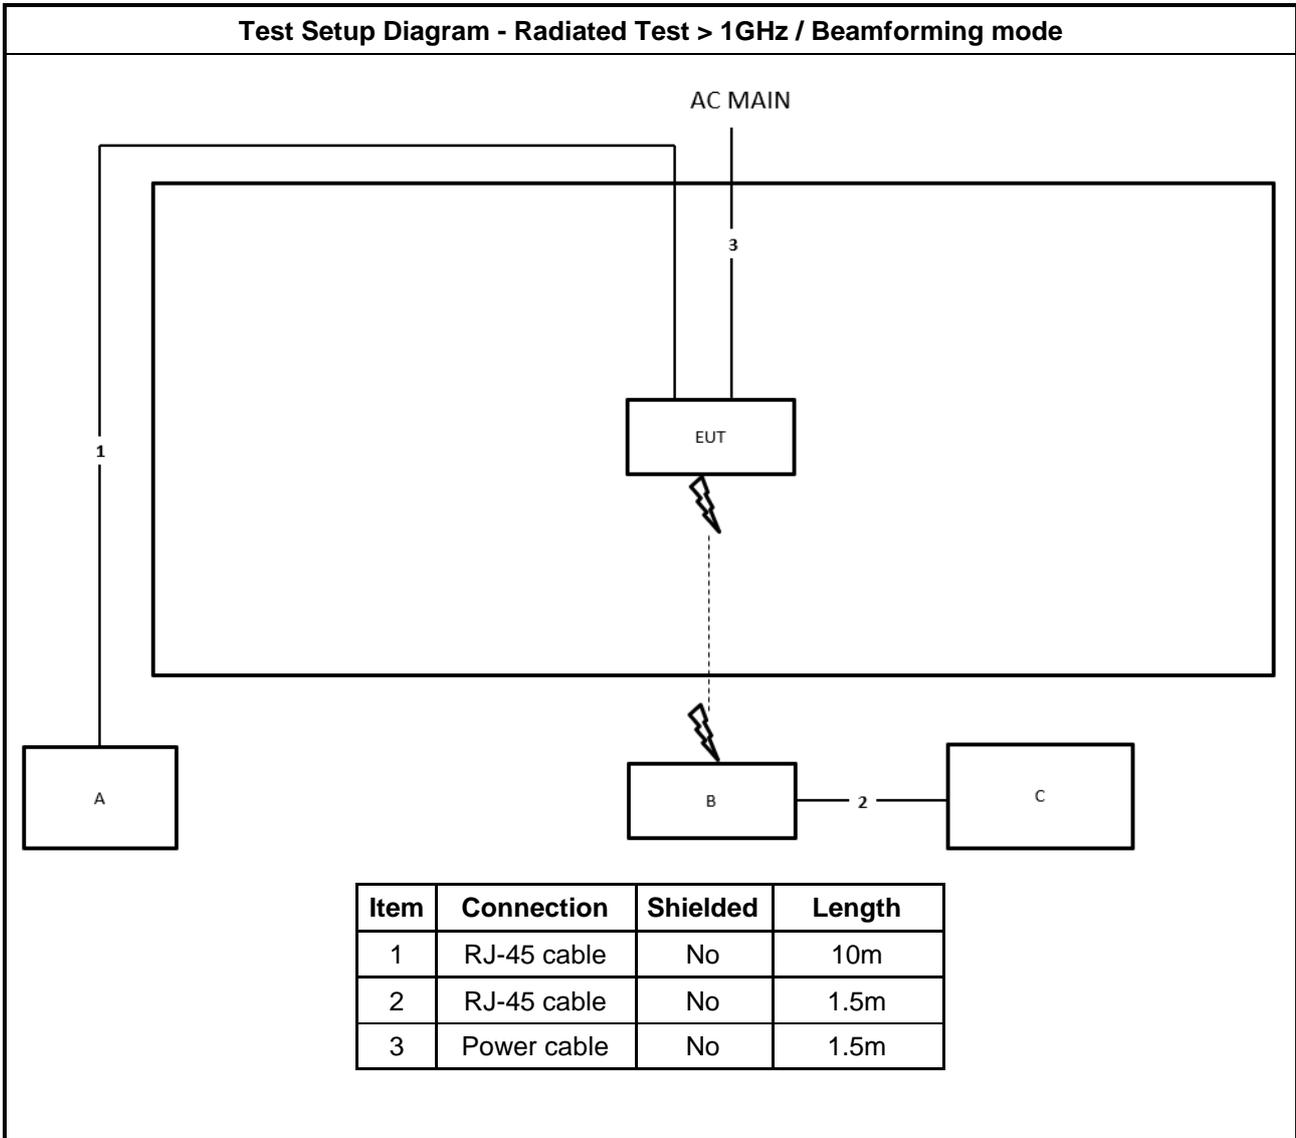



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

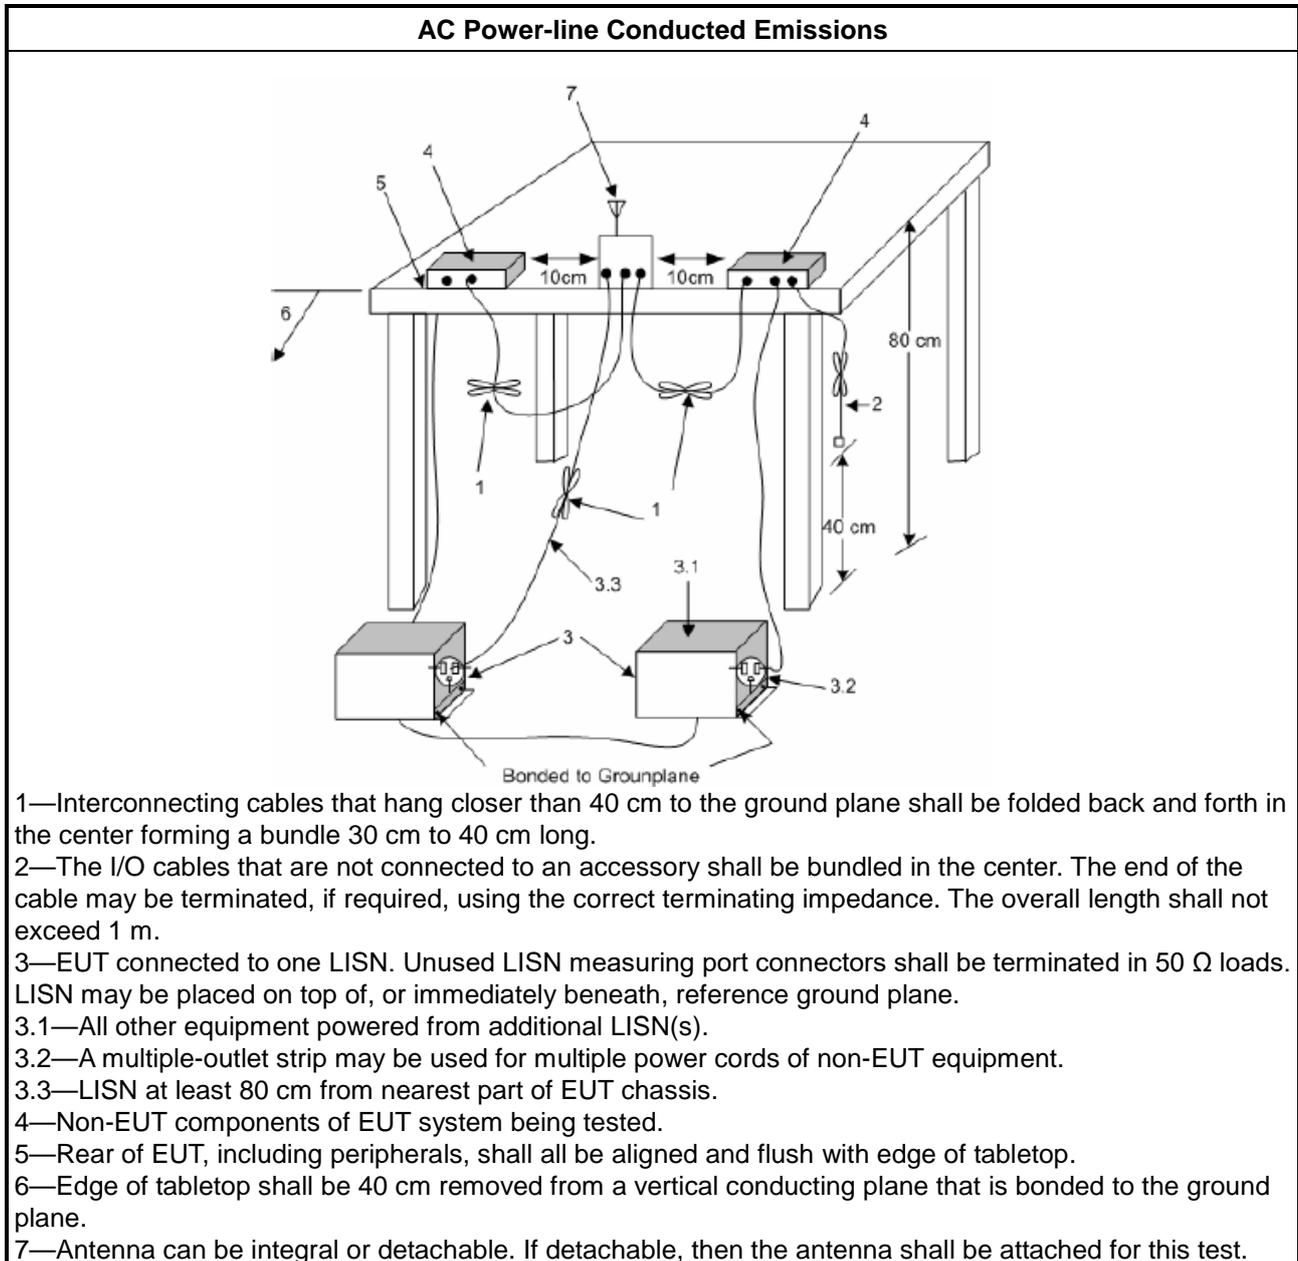

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level
- b. Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
<input checked="" type="checkbox"/>	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
<input checked="" type="checkbox"/>	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
<input checked="" type="checkbox"/>	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.
RLAN Devices	
<input type="checkbox"/>	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
<input type="checkbox"/>	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
<input type="checkbox"/>	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
<input type="checkbox"/>	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below: 	
<input checked="" type="checkbox"/>	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

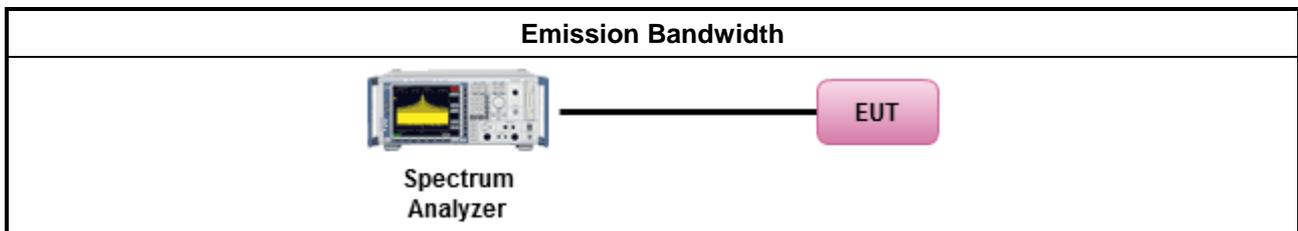

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5.925 ~ 6.425 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of a standard power access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. ▪ For very low power device : e.i.r.p < 14 dBm.
<input checked="" type="checkbox"/>	For the 6.425 ~ 6.525 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm.
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For very low power device : e.i.r.p < 14 dBm.
<input checked="" type="checkbox"/>	For the 6.525 ~ 6.875 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of a standard power access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. ▪ For very low power device : e.i.r.p < 14 dBm.
<input checked="" type="checkbox"/>	For the 6.875 ~ 7.125 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm.
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For very low power device : e.i.r.p < 14 dBm.
RLAN Devices	
<input type="checkbox"/>	For the 5.925 ~ 7.125 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For low-power indoor access-points & indoor subordinate devices < 30 dBm . ▪ For low-power client devices < 24 dBm. ▪ For very low-power devices < 14 dBm.
<input type="checkbox"/>	For the 5.925 ~ 6.875 GHz band:



<ul style="list-style-type: none"> ▪ For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
<ul style="list-style-type: none"> ▪ For standard client devices < 30 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033. 	
Average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	
<input type="checkbox"/>	For radiated measurement.
<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" 	
<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. 	
<ul style="list-style-type: none"> ▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation. 	

3.3.4 Test Setup

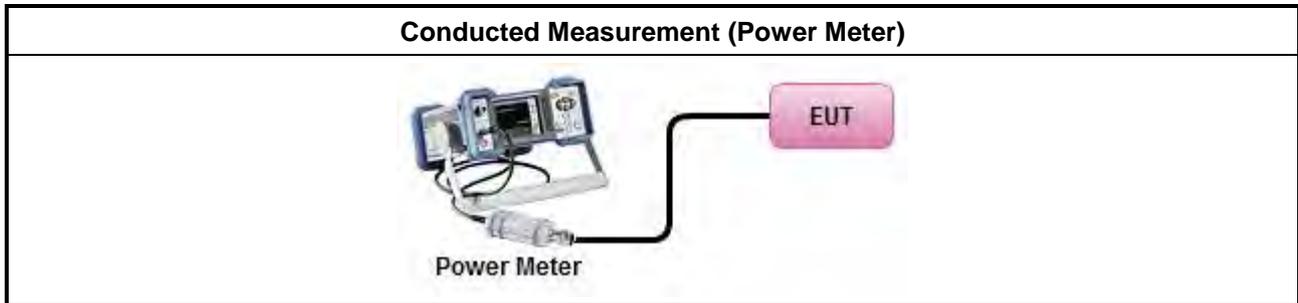

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
<input checked="" type="checkbox"/> For the 5.925 ~ 6.425 GHz band:	
	<ul style="list-style-type: none"> ▪ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz. ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz. ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz. ▪ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
<input checked="" type="checkbox"/> For the 6.425 ~ 6.525 GHz band:	
	<ul style="list-style-type: none"> ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	<ul style="list-style-type: none"> ▪ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
<input checked="" type="checkbox"/> For the 6.525 ~ 6.875 GHz band:	
	<ul style="list-style-type: none"> ▪ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz. ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz. ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz. ▪ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
<input checked="" type="checkbox"/> For the 6.875 ~ 7.125 GHz band:	
	<ul style="list-style-type: none"> ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	<ul style="list-style-type: none"> ▪ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
RLAN Devices	
<input type="checkbox"/> For the 5.925 ~ 7.125 GHz band:	
	<ul style="list-style-type: none"> ▪ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz. ▪ For low-power client devices < -1 dBm / MHz. ▪ For very low-power devices < -5 dBm / MHz.
<input type="checkbox"/> For the 5.925 ~ 6.875 GHz band:	
	<ul style="list-style-type: none"> ▪ For standard-power access points & fixed client devices < 23 dBm / MHz. ▪ For standard client devices < 17 dBm / MHz.



3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> ▪ According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
	[duty cycle ≥ 98% or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
	<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/>	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
	<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
<input type="checkbox"/>	For radiated measurement.

Test Method	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

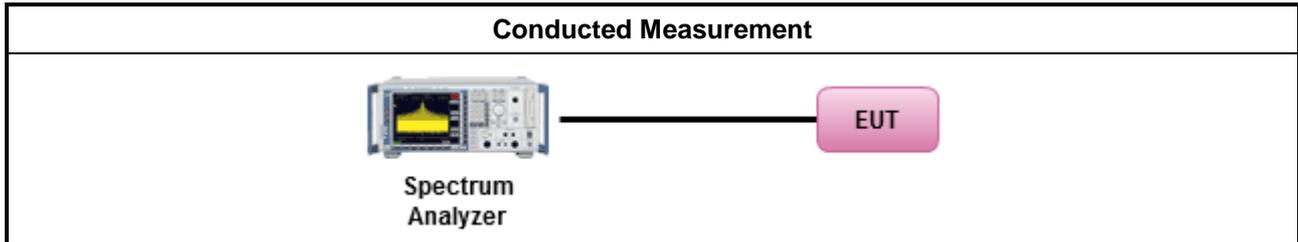

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{ dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.925 – 7.125 GHz emission	<p>e.i.r.p. -27 dBm [68.2 dBuV/m@3m]</p> <p>Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{ dBuV/m at 1m}$.</p> <p>Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.</p>

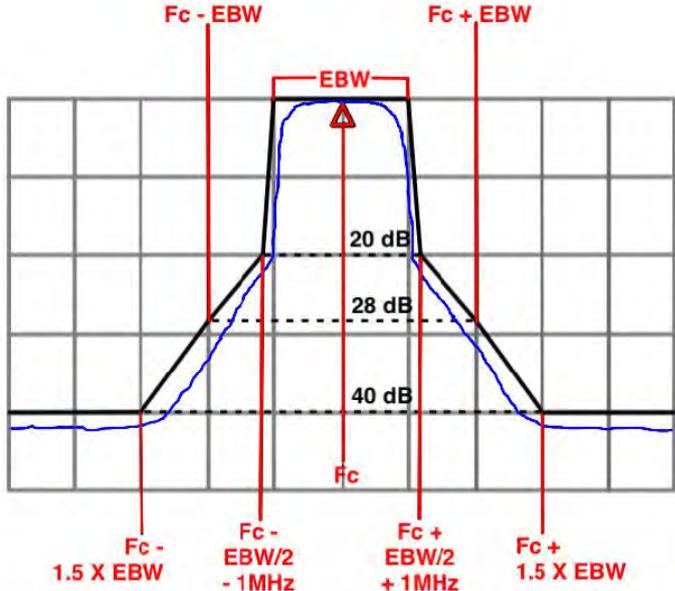Frequency	Emission MASK Limit
5.925 – 7.125 GHz	<p>Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.</p> 




3.5.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method		
<ul style="list-style-type: none"> ▪ According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). 		
<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor]. 		
<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: 		
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands. 	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands. 	
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)	
	<input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).	
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.(For restricted band average measurement)	
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.	
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.	
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements. 	
	<ul style="list-style-type: none"> ▪ For emission MASK shall be measured using following options below: 	
	<input checked="" type="checkbox"/> Refer as FCC KDB 987594 D02, J) In-Band Emissions	
<ul style="list-style-type: none"> ▪ For radiated measurement. 		
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. 	
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. 	
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. 	
<ul style="list-style-type: none"> ▪ The any unwanted emissions level shall not exceed the fundamental emission level. 		
<ul style="list-style-type: none"> ▪ All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported. 		

3.5.4 Test Setup

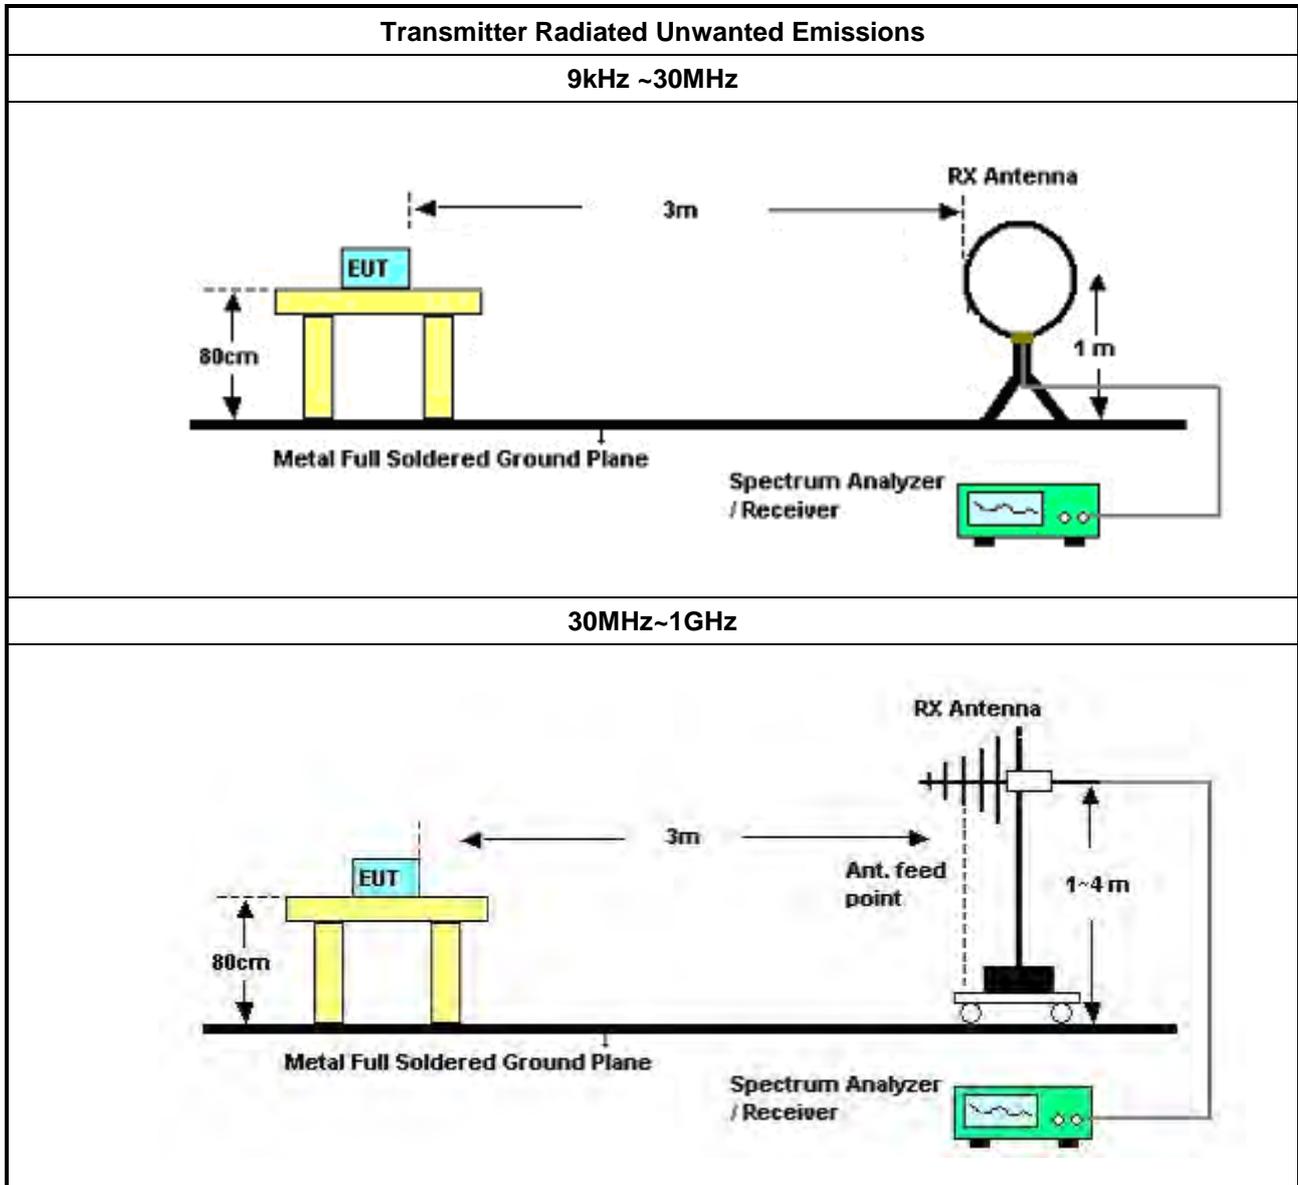

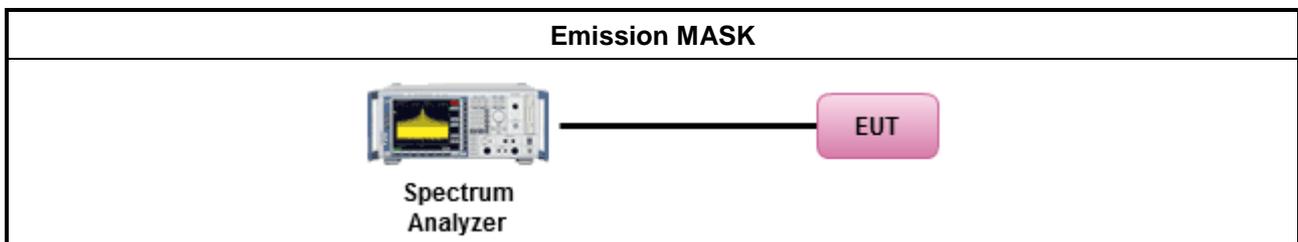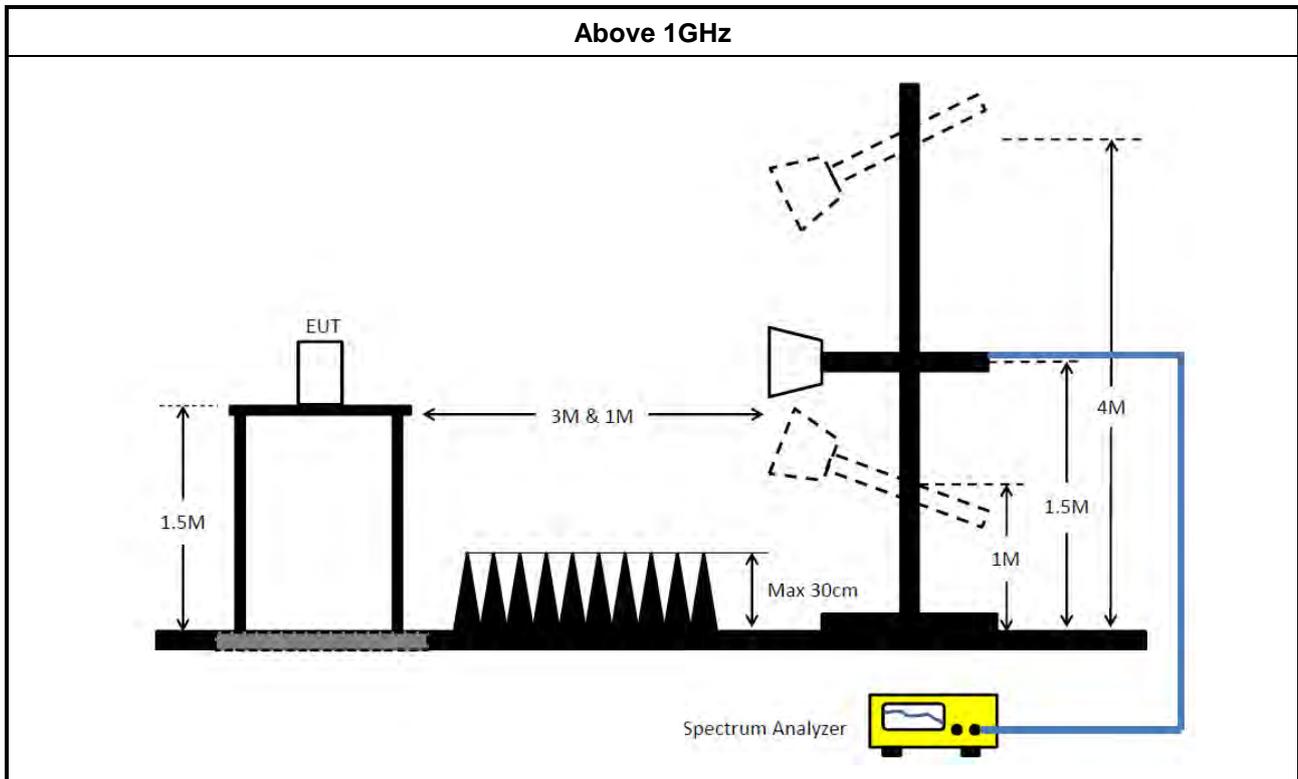

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
<input type="checkbox"/>	For Contention Based Protocol shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

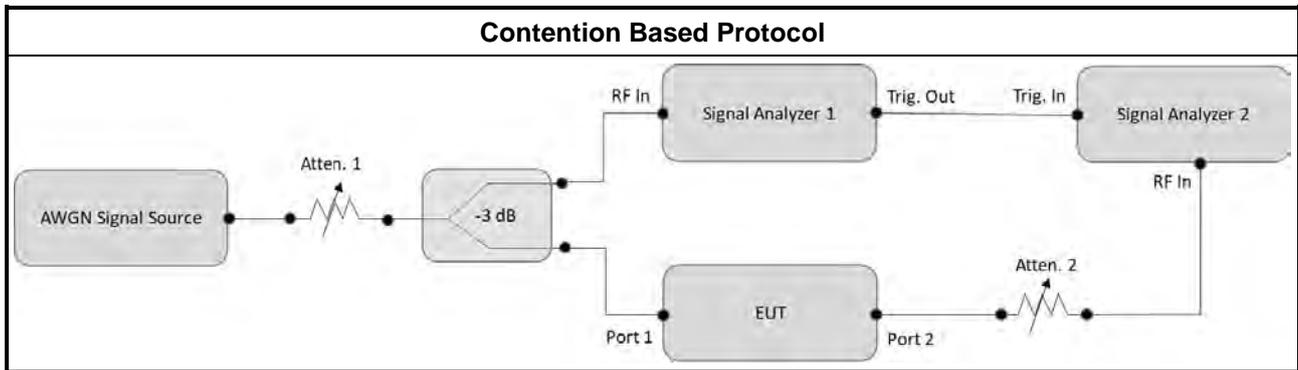

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 06, 2025	Mar. 05, 2026	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 18, 2025	Feb. 17, 2026	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Feb. 06, 2025	Feb. 05, 2026	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 17, 2024	Oct. 16, 2025	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 01, 2024	Jul. 31, 2025	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 22, 2025	Mar. 21, 2026	Radiation (03CH05-CB)
Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 02, 2024	May 01, 2025	Radiation (03CH05-CB)
Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 01, 2025	Apr. 30, 2026	Radiation (03CH05-CB)
Signal Analyzer	R&S	FSV3044	101321	9kHz ~ 44GHz	Jun. 26, 2024	Jun. 25, 2025	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 21, 2025	Apr. 20, 2026	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 04, 2024	May 03, 2025	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 03, 2025	May 02, 2026	Radiation (03CH01-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Oct. 18, 2024	Oct. 17, 2025	Radiation (03CH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 17, 2024	May 16, 2025	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2024	Dec. 11, 2025	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Oct. 02, 2024	Oct. 01, 2025	Radiation (03CH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 23, 2025	Mar. 22, 2026	Radiation (03CH02-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Jul. 11, 2024	Jul. 10, 2025	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Aug. 14, 2024	Aug. 13, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Oct. 02, 2024	Oct. 01, 2025	Radiation (03CH02-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 03, 2024	May 02, 2025	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 02, 2025	May 01, 2026	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Feb. 20, 2025	Feb. 19, 2026	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jul. 11, 2024	Jul. 10, 2025	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Oct. 02, 2024	Oct. 01, 2025	Radiation (03CH03-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Aug. 27, 2024	Aug. 26, 2025	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 18, 2024	Oct. 17, 2025	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 18, 2024	Oct. 17, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1 ~ 18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH02-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1 ~ 18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH02-CB)
Switch	SPTCB	SP-SWI	SWI-02	1~18 GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH02-CB)
Spectrum Analyzer	R&S	FSV40	101025	9kHz ~ 40GHz	Nov. 08, 2024	Nov. 07, 2025	Conducted (DF02-CB)
Vector Signal Generator	R&S	SMM100A	101894	100kHz ~ 7.5GHz	Oct. 28, 2024	Oct. 27, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -05	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -06	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -07	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -08	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-60	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-61	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-63	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF02-CB)


Note: Calibration Interval of instruments listed above is one year.


NCR means Non-Calibration required.



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 3	Pass	QP	154.5k	57.22	65.75	-8.53	Neutral

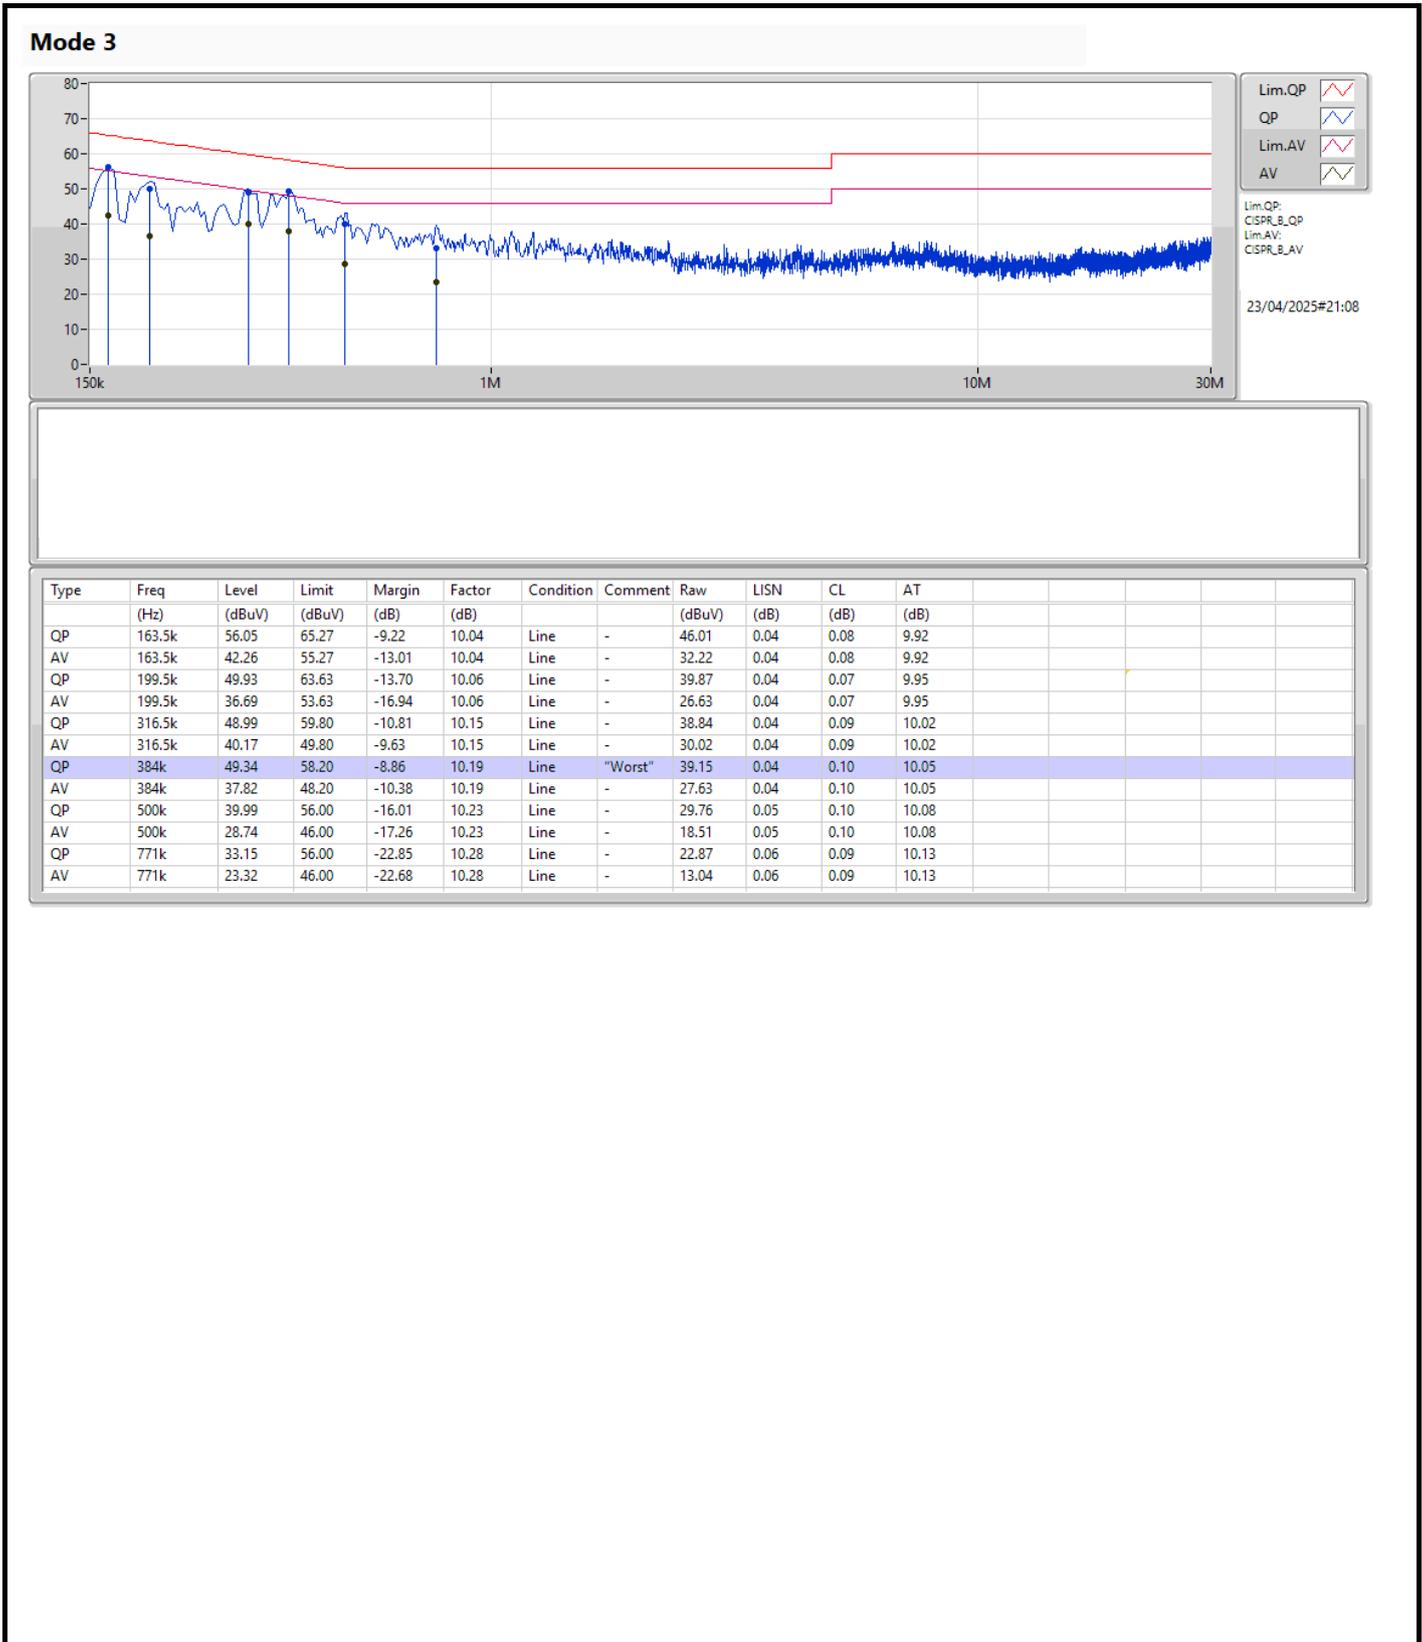

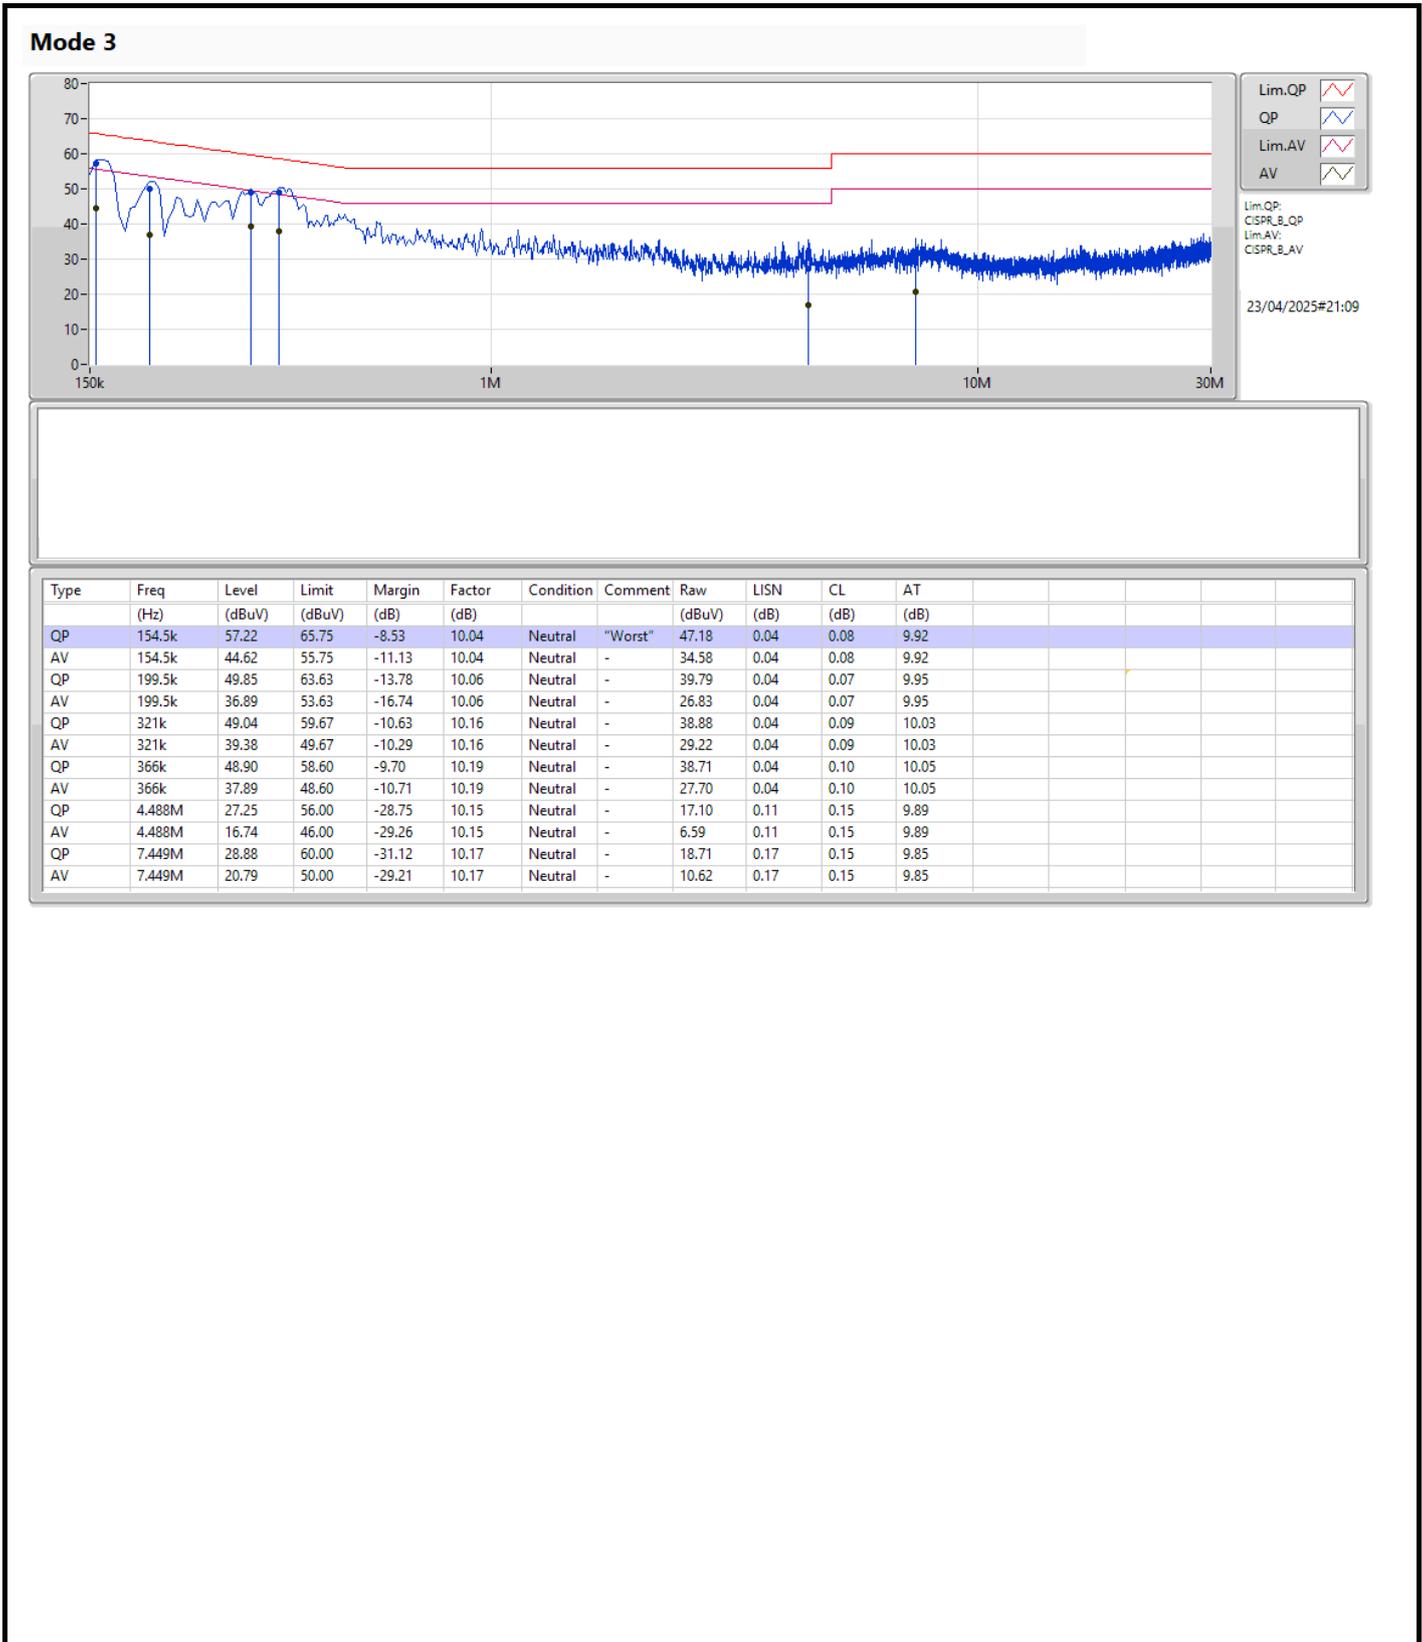

Test Mode: Mode 1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.165M	16.738M	16M7D1D	21.67M	16.68M
6.425-6.525GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.715M	16.803M	16M8D1D	21.67M	16.715M
6.525-6.875GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.99M	16.758M	16M8D1D	21.56M	16.691M
6.875-7.125GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.33M	16.733M	16M7D1D	21.45M	16.675M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5955MHz	Pass	Inf	21.67M	16.68M	21.67M	16.737M
6195MHz	Pass	Inf	22.055M	16.697M	21.835M	16.738M
6415MHz	Pass	Inf	22.165M	16.726M	22M	16.724M
6435MHz	Pass	Inf	22.11M	16.721M	22.715M	16.727M
6475MHz	Pass	Inf	21.78M	16.727M	22.165M	16.803M
6515MHz	Pass	Inf	21.67M	16.723M	21.835M	16.715M
6535MHz	Pass	Inf	21.56M	16.697M	22.055M	16.734M
6695MHz	Pass	Inf	21.615M	16.691M	22.99M	16.758M
6875MHz	Pass	Inf	22M	16.732M	21.67M	16.733M
6895MHz	Pass	Inf	21.615M	16.73M	21.945M	16.721M
6975MHz	Pass	Inf	22.33M	16.679M	21.725M	16.733M
7055MHz	Pass	Inf	21.56M	16.675M	21.45M	16.7M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
 Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5955MHz

21/06/2025

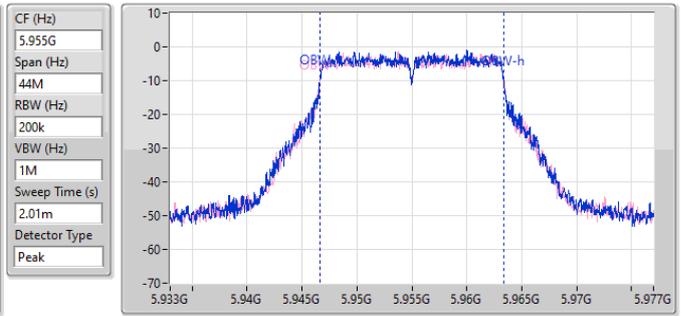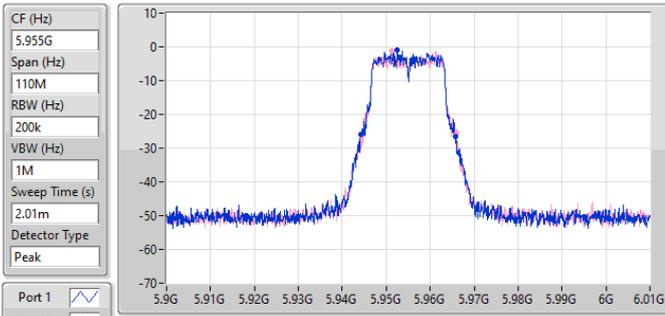



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.67M	5.944165G	5.965835G	16.68M	5.946663G	5.963342G	Inf	1
21.67M	5.94444G	5.96611G	16.737M	5.946643G	5.96338G	Inf	2

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6195MHz

21/06/2025

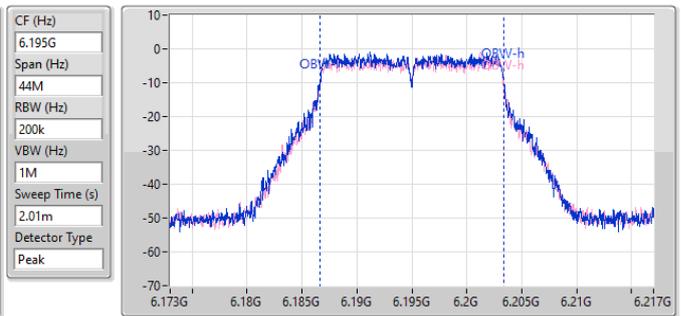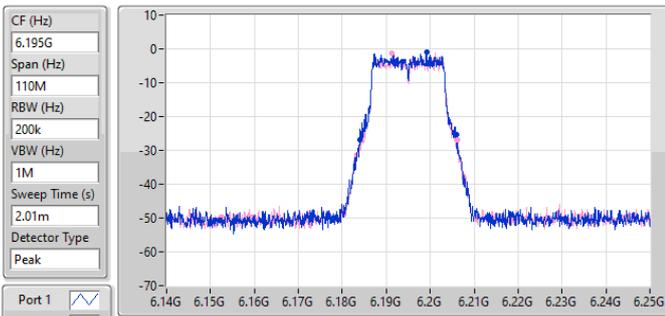


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.055M	6.183945G	6.206G	16.697M	6.186621G	6.203318G	Inf	1
21.835M	6.184385G	6.20622G	16.738M	6.186617G	6.203355G	Inf	2

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6415MHz

21/06/2025

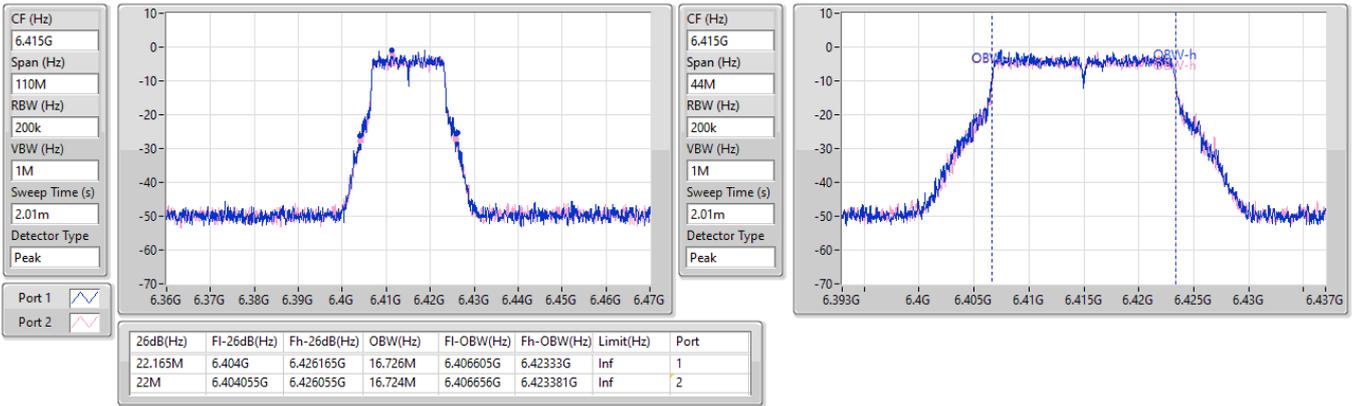


6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6435MHz

21/06/2025

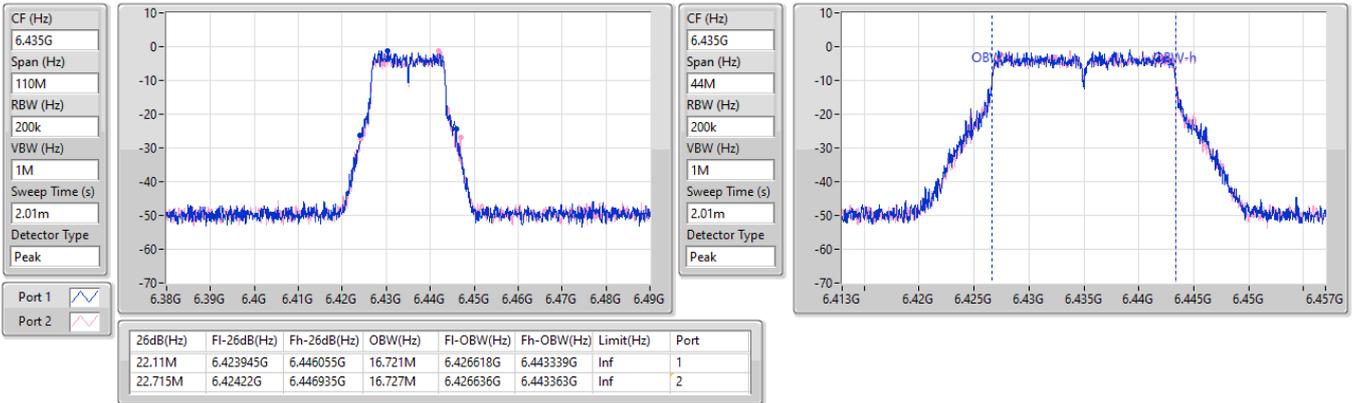


6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6475MHz

21/06/2025

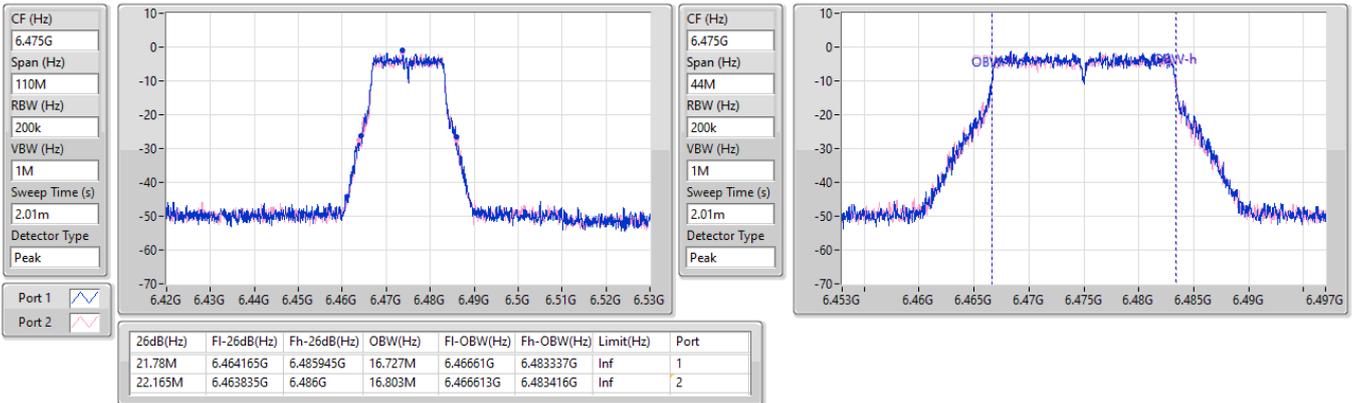


6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6515MHz

21/06/2025

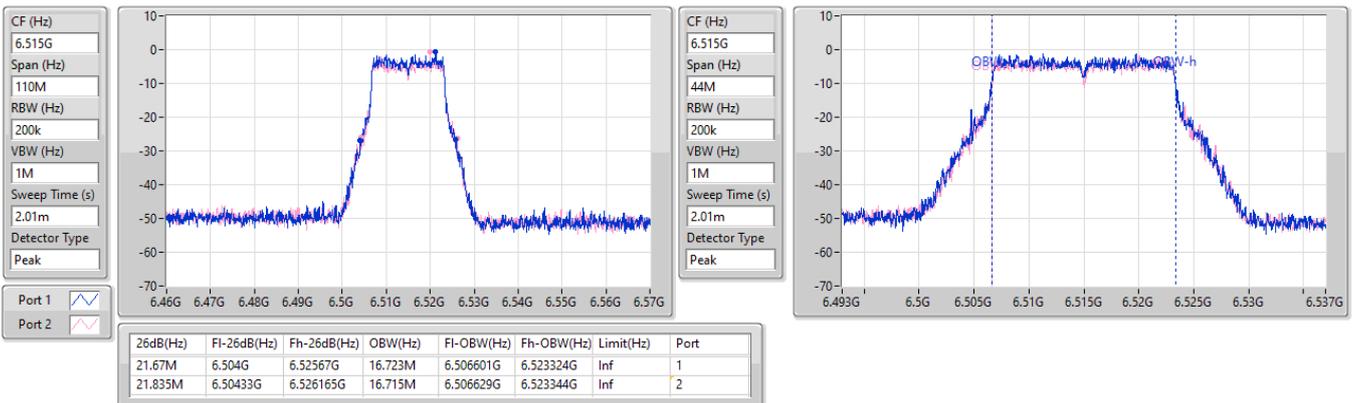


6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6535MHz

21/06/2025

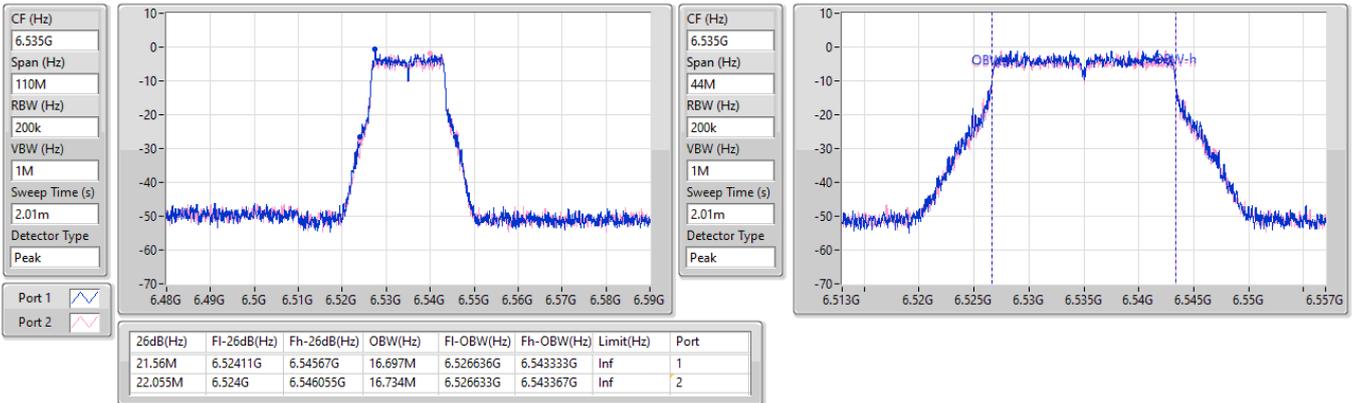


6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6695MHz

21/06/2025

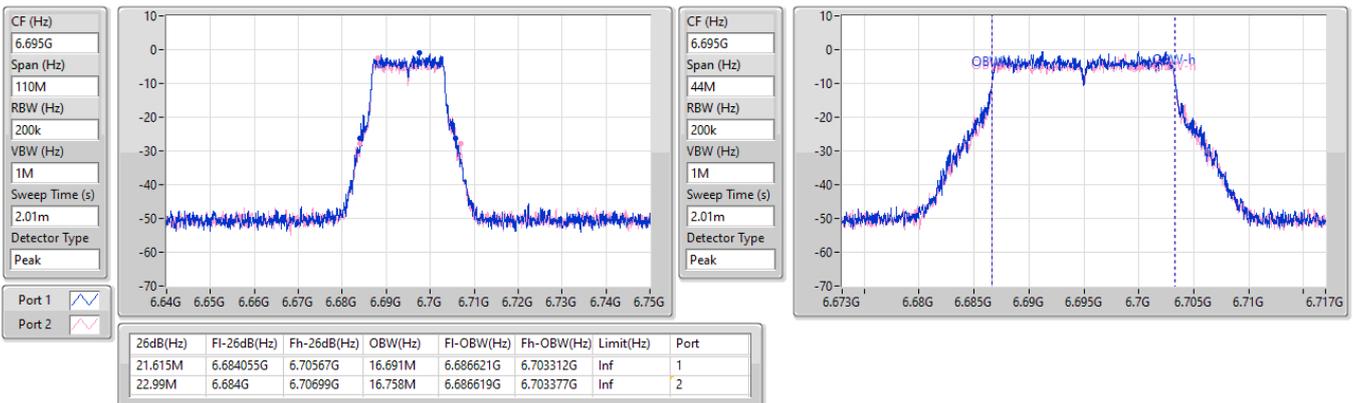

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6875MHz

21/06/2025

CF (Hz)
6.875G


Span (Hz)
110M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

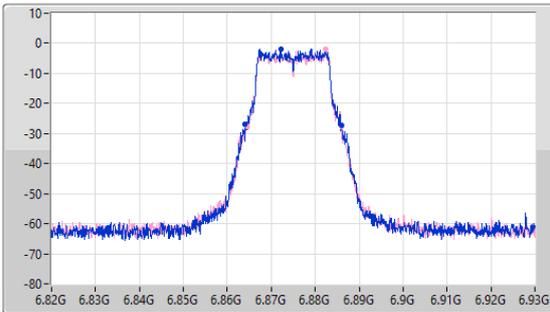

CF (Hz)
6.875G


Span (Hz)
44M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

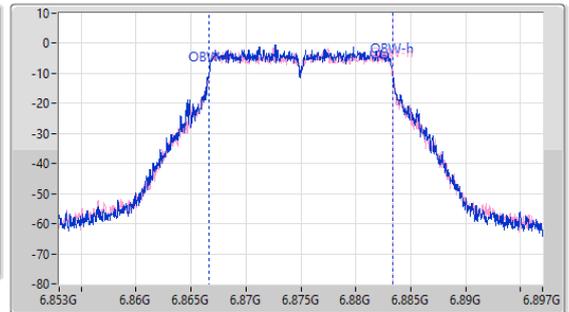

Port 1

Port 2

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22M	6.864055G	6.886055G	16.732M	6.866606G	6.883338G	Inf	1
21.67M	6.864385G	6.886055G	16.733M	6.866626G	6.883359G	Inf	2

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6895MHz

21/06/2025

CF (Hz)
6.895G


Span (Hz)
110M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

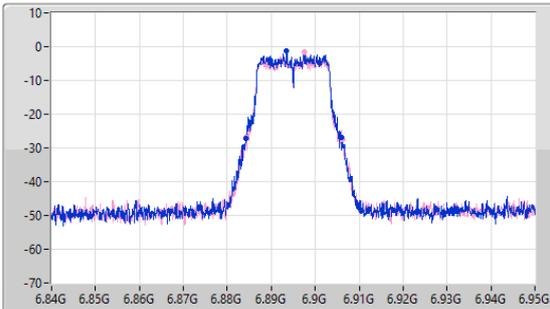

CF (Hz)
6.895G


Span (Hz)
44M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

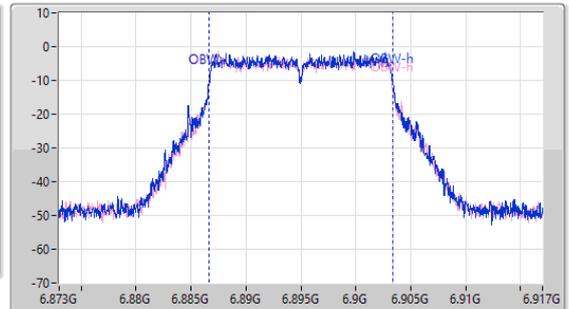

Port 1

Port 2

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.615M	6.884275G	6.90589G	16.73M	6.886638G	6.903367G	Inf	1
21.945M	6.88422G	6.906165G	16.721M	6.886617G	6.903339G	Inf	2

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6975MHz

21/06/2025

CF (Hz)
6.975G


Span (Hz)
110M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

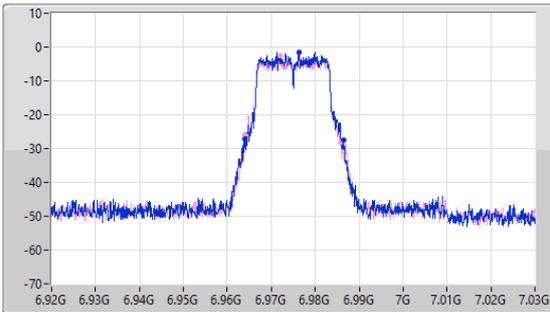

CF (Hz)
6.975G


Span (Hz)
44M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

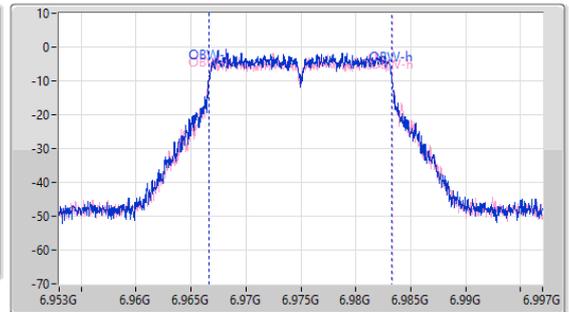

Port 1

Port 2

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.33M	6.96411G	6.98644G	16.679M	6.966617G	6.983296G	Inf	1
21.725M	6.964055G	6.98578G	16.733M	6.966638G	6.983371G	Inf	2

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

7055MHz

21/06/2025

CF (Hz)
7.055G


Span (Hz)
110M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

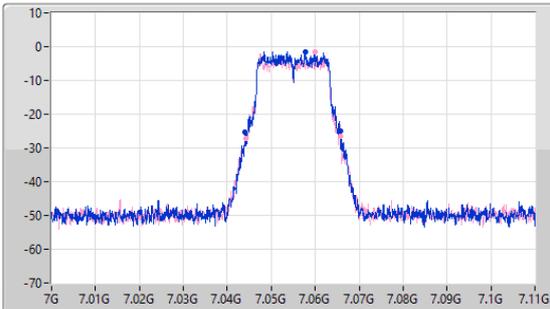

CF (Hz)
7.055G


Span (Hz)
44M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

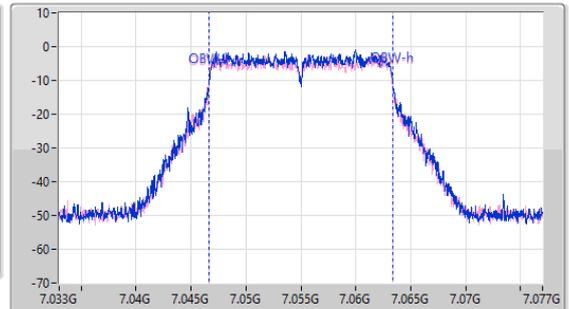

Port 1

Port 2

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.56M	7.04411G	7.06567G	16.675M	7.046657G	7.063331G	Inf	1
21.45M	7.044275G	7.065725G	16.7M	7.046618G	7.063318G	Inf	2

Test Mode: Mode 2
Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22M	19.062M	19M1D1D	21.01M	18.99M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	43.23M	38M	38M0D1D	42.46M	37.862M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	87.56M	77.601M	77M6D1D	84.48M	77.182M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	172.92M	156.939M	157MD1D	167.2M	156.345M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	592.24M	318.493M	318MD1D	333.52M	314.457M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.505M	19.051M	19M1D1D	21.065M	18.971M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	43.56M	38.05M	38M1D1D	41.58M	37.801M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	88M	77.608M	77M6D1D	83.6M	77.289M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	172.48M	156.867M	157MD1D	168.52M	156.804M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	630.96M	317.331M	317MD1D	630.96M	316.777M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.45M	19.035M	19M0D1D	21.175M	19.001M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	42.68M	38.059M	38M1D1D	40.48M	37.873M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	88.44M	77.74M	77M7D1D	83.16M	77.081M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	171.16M	157.006M	157MD1D	168.08M	156.395M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	566.72M	317.571M	318MD1D	484.88M	316.577M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.725M	19.063M	19M1D1D	20.955M	18.97M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	43.67M	38.097M	38M1D1D	40.48M	37.825M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	87.12M	77.733M	77M7D1D	85.8M	77.505M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	311.96M	157.728M	158MD1D	303.16M	157.587M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	489.28M	315.701M	316MD1D	337.92M	315.522M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
595MHz	Pass	Inf	21.285M	19.029M	21.395M	18.99M
6195MHz	Pass	Inf	21.78M	19.062M	21.395M	19.025M
6415MHz	Pass	Inf	22M	19.028M	21.01M	19.015M
6435MHz	Pass	Inf	21.395M	18.987M	21.505M	19.038M
6475MHz	Pass	Inf	21.45M	19.051M	21.065M	19.023M
6515MHz	Pass	Inf	21.175M	19.011M	21.34M	18.971M
6535MHz	Pass	Inf	21.175M	19.028M	21.45M	19.001M
6695MHz	Pass	Inf	21.285M	19.005M	21.34M	19.004M
6875MHz	Pass	Inf	21.285M	19.035M	21.23M	19.018M
6895MHz	Pass	Inf	21.725M	19M	21.175M	19.001M
6975MHz	Pass	Inf	21.67M	19.063M	20.955M	18.97M
7055MHz	Pass	Inf	21.175M	18.987M	21.34M	18.988M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	Inf	42.46M	37.927M	42.79M	37.888M
6205MHz	Pass	Inf	42.68M	37.862M	43.23M	38M
6405MHz	Pass	Inf	43.12M	37.925M	43.12M	37.883M
6445MHz	Pass	Inf	42.13M	37.801M	41.91M	37.898M
6485MHz	Pass	Inf	41.58M	37.825M	43.01M	38.05M
6525MHz	Pass	Inf	43.56M	37.987M	42.57M	37.953M
6565MHz	Pass	Inf	42.57M	38.025M	41.91M	37.99M
6685MHz	Pass	Inf	41.47M	37.947M	42.68M	38.059M
6885MHz	Pass	Inf	40.48M	37.873M	42.57M	37.926M
6925MHz	Pass	Inf	40.48M	37.956M	42.57M	37.999M
7005MHz	Pass	Inf	43.67M	37.825M	42.9M	37.955M
7045MHz	Pass	Inf	43.56M	37.997M	42.9M	38.097M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	Inf	87.56M	77.601M	85.14M	77.523M
6225MHz	Pass	Inf	86.46M	77.532M	84.92M	77.464M
6385MHz	Pass	Inf	87.34M	77.182M	84.48M	77.531M
6465MHz	Pass	Inf	88M	77.289M	85.36M	77.425M
6545MHz	Pass	Inf	85.58M	77.533M	83.6M	77.608M
6625MHz	Pass	Inf	84.7M	77.577M	88M	77.592M
6705MHz	Pass	Inf	83.16M	77.5M	86.68M	77.498M
6785MHz	Pass	Inf	84.92M	77.081M	88.44M	77.74M
6865MHz	Pass	Inf	85.8M	77.706M	86.02M	77.531M
6945MHz	Pass	Inf	86.24M	77.733M	87.12M	77.658M
7025MHz	Pass	Inf	86.46M	77.505M	85.8M	77.529M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	Inf	172.92M	156.64M	167.2M	156.345M
6185MHz	Pass	Inf	168.08M	156.801M	169.4M	156.862M
6345MHz	Pass	Inf	168.52M	156.939M	172.48M	156.564M
6505MHz	Pass	Inf	172.48M	156.867M	168.52M	156.804M
6665MHz	Pass	Inf	168.08M	156.749M	171.16M	156.395M
6825MHz	Pass	Inf	168.08M	156.887M	169.4M	157.006M
6985MHz	Pass	Inf	303.16M	157.587M	311.96M	157.728M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	Inf	334.4M	315.547M	333.52M	314.457M
6265MHz	Pass	Inf	444.4M	315.953M	425.92M	315.716M
6425MHz	Pass	Inf	470.8M	318.493M	592.24M	316.74M
6585MHz	Pass	Inf	630.96M	317.331M	630.96M	316.777M
6745MHz	Pass	Inf	484.88M	317.571M	566.72M	316.577M
6905MHz	Pass	Inf	489.28M	315.522M	337.92M	315.701M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

5955MHz

02/06/2025

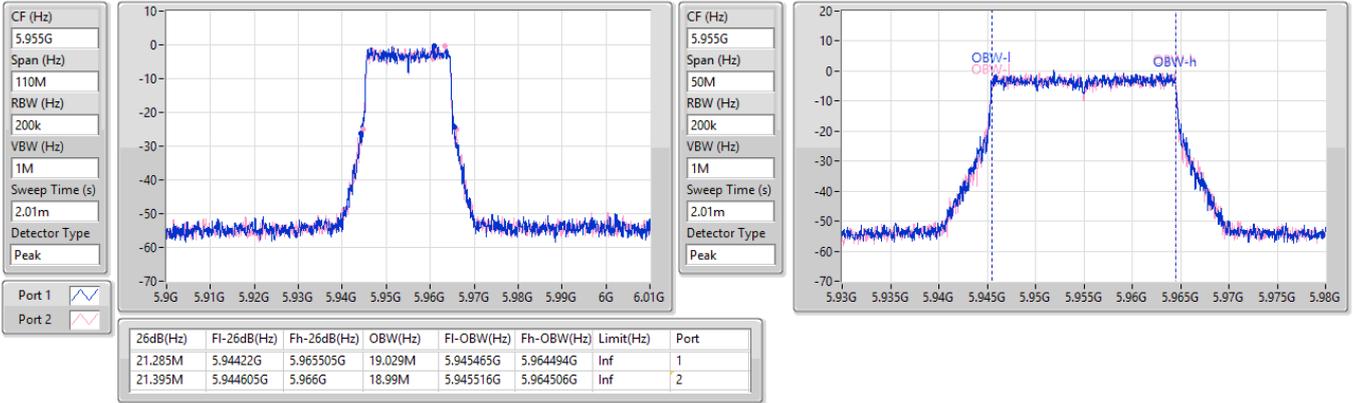


5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6195MHz

02/06/2025

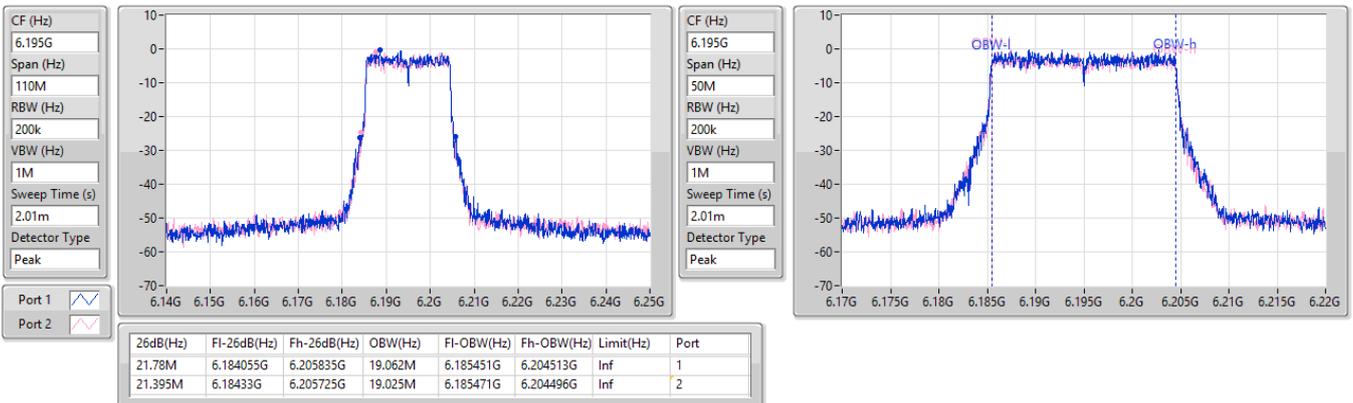


5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6415MHz

02/06/2025

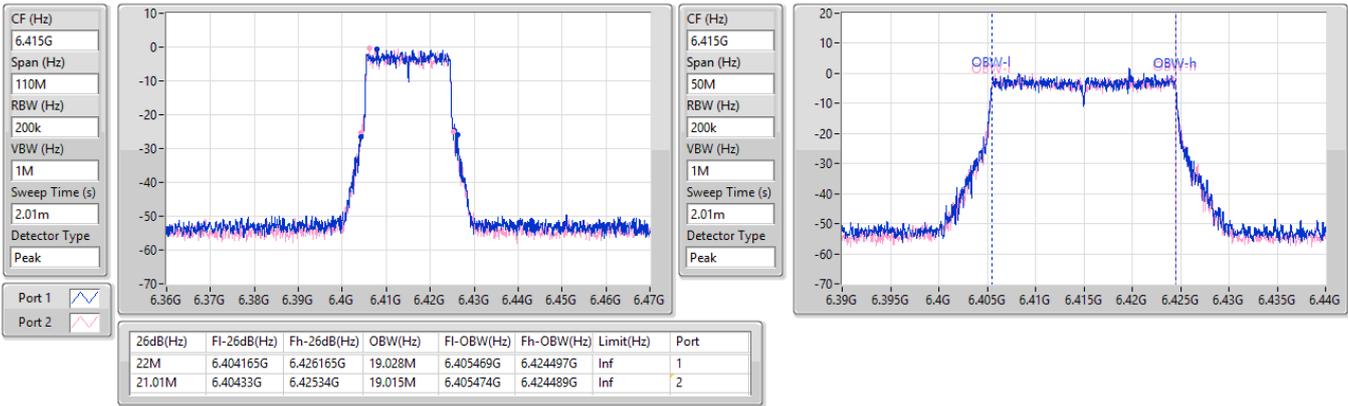


6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6435MHz

02/06/2025

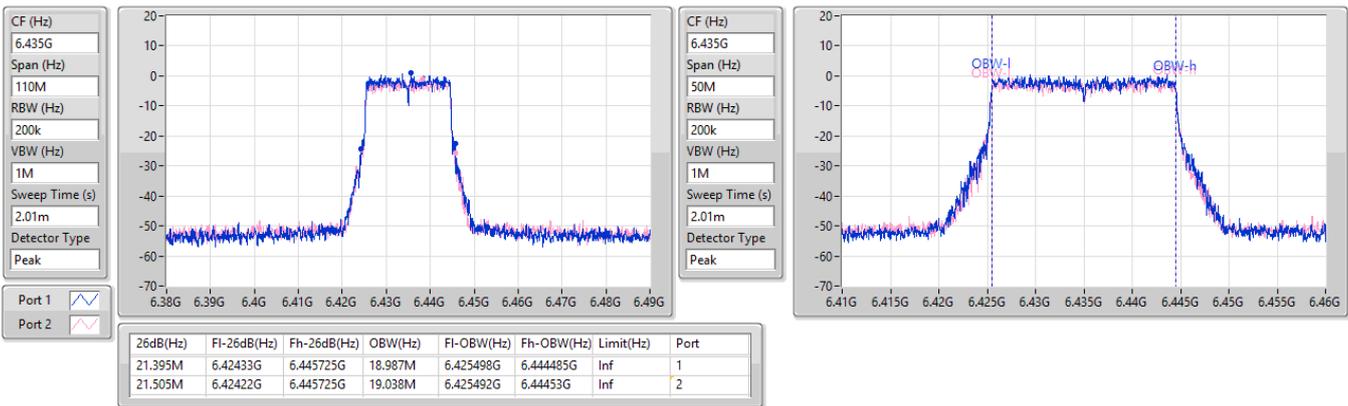


6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6475MHz

02/06/2025

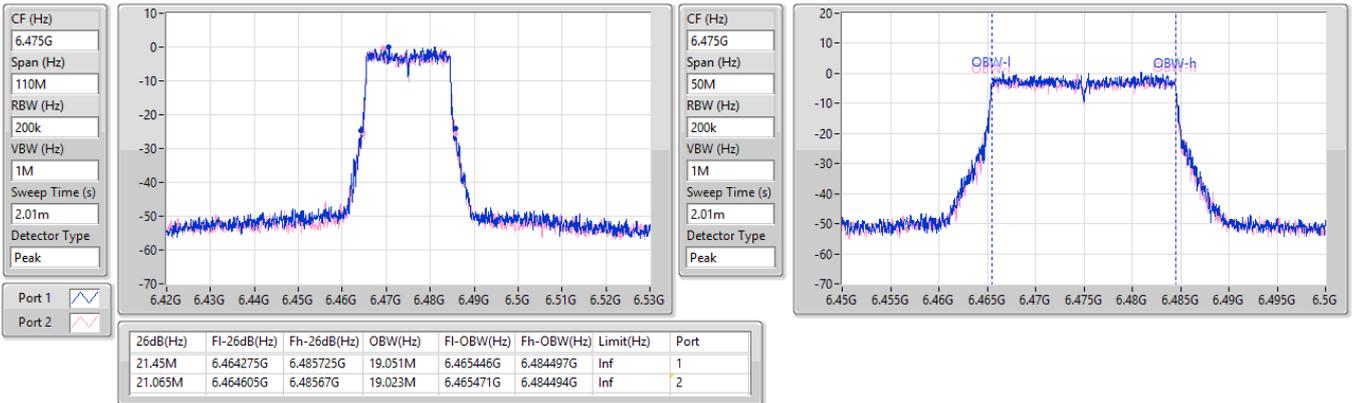


6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6515MHz

02/06/2025

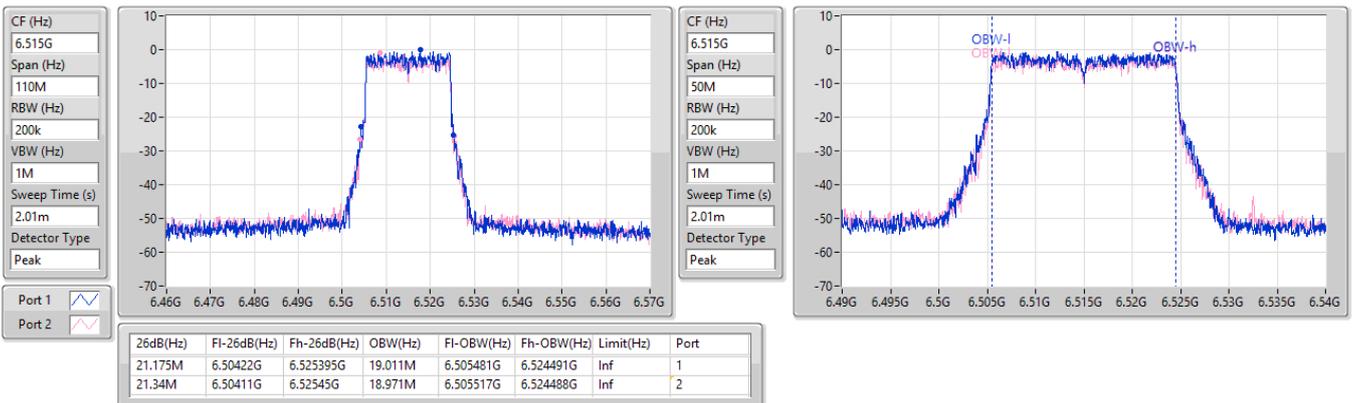


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6535MHz

02/06/2025

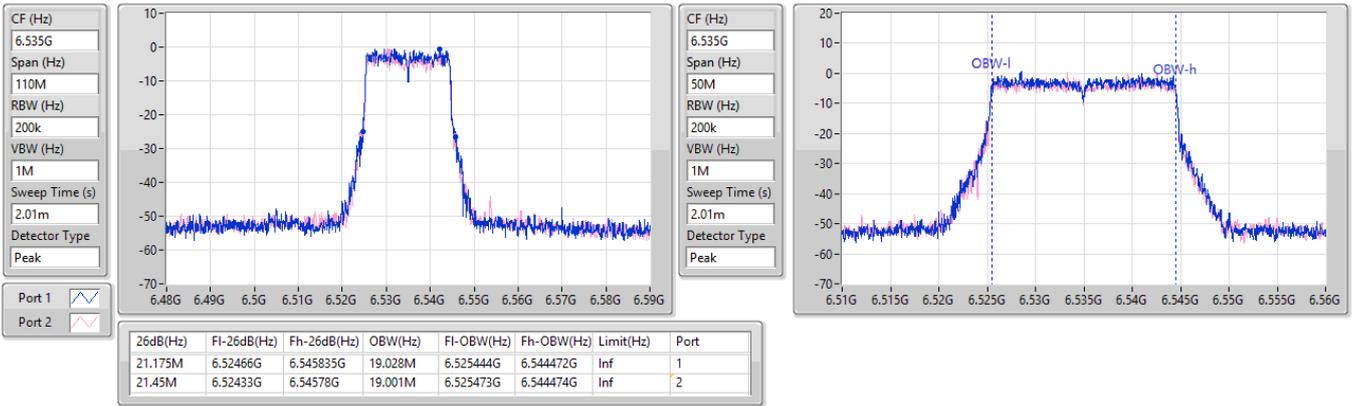


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6695MHz

02/06/2025

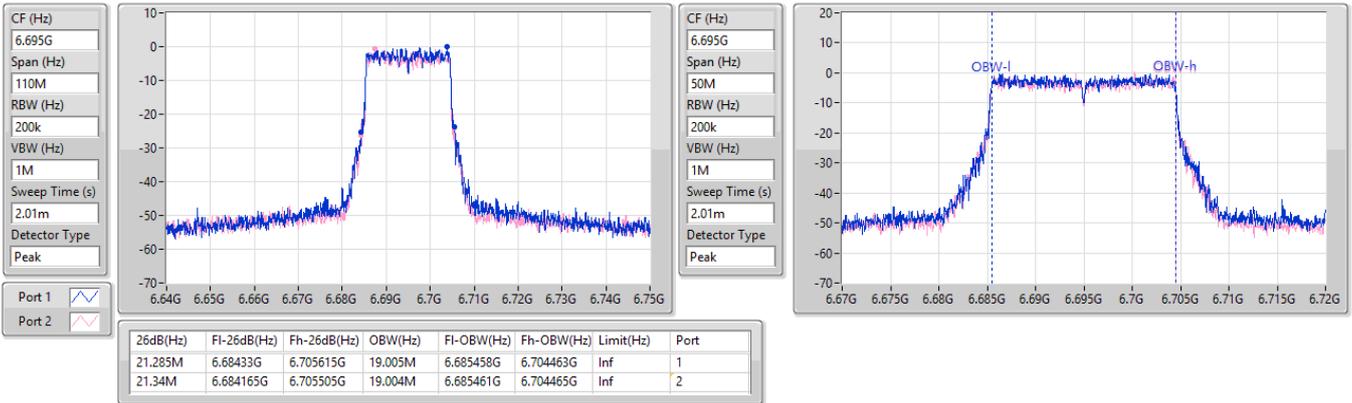


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6875MHz

02/06/2025

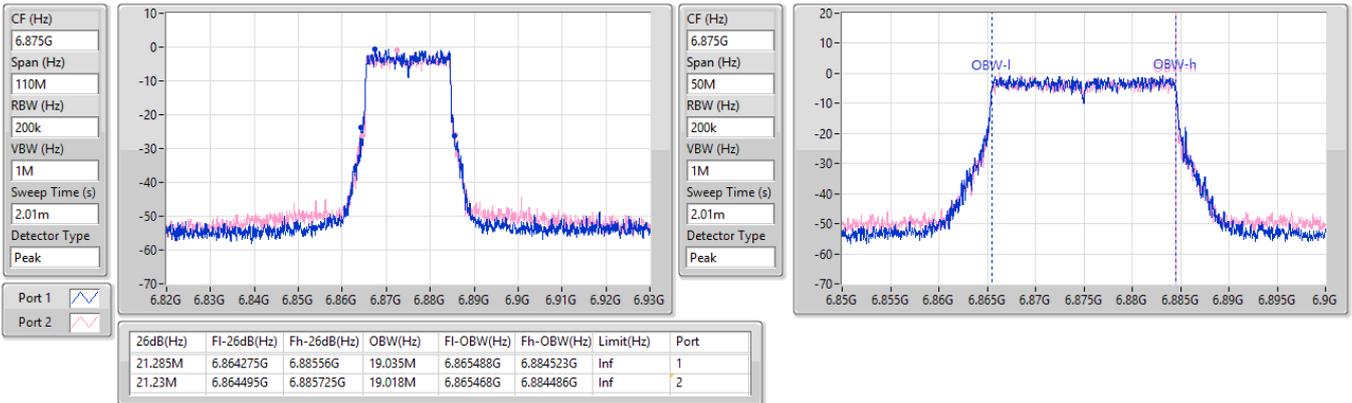


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6895MHz

02/06/2025

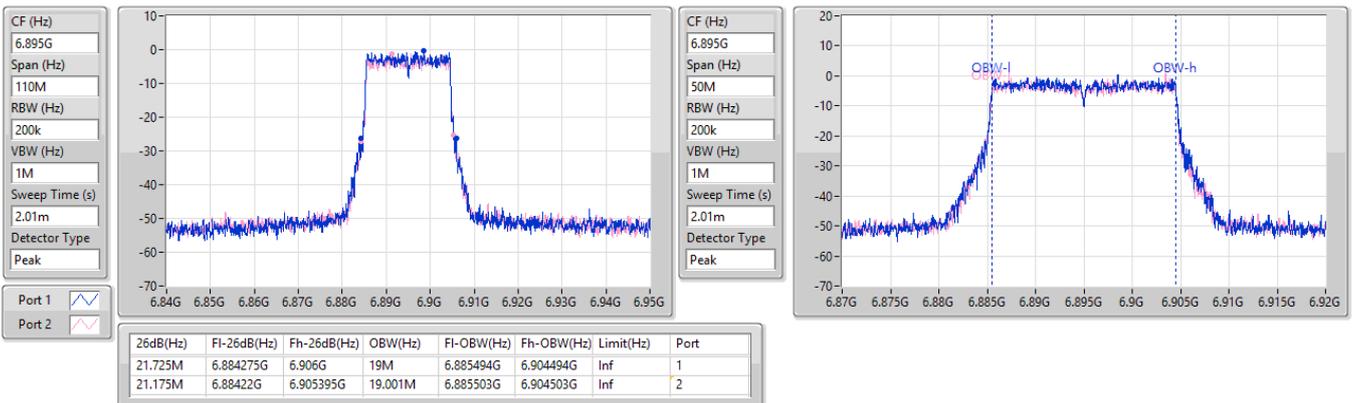


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6975MHz

02/06/2025

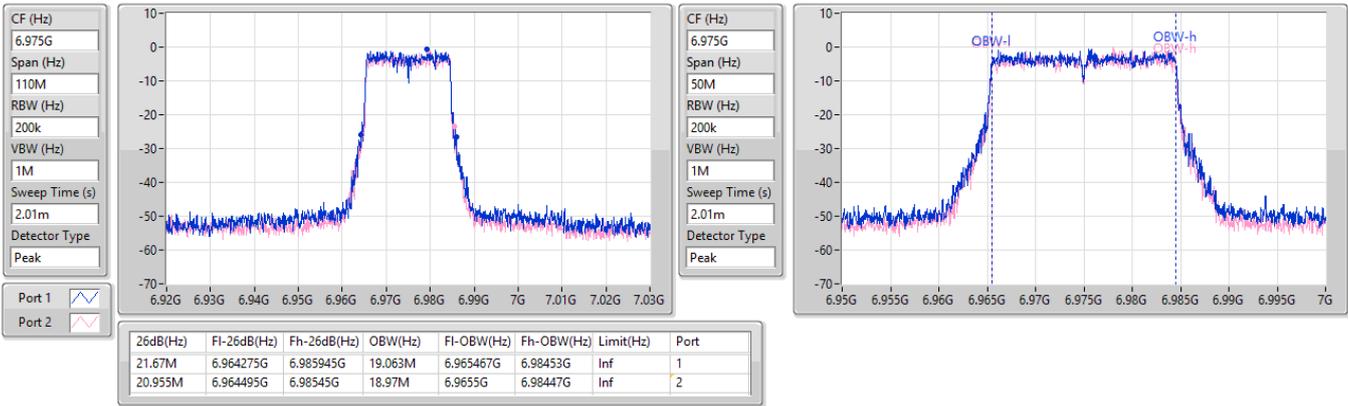


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

7055MHz

02/06/2025

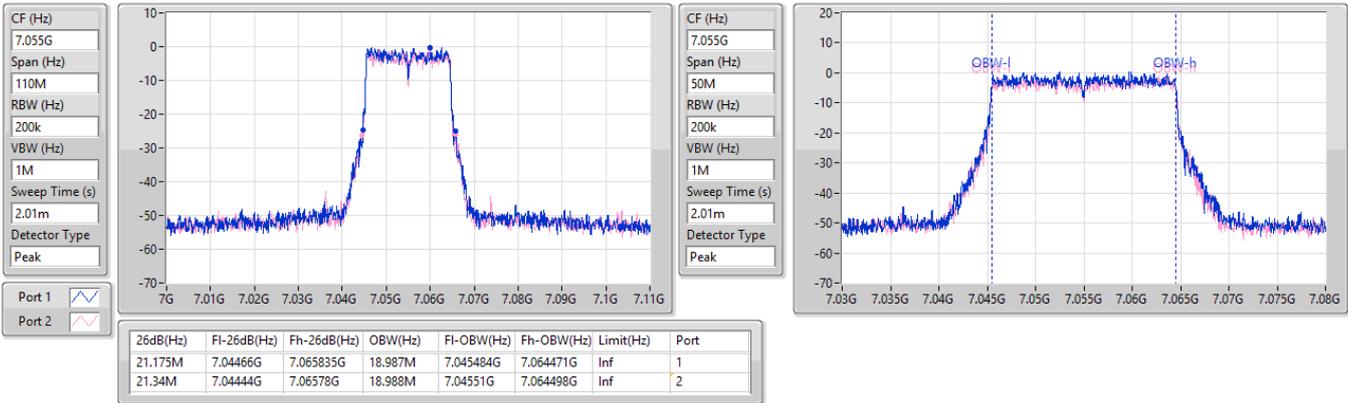

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

5965MHz

02/06/2025

CF (Hz)
5.965G


Span (Hz)
220M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

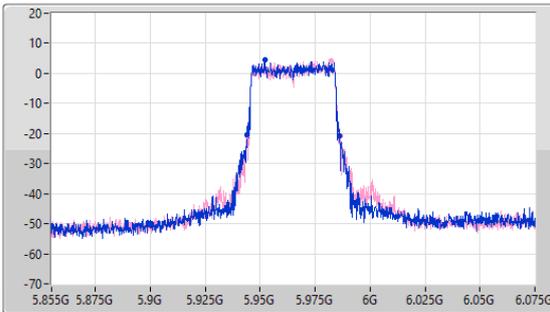

CF (Hz)
5.965G


Span (Hz)
100M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

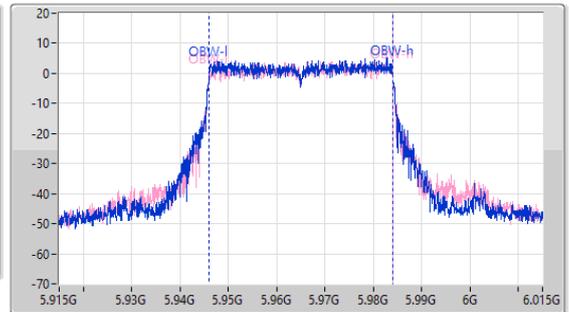

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
42.46M	5.94377G	5.98623G	37.927M	5.946037G	5.983964G	Inf	1
42.79M	5.94377G	5.98656G	37.888M	5.94609G	5.983979G	Inf	2

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6205MHz

02/06/2025

CF (Hz)
6.205G


Span (Hz)
220M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

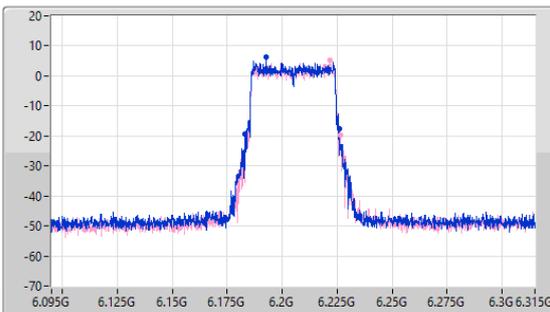

CF (Hz)
6.205G


Span (Hz)
100M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

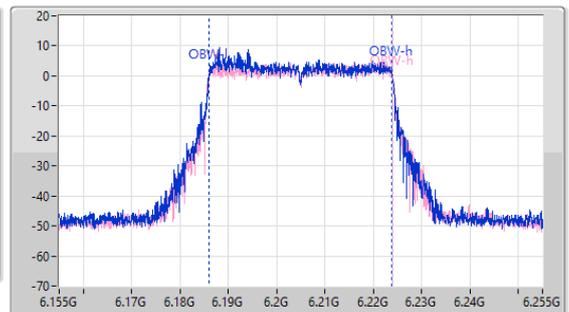


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
42.68M	6.18322G	6.2259G	37.862M	6.186018G	6.22388G	Inf	1
43.23M	6.18311G	6.22634G	38M	6.185991G	6.223991G	Inf	2

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6405MHz

02/06/2025

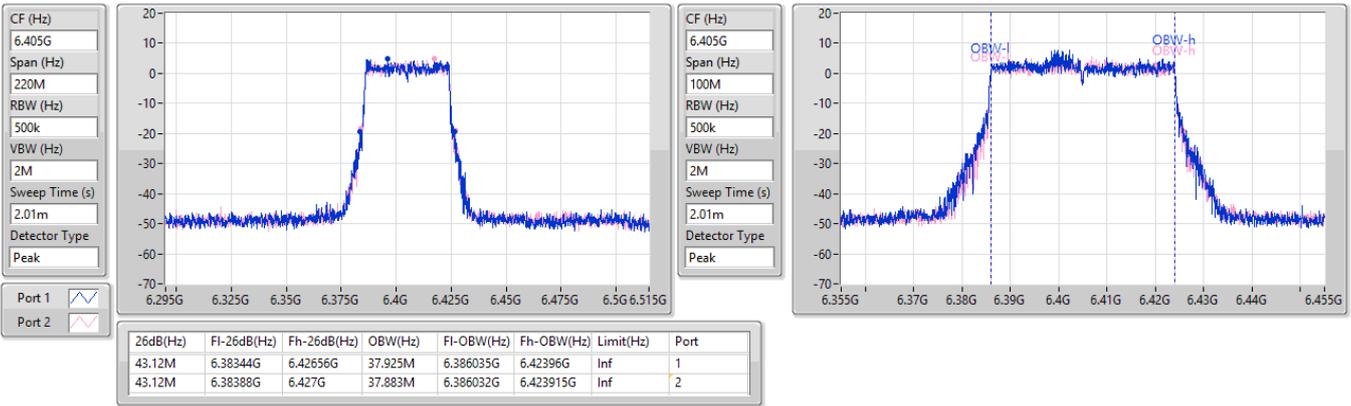


6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6445MHz

02/06/2025

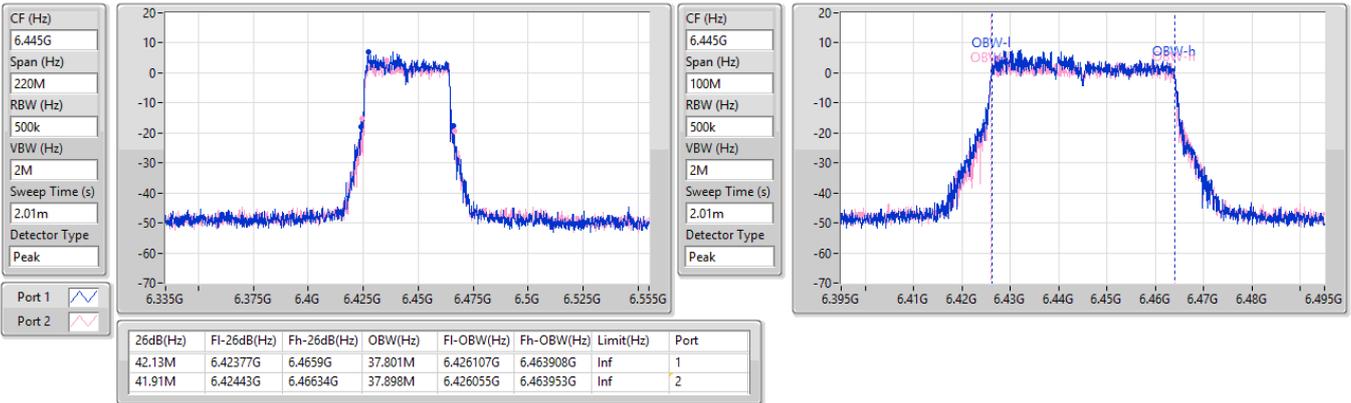


6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6485MHz

02/06/2025

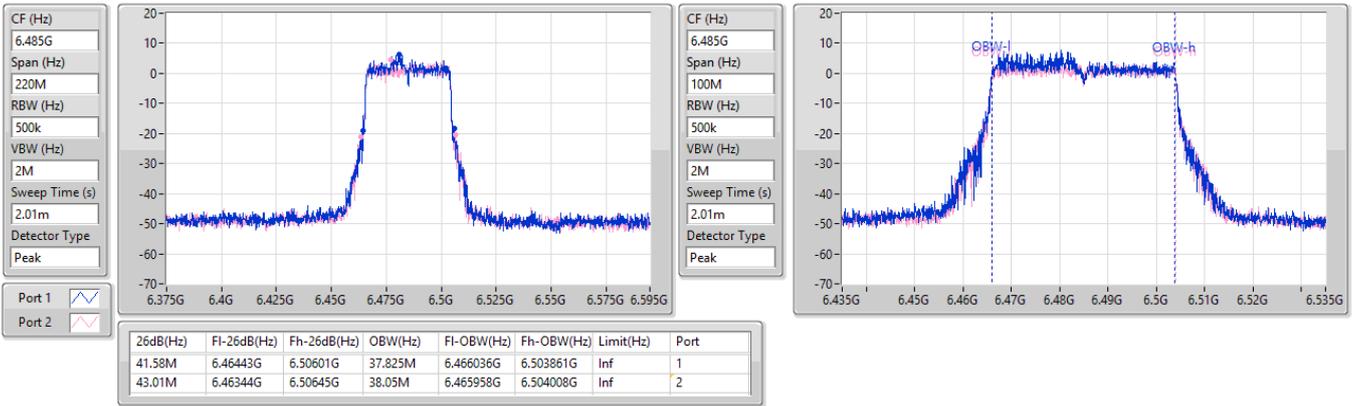


6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6525MHz

02/06/2025

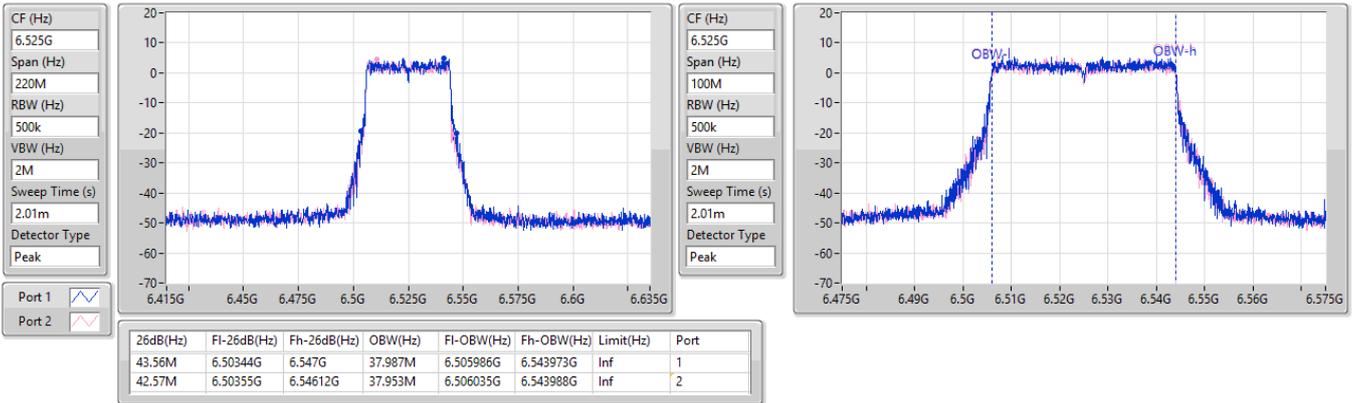


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6565MHz

02/06/2025

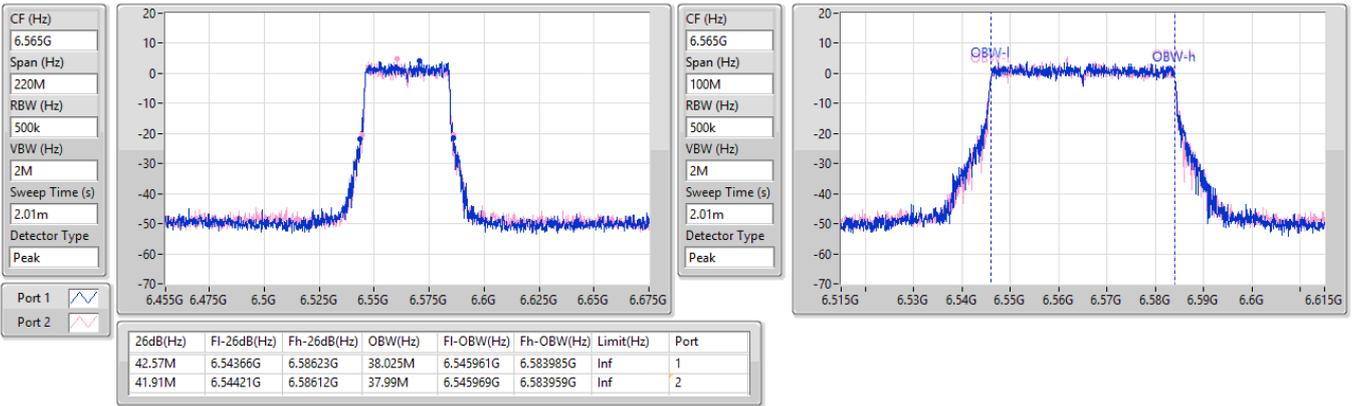


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6685MHz

02/06/2025

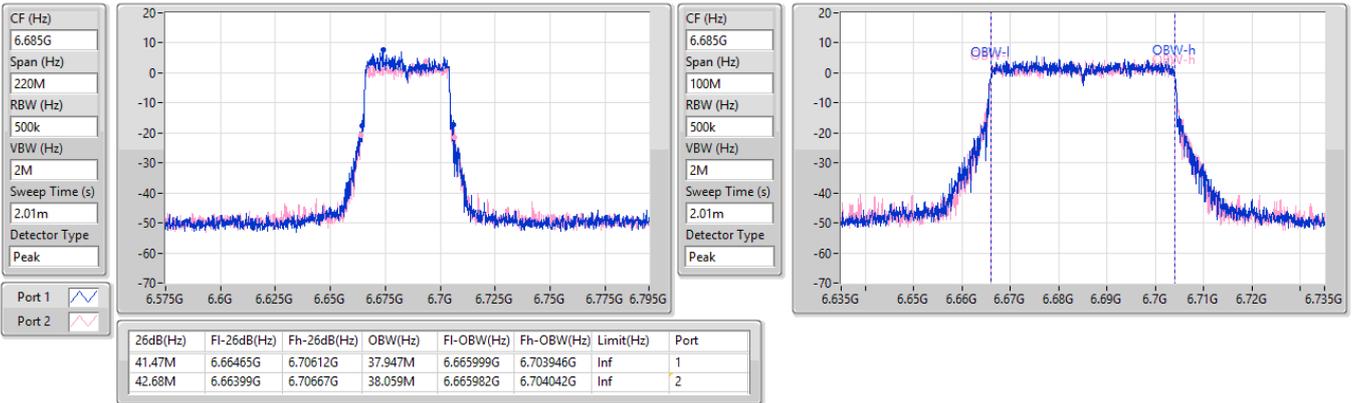


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6885MHz

02/06/2025

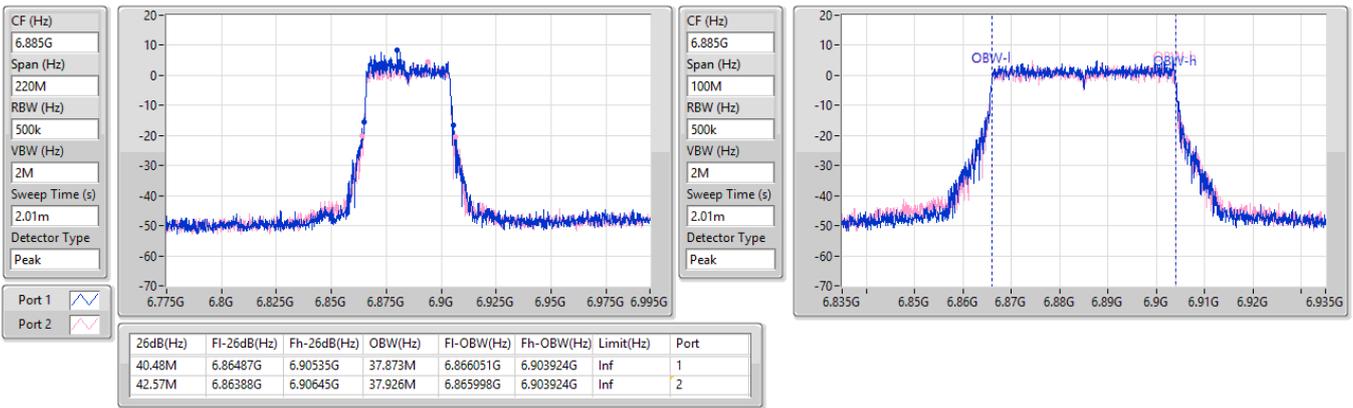


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6925MHz

02/06/2025

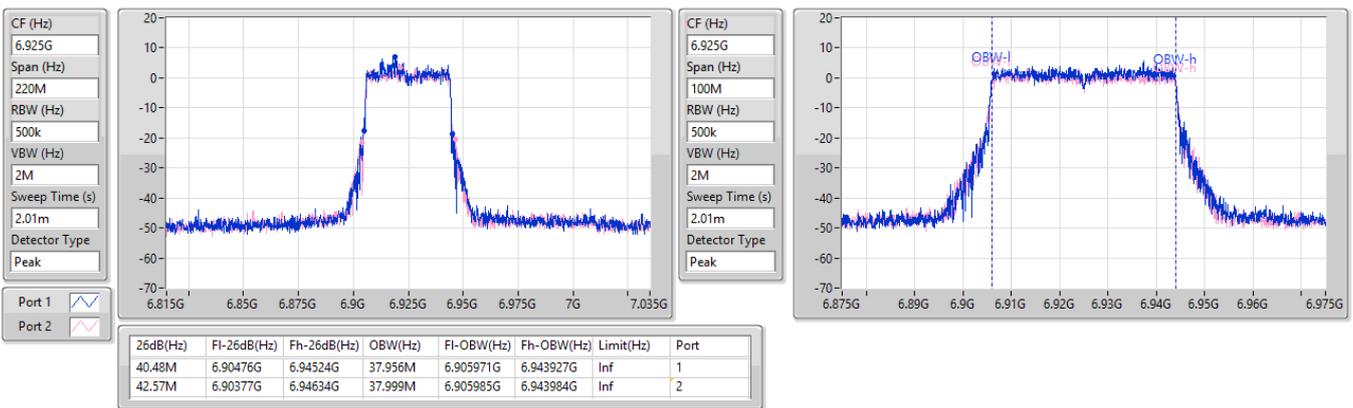


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

7005MHz

02/06/2025

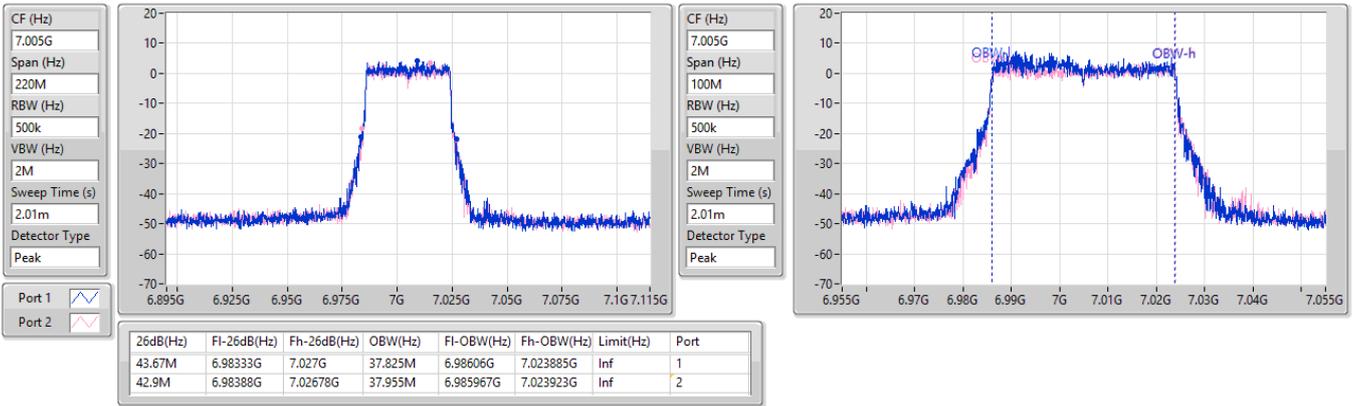


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

7045MHz

02/06/2025

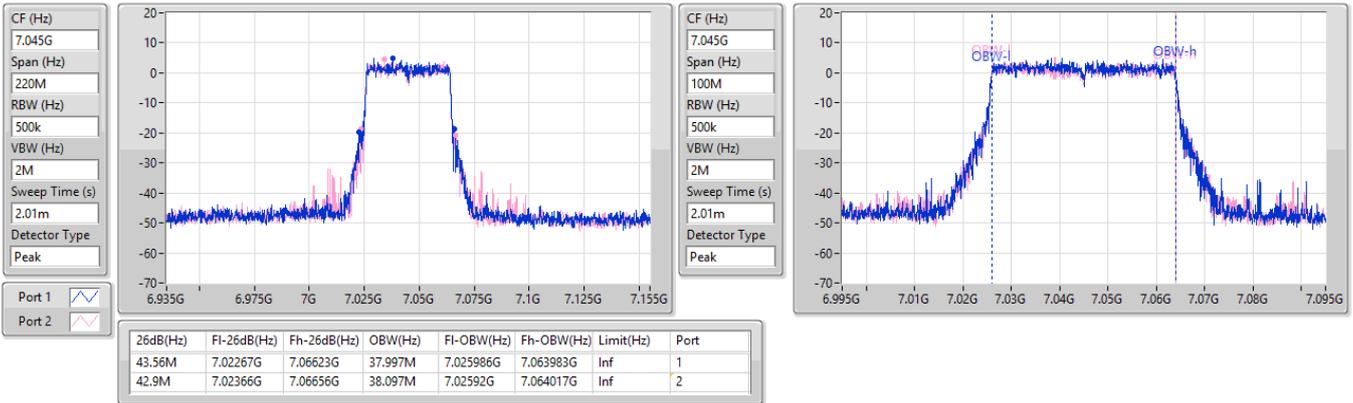


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

5985MHz

02/06/2025

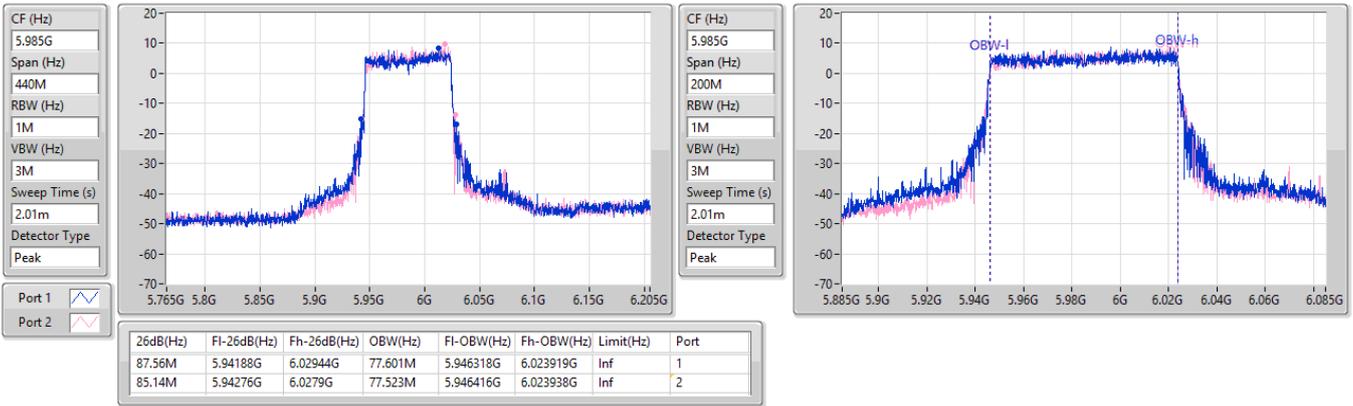


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6225MHz

02/06/2025

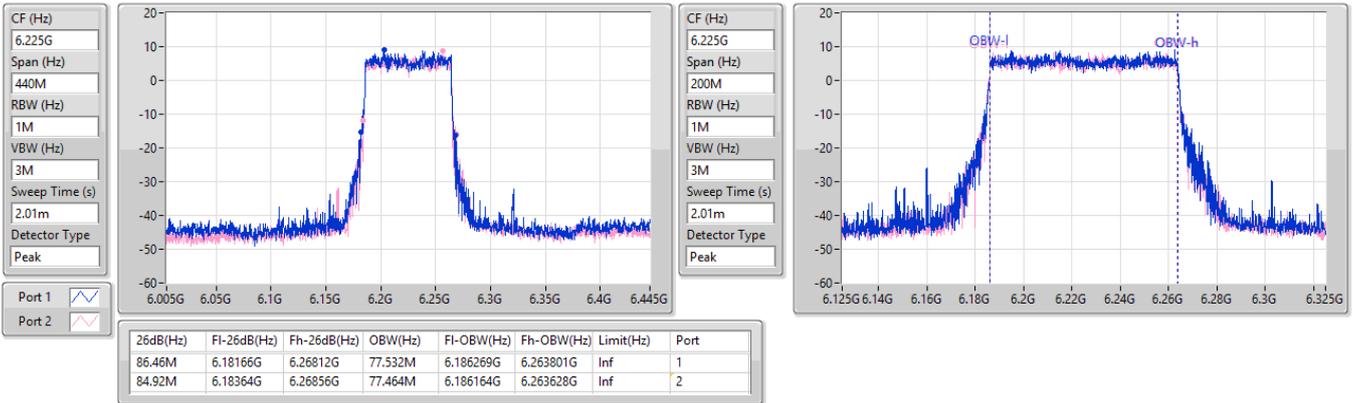


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6385MHz

02/06/2025

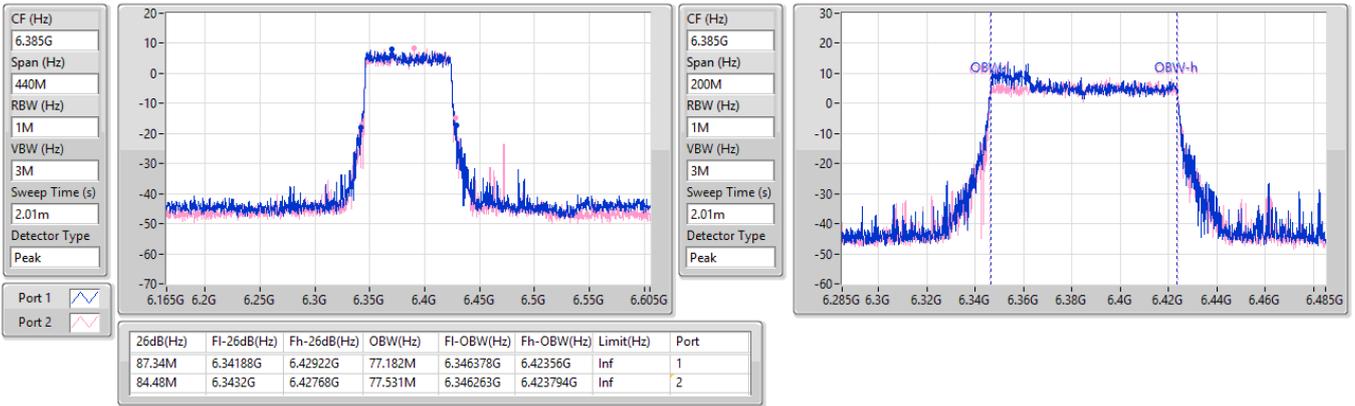


6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6465MHz

02/06/2025

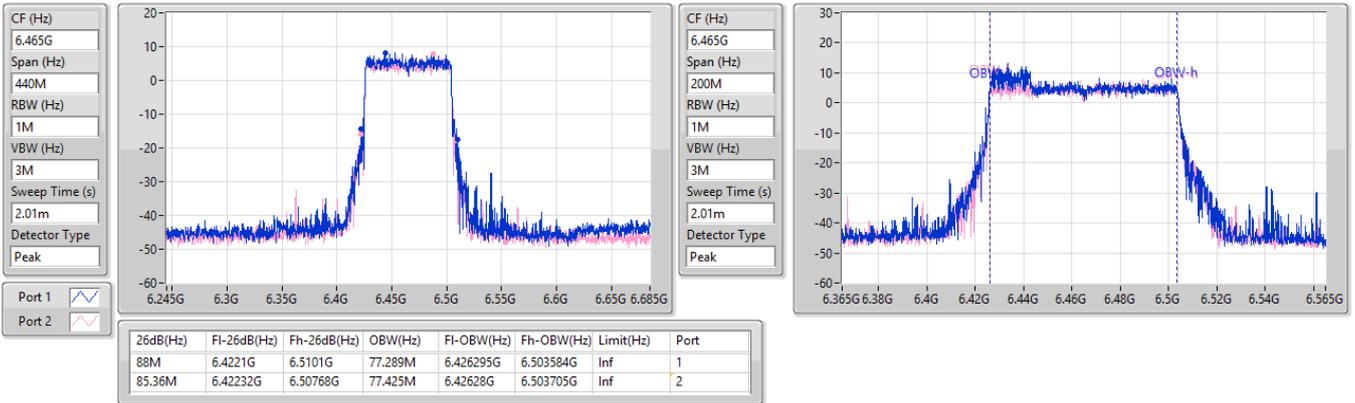


6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6545MHz

02/06/2025

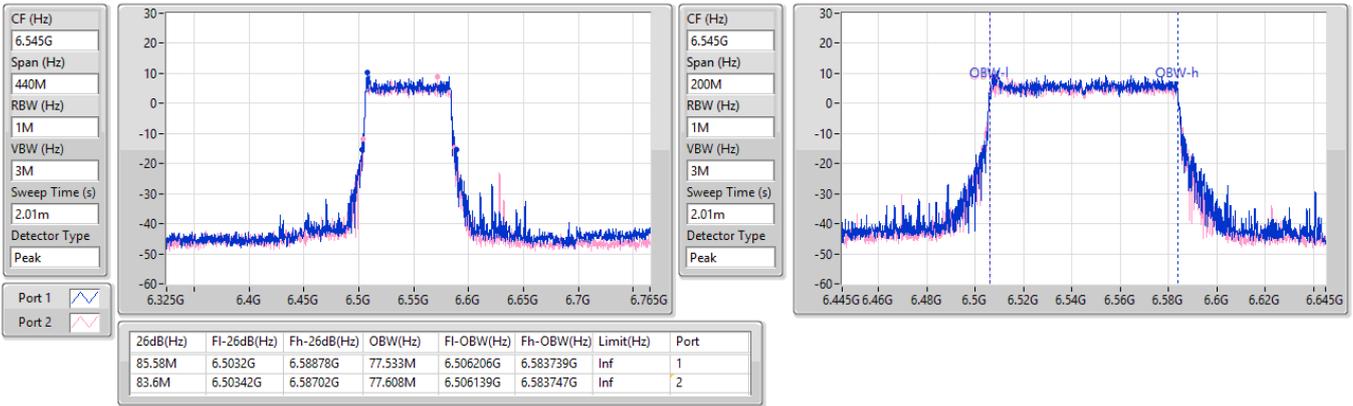


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6625MHz

02/06/2025

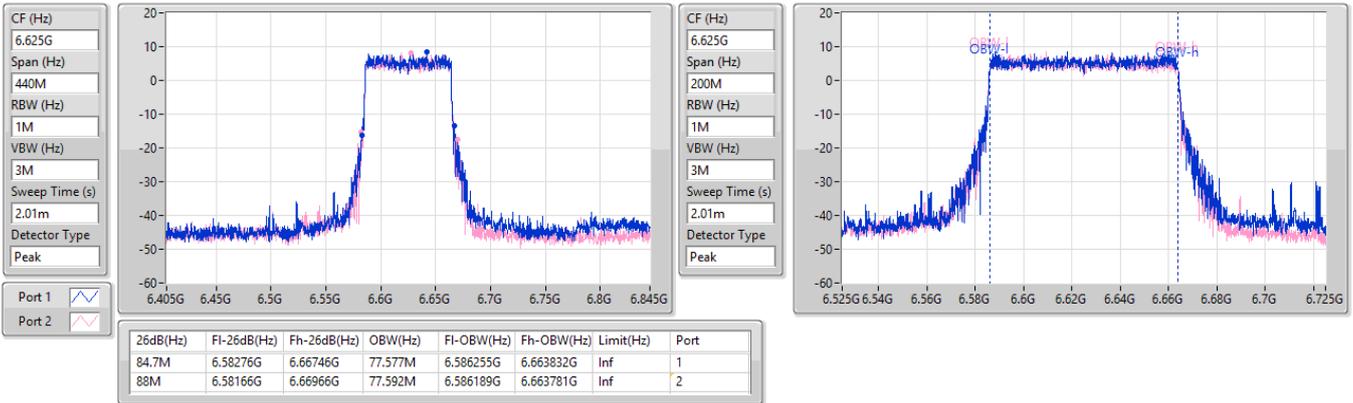


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6705MHz

02/06/2025

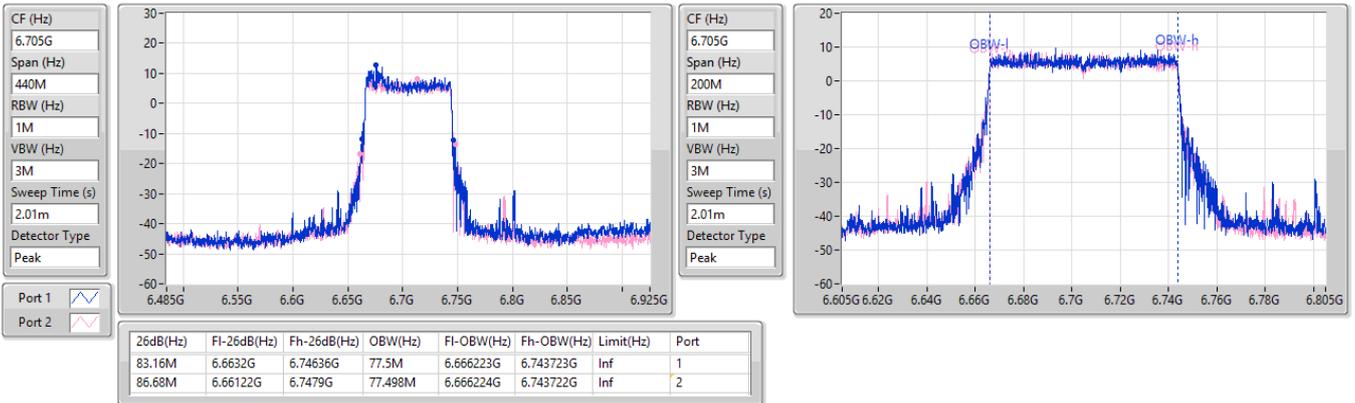


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6785MHz

02/06/2025

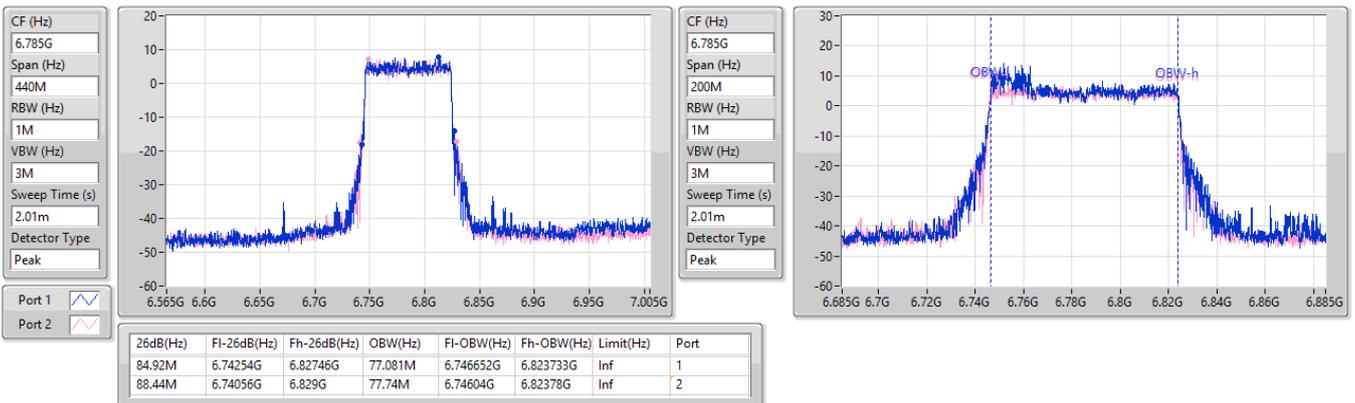


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6865MHz

02/06/2025

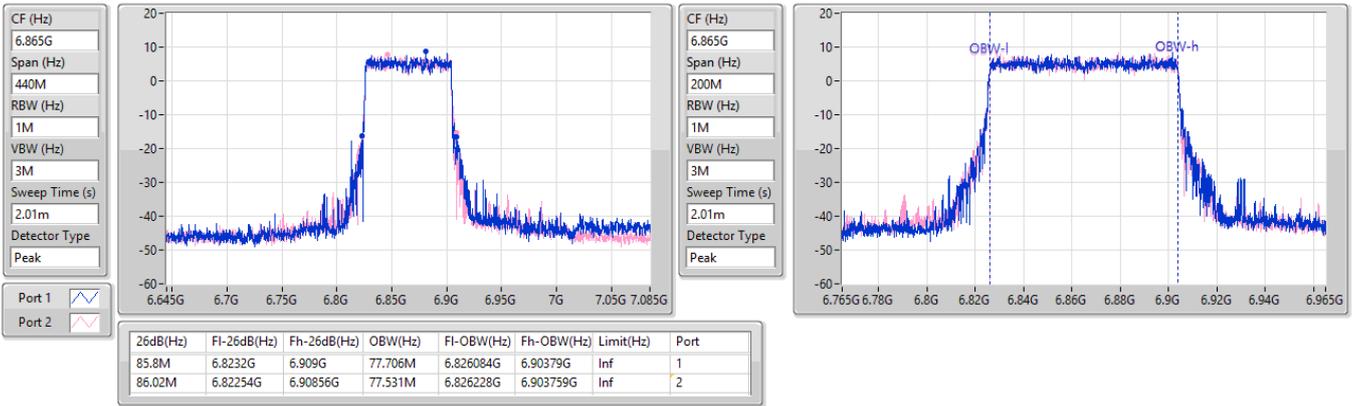


6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6945MHz

02/06/2025

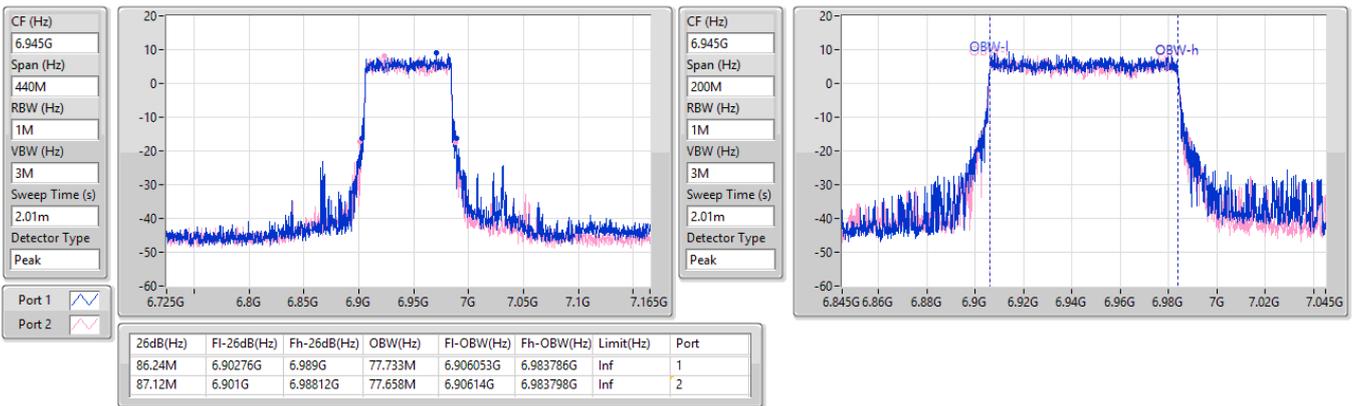


6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

7025MHz

02/06/2025

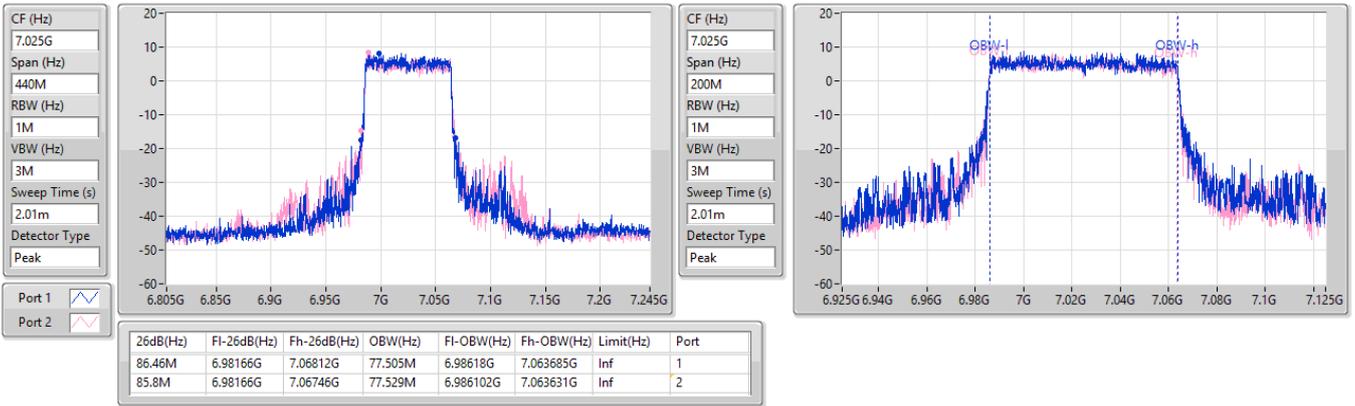


5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6025MHz

02/06/2025

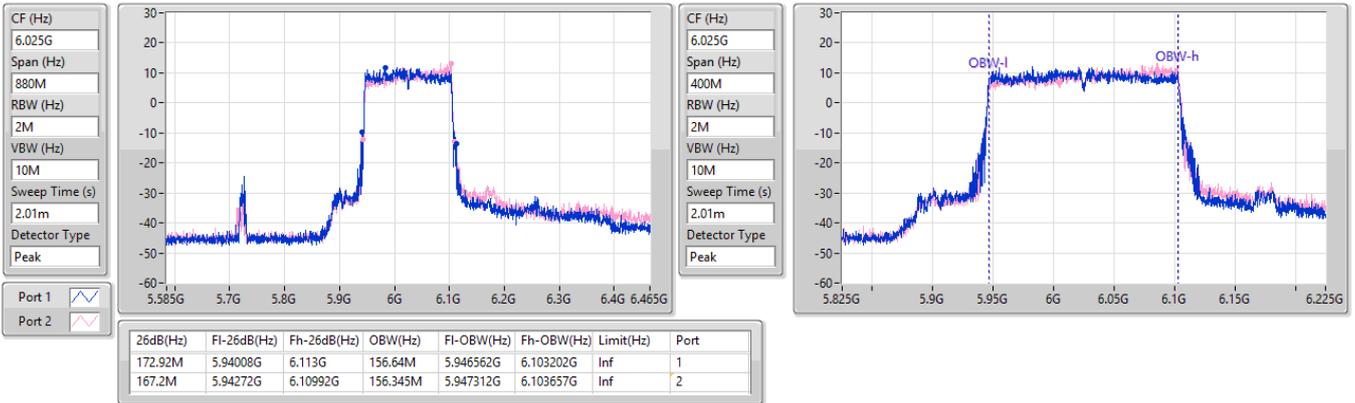


5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6185MHz

02/06/2025

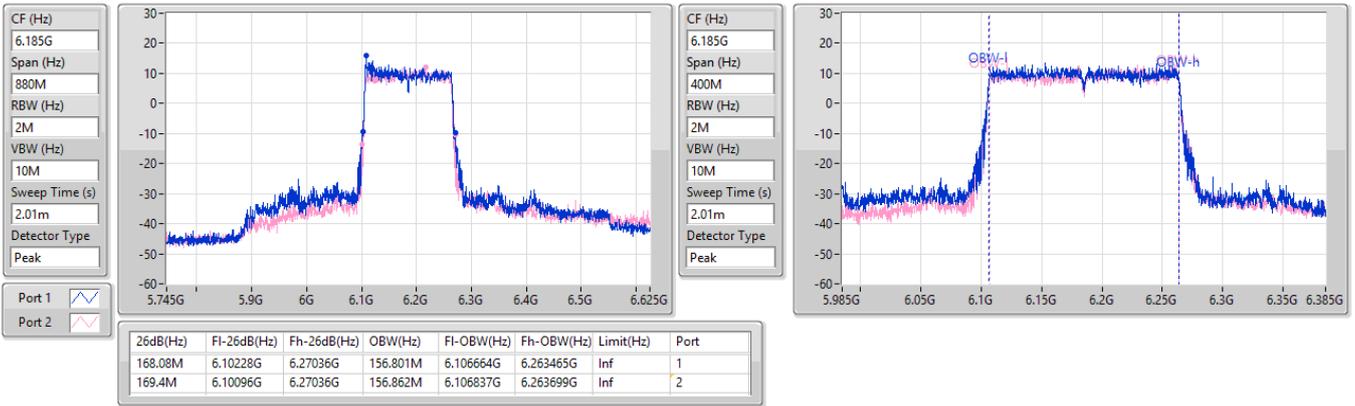


5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6345MHz

02/06/2025

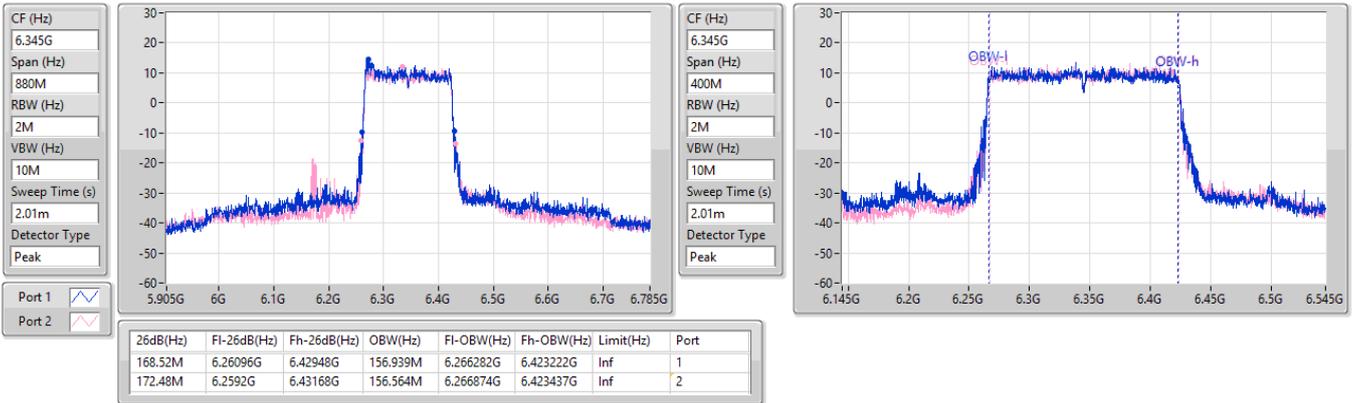

6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6505MHz

02/06/2025

CF (Hz)
6.505G


Span (Hz)
880M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

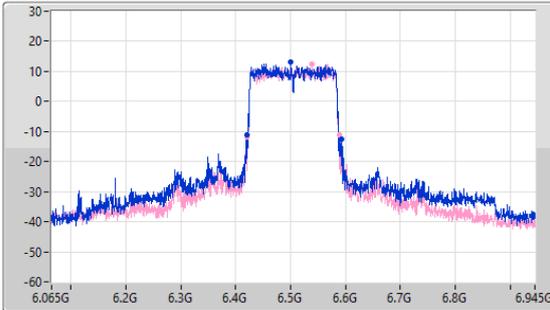

CF (Hz)
6.505G


Span (Hz)
400M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

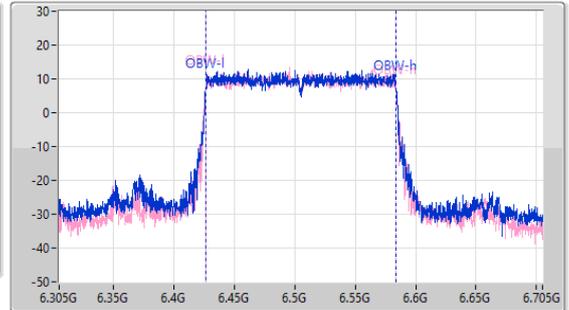

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
172.48M	6.42008G	6.59256G	156.867M	6.426627G	6.583494G	Inf	1
168.52M	6.4214G	6.58992G	156.804M	6.426587G	6.583391G	Inf	2

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6665MHz

02/06/2025

CF (Hz)
6.665G


Span (Hz)
880M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

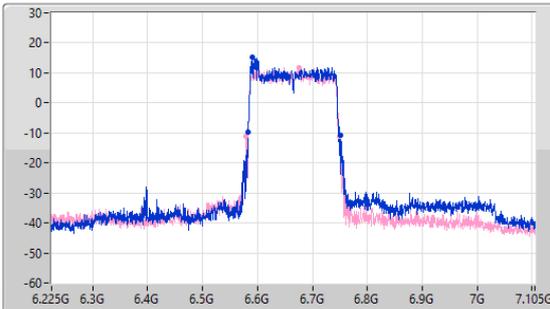

CF (Hz)
6.665G


Span (Hz)
400M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

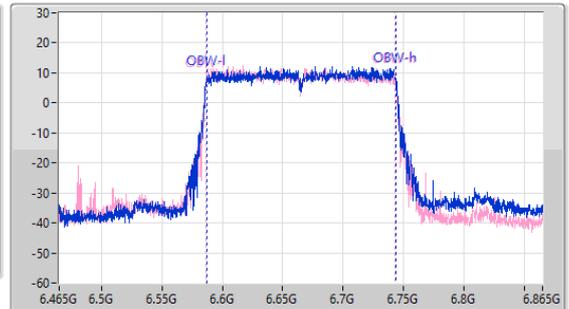


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
168.08M	6.58316G	6.75124G	156.749M	6.586856G	6.743605G	Inf	1
171.16M	6.57876G	6.74992G	156.395M	6.586736G	6.743131G	Inf	2

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6825MHz

02/06/2025

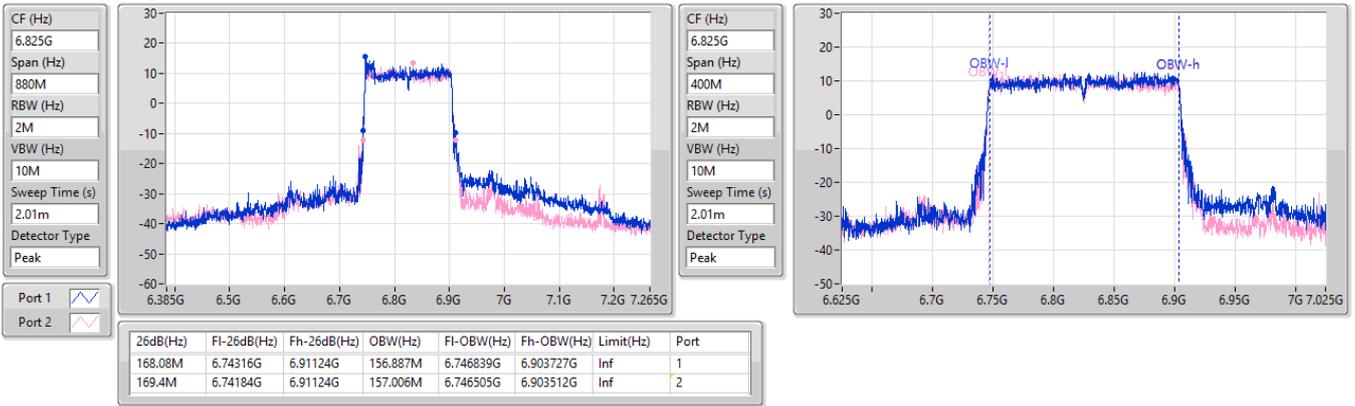


6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6985MHz

02/06/2025


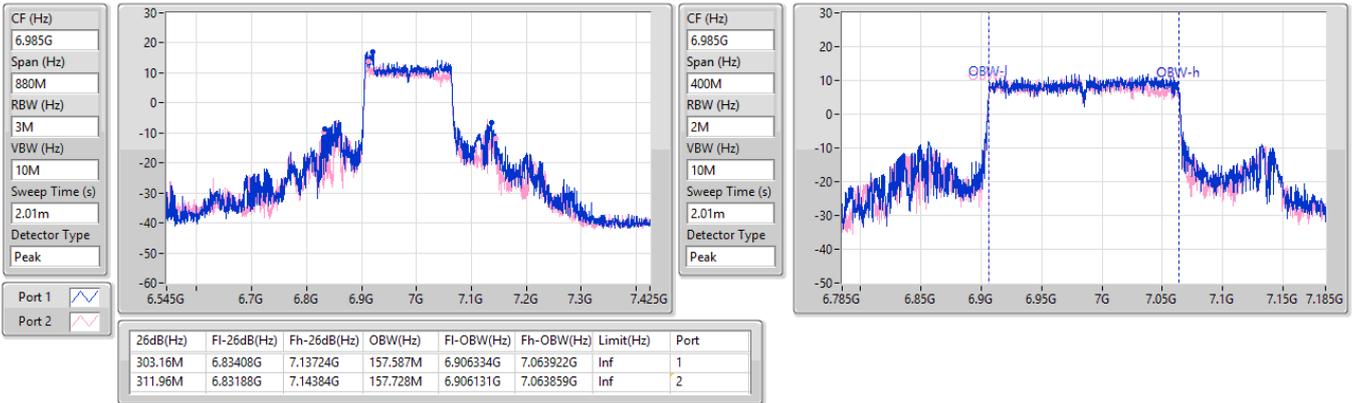


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6105MHz

02/06/2025

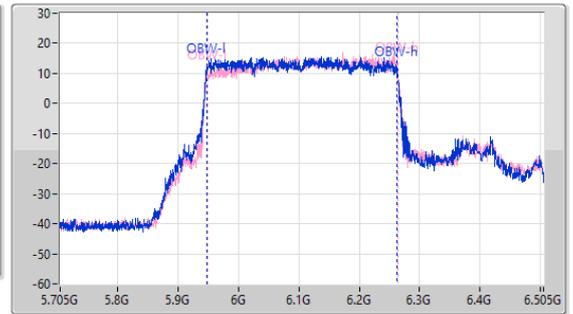
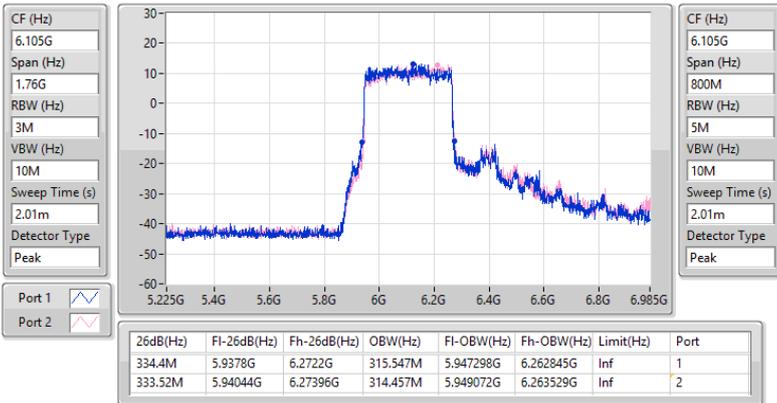


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6265MHz

02/06/2025

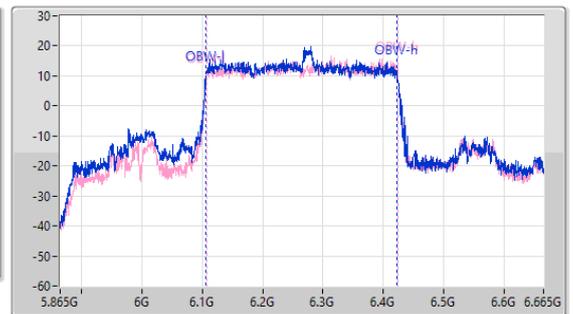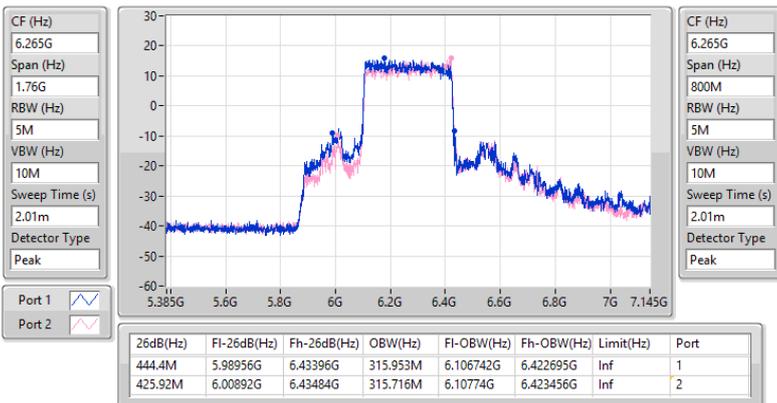

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6425MHz

02/06/2025

CF (Hz)
6.425G


Span (Hz)
1.76G

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

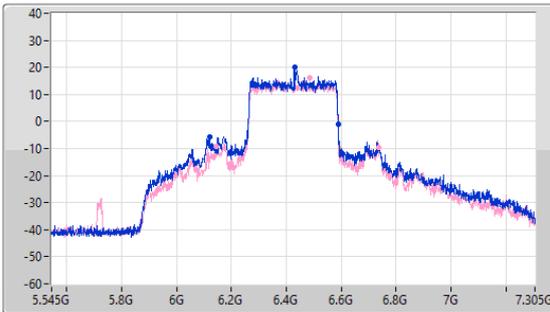

CF (Hz)
6.425G


Span (Hz)
800M

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

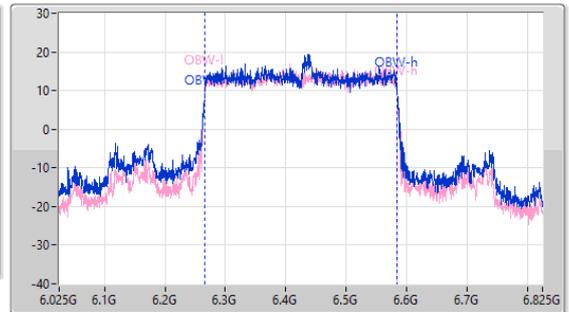

Port 1

Port 2

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
470.8M	6.11964G	6.59044G	318.493M	6.265347G	6.583839G	Inf	1
592.24M	6.14604G	6.73828G	316.74M	6.266664G	6.583404G	Inf	2

6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6585MHz

02/06/2025

CF (Hz)
6.585G


Span (Hz)
1.76G

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

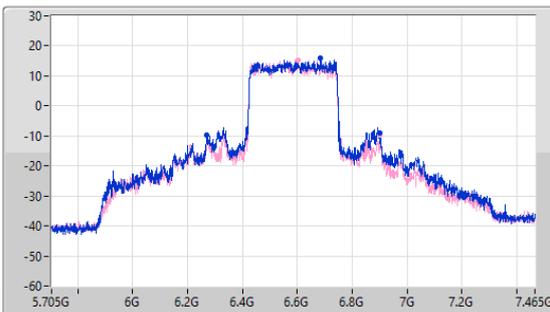

CF (Hz)
6.585G


Span (Hz)
800M

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

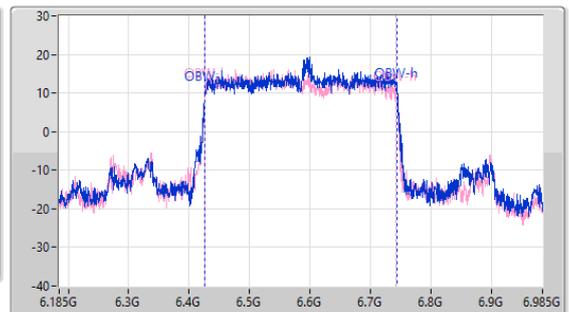

Port 1

Port 2

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
630.96M	6.26996G	6.90092G	317.331M	6.426697G	6.744028G	Inf	1
630.96M	6.27084G	6.9018G	316.777M	6.425951G	6.742728G	Inf	2

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6745MHz

02/06/2025

CF (Hz)
6.745G

Span (Hz)
1.76G

RBW (Hz)
5M


VBW (Hz)
10M

Sweep Time (s)
7.04m

Detector Type
Peak

Port 1

Port 2

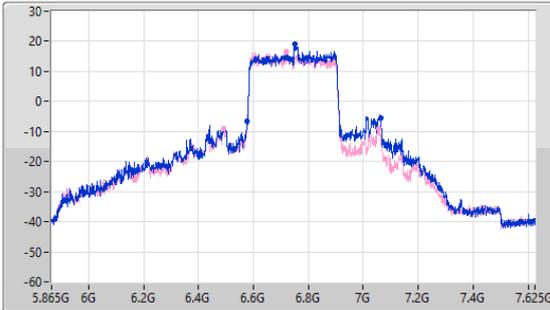

CF (Hz)
6.745G


Span (Hz)
800M

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

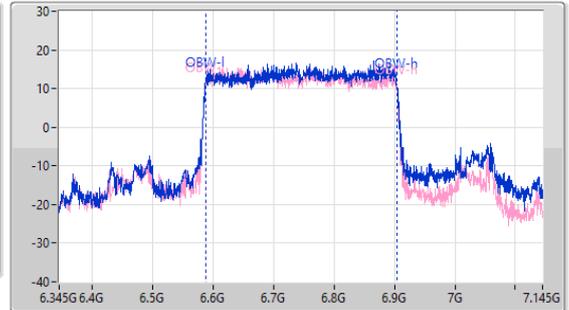

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
484.88M	6.5778G	7.06268G	317.571M	6.58701G	6.904581G	Inf	1
566.72M	6.4898G	7.05652G	316.577M	6.586945G	6.903422G	Inf	2

6.875-7.125GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6905MHz

11/06/2025

CF (Hz)
6.905G

Span (Hz)
1.76G

RBW (Hz)
5M


VBW (Hz)
10M

Sweep Time (s)
7.04m

Detector Type
Peak

Port 1

Port 2

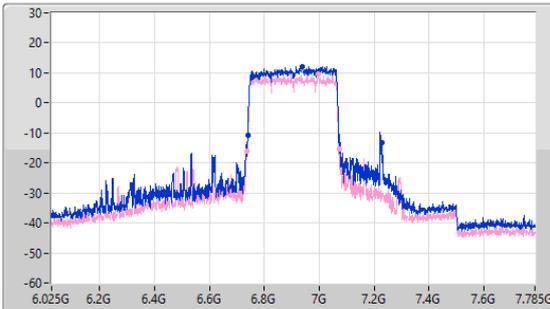

CF (Hz)
6.905G


Span (Hz)
800M

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

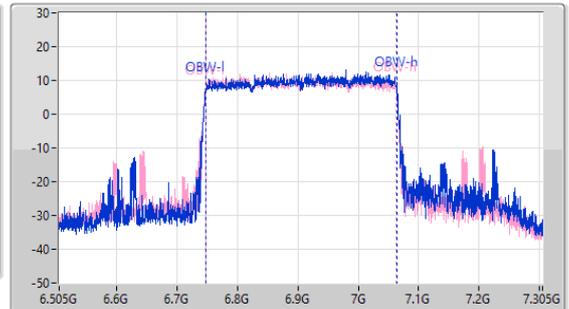

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
489.28M	6.73868G	7.22796G	315.522M	6.747764G	7.063287G	Inf	1
337.92M	6.73516G	7.07308G	315.701M	6.747115G	7.062816G	Inf	2



Test Mode: Mode 1

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	13.16	0.02070	15.21	0.03319
6.425-6.525GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	13.09	0.02037	15.06	0.03206
6.525-6.875GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	12.99	0.01991	15.38	0.03451
6.875-7.125GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	12.84	0.01923	15.40	0.03467



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	2.05	10.14	9.64	12.91	14.96	30.00
6195MHz	Pass	2.05	10.44	9.84	13.16	15.21	30.00
6415MHz	Pass	2.05	10.10	9.71	12.92	14.97	30.00
6435MHz	Pass	1.97	10.19	9.96	13.09	15.06	30.00
6475MHz	Pass	1.97	10.19	9.75	12.99	14.96	30.00
6515MHz	Pass	1.97	10.28	9.75	13.03	15.00	30.00
6535MHz	Pass	2.39	10.25	9.57	12.93	15.32	30.00
6695MHz	Pass	2.39	10.31	9.62	12.99	15.38	30.00
6875MHz	Pass	2.39	10.22	9.64	12.95	15.34	30.00
6895MHz	Pass	2.56	10.05	9.37	12.73	15.29	30.00
6975MHz	Pass	2.56	9.96	9.36	12.68	15.24	30.00
7055MHz	Pass	2.56	10.26	9.35	12.84	15.40	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Test Mode: Mode 2

Summary

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	18.25	0.06683
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.92	0.15560
802.11be EHT80-BF_Nss1,(MCS0)_2TX	24.25	0.26607
802.11be EHT160-BF_Nss1,(MCS0)_2TX	27.65	0.58210
802.11be EHT320-BF_Nss1,(MCS0)_2TX	29.73	0.93972
6.425-6.525GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	18.53	0.07129
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.70	0.14791
802.11be EHT80-BF_Nss1,(MCS0)_2TX	24.20	0.26303
802.11be EHT160-BF_Nss1,(MCS0)_2TX	27.65	0.58210
802.11be EHT320-BF_Nss1,(MCS0)_2TX	29.28	0.84723
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	18.49	0.07063
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.30	0.13490
802.11be EHT80-BF_Nss1,(MCS0)_2TX	25.08	0.32211
802.11be EHT160-BF_Nss1,(MCS0)_2TX	28.02	0.63387
802.11be EHT320-BF_Nss1,(MCS0)_2TX	29.65	0.92257
6.875-7.125GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	18.64	0.07311
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.17	0.13092
802.11be EHT80-BF_Nss1,(MCS0)_2TX	24.87	0.30690
802.11be EHT160-BF_Nss1,(MCS0)_2TX	27.18	0.52240
802.11be EHT320-BF_Nss1,(MCS0)_2TX	27.47	0.55847



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	5.02	10.11	9.93	13.03	18.05	30.00
6195MHz	Pass	5.02	9.96	9.50	12.75	17.77	30.00
6415MHz	Pass	5.02	10.37	10.06	13.23	18.25	30.00
6435MHz	Pass	4.98	10.94	10.10	13.55	18.53	30.00
6475MHz	Pass	4.98	10.67	10.28	13.49	18.47	30.00
6515MHz	Pass	4.98	10.26	9.52	12.92	17.90	30.00
6535MHz	Pass	5.29	10.30	9.50	12.93	18.22	30.00
6695MHz	Pass	5.29	10.40	9.97	13.20	18.49	30.00
6875MHz	Pass	5.29	10.01	9.37	12.71	18.00	30.00
6895MHz	Pass	5.48	10.48	9.80	13.16	18.64	30.00
6975MHz	Pass	5.48	10.00	9.34	12.69	18.17	30.00
7055MHz	Pass	5.48	10.37	9.72	13.07	18.55	30.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	5.02	13.66	12.85	16.28	21.30	30.00
6205MHz	Pass	5.02	13.99	13.15	16.60	21.62	30.00
6405MHz	Pass	5.02	13.81	13.96	16.90	21.92	30.00
6445MHz	Pass	4.98	13.51	12.41	16.01	20.99	30.00
6485MHz	Pass	4.98	13.07	12.64	15.87	20.85	30.00
6525MHz	Pass	4.98	13.91	13.51	16.72	21.70	30.00
6565MHz	Pass	5.29	12.13	12.39	15.27	20.56	30.00
6685MHz	Pass	5.29	13.20	12.79	16.01	21.30	30.00
6885MHz	Pass	5.29	12.62	12.14	15.40	20.69	30.00
6925MHz	Pass	5.48	12.78	12.02	15.43	20.91	30.00
7005MHz	Pass	5.48	12.65	12.08	15.38	20.86	30.00
7045MHz	Pass	5.48	12.91	12.43	15.69	21.17	30.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	5.02	15.93	15.84	18.90	23.92	30.00
6225MHz	Pass	5.02	16.36	16.08	19.23	24.25	30.00
6385MHz	Pass	5.02	16.01	16.05	19.04	24.06	30.00
6465MHz	Pass	4.98	16.25	15.80	19.04	24.02	30.00
6545MHz	Pass	4.98	16.51	15.88	19.22	24.20	30.00
6625MHz	Pass	5.29	16.43	16.03	19.24	24.53	30.00
6705MHz	Pass	5.29	16.83	16.72	19.79	25.08	30.00
6785MHz	Pass	5.29	15.70	15.37	18.55	23.84	30.00
6865MHz	Pass	5.29	16.43	15.86	19.16	24.45	30.00
6945MHz	Pass	5.48	16.48	16.27	19.39	24.87	30.00
7025MHz	Pass	5.48	16.23	15.63	18.95	24.43	30.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	5.02	18.90	19.09	22.01	27.03	30.00
6185MHz	Pass	5.02	19.79	19.44	22.63	27.65	30.00
6345MHz	Pass	5.02	19.51	19.29	22.41	27.43	30.00
6505MHz	Pass	4.98	19.82	19.50	22.67	27.65	30.00
6665MHz	Pass	5.29	19.15	19.09	22.13	27.42	30.00
6825MHz	Pass	5.29	19.88	19.55	22.73	28.02	30.00
6985MHz	Pass	5.48	18.88	18.50	21.70	27.18	30.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6105MHz	Pass	5.02	21.30	21.20	24.26	29.28	30.00
6265MHz	Pass	5.02	21.28	20.62	23.97	28.99	30.00
6425MHz	Pass	5.02	21.97	21.42	24.71	29.73	30.00
6585MHz	Pass	4.98	21.51	21.05	24.30	29.28	30.00
6745MHz	Pass	5.29	21.76	20.90	24.36	29.65	30.00
6905MHz	Pass	5.48	19.02	18.94	21.99	27.47	30.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.



Test Mode: Mode 1
Summary


Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	-0.27	4.75
6.425-6.525GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	-0.33	4.65
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	-0.48	4.81
6.875-7.125GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	-0.57	4.91


RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	5.02	-3.27	-3.40	-0.36	4.66	5.00
6195MHz	Pass	5.02	-2.95	-3.58	-0.27	4.75	5.00
6415MHz	Pass	5.02	-3.33	-3.66	-0.52	4.50	5.00
6435MHz	Pass	4.98	-3.22	-3.27	-0.33	4.65	5.00
6475MHz	Pass	4.98	-3.27	-3.54	-0.43	4.55	5.00
6515MHz	Pass	4.98	-3.21	-3.72	-0.47	4.51	5.00
6535MHz	Pass	5.29	-3.14	-3.66	-0.48	4.81	5.00
6695MHz	Pass	5.29	-3.08	-3.74	-0.49	4.80	5.00
6875MHz	Pass	5.29	-3.47	-3.91	-0.74	4.55	5.00
6895MHz	Pass	5.48	-3.61	-4.00	-0.85	4.63	5.00
6975MHz	Pass	5.48	-3.49	-4.04	-0.86	4.62	5.00
7055MHz	Pass	5.48	-3.08	-4.05	-0.57	4.91	5.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


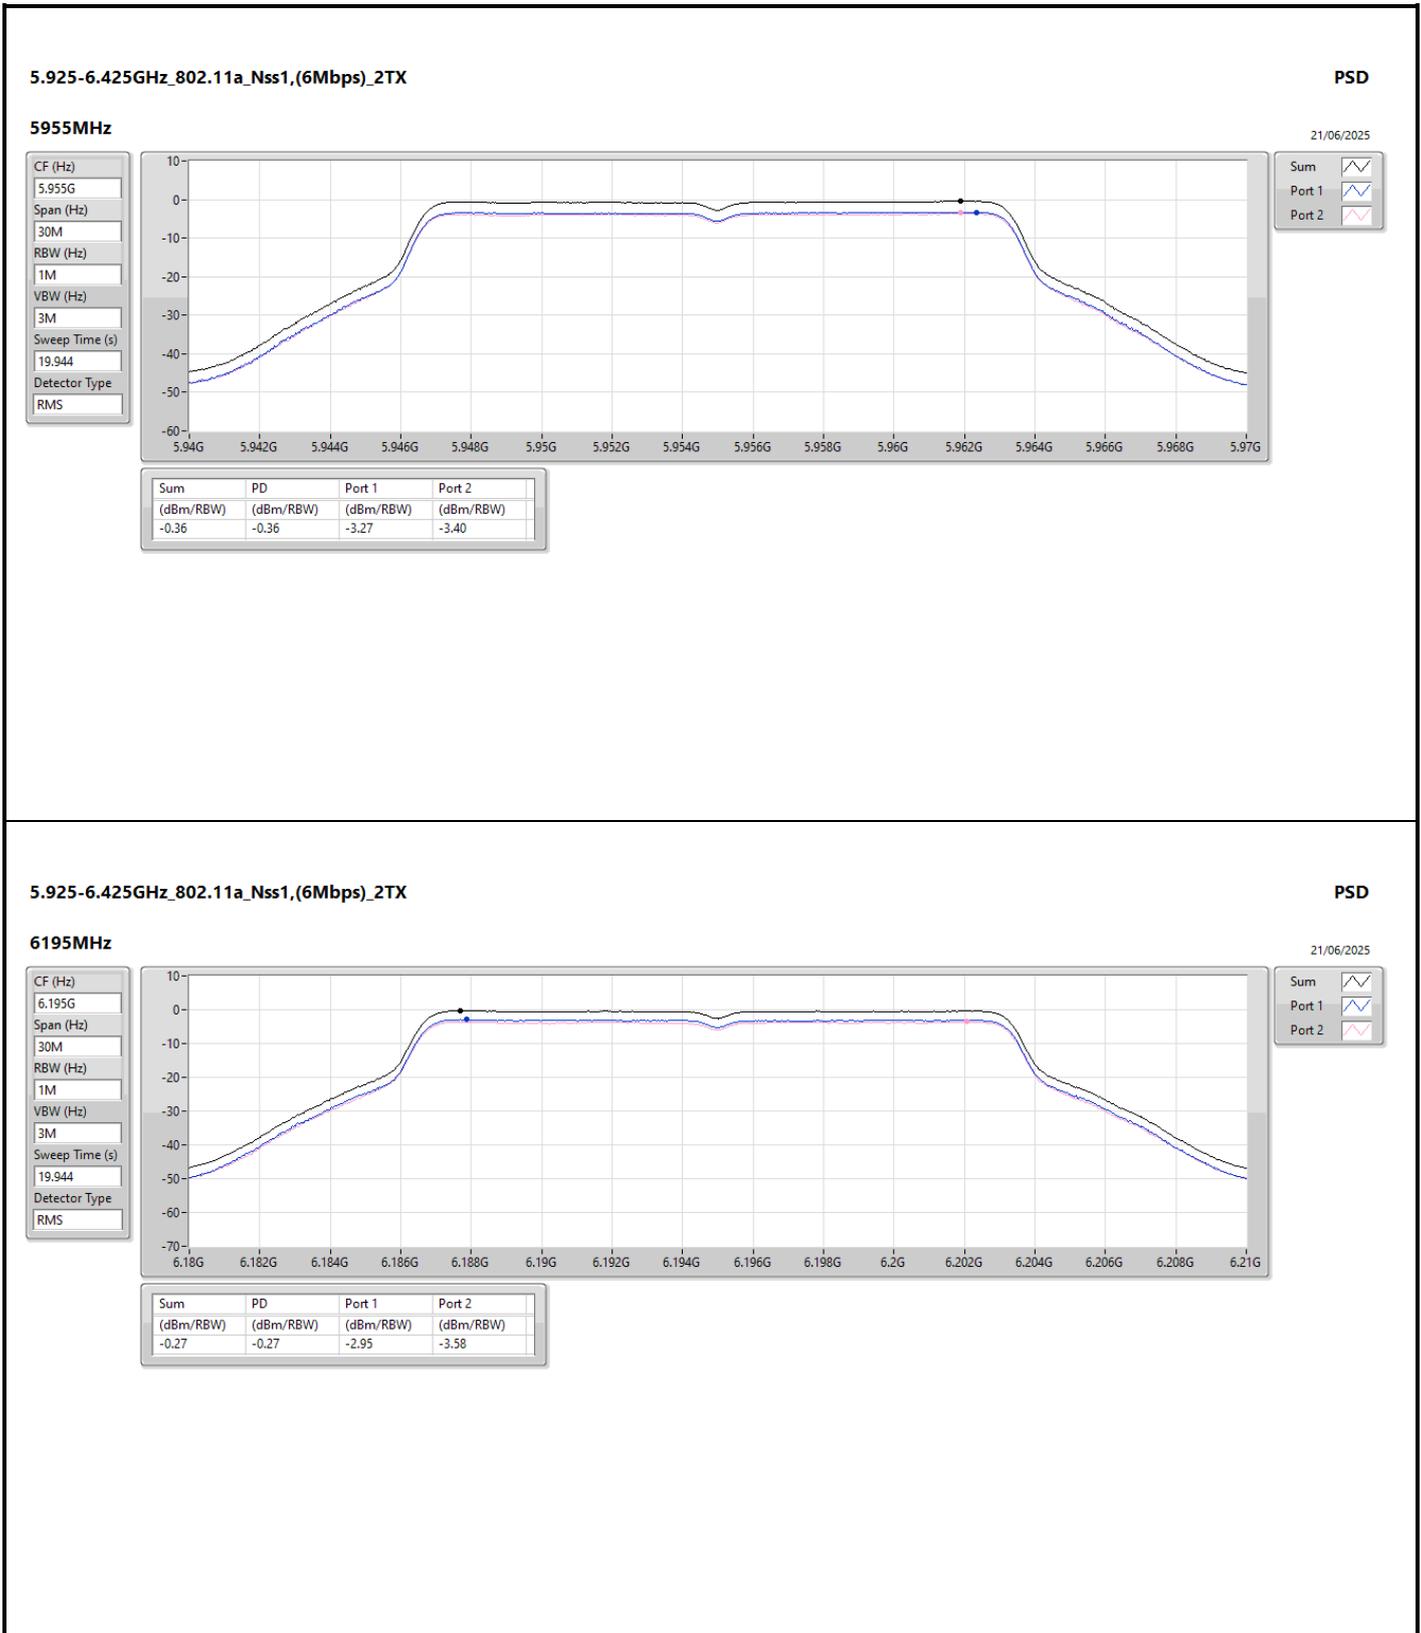


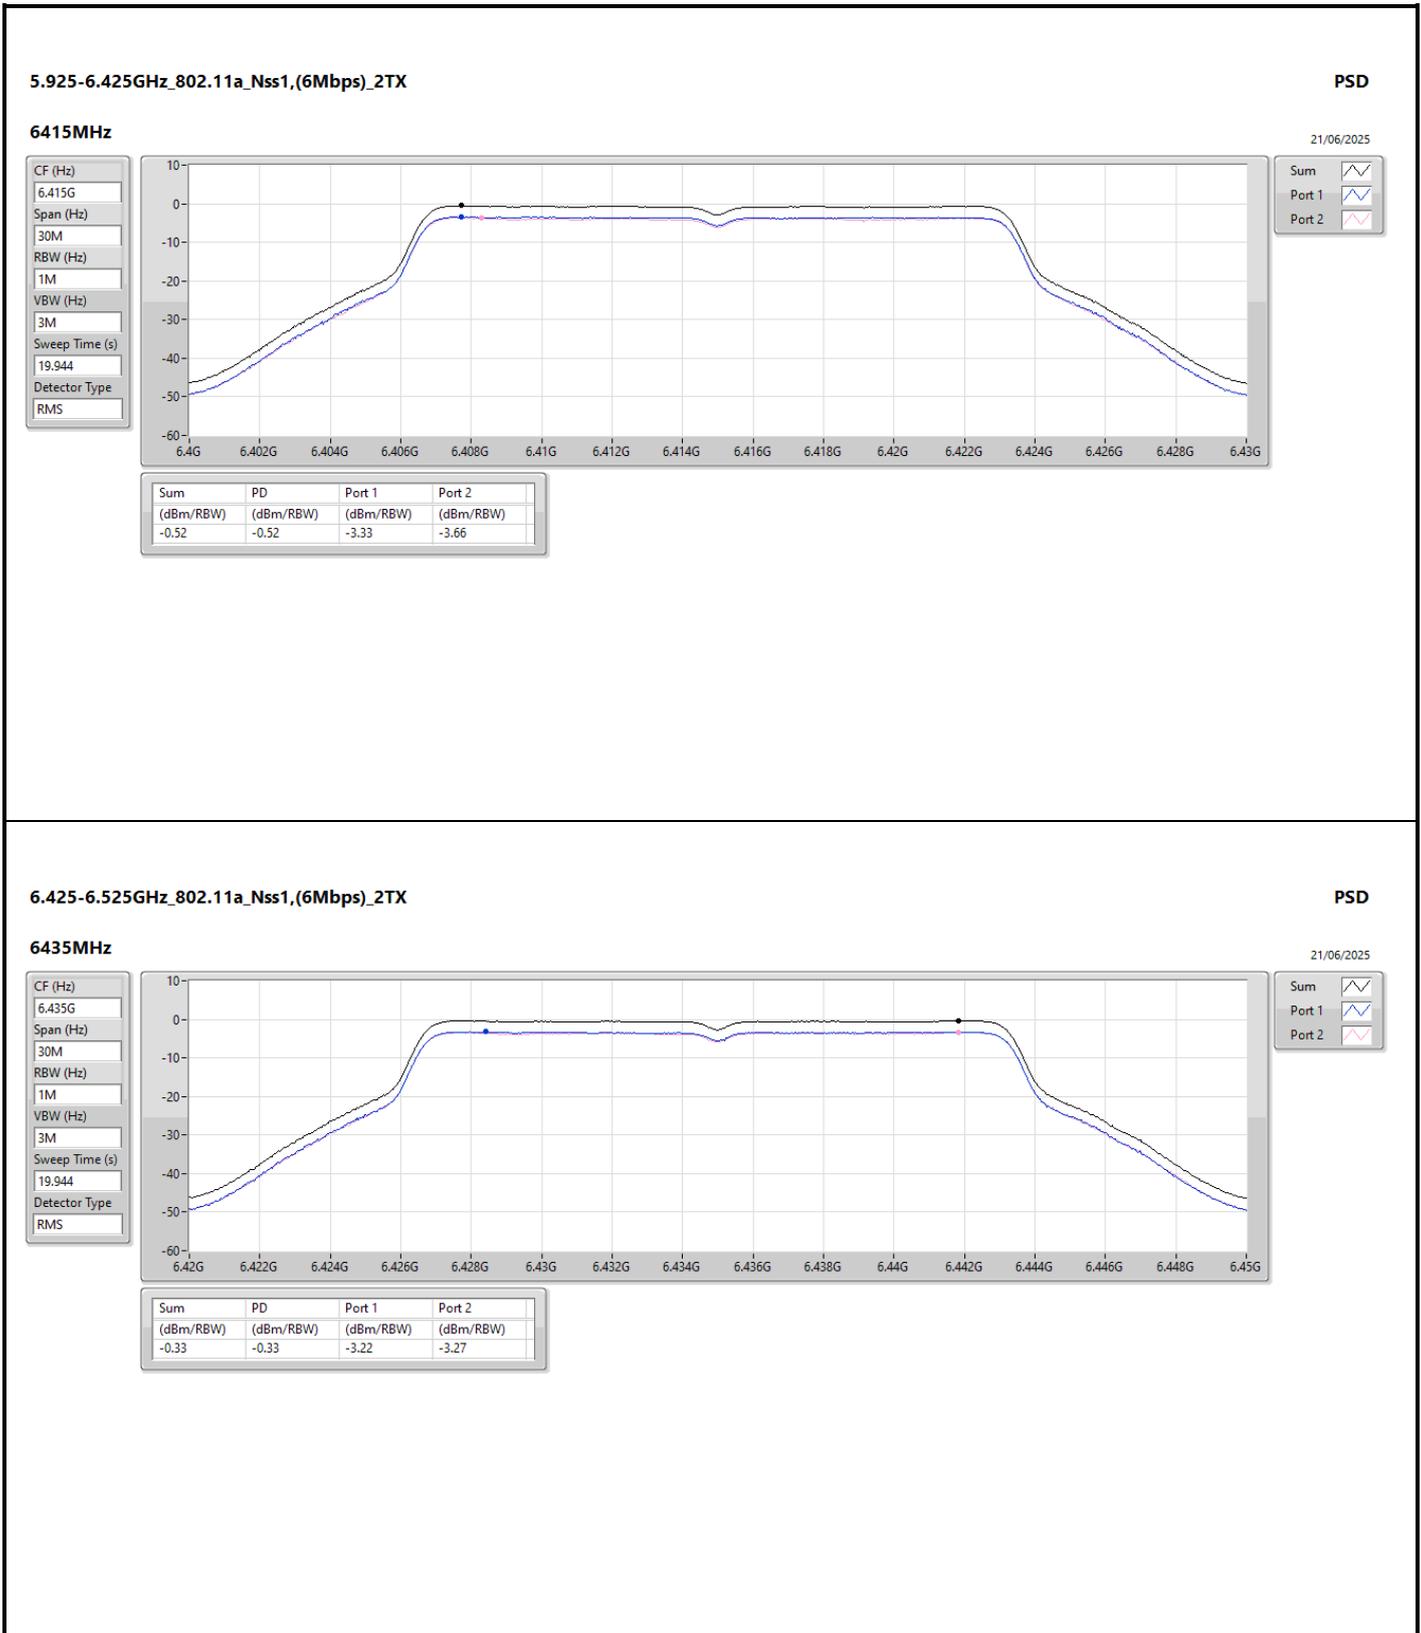

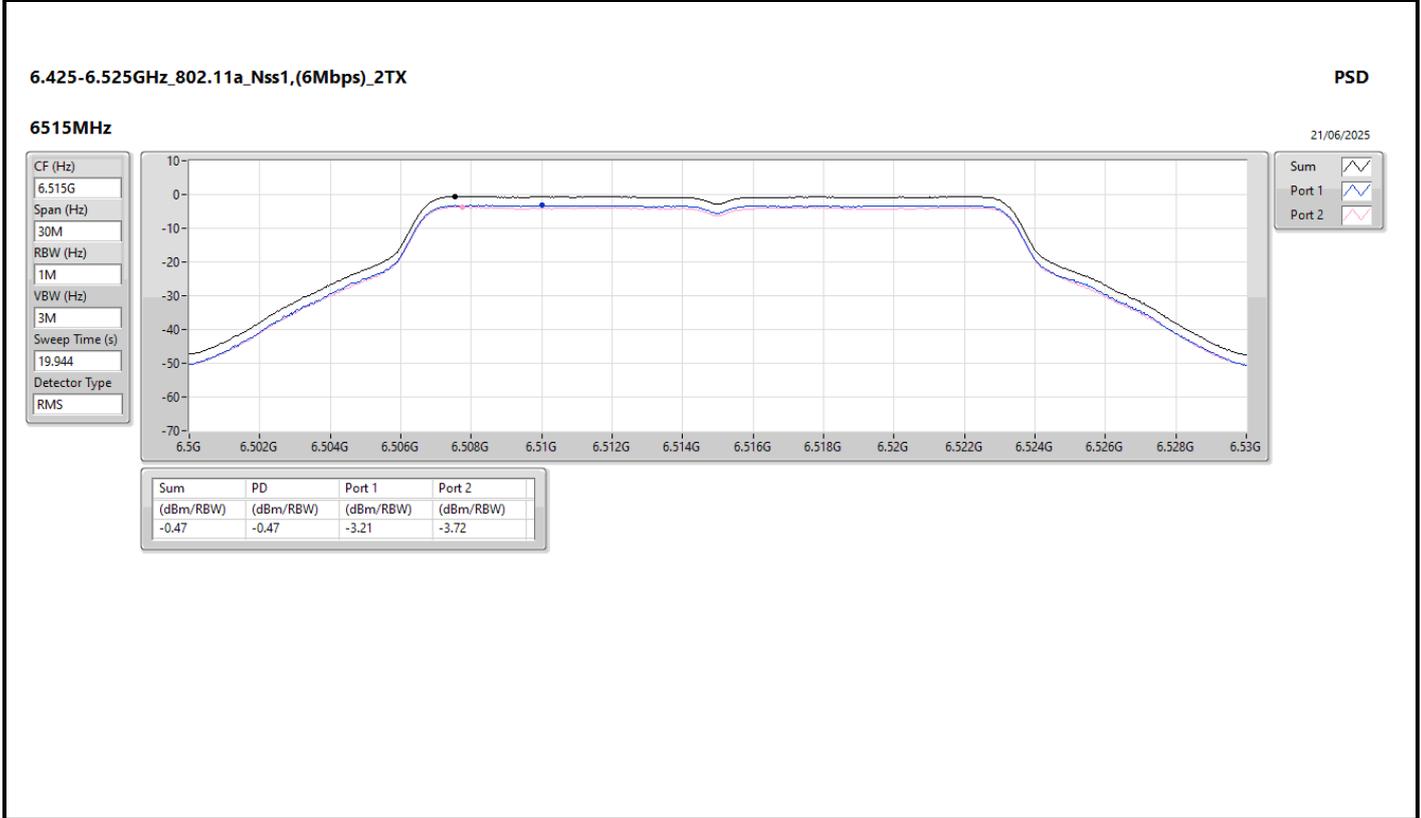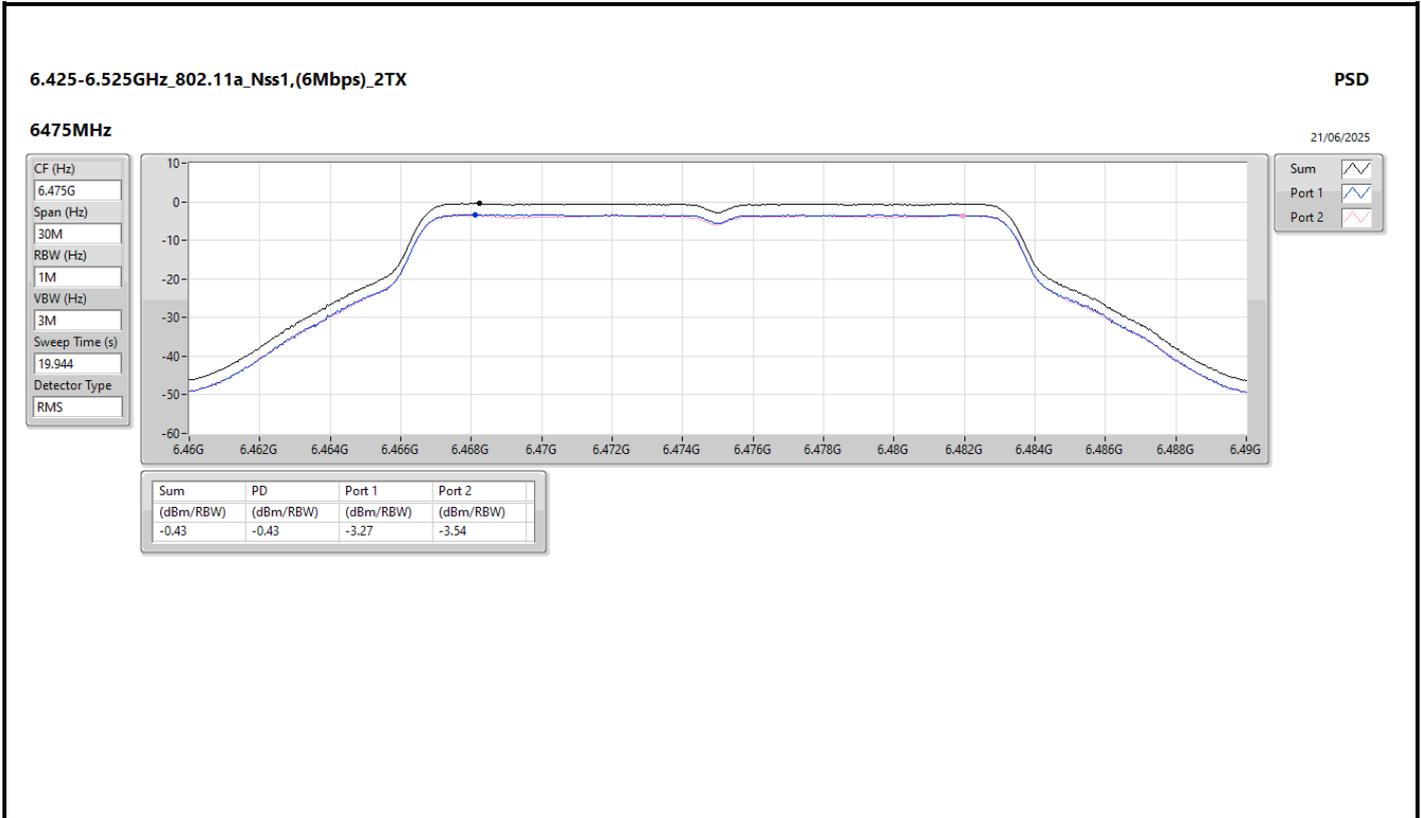

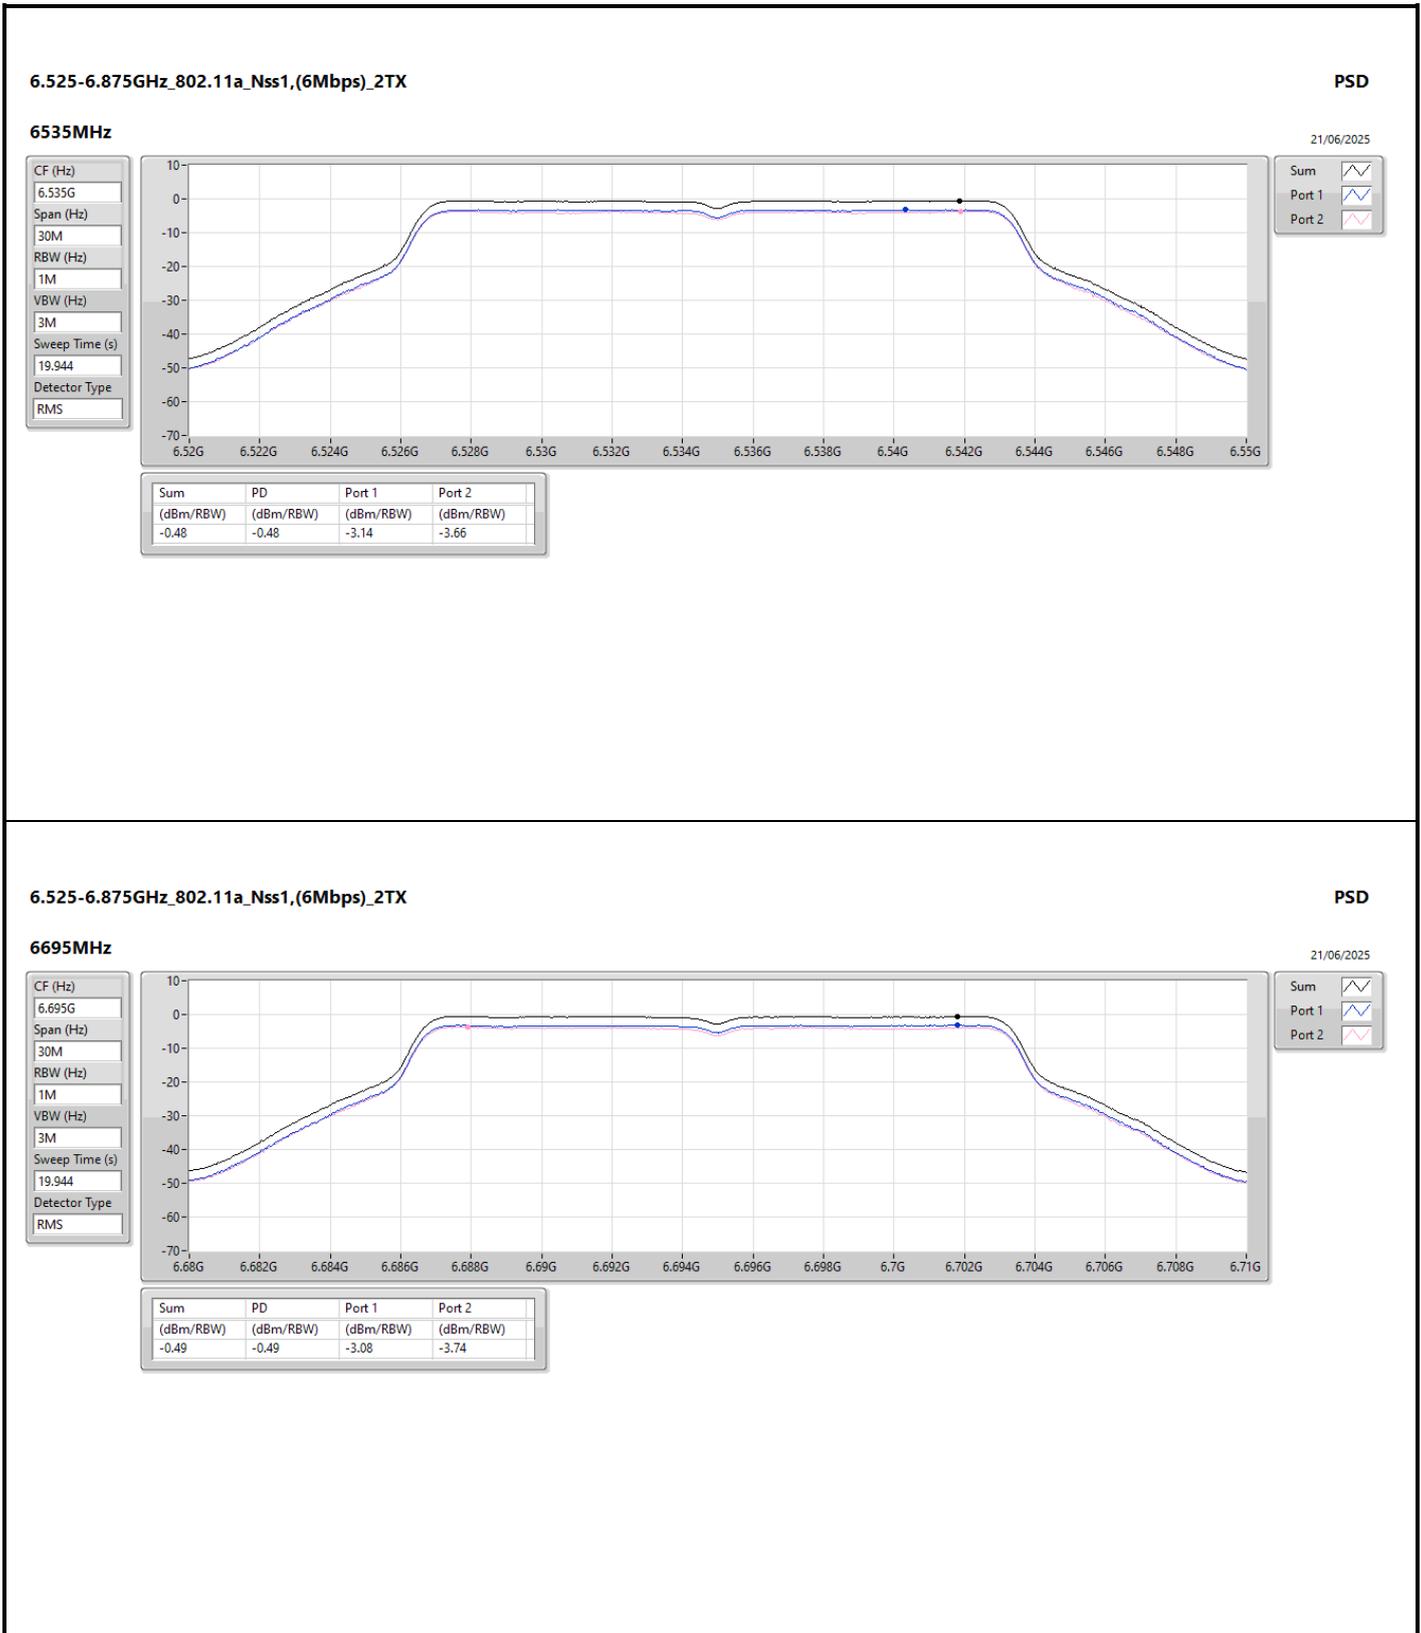

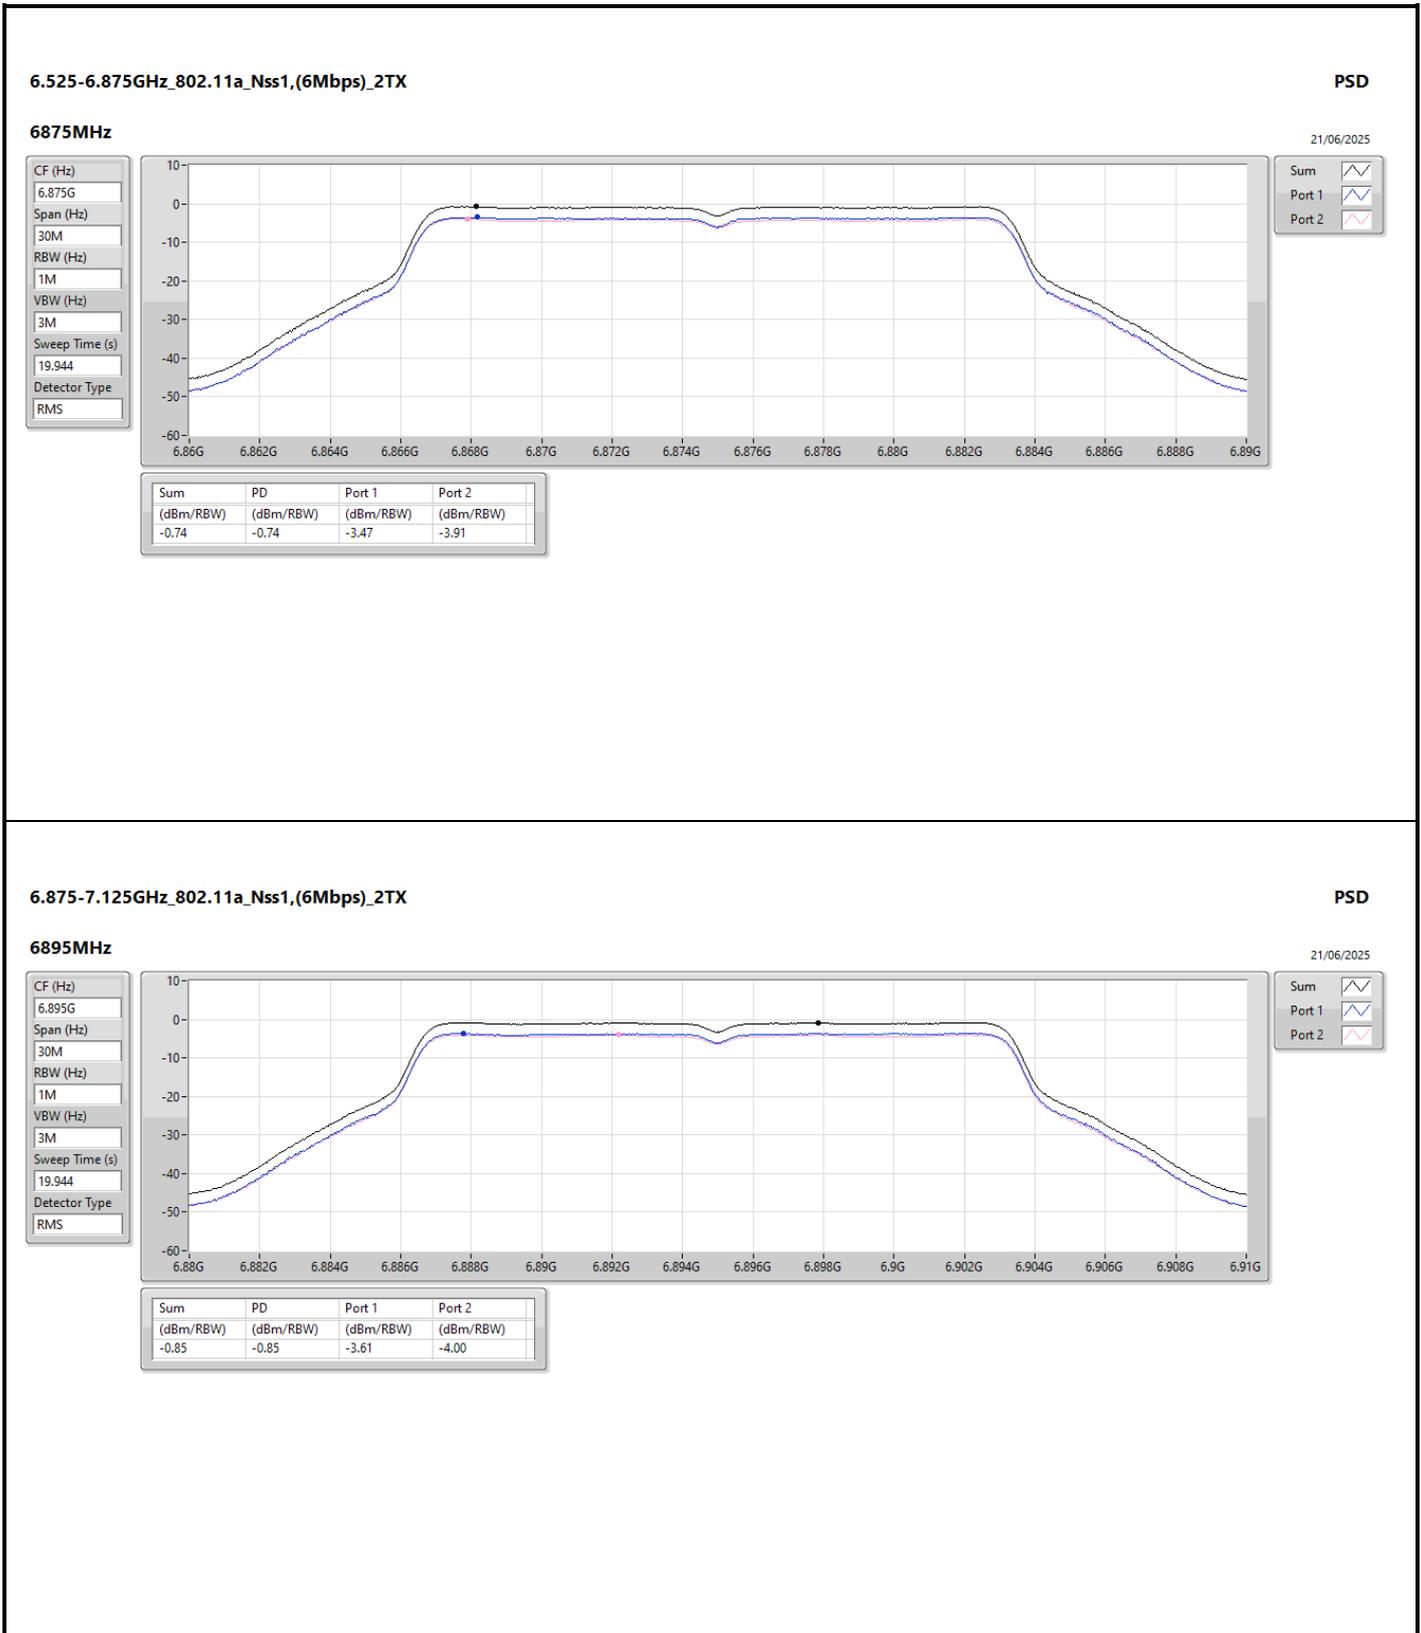

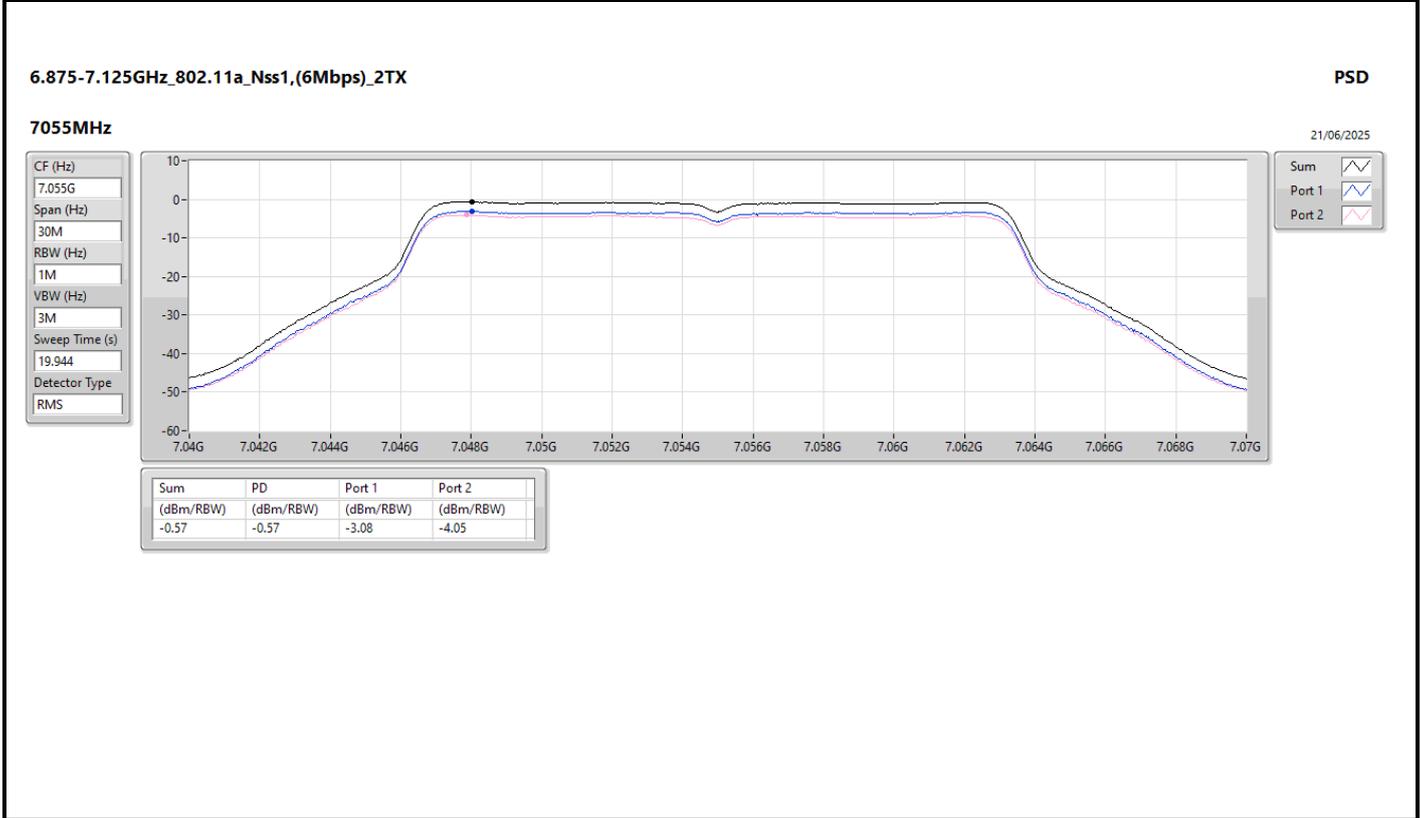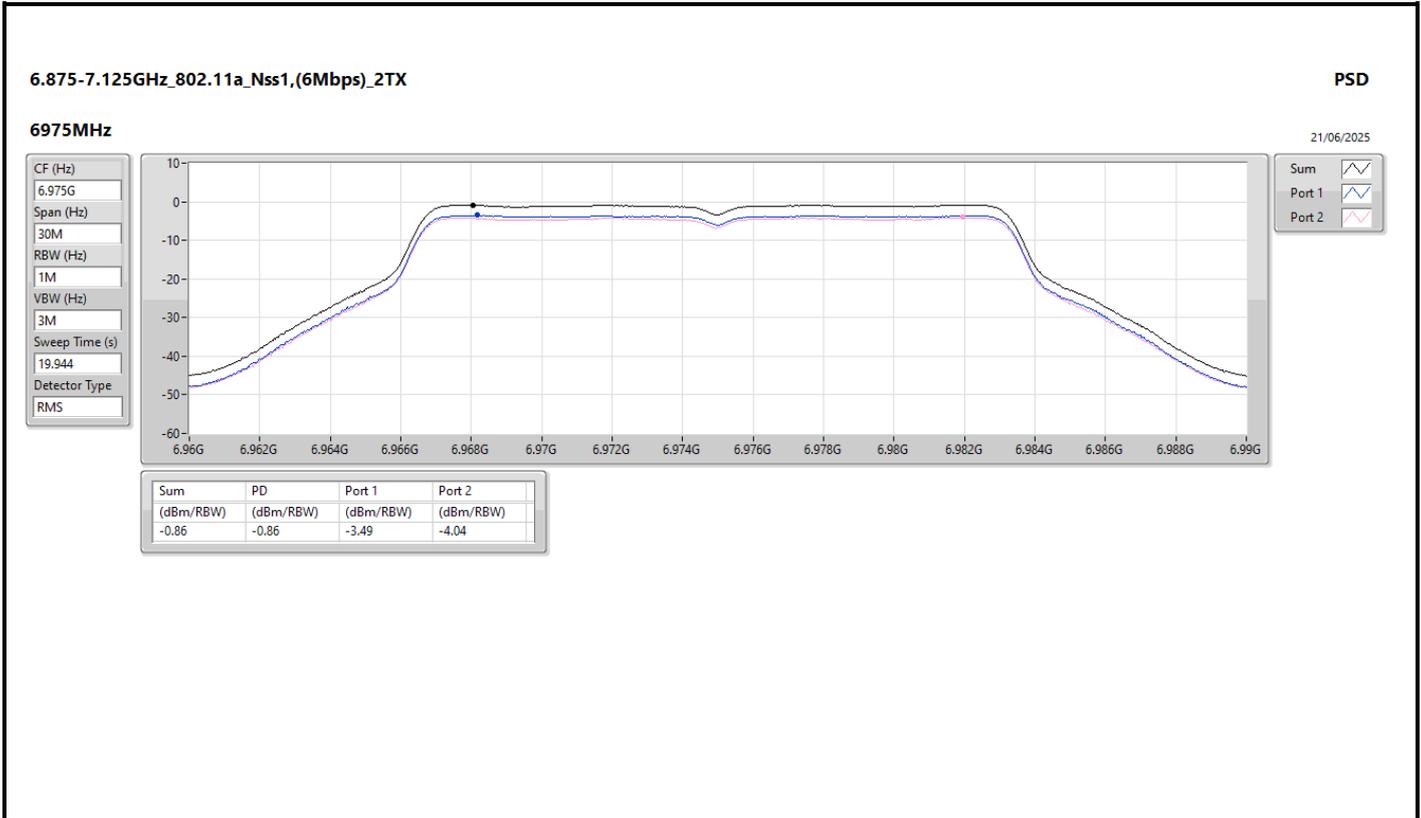

Test Mode: Mode 2

Summary


Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.81
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.83
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.75
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.62
802.11be EHT320-BF_Nss1,(MCS0)_2TX	4.48
6.425-6.525GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.92
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.88
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.14
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.77
802.11be EHT320-BF_Nss1,(MCS0)_2TX	3.54
6.525-6.875GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.66
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.25
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.92
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.94
802.11be EHT320-BF_Nss1,(MCS0)_2TX	4.38
6.875-7.125GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.96
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.92
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.59
802.11be EHT160-BF_Nss1,(MCS0)_2TX	3.86
802.11be EHT320-BF_Nss1,(MCS0)_2TX	2.28


RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	5.02	-3.36	-3.26	4.51	5.00
6195MHz	Pass	5.02	-3.10	-3.85	4.44	5.00
6415MHz	Pass	5.02	-2.97	-3.39	4.81	5.00
6435MHz	Pass	4.98	-3.21	-3.33	4.72	5.00
6475MHz	Pass	4.98	-2.69	-3.29	4.92	5.00
6515MHz	Pass	4.98	-3.16	-4.10	4.39	5.00
6535MHz	Pass	5.29	-3.18	-4.21	4.55	5.00
6695MHz	Pass	5.29	-3.24	-3.83	4.66	5.00
6875MHz	Pass	5.29	-3.51	-3.99	4.50	5.00
6895MHz	Pass	5.48	-3.16	-3.80	4.96	5.00
6975MHz	Pass	5.48	-3.59	-4.31	4.45	5.00
7055MHz	Pass	5.48	-2.87	-3.81	4.92	5.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	5.02	-3.69	-3.81	4.14	5.00
6205MHz	Pass	5.02	-2.58	-3.43	4.82	5.00
6405MHz	Pass	5.02	-3.31	-2.67	4.83	5.00
6445MHz	Pass	4.98	-3.50	-4.03	4.06	5.00
6485MHz	Pass	4.98	-2.92	-4.04	4.40	5.00
6525MHz	Pass	4.98	-2.67	-3.15	4.88	5.00
6565MHz	Pass	5.29	-3.86	-4.57	4.05	5.00
6685MHz	Pass	5.29	-3.57	-4.21	4.25	5.00
6885MHz	Pass	5.29	-3.87	-4.18	4.15	5.00
6925MHz	Pass	5.48	-3.91	-4.35	4.20	5.00
7005MHz	Pass	5.48	-3.10	-3.89	4.92	5.00
7045MHz	Pass	5.48	-3.51	-4.14	4.56	5.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	5.02	-3.58	-3.22	4.42	5.00
6225MHz	Pass	5.02	-2.66	-3.53	4.75	5.00
6385MHz	Pass	5.02	-3.47	-3.97	4.02	5.00
6465MHz	Pass	4.98	-3.18	-4.23	4.07	5.00
6545MHz	Pass	4.98	-3.50	-4.07	4.14	5.00
6625MHz	Pass	5.29	-3.52	-3.69	4.43	5.00
6705MHz	Pass	5.29	-2.87	-3.48	4.92	5.00
6785MHz	Pass	5.29	-3.38	-4.39	4.16	5.00
6865MHz	Pass	5.29	-3.01	-4.01	4.52	5.00
6945MHz	Pass	5.48	-3.08	-3.99	4.59	5.00
7025MHz	Pass	5.48	-3.40	-4.11	4.57	5.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	5.02	-3.40	-2.84	4.24	5.00
6185MHz	Pass	5.02	-2.54	-3.46	4.62	5.00
6345MHz	Pass	5.02	-3.03	-3.37	4.31	5.00
6505MHz	Pass	4.98	-2.64	-2.87	4.77	5.00
6665MHz	Pass	5.29	-3.57	-3.28	4.33	5.00
6825MHz	Pass	5.29	-2.83	-3.18	4.94	5.00
6985MHz	Pass	5.48	-4.17	-4.71	3.86	5.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	5.02	-3.44	-3.05	4.29	5.00
6265MHz	Pass	5.02	-1.76	-1.96	4.48	5.00
6425MHz	Pass	5.02	-3.44	-3.07	4.40	5.00
6585MHz	Pass	4.98	-4.00	-4.26	3.54	5.00
6745MHz	Pass	5.29	-3.38	-4.33	4.38	5.00
6905MHz	Pass	5.48	-5.80	-6.44	2.28	5.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

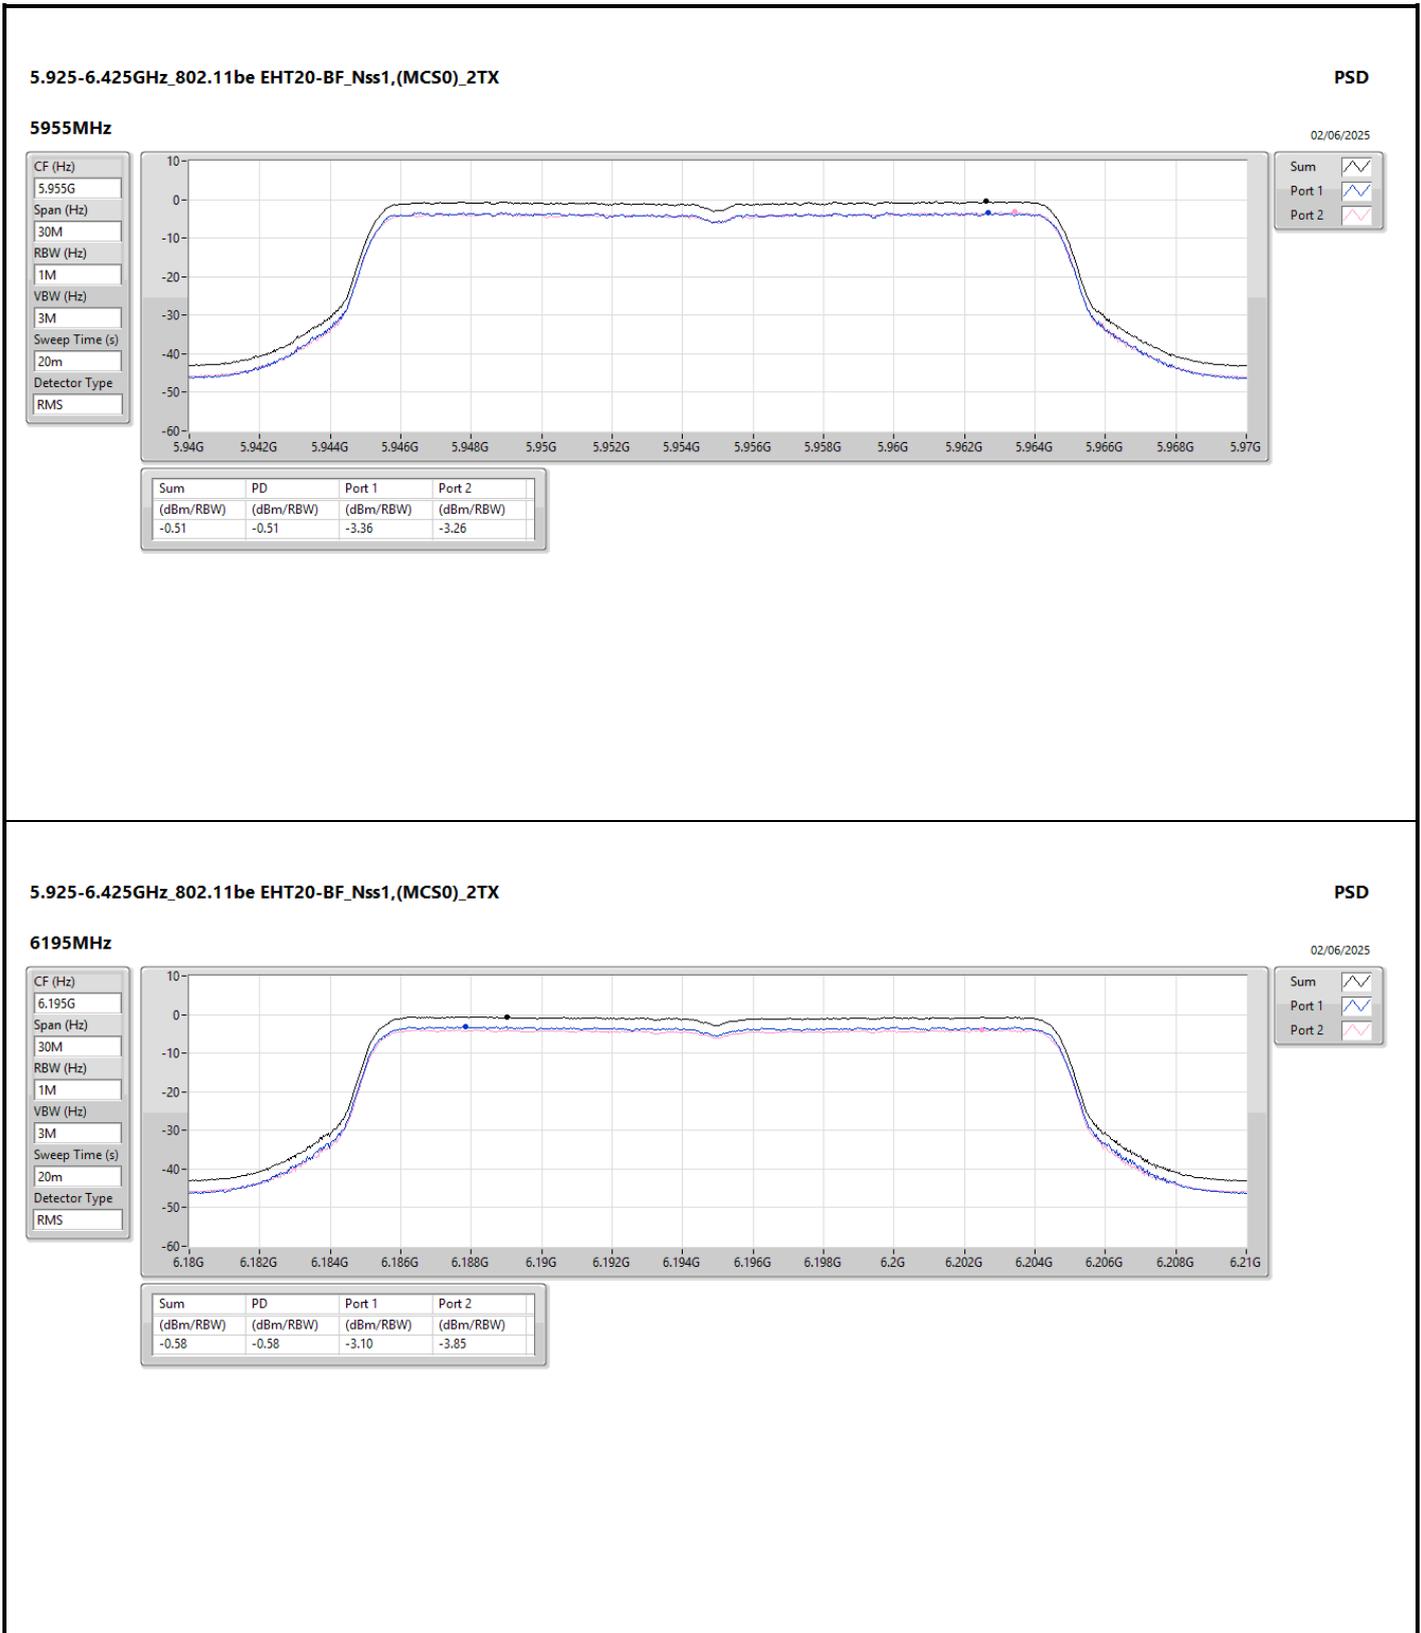



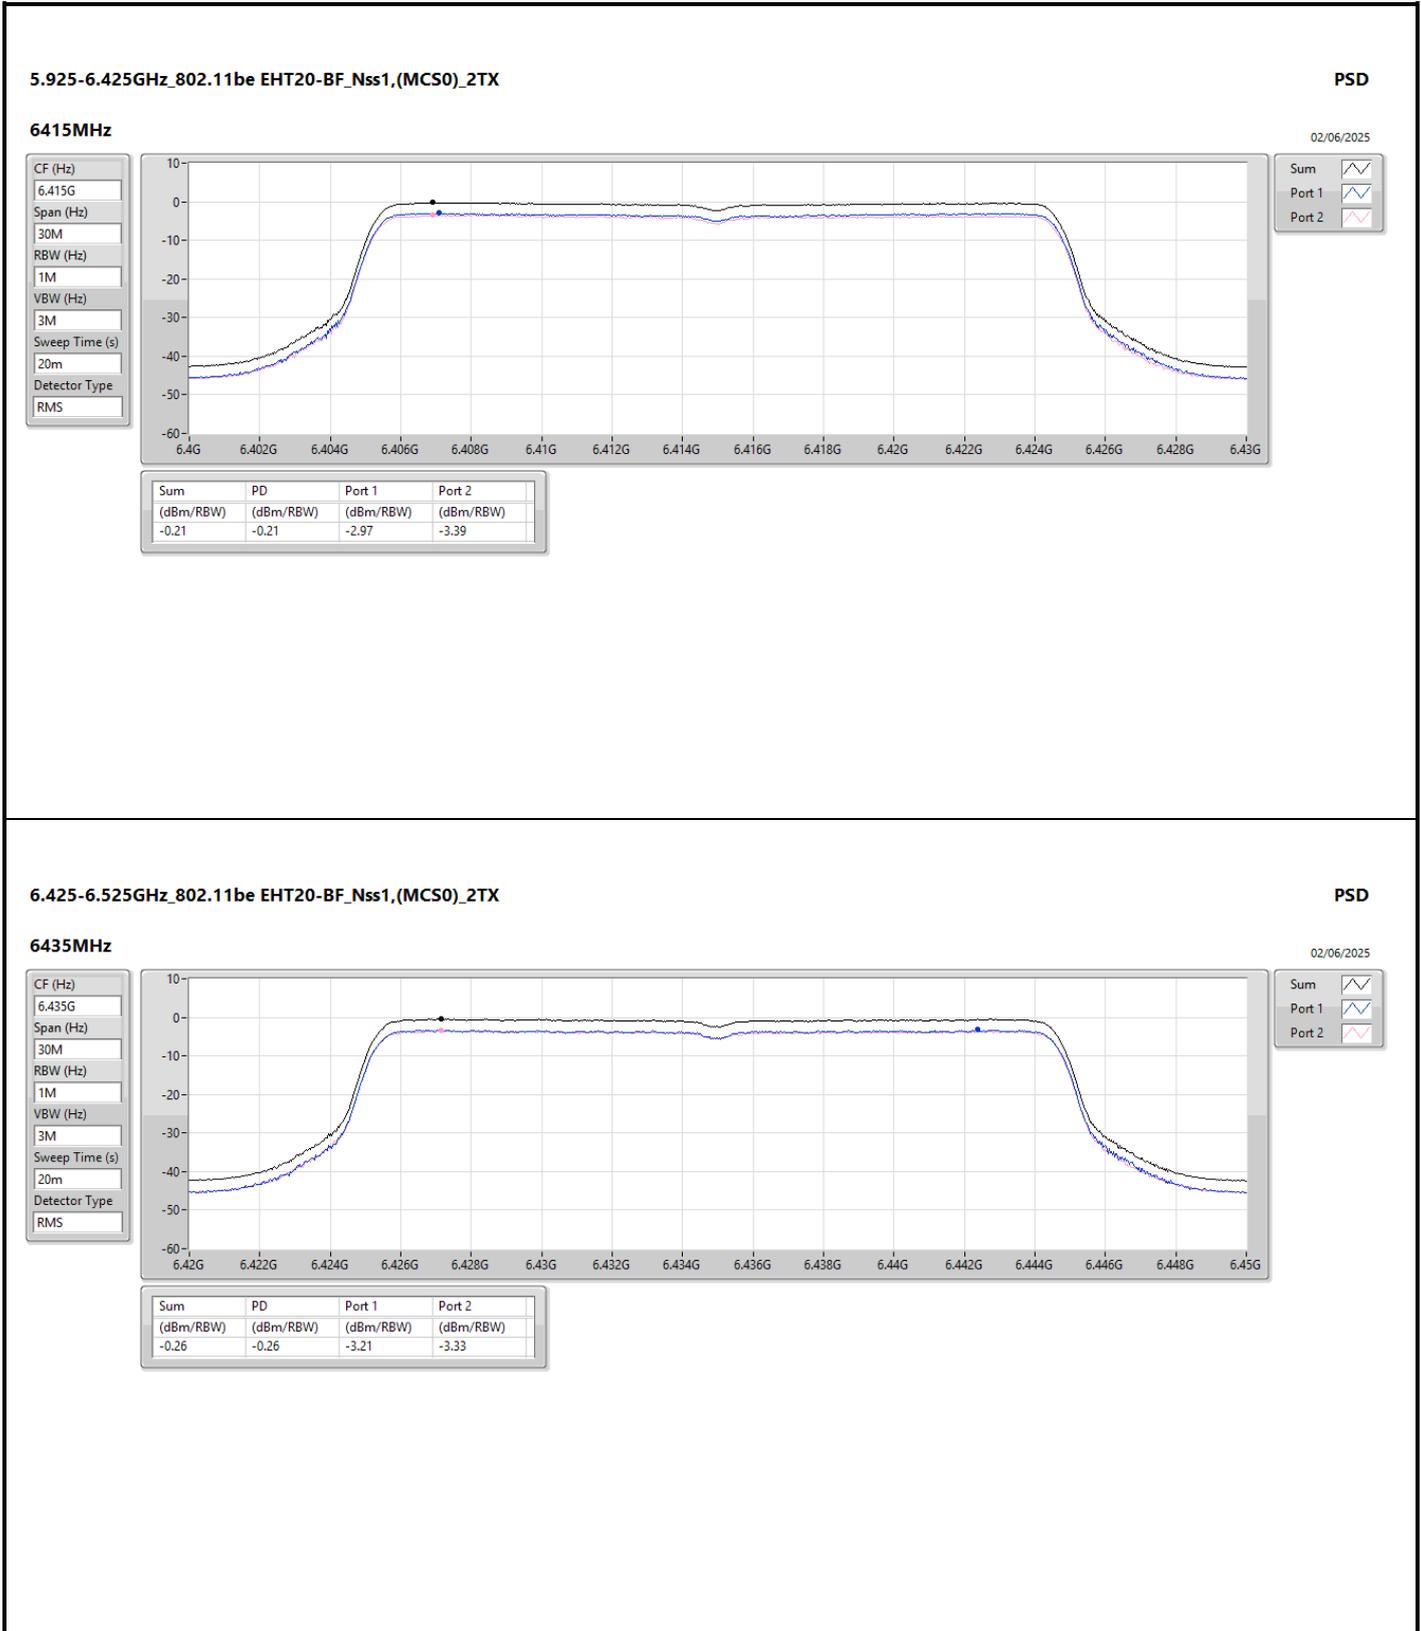


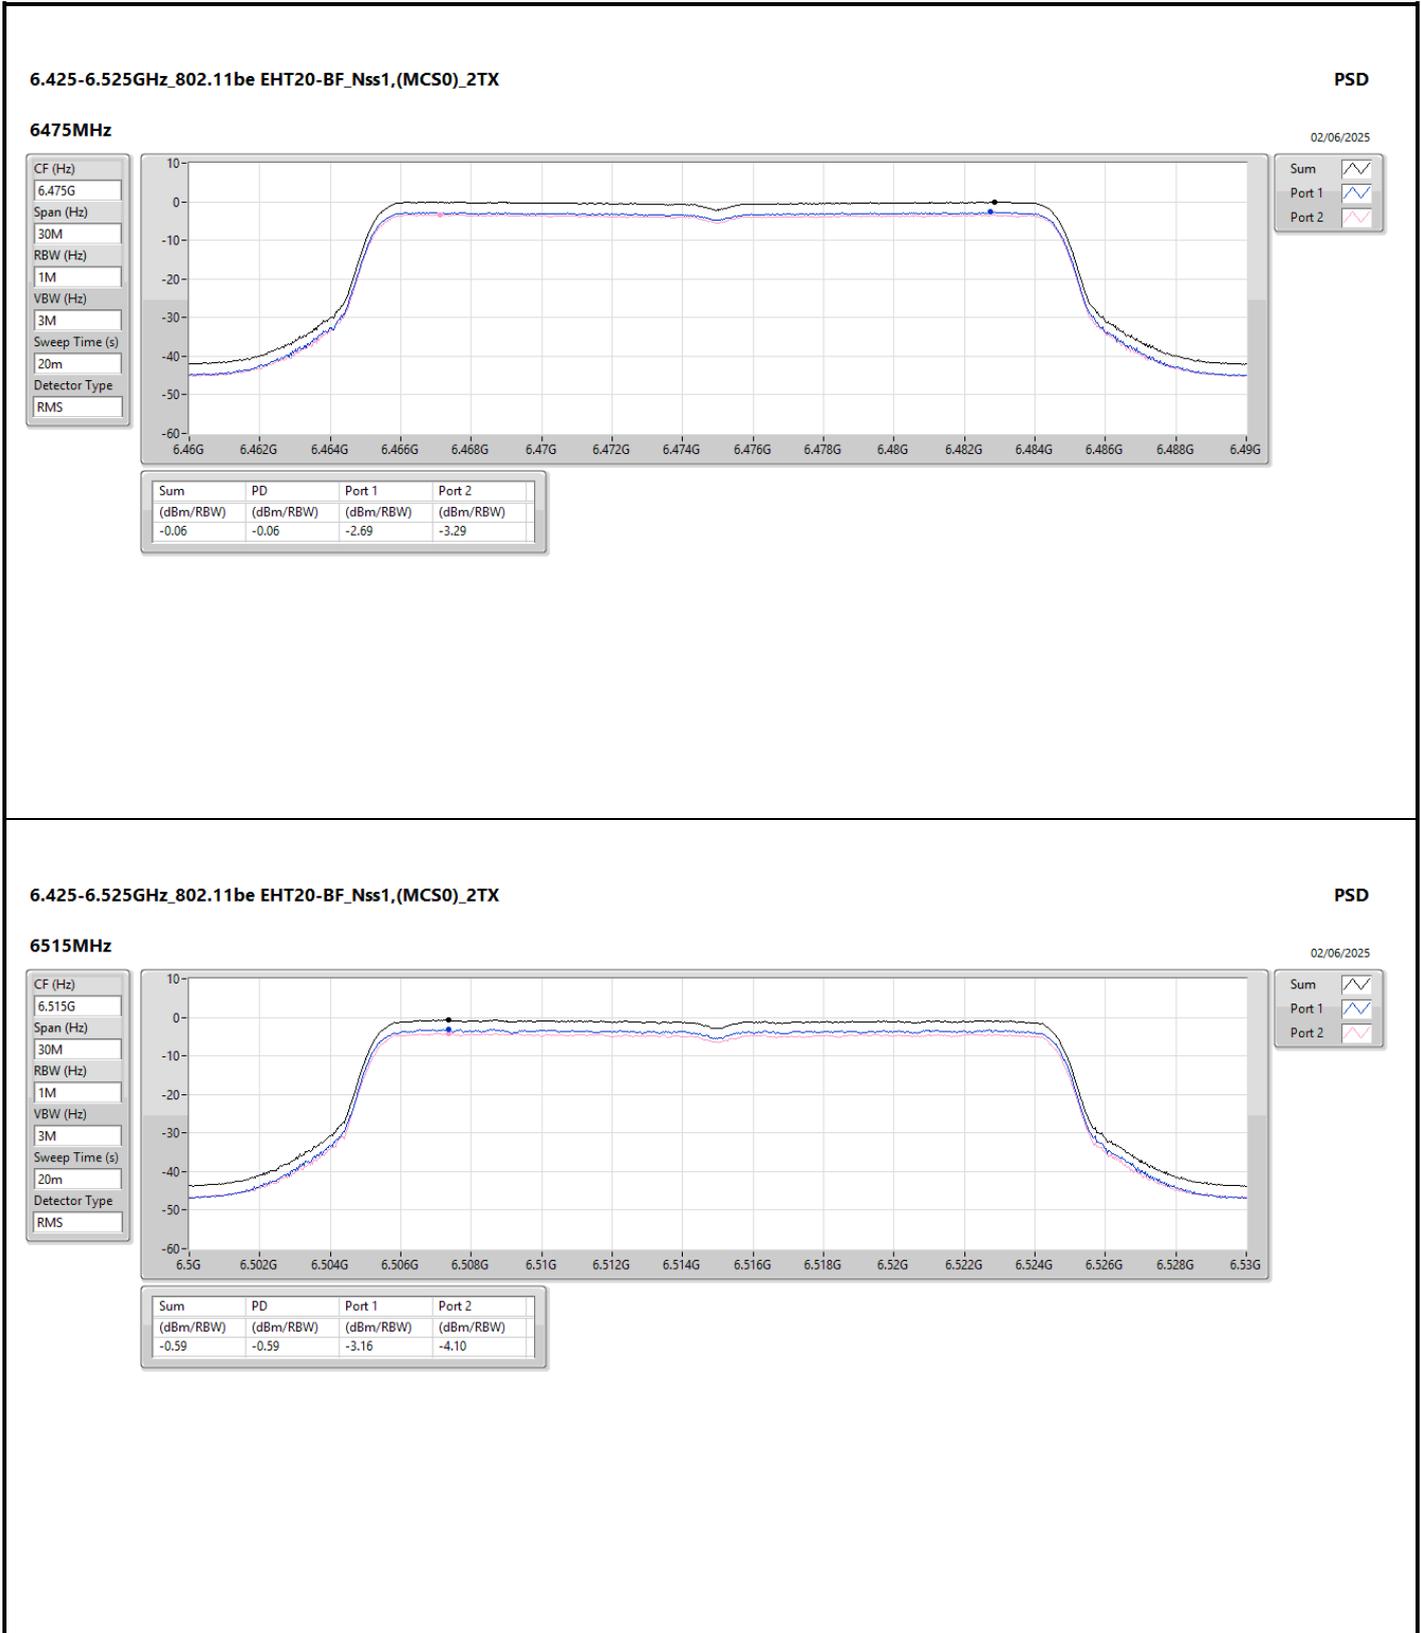


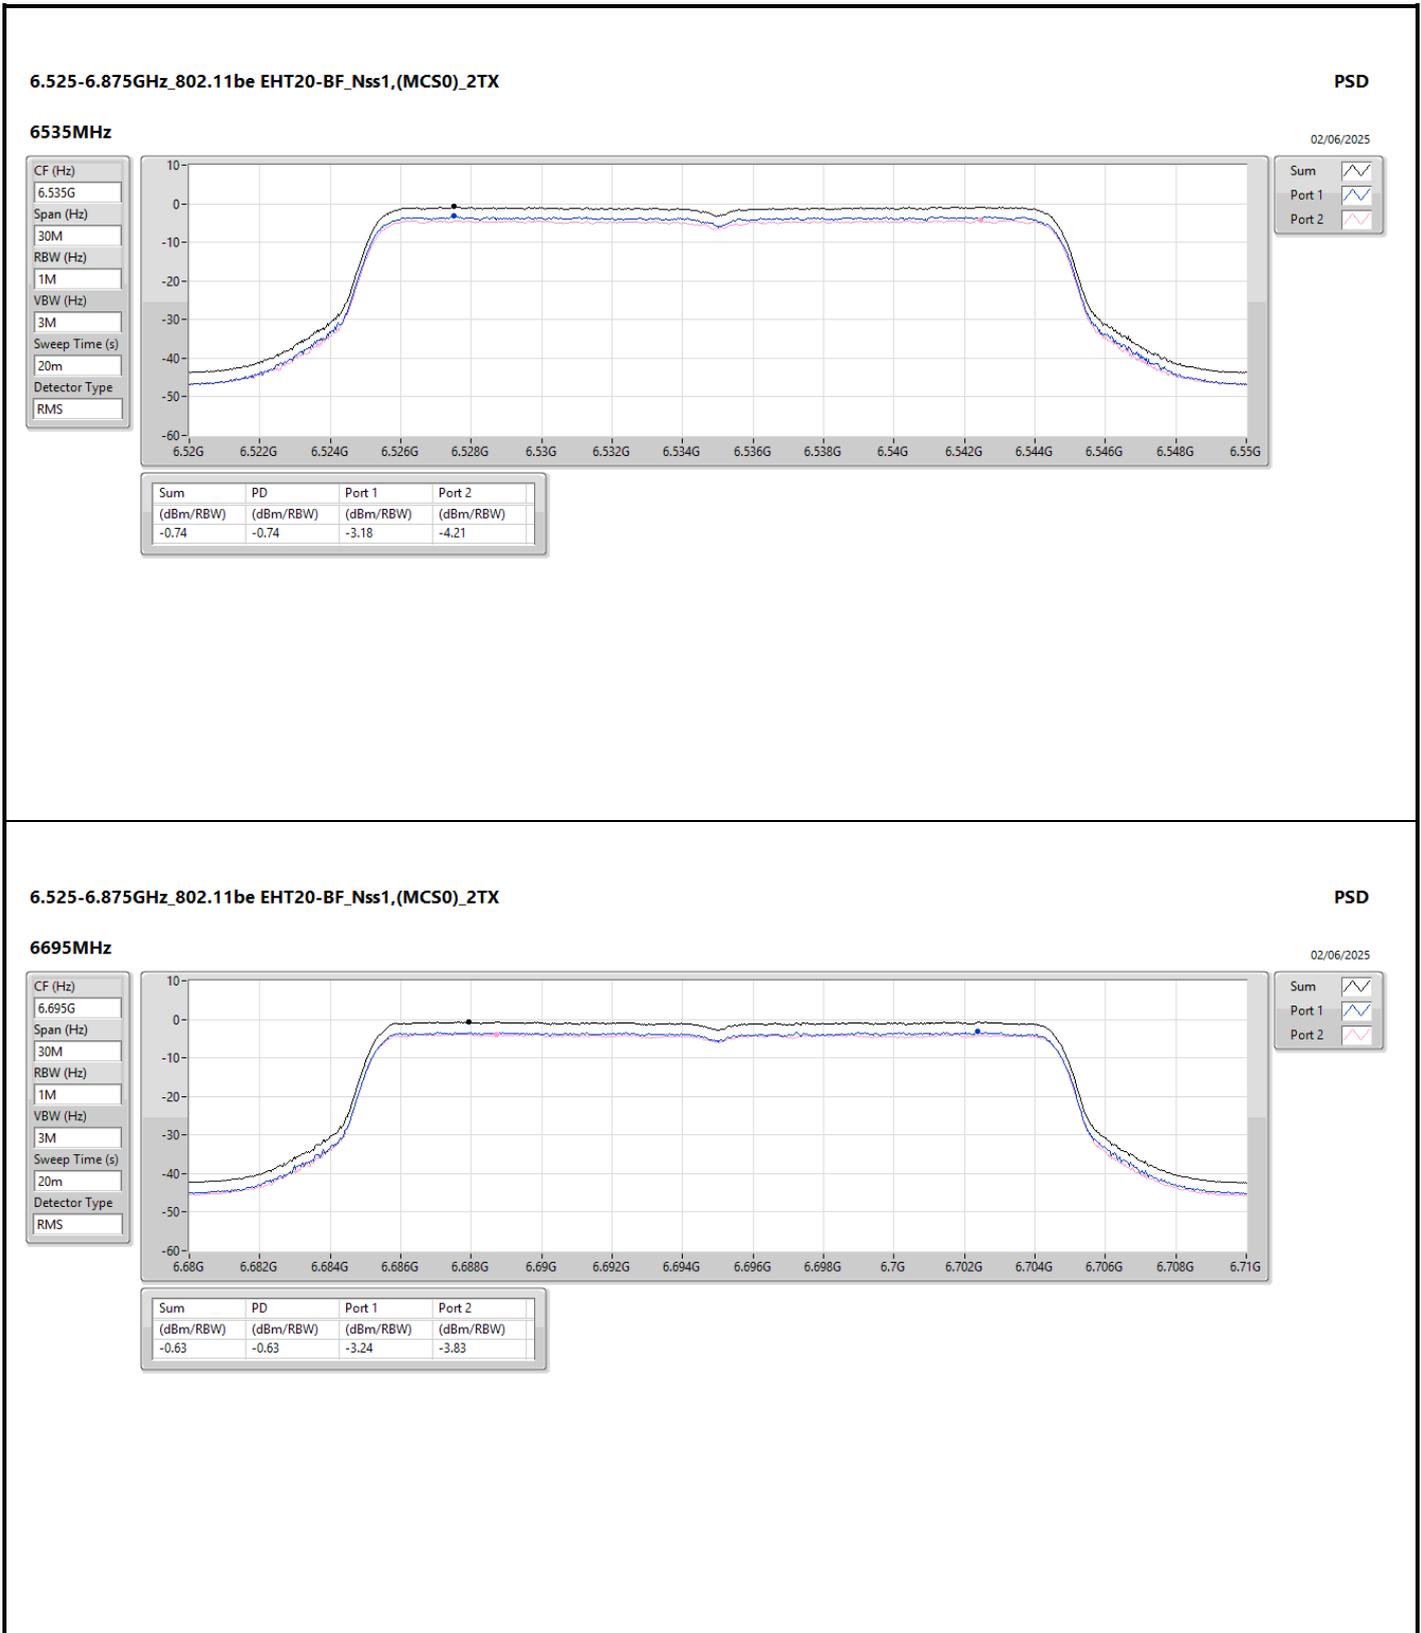


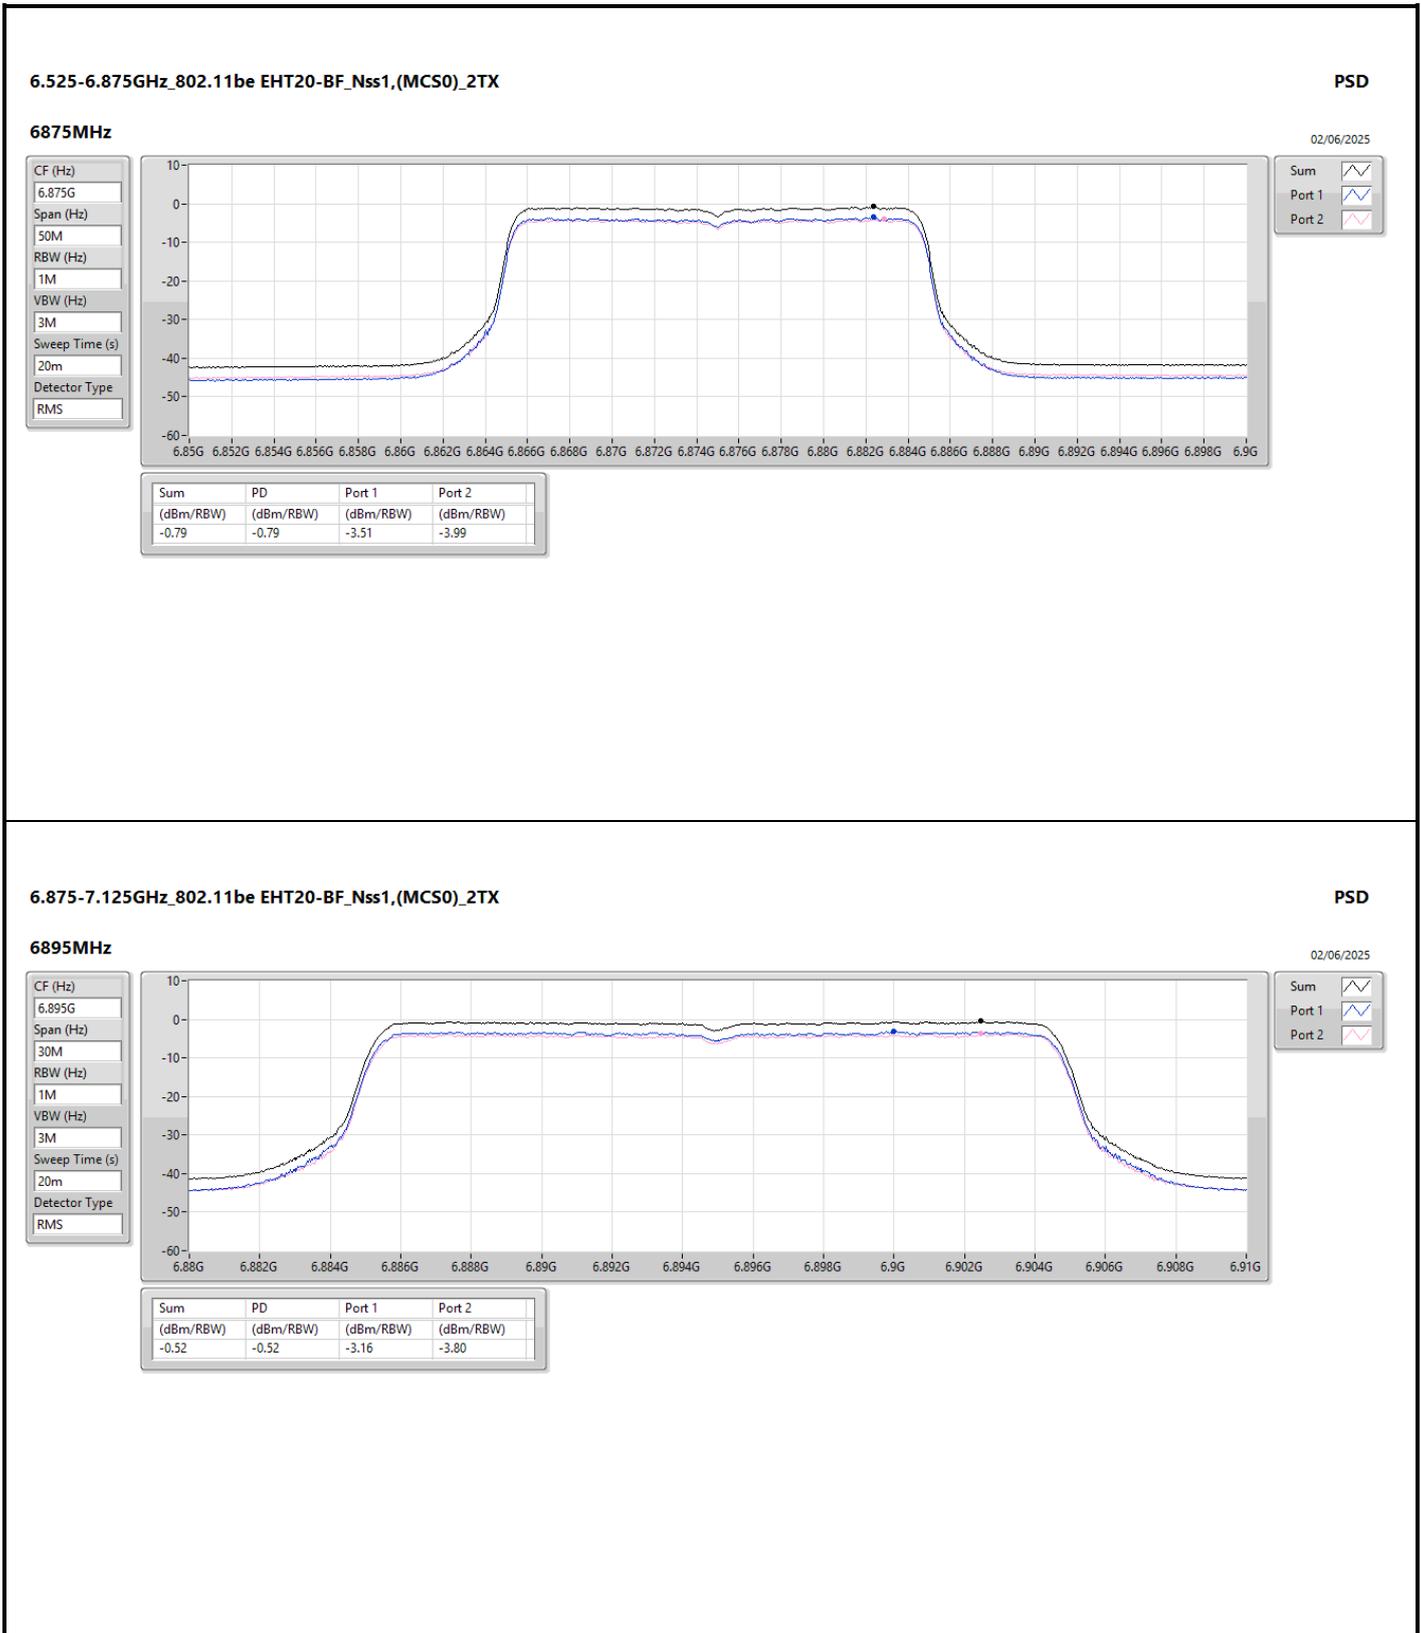


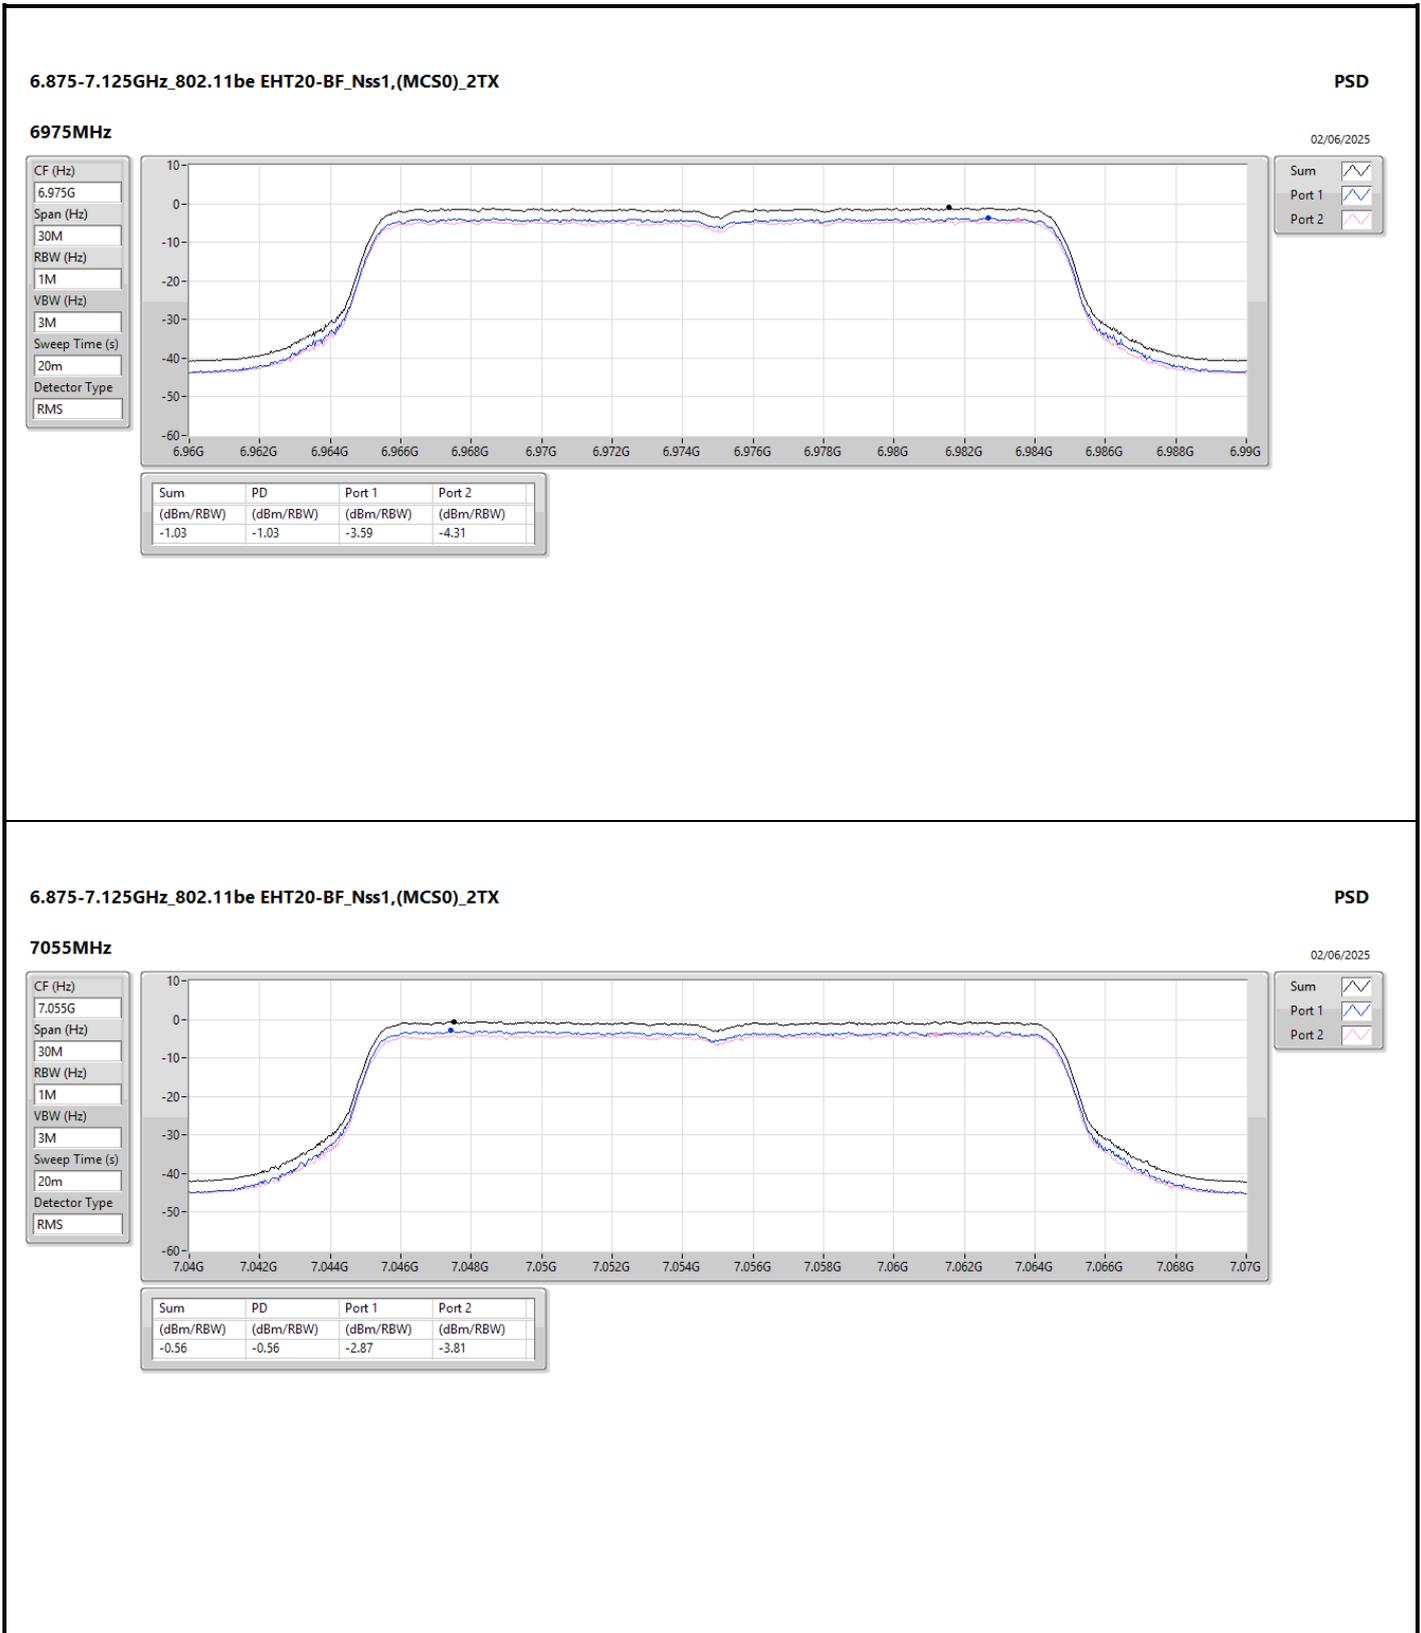

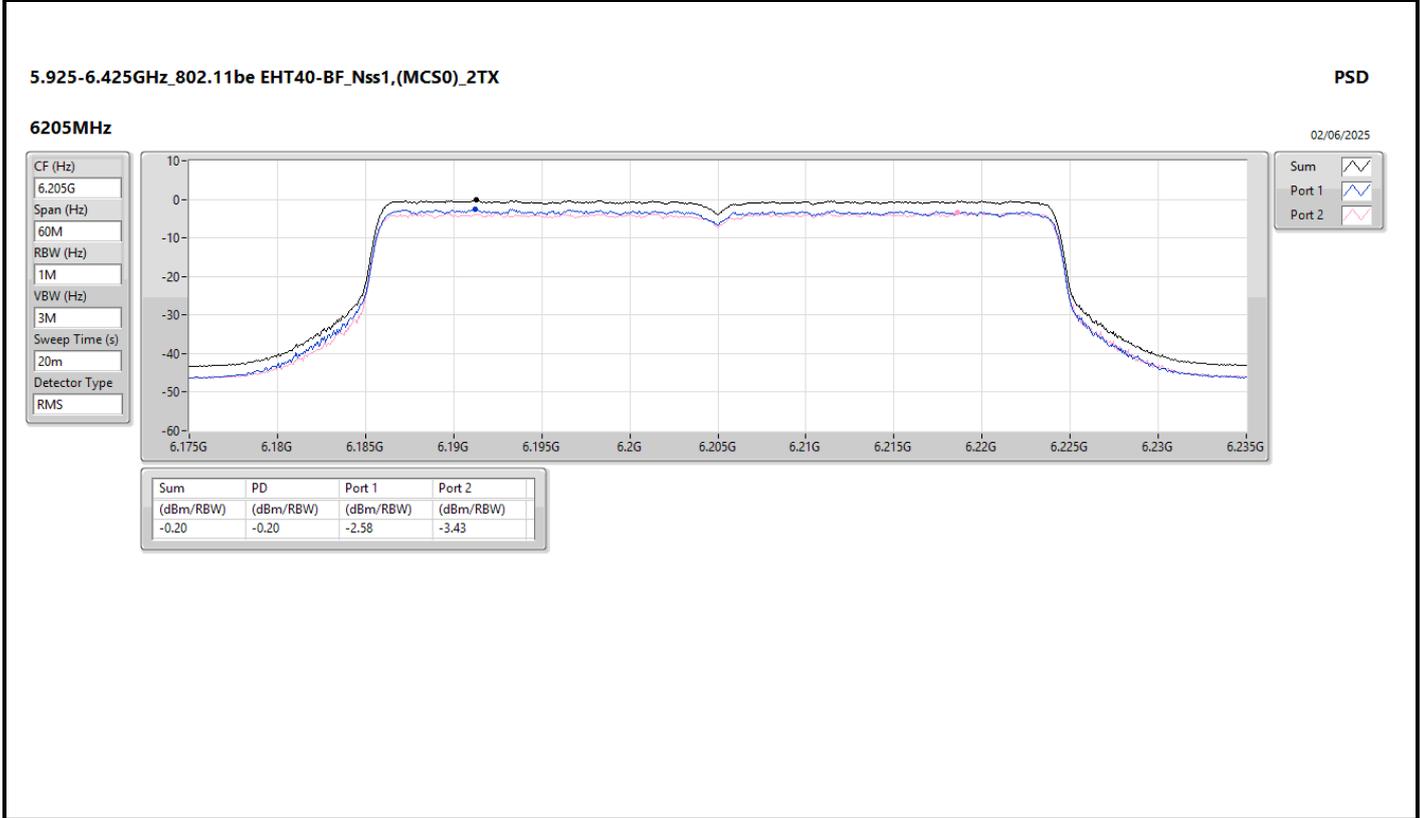
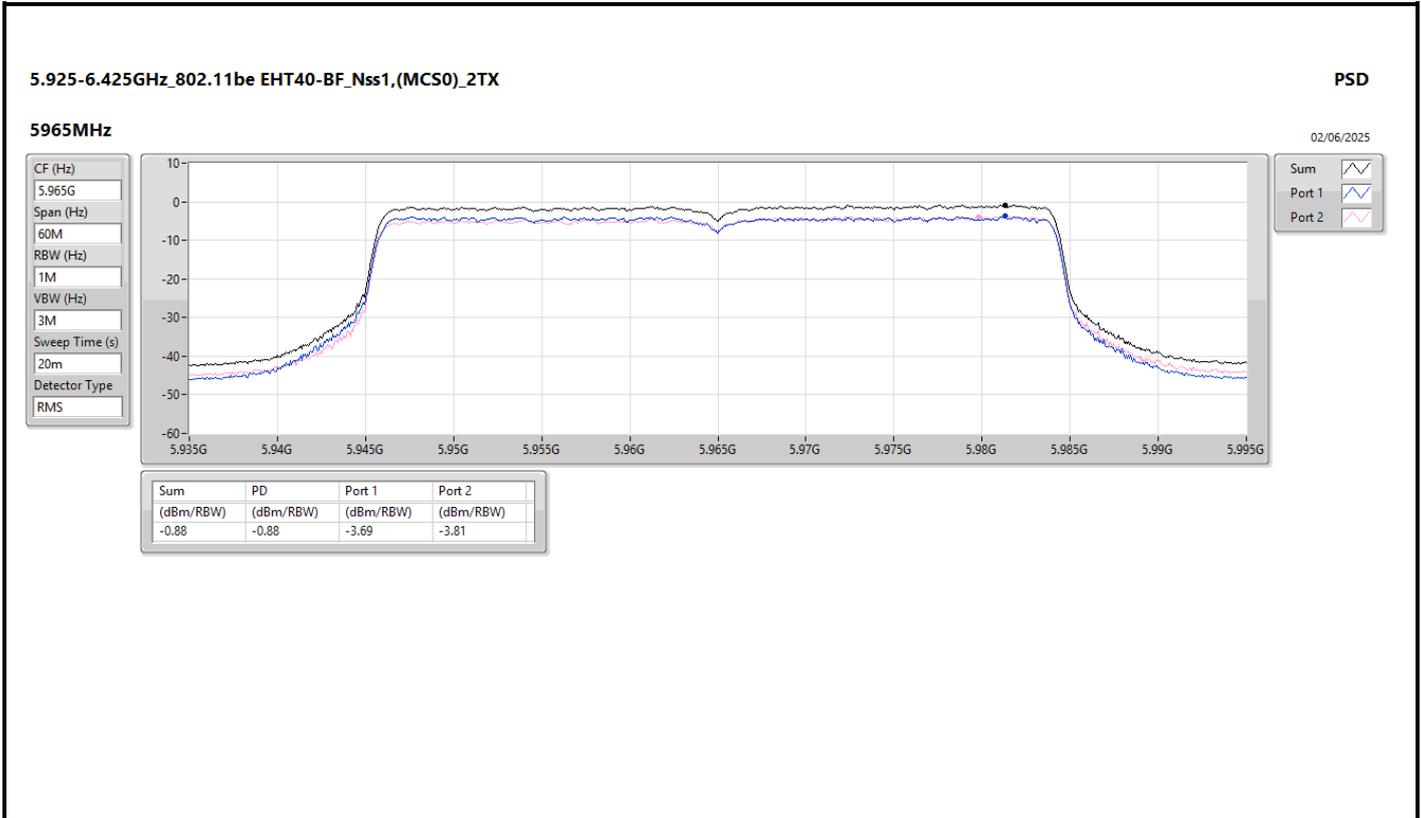


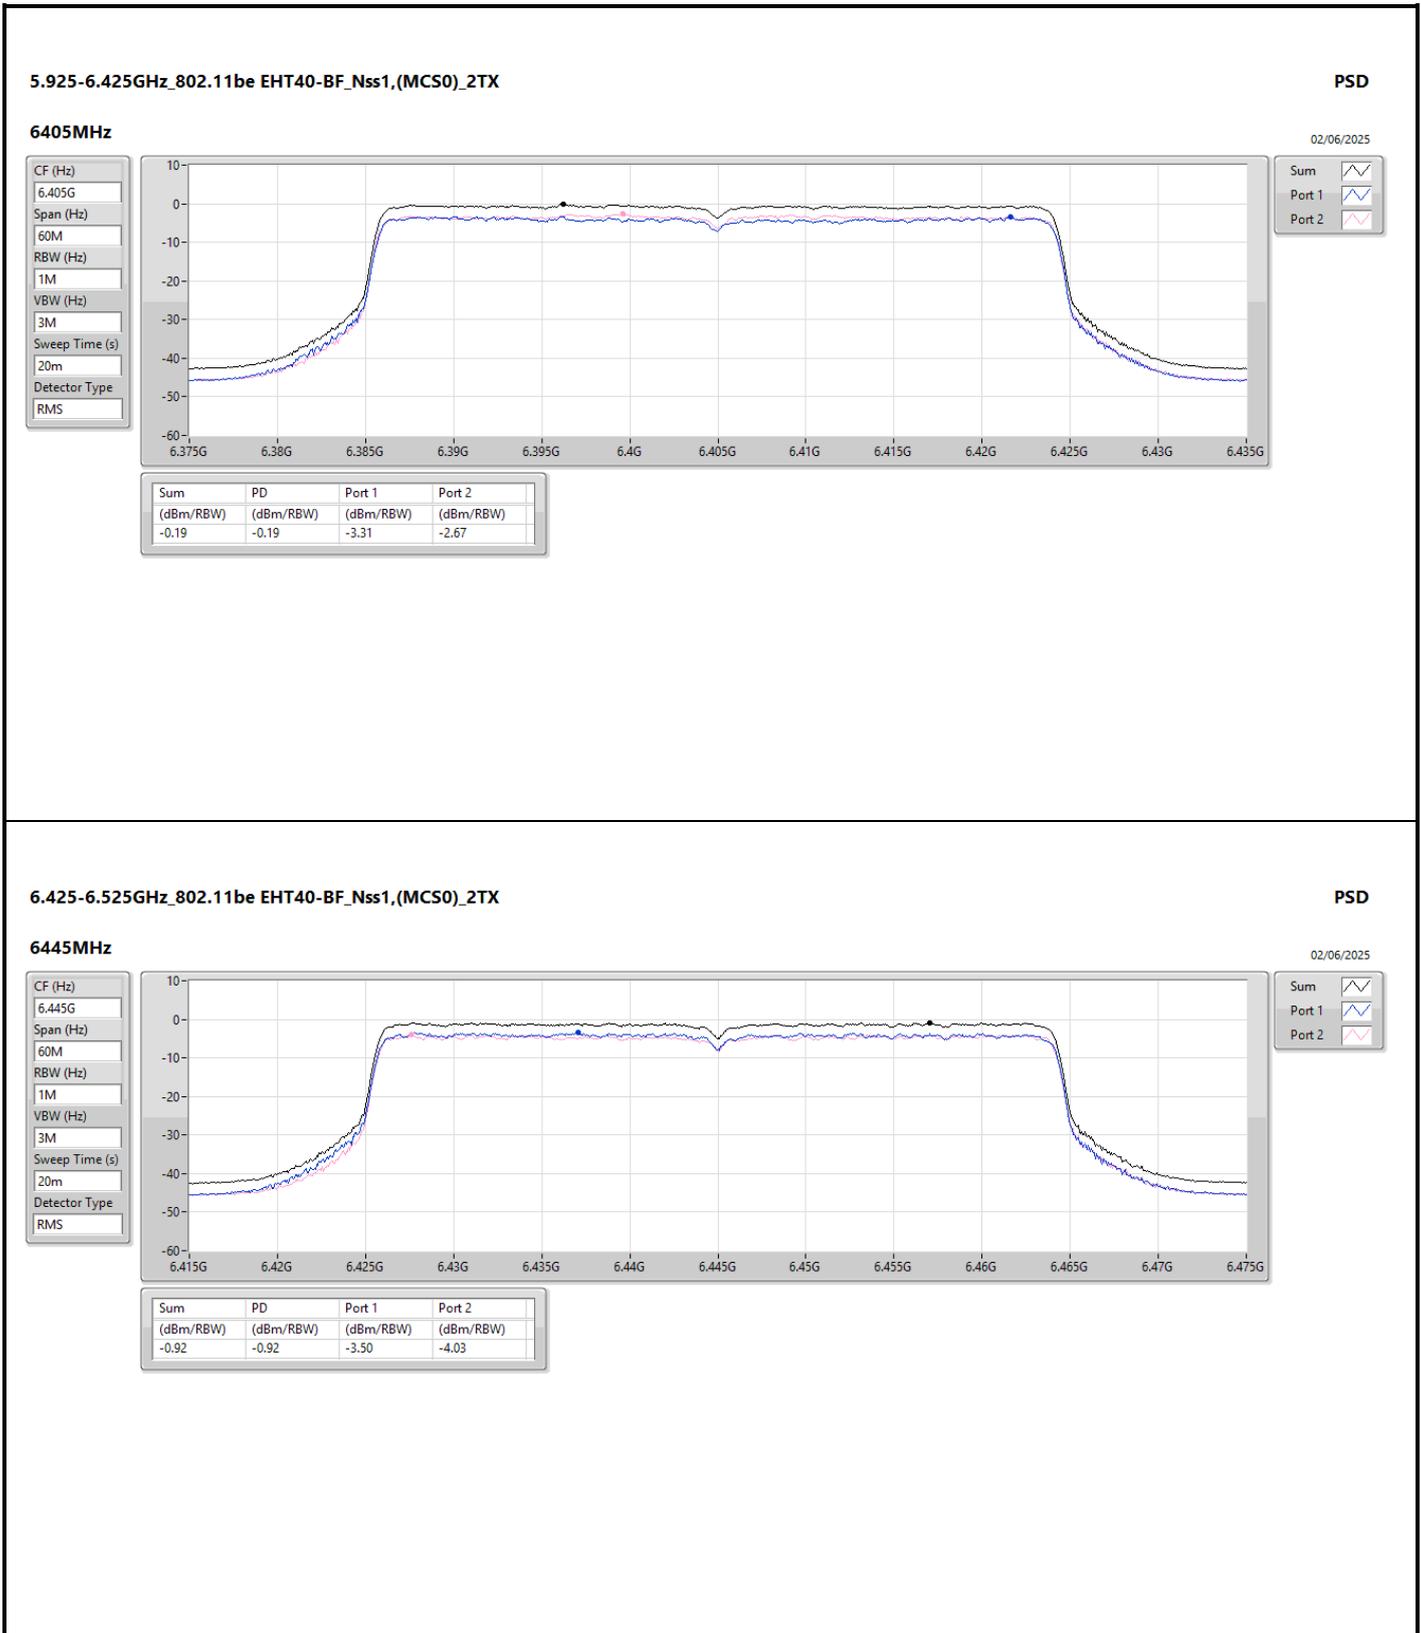

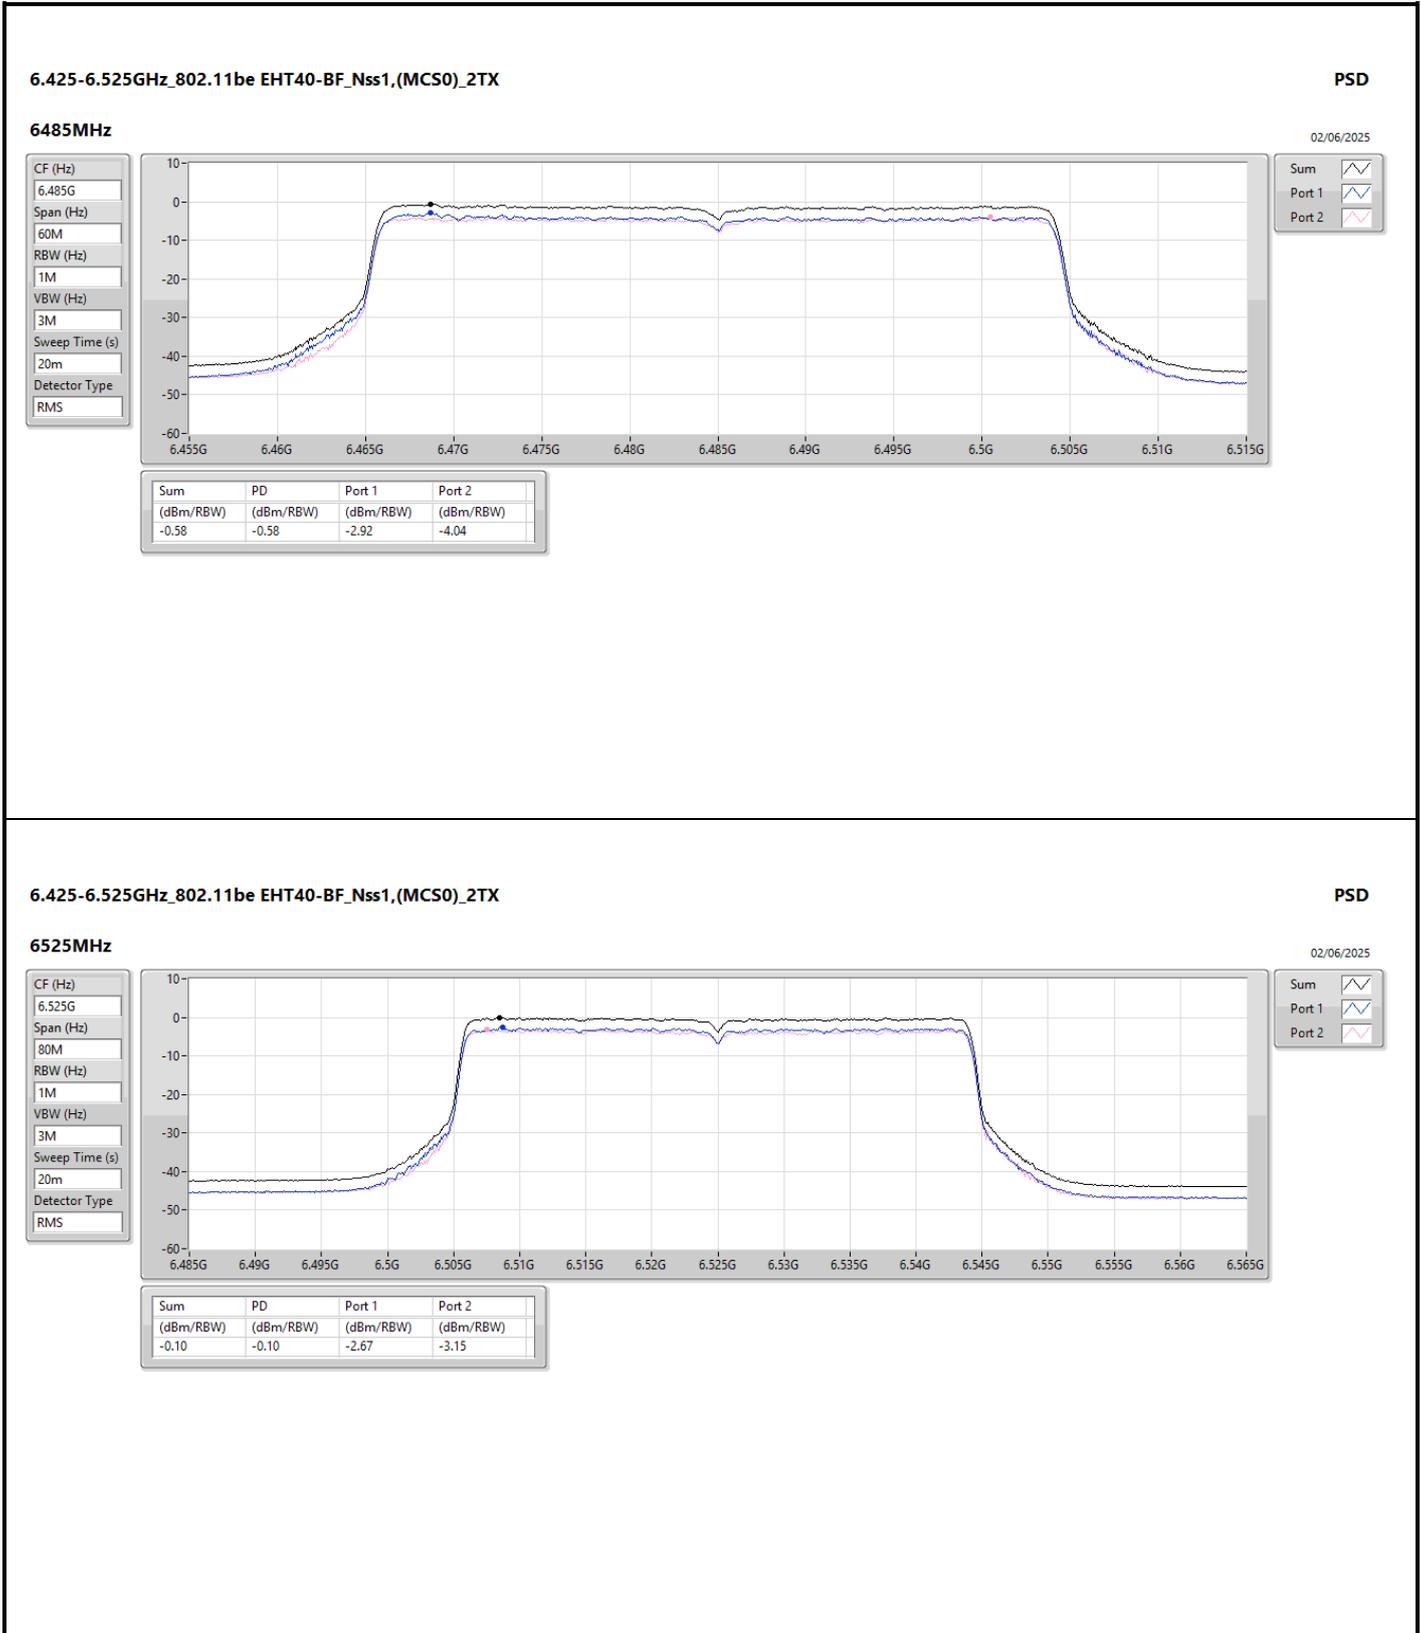


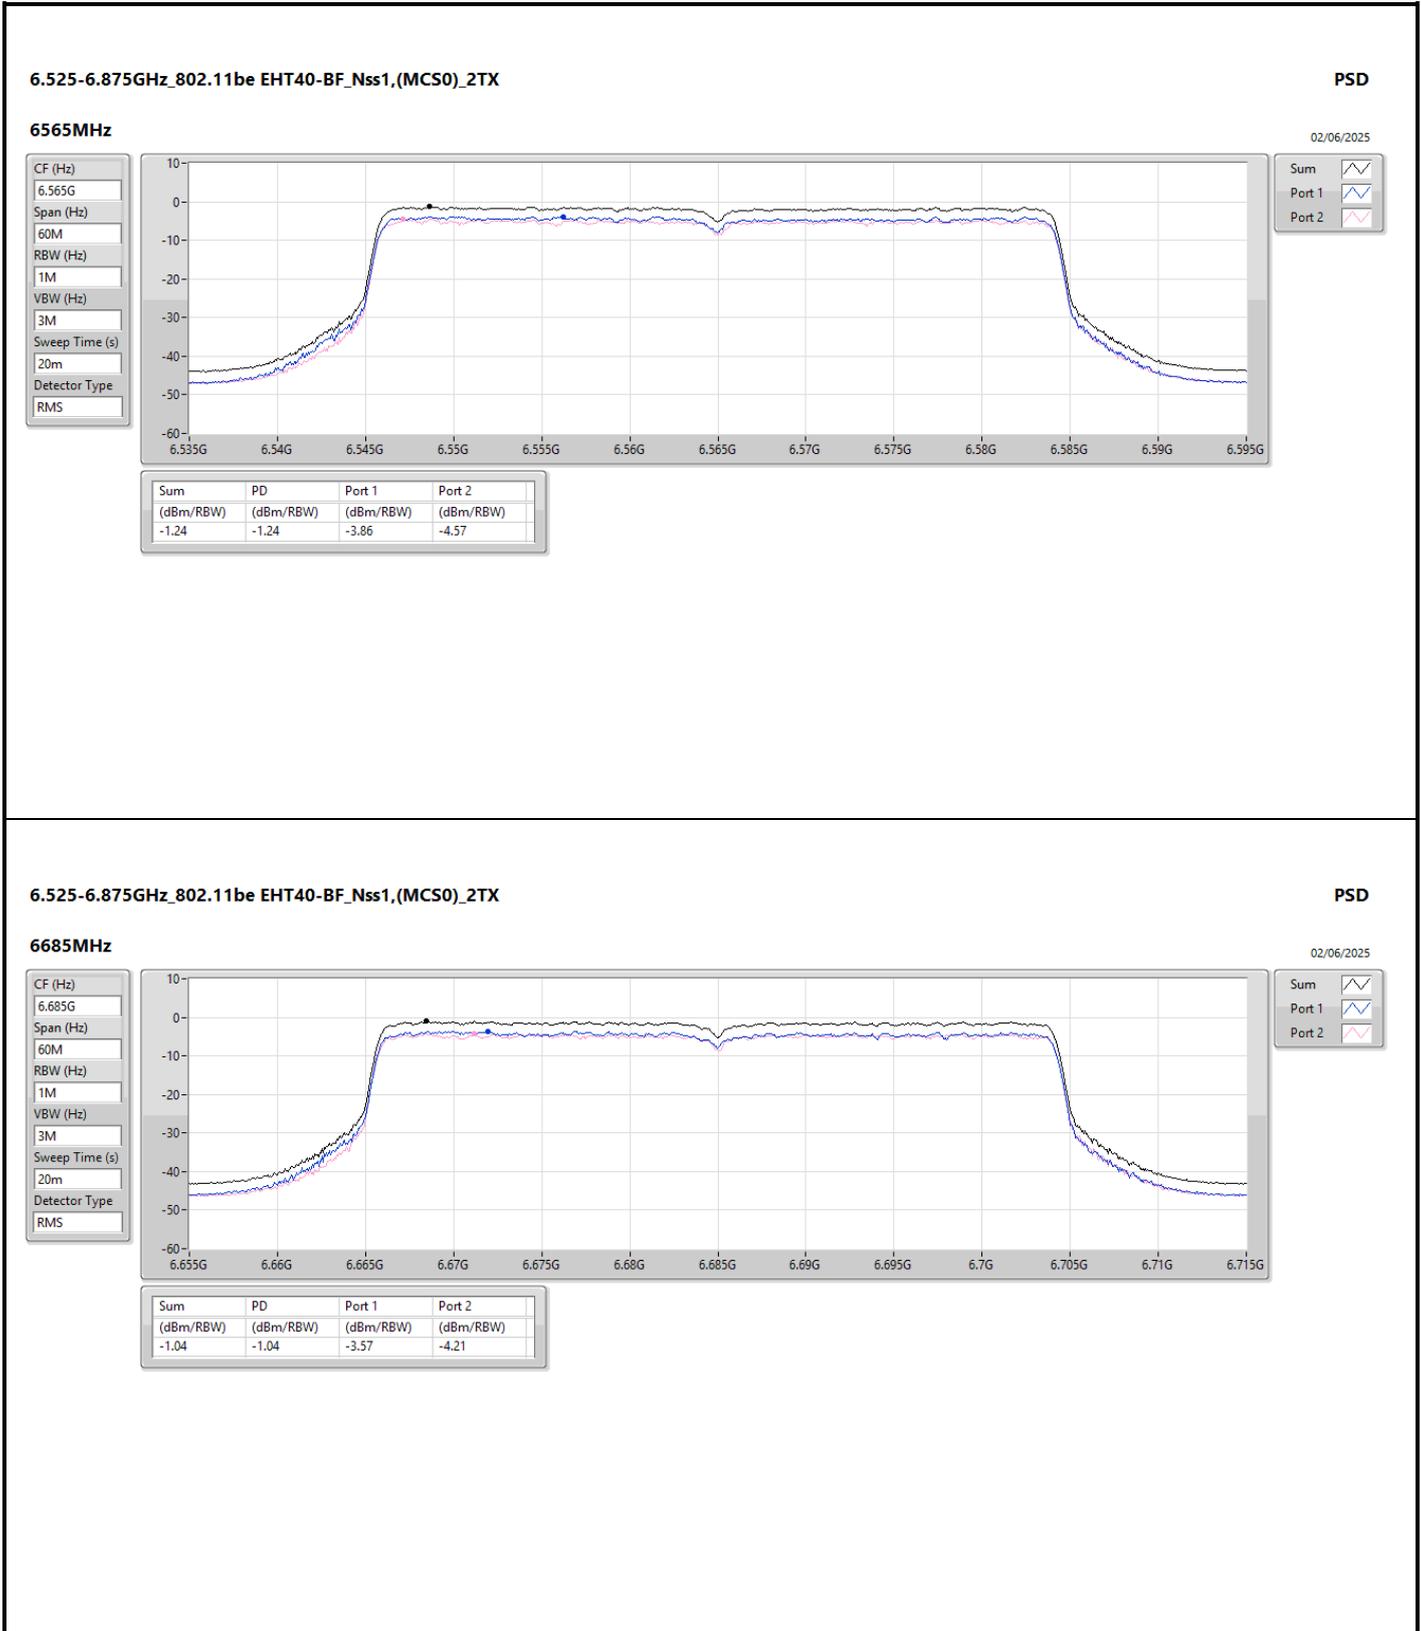




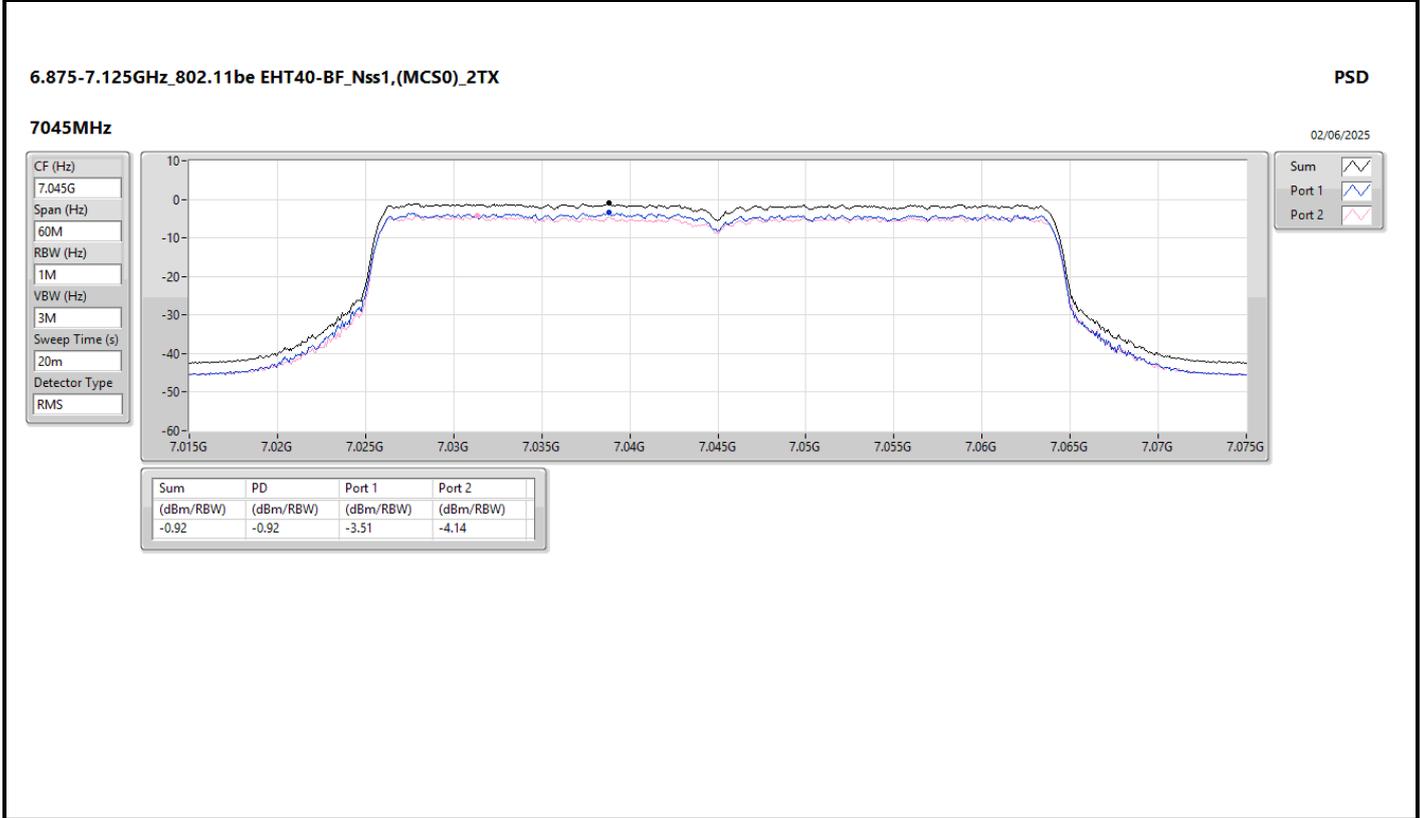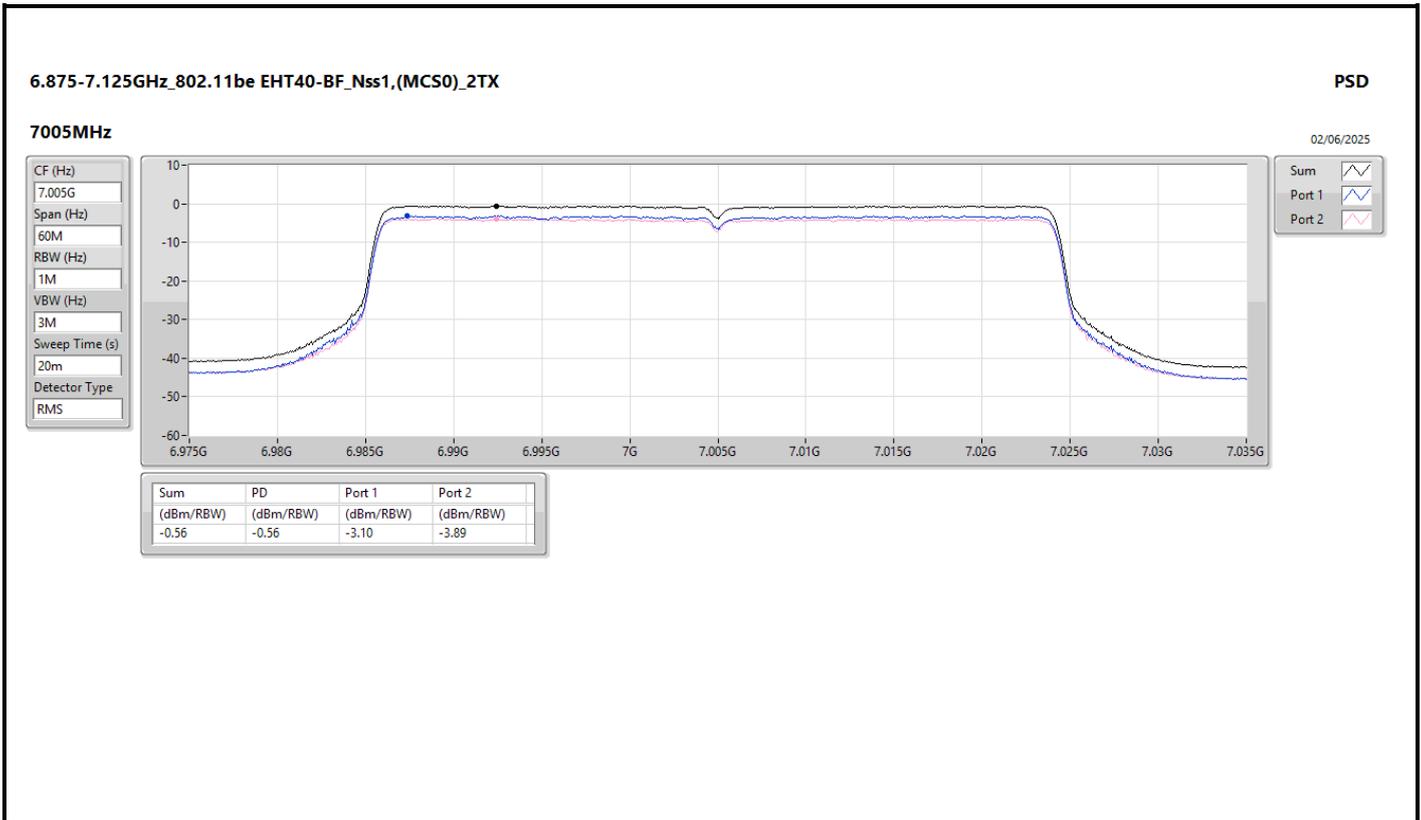




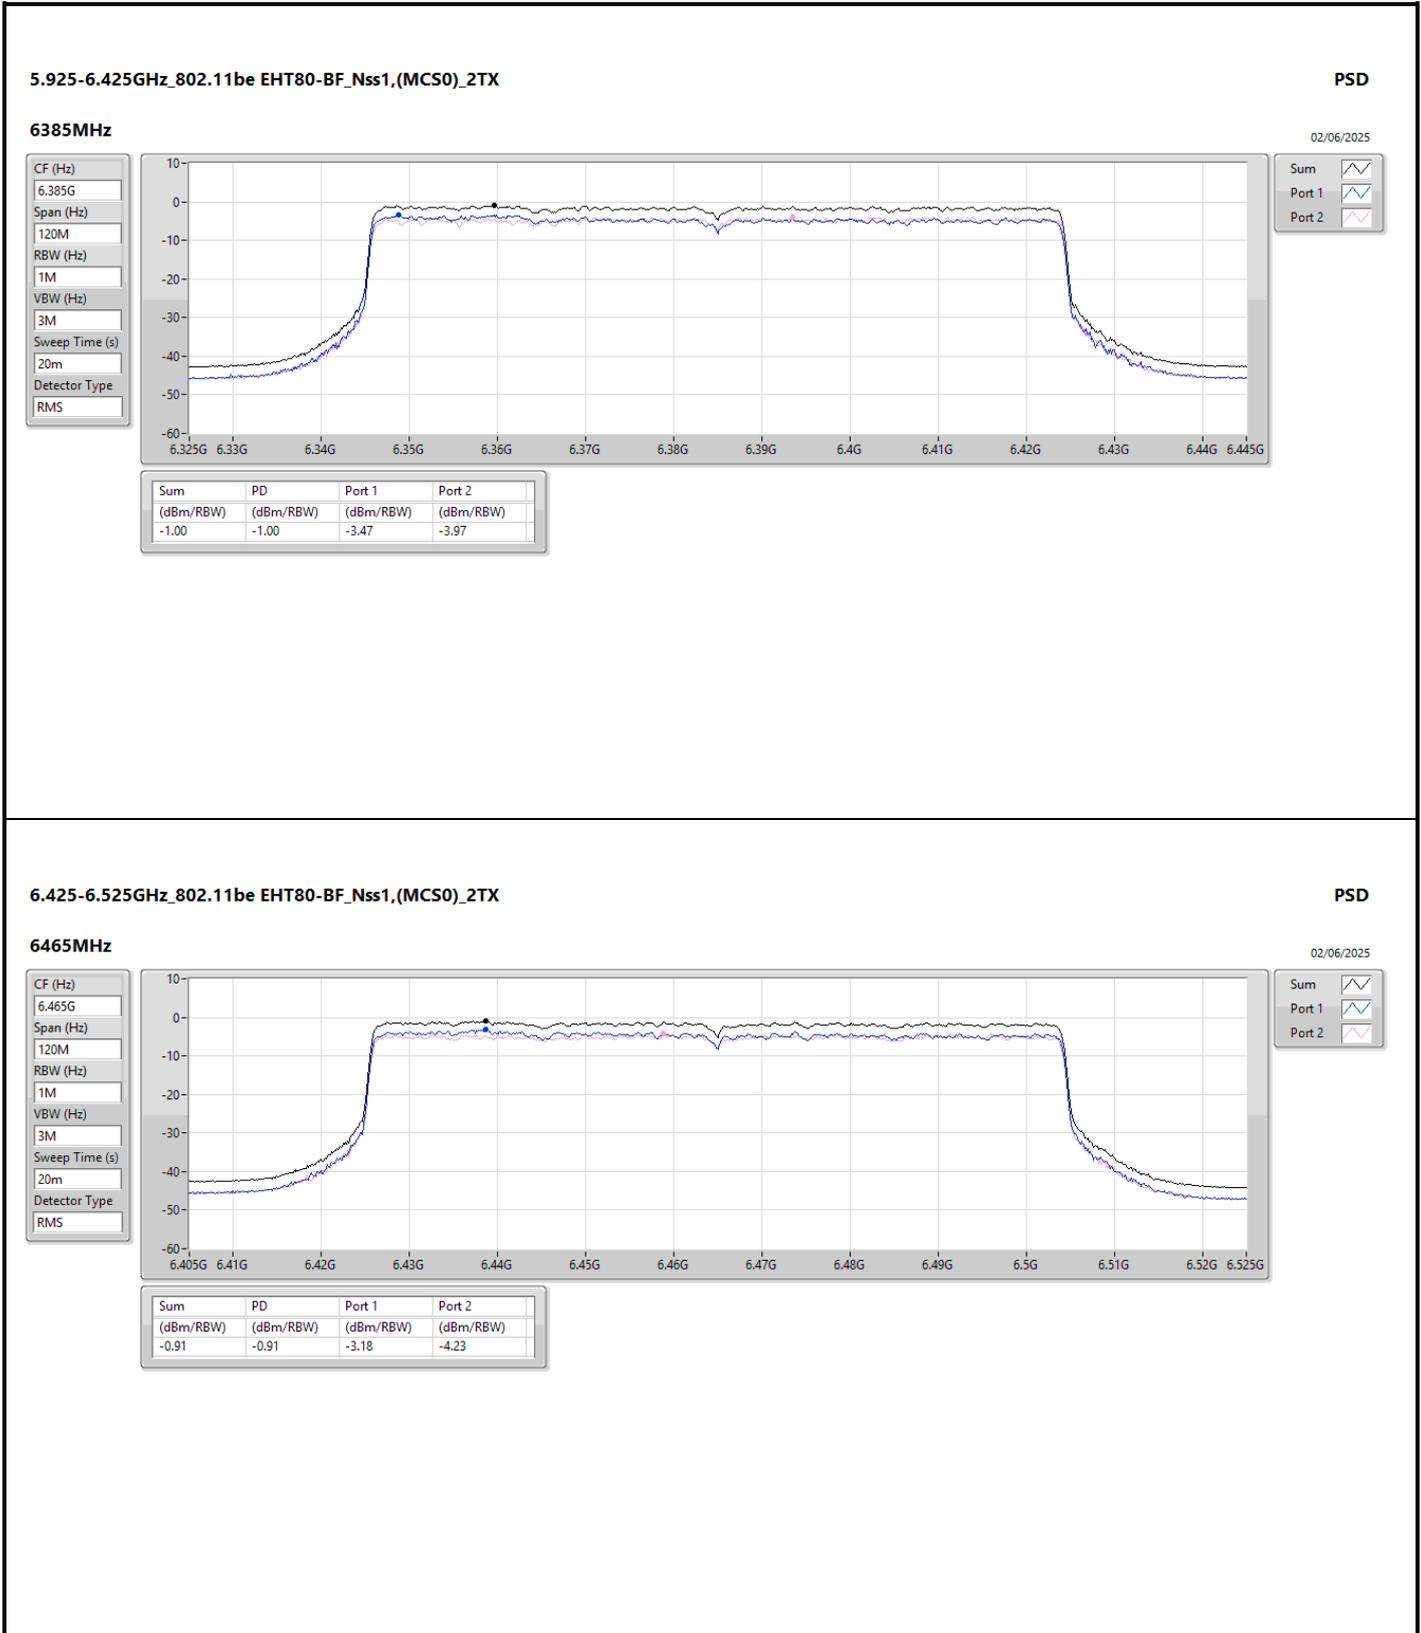





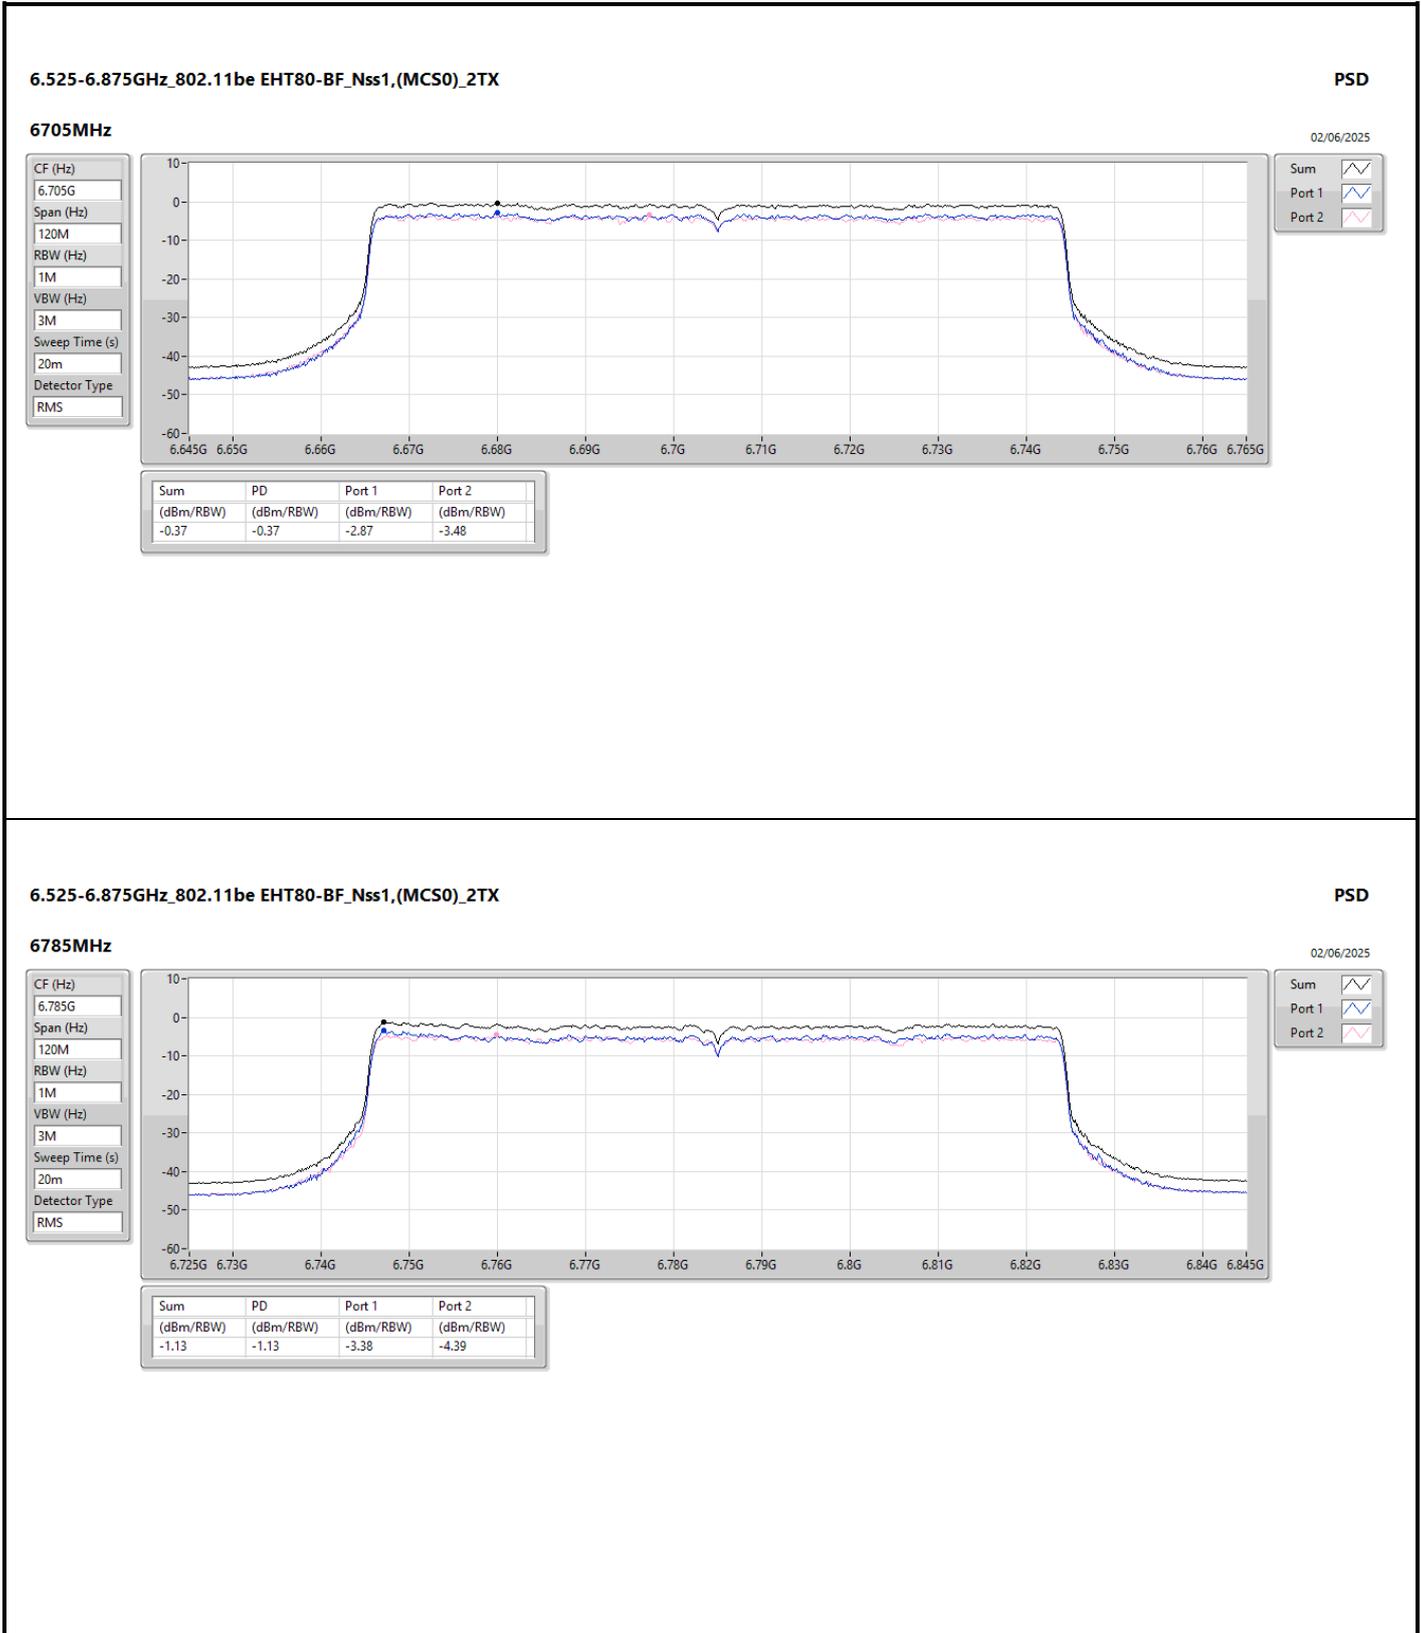





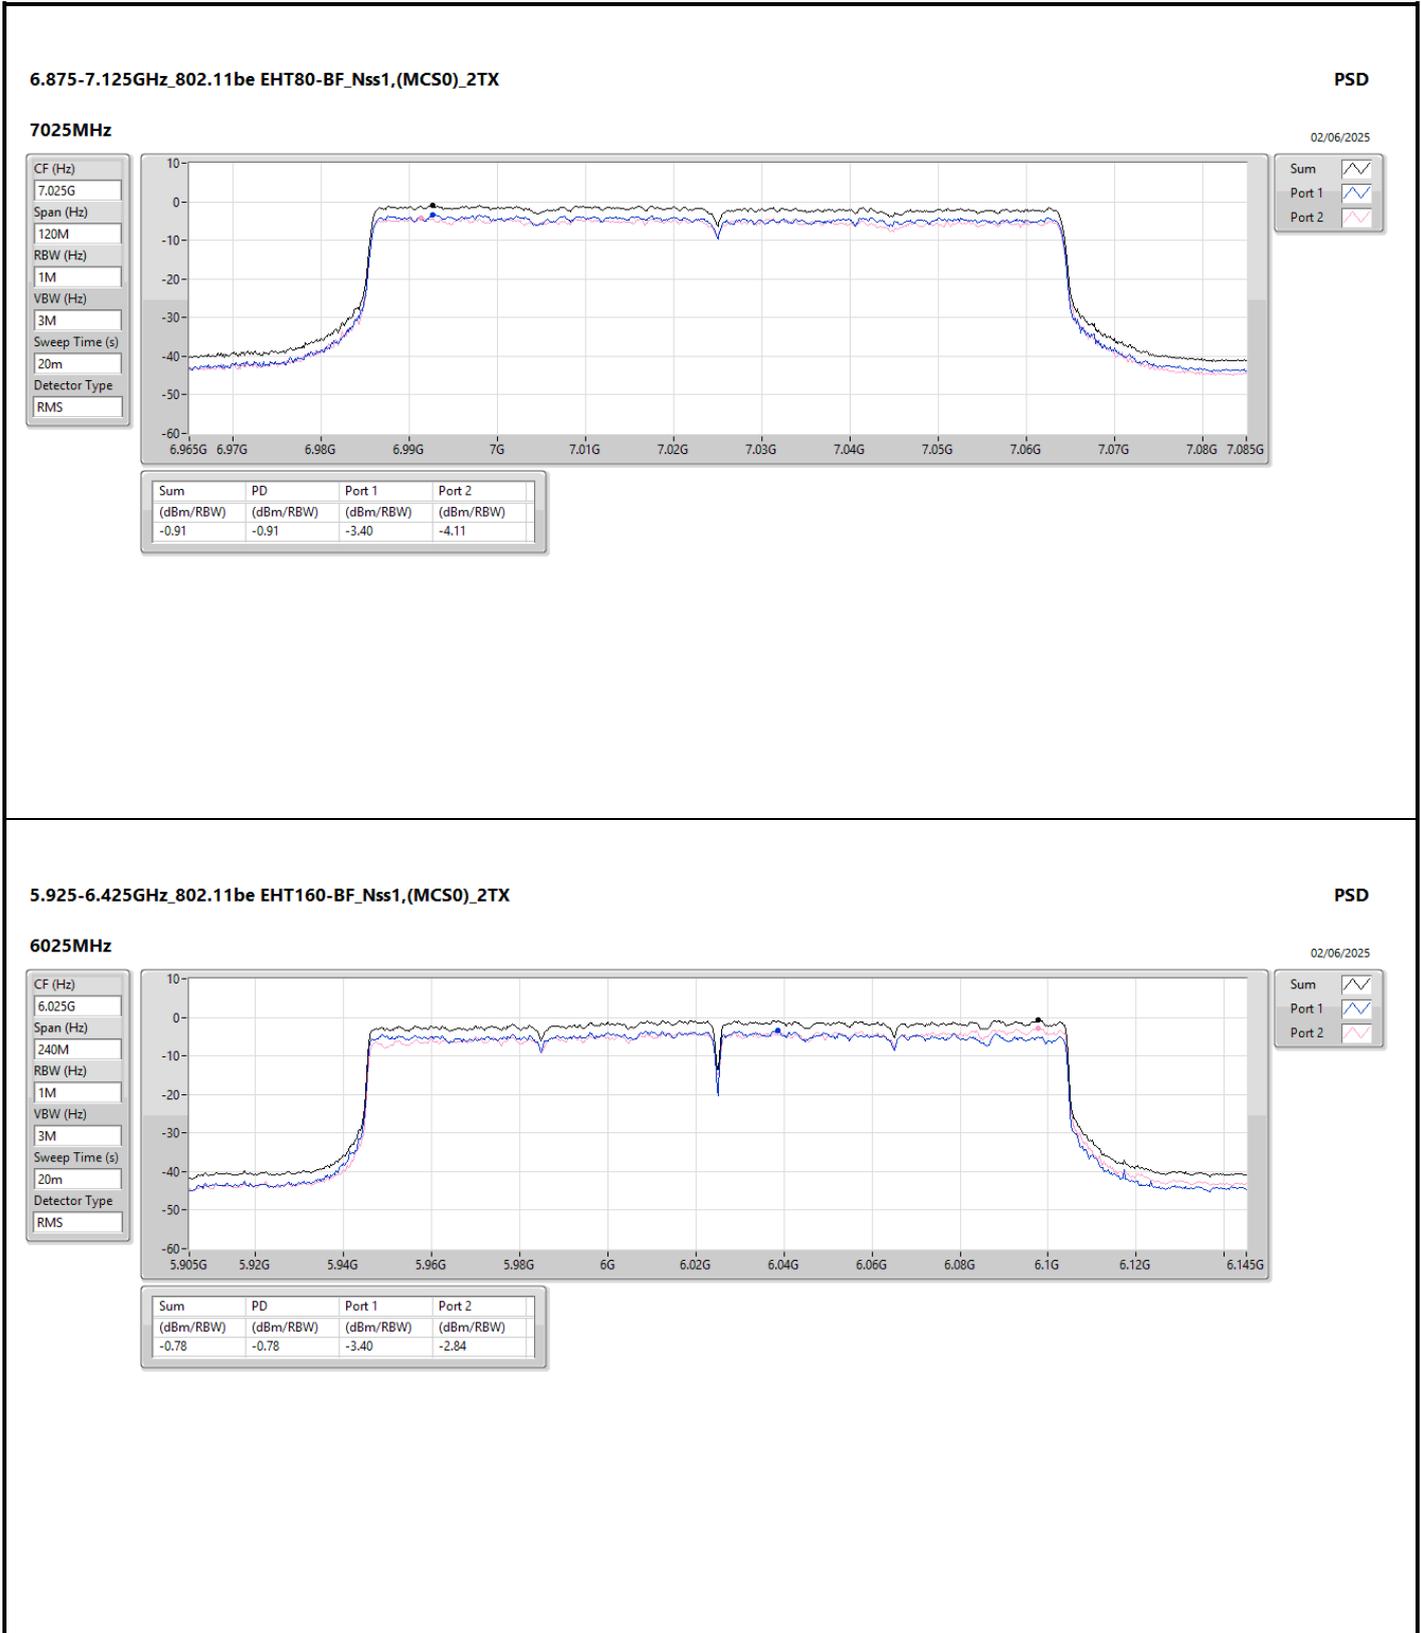


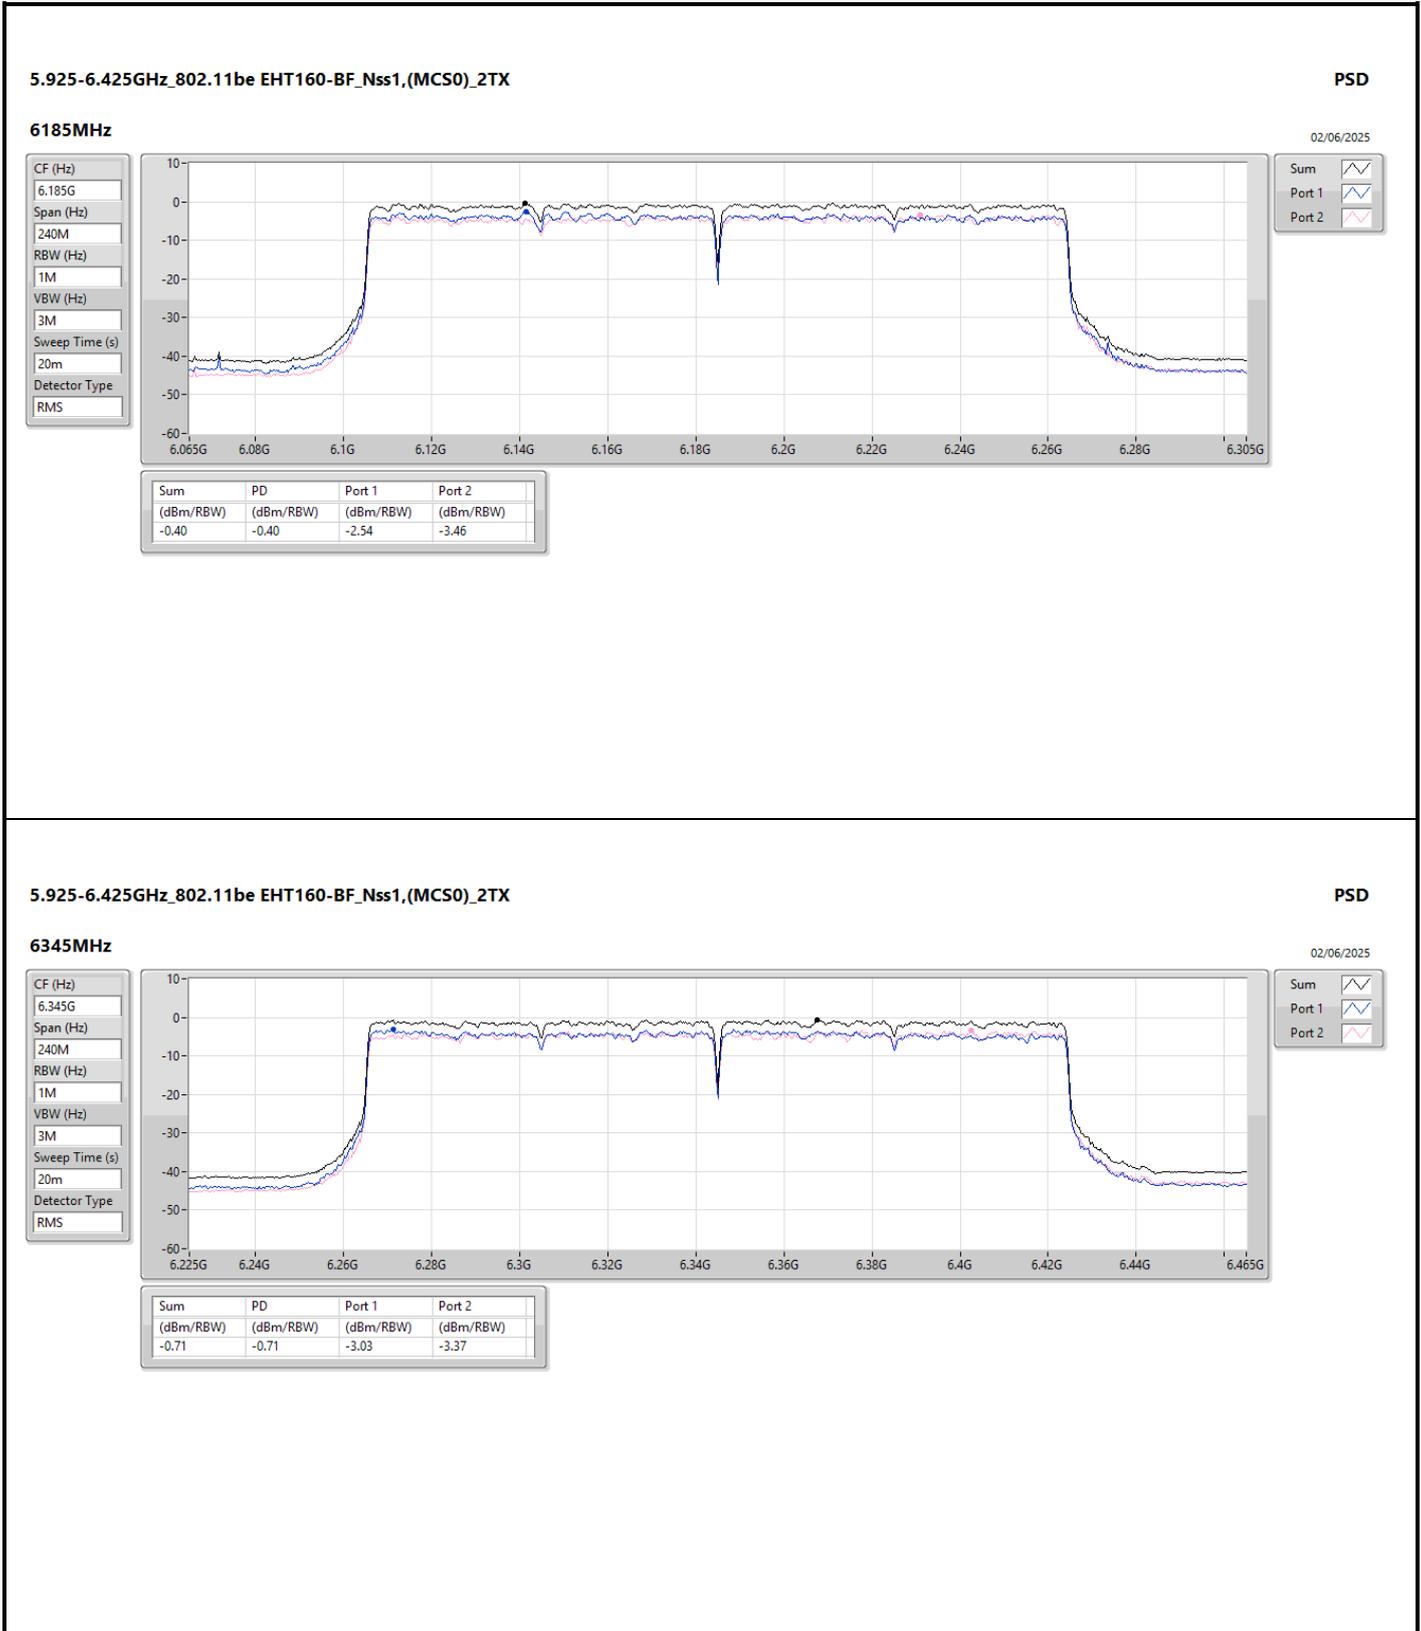

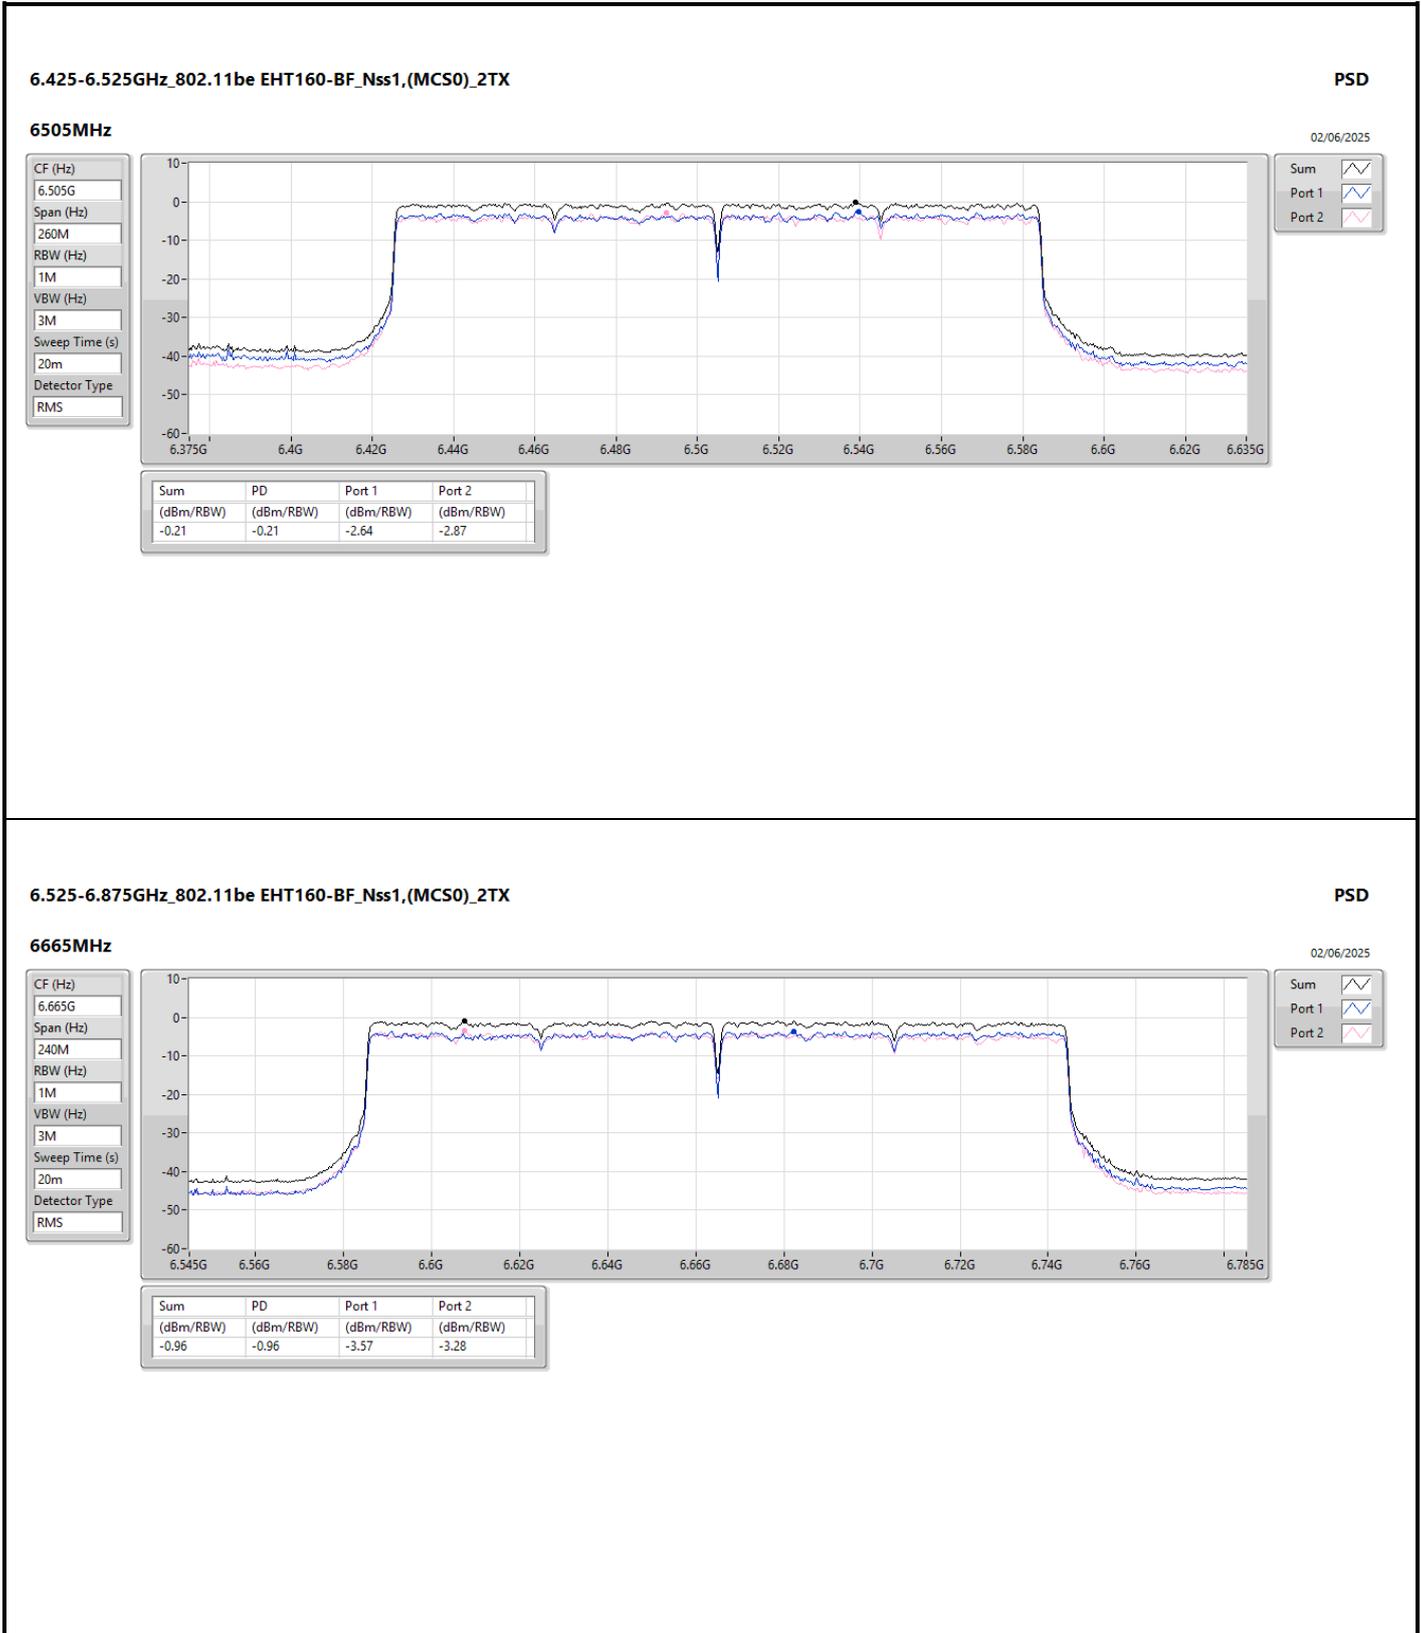

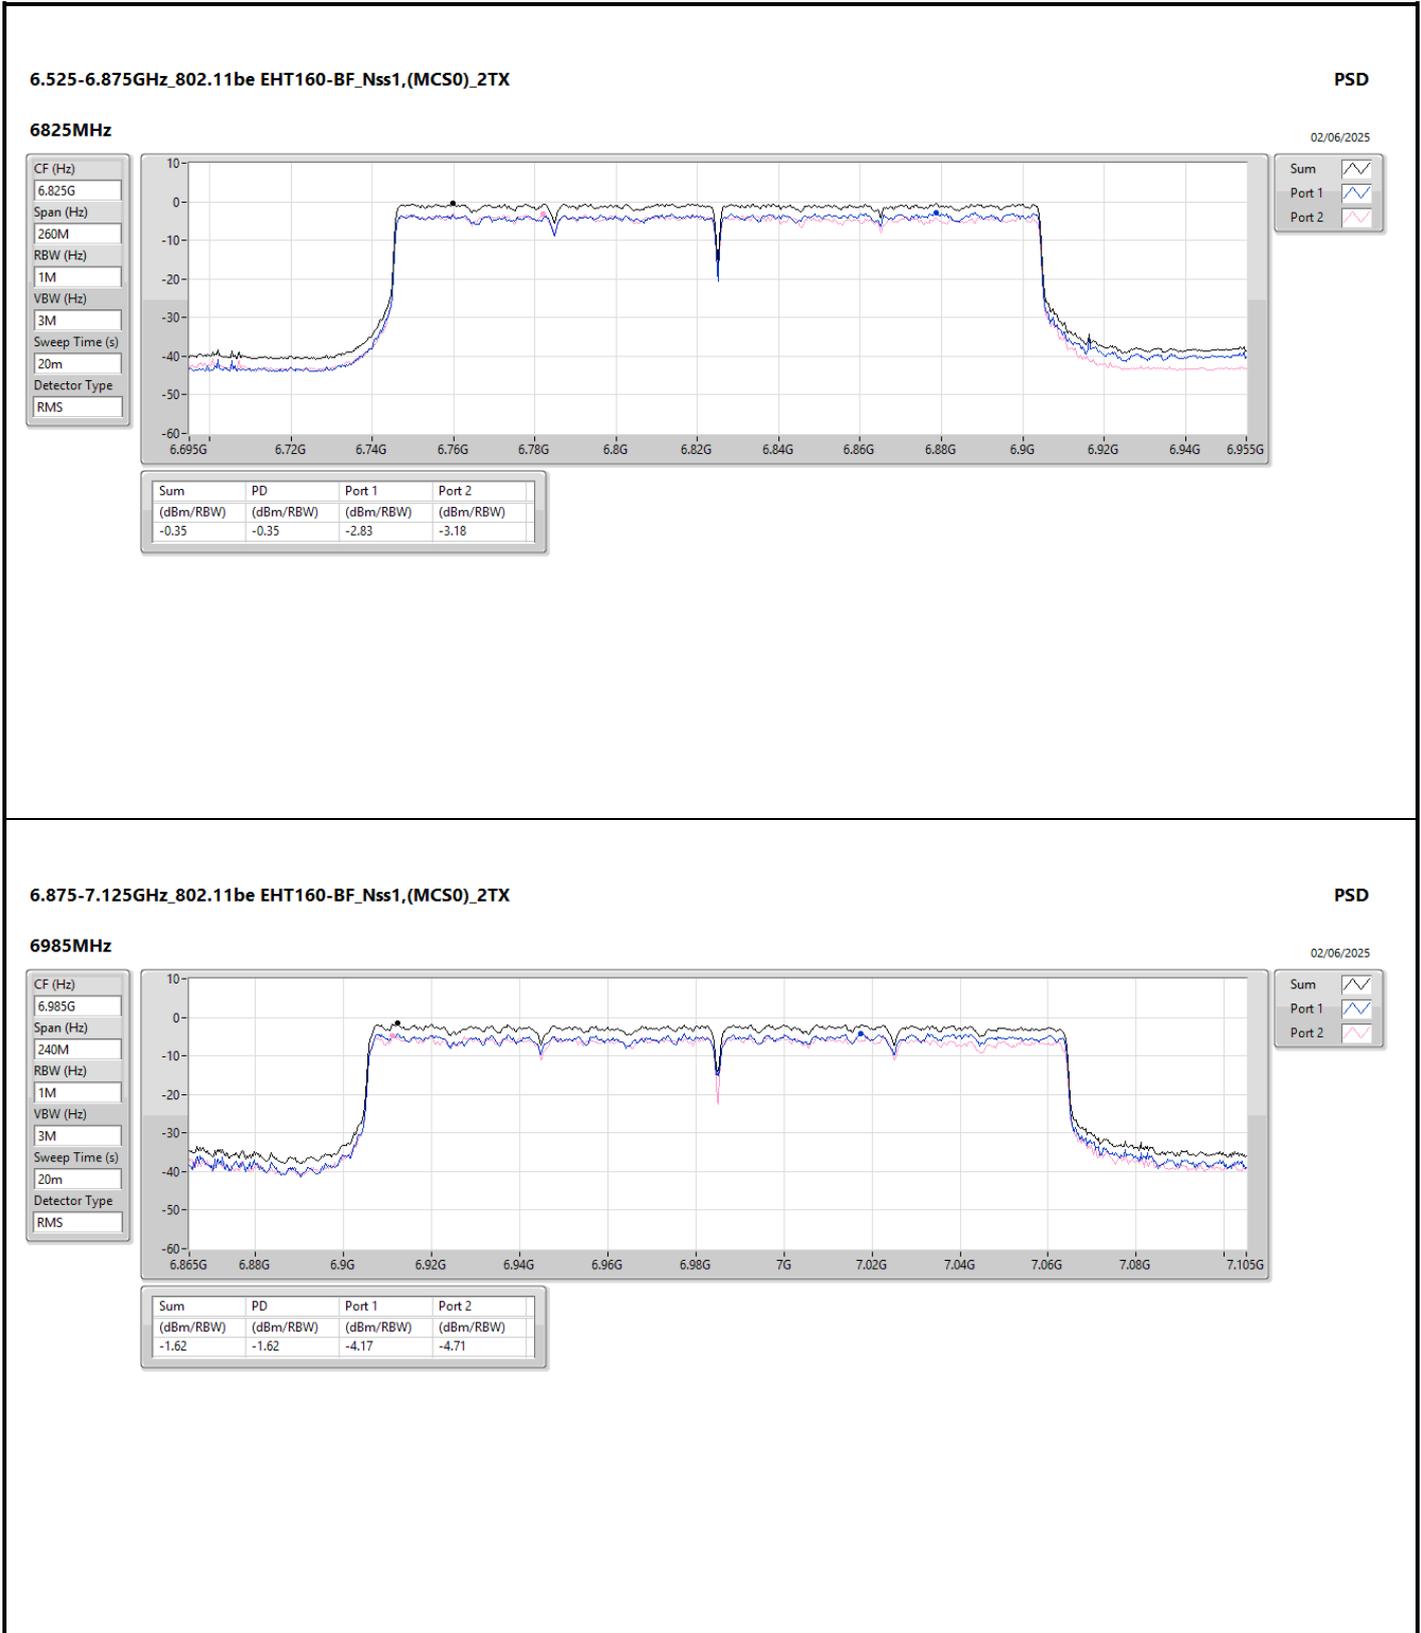

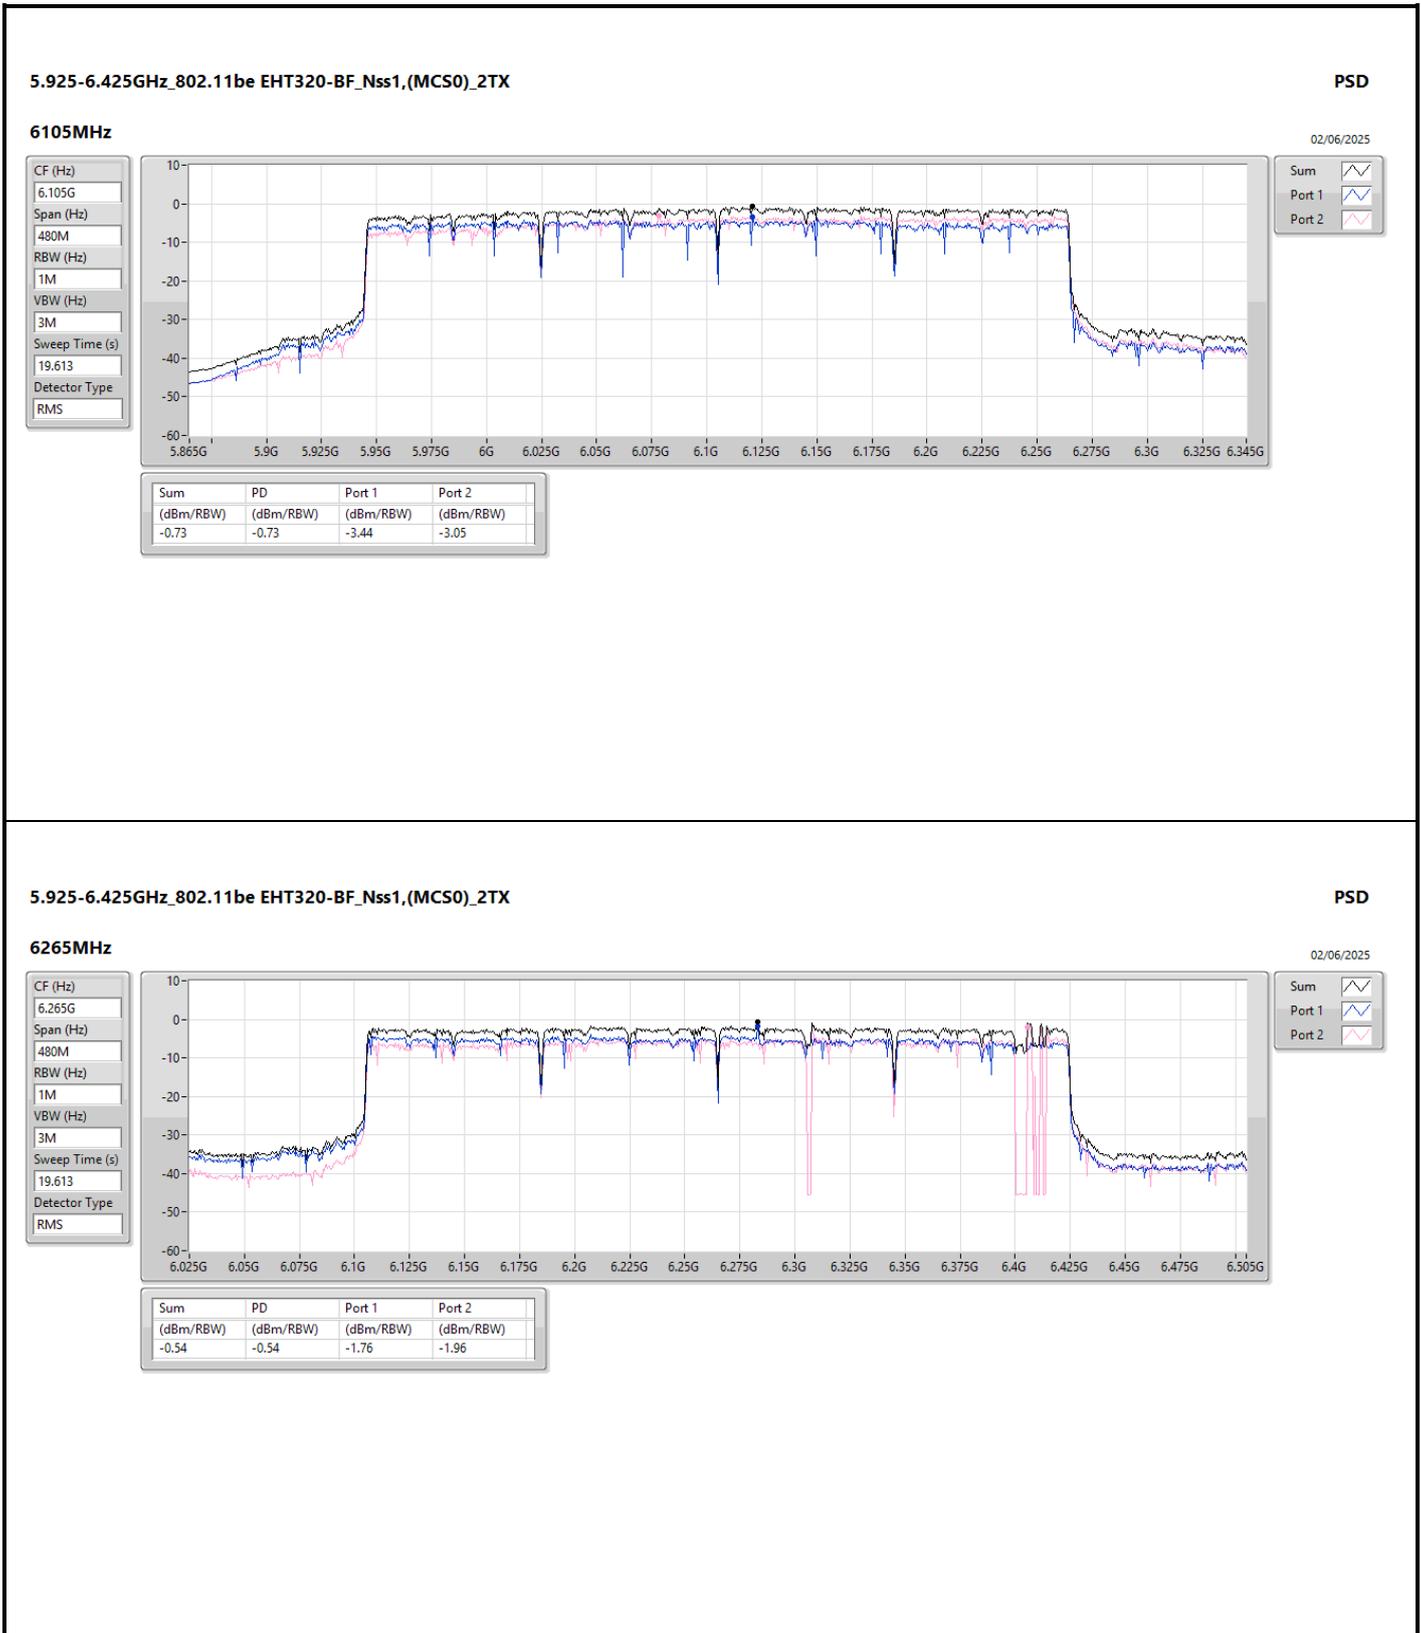

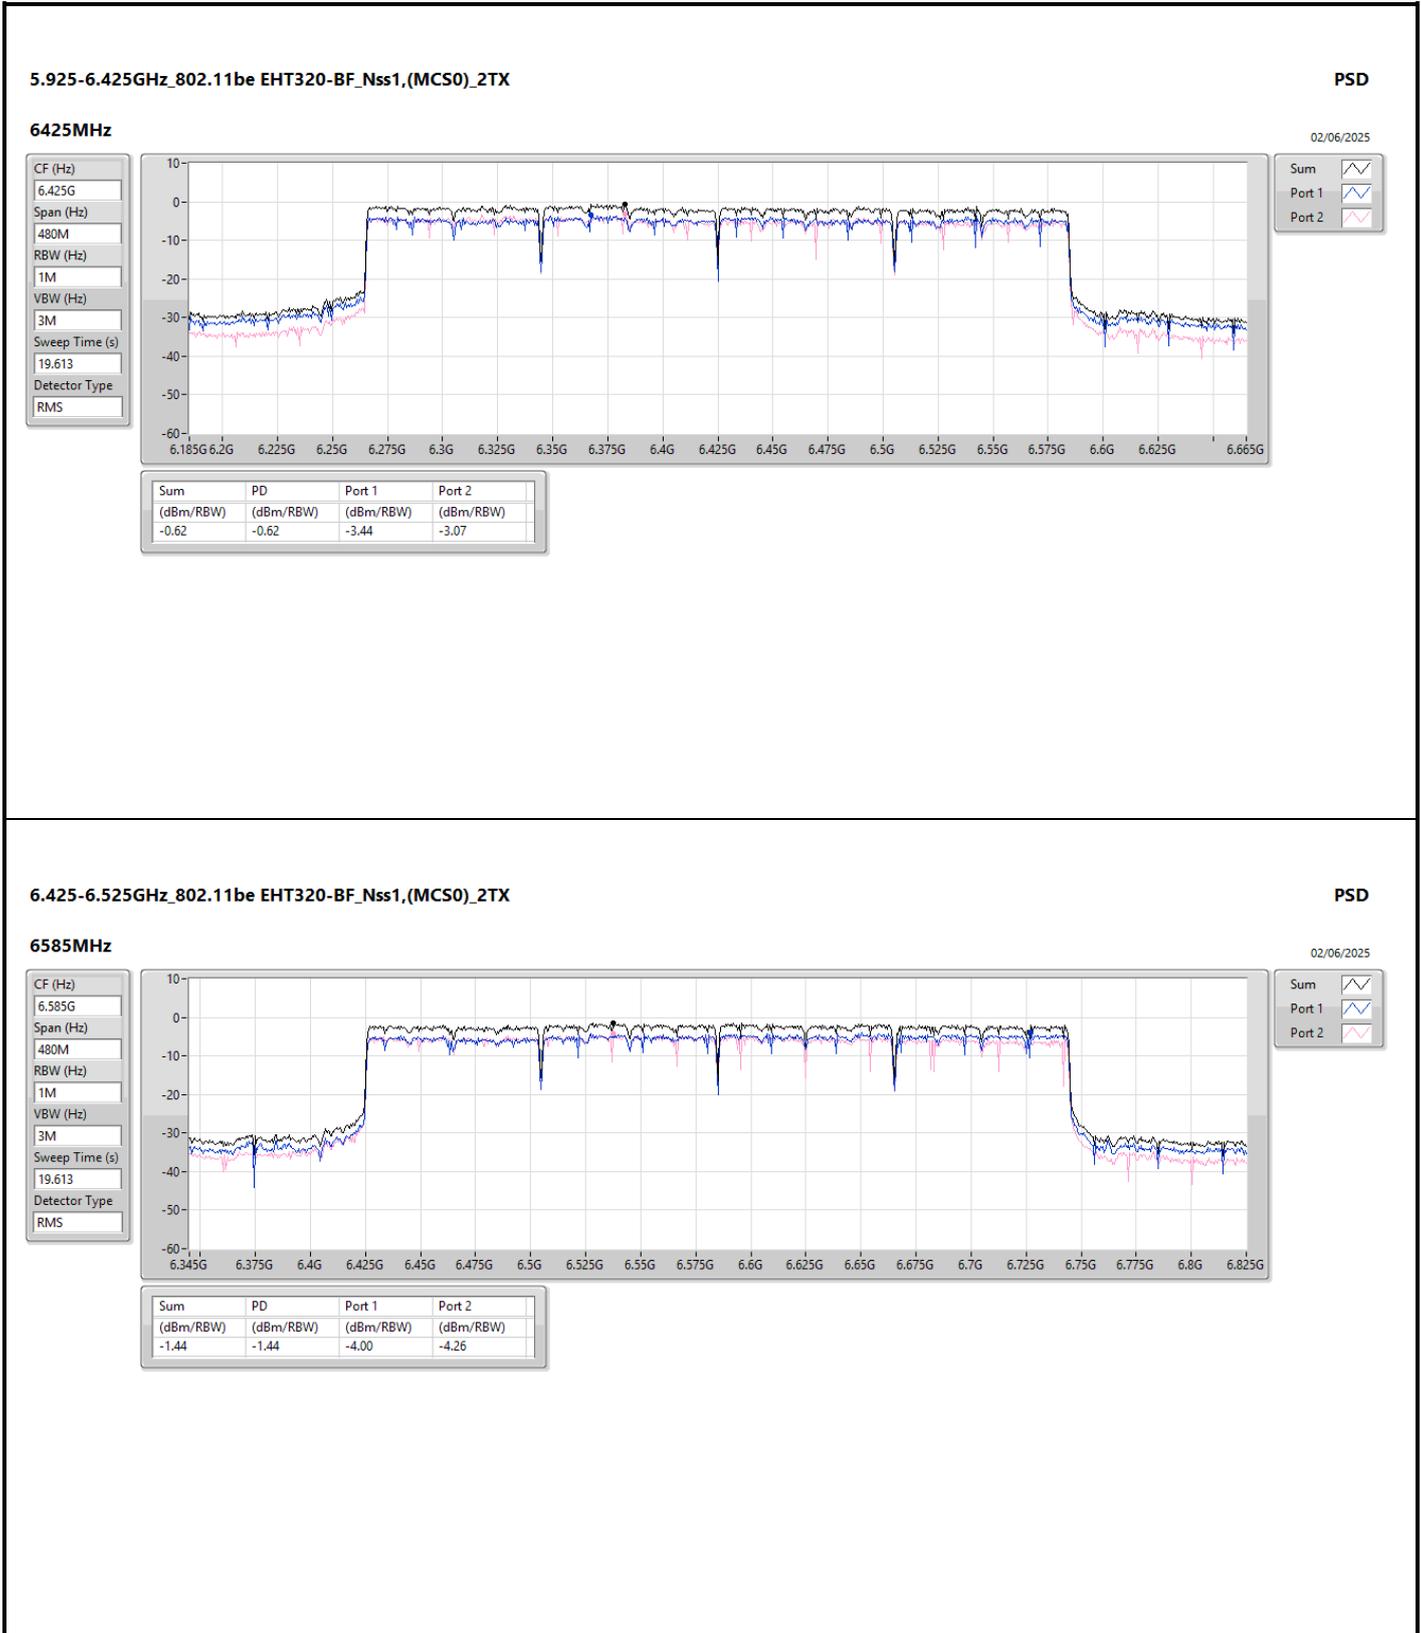






Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 3	Pass	QP	40.67M	35.90	40.00	-4.10	Vertical

Mode 3

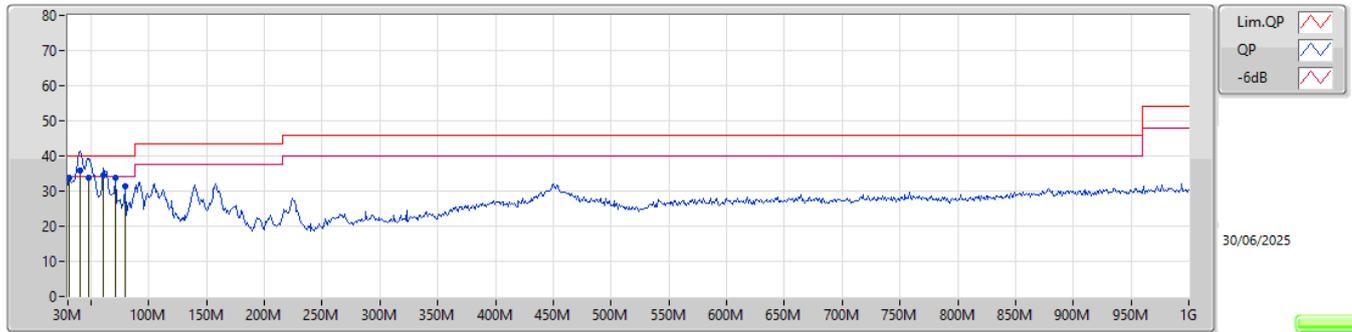

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)
PK	30.97M	33.63	40.00	-6.37	-8.09	3	Vertical	172	1.00	-	41.72	23.20	0.96	32.25
QP	40.67M	35.90	40.00	-4.10	-12.21	3	Vertical	2	1.00	"Worst"	48.11	18.44	1.08	31.73
QP	47.46M	33.76	40.00	-6.24	-15.64	3	Vertical	310	1.00	-	49.40	15.10	1.13	31.87
QP	61.04M	34.42	40.00	-5.58	-18.33	3	Vertical	37	2.00	-	52.75	12.42	1.25	32.00
PK	70.74M	33.93	40.00	-6.07	-18.31	3	Vertical	339	2.00	-	52.24	12.33	1.33	31.97
PK	79.47M	31.42	40.00	-8.58	-17.63	3	Vertical	274	1.25	-	49.05	12.99	1.40	32.02

Mode 3

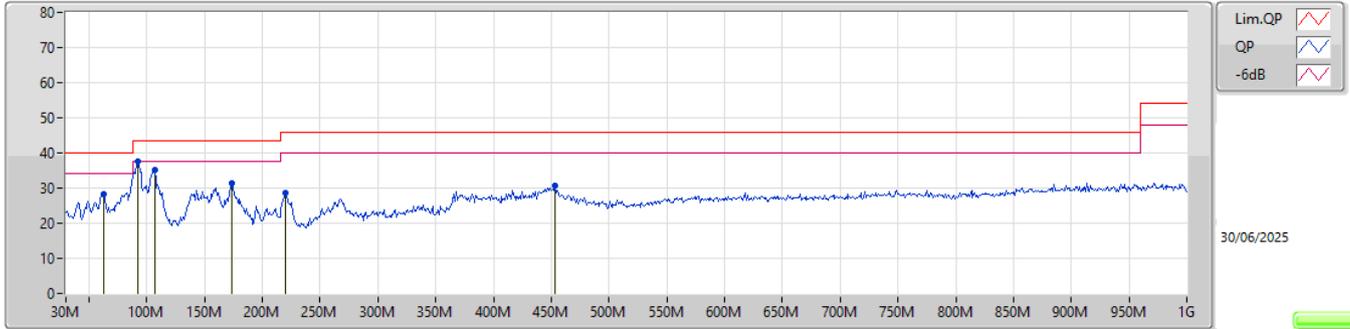

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)
PK	62.98M	28.27	40.00	-11.73	-18.34	3	Horizontal	102	3.00	-	46.61	12.39	1.26	31.99
PK	92.08M	37.55	43.50	-5.95	-15.22	3	Horizontal	106	2.00	"Worst"	52.77	15.30	1.48	32.00
PK	106.63M	35.12	43.50	-8.38	-12.90	3	Horizontal	261	3.00	-	48.02	17.48	1.58	31.96
PK	173.56M	31.50	43.50	-12.00	-14.51	3	Horizontal	4	1.50	-	46.01	15.49	1.99	31.99
PK	220.12M	28.67	46.00	-17.33	-14.67	3	Horizontal	359	2.00	-	43.34	15.14	2.24	32.05
PK	452.92M	30.63	46.00	-15.37	-6.58	3	Horizontal	294	2.00	-	37.21	22.44	3.27	32.29




Test Mode: Mode 1

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	RMS	5.922G	68.00	68.20	-0.20	3	Vertical	124	1.59	-

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

5955MHz_TX

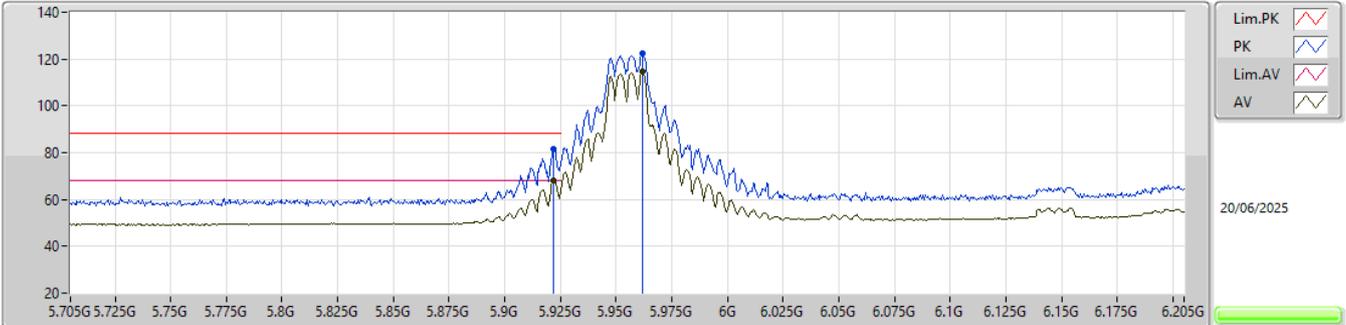


EUT_Y_2TX
 Setting 25.5
 03-E-5-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.922G	81.43	88.20	-6.77	73.95	3	Vertical	124	1.59	-	34.59	8.09	35.20
RMS	5.922G	68.00	68.20	-0.20	60.52	3	Vertical	124	1.59	-	34.59	8.09	35.20
PK	5.962G	122.48	Inf	-Inf	114.84	3	Vertical	124	1.59	-	34.70	8.13	35.19
RMS	5.962G	114.43	Inf	-Inf	106.79	3	Vertical	124	1.59	-	34.70	8.13	35.19

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

5955MHz_TX

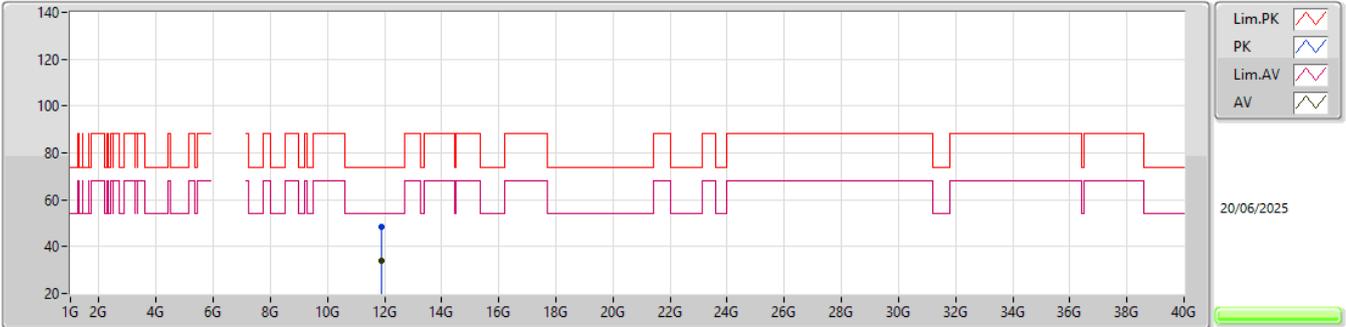


EUT_Y_2TX
 Setting 25.5
 03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.91032G	48.48	74.00	-25.52	42.75	3	Vertical	191	1.81	-	39.28	11.79	45.34
AV	11.90763G	33.96	54.00	-20.04	28.23	3	Vertical	191	1.81	-	39.28	11.79	45.34

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

5955MHz_TX

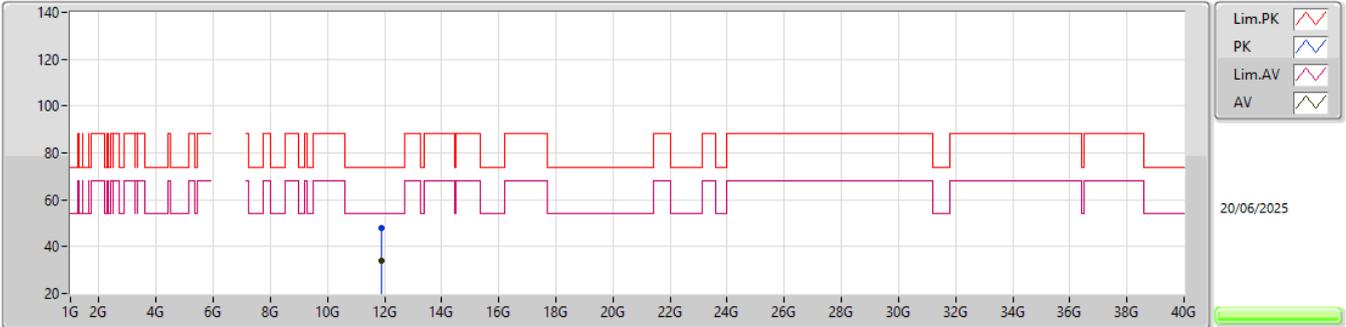

EUT_Y_2TX
 Setting 25.5
 03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.90859G	47.97	74.00	-26.03	42.24	3	Horizontal	175	1.85	-	39.28	11.79	45.34
AV	11.91046G	33.90	54.00	-20.10	28.17	3	Horizontal	175	1.85	-	39.28	11.79	45.34

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

5955MHz_TX




EUT_Y_2TX
 Setting 25.5
 03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.8246G	55.76	83.54	-27.78	41.34	1	Vertical	115	1.86	-	39.10	22.99	47.67
AV	23.81932G	42.33	63.54	-21.21	27.91	1	Vertical	115	1.86	-	39.10	22.99	47.67

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

5955MHz_TX

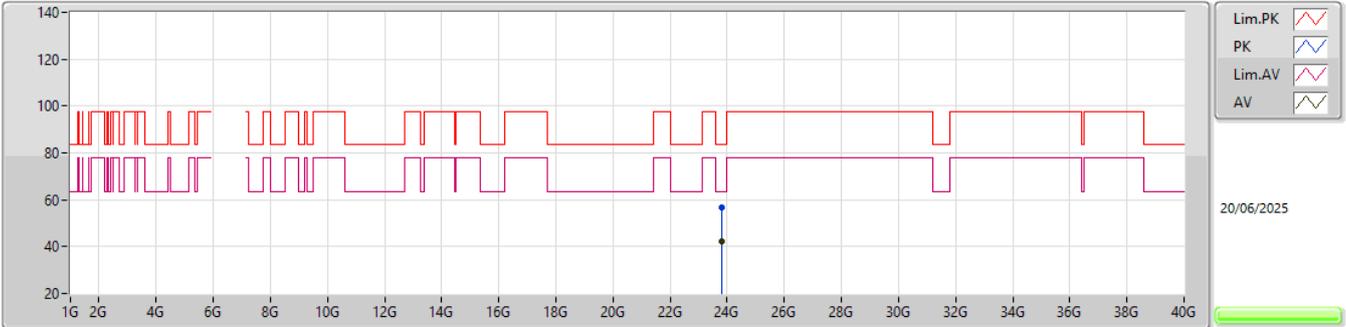


EUT_Y_2TX
 Setting 25.5
 03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.81148G	56.51	83.54	-27.03	42.11	1	Horizontal	13	2.12	-	39.10	22.98	47.68
AV	23.81988G	42.34	63.54	-21.20	27.92	1	Horizontal	13	2.12	-	39.10	22.99	47.67

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6195MHz_TX

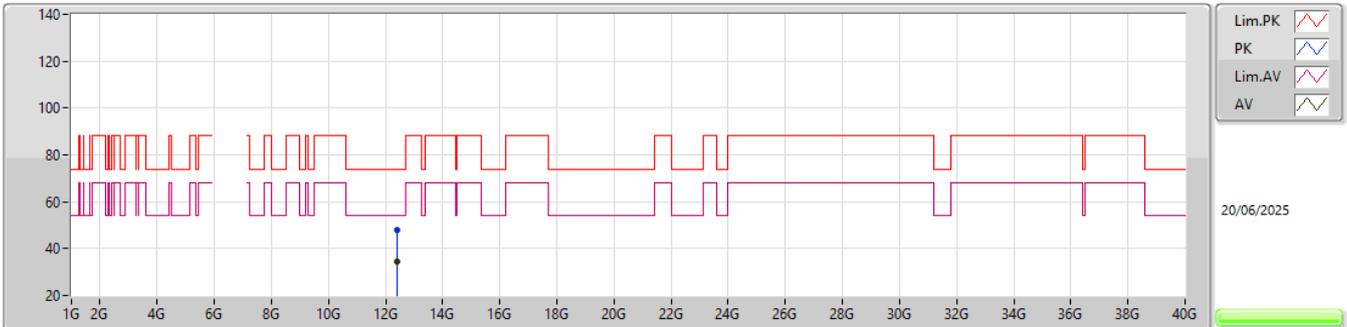


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.39008G	48.04	74.00	-25.96	43.01	3	Vertical	306	1.41	-	38.80	11.80	45.57
AV	12.38993G	34.59	54.00	-19.41	29.56	3	Vertical	306	1.41	-	38.80	11.80	45.57

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6195MHz_TX

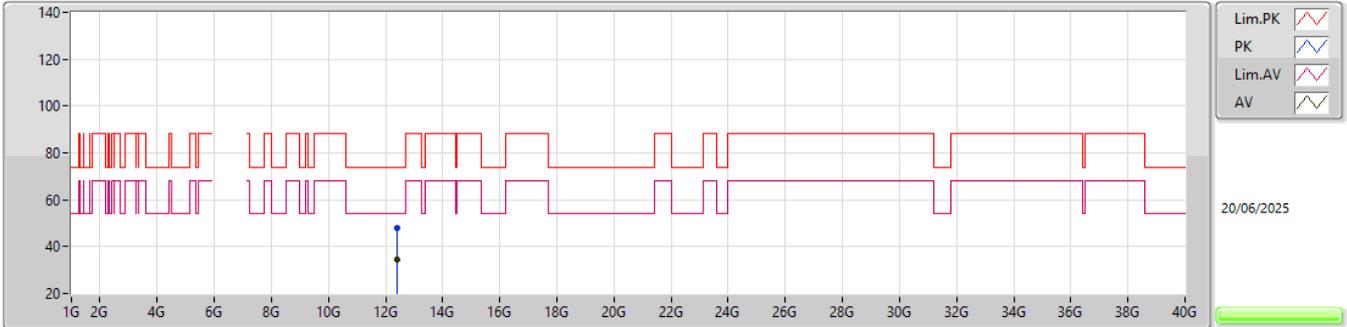

EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.38996G	48.03	74.00	-25.97	43.00	3	Horizontal	285	2.40	-	38.80	11.80	45.57
AV	12.38991G	34.60	54.00	-19.40	29.57	3	Horizontal	285	2.40	-	38.80	11.80	45.57

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6195MHz_TX




EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.5808G	61.58	83.54	-21.96	51.55	1	Vertical	55	1.51	-	37.80	20.61	48.38
AV	18.5866G	48.69	63.54	-14.85	38.67	1	Vertical	55	1.51	-	37.80	20.61	48.39

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6195MHz_TX

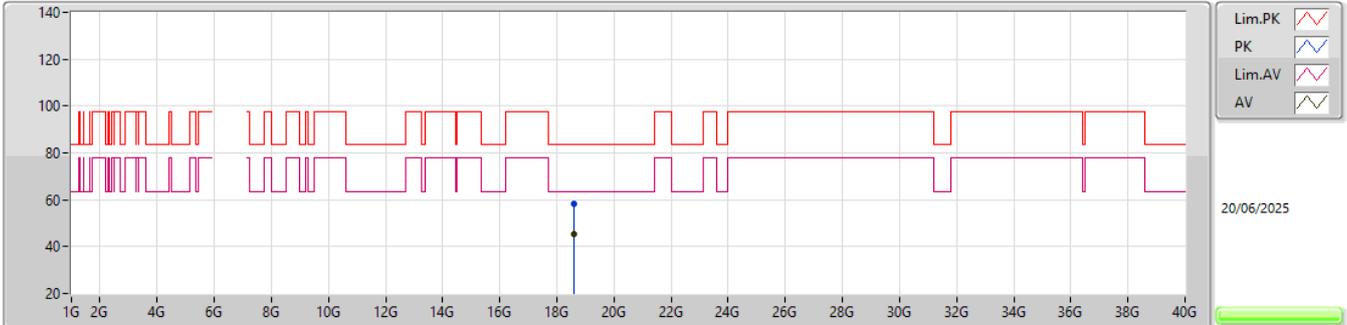


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.5876G	58.47	83.54	-25.07	48.45	1	Horizontal	31	2.30	-	37.80	20.61	48.39
AV	18.58192G	45.44	63.54	-18.10	35.41	1	Horizontal	31	2.30	-	37.80	20.61	48.38

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6415MHz_TX

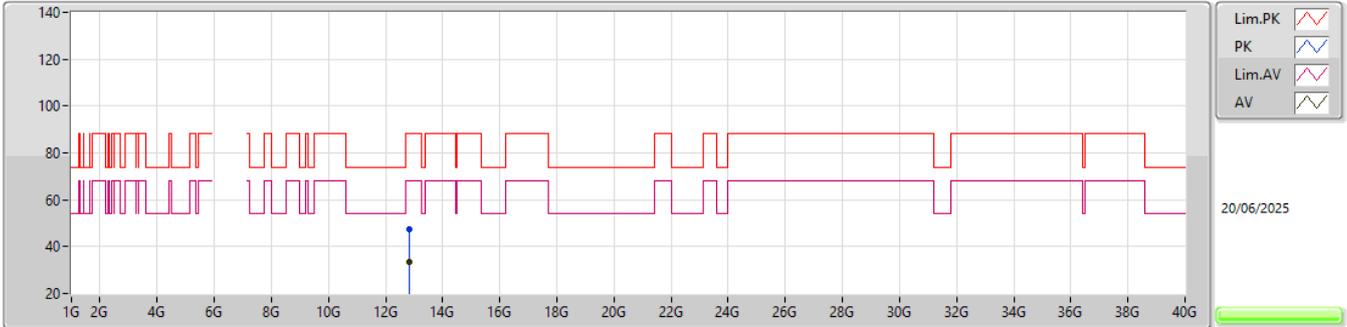


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.83119G	47.53	88.20	-40.67	41.86	3	Vertical	152	2.54	-	39.16	11.77	45.26
RMS	12.82782G	33.40	68.20	-34.80	27.73	3	Vertical	152	2.54	-	39.16	11.77	45.26

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6415MHz_TX

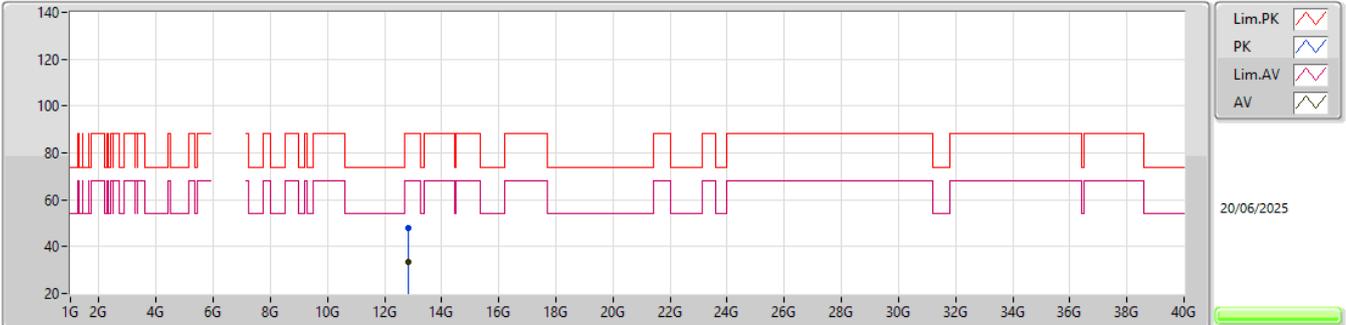


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.8312G	47.99	88.20	-40.21	42.32	3	Horizontal	80	2.35	-	39.16	11.77	45.26
RMS	12.83069G	33.42	68.20	-34.78	27.75	3	Horizontal	80	2.35	-	39.16	11.77	45.26

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6415MHz_TX

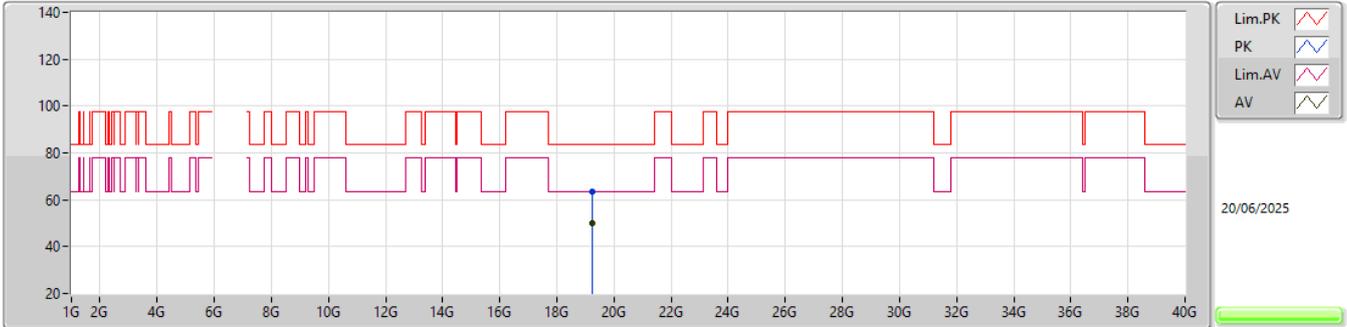

EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.24216G	63.65	83.54	-19.89	53.70	1	Vertical	101	2.88	-	37.97	20.78	48.80
AV	19.2466G	49.95	63.54	-13.59	39.98	1	Vertical	101	2.88	-	37.99	20.78	48.80

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6415MHz_TX




EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.25144G	61.14	83.54	-22.40	51.17	1	Horizontal	256	1.96	-	37.99	20.78	48.80
AV	19.24648G	48.07	63.54	-15.47	38.10	1	Horizontal	256	1.96	-	37.99	20.78	48.80

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6435MHz_TX

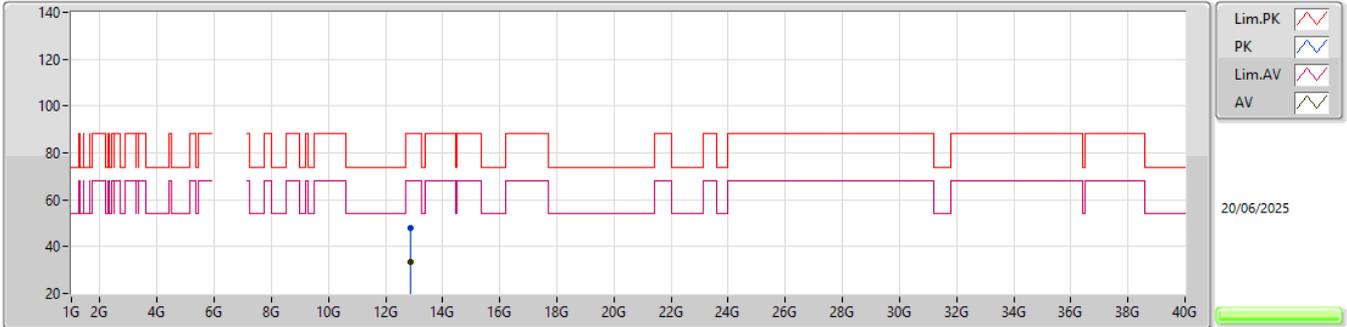


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.86911G	47.95	88.20	-40.25	42.17	3	Vertical	231	2.29	-	39.24	11.76	45.22
RMS	12.86979G	33.65	68.20	-34.55	27.87	3	Vertical	231	2.29	-	39.24	11.76	45.22

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6435MHz_TX

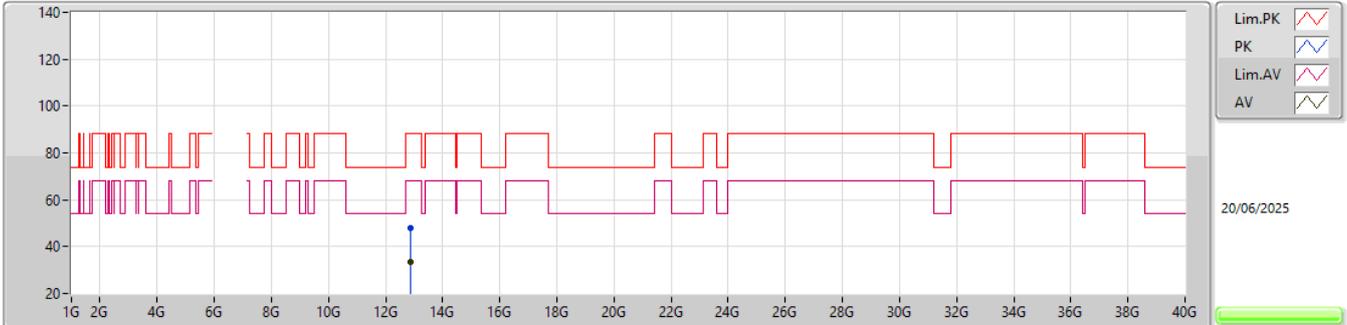


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.87125G	47.89	88.20	-40.31	42.10	3	Horizontal	4	1.51	-	39.24	11.76	45.21
RMS	12.8697G	33.65	68.20	-34.55	27.87	3	Horizontal	4	1.51	-	39.24	11.76	45.22

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6435MHz_TX

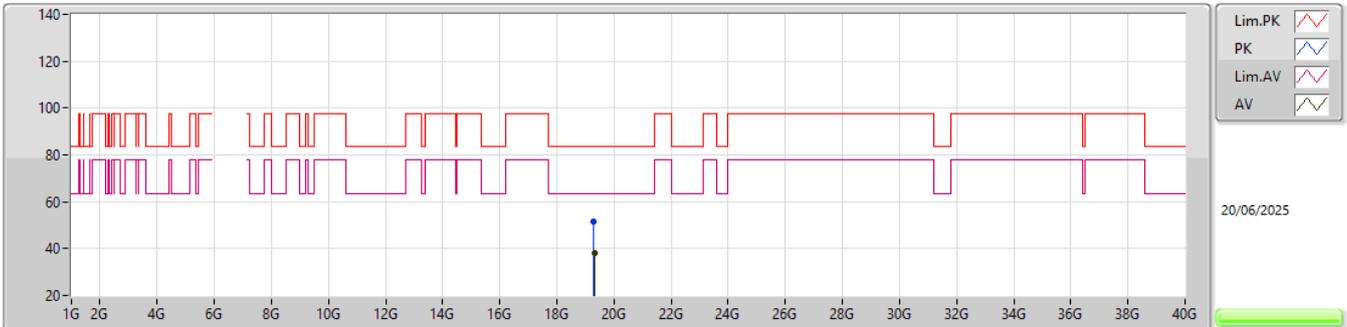


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.30326G	51.74	83.54	-31.80	41.93	1	Vertical	217	2.98	-	37.80	20.81	48.80
AV	19.30528G	38.15	63.54	-25.39	28.34	1	Vertical	217	2.98	-	37.80	20.81	48.80

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6435MHz_TX

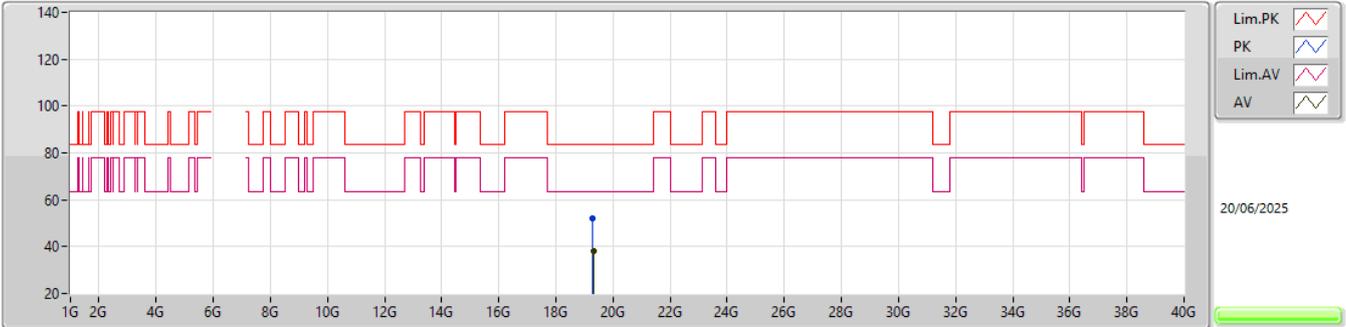


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.30104G	52.25	83.54	-31.29	42.44	1	Horizontal	225	1.86	-	37.80	20.81	48.80
AV	19.30546G	38.14	63.54	-25.40	28.33	1	Horizontal	225	1.86	-	37.80	20.81	48.80

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6475MHz_TX

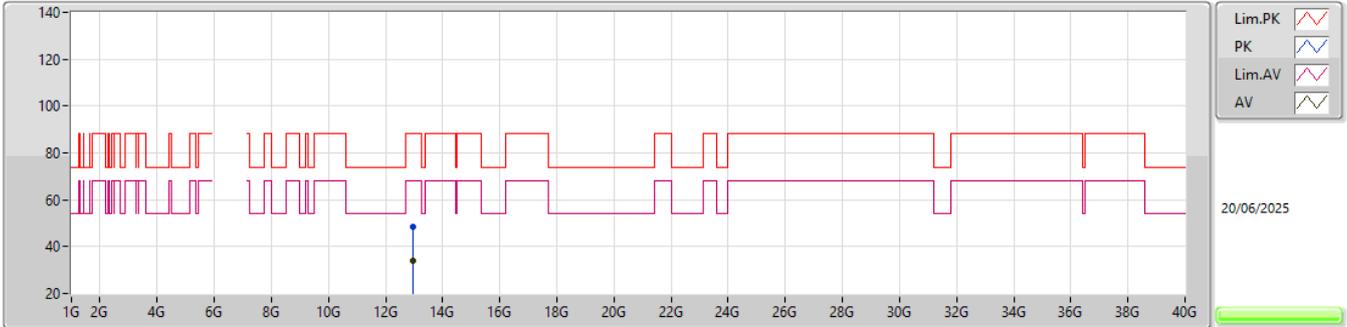


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (*)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.94973G	48.34	88.20	-39.86	42.21	3	Vertical	279	2.00	-	39.50	11.76	45.13
RMS	12.9513G	34.03	68.20	-34.17	27.89	3	Vertical	279	2.00	-	39.50	11.76	45.12

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6475MHz_TX

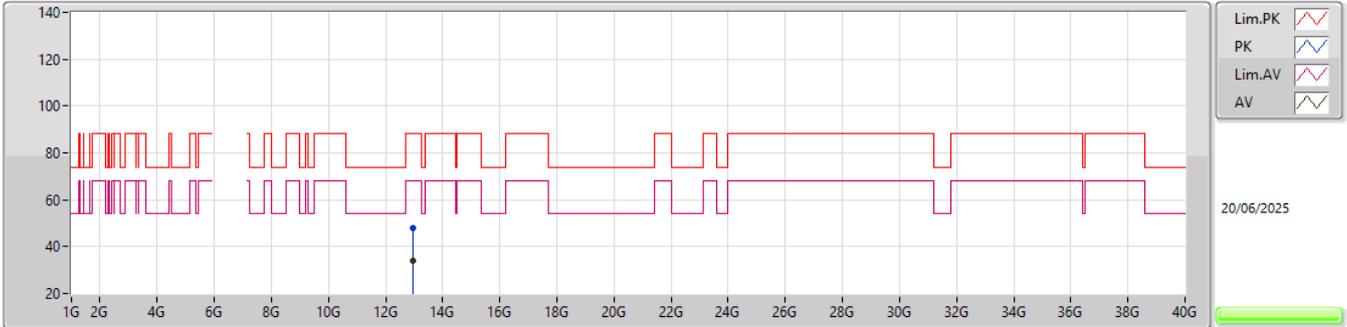


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.94843G	48.01	88.20	-40.19	41.89	3	Horizontal	303	1.71	-	39.49	11.76	45.13
RMS	12.94812G	34.00	68.20	-34.20	27.88	3	Horizontal	303	1.71	-	39.49	11.76	45.13

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6475MHz_TX

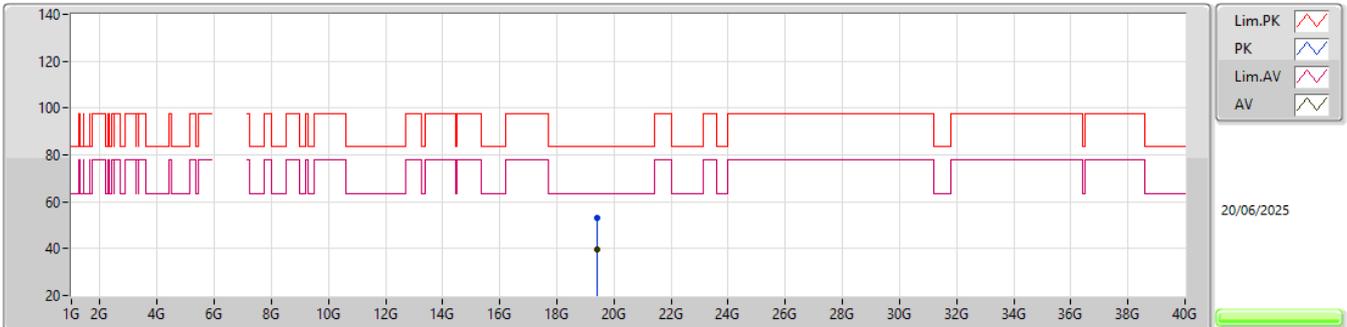


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.4289G	53.09	83.54	-30.45	43.24	1	Vertical	216	2.84	-	37.78	20.87	48.80
AV	19.4295G	39.50	63.54	-24.04	29.65	1	Vertical	216	2.84	-	37.78	20.87	48.80

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6475MHz_TX

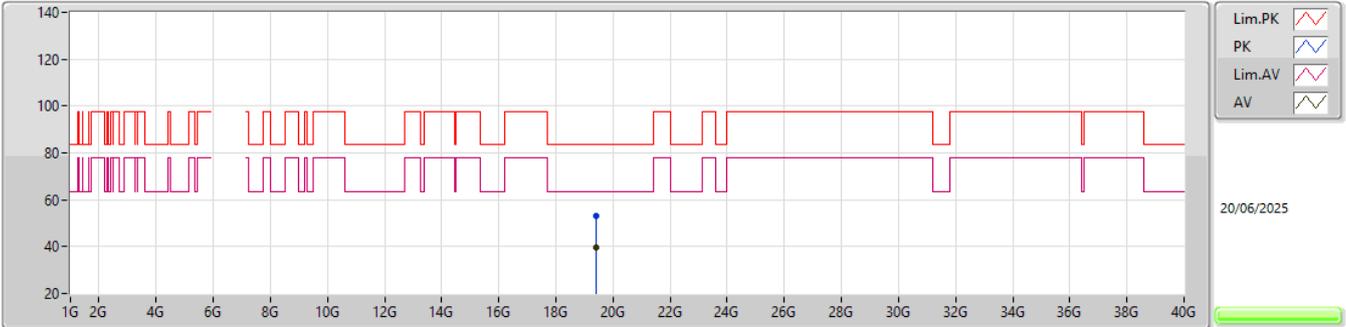


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.42298G	53.35	83.54	-30.19	43.47	1	Horizontal	18	2.75	-	37.81	20.87	48.80
AV	19.42976G	39.49	63.54	-24.05	29.64	1	Horizontal	18	2.75	-	37.78	20.87	48.80

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6515MHz_TX

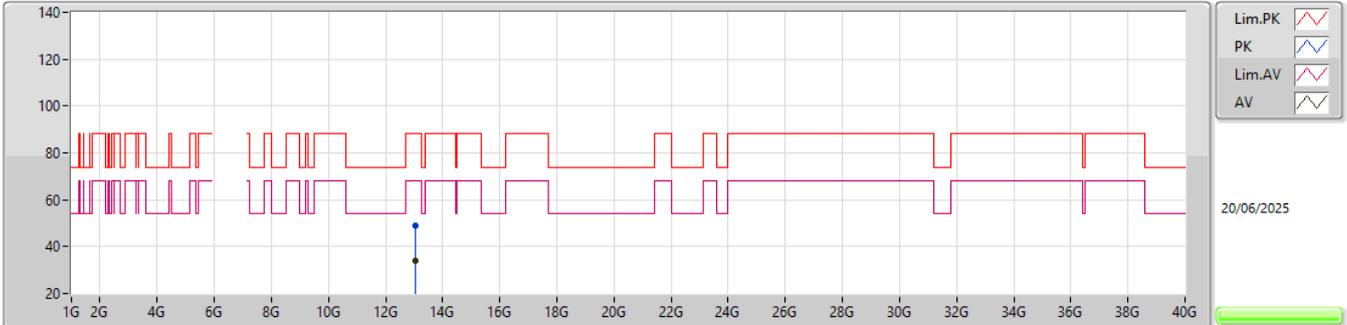


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.02987G	49.04	88.20	-39.16	42.84	3	Vertical	355	1.01	-	39.50	11.75	45.05
RMS	13.02828G	33.75	68.20	-34.45	27.55	3	Vertical	355	1.01	-	39.50	11.75	45.05

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6515MHz_TX

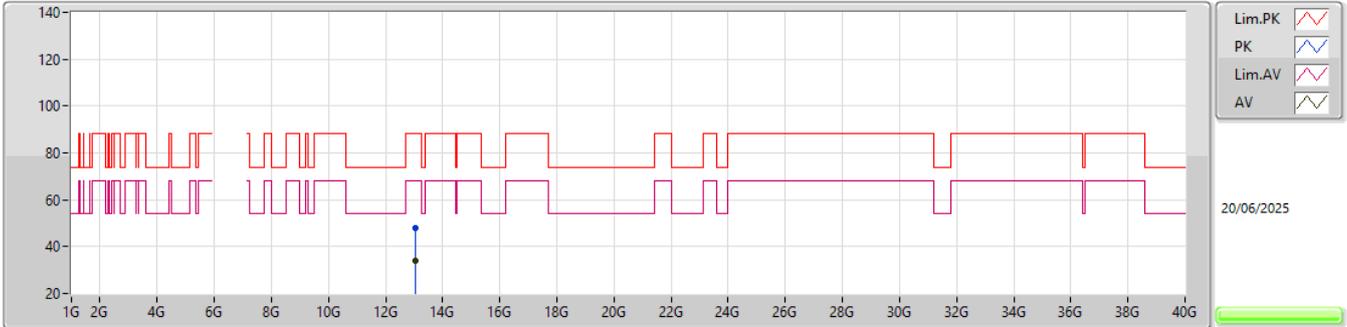

EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.02772G	47.75	88.20	-40.45	41.55	3	Horizontal	48	1.77	-	39.50	11.75	45.05
RMS	13.02995G	33.78	68.20	-34.42	27.58	3	Horizontal	48	1.77	-	39.50	11.75	45.05

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6515MHz_TX



EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.54406G	53.94	83.54	-29.60	44.15	1	Vertical	293	2.28	-	37.71	20.88	48.80
AV	19.54882G	39.95	63.54	-23.59	30.18	1	Vertical	293	2.28	-	37.70	20.87	48.80

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6515MHz_TX




EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.54914G	54.15	83.54	-29.39	44.38	1	Horizontal	318	1.13	-	37.70	20.87	48.80
AV	19.54028G	39.97	63.54	-23.57	30.17	1	Horizontal	318	1.13	-	37.72	20.88	48.80

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6535MHz_TX

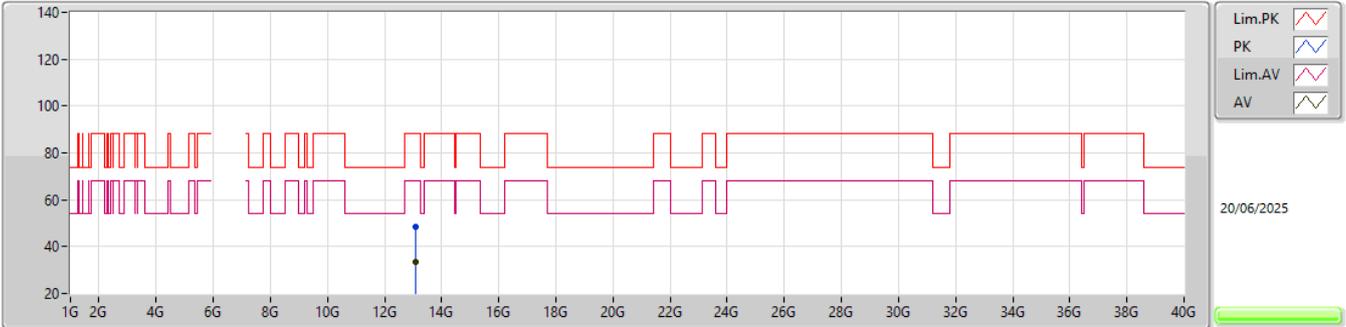


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.07129G	48.25	88.20	-39.95	41.97	3	Vertical	245	1.61	-	39.54	11.75	45.01
RMS	13.0686G	33.56	68.20	-34.64	27.28	3	Vertical	245	1.61	-	39.54	11.75	45.01

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6535MHz_TX

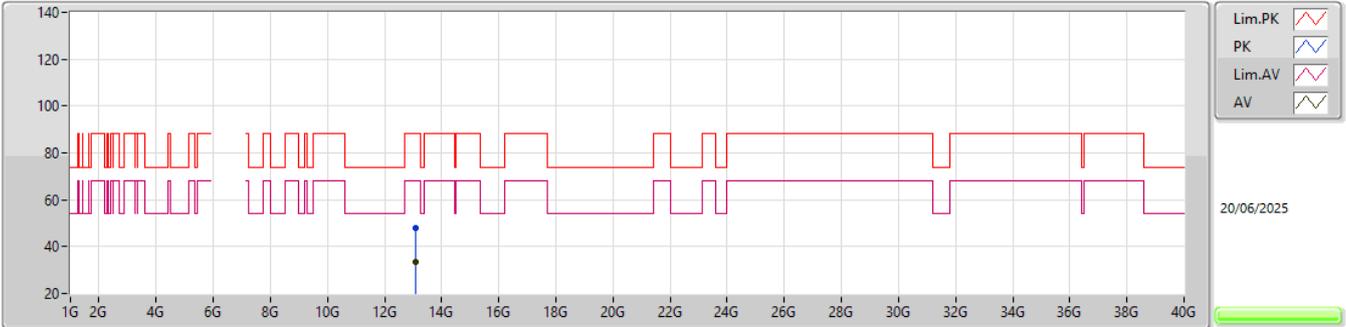


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.07172G	47.87	88.20	-40.33	41.59	3	Horizontal	321	2.03	-	39.54	11.75	45.01
RMS	13.06856G	33.56	68.20	-34.64	27.28	3	Horizontal	321	2.03	-	39.54	11.75	45.01

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6535MHz_TX

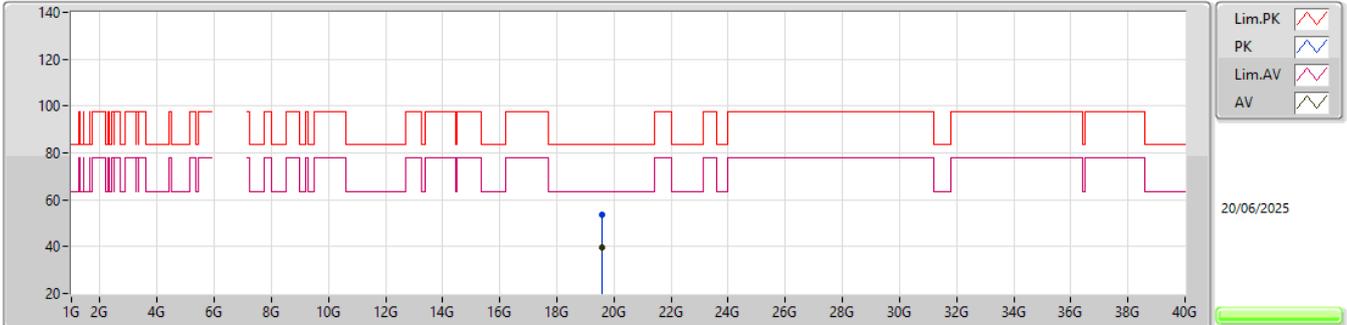

EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.60062G	53.46	83.54	-30.08	43.72	1	Vertical	184	2.96	-	37.70	20.84	48.80
AV	19.60086G	39.89	63.54	-23.65	30.15	1	Vertical	184	2.96	-	37.70	20.84	48.80

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6535MHz_TX




EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.6025G	53.66	83.54	-29.88	43.92	1	Horizontal	290	1.86	-	37.70	20.84	48.80
AV	19.60098G	39.66	63.54	-23.88	29.92	1	Horizontal	290	1.86	-	37.70	20.84	48.80

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6695MHz_TX

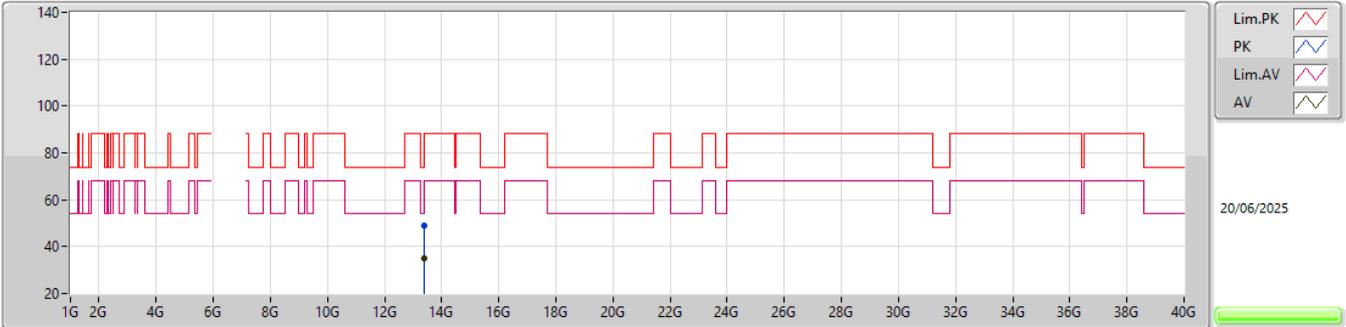


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.39216G	48.96	74.00	-25.04	41.80	3	Vertical	313	1.53	-	40.18	11.73	44.75
AV	13.39247G	35.01	54.00	-18.99	27.85	3	Vertical	313	1.53	-	40.18	11.73	44.75

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6695MHz_TX

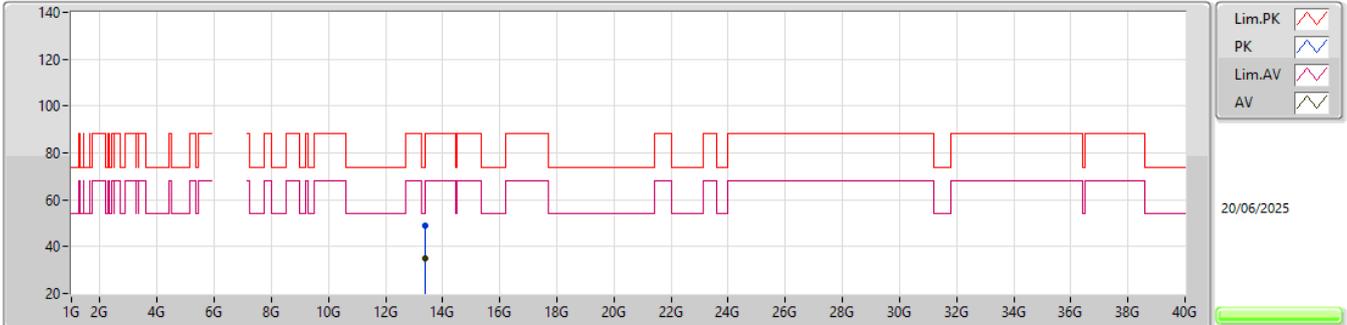


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.38859G	49.15	74.00	-24.85	41.99	3	Horizontal	73	2.70	-	40.18	11.73	44.75
AV	13.38987G	35.03	54.00	-18.97	27.87	3	Horizontal	73	2.70	-	40.18	11.73	44.75

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6695MHz_TX

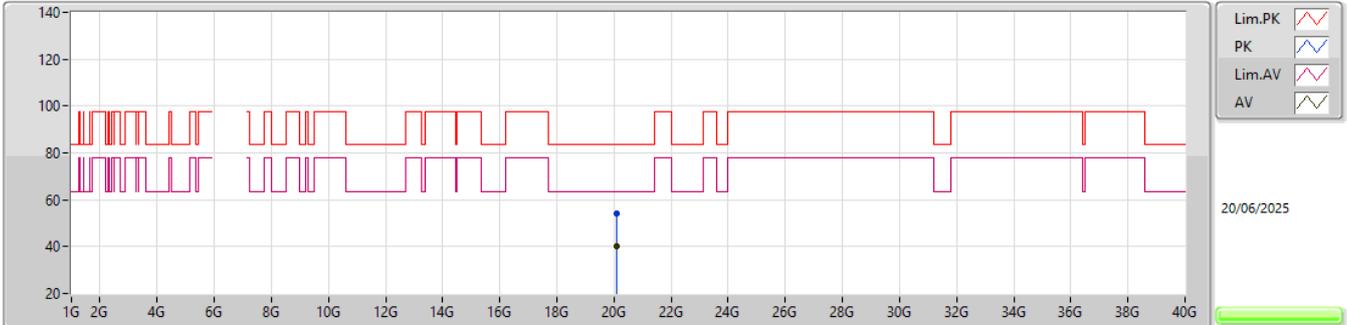


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.08412G	54.09	83.54	-29.45	44.37	1	Vertical	187	1.06	-	37.80	20.70	48.78
AV	20.08062G	39.94	63.54	-23.60	30.22	1	Vertical	187	1.06	-	37.80	20.70	48.78

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6695MHz_TX

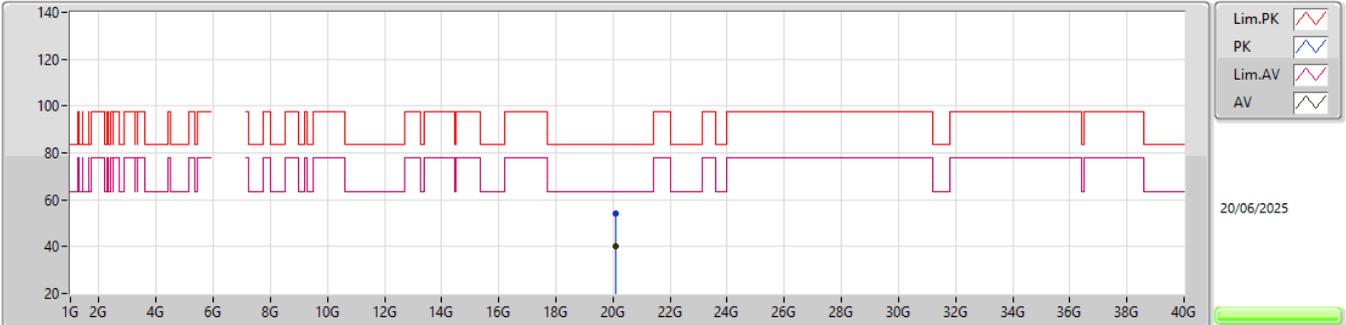


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.08498G	54.29	83.54	-29.25	44.57	1	Horizontal	278	2.61	-	37.80	20.70	48.78
AV	20.0806G	39.97	63.54	-23.57	30.25	1	Horizontal	278	2.61	-	37.80	20.70	48.78

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6875MHz_TX

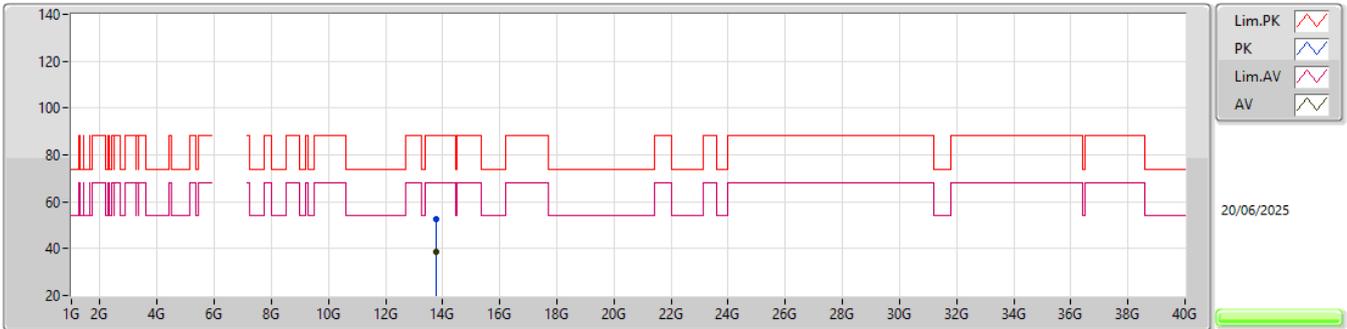


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.75171G	52.55	88.20	-35.65	44.63	3	Vertical	347	1.37	-	40.70	11.70	44.48
RMS	13.75096G	38.44	68.20	-29.76	30.52	3	Vertical	347	1.37	-	40.70	11.70	44.48

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6875MHz_TX

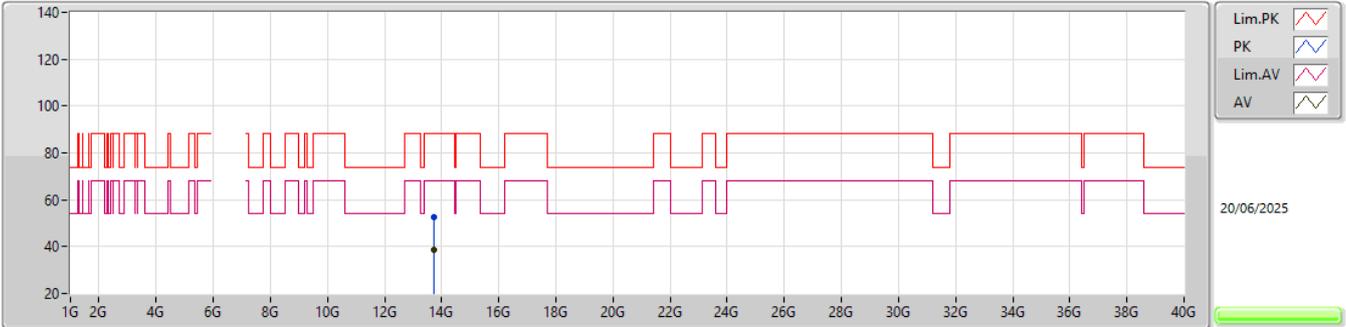


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.74872G	52.62	88.20	-35.58	44.72	3	Horizontal	107	1.18	-	40.69	11.70	44.49
RMS	13.7508G	38.42	68.20	-29.78	30.50	3	Horizontal	107	1.18	-	40.70	11.70	44.48

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6875MHz_TX

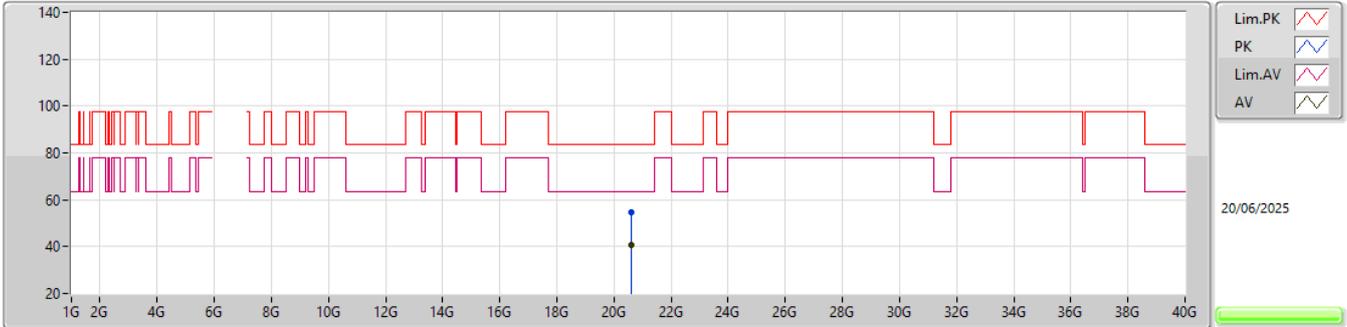


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.62354G	54.50	83.54	-29.04	43.71	1	Vertical	19	2.49	-	37.90	21.59	48.70
AV	20.62366G	40.67	63.54	-22.87	29.88	1	Vertical	19	2.49	-	37.90	21.59	48.70

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6875MHz_TX

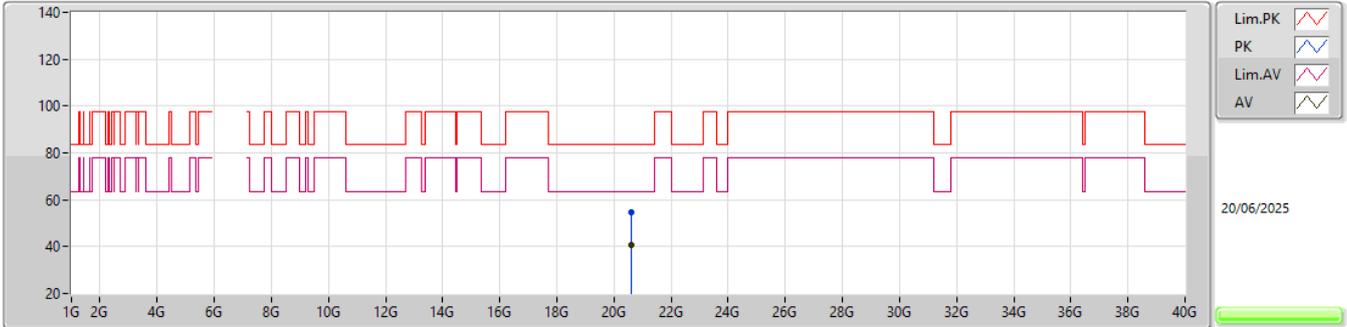


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.62744G	54.56	83.54	-28.98	43.77	1	Horizontal	48	1.22	-	37.90	21.59	48.70
AV	20.62358G	40.67	63.54	-22.87	29.88	1	Horizontal	48	1.22	-	37.90	21.59	48.70

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

6895MHz_TX

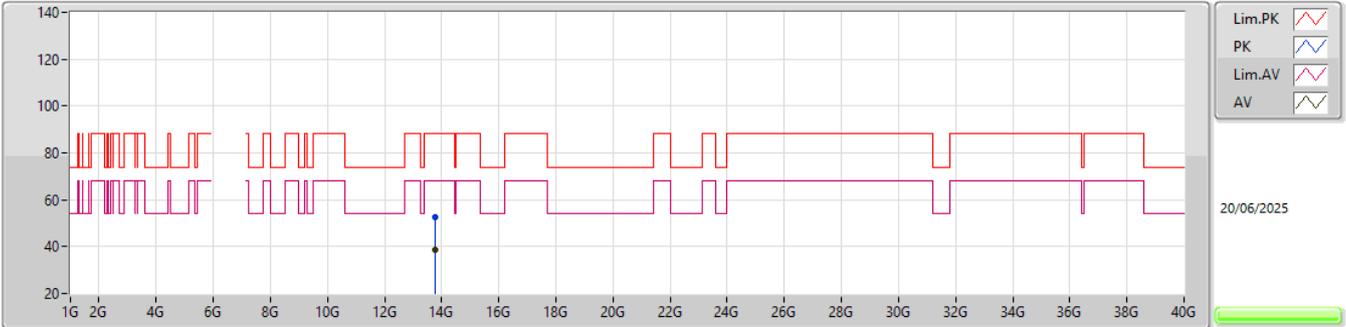


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.79049G	52.57	88.20	-35.63	44.63	3	Vertical	199	2.89	-	40.70	11.70	44.46
RMS	13.79054G	38.63	68.20	-29.57	30.69	3	Vertical	199	2.89	-	40.70	11.70	44.46

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

6895MHz_TX

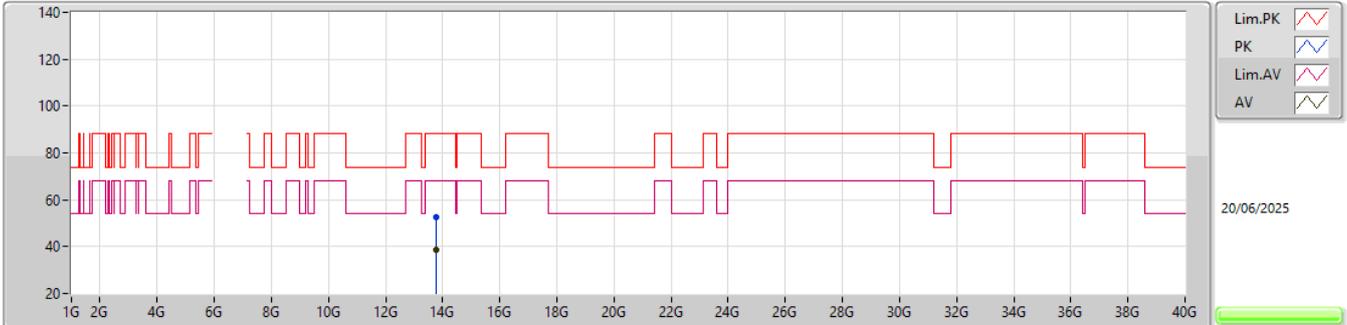


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.79134G	52.79	88.20	-35.41	44.85	3	Horizontal	72	1.91	-	40.70	11.70	44.46
RMS	13.78772G	38.63	68.20	-29.57	30.69	3	Horizontal	72	1.91	-	40.70	11.70	44.46

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

6895MHz_TX

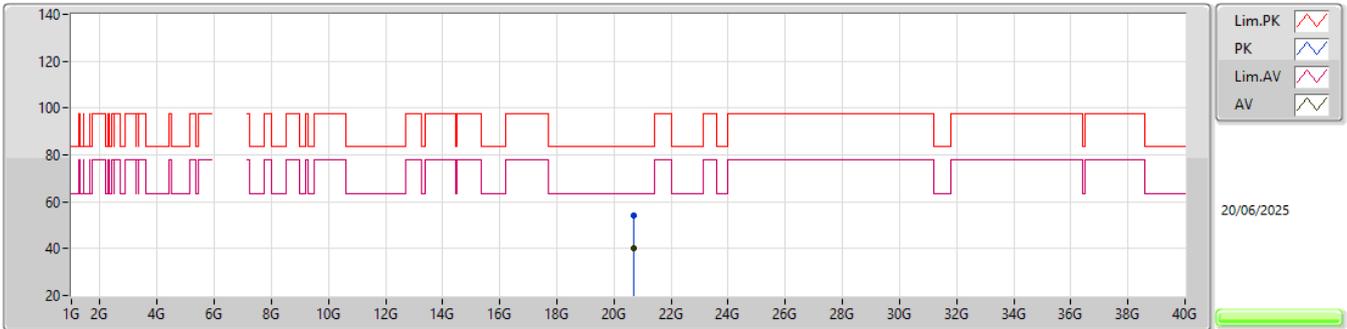


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.6805G	54.08	83.54	-29.46	43.24	1	Vertical	351	1.03	-	37.90	21.64	48.70
AV	20.68678G	40.13	63.54	-23.41	29.28	1	Vertical	351	1.03	-	37.90	21.65	48.70

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

6895MHz_TX

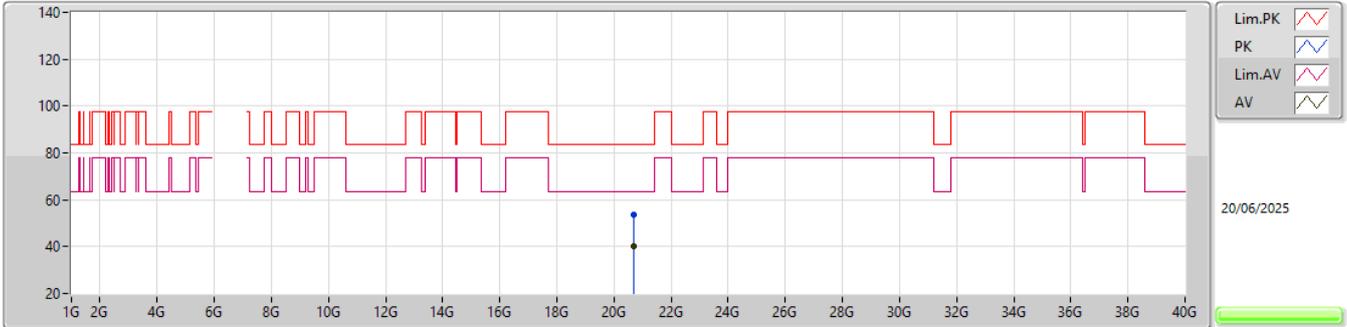


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.68656G	53.78	83.54	-29.76	42.93	1	Horizontal	207	1.54	-	37.90	21.65	48.70
AV	20.6869G	40.13	63.54	-23.41	29.28	1	Horizontal	207	1.54	-	37.90	21.65	48.70

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

6975MHz_TX

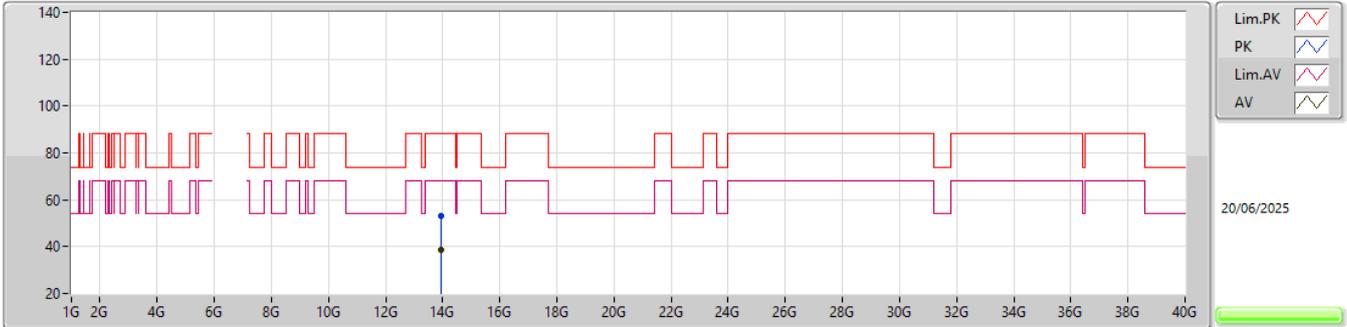


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.94809G	52.95	88.20	-35.25	44.72	3	Vertical	49	1.58	-	40.90	11.68	44.35
RMS	13.94896G	38.68	68.20	-29.52	30.45	3	Vertical	49	1.58	-	40.90	11.68	44.35

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

6975MHz_TX

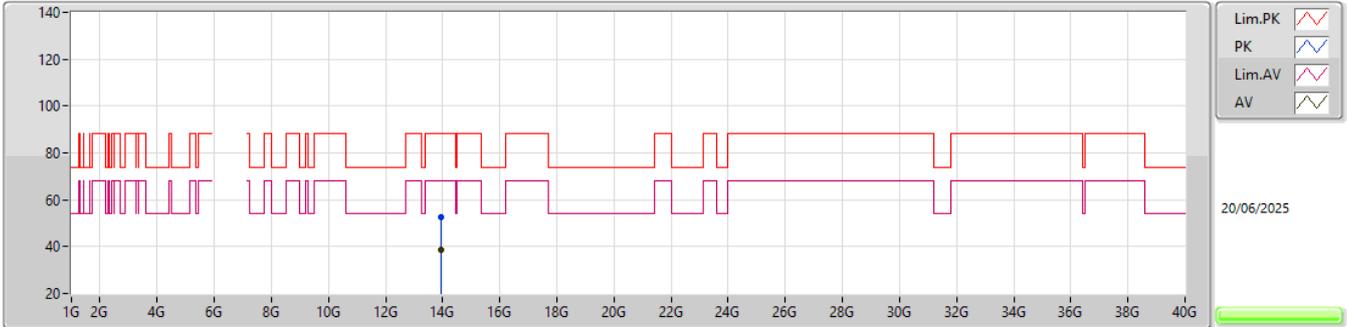


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.9492G	52.74	88.20	-35.46	44.51	3	Horizontal	164	1.11	-	40.90	11.68	44.35
RMS	13.94921G	38.72	68.20	-29.48	30.49	3	Horizontal	164	1.11	-	40.90	11.68	44.35

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

6975MHz_TX

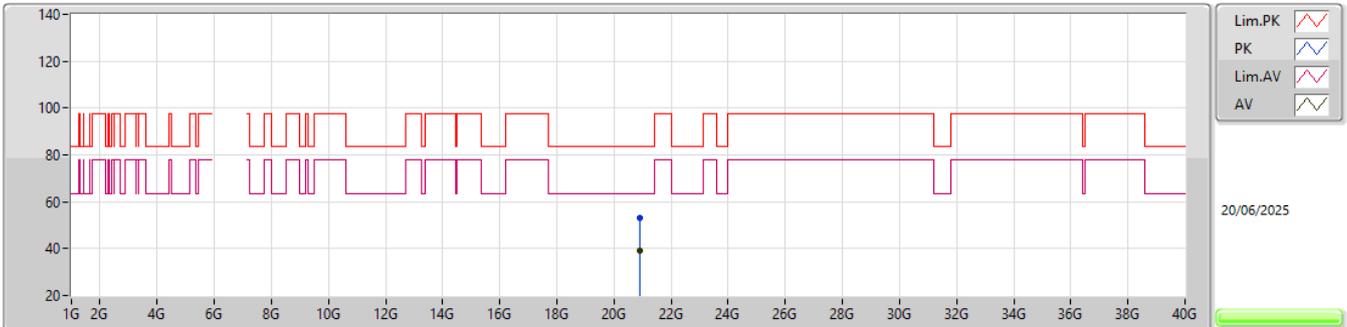


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.92596G	53.00	83.54	-30.54	41.91	1	Vertical	93	2.67	-	37.90	21.89	48.70
AV	20.92548G	39.01	63.54	-24.53	27.92	1	Vertical	93	2.67	-	37.90	21.89	48.70

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

6975MHz_TX

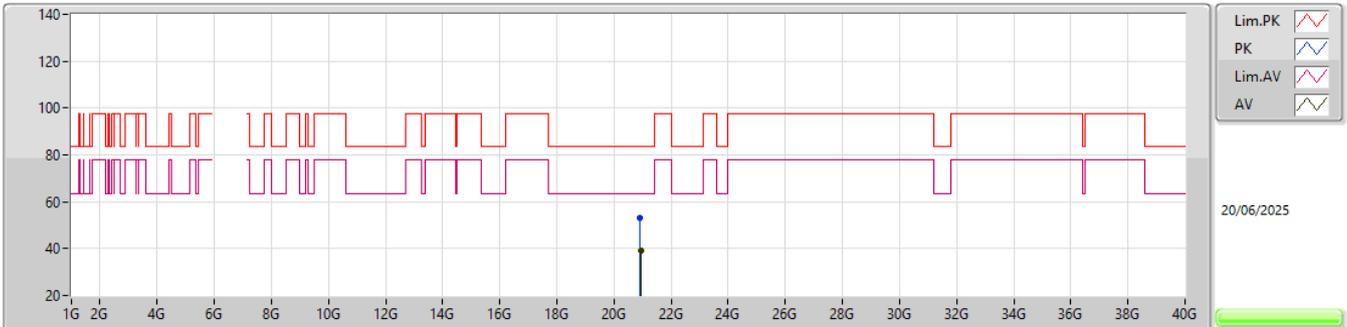


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.9204G	53.13	83.54	-30.41	42.04	1	Horizontal	252	1.49	-	37.90	21.89	48.70
AV	20.92724G	39.02	63.54	-24.52	27.92	1	Horizontal	252	1.49	-	37.90	21.90	48.70

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

7055MHz_TX

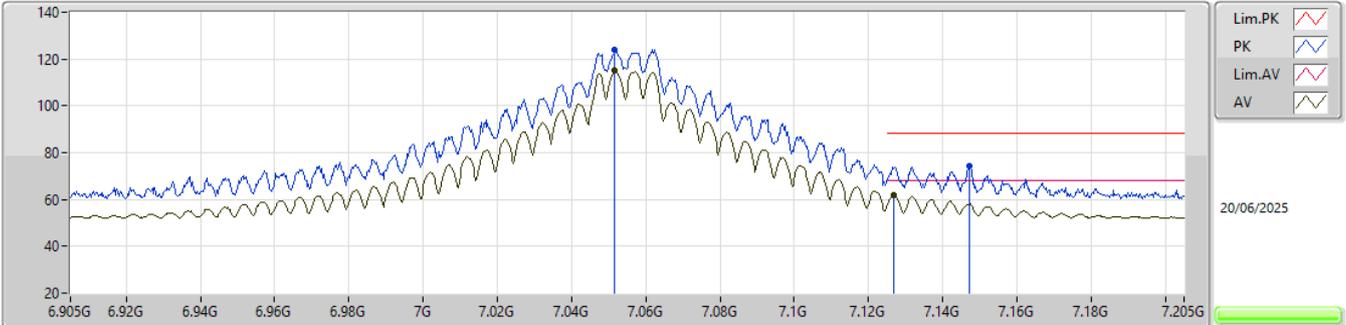


EUT_Y_2TX
 Setting 30
 03-E-5-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	7.0517G	124.19	Inf	-Inf	115.21	3	Vertical	170	1.45	-	35.70	8.41	35.13
RMS	7.0517G	114.99	Inf	-Inf	106.01	3	Vertical	170	1.45	-	35.70	8.41	35.13
PK	7.1471G	74.21	88.20	-13.99	64.87	3	Vertical	170	1.45	-	35.98	8.50	35.14
RMS	7.1267G	62.11	68.20	-6.09	52.91	3	Vertical	170	1.45	-	35.86	8.48	35.14

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

7055MHz_TX

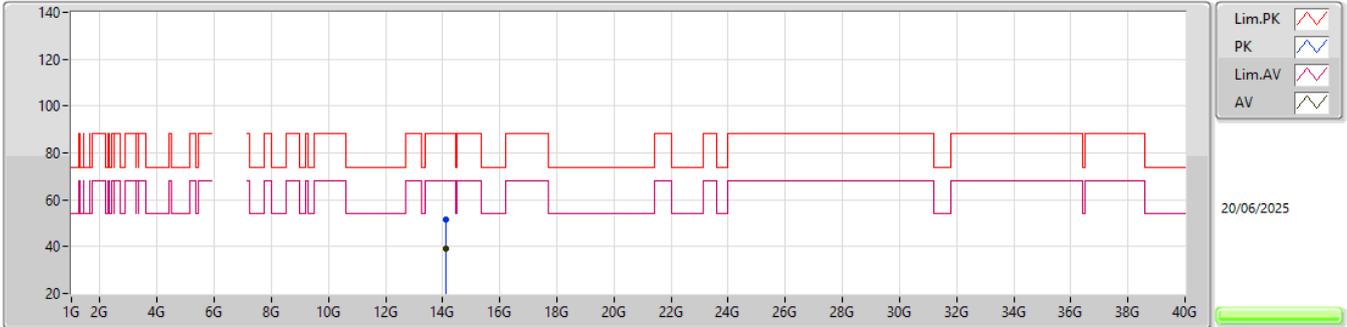


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	14.11954G	51.71	88.20	-36.49	43.12	3	Vertical	302	2.73	-	41.28	11.78	44.47
RMS	14.11794G	39.17	68.20	-29.03	30.60	3	Vertical	302	2.73	-	41.27	11.77	44.47

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

7055MHz_TX

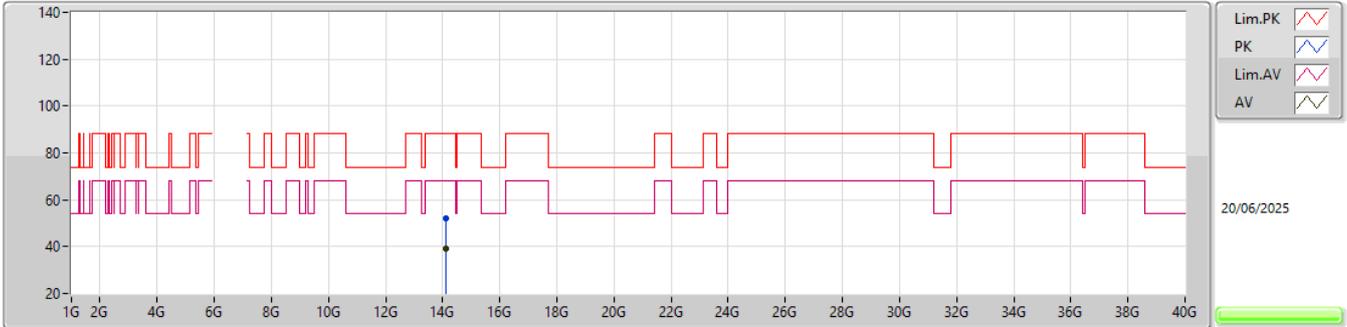


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	14.11456G	52.24	88.20	-35.96	43.68	3	Horizontal	14	2.44	-	41.26	11.77	44.47
RMS	14.11832G	39.02	68.20	-29.18	30.45	3	Horizontal	14	2.44	-	41.27	11.77	44.47

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

7055MHz_TX

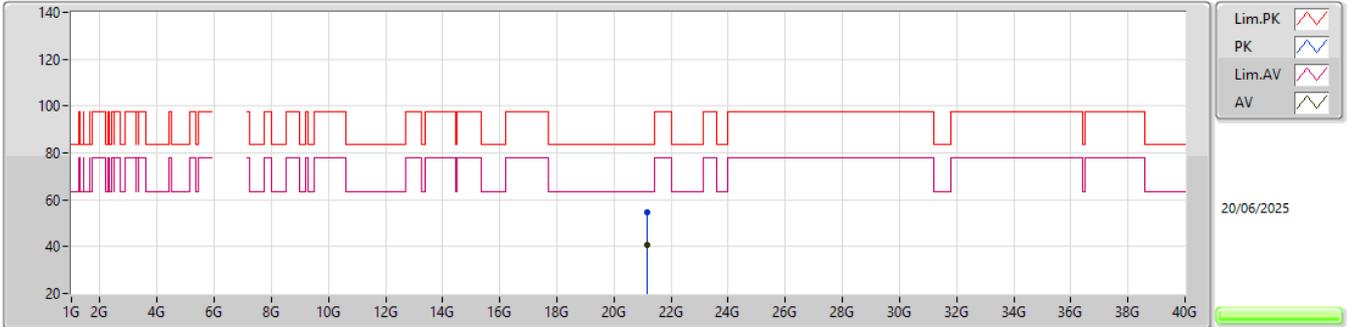


EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	21.16488G	54.71	83.54	-28.83	43.48	1	Vertical	116	2.94	-	38.03	21.87	48.67
AV	21.16808G	40.81	63.54	-22.73	29.57	1	Vertical	116	2.94	-	38.04	21.87	48.67

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

7055MHz_TX

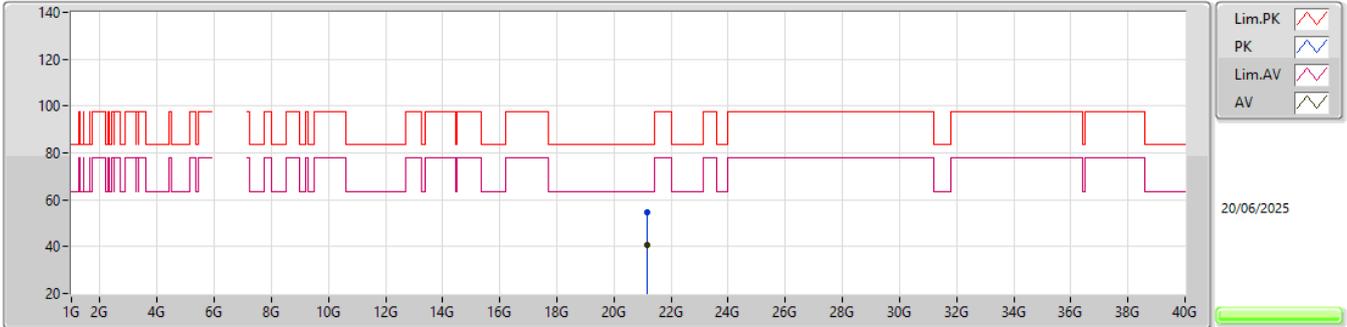

EUT_Y_2TX
Setting 30
03-E-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	21.1633G	54.64	83.54	-28.90	43.41	1	Horizontal	124	2.26	-	38.03	21.87	48.67
AV	21.16488G	40.77	63.54	-22.77	29.54	1	Horizontal	124	2.26	-	38.03	21.87	48.67




Test Mode: Mode 2

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT320-BF_Nss1,(MCS0)_2TX	Pass	RMS	5.9142G	67.04	68.20	-1.16	3	Vertical	96	1.80	-

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

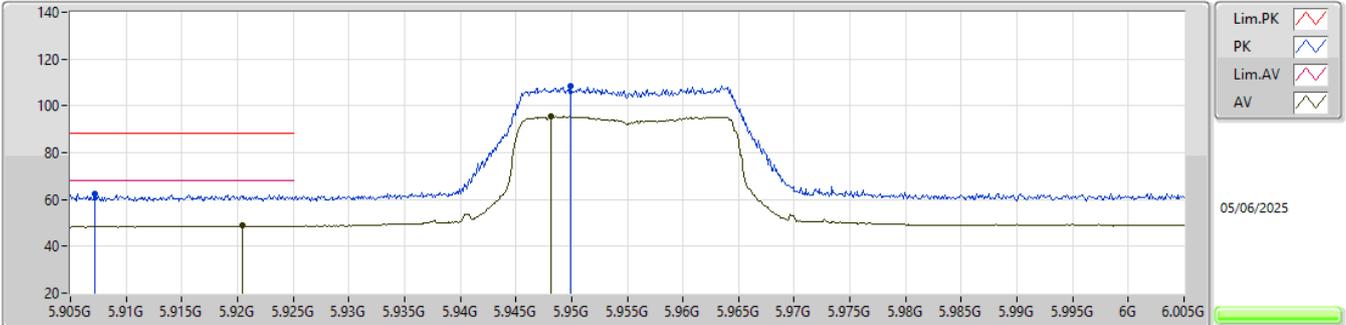


EUT_Y_2TX
Setting 17
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9072G	62.48	88.20	-25.72	52.65	3	Vertical	336	1.80	-	34.84	7.43	32.44
AV	5.9204G	48.75	68.20	-19.45	38.83	3	Vertical	336	1.80	-	34.92	7.44	32.44
PK	5.9499G	108.55	Inf	-Inf	98.43	3	Vertical	336	1.80	-	35.10	7.46	32.44
AV	5.9481G	95.37	Inf	-Inf	85.26	3	Vertical	336	1.80	-	35.09	7.46	32.44

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

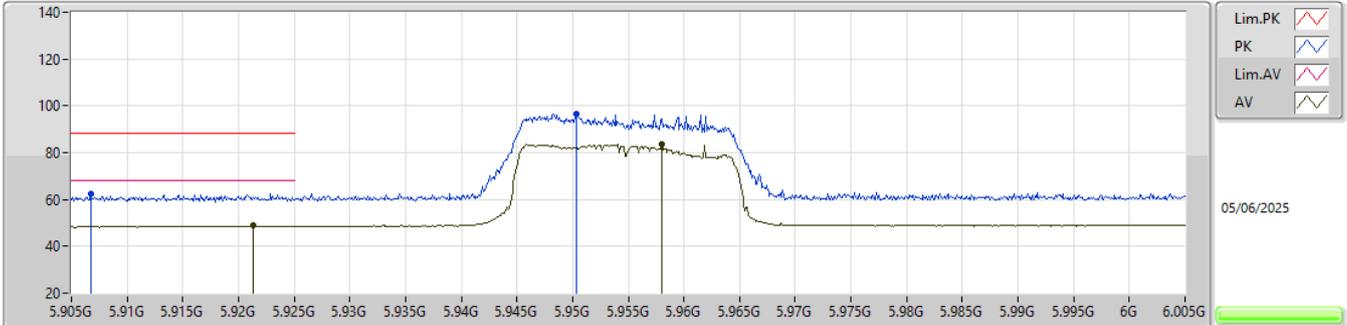


EUT_Y_2TX
Setting 17
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9067G	62.46	88.20	-25.74	52.63	3	Horizontal	295	1.80	-	34.84	7.43	32.44
AV	5.9213G	48.71	68.20	-19.49	38.78	3	Horizontal	295	1.80	-	34.93	7.44	32.44
PK	5.9503G	96.44	Inf	-Inf	86.32	3	Horizontal	295	1.80	-	35.10	7.46	32.44
AV	5.958G	83.48	Inf	-Inf	73.32	3	Horizontal	295	1.80	-	35.13	7.47	32.44

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

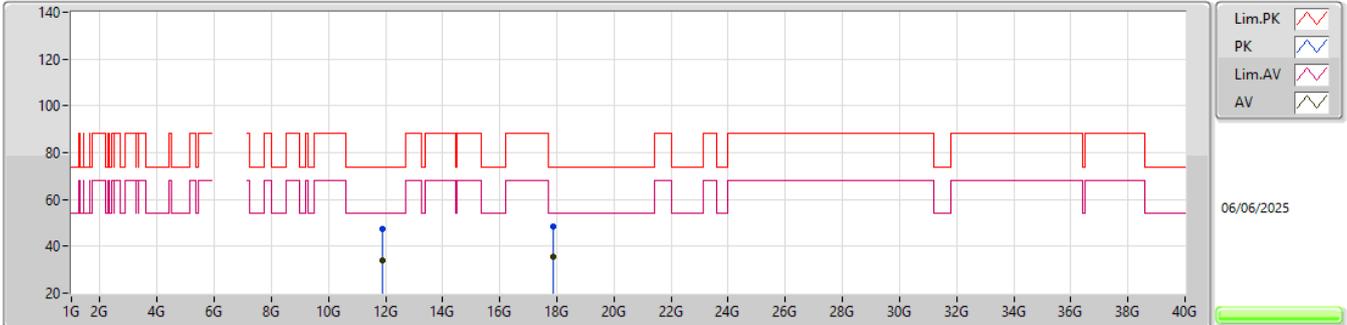


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.90808G	47.31	74.00	-26.69	41.60	3	Vertical	180	1.80	-	38.78	12.27	45.34
AV	11.90994G	33.76	54.00	-20.24	28.05	3	Vertical	180	1.80	-	38.78	12.27	45.34
PK	17.86884G	48.49	74.00	-25.51	37.44	3	Vertical	202	1.63	-	41.18	14.19	44.32
AV	17.86655G	35.32	54.00	-18.68	24.28	3	Vertical	202	1.63	-	41.17	14.19	44.32

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

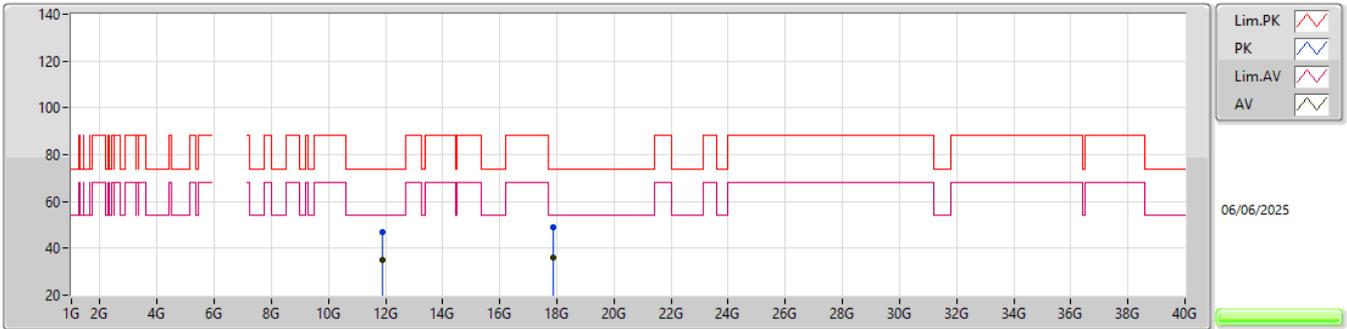


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.90947G	47.14	74.00	-26.86	41.43	3	Horizontal	32	1.98	-	38.78	12.27	45.34
AV	11.91005G	34.98	54.00	-19.02	29.27	3	Horizontal	32	1.98	-	38.78	12.27	45.34
PK	17.86869G	49.12	74.00	-24.88	38.08	3	Horizontal	119	1.93	-	41.17	14.19	44.32
AV	17.8623G	35.78	54.00	-18.22	24.77	3	Horizontal	119	1.93	-	41.15	14.19	44.33

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

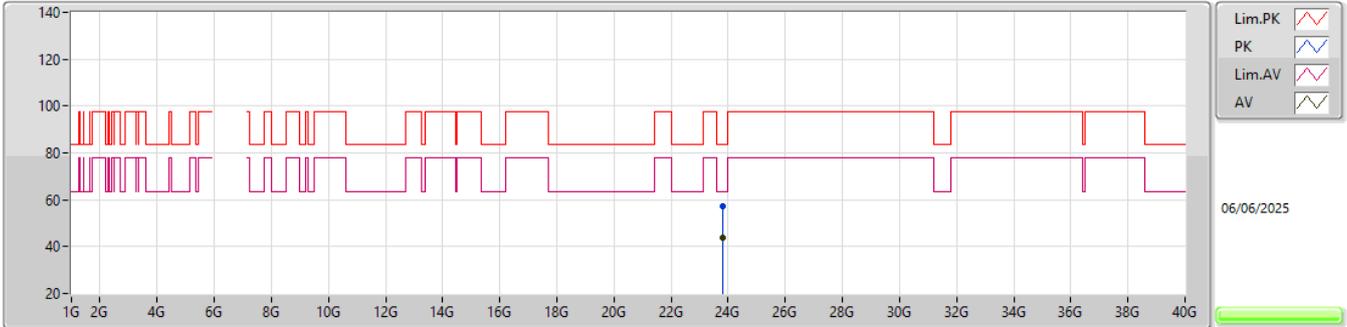


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.81991G	57.01	83.54	-26.53	43.07	1	Vertical	170	1.45	-	39.10	22.51	47.67
AV	23.81986G	43.87	63.54	-19.67	29.93	1	Vertical	170	1.45	-	39.10	22.51	47.67

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

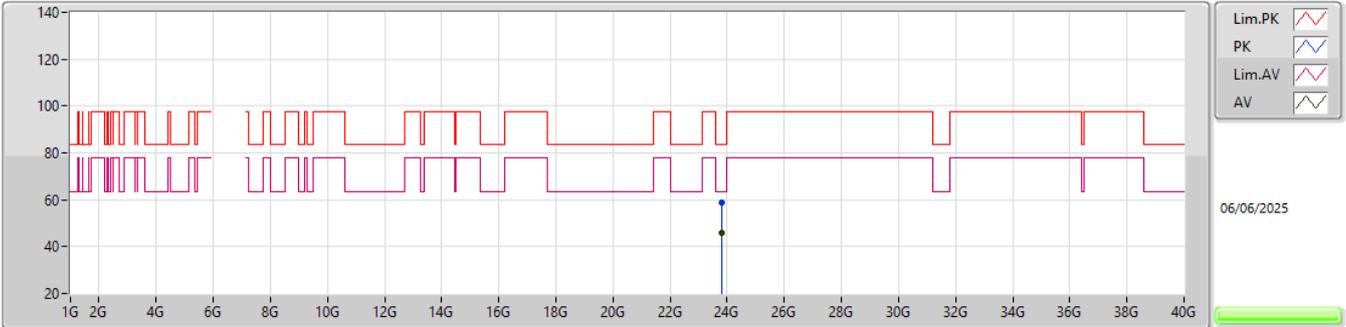


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.82027G	59.01	83.54	-24.53	45.07	1	Horizontal	189	1.87	-	39.10	22.51	47.67
AV	23.82019G	45.96	63.54	-17.58	32.02	1	Horizontal	189	1.87	-	39.10	22.51	47.67

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6195MHz_TX

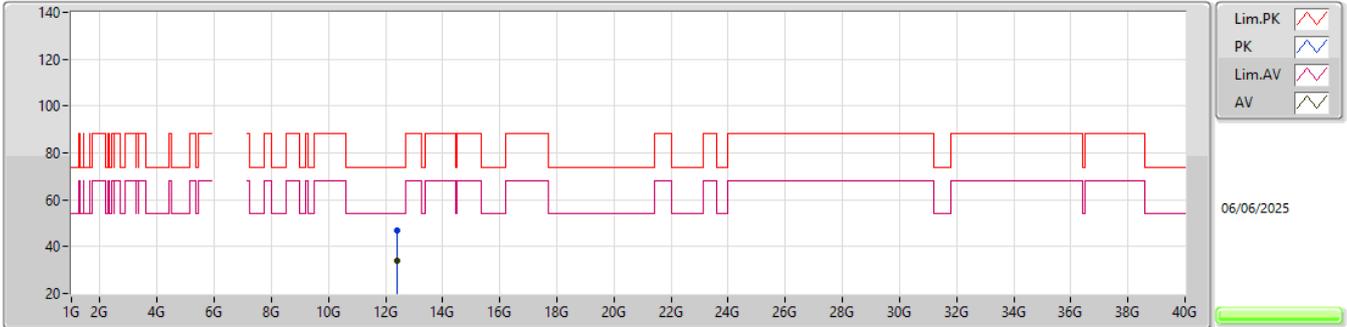


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.38509G	46.97	74.00	-27.03	41.40	3	Vertical	188	1.80	-	38.57	12.57	45.57
AV	12.38992G	34.11	54.00	-19.89	28.53	3	Vertical	188	1.80	-	38.58	12.57	45.57

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6195MHz_TX

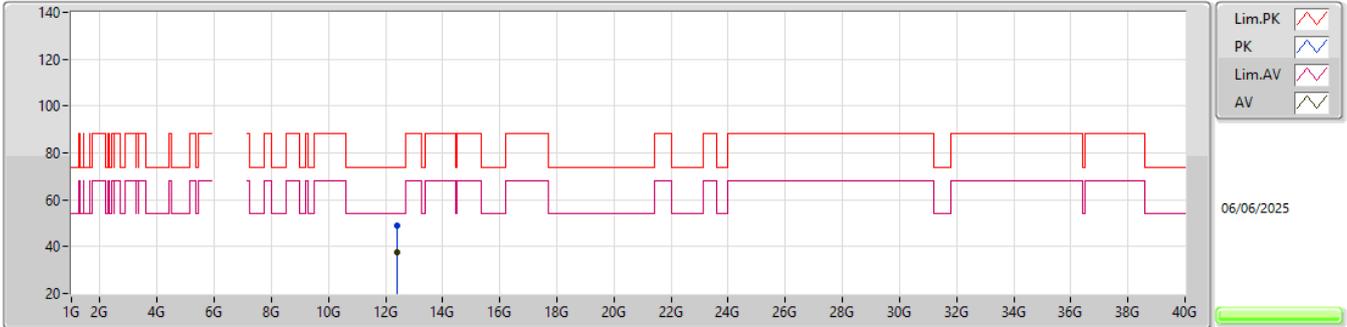


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.3901G	48.84	74.00	-25.16	43.26	3	Horizontal	244	2.20	-	38.58	12.57	45.57
AV	12.38998G	37.73	54.00	-16.27	32.15	3	Horizontal	244	2.20	-	38.58	12.57	45.57

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6195MHz_TX

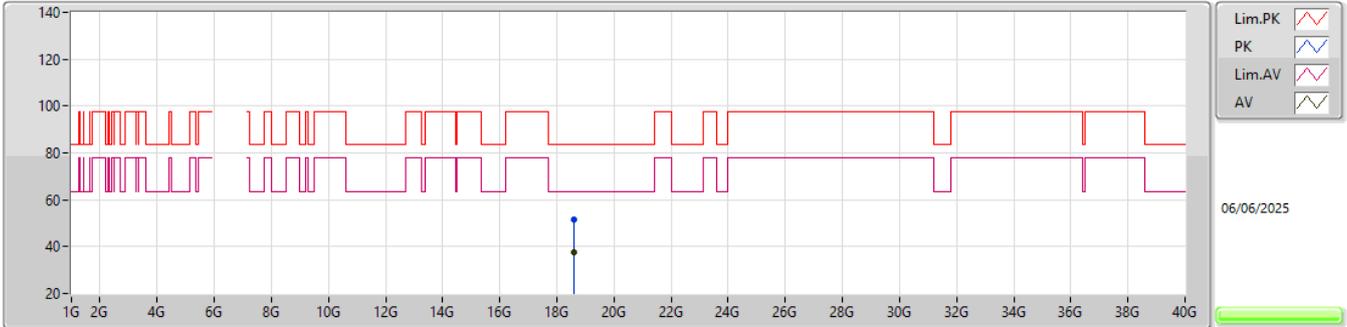


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.58485G	51.61	83.54	-31.93	41.74	1	Vertical	170	1.59	-	37.80	20.45	48.38
AV	18.58482G	37.51	63.54	-26.03	27.64	1	Vertical	170	1.59	-	37.80	20.45	48.38

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6195MHz_TX

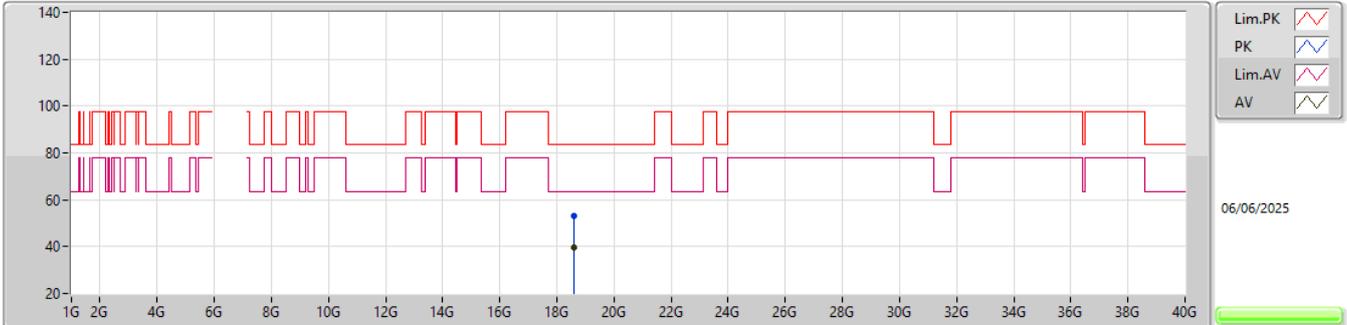


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.58489G	53.26	83.54	-30.28	43.39	1	Horizontal	55	1.81	-	37.80	20.45	48.38
AV	18.58529G	39.56	63.54	-23.98	29.70	1	Horizontal	55	1.81	-	37.80	20.45	48.39

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6415MHz_TX

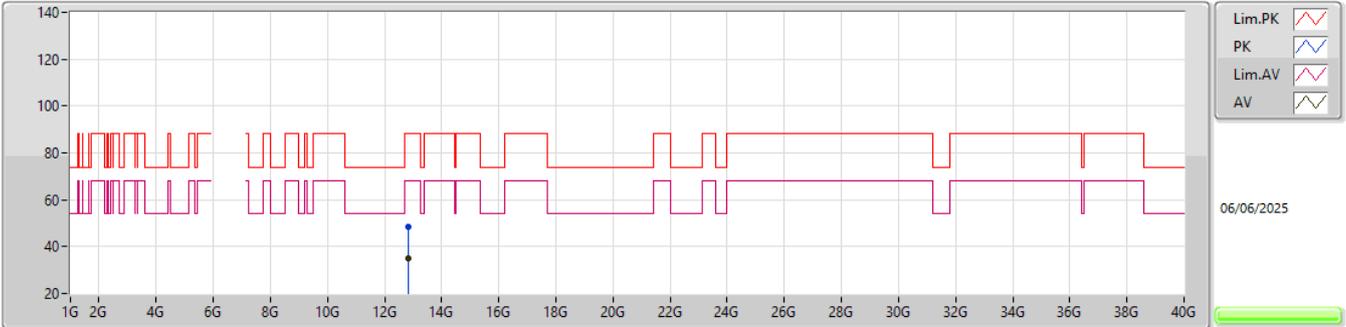


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.82876G	48.64	88.20	-39.56	41.77	3	Vertical	163	1.93	-	39.32	12.81	45.26
RMS	12.82529G	35.21	68.20	-32.99	28.37	3	Vertical	163	1.93	-	39.30	12.81	45.27

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6415MHz_TX

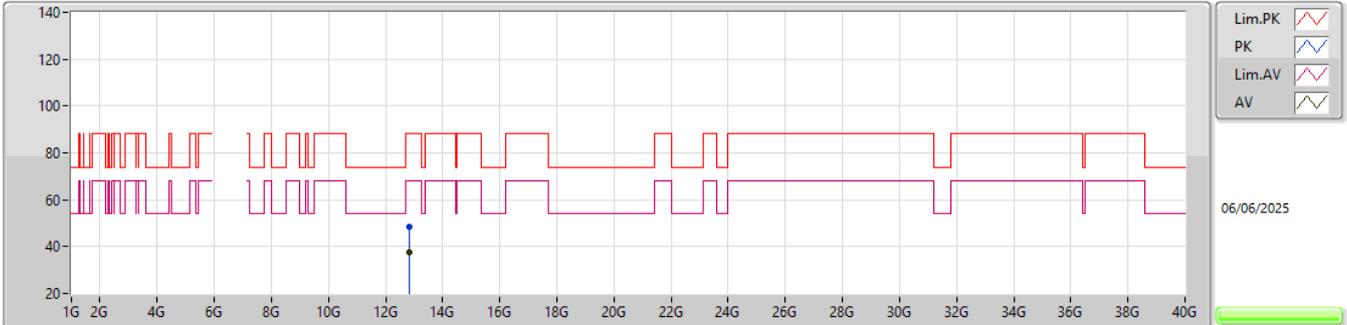


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.83079G	48.28	88.20	-39.92	41.41	3	Horizontal	188	1.42	-	39.32	12.81	45.26
RMS	12.8332G	37.34	68.20	-30.86	30.46	3	Horizontal	188	1.42	-	39.33	12.81	45.26

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6415MHz_TX

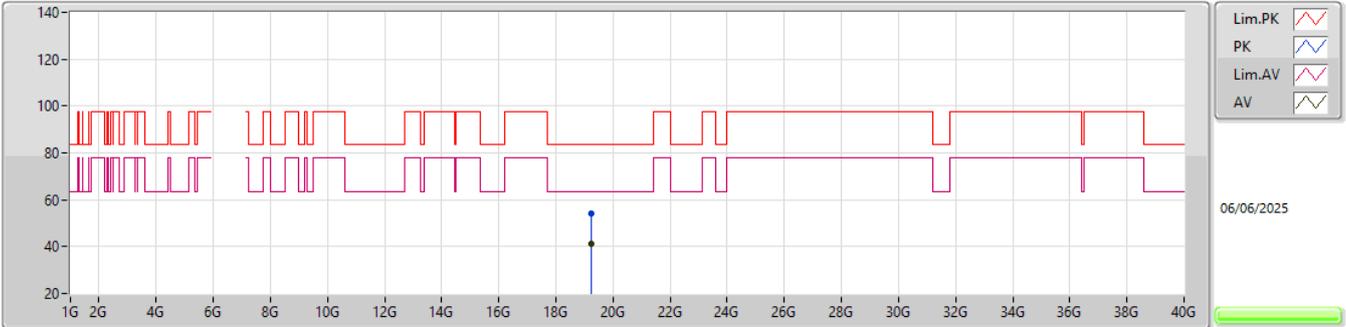


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.24538G	53.95	83.54	-29.59	43.80	1	Vertical	123	1.39	-	37.98	20.97	48.80
AV	19.24549G	41.05	63.54	-22.49	30.90	1	Vertical	123	1.39	-	37.98	20.97	48.80

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6415MHz_TX

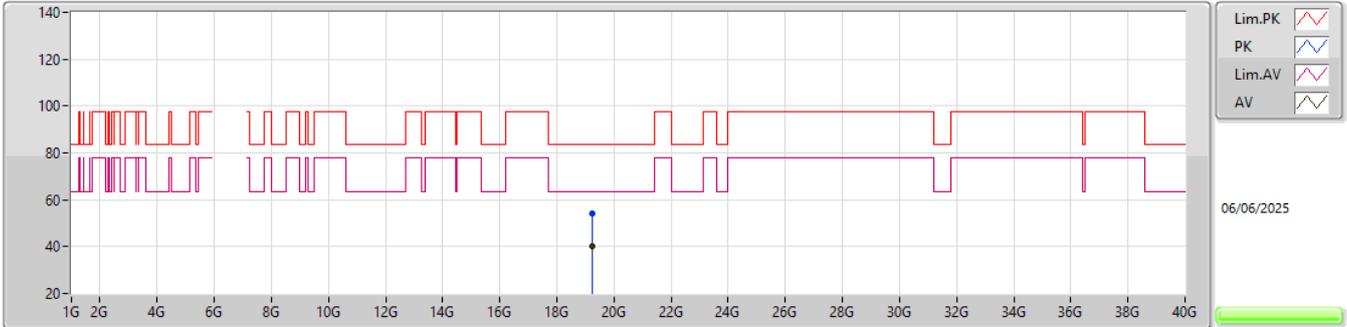


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.24471G	54.06	83.54	-29.48	43.91	1	Horizontal	253	1.75	-	37.98	20.97	48.80
AV	19.24487G	40.41	63.54	-23.13	30.26	1	Horizontal	253	1.75	-	37.98	20.97	48.80

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6435MHz_TX

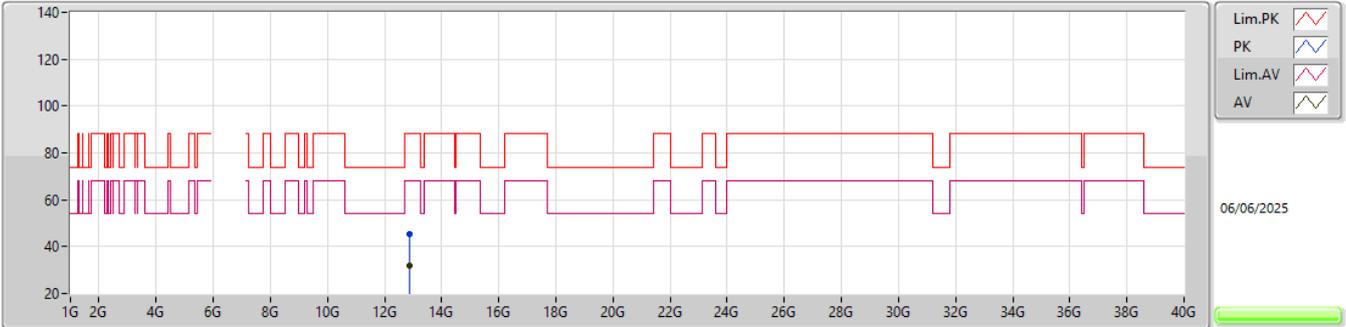


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.87188G	45.28	88.20	-42.92	38.25	3	Vertical	162	1.58	-	39.40	12.84	45.21
RMS	12.87307G	31.93	68.20	-36.27	24.90	3	Vertical	162	1.58	-	39.40	12.84	45.21

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6435MHz_TX

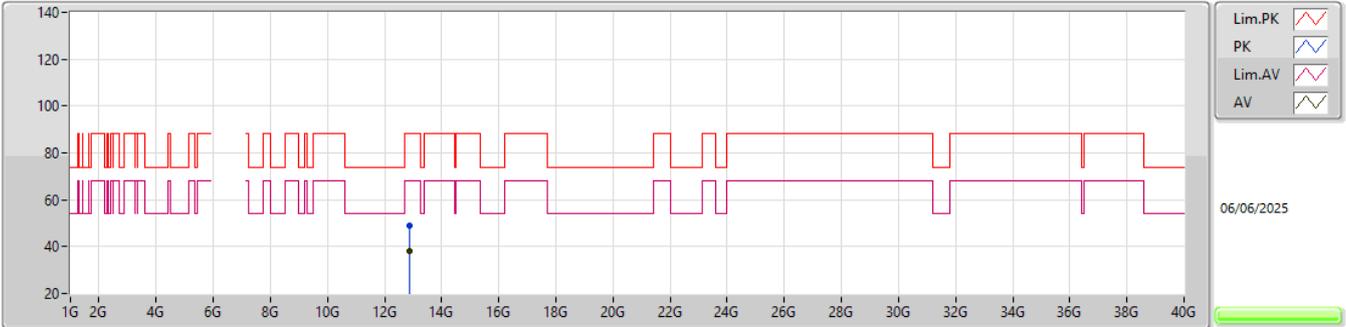


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.86993G	48.83	88.20	-39.37	41.82	3	Horizontal	205	1.71	-	39.40	12.83	45.22
RMS	12.87G	38.00	68.20	-30.20	30.99	3	Horizontal	205	1.71	-	39.40	12.83	45.22

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6435MHz_TX

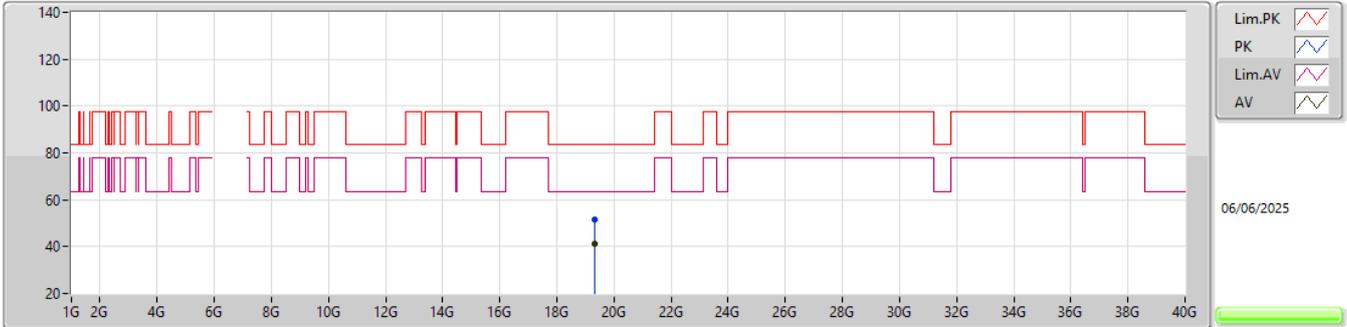


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.30485G	51.30	83.54	-32.24	41.32	1	Vertical	247	1.73	-	37.80	20.98	48.80
AV	19.30479G	40.98	63.54	-22.56	31.00	1	Vertical	247	1.73	-	37.80	20.98	48.80

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6435MHz_TX

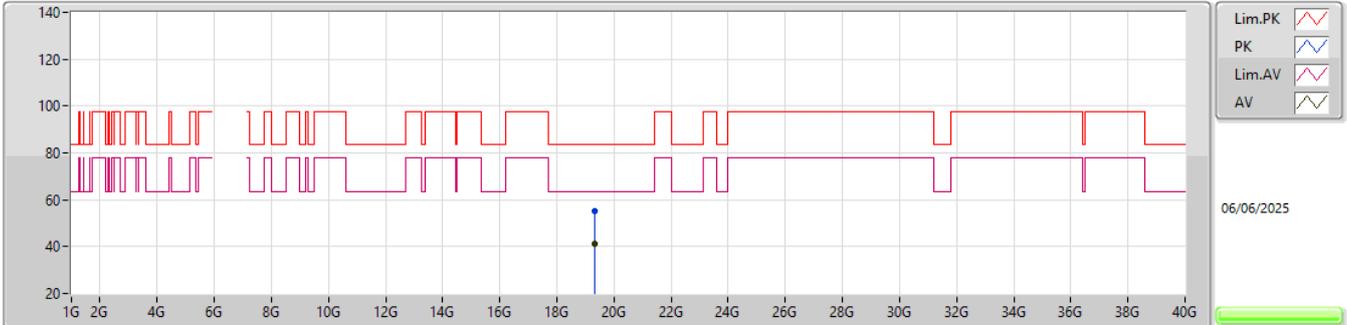


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.30549G	55.25	83.54	-28.29	45.27	1	Horizontal	157	1.88	-	37.80	20.98	48.80
AV	19.30498G	41.43	63.54	-22.11	31.45	1	Horizontal	157	1.88	-	37.80	20.98	48.80

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6475MHz_TX

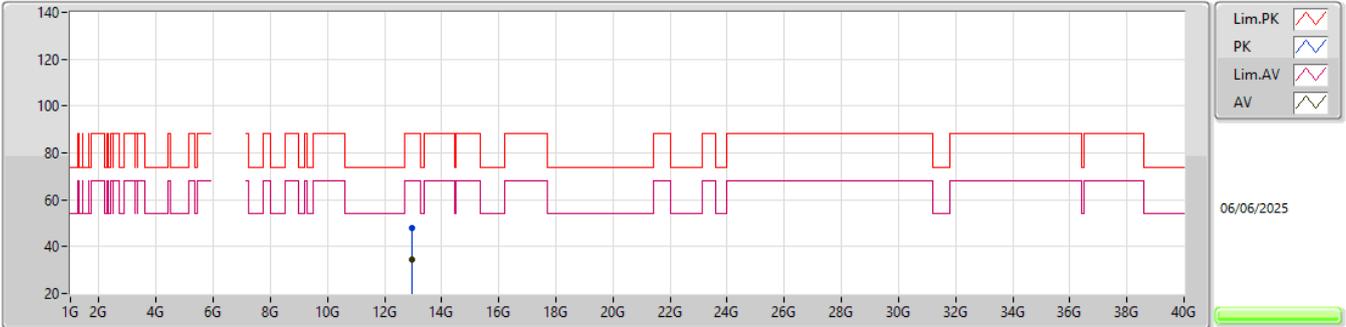


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.94815G	47.93	88.20	-40.27	40.68	3	Vertical	86	1.52	-	39.50	12.88	45.13
RMS	12.94866G	34.39	68.20	-33.81	27.14	3	Vertical	86	1.52	-	39.50	12.88	45.13

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6475MHz_TX

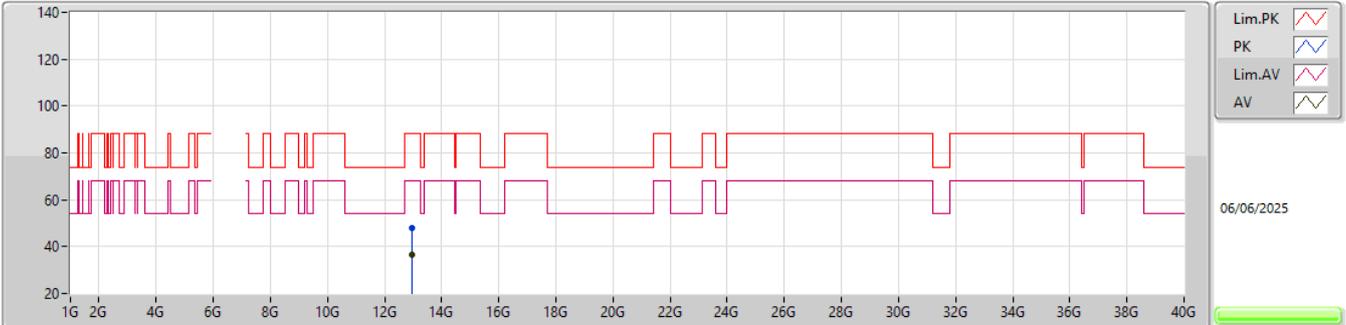


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (*)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.95241G	48.14	88.20	-40.06	40.88	3	Horizontal	23	1.50	-	39.50	12.88	45.12
RMS	12.95183G	36.78	68.20	-31.42	29.52	3	Horizontal	23	1.50	-	39.50	12.88	45.12

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6475MHz_TX

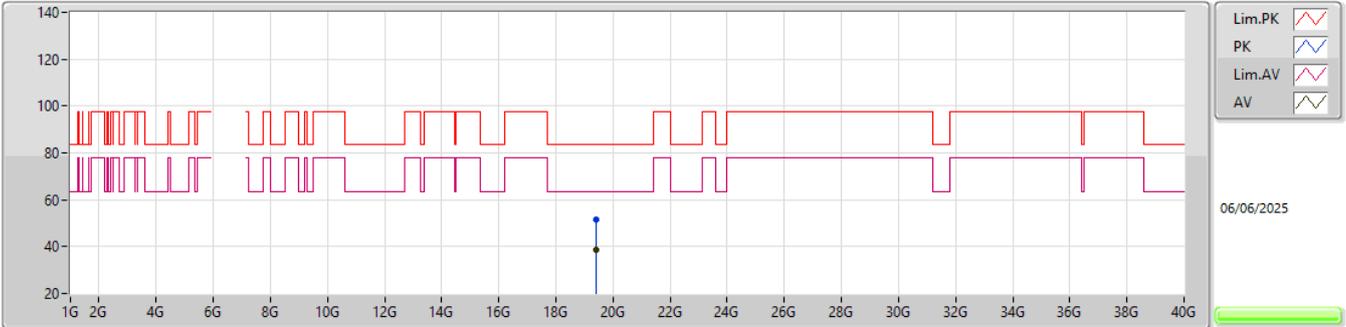


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.42453G	51.76	83.54	-31.78	41.77	1	Vertical	248	1.50	-	37.80	20.99	48.80
AV	19.42504G	38.69	63.54	-24.85	28.70	1	Vertical	248	1.50	-	37.80	20.99	48.80

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6475MHz_TX

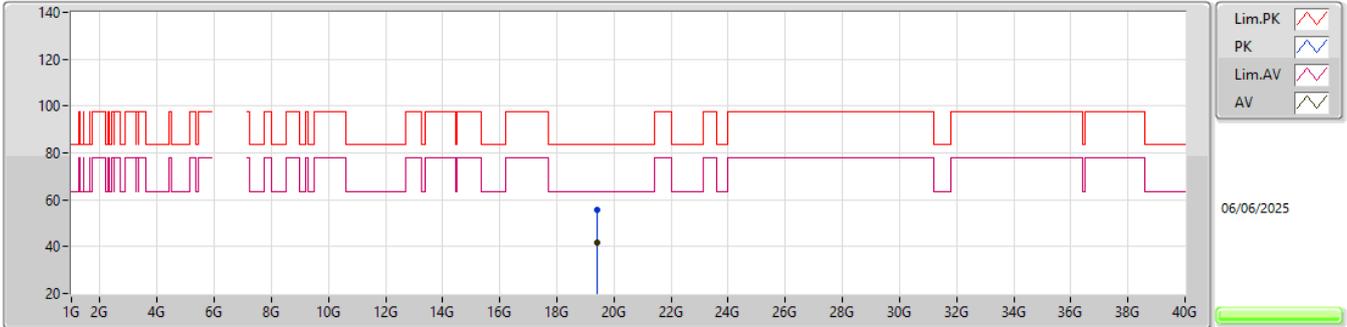


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.42523G	55.65	83.54	-27.89	45.66	1	Horizontal	77	1.99	-	37.80	20.99	48.80
AV	19.42528G	41.69	63.54	-21.85	31.70	1	Horizontal	77	1.99	-	37.80	20.99	48.80

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6515MHz_TX

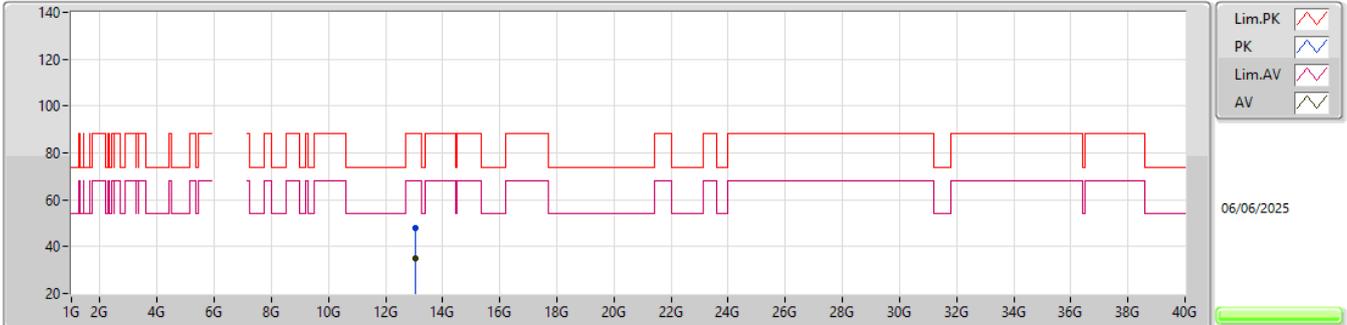


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.02861G	47.91	88.20	-40.29	40.44	3	Vertical	179	1.61	-	39.60	12.92	45.05
RMS	13.03071G	34.89	68.20	-33.31	27.41	3	Vertical	179	1.61	-	39.60	12.92	45.04

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6515MHz_TX

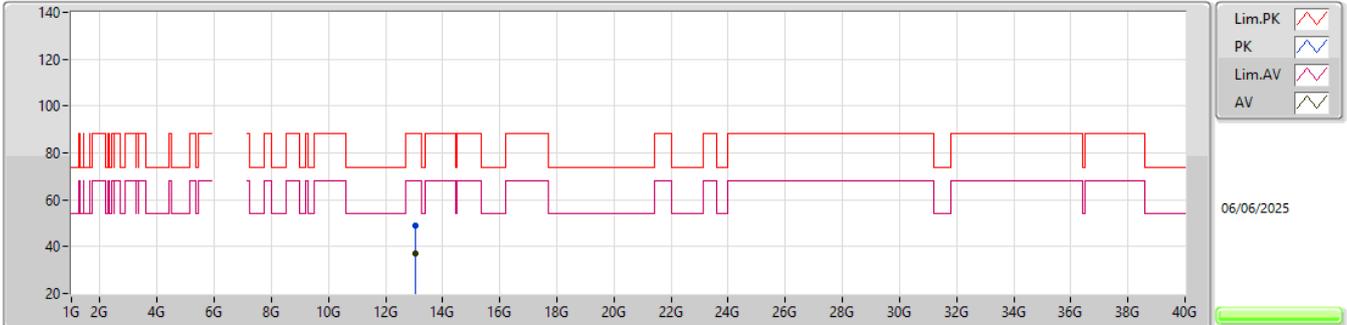


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.02873G	48.74	88.20	-39.46	41.27	3	Horizontal	14	1.48	-	39.60	12.92	45.05
RMS	13.03132G	37.14	68.20	-31.06	29.66	3	Horizontal	14	1.48	-	39.60	12.92	45.04

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6515MHz_TX

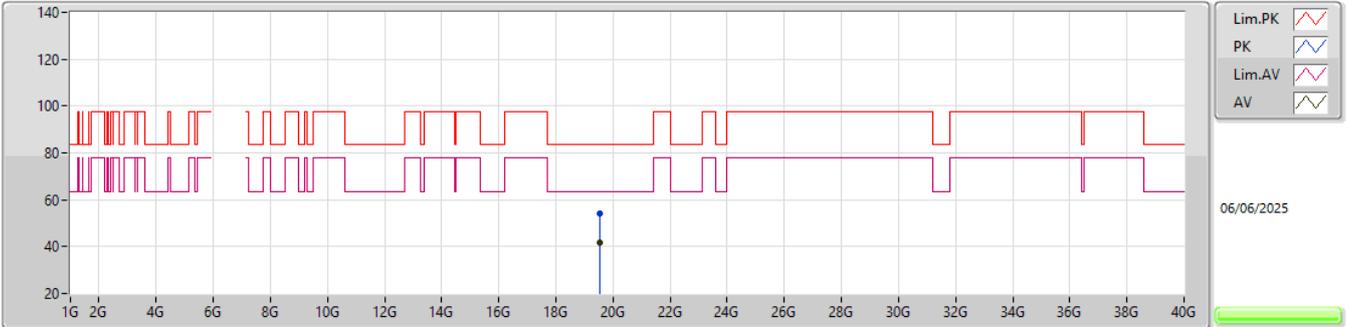


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.54486G	54.13	83.54	-29.41	44.21	1	Vertical	356	1.72	-	37.71	21.01	48.80
AV	19.54504G	41.47	63.54	-22.07	31.55	1	Vertical	356	1.72	-	37.71	21.01	48.80

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6515MHz_TX

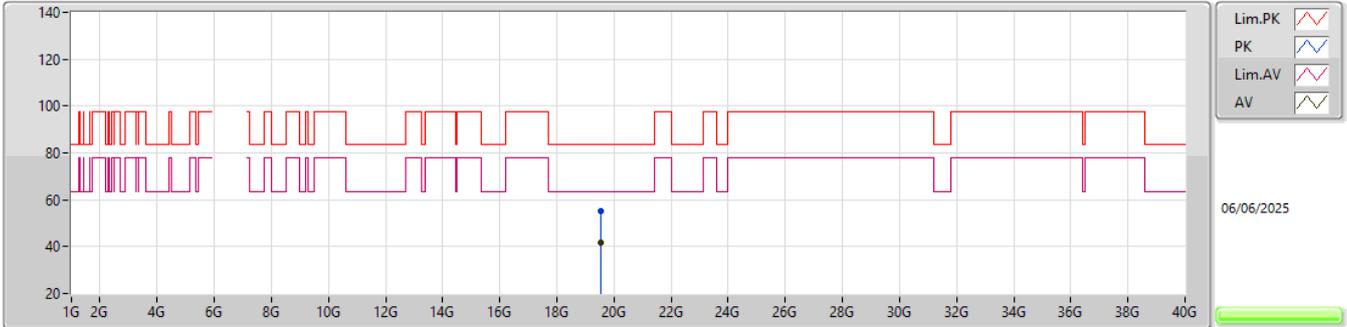


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.54485G	54.93	83.54	-28.61	45.01	1	Horizontal	201	1.86	-	37.71	21.01	48.80
AV	19.54527G	41.95	63.54	-21.59	32.03	1	Horizontal	201	1.86	-	37.71	21.01	48.80

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6535MHz_TX

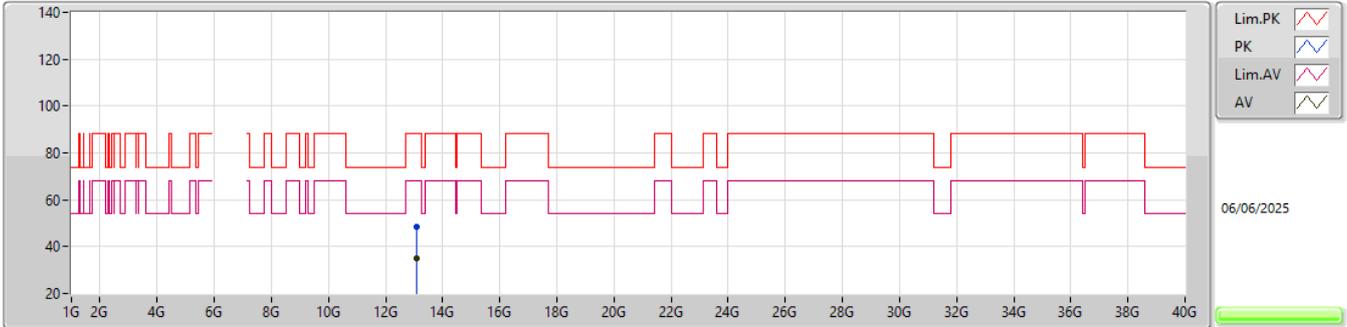


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.07241G	48.54	88.20	-39.66	40.97	3	Vertical	291	1.75	-	39.64	12.94	45.01
RMS	13.07246G	35.02	68.20	-33.18	27.45	3	Vertical	291	1.75	-	39.64	12.94	45.01

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6535MHz_TX

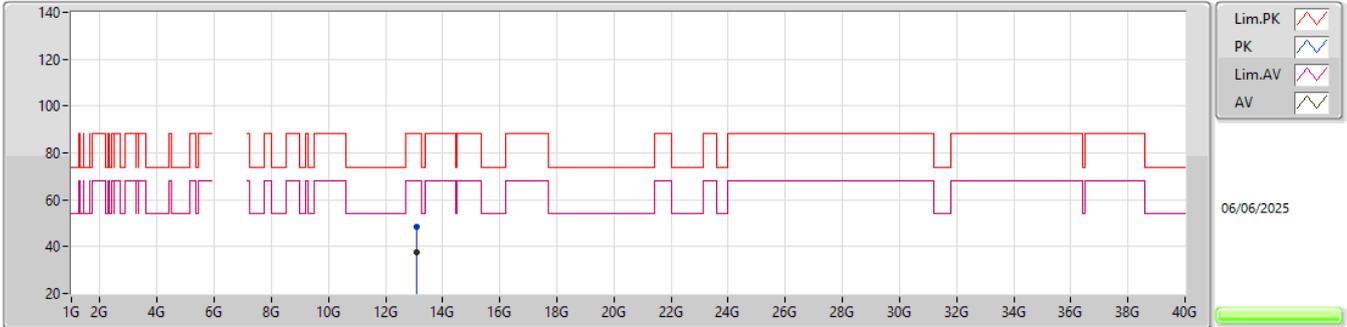


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.06825G	48.69	88.20	-39.51	41.12	3	Horizontal	325	1.46	-	39.64	12.94	45.01
RMS	13.07077G	37.39	68.20	-30.81	29.82	3	Horizontal	325	1.46	-	39.64	12.94	45.01

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6535MHz_TX

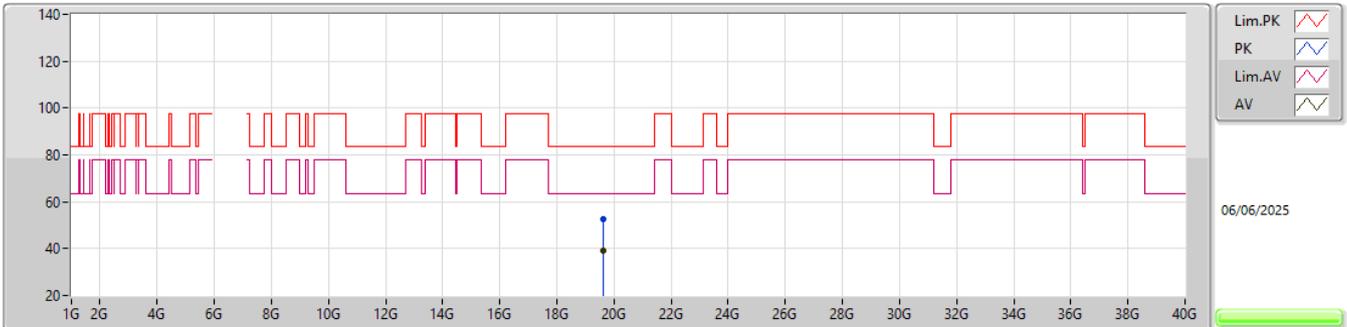

EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60481G	52.47	83.54	-31.07	42.54	1	Vertical	136	1.47	-	37.70	21.03	48.80			
AV	19.60514G	39.20	63.54	-24.34	29.27	1	Vertical	136	1.47	-	37.70	21.03	48.80			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6535MHz_TX




EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (*)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.60476G	55.98	83.54	-27.56	46.05	1	Horizontal	206	1.91	-	37.70	21.03	48.80
AV	19.60543G	42.10	63.54	-21.44	32.17	1	Horizontal	206	1.91	-	37.70	21.03	48.80

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6695MHz_TX

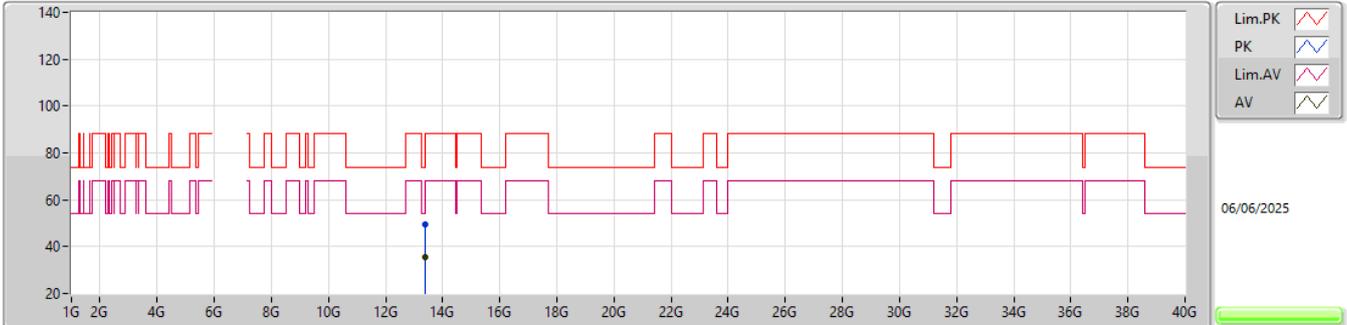


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.38952G	49.62	74.00	-24.38	41.05	3	Vertical	69	1.84	-	40.20	13.12	44.75
RMS	13.38804G	35.64	54.00	-18.36	27.07	3	Vertical	69	1.84	-	40.20	13.12	44.75

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6695MHz_TX

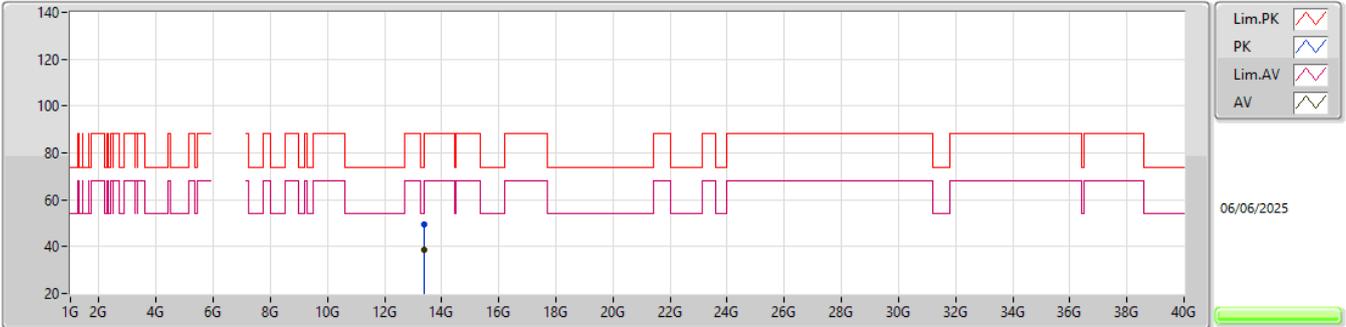


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.38931G	49.28	74.00	-24.72	40.71	3	Horizontal	163	1.91	-	40.20	13.12	44.75
RMS	13.38822G	38.51	54.00	-15.49	29.94	3	Horizontal	163	1.91	-	40.20	13.12	44.75

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6695MHz_TX

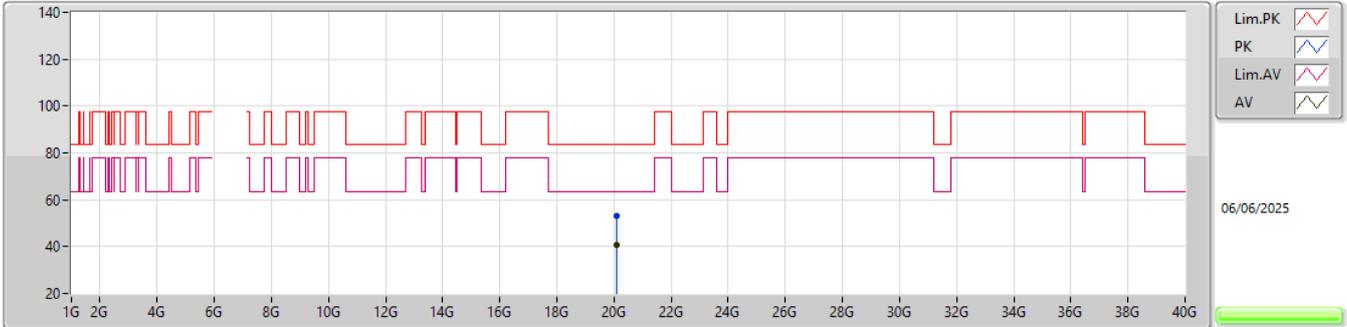


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.08529G	53.20	83.54	-30.34	43.00	1	Vertical	350	1.48	-	37.80	21.18	48.78
AV	20.08481G	40.49	63.54	-23.05	30.29	1	Vertical	350	1.48	-	37.80	21.18	48.78

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6695MHz_TX

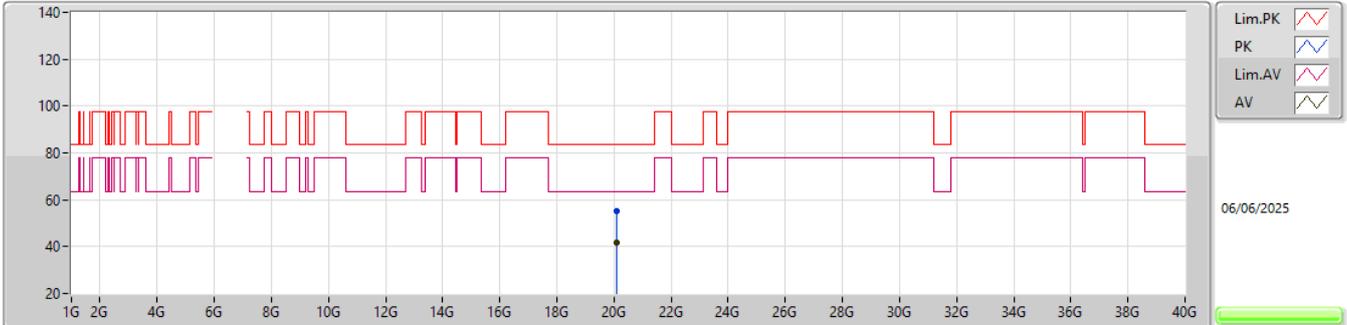


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.08526G	55.36	83.54	-28.18	45.16	1	Horizontal	142	1.75	-	37.80	21.18	48.78
AV	20.08493G	41.67	63.54	-21.87	31.47	1	Horizontal	142	1.75	-	37.80	21.18	48.78

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6875MHz_TX

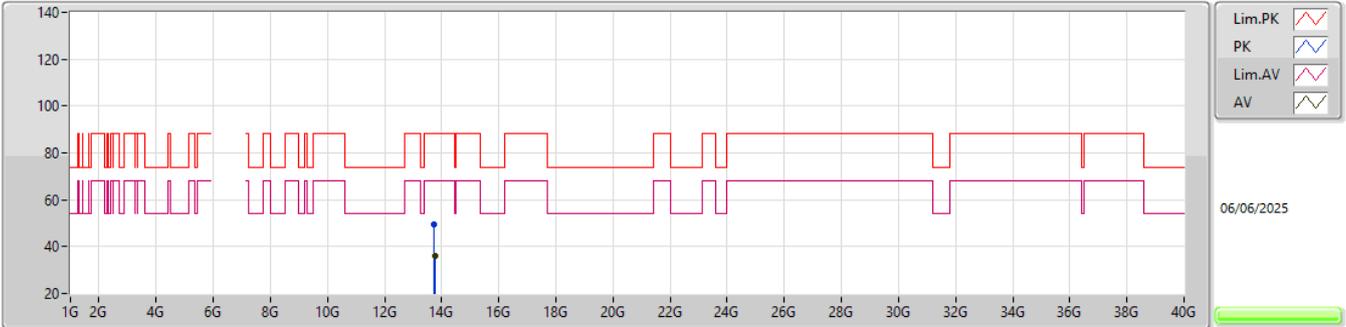


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.74846G	49.57	88.20	-38.63	40.25	3	Vertical	357	1.90	-	40.50	13.31	44.49
RMS	13.75177G	35.94	68.20	-32.26	26.60	3	Vertical	357	1.90	-	40.51	13.31	44.48

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6875MHz_TX

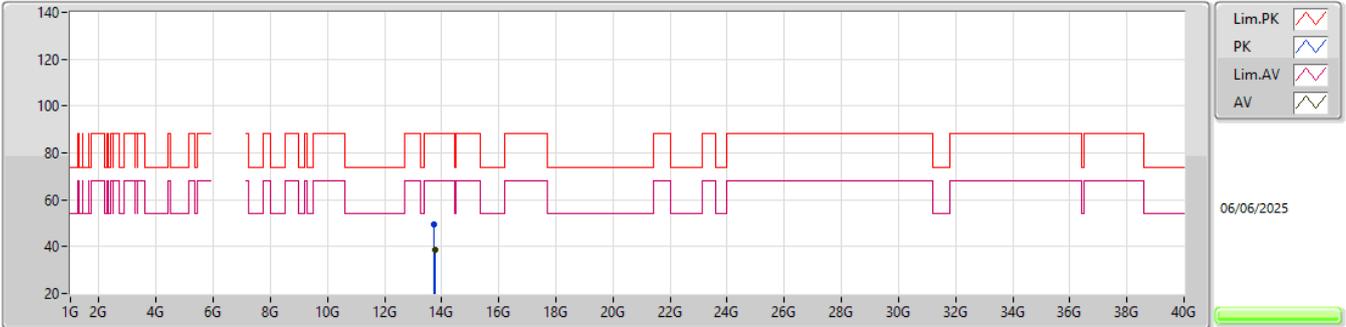


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.74761G	49.43	88.20	-38.77	40.11	3	Horizontal	314	2.00	-	40.50	13.31	44.49
RMS	13.75229G	38.60	68.20	-29.60	29.26	3	Horizontal	314	2.00	-	40.51	13.31	44.48

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6875MHz_TX

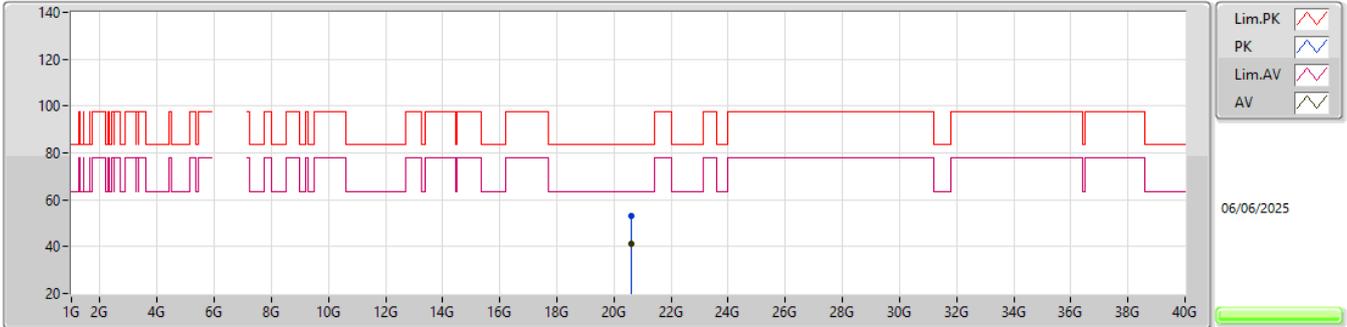


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.62525G	53.28	83.54	-30.26	42.42	1	Vertical	100	1.99	-	37.90	21.66	48.70
AV	20.62534G	41.44	63.54	-22.10	30.58	1	Vertical	100	1.99	-	37.90	21.66	48.70

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6875MHz_TX

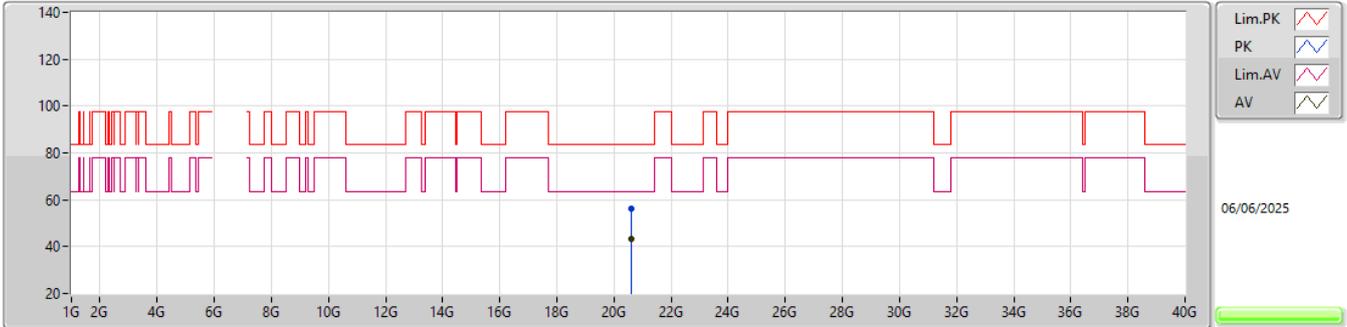


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.62467G	56.46	83.54	-27.08	45.60	1	Horizontal	322	1.45	-	37.90	21.66	48.70
AV	20.62508G	43.36	63.54	-20.18	32.50	1	Horizontal	322	1.45	-	37.90	21.66	48.70

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6895MHz_TX

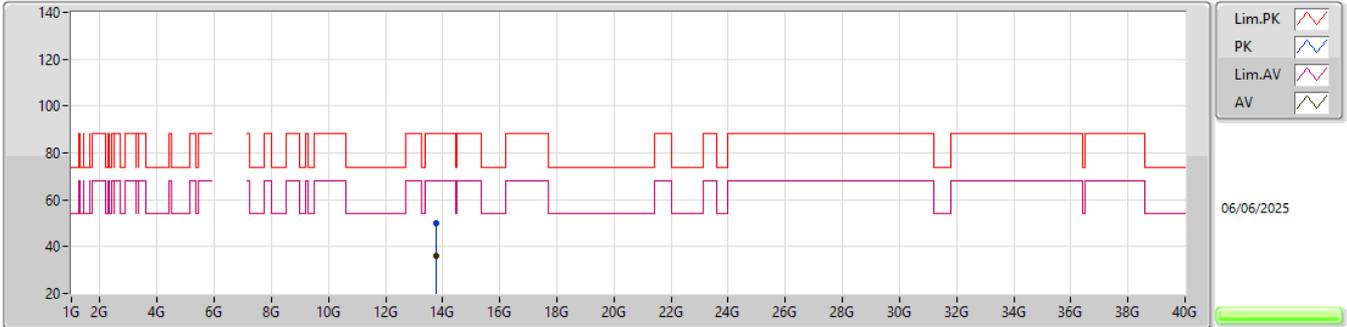


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.79248G	50.04	88.20	-38.16	40.49	3	Vertical	263	1.67	-	40.67	13.34	44.46
RMS	13.78842G	35.97	68.20	-32.23	26.45	3	Vertical	263	1.67	-	40.65	13.33	44.46

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6895MHz_TX

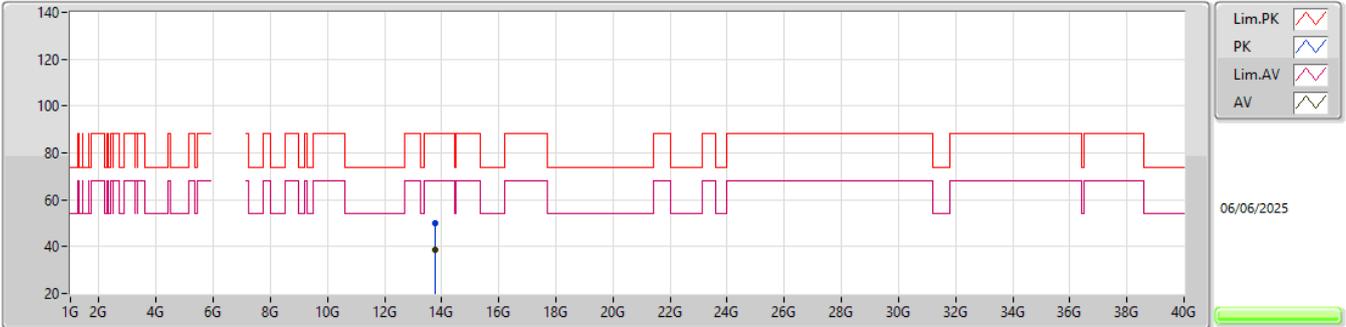


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.79058G	50.15	88.20	-38.05	40.61	3	Horizontal	62	1.56	-	40.66	13.34	44.46
RMS	13.78927G	38.49	68.20	-29.71	28.95	3	Horizontal	62	1.56	-	40.66	13.34	44.46

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6895MHz_TX

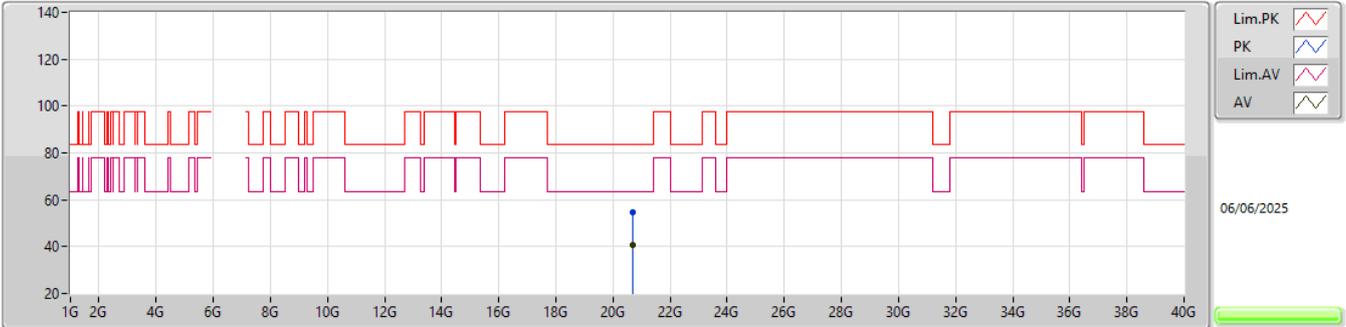


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.6854G	54.88	83.54	-28.66	43.94	1	Vertical	5	1.79	-	37.90	21.74	48.70
AV	20.6854G	40.51	63.54	-23.03	29.57	1	Vertical	5	1.79	-	37.90	21.74	48.70

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6895MHz_TX

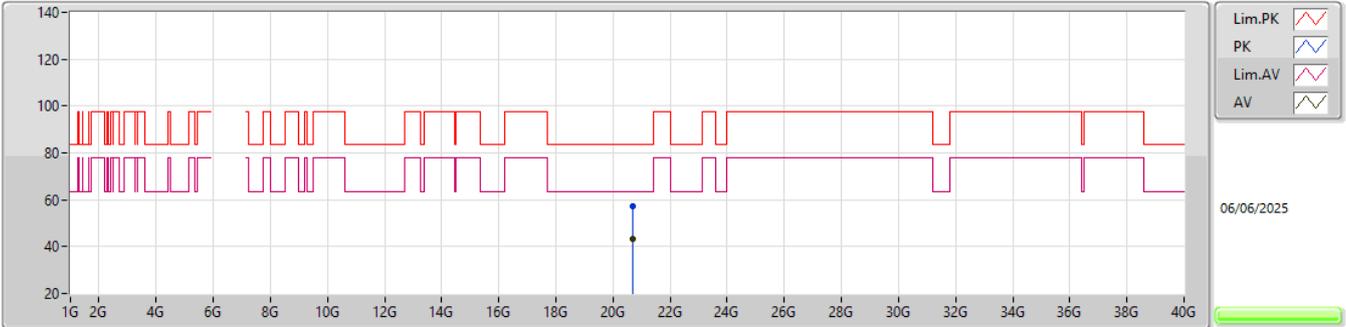


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.6851G	57.45	83.54	-26.09	46.51	1	Horizontal	269	1.64	-	37.90	21.74	48.70
AV	20.68487G	43.33	63.54	-20.21	32.39	1	Horizontal	269	1.64	-	37.90	21.74	48.70

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6975MHz_TX

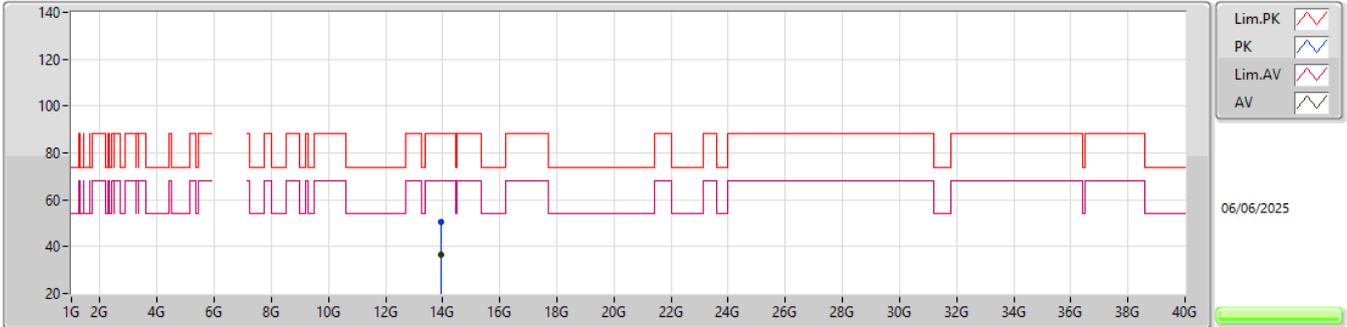


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.95017G	50.75	88.20	-37.45	40.77	3	Vertical	12	1.46	-	40.90	13.42	44.34
RMS	13.94986G	36.54	68.20	-31.66	26.57	3	Vertical	12	1.46	-	40.90	13.42	44.35

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6975MHz_TX

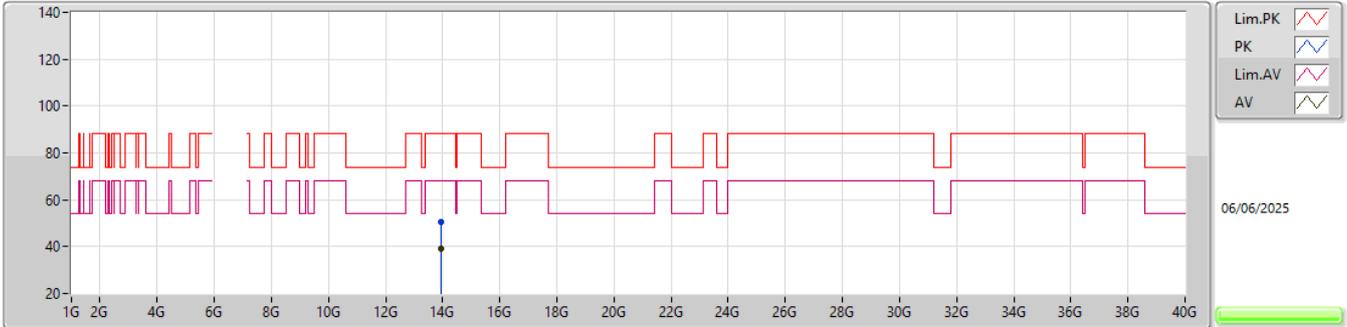


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.94789G	50.74	88.20	-37.46	40.77	3	Horizontal	64	1.70	-	40.90	13.42	44.35
RMS	13.95092G	39.31	68.20	-28.89	29.33	3	Horizontal	64	1.70	-	40.90	13.42	44.34

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6975MHz_TX

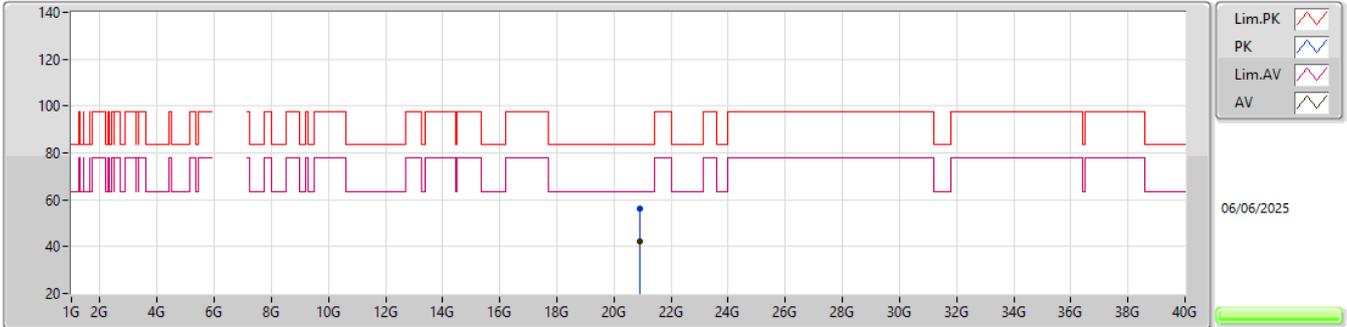


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.92479G	56.03	83.54	-27.51	44.79	1	Vertical	41	1.49	-	37.90	22.04	48.70
AV	20.92526G	42.42	63.54	-21.12	31.18	1	Vertical	41	1.49	-	37.90	22.04	48.70

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6975MHz_TX

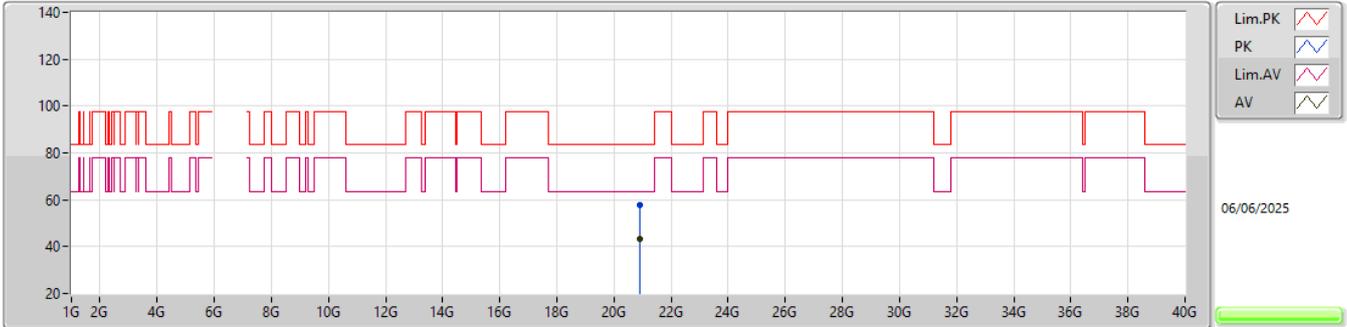


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.92494G	57.79	83.54	-25.75	46.55	1	Horizontal	147	1.60	-	37.90	22.04	48.70
AV	20.92497G	43.47	63.54	-20.07	32.23	1	Horizontal	147	1.60	-	37.90	22.04	48.70

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7055MHz_TX

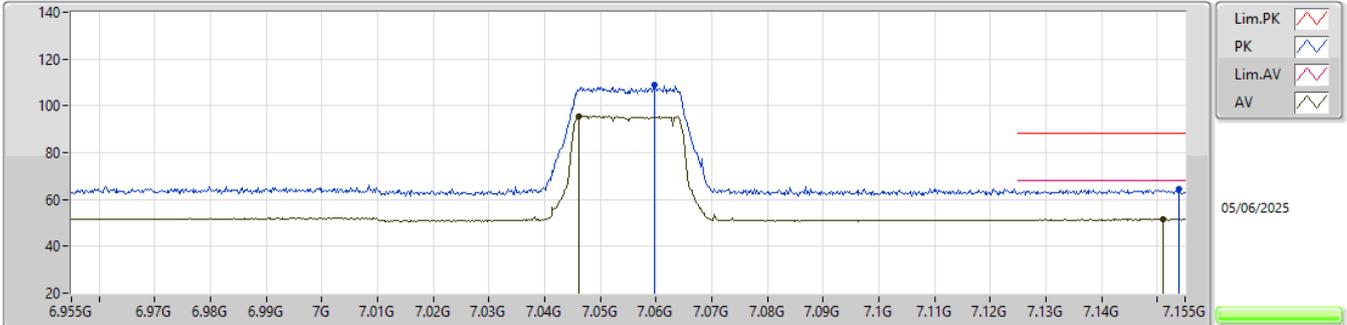


EUT_Y_2TX
Setting 17
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	7.0598G	108.80	Inf	-Inf	96.86	3	Vertical	9	1.80	-	36.72	7.95	32.73
AV	7.0462G	95.73	Inf	-Inf	83.79	3	Vertical	9	1.80	-	36.71	7.96	32.73
PK	7.154G	64.51	88.20	-23.69	52.34	3	Vertical	9	1.80	-	36.92	7.94	32.69
AV	7.151G	51.60	68.20	-16.60	39.44	3	Vertical	9	1.80	-	36.91	7.94	32.69

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7055MHz_TX

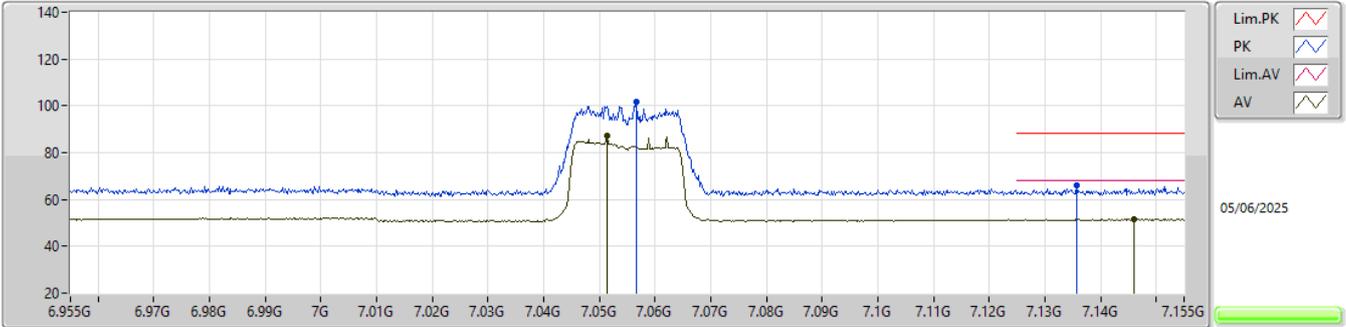


EUT_Y_2TX
Setting 17
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	7.0566G	101.49	Inf	-Inf	89.56	3	Horizontal	300	2.20	-	36.71	7.95	32.73
AV	7.0514G	87.14	Inf	-Inf	75.22	3	Horizontal	300	2.20	-	36.70	7.95	32.73
PK	7.1358G	65.80	88.20	-22.40	53.68	3	Horizontal	300	2.20	-	36.87	7.95	32.70
AV	7.146G	51.50	68.20	-16.70	39.35	3	Horizontal	300	2.20	-	36.89	7.95	32.69

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7055MHz_TX

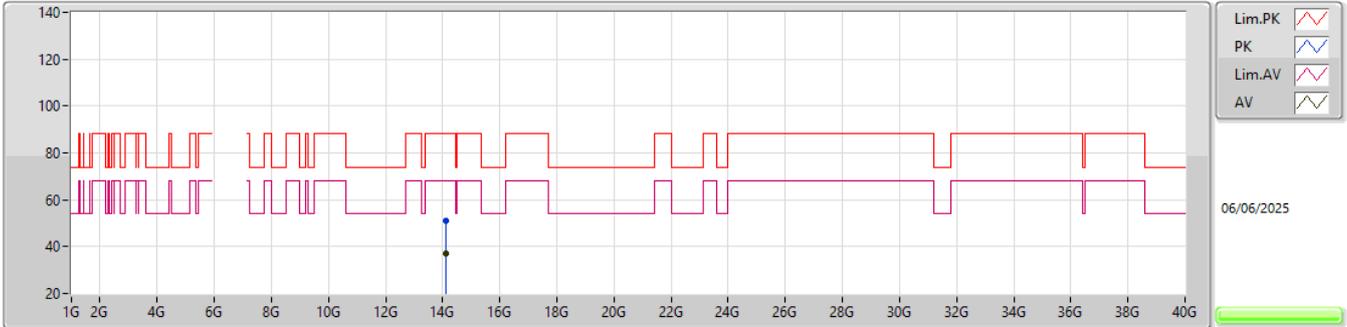


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	14.11147G	51.11	88.20	-37.09	41.13	3	Vertical	165	1.75	-	40.98	13.46	44.46
RMS	14.1119G	36.98	68.20	-31.22	27.00	3	Vertical	165	1.75	-	40.98	13.46	44.46

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7055MHz_TX

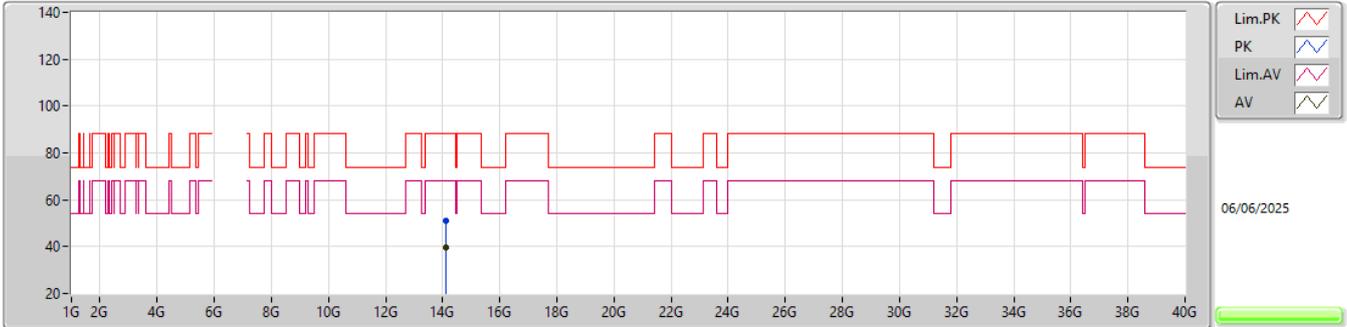


EUT_Y_2TX
Setting 17
01-U-M-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	14.10783G	50.81	88.20	-37.39	40.83	3	Horizontal	153	1.62	-	40.98	13.46	44.46
RMS	14.10836G	39.46	68.20	-28.74	29.48	3	Horizontal	153	1.62	-	40.98	13.46	44.46

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7055MHz_TX

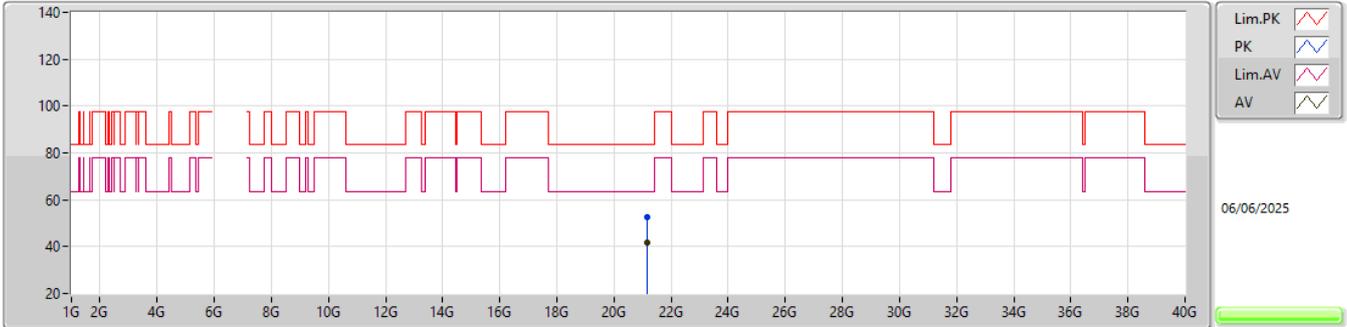


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	21.16496G	52.71	83.54	-30.83	41.19	1	Vertical	222	1.66	-	38.03	22.16	48.67
AV	21.16485G	41.59	63.54	-21.95	30.07	1	Vertical	222	1.66	-	38.03	22.16	48.67

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7055MHz_TX

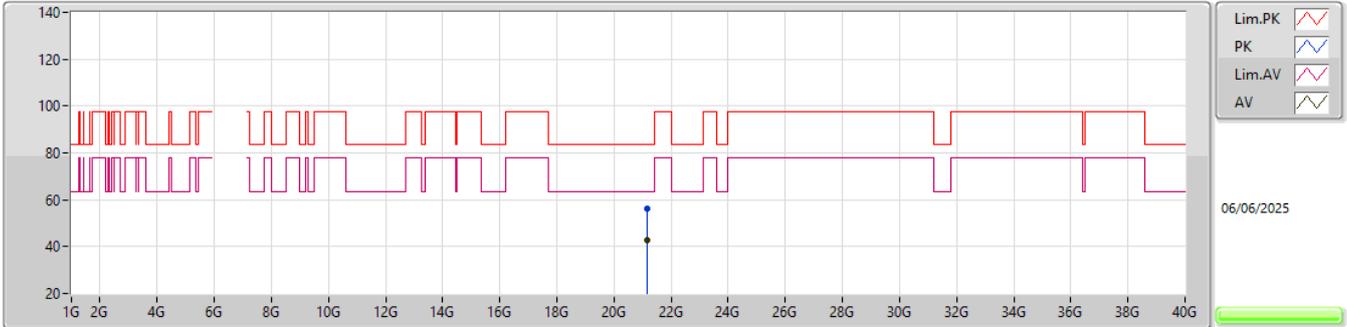


EUT_Y_2TX
Setting 17
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	21.16515G	56.35	83.54	-27.19	44.83	1	Horizontal	261	1.47	-	38.03	22.16	48.67
AV	21.16473G	42.86	63.54	-20.68	31.34	1	Horizontal	261	1.47	-	38.03	22.16	48.67

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

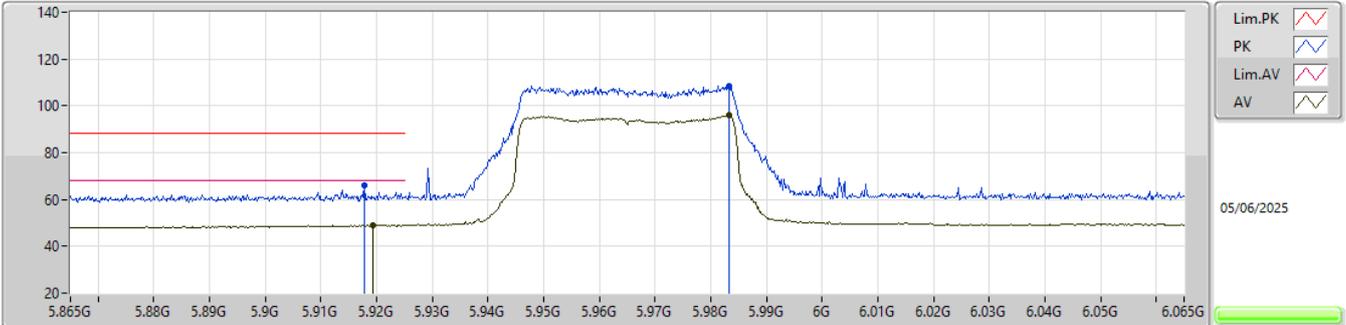


EUT_Y_2TX
Setting 20
01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9178G	65.81	88.20	-22.39	55.90	3	Vertical	336	1.80	-	34.91	7.44	32.44
AV	5.9194G	49.02	68.20	-19.18	39.10	3	Vertical	336	1.80	-	34.92	7.44	32.44
PK	5.9832G	108.66	Inf	-Inf	98.38	3	Vertical	336	1.80	-	35.23	7.49	32.44
AV	5.9832G	96.04	Inf	-Inf	85.76	3	Vertical	336	1.80	-	35.23	7.49	32.44

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

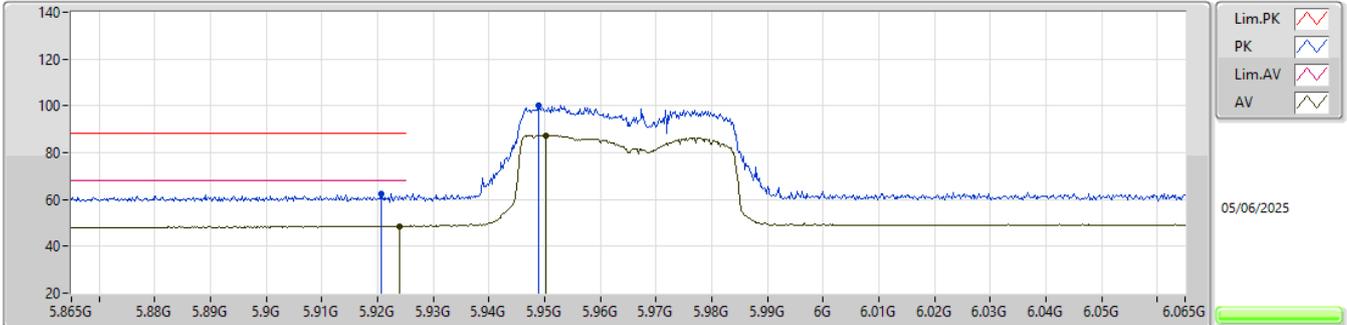


EUT_Y_2TX
 Setting 20
 01-U-M-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9206G	62.42	88.20	-25.78	52.50	3	Horizontal	319	1.92	-	34.92	7.44	32.44
AV	5.924G	48.68	68.20	-19.52	38.74	3	Horizontal	319	1.92	-	34.94	7.44	32.44
PK	5.949G	100.38	Inf	-Inf	90.27	3	Horizontal	319	1.92	-	35.09	7.46	32.44
AV	5.9502G	87.46	Inf	-Inf	77.34	3	Horizontal	319	1.92	-	35.10	7.46	32.44

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

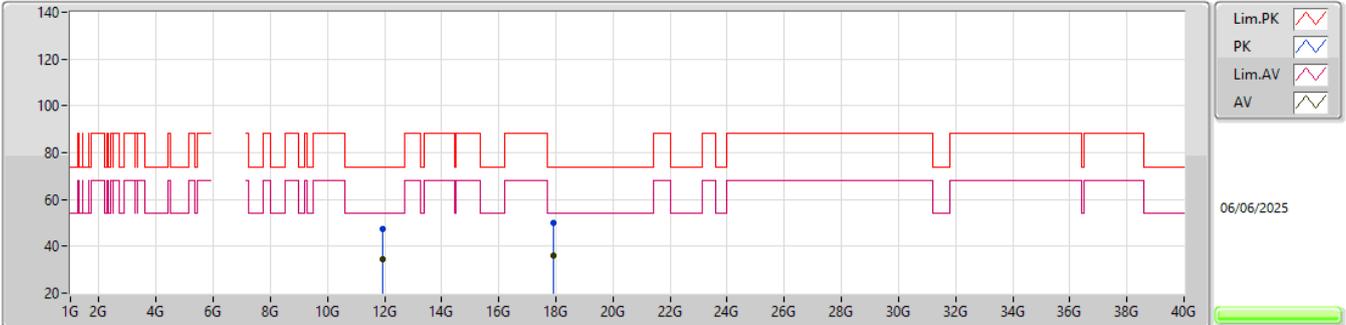


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.931111G	47.30	74.00	-26.70	41.61	3	Vertical	180	1.80	-	38.74	12.29	45.34
AV	11.92994G	34.70	54.00	-19.30	29.01	3	Vertical	180	1.80	-	38.74	12.29	45.34
PK	17.89471G	50.05	74.00	-23.95	38.88	3	Vertical	300	1.88	-	41.28	14.20	44.31
AV	17.89484G	36.15	54.00	-17.85	24.98	3	Vertical	300	1.88	-	41.28	14.20	44.31

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

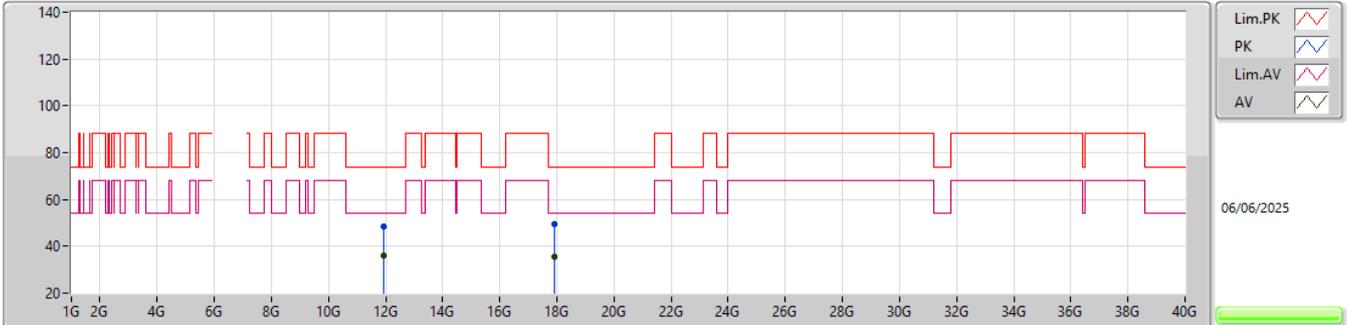


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.92974G	48.44	74.00	-25.56	42.75	3	Horizontal	215	1.80	-	38.74	12.29	45.34
AV	11.92983G	36.12	54.00	-17.88	30.43	3	Horizontal	215	1.80	-	38.74	12.29	45.34
PK	17.89497G	49.64	74.00	-24.36	38.47	3	Horizontal	293	1.99	-	41.28	14.20	44.31
AV	17.89523G	35.65	54.00	-18.35	24.48	3	Horizontal	293	1.99	-	41.28	14.20	44.31

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

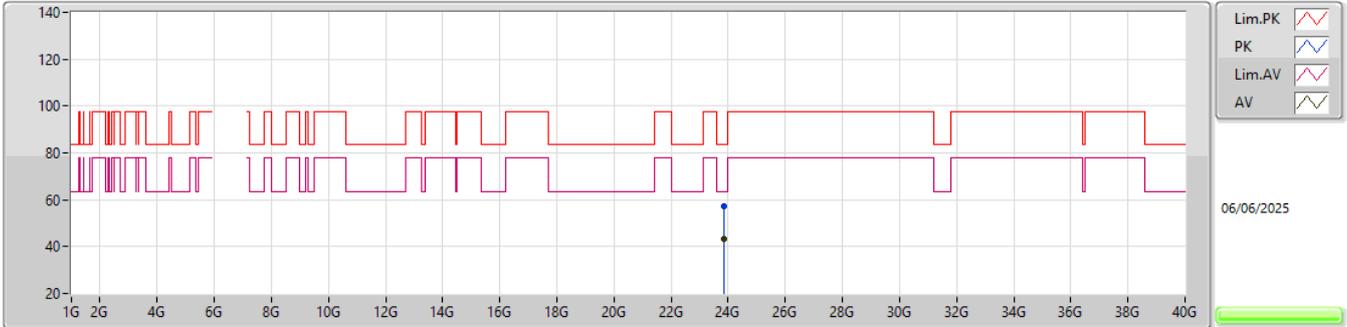


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.8602G	57.12	83.54	-26.42	43.19	1	Vertical	64	1.86	-	39.08	22.51	47.66
AV	23.86026G	43.46	63.54	-20.08	29.53	1	Vertical	64	1.86	-	39.08	22.51	47.66

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

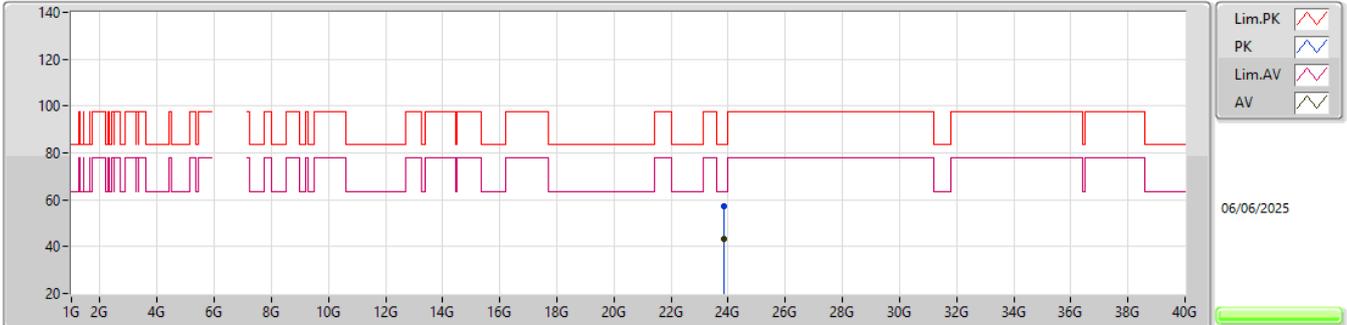


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.85952G	57.13	83.54	-26.41	43.20	1	Horizontal	155	1.74	-	39.08	22.51	47.66
AV	23.86009G	43.41	63.54	-20.13	29.48	1	Horizontal	155	1.74	-	39.08	22.51	47.66

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6205MHz_TX

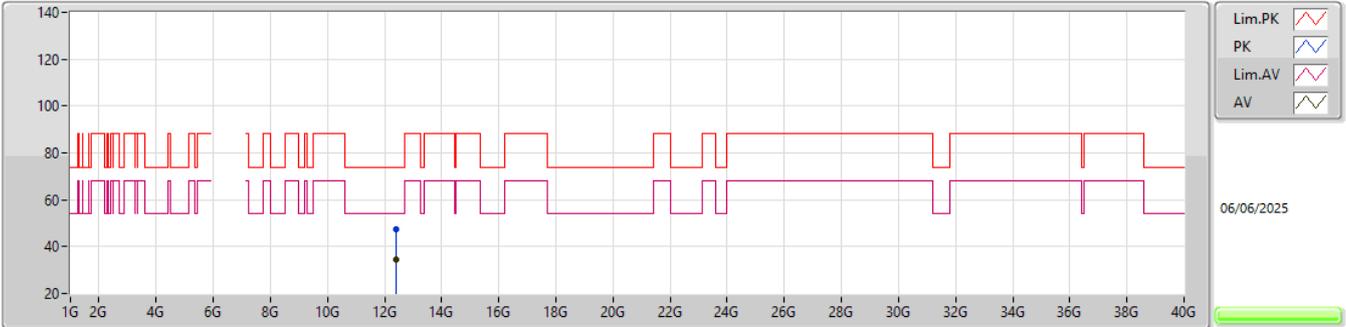


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.41166G	47.40	74.00	-26.60	41.78	3	Vertical	187	1.80	-	38.62	12.58	45.58
AV	12.41004G	34.37	54.00	-19.63	28.75	3	Vertical	187	1.80	-	38.62	12.58	45.58

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6205MHz_TX

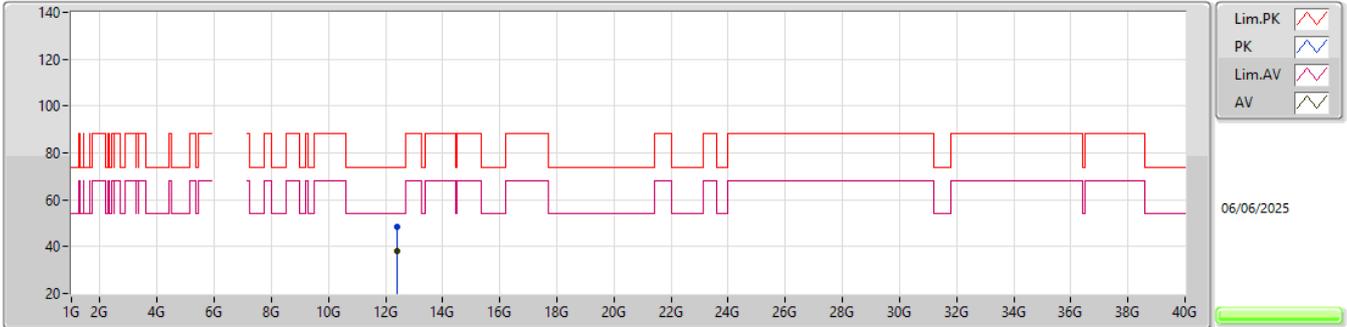


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.40959G	48.68	74.00	-25.32	43.06	3	Horizontal	244	2.19	-	38.62	12.58	45.58
AV	12.40988G	38.19	54.00	-15.81	32.57	3	Horizontal	244	2.19	-	38.62	12.58	45.58

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6205MHz_TX

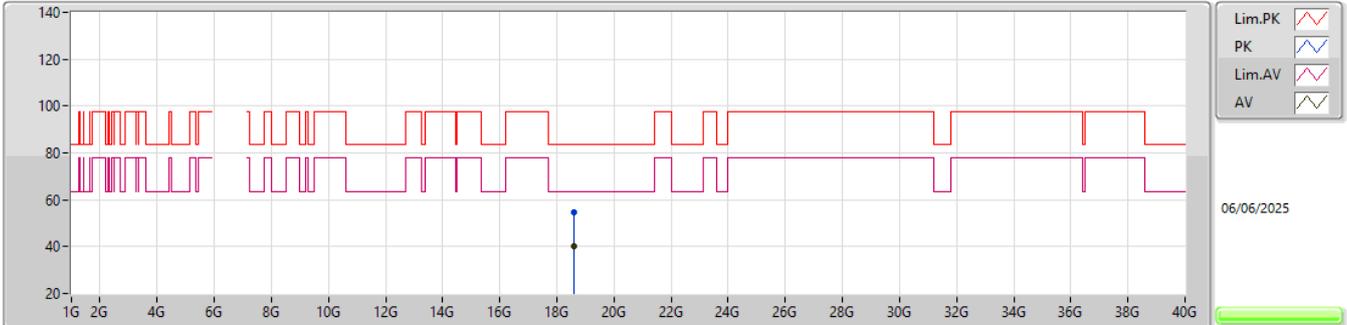


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.61508G	54.78	83.54	-28.76	44.88	1	Vertical	114	1.51	-	37.83	20.49	48.42
AV	18.61544G	40.09	63.54	-23.45	30.19	1	Vertical	114	1.51	-	37.83	20.49	48.42

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6205MHz_TX

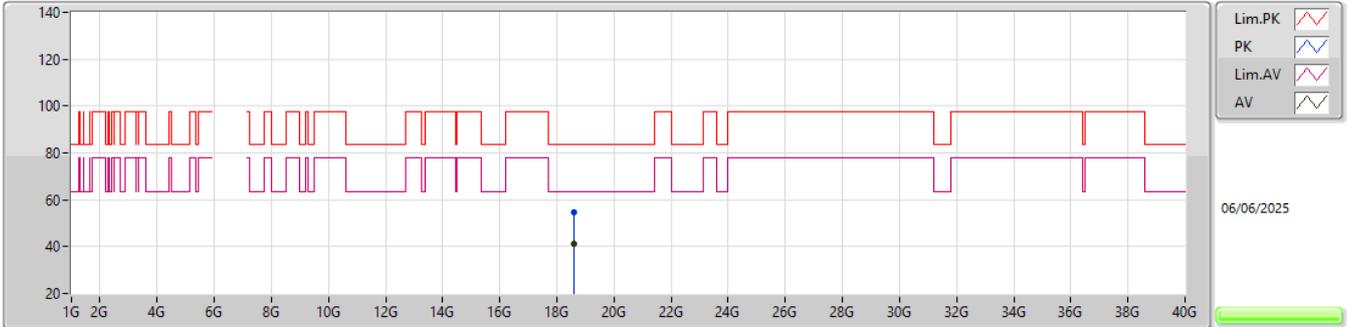


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.61478G	54.41	83.54	-29.13	44.50	1	Horizontal	309	1.90	-	37.83	20.49	48.41
AV	18.61501G	41.01	63.54	-22.53	31.11	1	Horizontal	309	1.90	-	37.83	20.49	48.42

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6405MHz_TX

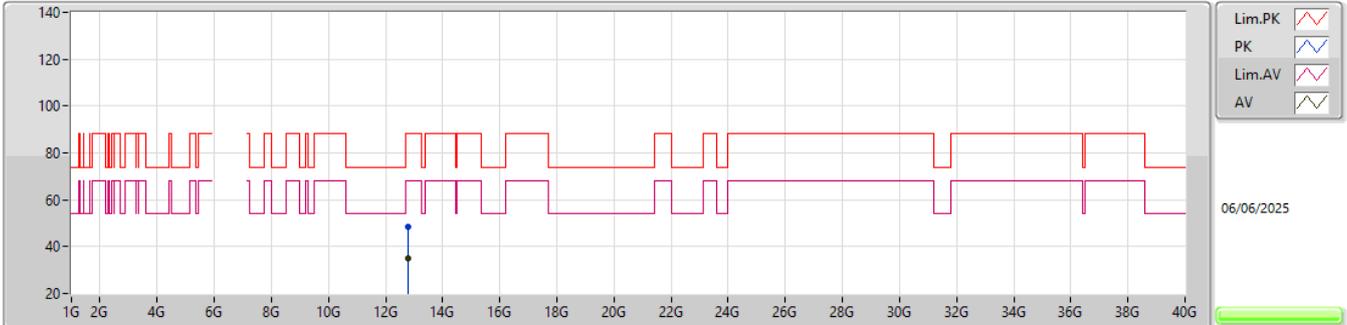


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.81039G	48.24	88.20	-39.96	41.48	3	Vertical	98	1.55	-	39.24	12.80	45.28
RMS	12.80997G	35.15	68.20	-33.05	28.39	3	Vertical	98	1.55	-	39.24	12.80	45.28

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6405MHz_TX

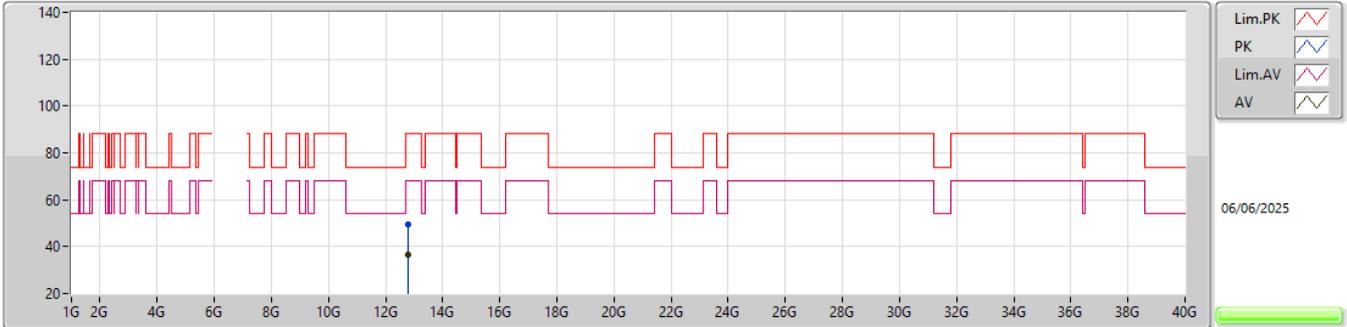


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.80979G	49.26	88.20	-38.94	42.50	3	Horizontal	78	1.80	-	39.24	12.80	45.28
RMS	12.80994G	36.51	68.20	-31.69	29.75	3	Horizontal	78	1.80	-	39.24	12.80	45.28

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6405MHz_TX

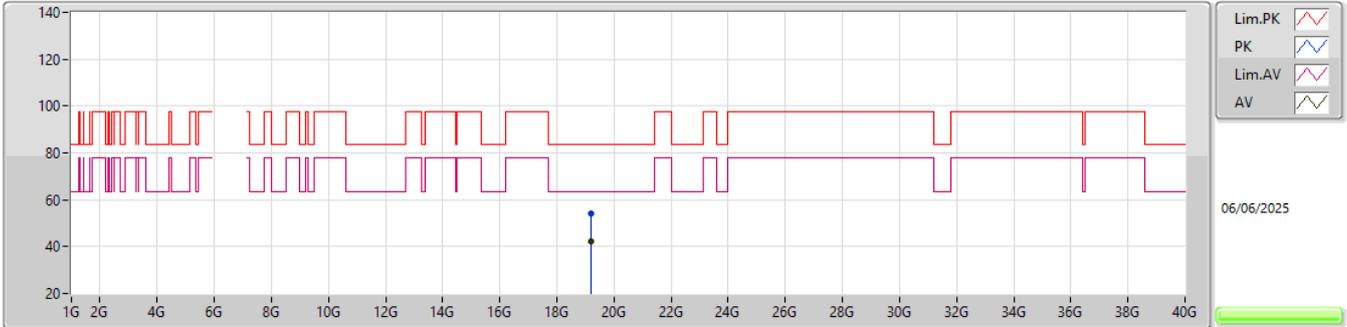


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.21488G	53.99	83.54	-29.55	43.96	1	Vertical	306	1.61	-	37.86	20.97	48.80
AV	19.21481G	42.25	63.54	-21.29	32.22	1	Vertical	306	1.61	-	37.86	20.97	48.80

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6405MHz_TX

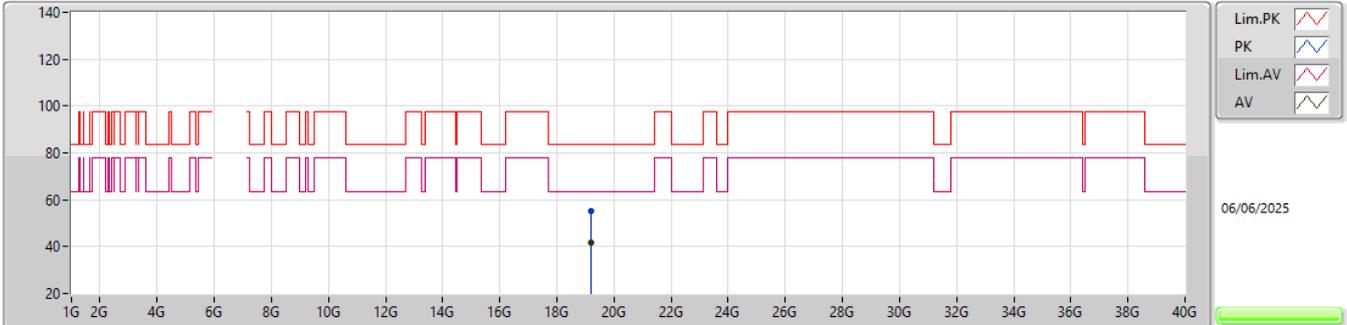


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.21475G	55.31	83.54	-28.23	45.28	1	Horizontal	92	1.99	-	37.86	20.97	48.80
AV	19.21507G	41.56	63.54	-21.98	31.53	1	Horizontal	92	1.99	-	37.86	20.97	48.80

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6445MHz_TX

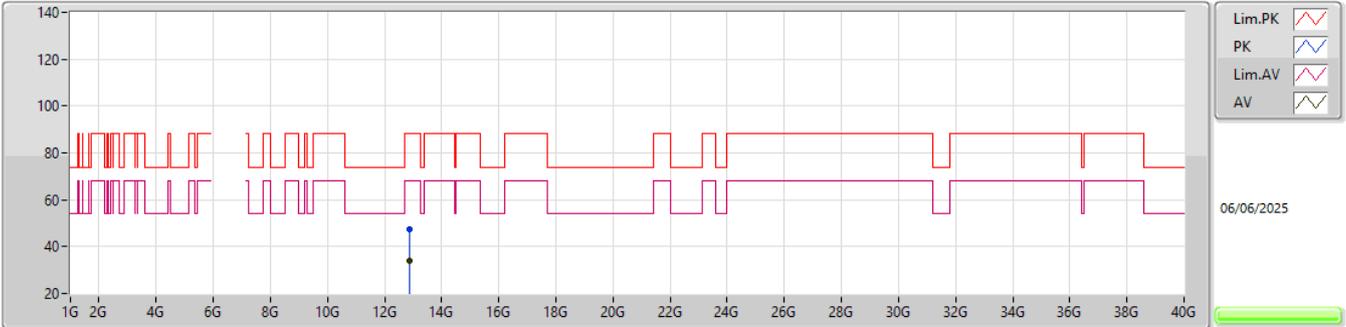


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.89041G	47.63	88.20	-40.57	40.57	3	Vertical	306	1.60	-	39.40	12.85	45.19
RMS	12.89025G	34.18	68.20	-34.02	27.12	3	Vertical	306	1.60	-	39.40	12.85	45.19

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6445MHz_TX

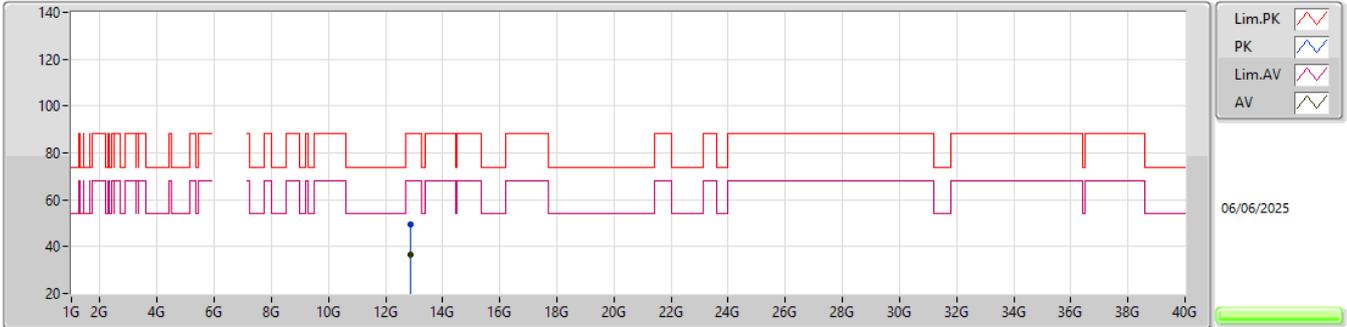


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.89029G	49.56	88.20	-38.64	42.50	3	Horizontal	358	1.85	-	39.40	12.85	45.19
RMS	12.89047G	36.79	68.20	-31.41	29.73	3	Horizontal	358	1.85	-	39.40	12.85	45.19

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6445MHz_TX

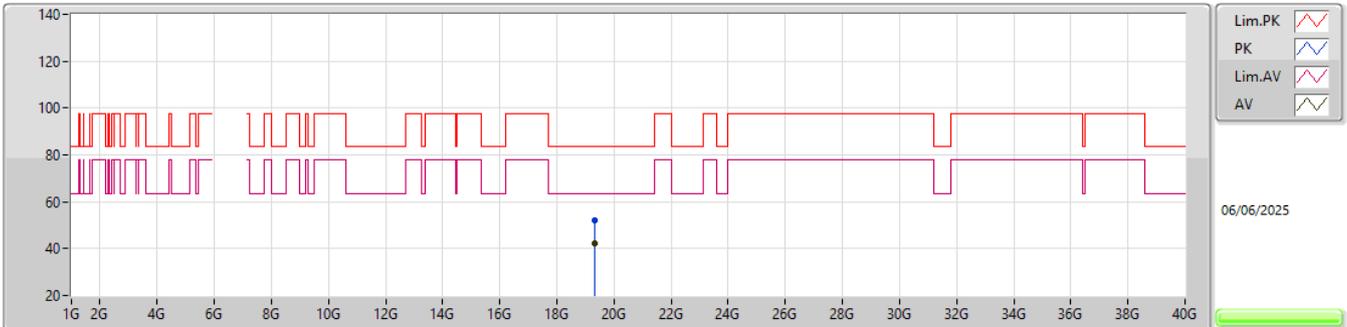


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.33461G	52.00	83.54	-31.54	42.02	1	Vertical	147	1.56	-	37.80	20.98	48.80
AV	19.33548G	42.08	63.54	-21.46	32.10	1	Vertical	147	1.56	-	37.80	20.98	48.80

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6445MHz_TX

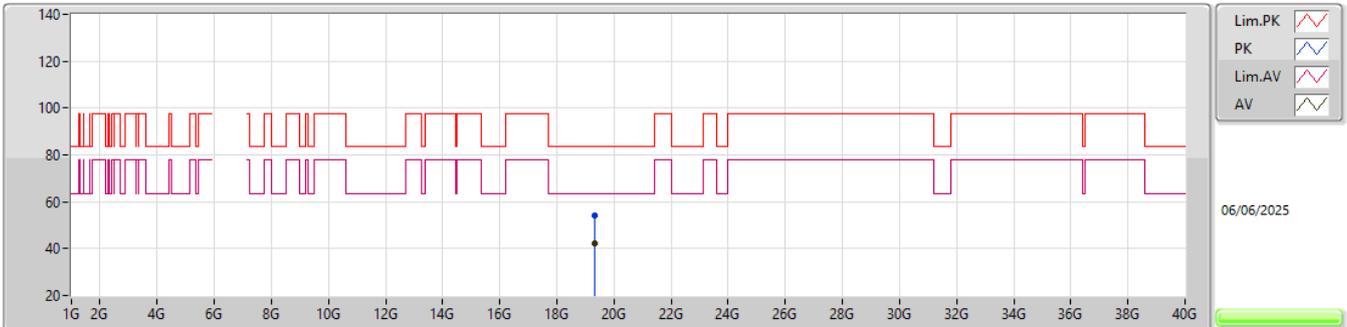


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.33477G	54.16	83.54	-29.38	44.18	1	Horizontal	149	1.67	-	37.80	20.98	48.80
AV	19.33544G	42.37	63.54	-21.17	32.39	1	Horizontal	149	1.67	-	37.80	20.98	48.80

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6485MHz_TX

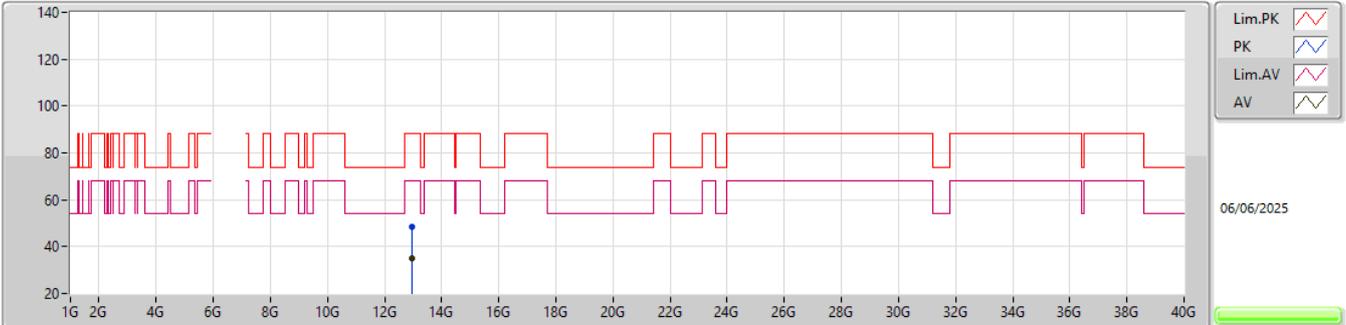


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.97047G	48.48	88.20	-39.72	41.15	3	Vertical	12	1.57	-	39.54	12.89	45.10
RMS	12.96997G	35.19	68.20	-33.01	27.86	3	Vertical	12	1.57	-	39.54	12.89	45.10

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6485MHz_TX

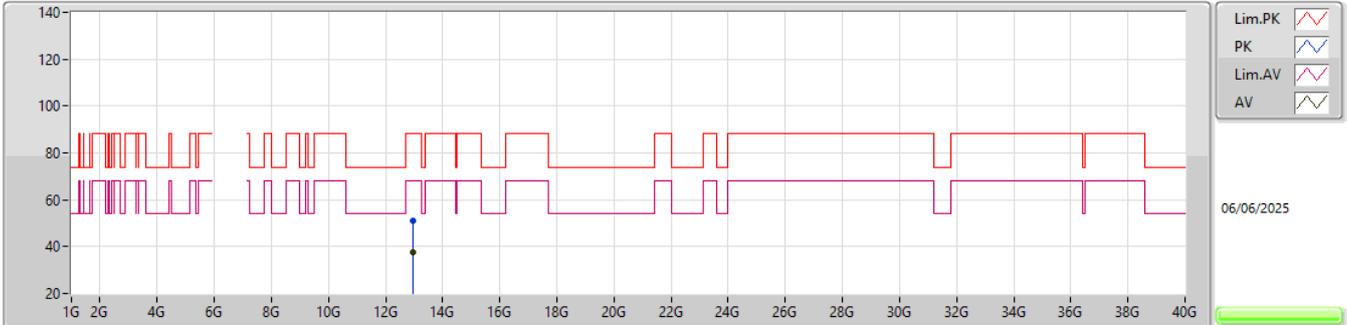


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.97042G	50.96	88.20	-37.24	43.63	3	Horizontal	306	1.87	-	39.54	12.89	45.10
RMS	12.96979G	37.75	68.20	-30.45	30.42	3	Horizontal	306	1.87	-	39.54	12.89	45.10

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6485MHz_TX

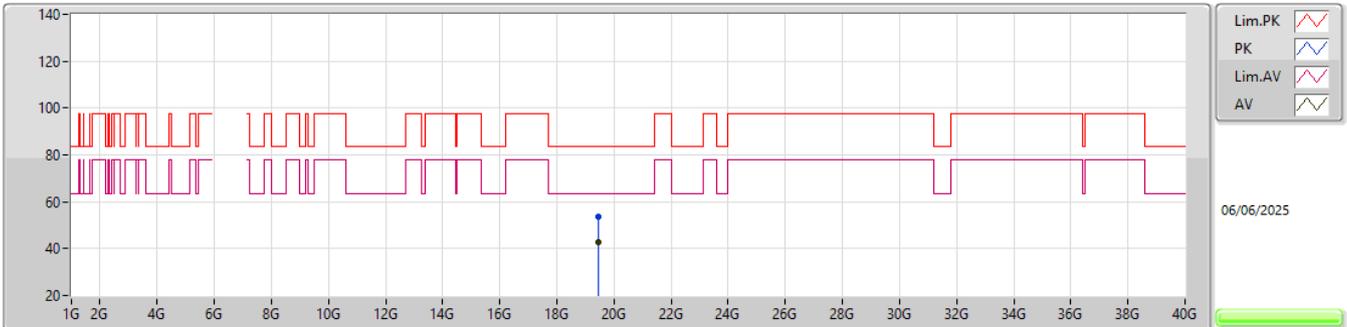


EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.455G	53.38	83.54	-30.16	43.47	1	Vertical	89	1.79	-	37.71	21.00	48.80
AV	19.45498G	42.91	63.54	-20.63	33.00	1	Vertical	89	1.79	-	37.71	21.00	48.80

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6485MHz_TX

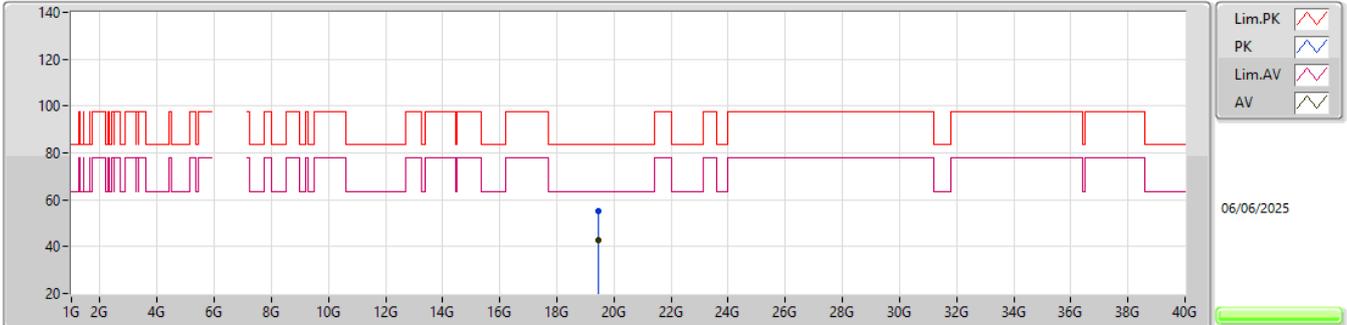

EUT_Y_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.45464G	55.01	83.54	-28.53	45.10	1	Horizontal	352	1.35	-	37.71	21.00	48.80
AV	19.45538G	42.72	63.54	-20.82	32.81	1	Horizontal	352	1.35	-	37.71	21.00	48.80