

承 认 书

SPECIFICATION FOR APPROVAL

客户名称

CUSTOMER NAME: 共进

产品名称

PRODUCT NAME: 5G 外置天线 L=165MM

客户料号

CUSTOMER P/N:

仁丰料号

RenFeng P/N: 3020202222 REV:A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:	顾思远	
AUDITOR BY:	肖玉鹏	
APPROVED BY:	姚定军	
DATE:	2025-03-13	



manufacture:


Dongguan RF Electronic Technology Co., Ltd

Address: No.1 Sankeng Industrial Zone, Qinghutou, Tangxia Town, Dongguan City

电话: 0769-38940168 传真: 0769-39010966 网址: <http://rflink.net.cn>

Contents

<i>Description</i>	<i>Page</i>
1、封面 Cover-----	1
2、履历表 Resume-----	2
3、目录 Catalogue-----	3
4、规格表 Specification sheet-----	4
5、成品图 Finished drawing-----	5
6、包装图 Package drawing-----	6
7、测试报告 Test report-----	7-10

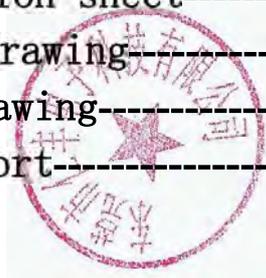





产品主要技术参数

Main technical specifications

主要技术指标		Main technical specifications	
频率范围 (MHZ)	5150-5850	Frequency Range (MHZ)	5150-5850
中心频率 特性阻抗(Ω)	50	Impedance(Ω)	50
增益(dBi)	2.89	Gain(dBi)	2.89
反射损耗	≤ -10	Return Loss(dB)	≤ -10
输出电压 驻波比	≤ 1.92	VSWR	≤ 1.92
极化方式	垂直极化	Polarization	Linear, Vertical
方向性	全向性	Radiation	Omni-directional
连接方式	出线	Connector Type	出线
物理性能		Physical Properties	
天线本体材 料	ABS	Antenna Base	ABS
工作温度	$-20^{\circ}\text{C}\sim+60^{\circ}\text{C}$	Operating Temp	$-20^{\circ}\text{C}\sim+60^{\circ}\text{C}$
保存温度	$-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$	Storage Temp	$-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$

REV	DATE	DESCRIPTION
A	2025-03-13	NEW ISSUE

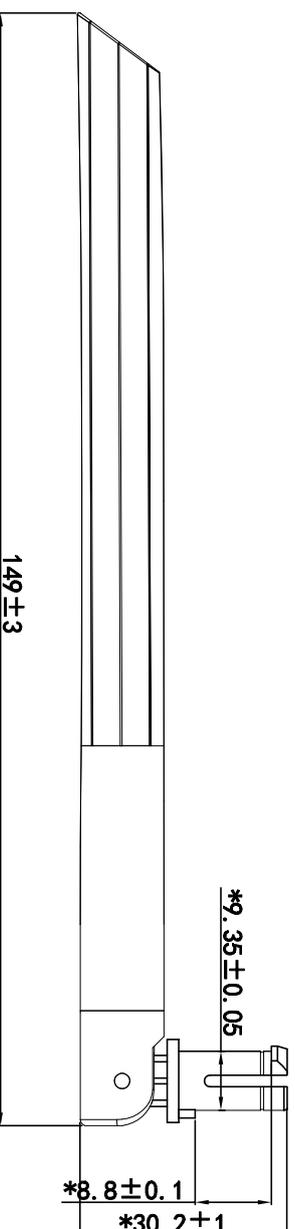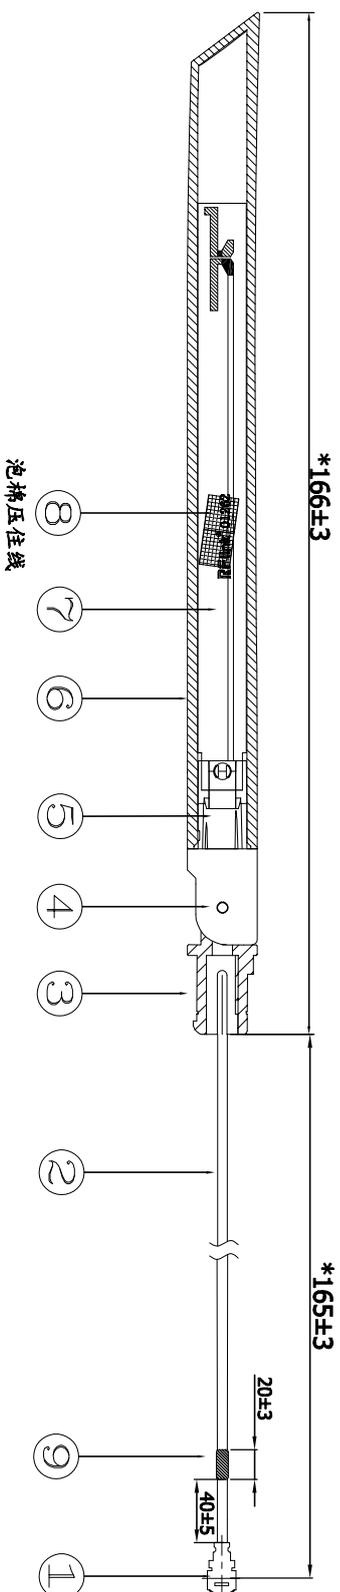

9	贴纸	1	铜板纸		
8	泡沫棉	1	EVA:Black		
7	PCB	1	FR-4		
6	杆套	1	TPEE; Black		
5	上固定座	1	PC+ABS; Black		
4	铆钉	2	POM; Black		
3	下固定座	1	PC; Black		
2	线材	1	φ1.37 Black		
6	端子	1	Copper		
NO.	DESCRIPTION	QTY		REMARK	

尺寸范围 (mm)	公差 (mm)
0<L≤6	±0.10
6<L≤30	±0.10
30<L≤90	±0.15
90<L≤180	±0.20
180<L≤315	±0.25
315<L≤800	±0.35

角度	公差
±0.5°	

APPROVED	CHECKED	DRAWING

CUSTOMER:	PART NO.:	PARTNAME:	R.F P/NO.:
		RF Antenna Assembly	3020202222

REV	UNIT	SCALE	SIZE	SHEET
	mm	1:1	A4	10F1

规格 Specification:
 频率 Frequency Range: 5.15~5.85GHz
 回波损耗 Return loss: -10dB or less
 驻波比 VSWR: 1.92 max
 增益 Gain(peak): 2dBi


RF link
 东莞市仁丰电子科技有限公司
 RenFeng Electronic
 technology Co., LTD.

A B C D E F G

带公差尺寸为检验尺寸
 产品符合环保RoHS2.0之要求


六、测试报告 (Testing report) :

6.1网络分析仪测试报告 (Network analyzer test report)

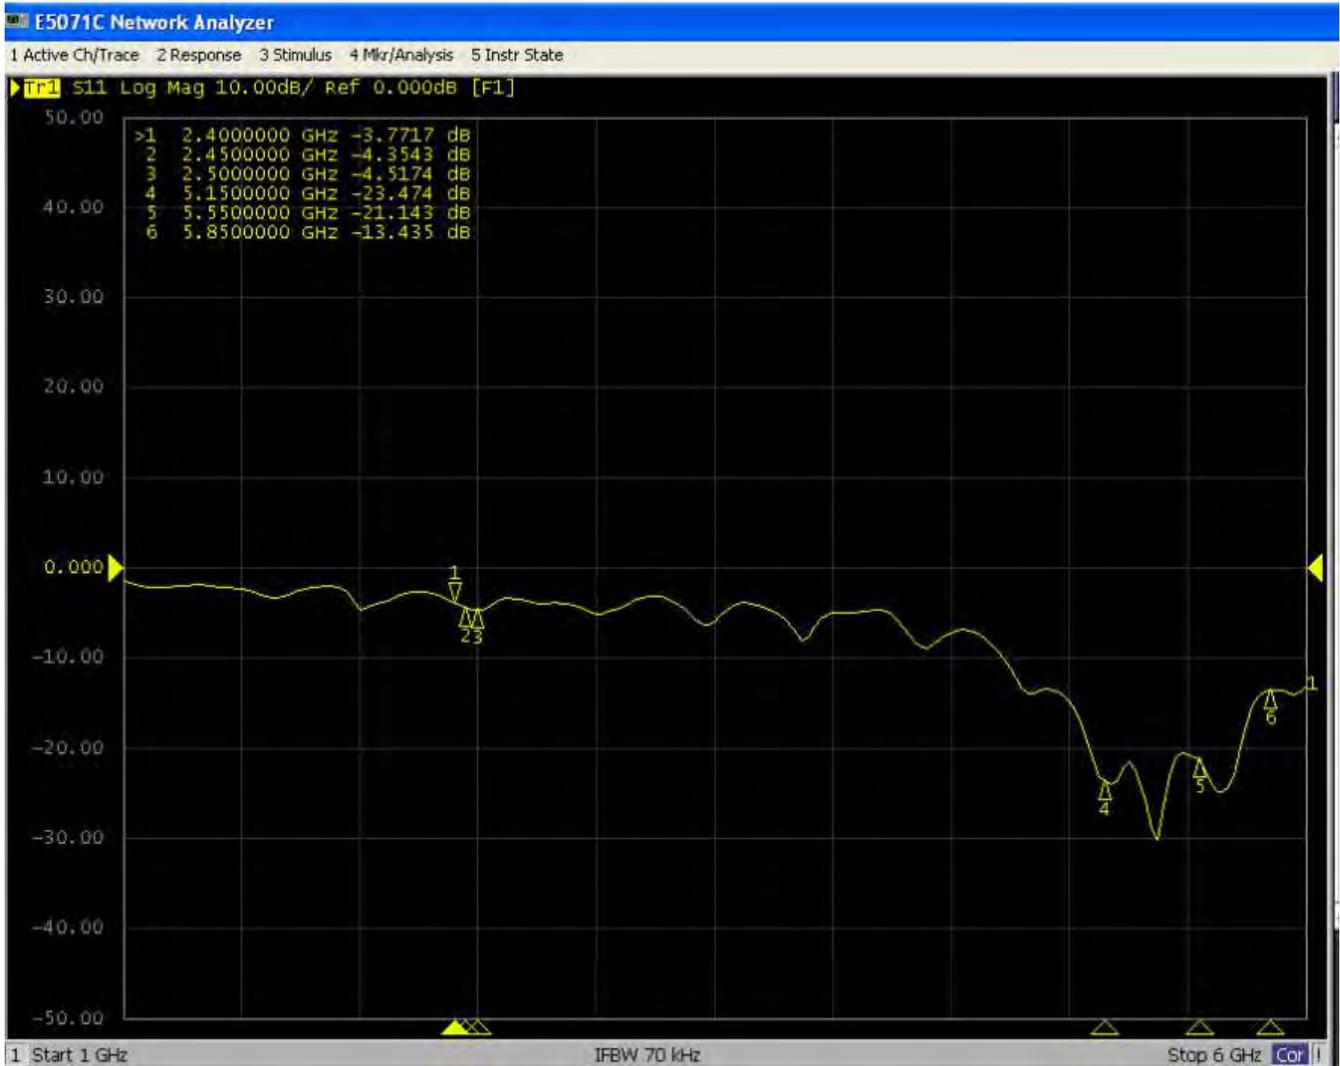


6.2 暗室3D、2D RadiationPattern


5150MHz

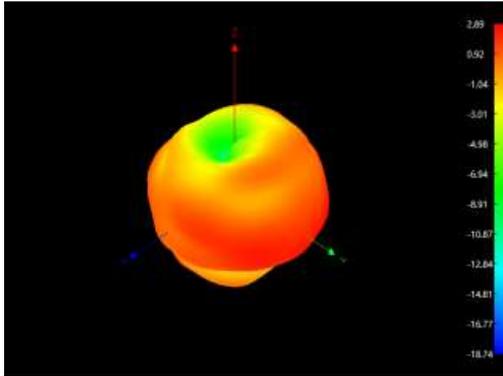


5550MHz

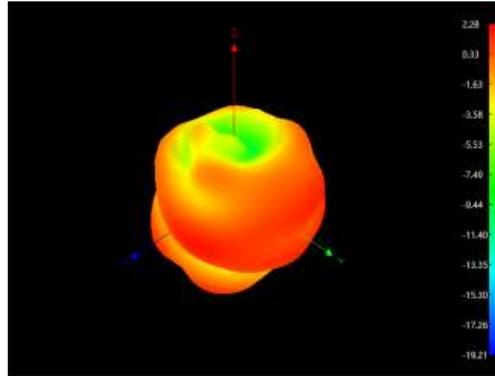


5850MHz

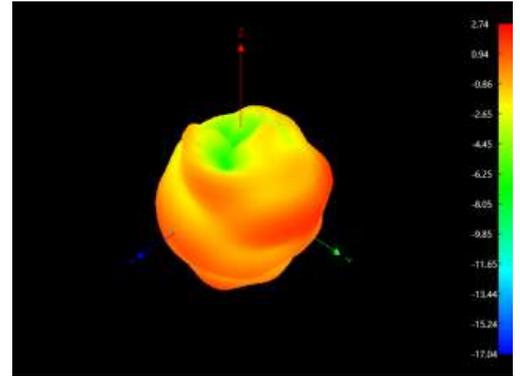


E1

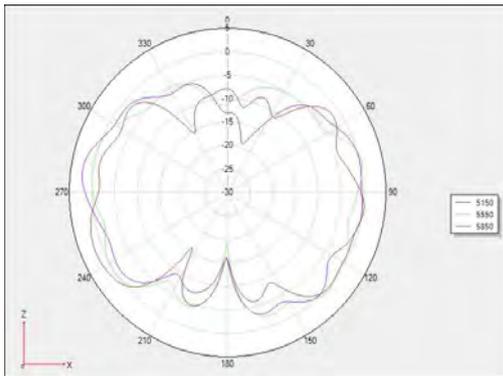

E2

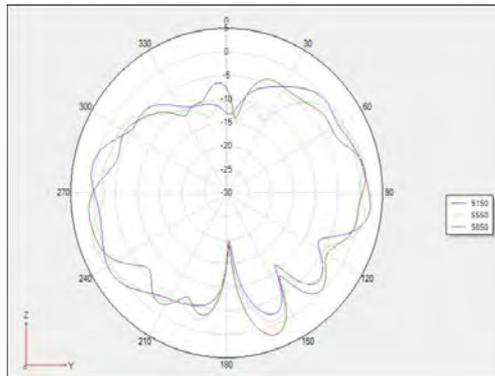

H

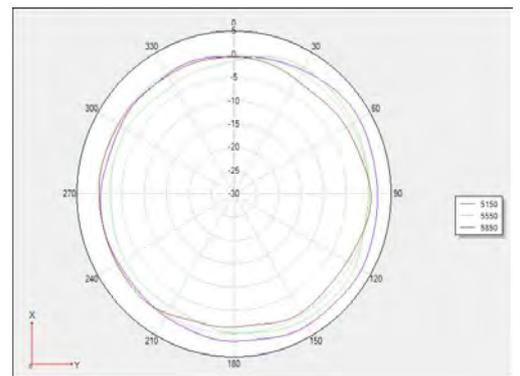



manufacture:

Dongguan RF Electronic Technology Co., Ltd
Company Address: No.1 Sankeng Industrial Zone, Qinghutou, Tangxia Town, Dongguan City
电话: 0769-38940168 传真: 0769-39010966 网址: <http://rflink.net.cn>

5G		
Frequency / MHz	Efficiency / %	Gain/ dBi
5150	74.34	2.89
5200	74.30	2.34
5250	72.61	2.21
5300	72.78	2.19
5350	73.96	2.28
5400	72.11	2.21
5450	68.39	2.63
5500	67.14	2.29
5550	70.47	2.28
5600	69.66	2.41
5650	68.61	2.67
5700	68.71	2.22
5750	68.23	2.23
5800	68.92	2.67
5850	68.07	2.74