


## Appendix C. Radiated Emission Co-location Report

### 1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	2.4GHz + 5GHz Band 1 + 5GHz Band 4
Test EUT	EUT: Version 1		

Horizontal

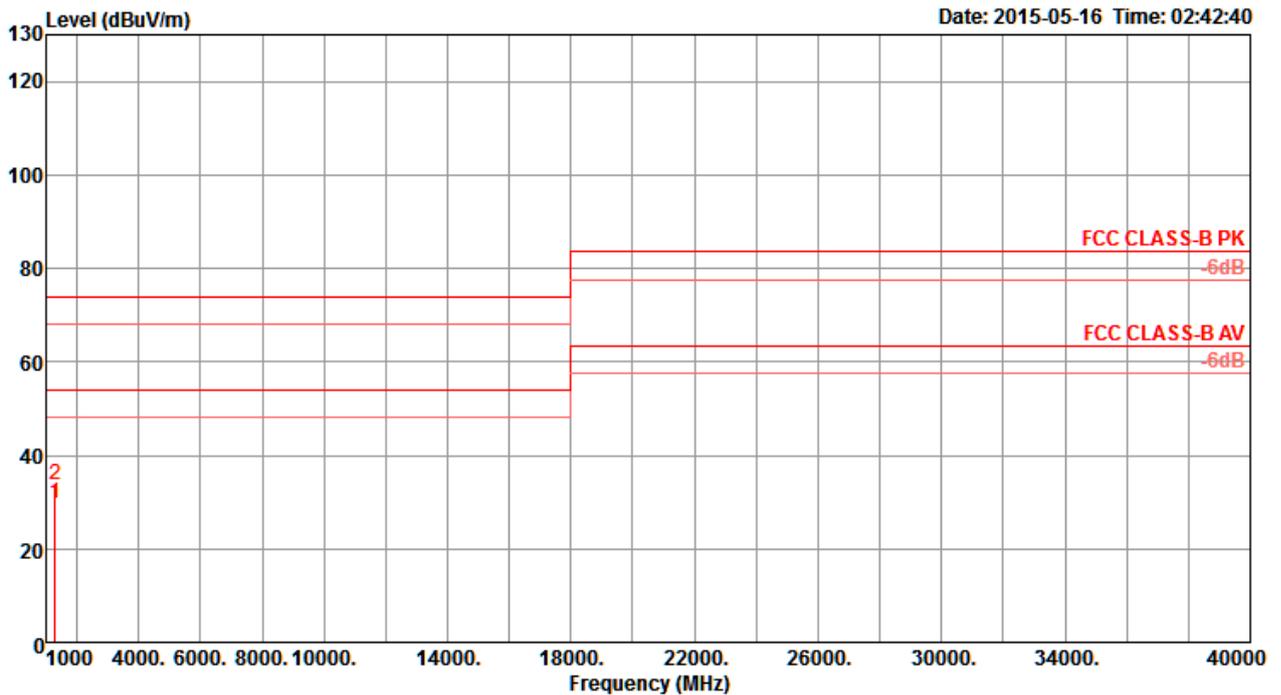

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	1285.72	29.87	54.00	-24.13	38.38	2.10	24.76	35.37	234	111	Average	HORIZONTAL
2	1285.78	33.71	74.00	-40.29	42.22	2.10	24.76	35.37	234	111	Peak	HORIZONTAL


Vertical

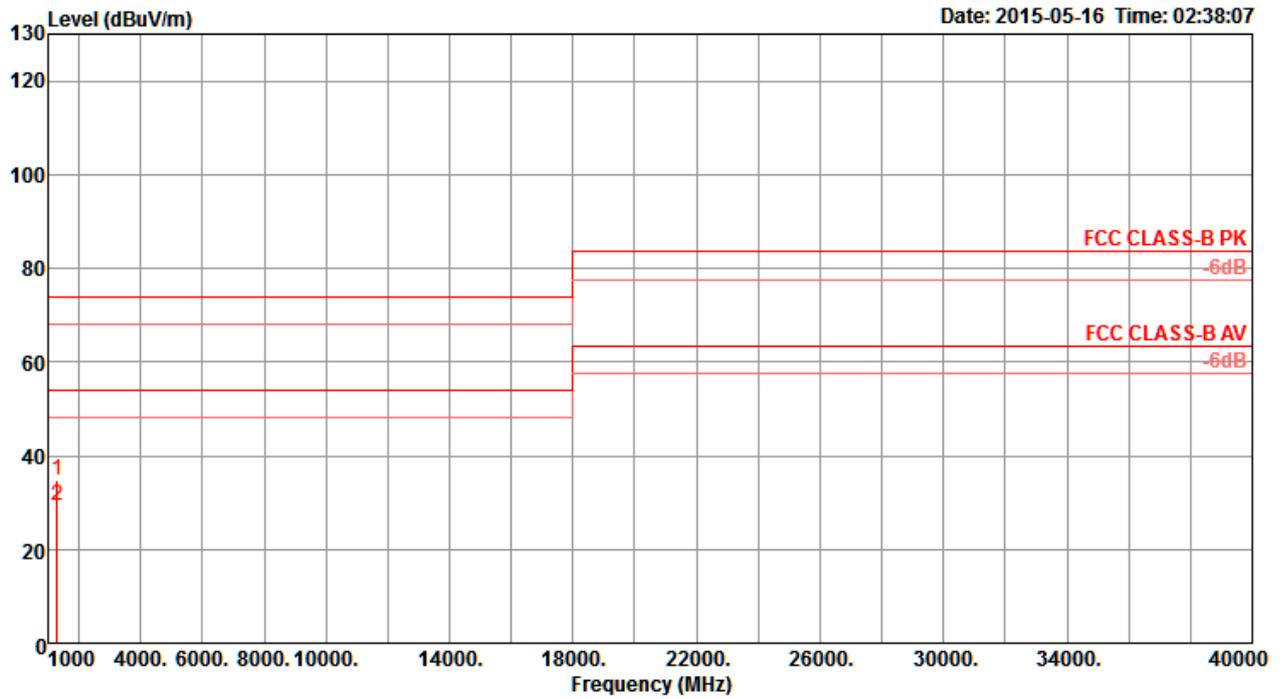

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	1285.60	34.83	74.00	-39.17	43.34	2.10	24.76	35.37	2	100	Peak	VERTICAL
2	1285.71	29.47	54.00	-24.53	37.98	2.10	24.76	35.37	2	100	Average	VERTICAL


Temperature	22°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	2.4GHz + 5GHz Band 1 + 5GHz Band 4
Test EUT	EUT: Version 2		

Horizontal

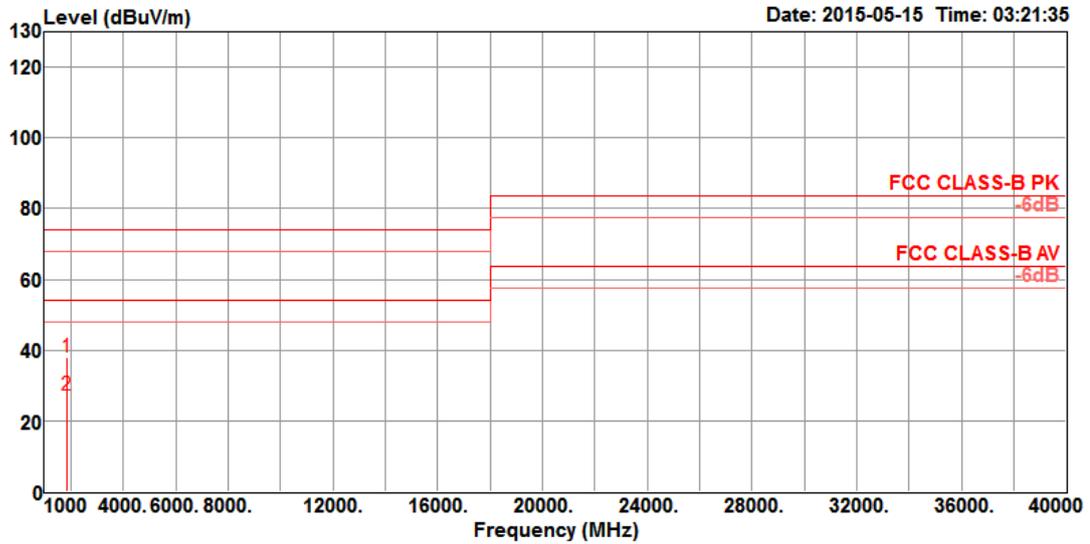

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1842.30	37.83	74.00	-36.17	43.86	3.35	25.82	35.20	100	132 Peak	HORIZONTAL
2	1842.43	27.22	54.00	-26.78	33.25	3.35	25.82	35.20	100	132 Average	HORIZONTAL

Vertical

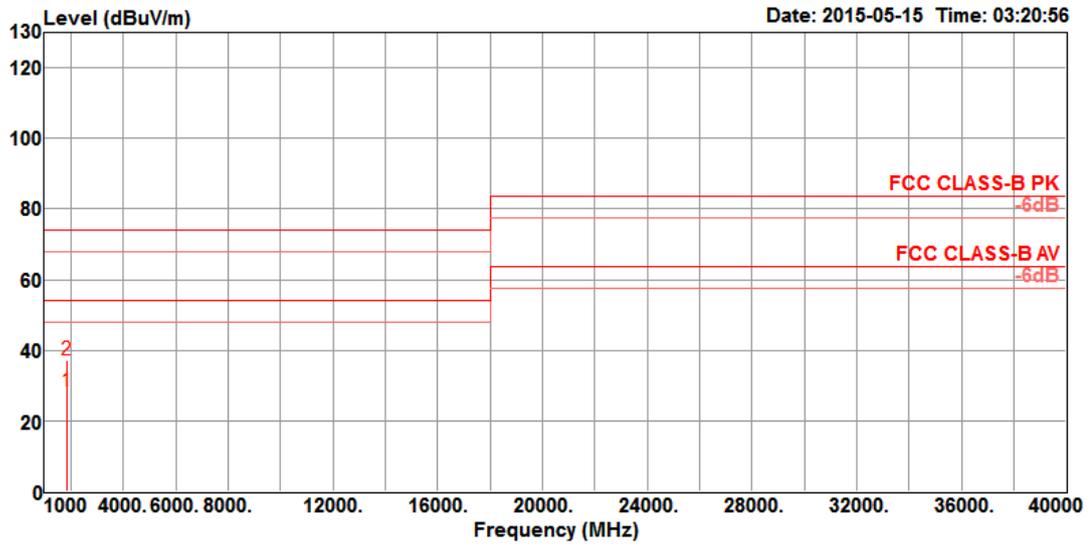

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	I/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1842.40	28.23	54.00	-25.77	34.25	3.35	25.83	35.20	100	167 Average	VERTICAL
2	1842.63	37.36	74.00	-36.64	43.38	3.35	25.83	35.20	100	167 Peak	VERTICAL