



# FCC RADIO TEST REPORT

**FCC ID** : MSQ-RTHR00

**Equipment** : Wireless-AX11000 Tri-band Gigabit Router, ROG Rapture Tri-band Gaming Router

**Brand Name** : ASUS

**Model Name** : RT-AX95U, GT-AX11000

**Applicant** : ASUSTeK COMPUTER INC.  
4F, No. 150, Li-Te Rd., Peitou, Taipei 112, Taiwan

**Manufacturer (1)** : ASKEY TECHNOLOGY (JIANG SU) LTD  
NO1388, Jiao Tong Road, Wujiang Economic Technological Development Area Jiangsu Province 215200 China

**Manufacturer (2)** : Compal Networking (KunShan) Co., LTD.  
No. 520, Nabbang Rd., Economic & Technical Development Zone Kunshan, Jiangsu Province China


**Manufacturer (3)** : Arcadyan Technology (Vietnam) Co., Ltd.  
Ba Thien Industrial Park, Ba Hien commune, Binh Xuyen district, Vinh Phuc Province, Viet Nam

**Standard** : 47 CFR FCC Part 15.407

The product was received on Jun. 05, 2018, and testing was started from Aug. 27, 2019 and completed on Feb. 17, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Sam Chen

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>History of this test report.....</b>                              | <b>3</b>  |
| <b>Summary of Test Result.....</b>                                   | <b>4</b>  |
| <b>1 General Description .....</b>                                   | <b>5</b>  |
| 1.1 Information.....                                                 | 5         |
| 1.2 Applicable Standards .....                                       | 13        |
| 1.3 Testing Location Information .....                               | 13        |
| 1.4 Measurement Uncertainty .....                                    | 13        |
| <b>2 Test Configuration of EUT .....</b>                             | <b>14</b> |
| 2.1 The Worst Case Measurement Configuration.....                    | 14        |
| 2.2 EUT Operation during Test .....                                  | 17        |
| 2.3 Accessories .....                                                | 17        |
| 2.4 Support Equipment.....                                           | 18        |
| 2.5 Test Setup Diagram .....                                         | 20        |
| <b>3 Transmitter Test Result .....</b>                               | <b>24</b> |
| 3.1 AC Power-line Conducted Emissions .....                          | 24        |
| 3.2 Emission Bandwidth .....                                         | 26        |
| 3.3 Maximum Conducted Output Power .....                             | 27        |
| 3.4 Peak Power Spectral Density.....                                 | 29        |
| 3.5 Unwanted Emissions.....                                          | 32        |
| <b>4 Test Equipment and Calibration Data .....</b>                   | <b>36</b> |
| <b>Appendix A. Test Results of AC Power-line Conducted Emissions</b> |           |
| <b>Appendix B. Test Results of Emission Bandwidth</b>                |           |
| <b>Appendix C. Test Results of Maximum Conducted Output Power</b>    |           |
| <b>Appendix D. Test Results of Peak Power Spectral Density</b>       |           |
| <b>Appendix E. Test Results of Unwanted Emissions</b>                |           |
| <b>Appendix F. Test Photos</b>                                       |           |
| <b>Photographs of EUT v01</b>                                        |           |



TEL : 886-3-656-9065  
FAX : 886-3-656-9085  
Report Template No.: CB-A12\_1 Ver1.0



## Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items                        | Result (PASS/FAIL) | Remark |
|---------------|-----------------|-----------------------------------|--------------------|--------|
| 1.1.2         | 15.203          | Antenna Requirement               | PASS               | -      |
| 3.1           | 15.207          | AC Power-line Conducted Emissions | PASS               | -      |
| 3.2           | 15.407(a)       | Emission Bandwidth                | PASS               | -      |
| 3.3           | 15.407(a)       | Maximum Conducted Output Power    | PASS               | -      |
| 3.4           | 15.407(a)       | Peak Power Spectral Density       | PASS               | -      |
| 3.5           | 15.407(b)       | Unwanted Emissions                | PASS               | -      |

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Cliff Chang**

**Report Producer: Emily Chen**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

| Frequency Range (MHz) | IEEE Std. 802.11                       | Ch. Frequency (MHz) | Channel Number |
|-----------------------|----------------------------------------|---------------------|----------------|
| 5150-5250             | a, n (HT20), ac (VHT20),<br>ax (HEW20) | 5180-5240           | 36-48 [4]      |
| 5250-5350             |                                        | 5260-5320           | 52-64 [4]      |
| 5470-5725             |                                        | 5500-5720           | 100-144 [12]   |
| 5725-5850             |                                        | 5745-5825           | 149-165 [5]    |
| 5150-5250             | n (HT40), ac (VHT40),<br>ax (HEW40)    | 5190-5230           | 38-46 [2]      |
| 5250-5350             |                                        | 5270-5310           | 54-62 [2]      |
| 5470-5725             |                                        | 5510-5710           | 102-142 [6]    |
| 5725-5850             |                                        | 5755-5795           | 151-159 [2]    |
| 5150-5250             | ac (VHT80), ax (HEW80)                 | 5210                | 42 [1]         |
| 5250-5350             |                                        | 5290                | 58 [1]         |
| 5470-5725             |                                        | 5530-5690           | 106-138 [3]    |
| 5725-5850             |                                        | 5775                | 155 [1]        |
| 5150-5350             | ac (VHT160),<br>ax (HEW160)            | 5250                | 50 [1]         |
| 5470-5725             |                                        | 5570                | 114 [1]        |



| <b>Band</b>  | <b>Mode</b>        | <b>BWch (MHz)</b> | <b>Nant</b> |
|--------------|--------------------|-------------------|-------------|
| 5.15-5.25GHz | 802.11a            | 20                | 4TX         |
| 5.15-5.25GHz | 802.11n HT20       | 20                | 4TX         |
| 5.15-5.25GHz | 802.11n HT20-BF    | 20                | 4TX         |
| 5.15-5.25GHz | 802.11ac VHT20     | 20                | 4TX         |
| 5.15-5.25GHz | 802.11ac VHT20-BF  | 20                | 4TX         |
| 5.15-5.25GHz | 802.11ax HEW20     | 20                | 4TX         |
| 5.15-5.25GHz | 802.11ax HEW20,BF  | 20                | 4TX         |
| 5.15-5.25GHz | 802.11n HT40       | 40                | 4TX         |
| 5.15-5.25GHz | 802.11n HT40-BF    | 40                | 4TX         |
| 5.15-5.25GHz | 802.11ac VHT40     | 40                | 4TX         |
| 5.15-5.25GHz | 802.11ac VHT40-BF  | 40                | 4TX         |
| 5.15-5.25GHz | 802.11ax HEW40     | 40                | 4TX         |
| 5.15-5.25GHz | 802.11ax HEW40,BF  | 40                | 4TX         |
| 5.15-5.25GHz | 802.11ac VHT80     | 80                | 4TX         |
| 5.15-5.25GHz | 802.11ac VHT80-BF  | 80                | 4TX         |
| 5.15-5.25GHz | 802.11ax HEW80     | 80                | 4TX         |
| 5.15-5.25GHz | 802.11ax HEW80,BF  | 80                | 4TX         |
| 5.15-5.25GHz | 802.11ac VHT160    | 160               | 4TX         |
| 5.15-5.25GHz | 802.11ac VHT160-BF | 160               | 4TX         |
| 5.15-5.25GHz | 802.11ax HEW160    | 160               | 4TX         |
| 5.15-5.25GHz | 802.11ax HEW160-BF | 160               | 4TX         |
| 5.25-5.35GHz | 802.11a            | 20                | 4TX         |
| 5.25-5.35GHz | 802.11n HT20       | 20                | 4TX         |
| 5.25-5.35GHz | 802.11n HT20-BF    | 20                | 4TX         |
| 5.25-5.35GHz | 802.11ac VHT20     | 20                | 4TX         |
| 5.25-5.35GHz | 802.11ac VHT20-BF  | 20                | 4TX         |
| 5.25-5.35GHz | 802.11HEW20        | 20                | 4TX         |
| 5.25-5.35GHz | 802.11HEW20,BF     | 20                | 4TX         |
| 5.25-5.35GHz | 802.11n HT40       | 40                | 4TX         |
| 5.25-5.35GHz | 802.11n HT40-BF    | 40                | 4TX         |
| 5.25-5.35GHz | 802.11ac VHT40     | 40                | 4TX         |
| 5.25-5.35GHz | 802.11ac VHT40-BF  | 40                | 4TX         |
| 5.25-5.35GHz | 802.11HEW40        | 40                | 4TX         |
| 5.25-5.35GHz | 802.11HEW40,BF     | 40                | 4TX         |
| 5.25-5.35GHz | 802.11ac VHT80     | 80                | 4TX         |
| 5.25-5.35GHz | 802.11ac VHT80-BF  | 80                | 4TX         |
| 5.25-5.35GHz | 802.11HEW80        | 80                | 4TX         |
| 5.25-5.35GHz | 802.11HEW80,BF     | 80                | 4TX         |



| Band          | Mode               | BWch (MHz) | Nant |
|---------------|--------------------|------------|------|
| 5.25-5.35GHz  | 802.11ac VHT160    | 160        | 4TX  |
| 5.25-5.35GHz  | 802.11ac VHT160-BF | 160        | 4TX  |
| 5.25-5.35GHz  | 802.11ax HEW160    | 160        | 4TX  |
| 5.25-5.35GHz  | 802.11ax HEW160-BF | 160        | 4TX  |
| 5.47-5.725GHz | 802.11a            | 20         | 4TX  |
| 5.47-5.725GHz | 802.11n HT20       | 20         | 4TX  |
| 5.47-5.725GHz | 802.11n HT20-BF    | 20         | 4TX  |
| 5.47-5.725GHz | 802.11ac VHT20     | 20         | 4TX  |
| 5.47-5.725GHz | 802.11ac VHT20-BF  | 20         | 4TX  |
| 5.47-5.725GHz | 802.11HEW20        | 20         | 4TX  |
| 5.47-5.725GHz | 802.11HEW20,BF     | 20         | 4TX  |
| 5.47-5.725GHz | 802.11n HT40       | 40         | 4TX  |
| 5.47-5.725GHz | 802.11n HT40-BF    | 40         | 4TX  |
| 5.47-5.725GHz | 802.11ac VHT40     | 40         | 4TX  |
| 5.47-5.725GHz | 802.11ac VHT40-BF  | 40         | 4TX  |
| 5.47-5.725GHz | 802.11HEW40        | 40         | 4TX  |
| 5.47-5.725GHz | 802.11HEW40,BF     | 40         | 4TX  |
| 5.47-5.725GHz | 802.11ac VHT80     | 80         | 4TX  |
| 5.47-5.725GHz | 802.11ac VHT80-BF  | 80         | 4TX  |
| 5.47-5.725GHz | 802.11HEW80        | 80         | 4TX  |
| 5.47-5.725GHz | 802.11HEW80,BF     | 80         | 4TX  |
| 5.47-5.725GHz | 802.11ac VHT160    | 160        | 4TX  |
| 5.47-5.725GHz | 802.11ac VHT160-BF | 160        | 4TX  |
| 5.47-5.725GHz | 802.11ax HEW160    | 160        | 4TX  |
| 5.47-5.725GHz | 802.11ax HEW160-BF | 160        | 4TX  |
| 5.725-5.85GHz | 802.11a            | 20         | 4TX  |
| 5.725-5.85GHz | 802.11n HT20       | 20         | 4TX  |
| 5.725-5.85GHz | 802.11n HT20-BF    | 20         | 4TX  |
| 5.725-5.85GHz | 802.11ac VHT20     | 20         | 4TX  |
| 5.725-5.85GHz | 802.11ac VHT20-BF  | 20         | 4TX  |
| 5.725-5.85GHz | 802.11ax HE20      | 20         | 4TX  |
| 5.725-5.85GHz | 802.11ax HE20,BF   | 20         | 4TX  |
| 5.725-5.85GHz | 802.11n HT40       | 40         | 4TX  |
| 5.725-5.85GHz | 802.11n HT40-BF    | 40         | 4TX  |
| 5.725-5.85GHz | 802.11ac VHT40     | 40         | 4TX  |
| 5.725-5.85GHz | 802.11ac VHT40-BF  | 40         | 4TX  |
| 5.725-5.85GHz | 802.11ax HE40      | 40         | 4TX  |
| 5.725-5.85GHz | 802.11ax HE40,BF   | 40         | 4TX  |
| 5.725-5.85GHz | 802.11ac VHT80     | 80         | 4TX  |
| 5.725-5.85GHz | 802.11ac VHT80-BF  | 80         | 4TX  |



| Band          | Mode               | BWch (MHz) | Nant |
|---------------|--------------------|------------|------|
| 5.725-5.85GHz | 802.11ax HE80      | 80         | 4TX  |
| 5.725-5.85GHz | 802.11ax HE80,BF   | 80         | 4TX  |
| 5.725-5.85GHz | 802.11ac VHT160    | 160        | 4TX  |
| 5.725-5.85GHz | 802.11ac VHT160-BF | 160        | 4TX  |
| 5.725-5.85GHz | 802.11ax HEW160    | 160        | 4TX  |
| 5.725-5.85GHz | 802.11ax HEW160-BF | 160        | 4TX  |

**Note:**

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 and VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.



## 1.1.2 Antenna Information

| Set | Ant. | Port   |            |         |         | Brand  | P/N                | Type   | Connector        | Gain (dBi) |            |         |         |
|-----|------|--------|------------|---------|---------|--------|--------------------|--------|------------------|------------|------------|---------|---------|
|     |      | 2.4GHz | 5GHz B1/B2 | 5GHz B3 | 5GHz B4 |        |                    |        |                  | 2.4GHz     | 5GHz B1/B2 | 5GHz B3 | 5GHz B4 |
| 1   | 1    | 1      | -          | 4       | 4       | WHA YU | C660-510413-A      | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 2    | 2      | -          | 3       | 3       | WHA YU | C660-510413-A      | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 3    | 3      | -          | 2       | 2       | WHA YU | C660-510413-A      | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 4    | 4      | -          | 1       | 1       | WHA YU | C660-510413-A      | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 5    | -      | 1          | -       | -       | WHA YU | C660-510413-A      | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 6    | -      | 2          | -       | -       | WHA YU | C660-510413-A      | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 7    | -      | 3          | -       | -       | WHA YU | C660-510413-A      | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 8    | -      | 4          | -       | -       | WHA YU | C660-510413-A      | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
| 2   | 1    | 1      | -          | 4       | 4       | WHA YU | C660-510431-A      | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 2    | 2      | -          | 3       | 3       | WHA YU | C660-510431-A      | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 3    | 3      | -          | 2       | 2       | WHA YU | C660-510431-A      | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 4    | 4      | -          | 1       | 1       | WHA YU | C660-510431-A      | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 5    | -      | 1          | -       | -       | WHA YU | C660-510431-A      | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 6    | -      | 2          | -       | -       | WHA YU | C660-510431-A      | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 7    | -      | 3          | -       | -       | WHA YU | C660-510431-A      | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 8    | -      | 4          | -       | -       | WHA YU | C660-510431-A      | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
| 3   | 1    | 1      | -          | 4       | 4       | PSA    | RFDPA161000SBLB801 | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 2    | 2      | -          | 3       | 3       | PSA    | RFDPA161000SBLB801 | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 3    | 3      | -          | 2       | 2       | PSA    | RFDPA161000SBLB801 | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 4    | 4      | -          | 1       | 1       | PSA    | RFDPA161000SBLB801 | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 5    | -      | 1          | -       | -       | PSA    | RFDPA161000SBLB801 | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 6    | -      | 2          | -       | -       | PSA    | RFDPA161000SBLB801 | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 7    | -      | 3          | -       | -       | PSA    | RFDPA161000SBLB801 | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 8    | -      | 4          | -       | -       | PSA    | RFDPA161000SBLB801 | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
| 4   | 1    | 1      | -          | 4       | 4       | Walsin | RFDPA161000SBLB802 | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 2    | 2      | -          | 3       | 3       | Walsin | RFDPA161000SBLB802 | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 3    | 3      | -          | 2       | 2       | Walsin | RFDPA161000SBLB802 | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 4    | 4      | -          | 1       | 1       | Walsin | RFDPA161000SBLB802 | Dipole | Reverse SMA Plug | 1.9        | -          | 2.3     | 1.9     |
|     | 5    | -      | 1          | -       | -       | Walsin | RFDPA161000SBLB802 | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 6    | -      | 2          | -       | -       | Walsin | RFDPA161000SBLB802 | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 7    | -      | 3          | -       | -       | Walsin | RFDPA161000SBLB802 | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |
|     | 8    | -      | 4          | -       | -       | Walsin | RFDPA161000SBLB802 | Dipole | Reverse SMA Plug | -          | 2.3        | -       | -       |

Note: The above information was declared by manufacturer.

Note: B1 means Band1. The rule also applies to B2, B3, and B4.

Because WHA YU's antennas、PSA's antennas and Walsin's antennas are the same type antennas and same gain, only the WHA YU's set 1 antennas was tested and recorded in the report.

<For 2.4GHz Band>

For IEEE 802.11b/g/n/ac/ax mode <4TX/4RX>:

Ant.1 (Port 1), Ant.2 (Port 2), Ant.3 (Port 3) and Ant.4 (Port 4) will transmit/receive the same signal simultaneously.

Ant.1 (Port 1), Ant.2 (Port 2), Ant.3 (Port 3) and Ant.4 (Port 4) can be used as transmitting/receiving antennas.

**<For 5GHz Band>****For Band 1/2****For IEEE 802.11a/n/ac/ax mode <4TX/4RX>:**

Ant.5 (Port 1), Ant.6 (Port 2), Ant.7 (Port 3) and Ant.8 (Port 4) will transmit/receive the same signal simultaneously.

Ant.5 (Port 1), Ant.6 (Port 2), Ant.7 (Port 3) and Ant.8 (Port 4) can be used as transmitting/receiving antennas.

**For Band 3/4****For IEEE 802.11a/n/ac/ax mode <4TX/4RX>:**

Ant.1 (Port 4), Ant.2 (Port 3), Ant.3 (Port 2) and Ant.4 (Port 1) will transmit/receive the same signal simultaneously.

Ant.1 (Port 4), Ant.2 (Port 3), Ant.3 (Port 2) and Ant.4 (Port 1) can be used as transmitting/receiving antennas.

**1.1.3 Mode Test Duty Cycle****4T1S:**

| Mode              | DC    | DCF(dB) | T(s)           | VBW(Hz) ≥ 1/T  |
|-------------------|-------|---------|----------------|----------------|
| 802.11a           | 0.953 | 0.21    | 2.068m         | 1k             |
| 802.11ax HEW20    | 0.989 | 0.05    | n/a (DC>=0.98) | n/a (DC>=0.98) |
| 802.11ax HEW20-BF | 0.977 | 0.1     | 2.931m         | 1k             |
| 802.11ax HEW40    | 0.978 | 0.1     | 1.149m         | 1k             |
| 802.11ax HEW40-BF | 0.945 | 0.25    | 2.931m         | 1k             |
| 802.11ax HEW80    | 0.957 | 0.19    | 580u           | 3k             |
| 802.11ax HEW80-BF | 0.979 | 0.09    | 2.804m         | 1k             |

**4T2S:**

| Mode              | DC    | DCF(dB) | T(s)   | VBW(Hz) ≥ 1/T |
|-------------------|-------|---------|--------|---------------|
| 802.11ax HEW20-BF | 0.97  | 0.13    | 2.939m | 1k            |
| 802.11ax HEW40-BF | 0.954 | 0.2     | 4.016m | 300           |
| 802.11ax HEW80-BF | 0.975 | 0.11    | 2.64m  | 1k            |

**4T4S:**

| Mode           | DC    | DCF(dB) | T(s) | VBW(Hz) ≥ 1/T |
|----------------|-------|---------|------|---------------|
| 802.11ax HEW80 | 0.886 | 0.53    | 215u | 10k           |

**1.1.4 EUT Operational Condition**

|                              |                                                                       |                   |                                     |                      |
|------------------------------|-----------------------------------------------------------------------|-------------------|-------------------------------------|----------------------|
| <b>EUT Power Type</b>        | From Power Adapter                                                    |                   |                                     |                      |
| <b>Beamforming Function</b>  | <input checked="" type="checkbox"/>                                   | With beamforming  | <input type="checkbox"/>            | Without beamforming  |
|                              | The product has beamforming function for 802.11n/ac/ax in 2.4GHz/5GHz |                   |                                     |                      |
| <b>Weather Band</b>          | <input checked="" type="checkbox"/>                                   | With 5600~5650MHz | <input type="checkbox"/>            | Without 5600~5650MHz |
| <b>Function</b>              | <input type="checkbox"/>                                              | Outdoor P2M       | <input checked="" type="checkbox"/> | Indoor P2M           |
|                              | <input type="checkbox"/>                                              | Fixed P2P         | <input type="checkbox"/>            | Client               |
| <b>TPC Function</b>          | <input checked="" type="checkbox"/>                                   | With TPC          | <input type="checkbox"/>            | Without TPC          |
| <b>Test Software Version</b> | Mtool 3.0.0.6                                                         |                   |                                     |                      |

Note: The above information was declared by manufacturer.

### 1.1.5 Table for Multiple Listing

The difference for each equipment name and model name is shown as below:

| Equipment Name                                                               | Model Name           | Description                                                                                                      |
|------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------|
| Wireless-AX11000 Tri-band Gigabit Router, ROG Rapture Tri-band Gaming Router | RT-AX95U, GT-AX11000 | All the models/equipment names are identical; the different models/equipment names served as marketing strategy. |

From the above models, model: RT-AX95U was selected as representative model for the test and its data was recorded in this report.

### 1.1.6 EUT Information

There are four EUT, the detail information as following:

| EUT | SKU | LAN Transformer |             | Power IC   |        | 2.5G phy chip |          |
|-----|-----|-----------------|-------------|------------|--------|---------------|----------|
|     |     | Brand Name      | P/N         | Brand Name | P/N    | Brand Name    | P/N      |
| 1   | 1   | SWAPnet         | NS777202*1  | Richtek    | RT6220 | Broadcom      | BCM84880 |
|     |     | SWAPnet         | NS771802*1  | Richtek    | RT6217 |               |          |
| 2   | 2   | Mingtek         | HN8001VG*1  | Richtek    | RT6220 | Broadcom      | BCM84880 |
|     |     | Mingtek         | HN18101HF*1 | Richtek    | RT6217 |               |          |
| 3   | 3   | SWAPnet         | NS777202*1  | MPS        | MP8765 | Broadcom      | BCM54991 |
|     |     | SWAPnet         | NS771802*1  | MPS        | MP2315 |               |          |
| 4   | 4   | Mingtek         | HN8001VG*1  | MPS        | MP8765 | Broadcom      | BCM54991 |
|     |     | Mingtek         | HN18101HF*1 | MPS        | MP2315 |               |          |

### 1.1.7 EUT Function

The EUT supports below functions:

|   |                                         |
|---|-----------------------------------------|
| 1 | AP Router (Master)                      |
| 2 | Client without radar detection          |
| 3 | Bridge (Client without radar detection) |
| 4 | Extender (Master)                       |
| 5 | Mesh (Client without radar detection)   |



### 1.1.8 Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR812227-03AB

Below is the table for the change of the product with respect to the original one.

| Modifications                                                                                                                                                                                                                                                               | Performance Checking                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| 1. Adding the second sources (EUT3 and EUT4). Please refer to section 1.1.6 for detail Information.<br>2. Adding a new adapter (Brand: DELTA, Model:ADP-65GD D)                                                                                                             | 1. AC Power Line Conducted Emissions<br>2. Unwanted Emissions below 1GHz |
| 3. Update the test rule of 5GHz Band 4 to "15.407 (b)(4)(i)" from "15.407 (b)(4)(ii)".                                                                                                                                                                                      | All test items                                                           |
| 4. Add a set of antennas (Brand:Walsin, P/N: RFDPA161000SBLB802) with the same type and same gain.<br>5. Adding Manufacturer " Arcadyan Technology (Vietnam) Co., Ltd." and " Ba Thien Industrial Park, Ba Hien commune, Binh Xuyen district, Vinh Phuc Province, Viet Nam" | Do not effect the test results                                           |



## 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

## 1.3 Testing Location Information

| Testing Location                    |        |                                                                                                                               |
|-------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/>            | HWA YA | ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)<br>TEL : 886-3-327-3456 FAX : 886-3-327-0973        |
| <input checked="" type="checkbox"/> | JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.<br>TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

| Test Condition      | Test Site No. | Test Engineer | Test Environment     | Test Date                       |
|---------------------|---------------|---------------|----------------------|---------------------------------|
| RF Conducted        | TH01-CB       | Eddie Wang    | 25~26.7°C / 53~54%   | Nov. 12, 2019~<br>Feb. 17, 2020 |
| Radiated below 1GHz | 03CH06-CB     | Eason Chen    | 24.2~25.5°C / 62~66% | Aug. 30, 2019                   |
| Radiated above 1GHz | 03CH05-CB     | Cola Fan      | 23.9~25°C / 57~60%   | Nov. 08, 2019~<br>Feb. 14, 2020 |
| AC Conduction       | CO02-CB       | Rick Yeh      | 25~26°C / 46~47%     | Aug. 27, 2019                   |

Test site Designation No. TW0006 with FCC

Test site registered number IC 4086D with Industry Canada.

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Test Items                           | Uncertainty | Remark                   |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz)  | 2.0 dB      | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 4.3 dB      | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz)     | 4.3 dB      | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz)    | 5.1 dB      | Confidence levels of 95% |
| Conducted Emission                   | 2.4 dB      | Confidence levels of 95% |
| Output Power Measurement             | 1.5 dB      | Confidence levels of 95% |
| Power Density Measurement            | 2.4 dB      | Confidence levels of 95% |
| Bandwidth Measurement                | 2%          | Confidence levels of 95% |



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

**4T1S:**

| Mode                              | Power Setting |
|-----------------------------------|---------------|
| 802.11a_Nss1,(6Mbps)_4TX          | -             |
| 5745MHz                           | 101           |
| 5785MHz                           | 102           |
| 5825MHz                           | 103           |
| 802.11ax HEW20_Nss1,(MCS0)_4TX    | -             |
| 5745MHz                           | 99            |
| 5785MHz                           | 100           |
| 5825MHz                           | 101           |
| 802.11ax HEW40_Nss1,(MCS0)_4TX    | -             |
| 5755MHz                           | 94            |
| 5795MHz                           | 99            |
| 802.11ax HEW80_Nss1,(MCS0)_4TX    | -             |
| 5775MHz                           | 88            |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | -             |
| 5745MHz                           | 90            |
| 5785MHz                           | 90            |
| 5825MHz                           | 91            |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | -             |
| 5755MHz                           | 89            |
| 5795MHz                           | 90            |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | -             |
| 5775MHz                           | 86            |

**4T2S:**

| Mode                              | Power Setting |
|-----------------------------------|---------------|
| 802.11ax HEW20-BF_Nss2,(MCS0)_4TX | -             |
| 5745MHz                           | 99            |
| 5785MHz                           | 100           |
| 5825MHz                           | 101           |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | -             |
| 5755MHz                           | 98            |
| 5795MHz                           | 99            |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | -             |
| 5775MHz                           | 89            |

**4T4S:**

| Mode                           | Power Setting |
|--------------------------------|---------------|
| 802.11ax HEW80_Nss4,(MCS0)_4TX | -             |
| 5775MHz                        | 89            |

**Note:**

- ♦ There are two modes of EUT for 802.11n/ac/ax. one is beamforming mode, and the other is non-beamforming mode. Both modes have been tested and recorded in this test report.

## 2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests                                                                                                                                                                                                                                      |                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| <b>Tests Item</b>                                                                                                                                                                                                                                                                        | AC power-line conducted emissions                        |
| <b>Condition</b>                                                                                                                                                                                                                                                                         | AC power-line conducted measurement for line and neutral |
| <b>Operating Mode</b>                                                                                                                                                                                                                                                                    | Normal Link                                              |
| The EUT has AP Router, Client without radar detection, Bridge, Extender and Mesh and four SKUs and equips with adapter 1 ~ adapter 4. After evaluated, EUT3 (SKU3) AP Router (Master) + adapter 2 generated the worst test result, thus the measurement test will follow this same test. |                                                          |
| 1                                                                                                                                                                                                                                                                                        | EUT3 (SKU3) AP Router (Master) + adapter 2               |

| The Worst Case Mode for Following Conformance Tests |                                                                                     |
|-----------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                   | Emission Bandwidth<br>Maximum Conducted Output Power<br>Peak Power Spectral Density |
| <b>Test Condition</b>                               | Conducted measurement at transmit chains                                            |
| <b>Test Mode</b>                                    | EUT 1 (SKU 1)                                                                       |

| The Worst Case Mode for Following Conformance Tests                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                                                                                                                                                                                                                                                        | Unwanted Emissions                                                                                                                                                                                                                                  |
| <b>Test Condition</b>                                                                                                                                                                                                                                                                    | Radiated measurement<br>If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| <b>Operating Mode &lt; 1GHz</b>                                                                                                                                                                                                                                                          | Normal Link                                                                                                                                                                                                                                         |
| The EUT has AP Router, Client without radar detection, Bridge, Extender and Mesh and four SKUs and equips with adapter 1 ~ adapter 4. After evaluated, EUT1 (SKU1) AP Router (Master) + adapter 4 generated the worst test result, thus the measurement test will follow this same test. |                                                                                                                                                                                                                                                     |
| 1                                                                                                                                                                                                                                                                                        | EUT1 (SKU1) AP Router (Master) + adapter 4                                                                                                                                                                                                          |
| <b>Operating Mode &gt; 1GHz</b>                                                                                                                                                                                                                                                          | CTX                                                                                                                                                                                                                                                 |
| 1                                                                                                                                                                                                                                                                                        | EUT 1 (SKU 1)                                                                                                                                                                                                                                       |

| The Worst Case Mode for Following Conformance Tests                                   |                                                                         |
|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>Tests Item</b>                                                                     | Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation |
| <b>Operating Mode</b>                                                                 |                                                                         |
| 1                                                                                     | WLAN 2.4GHz + WLAN 5GHz band 1, 2 + WLAN 5GHz band 3, 4                 |
| Refer to Sporton Test Report No.: FA812227-10 for Co-location RF Exposure Evaluation. |                                                                         |

Note: 1. The EUT only be used at Z axis.

2. This model supports full RU configuration only, and the model does not have adjustable power levels for each user.



## 2.3 EUT Operation during Test

**For Normal Mode:**

During the test, the EUT operation to normal function.

**For Radiated:****For CTX Mode:****For non-beamforming mode:**

The EUT was programmed to be in continuously transmitting mode.

**For beamforming mode:**

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under Telnet.
3. Executed " Telnet " to link with the remote workstation to transmit and receive packet by RX Device and transmit duty cycle no less than 98%.

**For Conducted:**

The EUT was programmed to be in continuously transmitting mode.

## 2.4 Accessories

| Accessories                                               |            |            |         |                                                     |                                   |
|-----------------------------------------------------------|------------|------------|---------|-----------------------------------------------------|-----------------------------------|
| Equipment Name                                            | Brand Name | Model Name | Type    | Rating                                              | Remark                            |
| Adapter 1                                                 | DELTA      | ADP-65DW B | -       | INPUT: 100-240V~50-60Hz, 1.5A<br>OUTPUT: 19V, 3.42A | -                                 |
| Adapter 2                                                 | DELTA      | ADP-65DW Y | -       | INPUT: 100-240V~50-60Hz, 1.5A<br>OUTPUT: 19V, 3.42A | -                                 |
| Adapter 3                                                 | PI         | AD2087320  | 010-1LF | INPUT: 100-240V~50/60Hz, 1.5A<br>OUTPUT: 19V, 3.42A | -                                 |
| Adapter 4                                                 | DELTA      | ADP-65GD D | -       | INPUT: 100-240V~50/60Hz, 1.5A<br>OUTPUT: 19V, 3.42A | DC Power Cable:Non-shielded, 1.8m |
| Others                                                    |            |            |         |                                                     |                                   |
| RJ-45 cable: Shielded, 1.5m                               |            |            |         |                                                     |                                   |
| Power cord*1: Non-shielded, 0.9m (for Adapter 4 use only) |            |            |         |                                                     |                                   |



## 2.5 Support Equipment

For AC Conduction:

| Support Equipment |           |            |               |        |
|-------------------|-----------|------------|---------------|--------|
| No.               | Equipment | Brand Name | Model Name    | FCC ID |
| A                 | HDD3.0    | WD         | WDBACY5000AWT | N/A    |
| B                 | HDD3.0    | WD         | WDBACY5000AWT | N/A    |
| C                 | LAN1 NB   | DELL       | E6430         | N/A    |
| D                 | LAN4 NB   | DELL       | E6430         | N/A    |
| E                 | WAN NB    | DELL       | E6430         | N/A    |
| F                 | 2.4G NB   | DELL       | E6430         | N/A    |
| G                 | 5G-1 NB   | DELL       | E6430         | N/A    |
| H                 | 5G-2 NB   | DELL       | E6430         | N/A    |
| I                 | 2.5G PC   | DELL       | T3400         | N/A    |

For Radiated (below 1GHz):

| Support Equipment |           |            |               |        |
|-------------------|-----------|------------|---------------|--------|
| No.               | Equipment | Brand Name | Model Name    | FCC ID |
| A                 | NB        | DELL       | E4300         | N/A    |
| B                 | NB        | DELL       | E4300         | N/A    |
| C                 | NB        | DELL       | E4300         | N/A    |
| D                 | NB        | DELL       | E4300         | N/A    |
| E                 | NB        | DELL       | E4300         | N/A    |
| F                 | NB        | DELL       | E4300         | N/A    |
| G                 | PC        | DELL       | OPTIPLEX 380  | N/A    |
| H                 | HDD3.0    | WD         | WDBACY5000AWT | N/A    |
| I                 | HDD3.0    | WD         | WDBACY5000AWT | N/A    |

**For Radiated (above 1GHz)  
Non-Beamforming Mode:**

| Support Equipment |           |            |            |        |
|-------------------|-----------|------------|------------|--------|
| No.               | Equipment | Brand Name | Model Name | FCC ID |
| A                 | NB        | DELL       | E4300      | N/A    |


**Beamforming Mode:**


| Support Equipment |           |            |            |              |
|-------------------|-----------|------------|------------|--------------|
| No.               | Equipment | Brand Name | Model Name | FCC ID       |
| A                 | NB        | DELL       | E4300      | N/A          |
| B                 | NB        | DELL       | E4300      | N/A          |
| C                 | RX Device | ASUS       | RT-AX88U   | MSQ-RTAXHP00 |

**For RF Conducted:**

| Support Equipment |           |            |            |        |
|-------------------|-----------|------------|------------|--------|
| No.               | Equipment | Brand Name | Model Name | FCC ID |
| A                 | NB        | DELL       | E4300      | DoC    |


## 2.6 Test Setup Diagram

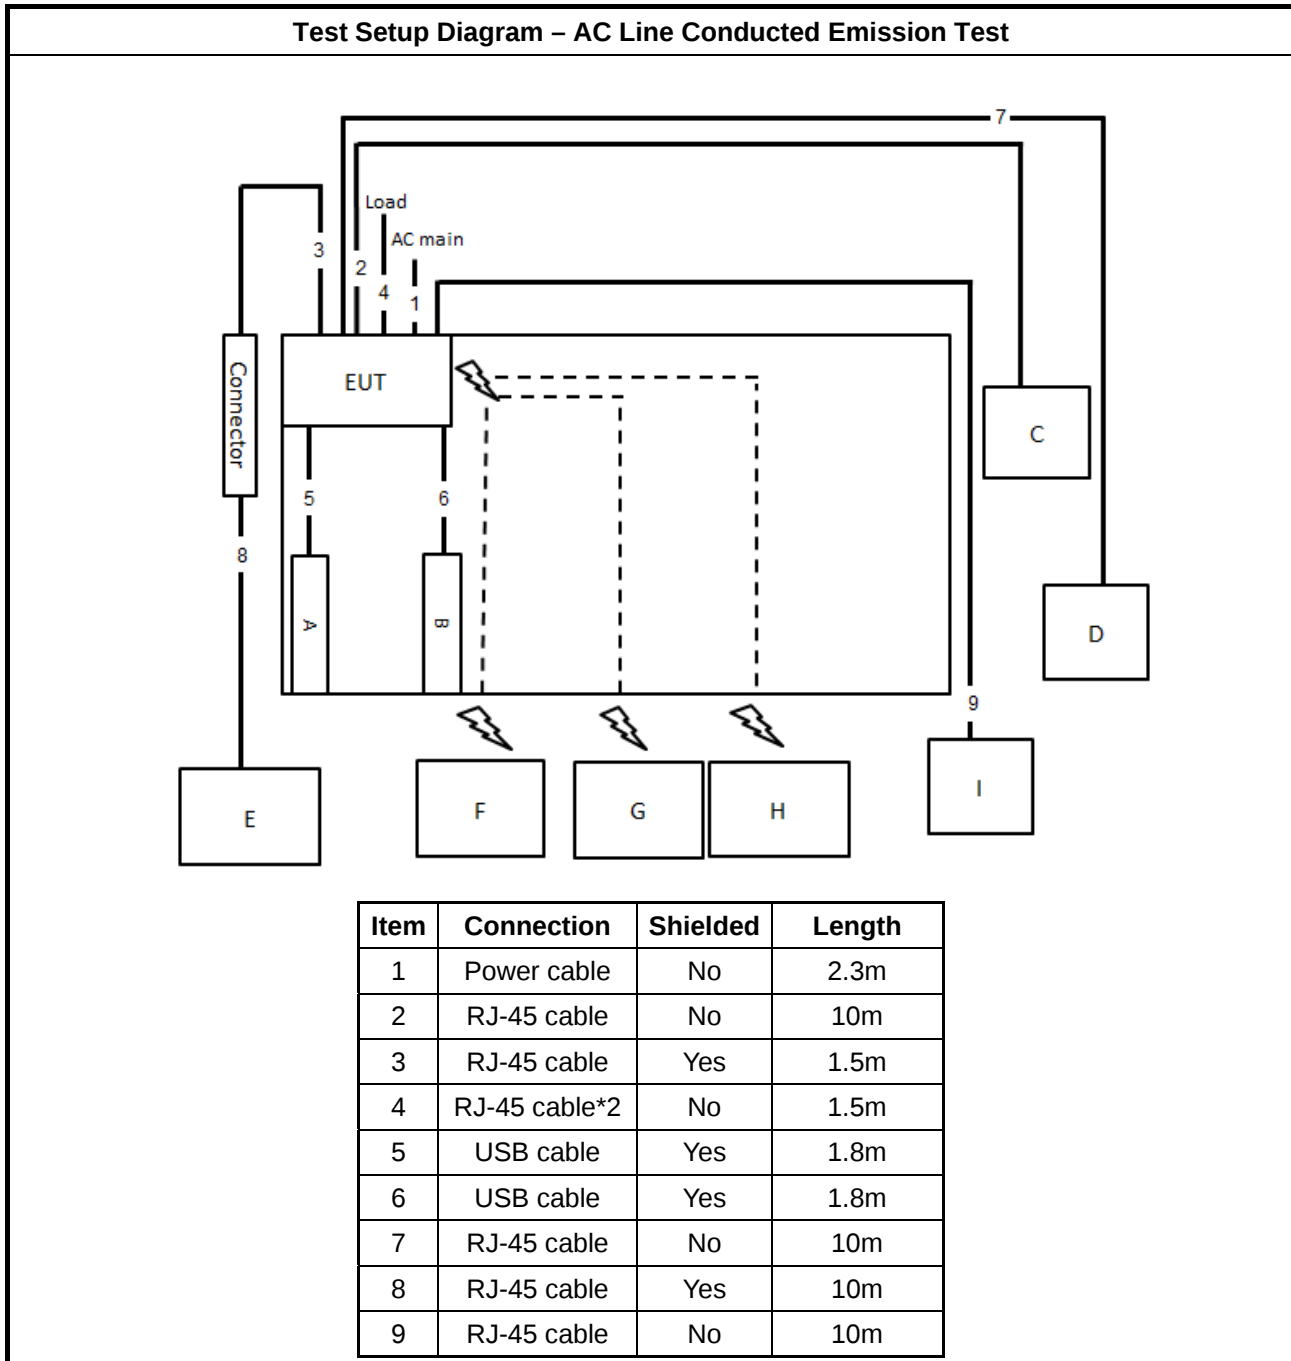

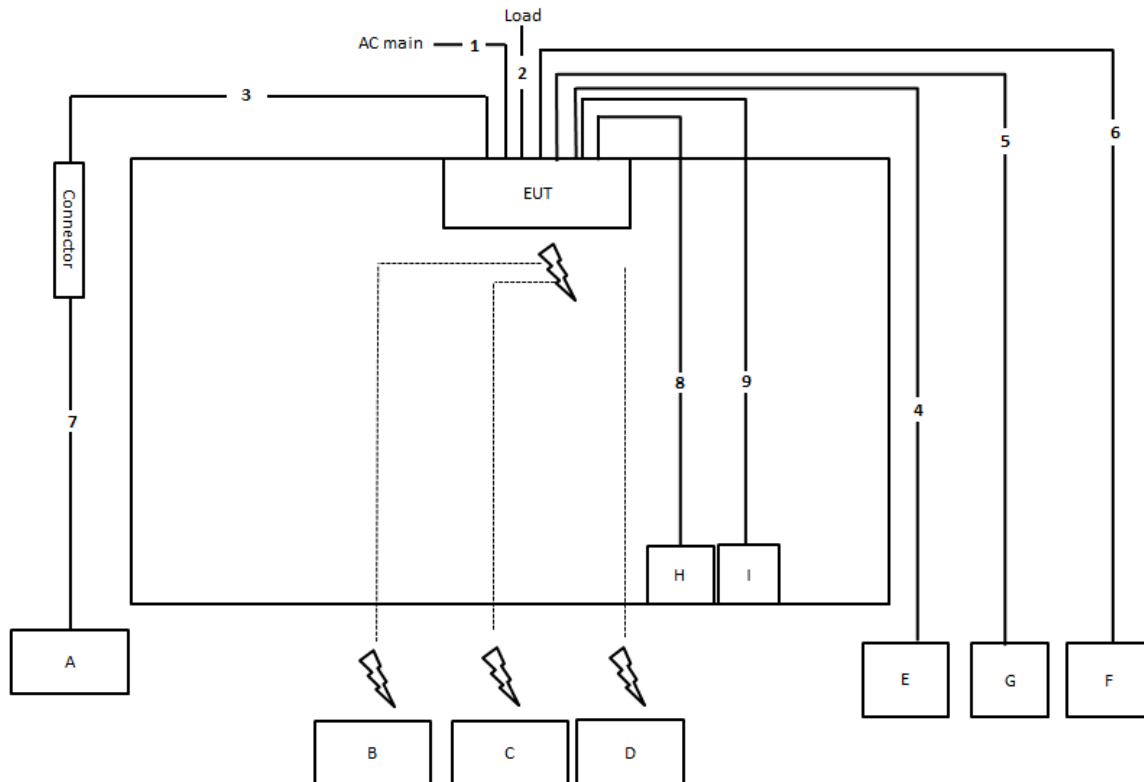**Test Setup Diagram - Radiated Test below 1GHz**


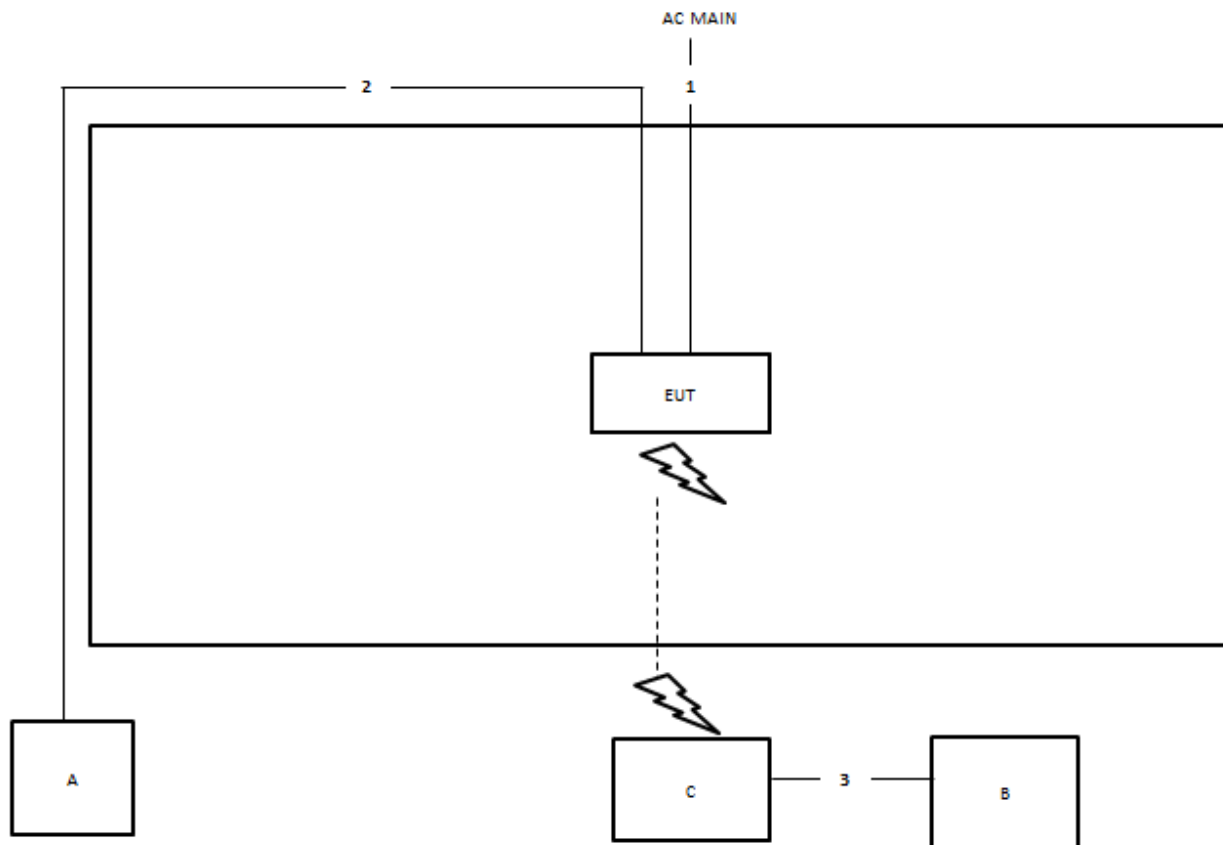
| Item | Connection    | Shielded | Length |
|------|---------------|----------|--------|
| 1    | Power cable   | No       | 2.7m   |
| 2    | RJ-45 cable*2 | No       | 1.5m   |
| 3    | RJ-45 cable   | Yes      | 1.5m   |
| 4    | RJ-45 cable   | No       | 10m    |
| 5    | RJ-45 cable   | No       | 10m    |
| 6    | RJ-45 cable   | No       | 10m    |
| 7    | RJ-45 cable   | Yes      | 10m    |
| 8    | USB cable     | Yes      | 1.8m   |
| 9    | USB cable     | Yes      | 1.8m   |

**Test Setup Diagram - Radiated Test above 1GHz  
<Non-Beamforming Mode>**

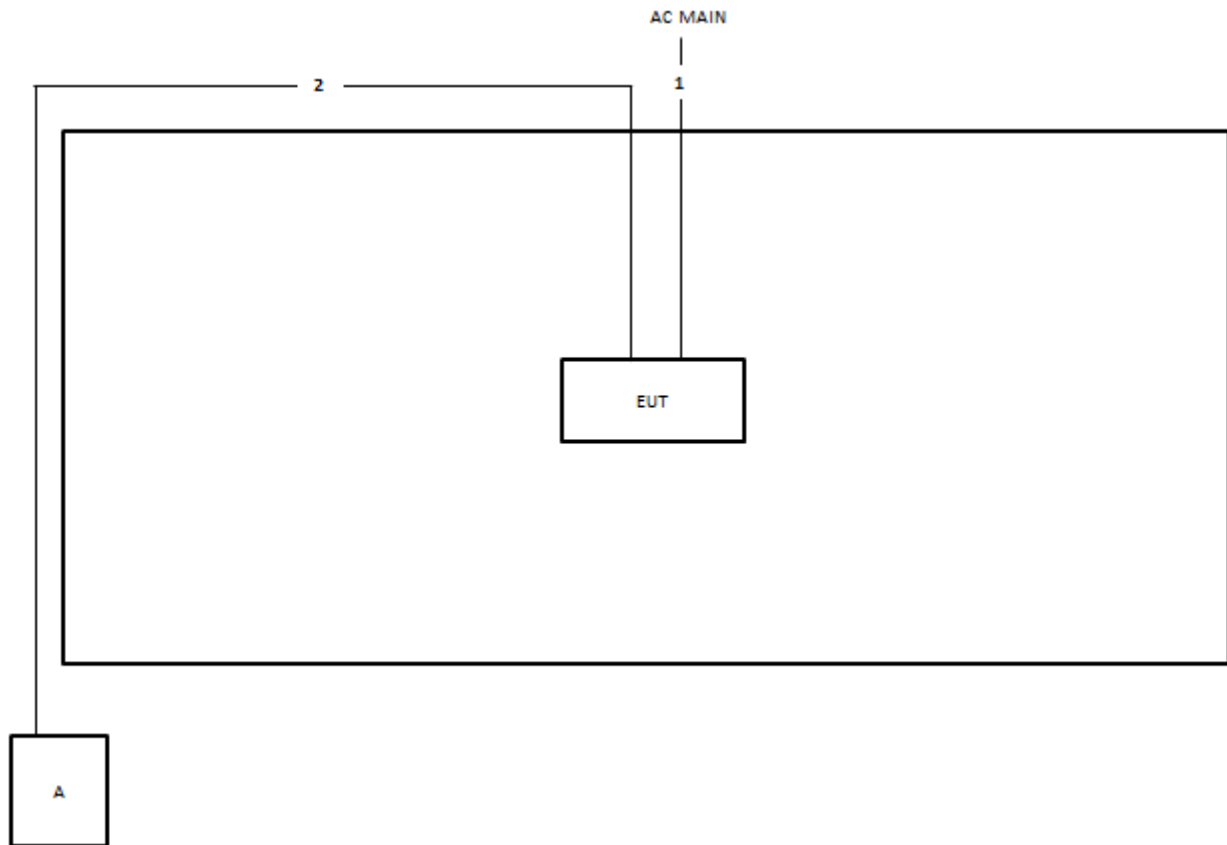

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 2.3m   |
| 2    | RJ-45 cable | No       | 10m    |

**Test Setup Diagram - Radiated Test above 1GHz  
<Beamforming Mode>**



| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 2.3m   |
| 2    | RJ-45 cable | No       | 10m    |
| 3    | RJ-45 cable | No       | 1.5m   |



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit |            |           |
|-----------------------------------------|------------|-----------|
| Frequency Emission (MHz)                | Quasi-Peak | Average   |
| 0.15-0.5                                | 66 - 56 *  | 56 - 46 * |
| 0.5-5                                   | 56         | 46        |
| 5-30                                    | 60         | 50        |

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

| Test Method                                                                                                      |
|------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions. |

### 3.1.4 Test Setup

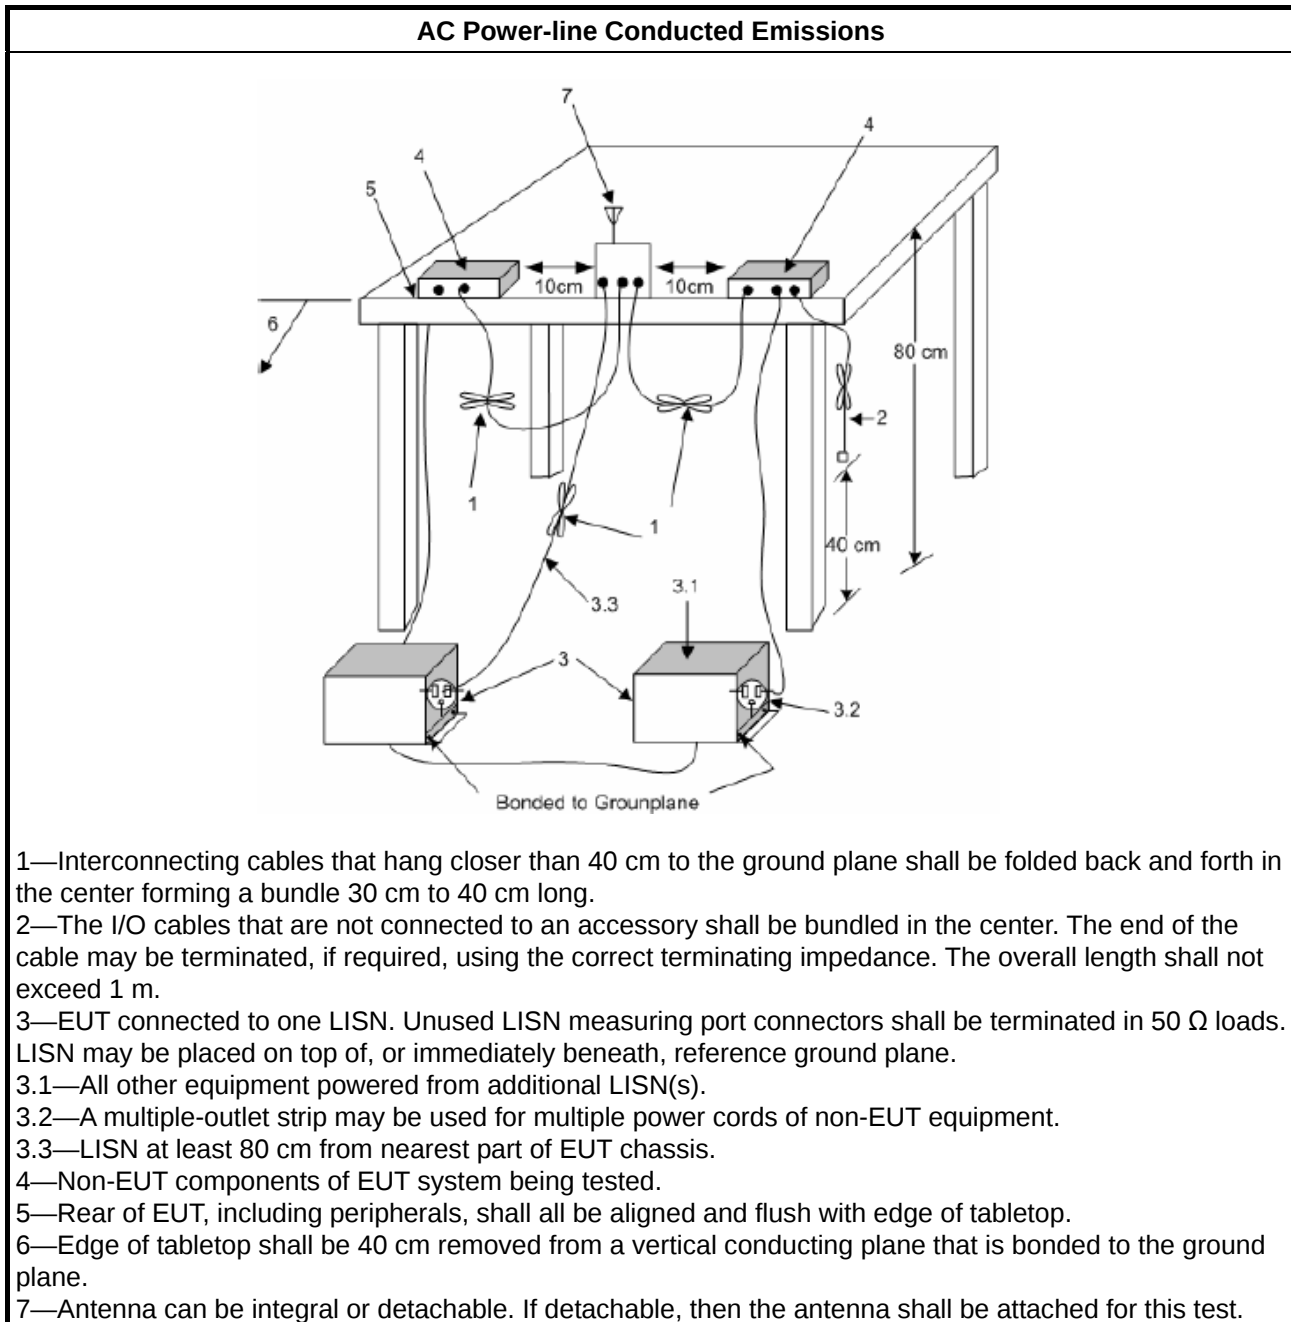

### 3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

| Emission Bandwidth Limit            |                                                                                                                                                                                       |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                 |                                                                                                                                                                                       |
| <input type="checkbox"/>            | For the 5.15-5.25 GHz band, N/A                                                                                                                                                       |
| <input type="checkbox"/>            | For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.            |
| <input type="checkbox"/>            | For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.           |
| <input checked="" type="checkbox"/> | For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.                                                                                                                   |
| <b>LE-LAN Devices</b>               |                                                                                                                                                                                       |
| <input type="checkbox"/>            | For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.                      |
| <input type="checkbox"/>            | For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz                        |
| <input type="checkbox"/>            | For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz |
| <input type="checkbox"/>            | For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.                                                                                                                   |


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

| Test Method                                                                                           |                                                                             |
|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| <input type="checkbox"/> For the emission bandwidth shall be measured using one of the options below: |                                                                             |
| <input checked="" type="checkbox"/>                                                                   | Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement. |
| <input type="checkbox"/>                                                                              | Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.          |
| <input type="checkbox"/>                                                                              | Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.                      |

### 3.2.4 Test Setup

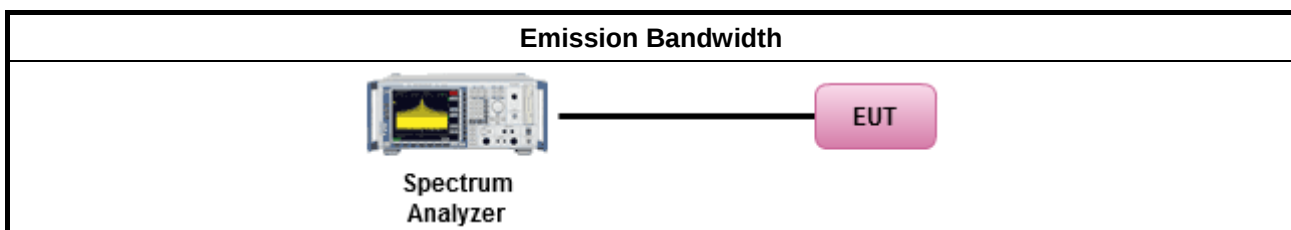

### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

| Maximum Conducted Output Power Limit                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/> For the 5.15-5.25 GHz band:                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/>                                                                                                   | <ul style="list-style-type: none"> <li>Outdoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>. e.i.r.p. at any elevation angle above 30 degrees <math>\leq 125</math>mW [21dBm]</li> <li>Indoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math></li> <li>Point-to-point AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 23)</math>.</li> <li>Mobile or Portable Client: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 250 mW. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li> </ul> |
| <input type="checkbox"/>                                                                                                   | For the 5.25-5.35 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <input type="checkbox"/>                                                                                                   | For the 5.47-5.725 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/>                                                                                                   | <ul style="list-style-type: none"> <li>Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li> <li>Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>LE-LAN Devices</b>                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/>                                                                                                   | For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <input type="checkbox"/>                                                                                                   | For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <input type="checkbox"/>                                                                                                   | For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <input type="checkbox"/> For the 5.725-5.85 GHz band:                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/>                                                                                                   | <ul style="list-style-type: none"> <li>Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li> <li>Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| $P_{Out}$ = maximum conducted output power in dBm,<br>$G_{TX}$ = the maximum transmitting antenna directional gain in dBi. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |


### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

| Test Method                                                                      |                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Maximum Conducted Output Power</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                        |
|                                                                                  | Average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                                           |
| <input type="checkbox"/>                                                         | Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).                                                                                                                                                                                                                                                                                              |
| <input type="checkbox"/>                                                         | Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                               |
|                                                                                  | Wideband RF power meter and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                               |
| <input checked="" type="checkbox"/>                                              | Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).                                                                                                                                                                                                                                                                                       |
| <ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>     |                                                                                                                                                                                                                                                                                                                                                                        |
|                                                                                  | <ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below:<br/>Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul> |
|                                                                                  | <ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP calculation could be following as methods:<br/> <math display="block">P_{total} = P_1 + P_2 + \dots + P_n</math> (calculated in linear unit [mW] and transfer to log unit [dBm])<br/> <math display="block">EIRP_{total} = P_{total} + DG</math> </li> </ul>                                  |

### 3.3.4 Test Setup

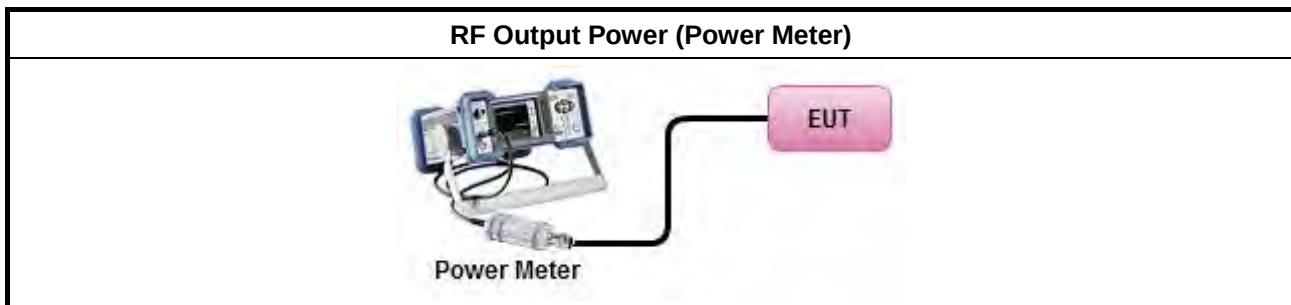

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



### 3.4 Peak Power Spectral Density

#### 3.4.1 Peak Power Spectral Density Limit

| Peak Power Spectral Density Limit                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.15-5.25 GHz band:                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"><li>Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li><li>Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li><li>Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 23)</math>.</li><li>Mobile or Portable Client: the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li></ul> |
| <input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"><li>Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li><li>Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>LE-LAN Devices</b>                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) $\leq 10$ dBm/MHz.                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz.                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"><li>e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where <math>\theta</math> is the angle above the local horizontal plane (of the Earth) as shown below:<br/>-13 dBW/MHz for <math>0^\circ \leq \theta &lt; 8^\circ</math>; -13 - 0.716 (<math>\theta</math>-8) dBW/MHz for <math>8^\circ \leq \theta &lt; 40^\circ</math><br/>-35.9 - 1.22 (<math>\theta</math>-40) dBW/MHz for <math>40^\circ \leq \theta \leq 45^\circ</math>; -42 dBW/MHz for <math>\theta &gt; 45^\circ</math></li></ul>                                                                                                                                                                                                                            |
| <input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz.                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> For the 5.725-5.85 GHz band:                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"><li>Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li><li>Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>PPSD</b> = peak power spectral density that the same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz<br><b>G<sub>TX</sub></b> = the maximum transmitting antenna directional gain in dBi. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.4.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                        | Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth<br>[duty cycle ≥ 98% or external video / power trigger]                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                             | Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                        | Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)<br>duty cycle < 98% and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                             | Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                        | Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below:</li> </ul>                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                             | Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                        | Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,                                                                                                                                                                                                         |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                        | Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.                                                                                                                                                                                                                                                                                                                  |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP PPSD calculation could be following as methods:<br/> <math display="block">PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n</math>           (calculated in linear unit [mW] and transfer to log unit [dBm])<br/> <math display="block">EIRP_{total} = PPSD_{total} + DG</math> </li> </ul>                                                                                                                                                                                                                                                                                                        |

### 3.4.4 Test Setup

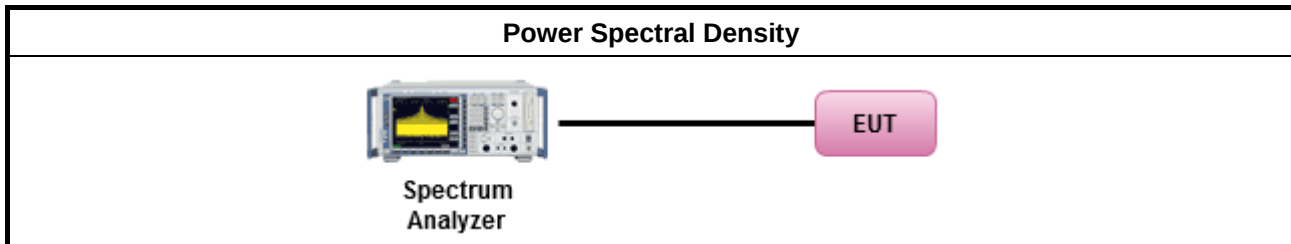

### 3.4.5 Test Result of Peak Power Spectral Density

Refer as Appendix D



### 3.5 Unwanted Emissions

#### 3.5.1 Transmitter Unwanted Emissions Limit

| Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit |                       |                         |                      |
|-------------------------------------------------------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz)                                                         | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490                                                                   | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |
| 0.490~1.705                                                                   | 24000/F(kHz)          | 33.8 - 23               | 30                   |
| 1.705~30.0                                                                    | 30                    | 29                      | 30                   |
| 30~88                                                                         | 100                   | 40                      | 3                    |
| 88~216                                                                        | 150                   | 43.5                    | 3                    |
| 216~960                                                                       | 200                   | 46                      | 3                    |
| Above 960                                                                     | 500                   | 54                      | 3                    |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

| Un-restricted band emissions above 1GHz Limit        |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Band                                       | Limit                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <input type="checkbox"/> 5.15 - 5.25 GHz             | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                               |
| <input type="checkbox"/> 5.25 - 5.35 GHz             | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                               |
| <input type="checkbox"/> 5.47 - 5.725 GHz            | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                               |
| <input checked="" type="checkbox"/> 5.725 - 5.85 GHz | all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. |

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of



linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


### 3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).</li></ul> |                                                                                                                                                  |
| <ul style="list-style-type: none"><li>The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                  |
| <ul style="list-style-type: none"><li>For the transmitter unwanted emissions shall be measured using following options below:</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                  |
| <ul style="list-style-type: none"><li></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"><li>Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.</li></ul>           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.</li></ul>               |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input checked="" type="checkbox"/> Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).                                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.                                                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.                                       |
| <ul style="list-style-type: none"><li></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>For radiated measurement.</li></ul>                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.</li></ul>    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.</li></ul> |
| <ul style="list-style-type: none"><li></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"><li>Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li></ul>                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"><li>The any unwanted emissions level shall not exceed the fundamental emission level.</li></ul>                |
| <ul style="list-style-type: none"><li>All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                  |

### 3.5.4 Test Setup

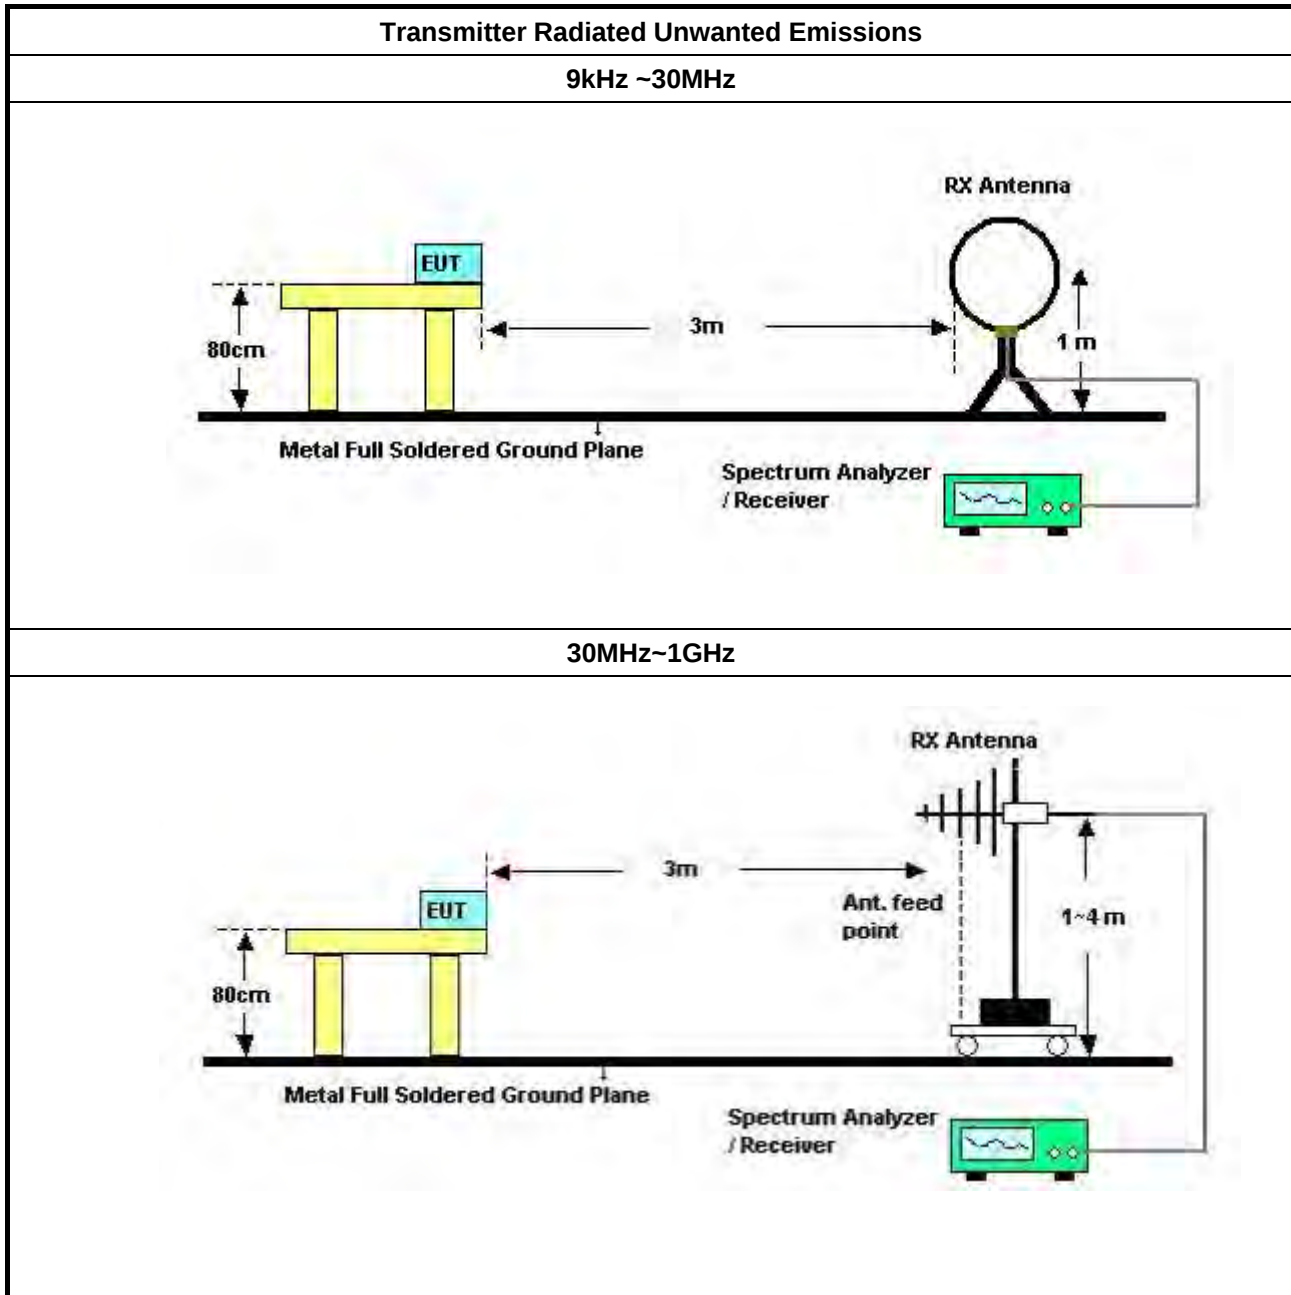

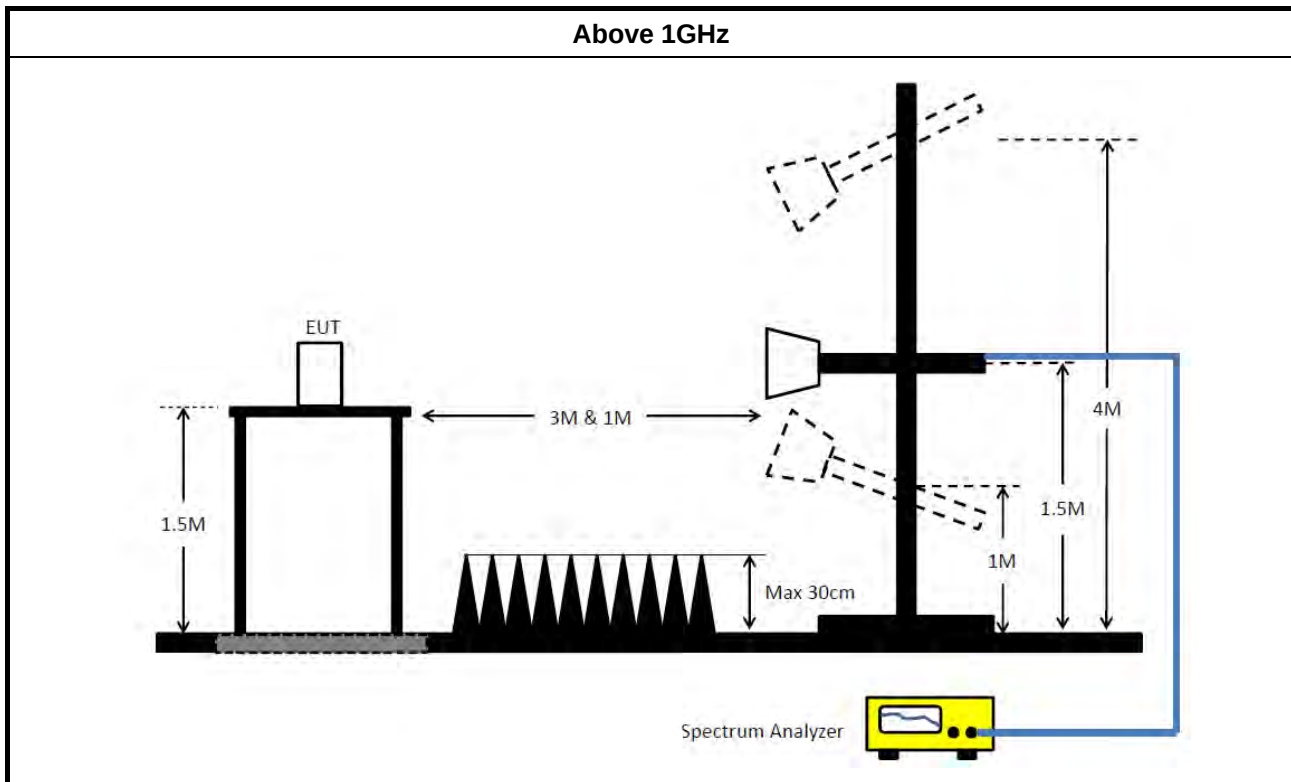

### 3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### 3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

### 3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



## 4 Test Equipment and Calibration Data


| Instrument                        | Manufacturer      | Model No.            | Serial No.       | Characteristics  | Calibration Date | Calibration Due Date | Remark                |
|-----------------------------------|-------------------|----------------------|------------------|------------------|------------------|----------------------|-----------------------|
| LISN                              | Schwarzbeck       | NSLK 8127            | 8127650          | 9kHz ~ 30MHz     | Nov. 21, 2018    | Nov. 20, 2019        | Conduction (CO02-CB)  |
| LISN                              | Schwarzbeck       | NSLK 8127            | 8127478          | 9kHz ~ 30MHz     | Nov. 05, 2018    | Nov. 04, 2019        | Conduction (CO02-CB)  |
| EMI Receiver                      | Agilent           | N9038A               | MY52260140       | 9kHz ~ 8.4GHz    | Jan. 16, 2019    | Jan. 15, 2020        | Conduction (CO02-CB)  |
| COND Cable                        | Woken             | Cable                | 2                | 0.15MHz ~ 30MHz  | Nov. 06, 2018    | Nov. 05, 2019        | Conduction (CO02-CB)  |
| Software                          | Audix             | E3                   | 6.120210n        | -                | N.C.R.           | N.C.R.               | Conduction (CO02-CB)  |
| Bilog Antenna with 6dB Attenuator | Schaffner & Woken | CBL6112B & N-6-06-06 | 2888 & AT-N0609  | 30MHz ~ 1GHz     | Oct. 12, 2018    | Oct. 11, 2019        | Radiation (03CH06-CB) |
| Loop Antenna                      | Teseq             | HLA 6120             | 24155            | 9kHz - 30 MHz    | Mar. 29, 2019    | Mar. 28, 2020        | Radiation (03CH06-CB) |
| Pre-Amplifier                     | Agilent           | 310N                 | 187290           | 0.1MHz ~ 1GHz    | May 07, 2019     | May 06, 2020         | Radiation (03CH06-CB) |
| Spectrum analyzer                 | R&S               | FSP40                | 100080           | 9kHz~40GHz       | Oct. 03, 2018    | Oct. 02, 2019        | Radiation (03CH06-CB) |
| EMI Test Receiver                 | R&S               | ESCS                 | 826547/017       | 9kHz ~ 2.75GHz   | May 15, 2019     | May 14, 2020         | Radiation (03CH06-CB) |
| RF Cable-low                      | HUBER+SUHNER      | RG402                | Low Cable-05+24  | 30MHz~1GHz       | Oct. 08, 2018    | Oct. 07, 2019        | Radiation (03CH06-CB) |
| Horn Antenna                      | SCHWARZBECK       | BBHA9120D            | BBHA 9120D-1291  | 1GHz~18GHz       | Oct. 05, 2019    | Oct. 04, 2020        | Radiation (03CH05-CB) |
| Horn Antenna                      | SCHWARZBECK       | BBHA 9170            | BBHA9170507      | 15GHz ~ 40GHz    | Jun. 12, 2019    | Jun. 11, 2020        | Radiation (03CH05-CB) |
| Pre-Amplifier                     | EMCI              | EMC12630SE           | 980287           | 1GHz ~ 26.5GHz   | Apr. 16, 2019    | Apr. 15, 2020        | Radiation (03CH05-CB) |
| Pre-Amplifier                     | MITEQ             | TTA1840-35-HG        | 1864479          | 18GHz ~ 40GHz    | Jul. 03, 2019    | Jul. 02, 2020        | Radiation (03CH05-CB) |
| Spectrum Analyzer                 | R&S               | FSP40                | 100304           | 9kHz ~ 40GHz     | Aug. 15, 2019    | Aug. 14, 2020        | Radiation (03CH05-CB) |
| RF Cable-high                     | Woken             | RG402                | High Cable-28    | 1GHz~18GHz       | Oct. 07, 2019    | Oct. 06, 2020        | Radiation (03CH05-CB) |
| RF Cable-high                     | Woken             | RG402                | High Cable-04+28 | 1GHz~18GHz       | Oct. 07, 2019    | Oct. 06, 2020        | Radiation (03CH05-CB) |
| RF Cable-high                     | Woken             | RG402                | High Cable-40G#1 | 18GHz ~ 40 GHz   | Jul. 24, 2019    | Jul. 23, 2020        | Radiation (03CH05-CB) |
| RF Cable-high                     | Woken             | RG402                | High Cable-40G#2 | 18GHz ~ 40 GHz   | Jul. 24, 2019    | Jul. 23, 2020        | Radiation (03CH05-CB) |
| Spectrum analyzer                 | R&S               | FSV40                | 100979           | 9kHz~40GHz       | Feb. 25, 2019    | Feb. 24, 2020        | Conducted (TH01-CB)   |
| RF Cable-high                     | Woken             | RG402                | High Cable-06    | 1 GHz ~ 26.5 GHz | Oct. 07, 2019    | Oct. 06, 2020        | Conducted (TH01-CB)   |




| Instrument    | Manufacturer | Model No. | Serial No.    | Characteristics | Calibration Date | Calibration Due Date | Remark              |
|---------------|--------------|-----------|---------------|-----------------|------------------|----------------------|---------------------|
| RF Cable-high | Woken        | RG402     | High Cable-07 | 1 GHz ~26.5 GHz | Oct. 07, 2019    | Oct. 06, 2020        | Conducted (TH01-CB) |
| RF Cable-high | Woken        | RG402     | High Cable-08 | 1 GHz ~26.5 GHz | Oct. 07, 2019    | Oct. 06, 2020        | Conducted (TH01-CB) |
| RF Cable-high | Woken        | RG402     | High Cable-09 | 1 GHz ~26.5 GHz | Oct. 07, 2019    | Oct. 06, 2020        | Conducted (TH01-CB) |
| RF Cable-high | Woken        | RG402     | High Cable-10 | 1 GHz ~26.5 GHz | Oct. 07, 2019    | Oct. 06, 2020        | Conducted (TH01-CB) |
| RF Cable-high | Woken        | RG402     | High Cable-28 | 1 GHz ~26.5 GHz | Nov. 19, 2018    | Nov. 18, 2019        | Conducted (TH01-CB) |
| RF Cable-high | Woken        | RG402     | High Cable-28 | 1 GHz ~26.5 GHz | Nov. 18, 2019    | Nov. 17, 2020        | Conducted (TH01-CB) |
| Power Sensor  | Anritsu      | MA2411B   | 1126203       | 300MHz~40GHz    | Sep. 11, 2019    | Sep. 10, 2020        | Conducted (TH01-CB) |
| Power Meter   | Anritsu      | ML2495A   | 1210004       | 300MHz~40GHz    | Sep. 11, 2019    | Sep. 10, 2020        | Conducted (TH01-CB) |

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

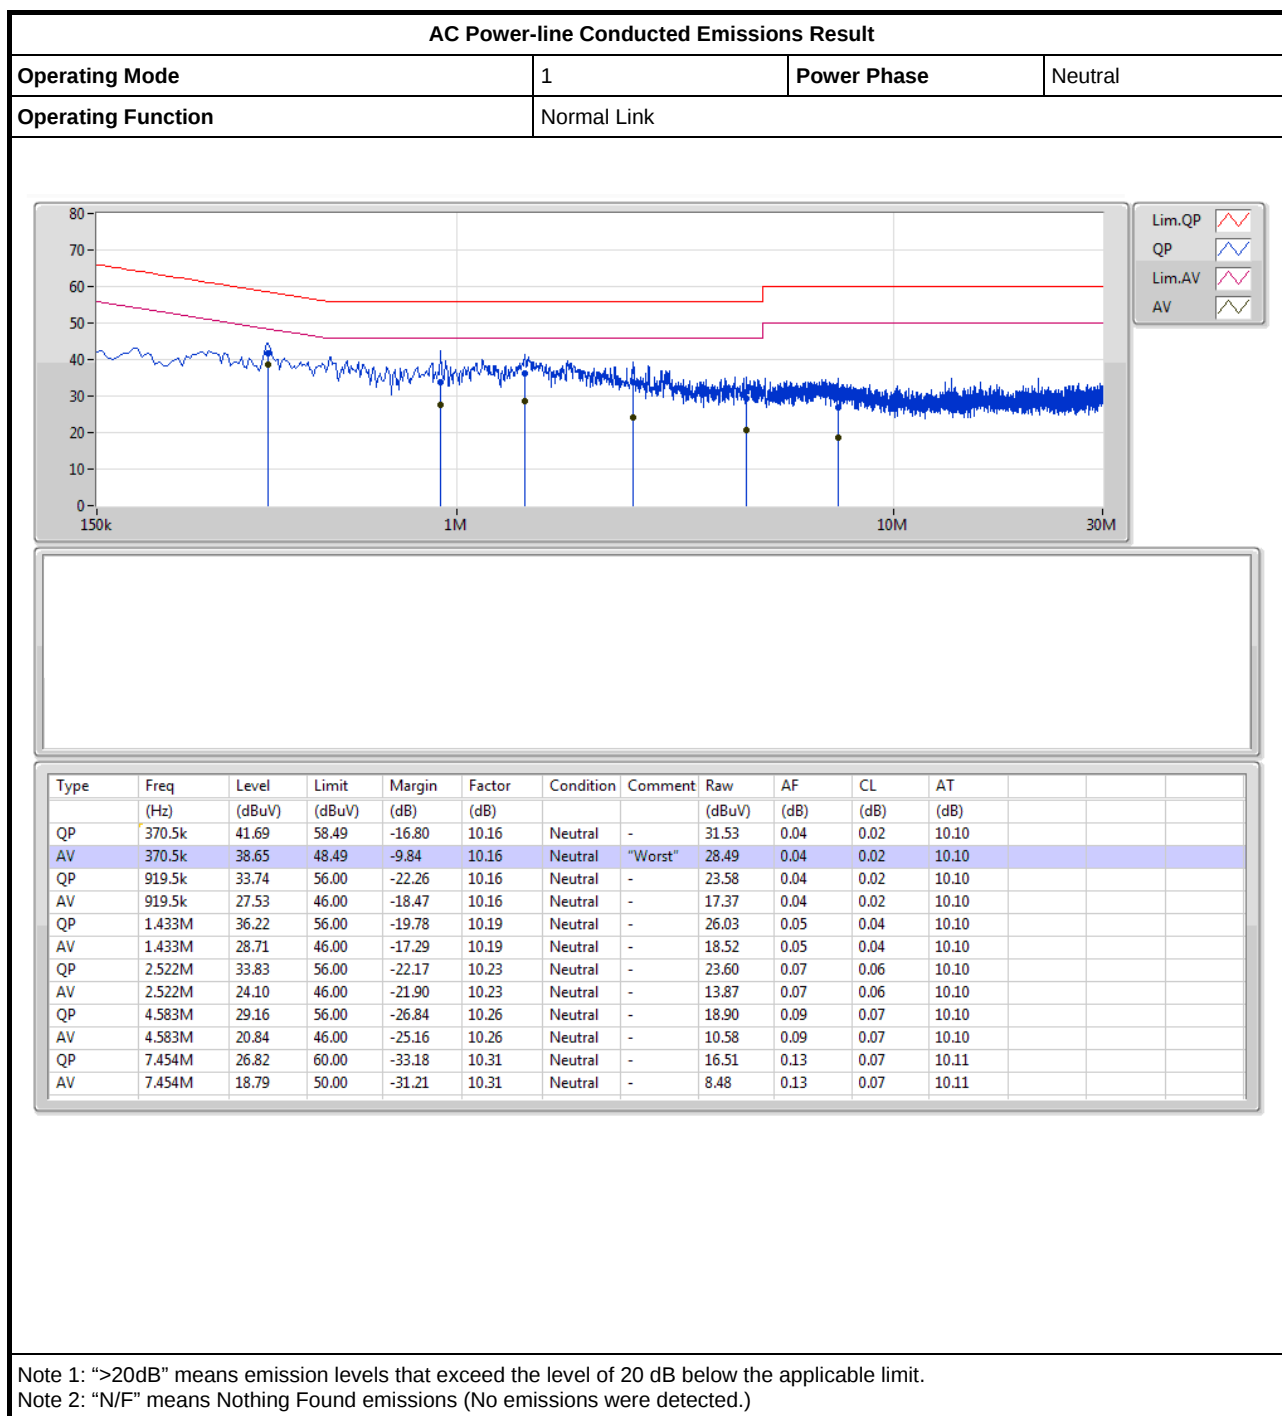

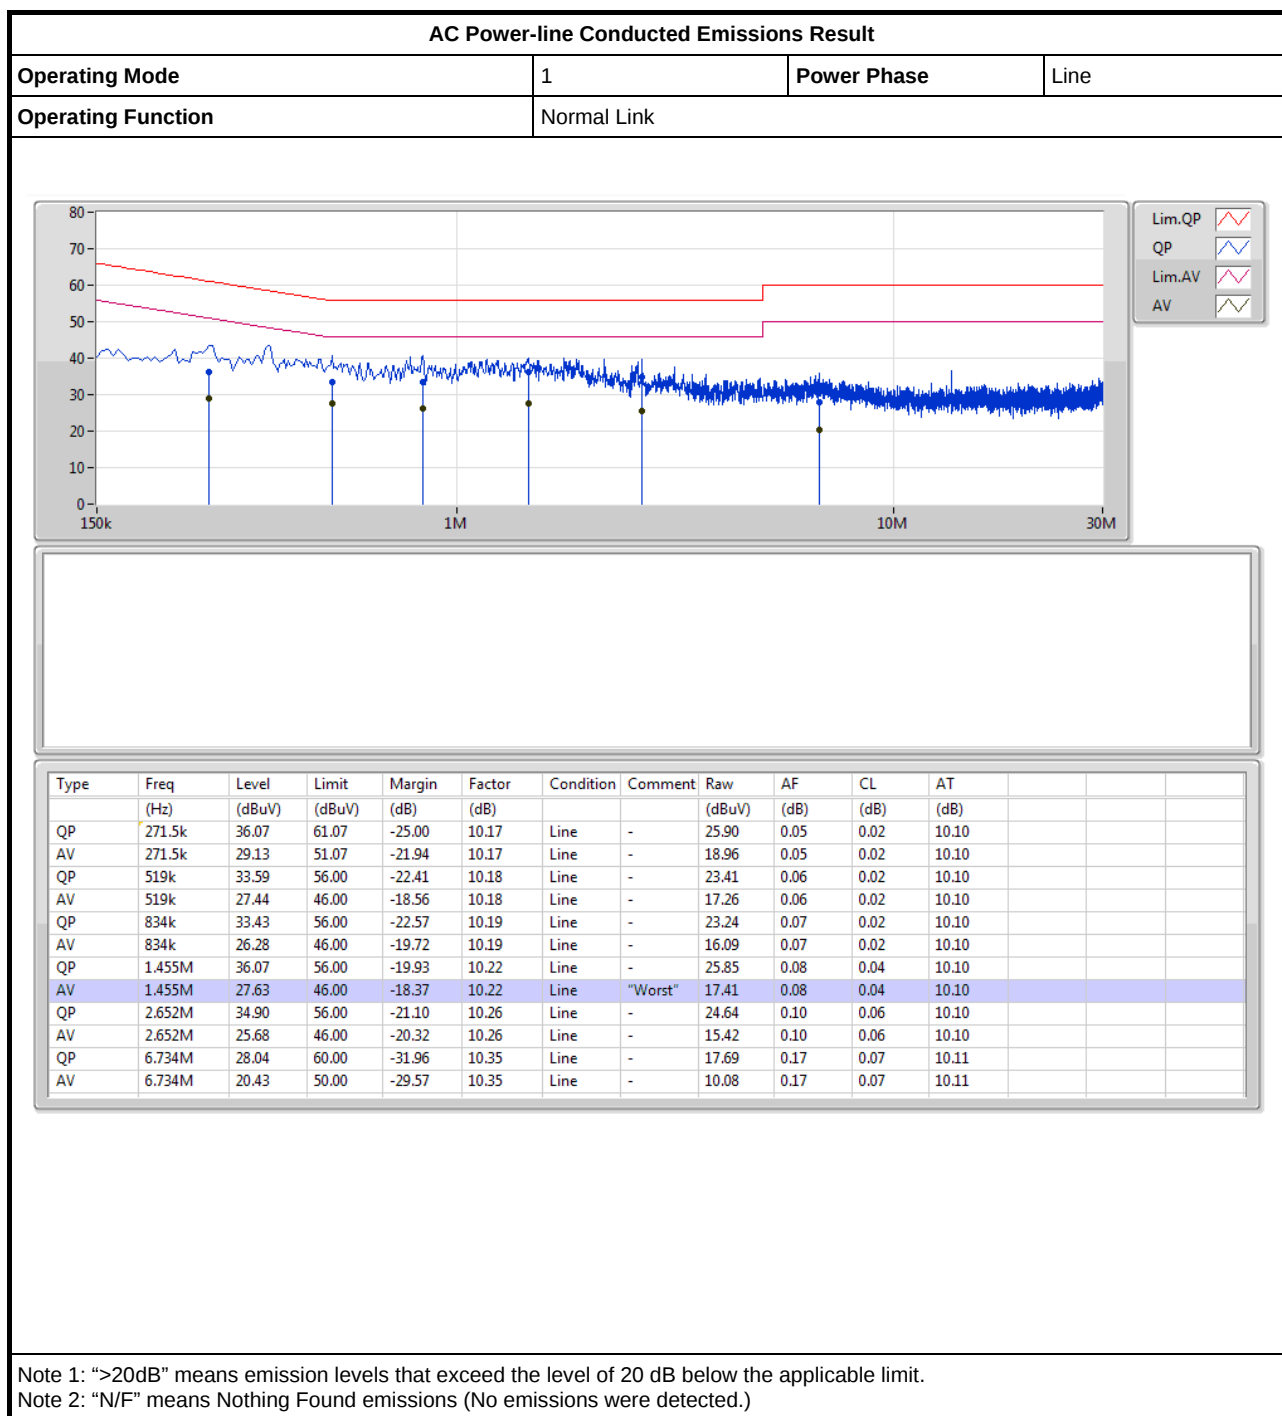

**Summary**

| Mode                              | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW<br>(Hz) |
|-----------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.725-5.85GHz                     | -                | -               | -        | -                | -               |
| 802.11a_Nss1,(6Mbps)_4TX          | 16.56M           | 19.61M          | 19M6D1D  | 16.29M           | 16.972M         |
| 802.11ax HEW20_Nss1,(MCS0)_4TX    | 18.99M           | 20.09M          | 20M1D1D  | 18.78M           | 19.07M          |
| 802.11ax HEW40_Nss1,(MCS0)_4TX    | 37.68M           | 41.499M         | 41M5D1D  | 37.2M            | 37.661M         |
| 802.11ax HEW80_Nss1,(MCS0)_4TX    | 77.52M           | 77.361M         | 77M4D1D  | 77.04M           | 77.121M         |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 19.02M           | 19.04M          | 19M0D1D  | 18.81M           | 18.981M         |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 37.62M           | 37.901M         | 37M9D1D  | 37.32M           | 37.601M         |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 76.68M           | 77.121M         | 77M1D1D  | 75.48M           | 77.001M         |

**Max-N dB** = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

**Max-OBW** = Maximum 99% occupied bandwidth;

**Min-N dB** = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

**Min-OBW** = Minimum 99% occupied bandwidth;

**Result**


| Mode                              | Result | Limit<br>(Hz) | Port 1-N dB<br>(Hz) | Port 1-OBW<br>(Hz) | Port 2-N dB<br>(Hz) | Port 2-OBW<br>(Hz) | Port 3-N dB<br>(Hz) | Port 3-OBW<br>(Hz) | Port 4-N dB<br>(Hz) | Port 4-OBW<br>(Hz) |
|-----------------------------------|--------|---------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|
| 802.11a_Nss1,(6Mbps)_4TX          | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5745MHz                           | Pass   | 500k          | 16.29M              | 17.901M            | 16.38M              | 16.972M            | 16.35M              | 17.181M            | 16.32M              | 17.331M            |
| 5785MHz                           | Pass   | 500k          | 16.32M              | 19.01M             | 16.29M              | 17.571M            | 16.32M              | 17.511M            | 16.5M               | 19.16M             |
| 5825MHz                           | Pass   | 500k          | 16.29M              | 19.61M             | 16.56M              | 19.31M             | 16.32M              | 17.931M            | 16.32M              | 19.01M             |
| 802.11ax HEW20_Nss1,(MCS0)_4TX    | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5745MHz                           | Pass   | 500k          | 18.9M               | 19.22M             | 18.84M              | 19.07M             | 18.93M              | 19.1M              | 18.84M              | 19.19M             |
| 5785MHz                           | Pass   | 500k          | 18.9M               | 19.43M             | 18.84M              | 19.22M             | 18.99M              | 19.13M             | 18.84M              | 19.49M             |
| 5825MHz                           | Pass   | 500k          | 18.9M               | 19.49M             | 18.78M              | 20.09M             | 18.84M              | 19.22M             | 18.81M              | 19.64M             |
| 802.11ax HEW40_Nss1,(MCS0)_4TX    | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5755MHz                           | Pass   | 500k          | 37.44M              | 37.781M            | 37.56M              | 37.721M            | 37.62M              | 37.661M            | 37.5M               | 37.781M            |
| 5795MHz                           | Pass   | 500k          | 37.2M               | 38.441M            | 37.56M              | 40.36M             | 37.68M              | 37.961M            | 37.56M              | 41.499M            |
| 802.11ax HEW80_Nss1,(MCS0)_4TX    | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5775MHz                           | Pass   | 500k          | 77.04M              | 77.241M            | 77.52M              | 77.121M            | 77.28M              | 77.121M            | 77.28M              | 77.361M            |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5745MHz                           | Pass   | 500k          | 19.02M              | 19.01M             | 18.87M              | 19.01M             | 18.84M              | 18.981M            | 18.96M              | 19.04M             |
| 5785MHz                           | Pass   | 500k          | 18.93M              | 19.01M             | 18.9M               | 19.04M             | 18.99M              | 19.01M             | 18.93M              | 19.01M             |
| 5825MHz                           | Pass   | 500k          | 18.99M              | 19.01M             | 18.84M              | 19.04M             | 18.81M              | 18.981M            | 18.93M              | 19.01M             |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5755MHz                           | Pass   | 500k          | 37.32M              | 37.661M            | 37.62M              | 37.661M            | 37.56M              | 37.661M            | 37.5M               | 37.721M            |
| 5795MHz                           | Pass   | 500k          | 37.32M              | 37.661M            | 37.44M              | 37.901M            | 37.56M              | 37.601M            | 37.5M               | 37.781M            |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5775MHz                           | Pass   | 500k          | 76.68M              | 77.121M            | 76.44M              | 77.001M            | 76.56M              | 77.121M            | 75.48M              | 77.121M            |

**Port X-N dB** = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


**Port X-OBW** = Port X 99% occupied bandwidth;

**802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**5745MHz**

12/11/2019

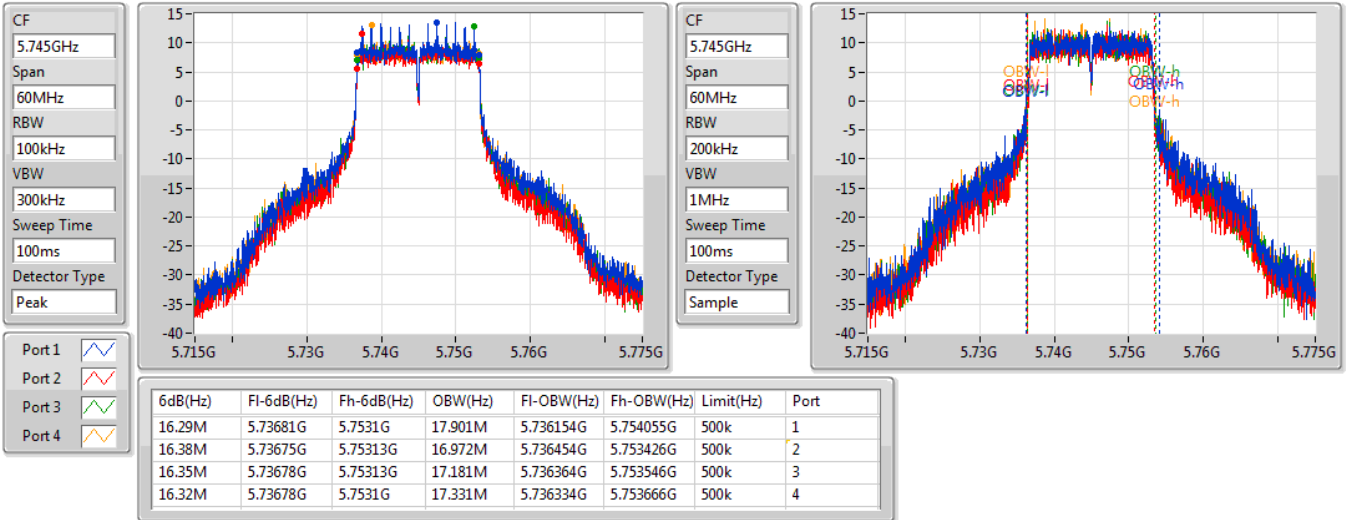
**802.11a\_Nss1,(6Mbps)\_4TX**
**EBW**
**5785MHz**

12/11/2019

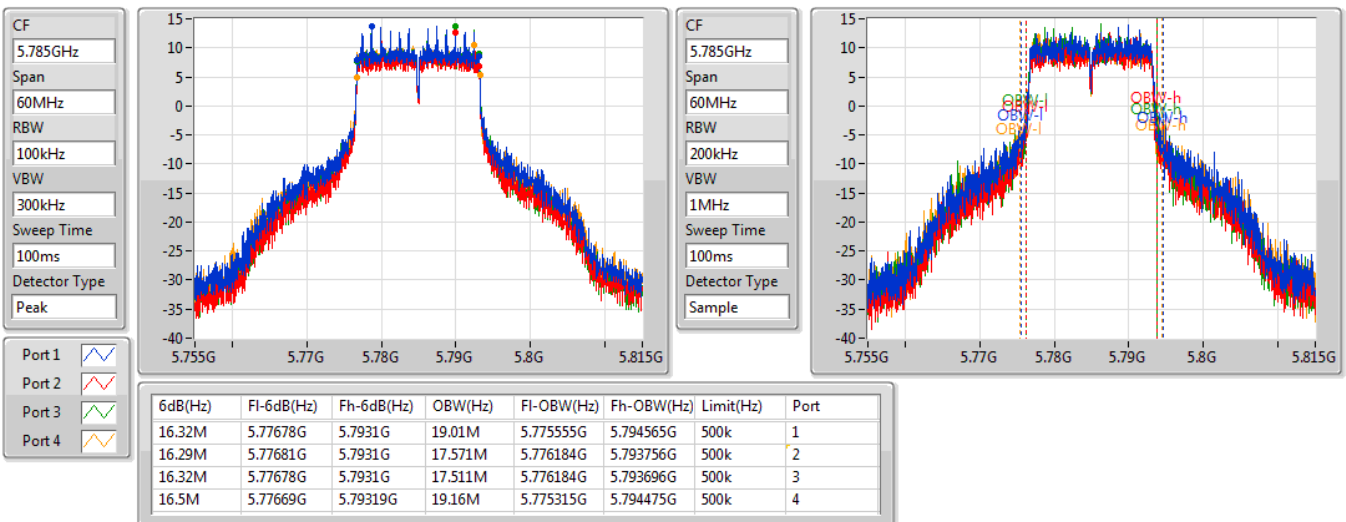


## 802.11a\_Nss1,(6Mbps)\_4TX

EBW

5825MHz

12/11/2019

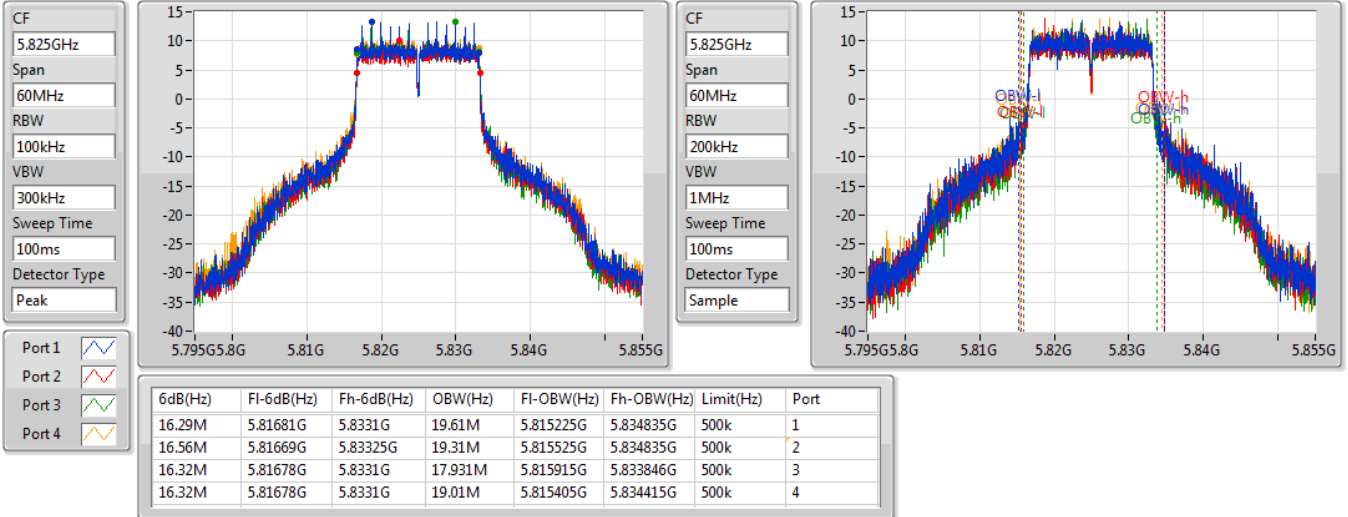


## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

EBW


5745MHz

12/11/2019

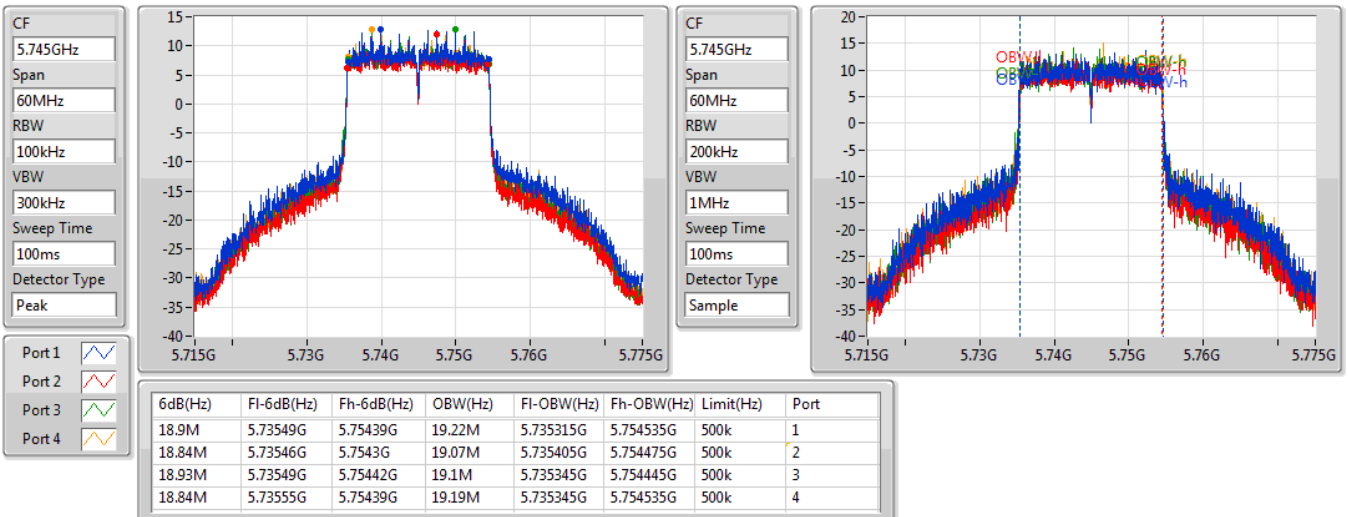


**802.11ax HEW20\_Nss1,(MCS0)\_4TX**
**EBW**
**5785MHz**

12/11/2019

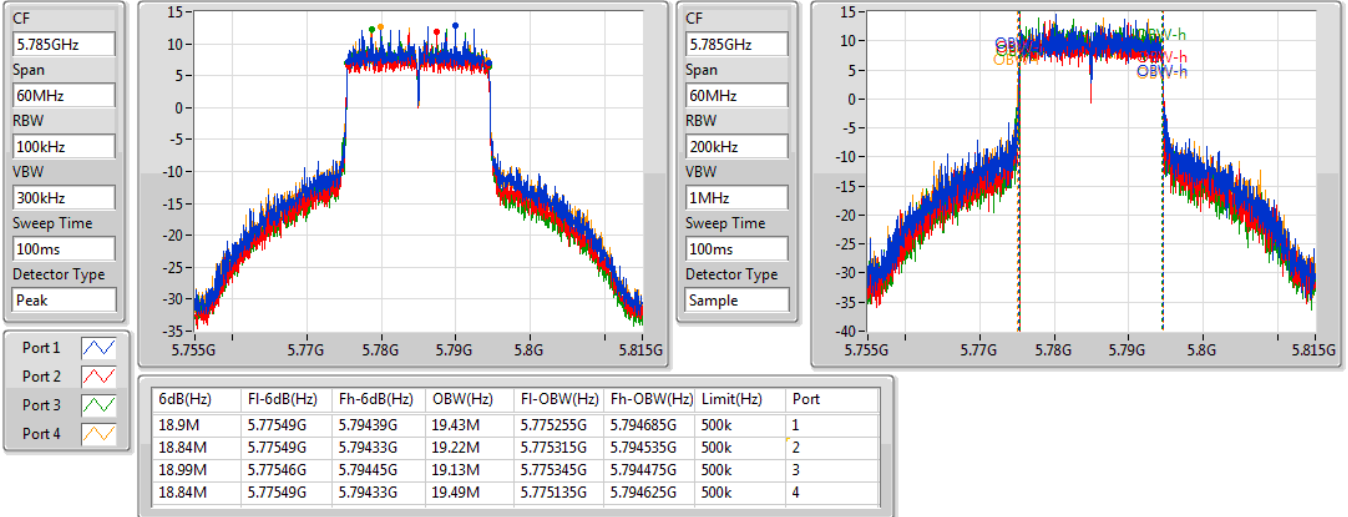

**802.11ax HEW20\_Nss1,(MCS0)\_4TX**
**EBW**
**5825MHz**

12/11/2019

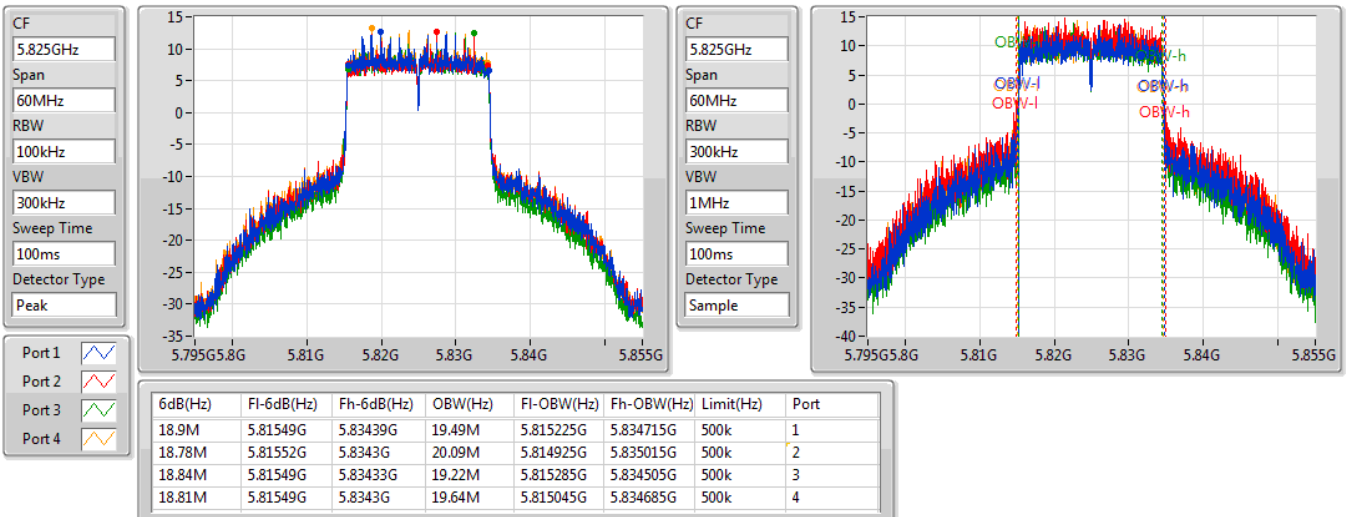


**802.11ax HEW40\_Nss1,(MCS0)\_4TX**
**EBW**
**5755MHz**

12/11/2019

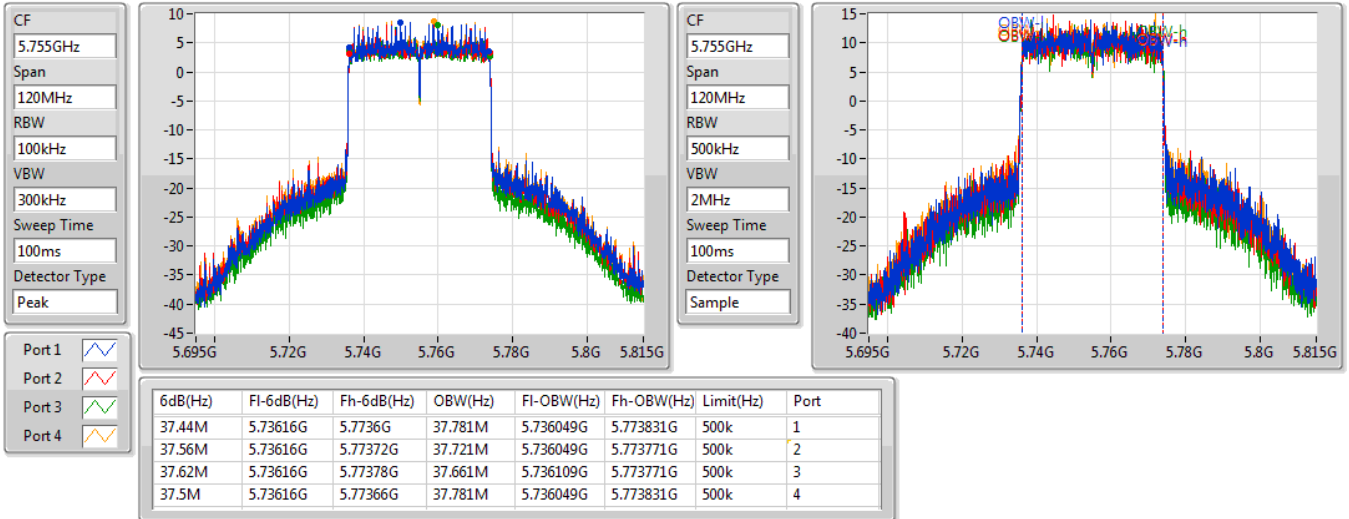

**802.11ax HEW40\_Nss1,(MCS0)\_4TX**
**EBW**
**5795MHz**

12/11/2019

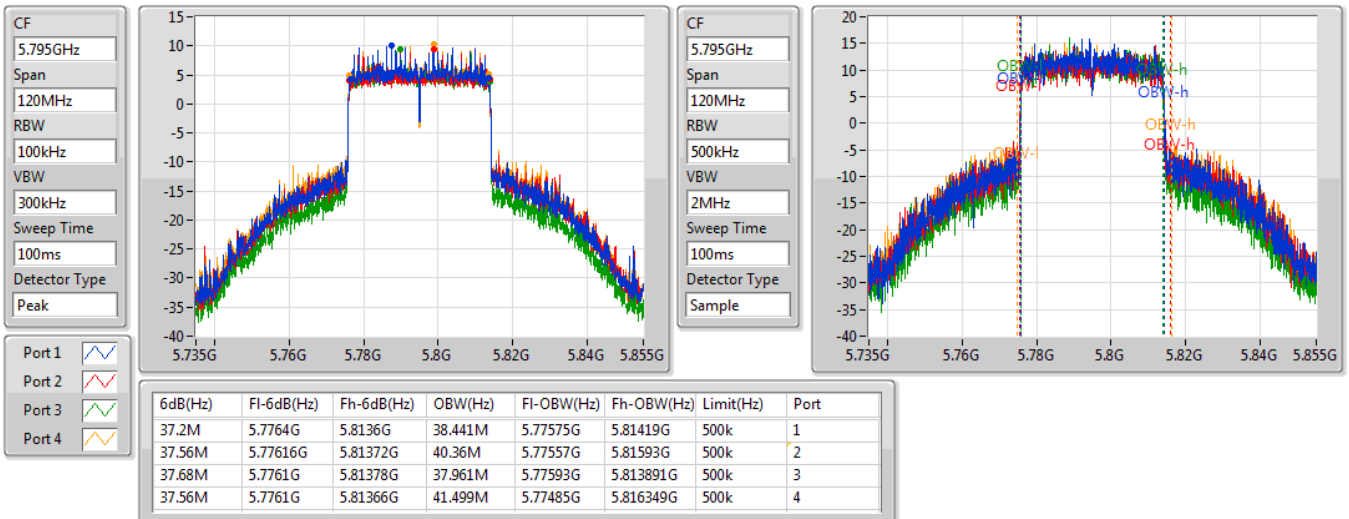


**802.11ax HEW80\_Nss1,(MCS0)\_4TX**
**EBW**
**5775MHz**

02/12/2019

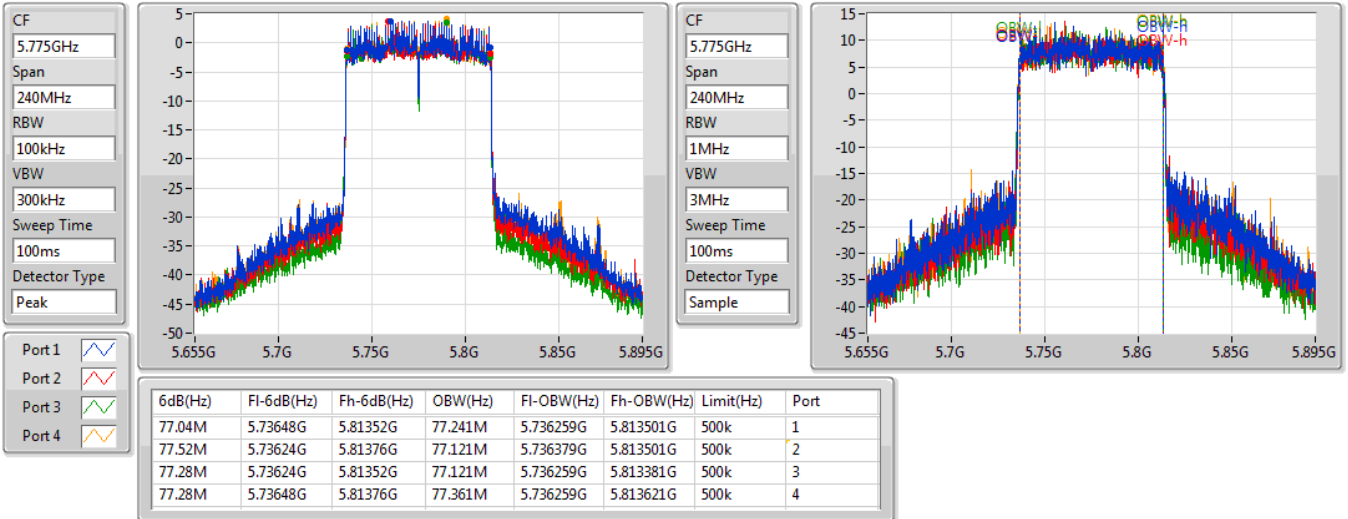

**802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5745MHz**

12/11/2019

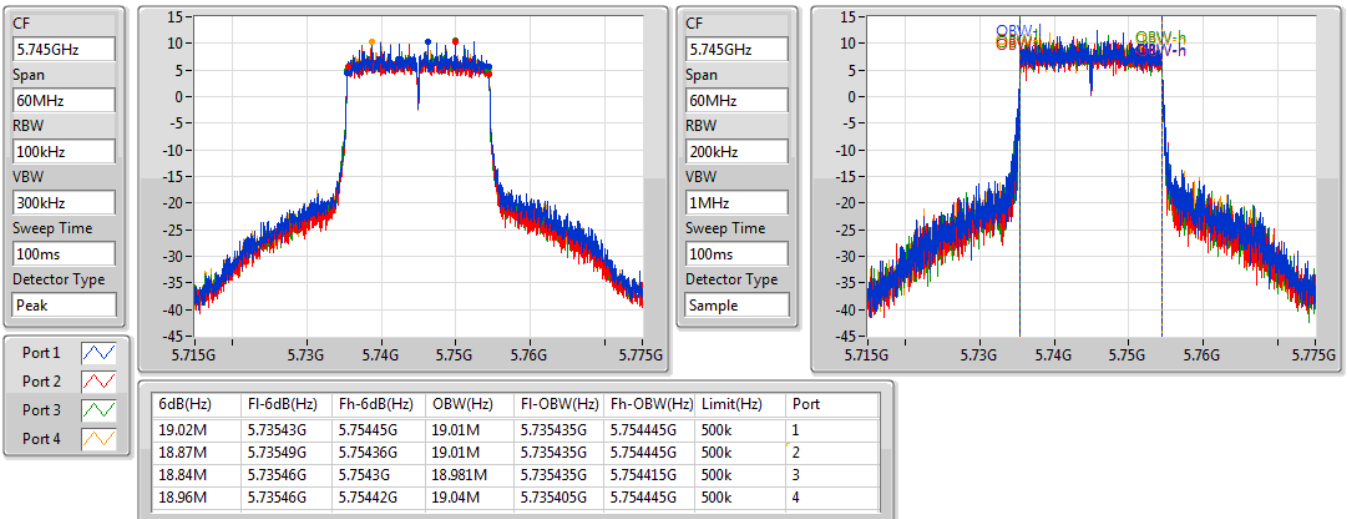


**802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5785MHz**

12/11/2019

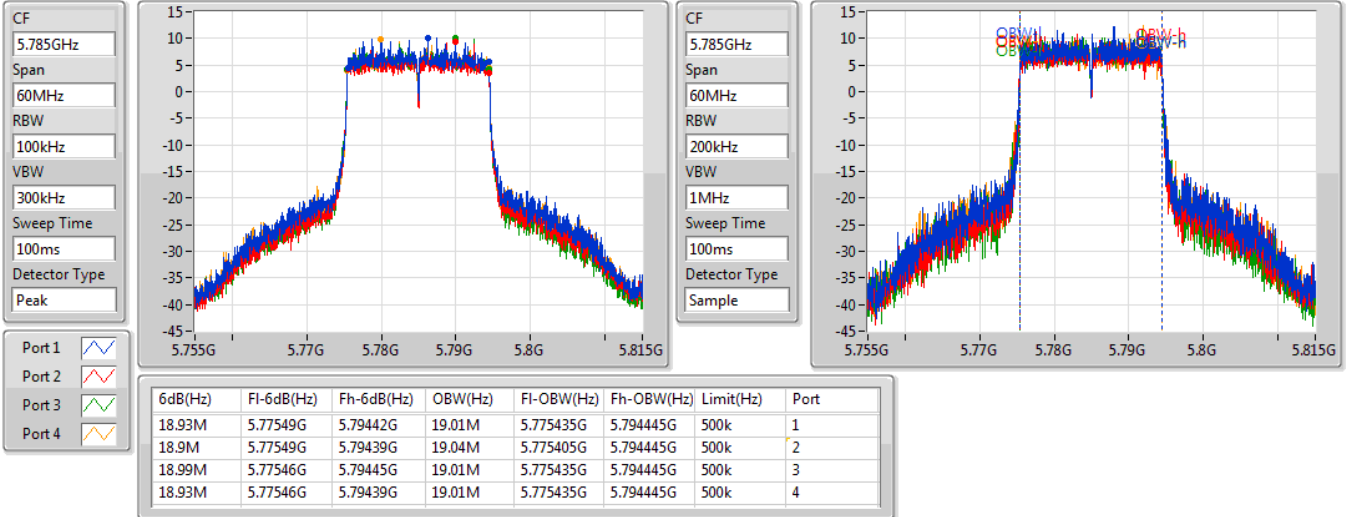

**802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5825MHz**

12/11/2019

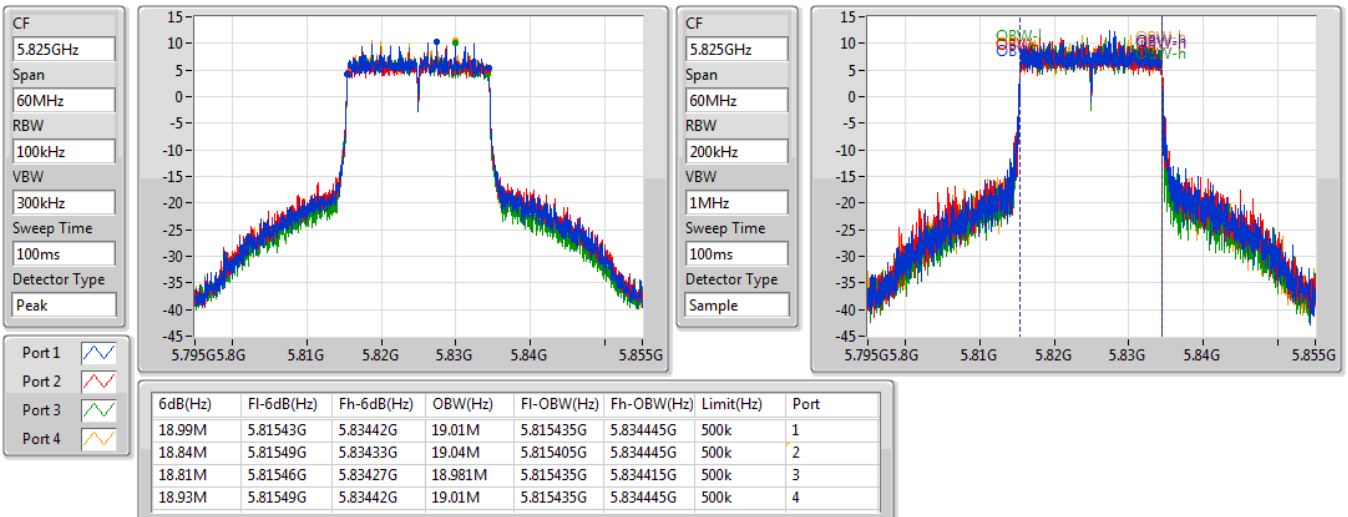


**802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5755MHz**

12/11/2019

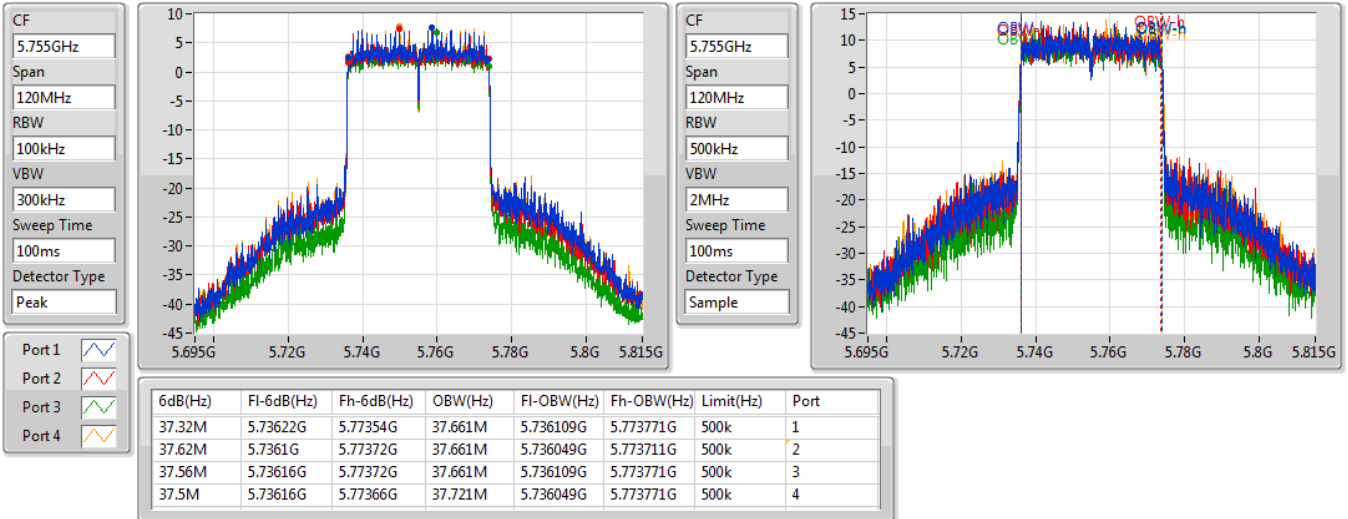
**802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX**
**EBW**
**5795MHz**

12/11/2019

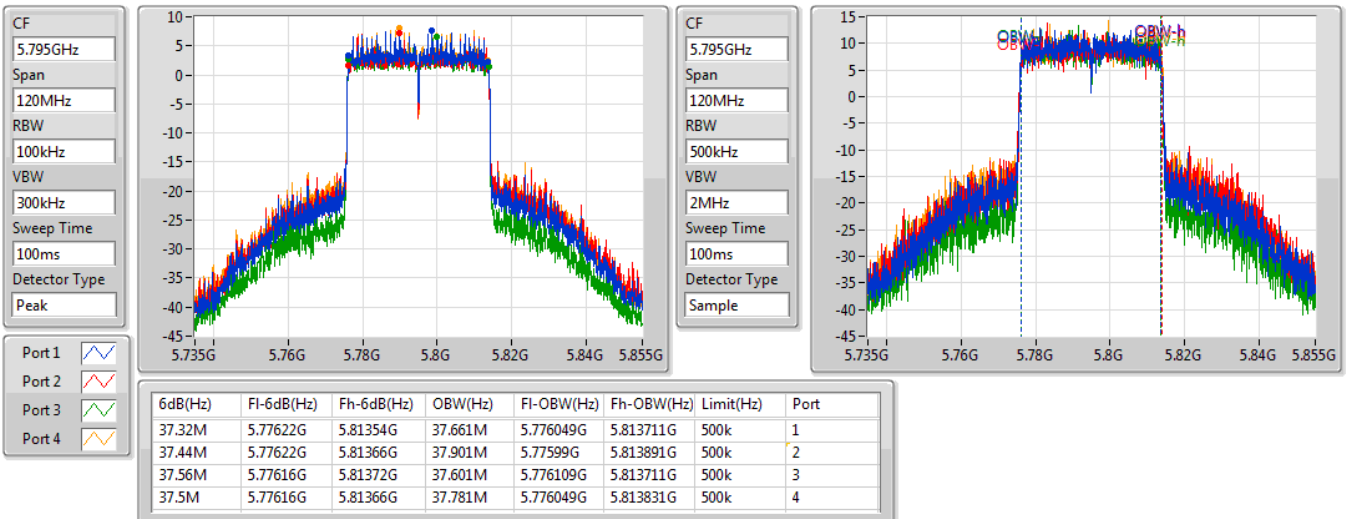


## 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

EBW

5775MHz

09/01/2020

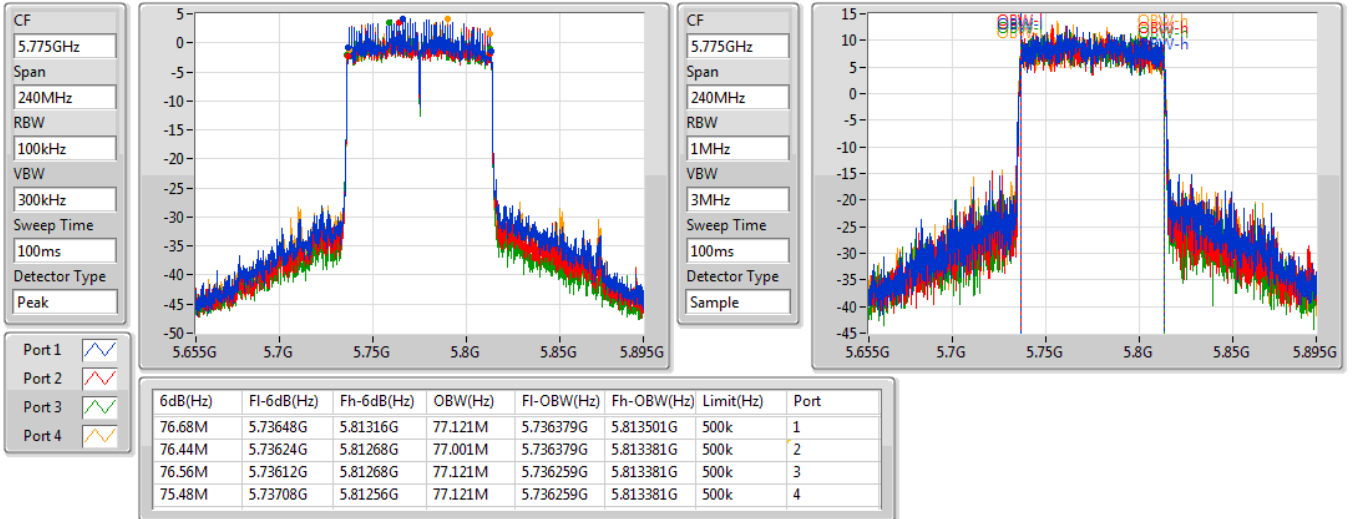

**Summary**

| Mode                              | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW<br>(Hz) |
|-----------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.725-5.85GHz                     | -                | -               | -        | -                | -               |
| 802.11ax HEW20-BF_Nss2,(MCS0)_4TX | 18.93M           | 20.75M          | 20M7D1D  | 18.66M           | 19.1M           |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | 37.56M           | 38.681M         | 38M7D1D  | 37.38M           | 37.781M         |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | 77.16M           | 77.361M         | 77M4D1D  | 75.48M           | 77.241M         |

**Max-N dB** = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

**Max-OBW** = Maximum 99% occupied bandwidth;

**Min-N dB** = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

**Min-OBW** = Minimum 99% occupied bandwidth;

**Result**


| Mode                              | Result | Limit<br>(Hz) | Port 1-N dB<br>(Hz) | Port 1-OBW<br>(Hz) | Port 2-N dB<br>(Hz) | Port 2-OBW<br>(Hz) | Port 3-N dB<br>(Hz) | Port 3-OBW<br>(Hz) | Port 4-N dB<br>(Hz) | Port 4-OBW<br>(Hz) |
|-----------------------------------|--------|---------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|
| 802.11ax HEW20-BF_Nss2,(MCS0)_4TX | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5745MHz                           | Pass   | 500k          | 18.93M              | 19.25M             | 18.93M              | 19.16M             | 18.81M              | 19.13M             | 18.78M              | 19.1M              |
| 5785MHz                           | Pass   | 500k          | 18.87M              | 19.4M              | 18.78M              | 19.37M             | 18.66M              | 19.13M             | 18.87M              | 19.16M             |
| 5825MHz                           | Pass   | 500k          | 18.87M              | 19.52M             | 18.78M              | 19.94M             | 18.81M              | 19.31M             | 18.72M              | 20.75M             |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5755MHz                           | Pass   | 500k          | 37.44M              | 38.201M            | 37.5M               | 38.141M            | 37.56M              | 37.781M            | 37.38M              | 38.021M            |
| 5795MHz                           | Pass   | 500k          | 37.5M               | 38.501M            | 37.56M              | 38.681M            | 37.5M               | 37.841M            | 37.38M              | 38.381M            |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5775MHz                           | Pass   | 500k          | 76.68M              | 77.361M            | 76.44M              | 77.241M            | 77.16M              | 77.241M            | 75.48M              | 77.241M            |

**Port X-N dB** = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


**Port X-OBW** = Port X 99% occupied bandwidth;

**802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5745MHz**

14/11/2019

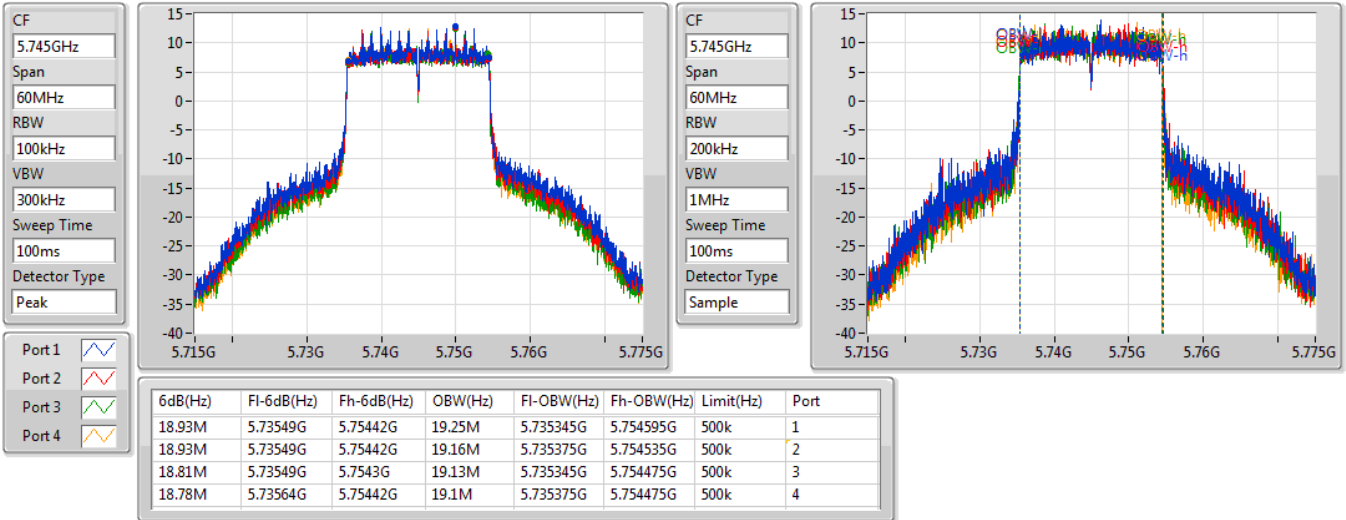

**802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5785MHz**

14/11/2019

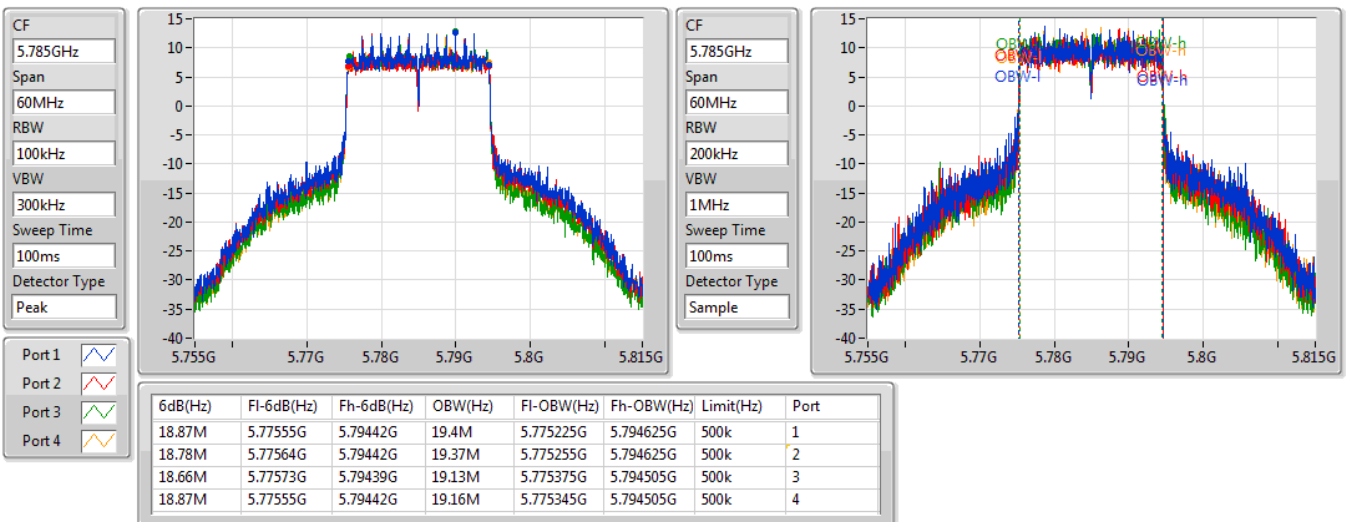


**802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5825MHz**

14/11/2019

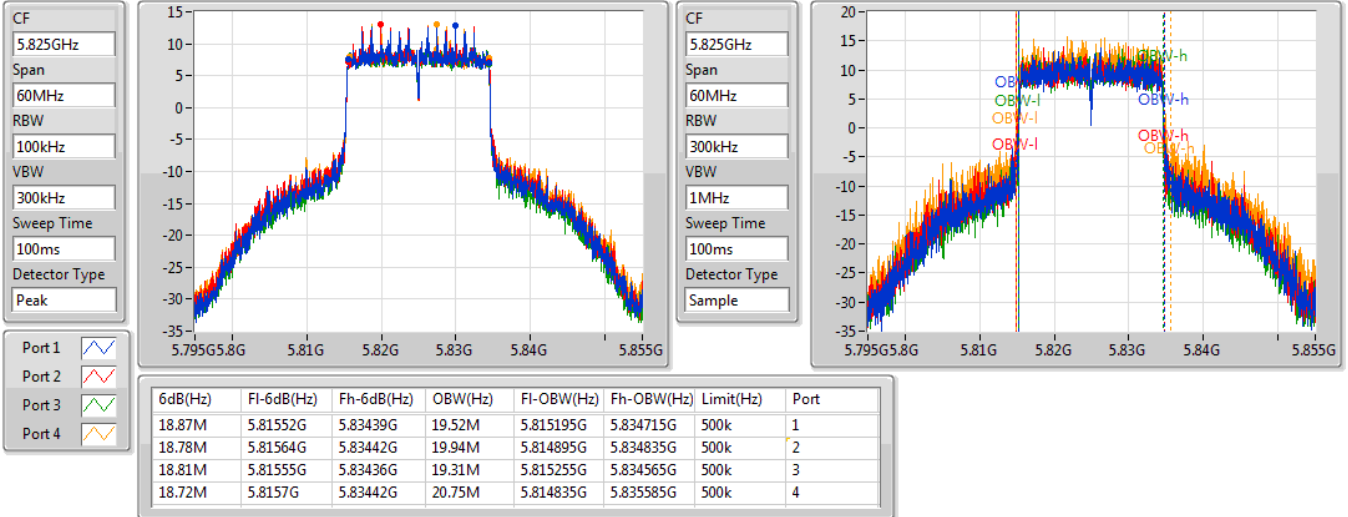

**802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5755MHz**

14/11/2019

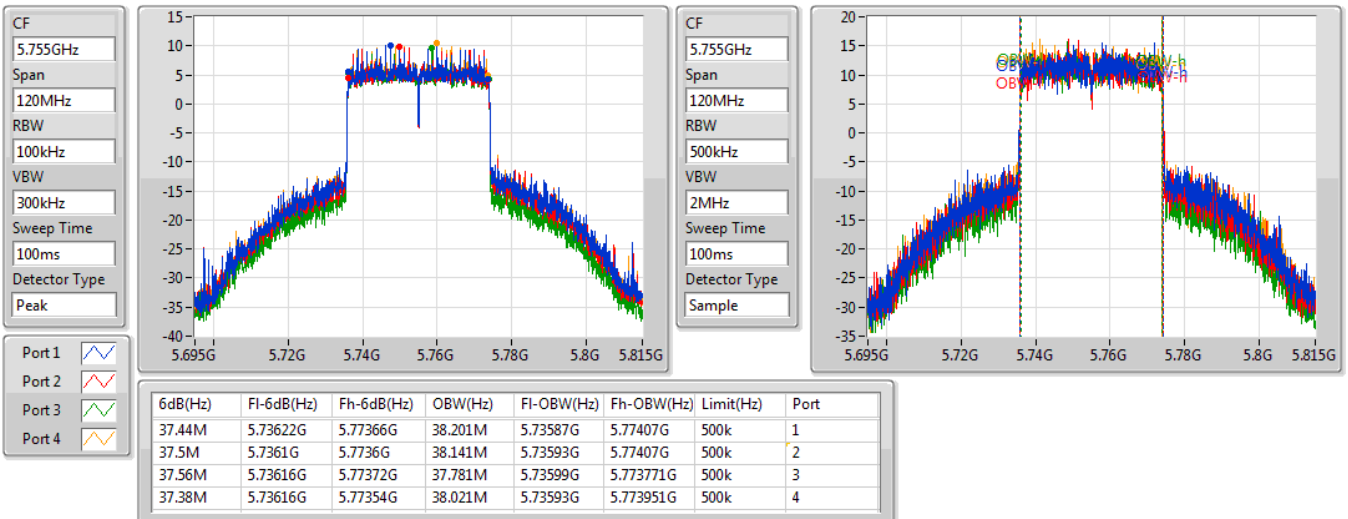


**802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5795MHz**

14/11/2019

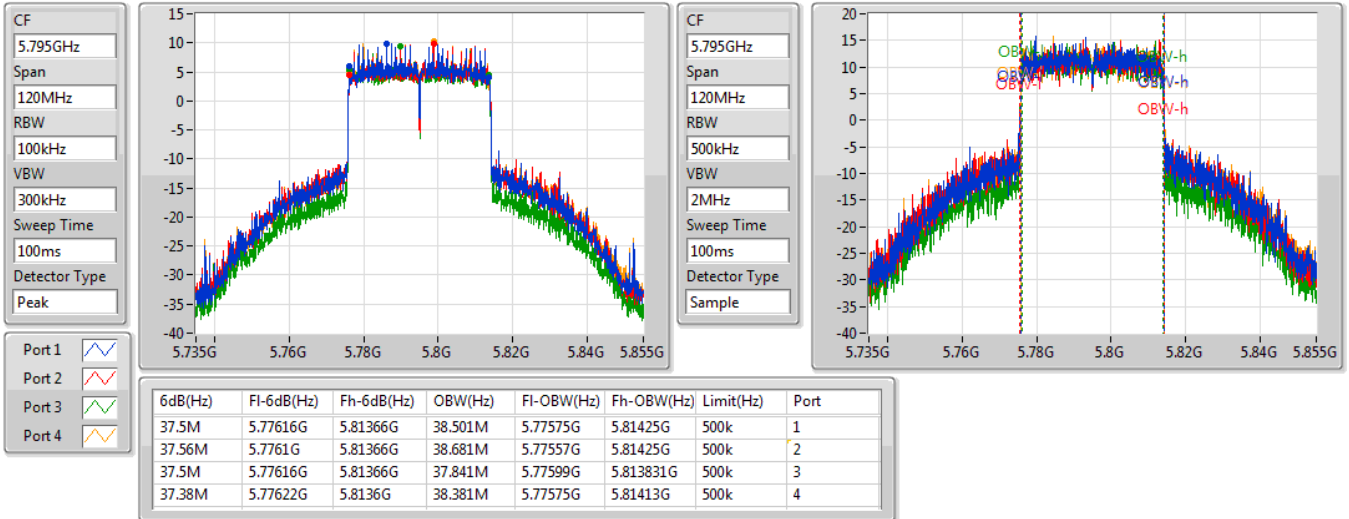
**802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX**
**EBW**
**5775MHz**

09/01/2020

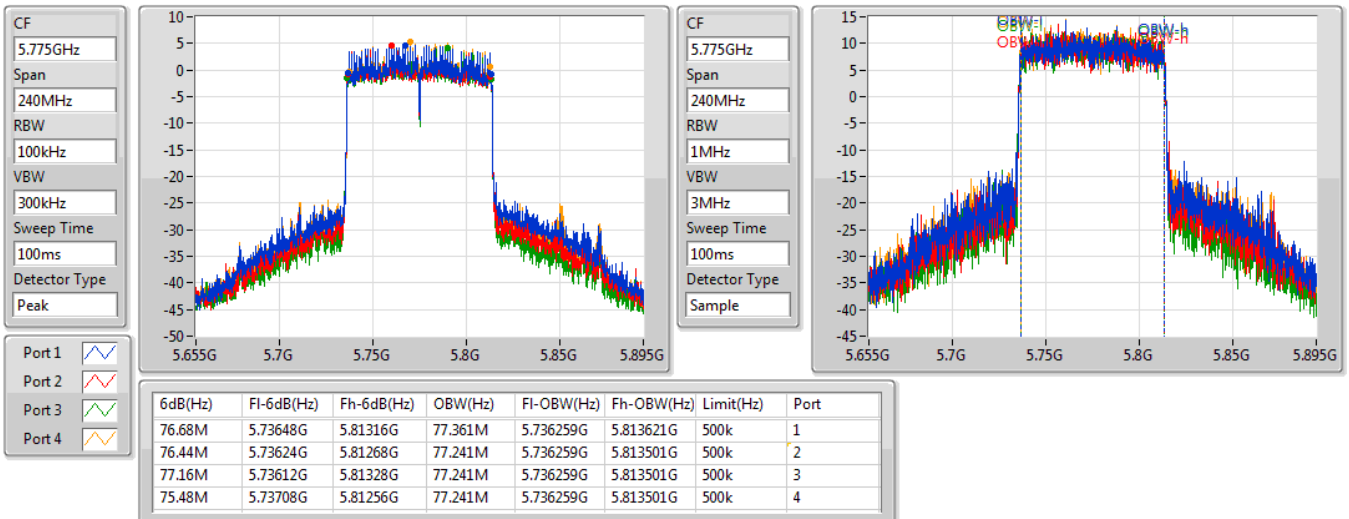

**Summary**

| Mode                           | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW<br>(Hz) |
|--------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.725-5.85GHz                  | -                | -               | -        | -                | -               |
| 802.11ax HEW80_Nss4,(MCS0)_4TX | 76.92M           | 77.4M           | 77M4D1D  | 76.32M           | 77.28M          |

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

**Result**

| Mode                           | Result | Limit<br>(Hz) | Port 1-N dB<br>(Hz) | Port 1-OBW<br>(Hz) | Port 2-N dB<br>(Hz) | Port 2-OBW<br>(Hz) | Port 3-N dB<br>(Hz) | Port 3-OBW<br>(Hz) | Port 4-N dB<br>(Hz) | Port 4-OBW<br>(Hz) |
|--------------------------------|--------|---------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|
| 802.11ax HEW80_Nss4,(MCS0)_4TX | -      | -             | -                   | -                  | -                   | -                  | -                   | -                  | -                   | -                  |
| 5775MHz                        | Pass   | 500k          | 76.8M               | 77.28M             | 76.92M              | 77.4M              | 76.32M              | 77.4M              | 76.32M              | 77.28M             |


**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

## 802.11ax HEW80\_Nss4,(MCS0)\_4TX

EBW

5775MHz

17/02/2020

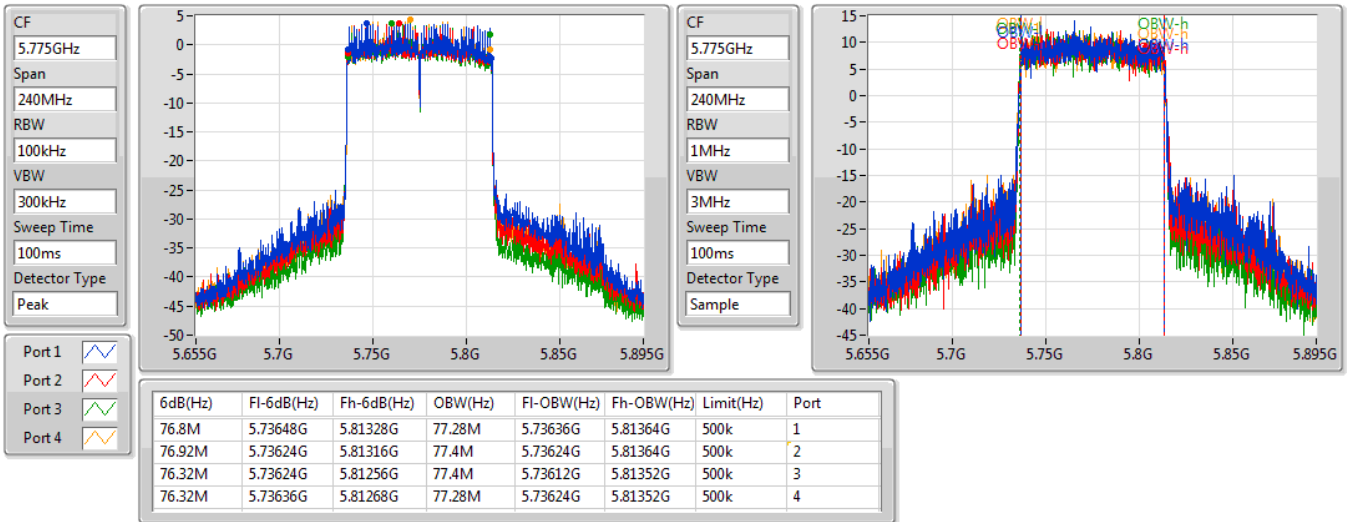



**Summary**

| Mode                              | Total Power<br>(dBm) | Total Power<br>(W) |
|-----------------------------------|----------------------|--------------------|
| 5.725-5.85GHz                     | -                    | -                  |
| 802.11a_Nss1,(6Mbps)_4TX          | 29.85                | 0.96605            |
| 802.11ax HEW20_Nss1,(MCS0)_4TX    | 29.90                | 0.97724            |
| 802.11ax HEW40_Nss1,(MCS0)_4TX    | 29.82                | 0.95940            |
| 802.11ax HEW80_Nss1,(MCS0)_4TX    | 27.32                | 0.53951            |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 27.99                | 0.62951            |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 28.05                | 0.63826            |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 26.94                | 0.49431            |

## Result

| Mode                              | Result | DG<br>(dBi) | Port 1<br>(dBm) | Port 2<br>(dBm) | Port 3<br>(dBm) | Port 4<br>(dBm) | Total Power<br>(dBm) | Power Limit<br>(dBm) |
|-----------------------------------|--------|-------------|-----------------|-----------------|-----------------|-----------------|----------------------|----------------------|
| 802.11a_Nss1,(6Mbps)_4TX          | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5745MHz                           | Pass   | 1.90        | 24.11           | 23.26           | 23.80           | 24.01           | 29.83                | 30.00                |
| 5785MHz                           | Pass   | 1.90        | 24.17           | 23.25           | 23.86           | 23.92           | 29.83                | 30.00                |
| 5825MHz                           | Pass   | 1.90        | 24.00           | 23.42           | 23.75           | 24.12           | 29.85                | 30.00                |
| 802.11ax HEW20_Nss1,(MCS0)_4TX    | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5745MHz                           | Pass   | 1.90        | 24.26           | 23.33           | 23.83           | 24.05           | 29.90                | 30.00                |
| 5785MHz                           | Pass   | 1.90        | 24.23           | 23.26           | 23.86           | 24.02           | 29.88                | 30.00                |
| 5825MHz                           | Pass   | 1.90        | 23.84           | 23.50           | 23.64           | 24.21           | 29.83                | 30.00                |
| 802.11ax HEW40_Nss1,(MCS0)_4TX    | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5755MHz                           | Pass   | 1.90        | 23.15           | 22.86           | 22.72           | 23.25           | 29.02                | 30.00                |
| 5795MHz                           | Pass   | 1.90        | 24.09           | 23.44           | 23.58           | 24.06           | 29.82                | 30.00                |
| 802.11ax HEW80_Nss1,(MCS0)_4TX    | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5775MHz                           | Pass   | 1.90        | 21.36           | 21.14           | 21.26           | 21.45           | 27.32                | 30.00                |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5745MHz                           | Pass   | 7.92        | 22.17           | 21.73           | 21.99           | 21.98           | 27.99                | 28.08                |
| 5785MHz                           | Pass   | 7.92        | 22.05           | 21.52           | 21.71           | 21.89           | 27.82                | 28.08                |
| 5825MHz                           | Pass   | 7.92        | 21.88           | 21.78           | 21.89           | 21.98           | 27.90                | 28.08                |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5755MHz                           | Pass   | 7.92        | 22.26           | 21.94           | 21.59           | 22.28           | 28.05                | 28.08                |
| 5795MHz                           | Pass   | 7.92        | 22.23           | 21.91           | 21.46           | 22.38           | 28.03                | 28.08                |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5775MHz                           | Pass   | 7.92        | 21.10           | 20.77           | 20.72           | 21.09           | 26.94                | 28.08                |

**DG** = Directional Gain; **Port X** = Port X output power



**Summary**

| Mode                              | Total Power<br>(dBm) | Total Power<br>(W) |
|-----------------------------------|----------------------|--------------------|
| 5.725-5.85GHz                     | -                    | -                  |
| 802.11ax HEW20-BF_Nss2,(MCS0)_4TX | 29.94                | 0.98628            |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | 29.99                | 0.99770            |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | 27.77                | 0.59841            |

## Result

| Mode                              | Result | DG<br>(dBi) | Port 1<br>(dBm) | Port 2<br>(dBm) | Port 3<br>(dBm) | Port 4<br>(dBm) | Total Power<br>(dBm) | Power Limit<br>(dBm) |
|-----------------------------------|--------|-------------|-----------------|-----------------|-----------------|-----------------|----------------------|----------------------|
| 802.11ax HEW20-BF_Nss2,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5745MHz                           | Pass   | 4.91        | 24.10           | 23.72           | 23.90           | 23.93           | 29.94                | 30.00                |
| 5785MHz                           | Pass   | 4.91        | 23.93           | 23.76           | 23.92           | 23.88           | 29.89                | 30.00                |
| 5825MHz                           | Pass   | 4.91        | 23.87           | 23.94           | 23.77           | 23.85           | 29.88                | 30.00                |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5755MHz                           | Pass   | 4.91        | 24.04           | 24.00           | 23.48           | 24.33           | 29.99                | 30.00                |
| 5795MHz                           | Pass   | 4.91        | 24.16           | 23.87           | 23.59           | 24.15           | 29.97                | 30.00                |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5775MHz                           | Pass   | 4.91        | 21.79           | 21.72           | 21.43           | 22.05           | 27.77                | 30.00                |

**DG** = Directional Gain; **Port X** = Port X output power



## Average Power

## Appendix C.3

### Summary

| Mode                           | Total Power<br>(dBm) | Total Power<br>(W) |
|--------------------------------|----------------------|--------------------|
| 5.725-5.85GHz                  | -                    | -                  |
| 802.11ax HEW80_Nss4,(MCS0)_4TX | 27.43                | 0.55335            |



## Average Power

## Appendix C.3

### Result

| Mode                           | Result | DG<br>(dBi) | Port 1<br>(dBm) | Port 2<br>(dBm) | Port 3<br>(dBm) | Port 4<br>(dBm) | Total Power<br>(dBm) | Power Limit<br>(dBm) |
|--------------------------------|--------|-------------|-----------------|-----------------|-----------------|-----------------|----------------------|----------------------|
| 802.11ax HEW80_Nss4,(MCS0)_4TX | -      | -           | -               | -               | -               | -               | -                    | -                    |
| 5775MHz                        | Pass   | 1.90        | 21.57           | 21.24           | 21.32           | 21.51           | 27.43                | 30.00                |

**DG** = Directional Gain; **Port X** = Port X output power

**Summary**

| Mode                              | PD<br>(dBm/RBW) |
|-----------------------------------|-----------------|
| 5.725-5.85GHz                     | -               |
| 802.11a_Nss1,(6Mbps)_4TX          | 15.47           |
| 802.11ax HEW20_Nss1,(MCS0)_4TX    | 14.92           |
| 802.11ax HEW40_Nss1,(MCS0)_4TX    | 12.02           |
| 802.11ax HEW80_Nss1,(MCS0)_4TX    | 6.69            |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 13.17           |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 10.45           |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 6.56            |

RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

| Mode                              | Result | DG<br>(dBi) | Port 1<br>(dBm/RBW) | Port 2<br>(dBm/RBW) | Port 3<br>(dBm/RBW) | Port 4<br>(dBm/RBW) | PD<br>(dBm/RBW) | PD Limit<br>(dBm/RBW) |
|-----------------------------------|--------|-------------|---------------------|---------------------|---------------------|---------------------|-----------------|-----------------------|
| 802.11a_Nss1,(6Mbps)_4TX          | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5745MHz                           | Pass   | 7.92        | 9.76                | 9.23                | 9.42                | 9.74                | 15.47           | 28.08                 |
| 5785MHz                           | Pass   | 7.92        | 9.89                | 8.88                | 9.39                | 9.60                | 15.38           | 28.08                 |
| 5825MHz                           | Pass   | 7.92        | 9.73                | 9.16                | 9.40                | 9.87                | 15.41           | 28.08                 |
| 802.11ax HEW20_Nss1,(MCS0)_4TX    | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5745MHz                           | Pass   | 7.92        | 9.23                | 8.49                | 9.08                | 9.20                | 14.90           | 28.08                 |
| 5785MHz                           | Pass   | 7.92        | 9.15                | 8.36                | 9.05                | 9.03                | 14.85           | 28.08                 |
| 5825MHz                           | Pass   | 7.92        | 8.97                | 8.67                | 8.96                | 9.30                | 14.92           | 28.08                 |
| 802.11ax HEW40_Nss1,(MCS0)_4TX    | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5755MHz                           | Pass   | 7.92        | 5.39                | 5.16                | 5.07                | 5.51                | 11.21           | 28.08                 |
| 5795MHz                           | Pass   | 7.92        | 6.43                | 5.68                | 5.80                | 6.31                | 12.02           | 28.08                 |
| 802.11ax HEW80_Nss1,(MCS0)_4TX    | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5775MHz                           | Pass   | 7.92        | 0.76                | 0.60                | 0.73                | 0.99                | 6.69            | 28.08                 |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5745MHz                           | Pass   | 7.92        | 7.38                | 7.02                | 7.38                | 7.30                | 13.17           | 28.08                 |
| 5785MHz                           | Pass   | 7.92        | 7.13                | 6.39                | 6.90                | 6.92                | 12.80           | 28.08                 |
| 5825MHz                           | Pass   | 7.92        | 6.99                | 6.88                | 7.01                | 7.16                | 12.93           | 28.08                 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5755MHz                           | Pass   | 7.92        | 4.62                | 4.37                | 4.04                | 4.79                | 10.40           | 28.08                 |
| 5795MHz                           | Pass   | 7.92        | 4.70                | 4.32                | 4.24                | 4.79                | 10.45           | 28.08                 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5775MHz                           | Pass   | 7.92        | 0.88                | 0.58                | 0.50                | 0.77                | 6.56            | 28.08                 |

**DG** = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

## 802.11a\_Nss1,(6Mbps)\_4TX

## PSD

5745MHz

12/11/2019

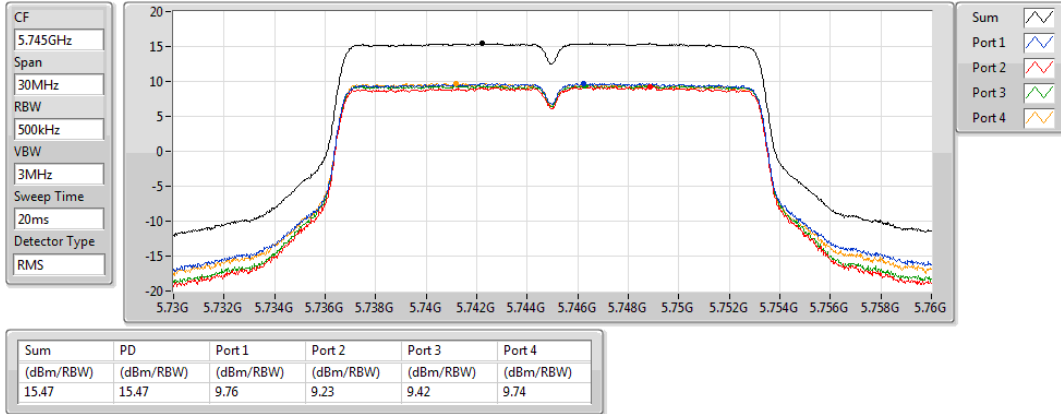


## 802.11a\_Nss1,(6Mbps)\_4TX

## PSD

5785MHz

12/11/2019

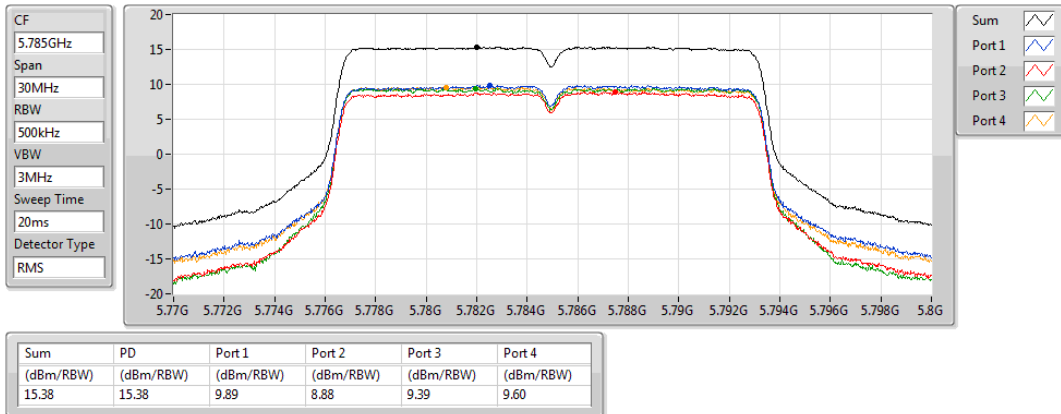


## 802.11a\_Nss1,(6Mbps)\_4TX

## PSD

5825MHz

12/11/2019

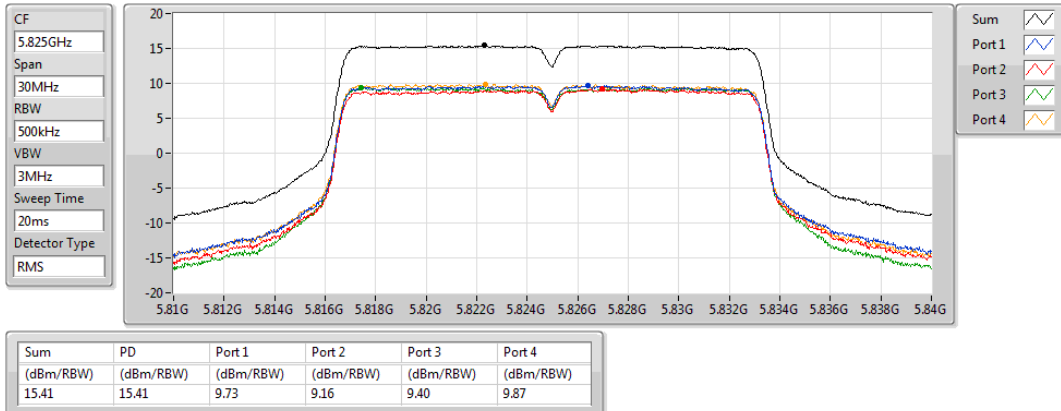


## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

PSD

5745MHz

12/11/2019

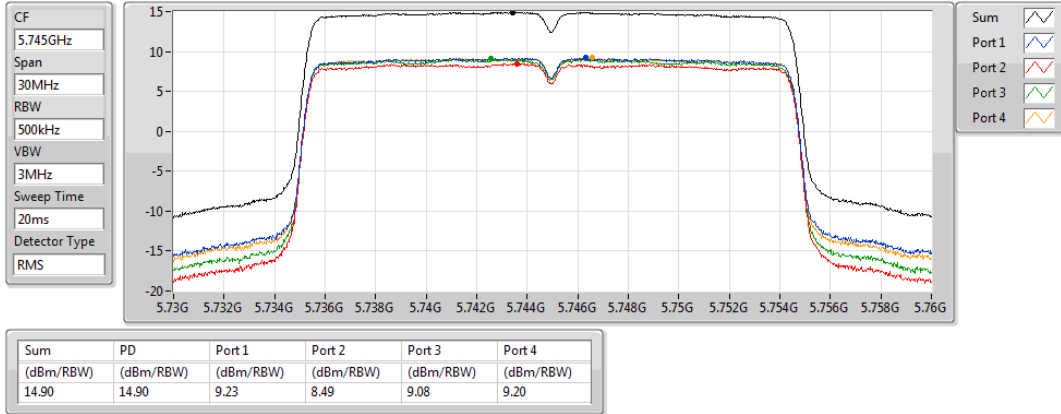


## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

PSD

5785MHz

12/11/2019

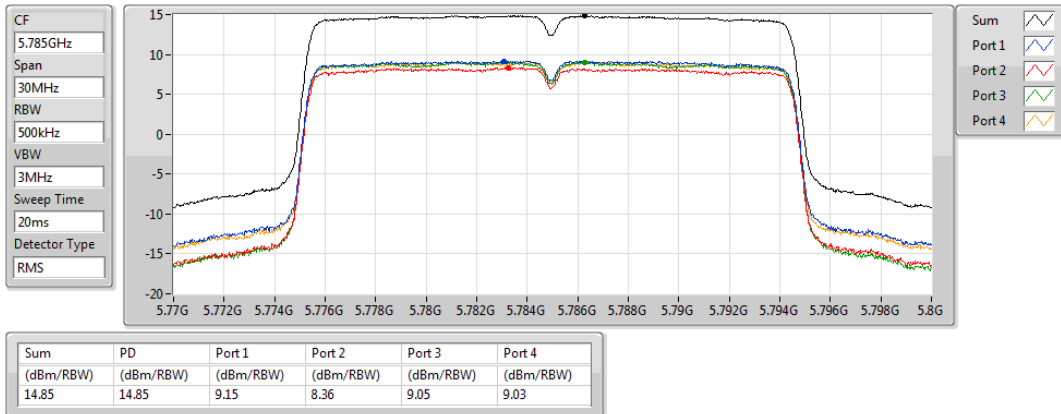


## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

PSD

5825MHz

12/11/2019

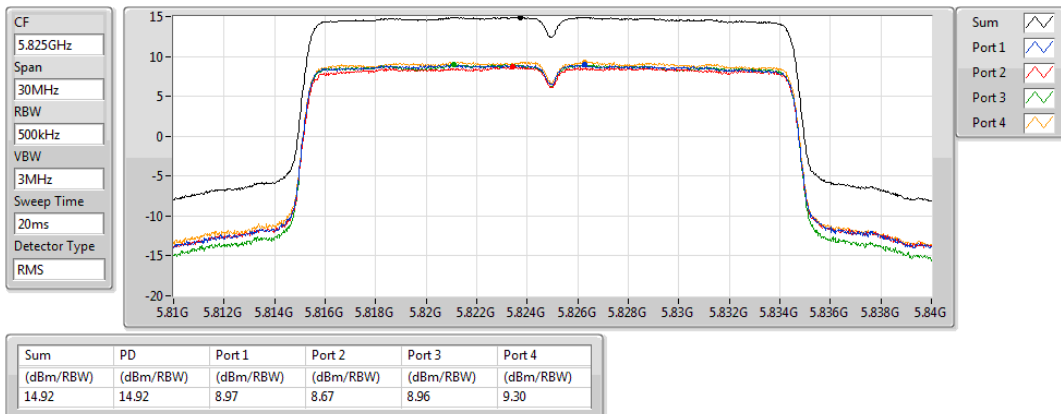


## 802.11ax HEW40\_Nss1,(MCS0)\_4TX

PSD

5755MHz

12/11/2019

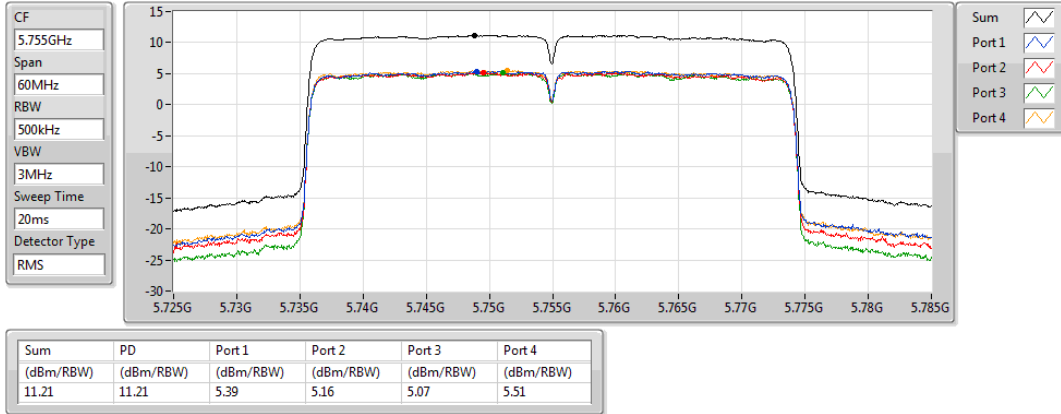


## 802.11ax HEW40\_Nss1,(MCS0)\_4TX

PSD

5795MHz

12/11/2019

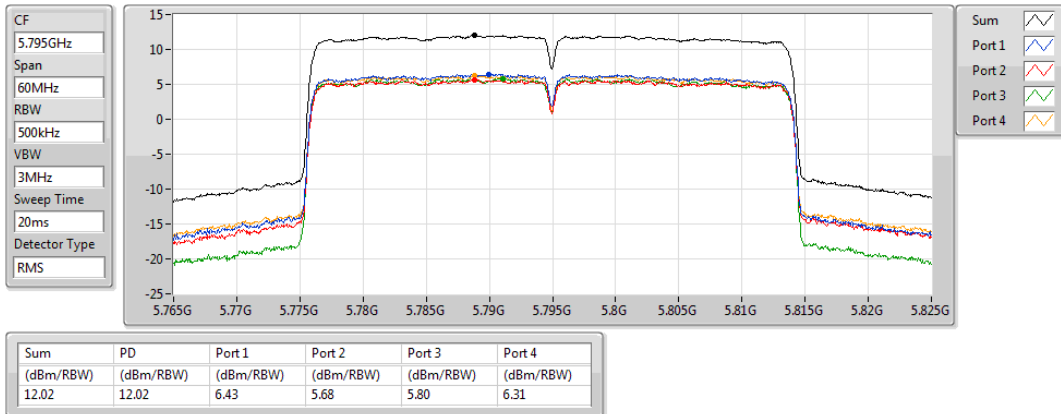


## 802.11ax HEW80\_Nss1,(MCS0)\_4TX

PSD

5775MHz

02/12/2019

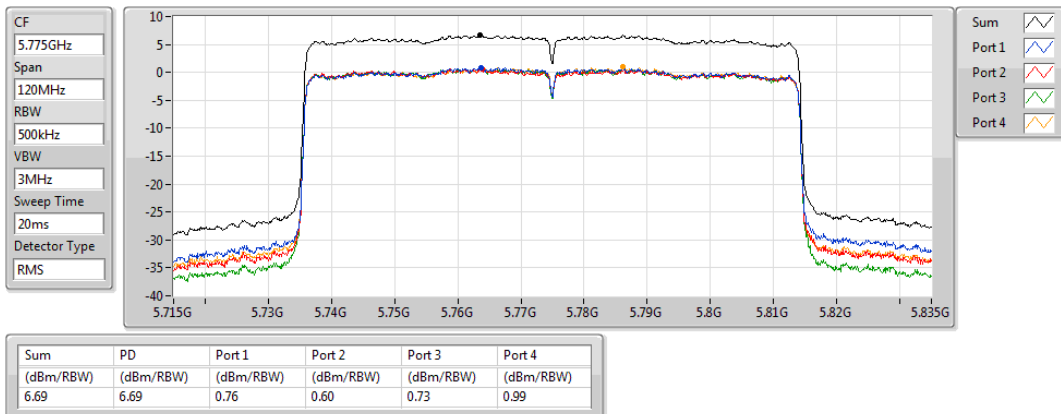


## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

PSD

5745MHz

12/11/2019

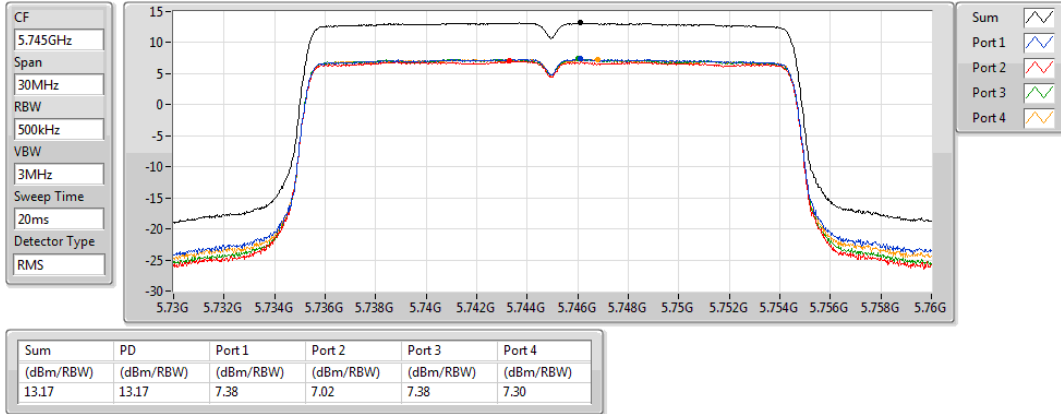


## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

PSD

5785MHz

12/11/2019

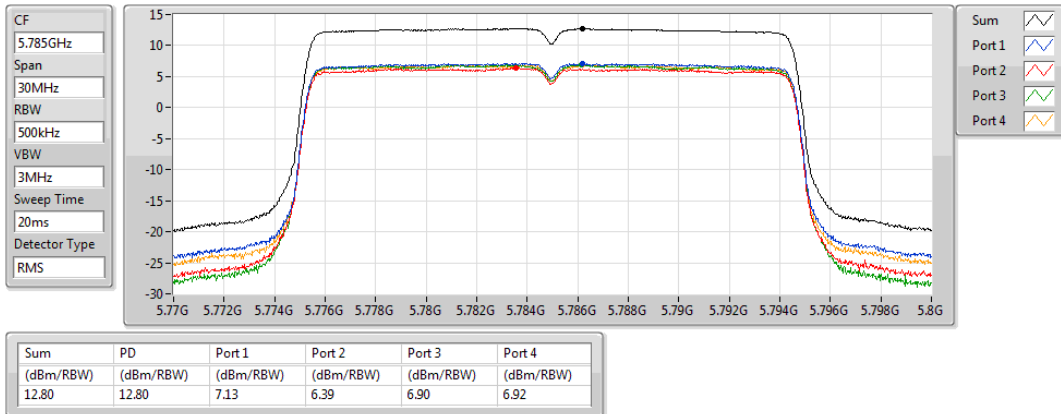


## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

PSD

5825MHz

12/11/2019

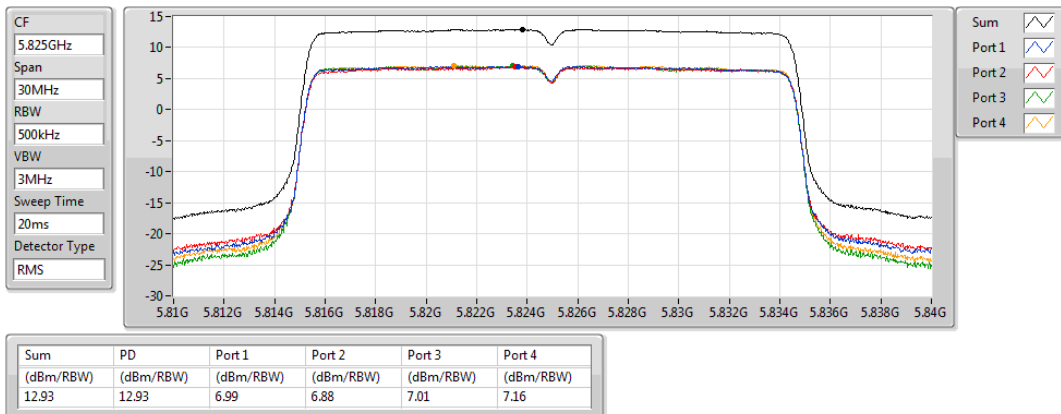


## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

PSD

5755MHz

12/11/2019

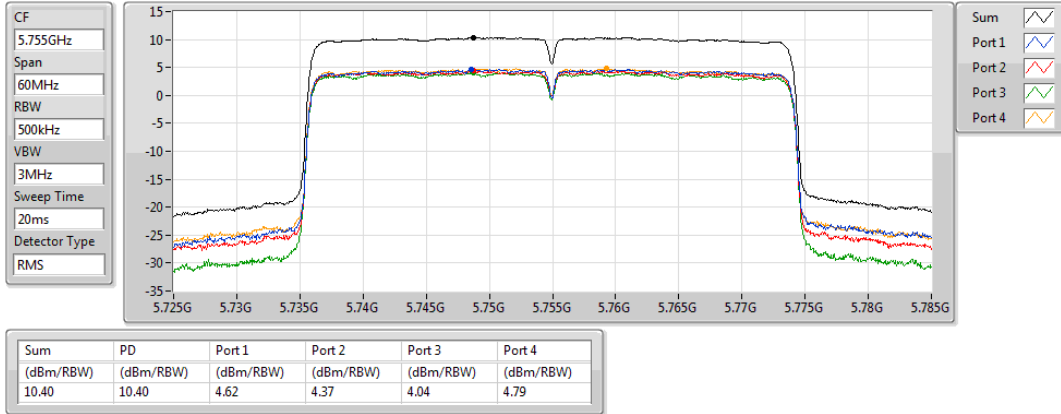


## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

PSD

5795MHz

12/11/2019

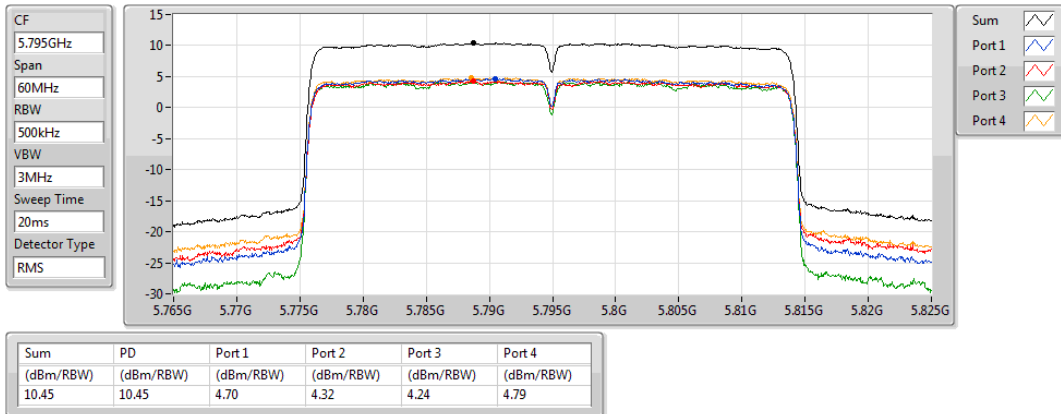


## 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

PSD

5775MHz

09/01/2020

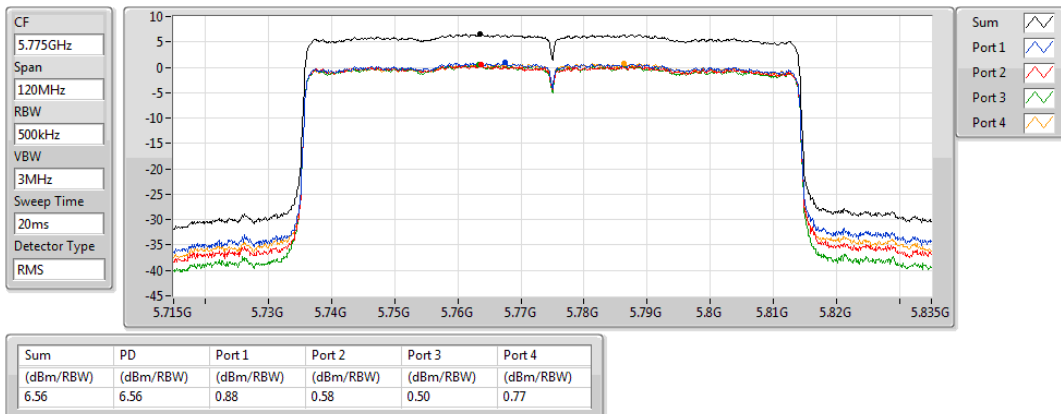

**Summary**

| Mode                              | PD<br>(dBm/RBW) |
|-----------------------------------|-----------------|
| 5.725-5.85GHz                     | -               |
| 802.11ax HEW20-BF_Nss2,(MCS0)_4TX | 15.20           |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | 12.58           |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | 7.44            |

**RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

| Mode                              | Result | DG<br>(dBi) | Port 1<br>(dBm/RBW) | Port 2<br>(dBm/RBW) | Port 3<br>(dBm/RBW) | Port 4<br>(dBm/RBW) | PD<br>(dBm/RBW) | PD Limit<br>(dBm/RBW) |
|-----------------------------------|--------|-------------|---------------------|---------------------|---------------------|---------------------|-----------------|-----------------------|
| 802.11ax HEW20-BF_Nss2,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5745MHz                           | Pass   | 4.91        | 9.34                | 9.14                | 9.24                | 9.23                | 15.20           | 30.00                 |
| 5785MHz                           | Pass   | 4.91        | 9.03                | 8.69                | 9.11                | 9.09                | 14.90           | 30.00                 |
| 5825MHz                           | Pass   | 4.91        | 9.24                | 9.28                | 9.15                | 9.14                | 15.17           | 30.00                 |
| 802.11ax HEW40-BF_Nss2,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5755MHz                           | Pass   | 4.91        | 6.38                | 6.34                | 6.01                | 6.86                | 12.34           | 30.00                 |
| 5795MHz                           | Pass   | 4.91        | 6.81                | 6.53                | 6.29                | 6.97                | 12.58           | 30.00                 |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5775MHz                           | Pass   | 4.91        | 1.47                | 1.39                | 1.29                | 1.81                | 7.44            | 30.00                 |

**DG** = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

## 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

PSD

5745MHz

14/11/2019

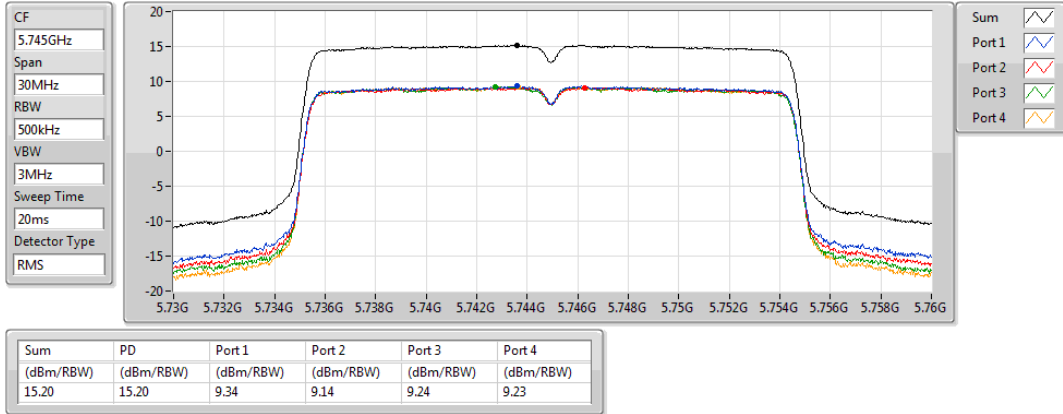


## 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

PSD

5785MHz

14/11/2019

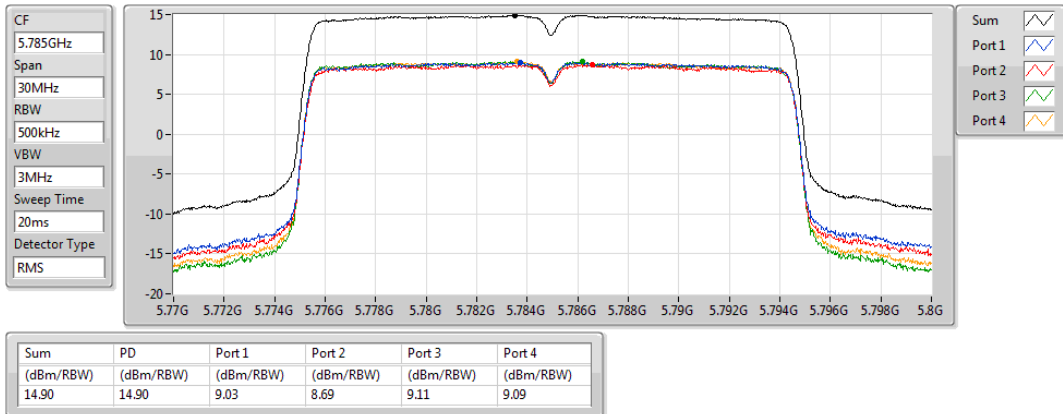


## 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

PSD

5825MHz

14/11/2019

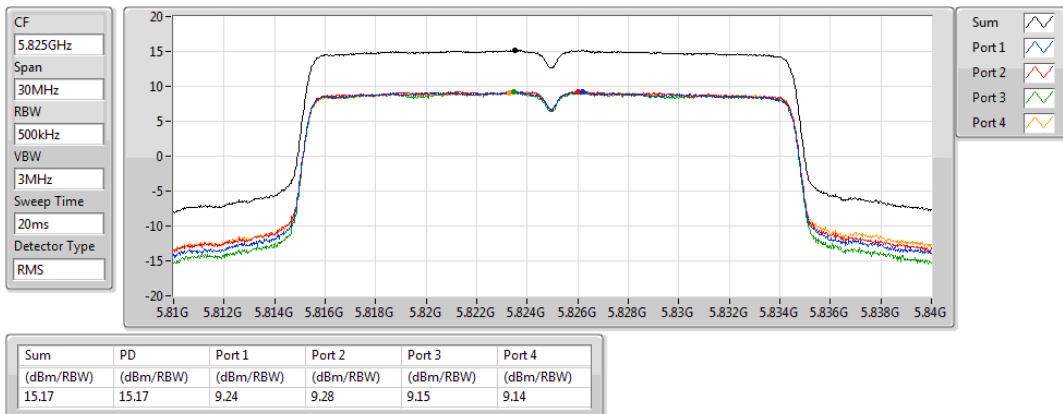


## 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

PSD

5755MHz

14/11/2019

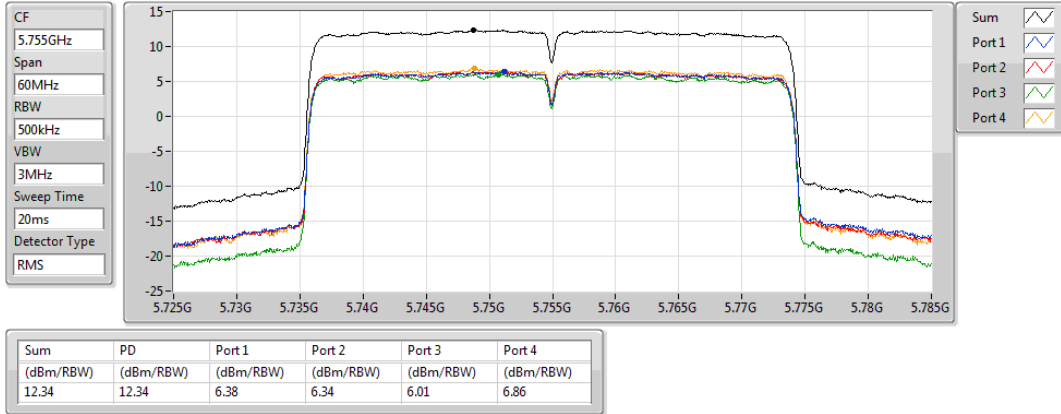


## 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

PSD

5795MHz

14/11/2019

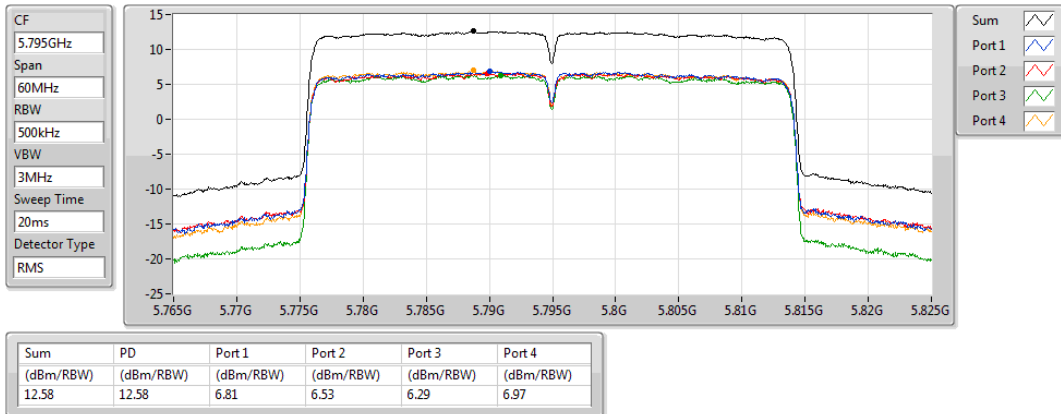


## 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

PSD

5775MHz

09/01/2020

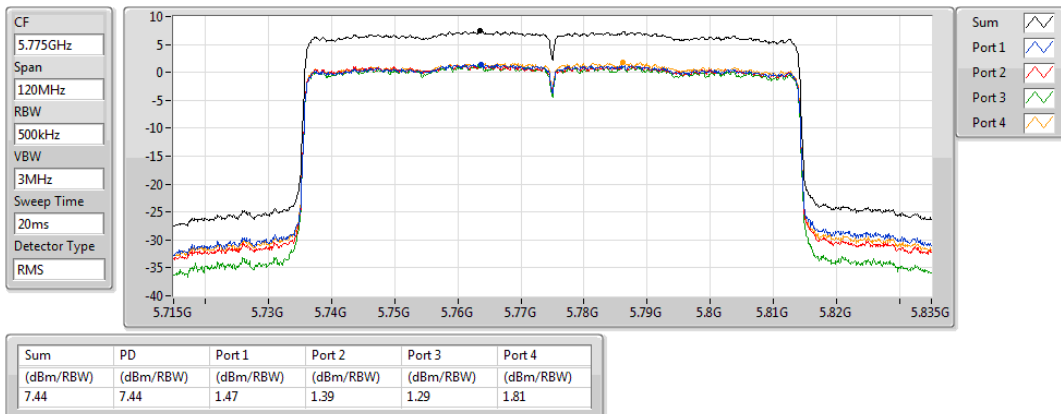

**Summary**

| Mode                           | PD<br>(dBm/RBW) |
|--------------------------------|-----------------|
| 5.725-5.85GHz                  | -               |
| 802.11ax HEW80_Nss4,(MCS0)_4TX | 7.42            |

**RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

| Mode                           | Result | DG<br>(dBi) | Port 1<br>(dBm/RBW) | Port 2<br>(dBm/RBW) | Port 3<br>(dBm/RBW) | Port 4<br>(dBm/RBW) | PD<br>(dBm/RBW) | PD Limit<br>(dBm/RBW) |
|--------------------------------|--------|-------------|---------------------|---------------------|---------------------|---------------------|-----------------|-----------------------|
| 802.11ax HEW80_Nss4,(MCS0)_4TX | -      | -           | -                   | -                   | -                   | -                   | -               | -                     |
| 5775MHz                        | Pass   | 1.90        | 1.33                | 1.24                | 1.73                | 1.34                | 7.42            | 30.00                 |

**DG** = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;


**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;


## 802.11ax HEW80\_Nss4,(MCS0)\_4TX


## PSD

5775MHz

17/02/2020

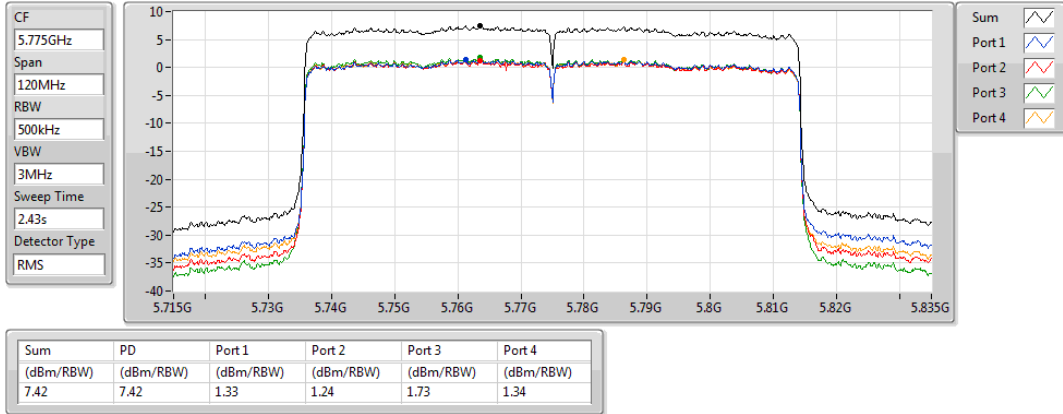

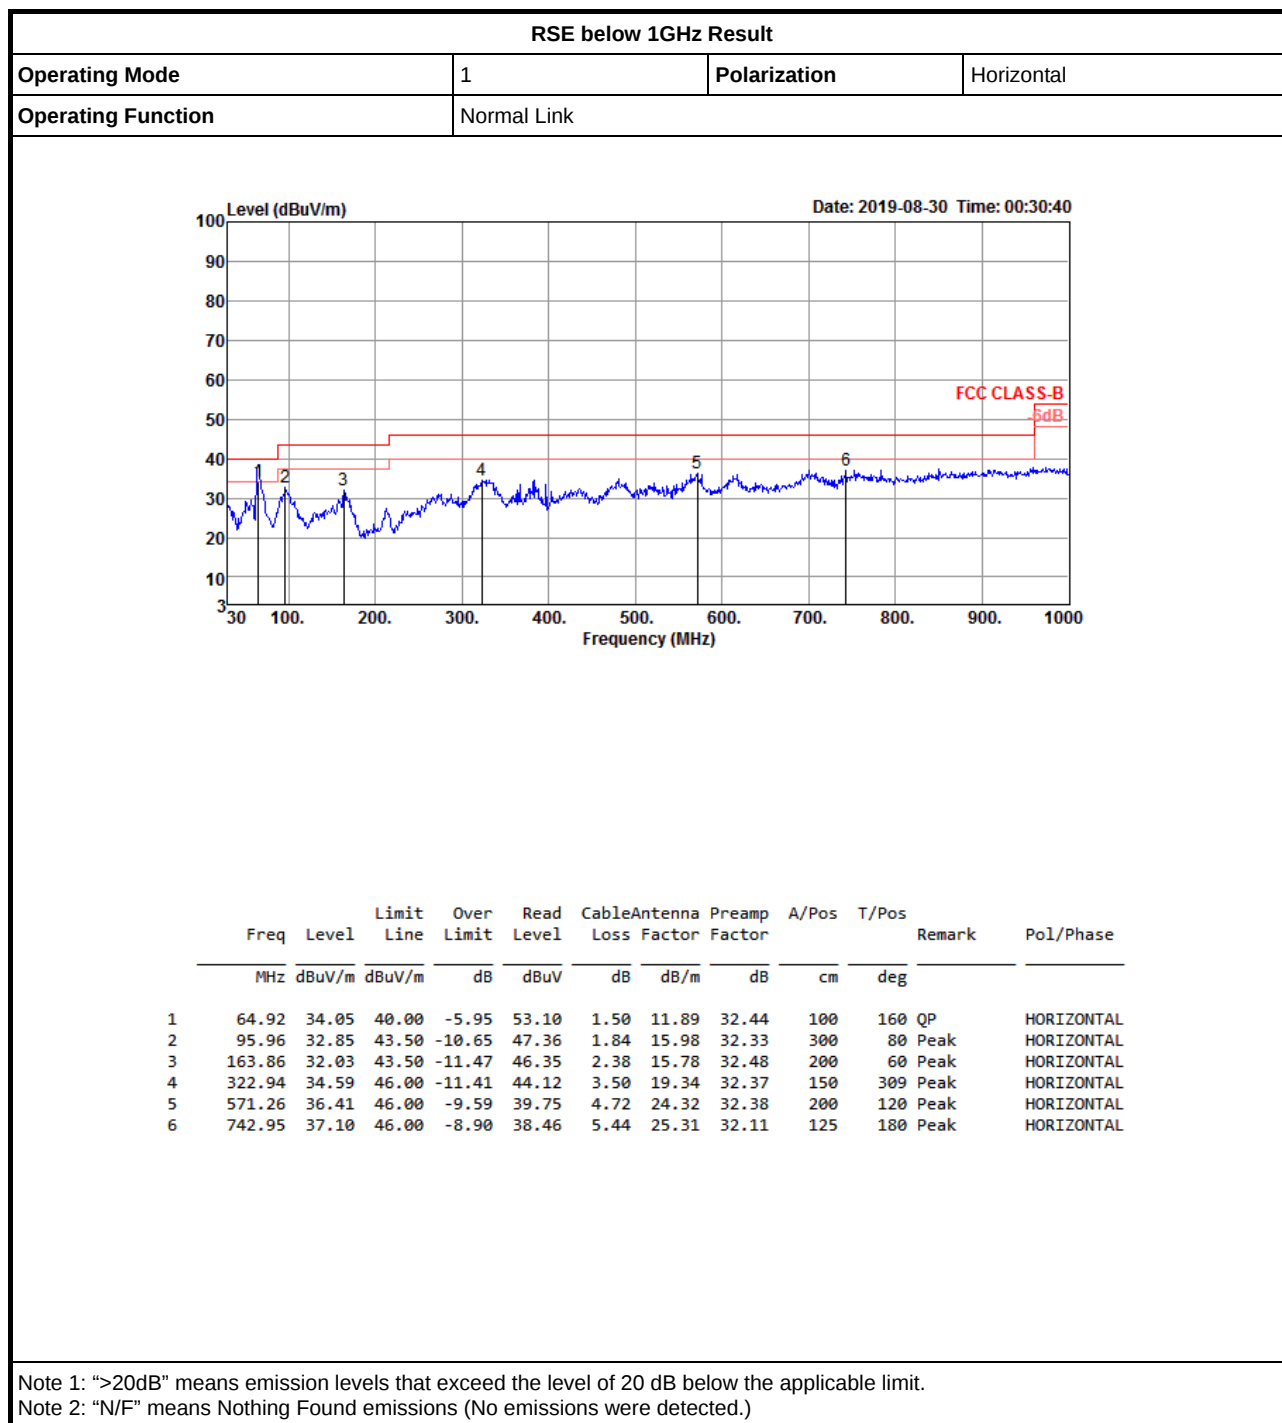

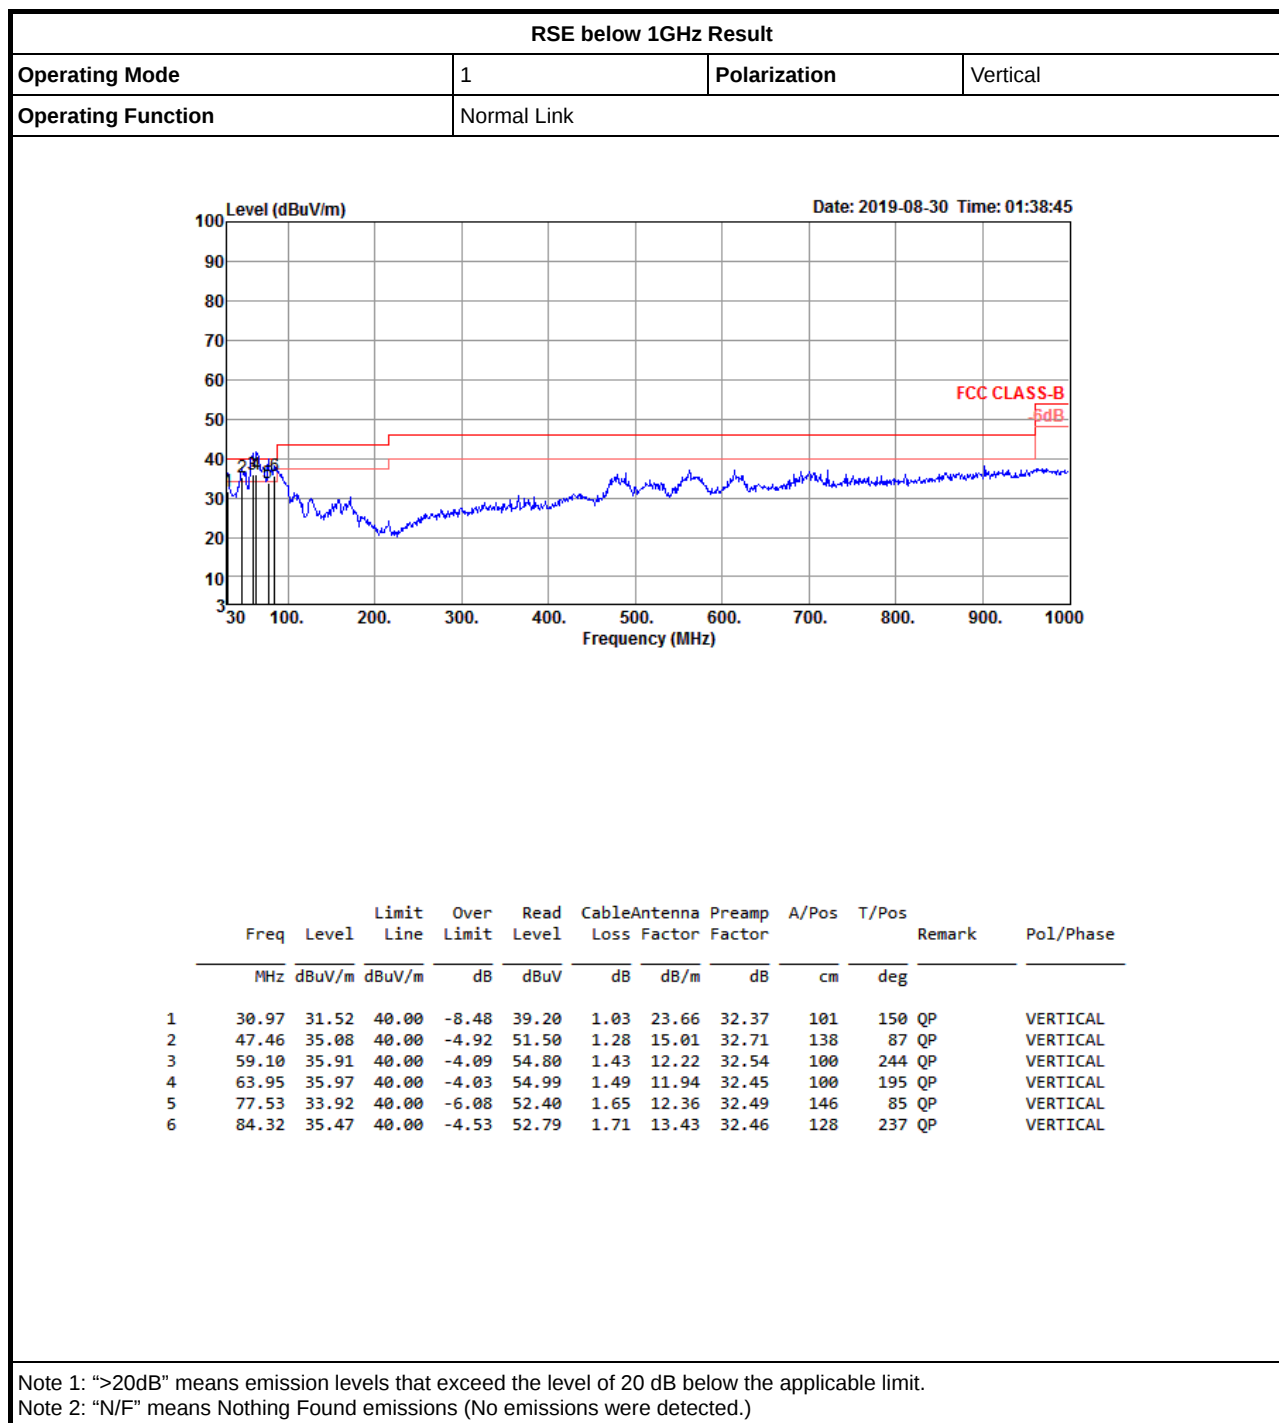




**Summary**

| Mode                           | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comments |
|--------------------------------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|----------|
| 5.725-5.85GHz                  | -      | -    | -            | -                 | -                 | -              | -              | -           | -         | -              | -             | -        |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | Pass   | PK   | 5.93G        | 68.14             | 68.20             | -0.06          | 8.93           | 3           | Vertical  | 186            | 2.54          | -        |

## 802.11a\_Nss1,(6Mbps)\_4TX

## 5745MHz\_TX

08/11/2019

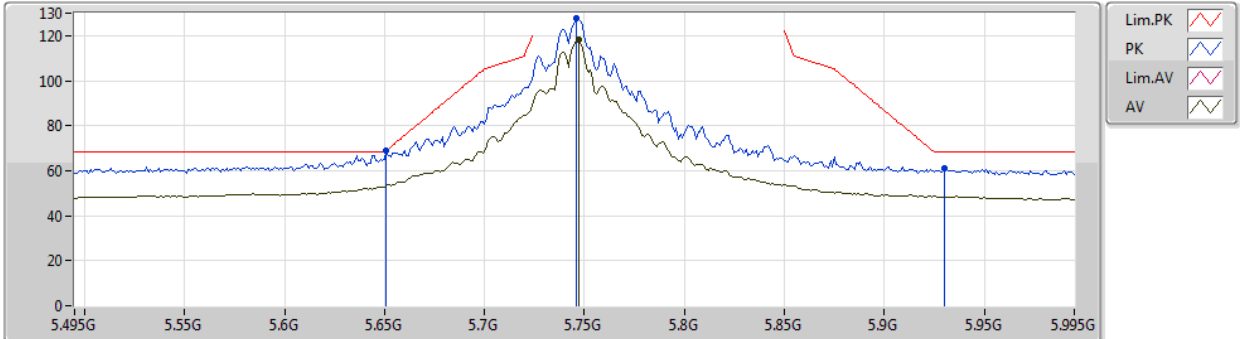


EUT\_Z\_4TX  
Setting 111  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.651G       | 68.71             | 68.94             | -0.23          | 8.66           | 3           | Vertical  | 23             | 1.71          | -       | 60.05         |  |  |  |
| PK   | 5.746G       | 127.50            | Inf               | -Inf           | 8.82           | 3           | Vertical  | 23             | 1.71          | -       | 118.68        |  |  |  |
| AV   | 5.747G       | 117.97            | Inf               | -Inf           | 8.82           | 3           | Vertical  | 23             | 1.71          | -       | 109.15        |  |  |  |
| PK   | 5.93G        | 61.08             | 68.20             | -7.12          | 8.93           | 3           | Vertical  | 23             | 1.71          | -       | 52.15         |  |  |  |

## 802.11a\_Nss1,(6Mbps)\_4TX

## 5745MHz\_TX

08/11/2019

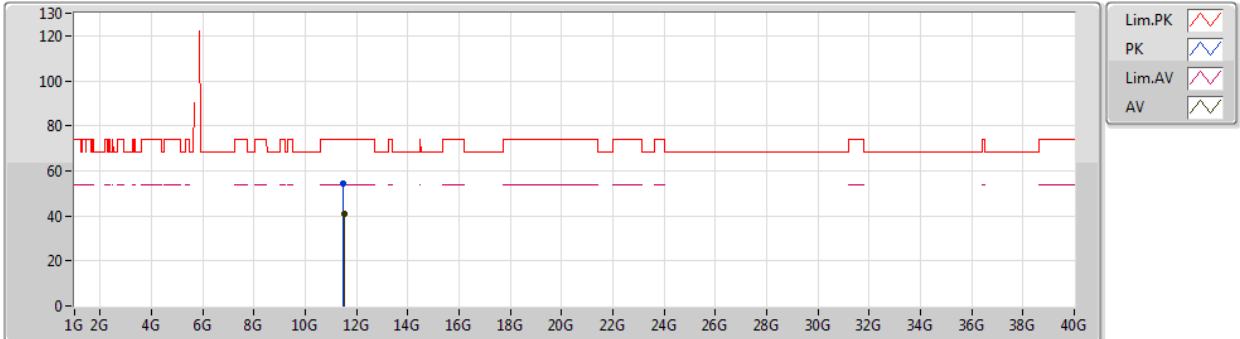


EUT\_Z\_4TX  
Setting 111  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.4921G     | 54.57             | 74.00             | -19.43         | 14.89          | 3           | Vertical  | 197            | 1.27          | -       | 39.68         |  |  |  |
| AV   | 11.50104G    | 40.83             | 54.00             | -13.17         | 14.91          | 3           | Vertical  | 197            | 1.27          | -       | 25.92         |  |  |  |

## 802.11a\_Nss1,(6Mbps)\_4TX

## 5745MHz\_TX

08/11/2019

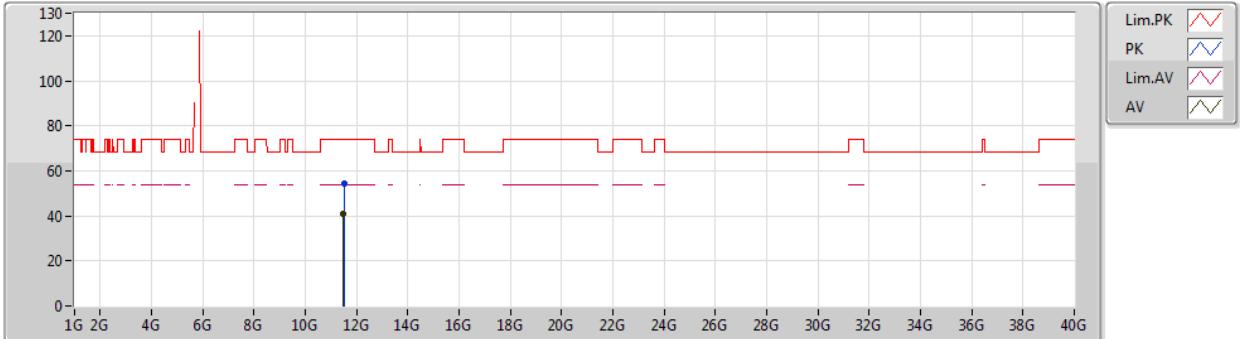


EUT\_Z\_4TX  
Setting 111  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|
| PK   | 11.50008G    | 54.08             | 74.00             | -19.92         | 14.91          | 3           | Horizontal | 336            | 1.45          | -       | 39.17         |
| AV   | 11.49906G    | 40.71             | 54.00             | -13.29         | 14.90          | 3           | Horizontal | 336            | 1.45          | -       | 25.81         |

## 802.11a\_Nss1,(6Mbps)\_4TX

## 5785MHz\_TX

08/11/2019

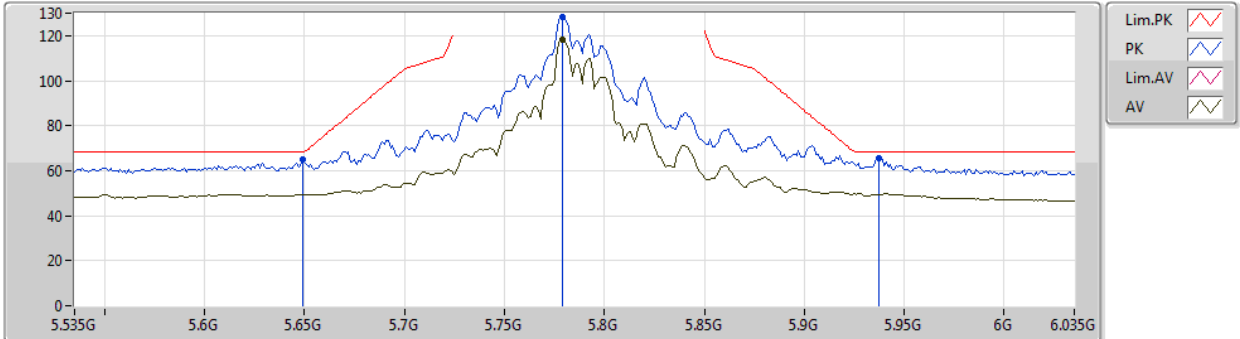


EUT\_Z\_4TX  
Setting 120  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.649G       | 64.75             | 68.20             | -3.45          | 8.67           | 3           | Vertical  | 17             | 2.42          | -       | 56.08         |  |  |  |
| PK   | 5.779G       | 128.25            | Inf               | -Inf           | 8.87           | 3           | Vertical  | 17             | 2.42          | -       | 119.38        |  |  |  |
| AV   | 5.779G       | 118.02            | Inf               | -Inf           | 8.87           | 3           | Vertical  | 17             | 2.42          | -       | 109.15        |  |  |  |
| PK   | 5.937G       | 65.78             | 68.20             | -2.42          | 8.93           | 3           | Vertical  | 17             | 2.42          | -       | 56.85         |  |  |  |

## 802.11a\_Nss1,(6Mbps)\_4TX

## 5785MHz\_TX

08/11/2019

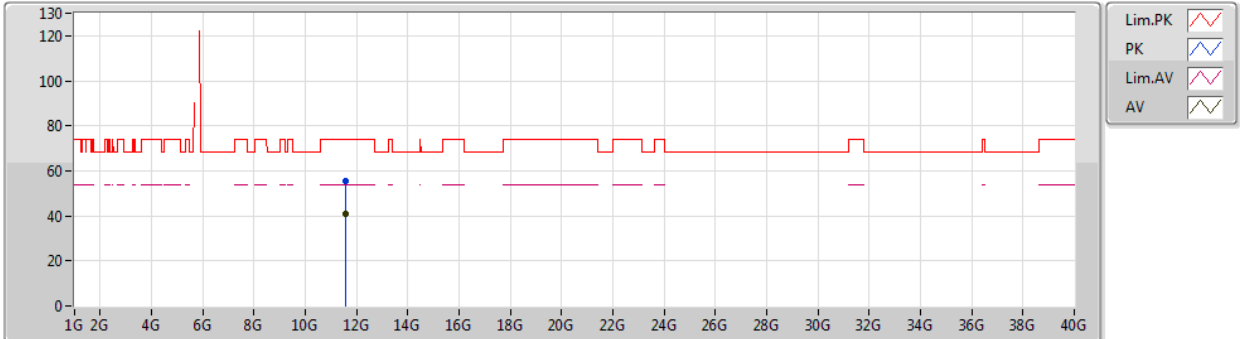


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.56088G    | 55.26             | 74.00             | -18.74         | 14.99          | 3           | Vertical  | 318            | 2.01          | -       | 40.27         |  |  |  |
| AV   | 11.57624G    | 40.78             | 54.00             | -13.22         | 15.01          | 3           | Vertical  | 318            | 2.01          | -       | 25.77         |  |  |  |

## 802.11a\_Nss1,(6Mbps)\_4TX

## 5785MHz\_TX

08/11/2019

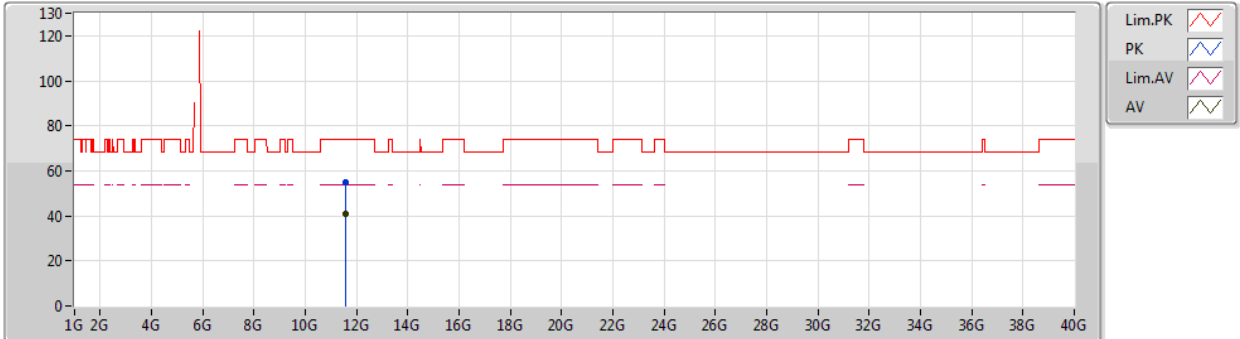


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.57246G    | 54.84             | 74.00             | -19.16         | 15.00          | 3           | Horizontal | 201            | 1.14          | -       | 39.84         |  |  |  |
| AV   | 11.57522G    | 40.75             | 54.00             | -13.25         | 15.00          | 3           | Horizontal | 201            | 1.14          | -       | 25.75         |  |  |  |

## 802.11a\_Nss1,(6Mbps)\_4TX

## 5825MHz\_TX

08/11/2019

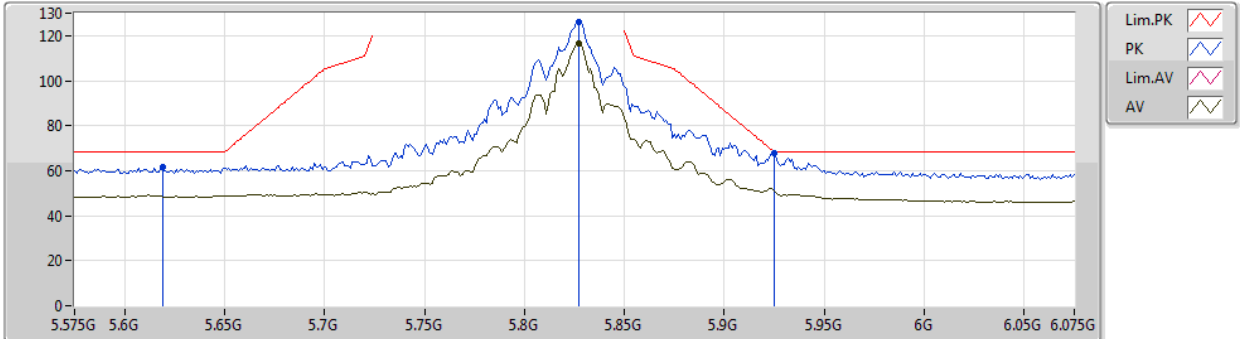


EUT\_Z\_4TX  
Setting 109  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|
| PK   | 5.619G       | 61.42             | 68.20             | -6.78          | 8.61           | 3           | Vertical  | 181            | 1.34          | -       | 52.81         |
| PK   | 5.827G       | 126.16            | Inf               | -Inf           | 8.91           | 3           | Vertical  | 181            | 1.34          | -       | 117.25        |
| AV   | 5.827G       | 116.55            | Inf               | -Inf           | 8.91           | 3           | Vertical  | 181            | 1.34          | -       | 107.64        |
| PK   | 5.925G       | 67.97             | 68.20             | -0.23          | 8.93           | 3           | Vertical  | 181            | 1.34          | -       | 59.04         |

## 802.11a\_Nss1,(6Mbps)\_4TX

## 5825MHz\_TX

08/11/2019

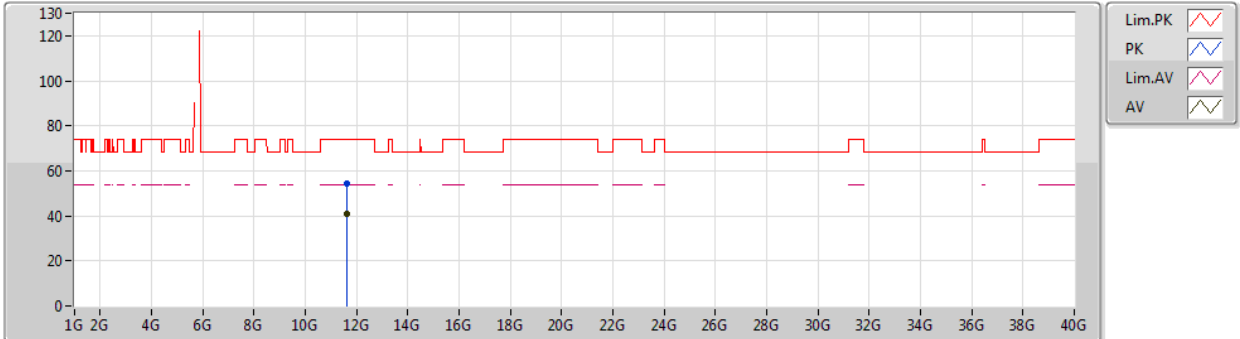


EUT\_Z\_4TX  
Setting 109  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.6437G     | 54.16             | 74.00             | -19.84         | 15.08          | 3           | Vertical  | 337            | 1.72          | -       | 39.08         |  |  |  |
| AV   | 11.6458G     | 40.65             | 54.00             | -13.35         | 15.09          | 3           | Vertical  | 337            | 1.72          | -       | 25.56         |  |  |  |

## 802.11a\_Nss1,(6Mbps)\_4TX

## 5825MHz\_TX

08/11/2019

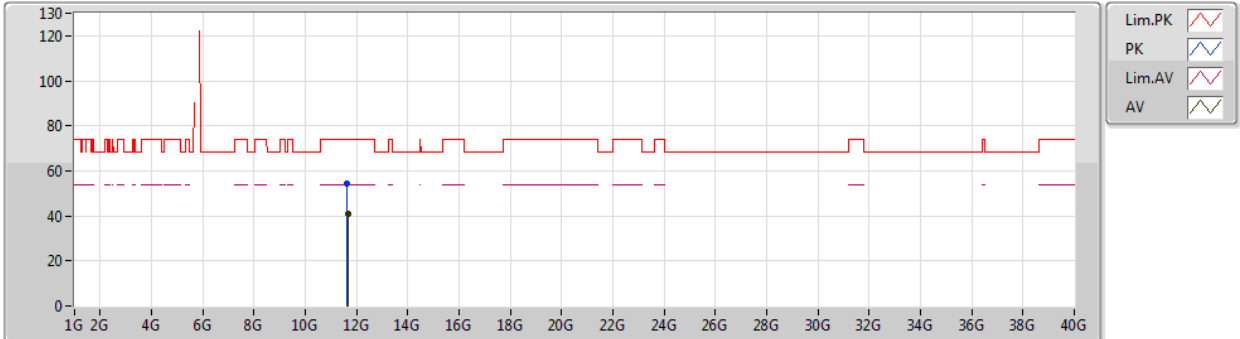


EUT\_Z\_4TX  
Setting 109  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.64148G    | 54.40             | 74.00             | -19.60         | 15.08          | 3           | Horizontal | 222            | 1.18          | -       | 39.32         |  |  |  |
| AV   | 11.64994G    | 40.68             | 54.00             | -13.32         | 15.09          | 3           | Horizontal | 222            | 1.18          | -       | 25.59         |  |  |  |

## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

08/11/2019

## 5745MHz\_TX

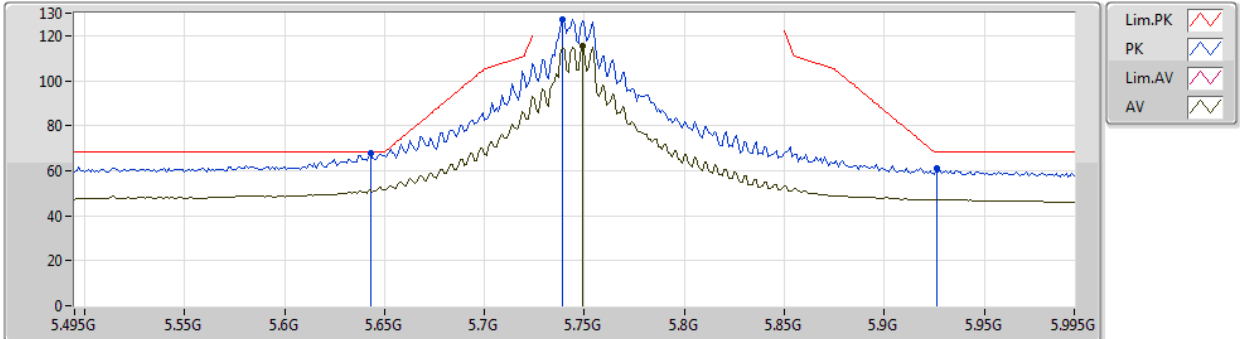


EUT\_Z\_4TX  
Setting 109  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.643G       | 67.98             | 68.20             | -0.22          | 8.66           | 3           | Vertical  | 194            | 1.48          | -       | 59.32         |  |  |  |
| PK   | 5.739G       | 127.46            | Inf               | -Inf           | 8.80           | 3           | Vertical  | 194            | 1.48          | -       | 118.66        |  |  |  |
| AV   | 5.749G       | 115.19            | Inf               | -Inf           | 8.82           | 3           | Vertical  | 194            | 1.48          | -       | 106.37        |  |  |  |
| PK   | 5.926G       | 60.86             | 68.20             | -7.34          | 8.93           | 3           | Vertical  | 194            | 1.48          | -       | 51.93         |  |  |  |

## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

08/11/2019

## 5745MHz\_TX

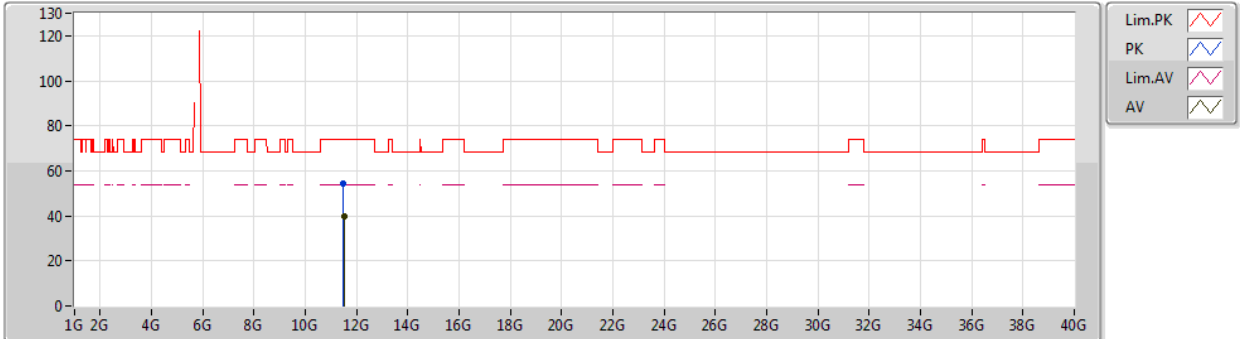


EUT\_Z\_4TX  
Setting 109  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.48604G    | 54.18             | 74.00             | -19.82         | 14.89          | 3           | Vertical  | 173            | 2.51          | -       | 39.29         |  |  |  |
| AV   | 11.50374G    | 39.52             | 54.00             | -14.48         | 14.91          | 3           | Vertical  | 173            | 2.51          | -       | 24.61         |  |  |  |

## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

08/11/2019

## 5745MHz\_TX

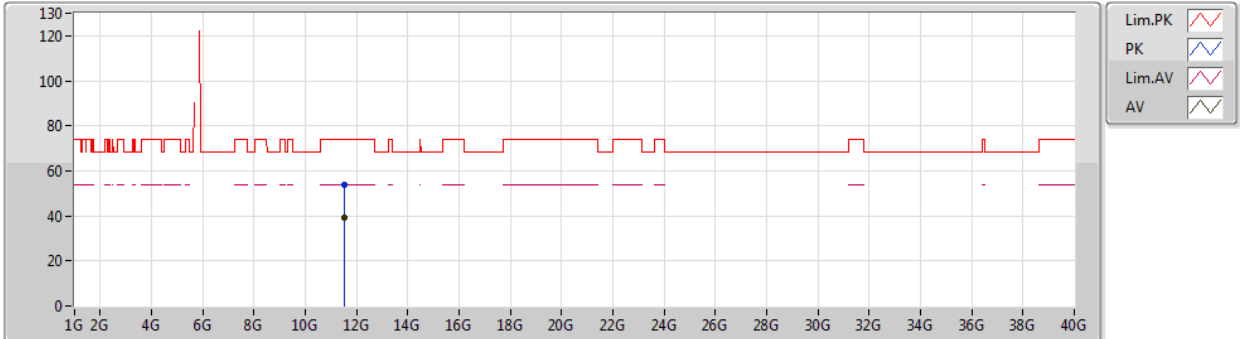


EUT\_Z\_4TX  
Setting 109  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.50422G    | 53.93             | 74.00             | -20.07         | 14.91          | 3           | Horizontal | 69             | 2.02          | -       | 39.02         |  |  |  |
| AV   | 11.5032G     | 39.46             | 54.00             | -14.54         | 14.91          | 3           | Horizontal | 69             | 2.02          | -       | 24.55         |  |  |  |

## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

08/11/2019

## 5785MHz\_TX

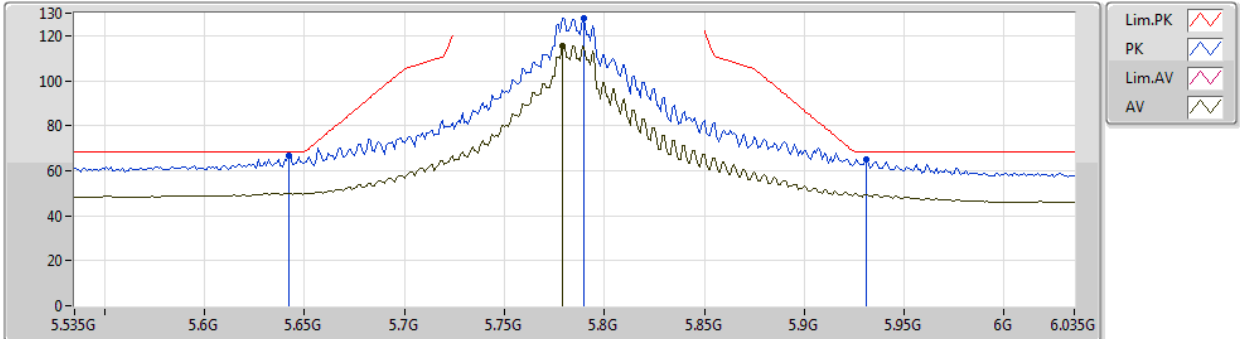


EUT\_Z\_4TX  
Setting 120  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.642G       | 66.65             | 68.20             | -1.55          | 8.66           | 3           | Vertical  | 192            | 1.37          | -       | 57.99         |  |  |  |
| PK   | 5.79G        | 127.73            | Inf               | -Inf           | 8.88           | 3           | Vertical  | 192            | 1.37          | -       | 118.85        |  |  |  |
| AV   | 5.779G       | 115.56            | Inf               | -Inf           | 8.87           | 3           | Vertical  | 192            | 1.37          | -       | 106.69        |  |  |  |
| PK   | 5.931G       | 64.80             | 68.20             | -3.40          | 8.93           | 3           | Vertical  | 192            | 1.37          | -       | 55.87         |  |  |  |

## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

08/11/2019

## 5785MHz\_TX

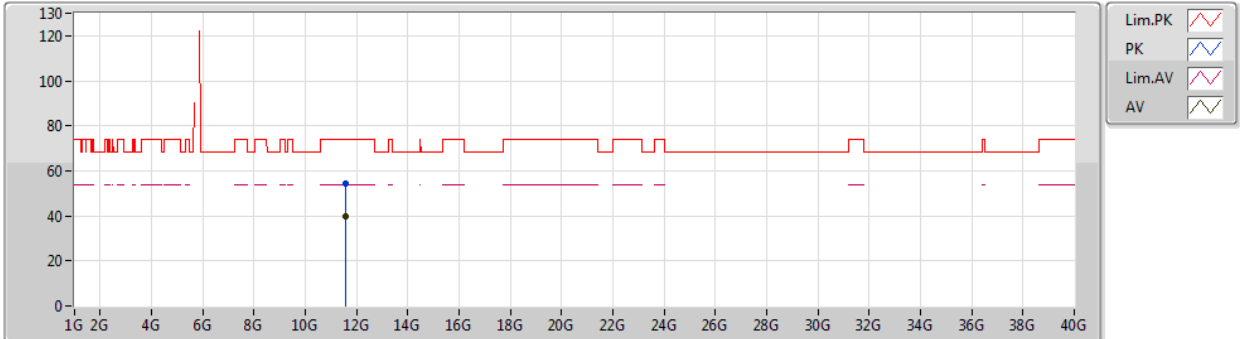


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.58098G    | 54.08             | 74.00             | -19.92         | 15.01          | 3           | Vertical  | 95             | 2.75          | -       | 39.07         |  |  |  |
| AV   | 11.57342G    | 39.67             | 54.00             | -14.33         | 15.00          | 3           | Vertical  | 95             | 2.75          | -       | 24.67         |  |  |  |

## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

08/11/2019

## 5785MHz\_TX

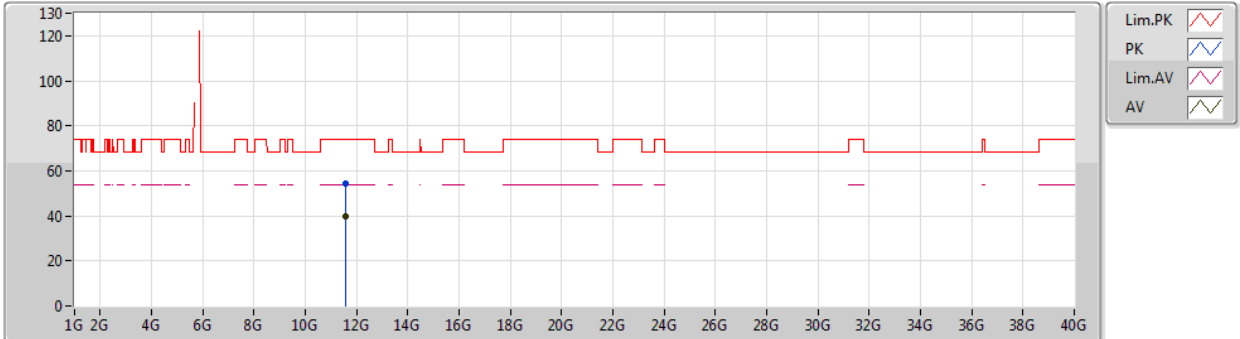


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.573G      | 54.32             | 74.00             | -19.68         | 15.00          | 3           | Horizontal | 77             | 2.88          | -       | 39.32         |  |  |  |
| AV   | 11.57924G    | 39.62             | 54.00             | -14.38         | 15.01          | 3           | Horizontal | 77             | 2.88          | -       | 24.61         |  |  |  |

## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

08/11/2019

## 5825MHz\_TX

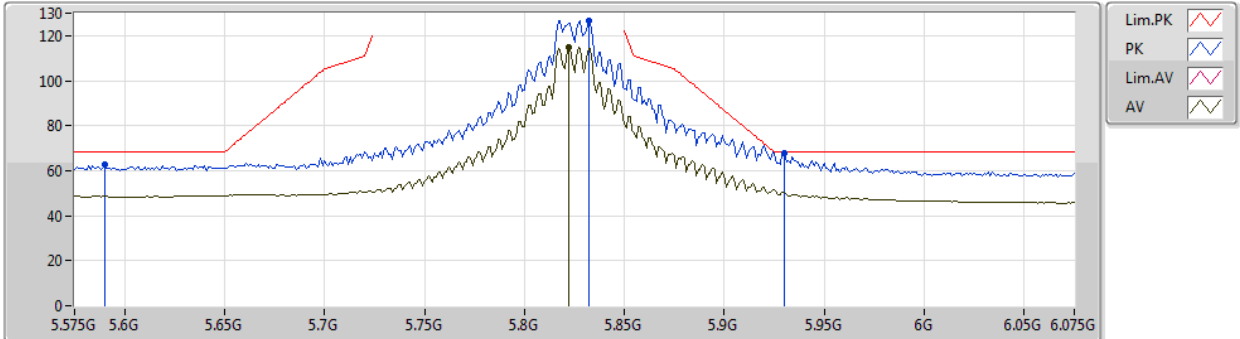


EUT\_Z\_4TX  
Setting 108  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.59G        | 62.74             | 68.20             | -5.46          | 8.57           | 3           | Vertical  | 183            | 2.42          | -       | 54.17         |  |  |  |
| PK   | 5.832G       | 126.88            | Inf               | -Inf           | 8.91           | 3           | Vertical  | 183            | 2.42          | -       | 117.97        |  |  |  |
| AV   | 5.822G       | 114.65            | Inf               | -Inf           | 8.90           | 3           | Vertical  | 183            | 2.42          | -       | 105.75        |  |  |  |
| PK   | 5.93G        | 67.96             | 68.20             | -0.24          | 8.93           | 3           | Vertical  | 183            | 2.42          | -       | 59.03         |  |  |  |

## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

08/11/2019

## 5825MHz\_TX

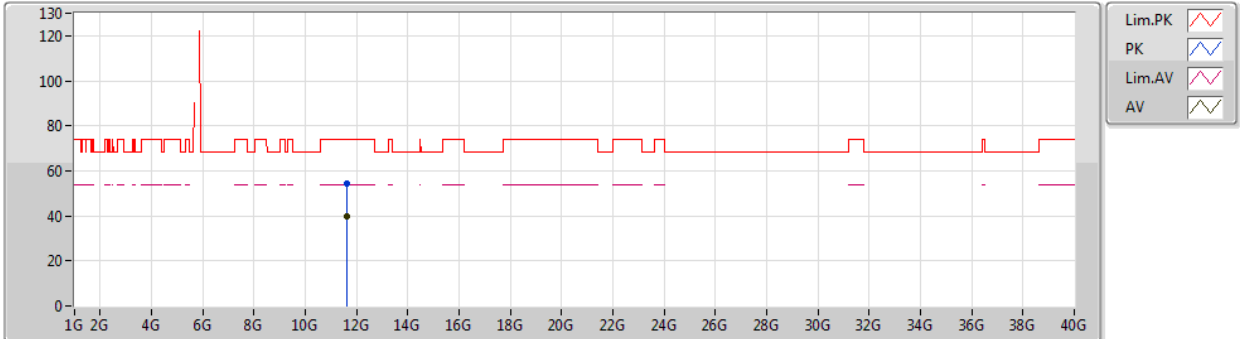


EUT\_Z\_4TX  
Setting 108  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.6452G     | 54.14             | 74.00             | -19.86         | 15.09          | 3           | Vertical  | 249            | 1.38          | -       | 39.05         |  |  |  |
| AV   | 11.64508G    | 39.68             | 54.00             | -14.32         | 15.09          | 3           | Vertical  | 249            | 1.38          | -       | 24.59         |  |  |  |

## 802.11ax HEW20\_Nss1,(MCS0)\_4TX

08/11/2019

## 5825MHz\_TX

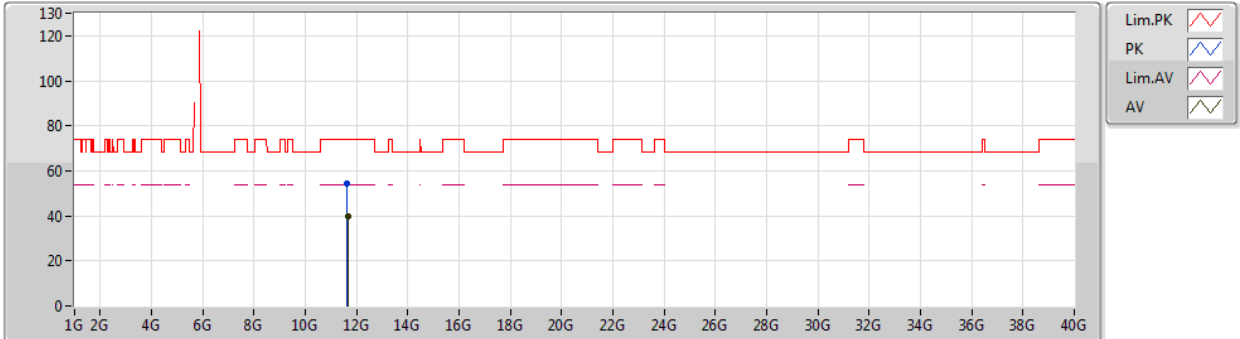


EUT\_Z\_4TX  
Setting 108  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.6473G     | 54.26             | 74.00             | -19.74         | 15.09          | 3           | Horizontal | 199            | 1.18          | -       | 39.17         |  |  |  |
| AV   | 11.65702G    | 39.66             | 54.00             | -14.34         | 15.11          | 3           | Horizontal | 199            | 1.18          | -       | 24.55         |  |  |  |

## 802.11ax HEW40\_Nss1,(MCS0)\_4TX

09/11/2019

## 5755MHz\_TX

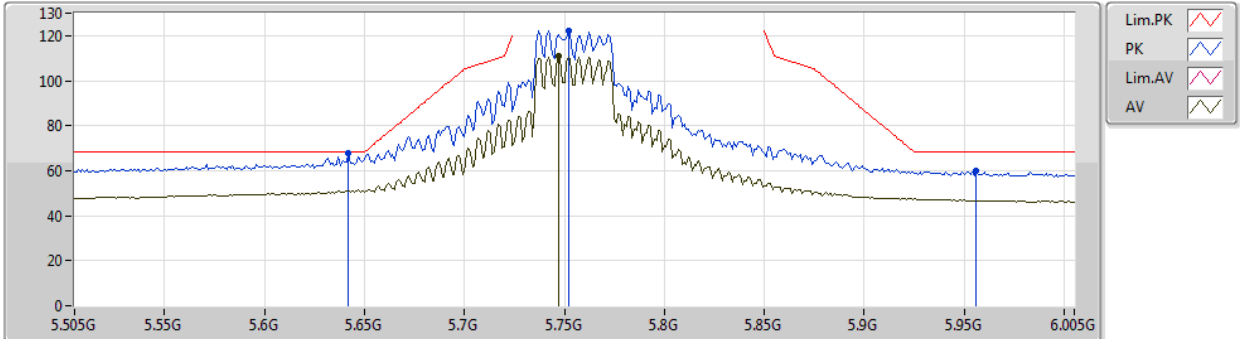


EUT\_Z\_4TX  
Setting 94  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.642G       | 67.99             | 68.20             | -0.21          | 8.66           | 3           | Vertical  | 193            | 2.59          | -       | 59.33         |  |  |  |
| PK   | 5.752G       | 122.32            | Inf               | -Inf           | 8.83           | 3           | Vertical  | 193            | 2.59          | -       | 113.49        |  |  |  |
| AV   | 5.747G       | 110.99            | Inf               | -Inf           | 8.82           | 3           | Vertical  | 193            | 2.59          | -       | 102.17        |  |  |  |
| PK   | 5.956G       | 59.87             | 68.20             | -8.33          | 8.92           | 3           | Vertical  | 193            | 2.59          | -       | 50.95         |  |  |  |

## 802.11ax HEW40\_Nss1,(MCS0)\_4TX

09/11/2019

## 5755MHz\_TX

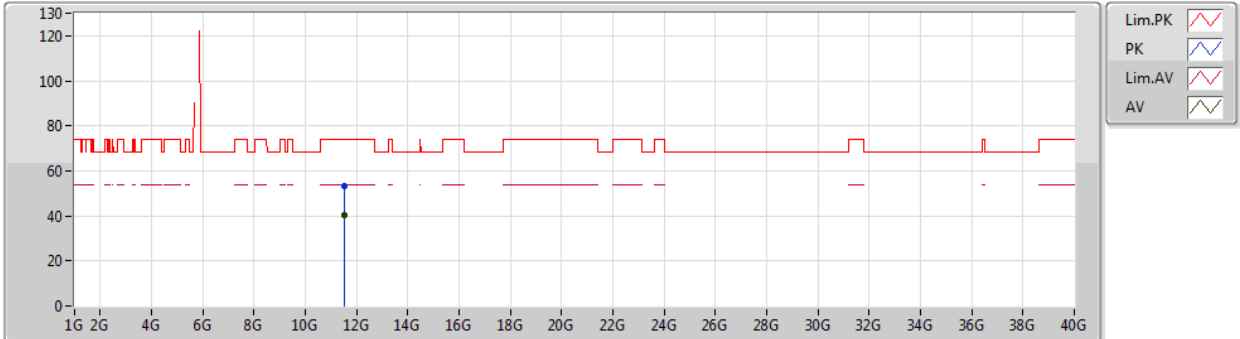


EUT\_Z\_4TX  
Setting 94  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.51984G    | 53.43             | 74.00             | -20.57         | 14.94          | 3           | Vertical  | 74             | 1.10          | -       | 38.49         |  |  |  |
| AV   | 11.5082G     | 40.51             | 54.00             | -13.49         | 14.92          | 3           | Vertical  | 74             | 1.10          | -       | 25.59         |  |  |  |

## 802.11ax HEW40\_Nss1,(MCS0)\_4TX

## 5755MHz\_TX

09/11/2019

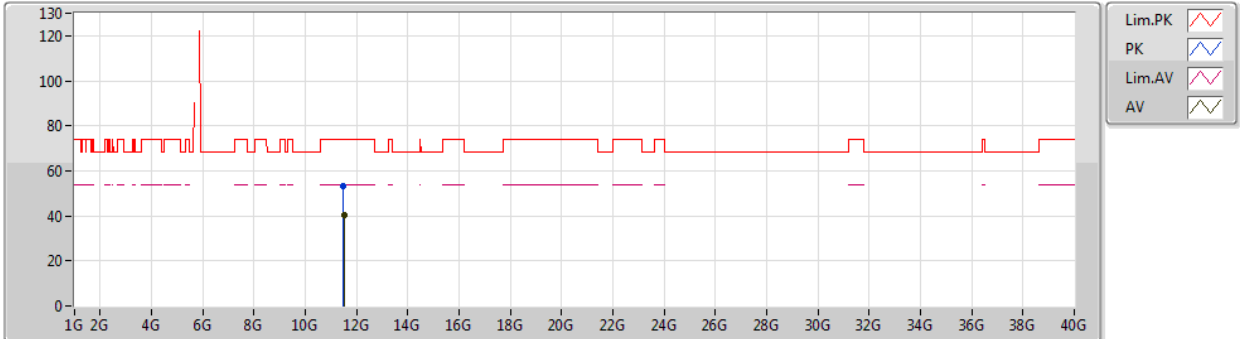


EUT\_Z\_4TX  
Setting 94  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.49962G    | 53.16             | 74.00             | -20.84         | 14.90          | 3           | Horizontal | 227            | 1.65          | -       | 38.26         |  |  |  |
| AV   | 11.50496G    | 40.29             | 54.00             | -13.71         | 14.91          | 3           | Horizontal | 227            | 1.65          | -       | 25.38         |  |  |  |

## 802.11ax HEW40\_Nss1,(MCS0)\_4TX

08/11/2019

## 5795MHz\_TX

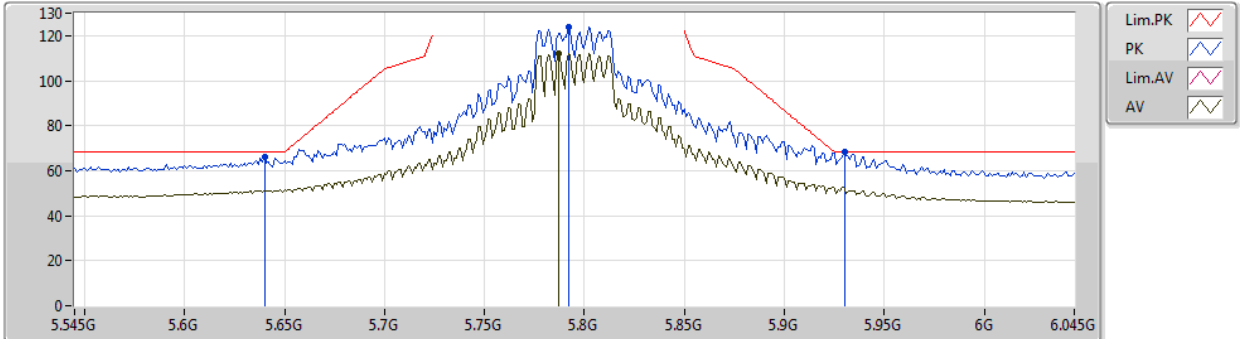


EUT\_Z\_4TX  
Setting 100  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.64G        | 66.33             | 68.20             | -1.87          | 8.65           | 3           | Vertical  | 186            | 2.54          | -       | 57.68         |  |  |  |
| PK   | 5.792G       | 123.97            | Inf               | -Inf           | 8.89           | 3           | Vertical  | 186            | 2.54          | -       | 115.08        |  |  |  |
| AV   | 5.787G       | 112.06            | Inf               | -Inf           | 8.88           | 3           | Vertical  | 186            | 2.54          | -       | 103.18        |  |  |  |
| PK   | 5.93G        | 68.14             | 68.20             | -0.06          | 8.93           | 3           | Vertical  | 186            | 2.54          | -       | 59.21         |  |  |  |

## 802.11ax HEW40\_Nss1,(MCS0)\_4TX

08/11/2019

## 5795MHz\_TX

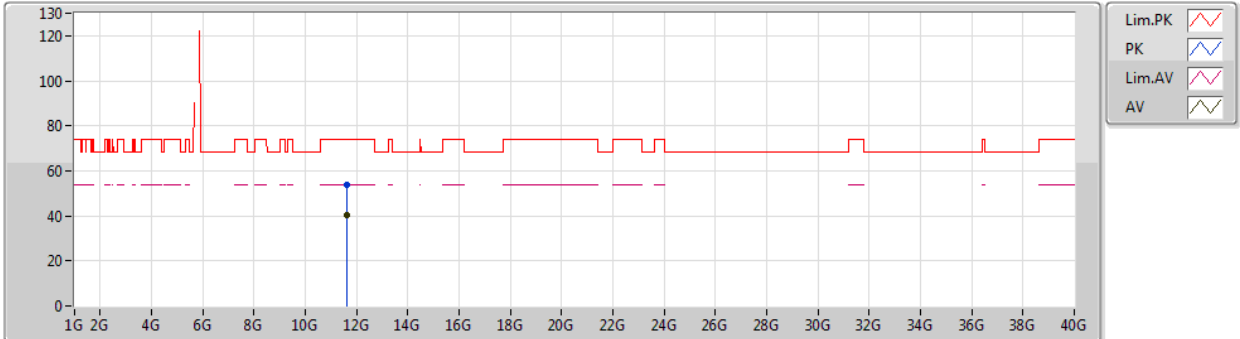


EUT\_Z\_4TX  
Setting 100  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.60428G    | 53.91             | 74.00             | -20.09         | 15.04          | 3           | Vertical  | 125            | 2.81          | -       | 38.87         |  |  |  |
| AV   | 11.60856G    | 40.54             | 54.00             | -13.46         | 15.05          | 3           | Vertical  | 125            | 2.81          | -       | 25.49         |  |  |  |

## 802.11ax HEW40\_Nss1,(MCS0)\_4TX

08/11/2019

## 5795MHz\_TX

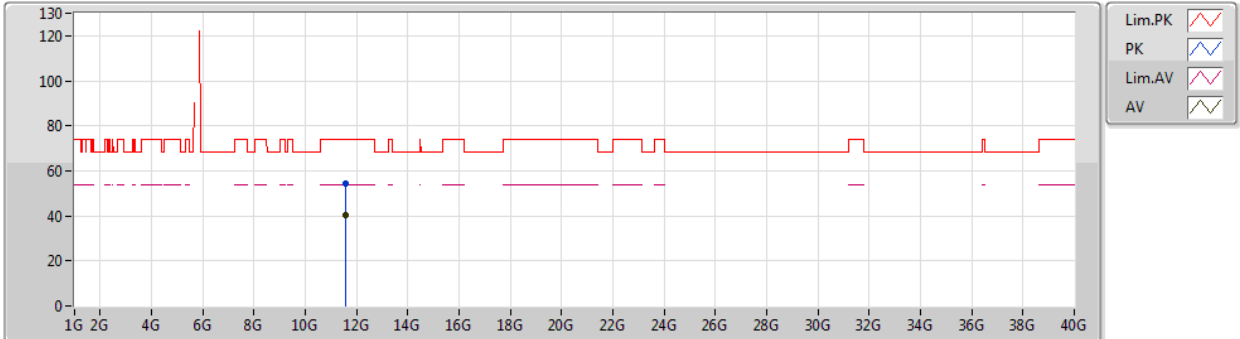


EUT\_Z\_4TX  
Setting 100  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|
| PK   | 11.59516G    | 54.48             | 74.00             | -19.52         | 15.04          | 3           | Horizontal | 311            | 2.44          | -       | 39.44         |
| AV   | 11.58796G    | 40.43             | 54.00             | -13.57         | 15.02          | 3           | Horizontal | 311            | 2.44          | -       | 25.41         |

## 802.11ax HEW80\_Nss1,(MCS0)\_4TX

20/11/2019

## 5775MHz\_TX

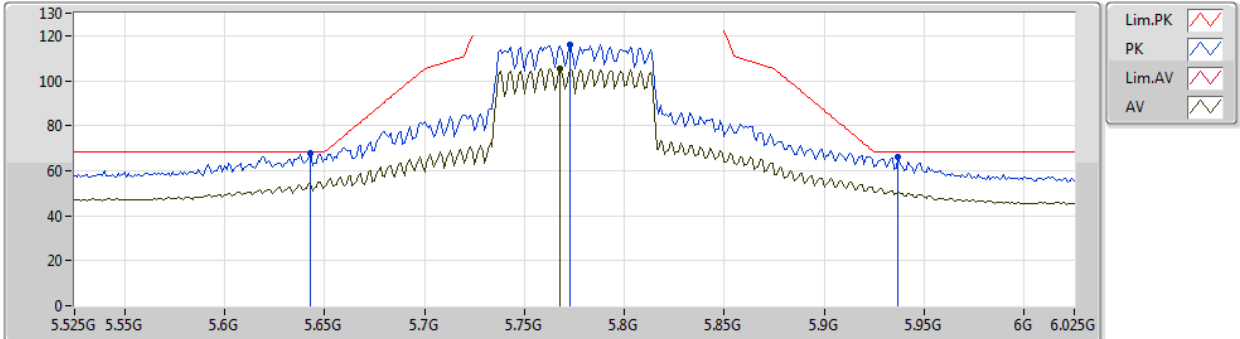


EUT\_Z\_4TX  
Setting 88  
06-S-5-10  
FSP

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.643G       | 67.89             | 68.20             | -0.31          | 4.96           | 3           | Vertical  | 91             | 1.50          | -       | 62.93         |  |  |  |
| PK   | 5.773G       | 115.84            | Inf               | -Inf           | 5.36           | 3           | Vertical  | 91             | 1.50          | -       | 110.48        |  |  |  |
| AV   | 5.768G       | 105.60            | Inf               | -Inf           | 5.34           | 3           | Vertical  | 91             | 1.50          | -       | 100.26        |  |  |  |
| PK   | 5.937G       | 65.94             | 68.20             | -2.26          | 5.79           | 3           | Vertical  | 91             | 1.50          | -       | 60.15         |  |  |  |

## 802.11ax HEW80\_Nss1,(MCS0)\_4TX

29/11/2019

## 5775MHz\_TX

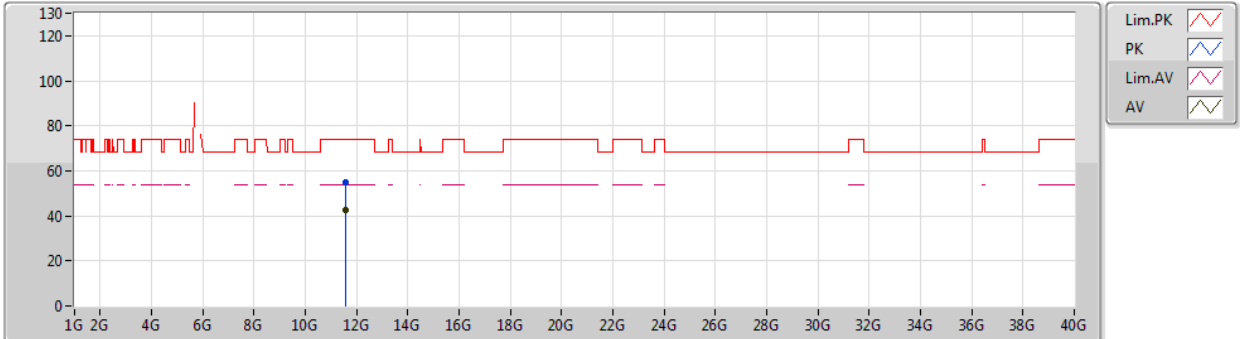


EUT\_Z\_4TX  
Setting 88  
03-C-P-2

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.55388G    | 54.97             | 74.00             | -19.03         | 13.79          | 3           | Vertical  | 250            | 1.30          | -       | 41.18         |  |  |  |
| AV   | 11.5546G     | 42.57             | 54.00             | -11.43         | 13.79          | 3           | Vertical  | 250            | 1.30          | -       | 28.78         |  |  |  |

## 802.11ax HEW80\_Nss1,(MCS0)\_4TX

29/11/2019

## 5775MHz\_TX

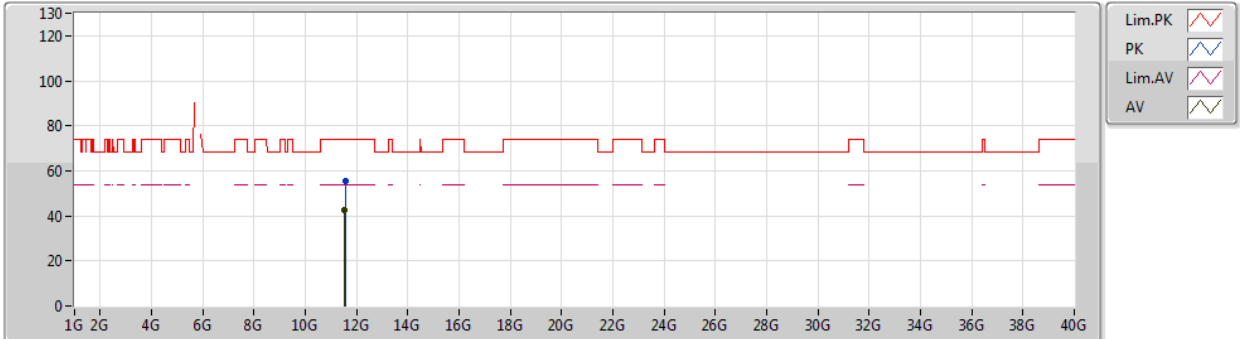


EUT\_Z\_4TX  
Setting 88  
03-C-P-2

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.5499G     | 55.66             | 74.00             | -18.34         | 13.78          | 3           | Horizontal | 168            | 1.64          | -       | 41.88         |  |  |  |
| AV   | 11.54534G    | 42.80             | 54.00             | -11.20         | 13.78          | 3           | Horizontal | 168            | 1.64          | -       | 29.02         |  |  |  |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5745MHz\_TX

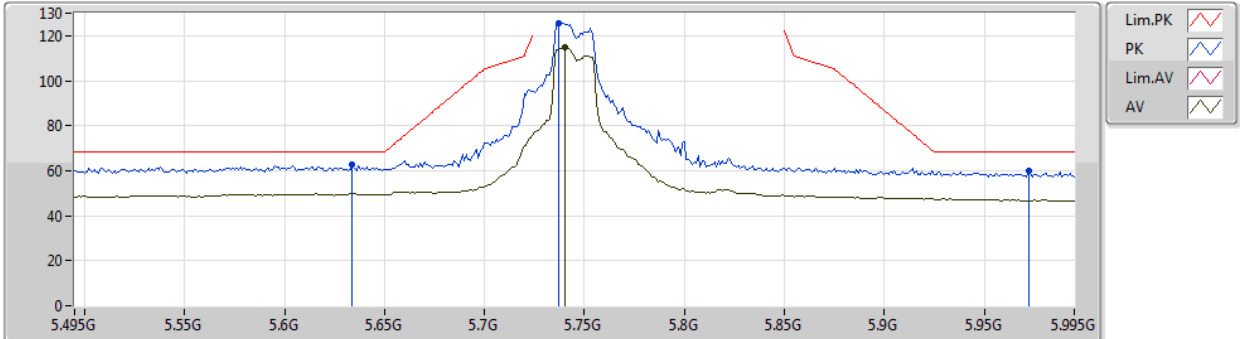


EUT\_Z\_4TX  
Setting 120  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|
| PK   | 5.634G       | 62.75             | 68.20             | -5.45          | 8.64           | 3           | Vertical  | 285            | 1.51          | -       | 54.11         |
| PK   | 5.737G       | 125.59            | Inf               | -Inf           | 8.81           | 3           | Vertical  | 285            | 1.51          | -       | 116.78        |
| AV   | 5.74G        | 114.68            | Inf               | -Inf           | 8.80           | 3           | Vertical  | 285            | 1.51          | -       | 105.88        |
| PK   | 5.972G       | 60.03             | 68.20             | -8.17          | 8.93           | 3           | Vertical  | 285            | 1.51          | -       | 51.10         |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5745MHz\_TX

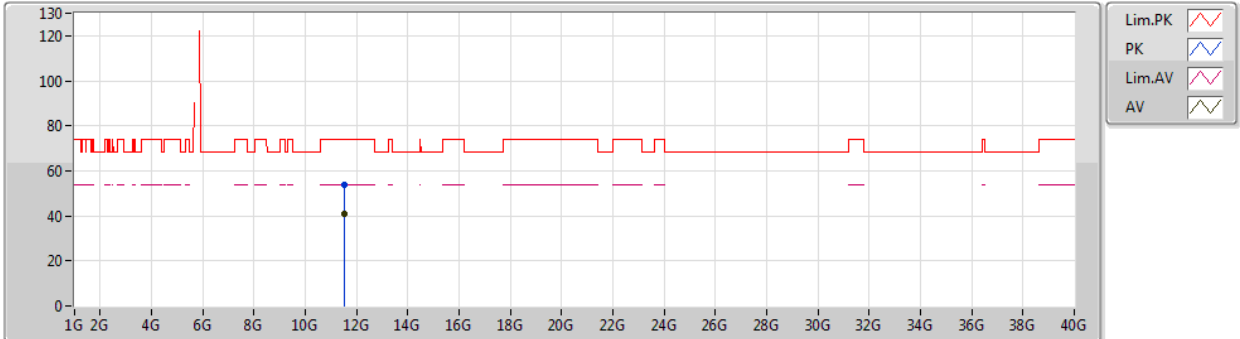


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.50236G    | 53.80             | 74.00             | -20.20         | 14.91          | 3           | Vertical  | 142            | 1.04          | -       | 38.89         |  |  |  |
| AV   | 11.50332G    | 41.07             | 54.00             | -12.93         | 14.91          | 3           | Vertical  | 142            | 1.04          | -       | 26.16         |  |  |  |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5745MHz\_TX

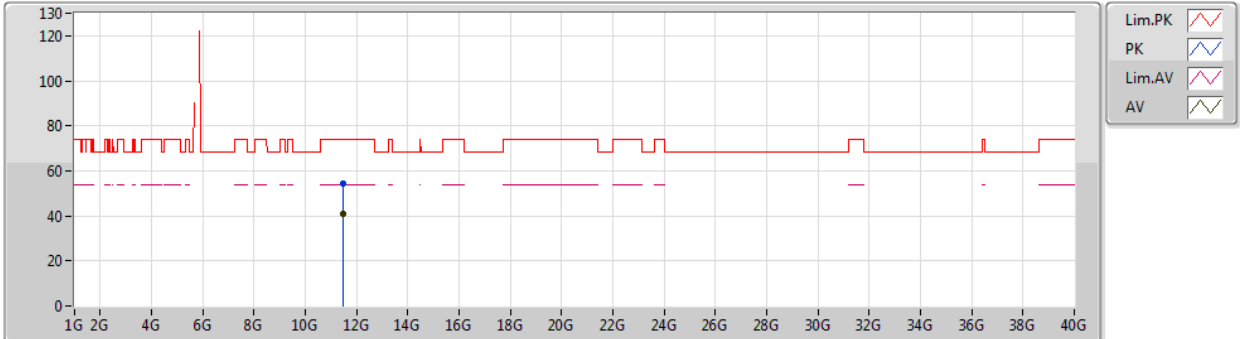


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.48394G    | 54.35             | 74.00             | -19.65         | 14.89          | 3           | Horizontal | 273            | 1.20          | -       | 39.46         |  |  |  |
| AV   | 11.48592G    | 40.86             | 54.00             | -13.14         | 14.89          | 3           | Horizontal | 273            | 1.20          | -       | 25.97         |  |  |  |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5785MHz\_TX

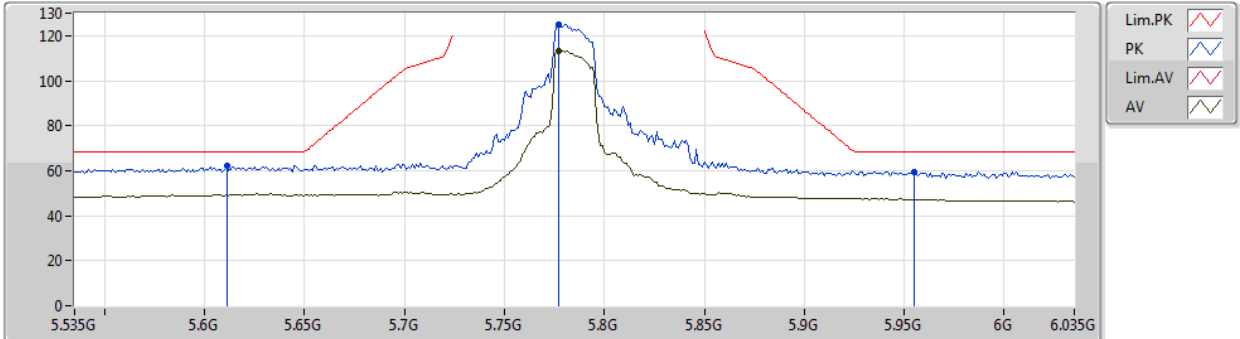


EUT\_Z\_4TX  
Setting 120  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.611G       | 62.17             | 68.20             | -6.03          | 8.61           | 3           | Vertical  | 280            | 1.61          | -       | 53.56         |  |  |  |
| PK   | 5.777G       | 125.21            | Inf               | -Inf           | 8.87           | 3           | Vertical  | 280            | 1.61          | -       | 116.34        |  |  |  |
| AV   | 5.777G       | 113.28            | Inf               | -Inf           | 8.87           | 3           | Vertical  | 280            | 1.61          | -       | 104.41        |  |  |  |
| PK   | 5.955G       | 59.67             | 68.20             | -8.53          | 8.92           | 3           | Vertical  | 280            | 1.61          | -       | 50.75         |  |  |  |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5785MHz\_TX

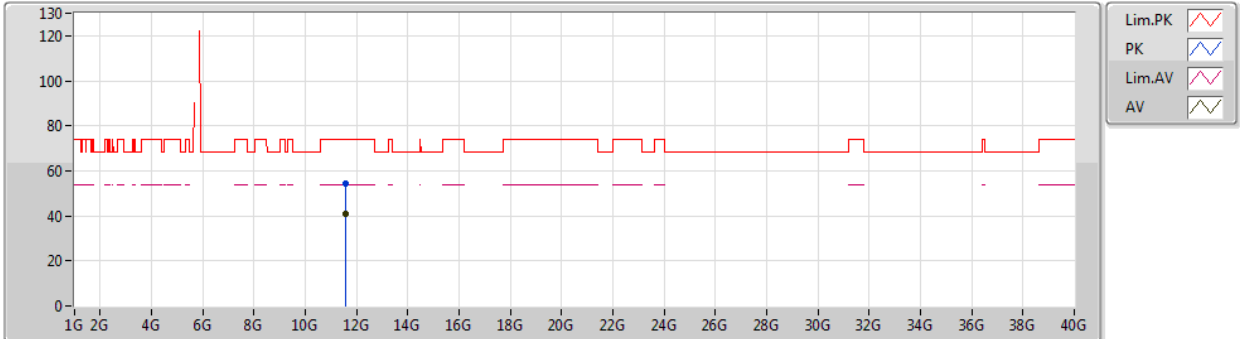


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.58278G    | 54.28             | 74.00             | -19.72         | 15.02          | 3           | Vertical  | 183            | 2.84          | -       | 39.26         |  |  |  |
| AV   | 11.57756G    | 40.88             | 54.00             | -13.12         | 15.01          | 3           | Vertical  | 183            | 2.84          | -       | 25.87         |  |  |  |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5785MHz\_TX

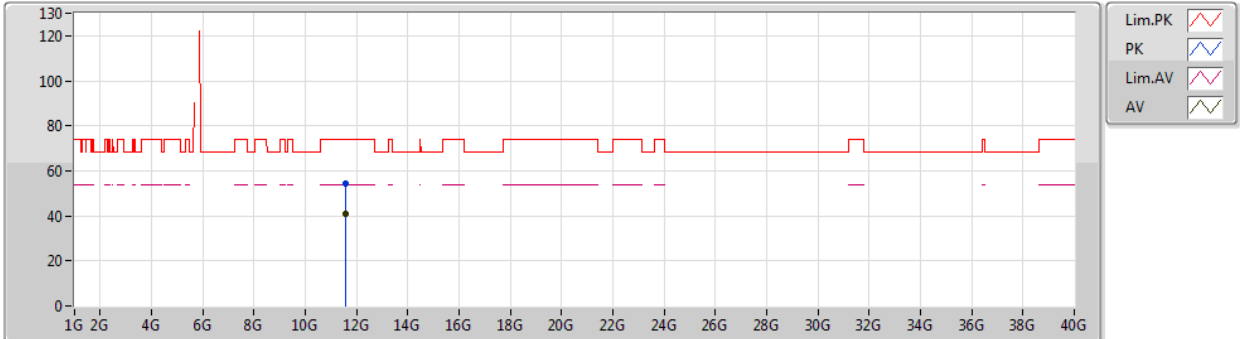


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.57624G    | 54.24             | 74.00             | -19.76         | 15.01          | 3           | Horizontal | 325            | 1.20          | -       | 39.23         |  |  |  |
| AV   | 11.58068G    | 40.84             | 54.00             | -13.16         | 15.01          | 3           | Horizontal | 325            | 1.20          | -       | 25.83         |  |  |  |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5825MHz\_TX

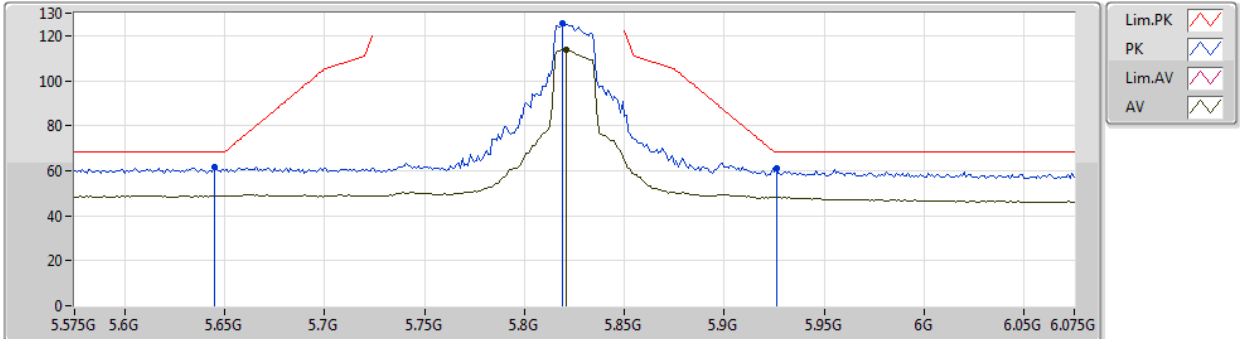


EUT\_Z\_4TX  
Setting 120  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.645G       | 61.70             | 68.20             | -6.50          | 8.66           | 3           | Vertical  | 279            | 1.49          | -       | 53.04         |  |  |  |
| PK   | 5.819G       | 125.35            | Inf               | -Inf           | 8.90           | 3           | Vertical  | 279            | 1.49          | -       | 116.45        |  |  |  |
| AV   | 5.821G       | 113.80            | Inf               | -Inf           | 8.90           | 3           | Vertical  | 279            | 1.49          | -       | 104.90        |  |  |  |
| PK   | 5.926G       | 61.05             | 68.20             | -7.15          | 8.93           | 3           | Vertical  | 279            | 1.49          | -       | 52.12         |  |  |  |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5825MHz\_TX

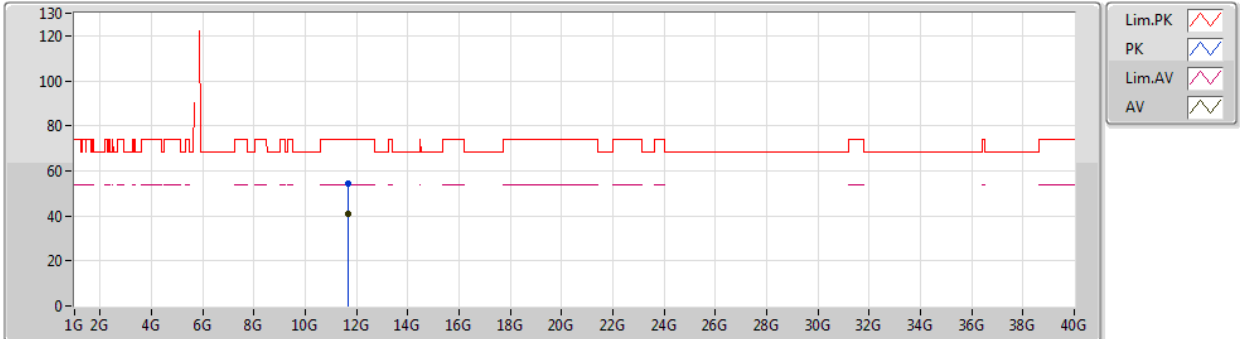


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.6524G     | 54.17             | 74.00             | -19.83         | 15.10          | 3           | Vertical  | 295            | 1.54          | -       | 39.07         |  |  |  |
| AV   | 11.65012G    | 40.92             | 54.00             | -13.08         | 15.09          | 3           | Vertical  | 295            | 1.54          | -       | 25.83         |  |  |  |

## 802.11ax HEW20-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5825MHz\_TX

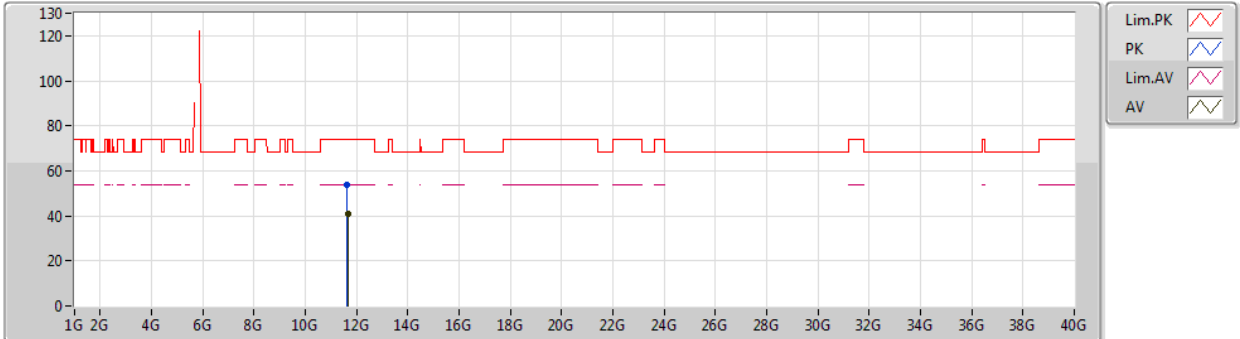


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.64334G    | 53.98             | 74.00             | -20.02         | 15.08          | 3           | Horizontal | 204            | 2.90          | -       | 38.90         |  |  |  |
| AV   | 11.65054G    | 40.78             | 54.00             | -13.22         | 15.09          | 3           | Horizontal | 204            | 2.90          | -       | 25.69         |  |  |  |

## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5755MHz\_TX

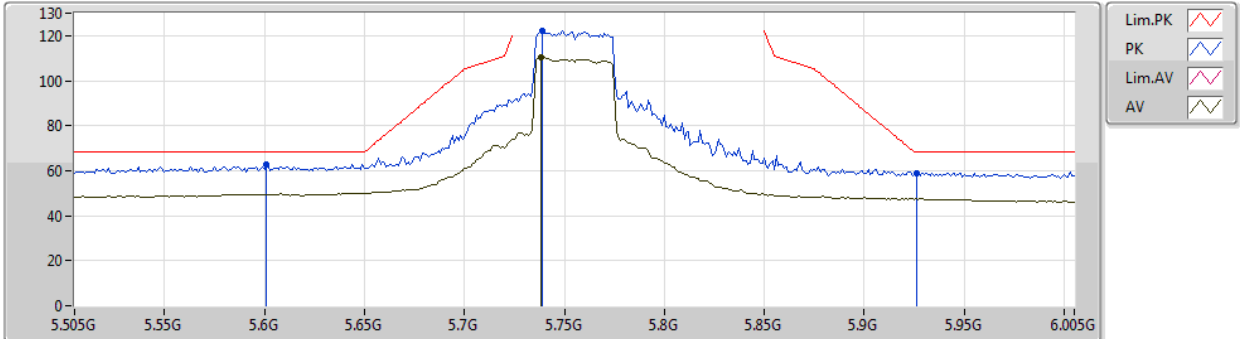


EUT\_Z\_4TX  
Setting 120  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.601G       | 63.01             | 68.20             | -5.19          | 8.58           | 3           | Vertical  | 248            | 1.76          | -       | 54.43         |  |  |  |
| PK   | 5.739G       | 122.23            | Inf               | -Inf           | 8.80           | 3           | Vertical  | 248            | 1.76          | -       | 113.43        |  |  |  |
| AV   | 5.738G       | 110.31            | Inf               | -Inf           | 8.80           | 3           | Vertical  | 248            | 1.76          | -       | 101.51        |  |  |  |
| PK   | 5.926G       | 59.07             | 68.20             | -9.13          | 8.93           | 3           | Vertical  | 248            | 1.76          | -       | 50.14         |  |  |  |

## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5755MHz\_TX

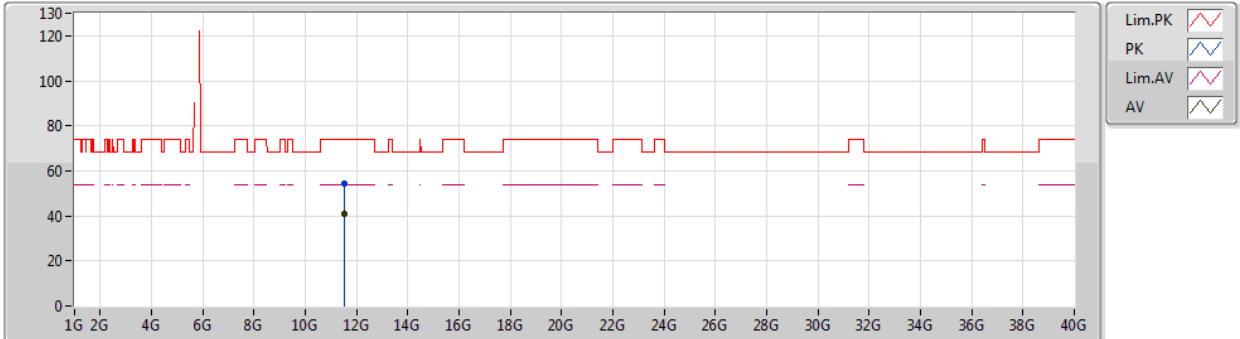


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.5112G     | 54.32             | 74.00             | -19.68         | 14.92          | 3           | Vertical  | 297            | 2.47          | -       | 39.40         |  |  |  |
| AV   | 11.50394G    | 40.63             | 54.00             | -13.37         | 14.91          | 3           | Vertical  | 297            | 2.47          | -       | 25.72         |  |  |  |

## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5755MHz\_TX

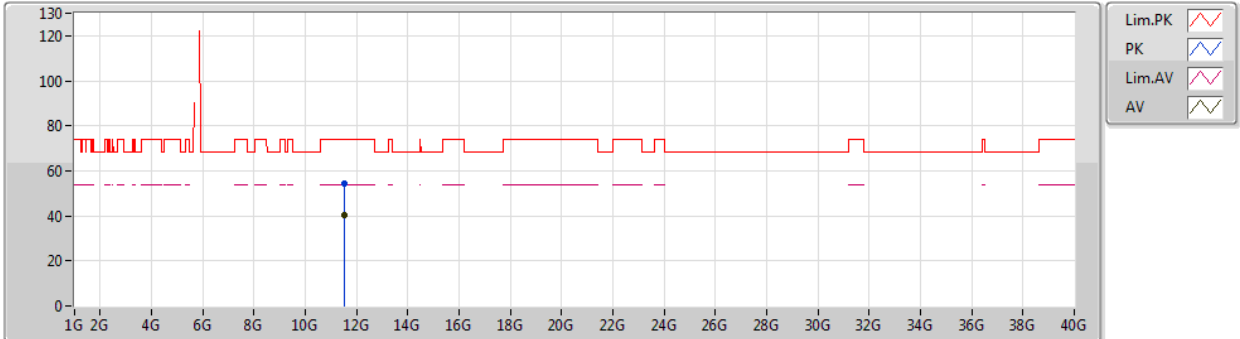


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.52266G    | 54.17             | 74.00             | -19.83         | 14.94          | 3           | Horizontal | 249            | 2.68          | -       | 39.23         |  |  |  |
| AV   | 11.51102G    | 40.51             | 54.00             | -13.49         | 14.92          | 3           | Horizontal | 249            | 2.68          | -       | 25.59         |  |  |  |

## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5795MHz\_TX

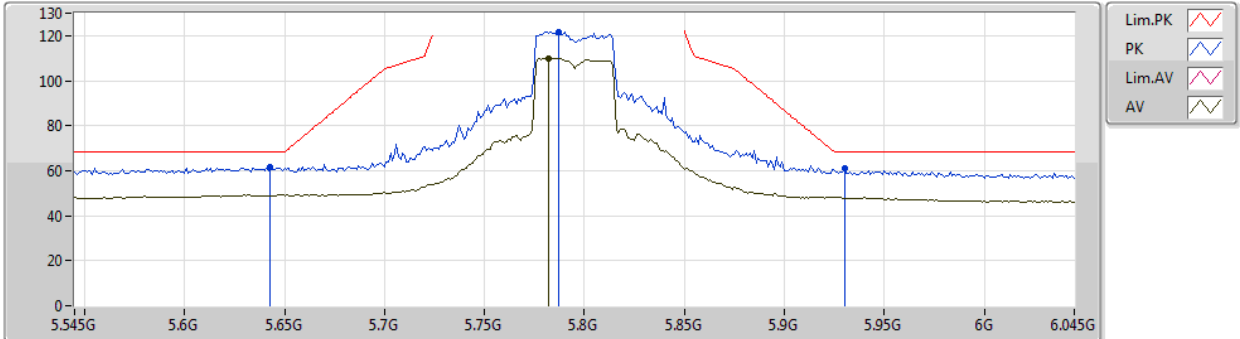


EUT\_Z\_4TX  
Setting 120  
02-C-4-10  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.643G       | 61.82             | 68.20             | -6.38          | 8.66           | 3           | Vertical  | 282            | 1.49          | -       | 53.16         |  |  |  |
| PK   | 5.787G       | 121.66            | Inf               | -Inf           | 8.88           | 3           | Vertical  | 282            | 1.49          | -       | 112.78        |  |  |  |
| AV   | 5.782G       | 110.03            | Inf               | -Inf           | 8.88           | 3           | Vertical  | 282            | 1.49          | -       | 101.15        |  |  |  |
| PK   | 5.93G        | 60.90             | 68.20             | -7.30          | 8.93           | 3           | Vertical  | 282            | 1.49          | -       | 51.97         |  |  |  |

## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5795MHz\_TX

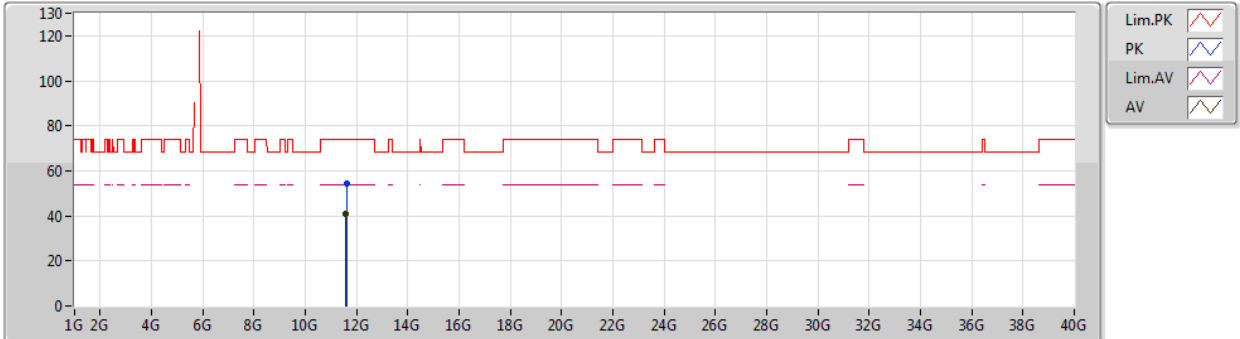


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.6035G     | 54.26             | 74.00             | -19.74         | 15.04          | 3           | Vertical  | 43             | 2.45          | -       | 39.22         |  |  |  |
| AV   | 11.5954G     | 40.85             | 54.00             | -13.15         | 15.04          | 3           | Vertical  | 43             | 2.45          | -       | 25.81         |  |  |  |

## 802.11ax HEW40-BF\_Nss1,(MCS0)\_4TX

09/11/2019

## 5795MHz\_TX

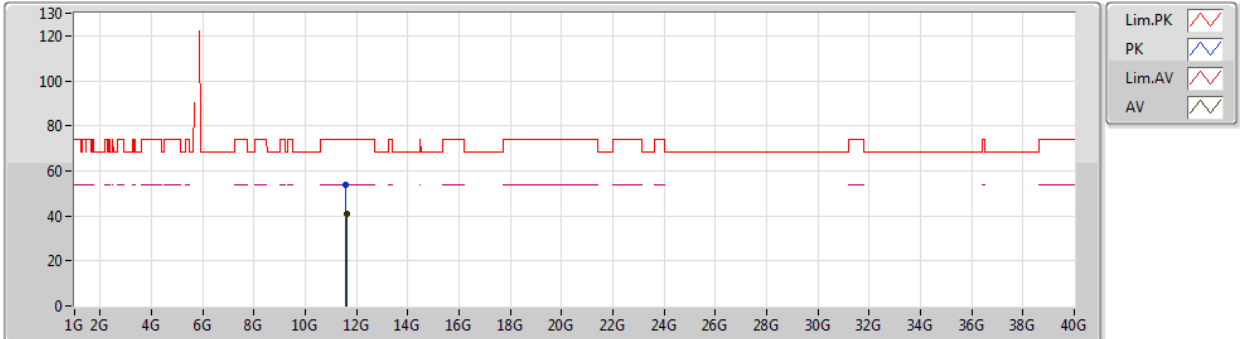


EUT\_Z\_4TX  
Setting 120  
02-C-4  
FSU(100015)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.59474G    | 53.98             | 74.00             | -20.02         | 15.04          | 3           | Horizontal | 22             | 1.63          | -       | 38.94         |  |  |  |
| AV   | 11.60008G    | 40.74             | 54.00             | -13.26         | 15.04          | 3           | Horizontal | 22             | 1.63          | -       | 25.70         |  |  |  |

## 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

07/01/2020

## 5775MHz\_TX

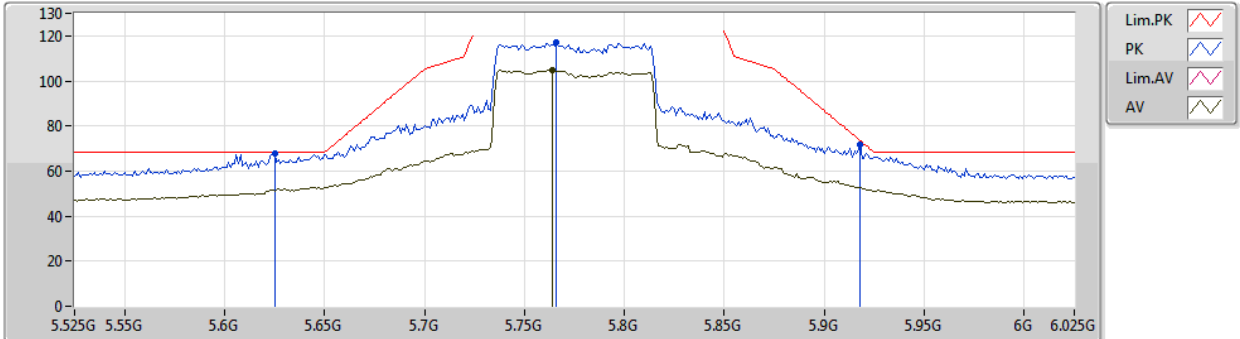


EUT Z\_4TX  
Setting 86  
04-F-Z-1-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.625G       | 67.81             | 68.20             | -0.39          | 5.39           | 3           | Vertical  | 279            | 1.50          | -       | 62.42         |  |  |  |
| PK   | 5.766G       | 117.04            | Inf               | -Inf           | 5.50           | 3           | Vertical  | 279            | 1.50          | -       | 111.54        |  |  |  |
| AV   | 5.764G       | 104.77            | Inf               | -Inf           | 5.50           | 3           | Vertical  | 279            | 1.50          | -       | 99.27         |  |  |  |
| PK   | 5.918G       | 71.54             | 73.38             | -1.84          | 6.24           | 3           | Vertical  | 279            | 1.50          | -       | 65.30         |  |  |  |

## 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

07/01/2020

## 5775MHz\_TX

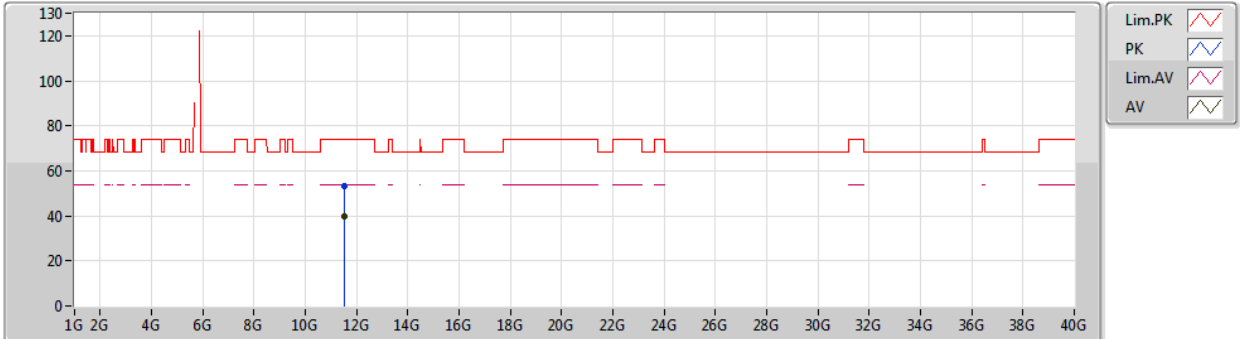


EUT\_Z\_4TX  
Setting 86  
04-F-Z-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.53506G    | 53.24             | 74.00             | -20.76         | 11.57          | 3           | Vertical  | 358            | 1.50          | -       | 41.67         |  |  |  |
| AV   | 11.5407G     | 40.02             | 54.00             | -13.98         | 11.57          | 3           | Vertical  | 358            | 1.50          | -       | 28.45         |  |  |  |

## 802.11ax HEW80-BF\_Nss1,(MCS0)\_4TX

07/01/2020

## 5775MHz\_TX

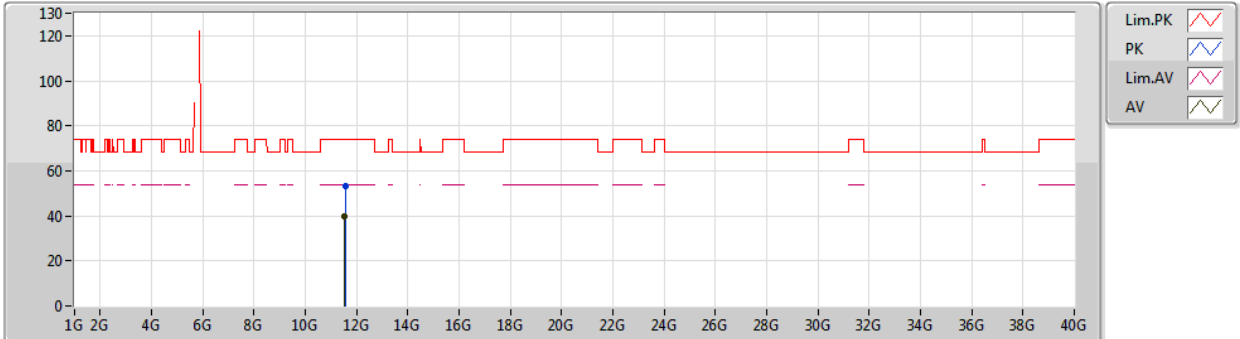

EUT\_Z\_4TX  
Setting 86  
04-F-Z-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.5626G     | 53.11             | 74.00             | -20.89         | 11.55          | 3           | Horizontal | 257            | 1.50          | -       | 41.56         |  |  |  |
| AV   | 11.53512G    | 39.92             | 54.00             | -14.08         | 11.57          | 3           | Horizontal | 257            | 1.50          | -       | 28.35         |  |  |  |




**Summary**

| Mode                              | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comments |
|-----------------------------------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|----------|
| 5.725-5.85GHz                     | -      | -    | -            | -                 | -                 | -              | -              | -           | -         | -              | -             | -        |
| 802.11ax HEW80-BF_Nss2,(MCS0)_4TX | Pass   | PK   | 5.631G       | 67.85             | 68.20             | -0.35          | 6.25           | 3           | Vertical  | 249            | 2.31          | -        |

## 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

14/11/2019

### 5745MHz\_TX

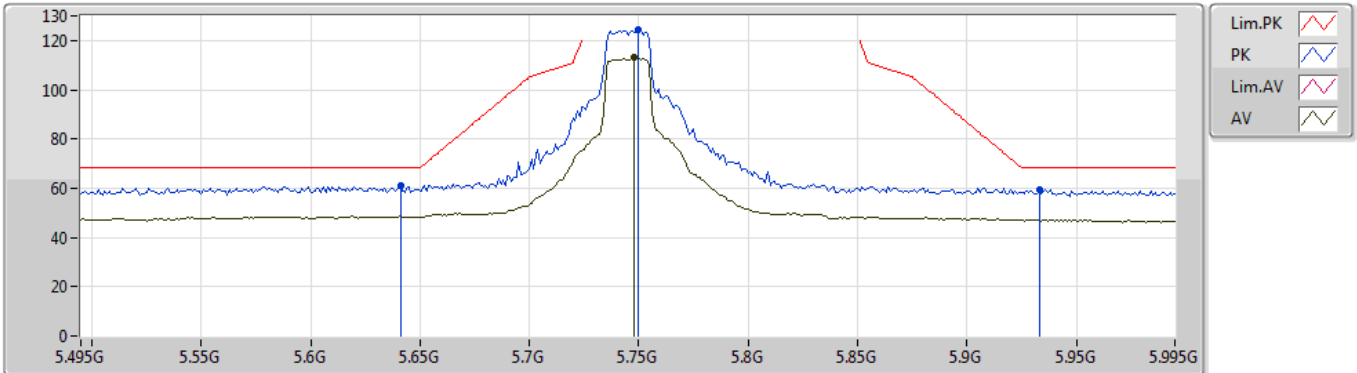


EUT\_Z\_4TX  
Setting 120  
03-C-4-10  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|
| PK   | 5.641G       | 60.90             | 68.20             | -7.30          | 6.24           | 3           | Vertical  | 56             | 1.61          | -       | 54.66         |
| PK   | 5.75G        | 124.26            | Inf               | -Inf           | 6.10           | 3           | Vertical  | 56             | 1.61          | -       | 118.16        |
| AV   | 5.748G       | 113.05            | Inf               | -Inf           | 6.11           | 3           | Vertical  | 56             | 1.61          | -       | 106.94        |
| PK   | 5.933G       | 59.59             | 68.20             | -8.61          | 6.43           | 3           | Vertical  | 56             | 1.61          | -       | 53.16         |

## 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5745MHz\_TX

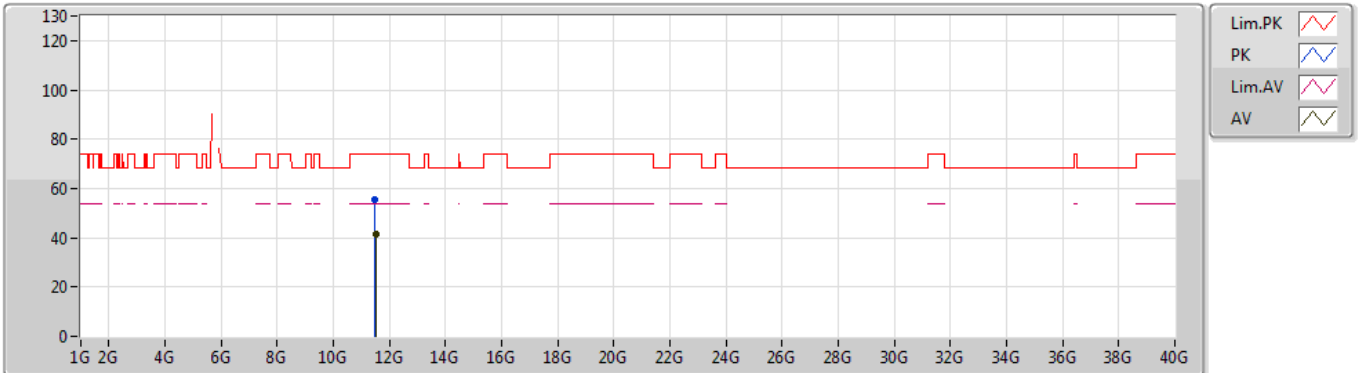


EUT\_Z\_4TX  
Setting 120  
03-C-4  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.48394G    | 55.29             | 74.00             | -18.71         | 13.74          | 3           | Vertical  | 41             | 1.24          | -       | 41.55         |  |  |  |
| AV   | 11.50062G    | 41.58             | 54.00             | -12.42         | 13.75          | 3           | Vertical  | 41             | 1.24          | -       | 27.83         |  |  |  |

# 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5745MHz\_TX

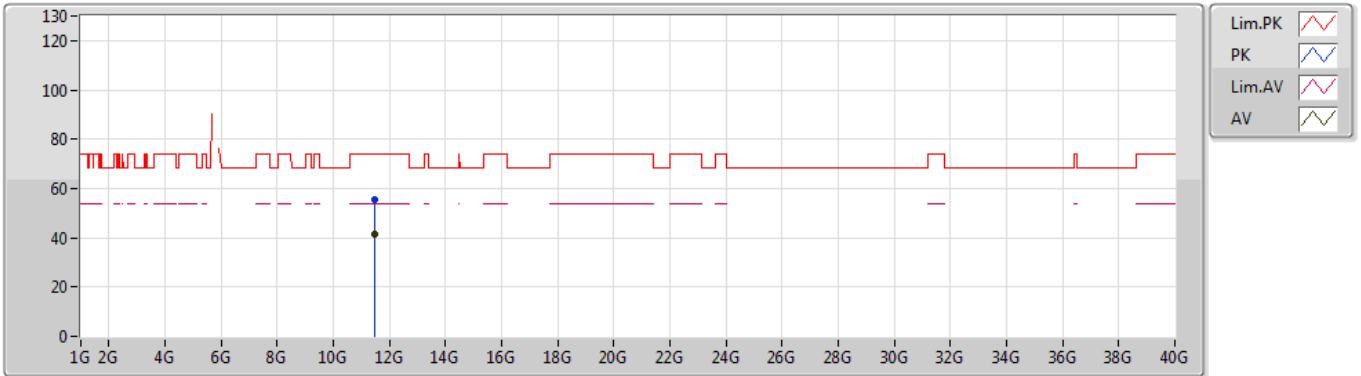


EUT\_Z\_4TX  
Setting 120  
03-C-4  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.47662G    | 55.61             | 74.00             | -18.39         | 13.72          | 3           | Horizontal | 320            | 2.41          | -       | 41.89         |  |  |  |
| AV   | 11.49816G    | 41.61             | 54.00             | -12.39         | 13.75          | 3           | Horizontal | 320            | 2.41          | -       | 27.86         |  |  |  |

## 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

14/11/2019

### 5785MHz\_TX

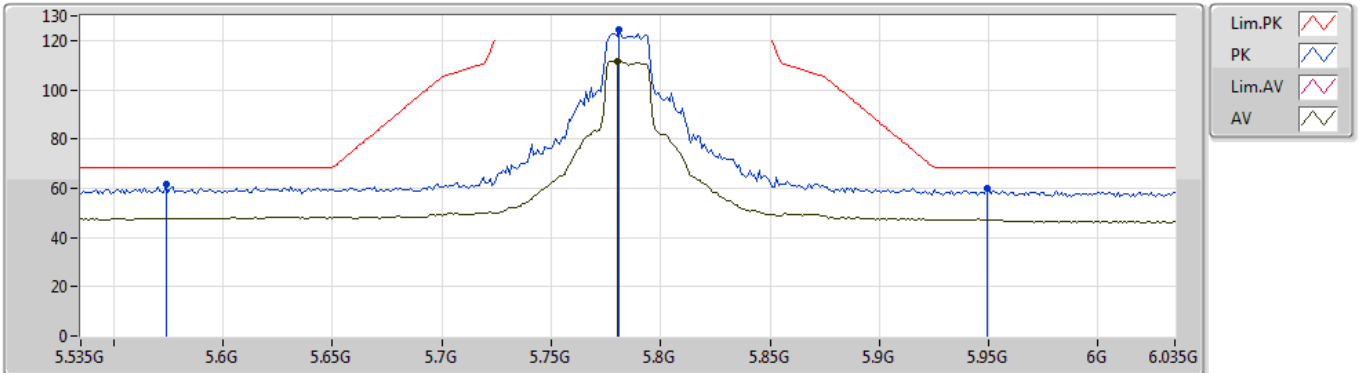


EUT\_Z\_4TX  
Setting 120  
03-C-4-10  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|
| PK   | 5.574G       | 61.68             | 68.20             | -6.52          | 6.29           | 3           | Vertical  | 85             | 1.50          | -       | 55.39         |
| PK   | 5.781G       | 124.33            | Inf               | -Inf           | 6.08           | 3           | Vertical  | 85             | 1.50          | -       | 118.25        |
| AV   | 5.78G        | 111.61            | Inf               | -Inf           | 6.08           | 3           | Vertical  | 85             | 1.50          | -       | 105.53        |
| PK   | 5.949G       | 59.88             | 68.20             | -8.32          | 6.48           | 3           | Vertical  | 85             | 1.50          | -       | 53.40         |

## 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5785MHz\_TX

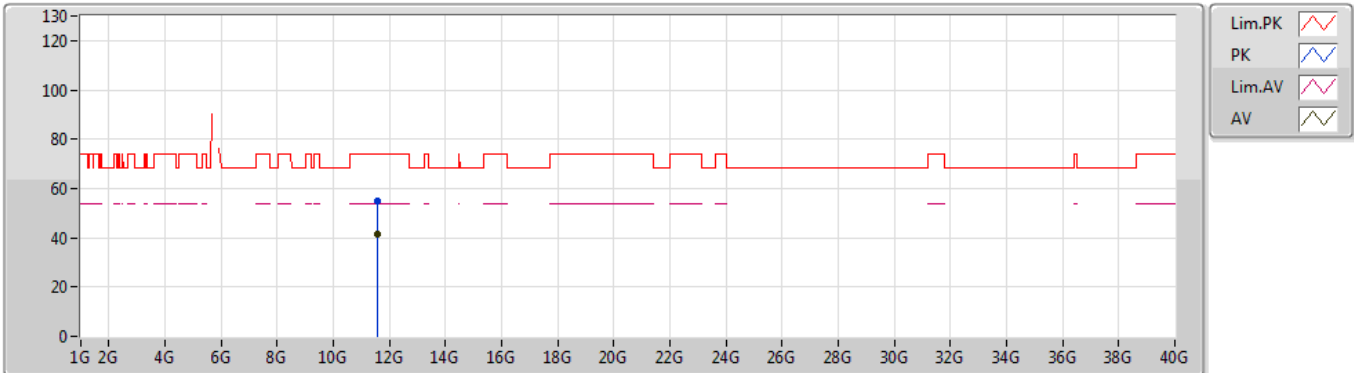


EUT\_Z\_4TX  
Setting 120  
03-C-4  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.56874G    | 54.97             | 74.00             | -19.03         | 13.81          | 3           | Vertical  | 302            | 2.98          | -       | 41.16         |  |  |  |
| AV   | 11.56718G    | 41.62             | 54.00             | -12.38         | 13.81          | 3           | Vertical  | 302            | 2.98          | -       | 27.81         |  |  |  |

## 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5785MHz\_TX

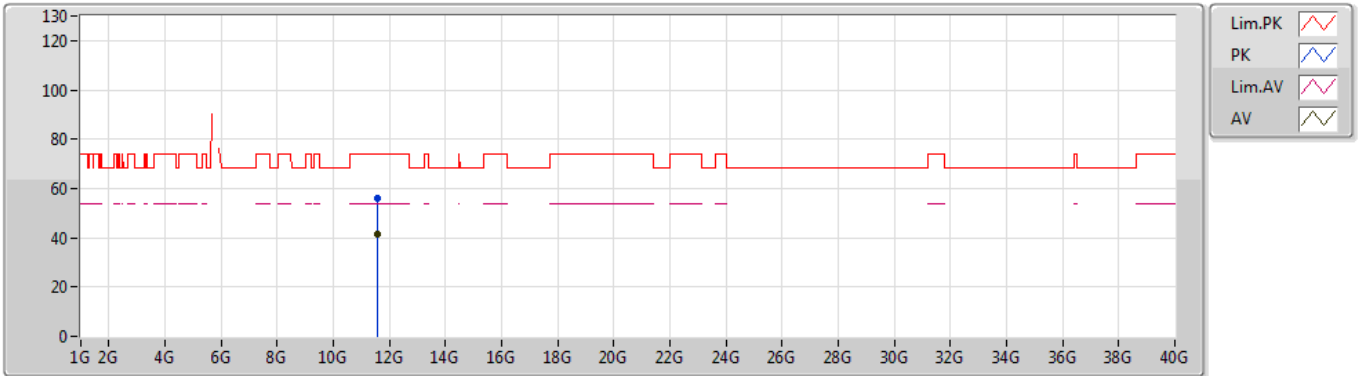


EUT\_Z\_4TX  
Setting 120  
03-C-4  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.55908G    | 55.78             | 74.00             | -18.22         | 13.79          | 3           | Horizontal | 204            | 1.88          | -       | 41.99         |  |  |  |
| AV   | 11.56154G    | 41.60             | 54.00             | -12.40         | 13.79          | 3           | Horizontal | 204            | 1.88          | -       | 27.81         |  |  |  |

# 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5825MHz\_TX

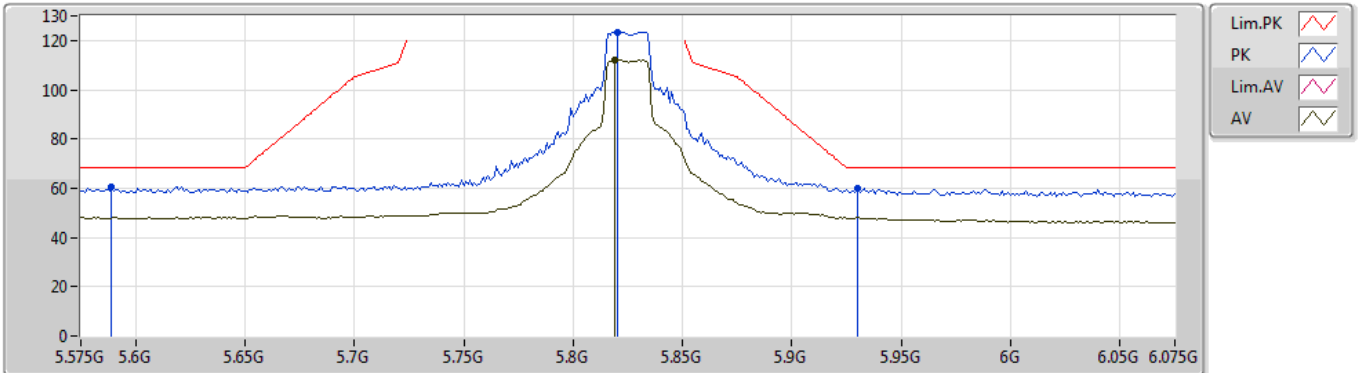


EUT\_Z\_4TX  
Setting 120  
03-C-4-10  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 5.589G       | 60.47             | 68.20             | -7.73          | 6.29           | 3           | Vertical  | 87             | 1.54          | -       | 54.18         |  |  |  |
| PK   | 5.82G        | 123.51            | Inf               | -Inf           | 6.12           | 3           | Vertical  | 87             | 1.54          | -       | 117.39        |  |  |  |
| AV   | 5.819G       | 112.00            | Inf               | -Inf           | 6.12           | 3           | Vertical  | 87             | 1.54          | -       | 105.88        |  |  |  |
| PK   | 5.93G        | 60.10             | 68.20             | -8.10          | 6.41           | 3           | Vertical  | 87             | 1.54          | -       | 53.69         |  |  |  |

# 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5825MHz\_TX

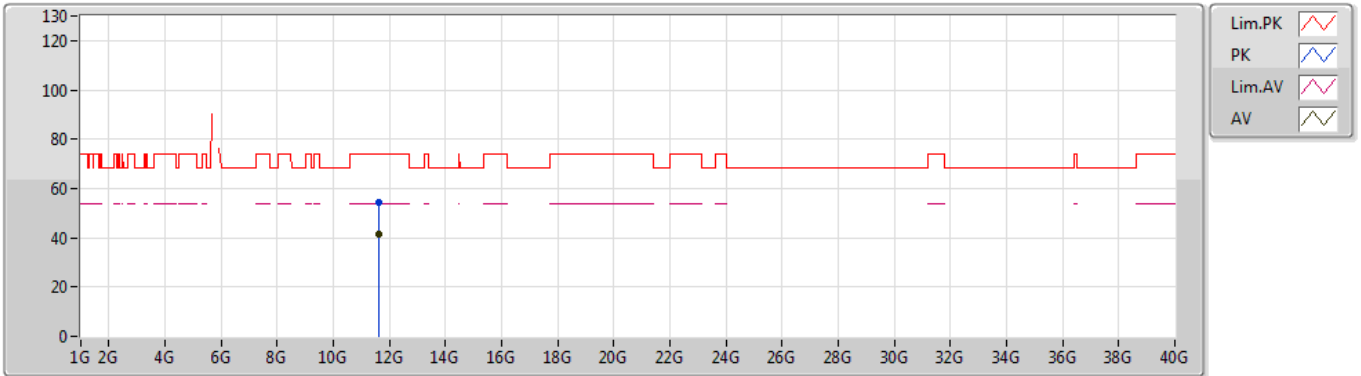


EUT\_Z\_4TX  
Setting 120  
03-C-4  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.63602G    | 54.54             | 74.00             | -19.46         | 13.86          | 3           | Vertical  | 140            | 2.13          | -       | 40.68         |  |  |  |
| AV   | 11.63716G    | 41.40             | 54.00             | -12.60         | 13.86          | 3           | Vertical  | 140            | 2.13          | -       | 27.54         |  |  |  |

## 802.11ax HEW20-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5825MHz\_TX

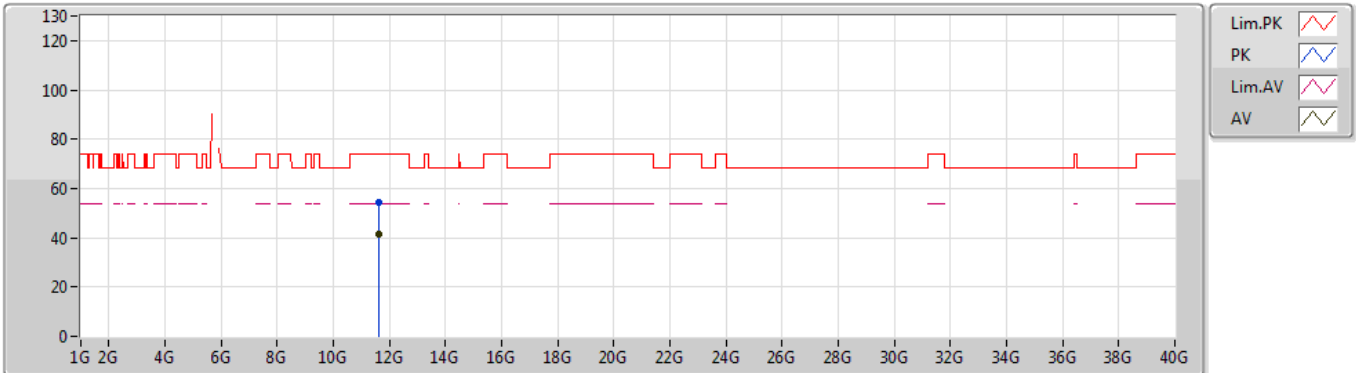


EUT\_Z\_4TX  
Setting 120  
03-C-4  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.63968G    | 54.54             | 74.00             | -19.46         | 13.86          | 3           | Horizontal | 310            | 2.17          | -       | 40.68         |  |  |  |
| AV   | 11.63974G    | 41.39             | 54.00             | -12.61         | 13.86          | 3           | Horizontal | 310            | 2.17          | -       | 27.53         |  |  |  |

## 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

14/11/2019

### 5755MHz\_TX

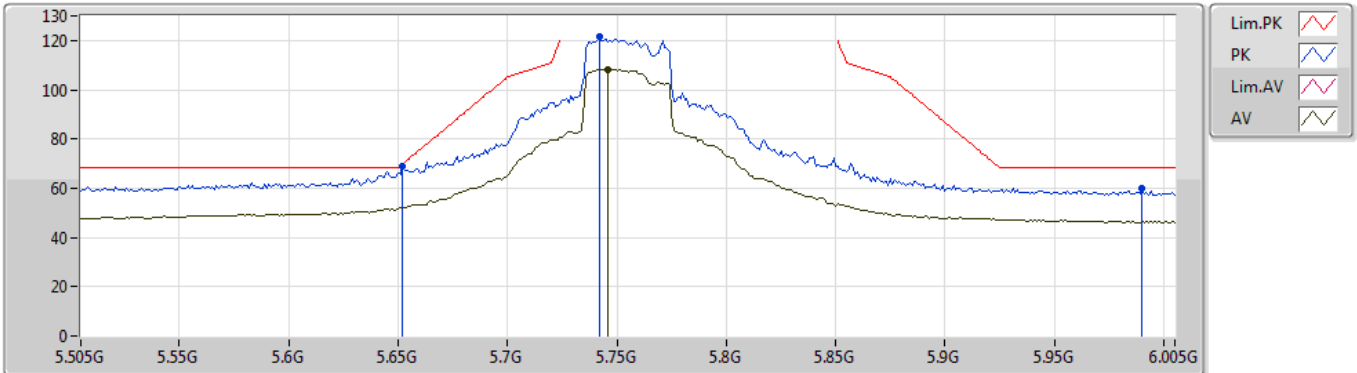


EUT\_Z\_4TX  
Setting 120  
03-C-4-10  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|
| PK   | 5.652G       | 68.79             | 69.68             | -0.89          | 6.21           | 3           | Vertical  | 164            | 1.71          | -       | 62.58         |
| PK   | 5.742G       | 121.75            | Inf               | -Inf           | 6.11           | 3           | Vertical  | 164            | 1.71          | -       | 115.64        |
| AV   | 5.746G       | 108.33            | Inf               | -Inf           | 6.11           | 3           | Vertical  | 164            | 1.71          | -       | 102.22        |
| PK   | 5.99G        | 60.08             | 68.20             | -8.12          | 6.62           | 3           | Vertical  | 164            | 1.71          | -       | 53.46         |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5755MHz\_TX

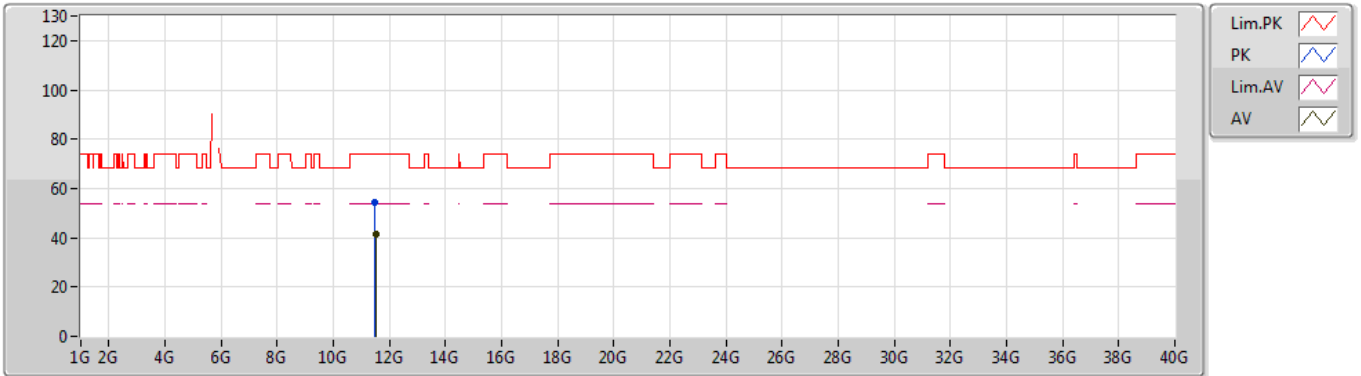


EUT\_Z\_4TX  
Setting 120  
03-C-4  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.49632G    | 54.62             | 74.00             | -19.38         | 13.75          | 3           | Vertical  | 351            | 2.71          | -       | 40.87         |  |  |  |
| AV   | 11.50826G    | 41.51             | 54.00             | -12.49         | 13.76          | 3           | Vertical  | 351            | 2.71          | -       | 27.75         |  |  |  |

## 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5755MHz\_TX

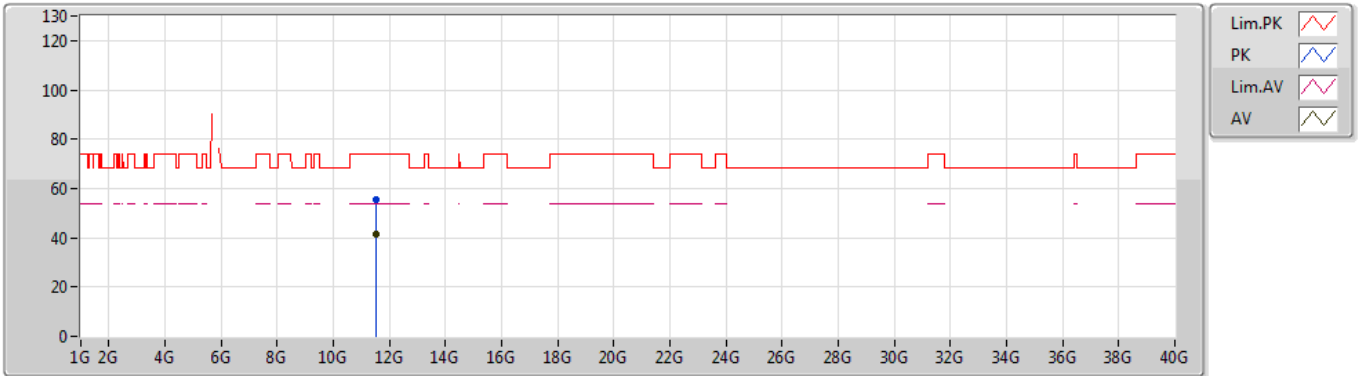


EUT\_Z\_4TX  
Setting 120  
03-C-4  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.51618G    | 55.63             | 74.00             | -18.37         | 13.76          | 3           | Horizontal | 275            | 1.29          | -       | 41.87         |  |  |  |
| AV   | 11.51444G    | 41.52             | 54.00             | -12.48         | 13.76          | 3           | Horizontal | 275            | 1.29          | -       | 27.76         |  |  |  |

## 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

14/11/2019

### 5795MHz\_TX

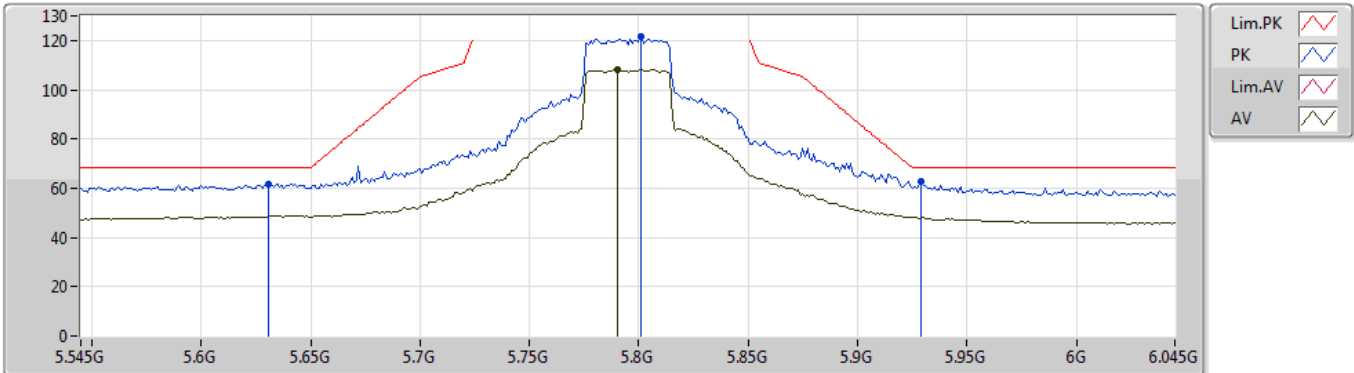


EUT\_Z\_4TX  
Setting 120  
03-C-4-10  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|
| PK   | 5.631G       | 61.53             | 68.20             | -6.67          | 6.25           | 3           | Vertical  | 281            | 1.92          | -       | 55.28         |
| PK   | 5.801G       | 121.56            | Inf               | -Inf           | 6.07           | 3           | Vertical  | 281            | 1.92          | -       | 115.49        |
| AV   | 5.79G        | 108.07            | Inf               | -Inf           | 6.07           | 3           | Vertical  | 281            | 1.92          | -       | 102.00        |
| PK   | 5.929G       | 62.85             | 68.20             | -5.35          | 6.41           | 3           | Vertical  | 281            | 1.92          | -       | 56.44         |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5795MHz\_TX

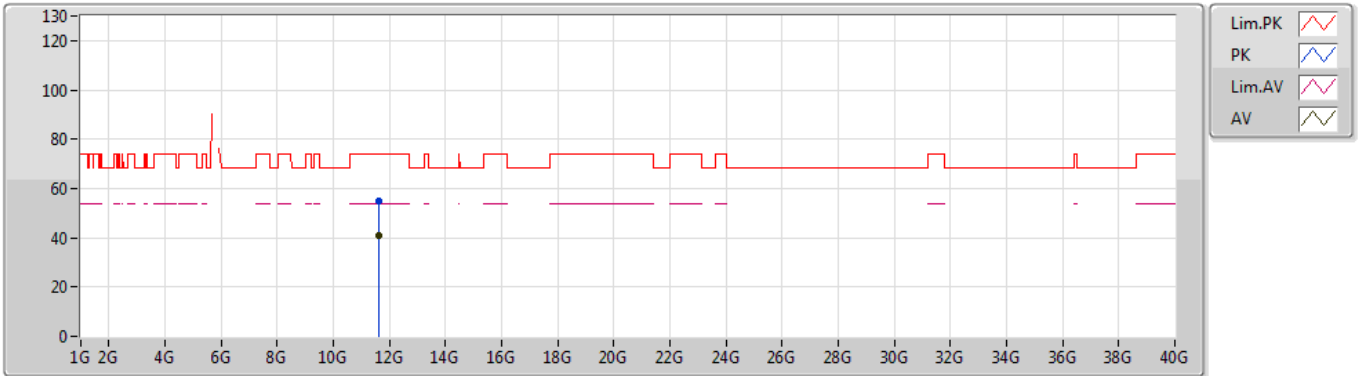


EUT\_Z\_4TX  
Setting 120  
03-C-4  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.60308G    | 55.05             | 74.00             | -18.95         | 13.82          | 3           | Vertical  | 326            | 1.55          | -       | 41.23         |  |  |  |
| AV   | 11.60008G    | 41.11             | 54.00             | -12.89         | 13.82          | 3           | Vertical  | 326            | 1.55          | -       | 27.29         |  |  |  |

# 802.11ax HEW40-BF\_Nss2,(MCS0)\_4TX

14/11/2019

## 5795MHz\_TX

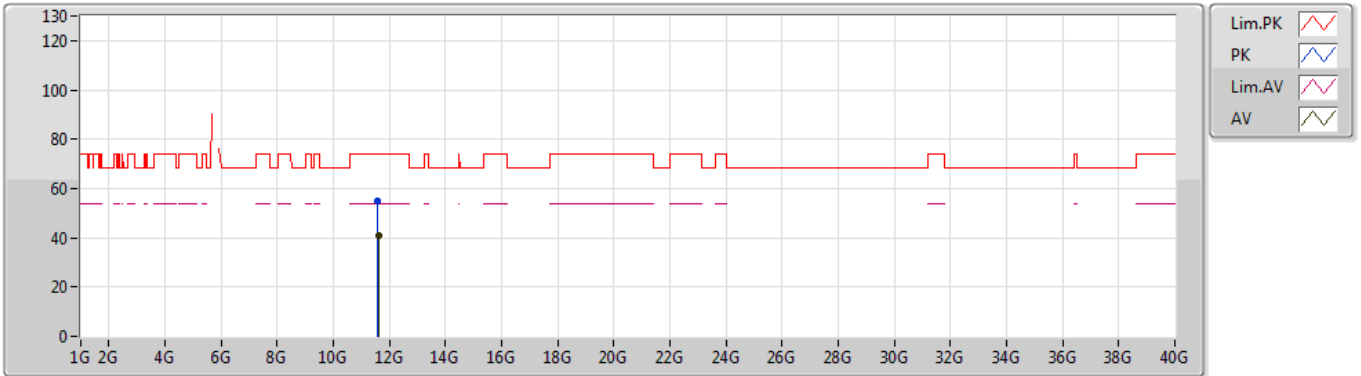


EUT\_Z\_4TX  
Setting 120  
03-C-4  
FSP(100080)

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.59402G    | 54.87             | 74.00             | -19.13         | 13.82          | 3           | Horizontal | 29             | 2.49          | -       | 41.05         |  |  |  |
| AV   | 11.60176G    | 41.15             | 54.00             | -12.85         | 13.82          | 3           | Horizontal | 29             | 2.49          | -       | 27.33         |  |  |  |

## 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

07/01/2020

### 5775MHz\_TX

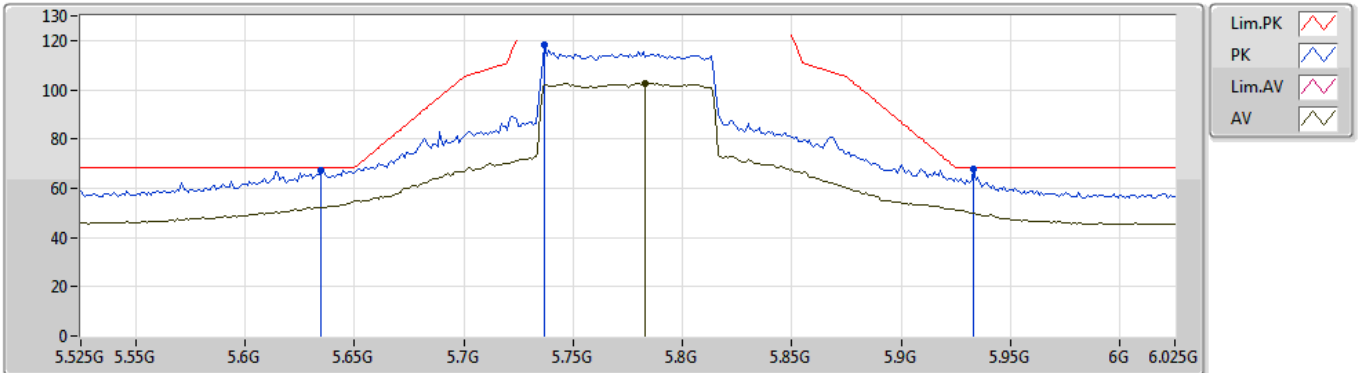


EUT\_Z\_4TX  
Setting 89  
04-F-Z-1-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|
| PK   | 5.635G       | 67.12             | 68.20             | -1.08          | 5.40           | 3           | Vertical  | 95             | 1.50          | -       | 61.72         |
| PK   | 5.737G       | 117.99            | Inf               | -Inf           | 5.46           | 3           | Vertical  | 95             | 1.50          | -       | 112.53        |
| AV   | 5.783G       | 102.65            | Inf               | -Inf           | 5.53           | 3           | Vertical  | 95             | 1.50          | -       | 97.12         |
| PK   | 5.933G       | 67.60             | 68.20             | -0.60          | 6.31           | 3           | Vertical  | 95             | 1.50          | -       | 61.29         |

## 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

07/01/2020

### 5775MHz\_TX

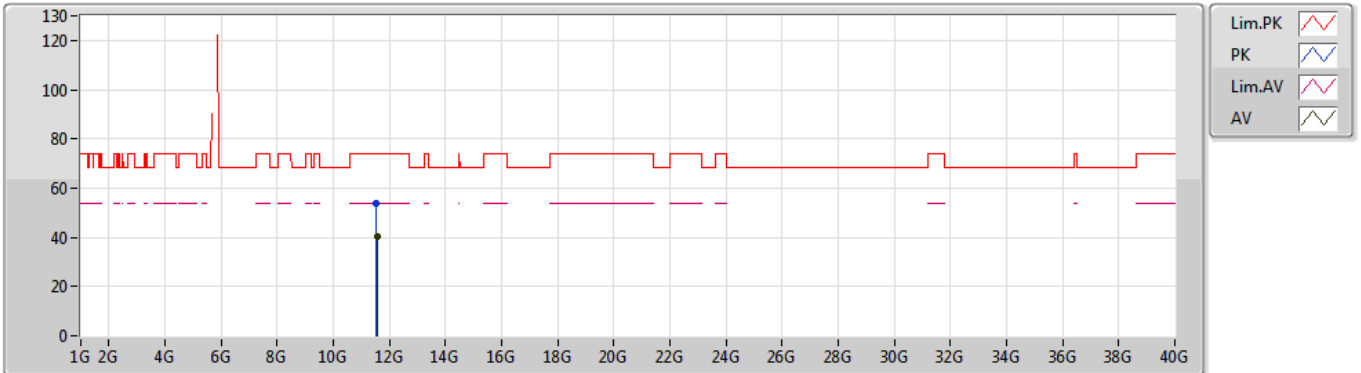


EUT\_Z\_4TX  
Setting 89  
04-F-Z-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.53722G    | 53.73             | 74.00             | -20.27         | 11.57          | 3           | Vertical  | 286            | 1.50          | -       | 42.16         |  |  |  |
| AV   | 11.55696G    | 40.47             | 54.00             | -13.53         | 11.56          | 3           | Vertical  | 286            | 1.50          | -       | 28.91         |  |  |  |

## 802.11ax HEW80-BF\_Nss2,(MCS0)\_4TX

07/01/2020

### 5775MHz\_TX

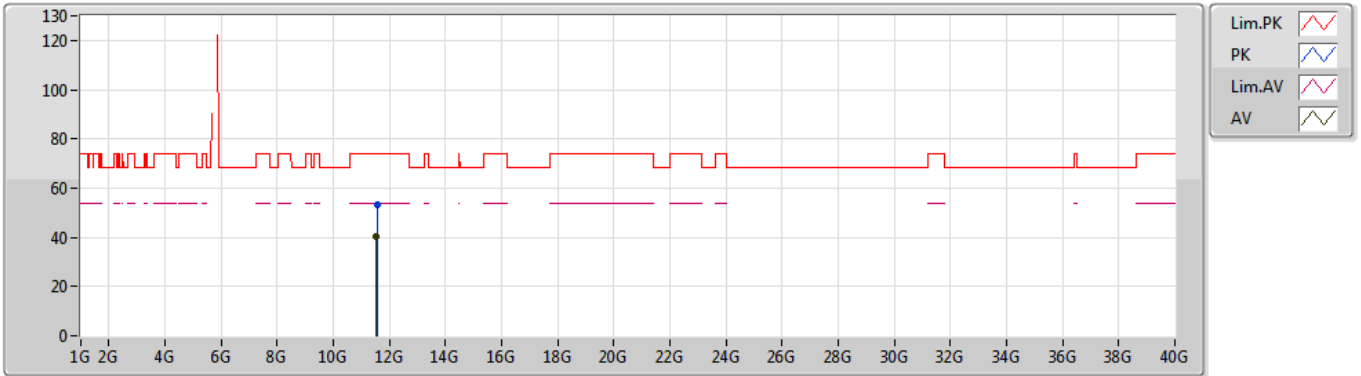

EUT\_Z\_4TX  
Setting 89  
04-F-Z-1

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|--|--|--|
| PK   | 11.56284G    | 53.38             | 74.00             | -20.62         | 11.55          | 3           | Horizontal | 359            | 1.50          | -       | 41.83         |  |  |  |
| AV   | 11.53782G    | 40.24             | 54.00             | -13.76         | 11.57          | 3           | Horizontal | 359            | 1.50          | -       | 28.67         |  |  |  |




**Summary**

| Mode                           | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comments |
|--------------------------------|--------|------|--------------|-------------------|-------------------|----------------|-------------|-----------|----------------|---------------|----------|
| 5.725-5.85GHz                  | -      | -    | -            | -                 | -                 | -              | -           | -         | -              | -             | -        |
| 802.11ax HEW80_Nss4,(MCS0)_4TX | Pass   | PK   | 5.624G       | 68.18             | 68.20             | -0.02          | 3           | Vertical  | 134            | 1.80          | -        |

# 802.11ax HEW80\_Nss4,(MCS0)\_4TX

14/02/2020

## 5775MHz\_TX

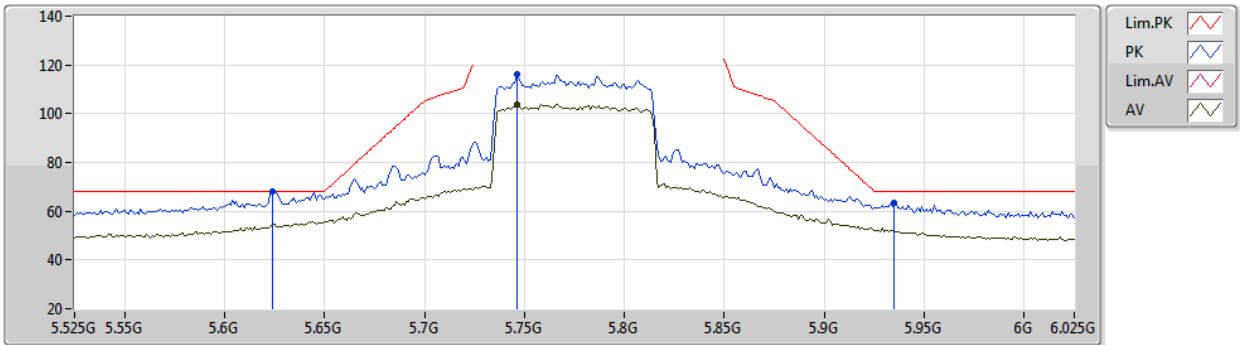


EUT\_Z\_4TX  
Setting 89  
04-C-K-3-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 5.624G       | 68.18             | 68.20             | -0.02          | 62.39         | 3           | Vertical  | 134            | 1.80          | -       | 34.02      | 5.38       | 33.61      |
| PK   | 5.746G       | 116.04            | Inf               | -Inf           | 110.02        | 3           | Vertical  | 134            | 1.80          | -       | 34.19      | 5.47       | 33.64      |
| AV   | 5.746G       | 103.74            | Inf               | -Inf           | 97.72         | 3           | Vertical  | 134            | 1.80          | -       | 34.19      | 5.47       | 33.64      |
| PK   | 5.935G       | 63.38             | 68.20             | -4.82          | 56.42         | 3           | Vertical  | 134            | 1.80          | -       | 35.04      | 5.61       | 33.69      |

# 802.11ax HEW80\_Nss4,(MCS0)\_4TX

14/02/2020

## 5775MHz\_TX

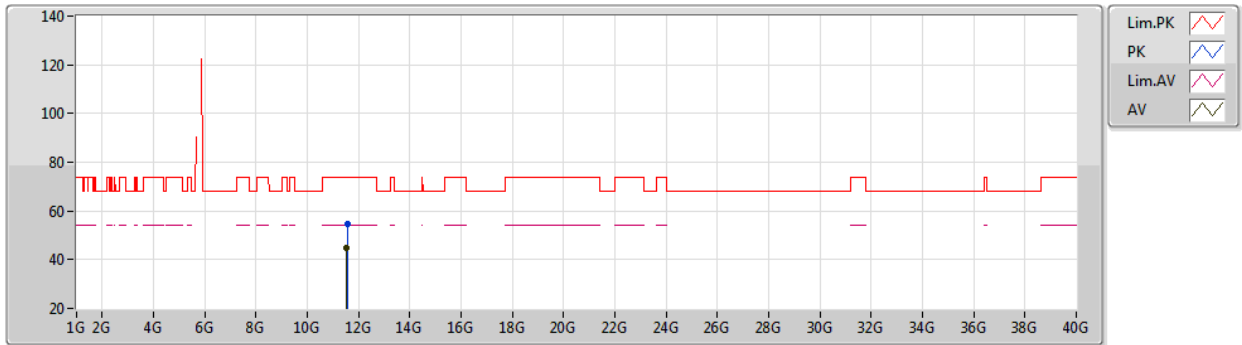


EUT\_Z\_4TX  
Setting 89  
04-C-K-3-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.5539G     | 54.47             | 74.00             | -19.53         | 41.95         | 3           | Vertical  | 175            | 2.00          | -       | 39.12      | 8.22       | 34.82      |
| AV   | 11.54642G    | 44.59             | 54.00             | -9.41          | 32.05         | 3           | Vertical  | 175            | 2.00          | -       | 39.13      | 8.22       | 34.81      |

# 802.11ax HEW80\_Nss4,(MCS0)\_4TX

14/02/2020

## 5775MHz\_TX

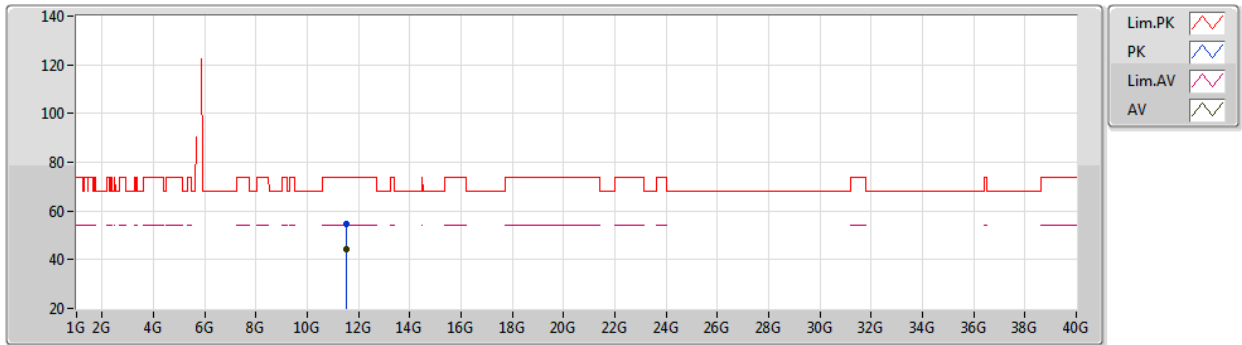

EUT\_Z\_4TX  
Setting 89  
04-C-K-3-10

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|
| PK   | 11.54774G    | 54.84             | 74.00             | -19.16         | 42.31         | 3           | Horizontal | 309            | 2.37          | -       | 39.13      | 8.22       | 34.82      |
| AV   | 11.54662G    | 44.46             | 54.00             | -9.54          | 31.92         | 3           | Horizontal | 309            | 2.37          | -       | 39.13      | 8.22       | 34.81      |