



FCC 47 CFR PART 15 SUBPART C

for

Wireless-N Router

Model: RT-N12

Brand: ASUS

Test Report Number:

C130916Z01-RP1

Issued Date: October 8, 2013

Issued for

ASUSTeK COMPUTER INC.

4F, No. 150, Li-Te Rd. Peitou, Taipei 112, Taiwan

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,

Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221



TESTING CERT #2861.01

Note: *This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.*



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C121026Z01-RP1	Initial Issue	ALL	Amay Tang
01	C130916Z01-RP1	Update	ALL	Sabrina Wang

Rev.01: (C130916Z01-RP1)

Note: 1. The applicant company updated the power rating of the EUT. After the reassessment, all items were retested, except the Power line Conducted Emissions and the radiated emissions of below 1GHz.

2. The other information, please refer to the Report No.: C121026Z01-RP1 and this report.



TABLE OF CONTENTS

1 TEST CERTIFICATION..... 4

2 TEST RESULT SUMMARY..... 5

3 EUT DESCRIPTION 6

4 TEST METHODOLOGY 7

 4.1. DESCRIPTION OF TEST MODES 7

5 SETUP OF EQUIPMENT UNDER TEST..... 8

 5.1. DESCRIPTION OF SUPPORT UNITS..... 8

 5.2. CONFIGURATION OF SYSTEM UNDER TEST 8

6 FACILITIES AND ACCREDITATIONS 9

 6.1. FACILITIES 9

 6.2. ACCREDITATIONS 9

 6.3. MEASUREMENT UNCERTAINTY..... 10

7 FCC PART 15.247 REQUIREMENTS..... 11

 7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT 11

 7.2. SPURIOUS EMISSIONS MEASUREMENT 16

 7.3. 6dB BANDWIDTH MEASUREMENT 54

 7.4. PEAK OUTPUT POWER 64

 7.5. BAND EDGES MEASUREMENT:..... 68

 7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT..... 87



1 TEST CERTIFICATION

Product	Wireless-N Router
Model	RT-N12
Brand	ASUS
Tested	October 26~November 24, 2012 & September 16~October 8, 2013
Applicant	ASUSTeK COMPUTER INC. 4F, No. 150, Li-Te Rd. Peitou, Taipei 112, Taiwan
Manufacturer	Shenzhen Gongjin Electronics Co., Ltd B116, B118, A211-A213, B201-B213, A311-A313, B411-413, BF08-09 Nanshan Medical Instrument Industry Park, 1019# Nanhai Road, Nanshan District, Shenzhen, Guangdong, 518067, P.R.China
Factory #1	Shenzhen Gongjin Electrics Co., Ltd. No2&3 Buildings, Mingwei Factory Area, Songgang Road West, No. A Building, 1#Songgang Road Songgang Sub-District, Shenzhen, Guangdong, 518105, P.R.China
Factory #2	TAICANG T&W ELECTRONICS CO., LTD Jiangnan Road 89, Ludu Town, Taicang, Jiangsu, 215412, P.R. China

APPLICABLE STANDARDS			
Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	<ul style="list-style-type: none"> ● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Tom Gan
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Service Inc.



2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	<ul style="list-style-type: none">● Spurious Emissions● Conducted Measurement● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.

2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

Product	Wireless-N Router
Model Number	RT-N12
Brand	ASUS
Model Discrepancy	N/A
Identify Number	C130916Z01-RP1
Received Date	September 16, 2013
Power Supply	DC 12V supplied by the adapter
Adapter Manufacturer / Model No.	Adapter1: Shenzhen Gongjin Electronics Co., Ltd. S06A22-120A050-PB I/P: 100-240Vac, 50/60Hz, 0.30A max O/P: 12Vdc, 500mA, DC Output Cable: Unshielded,1.50m Adapter2:RUIDE RD1200500-C55-8MG I/P: 100-240Vac, 50/60Hz, 250mA max O/P: 12Vdc, 500mA, DC Output Cable: Unshielded,1.50m
Frequency Range	IEEE 802.11b/g: 2412 ~ 2462 MHz IEEE 802.11n HT20 : 2412 ~ 2462 MHz IEEE 802.11n HT40 : 2422MHz~ 2452MHz
Transmit Power	IEEE 802.11b mode: 21.10dBm (Antenna 1) IEEE 802.11g mode: 24.30dBm (Antenna 1) IEEE 802.11n HT20 MHz mode: 26.06dBm (Combine with antenna 1 and antenna 2) IEEE 802.11n HT40 MHz mode: 24.80dBm (Combine with antenna 1 and antenna 2)
Modulation Technique	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Transmit Data Rate	802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/9 /6Mbps IEEE 802.11n HT20: 130.0Mbps with fall back rates of 130/ 117/104 /78/52/39/26/13Mbps IEEE 802.11n HT40: 270Mbps with fall back rates of 270/ 243/216 /162/108/81/54/27Mbps
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 7 Channels
Antenna Specification	Dipole Antenna with 5.0dBi gain (Max)

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: **MSQ-RTN12D1** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Normal Link+ Adapter 1 Mode 2: Normal Link+ Adapter 2	Mode 1 Mode 2
Radiated Emission	Mode 1: TX	Mode 1

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode (Antenna 1): Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode (Antenna 1): Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 MHz (Antenna 1) mode: Channel Low (2412MHz), Channel Mid(2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 MHz (Combine with antenna 1 and antenna 2) mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT40 MHz (Antenna 1) mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT40 MHz (Combine with antenna 1 and antenna 1) mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	NOTEBOOK	B475	WB04861612	N/A	Lenovo	Unshielded 1.80m	N/A
2	NOTEBOOK	2672	992F2VG	N/A	IBM	Unshielded 1.80m	N/A

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-624)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	04/20/2013	04/19/2014
LISN	EMCO	3825/2	8901-1459	03/09/2013	03/08/2014
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2013	03/03/2014
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.




7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



7.1.4. TEST SETUP

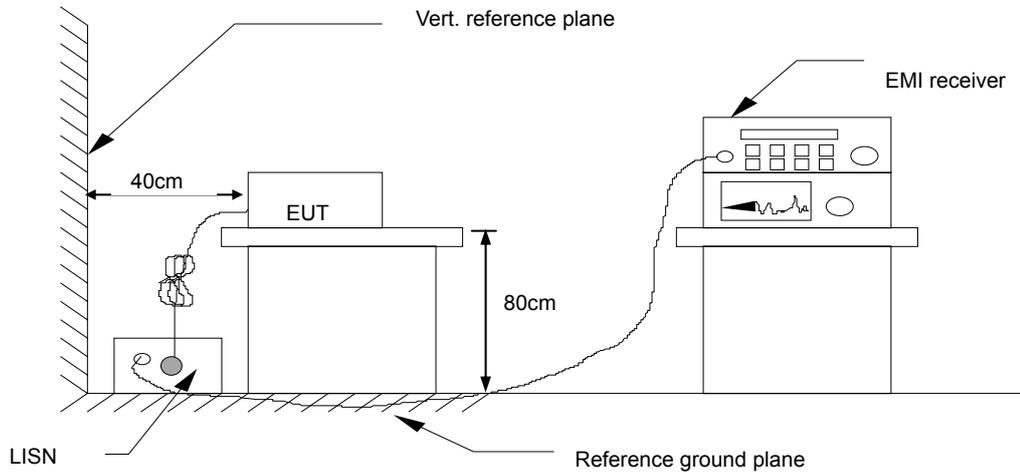

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

7.1.5. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

- Factor = Insertion loss of LISN + Cable Loss
- Result = Quasi-peak Reading/ Average Reading + Factor
- Limit = Limit stated in standard
- Margin = Result (dBuV) – Limit (dBuV)



7.1.6. TEST RESULTS

Model No.	RT-N12	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1(S06A22-120A050-PB)
Tested by	Sunday Hu	Line	L1

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1580	54.87	36.37	0.48	55.35	36.85	65.56	55.57	-10.21	-18.72	Pass
0.3420	44.87	29.07	0.34	45.21	29.41	59.15	49.15	-13.94	-19.74	Pass
2.2780	38.57	22.84	0.46	39.03	23.30	56.00	46.00	-16.97	-22.70	Pass
3.8900	39.52	24.06	0.50	40.02	24.56	56.00	46.00	-15.98	-21.44	Pass
7.8700	46.70	28.59	0.61	47.31	29.20	60.00	50.00	-12.69	-20.80	Pass
9.4500	46.33	30.69	0.89	47.22	31.58	60.00	50.00	-12.78	-18.42	Pass

Model No.	RT-N12	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1 (S06A22-120A050-PB)
Tested by	Sunday Hu	Line	L2

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1620	54.24	37.33	0.46	54.70	37.79	65.36	55.36	-10.66	-17.57	Pass
0.3420	46.08	35.52	0.54	46.62	36.06	59.15	49.15	-12.53	-13.09	Pass
1.1340	41.37	30.48	0.57	41.94	31.05	56.00	46.00	-14.06	-14.95	Pass
2.1099	42.85	29.42	0.76	43.61	30.18	56.00	46.00	-12.39	-15.82	Pass
4.8140	43.50	29.37	0.46	43.96	29.83	56.00	46.00	-12.04	-16.17	Pass
7.9140	48.66	33.72	0.50	49.16	34.22	60.00	50.00	-10.84	-15.78	Pass

REMARKS: L1 = Line One (Live Line)

L2 = Line Two (Neutral Line)



Model No.	RT-N12	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2(RD1200500-C55-8MG)
Tested by	Sunday Hu	Line	L1

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	50.31	36.96	0.52	50.83	37.48	65.99	56.00	-15.16	-18.52	Pass
0.3460	43.81	33.25	0.34	44.15	33.59	59.06	49.06	-14.91	-15.47	Pass
0.6940	35.96	17.23	0.41	36.37	17.64	56.00	46.00	-19.63	-28.36	Pass
1.7900	37.01	20.76	0.44	37.45	21.20	56.00	46.00	-18.55	-24.80	Pass
2.9539	39.99	24.28	0.48	40.47	24.76	56.00	46.00	-15.53	-21.24	Pass
5.8100	34.26	22.56	0.50	34.76	23.06	60.00	50.00	-25.24	-26.94	Pass

Model No.	RT-N12	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2 (RD1200500-C55-8MG)
Tested by	Sunday Hu	Line	L2

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	51.27	38.94	0.45	51.72	39.39	65.99	56.00	-14.27	-16.61	Pass
0.1700	48.72	37.53	0.46	49.18	37.99	64.96	54.96	-15.78	-16.97	Pass
0.1980	45.57	33.37	0.49	46.06	33.86	63.69	53.69	-17.63	-19.83	Pass
0.3420	40.73	35.90	0.54	41.27	36.44	59.15	49.15	-17.88	-12.71	Pass
0.7820	33.29	20.76	0.55	33.84	21.31	56.00	46.00	-22.16	-24.69	Pass
3.0780	40.26	26.12	0.65	40.91	26.77	56.00	46.00	-15.09	-19.23	Pass

REMARKS: L1 = Line One (Live Line)

L2 = Line Two (Neutral Line)



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	ROHDE&SCHWARZ	FSU	200409	09/23/2013	09/22/2014

7.2.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.




7.2.4. TEST RESULTS

Test Plot IEEE 802.11b (Antenna 1) mode CH Low (30MHz ~25GHz)

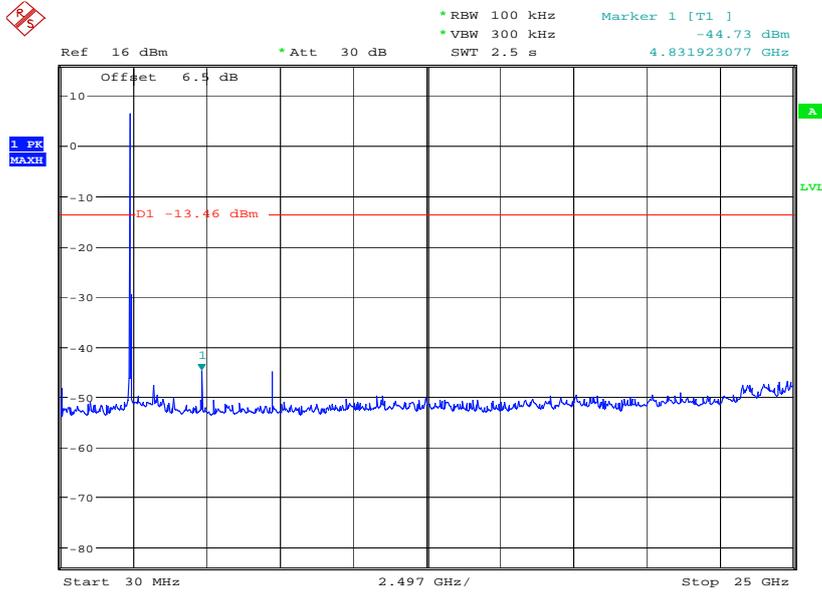

Date: 28.SEP.2013 11:05:54


CH Low

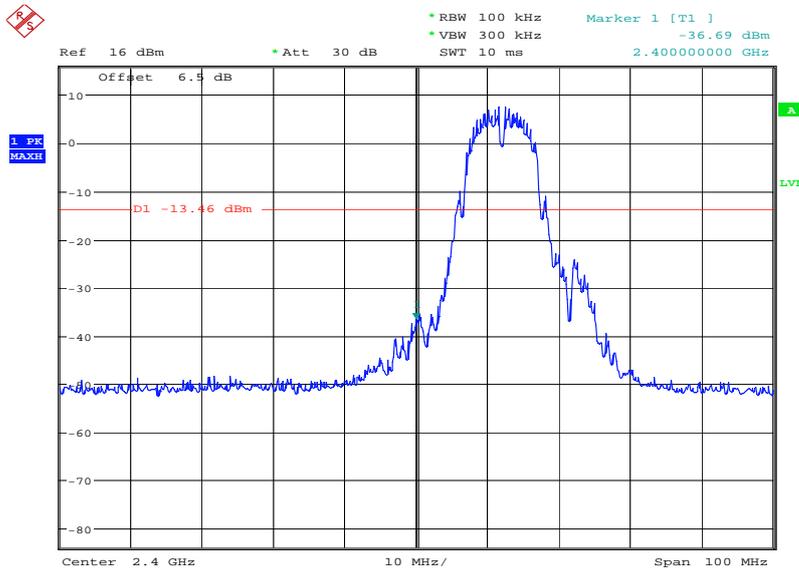

Date: 28.SEP.2013 11:06:27




CH Mid (30MHz ~25GHz)

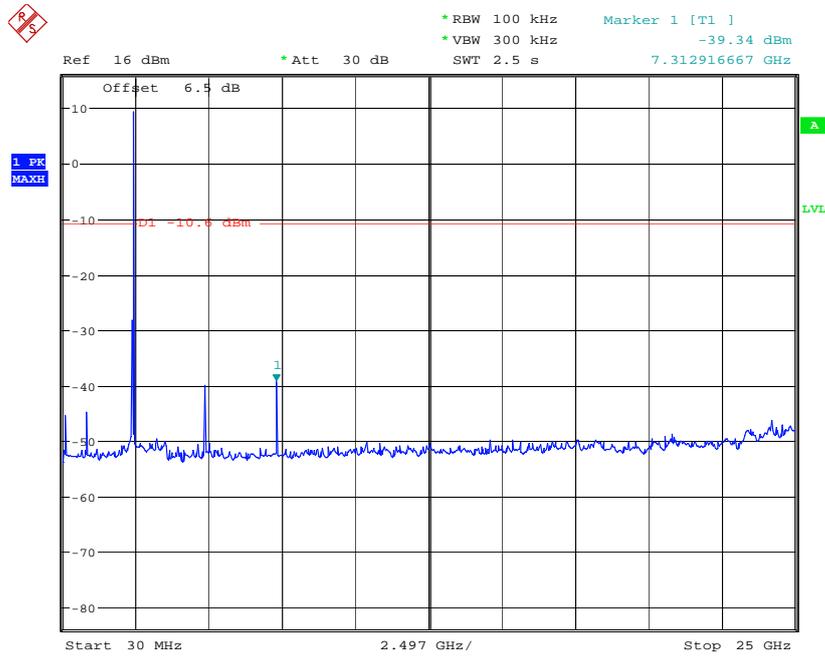

Date: 28.SEP.2013 11:10:00




CH High (30MHz ~25GHz)

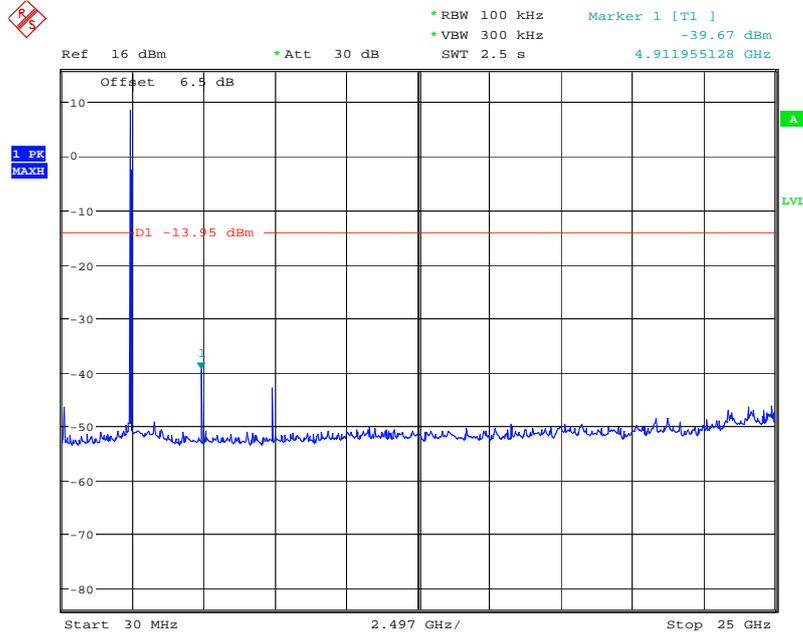

Date: 28.SEP.2013 11:08:04


CH High

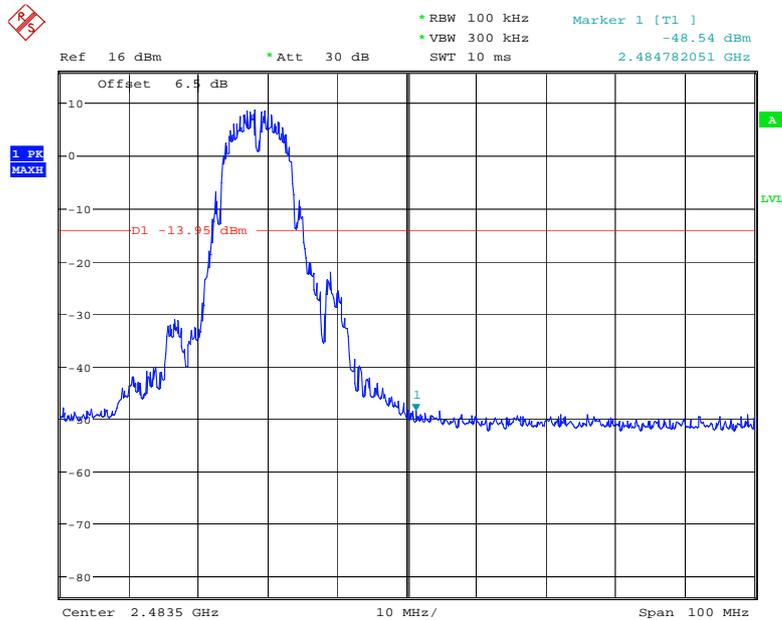

Date: 28.SEP.2013 11:08:41




IEEE 802.11g (Antenna 1)mode CH Low (30MHz ~25GHz)

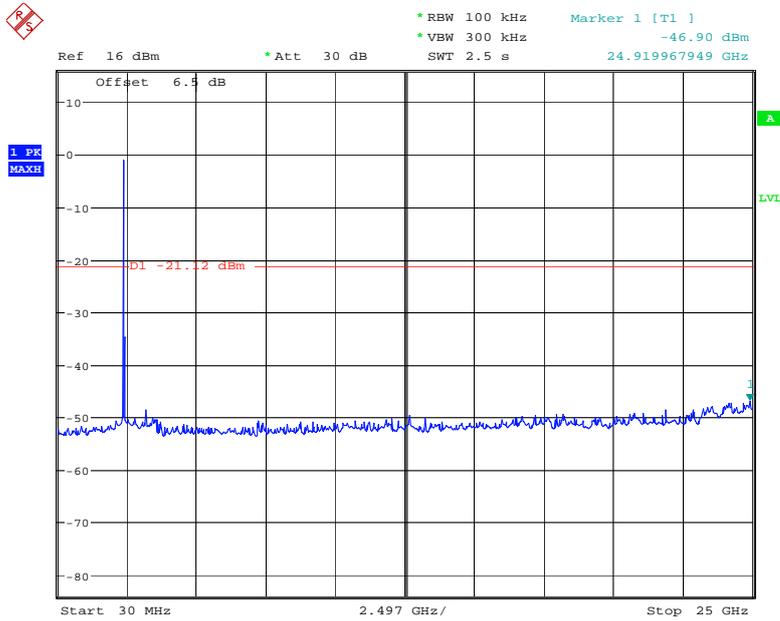

Date: 28.SEP.2013 10:57:38


CH Low

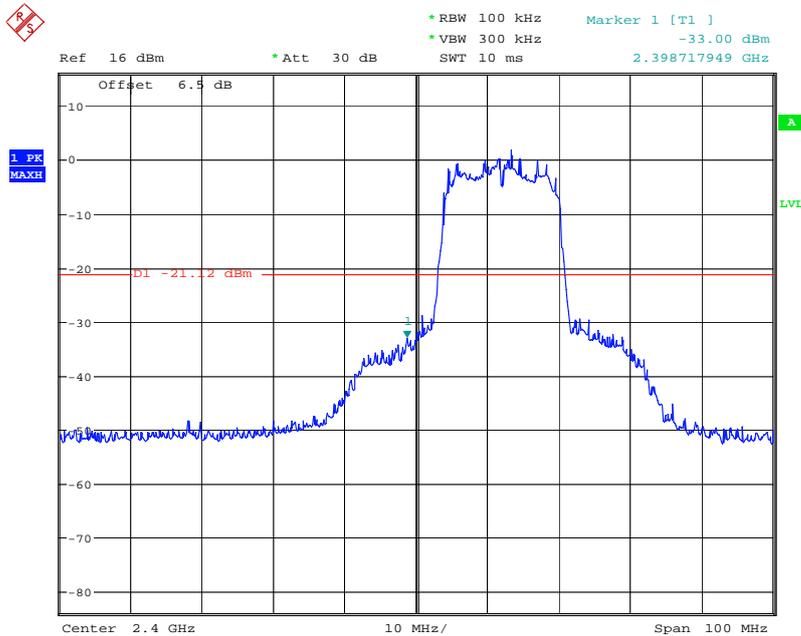

Date: 28.SEP.2013 10:58:10




CH Mid (30MHz ~25GHz)

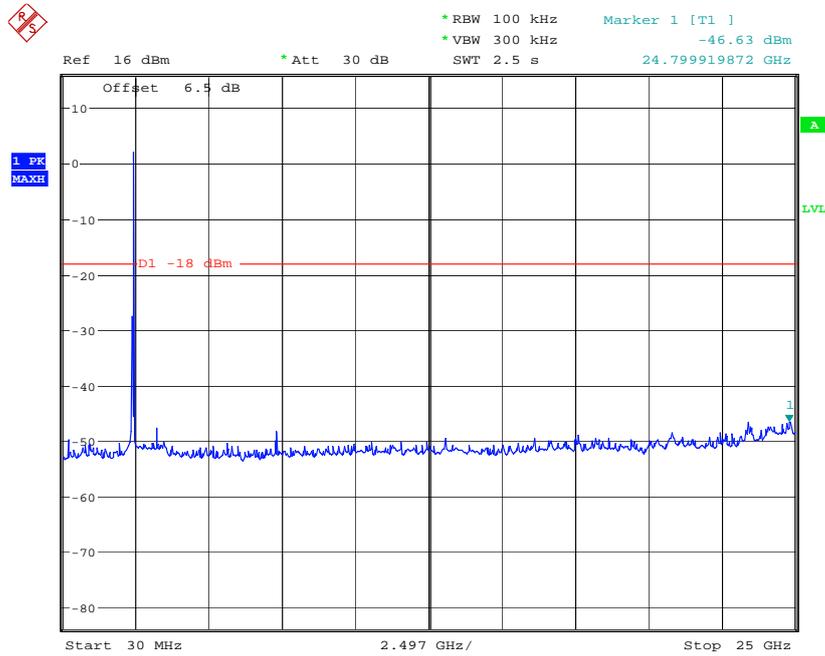

Date: 28.SEP.2013 11:04:47




CH High (30MHz ~25GHz)

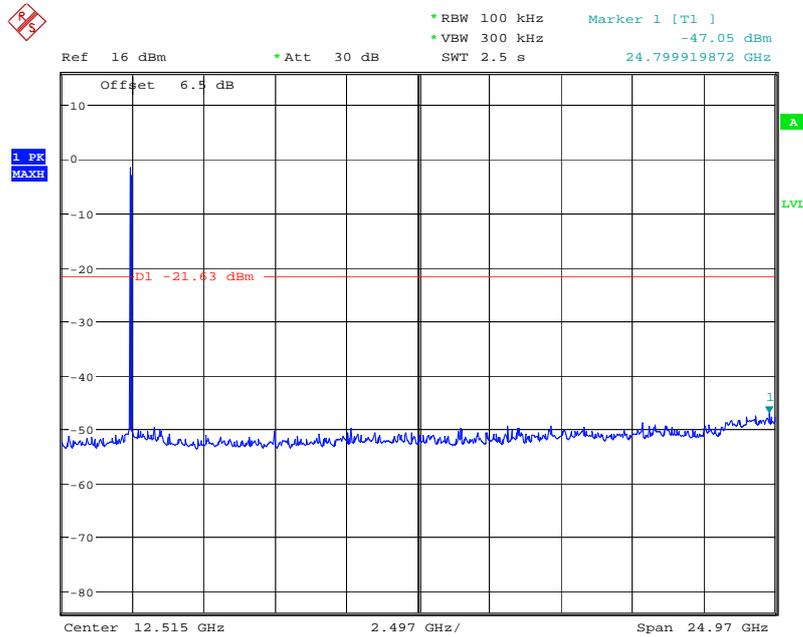

Date: 28.SEP.2013 11:02:28


CH High

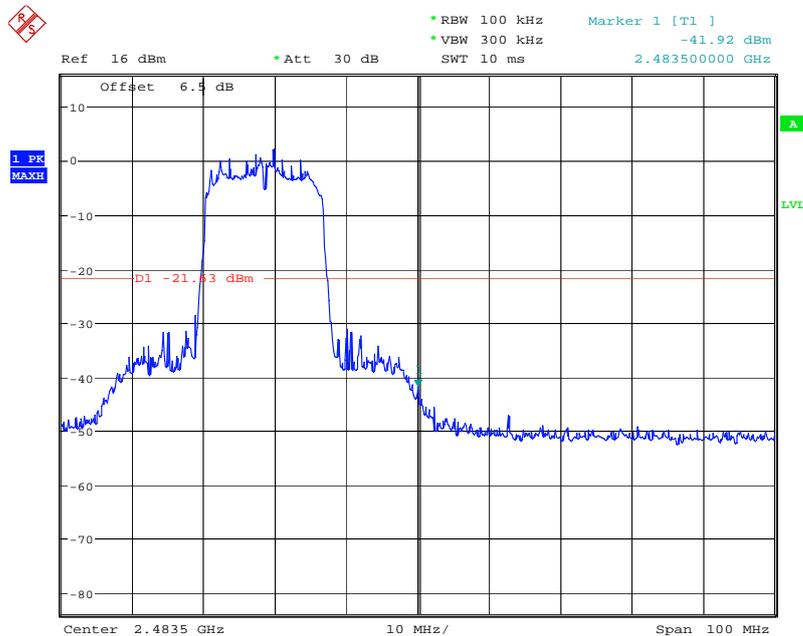

Date: 28.SEP.2013 11:03:27




IEEE 802.11n HT20 MHz (Antenna 1) mode
CH Low (30MHz ~25GHz)

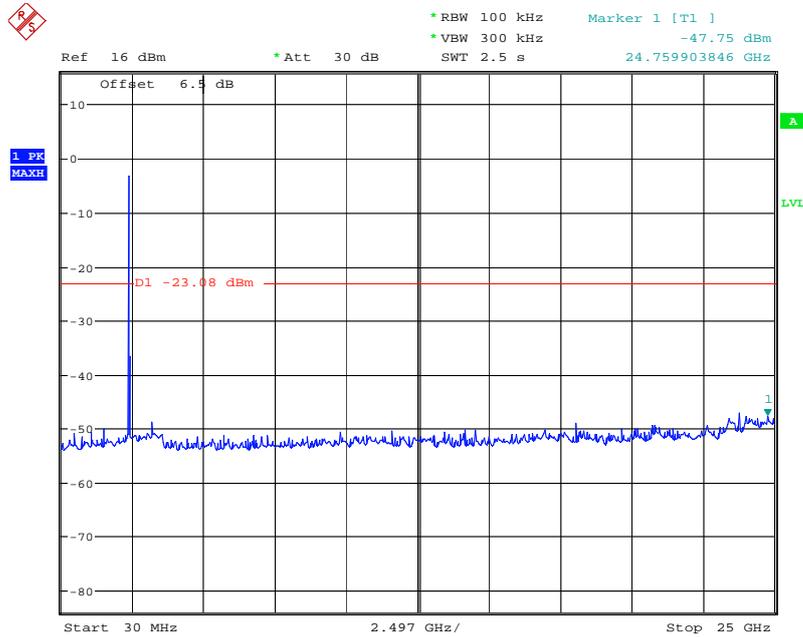

Date: 28.SEP.2013 10:44:02


CH Low

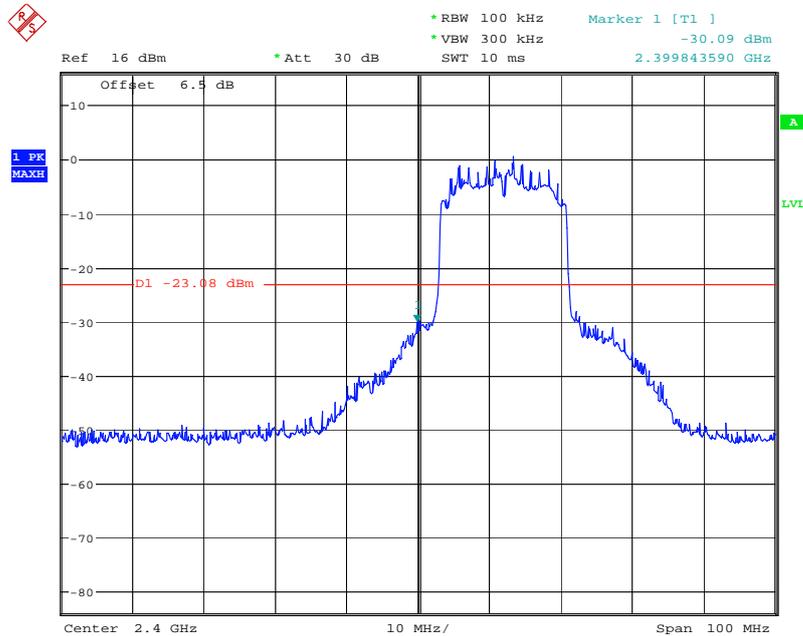

Date: 28.SEP.2013 10:45:04




CH Mid (30MHz ~25GHz)

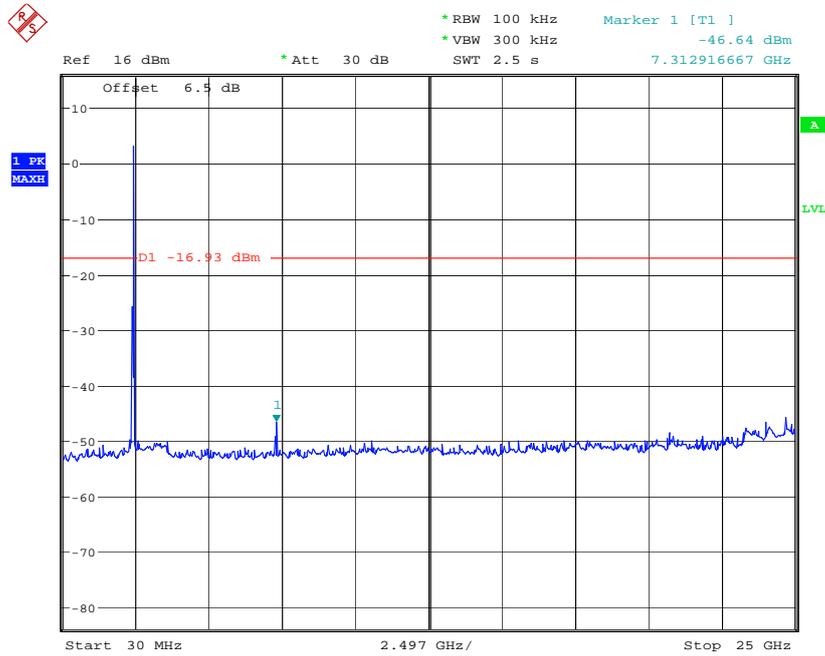

Date: 28.SEP.2013 10:46:19




CH High (30MHz ~25GHz)

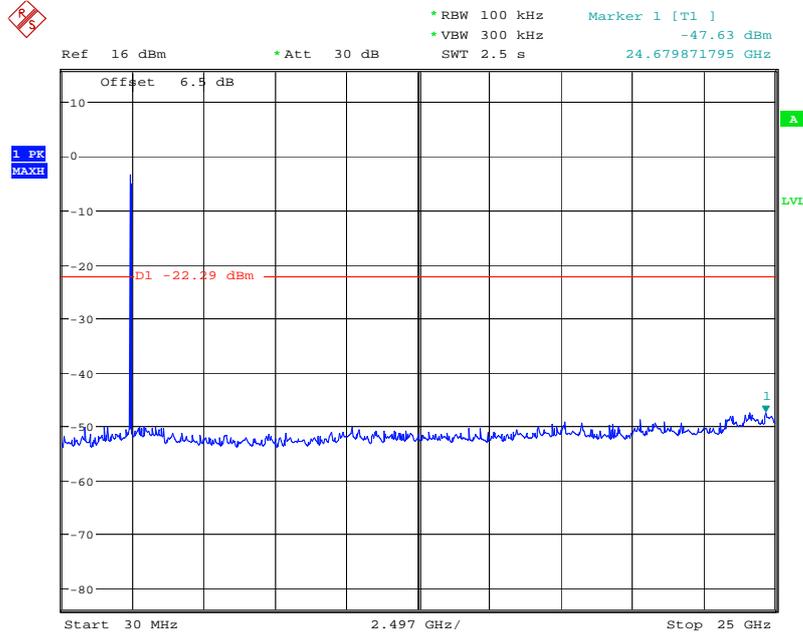

Date: 28.SEP.2013 10:42:02


CH High

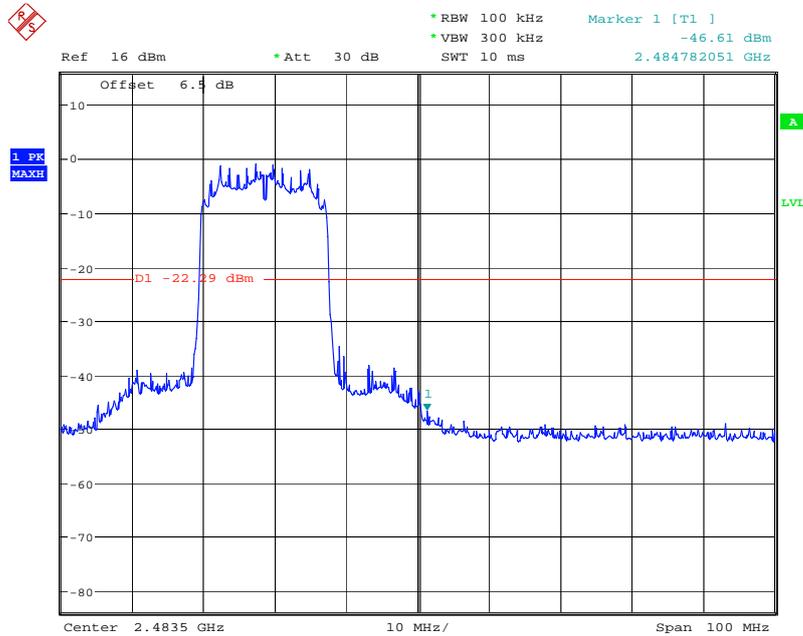

Date: 28.SEP.2013 10:38:27




IEEE 802.11n HT20 MHz (Antenna 2) mode CH Low (30MHz ~25GHz)

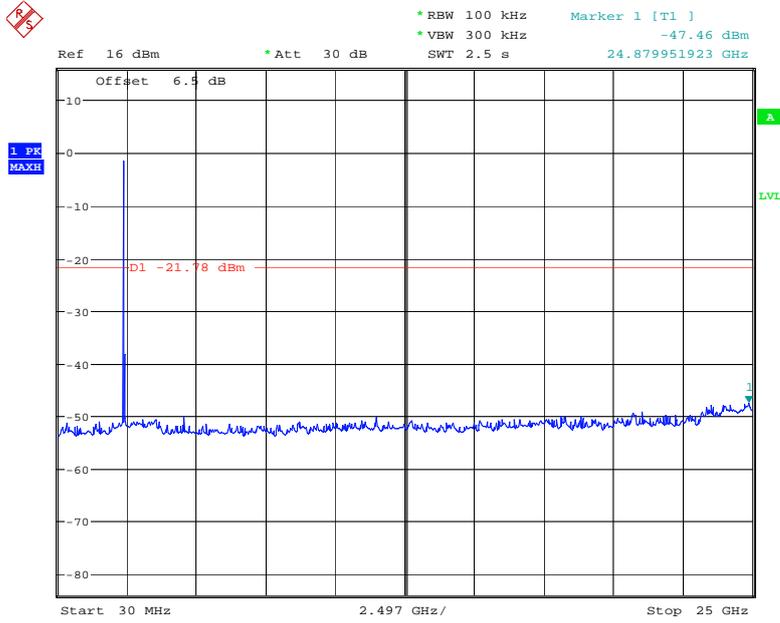

Date: 28.SEP.2013 11:22:52


CH Low

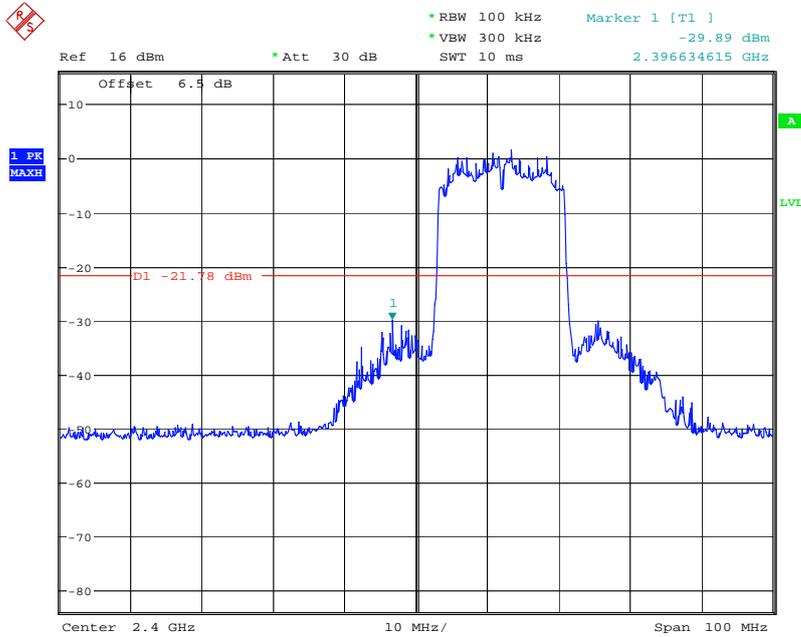

Date: 28.SEP.2013 11:23:42




CH Mid (30MHz ~25GHz)

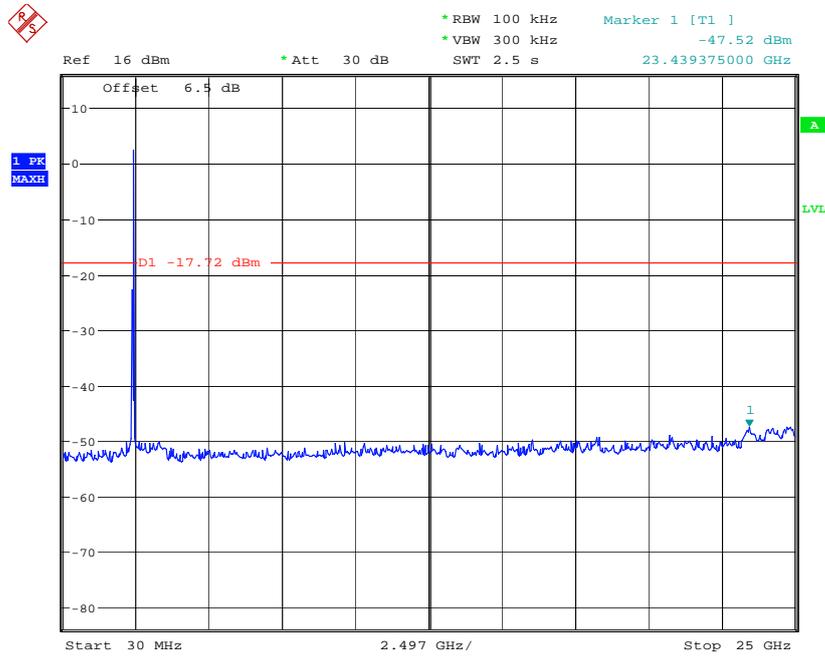

Date: 28.SEP.2013 11:11:55




CH High (30MHz ~25GHz)

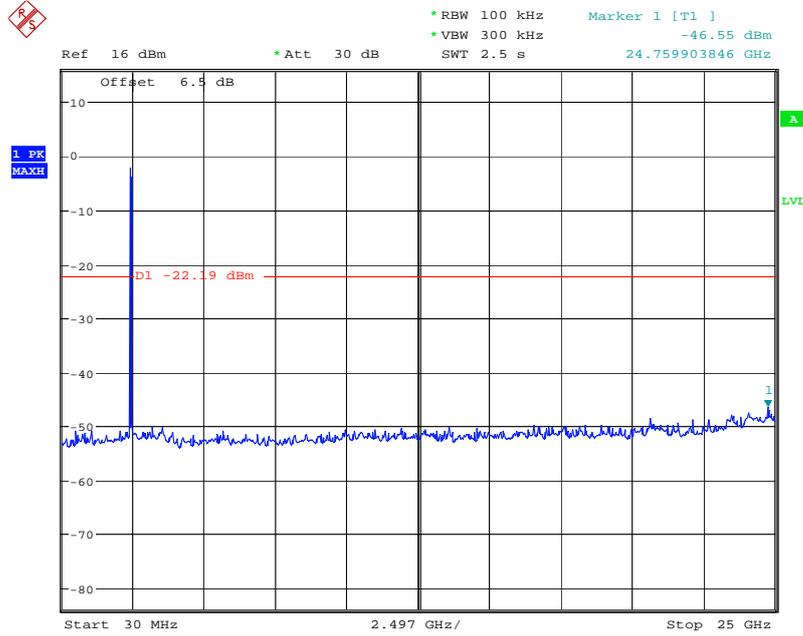

Date: 28.SEP.2013 11:24:27


CH High

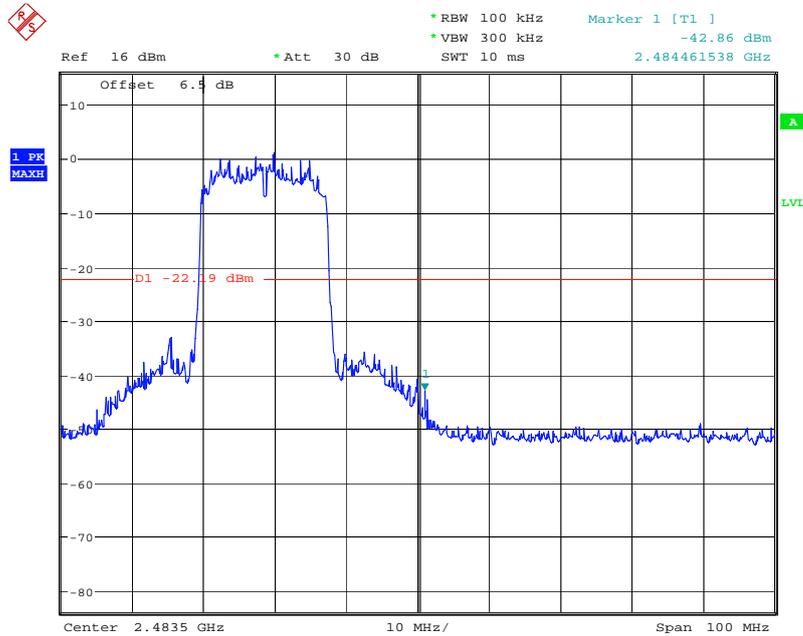

Date: 28.SEP.2013 11:24:55




IEEE 802.11n HT40 MHz (Antenna 1) mode
CH Low (30MHz ~25GHz)

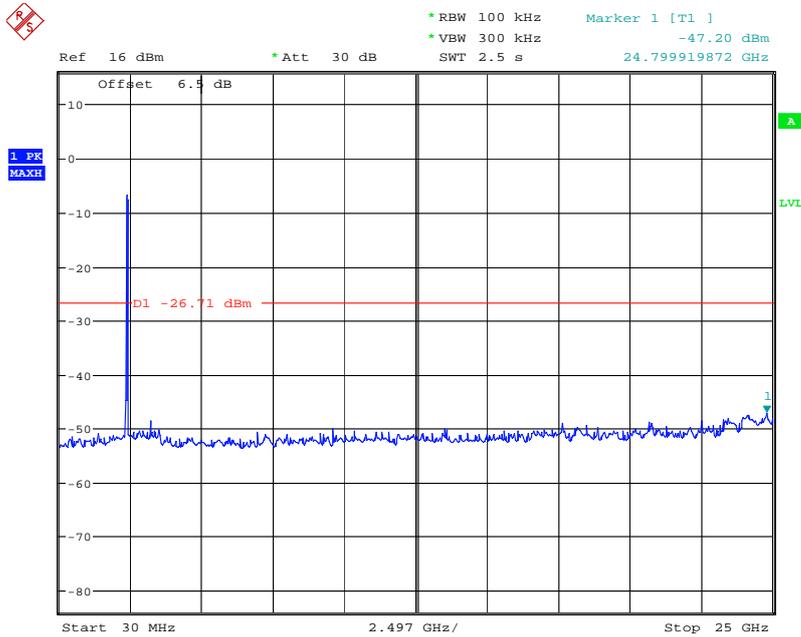

Date: 28.SEP.2013 10:49:50


CH Low

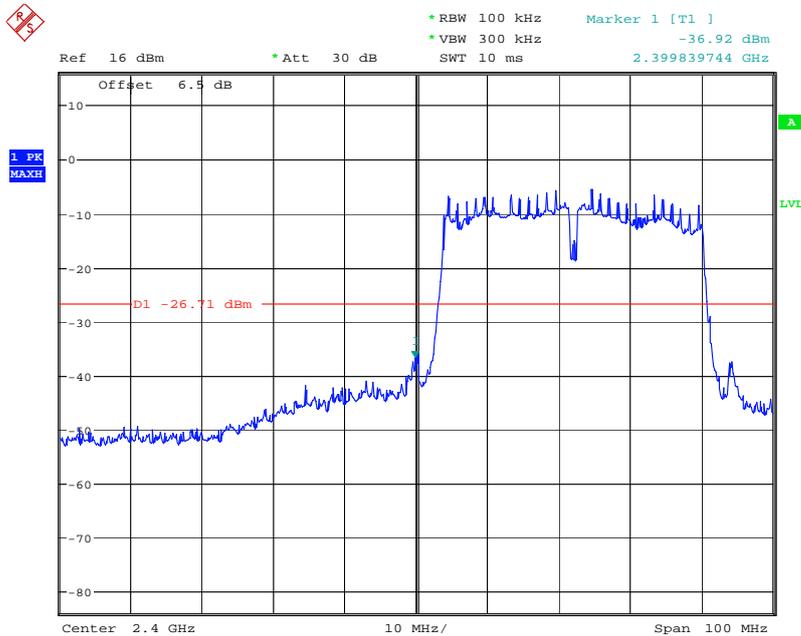

Date: 28.SEP.2013 10:50:26




CH Mid (30MHz ~25GHz)

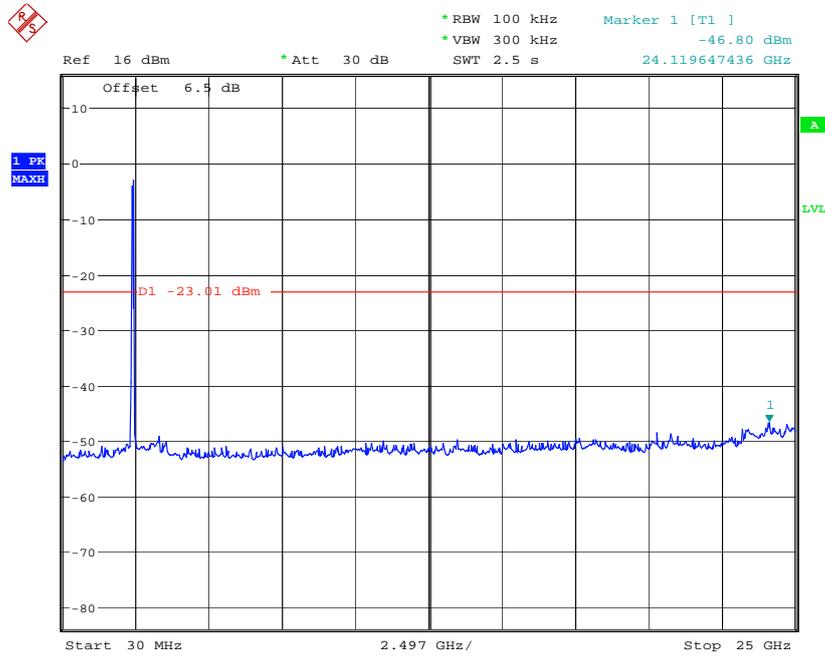

Date: 28.SEP.2013 10:48:04




CH High (30MHz ~25GHz)

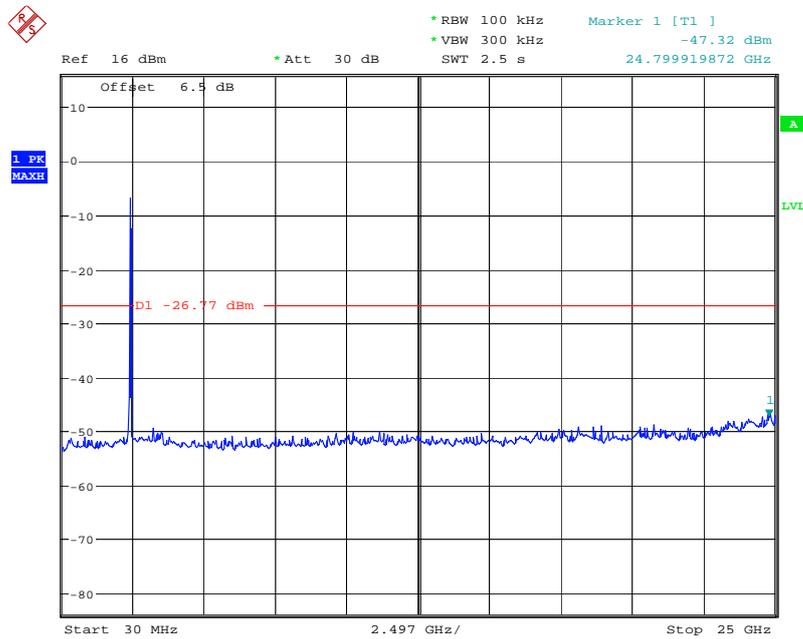

Date: 28.SEP.2013 10:51:46

CH High

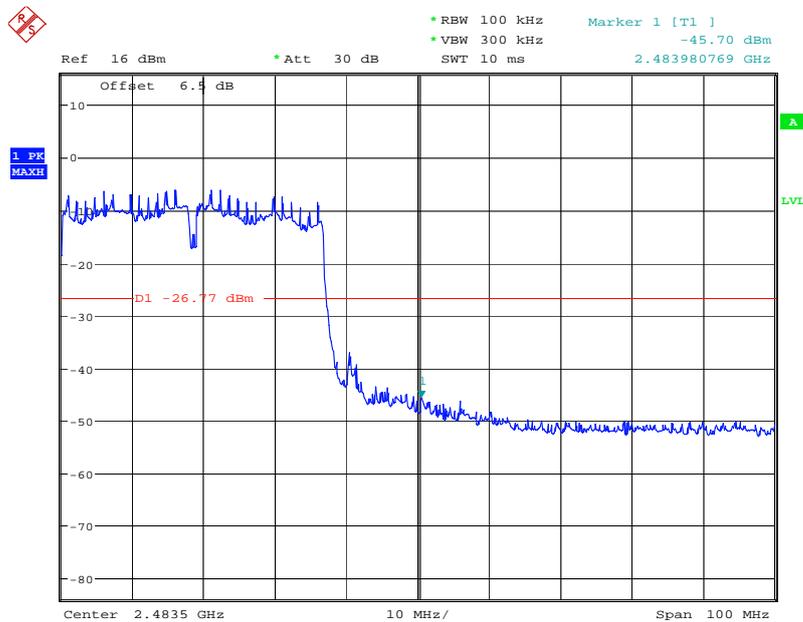


Date: 28.SEP.2013 10:52:23




IEEE 802.11n HT40 MHz (Antenna 2) mode

CH Low (30MHz ~25GHz)

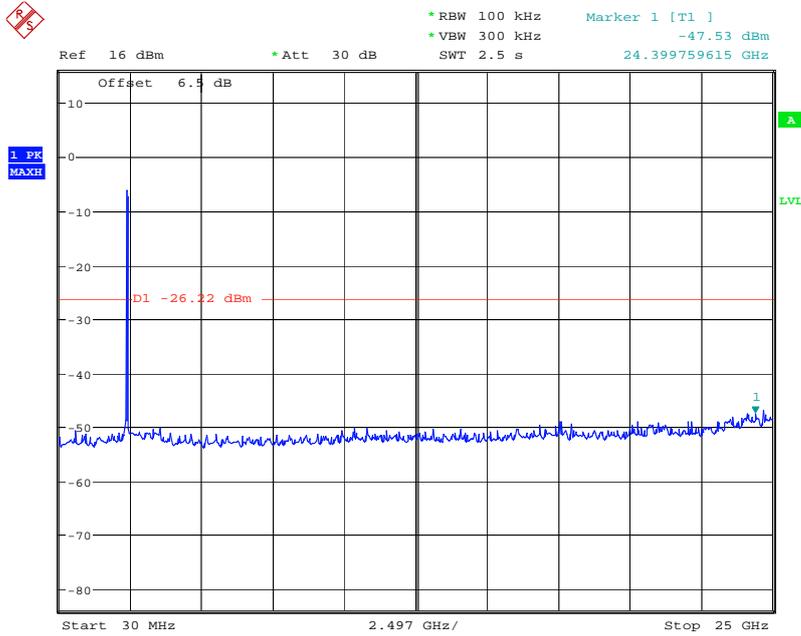

Date: 28.SEP.2013 11:27:19


CH Low

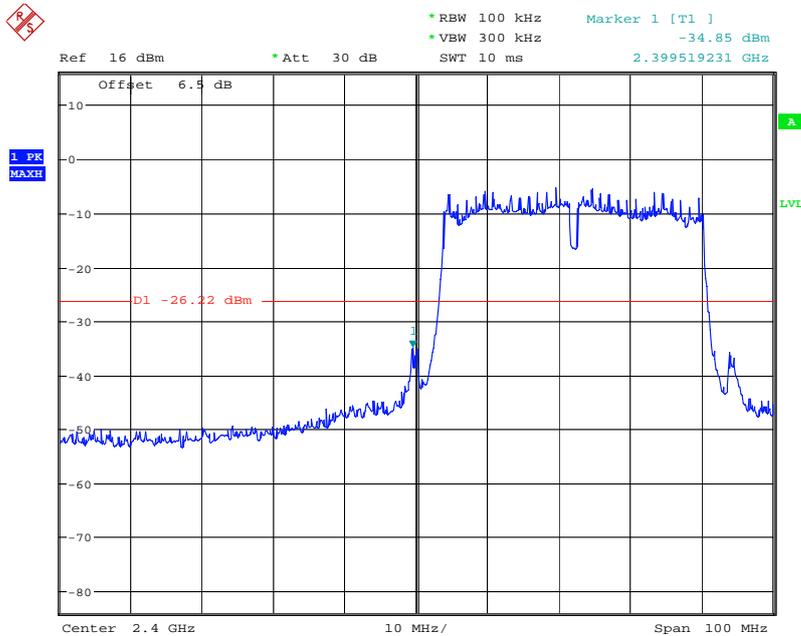

Date: 28.SEP.2013 11:27:54




CH Mid (30MHz ~25GHz)

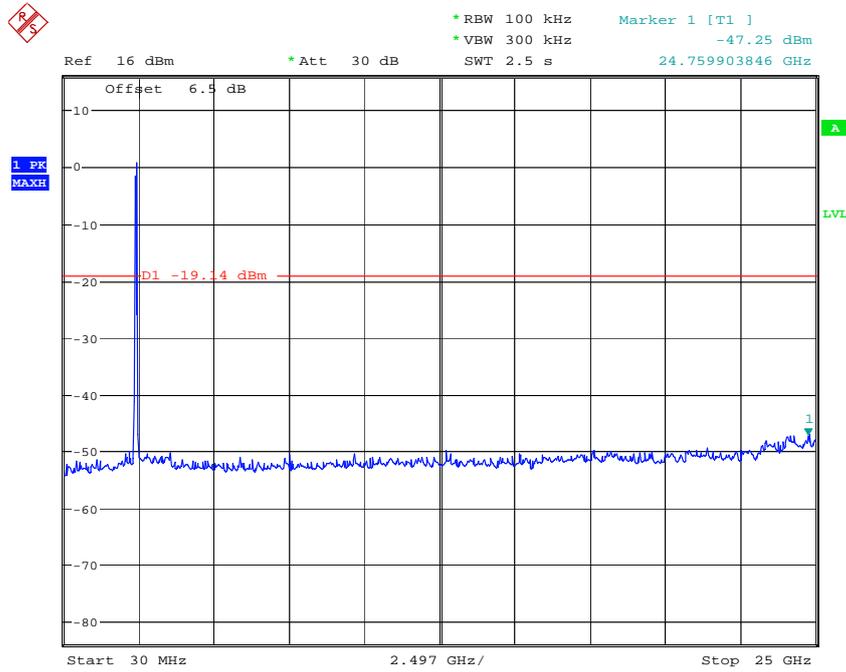

Date: 28.SEP.2013 11:26:19




CH High (30MHz ~25GHz)

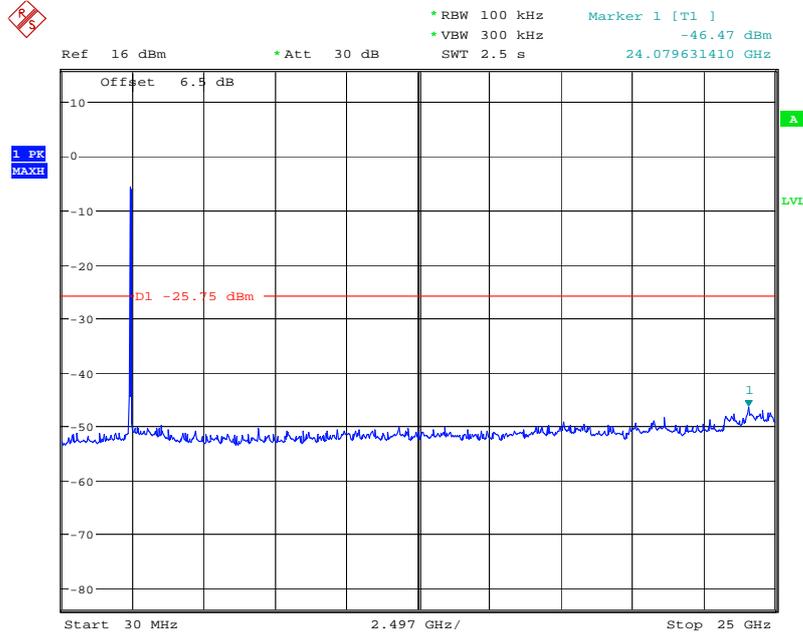

Date: 28.SEP.2013 11:30:15

CH High

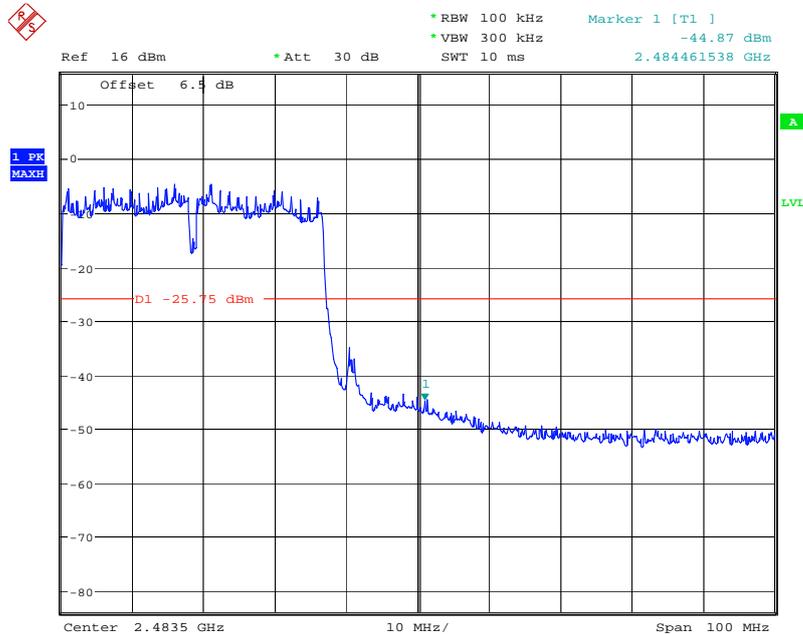

Date: 28.SEP.2013 11:30:56



7.2.4.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE:(1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).



7.2.4.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2013	06/21/2014
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A. R. A	PLA-1030/B	1029	03/19/2013	03/18/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The FCC Site Registration number is 101879.
 3. N.C.R = No Calibration Required.


7.2.4.3. TEST PROCEDURE (please refer to measurement standard)

- The EUT is placed on a turntable, which is 0.8m above ground plane.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Set the spectrum analyzer in the following setting as:
 Below 1GHz:
 RBW=100kHz / VBW=300kHz / Sweep=AUTO
 Above 1GHz:
 (a) PEAK: RBW=1MHz,VBW=3MHz / Sweep=AUTO
 (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- Repeat above procedures until the measurements for all frequencies are complete.




7.2.4.4. TEST SETUP

Below 30MHz

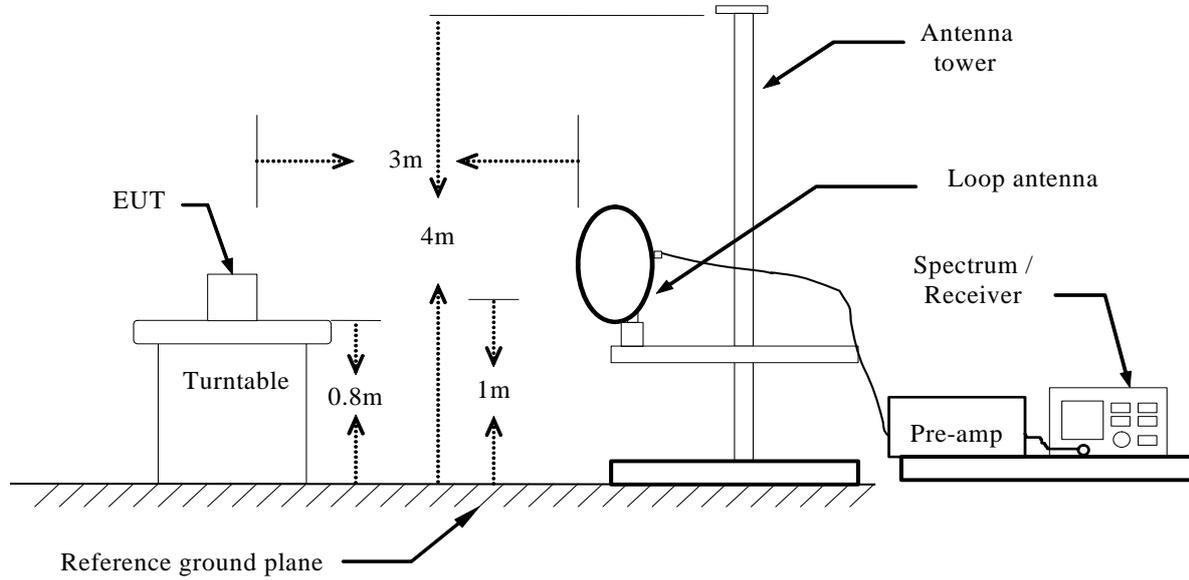


Below 1 GHz

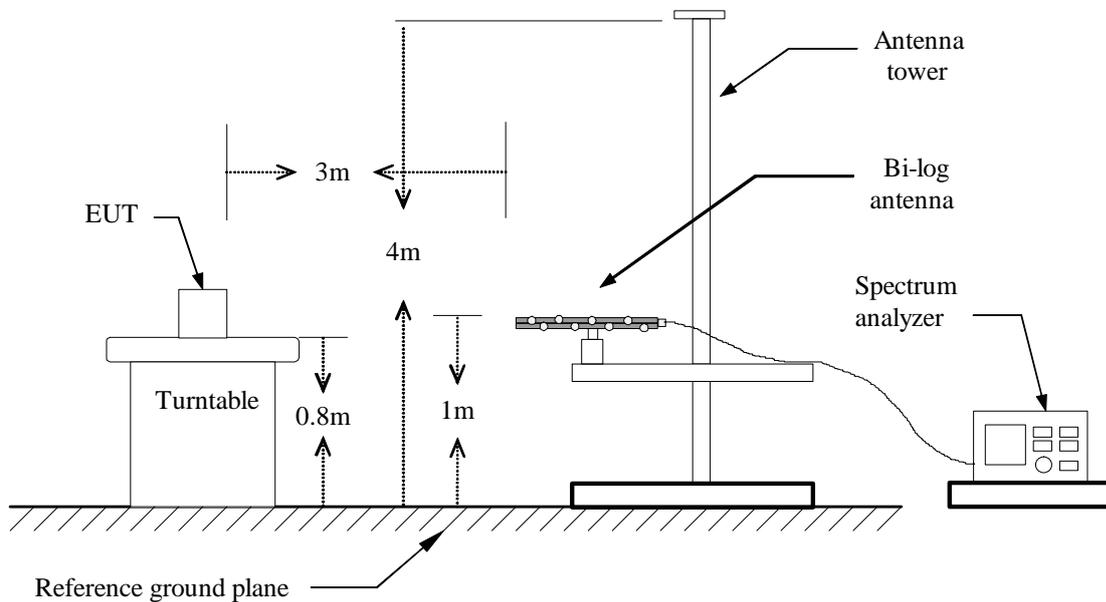



Above 1 GHz

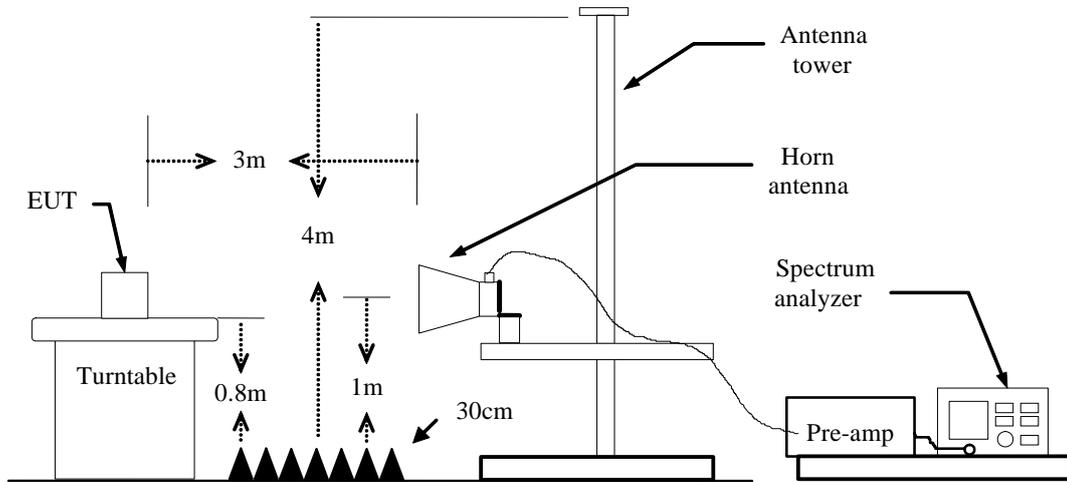

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



7.2.4.5. DATA SAPLE

Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	36.37	-12.20	24.17	40.00	-15.83	V	QP

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Q.P. = Quasi-peak Reading

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Peak = Peak Reading
 AVG = Average Reading

Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)
 Result (dBuV/m) = Reading (dBuV) + Correction Factor



7.2.4.6. TEST RESULTS

Below 1 GHz

Test Mode: TX

Test Date: November 19, 2012

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Vertical

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
102.7500	56.40	-21.86	34.54	43.50	-8.96	QP
249.8667	47.42	-17.77	29.65	46.00	-16.35	QP
374.3500	49.43	-16.77	32.66	46.00	-13.34	QP
450.3333	45.86	-15.35	30.51	46.00	-15.49	QP
500.4500	47.50	-14.06	33.44	46.00	-12.56	QP
749.4167	42.79	-11.36	31.43	46.00	-14.57	QP

**Remark: No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
4. Frequency (MHz). = Emission frequency in MHz
 Reading (dBμV/m) = Receiver reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Measured (dBμV/m) – Limits (dBμV/m)
 Antenna Pol e(H/V) = Current carrying line of reading



Test Mode: TX

Test Date: November 19, 2012

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Horizontal

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
249.8667	49.63	-17.77	31.86	46.00	-14.14	QP
280.5833	50.69	-18.59	32.10	46.00	-13.90	QP
299.9833	50.96	-18.35	32.61	46.00	-13.39	QP
374.3500	50.70	-16.77	33.93	46.00	-12.07	QP
500.4500	48.40	-14.06	34.34	46.00	-11.66	QP
249.8667	49.63	-17.77	31.86	46.00	-14.14	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
4. Frequency (MHz). = Emission frequency in MHz
 Reading (dBµV/m) = Receiver reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBµV/m) = Limit stated in standard
 Margin (dB) = Measured (dBµV/m) – Limits (dBµV/m)
 Antenna Pol e(H/V) = Current carrying line of reading



Above 1 GHz

Antenna 1

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: September 29, 2013

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1285.0000	47.92	-8.35	39.57	74.00	-34.43	V	Peak
3220.0000	50.04	-4.08	45.96	74.00	-28.04	V	Peak
4255.0000	44.84	-1.37	43.47	74.00	-30.53	V	Peak
4825.0000	49.37	0.52	49.89	74.00	-24.11	V	Peak
6145.0000	44.49	3.52	48.01	74.00	-25.99	V	Peak
7240.0000	49.25	7.41	56.66	74.00	-17.34	V	Peak
7240.0000	41.94	7.41	49.35	54.00	-4.65	V	AVG
3220.0000	48.98	-4.08	44.90	74.00	-29.10	H	Peak
4180.0000	46.56	-1.67	44.89	74.00	-29.11	H	Peak
4825.0000	48.88	0.52	49.40	74.00	-24.60	H	Peak
5620.0000	45.26	2.02	47.28	74.00	-26.72	H	Peak
6445.0000	44.10	4.39	48.49	74.00	-25.51	H	Peak
7240.0000	45.81	7.41	53.22	74.00	-20.78	H	Peak
7240.0000	40.78	7.41	48.19	54.00	-5.81	H	AVG

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: September 29, 2013

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.0000	50.74	-8.23	42.51	74.00	-31.49	V	peak
1990.0000	53.31	-11.21	42.10	74.00	-31.90	V	peak
2440.0000	49.83	-6.39	43.44	74.00	-30.56	V	peak
3250.0000	49.78	-4.07	45.71	74.00	-28.29	V	peak
4870.0000	53.56	0.73	54.29	74.00	-19.71	V	peak
4870.0000	49.70	0.73	50.43	54.00	-3.57	V	AVG
7315.0000	48.98	7.49	56.47	74.00	-17.53	V	peak
7315.0000	43.61	7.49	51.10	54.00	-2.90	V	AVG
1585.0000	49.56	-8.62	40.94	74.00	-33.06	H	Peak
3250.0000	47.01	-4.07	42.94	74.00	-31.06	H	Peak
3760.0000	45.69	-2.59	43.10	74.00	-30.90	H	Peak
4870.0000	48.02	0.73	48.75	74.00	-25.25	H	Peak
5620.0000	44.80	2.02	46.82	74.00	-27.18	H	Peak
6145.0000	44.77	3.52	48.29	74.00	-25.71	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: September 29, 2013

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.0000	50.59	-8.23	42.36	74.00	-31.64	V	peak
1720.0000	55.01	-9.14	45.87	74.00	-28.13	V	peak
3025.0000	47.24	-4.22	43.02	74.00	-30.98	V	peak
4285.0000	44.97	-1.26	43.71	74.00	-30.29	V	peak
4930.0000	52.65	1.00	53.65	74.00	-20.35	V	peak
4930.0000	48.00	1.00	49.00	54.00	-5.00	V	AVG
7225.0000	43.57	7.40	50.97	74.00	-23.03	V	peak
3760.0000	45.08	-2.59	42.49	74.00	-31.51	H	Peak
4330.0000	45.31	-1.09	44.22	74.00	-29.78	H	Peak
4930.0000	48.10	1.00	49.10	74.00	-24.90	H	Peak
5440.0000	44.40	1.60	46.00	74.00	-28.00	H	Peak
5740.0000	45.17	2.53	47.70	74.00	-26.30	H	Peak
6415.0000	44.44	4.30	48.74	74.00	-25.26	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Antenna 1

Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: September 29, 2013

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1990.0000	54.80	-11.21	43.59	74.00	-30.41	V	Peak
3220.0000	50.32	-4.08	46.24	74.00	-27.76	V	Peak
4360.0000	45.50	-0.97	44.53	74.00	-29.47	V	Peak
4825.0000	45.60	0.52	46.12	74.00	-27.88	V	Peak
5605.0000	45.07	1.95	47.02	74.00	-26.98	V	Peak
6445.0000	43.63	4.39	48.02	74.00	-25.98	V	Peak
3220.0000	48.19	-4.08	44.11	74.00	-29.89	H	Peak
4255.0000	45.22	-1.37	43.85	74.00	-30.15	H	Peak
5020.0000	44.34	1.34	45.68	74.00	-28.32	H	Peak
5500.0000	44.72	1.73	46.45	74.00	-27.55	H	Peak
6145.0000	44.55	3.52	48.07	74.00	-25.93	H	Peak
6835.0000	45.92	5.62	51.54	74.00	-22.46	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid
Temperature: 24°C
Humidity: 52 % RH

Test Date: September 29, 2013
Tested by: Sunday Hu
Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1300.0000	49.72	-8.28	41.44	74.00	-32.56	V	Peak
3250.0000	49.07	-4.07	45.00	74.00	-29.00	V	Peak
4390.0000	45.42	-0.86	44.56	74.00	-29.44	V	Peak
4870.0000	48.71	0.73	49.44	74.00	-24.56	V	Peak
5860.0000	44.76	2.87	47.63	74.00	-26.37	V	Peak
7315.0000	53.02	7.49	60.51	74.00	-13.49	V	Peak
7315.0000	40.23	7.49	47.72	54.00	-6.28	V	AVH
1435.0000	50.77	-7.98	42.79	74.00	-31.21	H	Peak
3730.0000	45.58	-2.67	42.91	74.00	-31.09	H	Peak
4885.0000	45.01	0.80	45.81	74.00	-28.19	H	Peak
5650.0000	44.28	2.14	46.42	74.00	-27.58	H	Peak
6460.0000	43.74	4.43	48.17	74.00	-25.83	H	Peak
7315.0000	44.95	7.49	52.44	74.00	-21.56	H	Peak
7315.0000	35.40	7.49	42.89	54.00	-11.11	H	AVG

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High Test Date: September 29, 2013
Temperature: 24°C Tested by: Sunday Hu
Humidity: 52 % RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3280.0000	47.13	-4.05	43.08	74.00	-30.92	V	Peak
3865.0000	46.08	-2.50	43.58	74.00	-30.42	V	Peak
4930.0000	45.55	1.00	46.55	74.00	-27.45	V	Peak
5635.0000	44.31	2.08	46.39	74.00	-27.61	V	Peak
6220.0000	43.81	3.74	47.55	74.00	-26.45	V	Peak
6955.0000	44.83	6.12	50.95	74.00	-23.05	V	Peak
3385.0000	46.57	-4.01	42.56	74.00	-31.44	H	Peak
4285.0000	46.40	-1.26	45.14	74.00	-28.86	H	Peak
4990.0000	44.70	1.27	45.97	74.00	-28.03	H	Peak
5845.0000	44.36	2.85	47.21	74.00	-26.79	H	Peak
6145.0000	45.74	3.52	49.26	74.00	-24.74	H	Peak
6925.0000	44.74	5.97	50.71	74.00	-23.29	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Combine with antenna 1 and antenna 2

Operation Mode: TX / IEEE 802.11n HT20 MHz / CH Low Test Date: September 29, 2013

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3220.0000	51.17	-4.08	47.09	74.00	-26.91	V	Peak
4360.0000	44.88	-0.97	43.91	74.00	-30.09	V	Peak
5080.0000	45.32	1.41	46.73	74.00	-27.27	V	Peak
5995.0000	44.28	3.08	47.36	74.00	-26.64	V	Peak
6670.0000	44.63	5.06	49.69	74.00	-24.31	V	Peak
7240.0000	43.65	7.41	51.06	74.00	-22.94	V	Peak
1435.0000	49.74	-7.98	41.76	74.00	-32.24	H	Peak
3670.0000	45.95	-2.83	43.12	74.00	-30.88	H	Peak
4975.0000	44.89	1.21	46.10	74.00	-27.90	H	Peak
5860.0000	44.87	2.87	47.74	74.00	-26.26	H	Peak
6520.0000	43.76	4.60	48.36	74.00	-25.64	H	Peak
6985.0000	44.04	6.27	50.31	74.00	-23.69	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT20 MHz / CH Mid **Test Date:** September 29, 2013
Temperature: 24°C **Tested by:** Sunday Hu
Humidity: 52% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3250.0000	50.17	-4.07	46.10	74.00	-27.90	V	Peak
4885.0000	49.13	0.80	49.93	74.00	-24.07	V	Peak
5755.0000	43.80	2.59	46.39	74.00	-27.61	V	Peak
6460.0000	44.25	4.43	48.68	74.00	-25.32	V	Peak
6955.0000	44.82	6.12	50.94	74.00	-23.06	V	Peak
7315.0000	45.53	7.49	53.02	74.00	-20.98	V	Peak
3040.0000	47.16	-4.21	42.95	74.00	-31.05	H	Peak
4270.0000	44.99	-1.31	43.68	74.00	-30.32	H	Peak
4870.0000	49.87	0.73	50.60	74.00	-23.40	H	Peak
5320.0000	44.96	1.53	46.49	74.00	-27.51	H	Peak
6130.0000	44.75	3.48	48.23	74.00	-25.77	H	Peak
7120.0000	44.99	6.96	51.95	74.00	-22.05	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT20 MHz / CH High **Test Date:** September 29, 2013

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1255.0000	51.89	-8.48	43.41	74.00	-30.59	V	Peak
4300.0000	45.37	-1.20	44.17	74.00	-29.83	V	Peak
4930.0000	44.97	1.00	45.97	74.00	-28.03	V	Peak
5485.0000	45.07	1.69	46.76	74.00	-27.24	V	Peak
6235.0000	44.21	3.79	48.00	74.00	-26.00	V	Peak
6955.0000	44.33	6.12	50.45	74.00	-23.55	V	Peak
3760.0000	45.73	-2.59	43.14	74.00	-30.86	H	Peak
4270.0000	44.90	-1.31	43.59	74.00	-30.41	H	Peak
5215.0000	45.25	1.55	46.80	74.00	-27.20	H	Peak
5770.0000	44.71	2.65	47.36	74.00	-26.64	H	Peak
6475.0000	43.34	4.47	47.81	74.00	-26.19	H	Peak
6985.0000	44.46	6.27	50.73	74.00	-23.27	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Combine with antenna 1and antenna 2

Operation Mode: TX / IEEE 802.11n HT40 MHz / CH Low Test Date: September 29, 2013

Temperature: 24°C Tested by: Sunday Hu

Humidity: 52% RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1240.0000	52.99	-8.55	44.44	74.00	-29.56	V	Peak
4375.0000	46.01	-0.91	45.10	74.00	-28.90	V	Peak
5050.0000	45.19	1.38	46.57	74.00	-27.43	V	Peak
5800.0000	44.31	2.78	47.09	74.00	-26.91	V	Peak
6565.0000	43.88	4.72	48.60	74.00	-25.40	V	Peak
6925.0000	44.71	5.97	50.68	74.00	-23.32	V	Peak
3670.0000	45.46	-2.83	42.63	74.00	-31.37	H	Peak
4150.0000	44.57	-1.82	42.75	74.00	-31.25	H	Peak
4840.0000	45.32	0.59	45.91	74.00	-28.09	H	Peak
5095.0000	44.76	1.43	46.19	74.00	-27.81	H	Peak
6250.0000	44.22	3.83	48.05	74.00	-25.95	H	Peak
6955.0000	44.81	6.12	50.93	74.00	-23.07	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT40 MHz / CH Mid **Test Date:** September 29, 2013
Temperature: 24°C **Tested by:** Sunday Hu
Humidity: 52% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3250.0000	47.35	-4.07	43.28	74.00	-30.72	V	Peak
4270.0000	44.95	-1.31	43.64	74.00	-30.36	V	Peak
5020.0000	44.84	1.34	46.18	74.00	-27.82	V	Peak
5800.0000	44.16	2.78	46.94	74.00	-27.06	V	Peak
6070.0000	44.81	3.30	48.11	74.00	-25.89	V	Peak
6895.0000	44.44	5.82	50.26	74.00	-23.74	V	Peak
3790.0000	45.31	-2.52	42.79	74.00	-31.21	H	Peak
4000.0000	46.18	-2.53	43.65	74.00	-30.35	H	Peak
4975.0000	44.25	1.21	45.46	74.00	-28.54	H	Peak
5470.0000	44.59	1.66	46.25	74.00	-27.75	H	Peak
5950.0000	44.65	3.01	47.66	74.00	-26.34	H	Peak
6955.0000	45.03	6.12	51.15	74.00	-22.85	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT40 MHz / CH High Test Date: September 29, 2013

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3265.0000	48.14	-4.06	44.08	74.00	-29.92	V	Peak
4660.0000	44.57	-0.20	44.37	74.00	-29.63	V	Peak
5380.0000	44.52	1.52	46.04	74.00	-27.96	V	Peak
5740.0000	44.48	2.52	47.00	74.00	-27.00	V	Peak
6565.0000	43.95	4.72	48.67	74.00	-25.33	V	Peak
7150.0000	44.48	7.12	51.60	74.00	-22.40	V	Peak
3010.0000	46.89	-4.23	42.66	74.00	-31.34	H	Peak
3775.0000	45.63	-2.55	43.08	74.00	-30.92	H	Peak
4435.0000	44.99	-0.76	44.23	74.00	-29.77	H	Peak
5260.0000	44.15	1.54	45.69	74.00	-28.31	H	Peak
5800.0000	44.32	2.78	47.10	74.00	-26.90	H	Peak
6430.0000	44.49	4.34	48.83	74.00	-25.17	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS


According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

7.3.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 1-5 % of the emission bandwidth (EBW), VBW = $\geq 3 \times$ RBW, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



7.3.4. TEST SETUP



7.3.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b (Antenna 1)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	8107	>500	PASS
Mid	2437	8600		PASS
High	2462	8112		PASS

Test mode: IEEE 802.11g (Antenna 1)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	14446	>500	PASS
Mid	2437	15064		PASS
High	2462	15096		PASS

Test mode: IEEE 802.11n HT20 MHz (Antenna 1)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	15108	>500	PASS
Mid	2437	15085		PASS
High	2462	15115		PASS

Test mode: IEEE 802.11n HT20 MHz (Antenna 2))

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	15090	>500	PASS
Mid	2437	15125		PASS
High	2462	15136		PASS



Test mode: IEEE 802.11n HT40 MHz (Antenna 1)

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	36835	>500	PASS
Mid	2437	35788		PASS
High	2452	35831		PASS

Test mode: IEEE 802.11n HT40 MHz (Antenna 2)


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	36434	>500	PASS
Mid	2437	36417		PASS
High	2452	36405		PASS



Test Plot


IEEE 802.11b (Antenna 1)mode

6dB Bandwidth (CH Low)

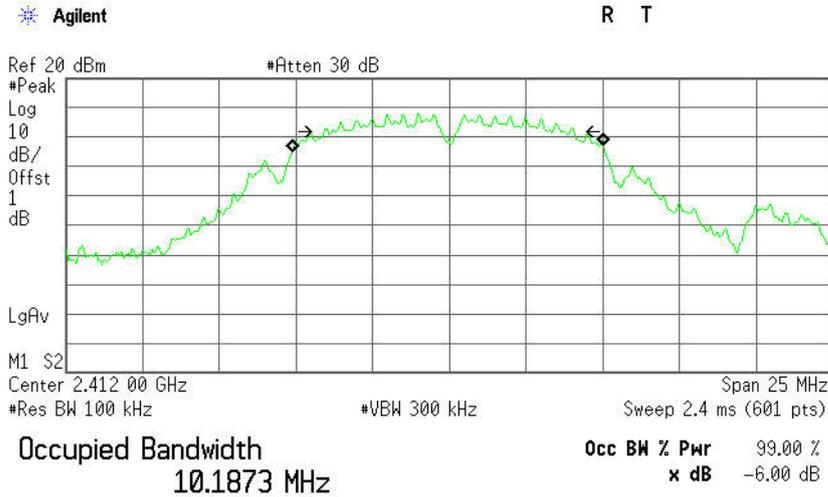

Transmit Freq Error -48.503 kHz
x dB Bandwidth 8.107 MHz

6dB Bandwidth (CH Mid)

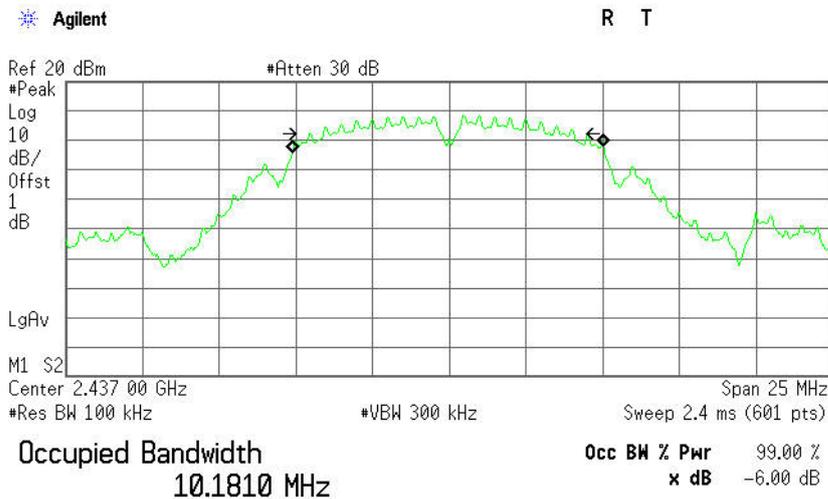


Transmit Freq Error -36.973 kHz
x dB Bandwidth 8.600 MHz



6dB Bandwidth (CH High)

Agilent

R T

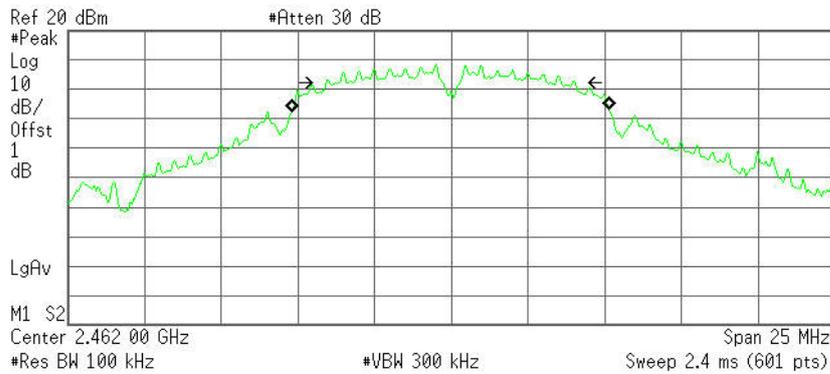

Occupied Bandwidth
10.3893 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -28.909 kHz
x dB Bandwidth 8.112 MHz

IEEE 802.11g (Antenna 1) mode

6dB Bandwidth (CH Low)

Agilent

R T

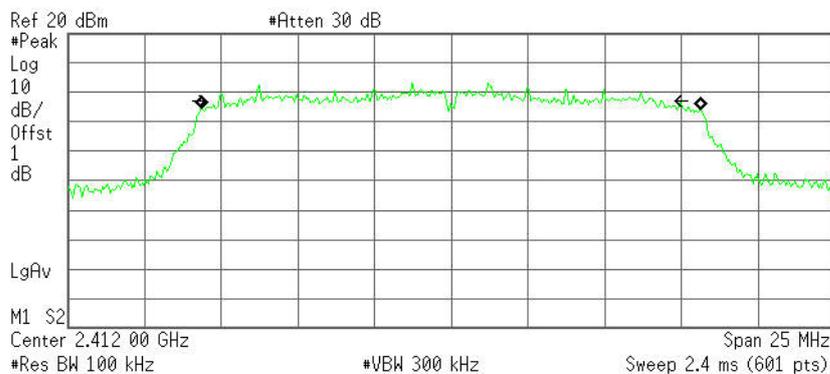

Occupied Bandwidth
16.2452 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -16.857 kHz
x dB Bandwidth 14.446 MHz



6dB Bandwidth (CH Mid)

Agilent

R T

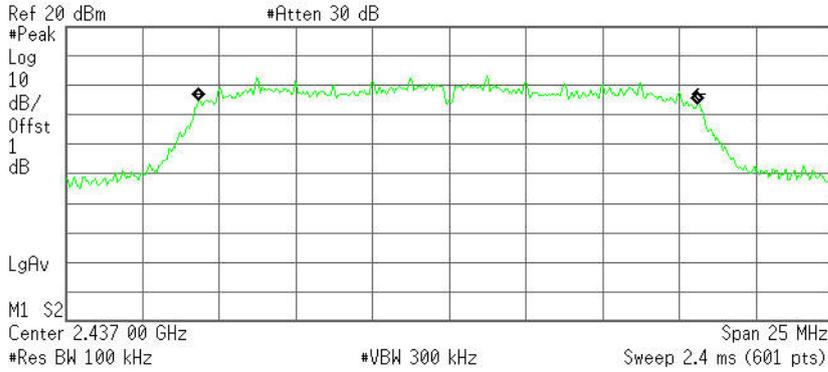

Occupied Bandwidth
16.2527 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -30.548 kHz
x dB Bandwidth 15.064 MHz

6dB Bandwidth (CH High)

Agilent

R T

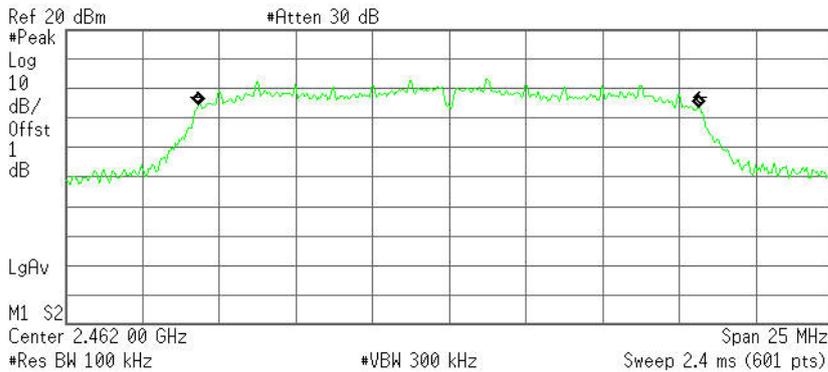

Occupied Bandwidth
16.2764 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -23.279 kHz
x dB Bandwidth 15.096 MHz




IEEE 802.11n HT20 MHz (Antenna 1)mode

6dB Bandwidth (CH Low)

Agilent

R T

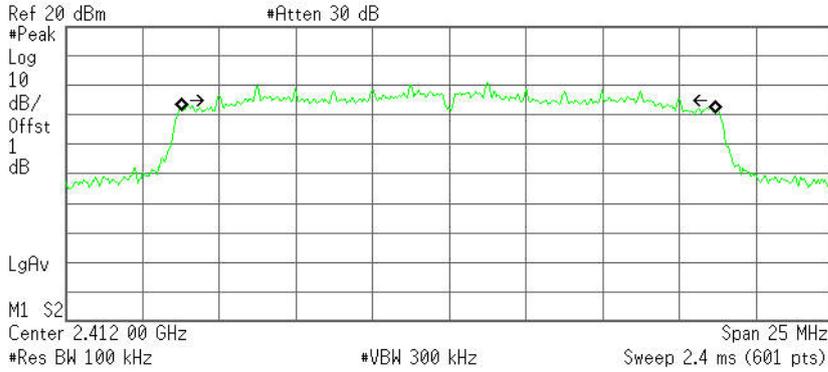

Occupied Bandwidth
17.3793 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -23.597 kHz
x dB Bandwidth 15.108 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

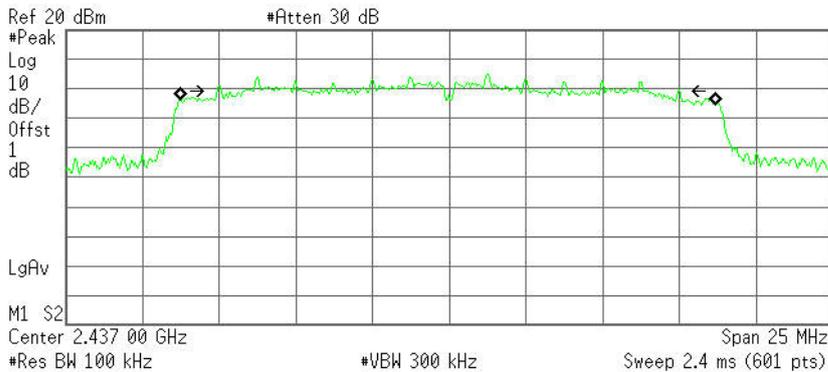


Occupied Bandwidth
17.3957 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -33.261 kHz
x dB Bandwidth 15.085 MHz




6dB Bandwidth (CH High)

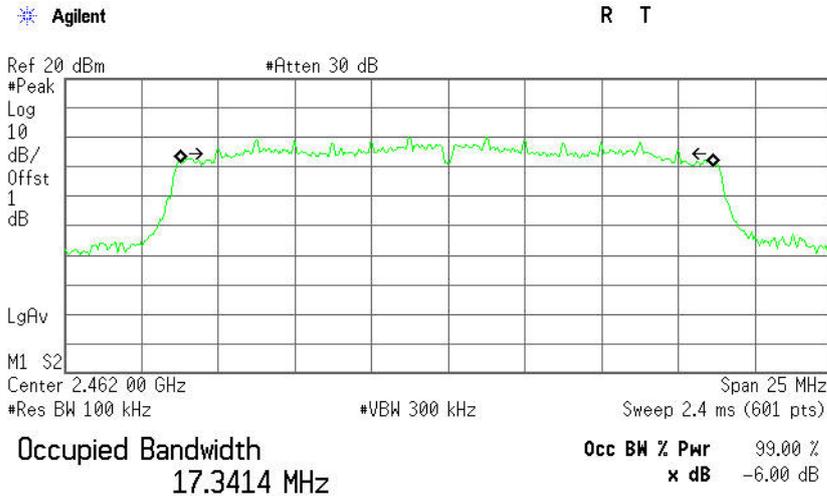

Transmit Freq Error -25.843 kHz
x dB Bandwidth 15.115 MHz

IEEE 802.11n HT20 MHz (Antenna 2)mode

6dB Bandwidth (CH Low)

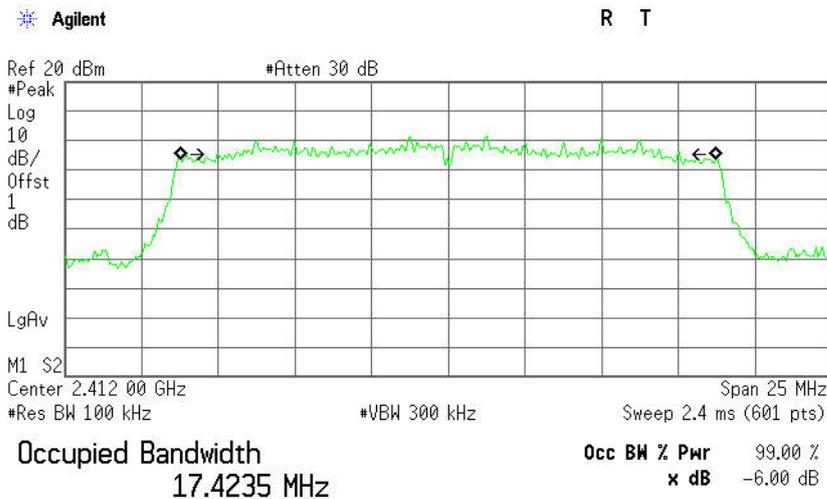


Transmit Freq Error -10.073 kHz
x dB Bandwidth 15.090 MHz



6dB Bandwidth (CH Mid)

Agilent

R T

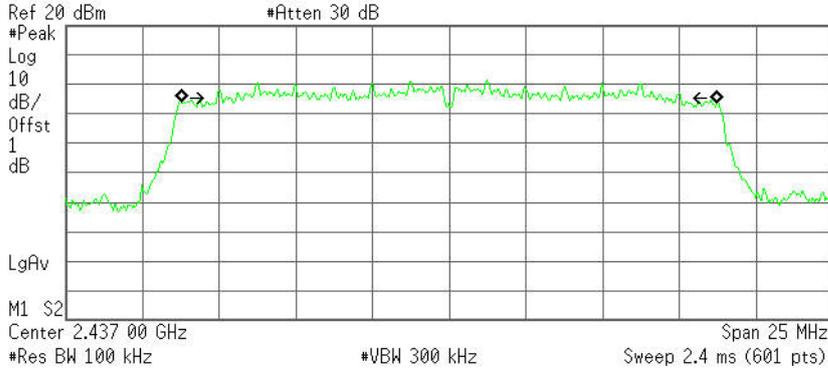

Occupied Bandwidth
17.4204 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -11.294 kHz
x dB Bandwidth 15.125 MHz

6dB Bandwidth (CH High)

Agilent

R T

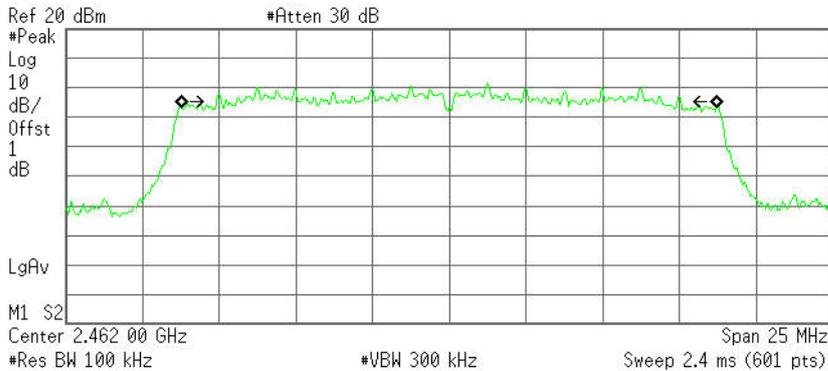

Occupied Bandwidth
17.4100 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -11.492 kHz
x dB Bandwidth 15.136 MHz




IEEE 802.11n HT40 MHz (Antenna 1) mode

6dB Bandwidth (CH Low)

Agilent

R T

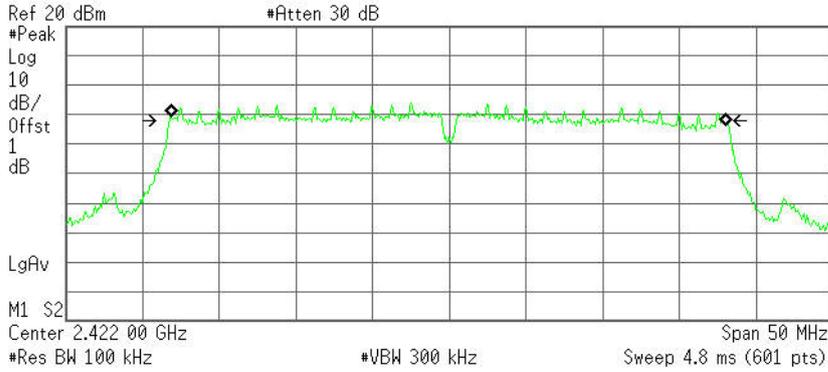

Occupied Bandwidth
36.1369 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -51.114 kHz
x dB Bandwidth 35.835 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

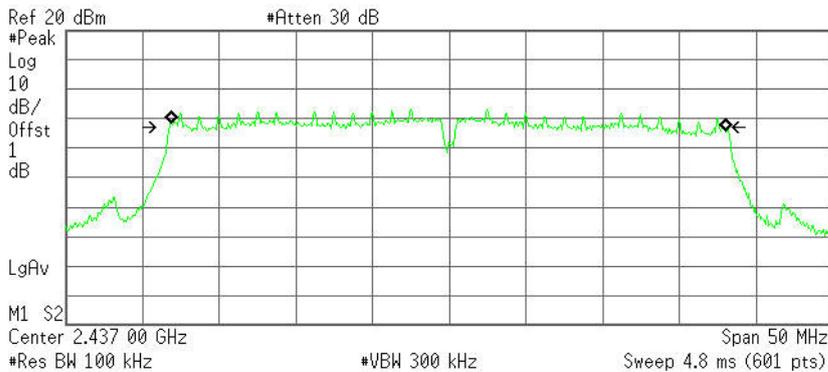


Occupied Bandwidth
36.1092 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -59.363 kHz
x dB Bandwidth 35.788 MHz




6dB Bandwidth (CH High)

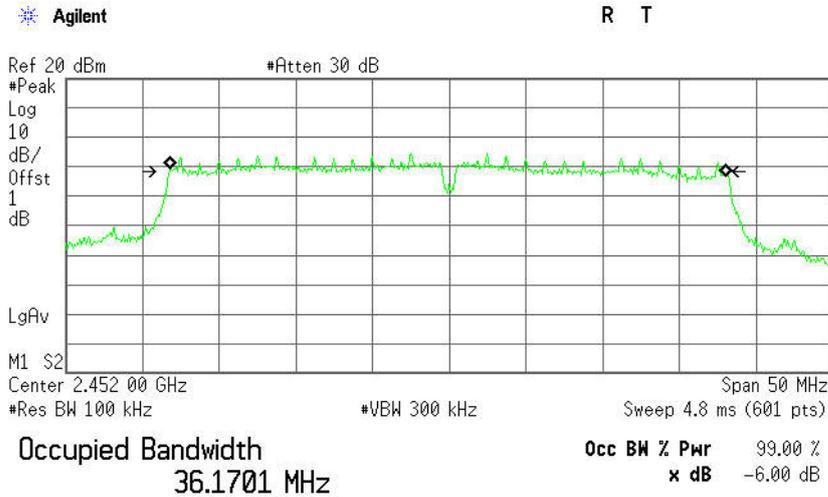

Transmit Freq Error -64.727 kHz
x dB Bandwidth 35.831 MHz

IEEE 802.11n HT40 MHz (Antenna 2) mode

6dB Bandwidth (CH Low)

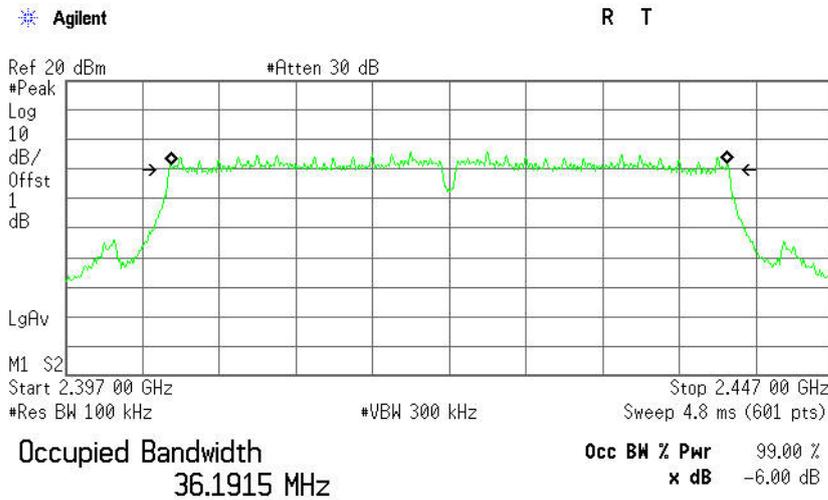


Transmit Freq Error -9.158 kHz
x dB Bandwidth 36.434 MHz



6dB Bandwidth (CH Mid)

Agilent

R T

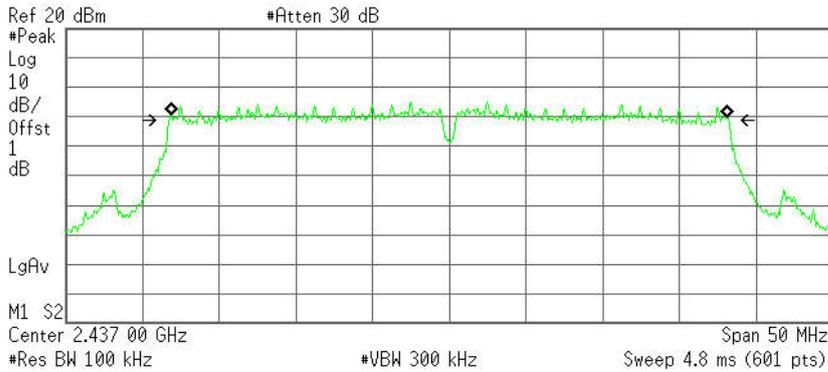

Occupied Bandwidth
36.1712 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -18.286 kHz
x dB Bandwidth 36.417 MHz

6dB Bandwidth (CH High)

Agilent

R T

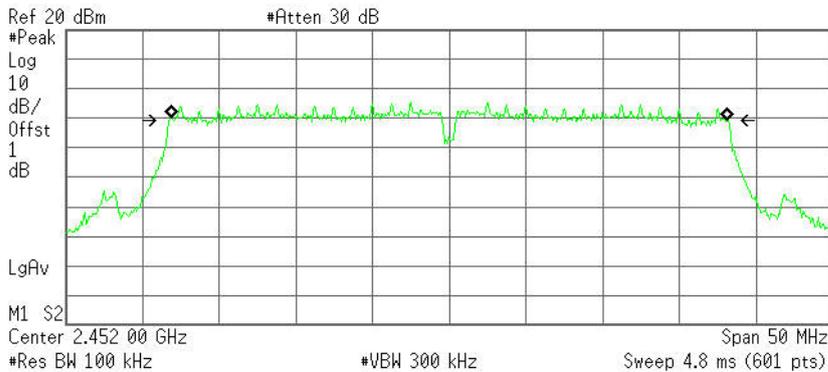

Occupied Bandwidth
36.1477 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -23.064 kHz
x dB Bandwidth 36.405 MHz



7.4. PEAK OUTPUT POWER

7.4.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.4.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
Power Sensor	Anritsu	MA2411B	1126150	03/09/2013	03/08/2014
Power Meter	Anritsu	ML2495A	1204003	03/09/2013	03/08/2014

7.4.3. TEST PROCEDURES (please refer to measurement standard)

1. This procedure provides an integrated measurement alternative when the maximum available RBW < EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Set the span to a value that is 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges(for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at 1 MHz intervals extending across the EBW of the spectrum.



7.4.4. TEST SETUP

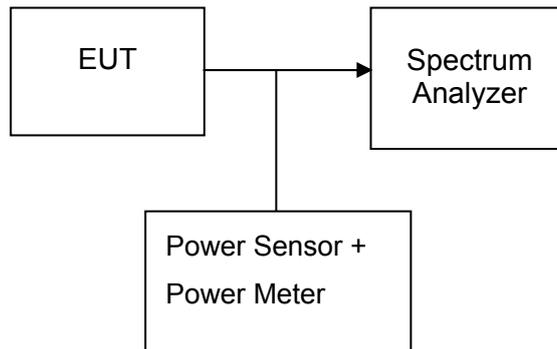

7.4.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b (Antenna 1)

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Remark	Result
Low	2412	21.10	0.12882	1	peak	PASS
Mid	2437	20.30	0.10715			PASS
High	2462	20.40	0.10965			PASS
Low	2412	16.50	0.04467	1	AVG	PASS
Mid	2437	16.70	0.04677			PASS
High	2462	16.10	0.04074			PASS

Test mode: IEEE 802.11g (Antenna 1)

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Remark	Result
Low	2412	24.30	0.26915	1	peak	PASS
Mid	2437	23.60	0.22909			PASS
High	2462	23.70	0.23442			PASS
Low	2412	14.90	0.03090	1	AVG	PASS
Mid	2437	16.20	0.04169			PASS
High	2462	13.50	0.02239			PASS

Test mode: IEEE 802.11n HT20 MHz (Combine with antenna 1 and antenna 2)

Channel	Frequency (MHz)	Output Power (dBm)		Output Power Total(dBm)	Output Power (W)	Limit (W)	Remark	Result
		Chain 1	Chain 2					
Low	2412	21.80	21.90	24.86	0.30624	1	peak	PASS
Mid	2437	23.20	22.90	26.06	0.40391			PASS
High	2462	22.60	21.30	25.01	0.31687			PASS
Low	2412	11.60	11.60	14.61	0.02891	1	AVG	PASS
Mid	2437	14.30	14.60	17.46	0.05576			PASS
High	2462	11.50	11.10	14.31	0.02701			PASS



Test mode: IEEE 802.11n HT40 MHz (Combine with antenna 1 and antenna 2)

Channel	Frequency (MHz)	Output Power (dBm)		Output Power Total(dBm)	Output Power (W)	Limit (W)	Remark	Result
		Chain 1	Chain 2					
Low	2422	19.00	19.20	22.11	0.16261	1	peak	PASS
Mid	2437	21.20	22.30	24.80	0.30165			PASS
High	2452	18.60	19.70	22.20	0.16577			PASS
Low	2422	9.10	8.70	11.91	0.01554	1	AVG	PASS
Mid	2437	12.50	12.30	15.41	0.03477			PASS
High	2452	8.50	8.70	11.61	0.01449			PASS

Note : Combine Power Calculation :

$$\text{Total Power(dBm)} = \lg (10^{(\text{chain 0 power}/10)} + 10^{(\text{chain 1 power}/10)}) * 10$$



7.5. BAND EDGES MEASUREMENT

7.5.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.5.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2013	06/21/2014
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A、R、A	PLA-1030/B	1029	03/19/2013	03/18/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			


- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The FCC Site Registration number is 101879.
 3. N.C.R = No Calibration Required.



7.5.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are

7.5.4. TEST SETUP

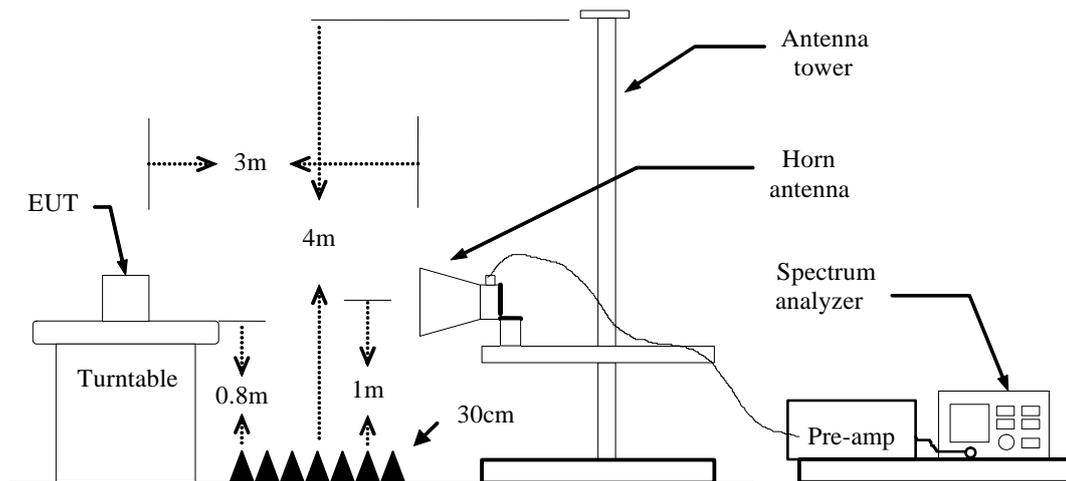



7.5.5. TEST RESULTS


Test Plot

IEEE 802.11b (Antenna 1)mode

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

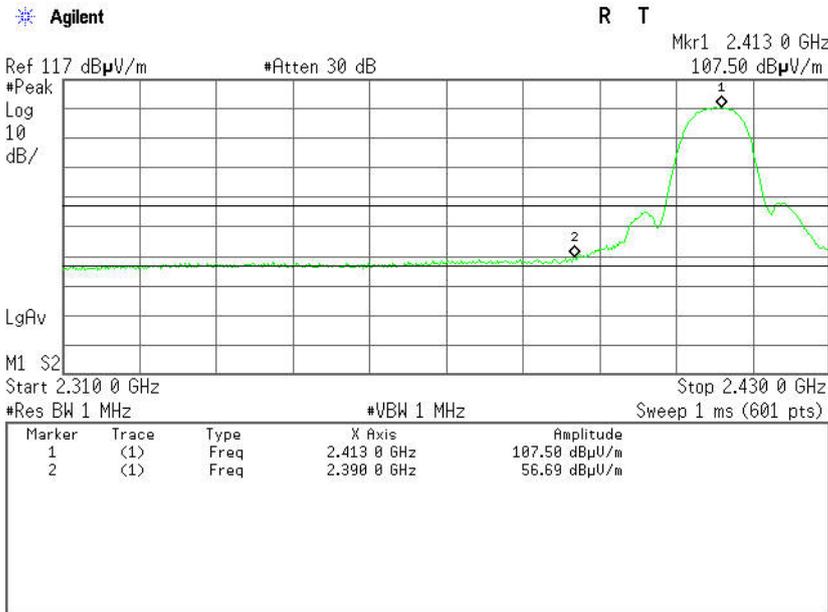

Detector mode: Average

Polarity: Vertical

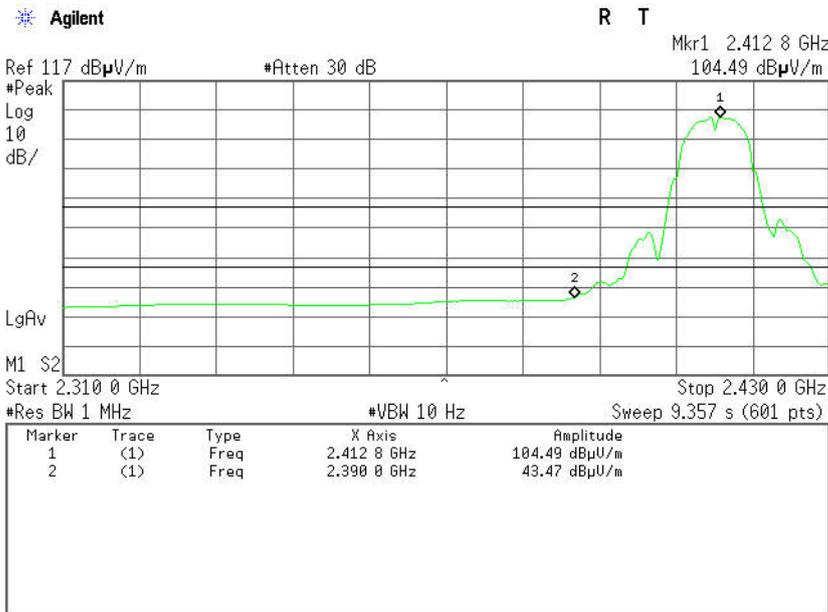


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	50.09	-6.60	56.69	74.00	-17.31	Peak	Vertical
2	2390.0000	36.87	-6.60	43.47	54.00	-10.53	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

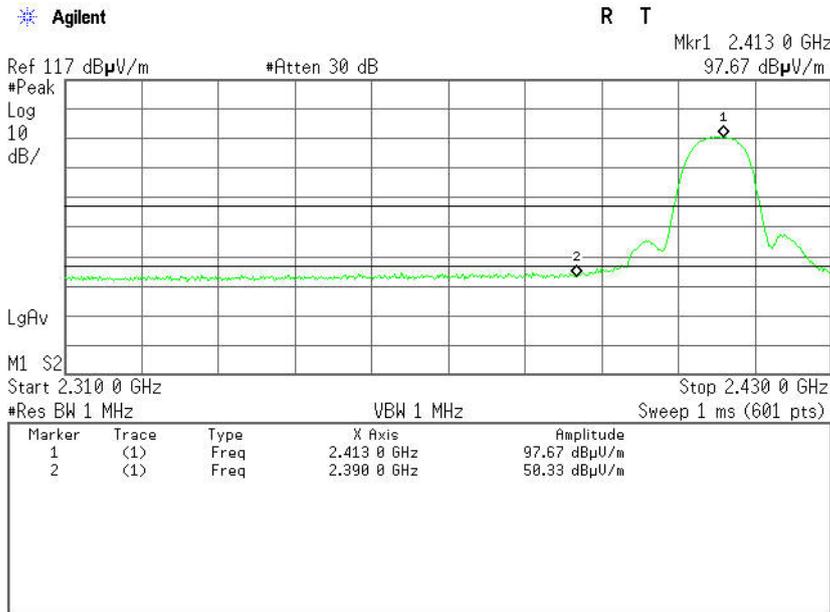

Detector mode: Average

Polarity: Horizontal

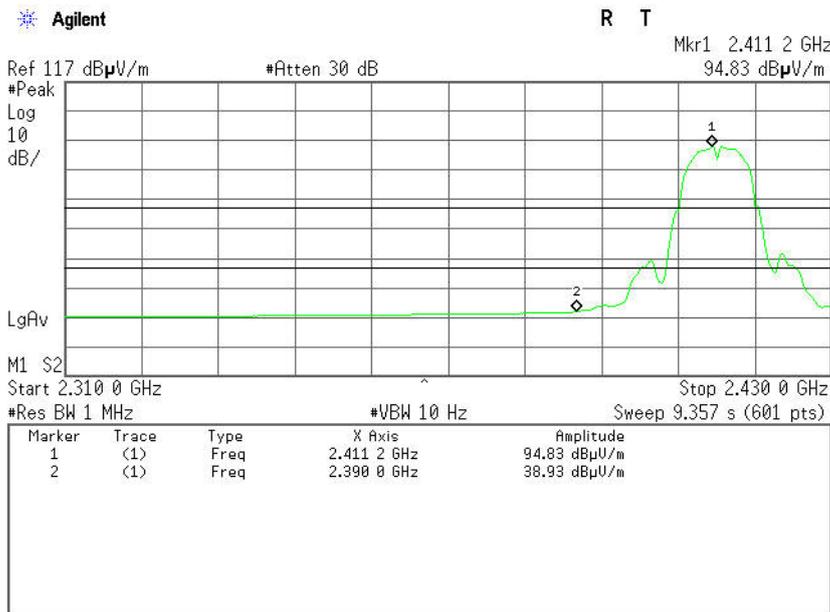


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.73	-6.60	50.33	74.00	-23.67	Peak	Horizontal
2	2390.0000	32.33	-6.60	38.93	54.00	-15.07	Average	Horizontal



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

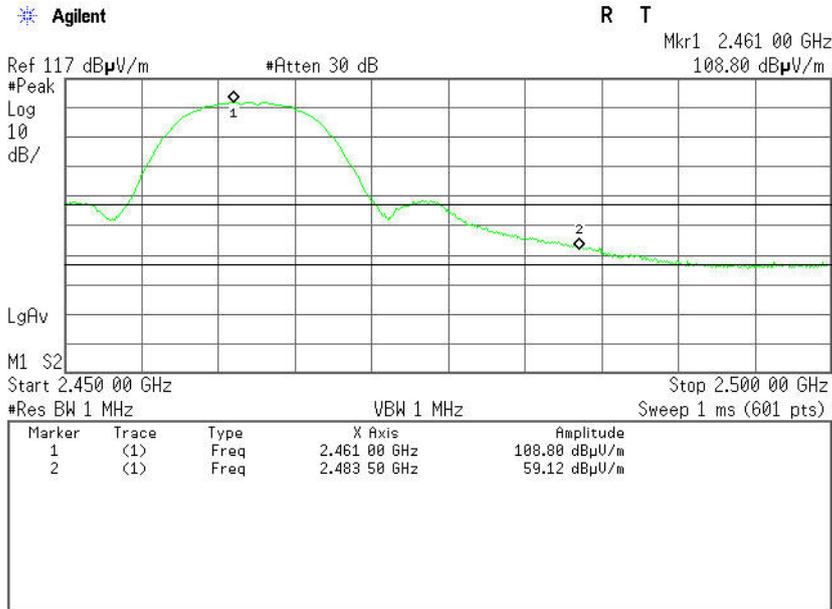

Detector mode: Average

Polarity: Vertical

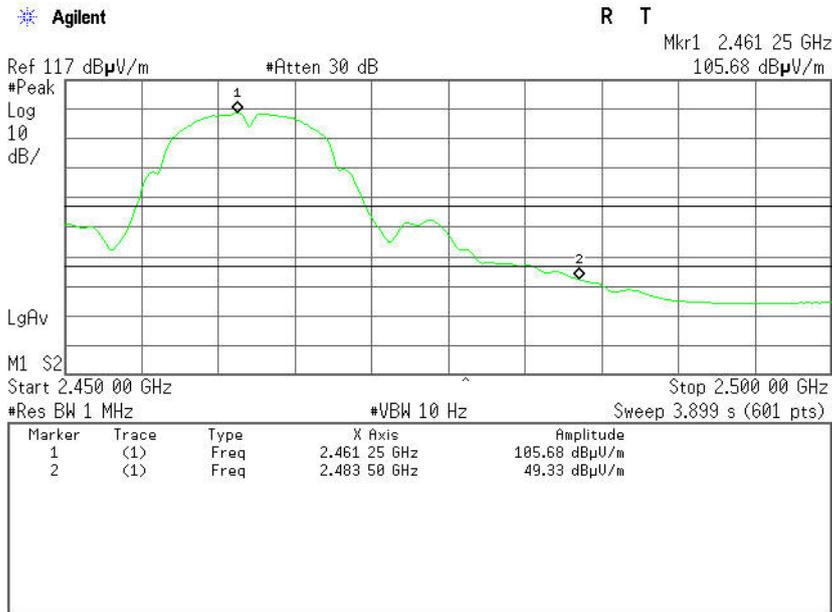


No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	52.88	-6.24	59.12	74.00	-14.88	Peak	Vertical
2	2483.5000	43.09	-6.24	49.33	54.00	-4.67	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

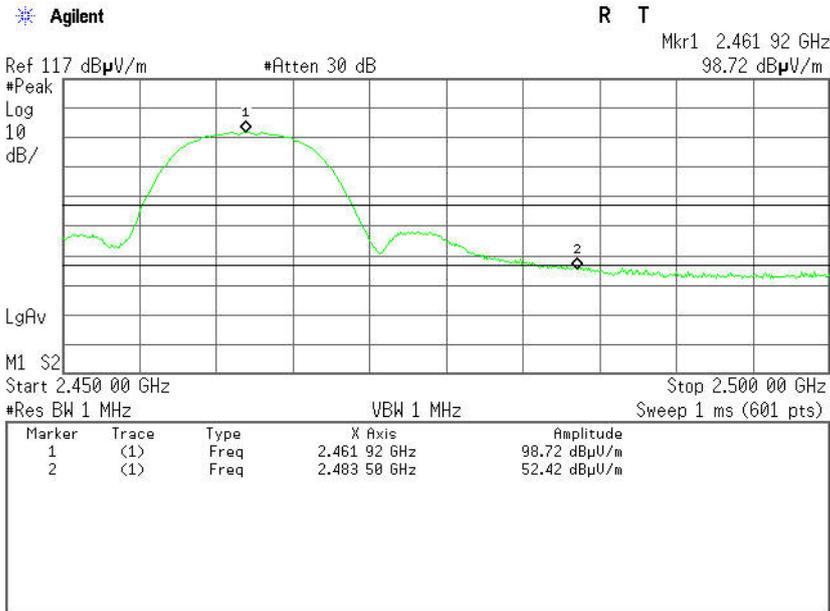

Detector mode: Average

Polarity: Horizontal

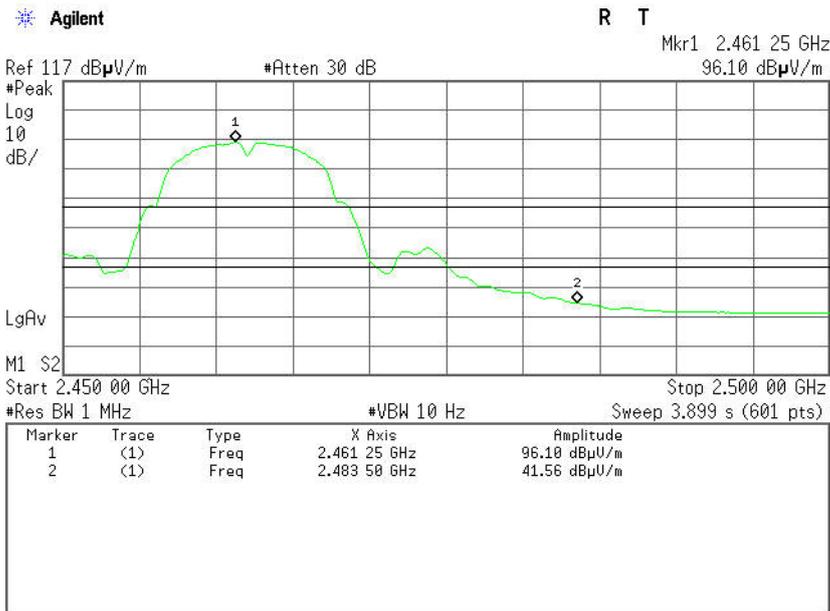

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	46.18	-6.24	52.42	74.00	-21.58	Peak	Horizontal
2	2483.5000	35.32	-6.24	41.56	54.00	-12.44	Average	Horizontal




IEEE 802.11g (Antenna 1)mode

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

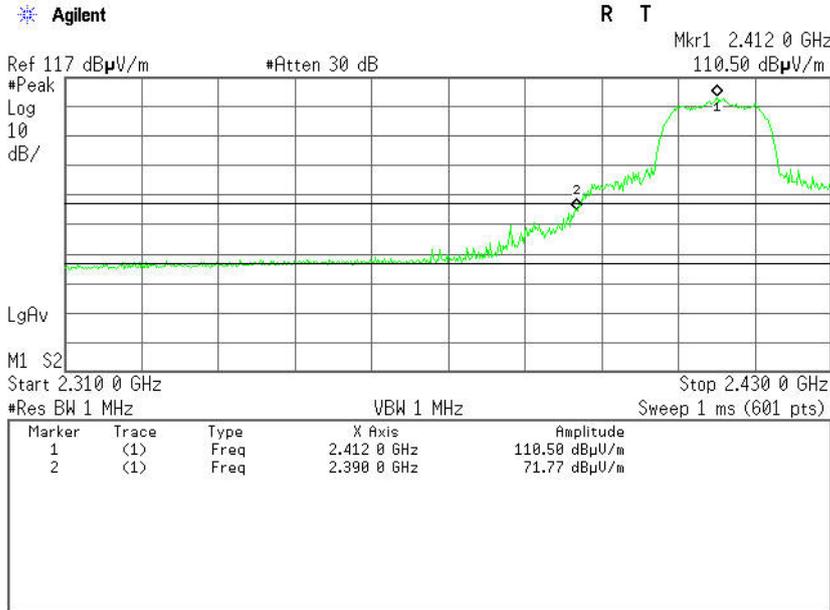

Detector mode: Average

Polarity: Vertical

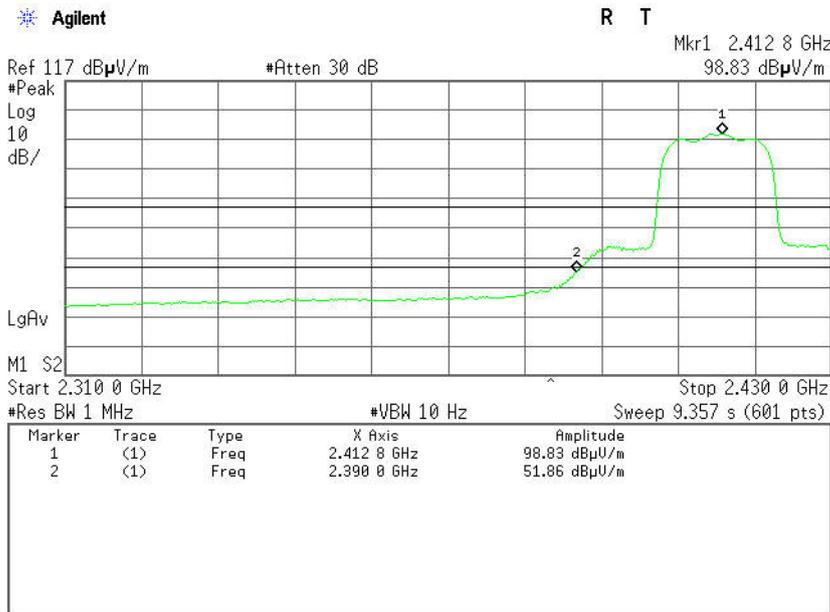


No.	Frequency (MHz)	Reading (dBµV)	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	65.17	-6.60	71.77	74.00	-2.23	Peak	Vertical
2	2390.0000	45.26	-6.60	51.86	54.00	-2.14	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

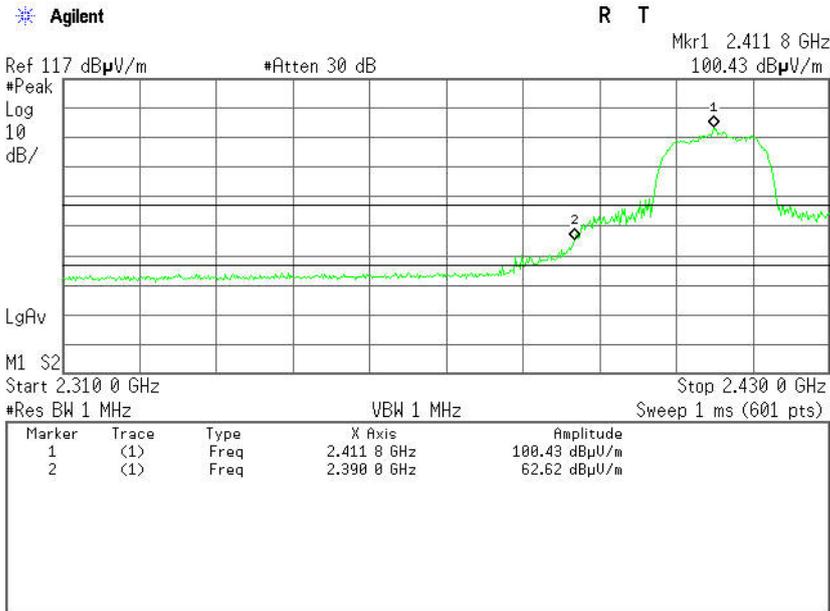

Detector mode: Average

Polarity: Horizontal

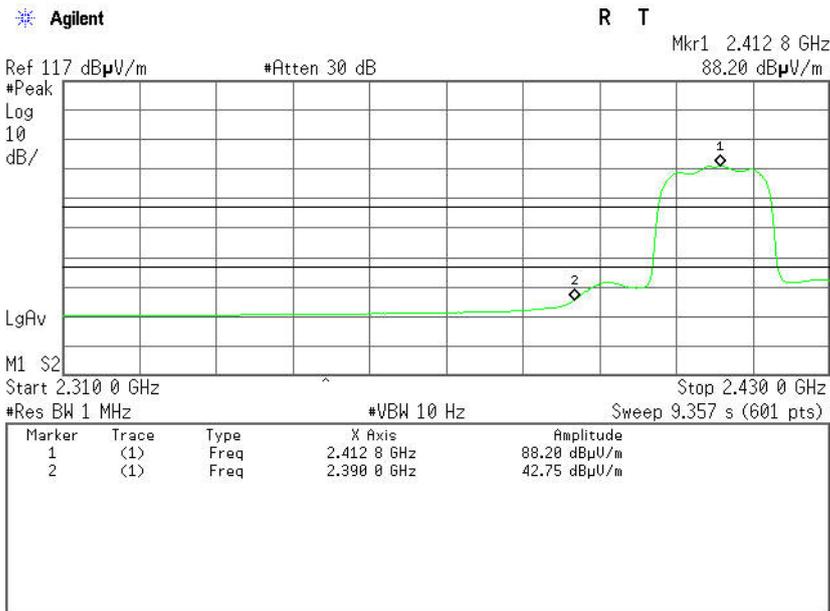


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	56.02	-6.60	62.62	74.00	-11.38	Peak	Horizontal
2	2390.0000	36.15	-6.60	42.75	54.00	-11.25	Average	Horizontal



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

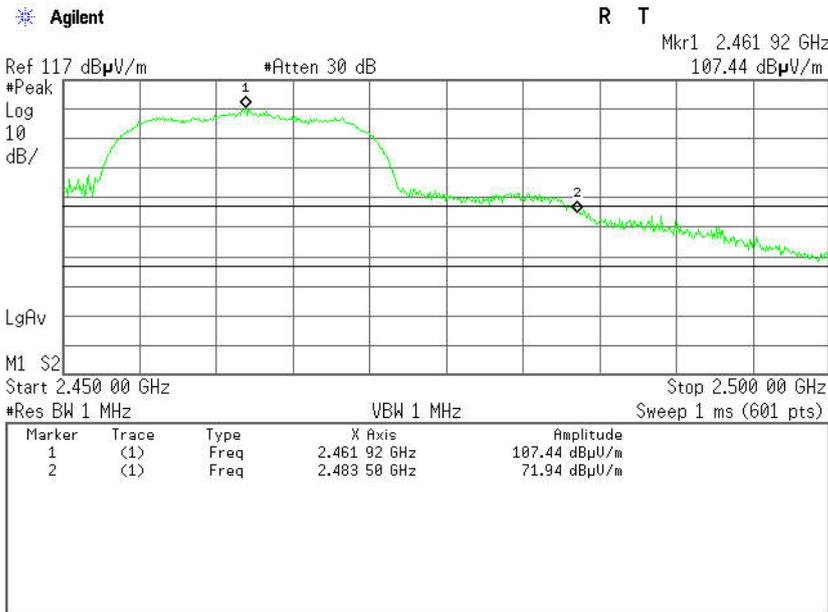

Detector mode: Average

Polarity: Vertical

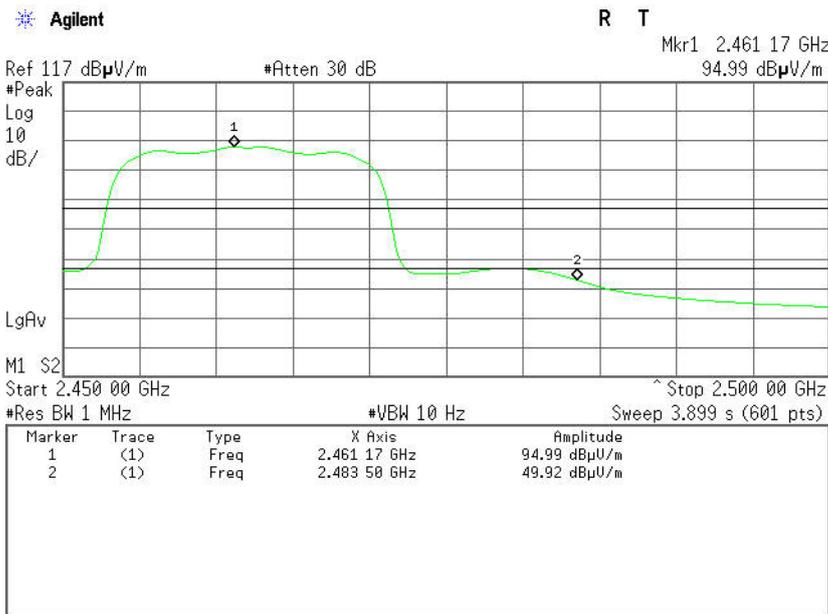


No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	65.70	-6.24	71.94	74.00	-2.06	Peak	Vertical
2	2483.5000	43.68	-6.24	49.92	54.00	-4.08	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

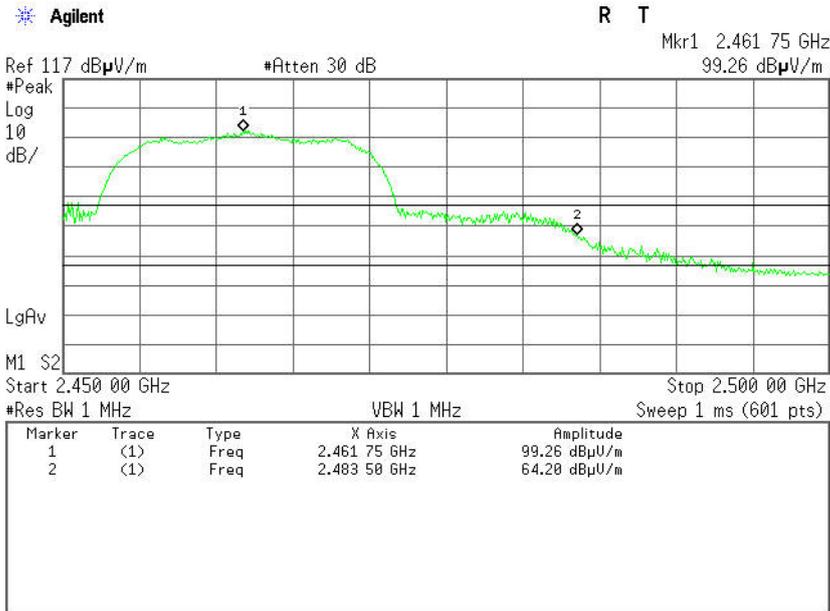

Detector mode: Average

Polarity: Horizontal

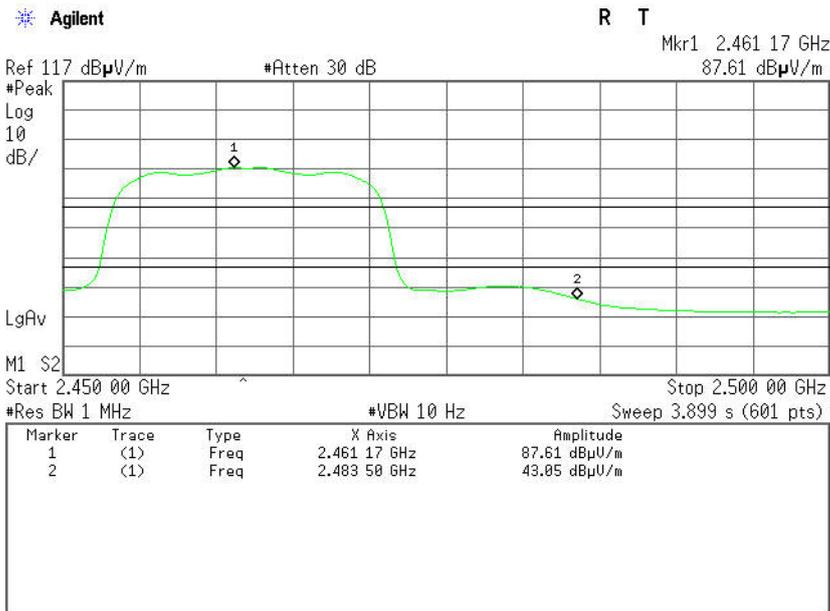

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	57.96	-6.24	64.20	74.00	-9.80	Peak	Horizontal
2	2483.5000	36.81	-6.24	43.05	54.00	-10.95	Average	Horizontal




IEEE 802.11n HT20 MHz (Combine with antenna 1 and antenna 2) mode

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

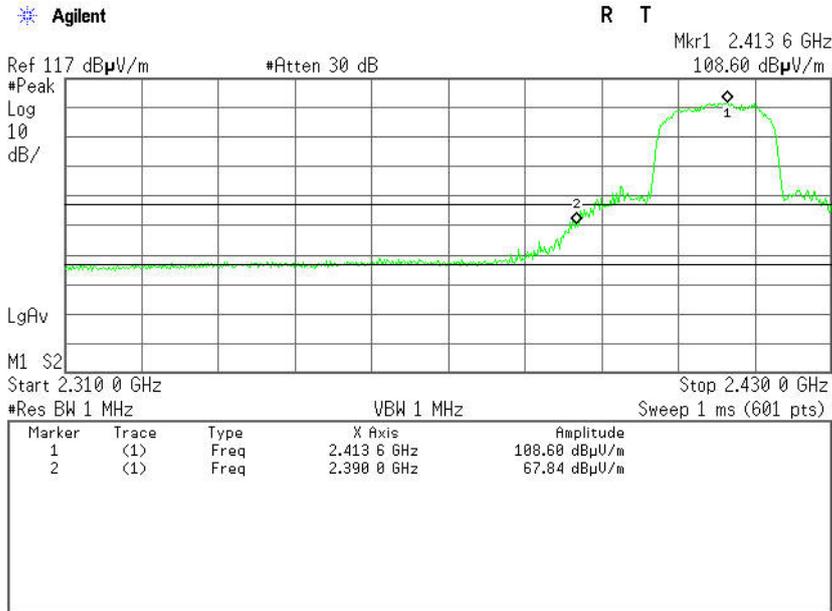

Detector mode: Average

Polarity: Vertical

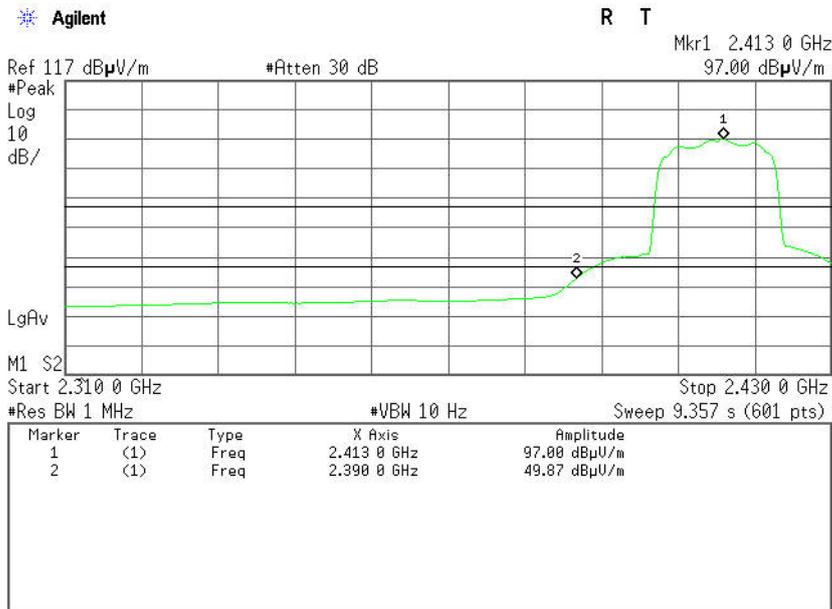


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	61.24	-6.60	67.84	74.00	-6.16	Peak	Vertical
2	2390.0000	43.27	-6.60	49.87	54.00	-4.13	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

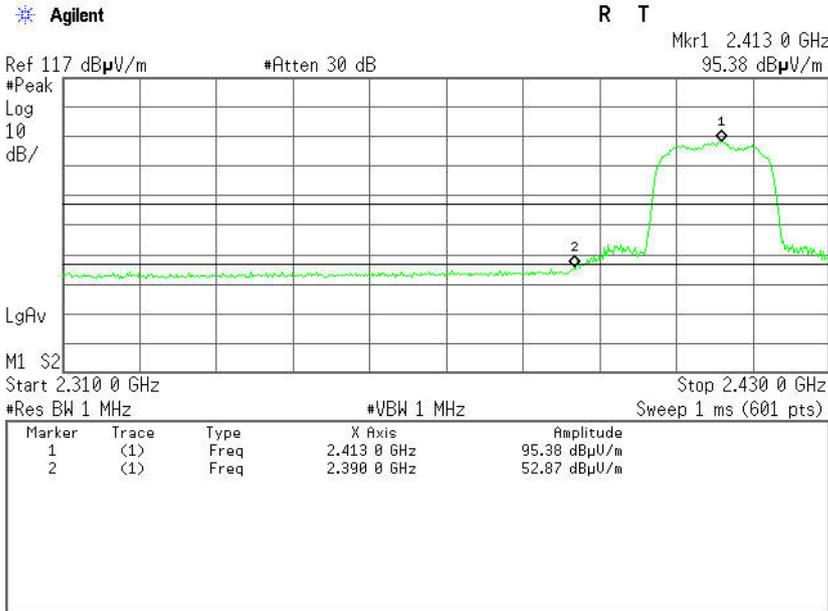

Detector mode: Average

Polarity: Horizontal

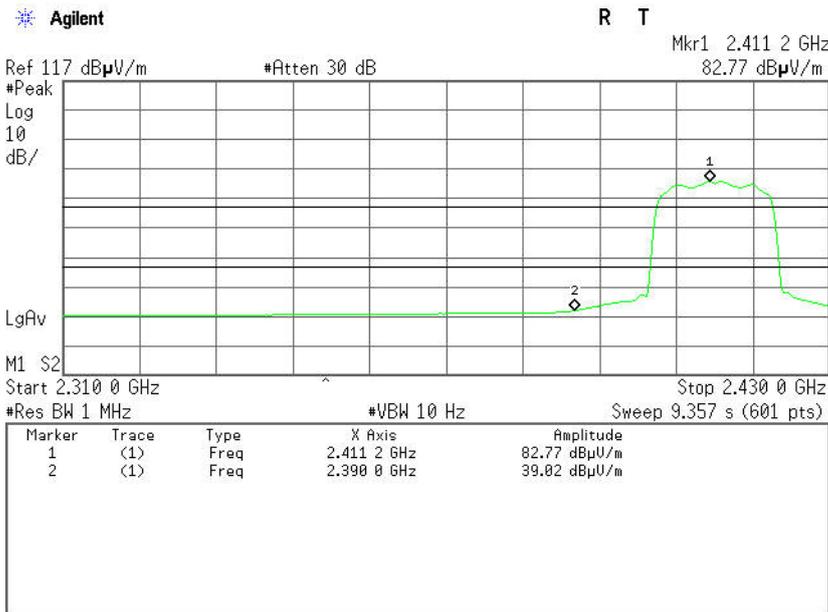


No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	46.27	-6.60	52.87	74.00	-21.13	Peak	Horizontal
2	2390.0000	32.42	-6.60	39.02	54.00	-14.98	Average	Horizontal



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

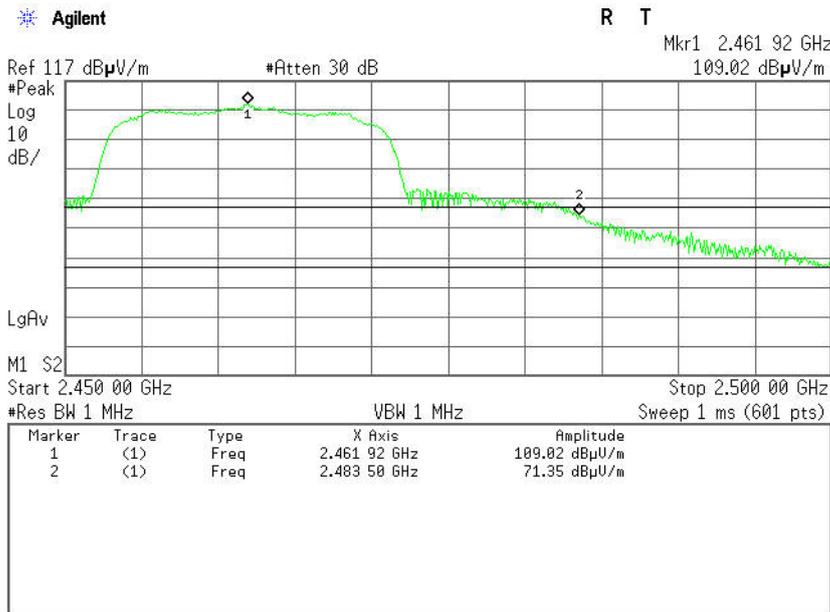

Detector mode: Average

Polarity: Vertical

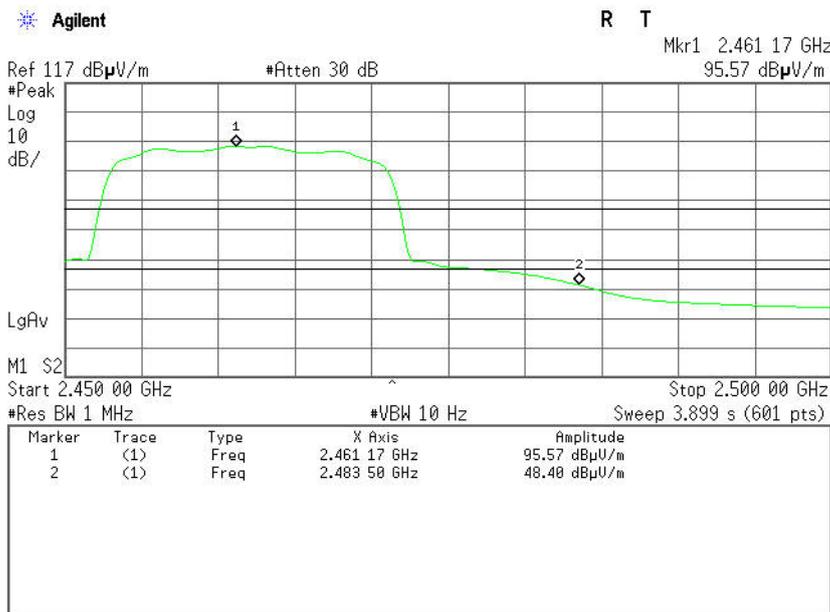


No.	Frequency (MHz)	Reading (dBµV)	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	65.11	-6.24	71.35	74.00	-2.65	Peak	Vertical
2	2483.5000	42.16	-6.24	48.40	54.00	-5.60	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

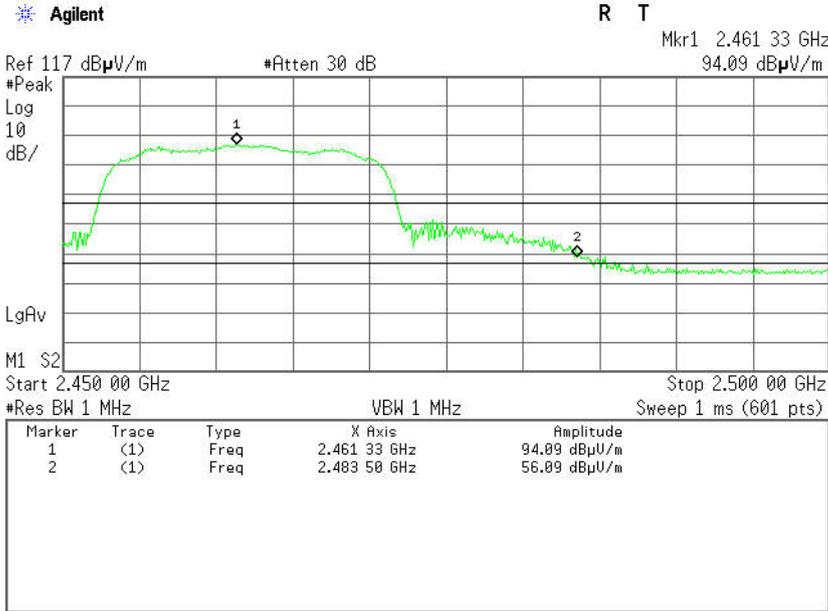

sDetector mode: Average

Polarity: Horizontal

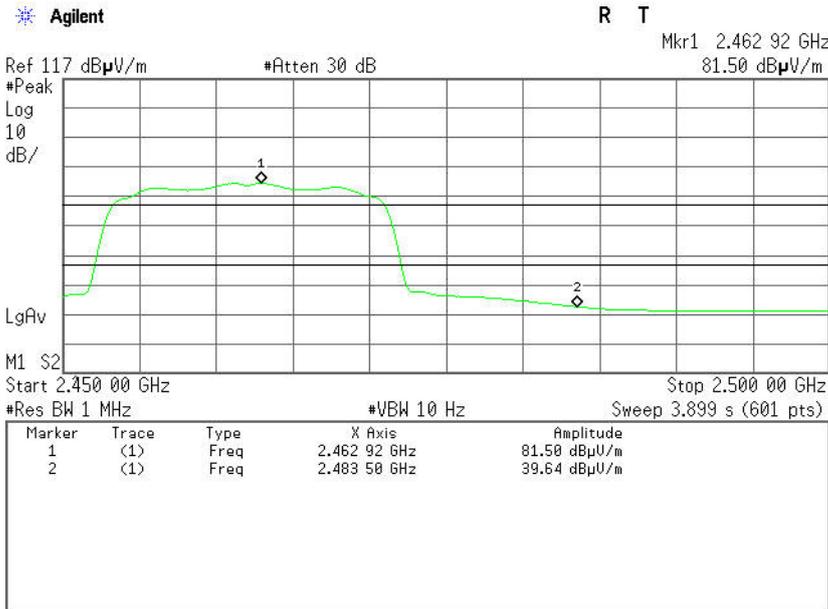

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	49.85	-6.24	56.09	74.00	-17.91	Peak	Horizontal
2	2483.5000	33.40	-6.24	39.64	54.00	-14.36	Average	Horizontal




IEEE 802.11n HT40 MHz (Combine with antenna 1 and antenna 2) mode

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

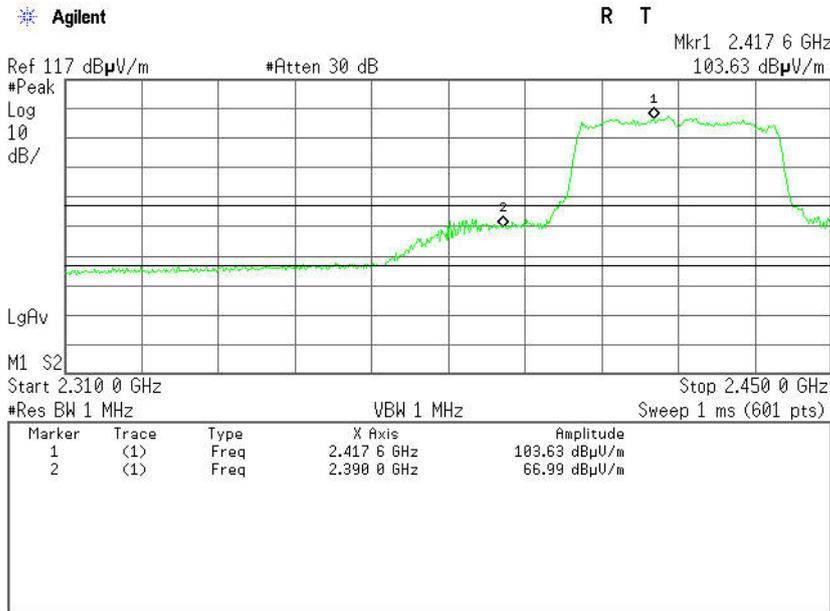

Detector mode: Average

Polarity: Vertical

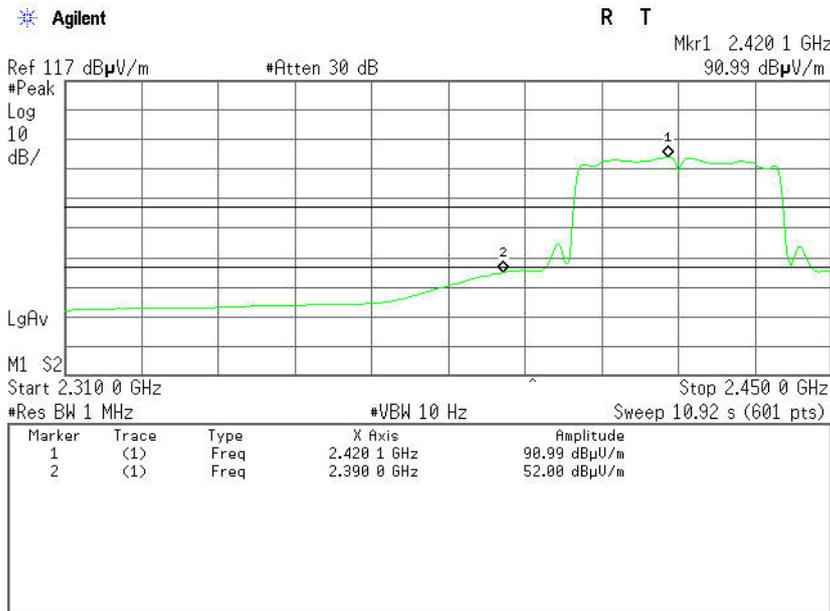


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	60.39	-6.60	66.99	74.00	-7.01	Peak	Vertical
2	2390.0000	45.40	-6.60	52.00	54.00	-2.00	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

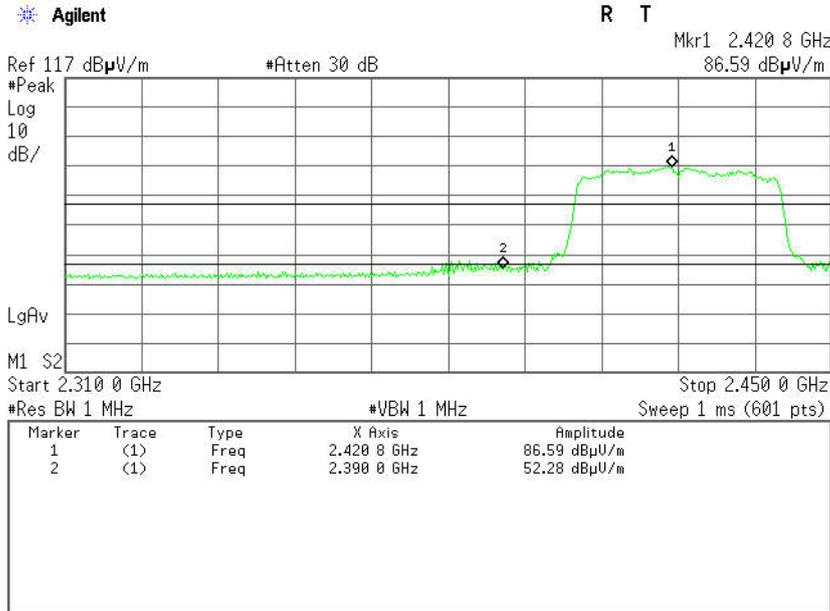

Detector mode: Average

Polarity: Horizontal

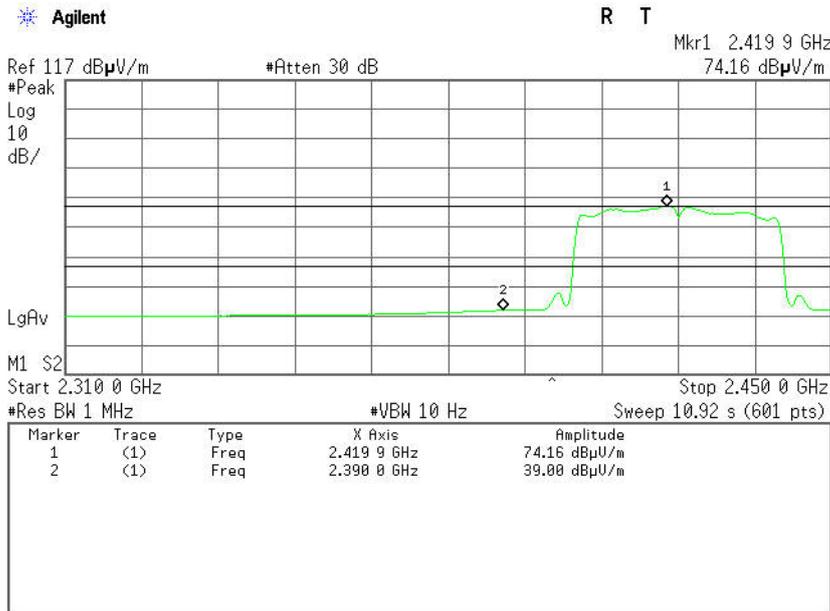


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	45.60	-6.60	52.20	74.00	-21.80	Peak	Horizontal
2	2390.0000	32.40	-6.60	39.00	54.00	-15.00	Average	Horizontal



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

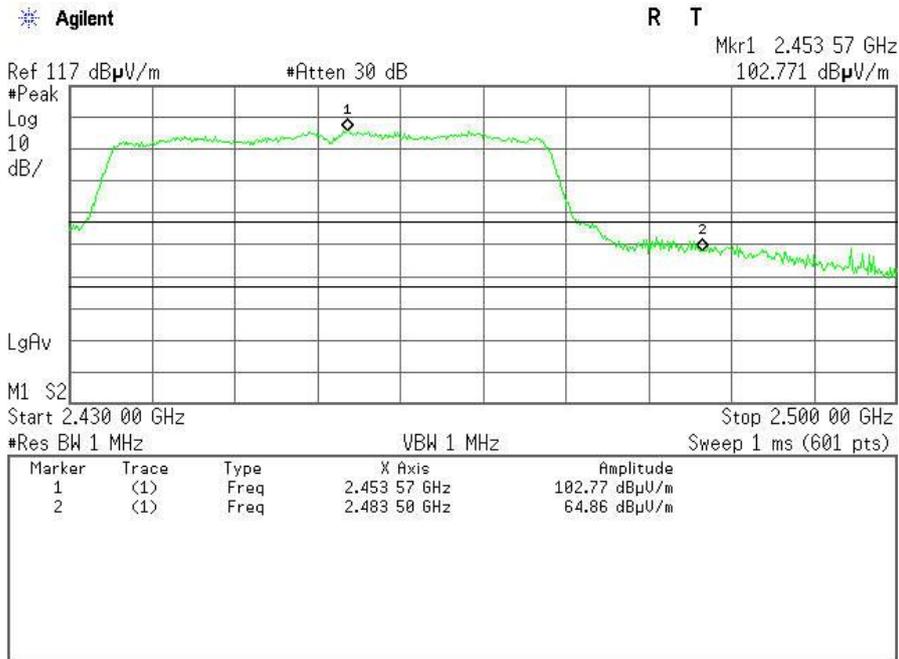

Detector mode: Average

Polarity: Vertical

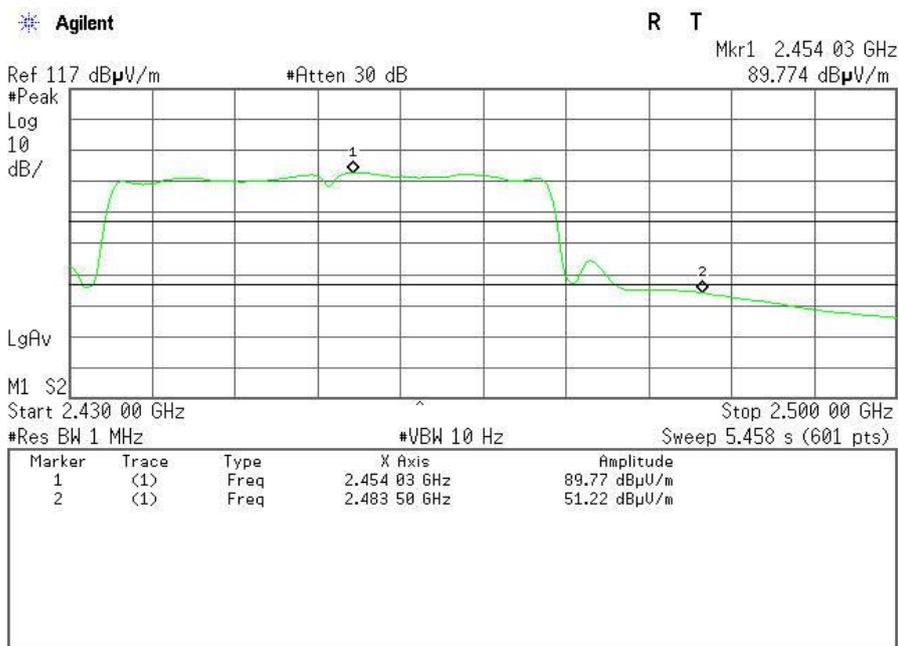


No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	58.62	-6.24	64.86	74.00	-9.14	Peak	Vertical
2	2483.5000	44.98	-6.24	51.22	54.00	-2.78	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

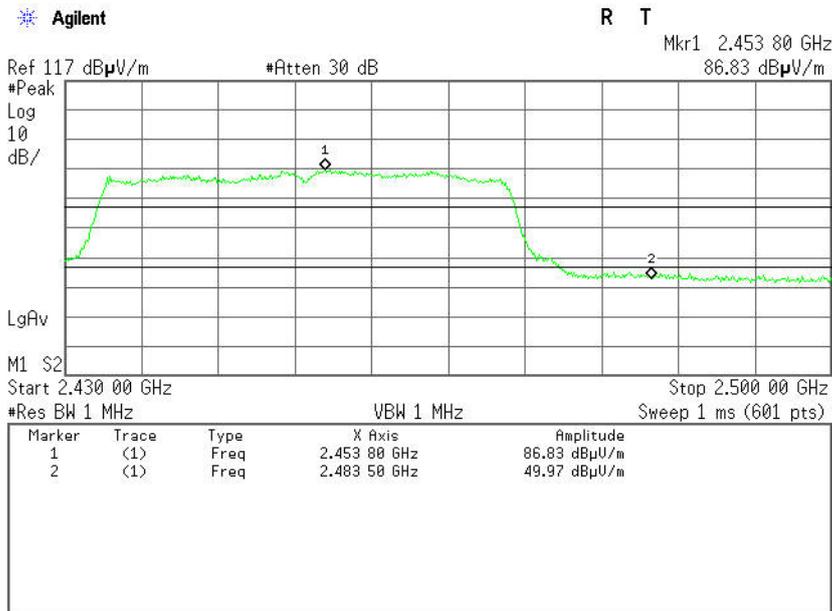

Detector mode: Average

Polarity: Horizontal

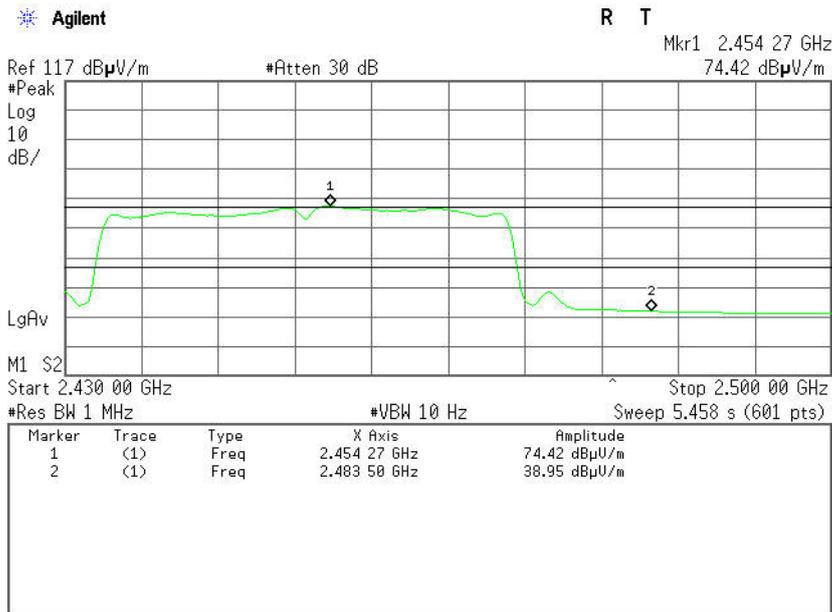

No.	Frequency (MHz)	Reading (dB μ V)	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	43.73	-6.24	49.97	74.00	-24.03	Peak	Horizontal
2	2483.5000	32.71	-6.24	38.95	54.00	-15.05	Average	Horizontal



7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.6.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

7.6.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSU	200409	09/23/2013	09/22/2014

7.6.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e) specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 100 kHz.
3. Set the VBW \geq 300 kHz.
4. Set the span to 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
10. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100 \text{ kHz} = -15.2 \text{ dB})$.
11. The resulting peak PSD level must be \leq 8 dBm.

7.6.4. TEST SETUP





7.6.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b (Antenna 1)

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-5.39	8	PASS
Mid	2437	-3.97		PASS
High	2462	-6.89		PASS

Test mode: IEEE 802.11g (Antenna 1)

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-10.38	8	PASS
Mid	2437	-8.43		PASS
High	2462	-11.63		PASS

Test mode: IEEE 802.11n HT20 MHz (Combine with Antenna 1 and Antenna 2)


Channel	Frequency (MHz)	PPSD (dBm)		PPSD Total (dBm)	Limit (W)	Result
		Chain 1	Chain 2			
Low	2422	-12.94	-12.71	-9.81	8	PASS
Mid	2437	-8.30	-8.91	-5.58		PASS
High	2452	-13.57	-13.11	-10.32		PASS

Test mode: IEEE 802.11n HT40 MHz (Combine with Antenna 1 and Antenna 2)

Channel	Frequency (MHz)	PPSD (dBm)		PPSD Total (dBm)	Limit (W)	Result
		Chain 1	Chain 2			
Low	2422	-17.82	-20.13	-15.81	8	PASS
Mid	2437	-13.47	-12.03	-9.68		PASS
High	2452	-19.39	-20.63	-16.96		PASS




Test Plot IEEE 802.11b (Antenna 1)mode
PPSD (CH Low)

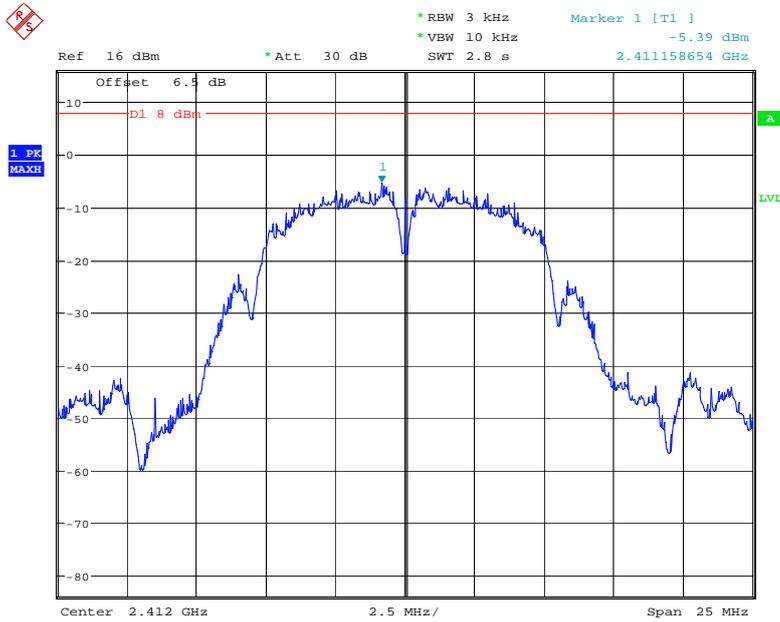

Date: 28.SEP.2013 09:22:00


PPSD (CH Mid)

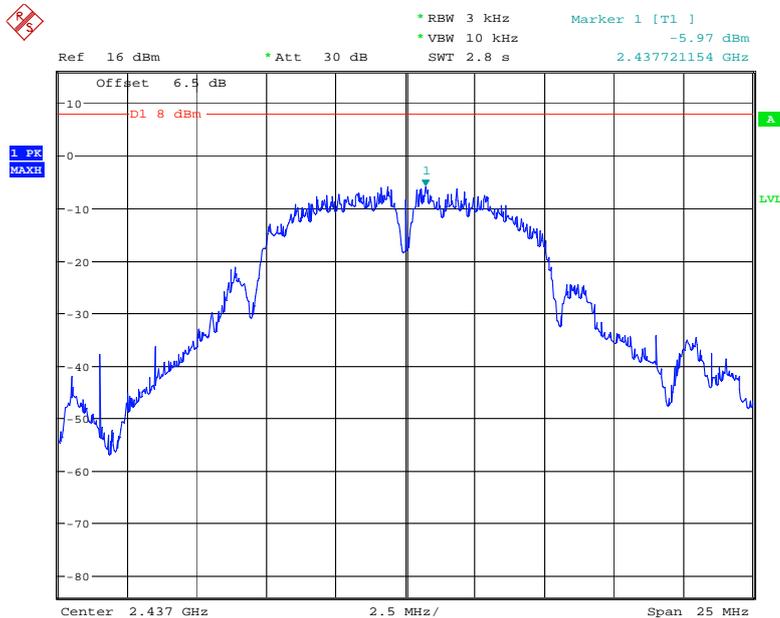

Date: 28.SEP.2013 09:23:48




PPSD (CH High)

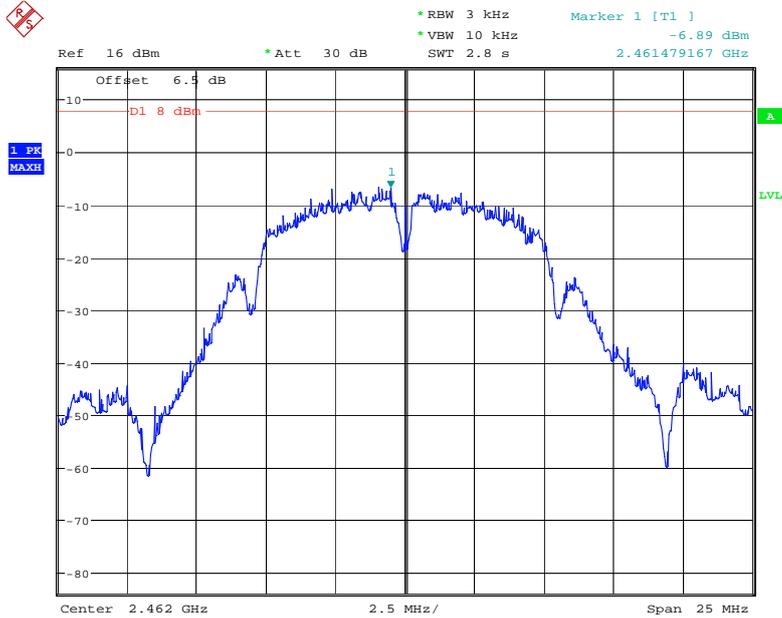

Date: 28.SEP.2013 09:23:06

IEEE 802.11g (Antenna 1)mode


PPSD (CH Low)

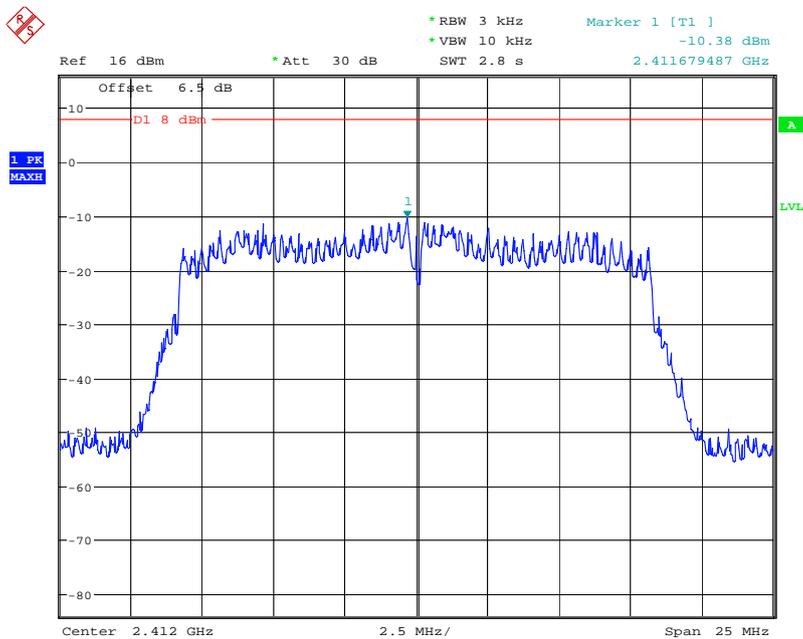

Date: 28.SEP.2013 09:19:18




PPSD (CH Mid)

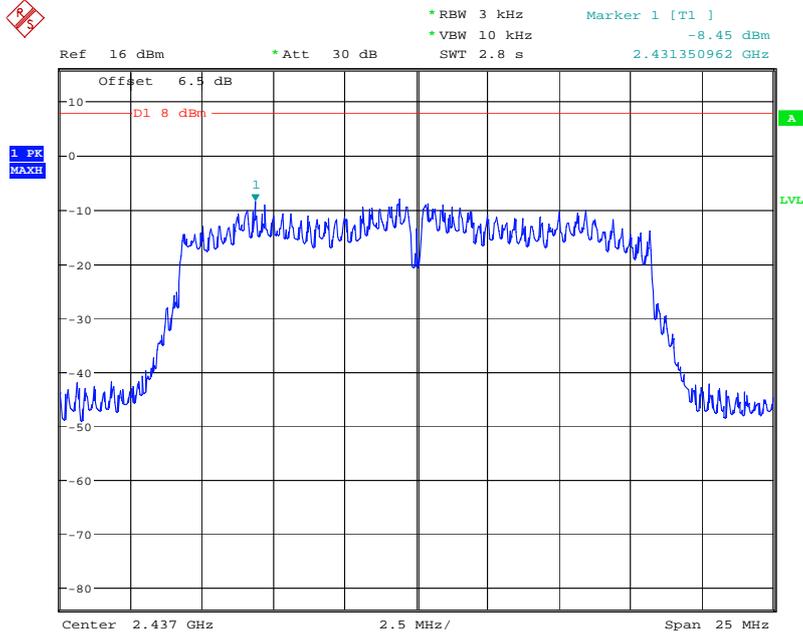

Date: 28.SEP.2013 09:20:50


PPSD (CH High)

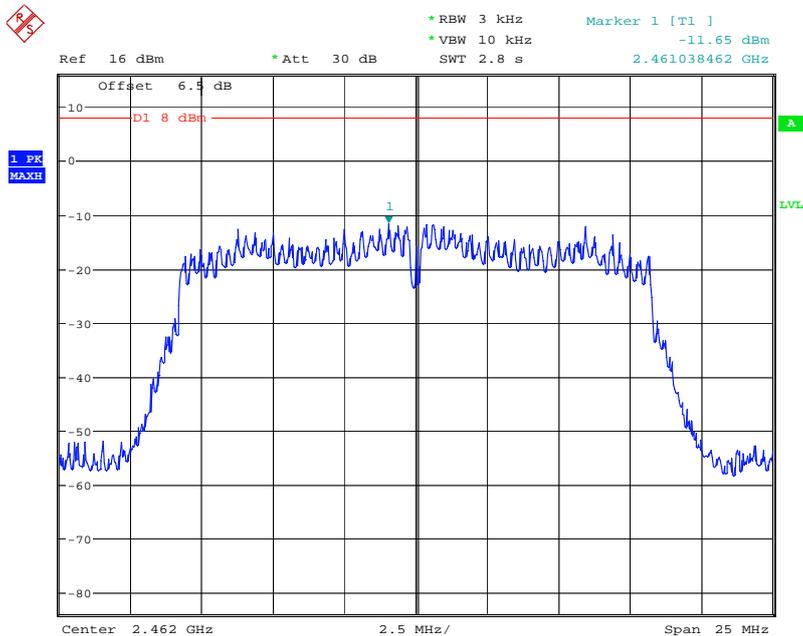

Date: 28.SEP.2013 09:20:05




IEEE 802.11n HT20 MHz(Antenna 1)mode
PPSD (CH Low)

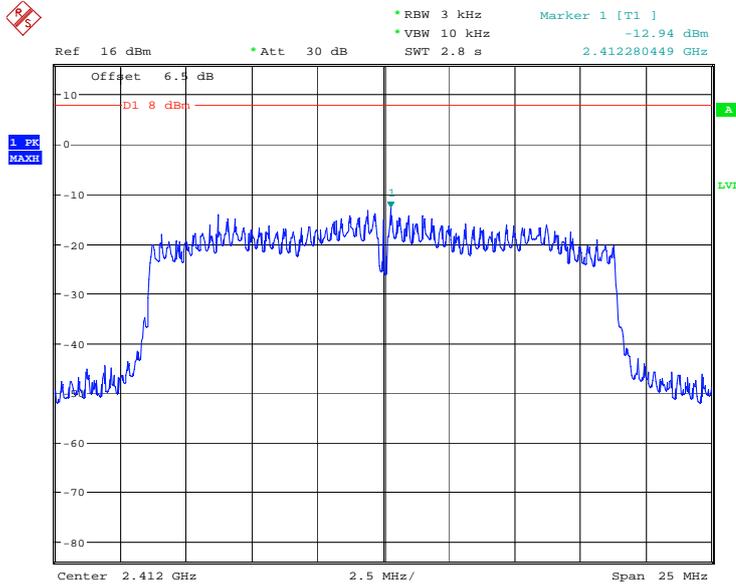

Date: 28.SEP.2013 09:36:40


PPSD (CH Mid)

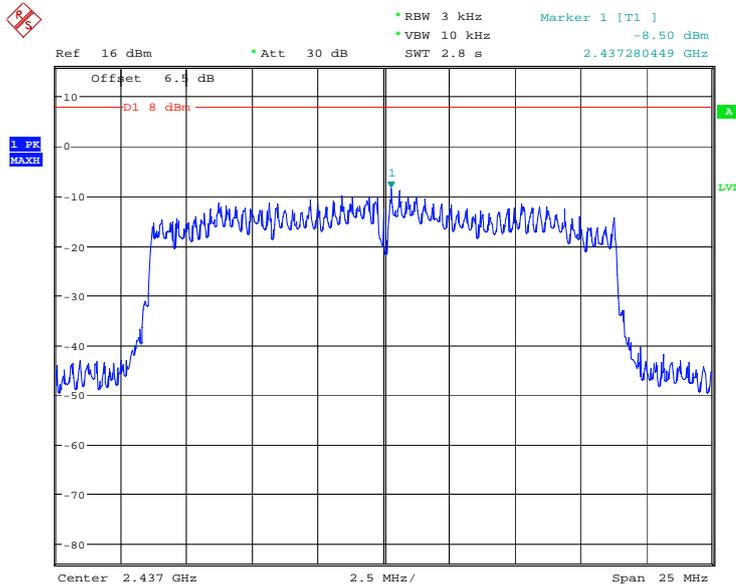

Date: 28.SEP.2013 09:25:18




PPSD (CH High)

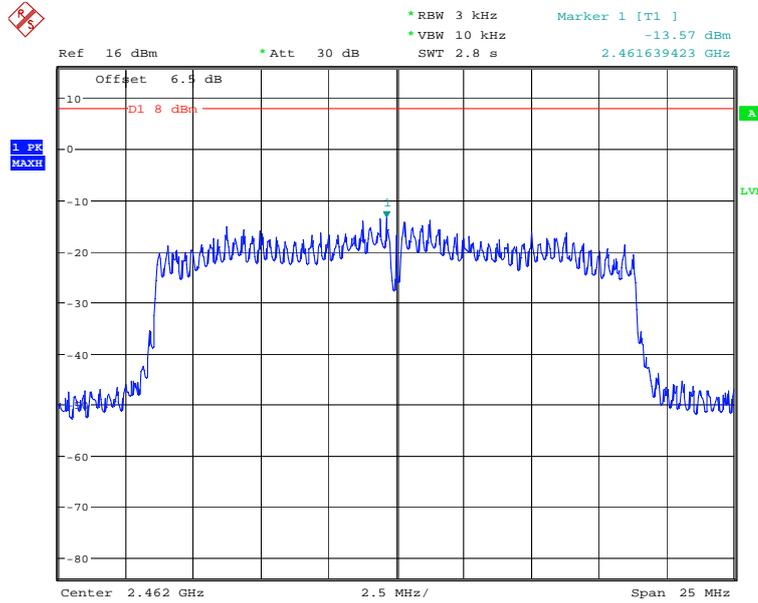

Date: 28.SEP.2013 09:27:19


IEEE 802.11n HT20 MHz(Antenna 2)mode PPSD (CH Low)

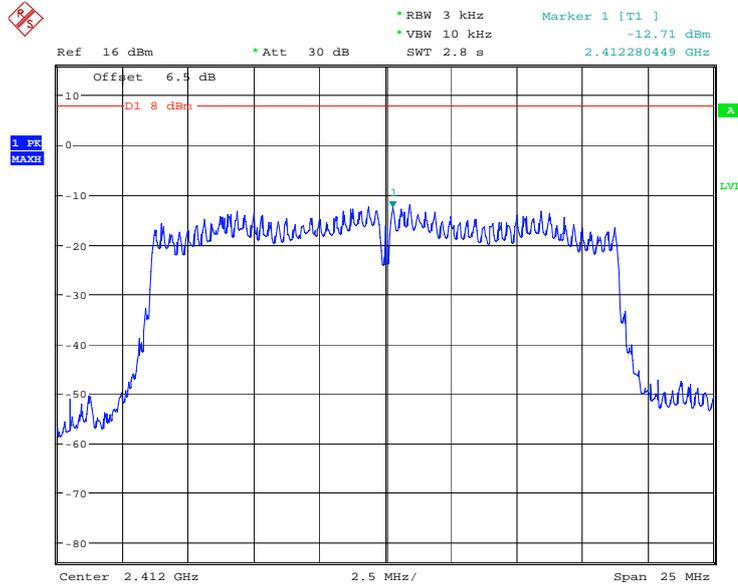

Date: 28.SEP.2013 09:42:01




PPSD (CH Mid)

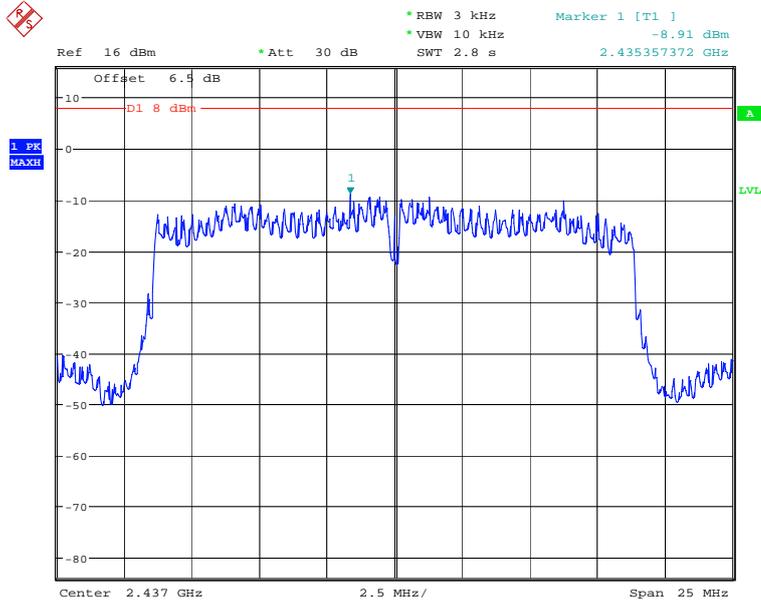

Date: 28.SEP.2013 09:44:06


PPSD (CH High)

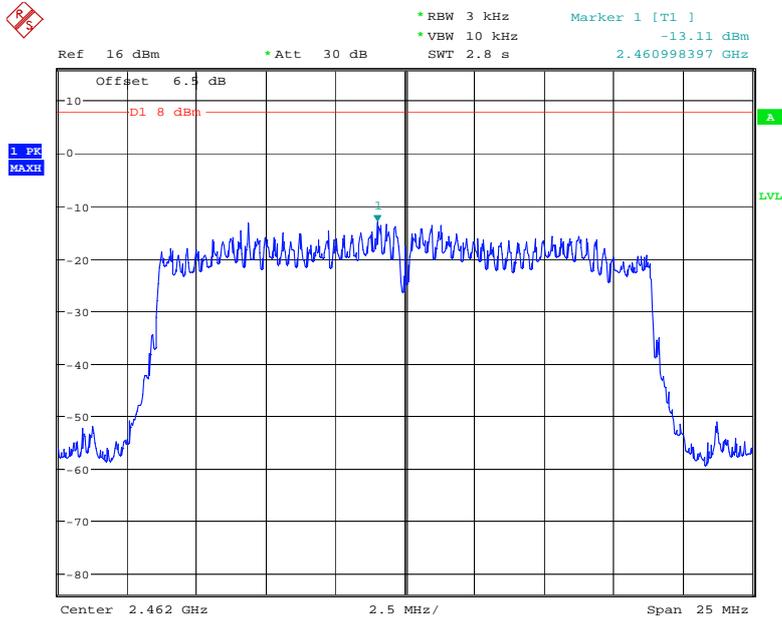

Date: 28.SEP.2013 09:42:56




IEEE 802.11n HT40 MHz(Antenna 1)mode
PPSD (CH Low)

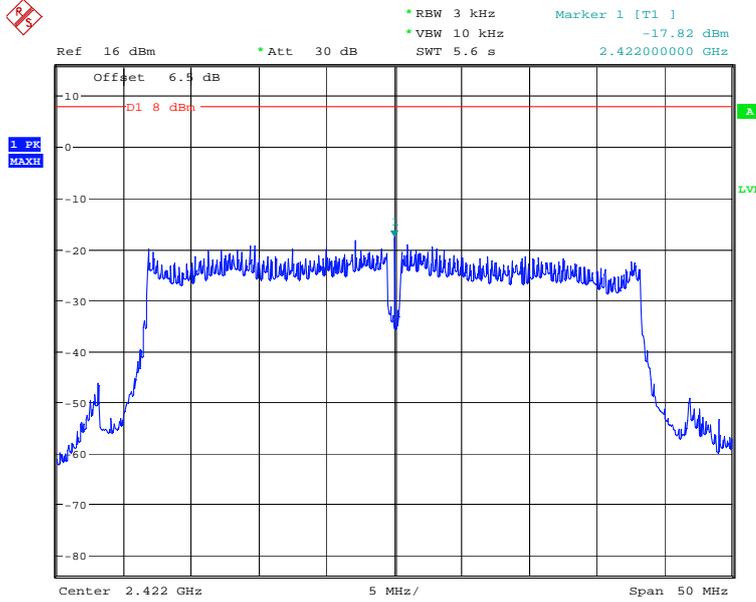

Date: 28.SEP.2013 09:34:08


PPSD (CH Mid)

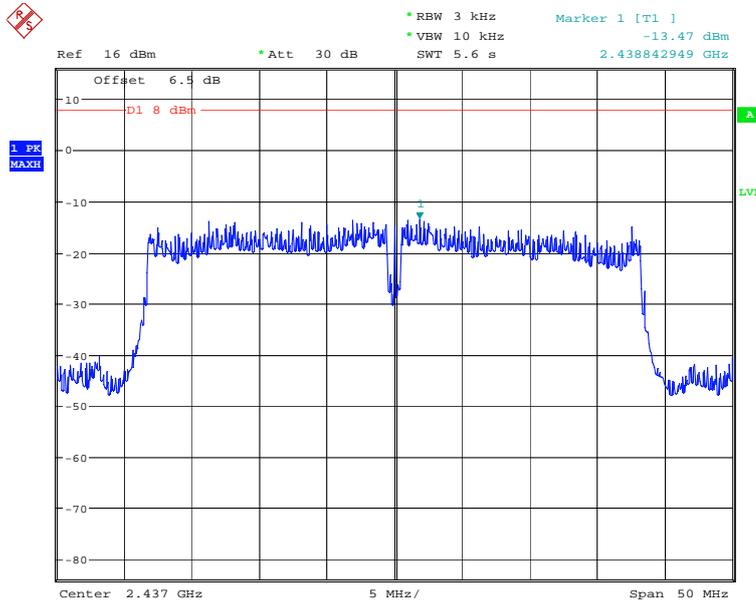

Date: 28.SEP.2013 09:31:57




PPSD (CH High)

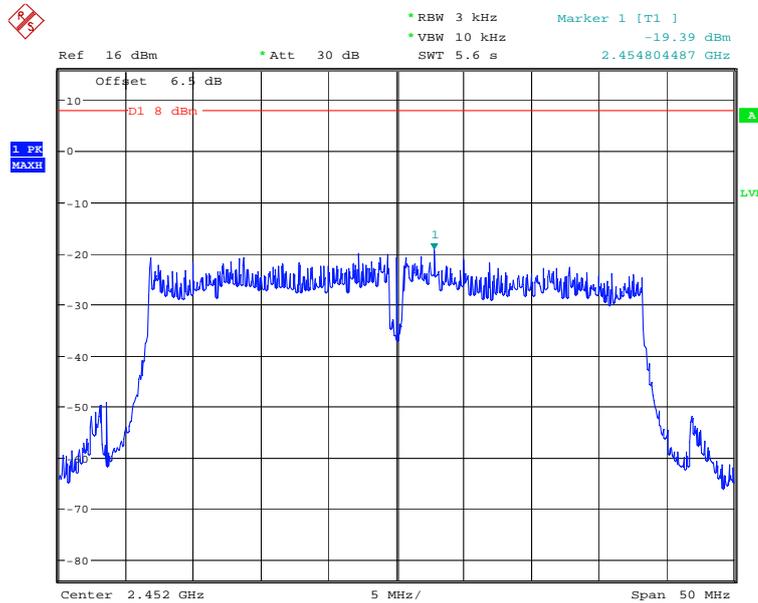

Date: 28.SEP.2013 09:34:52


IEEE 802.11n HT40 MHz (Antenna 2)mode PPSD (CH Low)

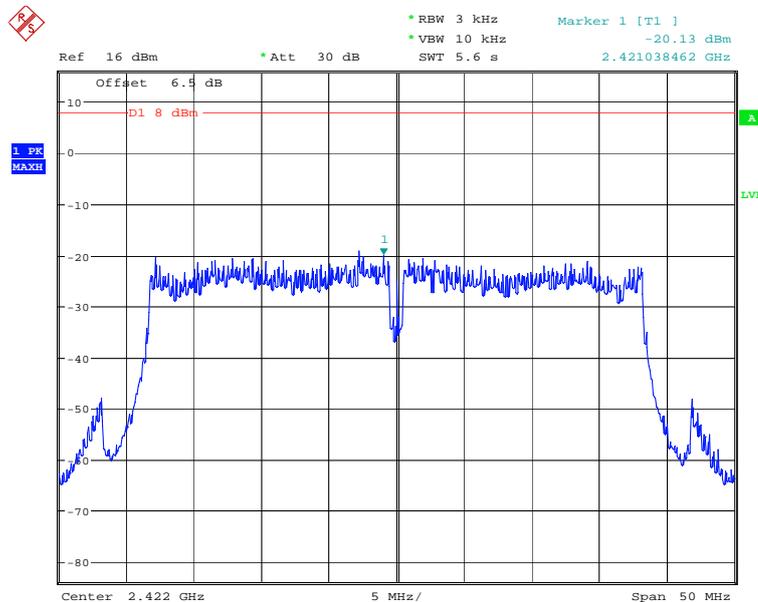

Date: 28.SEP.2013 09:47:32




PPSD (CH Mid)

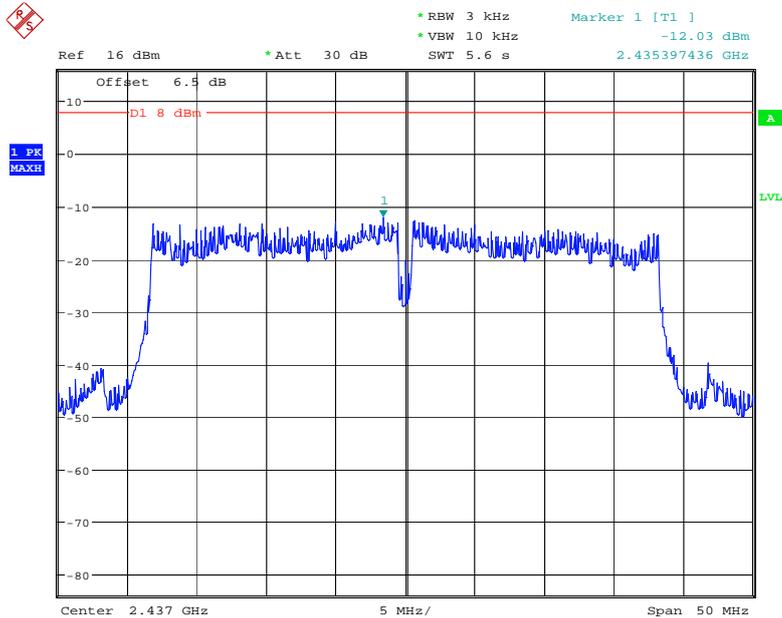

Date: 28.SEP.2013 09:46:05

PPSD (CH High)

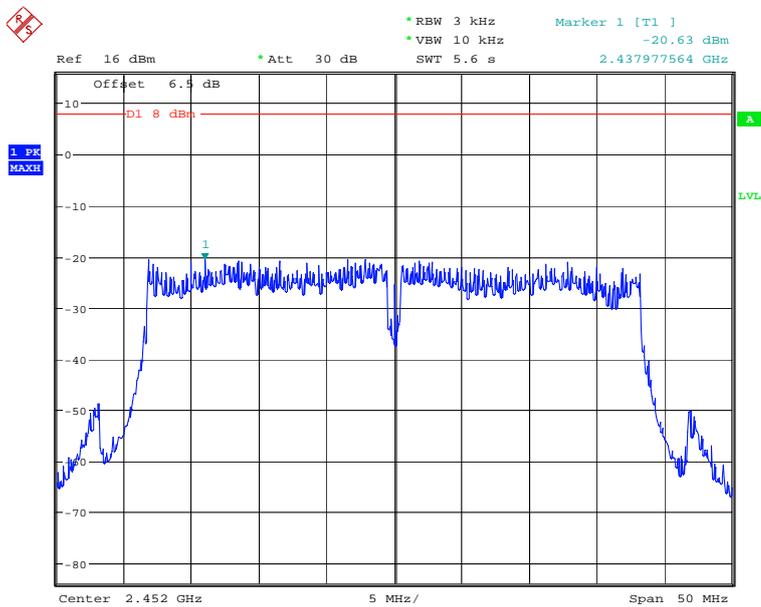

Date: 28.SEP.2013 09:48:07