




RADIO TEST REPORT

FCC ID : MSQ-USBBE7V00
Equipment : Tri-band BE6500 WiFi 7 USB Adapter
Brand Name : ASUS
Model Name : ROG USB-BE92
Applicant : ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou, Taipei City 112, Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on Oct. 29, 2024, and testing was started from Dec. 05, 2024 and completed on Dec. 30, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

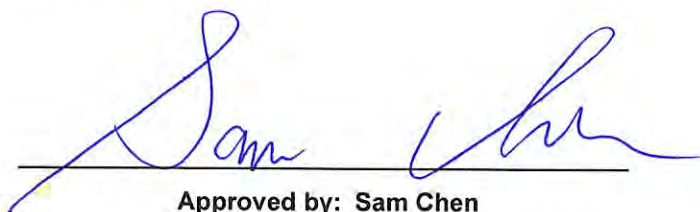

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	10
2 Test Configuration of EUT	11
2.1 Test Channel Mode	11
2.2 The Worst Case Measurement Configuration	13
2.3 EUT Operation during Test	15
2.4 Accessories	15
2.5 Support Equipment.....	15
2.6 Test Setup Diagram	16
3 Transmitter Test Result	18
3.1 AC Power-line Conducted Emissions	18
3.2 Emission Bandwidth	20
3.3 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	21
3.4 Peak Power Spectral Density (E.I.R.P.)	23
3.5 Unwanted Emissions.....	26
3.6 Contention Based Protocol.....	32
4 Test Equipment and Calibration Data	33
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Contention-Based Protocol	
Appendix G. Test Photos	

Photographs of EUT v01



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Non-Dual Client Device or non-Standard Client Device w/o test
-	15.407(a)	Transmit Power Control	N/A	Non-Very Low Power Device w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Wendy Pan**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-7125	a, ax (HEW20), be (EHT20)	5955-7115	1-233 [59]
5925-7125	ax (HEW40), be (EHT40)	5965-7085	3-227 [29]
5925-7125	ax (HEW80), be (EHT80)	5985-7025	7-215 [14]
5925-7125	ax (HEW160), be (EHT160)	6025-6985	15-207 [7]

Band	Mode	BWch (MHz)	Nant
5.925-7.125GHz	802.11a	20	2TX
5.925-7.125GHz	802.11ax HEW20	20	2TX
5.925-7.125GHz	802.11be EHT20	20	2TX
5.925-7.125GHz	802.11ax HEW40	40	2TX
5.925-7.125GHz	802.11be EHT40	40	2TX
5.925-7.125GHz	802.11ax HEW80	80	2TX
5.925-7.125GHz	802.11be EHT80	80	2TX
5.925-7.125GHz	802.11ax HEW160	160	2TX
5.925-7.125GHz	802.11be EHT160	160	2TX

Note:

- 11a use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80 and EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	LYNwave	ALX24M-122AA3	PIFA Antenna	N/A	Note1
2	2	LYNwave	ALX24M-122AA4	PIFA Antenna	N/A	

Note1:

Ant.	Port	Antenna Gain (dBi)						
		WLAN 2.4GHz	WLAN 5GHz			WLAN 6GHz		
			UNII1~2A	UNII2C	UNII3	UNII5	UNII6~7	UNII8
1	1	3.8	2.8	3.2	2.9	3.1	4.7	4.6
2	2	3.8	3.1	2.9	3.3	4.3	3.5	3.4

Note 2: The above information was declared by manufacturer.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{i=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{SS1}} g_{i,k} \right)^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{i=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{SS1}} g_{i,k} \right)^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20}; NSS1(g1,2) = 10^{G2/20}; NSS1(g1,2) = 10^{G3/20}; NSS1(g1,2) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

$$2.4G \ G1 = 3.8 \text{ dBi}; G2 = 3.8 \text{ dBi};$$

$$5G \ \text{UNII-1} \ G1 = 2.8 \text{ dBi}; G2 = 3.1 \text{ dBi};$$

$$5G \ \text{UNII-2A} \ G1 = 2.8 \text{ dBi}; G2 = 3.1 \text{ dBi};$$

$$5G \ \text{UNII-2C} \ G1 = 3.2 \text{ dBi}; G2 = 2.9 \text{ dBi};$$

$$5G \ \text{UNII-3} \ G1 = 2.9 \text{ dBi}; G2 = 3.3 \text{ dBi};$$

$$6G \ \text{UNII-5} \ G1 = 3.1 \text{ dBi}; G2 = 4.3 \text{ dBi};$$

$$6G \ \text{UNII-6} \ G1 = 4.7 \text{ dBi}; G2 = 3.5 \text{ dBi};$$

$$6G \ \text{UNII-7} \ G1 = 4.7 \text{ dBi}; G2 = 3.5 \text{ dBi};$$

$$6G \ \text{UNII-8} \ G1 = 4.6 \text{ dBi}; G2 = 3.4 \text{ dBi};$$

$$2.4G \ DG = 6.81 \text{ dBi}$$

$$5G \ \text{UNII-1} \ DG = 5.96 \text{ dBi}$$

$$5G \ \text{UNII-2A} \ DG = 5.96 \text{ dBi}$$

$$5G \ \text{UNII-2C} \ DG = 6.06 \text{ dB}$$

$$5G \ \text{UNII-3} \ DG = 6.11 \text{ dBi}$$

$$6G \ \text{UNII-5} \ DG = 6.73 \text{ dBi}$$

$$6G \ \text{UNII-6} \ DG = 7.13 \text{ dBi}$$

$$6G \ \text{UNII-7} \ DG = 7.13 \text{ dB}$$

$$6G \ \text{UNII-8} \ DG = 7.03 \text{ dBi}$$

**Note 4: For 2.4GHz function:****For IEEE 802.11b/g/n/VHT/ax/be (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:**For IEEE 802.11a/n/ac/ax/be (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 6GHz function:**For IEEE 802.11a/ax/be (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
11a_Nss 1,(6D)	0.986	0.06	960.625u	10
802.11be EHT20_Nss 1,(M0)	0.987	0.06	956.563u	10
802.11be EHT40_Nss 1,(M0)	0.986	0.06	952.5u	10
802.11be EHT80_Nss 1,(M0)	0.987	0.06	992.5u	10
802.11be EHT160_Nss 1,(M0)	0.987	0.06	992.5u	10

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From host system			
Beamforming Function	☐	With beamforming	☒	Without beamforming
Device Type	☐	Indoor Access Point	☐	Subordinate
	☒	Indoor Client	☐	Standard Power Access Point
	☐	Dual Client	☐	Standard Client
	☐	Fixed Client	☐	Very Low Power
Condition of EUT	☒	Indoor	☐	Outdoor
Channel Puncturing Function	☐	Supported Static Puncturing		
	☐	Supported Dynamic Puncturing		
	☒	Unsupported		
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	AX Series MP Toolkit mp_v2.0.44			
Software / Firmware Version for CBP	5002.24.117.1			

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (For other tests)	TH01-CB	Ken Yeh	23.3~24.7 / 61~63	Dec. 09, 2024~ Dec. 30, 2024
Radiated below 1GHz	03CH03-CB	Gordon Hung	22.2~22.6 / 59~61	Dec. 05, 2024~ Dec. 17, 2024
Radiated above 1GHz	03CH02-CB	Gordon Hung	22~23 / 61~63	Dec. 05, 2024~ Dec. 17, 2024
AC Conduction	CO01-CB	Bob Chang	23~24 / 58~60	Dec. 09, 2024
RF Conducted (Contention-Based Protocol test)	DF01-CB	Kevin Huang	22.8~24.6 / 63~66	Dec. 27, 2024~ Dec. 28, 2024



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
11a_Nss1,(6Mbps)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6995MHz
7095MHz
7115MHz
802.11be EHT20_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6995MHz
7095MHz
7115MHz
802.11be EHT40_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz
6565MHz
6685MHz
6885MHz
6925MHz
7005MHz
7085MHz
802.11be EHT80_Nss1,(MCS0)_2TX



5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz
6705MHz
6785MHz
6865MHz
6945MHz
7025MHz
802.11be EHT160_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz
6505MHz
6665MHz
6825MHz
6985MHz

Note:

- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT in Z axis + WLAN 2.4GHz
2	EUT in Y axis + Extension USB Cradle + WLAN 2.4GHz
Mode 2 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.	
3	EUT in Y axis + Extension USB Cradle + WLAN 5GHz
4	EUT in Y axis + Extension USB Cradle + WLAN 6GHz
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) Contention Based Protocol
Test Condition	Conducted measurement at transmit chains



The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
After evaluating, and the worst case axis was found as below from Unwanted Emissions above 1GHz. So the measurement will follow this same test configuration.	
1	EUT in Z axis + WLAN 2.4GHz
2	EUT in X axis + WLAN 5GHz
3	EUT in X axis + WLAN 6GHz
For operating mode 3 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found as below. So the measurement will follow this same test configuration.	
1	EUT in X axis for Harmonic EUT in Z axis for Bandedge

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains



2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories			
Equipment Name	Brand Holder	Model Name	Length
Extension USB Cradle	Always Tai Lai Co., Ltd.	Y001-1686	Shielded, 1m

2.5 Support Equipment


For AC Conduction:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	EUT NB	ASUS	P14T	N/A
B	Earphone	e-Power	GT-02	N/A
C	Mouse	Logitech	M-UAE96	N/A
D	AP Router	ASUS	RT-BE96U	MSQ-RTBE6G00
E	AP Router NB	DELL	E6430	N/A

For Radiated and RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

2.6 Test Setup Diagram

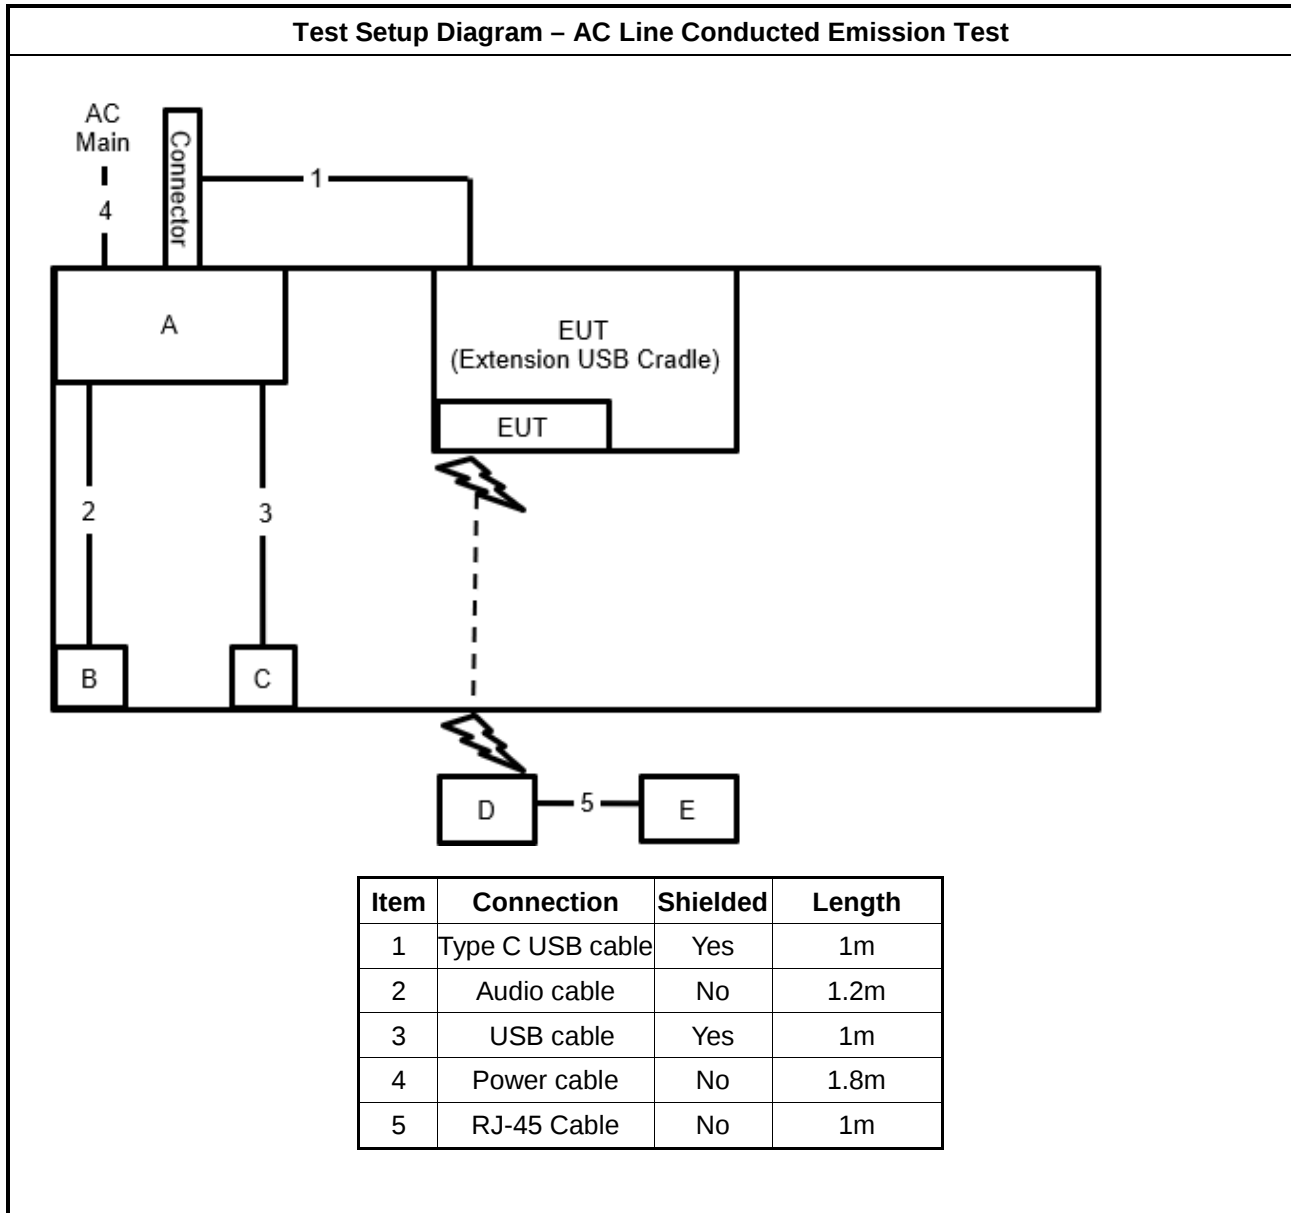

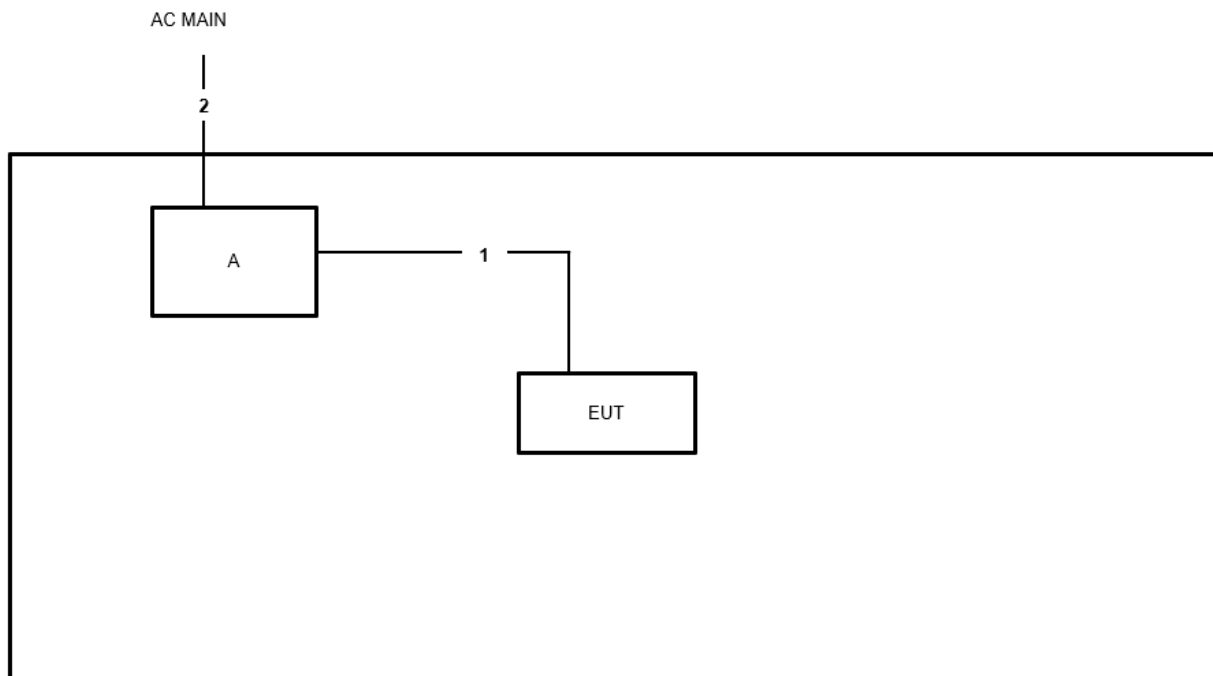Test Setup Diagram - Radiated Test


Item	Connection	Shielded	Length
1	USB Cable	Yes	1.5m
2	Power cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

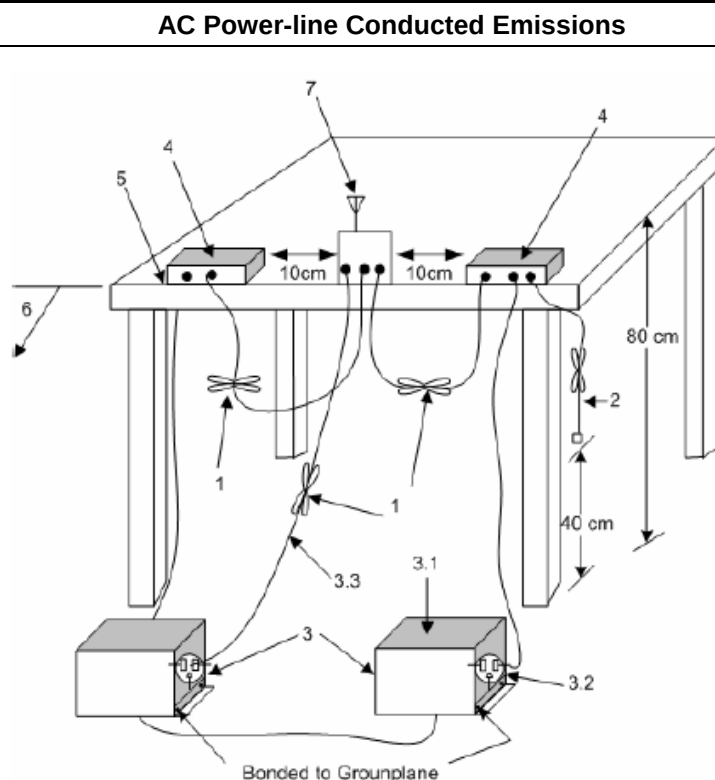

- 1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.
- 2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.
- 3.1—All other equipment powered from additional LISN(s).
- 3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.
- 3.3—LISN at least 80 cm from nearest part of EUT chassis.
- 4—Non-EUT components of EUT system being tested.
- 5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.
- 6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.
- 7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBUV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, N/A
☒	For the 6425-6525 GHz band, N/A
☒	For the 6525-6875 GHz band, N/A
☒	For the 6875-7125 GHz band, N/A
RLAN Devices	
☐	For the 5925-6425 GHz band, N/A
☐	For the 6425-6525 GHz band, N/A
☐	For the 6525-6875 GHz band, N/A
☐	For the 6875-7125 GHz band, N/A


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

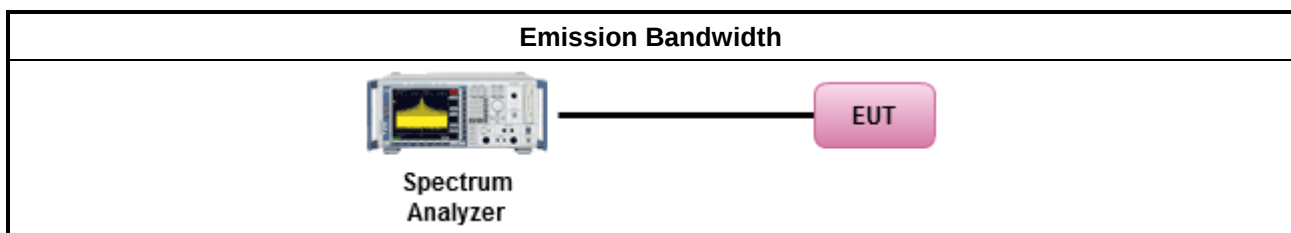

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For standard client devices < 30 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.	
Average over on/off periods with duty factor	
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	
☐ For radiated measurement.	
Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.	

3.3.4 Test Setup

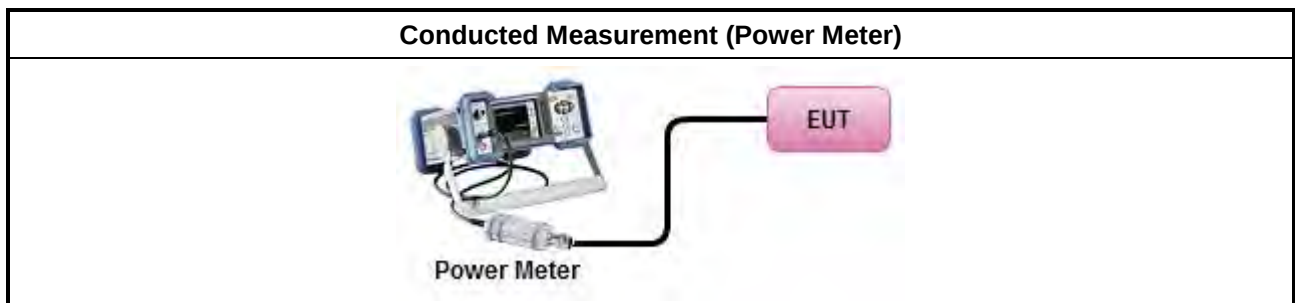

3.3.5 Test Result of Maximum Equivalent Isotopically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.



3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐	For radiated measurement.

Test Method	
	Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

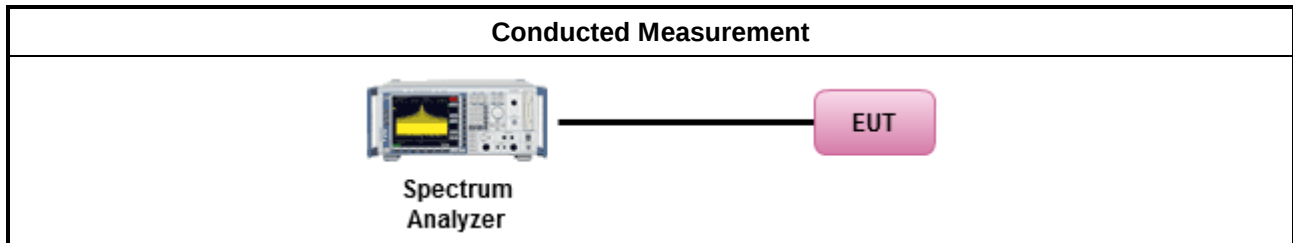

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$. EX. Above 18GHz emission limit calculation (3m to 1m) = 68.2dBuV/m at 3m + 9.54dB = 77.74 dBuV/m at 1m. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

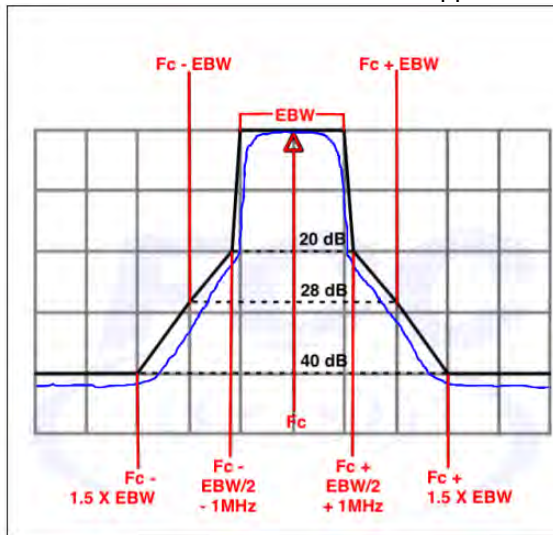Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 



3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.5.3 Test Procedures



Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	



Test Method	
▪ For conducted and cabinet radiation measurement, refer as FCC KDB 789033 D02, clause G)3).	
	▪ For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.5.4 Test Setup

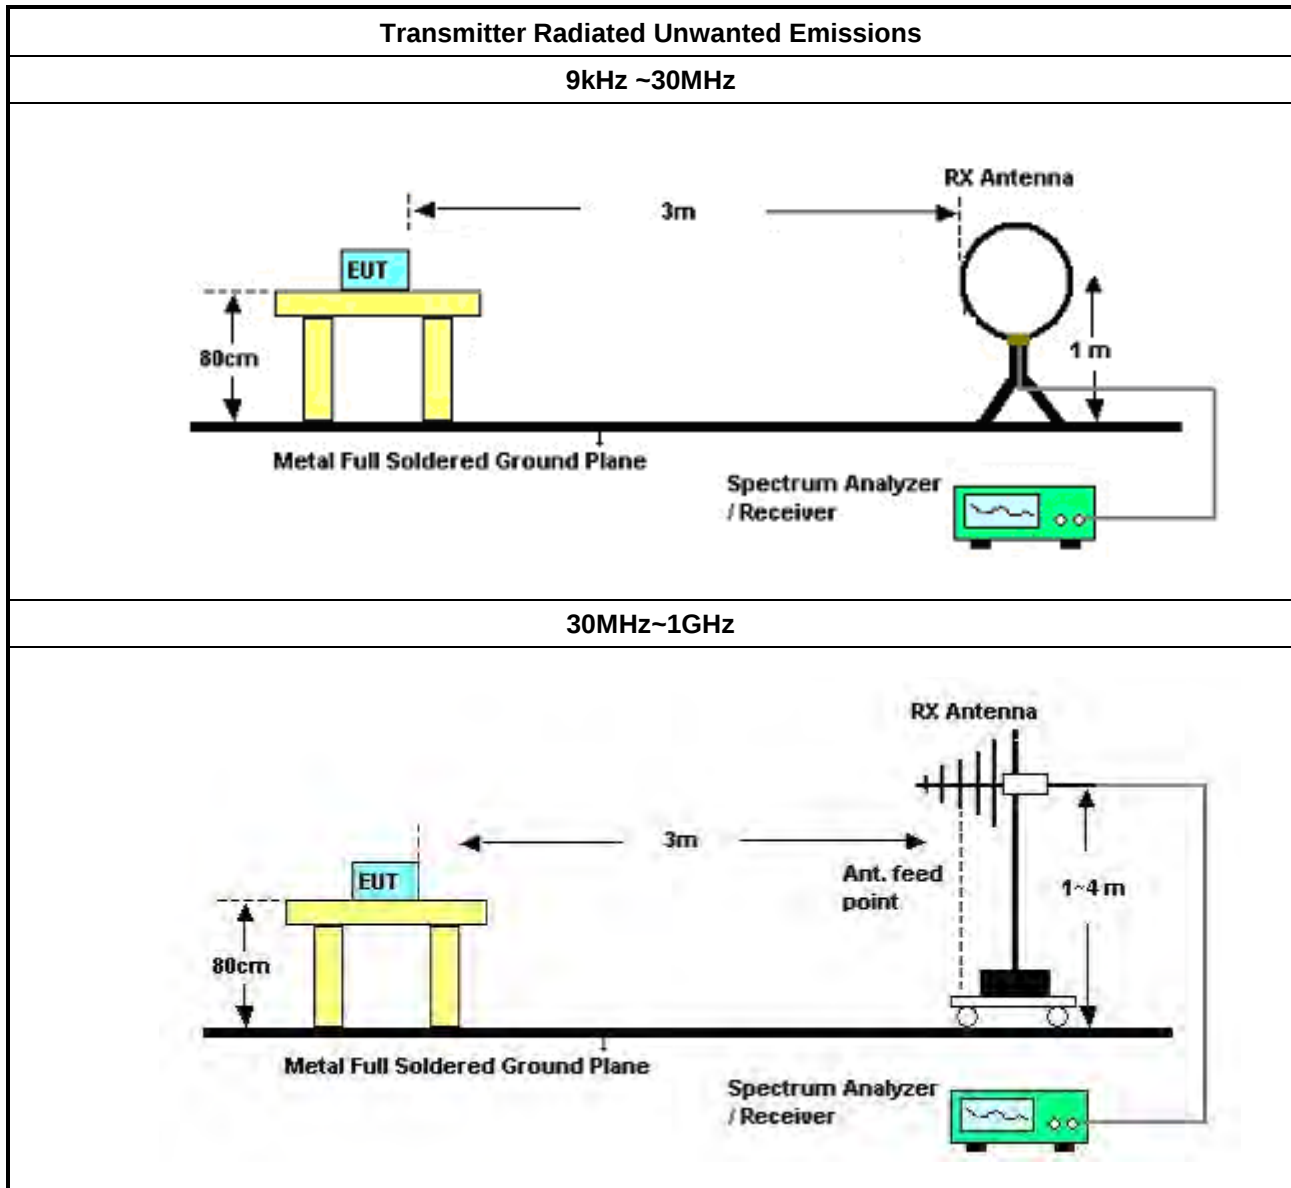

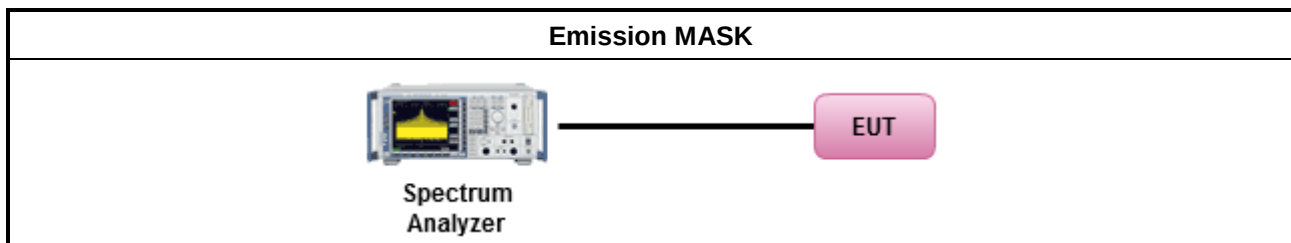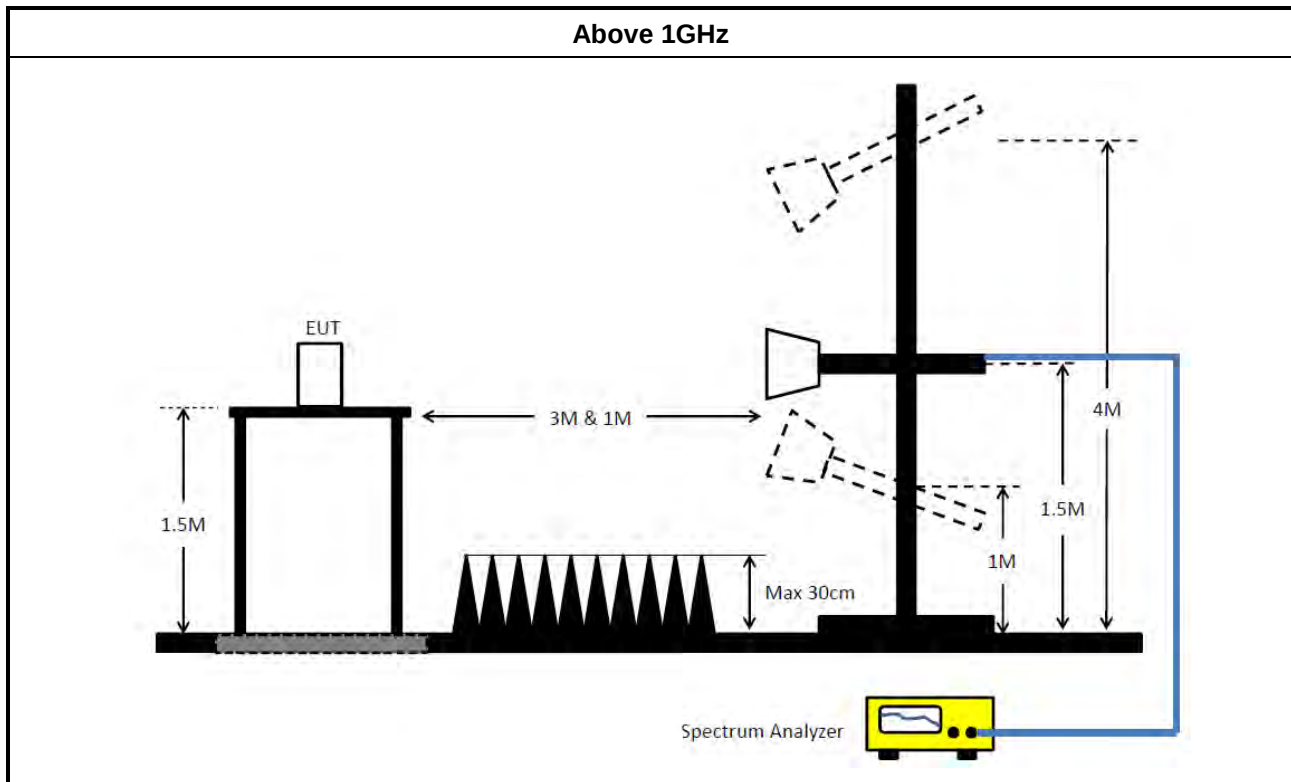

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as FCC KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

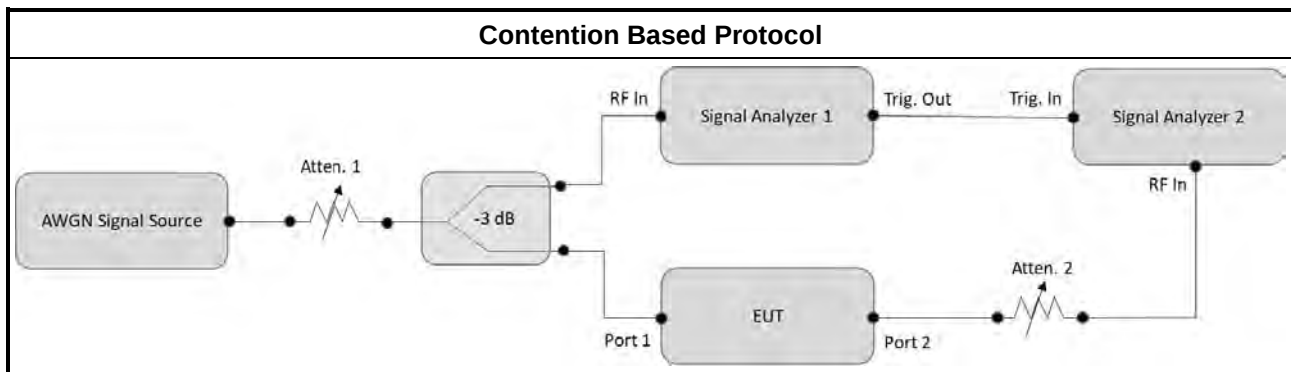

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 01, 2024	Feb. 28, 2025	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 19, 2024	Feb. 18, 2025	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 24, 2024	Apr. 23, 2025	Conduction (CO01-CB)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30 MHz	Oct. 16, 2024	Oct. 15, 2025	Radiation (03CH03-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH03-CB	30 MHz ~ 1 GHz	Jan. 18, 2024	Jan. 17, 2025	Radiation (03CH03-CB)
Bilog Antenna with 6dB Attenuator	Schaffner & EMCI	CBL6112B& N-6-06	2888&AT-N060 5	30MHz ~ 1GHz	Jan. 18, 2024	Jan. 17, 2025	Radiation (03CH03-CB)
Amplifier	SGH	SGH301	20240606-1	30MHz ~ 1GHz	Jun. 04, 2024	Jun. 03, 2025	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 11, 2024	Jun. 10, 2025	Radiation (03CH03-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH03-CB)
RF Cable-low	Woken	RG402	Low Cable-02+29	30MHz ~ 1GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 24, 2024	Mar. 23, 2025	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 12, 2024	Apr. 11, 2025	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Aug. 14, 2024	Aug. 13, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH02-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Oct. 02, 2024	Oct. 01, 2025	Radiation (03CH02-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11.19	5.15GHz-7.115 GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2024	May 26, 2025	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~18 GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Mar. 01, 2024	Feb. 28, 2025	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	MY45100745	50MHz~18GHz	Jul. 12, 2024	Jul. 11, 2025	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1 ~ 18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1~ 18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11.19	5.15GHz-7.115 GHz	N.C.R.	N.C.R.	Conducted (TH01-CB)
Spectrum Analyzer	R&S	FSV40	101026	9kHz~40GHz	Nov. 26, 2024	Nov. 25, 2025	Conducted (DF01-CB)
Signal generator	R&S	SMB100A	177785	1MHz-40GHz	Sep. 23, 2024	Sep. 22, 2025	Conducted (DF01-CB)
Vector Signal Generator	R&S	SMM100A	101894	100kHz ~ 7.5GHz	Oct. 28, 2024	Oct. 27, 2025	Conducted (DF01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Power Divider	Titan	2 Way	DV-8G -09	2GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF01-CB)
RF Power Divider	Titan	2 Way	DV-8G -10	2GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF01-CB)
RF Power Divider	Titan	2 Way	DV-8G -11	2GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-52	1 GHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-53	1 GHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-54	1 GHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-56	1 GHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	QP	154.5k	43.06	65.75	-22.69	Line

Mode 2

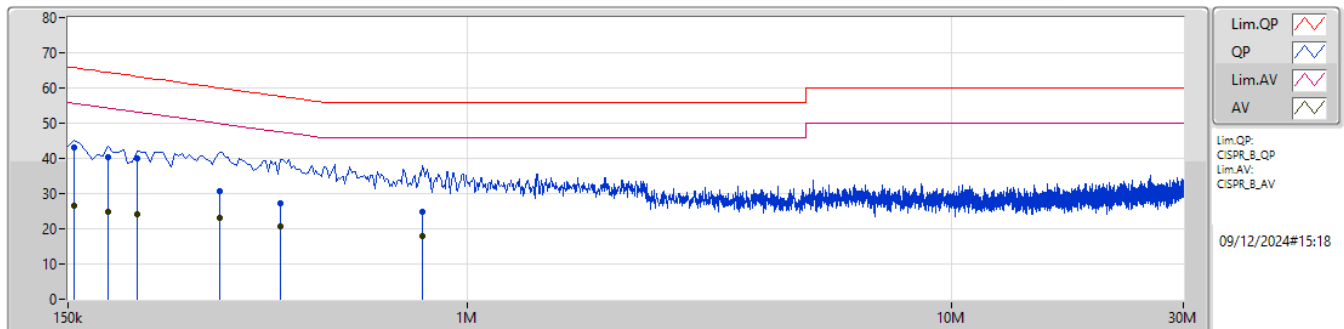

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	43.06	65.75	-22.69	10.04	Line	"Worst"	33.02	0.04	0.08	9.92						
AV	154.5k	26.70	55.75	-29.05	10.04	Line	-	16.66	0.04	0.08	9.92						
QP	181.5k	40.36	64.41	-24.05	10.05	Line	-	30.31	0.04	0.07	9.94						
AV	181.5k	24.99	54.41	-29.42	10.05	Line	-	14.94	0.04	0.07	9.94						
QP	208.5k	40.11	63.27	-23.16	10.07	Line	-	30.04	0.04	0.07	9.96						
AV	208.5k	24.29	53.27	-28.98	10.07	Line	-	14.22	0.04	0.07	9.96						
QP	307.5k	30.59	60.03	-29.44	10.16	Line	-	20.43	0.05	0.09	10.02						
AV	307.5k	23.18	50.03	-26.85	10.16	Line	-	13.02	0.05	0.09	10.02						
QP	411k	27.28	57.63	-30.35	10.21	Line	-	17.07	0.05	0.10	10.06						
AV	411k	20.61	47.63	-27.02	10.21	Line	-	10.40	0.05	0.10	10.06						
QP	807k	24.85	56.00	-31.15	10.30	Line	-	14.55	0.07	0.09	10.14						
AV	807k	17.96	46.00	-28.04	10.30	Line	-	7.66	0.07	0.09	10.14						

Mode 2

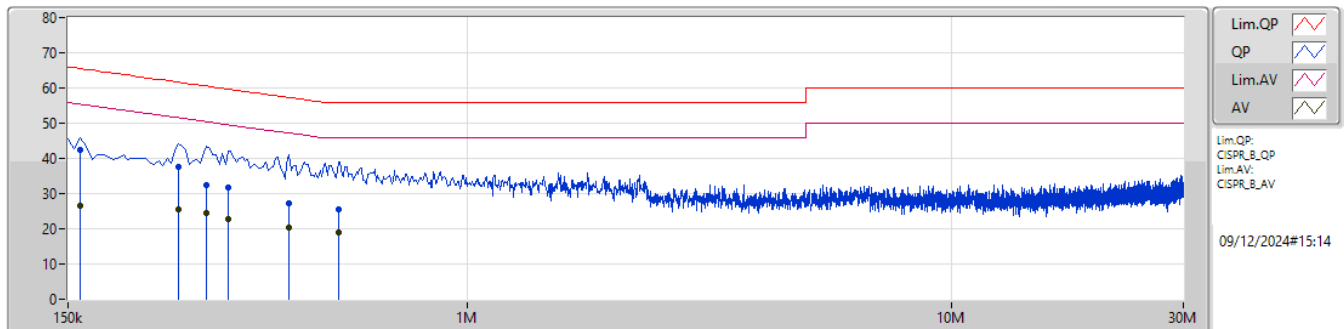

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	159k	42.41	65.52	-23.11	10.06	Neutral	"Worst"	32.35	0.06	0.08	9.92						
AV	159k	26.46	55.52	-29.06	10.06	Neutral	-	16.40	0.06	0.08	9.92						
QP	253.5k	37.43	61.64	-24.21	10.13	Neutral	-	27.30	0.06	0.08	9.99						
AV	253.5k	25.61	51.64	-26.03	10.13	Neutral	-	15.48	0.06	0.08	9.99						
QP	289.5k	32.47	60.53	-28.06	10.16	Neutral	-	22.31	0.06	0.09	10.01						
AV	289.5k	24.53	50.53	-26.00	10.16	Neutral	-	14.37	0.06	0.09	10.01						
QP	321k	31.61	59.67	-28.06	10.18	Neutral	-	21.43	0.06	0.09	10.03						
AV	321k	22.91	49.67	-26.76	10.18	Neutral	-	12.73	0.06	0.09	10.03						
QP	429k	27.08	57.28	-30.20	10.23	Neutral	-	16.85	0.06	0.10	10.07						
AV	429k	20.29	47.28	-26.99	10.23	Neutral	-	10.06	0.06	0.10	10.07						
QP	541.5k	25.61	56.00	-30.39	10.26	Neutral	-	15.35	0.07	0.10	10.09						
AV	541.5k	18.93	46.00	-27.07	10.26	Neutral	-	8.67	0.07	0.10	10.09						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	18.425M	16.339M	16M3D1D	18.26M	16.296M
802.11be EHT20_Nss1,(MCS0)_2TX	20.625M	18.969M	19M0D1D	20.185M	18.866M
802.11be EHT40_Nss1,(MCS0)_2TX	40.37M	37.85M	37M9D1D	39.71M	37.662M
802.11be EHT80_Nss1,(MCS0)_2TX	80.52M	77.222M	77M2D1D	80.3M	76.933M
802.11be EHT160_Nss1,(MCS0)_2TX	162.8M	156.579M	157MD1D	161.92M	156.008M
6.425-6.525GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	18.535M	16.349M	16M3D1D	18.315M	16.335M
802.11be EHT20_Nss1,(MCS0)_2TX	20.57M	18.916M	18M9D1D	20.24M	18.885M
802.11be EHT40_Nss1,(MCS0)_2TX	40.15M	37.858M	37M9D1D	39.82M	37.71M
802.11be EHT80_Nss1,(MCS0)_2TX	80.96M	77.263M	77M3D1D	80.3M	77.039M
802.11be EHT160_Nss1,(MCS0)_2TX	162.8M	156.663M	157MD1D	162.36M	156.492M
6.525-6.875GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	18.535M	16.339M	16M3D1D	18.205M	16.309M
802.11be EHT20_Nss1,(MCS0)_2TX	20.57M	18.905M	18M9D1D	20.295M	18.869M
802.11be EHT40_Nss1,(MCS0)_2TX	40.15M	37.839M	37M8D1D	40.04M	37.764M
802.11be EHT80_Nss1,(MCS0)_2TX	80.52M	77.25M	77M3D1D	80.08M	76.986M
802.11be EHT160_Nss1,(MCS0)_2TX	163.24M	156.644M	157MD1D	161.92M	156.268M
6.875-7.125GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	18.535M	16.338M	16M3D1D	18.26M	16.308M
802.11be EHT20_Nss1,(MCS0)_2TX	20.405M	18.886M	18M9D1D	20.185M	18.862M
802.11be EHT40_Nss1,(MCS0)_2TX	40.04M	37.826M	37M8D1D	39.49M	37.71M
802.11be EHT80_Nss1,(MCS0)_2TX	80.52M	77.284M	77M3D1D	80.3M	76.98M
802.11be EHT160_Nss1,(MCS0)_2TX	162.8M	156.449M	156MD1D	162.8M	156.133M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result



Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5955MHz	Pass	Inf	18.26M	16.319M	18.37M	16.296M
6195MHz	Pass	Inf	18.37M	16.336M	18.315M	16.309M
6415MHz	Pass	Inf	18.425M	16.339M	18.425M	16.323M
6435MHz	Pass	Inf	18.48M	16.336M	18.535M	16.335M
6475MHz	Pass	Inf	18.535M	16.348M	18.425M	16.343M
6515MHz	Pass	Inf	18.315M	16.349M	18.48M	16.349M
6535MHz	Pass	Inf	18.205M	16.309M	18.535M	16.339M
6695MHz	Pass	Inf	18.37M	16.327M	18.48M	16.331M
6875MHz	Pass	Inf	18.425M	16.334M	18.535M	16.337M
6895MHz	Pass	Inf	18.48M	16.327M	18.535M	16.315M
6995MHz	Pass	Inf	18.315M	16.329M	18.535M	16.334M
7095MHz	Pass	Inf	18.37M	16.324M	18.535M	16.323M
7115MHz	Pass	Inf	18.26M	16.338M	18.48M	16.308M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	Inf	20.185M	18.867M	20.185M	18.871M
6195MHz	Pass	Inf	20.24M	18.866M	20.35M	18.88M
6415MHz	Pass	Inf	20.35M	18.969M	20.625M	18.904M
6435MHz	Pass	Inf	20.24M	18.916M	20.57M	18.911M
6475MHz	Pass	Inf	20.515M	18.915M	20.35M	18.889M
6515MHz	Pass	Inf	20.24M	18.885M	20.515M	18.896M
6535MHz	Pass	Inf	20.57M	18.905M	20.405M	18.9M
6695MHz	Pass	Inf	20.405M	18.884M	20.405M	18.883M
6875MHz	Pass	Inf	20.295M	18.87M	20.405M	18.869M
6895MHz	Pass	Inf	20.295M	18.872M	20.35M	18.862M
6995MHz	Pass	Inf	20.24M	18.877M	20.295M	18.886M
7095MHz	Pass	Inf	20.295M	18.872M	20.405M	18.876M
7115MHz	Pass	Inf	20.185M	18.885M	20.295M	18.87M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	Inf	40.04M	37.785M	40.15M	37.829M
6205MHz	Pass	Inf	39.71M	37.714M	39.71M	37.662M
6405MHz	Pass	Inf	40.26M	37.814M	40.37M	37.85M
6445MHz	Pass	Inf	39.93M	37.858M	39.93M	37.842M
6485MHz	Pass	Inf	39.82M	37.834M	39.93M	37.777M
6525MHz	Pass	Inf	40.15M	37.714M	40.04M	37.71M
6565MHz	Pass	Inf	40.15M	37.793M	40.04M	37.782M
6685MHz	Pass	Inf	40.04M	37.839M	40.15M	37.785M
6885MHz	Pass	Inf	40.15M	37.764M	40.04M	37.802M
6925MHz	Pass	Inf	40.04M	37.71M	40.04M	37.756M
7005MHz	Pass	Inf	39.82M	37.773M	39.82M	37.714M
7085MHz	Pass	Inf	39.49M	37.818M	39.71M	37.826M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	Inf	80.52M	76.933M	80.3M	77.016M
6225MHz	Pass	Inf	80.3M	77.222M	80.52M	77.042M
6385MHz	Pass	Inf	80.3M	76.974M	80.52M	77.056M
6465MHz	Pass	Inf	80.3M	77.247M	80.96M	77.039M
6545MHz	Pass	Inf	80.52M	77.263M	80.52M	77.139M
6625MHz	Pass	Inf	80.52M	77.209M	80.52M	77.053M
6705MHz	Pass	Inf	80.52M	77.011M	80.08M	77.019M
6785MHz	Pass	Inf	80.52M	77.094M	80.52M	76.986M
6865MHz	Pass	Inf	80.3M	77.25M	80.3M	77.203M
6945MHz	Pass	Inf	80.52M	77.284M	80.3M	77.218M
7025MHz	Pass	Inf	80.3M	77.09M	80.52M	76.98M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	Inf	162.8M	156.329M	162.8M	156.579M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
6185MHz	Pass	Inf	162.8M	156.513M	161.92M	156.151M
6345MHz	Pass	Inf	162.8M	156.167M	162.36M	156.008M
6505MHz	Pass	Inf	162.8M	156.663M	162.36M	156.492M
6665MHz	Pass	Inf	162.8M	156.644M	161.92M	156.508M
6825MHz	Pass	Inf	163.24M	156.268M	162.8M	156.336M
6985MHz	Pass	Inf	162.8M	156.449M	162.8M	156.133M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5955MHz

10/12/2024

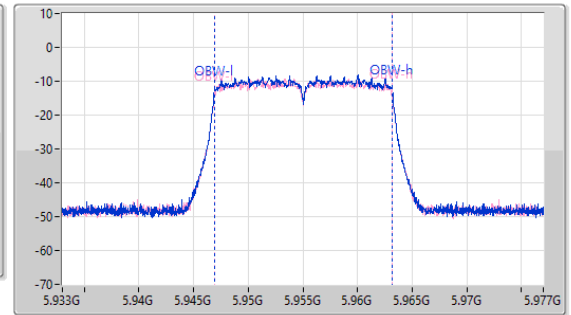
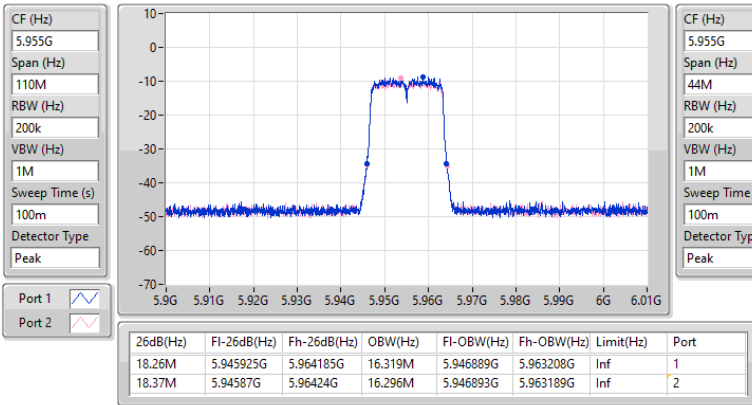

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
6195MHz

10/12/2024

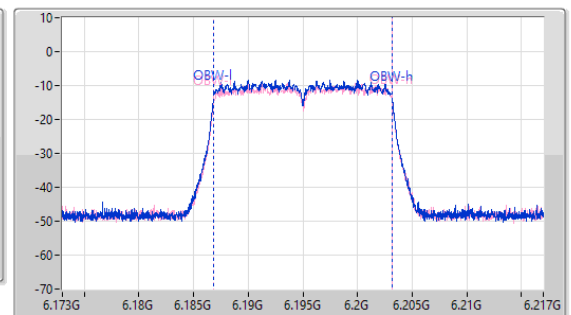
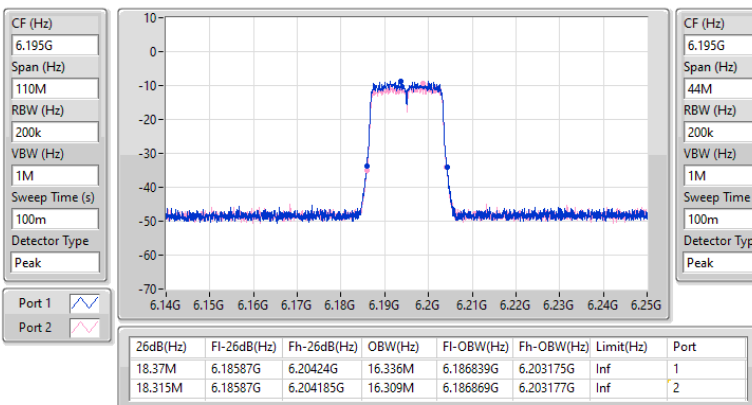


5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
6415MHz

10/12/2024

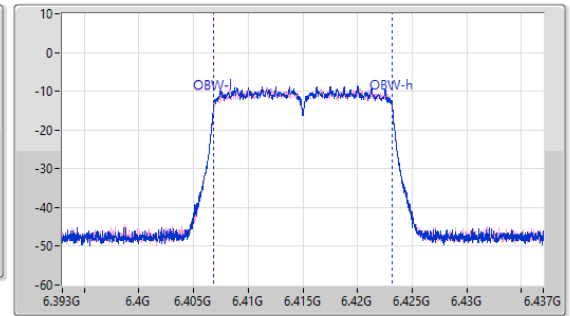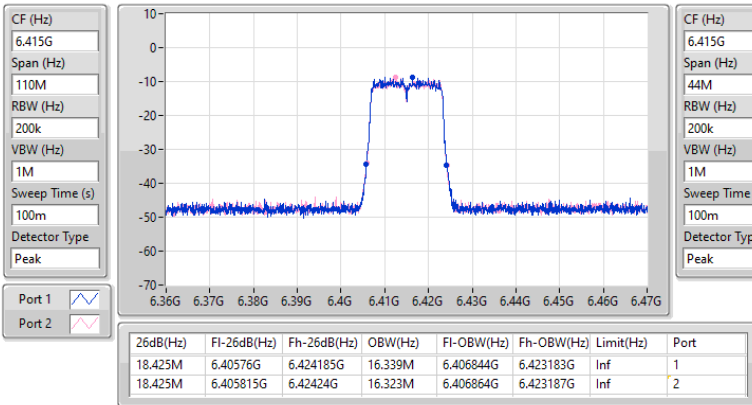

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
6435MHz

10/12/2024

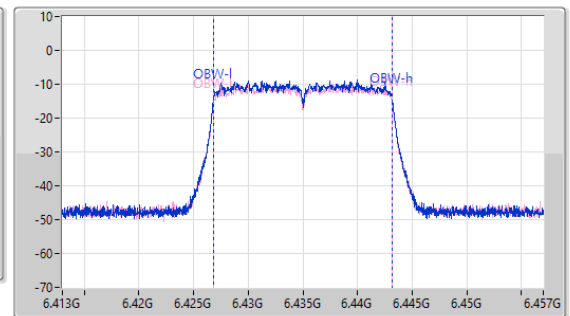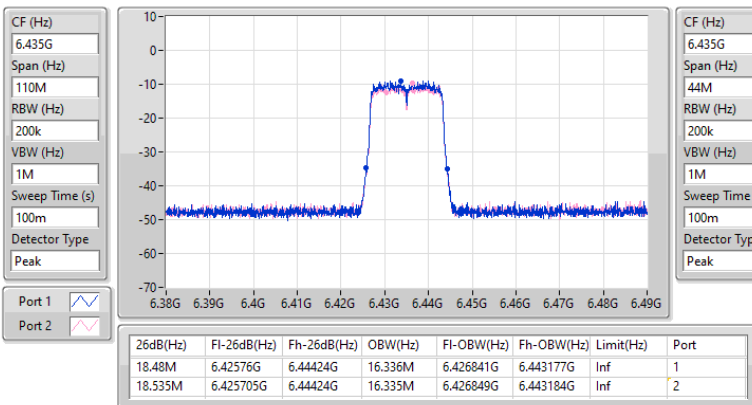


6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
6475MHz

10/12/2024

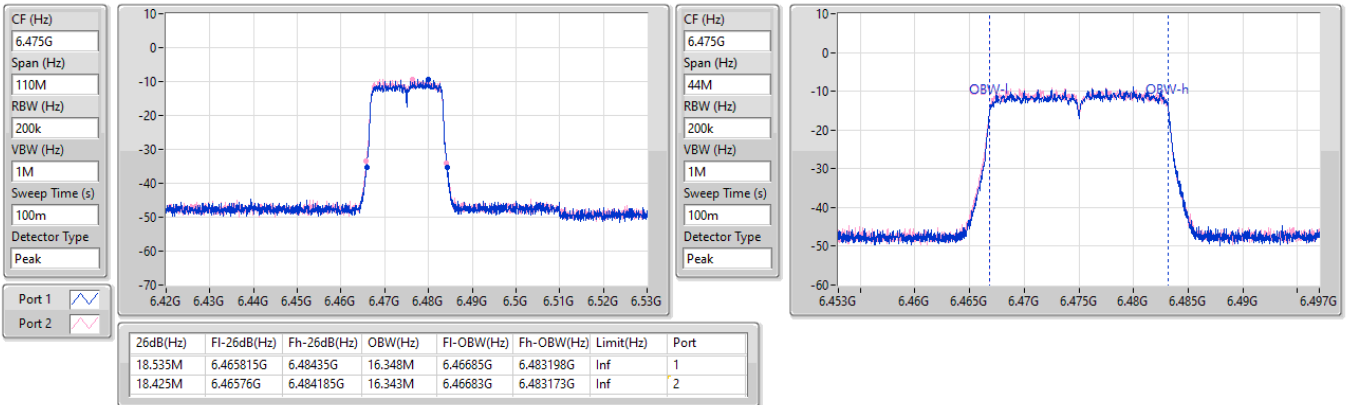

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
6515MHz

10/12/2024

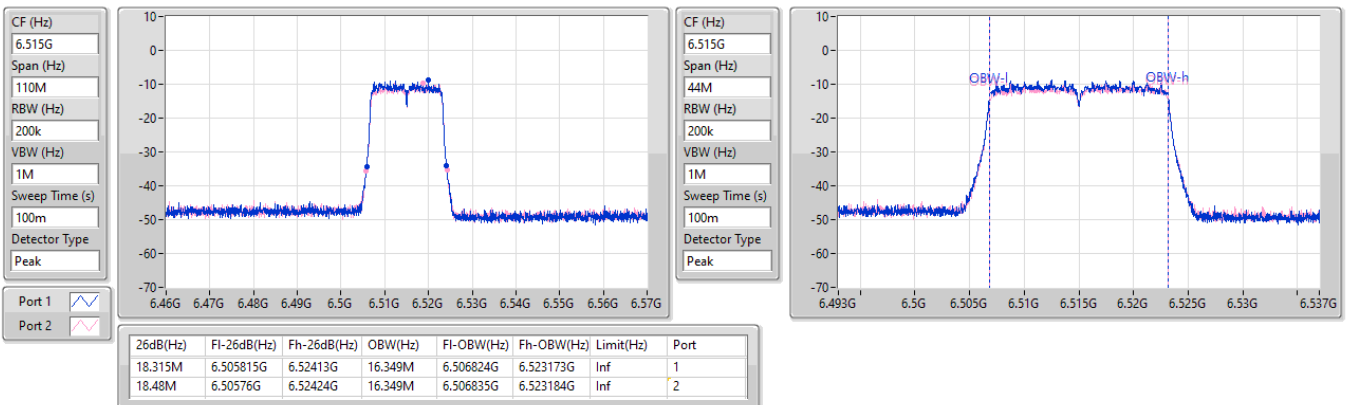


6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
6535MHz

10/12/2024

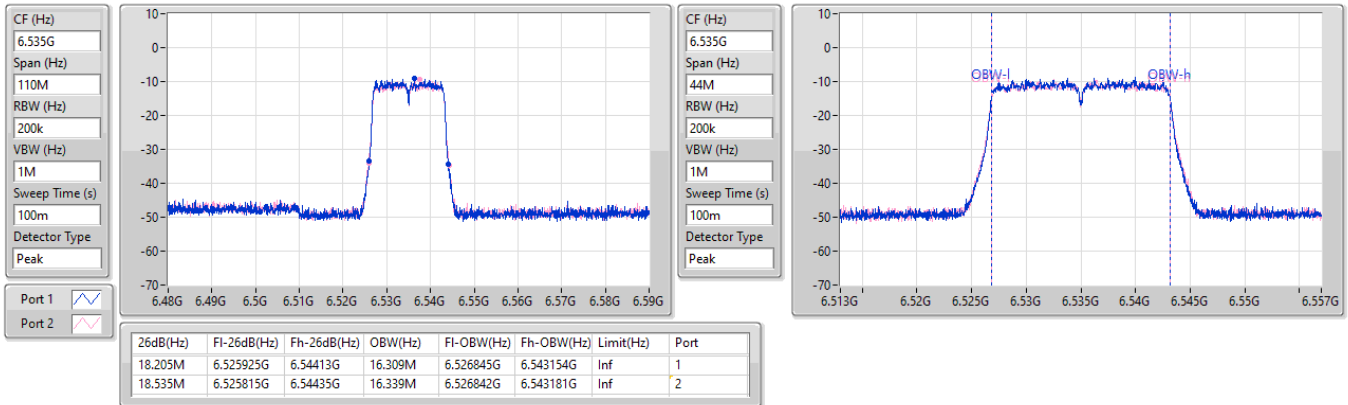

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
6695MHz

10/12/2024

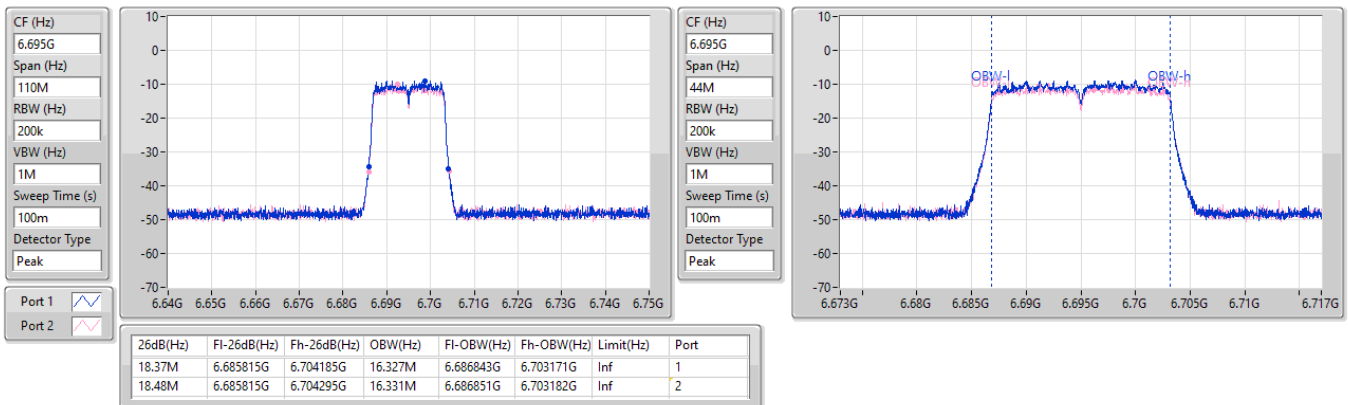


6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
6875MHz

10/12/2024

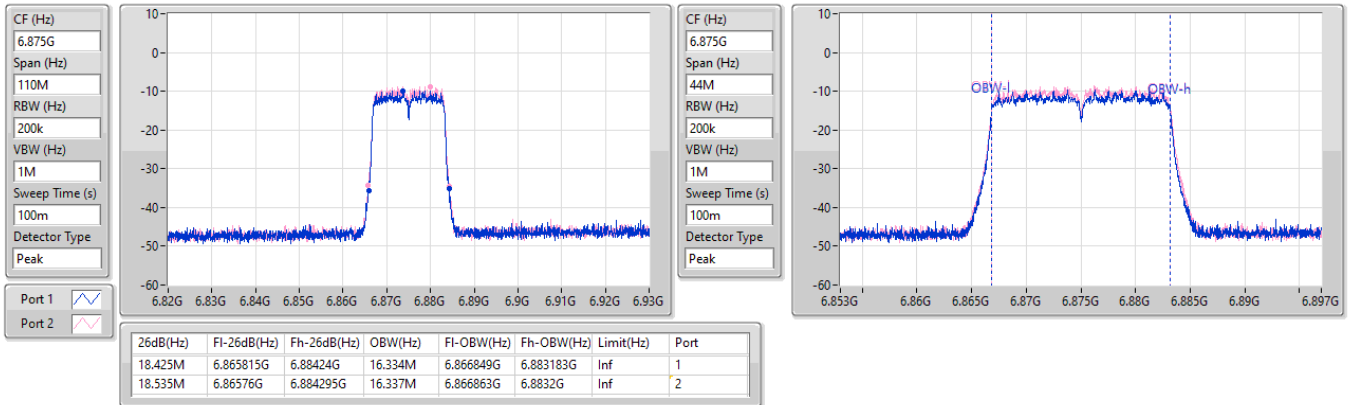

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
6895MHz

10/12/2024

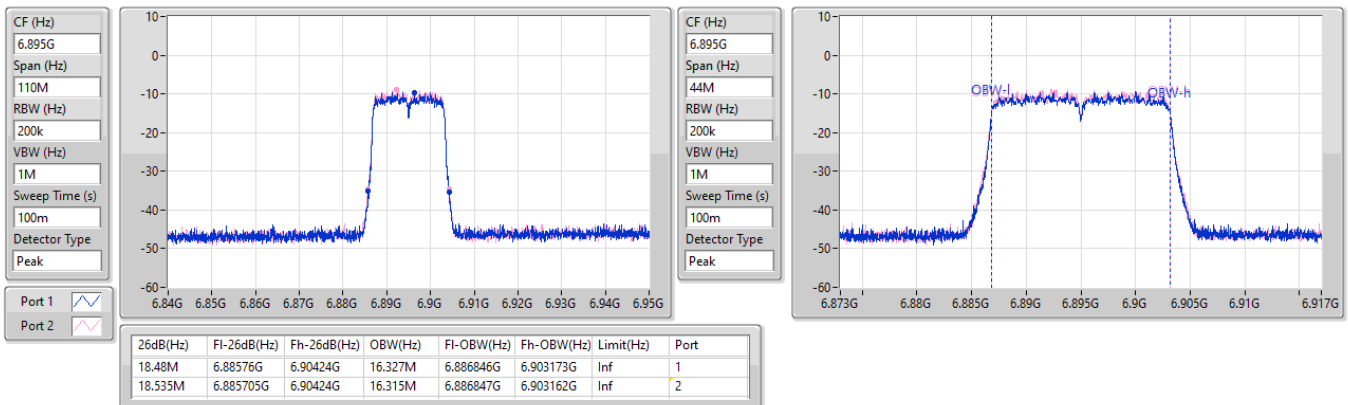


6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
6995MHz

10/12/2024

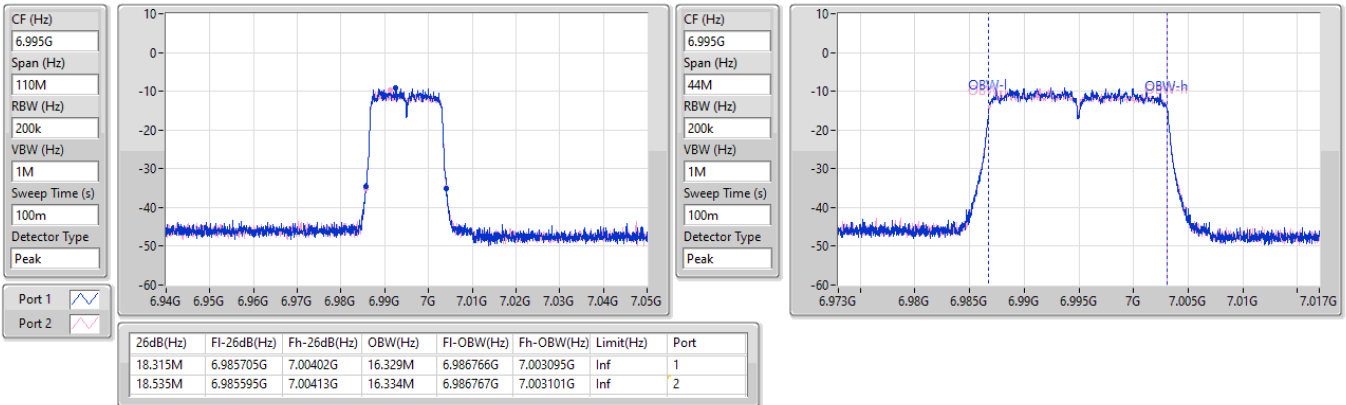

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
7095MHz

10/12/2024

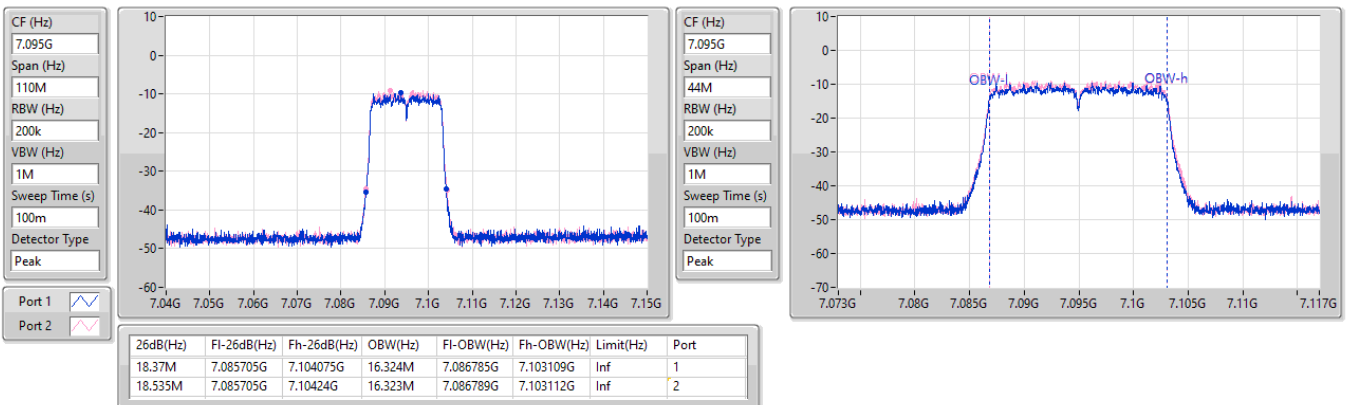


6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
7115MHz

10/12/2024


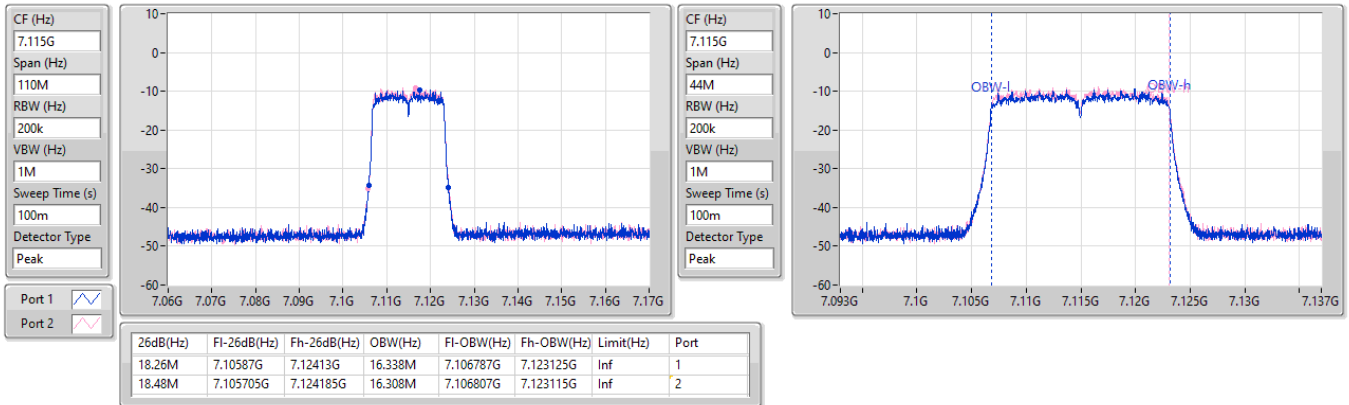

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5955MHz

10/12/2024


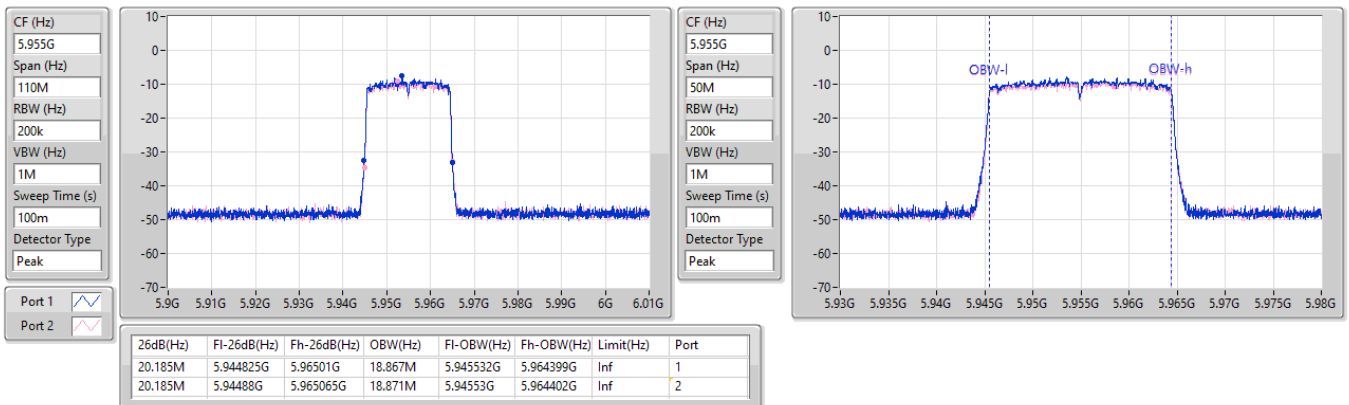


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6195MHz

10/12/2024

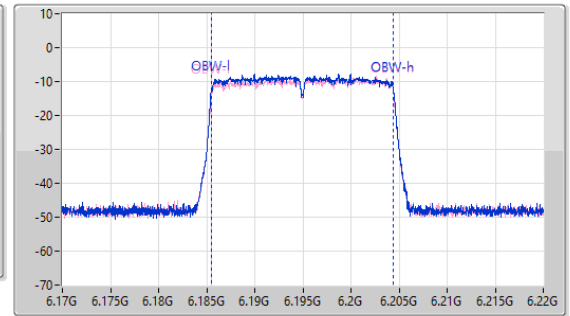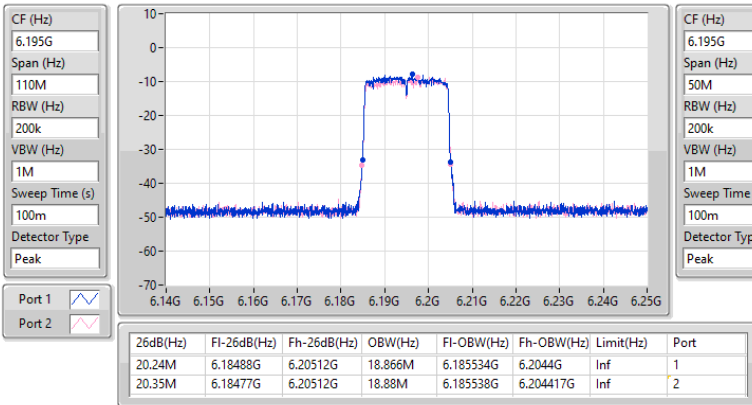

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6415MHz

10/12/2024

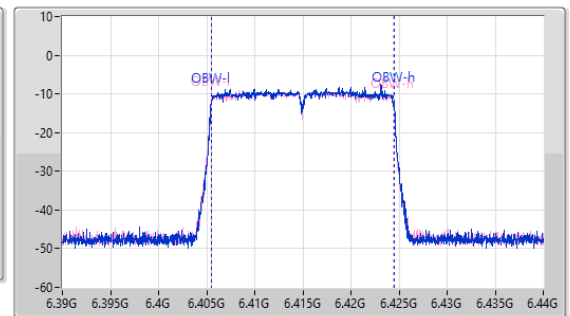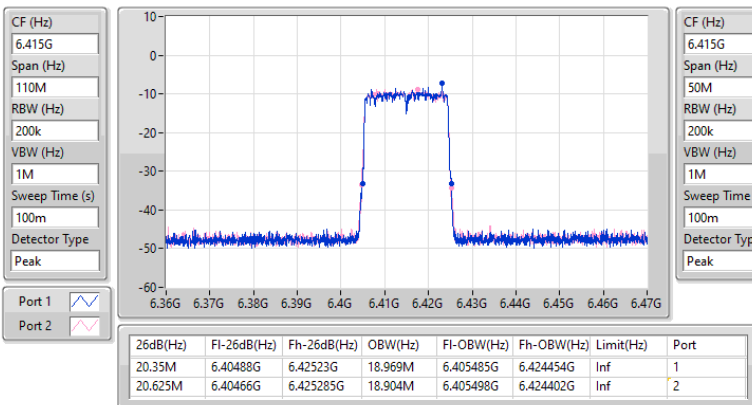


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6435MHz

10/12/2024

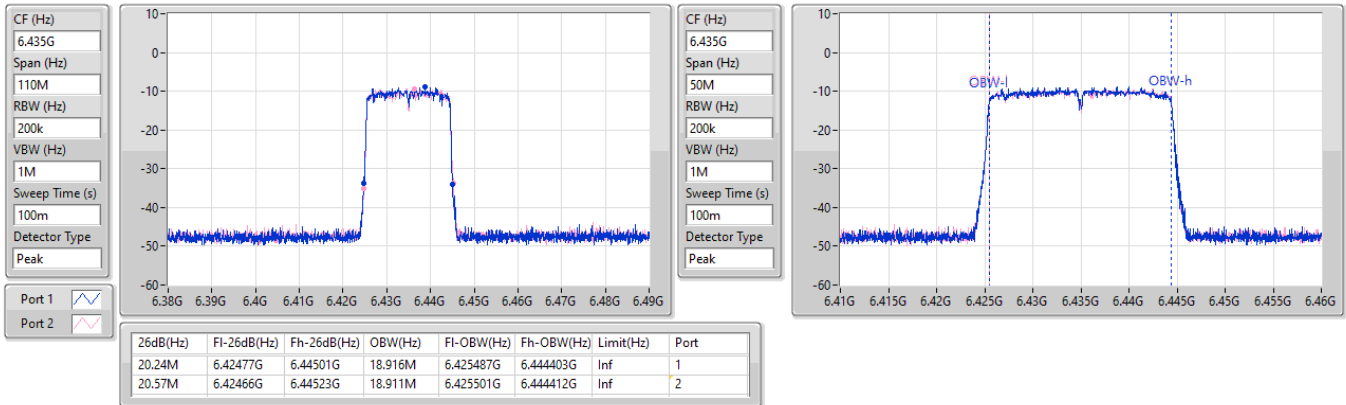

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6475MHz

10/12/2024

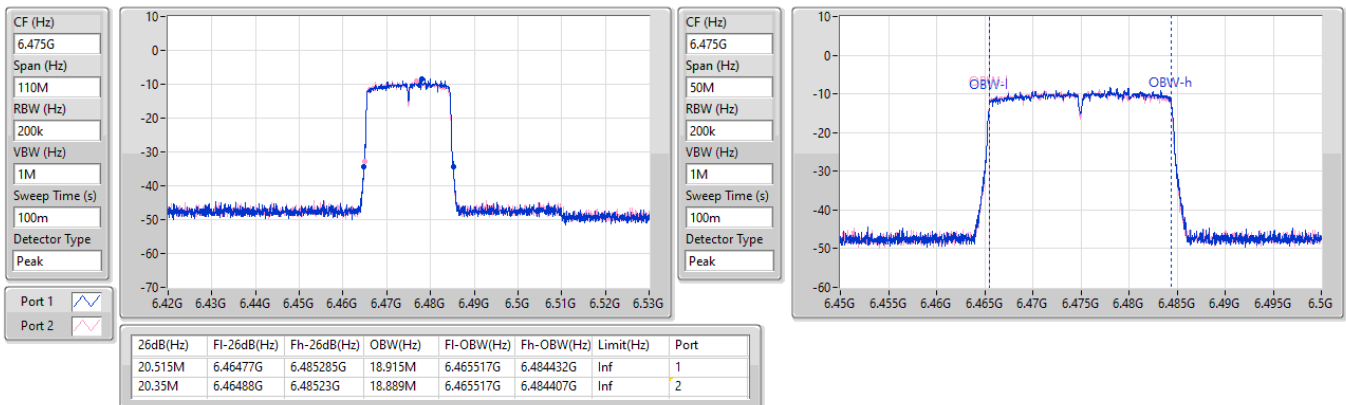


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6515MHz

10/12/2024

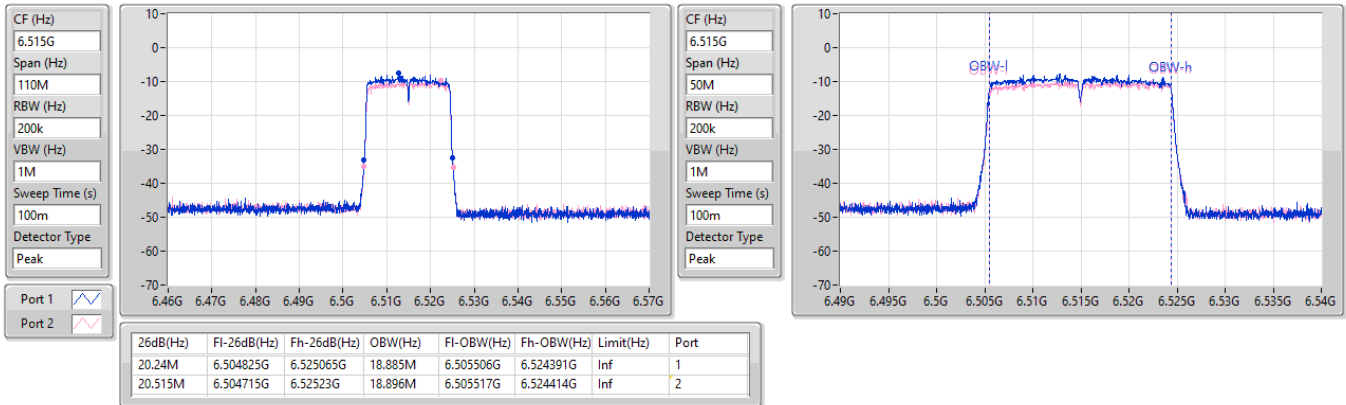

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6535MHz

10/12/2024

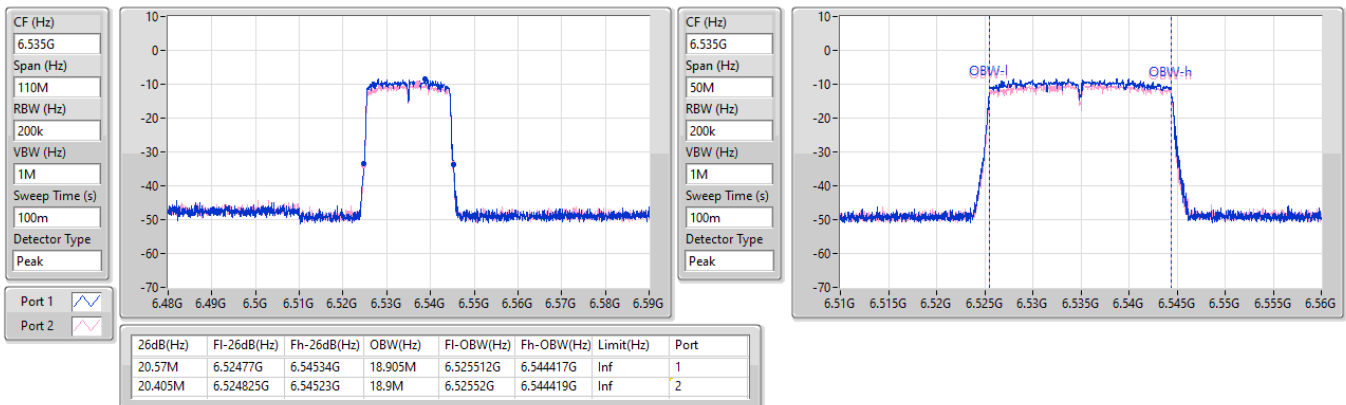


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6695MHz

10/12/2024

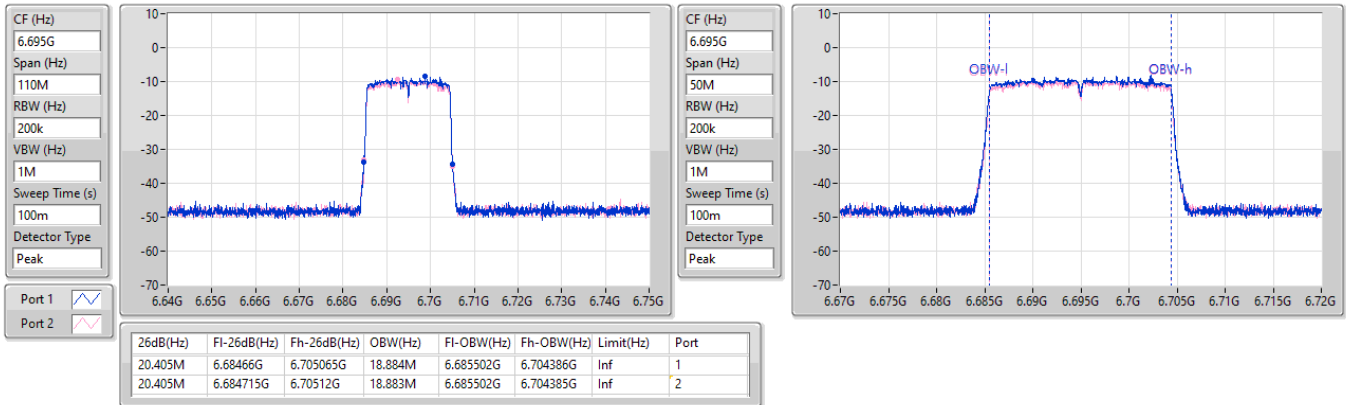

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6875MHz

10/12/2024

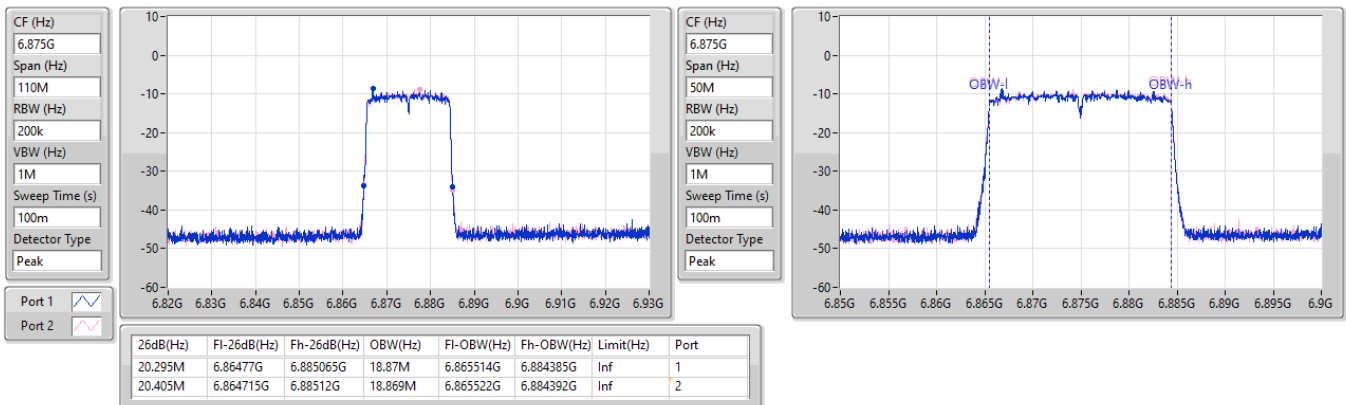


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6895MHz

10/12/2024

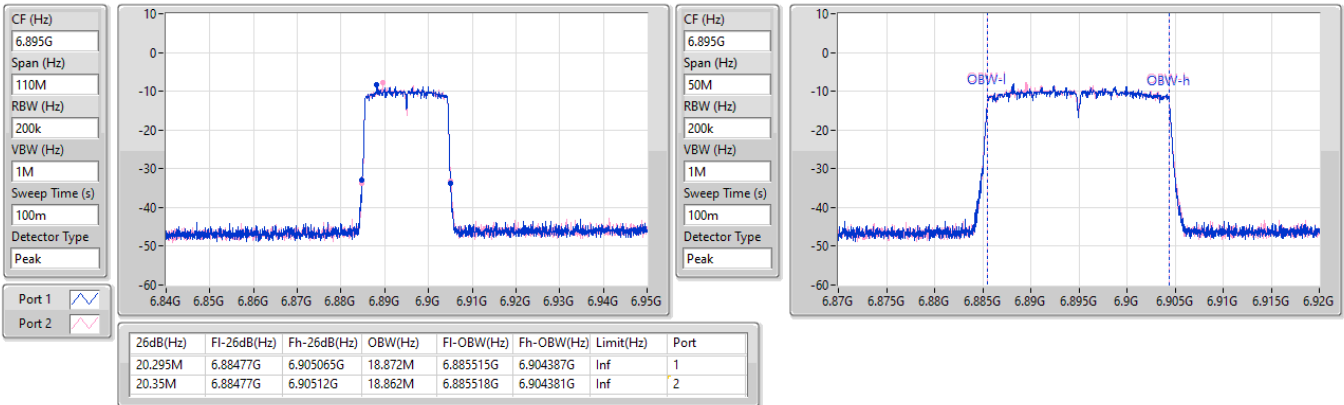

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6995MHz

10/12/2024

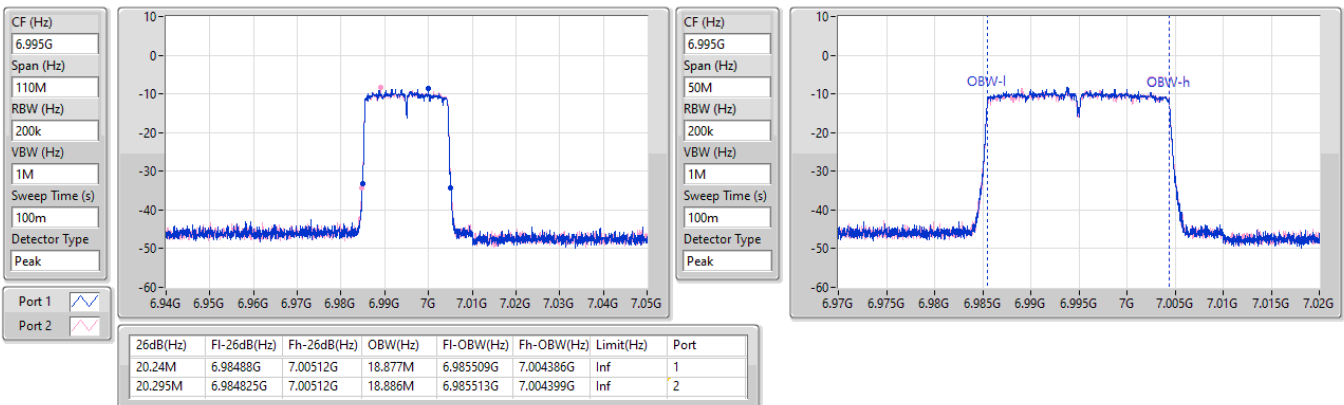


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
7095MHz

10/12/2024

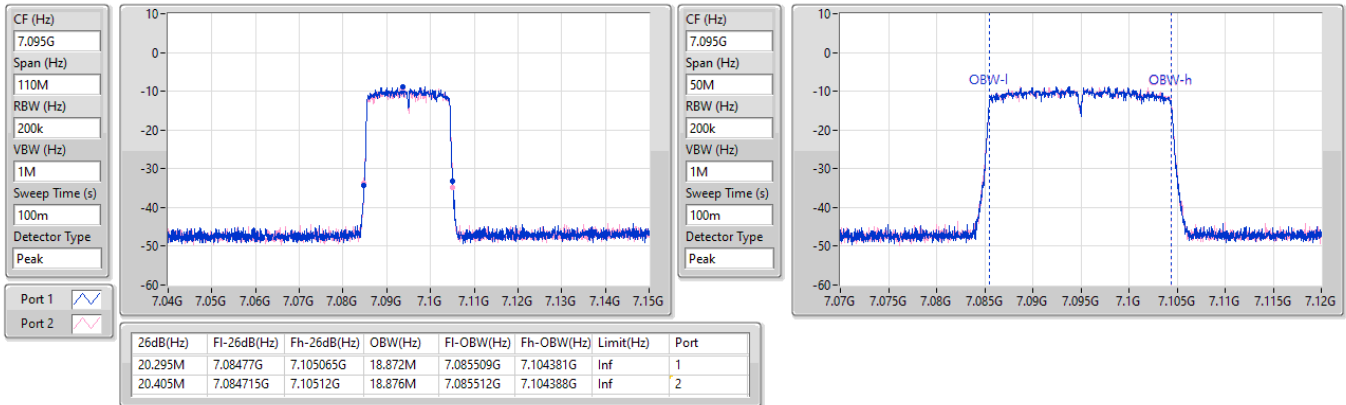

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
7115MHz

10/12/2024

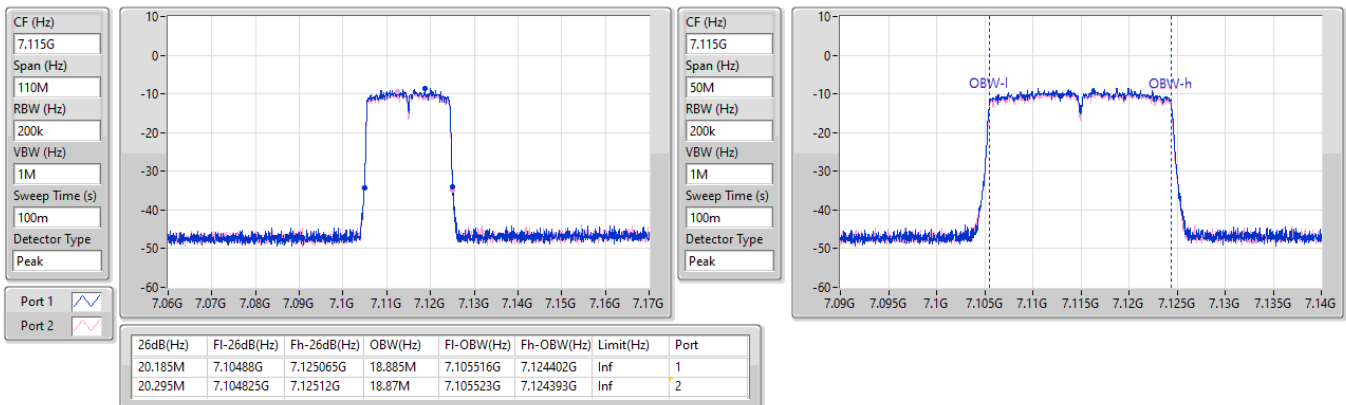


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5965MHz

10/12/2024

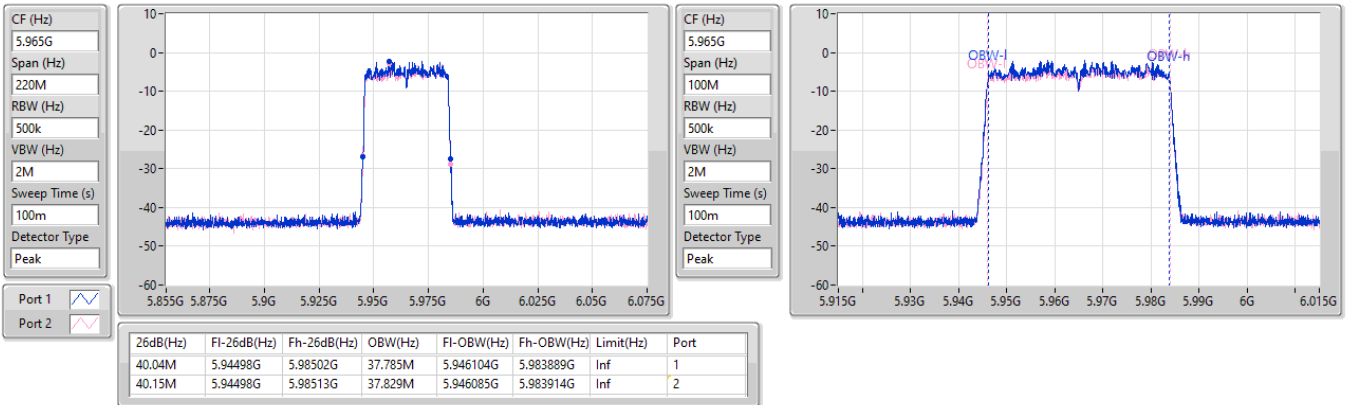

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6205MHz

10/12/2024

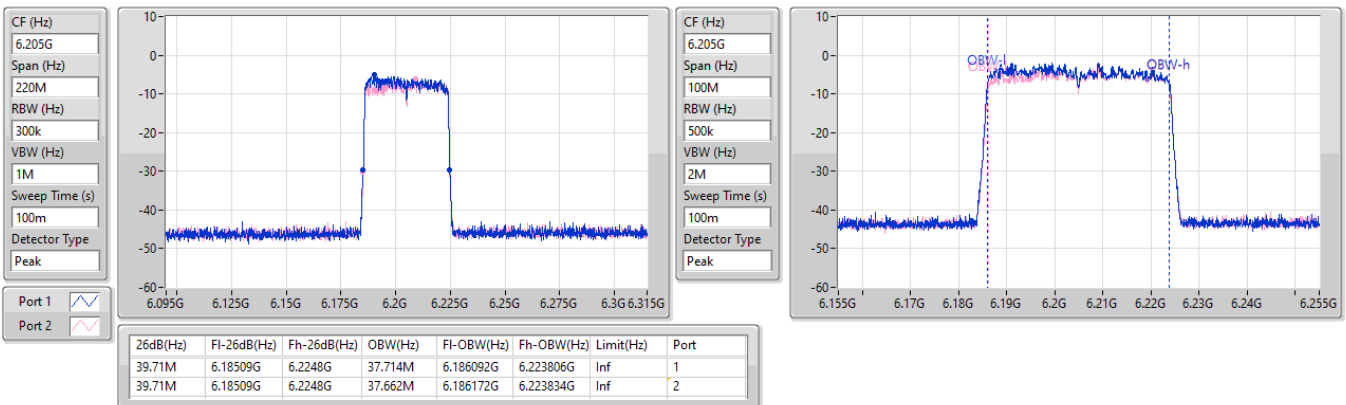


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6405MHz

10/12/2024

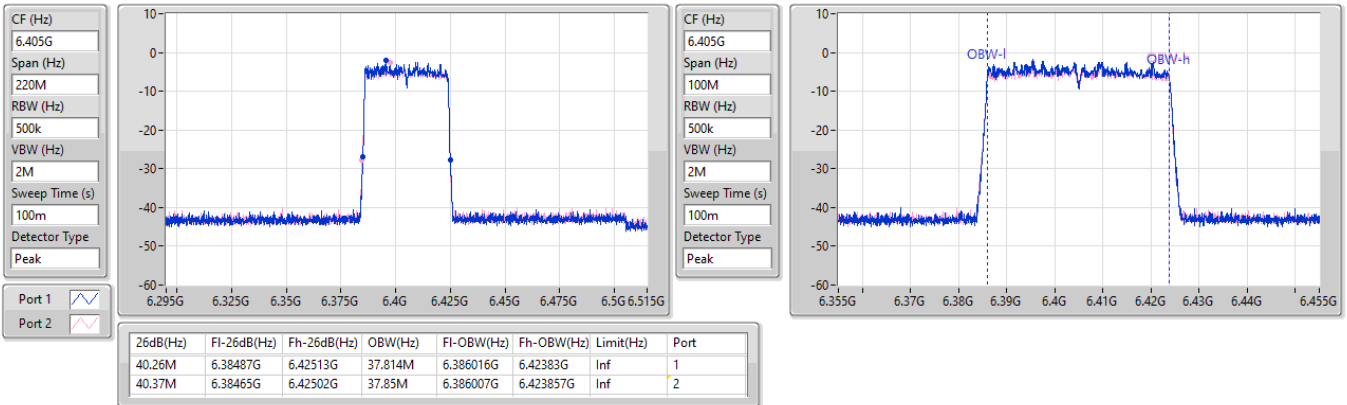
6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6445MHz

10/12/2024


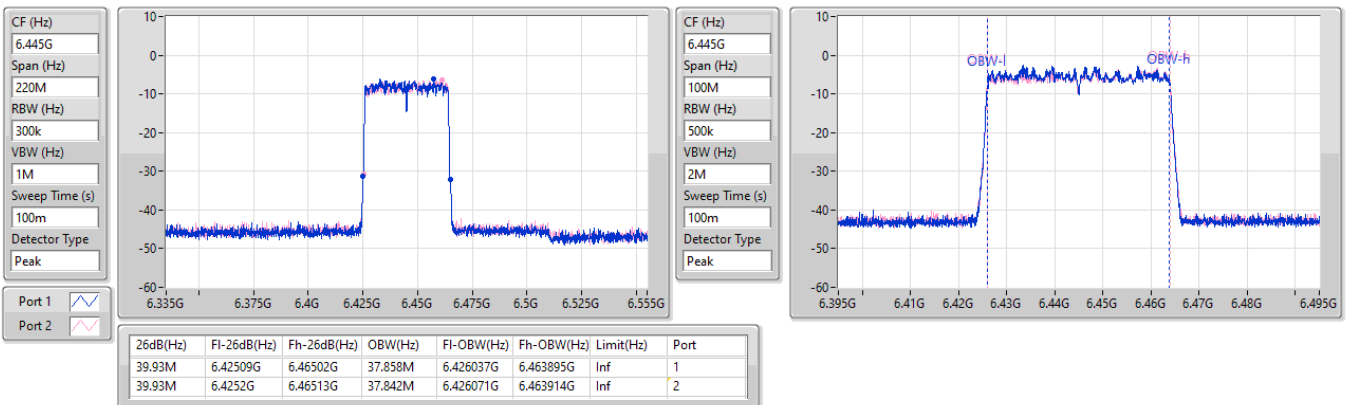


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6485MHz

10/12/2024

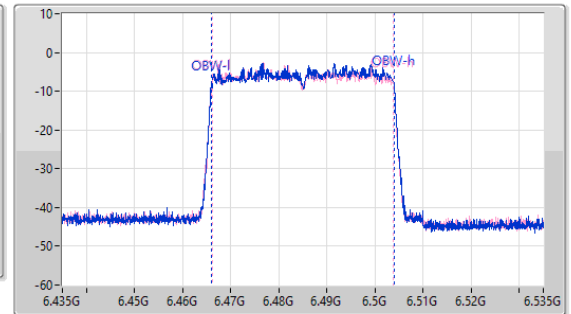
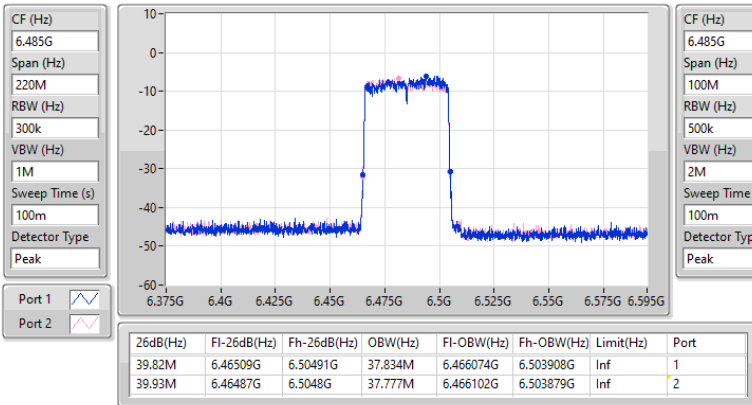


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6525MHz

10/12/2024

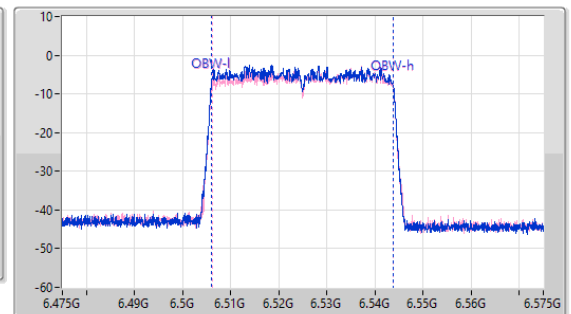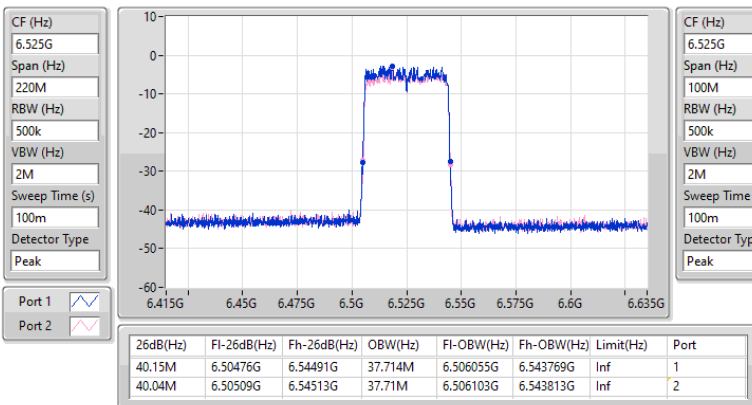


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6565MHz

10/12/2024

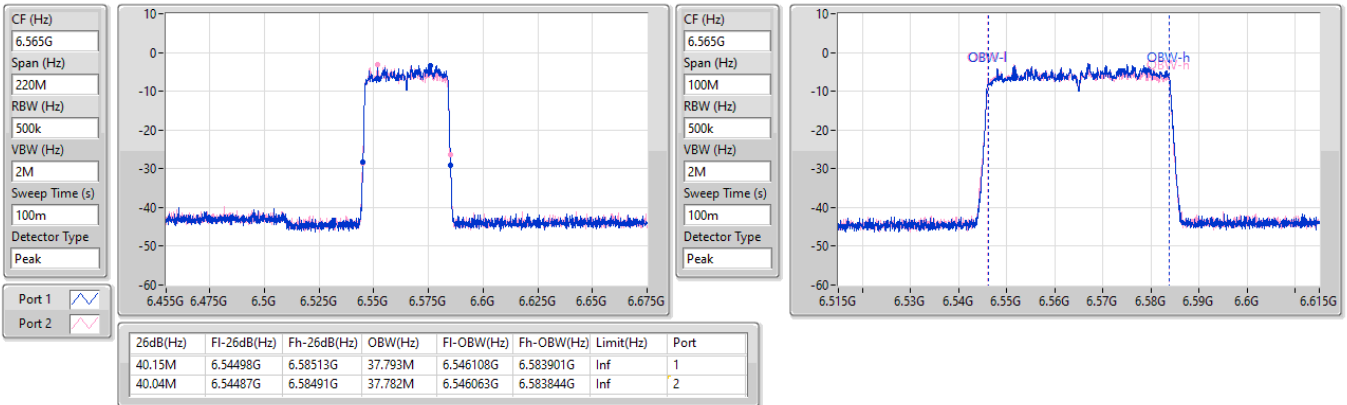


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW



6685MHz

10/12/2024


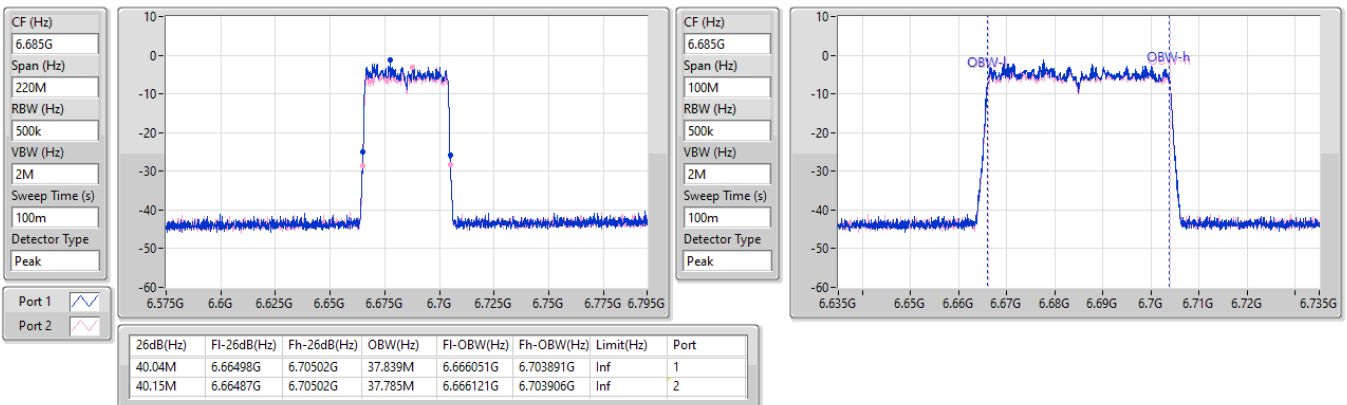


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6885MHz

10/12/2024

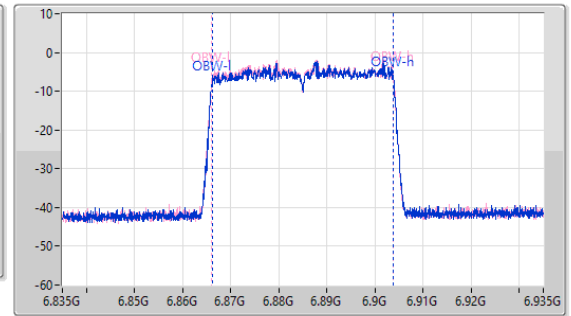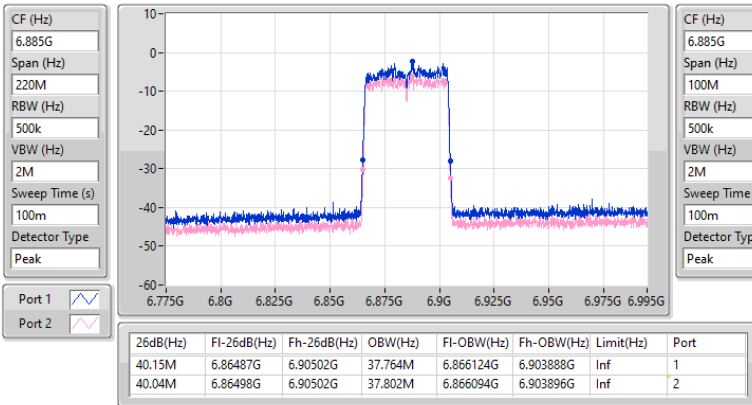
6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6925MHz

10/12/2024

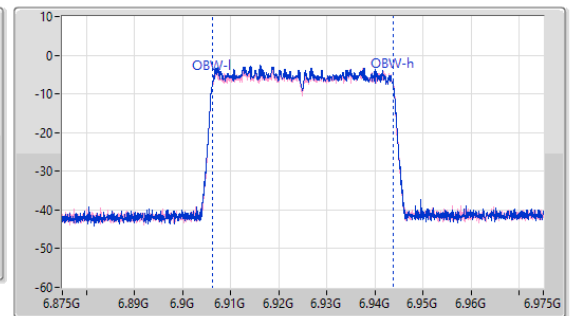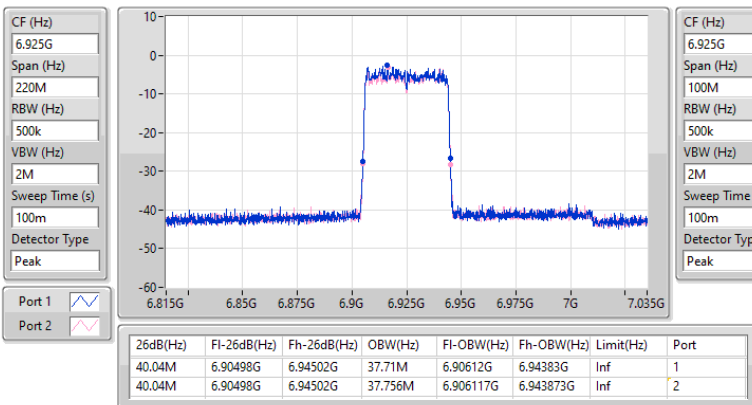


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

7005MHz

10/12/2024

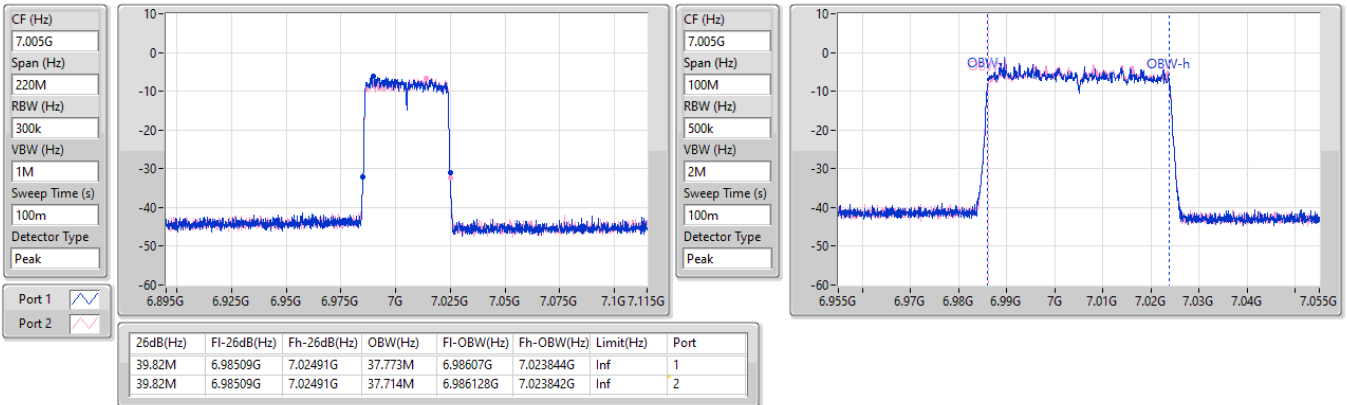


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


7085MHz

10/12/2024

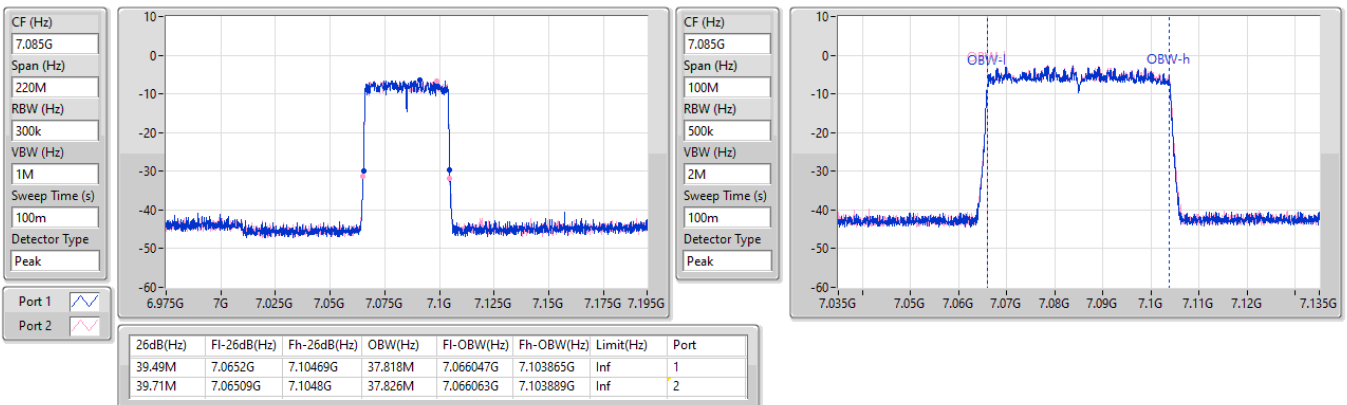


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5985MHz

10/12/2024


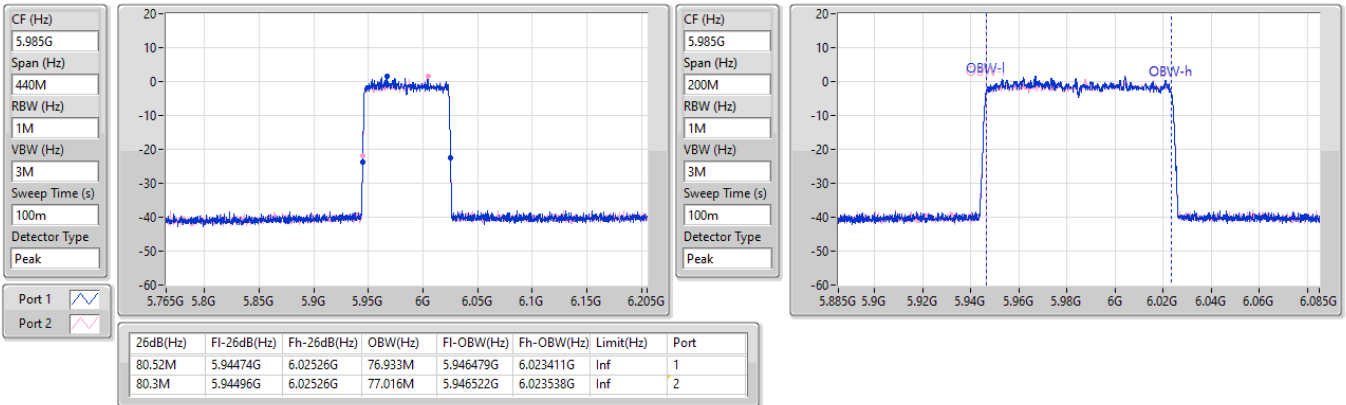

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6225MHz

10/12/2024


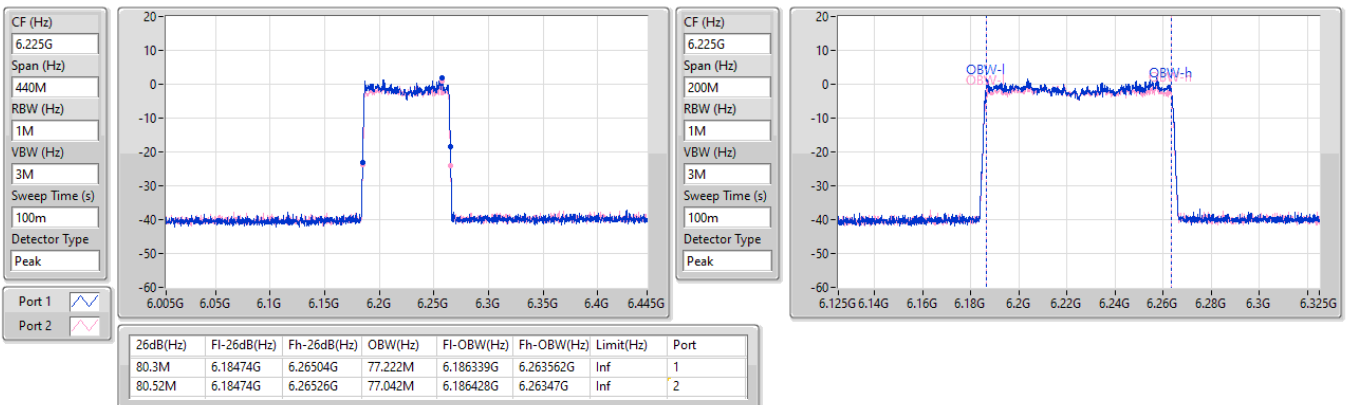


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6385MHz

10/12/2024

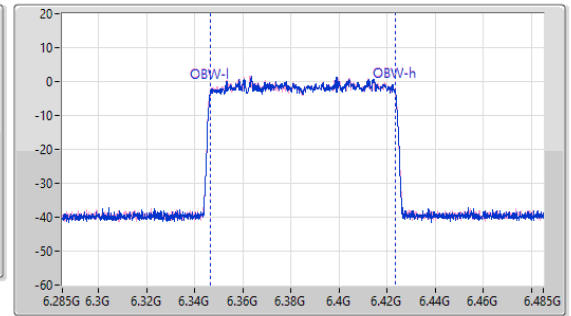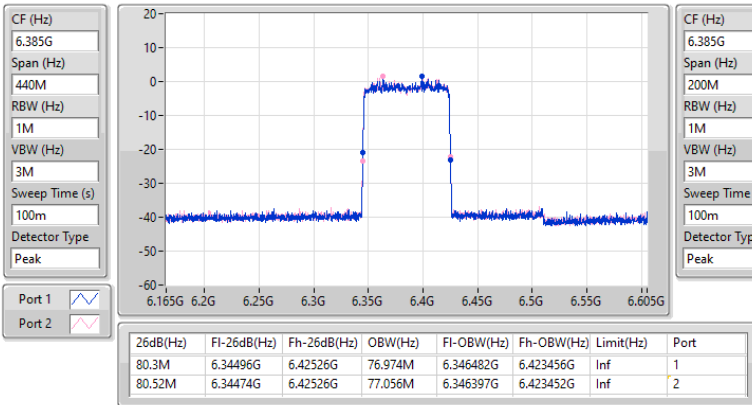

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6465MHz

10/12/2024

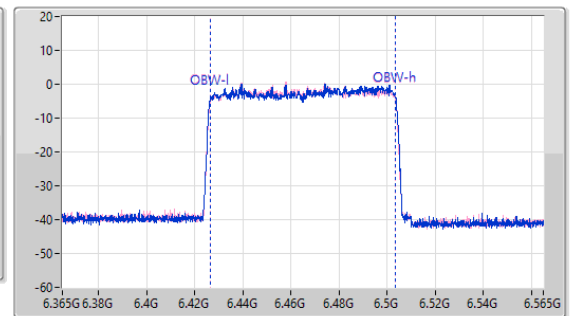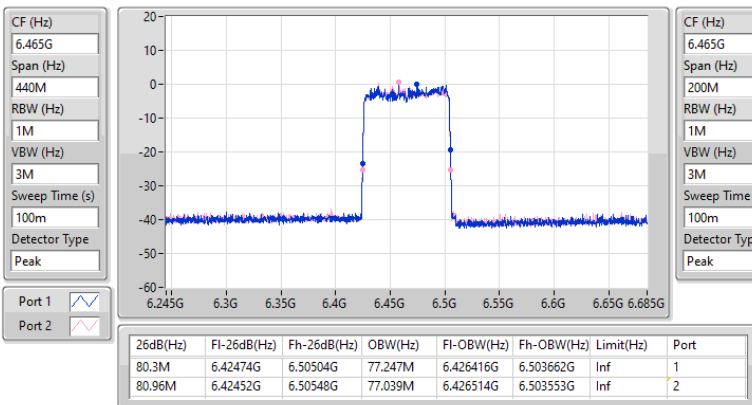


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6545MHz

10/12/2024

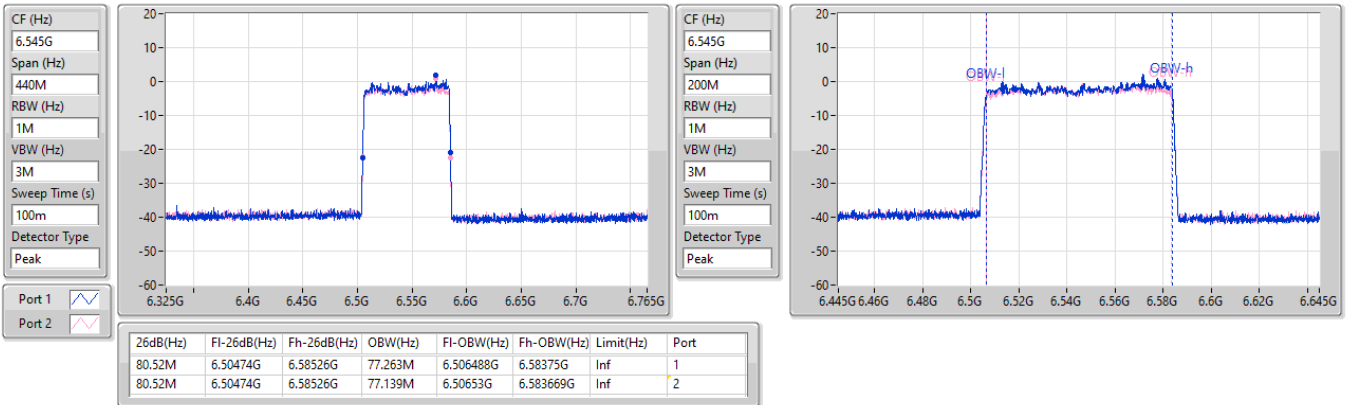
6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6625MHz

10/12/2024

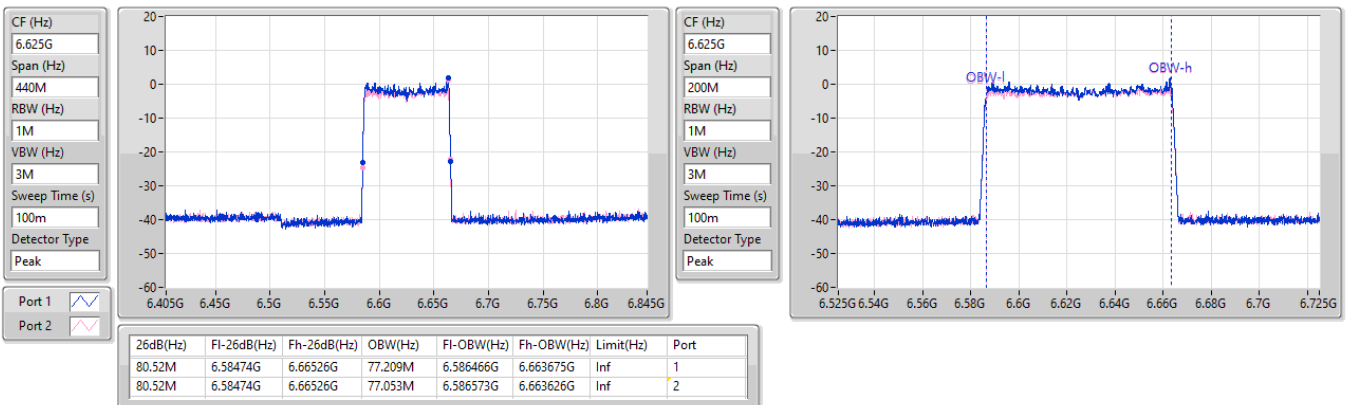


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6705MHz

10/12/2024

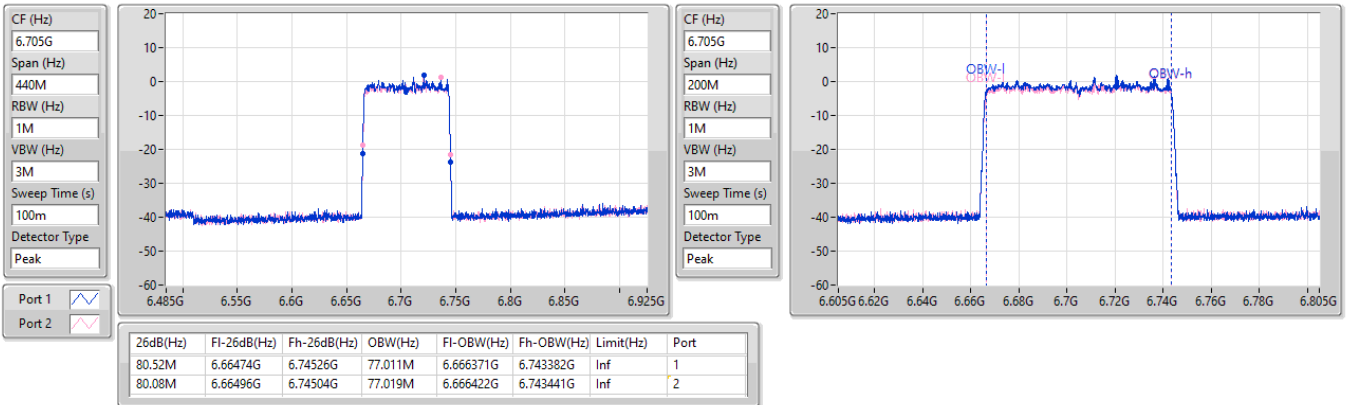


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW



6785MHz

10/12/2024


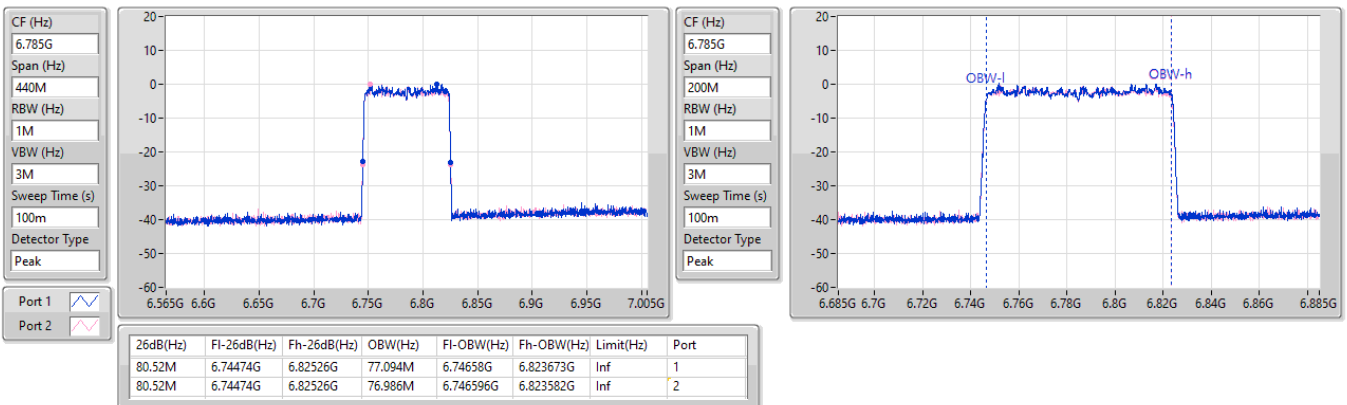


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6865MHz

10/12/2024

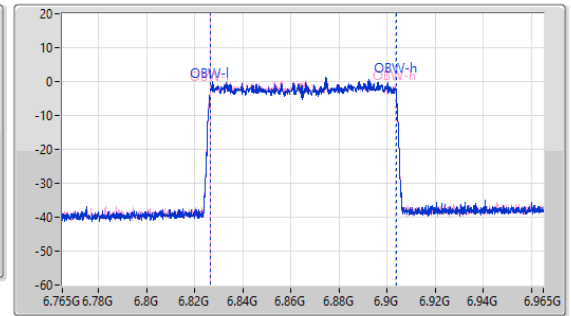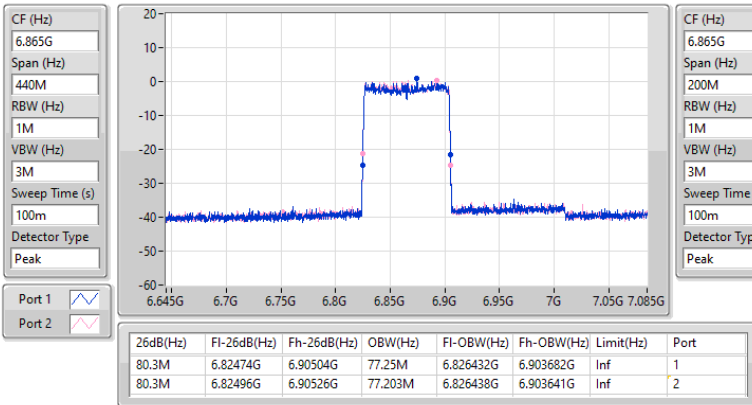
6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6945MHz

10/12/2024

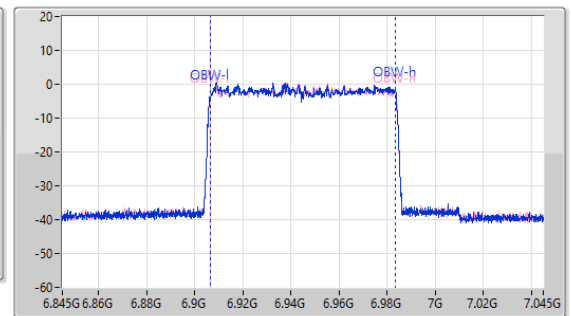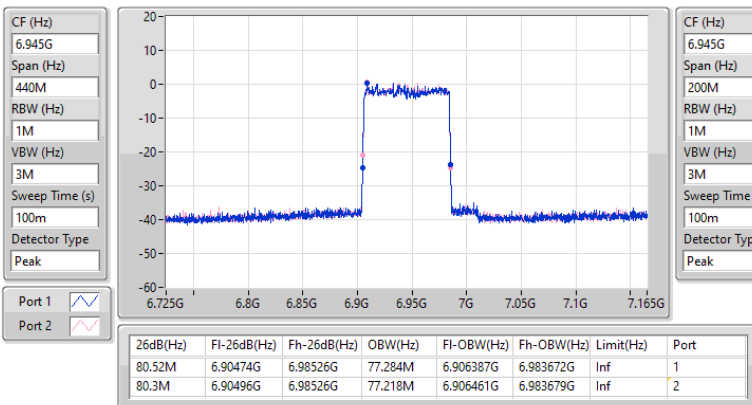


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

7025MHz

10/12/2024

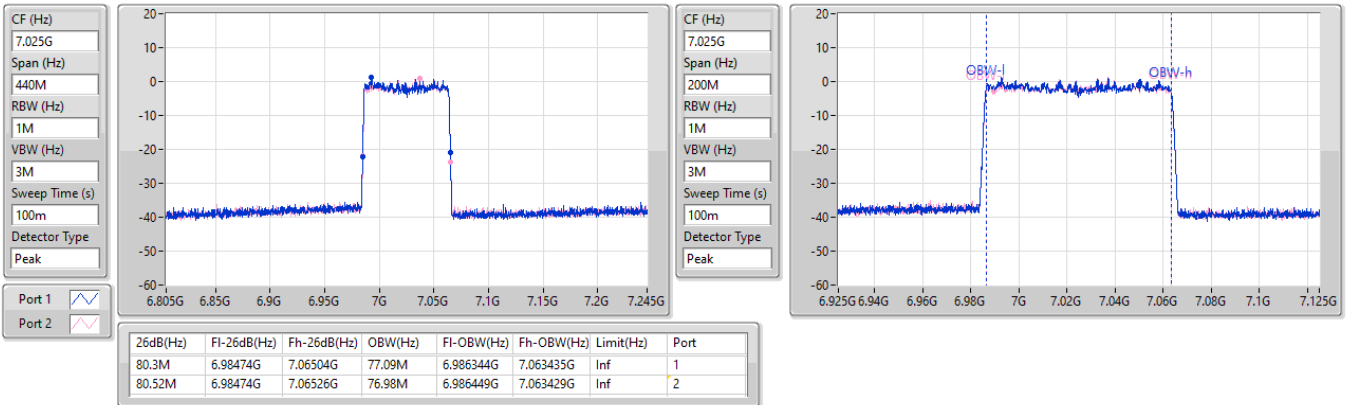


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW


6025MHz

10/12/2024

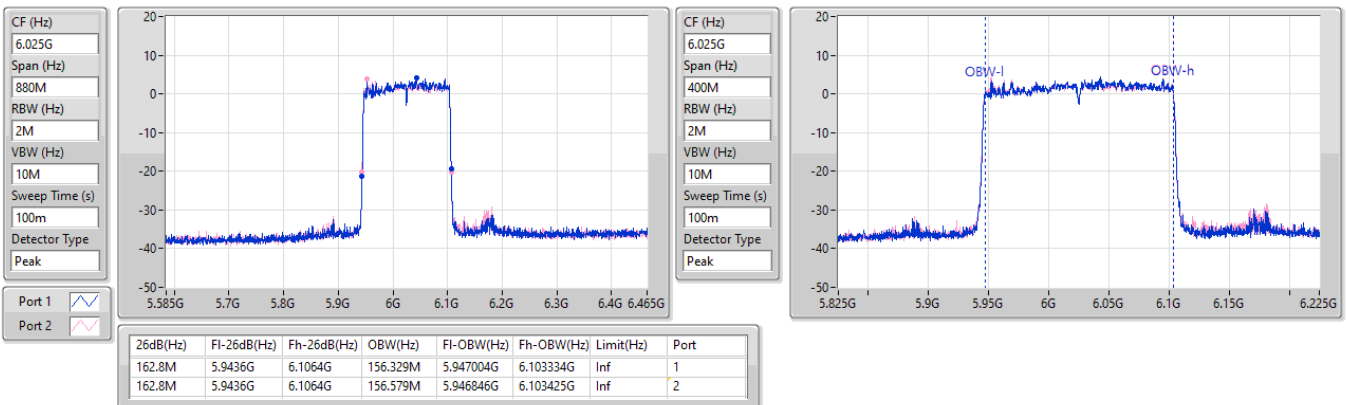


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6185MHz

10/12/2024

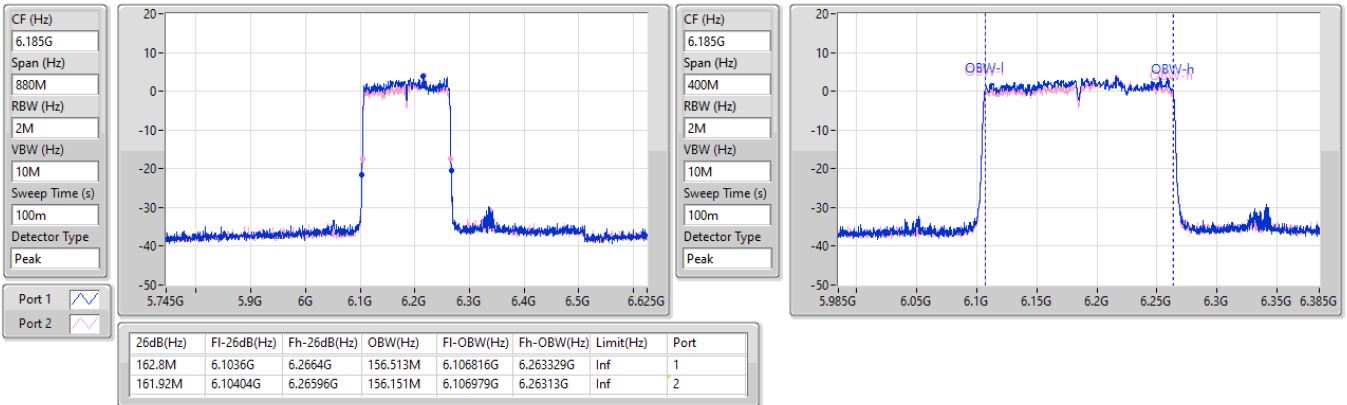

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6345MHz

10/12/2024

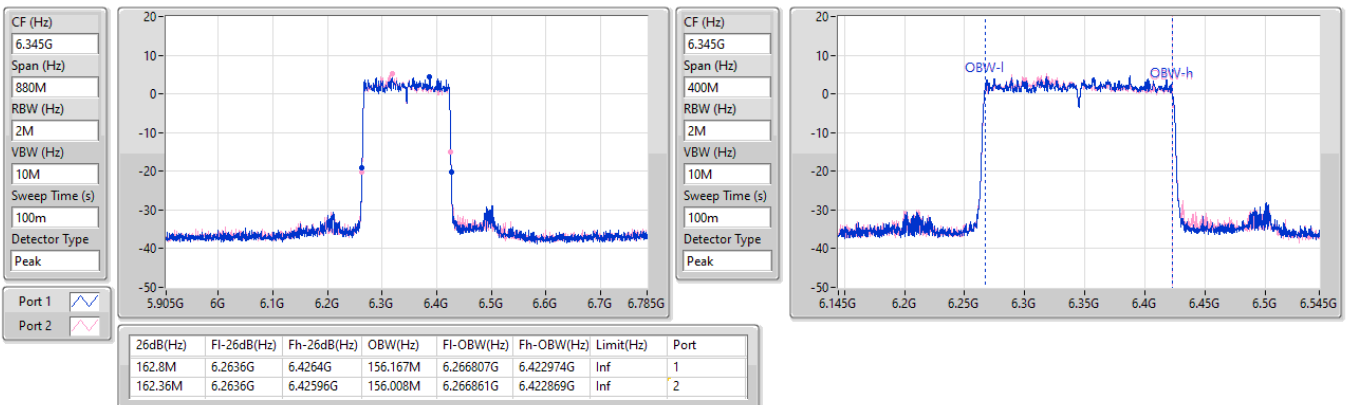


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6505MHz

10/12/2024

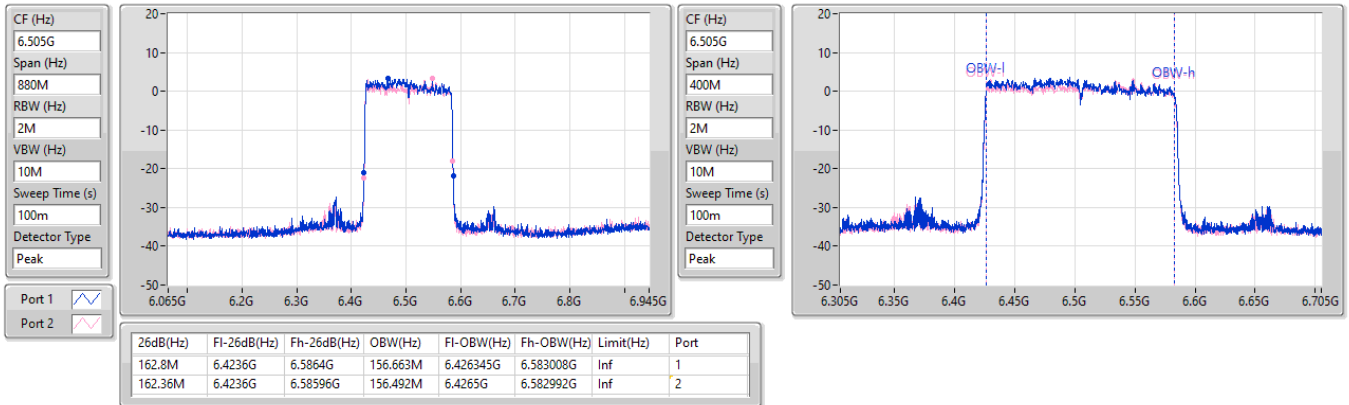
6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6665MHz

10/12/2024


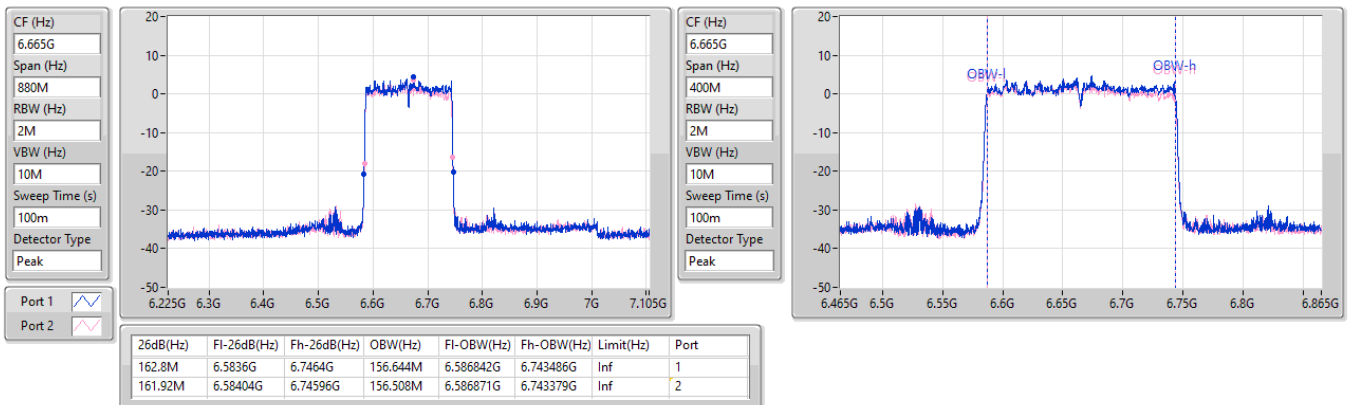


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6825MHz

10/12/2024

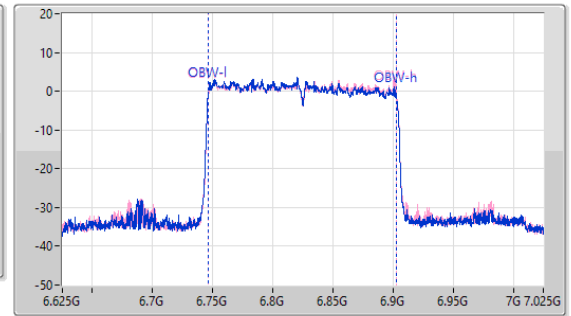
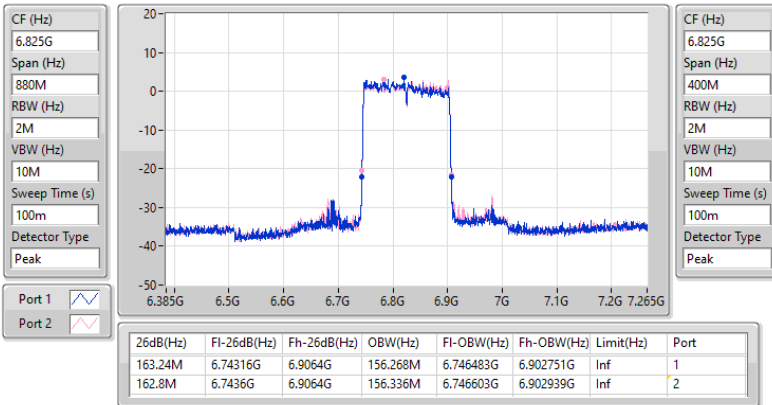


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6985MHz

10/12/2024

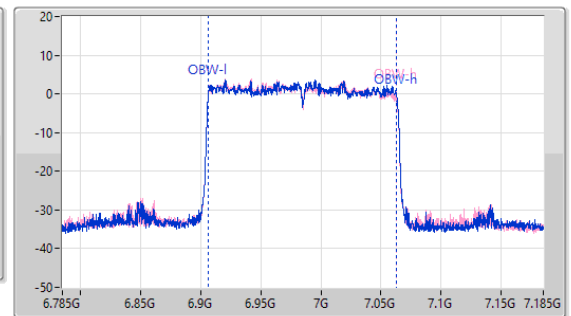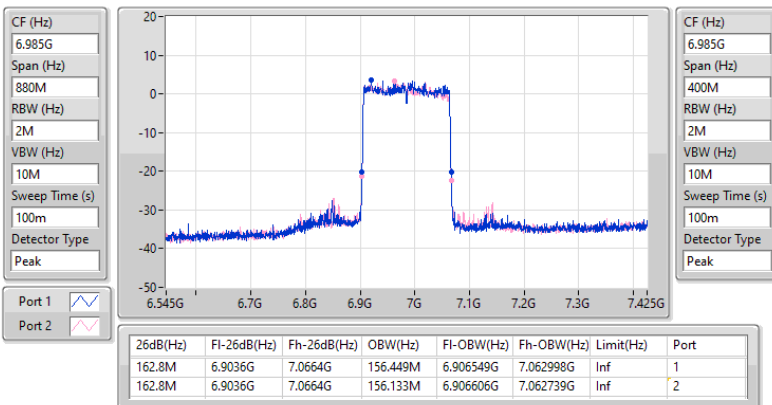

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
11a_Nss1,(6Mbps)_2TX	5.33	0.00341	9.63	0.00918
802.11be EHT20_Nss1,(MCS0)_2TX	5.79	0.00379	10.09	0.01021
802.11be EHT40_Nss1,(MCS0)_2TX	8.73	0.00746	13.03	0.02009
802.11be EHT80_Nss1,(MCS0)_2TX	11.85	0.01531	16.15	0.04121
802.11be EHT160_Nss1,(MCS0)_2TX	14.87	0.03069	19.17	0.08260
6.425-6.525GHz	-	-	-	-
11a_Nss1,(6Mbps)_2TX	4.90	0.00309	9.60	0.00912
802.11be EHT20_Nss1,(MCS0)_2TX	5.25	0.00335	9.95	0.00989
802.11be EHT40_Nss1,(MCS0)_2TX	8.41	0.00693	13.11	0.02046
802.11be EHT80_Nss1,(MCS0)_2TX	11.11	0.01291	15.81	0.03811
802.11be EHT160_Nss1,(MCS0)_2TX	14.22	0.02642	18.92	0.07798
6.525-6.875GHz	-	-	-	-
11a_Nss1,(6Mbps)_2TX	5.00	0.00316	9.70	0.00933
802.11be EHT20_Nss1,(MCS0)_2TX	5.26	0.00336	9.96	0.00991
802.11be EHT40_Nss1,(MCS0)_2TX	8.53	0.00713	13.23	0.02104
802.11be EHT80_Nss1,(MCS0)_2TX	11.64	0.01459	16.34	0.04305
802.11be EHT160_Nss1,(MCS0)_2TX	14.40	0.02754	19.10	0.08128
6.875-7.125GHz	-	-	-	-
11a_Nss1,(6Mbps)_2TX	5.10	0.00324	9.70	0.00933
802.11be EHT20_Nss1,(MCS0)_2TX	5.51	0.00356	10.11	0.01026
802.11be EHT40_Nss1,(MCS0)_2TX	8.68	0.00738	13.28	0.02128
802.11be EHT80_Nss1,(MCS0)_2TX	11.80	0.01514	16.40	0.04365
802.11be EHT160_Nss1,(MCS0)_2TX	14.28	0.02679	18.88	0.07727

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	4.30	2.36	2.28	5.33	9.63	24.00
6195MHz	Pass	4.30	2.68	1.68	5.22	9.52	24.00
6415MHz	Pass	4.30	2.13	2.31	5.23	9.53	24.00
6435MHz	Pass	4.70	2.28	1.33	4.84	9.54	24.00
6475MHz	Pass	4.70	1.64	2.00	4.83	9.53	24.00
6515MHz	Pass	4.70	2.20	1.56	4.90	9.60	24.00
6535MHz	Pass	4.70	2.05	1.72	4.90	9.60	24.00
6695MHz	Pass	4.70	2.29	1.23	4.80	9.50	24.00
6875MHz	Pass	4.70	1.48	2.44	5.00	9.70	24.00
6895MHz	Pass	4.60	1.81	2.36	5.10	9.70	24.00
6995MHz	Pass	4.60	1.63	1.37	4.51	9.11	24.00
7095MHz	Pass	4.60	1.35	2.05	4.72	9.32	24.00
7115MHz	Pass	4.60	1.68	2.23	4.97	9.57	24.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	4.30	3.00	2.40	5.72	10.02	24.00
6195MHz	Pass	4.30	3.09	2.18	5.67	9.97	24.00
6415MHz	Pass	4.30	2.81	2.75	5.79	10.09	24.00
6435MHz	Pass	4.70	2.21	2.22	5.23	9.93	24.00
6475MHz	Pass	4.70	2.13	2.22	5.19	9.89	24.00
6515MHz	Pass	4.70	2.78	1.63	5.25	9.95	24.00
6535MHz	Pass	4.70	2.75	1.62	5.23	9.93	24.00
6695MHz	Pass	4.70	2.28	1.57	4.95	9.65	24.00
6875MHz	Pass	4.70	2.09	2.40	5.26	9.96	24.00
6895MHz	Pass	4.60	2.07	2.19	5.14	9.74	24.00
6995MHz	Pass	4.60	2.28	2.16	5.23	9.83	24.00
7095MHz	Pass	4.60	2.45	2.54	5.51	10.11	24.00
7115MHz	Pass	4.60	2.46	1.85	5.18	9.78	24.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	4.30	5.95	5.44	8.71	13.01	24.00
6205MHz	Pass	4.30	6.01	5.26	8.66	12.96	24.00
6405MHz	Pass	4.30	5.82	5.62	8.73	13.03	24.00
6445MHz	Pass	4.70	5.41	5.14	8.29	12.99	24.00
6485MHz	Pass	4.70	5.25	5.17	8.22	12.92	24.00
6525MHz	Pass	4.70	5.58	5.22	8.41	13.11	24.00
6565MHz	Pass	4.70	5.49	5.29	8.40	13.10	24.00
6685MHz	Pass	4.70	5.75	5.20	8.49	13.19	24.00
6885MHz	Pass	4.70	5.28	5.74	8.53	13.23	24.00
6925MHz	Pass	4.60	5.69	5.40	8.56	13.16	24.00
7005MHz	Pass	4.60	5.70	5.63	8.68	13.28	24.00
7085MHz	Pass	4.60	5.48	5.57	8.54	13.14	24.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	4.30	8.95	8.73	11.85	16.15	24.00
6225MHz	Pass	4.30	9.02	8.24	11.66	15.96	24.00
6385MHz	Pass	4.30	8.54	8.83	11.70	16.00	24.00
6465MHz	Pass	4.70	7.88	7.98	10.94	15.64	24.00
6545MHz	Pass	4.70	8.29	7.90	11.11	15.81	24.00
6625MHz	Pass	4.70	8.85	8.17	11.53	16.23	24.00
6705MHz	Pass	4.70	8.64	8.23	11.45	16.15	24.00
6785MHz	Pass	4.70	8.43	8.30	11.38	16.08	24.00
6865MHz	Pass	4.70	8.52	8.73	11.64	16.34	24.00
6945MHz	Pass	4.60	8.43	8.55	11.50	16.10	24.00
7025MHz	Pass	4.60	8.76	8.81	11.80	16.40	24.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	4.30	11.57	11.63	14.61	18.91	24.00



Average Power

Appendix C

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6185MHz	Pass	4.30	11.58	10.93	14.28	18.58	24.00
6345MHz	Pass	4.30	11.77	11.94	14.87	19.17	24.00
6505MHz	Pass	4.70	11.49	10.90	14.22	18.92	24.00
6665MHz	Pass	4.70	11.42	10.88	14.17	18.87	24.00
6825MHz	Pass	4.70	11.33	11.45	14.40	19.10	24.00
6985MHz	Pass	4.60	11.21	11.33	14.28	18.88	24.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
11a_Nss1,(6Mbps)_2TX	-7.80	-1.07
802.11be EHT20_Nss1,(MCS0)_2TX	-7.78	-1.05
802.11be EHT40_Nss1,(MCS0)_2TX	-7.78	-1.05
802.11be EHT80_Nss1,(MCS0)_2TX	-7.81	-1.08
802.11be EHT160_Nss1,(MCS0)_2TX	-7.84	-1.11
6.425-6.525GHz	-	-
11a_Nss1,(6Mbps)_2TX	-8.25	-1.12
802.11be EHT20_Nss1,(MCS0)_2TX	-8.20	-1.07
802.11be EHT40_Nss1,(MCS0)_2TX	-8.27	-1.14
802.11be EHT80_Nss1,(MCS0)_2TX	-8.27	-1.14
802.11be EHT160_Nss1,(MCS0)_2TX	-8.24	-1.11
6.525-6.875GHz	-	-
11a_Nss1,(6Mbps)_2TX	-8.15	-1.02
802.11be EHT20_Nss1,(MCS0)_2TX	-8.18	-1.05
802.11be EHT40_Nss1,(MCS0)_2TX	-8.20	-1.07
802.11be EHT80_Nss1,(MCS0)_2TX	-8.26	-1.13
802.11be EHT160_Nss1,(MCS0)_2TX	-8.16	-1.03
6.875-7.125GHz	-	-
11a_Nss1,(6Mbps)_2TX	-8.07	-1.04
802.11be EHT20_Nss1,(MCS0)_2TX	-8.13	-1.10
802.11be EHT40_Nss1,(MCS0)_2TX	-8.04	-1.01
802.11be EHT80_Nss1,(MCS0)_2TX	-8.21	-1.18
802.11be EHT160_Nss1,(MCS0)_2TX	-8.16	-1.13

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	6.73	-10.84	-10.89	-7.89	-1.16	-1.00
6195MHz	Pass	6.73	-10.73	-10.75	-7.80	-1.07	-1.00
6415MHz	Pass	6.73	-11.06	-10.83	-7.96	-1.23	-1.00
6435MHz	Pass	7.13	-11.44	-11.26	-8.36	-1.23	-1.00
6475MHz	Pass	7.13	-11.32	-11.15	-8.25	-1.12	-1.00
6515MHz	Pass	7.13	-11.45	-11.14	-8.35	-1.22	-1.00
6535MHz	Pass	7.13	-11.44	-11.26	-8.34	-1.21	-1.00
6695MHz	Pass	7.13	-11.16	-11.21	-8.19	-1.06	-1.00
6875MHz	Pass	7.13	-11.16	-11.11	-8.15	-1.02	-1.00
6895MHz	Pass	7.03	-11.08	-11.10	-8.09	-1.06	-1.00
6995MHz	Pass	7.03	-11.23	-11.30	-8.31	-1.28	-1.00
7095MHz	Pass	7.03	-11.12	-11.10	-8.13	-1.10	-1.00
7115MHz	Pass	7.03	-11.08	-11.08	-8.07	-1.04	-1.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	6.73	-10.76	-10.82	-7.81	-1.08	-1.00
6195MHz	Pass	6.73	-10.79	-10.73	-7.79	-1.06	-1.00
6415MHz	Pass	6.73	-10.81	-10.62	-7.78	-1.05	-1.00
6435MHz	Pass	7.13	-11.29	-11.05	-8.20	-1.07	-1.00
6475MHz	Pass	7.13	-11.37	-11.13	-8.28	-1.15	-1.00
6515MHz	Pass	7.13	-11.31	-11.08	-8.22	-1.09	-1.00
6535MHz	Pass	7.13	-11.33	-11.08	-8.23	-1.10	-1.00
6695MHz	Pass	7.13	-11.25	-11.23	-8.24	-1.11	-1.00
6875MHz	Pass	7.13	-11.17	-11.21	-8.18	-1.05	-1.00
6895MHz	Pass	7.03	-11.23	-11.25	-8.27	-1.24	-1.00
6995MHz	Pass	7.03	-11.25	-11.16	-8.19	-1.16	-1.00
7095MHz	Pass	7.03	-11.12	-11.11	-8.13	-1.10	-1.00
7115MHz	Pass	7.03	-11.07	-11.21	-8.17	-1.14	-1.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	6.73	-10.77	-10.78	-7.78	-1.05	-1.00
6205MHz	Pass	6.73	-10.89	-10.90	-7.91	-1.18	-1.00
6405MHz	Pass	6.73	-10.91	-10.79	-7.86	-1.13	-1.00
6445MHz	Pass	7.13	-11.46	-11.27	-8.38	-1.25	-1.00
6485MHz	Pass	7.13	-11.36	-11.21	-8.34	-1.21	-1.00
6525MHz	Pass	7.13	-11.34	-11.20	-8.27	-1.14	-1.00
6565MHz	Pass	7.13	-11.26	-11.11	-8.20	-1.07	-1.00
6685MHz	Pass	7.13	-11.18	-11.21	-8.20	-1.07	-1.00
6885MHz	Pass	7.13	-11.36	-11.30	-8.35	-1.22	-1.00
6925MHz	Pass	7.03	-10.98	-10.95	-8.04	-1.01	-1.00
7005MHz	Pass	7.03	-11.08	-11.16	-8.14	-1.11	-1.00
7085MHz	Pass	7.03	-11.06	-11.16	-8.10	-1.07	-1.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	6.73	-10.77	-10.86	-7.81	-1.08	-1.00
6225MHz	Pass	6.73	-10.89	-10.98	-7.95	-1.22	-1.00
6385MHz	Pass	6.73	-11.02	-10.87	-7.95	-1.22	-1.00
6465MHz	Pass	7.13	-11.33	-11.16	-8.27	-1.14	-1.00
6545MHz	Pass	7.13	-11.34	-11.19	-8.31	-1.18	-1.00
6625MHz	Pass	7.13	-11.36	-11.34	-8.34	-1.21	-1.00
6705MHz	Pass	7.13	-11.32	-11.42	-8.36	-1.23	-1.00
6785MHz	Pass	7.13	-11.24	-11.23	-8.26	-1.13	-1.00
6865MHz	Pass	7.13	-11.21	-11.26	-8.31	-1.18	-1.00
6945MHz	Pass	7.03	-11.16	-11.23	-8.21	-1.18	-1.00
7025MHz	Pass	7.03	-11.23	-11.17	-8.21	-1.18	-1.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6025MHz	Pass	6.73	-10.88	-10.91	-7.92	-1.19	-1.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6185MHz	Pass	6.73	-10.94	-10.92	-7.96	-1.23	-1.00
6345MHz	Pass	6.73	-10.86	-10.77	-7.84	-1.11	-1.00
6505MHz	Pass	7.13	-11.33	-11.13	-8.24	-1.11	-1.00
6665MHz	Pass	7.13	-11.28	-11.29	-8.27	-1.14	-1.00
6825MHz	Pass	7.13	-11.14	-11.13	-8.16	-1.03	-1.00
6985MHz	Pass	7.03	-11.16	-11.13	-8.16	-1.13	-1.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.925-6.425GHz_11a_Nss1,(6Mbps)_2TX

PSD

5955MHz

10/12/2024

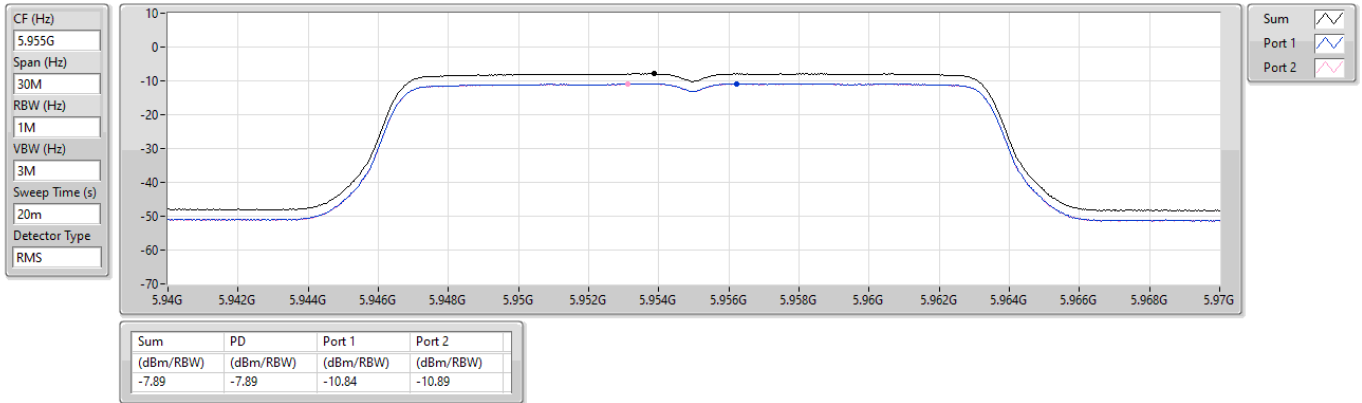


5.925-6.425GHz_11a_Nss1,(6Mbps)_2TX

PSD

6195MHz

10/12/2024

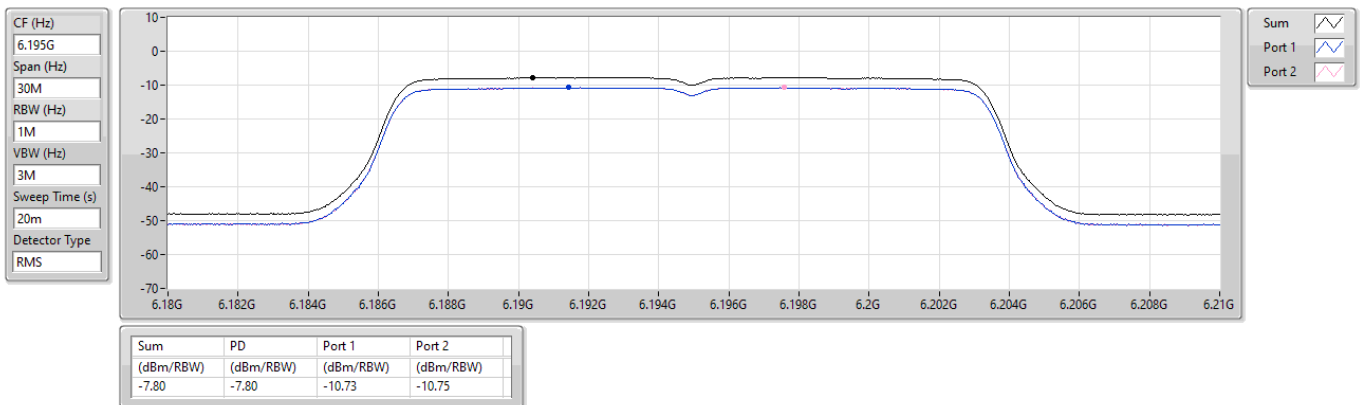


5.925-6.425GHz_11a_Nss1,(6Mbps)_2TX

PSD

6415MHz

10/12/2024

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

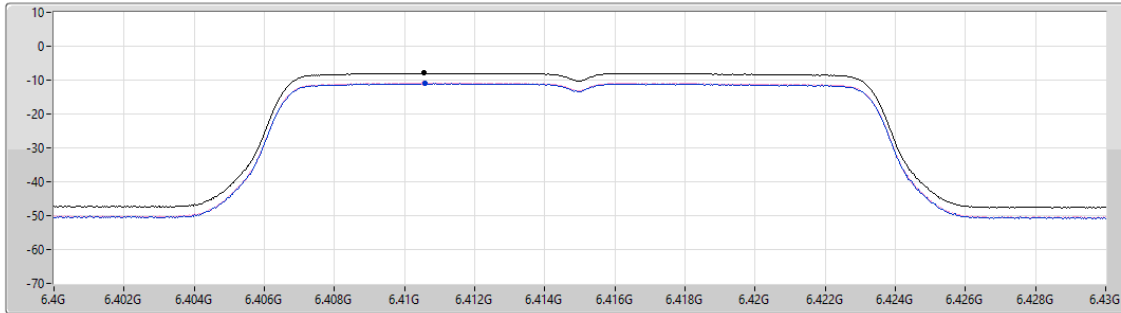

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-7.96	-7.96	-11.06	-10.83

Sum
Port 1
Port 2


6.425-6.525GHz_11a_Nss1,(6Mbps)_2TX

PSD

6435MHz

10/12/2024

CF (Hz)
6.435G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

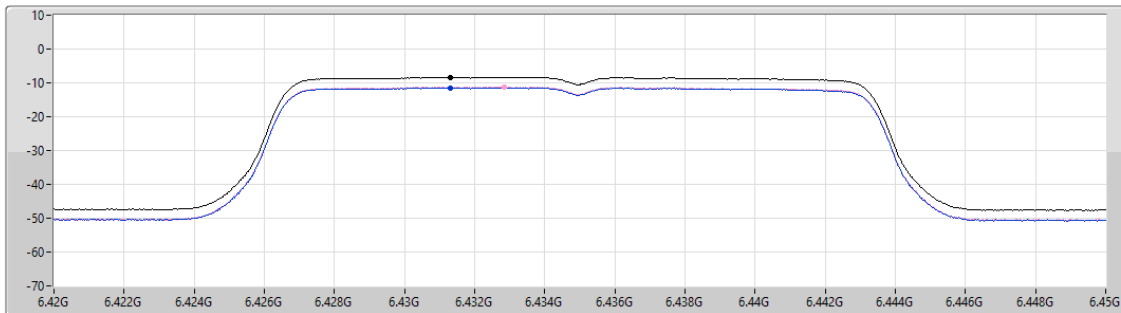

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-8.36	-8.36	-11.44	-11.26

Sum
Port 1
Port 2


6.425-6.525GHz_11a_Nss1,(6Mbps)_2TX

PSD

6475MHz

10/12/2024

CF (Hz)
6.475G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

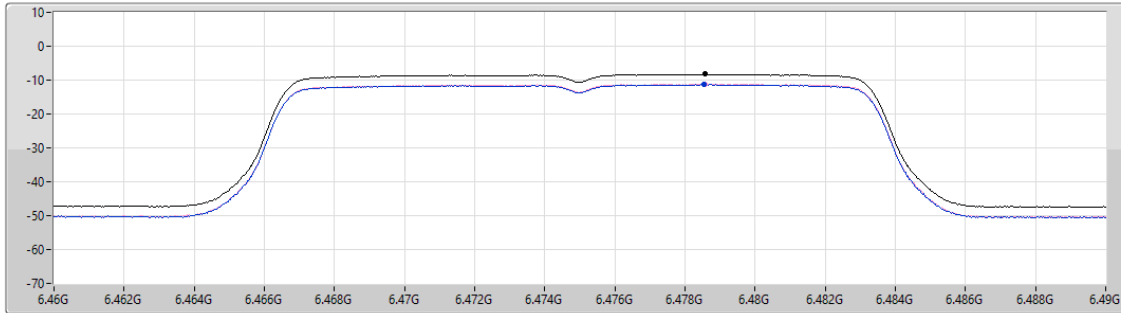

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.25	-8.25	-11.32	-11.15

Sum
Port 1
Port 2


6.425-6.525GHz_11a_Nss1,(6Mbps)_2TX

PSD

6515MHz

10/12/2024

CF (Hz)
6.515G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

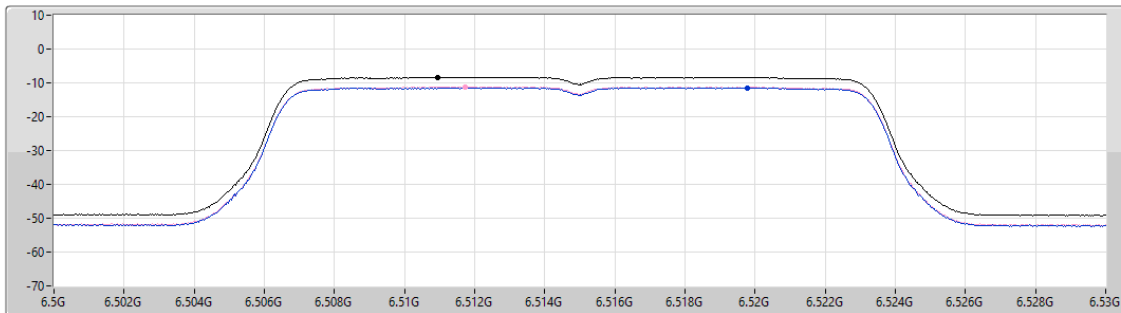

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.35	-8.35	-11.45	-11.14

Sum
Port 1
Port 2


6.525-6.875GHz_11a_Nss1,(6Mbps)_2TX

PSD

6535MHz

10/12/2024

CF (Hz)
6.535G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

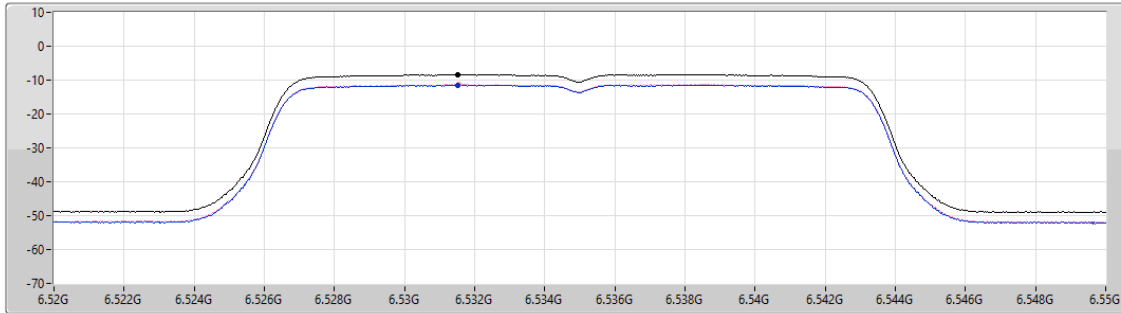

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.34	-8.34	-11.44	-11.26

Sum
Port 1
Port 2


6.525-6.875GHz_11a_Nss1,(6Mbps)_2TX

PSD

6695MHz

10/12/2024

CF (Hz)
6.695G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

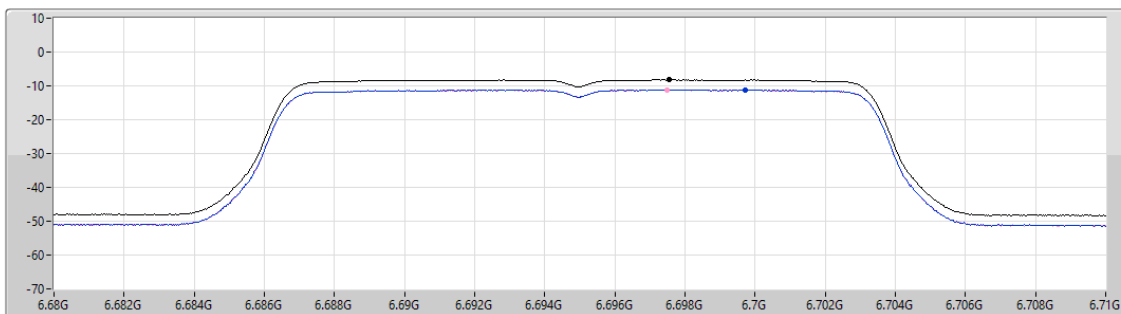

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.19	-8.19	-11.16	-11.21


Sum
Port 1
Port 2

6.525-6.875GHz_11a_Nss1,(6Mbps)_2TX

PSD

6875MHz

10/12/2024

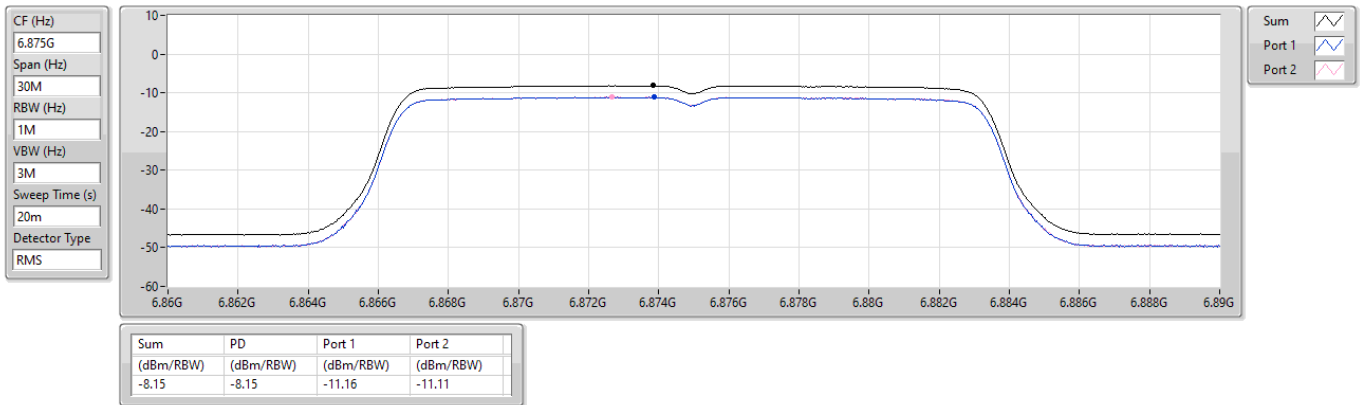


6.875-7.125GHz_11a_Nss1,(6Mbps)_2TX

PSD

6895MHz

10/12/2024

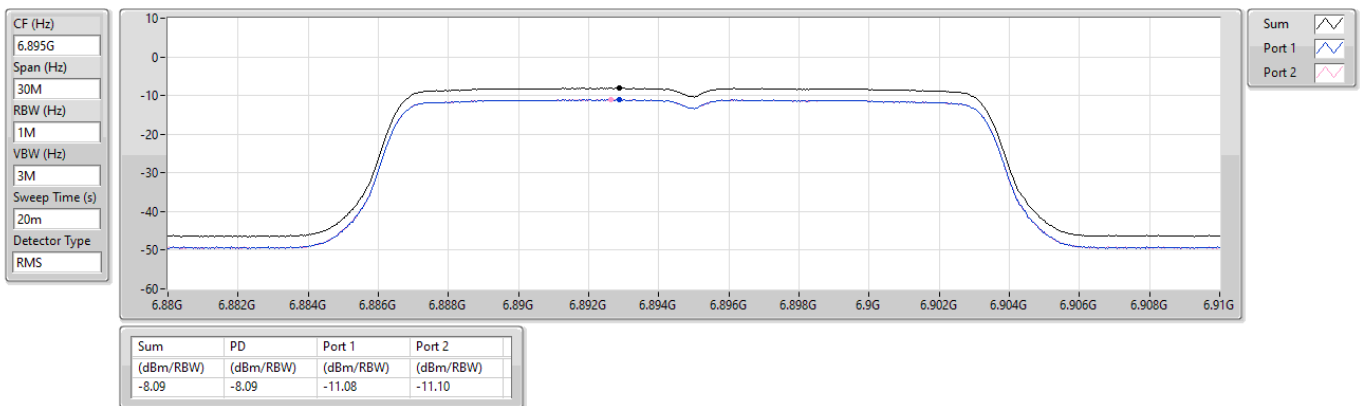


6.875-7.125GHz_11a_Nss1,(6Mbps)_2TX

PSD

6995MHz

10/12/2024

CF (Hz)
6.995G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

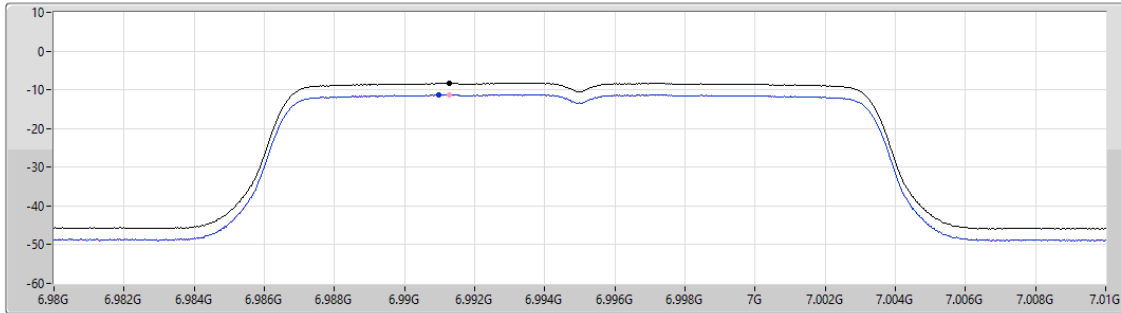

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.31	-8.31	-11.23	-11.30


6.875-7.125GHz_11a_Nss1,(6Mbps)_2TX

PSD

7095MHz

10/12/2024

CF (Hz)
7.095G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

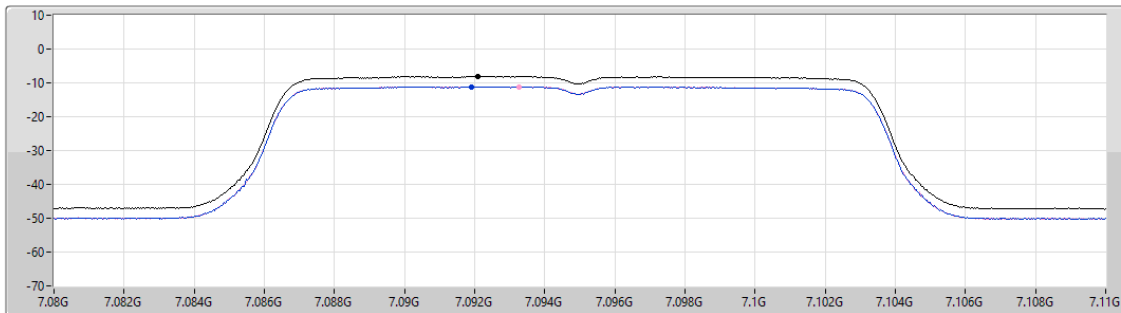

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.13	-8.13	-11.12	-11.10

6.875-7.125GHz_11a_Nss1,(6Mbps)_2TX

PSD

7115MHz

10/12/2024

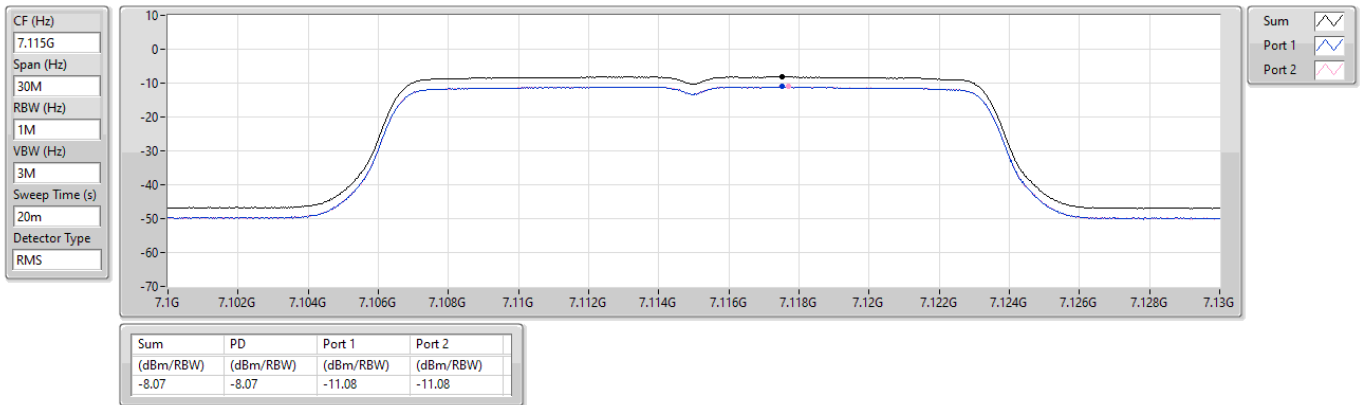


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5955MHz

10/12/2024

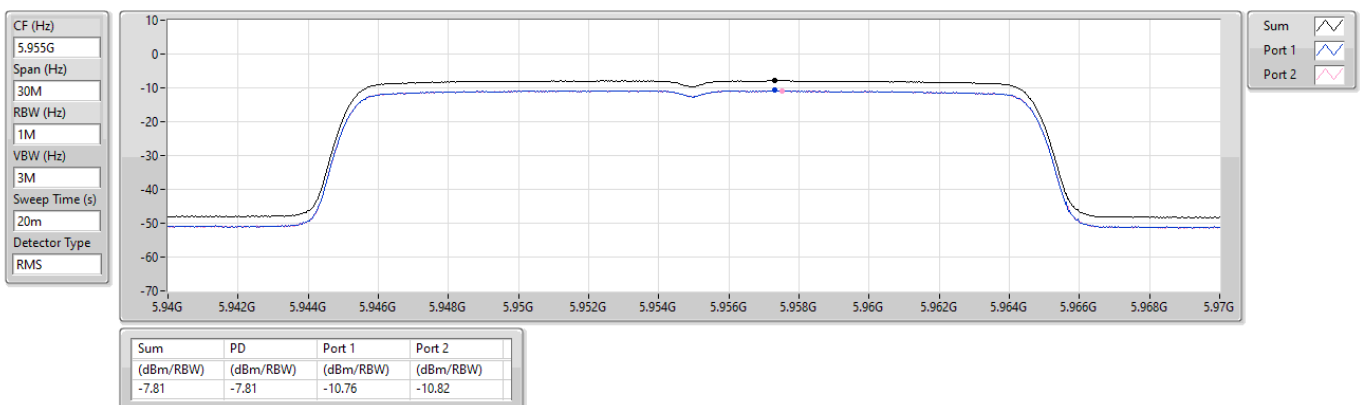


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6195MHz

10/12/2024

CF (Hz)
6.195G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

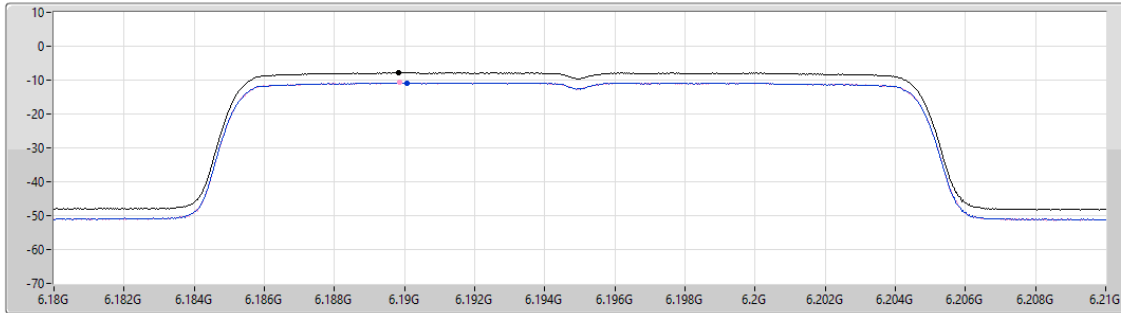

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.79	-7.79	-10.79	-10.73

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6415MHz

10/12/2024

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

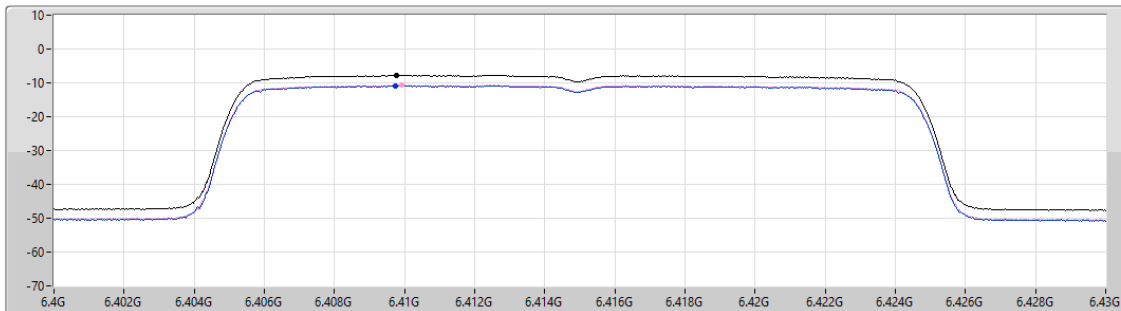

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.78	-7.78	-10.81	-10.62

Sum
Port 1
Port 2


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6435MHz

10/12/2024

CF (Hz)
6.435G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

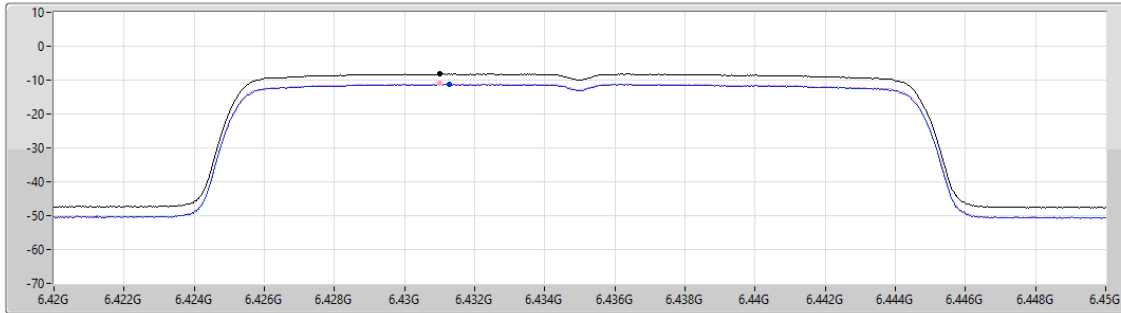

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.20	-8.20	-11.29	-11.05

Sum
Port 1
Port 2


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6475MHz

10/12/2024

CF (Hz)
6.475G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

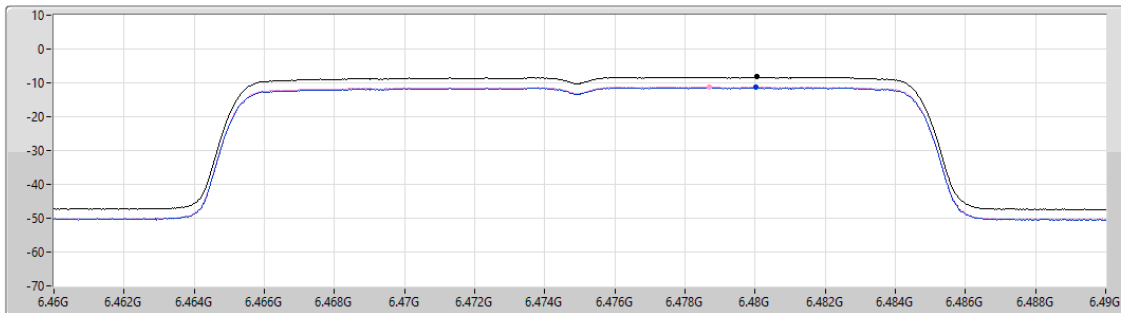

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.28	-8.28	-11.37	-11.13

Sum
Port 1
Port 2

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6515MHz

10/12/2024

CF (Hz)
6.515G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

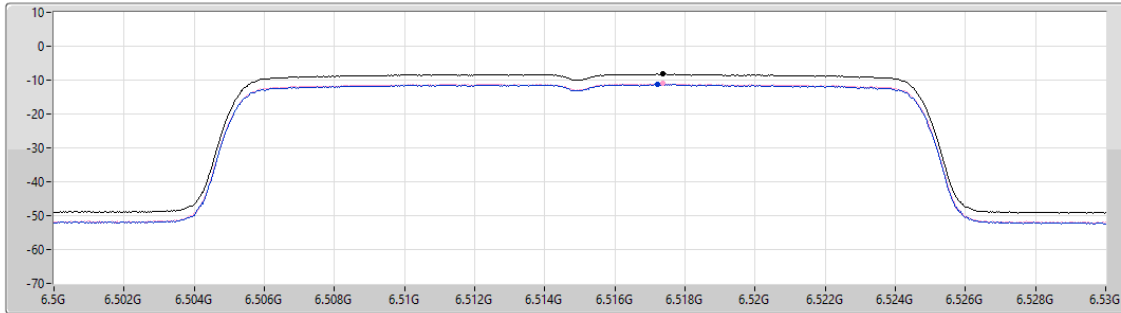

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.22	-8.22	-11.31	-11.08

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6535MHz

10/12/2024

CF (Hz)
6.535G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

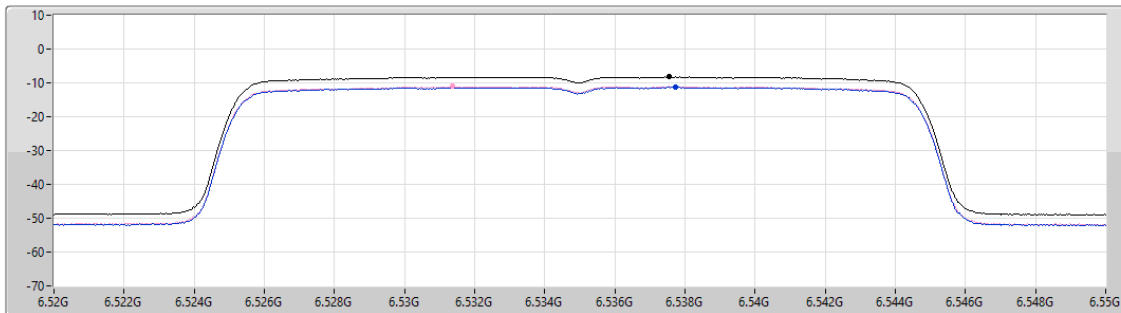

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.23	-8.23	-11.33	-11.08


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6695MHz

10/12/2024

CF (Hz)
6.695G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

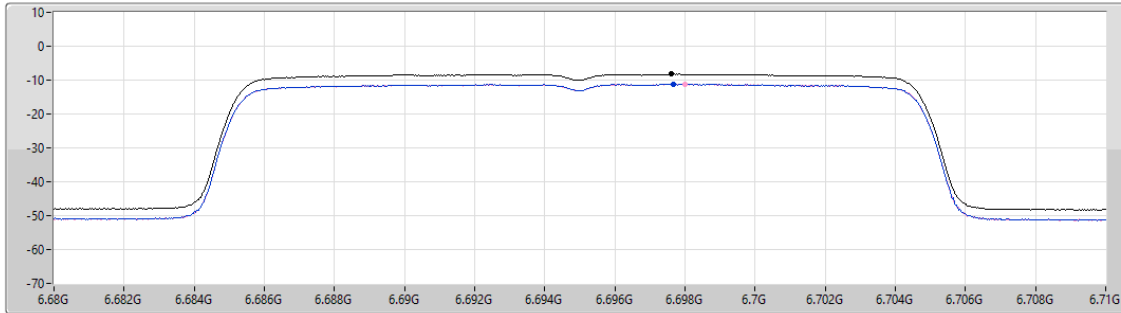

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.24	-8.24	-11.25	-11.23


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6875MHz

10/12/2024

CF (Hz)
6.875G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

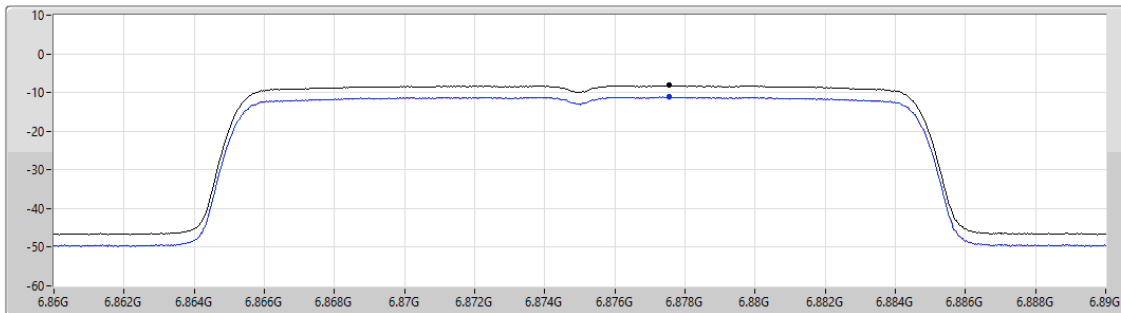

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.18	-8.18	-11.17	-11.21


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6895MHz

10/12/2024

CF (Hz)
6.895G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

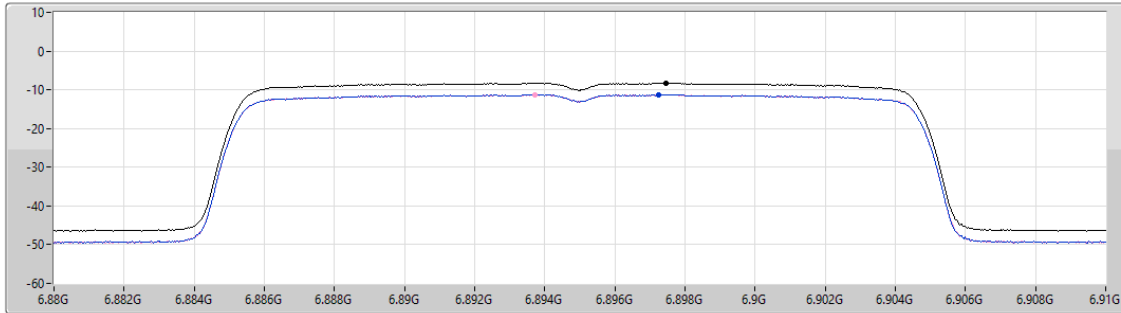

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.27	-8.27	-11.23	-11.25


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6995MHz

10/12/2024

CF (Hz)
6.995G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

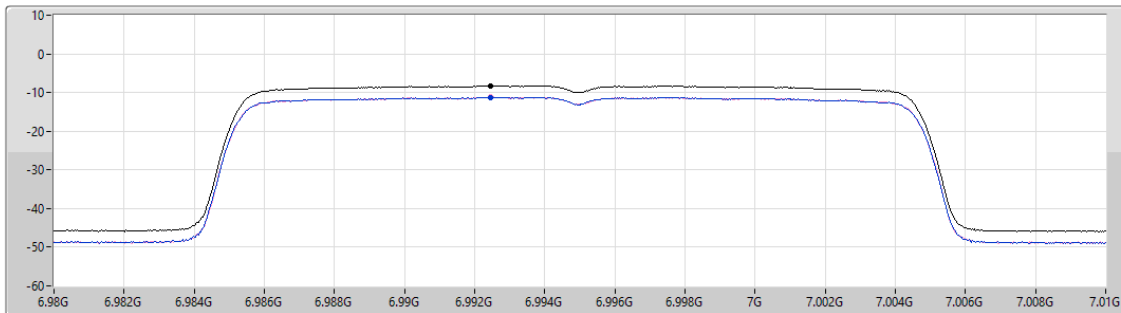

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.19	-8.19	-11.25	-11.16

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

7095MHz

10/12/2024

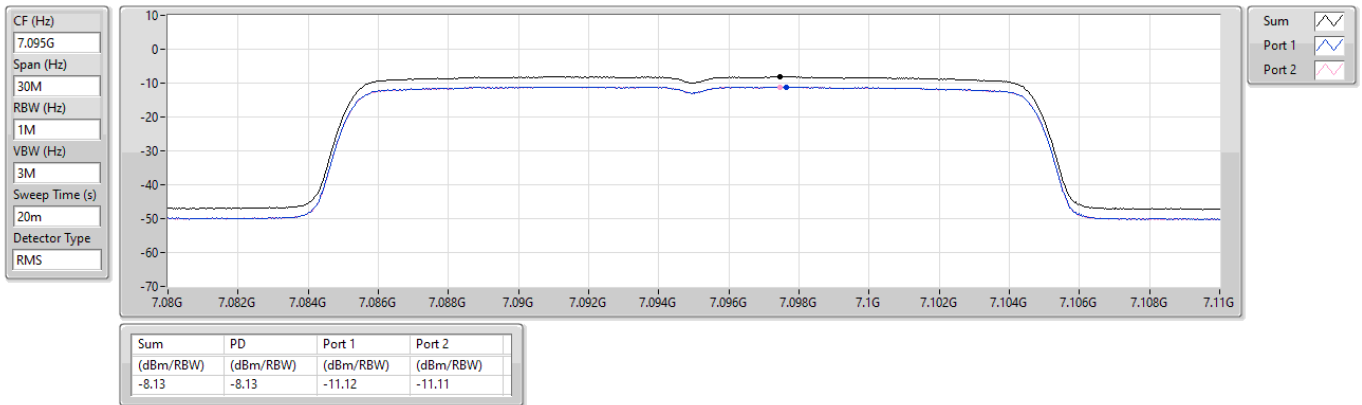


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

7115MHz

10/12/2024

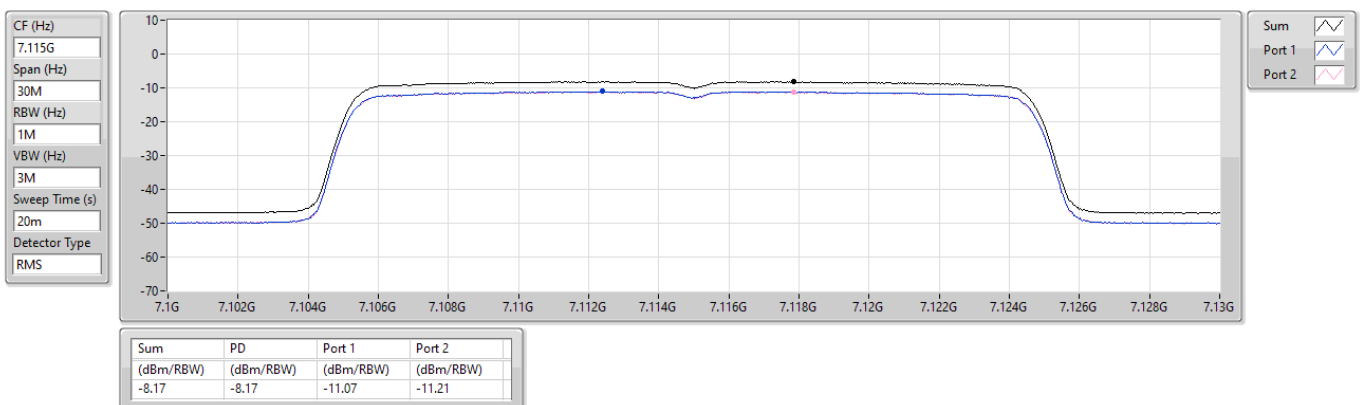


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5965MHz

10/12/2024

CF (Hz)
5.965G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

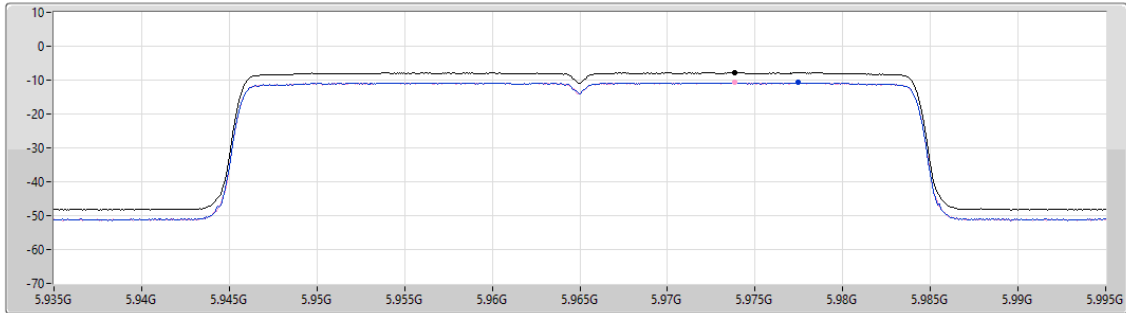

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.78	-7.78	-10.77	-10.78


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6205MHz

10/12/2024

CF (Hz)
6.205G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

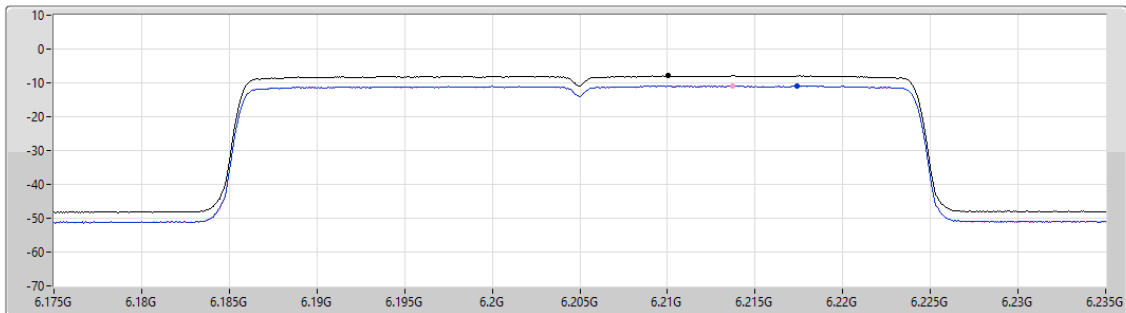

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.91	-7.91	-10.89	-10.90

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6405MHz

10/12/2024

CF (Hz)
6.405G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

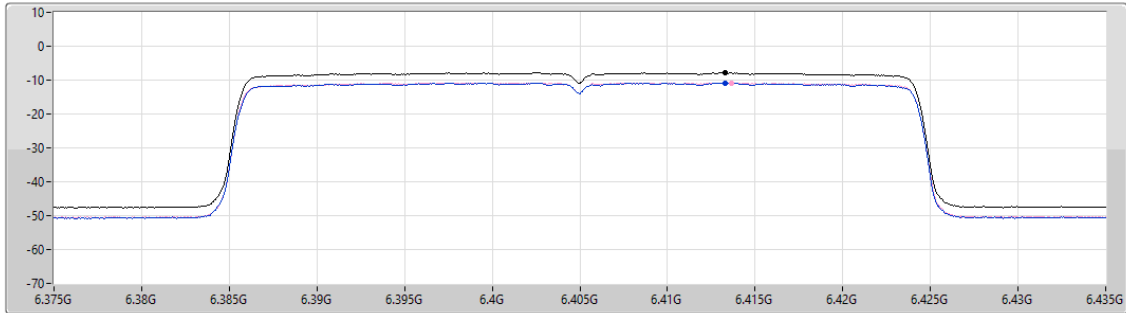

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.86	-7.86	-10.91	-10.79

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6445MHz

10/12/2024

CF (Hz)
6.445G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

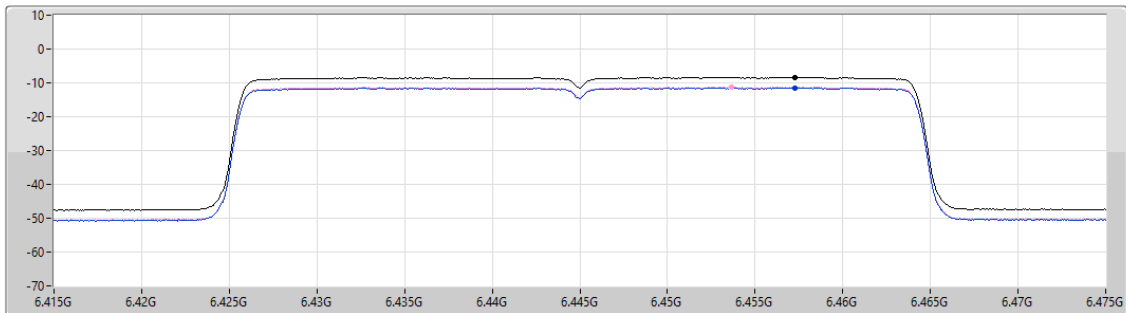

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.38	-8.38	-11.46	-11.27


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6485MHz

10/12/2024

CF (Hz)
6.485G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

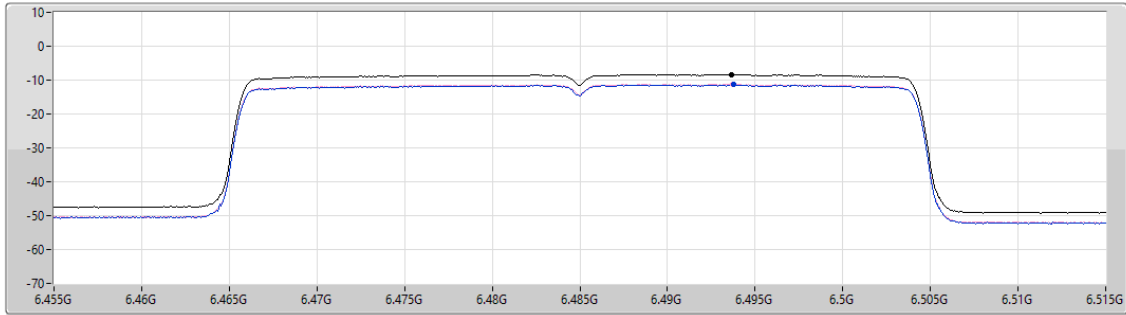

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.34	-8.34	-11.36	-11.21


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6525MHz

10/12/2024

CF (Hz)
6.525G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

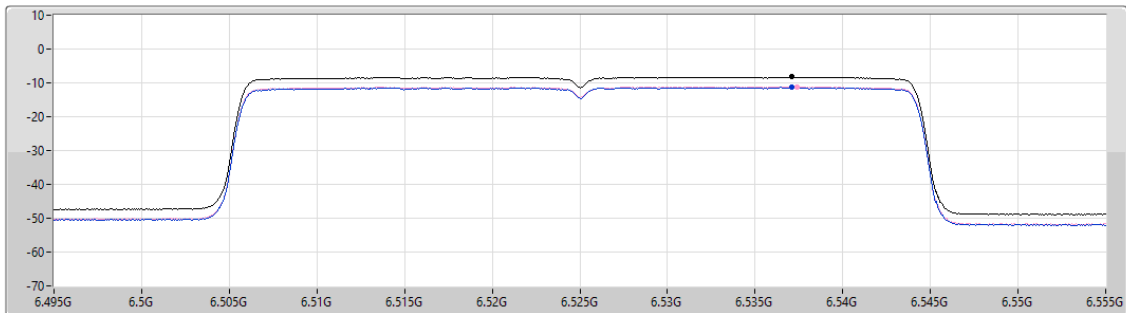

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.27	-8.27	-11.34	-11.20

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6565MHz

10/12/2024

CF (Hz)
6.565G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

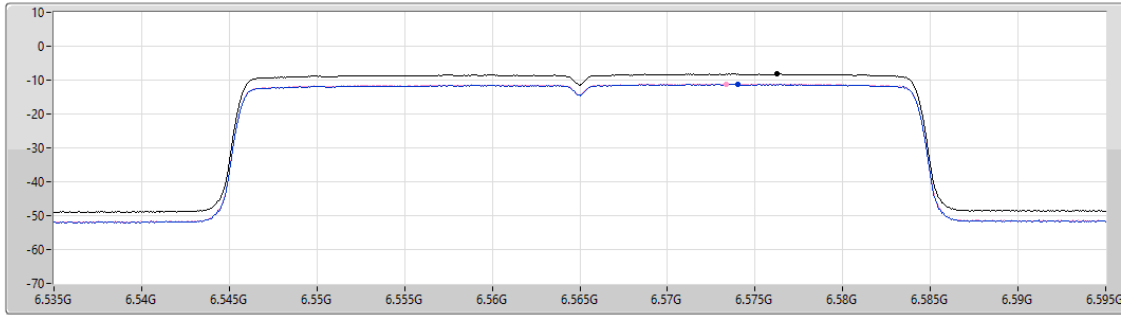

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.20	-8.20	-11.26	-11.11

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6685MHz

10/12/2024

CF (Hz)
6.685G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

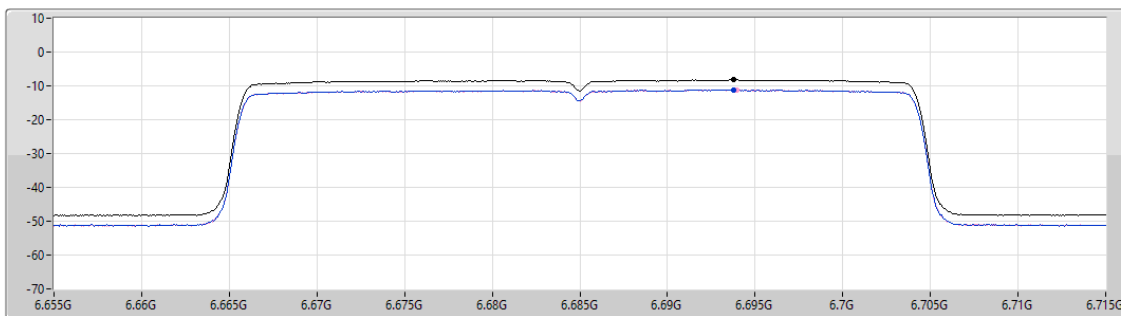

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.20	-8.20	-11.18	-11.21


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6885MHz

10/12/2024

CF (Hz)
6.885G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

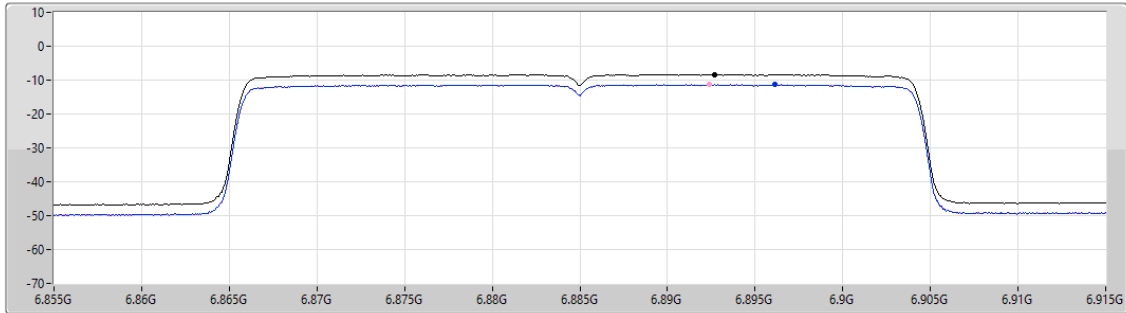

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.35	-8.35	-11.36	-11.30

Sum
Port 1
Port 2


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6925MHz

10/12/2024

CF (Hz)
6.925G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

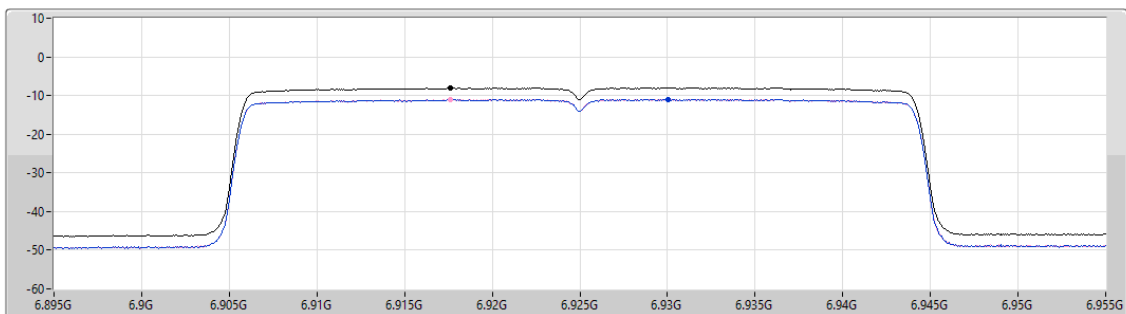

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.04	-8.04	-10.98	-10.95

Sum
Port 1
Port 2

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

7005MHz

10/12/2024

CF (Hz)
7.005G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

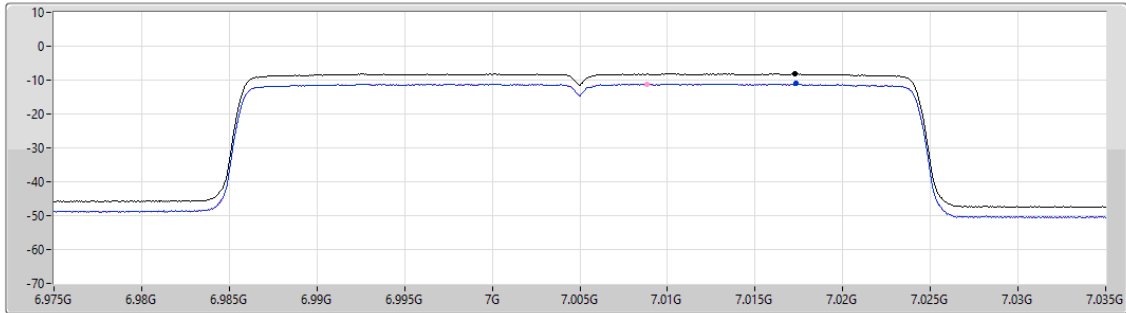

Sum

Port 1

Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.14	-8.14	-11.08	-11.16

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

7085MHz

10/12/2024

CF (Hz)
7.085G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

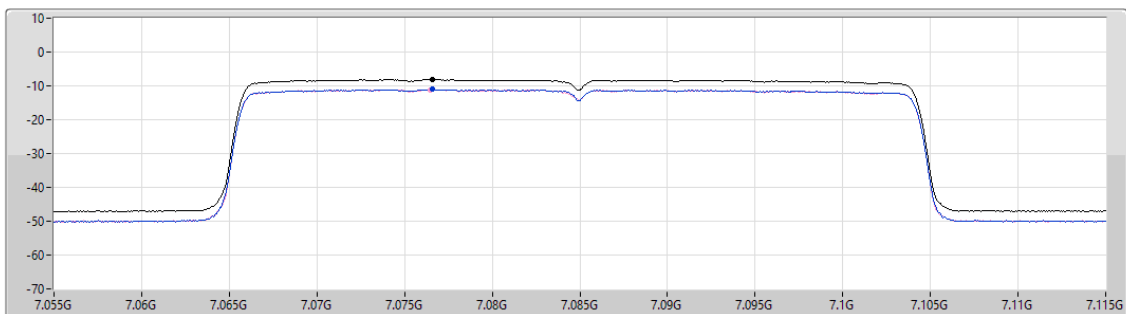

Sum

Port 1

Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.10	-8.10	-11.06	-11.16


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5985MHz

10/12/2024

CF (Hz)
5.985G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

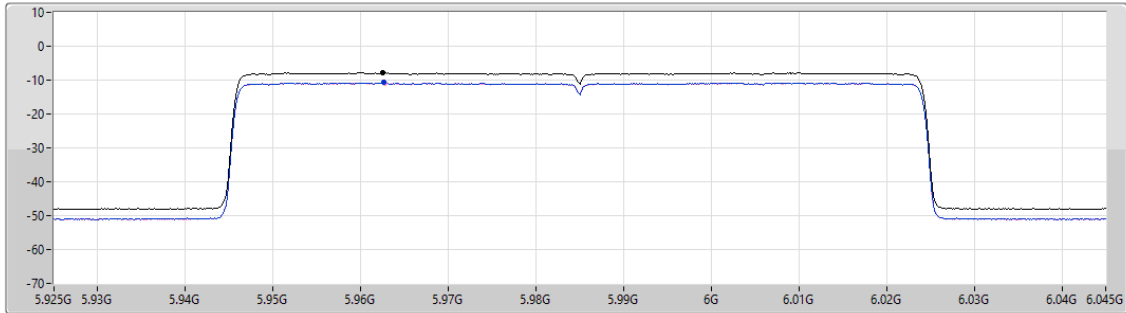

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.81	-7.81	-10.77	-10.86

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6225MHz

10/12/2024

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

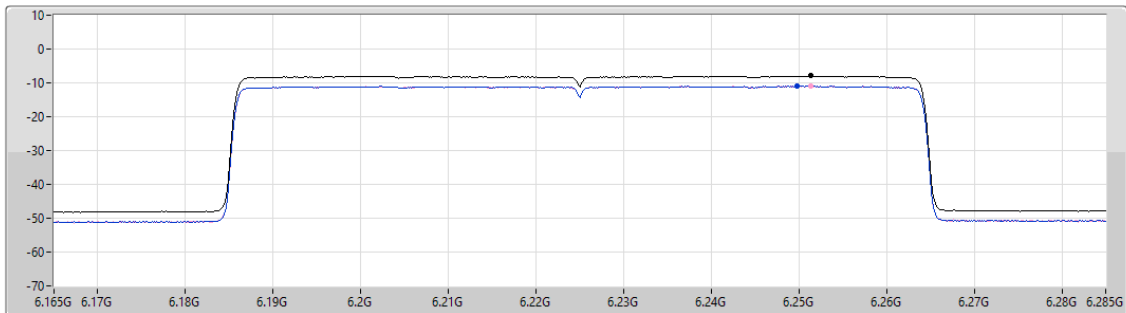

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.95	-7.95	-10.89	-10.98

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6385MHz

10/12/2024

CF (Hz)
6.385G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

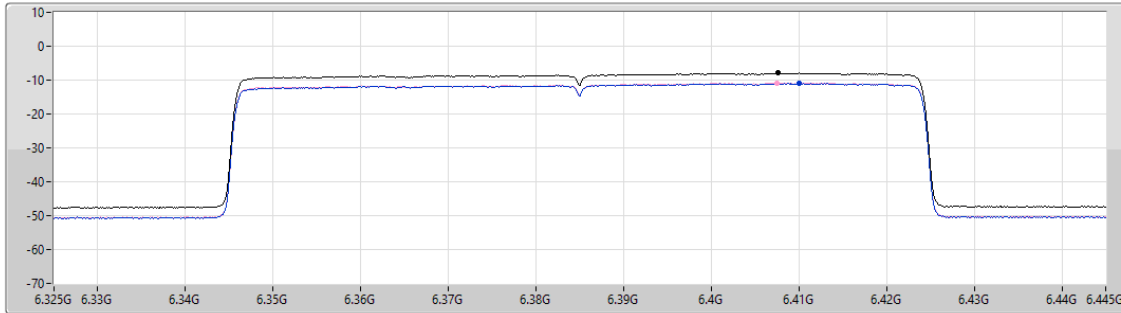

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.95	-7.95	-11.02	-10.87


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6465MHz

10/12/2024

CF (Hz)
6.465G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

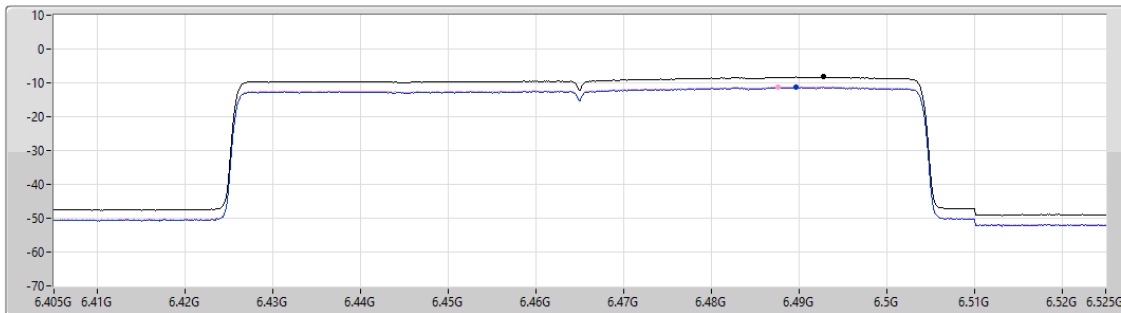

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.27	-8.27	-11.33	-11.16


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6545MHz

10/12/2024

CF (Hz)
6.545G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

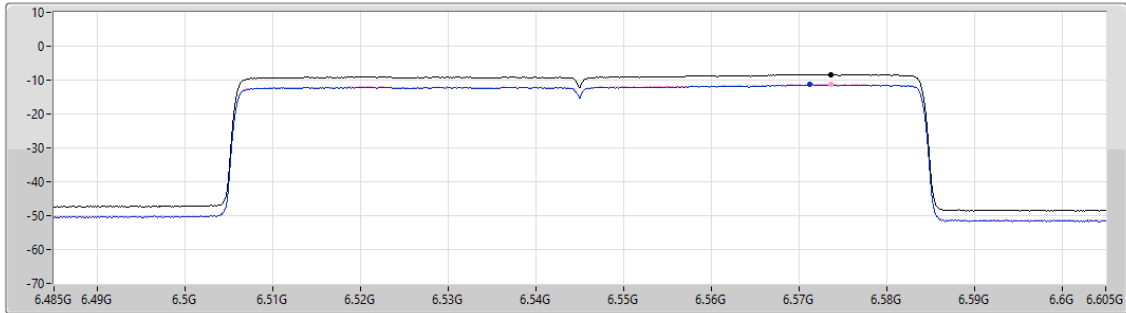

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.31	-8.31	-11.34	-11.19


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6625MHz

10/12/2024

CF (Hz)
6.625G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

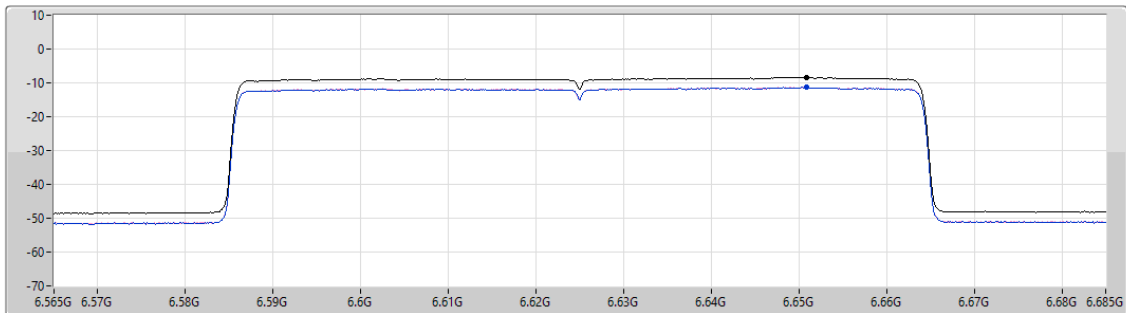

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.34	-8.34	-11.36	-11.34


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6705MHz

10/12/2024

CF (Hz)
6.705G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

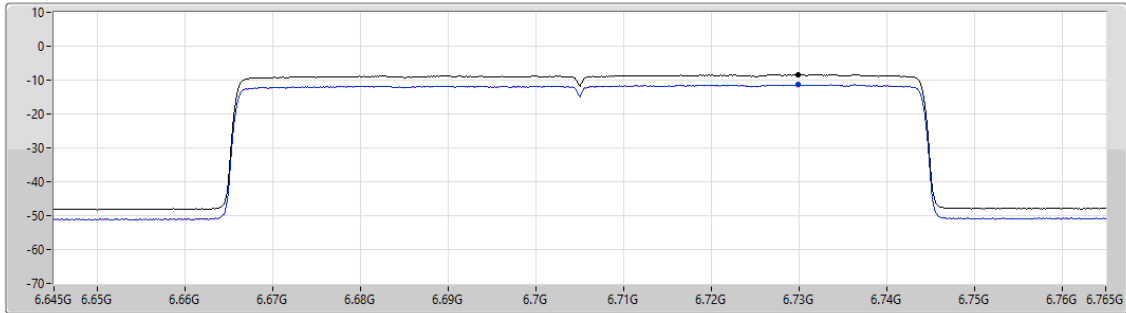

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.36	-8.36	-11.32	-11.42


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6785MHz

10/12/2024

CF (Hz)
6.785G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

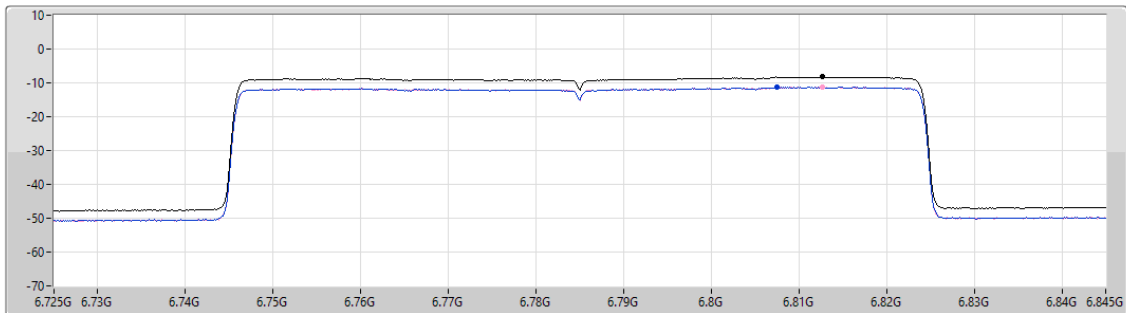

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.26	-8.26	-11.24	-11.23


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6865MHz

10/12/2024

CF (Hz)
6.865G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

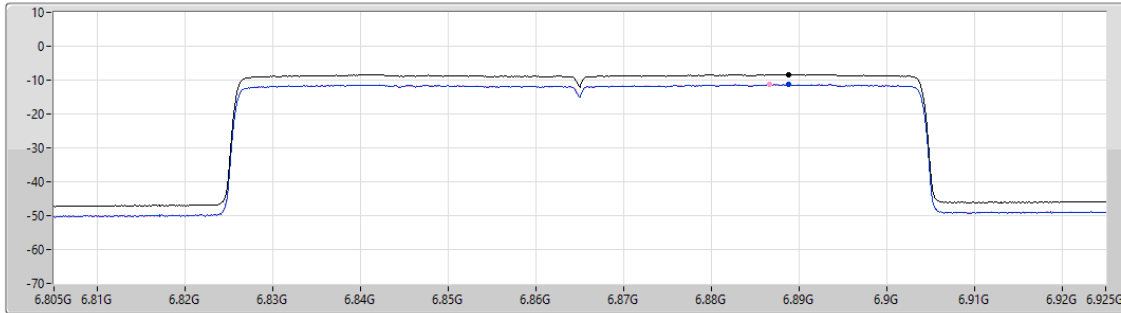

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.31	-8.31	-11.21	-11.26

Sum
Port 1
Port 2


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6945MHz

10/12/2024

CF (Hz)
6.945G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

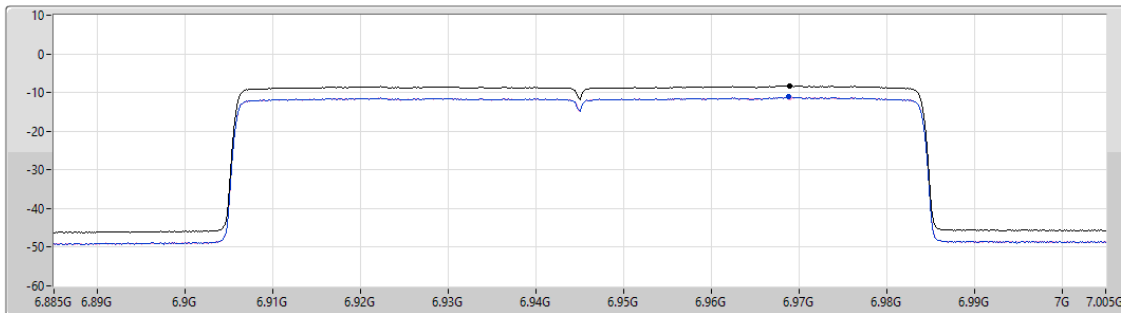

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.21	-8.21	-11.16	-11.23

Sum
Port 1
Port 2


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

7025MHz

10/12/2024

CF (Hz)
7.025G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

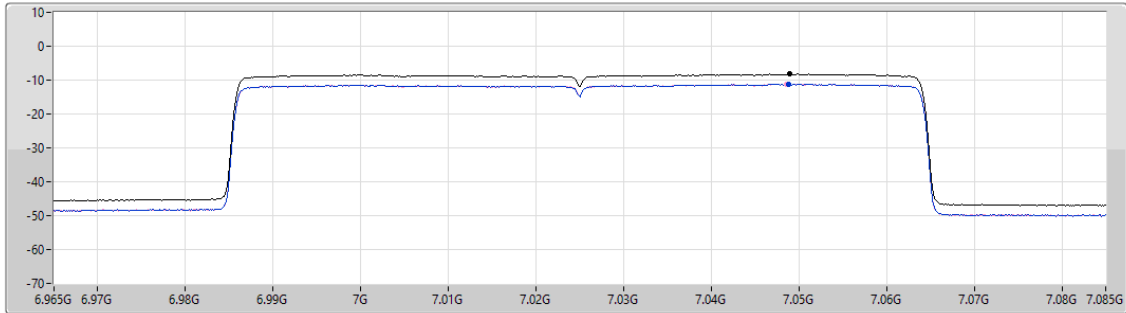

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.21	-8.21	-11.23	-11.17

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6025MHz

10/12/2024

CF (Hz)
6.025G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

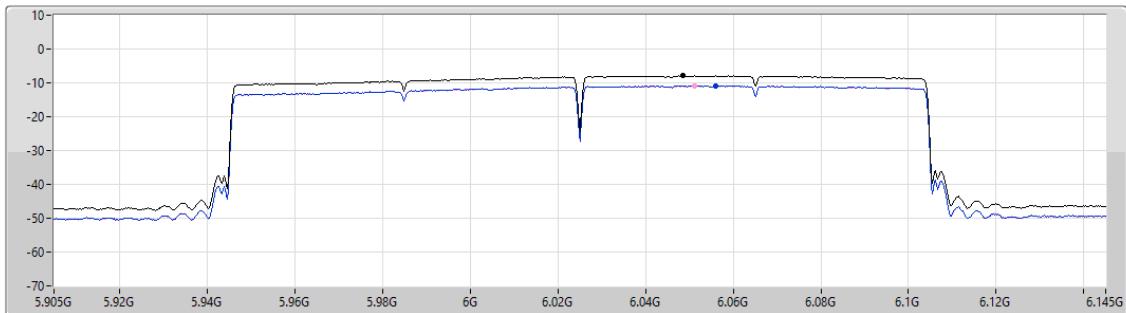

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.92	-7.92	-10.88	-10.91

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6185MHz

10/12/2024

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

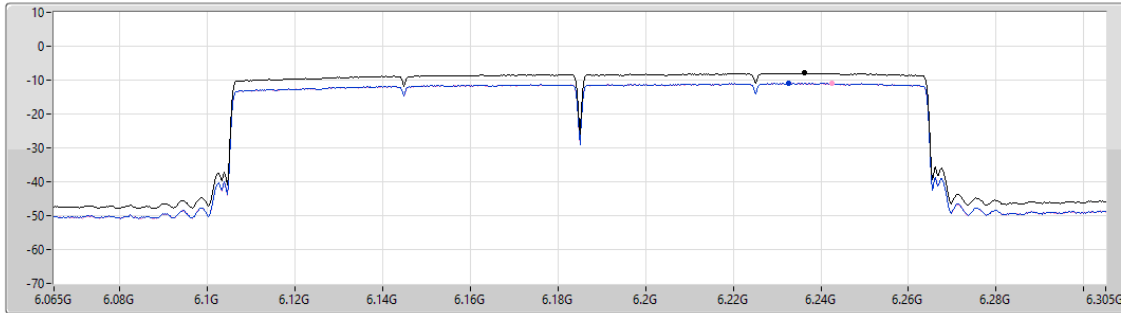

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.96	-7.96	-10.94	-10.92

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6345MHz

10/12/2024

CF (Hz)
6.345G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

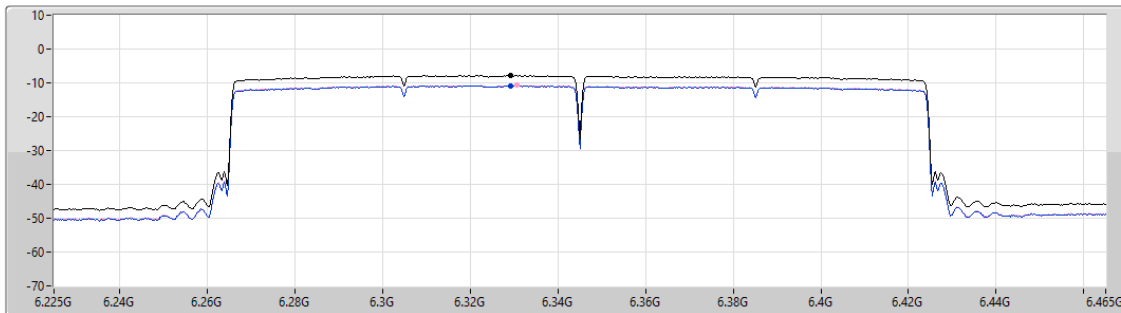

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.84	-7.84	-10.86	-10.77

Sum
Port 1
Port 2


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6505MHz

10/12/2024

CF (Hz)
6.505G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

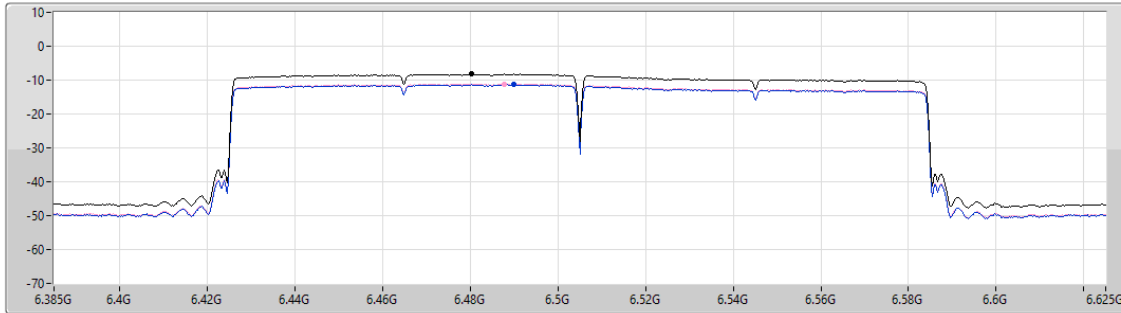

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.24	-8.24	-11.33	-11.13

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6665MHz

10/12/2024

CF (Hz)
6.665G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

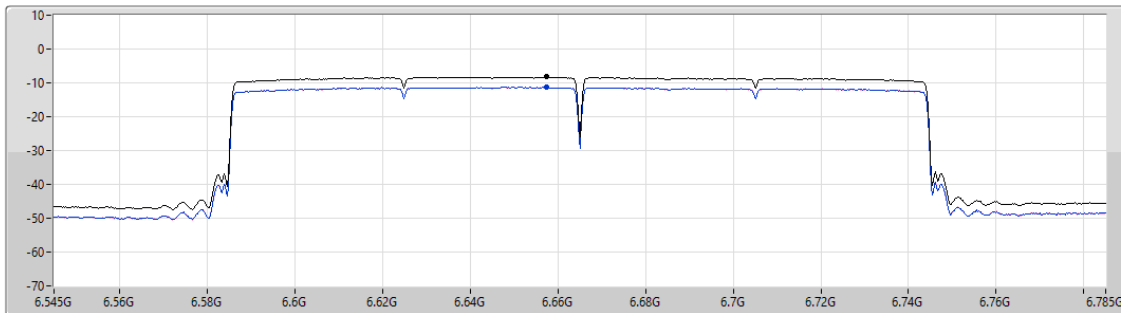

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.27	-8.27	-11.28	-11.29


Sum
Port 1
Port 2

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6825MHz

10/12/2024

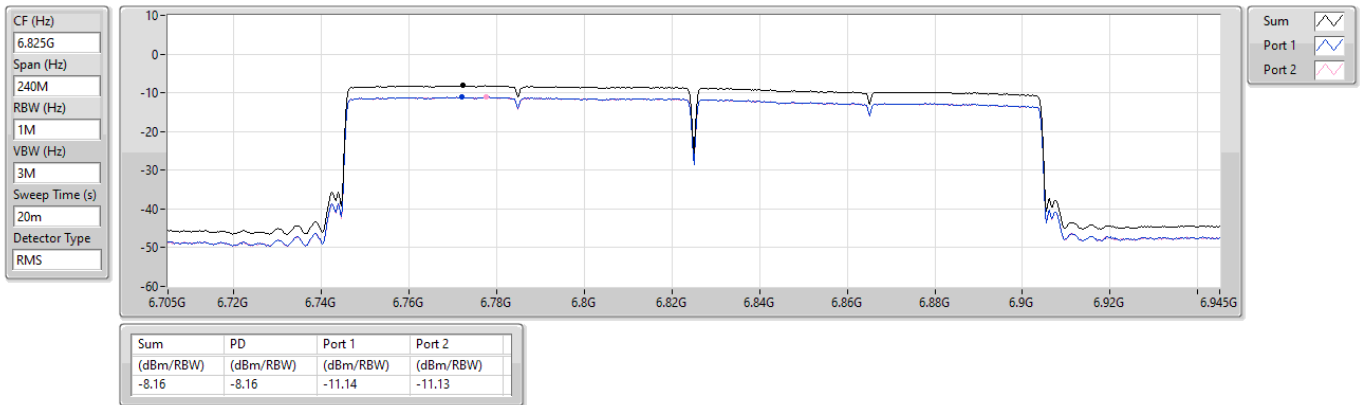


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6985MHz

10/12/2024

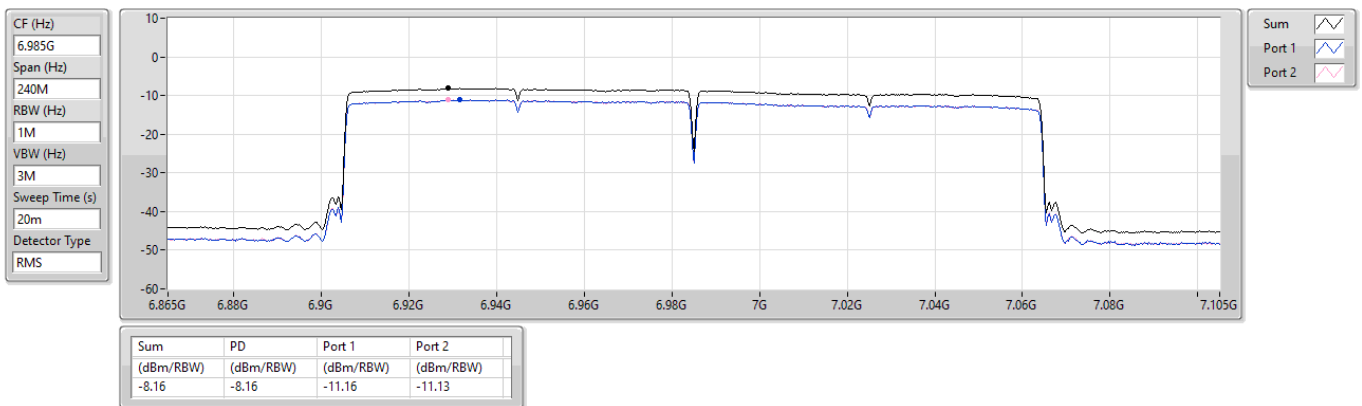




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 3	Pass	QP	33.88M	35.98	40.00	-4.02	Vertical

Mode 3

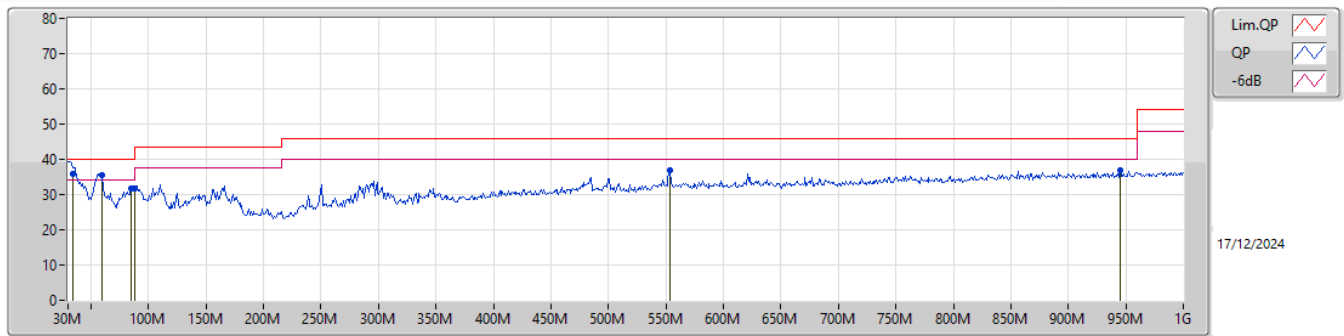

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	33.88M	35.98	40.00	-4.02	-21.10	3	Vertical	156	3.00	"Worst"	57.08	21.98	1.15	44.23		
PK	59.1M	35.47	40.00	-4.53	-30.32	3	Vertical	106	1.00	-	65.79	12.46	1.62	44.40		
PK	85.29M	31.87	40.00	-8.13	-28.42	3	Vertical	142	1.50	-	60.29	14.29	1.80	44.51		
PK	88M	31.64	43.50	-11.86	-27.82	3	Vertical	204	1.00	-	59.46	14.82	1.87	44.51		
PK	553.8M	36.81	46.00	-9.19	-14.05	3	Vertical	190	1.00	-	50.86	24.87	4.88	43.80		
PK	944.71M	37.03	46.00	-8.97	-10.20	3	Vertical	214	1.50	-	47.23	26.66	6.58	43.44		

Mode 3

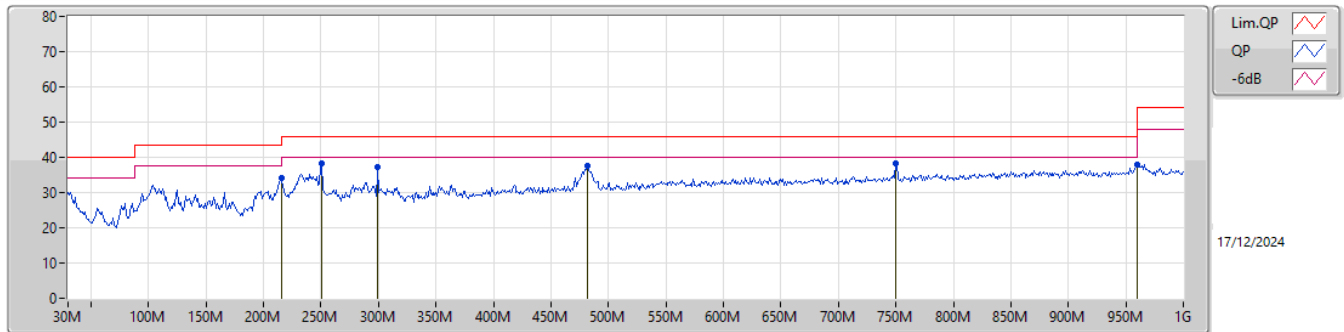

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	215.27M	34.13	43.50	-9.37	-26.52	3	Horizontal	76	1.50	-	60.65	14.75	3.11	44.38		
PK	250.19M	38.44	46.00	-7.56	-22.68	3	Horizontal	125	1.00	"Worst"	61.12	18.23	3.39	44.30		
PK	299.66M	37.15	46.00	-8.85	-21.40	3	Horizontal	194	1.00	-	58.55	19.04	3.79	44.23		
PK	482.02M	37.58	46.00	-8.42	-15.87	3	Horizontal	201	2.00	-	53.45	23.24	4.71	43.82		
PK	749.74M	38.18	46.00	-7.82	-12.05	3	Horizontal	215	1.25	-	50.23	25.58	5.81	43.44		
PK	960M	38.06	54.00	-15.94	-10.03	3	Horizontal	288	1.00	-	48.09	26.80	6.62	43.45		




Summary

Mode	Result	Type	Freq	Level	Limit	Margin	Dist	Condition	Azimuth	Height	Comments
			(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(m)		(°)	(m)	
6.875-7.125GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	RMS	7.1261G	67.19	68.20	-1.01	3	Horizontal	87	1.00	-

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

5955MHz_TX

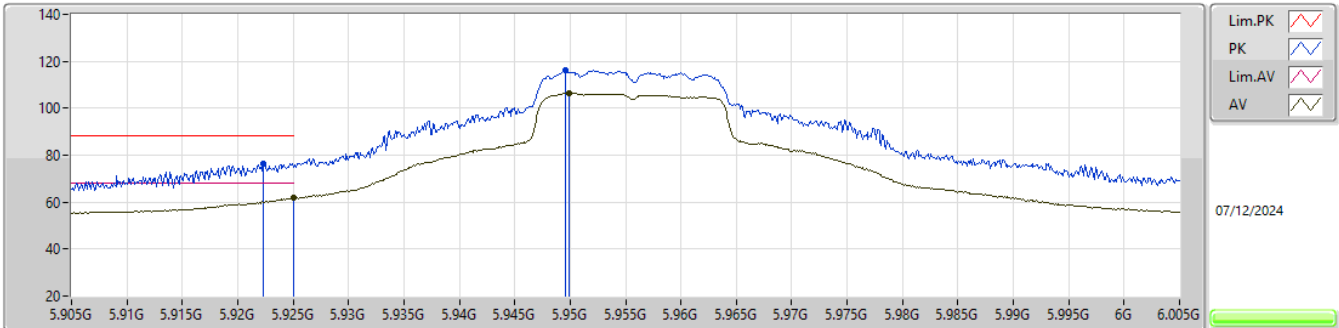


EUT_Z_2TX
Setting 22.75
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9223G	76.57	88.20	-11.63	65.12	3	Vertical	192	2.81	-	34.20	7.88	30.63			
RMS	5.925G	61.78	68.20	-6.42	50.33	3	Vertical	192	2.81	-	34.20	7.88	30.63			
PK	5.9496G	115.99	Inf	-Inf	104.51	3	Vertical	192	2.81	-	34.20	7.90	30.62			
RMS	5.9499G	106.45	Inf	-Inf	94.97	3	Vertical	192	2.81	-	34.20	7.90	30.62			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

5955MHz_TX

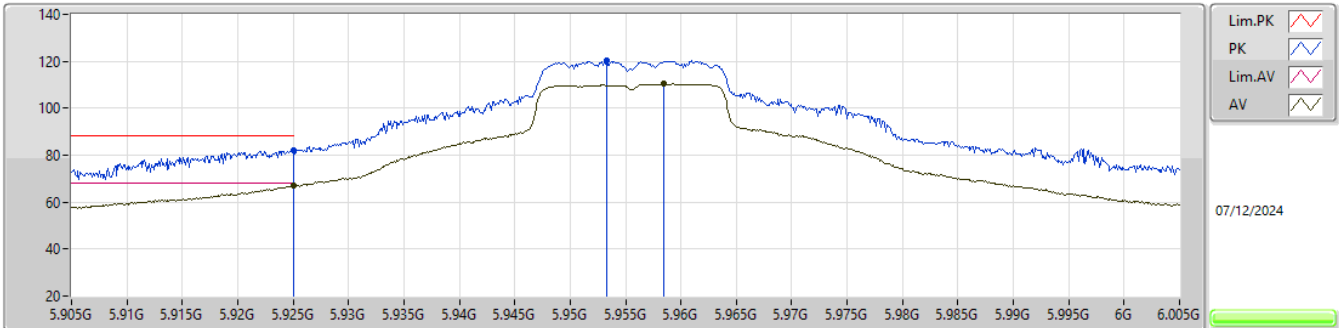


EUT_Z_2TX
Setting 22.75
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.925G	82.26	88.20	-5.94	70.81	3	Horizontal	81	1.17	-	34.20	7.88	30.63			
RMS	5.925G	67.00	68.20	-1.20	55.55	3	Horizontal	81	1.17	-	34.20	7.88	30.63			
PK	5.9533G	120.26	Inf	-Inf	108.77	3	Horizontal	81	1.17	-	34.21	7.90	30.62			
RMS	5.9585G	110.30	Inf	-Inf	98.80	3	Horizontal	81	1.17	-	34.22	7.90	30.62			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

5955MHz_TX

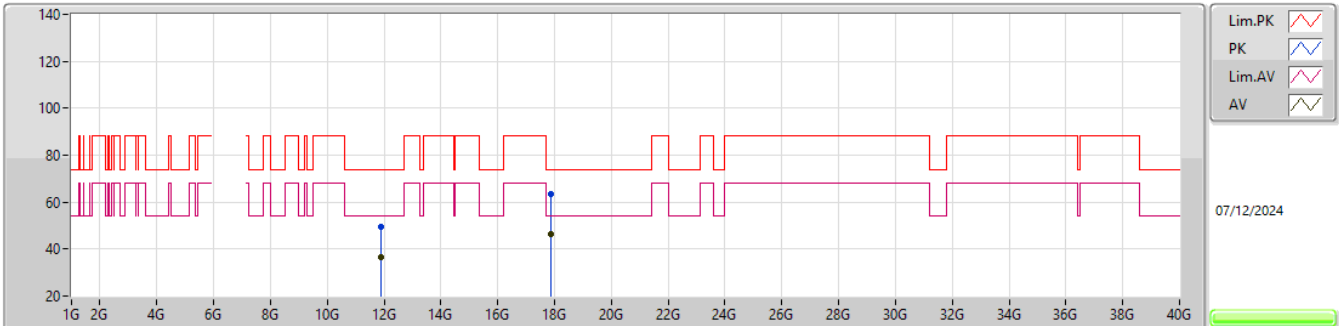


EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.91108G	49.57	74.00	-24.43	43.51	3	Vertical	175	1.79	-	39.38	12.02	45.34				
AV	11.9109G	36.41	54.00	-17.59	30.35	3	Vertical	175	1.79	-	39.38	12.02	45.34				
PK	17.864G	63.62	74.00	-10.38	48.35	3	Vertical	178	1.80	-	46.83	12.76	44.32				
AV	17.86528G	46.56	54.00	-7.44	31.29	3	Vertical	178	1.80	-	46.83	12.76	44.32				

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

5955MHz_TX

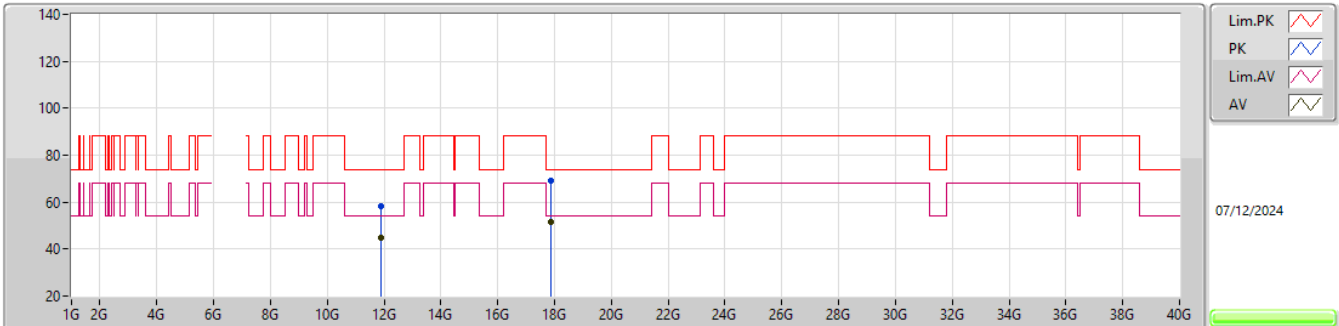


EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.91096G	58.09	74.00	-15.91	52.03	3	Horizontal	310	1.80	-	39.38	12.02	45.34				
AV	11.91042G	44.58	54.00	-9.42	38.52	3	Horizontal	310	1.80	-	39.38	12.02	45.34				
PK	17.86396G	69.00	74.00	-5.00	53.73	3	Horizontal	270	2.90	-	46.83	12.76	44.32				
AV	17.8687G	51.68	54.00	-2.32	36.40	3	Horizontal	270	2.90	-	46.84	12.76	44.32				

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX


5955MHz_TX

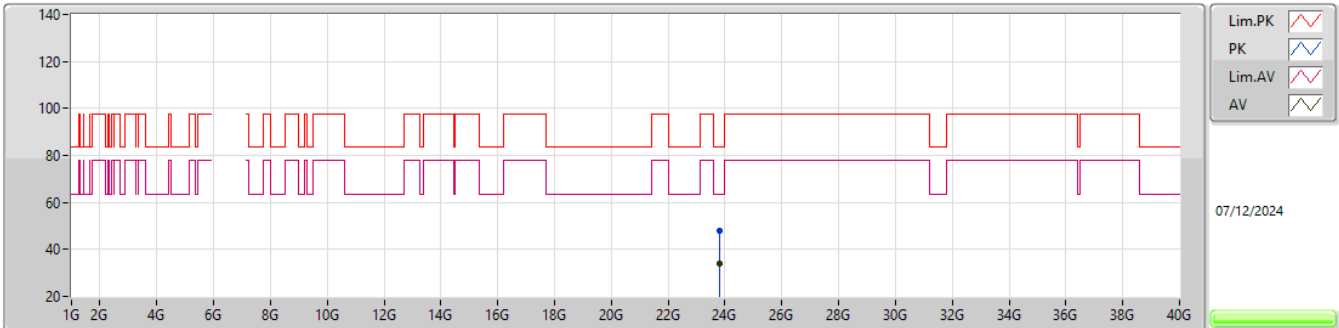EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82318G	48.02	83.54	-35.52	39.31	1	Vertical	189	1.80	-	39.10	17.28	47.67			
AV	23.82312G	34.14	63.54	-29.40	25.43	1	Vertical	189	1.80	-	39.10	17.28	47.67			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX


5955MHz_TX

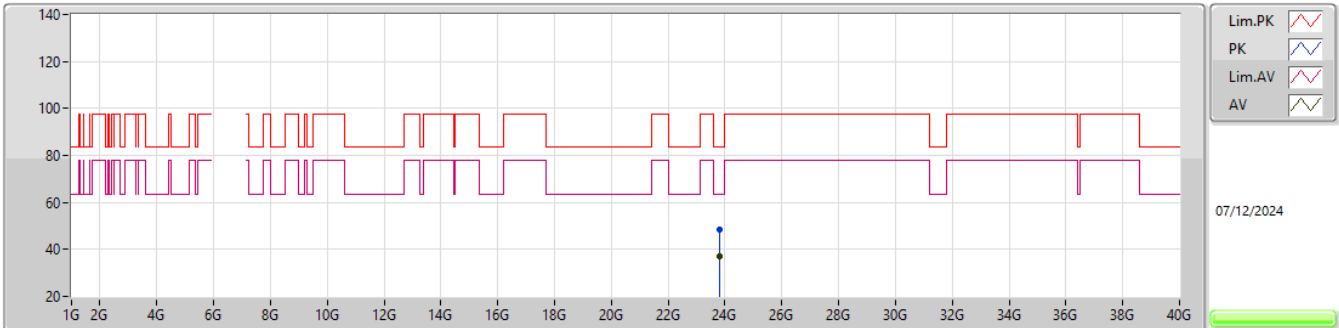EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.822G	48.37	83.54	-35.17	39.66	1	Horizontal	48	1.86	-	39.10	17.28	47.67			
AV	23.82212G	36.92	63.54	-26.62	28.21	1	Horizontal	48	1.86	-	39.10	17.28	47.67			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6195MHz_TX

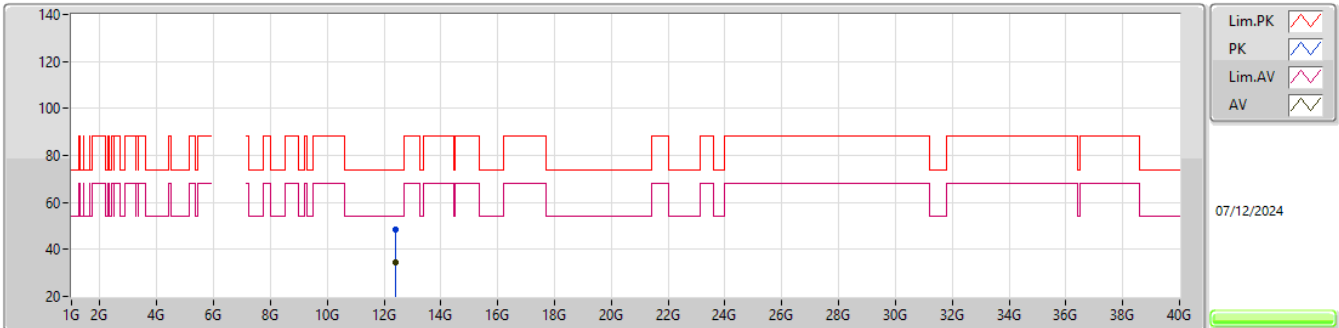


EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.38571G	48.50	74.00	-25.50	43.25	3	Vertical	42	1.77	-	38.80	12.02	45.57			
AV	12.3912G	34.31	54.00	-19.69	29.06	3	Vertical	42	1.77	-	38.80	12.02	45.57			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6195MHz_TX

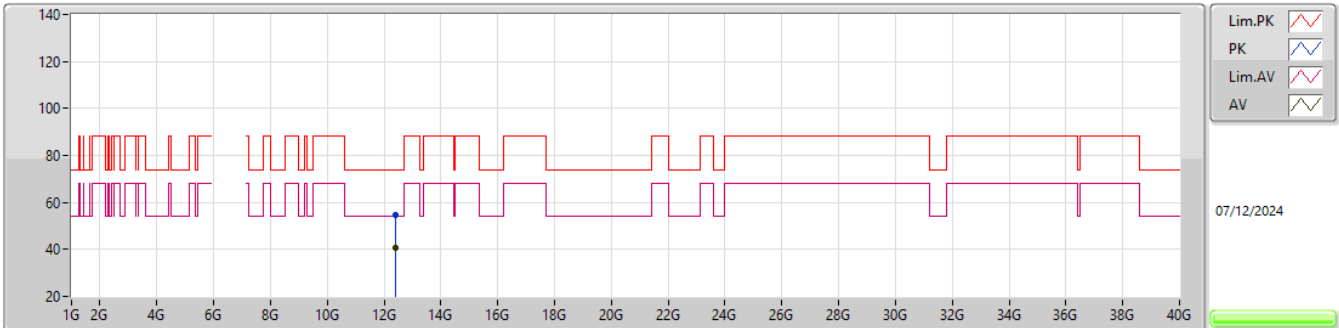


EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39057G	54.78	74.00	-19.22	49.53	3	Horizontal	325	2.01	-	38.80	12.02	45.57			
AV	12.38976G	40.66	54.00	-13.34	35.41	3	Horizontal	325	2.01	-	38.80	12.02	45.57			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6195MHz_TX

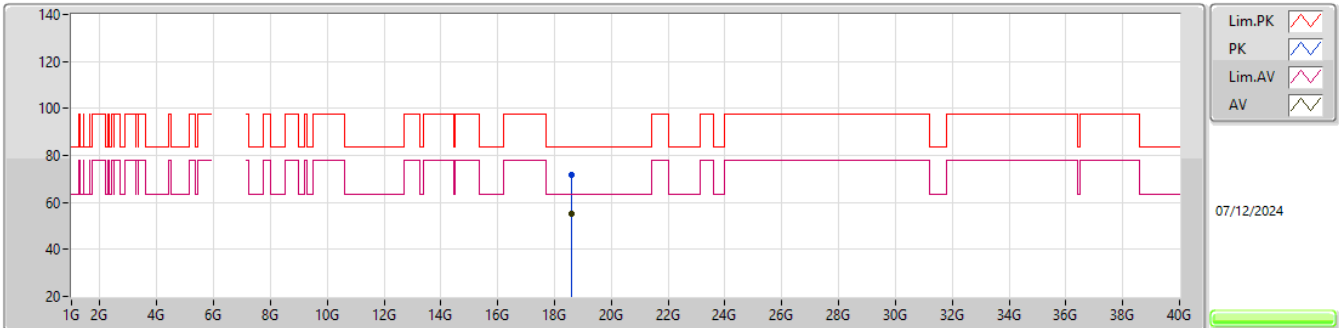


EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.59409G	71.82	83.54	-11.72	67.16	1	Vertical	301	1.81	-	37.80	15.25	48.39			
AV	18.58767G	55.12	63.54	-8.42	50.46	1	Vertical	301	1.81	-	37.80	15.25	48.39			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6195MHz_TX

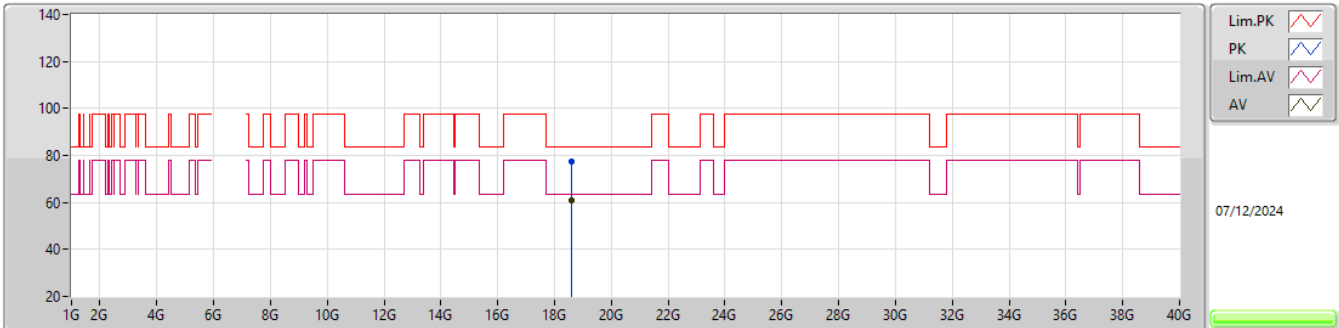


EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.59418G	77.61	83.54	-5.93	72.95	1	Horizontal	269	1.82	-	37.80	15.25	48.39			
AV	18.58692G	61.01	63.54	-2.53	56.35	1	Horizontal	269	1.82	-	37.80	15.25	48.39			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6415MHz_TX

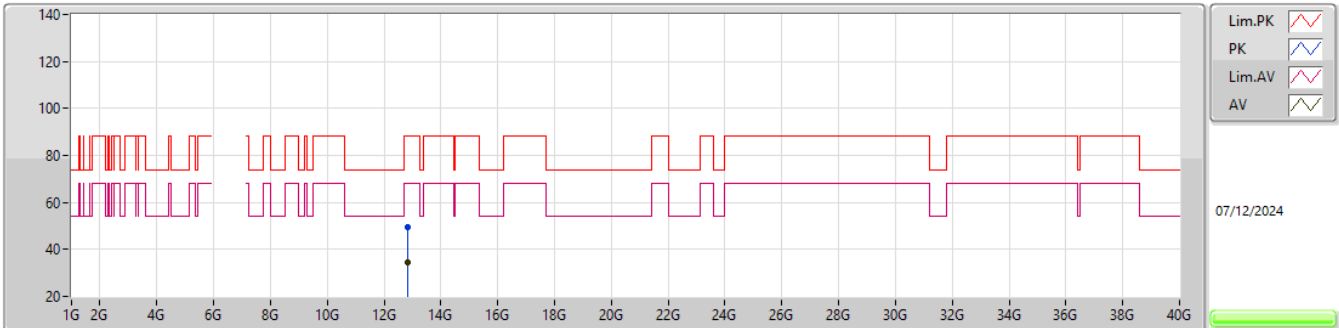


EUT_X_2TX
Setting 19.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.83543G	49.50	88.20	-38.70	43.83	3	Vertical	127	1.64	-	38.97	11.95	45.25			
RMS	12.83222G	34.65	68.20	-33.55	28.99	3	Vertical	127	1.64	-	38.96	11.96	45.26			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6415MHz_TX

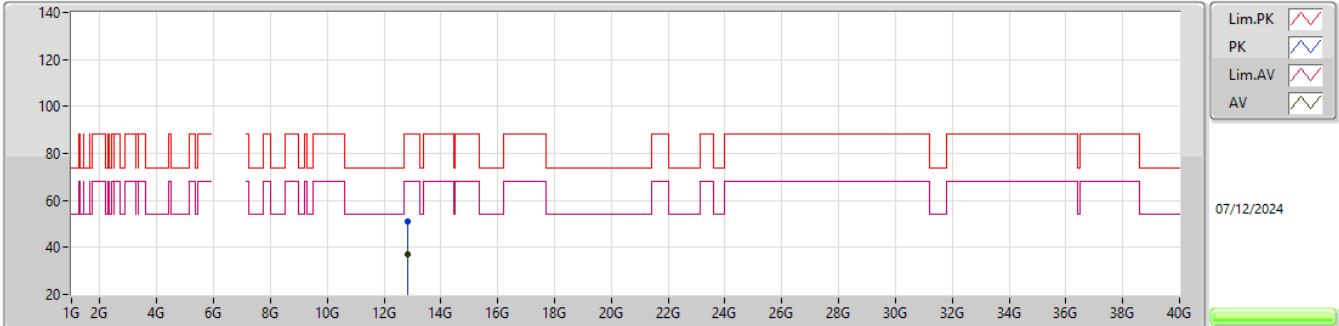


EUT_X_2TX
Setting 19.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.83171G	51.26	88.20	-36.94	45.60	3	Horizontal	120	1.48	-	38.96	11.96	45.26			
RMS	12.8324G	37.02	68.20	-31.18	31.36	3	Horizontal	120	1.48	-	38.96	11.96	45.26			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6415MHz_TX

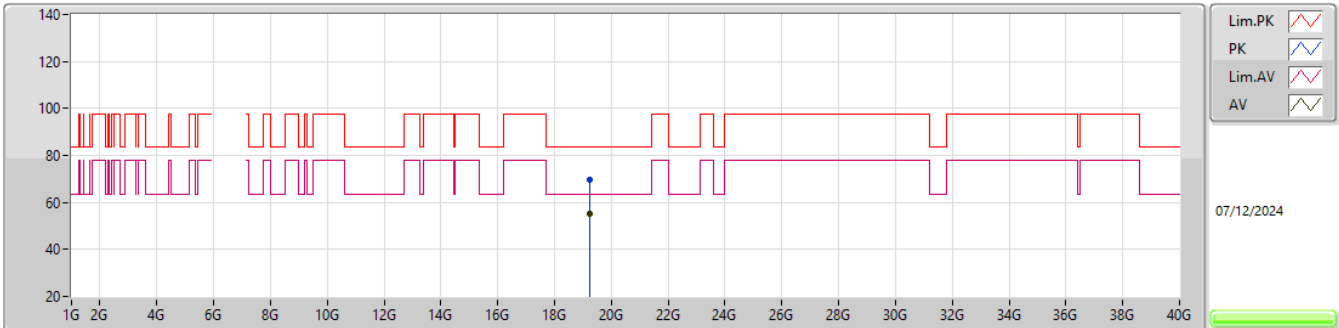


EUT_X_2TX
Setting 19.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24761G	69.46	83.54	-14.08	65.05	1	Vertical	67	1.80	-	37.99	15.22	48.80			
AV	19.24983G	55.08	63.54	-8.46	50.66	1	Vertical	67	1.80	-	38.00	15.22	48.80			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

6415MHz_TX

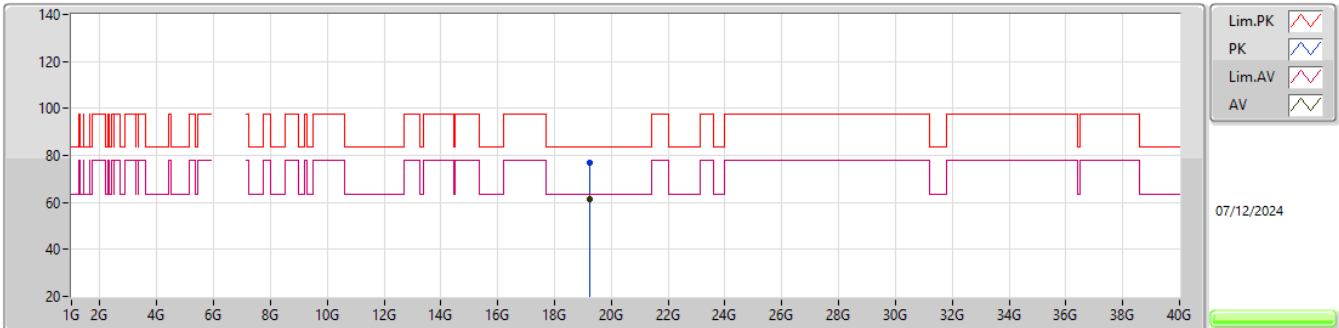


EUT_X_2TX
Setting 19.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.25127G	76.93	83.54	-6.61	72.53	1	Horizontal	266	1.95	-	37.99	15.21	48.80			
AV	19.24824G	61.24	63.54	-2.30	56.83	1	Horizontal	266	1.95	-	37.99	15.22	48.80			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

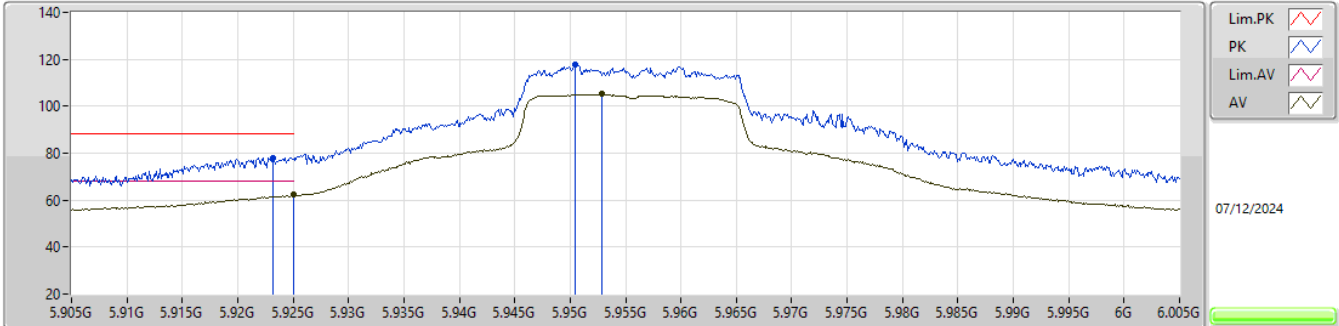


EUT_Z_2TX
Setting 22
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9232G	78.17	88.20	-10.03	66.72	3	Vertical	202	2.80	-	34.20	7.88	30.63			
RMS	5.925G	62.20	68.20	-6.00	50.75	3	Vertical	202	2.80	-	34.20	7.88	30.63			
PK	5.9504G	117.57	Inf	-Inf	106.09	3	Vertical	202	2.80	-	34.20	7.90	30.62			
RMS	5.9529G	105.09	Inf	-Inf	93.60	3	Vertical	202	2.80	-	34.21	7.90	30.62			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

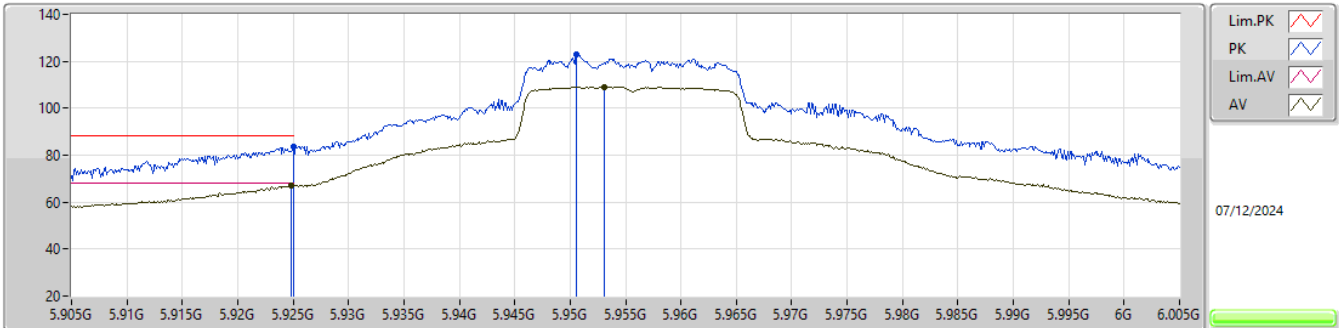


EUT_Z_2TX
Setting 22
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	83.50	88.20	-4.70	72.05	3	Horizontal	89	1.00	-	34.20	7.88	30.63			
RMS	5.9248G	66.96	68.20	-1.24	55.51	3	Horizontal	89	1.00	-	34.20	7.88	30.63			
PK	5.9506G	122.84	Inf	-Inf	111.36	3	Horizontal	89	1.00	-	34.20	7.90	30.62			
RMS	5.9531G	109.06	Inf	-Inf	97.57	3	Horizontal	89	1.00	-	34.21	7.90	30.62			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

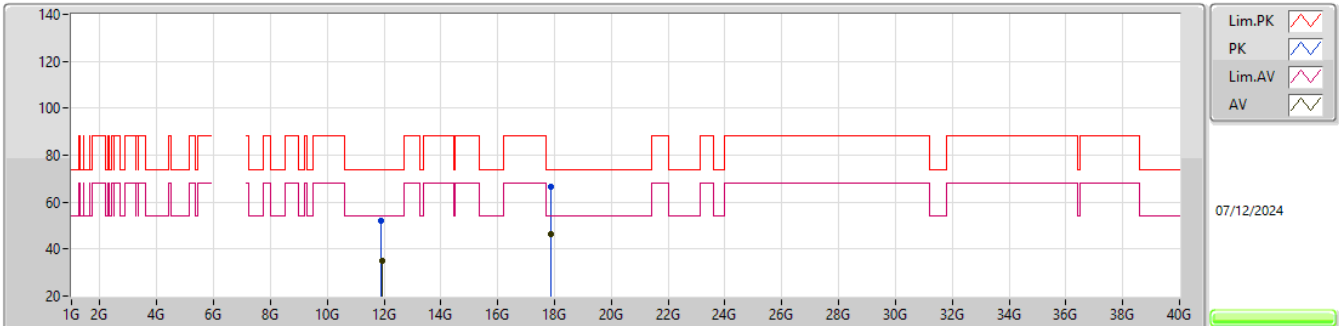


EUT_X_2TX
Setting 15.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.91032G	51.96	74.00	-22.04	45.90	3	Vertical	204	2.17	-	39.38	12.02	45.34			
AV	11.91478G	35.18	54.00	-18.82	29.12	3	Vertical	204	2.17	-	39.37	12.03	45.34			
PK	17.8622G	66.53	74.00	-7.47	51.29	3	Vertical	237	2.08	-	46.82	12.75	44.33			
AV	17.87148G	46.42	54.00	-7.58	31.14	3	Vertical	237	2.08	-	46.84	12.76	44.32			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

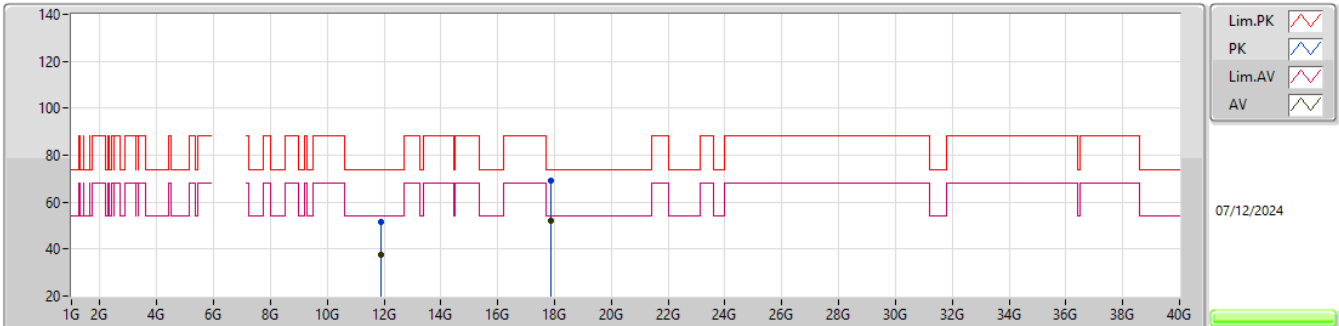


EUT_X_2TX
Setting 15.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.90998G	51.54	74.00	-22.46	45.48	3	Horizontal	118	2.72	-	39.38	12.02	45.34			
AV	11.90982G	37.65	54.00	-16.35	31.59	3	Horizontal	118	2.72	-	39.38	12.02	45.34			
PK	17.86216G	69.15	74.00	-4.85	53.91	3	Horizontal	280	2.89	-	46.82	12.75	44.33			
AV	17.86522G	51.82	54.00	-2.18	36.55	3	Horizontal	280	2.89	-	46.83	12.76	44.32			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

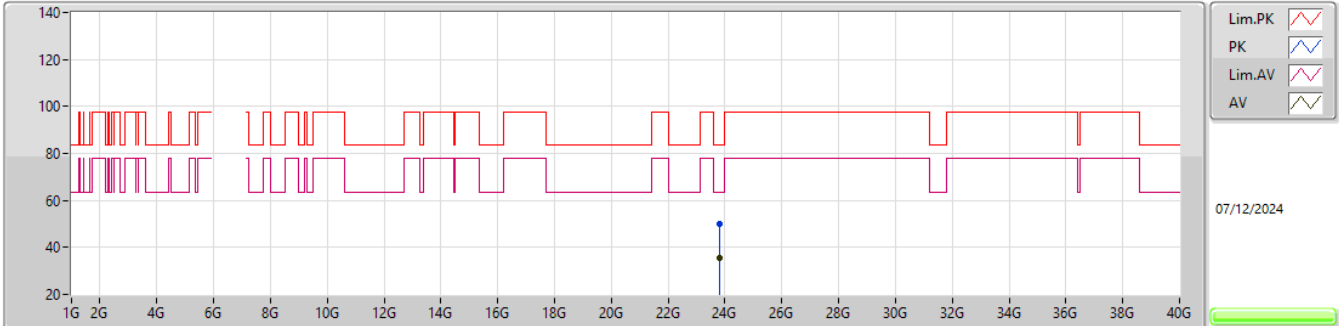


EUT_X_2TX
Setting 15.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81946G	50.17	83.54	-33.37	41.46	1	Vertical	190	1.78	-	39.10	17.28	47.67			
AV	23.82333G	35.36	63.54	-28.18	26.65	1	Vertical	190	1.78	-	39.10	17.28	47.67			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5955MHz_TX

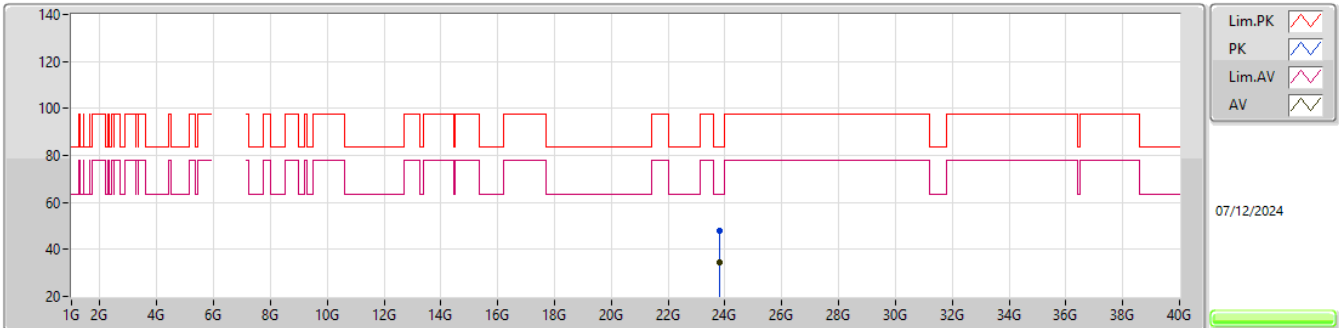


EUT_X_2TX
Setting 15.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82345G	47.82	83.54	-35.72	39.11	1	Horizontal	241	1.56	-	39.10	17.28	47.67			
AV	23.82327G	34.53	63.54	-29.01	25.82	1	Horizontal	241	1.56	-	39.10	17.28	47.67			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

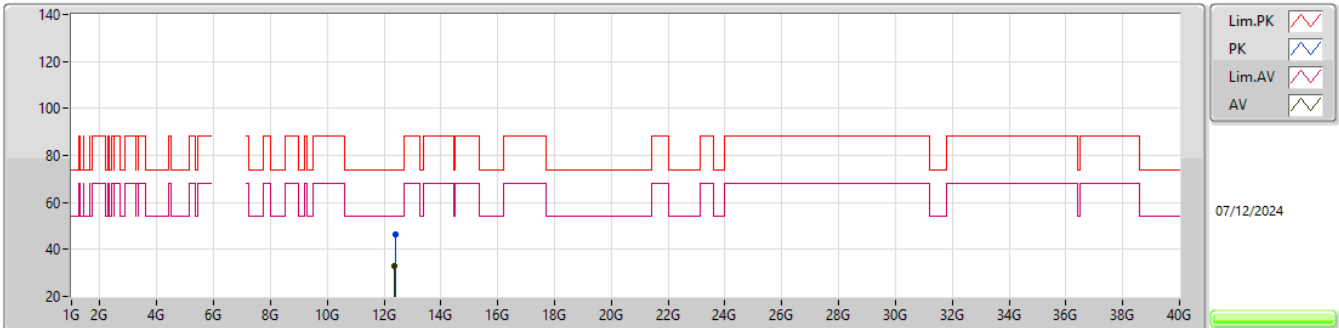


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.38812G	46.38	74.00	-27.62	41.13	3	Vertical	263	1.94	-	38.80	12.02	45.57			
AV	12.38342G	32.78	54.00	-21.22	27.53	3	Vertical	263	1.94	-	38.80	12.02	45.57			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

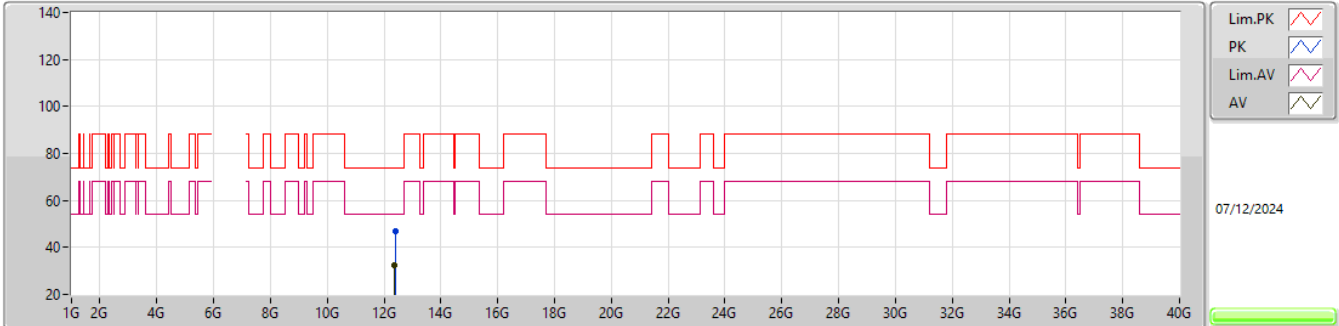

EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39154G	46.88	74.00	-27.12	41.63	3	Horizontal	191	2.77	-	38.80	12.02	45.57			
AV	12.38368G	32.44	54.00	-21.56	27.19	3	Horizontal	191	2.77	-	38.80	12.02	45.57			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX




EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.58692G	72.24	83.54	-11.30	67.58	1	Vertical	303	1.80	-	37.80	15.25	48.39			
AV	18.59028G	55.19	63.54	-8.35	50.53	1	Vertical	303	1.80	-	37.80	15.25	48.39			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

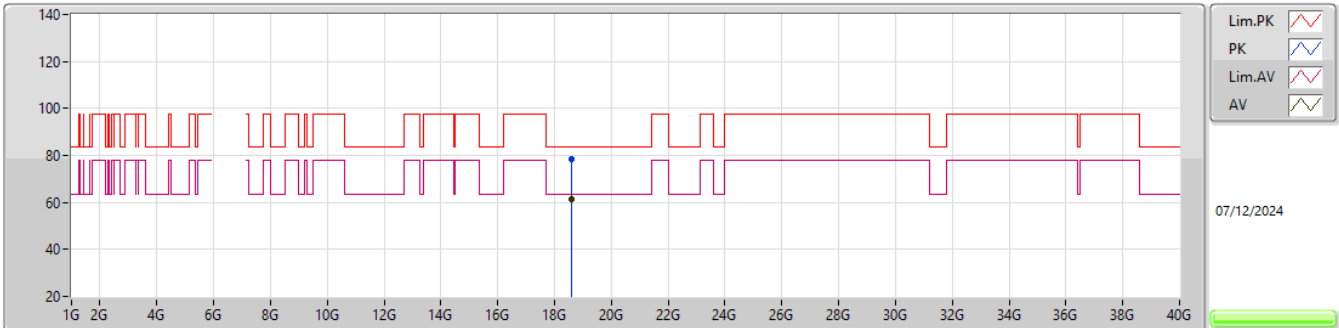


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5874G	78.31	83.54	-5.23	73.65	1	Horizontal	268	1.82	-	37.80	15.25	48.39			
AV	18.58665G	61.42	63.54	-2.12	56.76	1	Horizontal	268	1.82	-	37.80	15.25	48.39			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

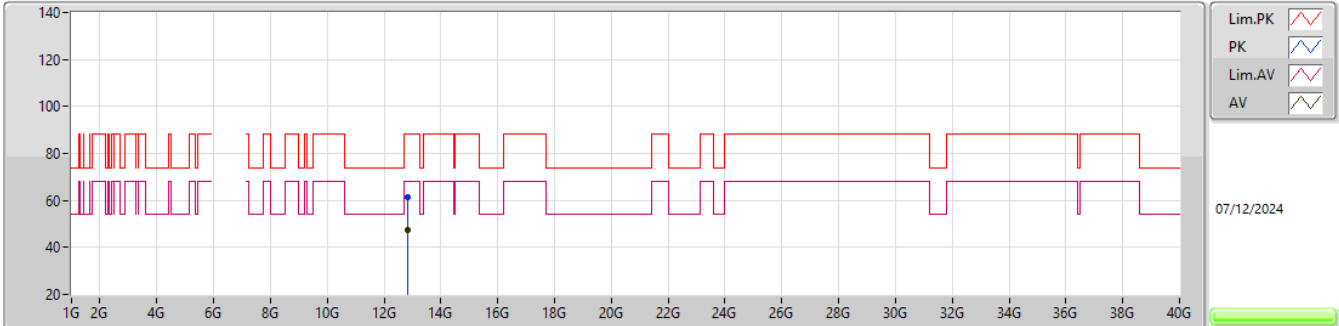


EUT_X_2TX
Setting 17.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.83506G	61.29	88.20	-26.91	41.56	3	Vertical	56	1.14	-	38.97	11.95	31.19			
RMS	12.83972G	47.26	68.20	-20.94	27.53	3	Vertical	56	1.14	-	38.98	11.95	31.20			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

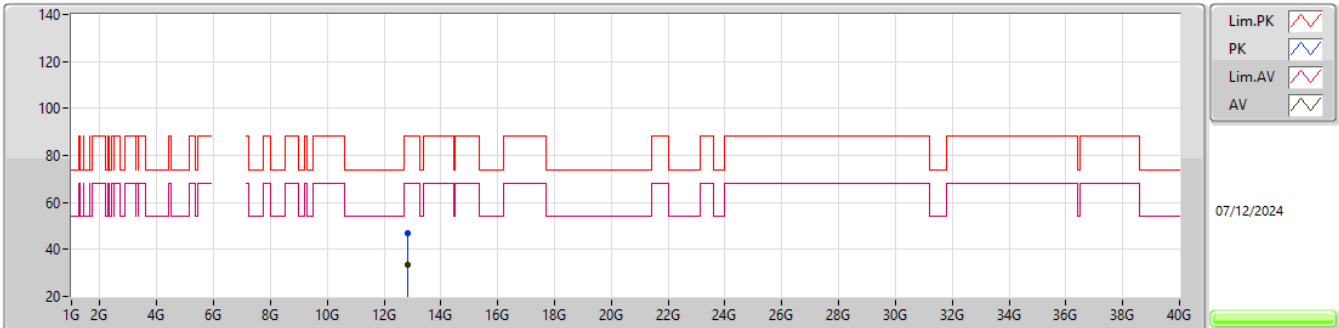


EUT_X_2TX
Setting 17.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.83308G	47.07	88.20	-41.13	41.40	3	Horizontal	354	1.48	-	38.97	11.96	45.26			
RMS	12.82068G	33.27	68.20	-34.93	27.64	3	Horizontal	354	1.48	-	38.94	11.96	45.27			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

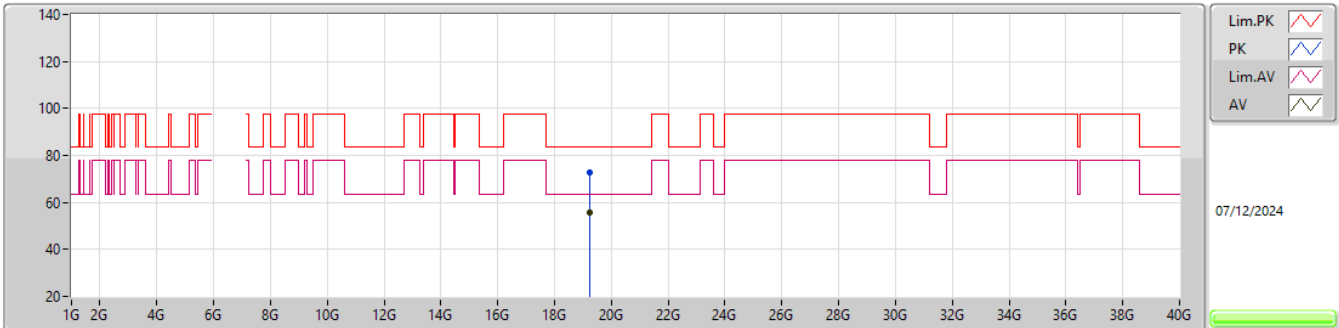


EUT_X_2TX
Setting 17.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2447G	72.55	83.54	-10.99	68.15	1	Vertical	66	1.80	-	37.98	15.22	48.80			
AV	19.24659G	55.92	63.54	-7.62	51.51	1	Vertical	66	1.80	-	37.99	15.22	48.80			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

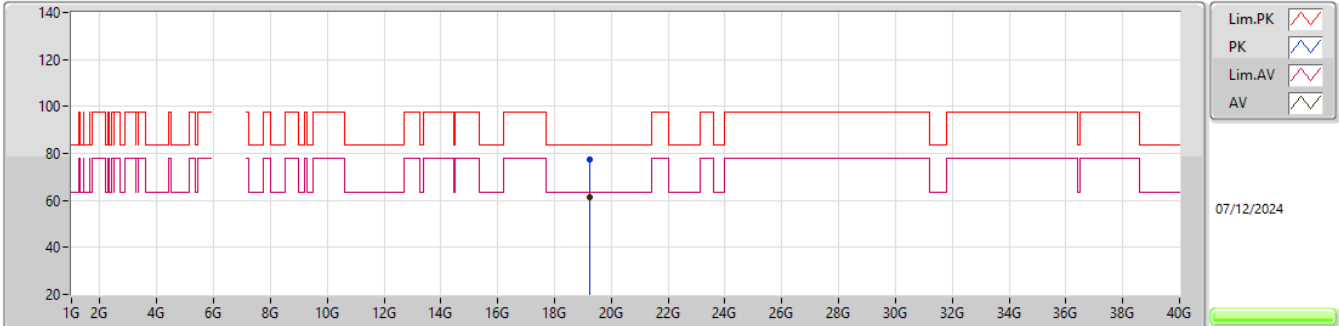


EUT_X_2TX
Setting 17.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24449G	77.41	83.54	-6.13	73.01	1	Horizontal	266	1.96	-	37.98	15.22	48.80			
AV	19.25022G	61.48	63.54	-2.06	57.07	1	Horizontal	266	1.96	-	38.00	15.21	48.80			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

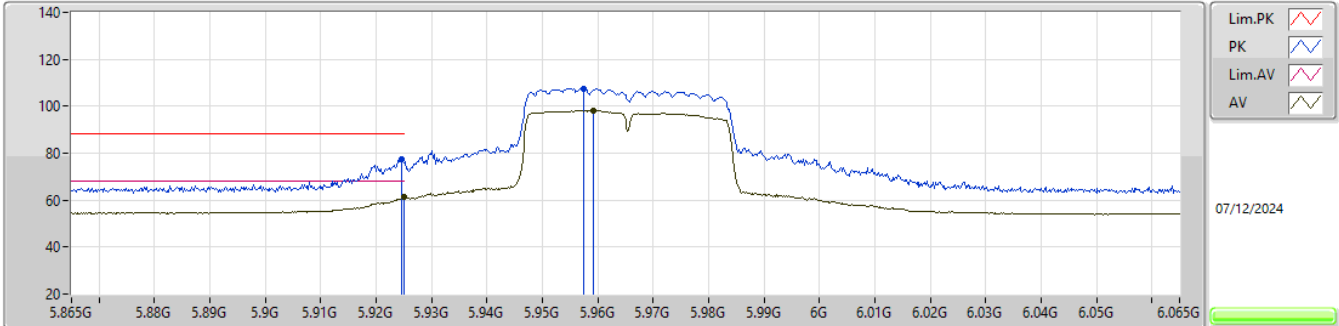


EUT_Z_2TX
Setting 18
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9246G	77.41	88.20	-10.79	65.96	3	Vertical	351	2.68	-	34.20	7.88	30.63			
RMS	5.925G	61.15	68.20	-7.05	49.70	3	Vertical	351	2.68	-	34.20	7.88	30.63			
PK	5.9574G	107.60	Inf	-Inf	96.11	3	Vertical	351	2.68	-	34.21	7.90	30.62			
RMS	5.9592G	98.22	Inf	-Inf	86.72	3	Vertical	351	2.68	-	34.22	7.90	30.62			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5965MHz_TX

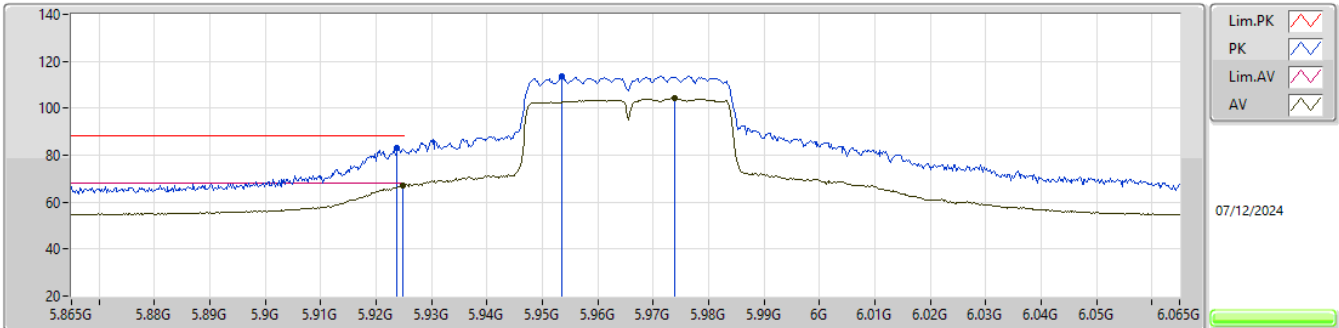EUT_Z_2TX
Setting 18
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9238G	82.96	88.20	-5.24	71.51	3	Horizontal	84	1.05	-	34.20	7.88	30.63			
RMS	5.9248G	67.09	68.20	-1.11	55.64	3	Horizontal	84	1.05	-	34.20	7.88	30.63			
PK	5.9536G	113.83	Inf	-Inf	102.34	3	Horizontal	84	1.05	-	34.21	7.90	30.62			
RMS	5.9738G	104.48	Inf	-Inf	92.94	3	Horizontal	84	1.05	-	34.25	7.91	30.62			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5965MHz_TX

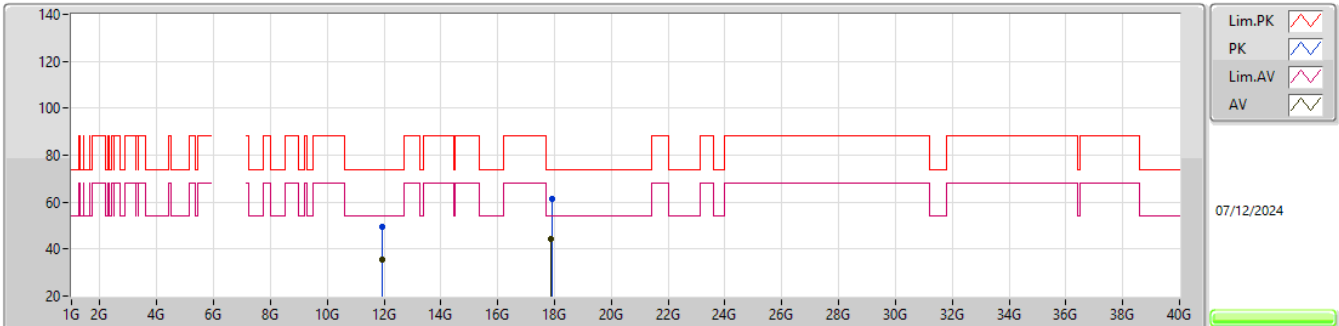


EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.92885G	49.46	74.00	-24.54	43.43	3	Vertical	221	1.06	-	39.34	12.03	45.34			
AV	11.93453G	35.64	54.00	-18.36	29.61	3	Vertical	221	1.06	-	39.33	12.04	45.34			
PK	17.89684G	61.15	74.00	-12.85	45.80	3	Vertical	42	2.75	-	46.89	12.77	44.31			
AV	17.89012G	44.25	54.00	-9.75	28.91	3	Vertical	42	2.75	-	46.88	12.77	44.31			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5965MHz_TX

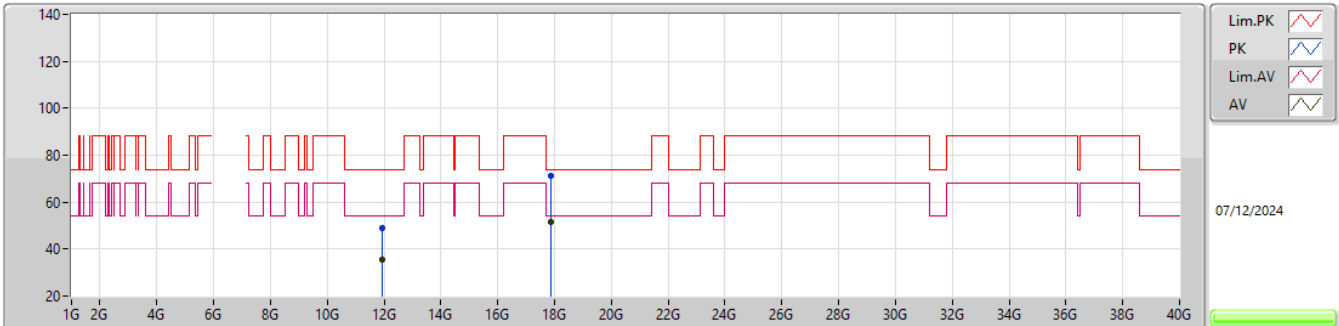EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.93114G	49.14	74.00	-24.86	43.10	3	Horizontal	177	2.29	-	39.34	12.04	45.34				
AV	11.93426G	35.46	54.00	-18.54	29.43	3	Horizontal	177	2.29	-	39.33	12.04	45.34				
PK	17.89326G	71.02	74.00	-2.98	55.67	3	Horizontal	258	1.43	-	46.89	12.77	44.31				
AV	17.89227G	51.71	54.00	-2.29	36.37	3	Horizontal	258	1.43	-	46.88	12.77	44.31				

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5965MHz_TX

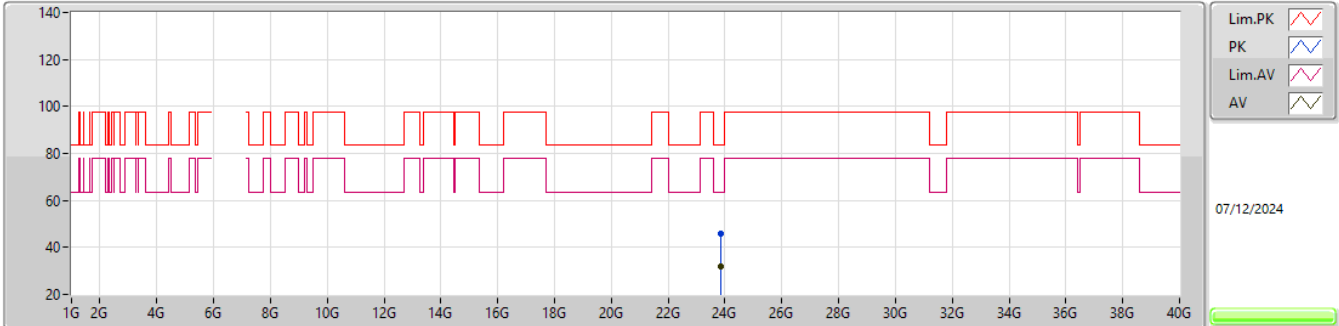EUT_X_2TX
Setting 16.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85839G	45.70	83.54	-37.84	36.99	1	Vertical	292	1.21	-	39.08	17.29	47.66			
AV	23.85618G	32.03	63.54	-31.51	23.31	1	Vertical	292	1.21	-	39.09	17.29	47.66			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5965MHz_TX

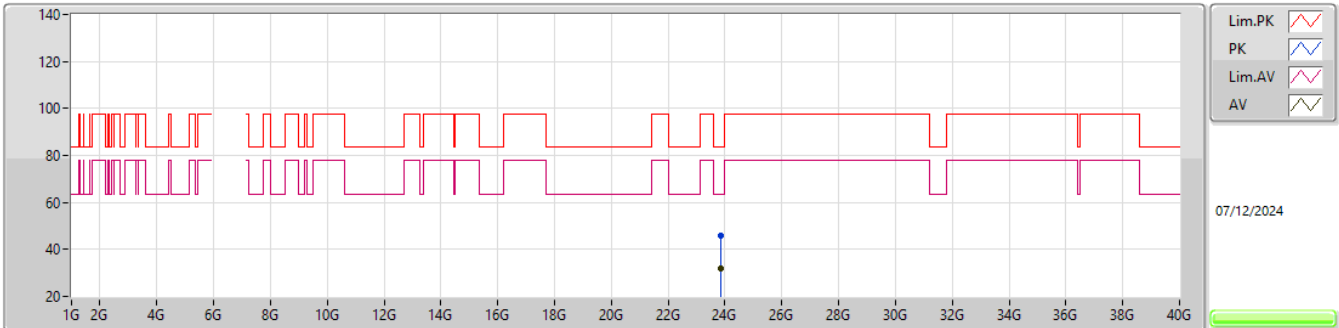EUT_X_2TX
Setting 16.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.86076G	45.81	83.54	-37.73	37.10	1	Horizontal	78	2.25	-	39.08	17.29	47.66			
AV	23.85763G	31.75	63.54	-31.79	23.04	1	Horizontal	78	2.25	-	39.08	17.29	47.66			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6205MHz_TX

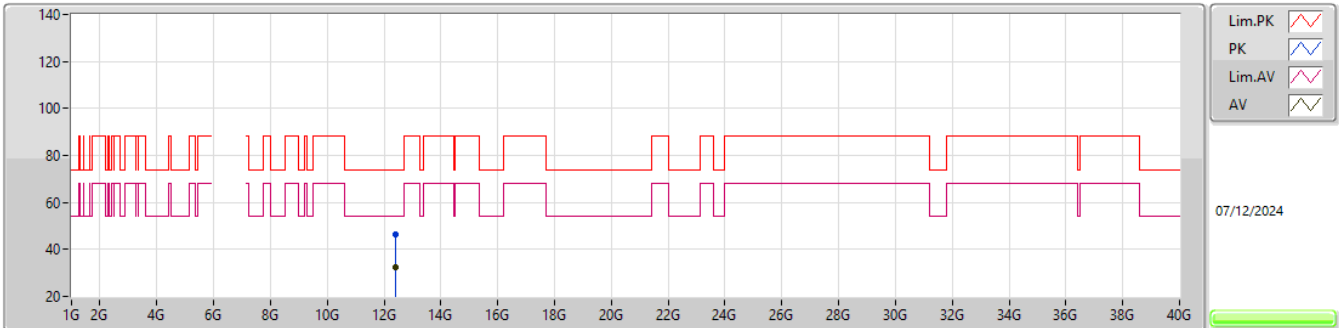EUT_X_2TX
Setting 18.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41387G	46.56	74.00	-27.44	41.32	3	Vertical	5	2.03	-	38.80	12.02	45.58			
AV	12.40976G	32.46	54.00	-21.54	27.22	3	Vertical	5	2.03	-	38.80	12.02	45.58			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

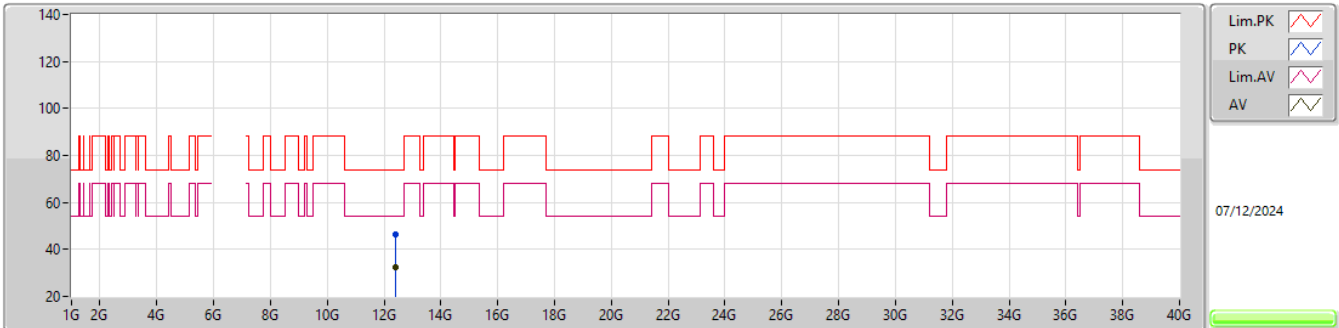


EUT_X_2TX
Setting 18.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.41365G	46.35	74.00	-27.65	41.11	3	Horizontal	282	2.94	-	38.80	12.02	45.58			
AV	12.41405G	32.66	54.00	-21.34	27.42	3	Horizontal	282	2.94	-	38.80	12.02	45.58			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

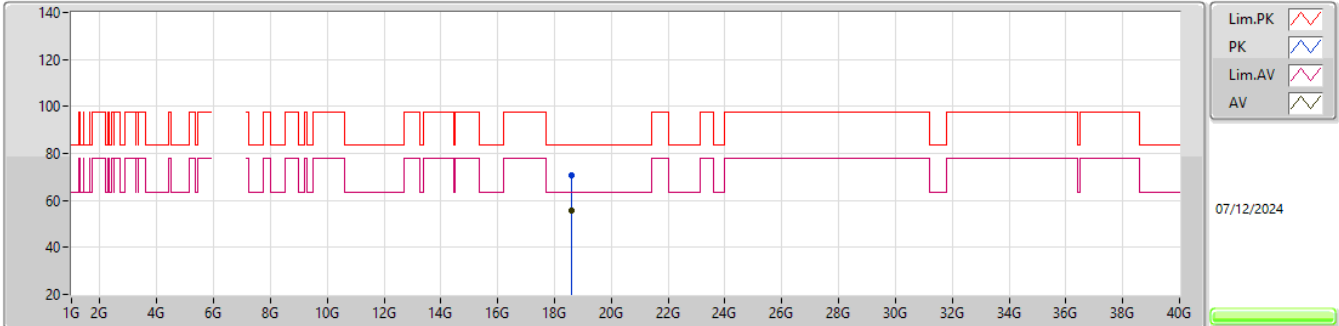


EUT_X_2TX
Setting 18.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6153G	70.49	83.54	-13.05	65.83	1	Vertical	301	1.82	-	37.83	15.25	48.42			
AV	18.61746G	55.47	63.54	-8.07	50.81	1	Vertical	301	1.82	-	37.83	15.25	48.42			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

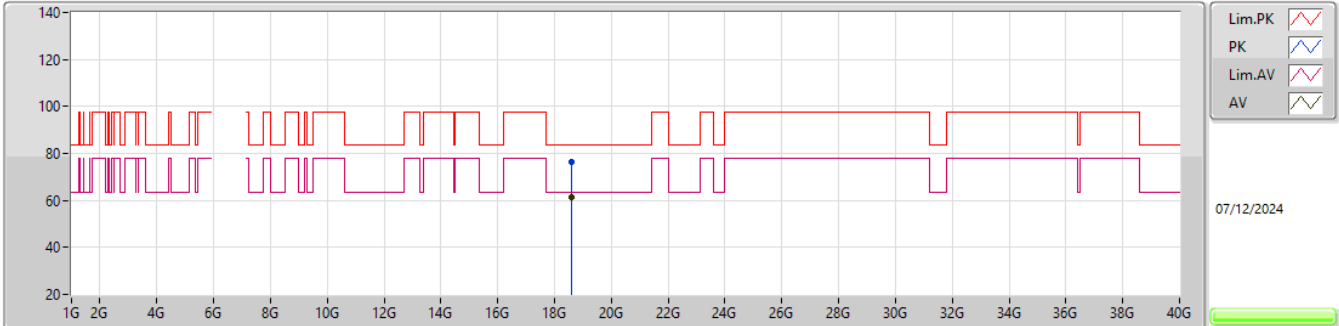


EUT_X_2TX
Setting 18.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61107G	76.33	83.54	-7.21	71.67	1	Horizontal	270	1.81	-	37.82	15.25	48.41			
AV	18.61173G	61.27	63.54	-2.27	56.61	1	Horizontal	270	1.81	-	37.82	15.25	48.41			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6405MHz_TX

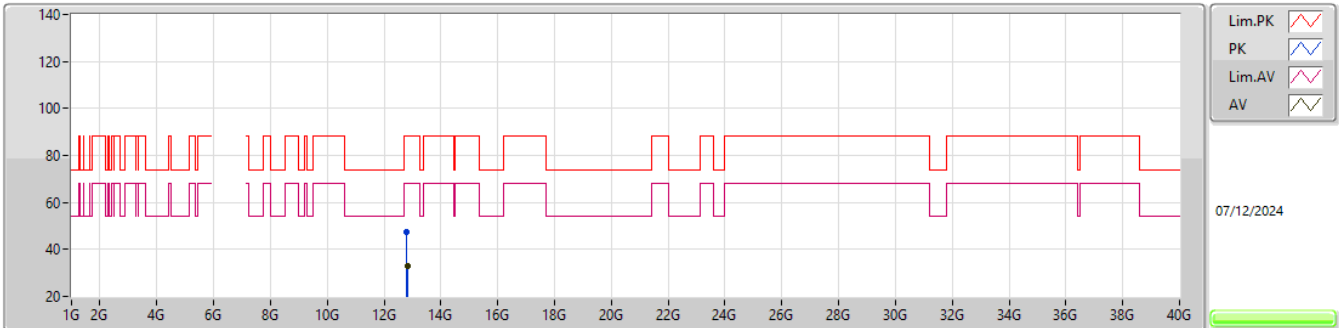EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80639G	47.16	88.20	-41.04	41.58	3	Vertical	19	1.89	-	38.91	11.96	45.29			
RMS	12.81147G	33.08	68.20	-35.12	27.48	3	Vertical	19	1.89	-	38.92	11.96	45.28			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6405MHz_TX

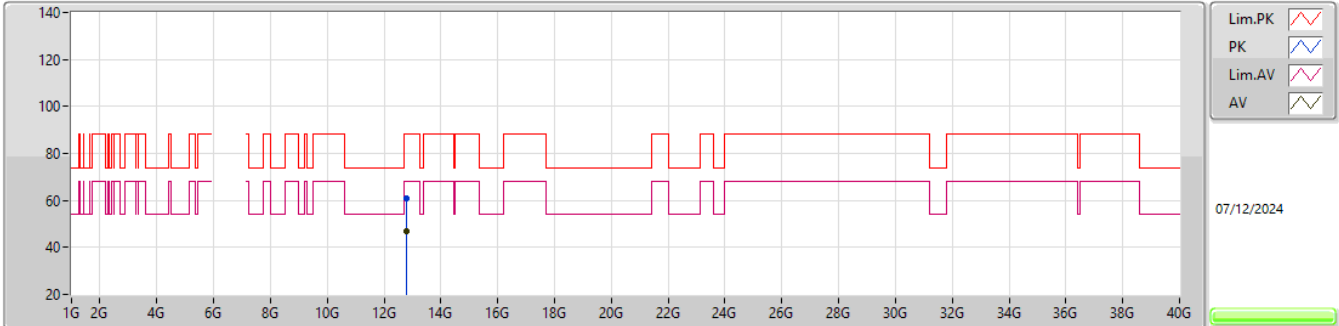EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81044G	60.98	88.20	-27.22	41.29	3	Horizontal	130	1.81	-	38.92	11.96	31.19			
RMS	12.80966G	46.98	68.20	-21.22	27.29	3	Horizontal	130	1.81	-	38.92	11.96	31.19			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

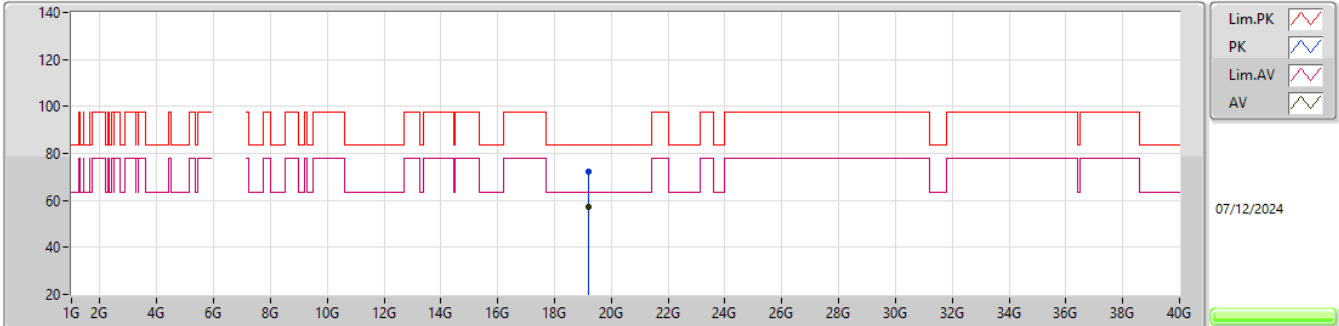


EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.20618G	72.23	83.54	-11.31	67.99	1	Vertical	64	1.69	-	37.82	15.22	48.80			
AV	19.21098G	57.32	63.54	-6.22	53.06	1	Vertical	64	1.69	-	37.84	15.22	48.80			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6405MHz_TX

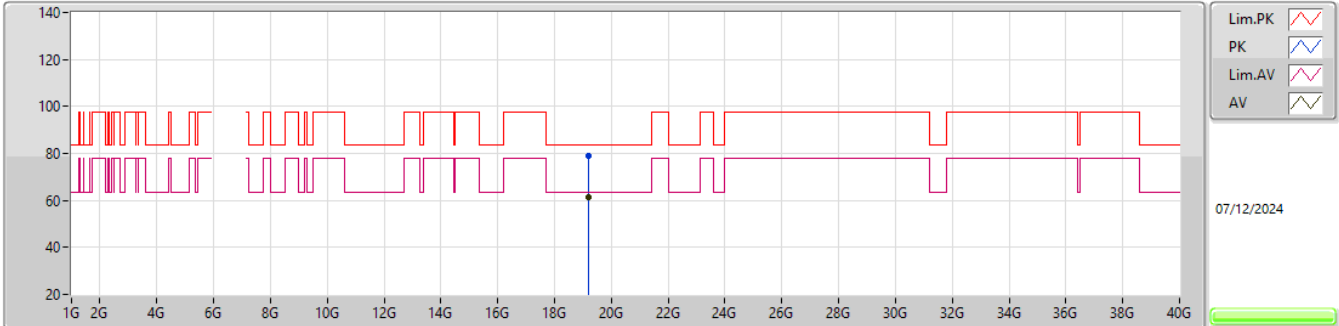EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.206G	78.83	83.54	-4.71	74.59	1	Horizontal	268	1.95	-	37.82	15.22	48.80			
AV	19.21173G	61.28	63.54	-2.26	57.01	1	Horizontal	268	1.95	-	37.85	15.22	48.80			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5985MHz_TX

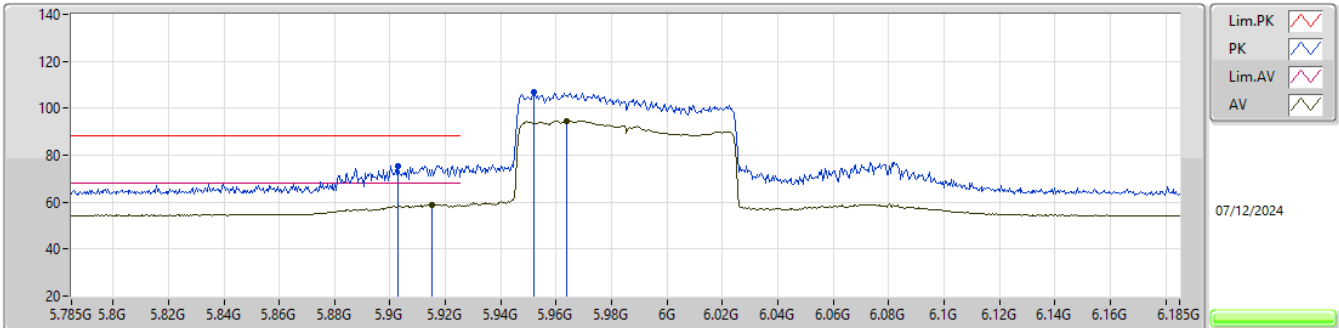EUT_Z_2TX
Setting 18
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.903G	75.54	88.20	-12.66	64.10	3	Vertical	354	2.93	-	34.20	7.87	30.63			
RMS	5.915G	59.05	68.20	-9.15	47.61	3	Vertical	354	2.93	-	34.20	7.87	30.63			
PK	5.9518G	107.10	Inf	-Inf	95.62	3	Vertical	354	2.93	-	34.20	7.90	30.62			
RMS	5.9638G	94.71	Inf	-Inf	83.19	3	Vertical	354	2.93	-	34.23	7.91	30.62			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5985MHz_TX

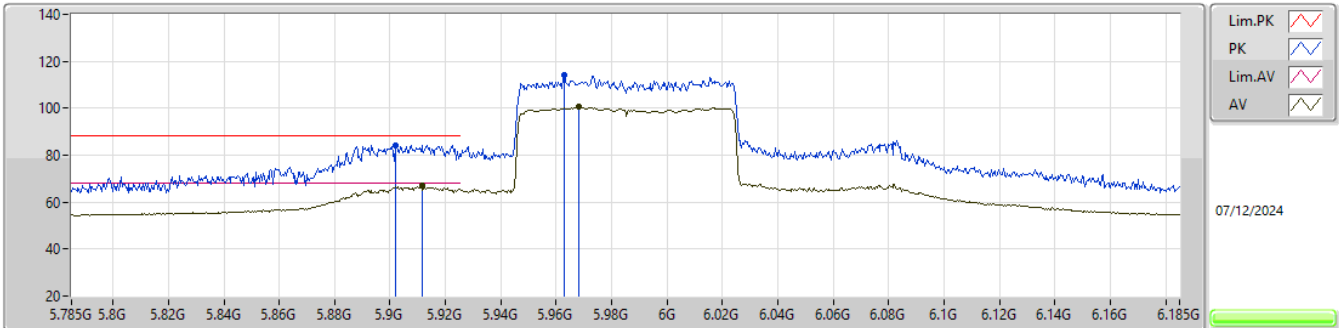


EUT_Z_2TX
Setting 18
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9018G	84.35	88.20	-3.85	72.91	3	Horizontal	89	1.24	-	34.20	7.87	30.63			
RMS	5.9114G	67.15	68.20	-1.05	55.71	3	Horizontal	89	1.24	-	34.20	7.87	30.63			
PK	5.963G	114.16	Inf	-Inf	102.64	3	Horizontal	89	1.24	-	34.23	7.91	30.62			
RMS	5.9682G	100.70	Inf	-Inf	89.17	3	Horizontal	89	1.24	-	34.24	7.91	30.62			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5985MHz_TX

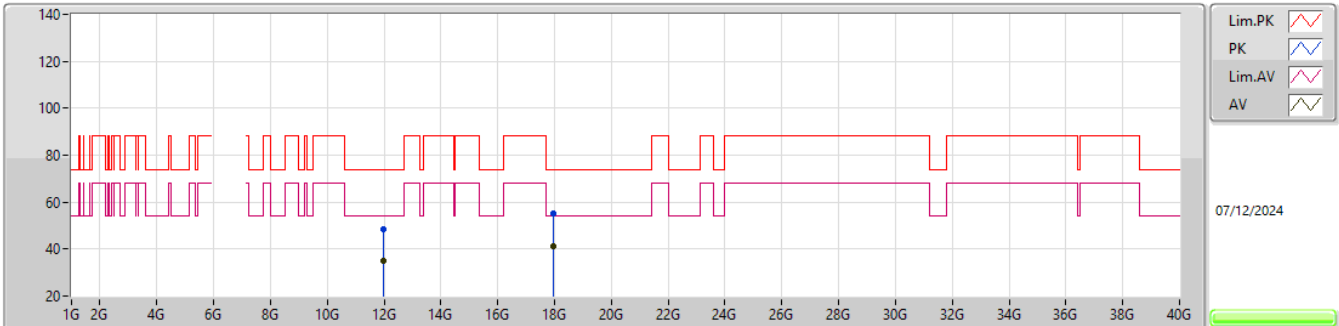EUT_X_2TX
Setting 18
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.97171G	48.36	74.00	-25.64	42.35	3	Vertical	101	1.06	-	39.30	12.06	45.35				
AV	11.9749G	34.79	54.00	-19.21	28.78	3	Vertical	101	1.06	-	39.30	12.06	45.35				
PK	17.95304G	55.01	74.00	-18.99	39.71	3	Vertical	326	1.14	-	46.79	12.80	44.29				
AV	17.95415G	41.21	54.00	-12.79	25.91	3	Vertical	326	1.14	-	46.79	12.80	44.29				

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5985MHz_TX

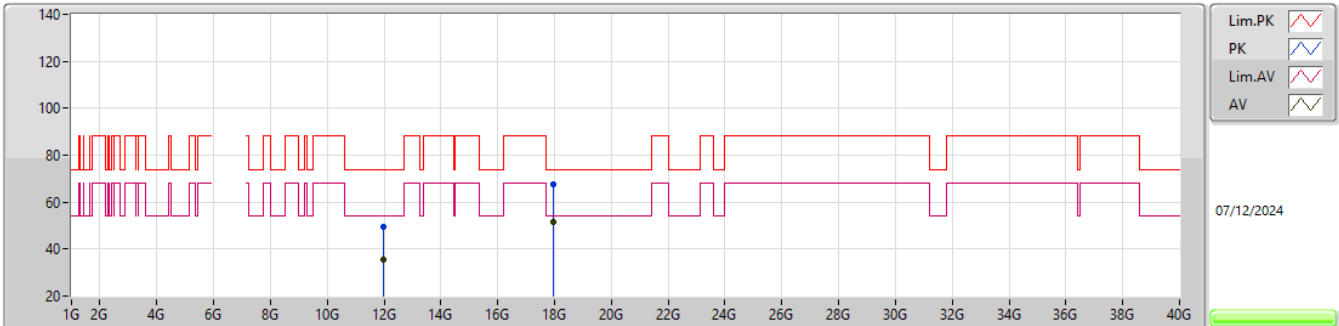EUT_X_2TX
Setting 18
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.97452G	49.29	74.00	-24.71	43.28	3	Horizontal	250	2.24	-	39.30	12.06	45.35			
AV	11.97453G	35.77	54.00	-18.23	29.76	3	Horizontal	250	2.24	-	39.30	12.06	45.35			
PK	17.95268G	67.39	74.00	-6.61	52.09	3	Horizontal	276	2.89	-	46.79	12.80	44.29			
AV	17.95475G	51.73	54.00	-2.27	36.43	3	Horizontal	276	2.89	-	46.79	12.80	44.29			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5985MHz_TX

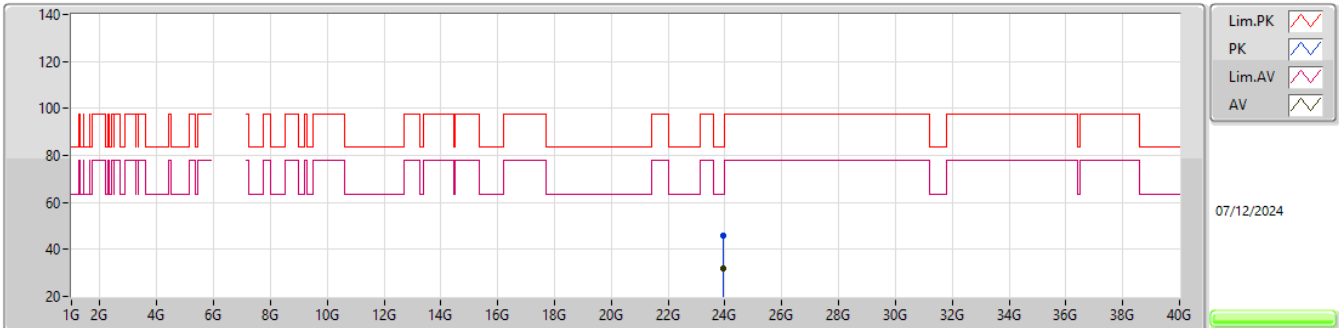EUT_X_2TX
Setting 18
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.94414G	45.68	83.54	-37.86	36.98	1	Vertical	133	1.54	-	39.00	17.32	47.62			
AV	23.94073G	31.90	63.54	-31.64	23.21	1	Vertical	133	1.54	-	39.00	17.31	47.62			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5985MHz_TX

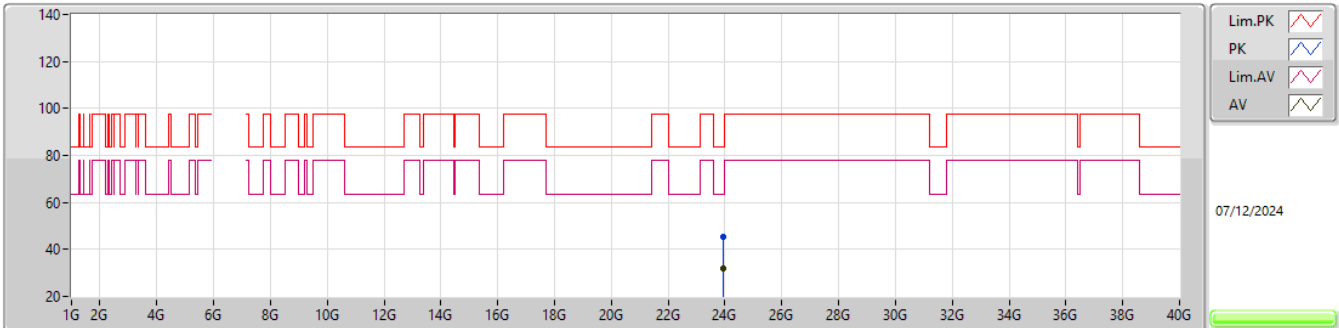EUT_X_2TX
Setting 18
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.9393G	45.59	83.54	-37.95	36.90	1	Horizontal	308	1.47	-	39.00	17.31	47.62			
AV	23.94152G	31.81	63.54	-31.73	23.12	1	Horizontal	308	1.47	-	39.00	17.31	47.62			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6225MHz_TX

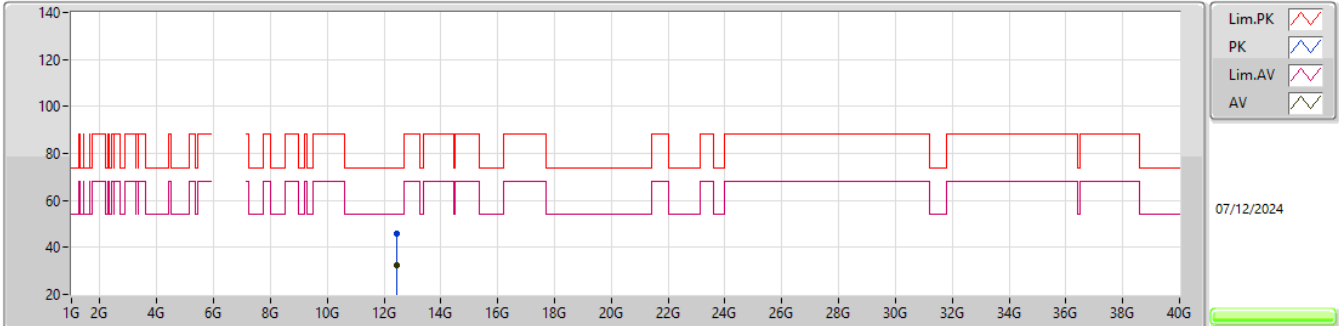EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.45417G	45.99	74.00	-28.01	40.80	3	Vertical	211	2.05	-	38.79	12.01	45.61			
AV	12.44972G	32.29	54.00	-21.71	27.08	3	Vertical	211	2.05	-	38.80	12.01	45.60			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6225MHz_TX

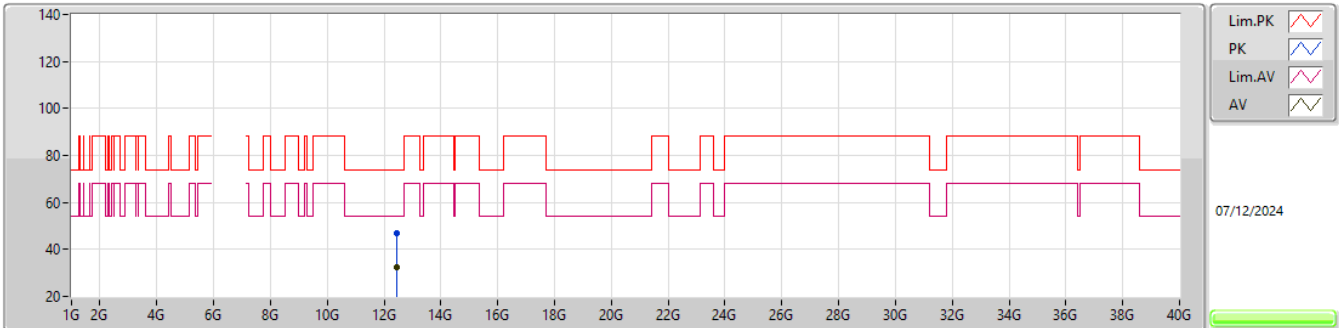EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.45065G	47.09	74.00	-26.91	41.88	3	Horizontal	289	2.20	-	38.80	12.01	45.60			
AV	12.45433G	32.61	54.00	-21.39	27.42	3	Horizontal	289	2.20	-	38.79	12.01	45.61			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6225MHz_TX

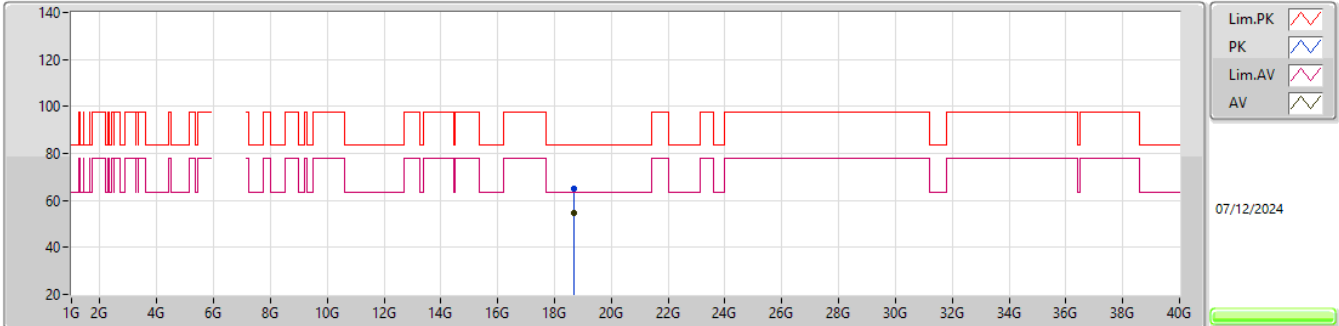EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.67695G	64.88	83.54	-18.66	60.21	1	Vertical	349	2.69	-	37.90	15.25	48.48			
AV	18.66558G	54.81	63.54	-8.73	50.13	1	Vertical	349	2.69	-	37.90	15.25	48.47			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6225MHz_TX

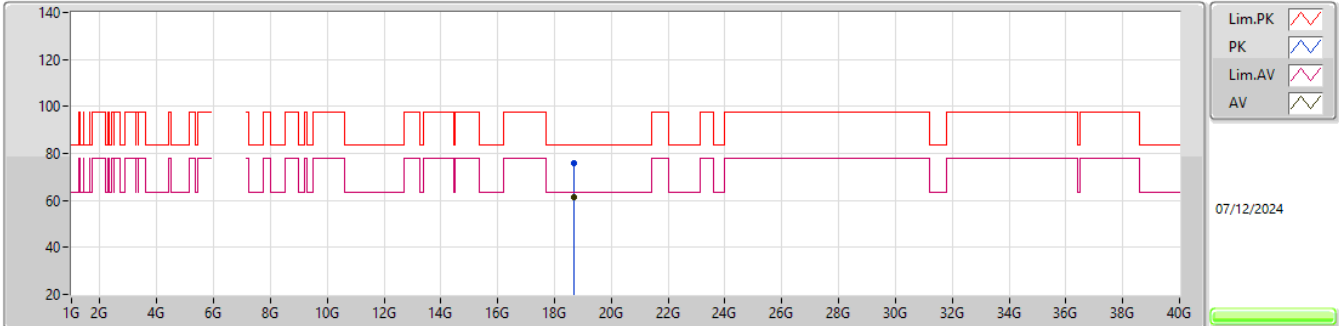EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.67695G	75.88	83.54	-7.66	71.21	1	Horizontal	267	1.82	-	37.90	15.25	48.48			
AV	18.66498G	61.14	63.54	-2.40	56.45	1	Horizontal	267	1.82	-	37.90	15.25	48.46			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

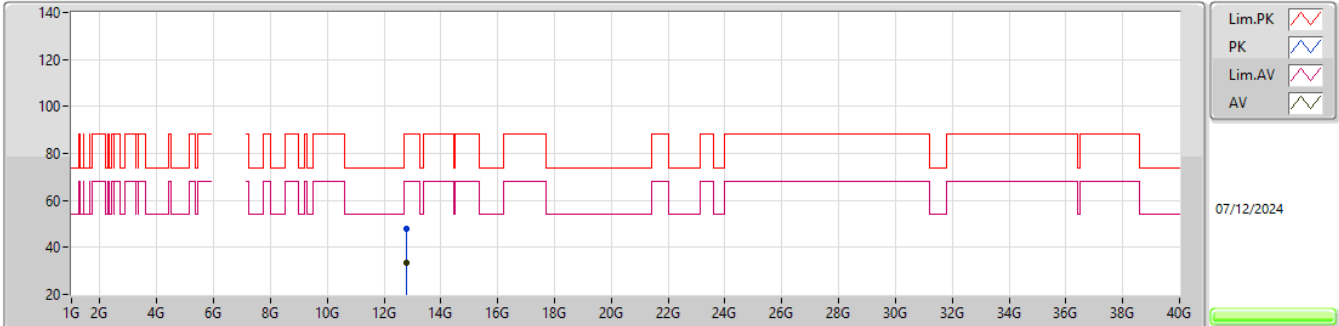


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.77453G	47.71	88.20	-40.49	42.22	3	Vertical	44	2.16	-	38.85	11.96	45.32			
RMS	12.76943G	33.35	68.20	-34.85	27.88	3	Vertical	44	2.16	-	38.84	11.96	45.33			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

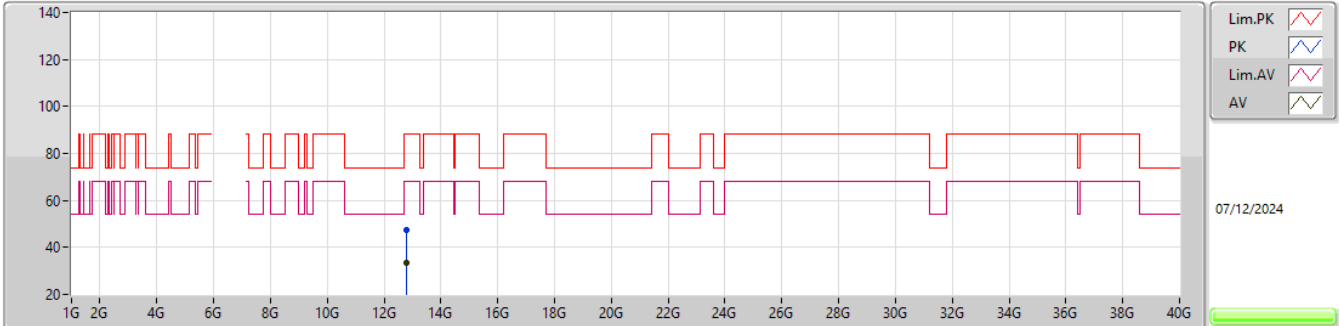


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.77103G	47.48	88.20	-40.72	42.01	3	Horizontal	161	1.26	-	38.84	11.96	45.33			
RMS	12.76886G	33.29	68.20	-34.91	27.82	3	Horizontal	161	1.26	-	38.84	11.96	45.33			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

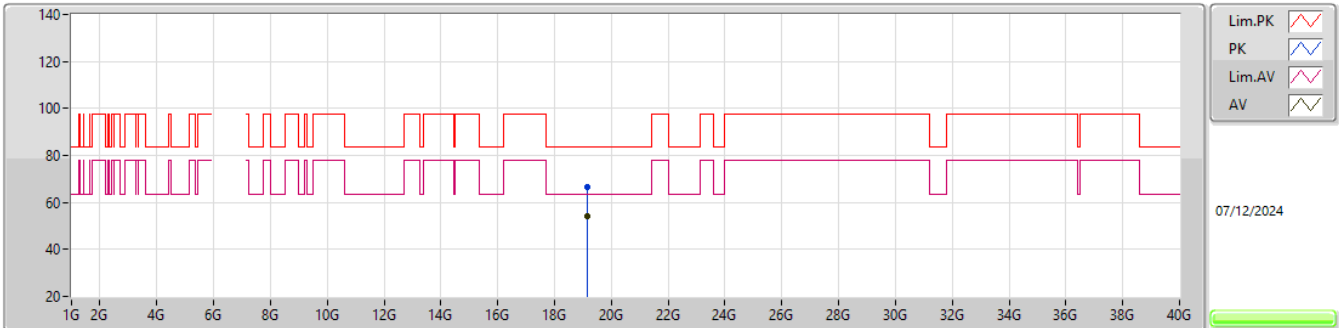

EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.16637G	66.57	83.54	-16.97	62.22	1	Vertical	223	1.08	-	37.93	15.22	48.80			
AV	19.15935G	54.00	63.54	-9.54	49.62	1	Vertical	223	1.08	-	37.96	15.22	48.80			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX




EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.16652G	76.92	83.54	-6.62	72.57	1	Horizontal	268	1.96	-	37.93	15.22	48.80			
AV	19.14441G	61.32	63.54	-2.22	56.90	1	Horizontal	268	1.96	-	38.00	15.22	48.80			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

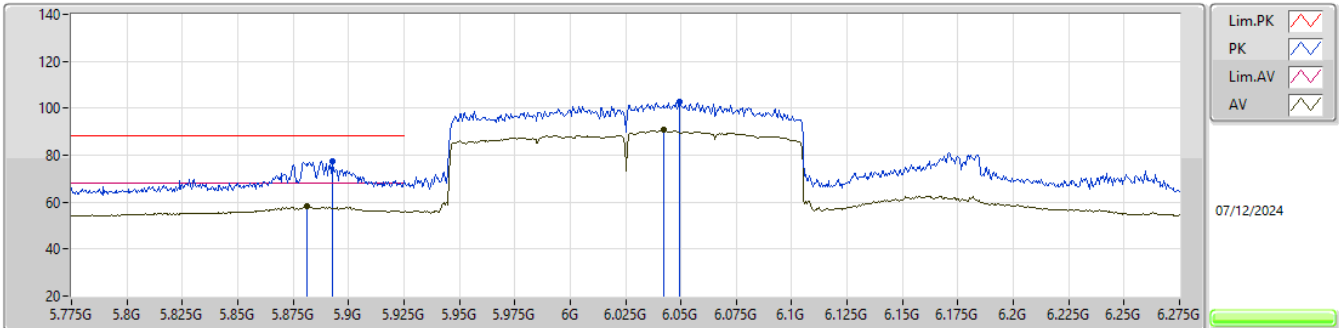


EUT_Z_2TX
Setting 16
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.8925G	77.54	88.20	-10.66	66.15	3	Vertical	184	3.00	-	34.17	7.86	30.64			
RMS	5.8815G	58.36	68.20	-9.84	47.02	3	Vertical	184	3.00	-	34.13	7.85	30.64			
PK	6.0495G	102.77	Inf	-Inf	91.12	3	Vertical	184	3.00	-	34.30	8.01	30.66			
RMS	6.042G	90.91	Inf	-Inf	79.26	3	Vertical	184	3.00	-	34.30	8.00	30.65			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6025MHz_TX

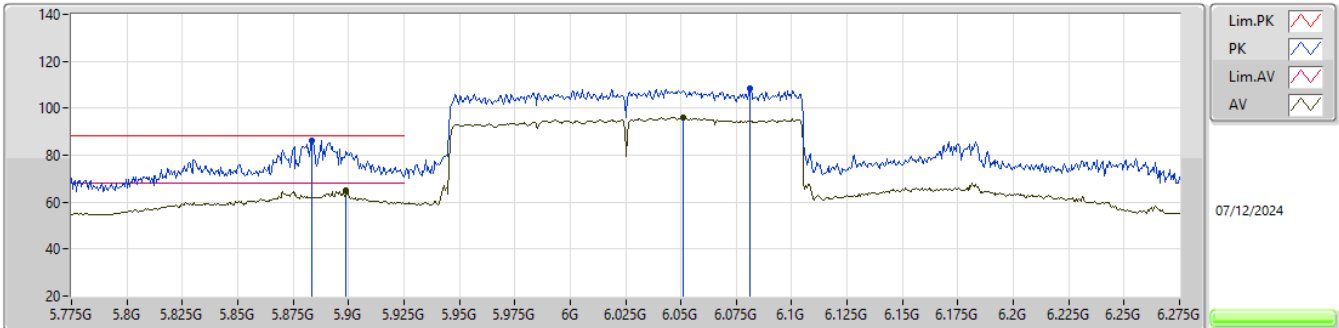


EUT_Z_2TX
Setting 16
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8835G	86.00	88.20	-2.20	74.66	3	Horizontal	88	1.02	-	34.13	7.85	30.64			
RMS	5.899G	64.79	68.20	-3.41	53.36	3	Horizontal	88	1.02	-	34.20	7.86	30.63			
PK	6.081G	108.52	Inf	-Inf	96.74	3	Horizontal	88	1.02	-	34.42	8.06	30.70			
RMS	6.051G	96.18	Inf	-Inf	84.53	3	Horizontal	88	1.02	-	34.30	8.01	30.66			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6025MHz_TX

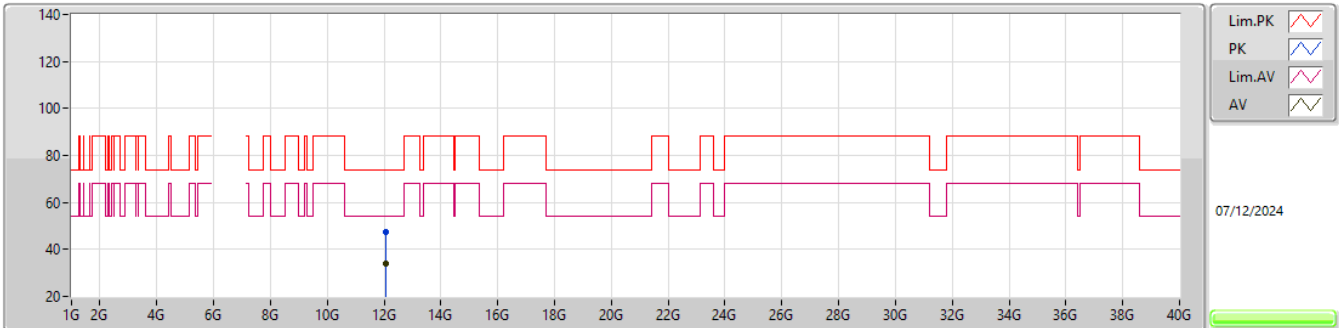EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.05256G	47.31	74.00	-26.69	41.54	3	Vertical	179	2.61	-	39.09	12.07	45.39			
AV	12.05489G	33.76	54.00	-20.24	27.99	3	Vertical	179	2.61	-	39.09	12.07	45.39			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6025MHz_TX

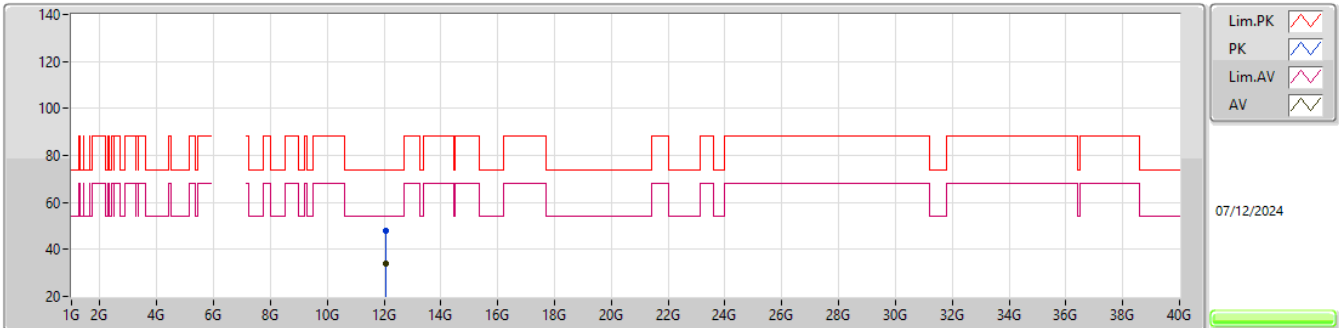EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.04513G	47.89	74.00	-26.11	42.08	3	Horizontal	327	2.35	-	39.12	12.07	45.38			
AV	12.0548G	33.87	54.00	-20.13	28.10	3	Horizontal	327	2.35	-	39.09	12.07	45.39			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6025MHz_TX

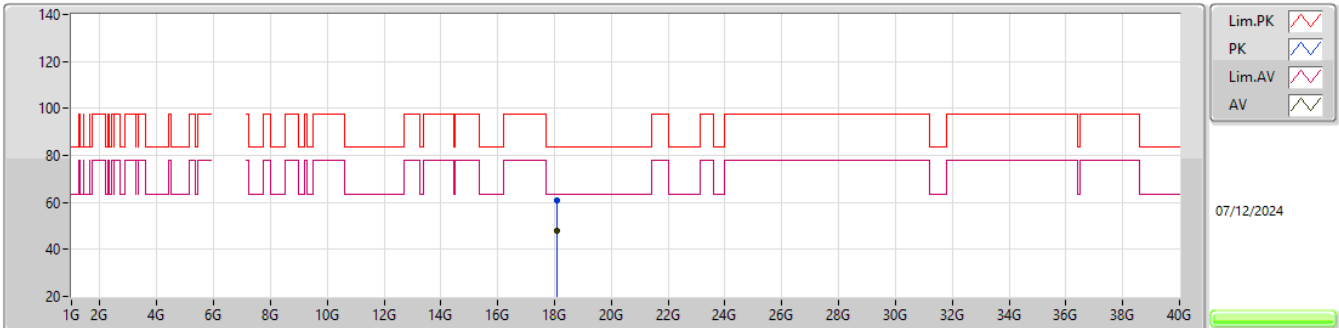EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.08823G	60.89	83.54	-22.65	56.20	1	Vertical	156	1.75	-	37.63	15.28	48.22			
AV	18.06783G	47.81	63.54	-15.73	43.22	1	Vertical	156	1.75	-	37.51	15.29	48.21			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6025MHz_TX

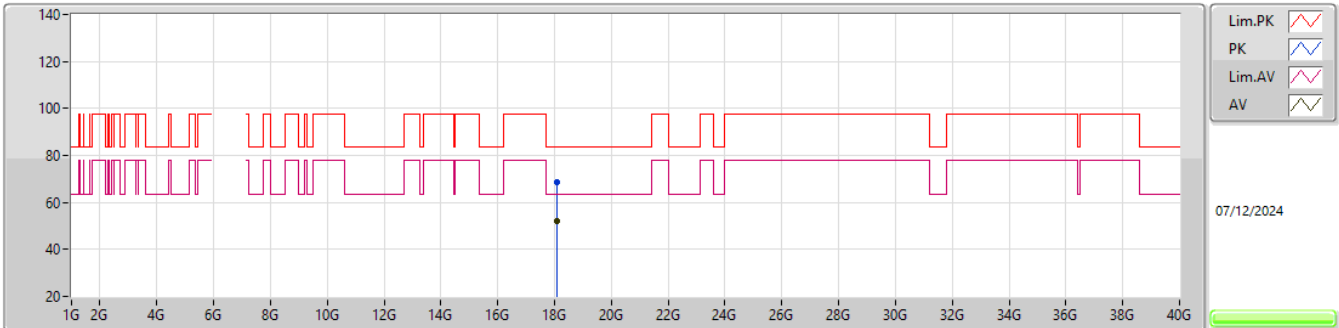EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.08829G	68.65	83.54	-14.89	63.96	1	Horizontal	298	1.60	-	37.63	15.28	48.22			
AV	18.07959G	51.90	63.54	-11.64	47.25	1	Horizontal	298	1.60	-	37.58	15.29	48.22			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6185MHz_TX

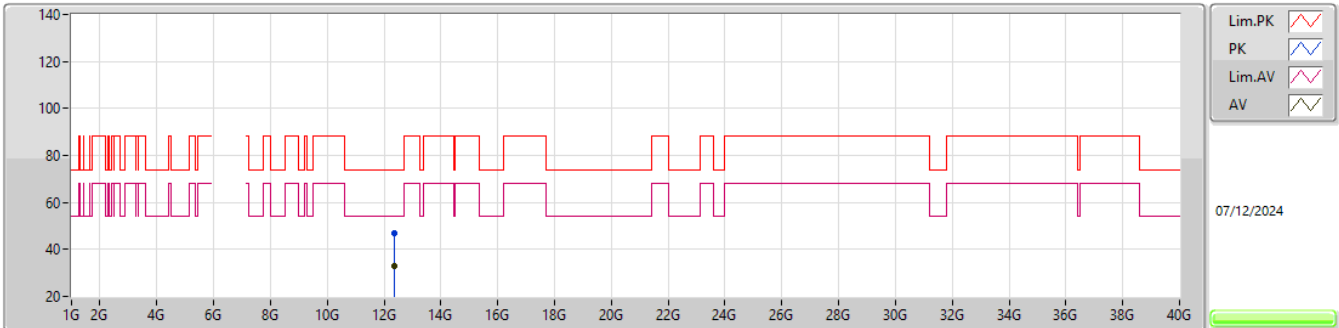EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.37039G	46.89	74.00	-27.11	41.63	3	Vertical	56	2.60	-	38.80	12.02	45.56			
AV	12.36975G	32.80	54.00	-21.20	27.54	3	Vertical	56	2.60	-	38.80	12.02	45.56			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6185MHz_TX

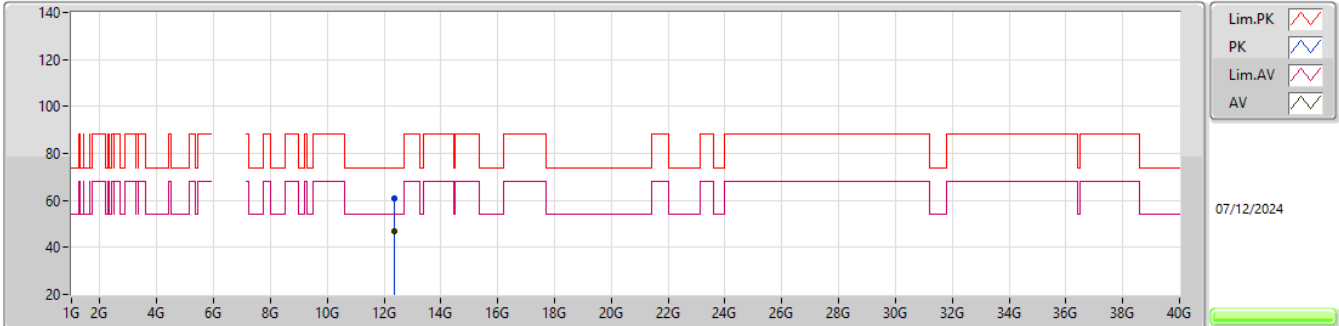EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.36635G	60.83	74.00	-13.17	41.11	3	Horizontal	84	1.00	-	38.80	12.03	31.11			
AV	12.36977G	46.88	54.00	-7.12	27.17	3	Horizontal	84	1.00	-	38.80	12.02	31.11			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6185MHz_TX

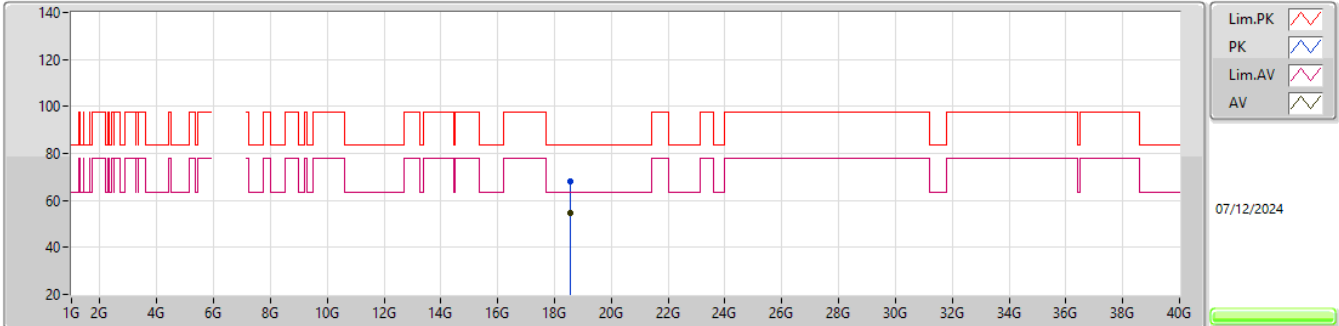EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.56391G	68.08	83.54	-15.46	63.38	1	Vertical	144	1.18	-	37.80	15.26	48.36			
AV	18.54G	54.87	63.54	-8.67	50.15	1	Vertical	144	1.18	-	37.80	15.26	48.34			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6185MHz_TX

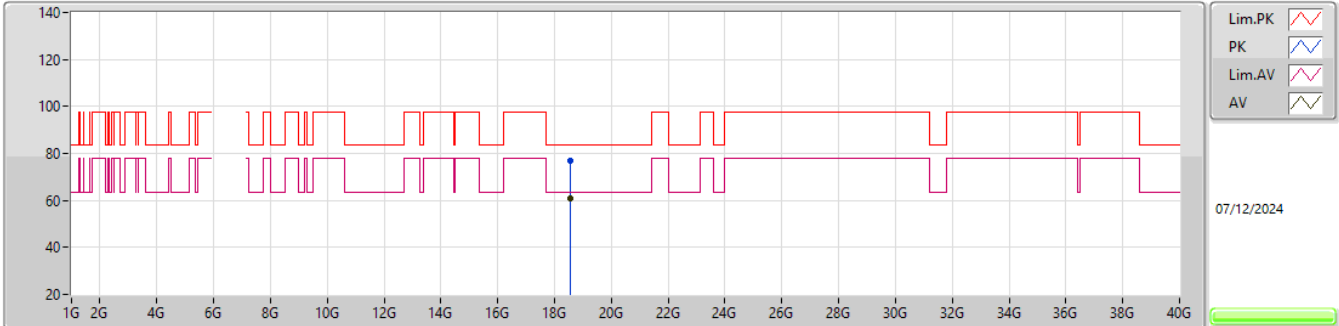EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.56352G	76.96	83.54	-6.58	72.26	1	Horizontal	266	1.61	-	37.80	15.26	48.36			
AV	18.55605G	60.92	63.54	-2.62	56.22	1	Horizontal	266	1.61	-	37.80	15.26	48.36			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

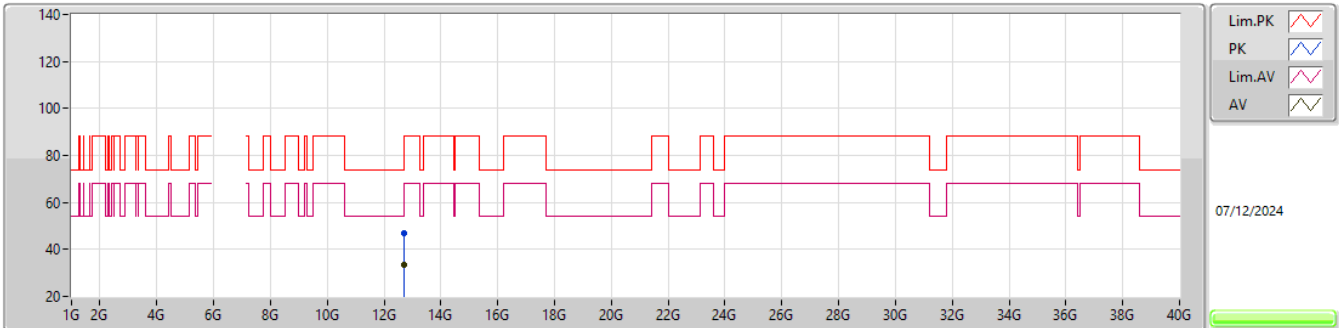EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.6948G	47.02	74.00	-26.98	41.75	3	Vertical	38	1.65	-	38.70	11.98	45.41			
AV	12.68848G	33.33	54.00	-20.67	28.07	3	Vertical	38	1.65	-	38.70	11.98	45.42			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

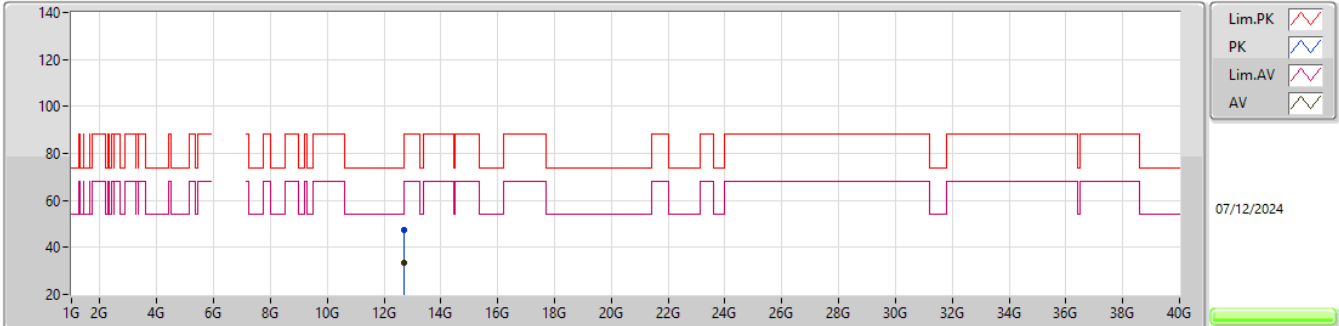EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.68605G	47.46	74.00	-26.54	42.20	3	Horizontal	286	1.70	-	38.70	11.98	45.42			
AV	12.68956G	33.46	54.00	-20.54	28.20	3	Horizontal	286	1.70	-	38.70	11.98	45.42			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

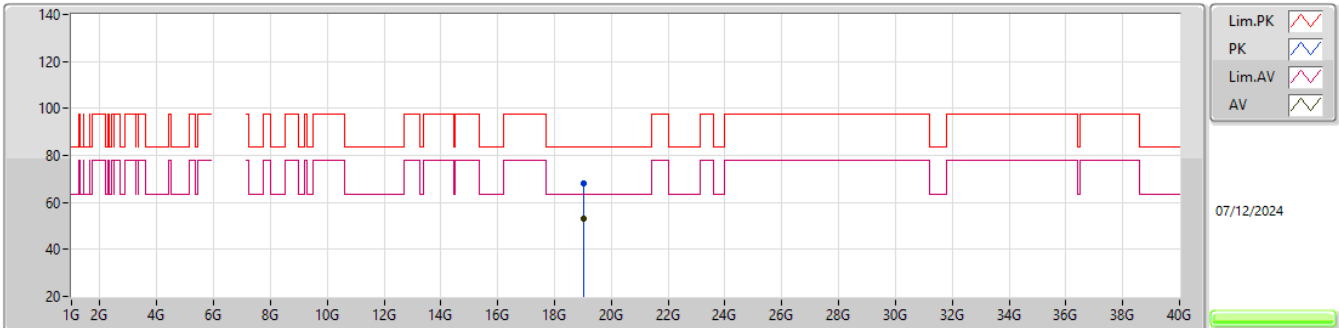EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03479G	68.30	83.54	-15.24	63.94	1	Vertical	234	1.34	-	37.93	15.23	48.80			
AV	19.04679G	53.19	63.54	-10.35	48.85	1	Vertical	234	1.34	-	37.91	15.23	48.80			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

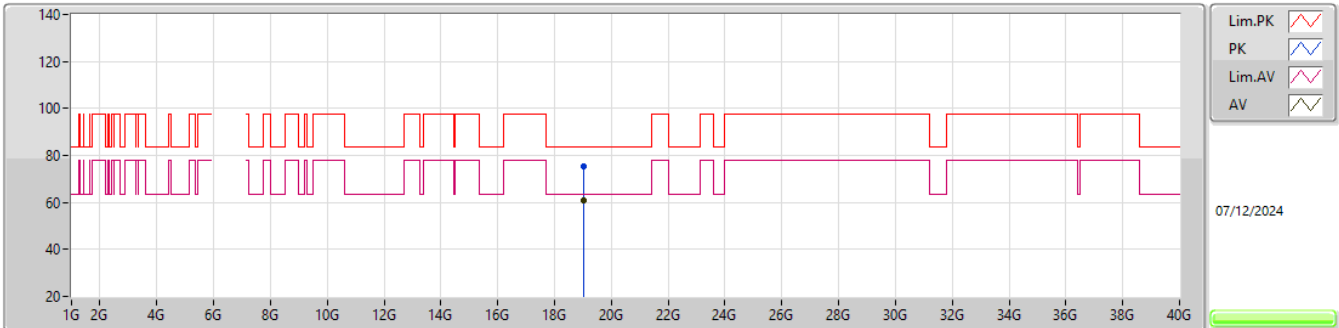EUT_X_2TX
Setting 19
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03149G	75.43	83.54	-8.11	71.06	1	Horizontal	298	1.60	-	37.94	15.23	48.80			
AV	19.04223G	61.12	63.54	-2.42	56.77	1	Horizontal	298	1.60	-	37.92	15.23	48.80			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6435MHz_TX

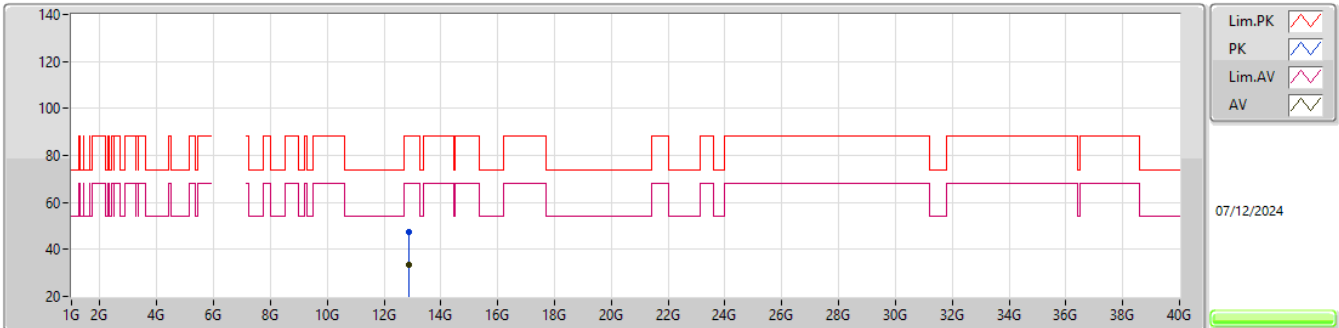


EUT_X_2TX
Setting 20.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.8802G	47.61	88.20	-40.59	41.80	3	Vertical	138	2.56	-	39.06	11.95	45.20			
RMS	12.87264G	33.59	68.20	-34.61	27.80	3	Vertical	138	2.56	-	39.05	11.95	45.21			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6435MHz_TX

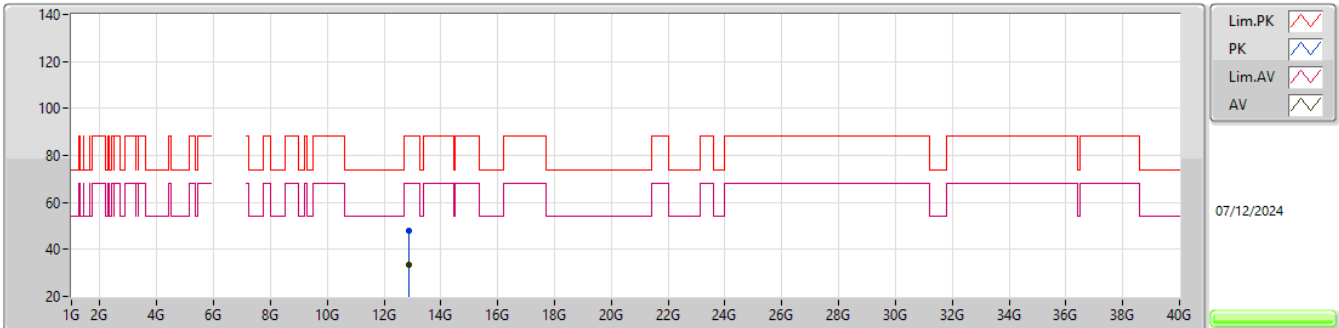


EUT_X_2TX
Setting 20.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.85671G	47.86	88.20	-40.34	42.13	3	Horizontal	287	1.40	-	39.01	11.95	45.23			
RMS	12.8553G	33.62	68.20	-34.58	27.89	3	Horizontal	287	1.40	-	39.01	11.95	45.23			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6435MHz_TX

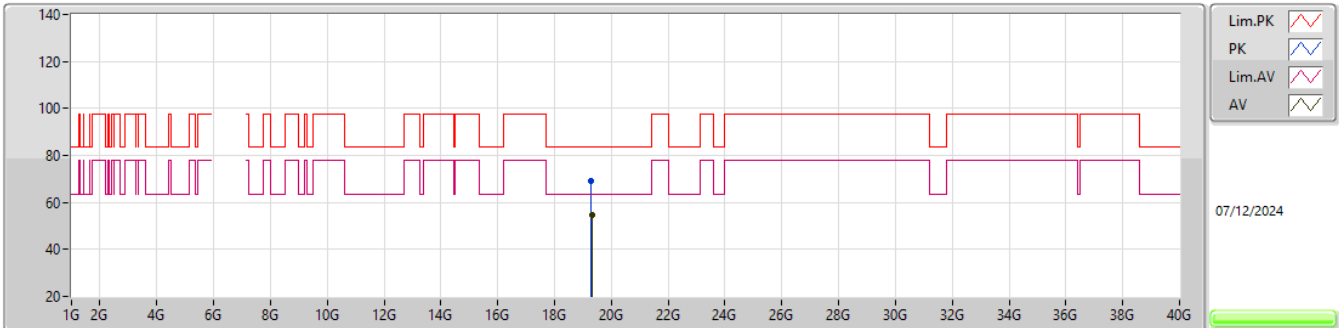


EUT_X_2TX
Setting 20.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.29849G	69.16	83.54	-14.38	64.94	1	Vertical	61	1.72	-	37.81	15.21	48.80			
AV	19.30842G	54.73	63.54	-8.81	50.52	1	Vertical	61	1.72	-	37.80	15.21	48.80			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6435MHz_TX

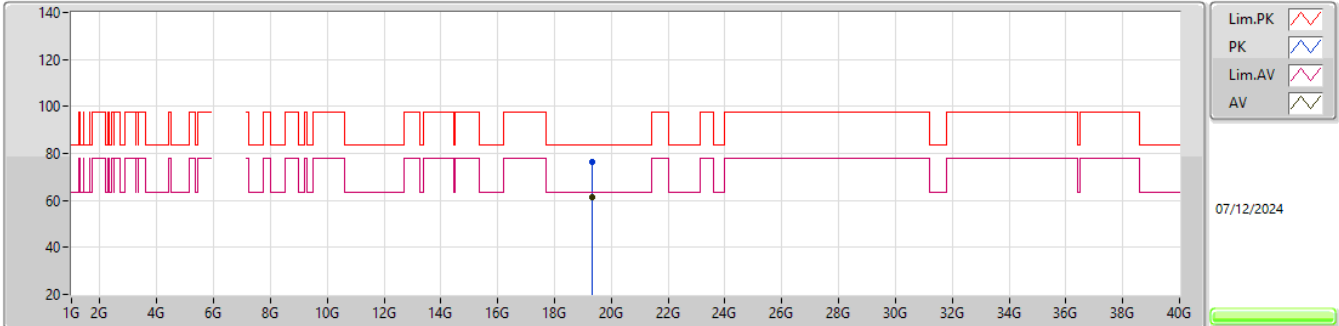


EUT_X_2TX
Setting 20.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.30677G	76.40	83.54	-7.14	72.19	1	Horizontal	265	1.95	-	37.80	15.21	48.80			
AV	19.30902G	61.38	63.54	-2.16	57.17	1	Horizontal	265	1.95	-	37.80	15.21	48.80			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6475MHz_TX

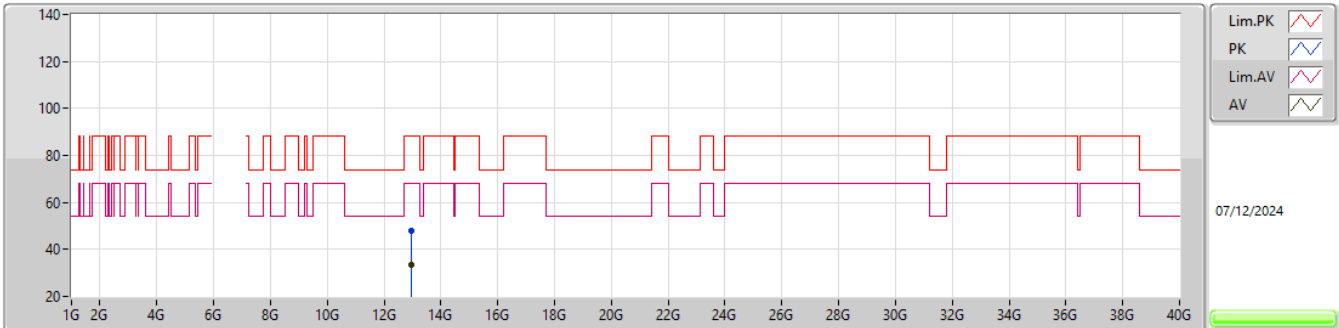


EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96065G	47.72	88.20	-40.48	41.57	3	Vertical	310	2.95	-	39.32	11.94	45.11			
RMS	12.95828G	33.29	68.20	-34.91	27.15	3	Vertical	310	2.95	-	39.32	11.94	45.12			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX


6475MHz_TX

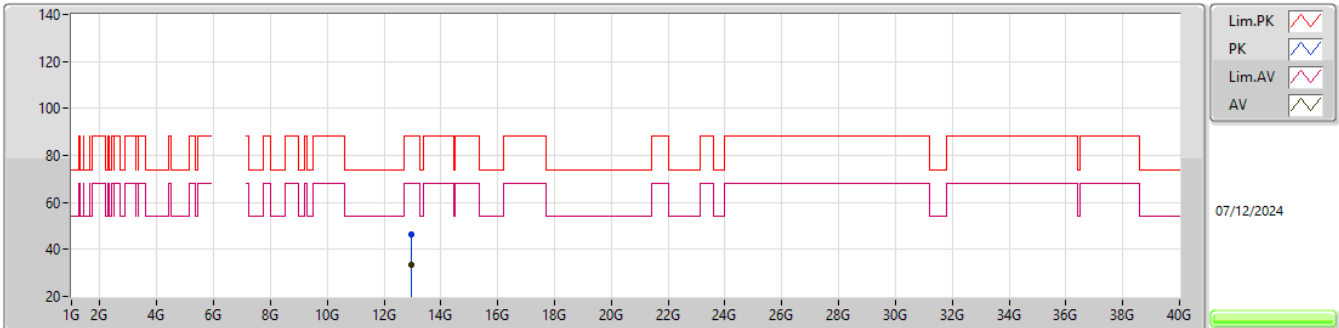EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9578G	46.50	88.20	-41.70	40.36	3	Horizontal	278	1.63	-	39.32	11.94	45.12			
RMS	12.96497G	33.35	68.20	-34.85	27.19	3	Horizontal	278	1.63	-	39.33	11.94	45.11			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX


6475MHz_TX

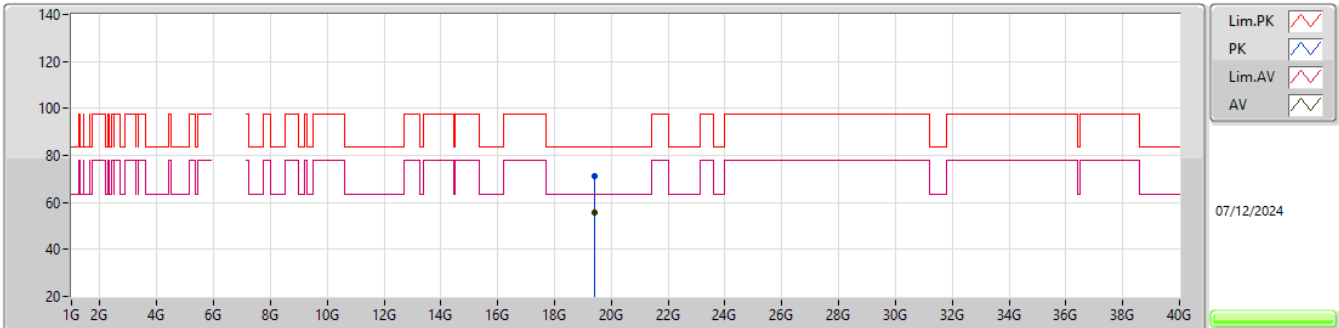EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42515G	70.96	83.54	-12.58	66.76	1	Vertical	65	1.63	-	37.80	15.20	48.80			
AV	19.42587G	55.86	63.54	-7.68	51.66	1	Vertical	65	1.63	-	37.80	15.20	48.80			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX


6475MHz_TX

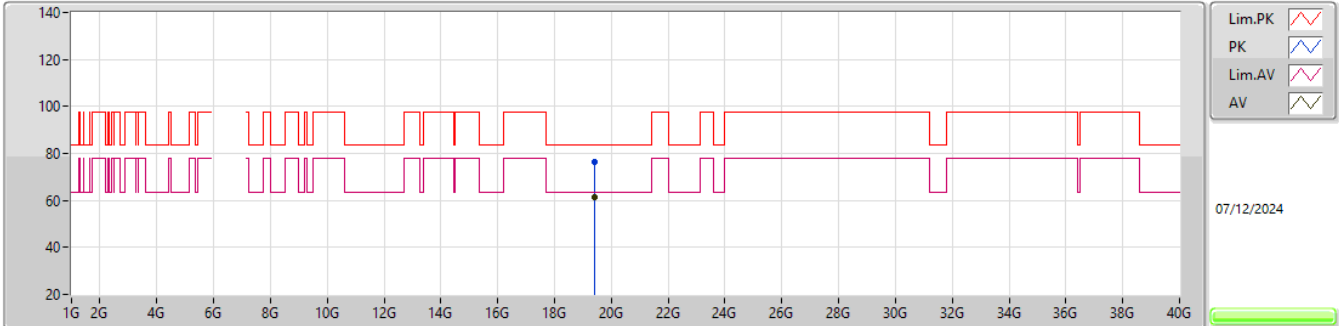EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.42791G	76.20	83.54	-7.34	72.01	1	Horizontal	266	1.80	-	37.79	15.20	48.80			
AV	19.42599G	61.19	63.54	-2.35	56.99	1	Horizontal	266	1.80	-	37.80	15.20	48.80			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX


6515MHz_TX

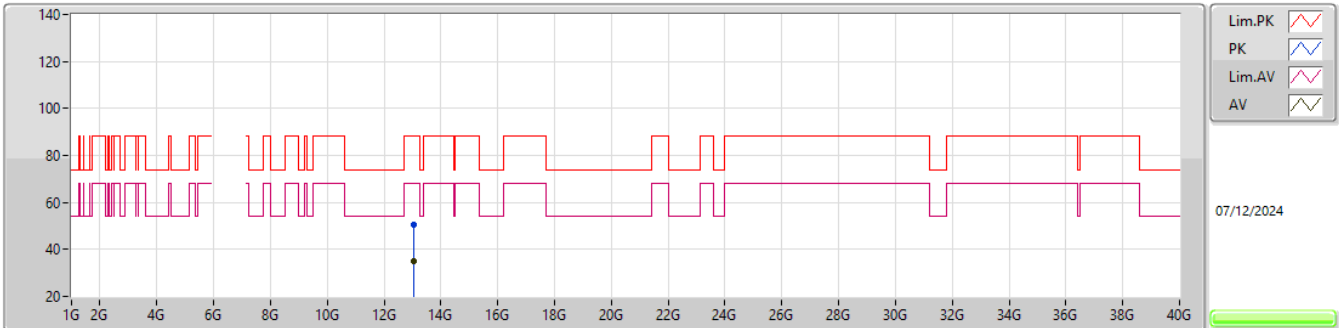EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.03219G	50.37	88.20	-37.83	44.08	3	Vertical	357	2.76	-	39.40	11.93	45.04			
RMS	13.03246G	35.19	68.20	-33.01	28.90	3	Vertical	357	2.76	-	39.40	11.93	45.04			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

6515MHz_TX

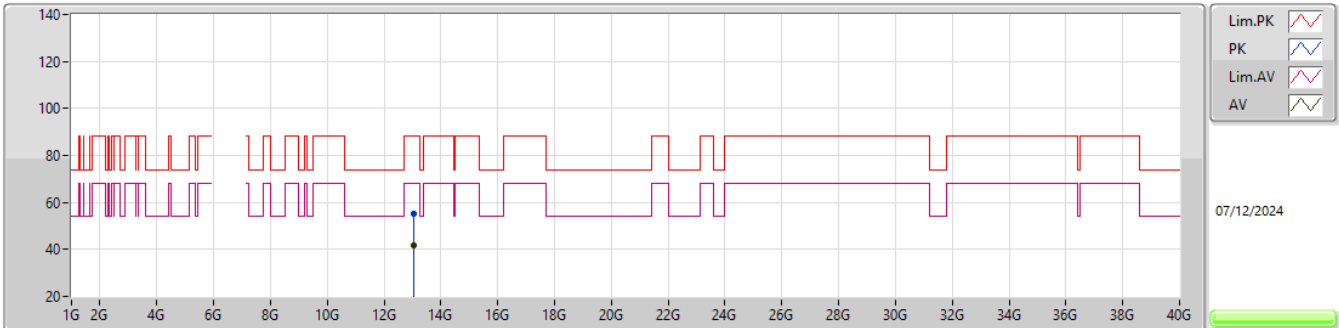


EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.03303G	55.21	88.20	-32.99	48.92	3	Horizontal	329	1.79	-	39.40	11.93	45.04			
RMS	13.03231G	41.95	68.20	-26.25	35.66	3	Horizontal	329	1.79	-	39.40	11.93	45.04			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX


6515MHz_TX

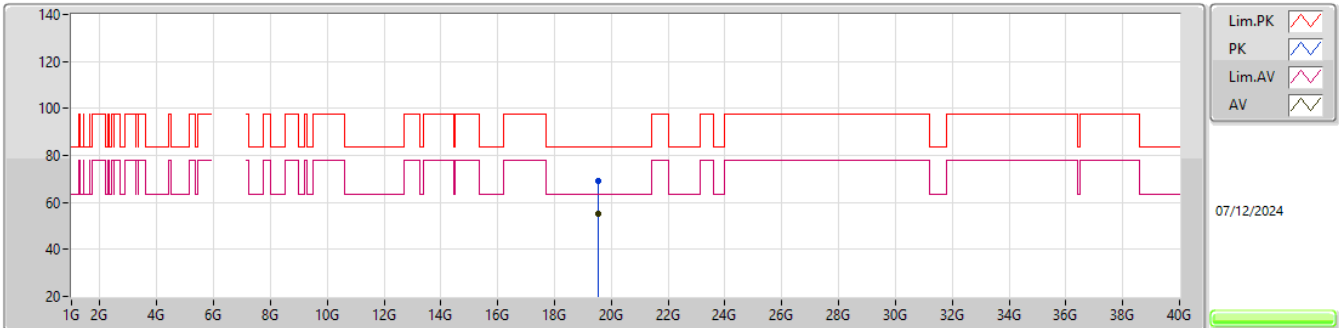EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.5495G	69.04	83.54	-14.50	64.94	1	Vertical	63	1.62	-	37.70	15.20	48.80			
AV	19.54668G	55.00	63.54	-8.54	50.89	1	Vertical	63	1.62	-	37.71	15.20	48.80			

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX


6515MHz_TX

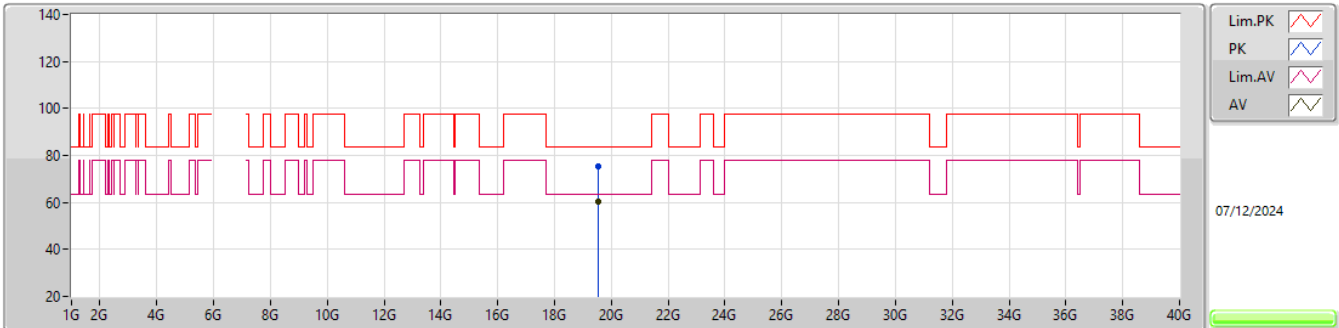EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54905G	75.36	83.54	-8.18	71.26	1	Horizontal	260	1.93	-	37.70	15.20	48.80			
AV	19.5462G	60.60	63.54	-2.94	56.49	1	Horizontal	260	1.93	-	37.71	15.20	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6435MHz_TX

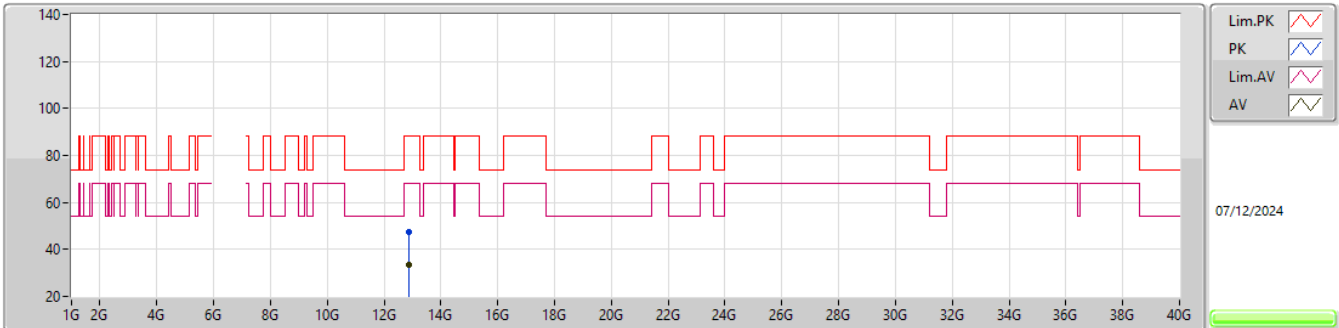


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8635G	47.49	88.20	-40.71	41.73	3	Vertical	299	1.78	-	39.03	11.95	45.22			
RMS	12.86474G	33.27	68.20	-34.93	27.51	3	Vertical	299	1.78	-	39.03	11.95	45.22			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6435MHz_TX

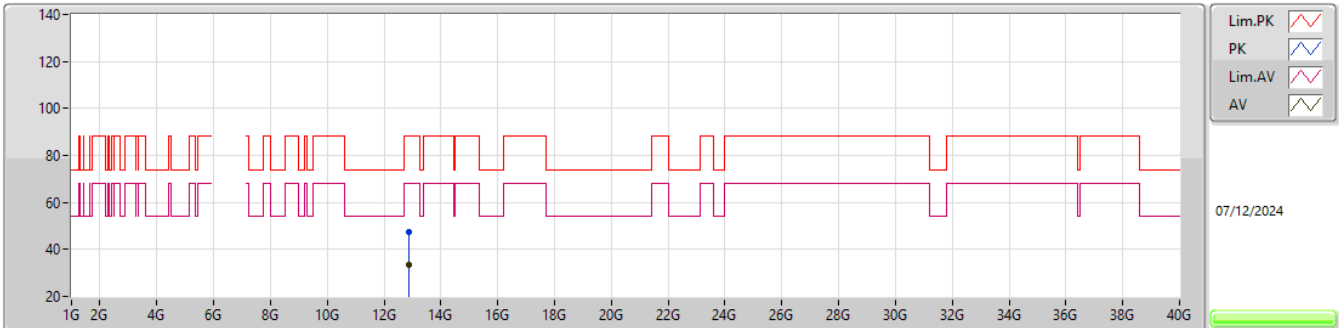


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.86154G	47.53	88.20	-40.67	41.79	3	Horizontal	357	2.96	-	39.02	11.95	45.23			
RMS	12.86472G	33.23	68.20	-34.97	27.47	3	Horizontal	357	2.96	-	39.03	11.95	45.22			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6435MHz_TX

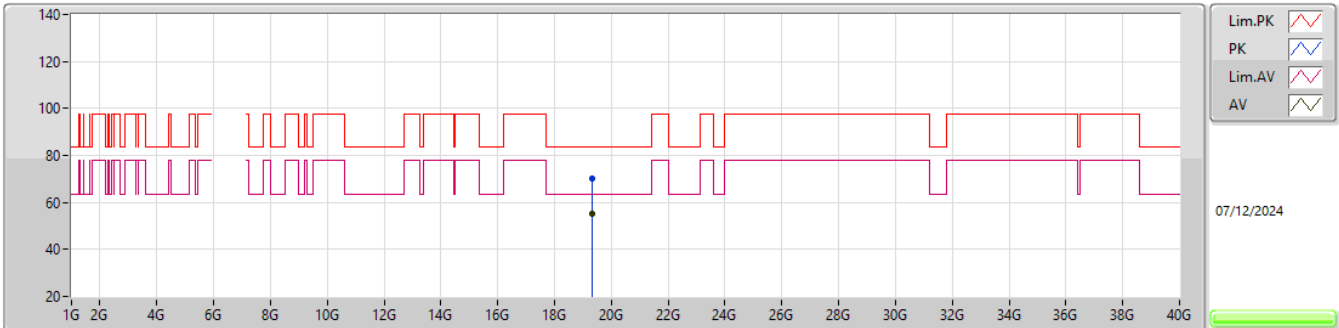


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.31031G	70.29	83.54	-13.25	66.08	1	Vertical	67	1.80	-	37.80	15.21	48.80			
AV	19.30962G	55.33	63.54	-8.21	51.12	1	Vertical	67	1.80	-	37.80	15.21	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6435MHz_TX

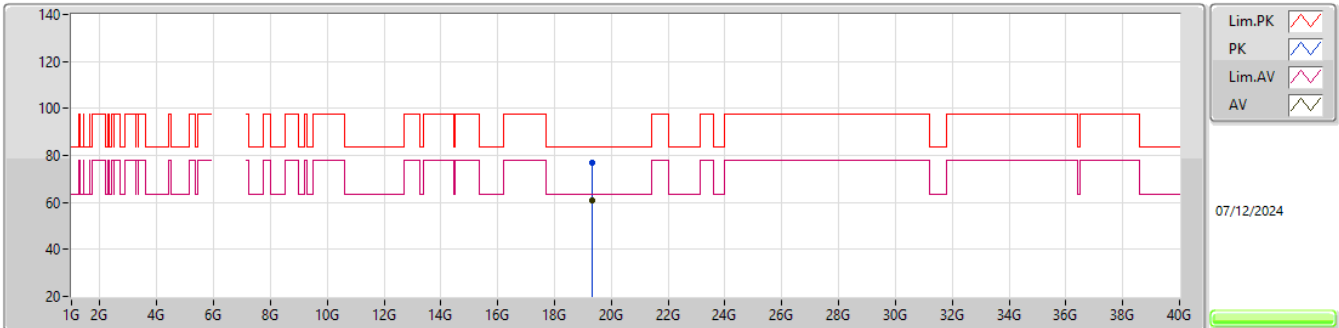


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.31013G	76.79	83.54	-6.75	72.58	1	Horizontal	264	1.95	-	37.80	15.21	48.80			
AV	19.31016G	61.07	63.54	-2.47	56.86	1	Horizontal	264	1.95	-	37.80	15.21	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6475MHz_TX

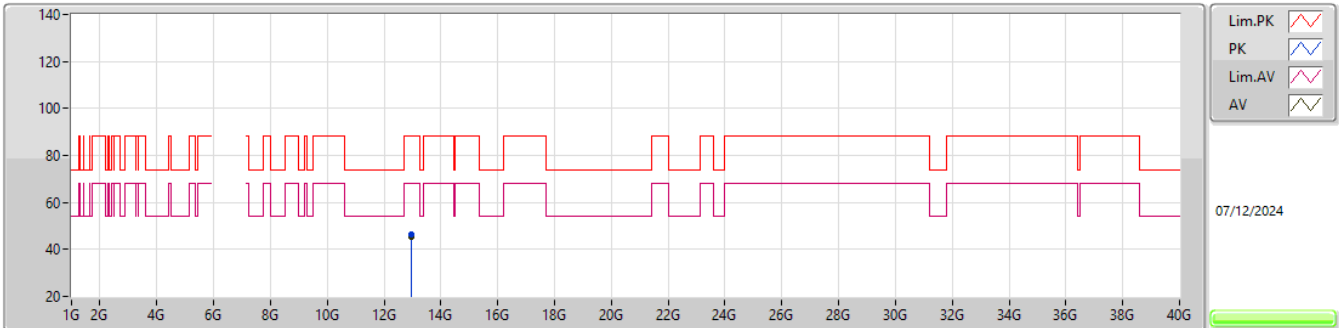


EUT_X_2TX
Setting 17
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.95578G	46.45	88.20	-41.75	40.32	3	Vertical	240	1.99	-	39.31	11.94	45.12			
RMS	12.95614G	45.24	68.20	-22.96	39.11	3	Vertical	240	1.99	-	39.31	11.94	45.12			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6475MHz_TX

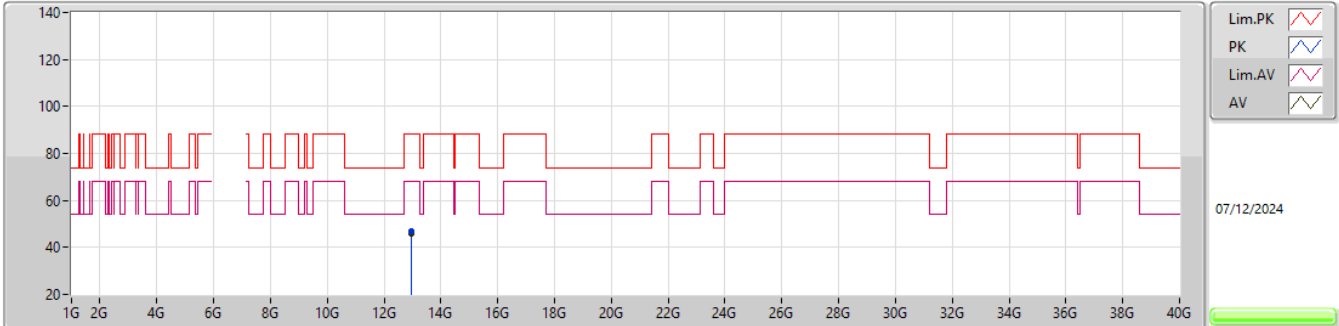EUT_X_2TX
Setting 17
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9406G	46.96	88.20	-41.24	40.90	3	Horizontal	235	1.94	-	39.26	11.94	45.14			
RMS	12.95544G	46.07	68.20	-22.13	39.94	3	Horizontal	235	1.94	-	39.31	11.94	45.12			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6475MHz_TX

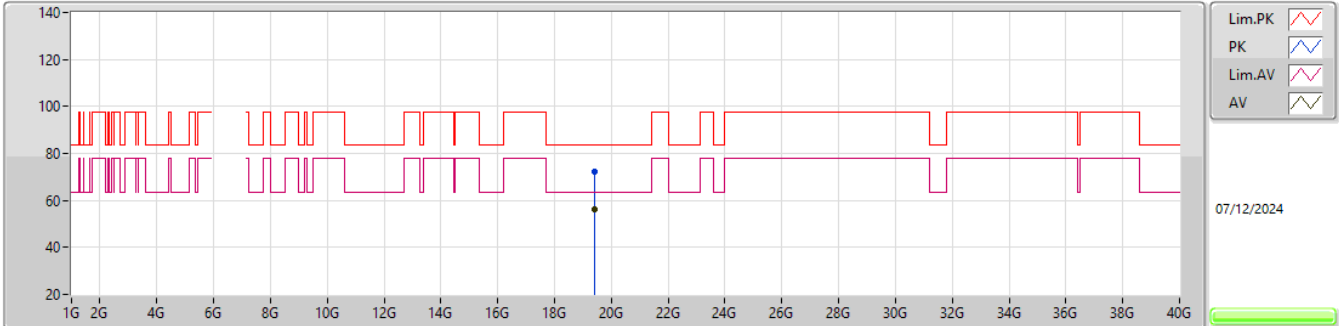EUT_X_2TX
Setting 17
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42737G	72.10	83.54	-11.44	67.91	1	Vertical	65	1.63	-	37.79	15.20	48.80			
AV	19.42491G	55.95	63.54	-7.59	51.75	1	Vertical	65	1.63	-	37.80	15.20	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6475MHz_TX

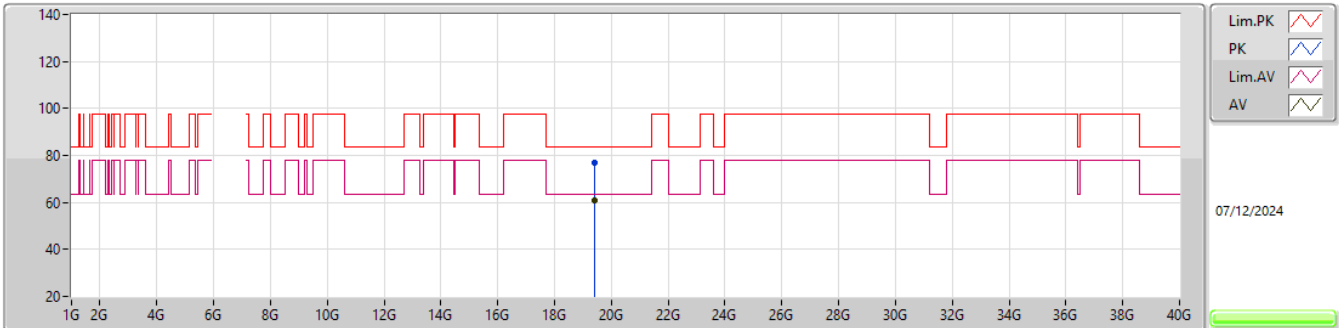EUT_X_2TX
Setting 17
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.42719G	77.03	83.54	-6.51	72.84	1	Horizontal	265	1.95	-	37.79	15.20	48.80			
AV	19.425G	61.04	63.54	-2.50	56.84	1	Horizontal	265	1.95	-	37.80	15.20	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6515MHz_TX

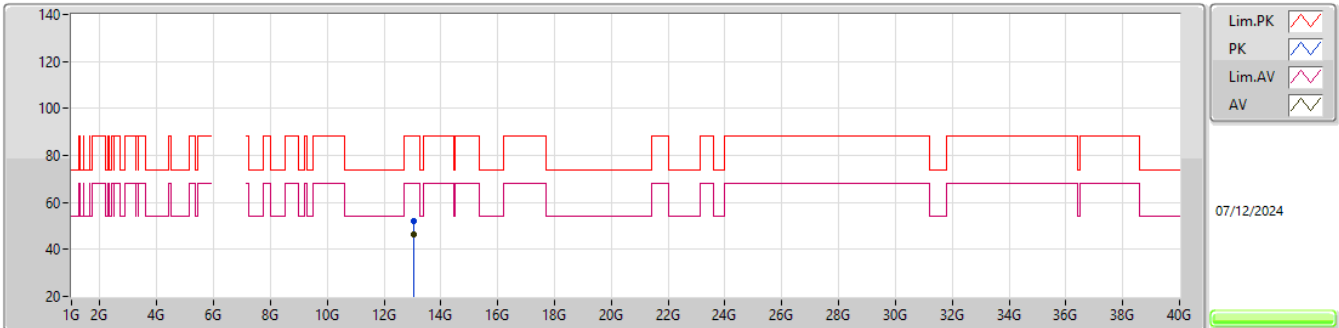


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.03728G	52.18	88.20	-36.02	45.90	3	Vertical	14	1.64	-	39.40	11.92	45.04			
RMS	13.03936G	46.20	68.20	-22.00	39.92	3	Vertical	14	1.64	-	39.40	11.92	45.04			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6515MHz_TX

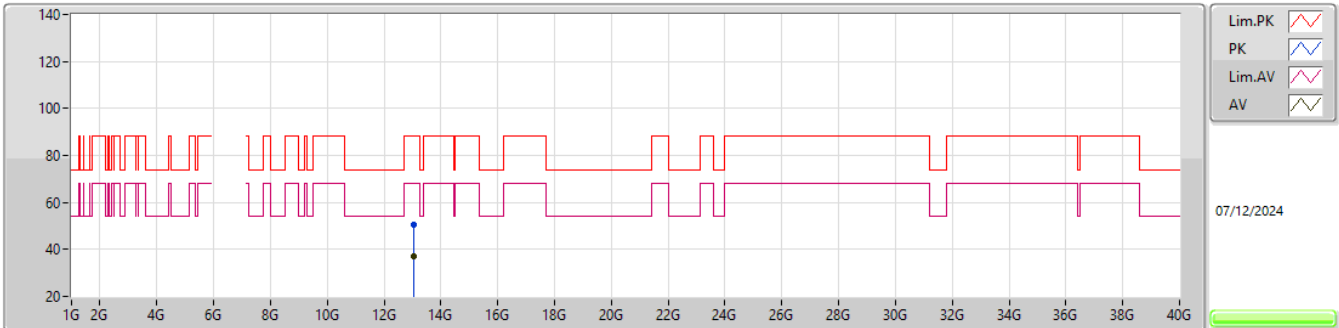


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.02955G	50.37	88.20	-37.83	44.09	3	Horizontal	265	2.31	-	39.40	11.93	45.05			
RMS	13.02974G	36.97	68.20	-31.23	30.69	3	Horizontal	265	2.31	-	39.40	11.93	45.05			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6515MHz_TX

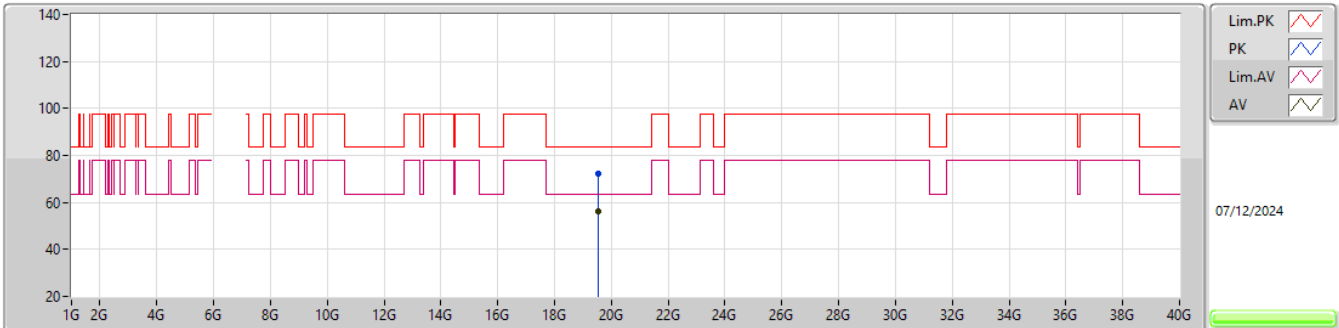


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.54686G	72.20	83.54	-11.34	68.09	1	Vertical	65	1.64	-	37.71	15.20	48.80			
AV	19.54419G	56.09	63.54	-7.45	51.98	1	Vertical	65	1.64	-	37.71	15.20	48.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6515MHz_TX

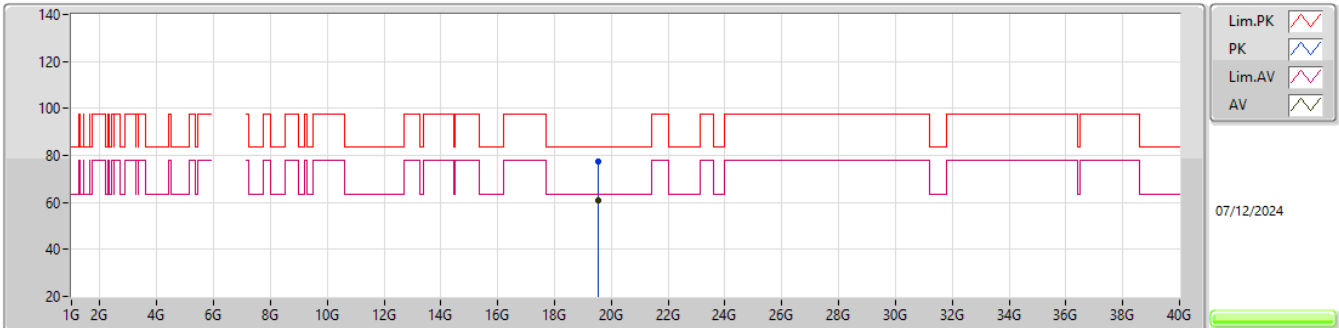


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54683G	77.19	83.54	-6.35	73.08	1	Horizontal	263	1.93	-	37.71	15.20	48.80			
AV	19.54689G	60.95	63.54	-2.59	56.84	1	Horizontal	263	1.93	-	37.71	15.20	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6445MHz_TX

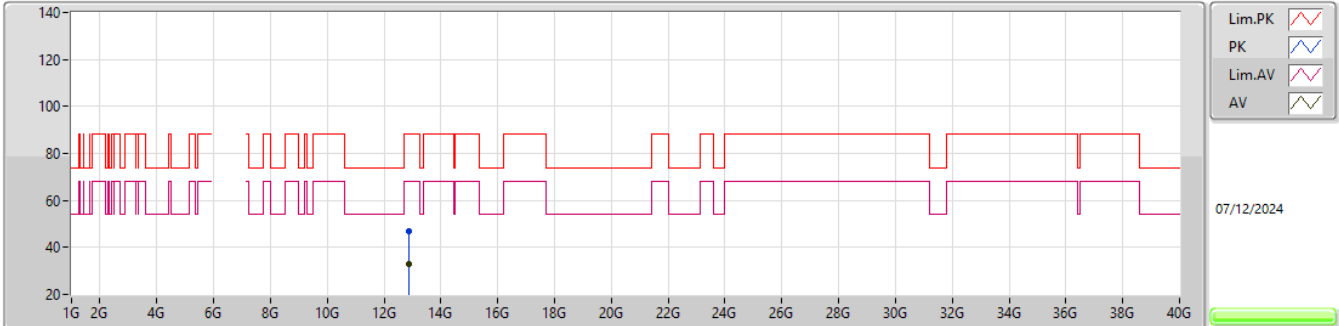


EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.88583G	46.88	88.20	-41.32	41.06	3	Vertical	309	2.27	-	39.07	11.95	45.20			
RMS	12.89488G	32.99	68.20	-35.21	27.14	3	Vertical	309	2.27	-	39.09	11.95	45.19			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6445MHz_TX

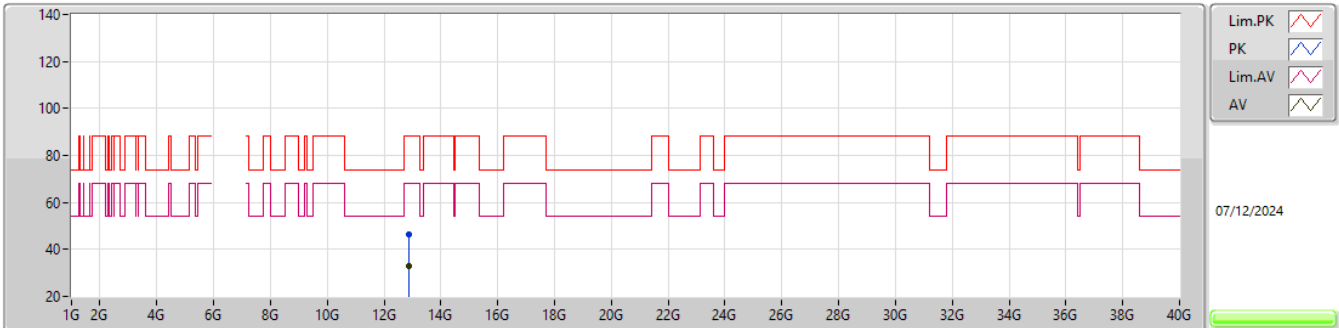EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.88528G	46.62	88.20	-41.58	40.80	3	Horizontal	201	1.90	-	39.07	11.95	45.20			
RMS	12.895G	33.18	68.20	-35.02	27.33	3	Horizontal	201	1.90	-	39.09	11.95	45.19			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6445MHz_TX

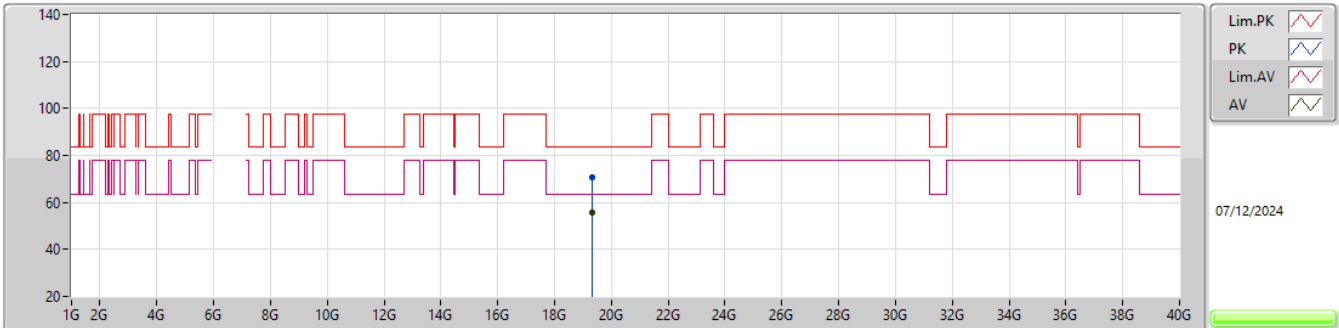EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.32258G	70.45	83.54	-13.09	66.24	1	Vertical	67	1.80	-	37.80	15.21	48.80			
AV	19.33758G	55.53	63.54	-8.01	51.32	1	Vertical	67	1.80	-	37.80	15.21	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6445MHz_TX

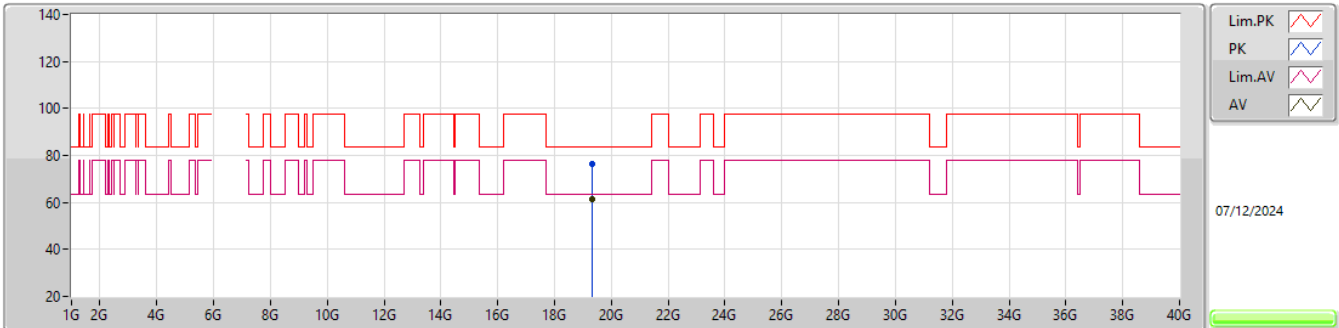


EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.34607G	76.58	83.54	-6.96	72.37	1	Horizontal	266	1.95	-	37.80	15.21	48.80			
AV	19.33347G	61.47	63.54	-2.07	57.26	1	Horizontal	266	1.95	-	37.80	15.21	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6485MHz_TX

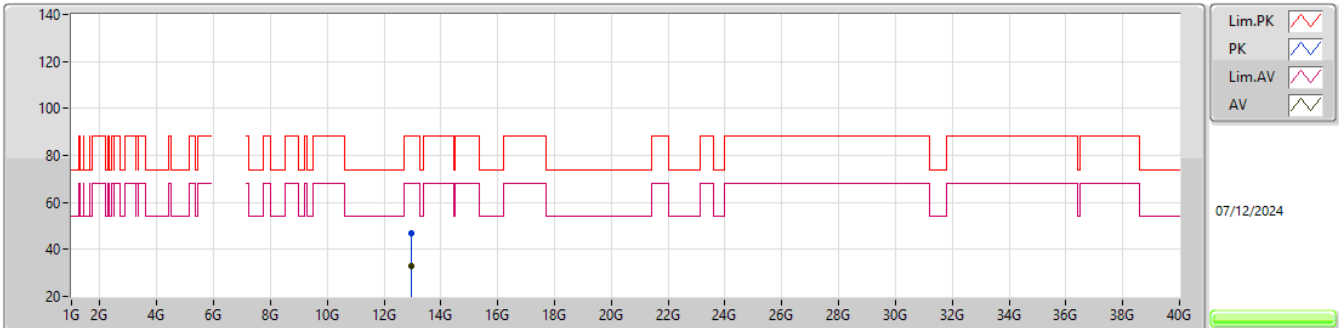EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.97103G	47.15	88.20	-41.05	40.98	3	Vertical	149	1.50	-	39.34	11.93	45.10			
RMS	12.97489G	33.10	68.20	-35.10	26.92	3	Vertical	149	1.50	-	39.35	11.93	45.10			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6485MHz_TX

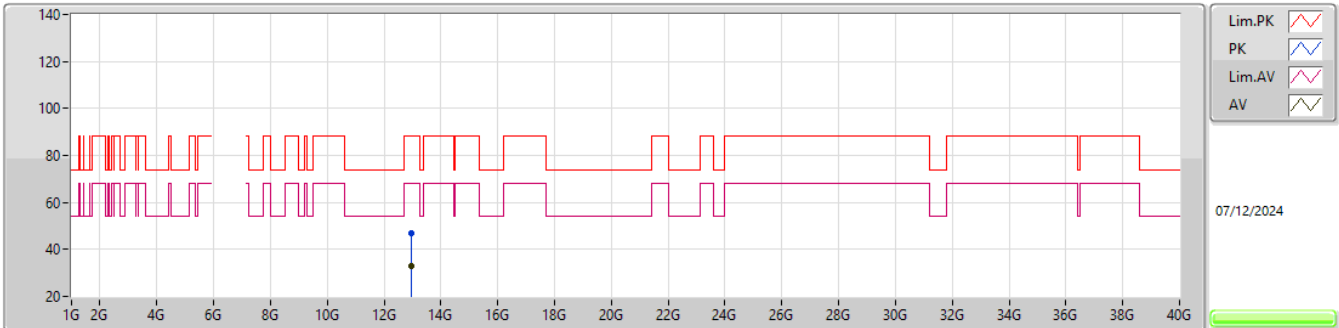


EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96585G	46.99	88.20	-41.21	40.83	3	Horizontal	53	2.07	-	39.33	11.94	45.11			
RMS	12.97442G	32.98	68.20	-35.22	26.80	3	Horizontal	53	2.07	-	39.35	11.93	45.10			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6485MHz_TX

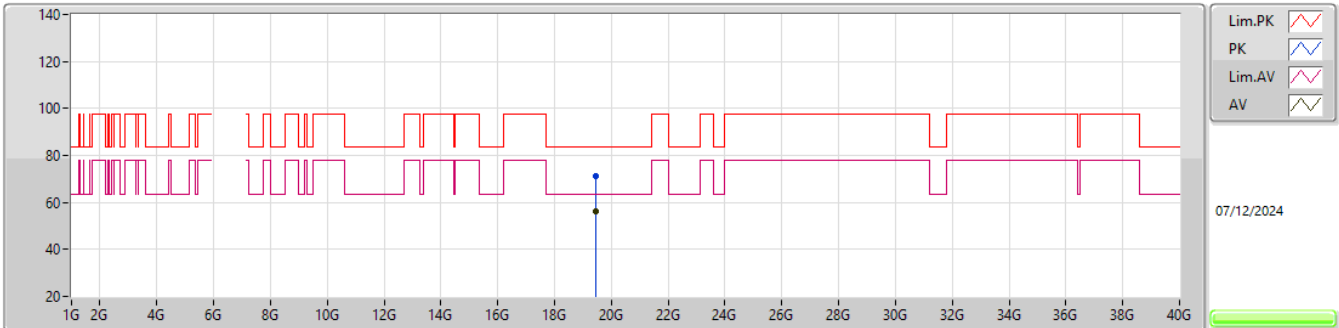EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.44708G	71.39	83.54	-12.15	67.28	1	Vertical	32	2.62	-	37.71	15.20	48.80			
AV	19.46208G	56.38	63.54	-7.16	52.26	1	Vertical	32	2.62	-	37.72	15.20	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6485MHz_TX

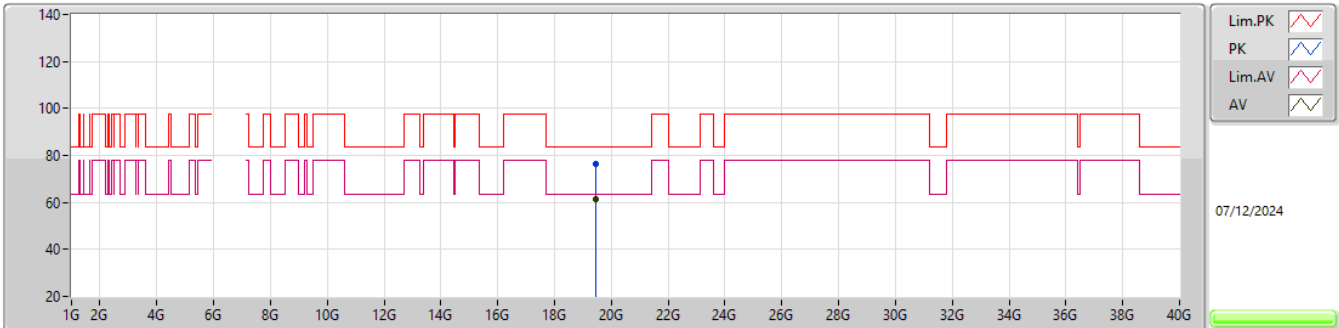


EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.44708G	76.51	83.54	-7.03	72.40	1	Horizontal	262	1.94	-	37.71	15.20	48.80			
AV	19.45458G	61.24	63.54	-2.30	57.13	1	Horizontal	262	1.94	-	37.71	15.20	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6525MHz_TX

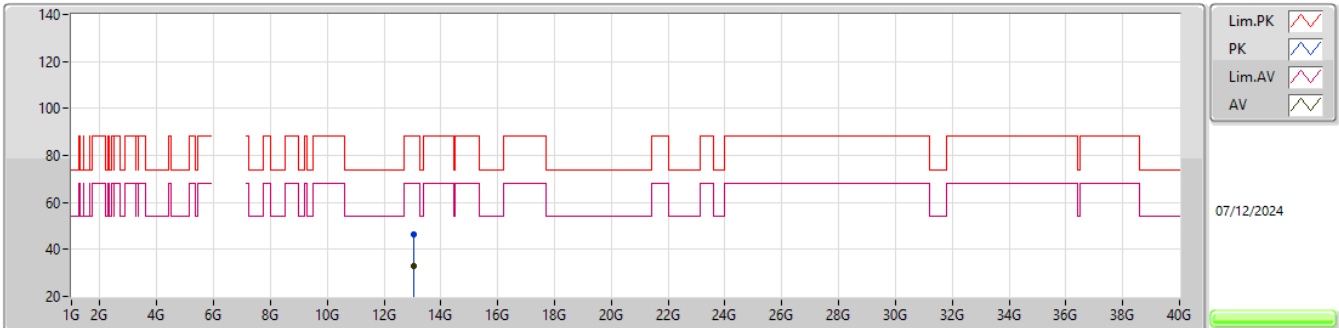EUT_X_2TX
Setting 18
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05346G	46.41	88.20	-41.79	40.11	3	Vertical	243	2.17	-	39.41	11.92	45.03			
RMS	13.04981G	33.13	68.20	-35.07	26.84	3	Vertical	243	2.17	-	39.40	11.92	45.03			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6525MHz_TX

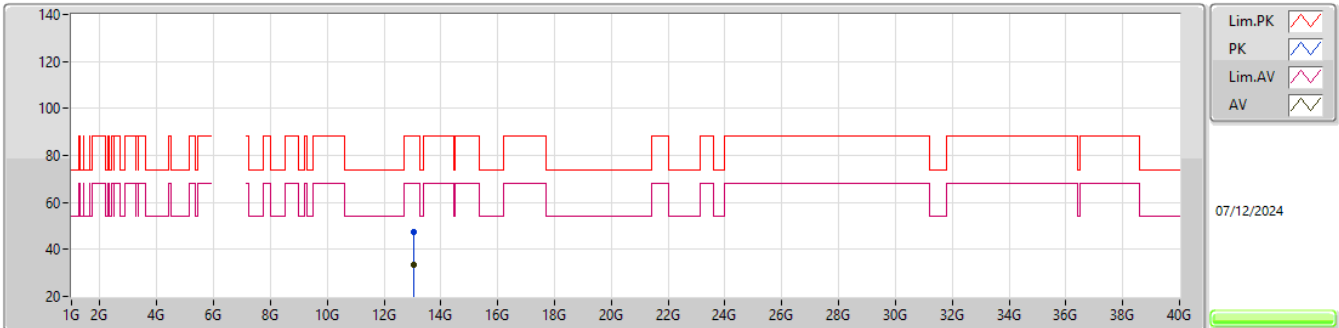


EUT_X_2TX
Setting 18
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.04622G	47.36	88.20	-40.84	41.07	3	Horizontal	121	2.98	-	39.40	11.92	45.03			
RMS	13.04783G	33.19	68.20	-35.01	26.90	3	Horizontal	121	2.98	-	39.40	11.92	45.03			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6525MHz_TX

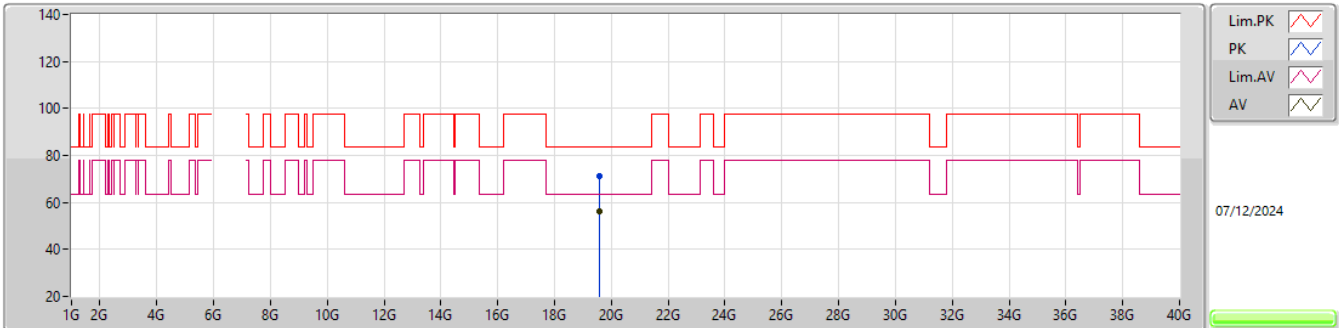EUT_X_2TX
Setting 18
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.58244G	70.96	83.54	-12.58	66.86	1	Vertical	59	1.63	-	37.70	15.20	48.80			
AV	19.57494G	56.31	63.54	-7.23	52.21	1	Vertical	59	1.63	-	37.70	15.20	48.80			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6525MHz_TX

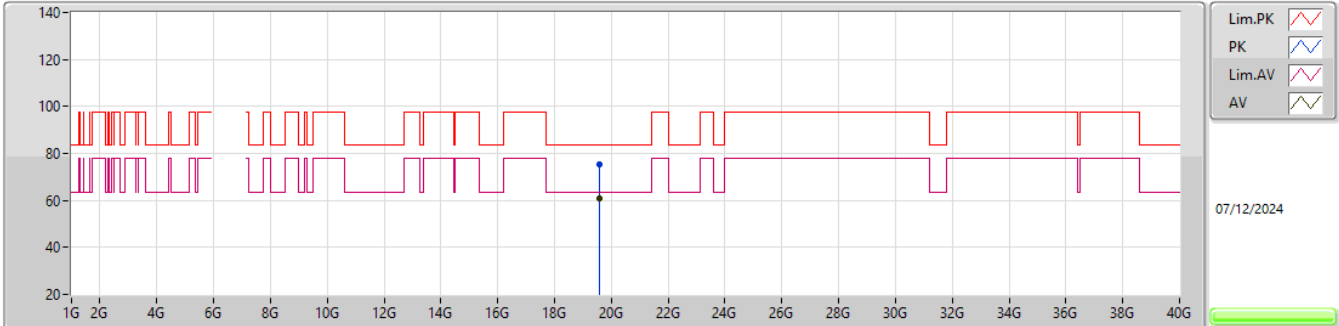EUT_X_2TX
Setting 18
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.57791G	75.53	83.54	-8.01	71.43	1	Horizontal	263	1.93	-	37.70	15.20	48.80			
AV	19.58031G	61.05	63.54	-2.49	56.95	1	Horizontal	263	1.93	-	37.70	15.20	48.80			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6465MHz_TX

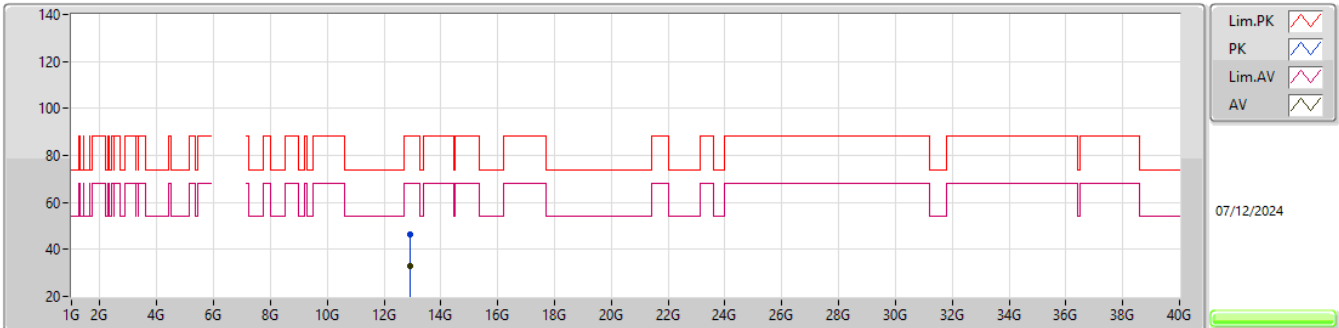


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.92939G	46.22	88.20	-41.98	40.21	3	Vertical	323	1.94	-	39.22	11.94	45.15			
RMS	12.93491G	32.70	68.20	-35.50	26.66	3	Vertical	323	1.94	-	39.24	11.94	45.14			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6465MHz_TX

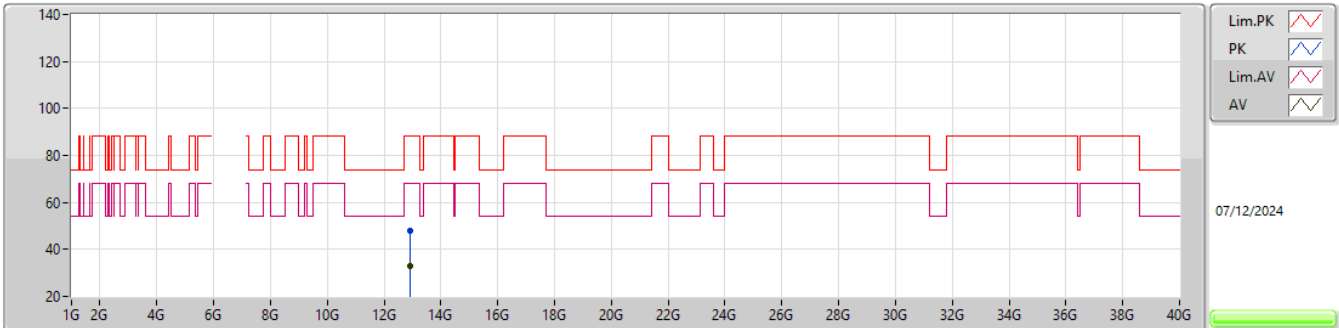


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.93042G	47.79	88.20	-40.41	41.78	3	Horizontal	137	1.02	-	39.22	11.94	45.15			
RMS	12.93497G	33.00	68.20	-35.20	26.96	3	Horizontal	137	1.02	-	39.24	11.94	45.14			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6465MHz_TX

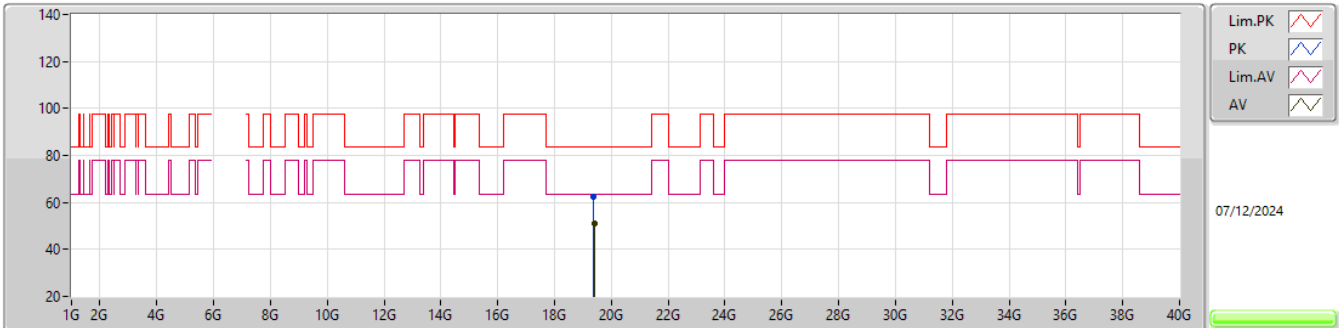


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.38663G	62.67	83.54	-20.87	58.39	1	Vertical	304	2.24	-	37.87	15.21	48.80			
AV	19.39467G	51.14	63.54	-12.40	46.84	1	Vertical	304	2.24	-	37.89	15.21	48.80			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6465MHz_TX

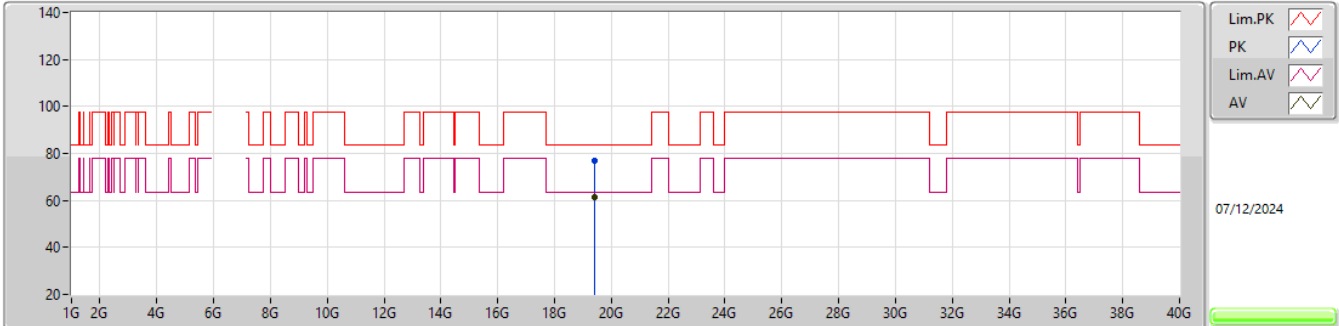EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.40184G	76.99	83.54	-6.55	72.69	1	Horizontal	269	1.94	-	37.89	15.21	48.80			
AV	19.40193G	61.47	63.54	-2.07	57.17	1	Horizontal	269	1.94	-	37.89	15.21	48.80			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6545MHz_TX

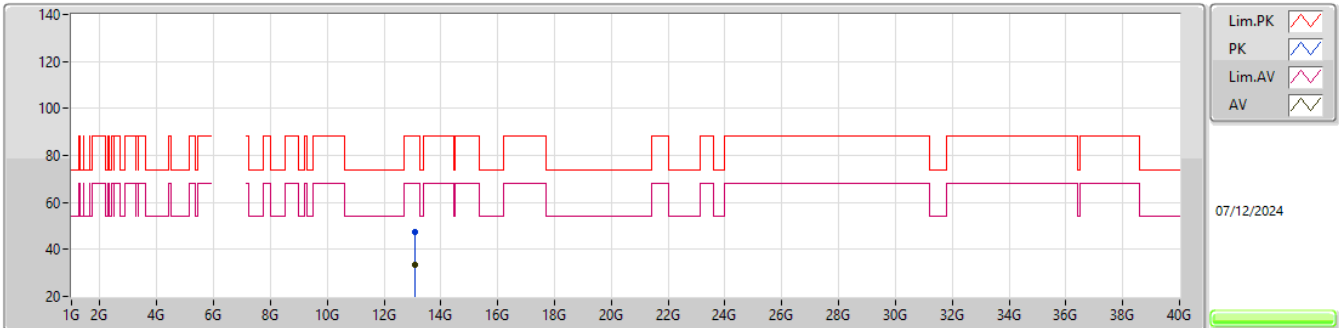EUT_X_2TX
Setting 18.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.09167G	47.37	88.20	-40.83	40.87	3	Vertical	84	2.13	-	39.57	11.92	44.99			
RMS	13.095G	33.45	68.20	-34.75	26.94	3	Vertical	84	2.13	-	39.58	11.92	44.99			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6545MHz_TX

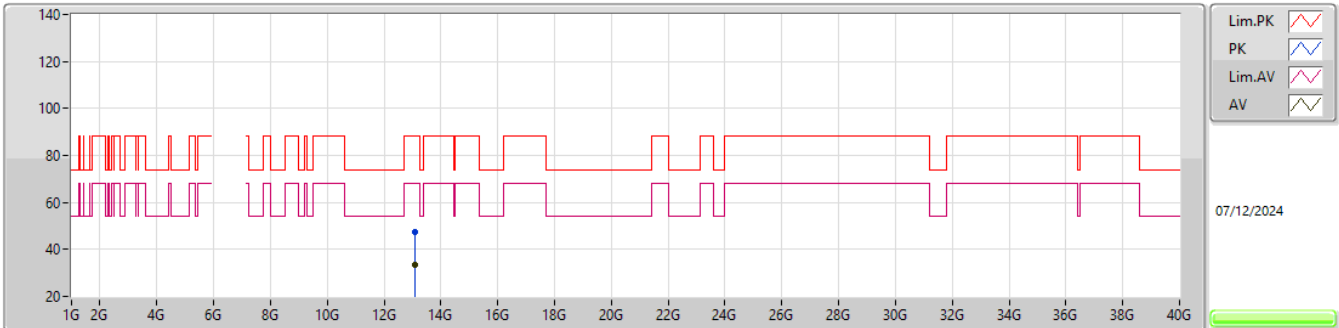


EUT_X_2TX
Setting 18.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.09307G	47.19	88.20	-41.01	40.69	3	Horizontal	218	2.71	-	39.57	11.92	44.99			
RMS	13.09494G	33.31	68.20	-34.89	26.80	3	Horizontal	218	2.71	-	39.58	11.92	44.99			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6545MHz_TX

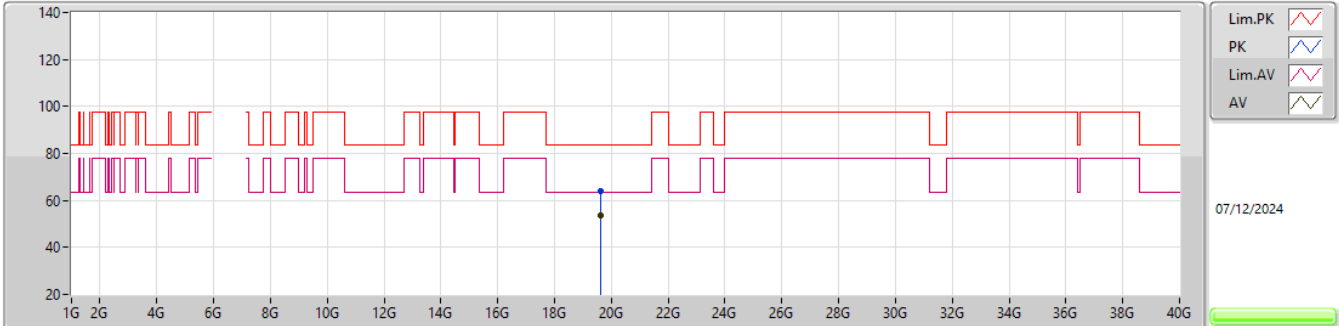


EUT_X_2TX
Setting 18.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63554G	63.79	83.54	-19.75	59.70	1	Vertical	261	2.88	-	37.70	15.19	48.80			
AV	19.62501G	53.70	63.54	-9.84	49.61	1	Vertical	261	2.88	-	37.70	15.19	48.80			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6545MHz_TX

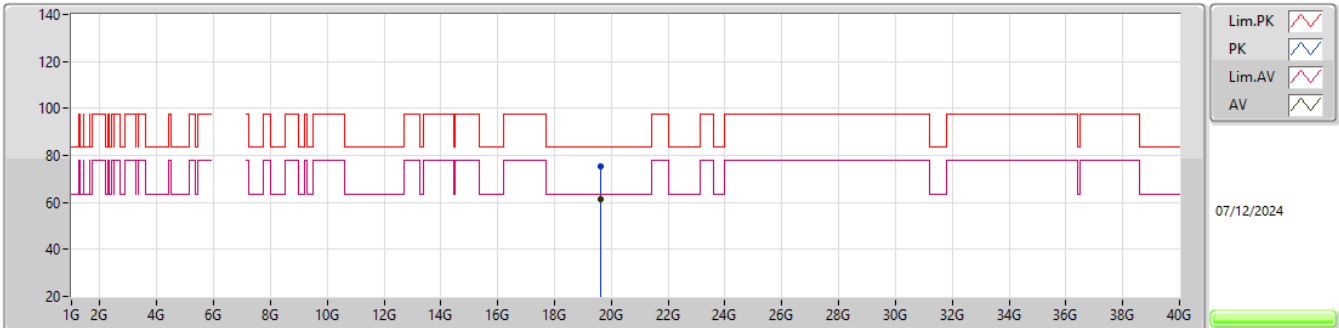


EUT_X_2TX
Setting 18.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.62501G	75.31	83.54	-8.23	71.22	1	Horizontal	289	1.60	-	37.70	15.19	48.80			
AV	19.62699G	61.44	63.54	-2.10	57.35	1	Horizontal	289	1.60	-	37.70	15.19	48.80			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6505MHz_TX

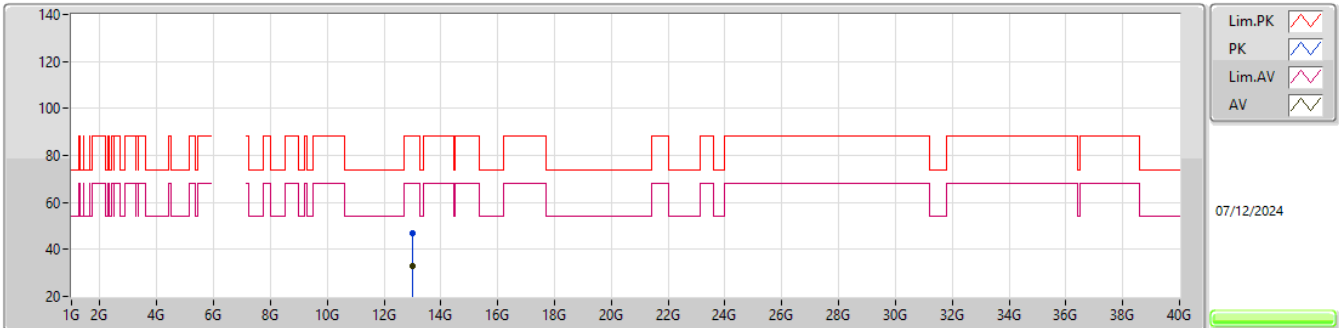


EUT_X_2TX
Setting 21.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.00839G	46.87	88.20	-41.33	40.60	3	Vertical	304	1.32	-	39.40	11.93	45.06			
RMS	13.0139G	33.16	68.20	-35.04	26.89	3	Vertical	304	1.32	-	39.40	11.93	45.06			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6505MHz_TX

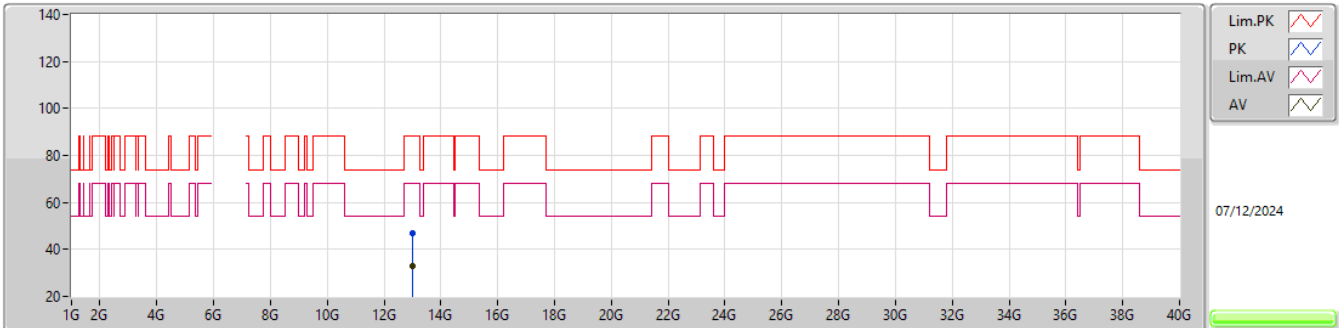


EUT_X_2TX
Setting 21.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.01096G	46.93	88.20	-41.27	40.66	3	Horizontal	303	2.40	-	39.40	11.93	45.06			
RMS	13.01499G	33.13	68.20	-35.07	26.86	3	Horizontal	303	2.40	-	39.40	11.93	45.06			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6505MHz_TX

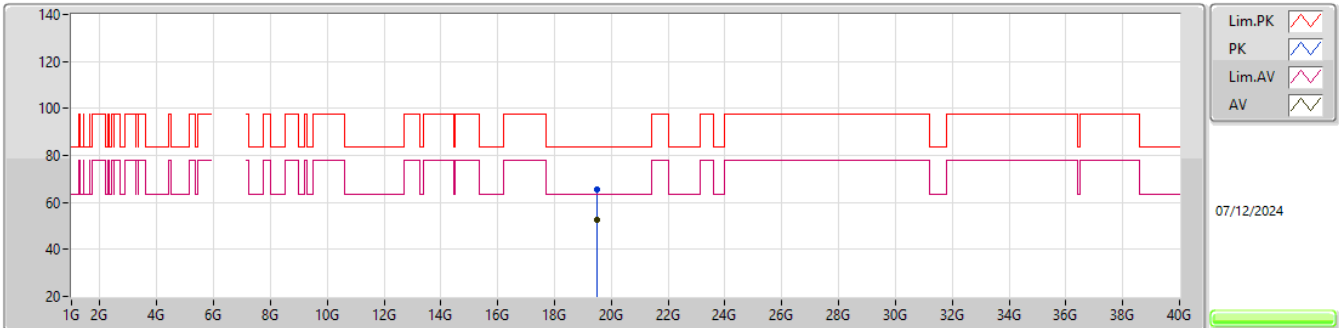


EUT_X_2TX
Setting 21.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.50141G	65.42	83.54	-18.12	61.22	1	Vertical	6	1.69	-	37.80	15.20	48.80			
AV	19.50381G	52.58	63.54	-10.96	48.39	1	Vertical	6	1.69	-	37.79	15.20	48.80			

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6505MHz_TX

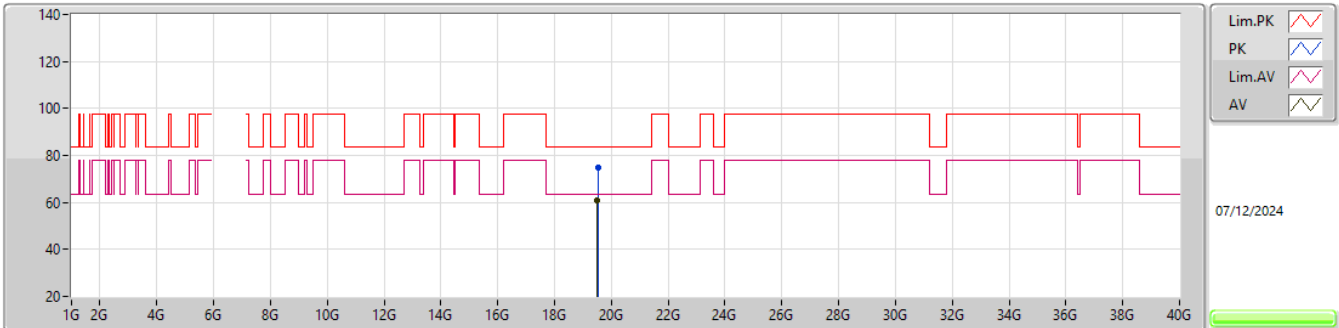


EUT_X_2TX
Setting 21.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.52382G	74.66	83.54	-8.88	70.51	1	Horizontal	293	1.60	-	37.75	15.20	48.80			
AV	19.51056G	61.06	63.54	-2.48	56.88	1	Horizontal	293	1.60	-	37.78	15.20	48.80			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6535MHz_TX

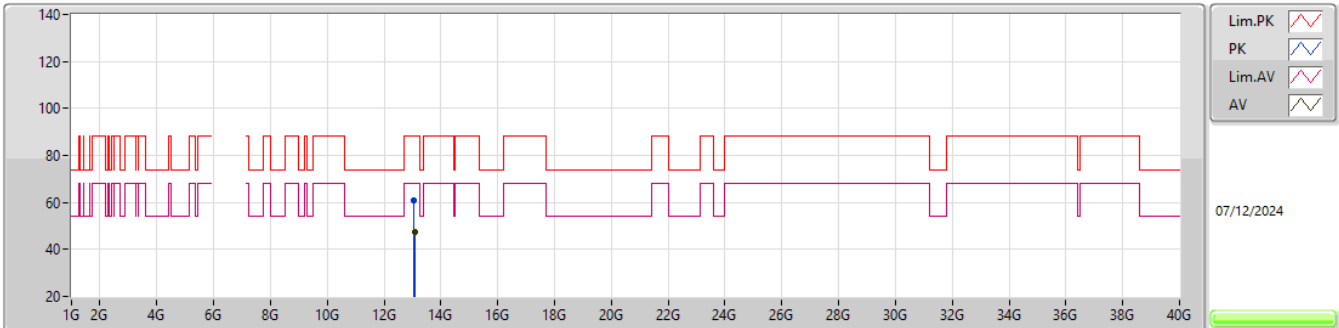EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.05752G	61.08	88.20	-27.12	41.00	3	Vertical	218	1.03	-	39.43	11.92	31.27			
RMS	13.07861G	47.29	68.20	-20.91	27.14	3	Vertical	218	1.03	-	39.51	11.92	31.28			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6535MHz_TX

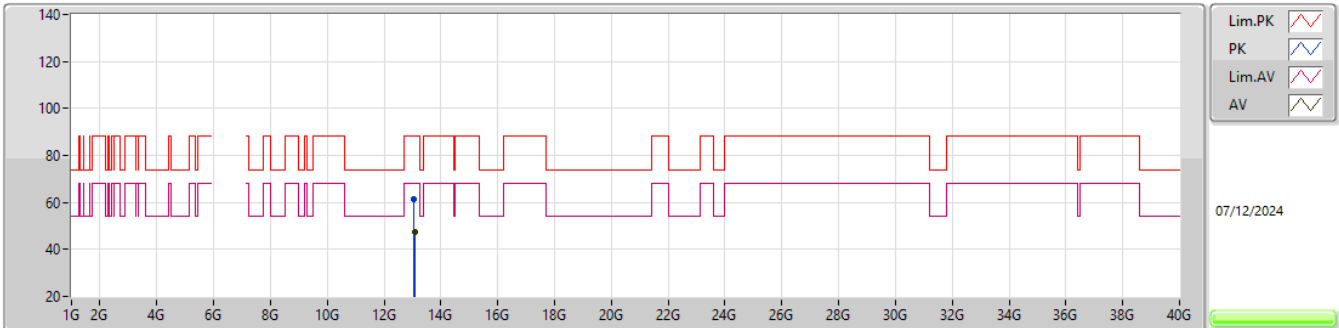EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06343G	61.37	88.20	-26.83	41.27	3	Horizontal	112	2.06	-	39.45	11.92	31.27			
RMS	13.07246G	47.42	68.20	-20.78	27.28	3	Horizontal	112	2.06	-	39.49	11.92	31.27			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6535MHz_TX

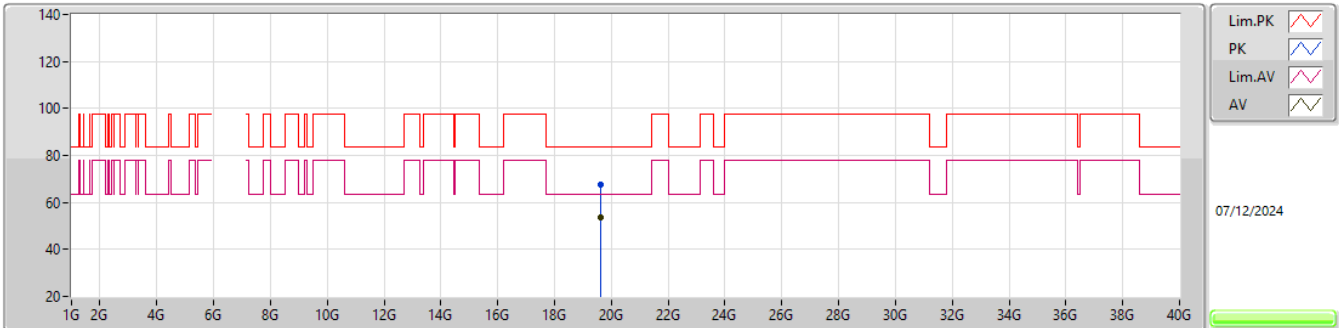EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.6107G	67.57	83.54	-15.97	63.48	1	Vertical	24	1.80	-	37.70	15.19	48.80			
AV	19.60617G	53.55	63.54	-9.99	49.46	1	Vertical	24	1.80	-	37.70	15.19	48.80			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6535MHz_TX

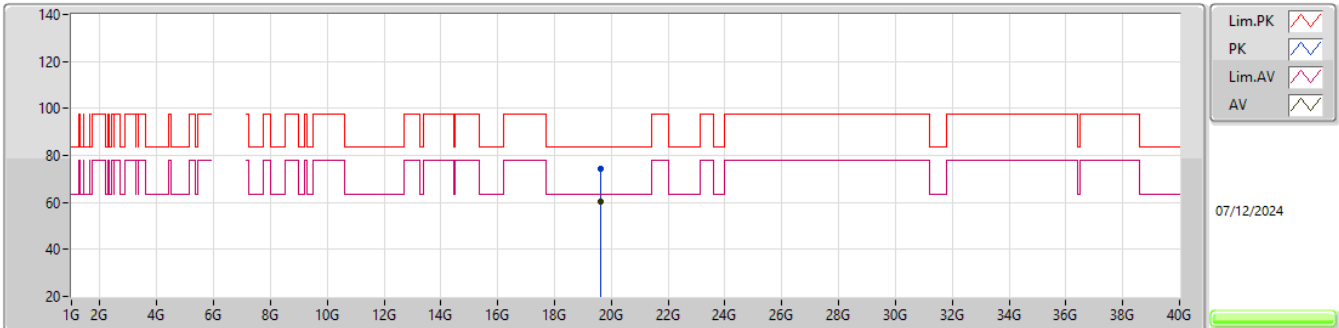EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.60851G	74.44	83.54	-9.10	70.35	1	Horizontal	258	1.94	-	37.70	15.19	48.80			
AV	19.60638G	60.48	63.54	-3.06	56.39	1	Horizontal	258	1.94	-	37.70	15.19	48.80			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6695MHz_TX

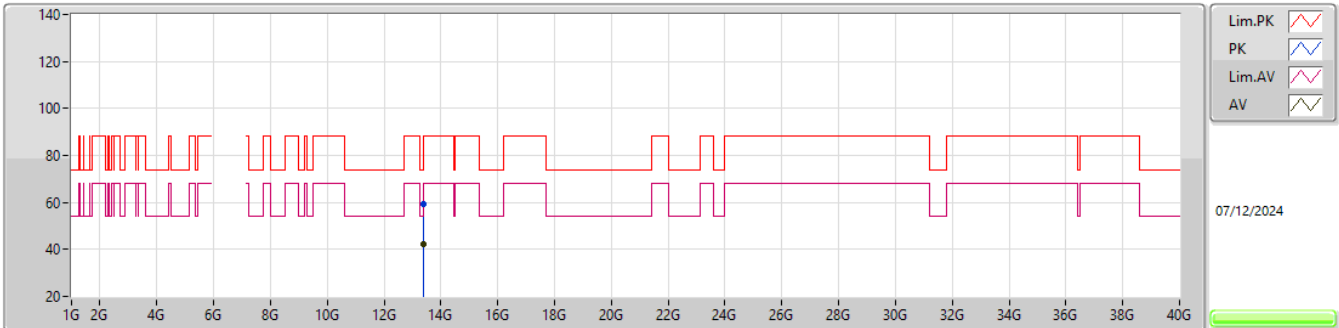EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.38572G	59.55	74.00	-14.45	52.16	3	Vertical	101	2.09	-	40.27	11.87	44.75			
AV	13.392G	42.11	54.00	-11.89	34.71	3	Vertical	101	2.09	-	40.28	11.87	44.75			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6695MHz_TX

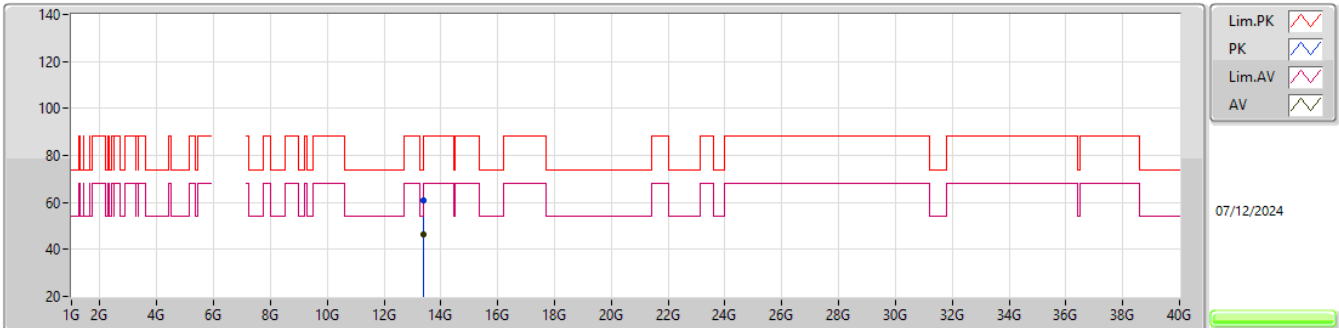EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.38618G	60.68	74.00	-13.32	53.29	3	Horizontal	303	2.58	-	40.27	11.87	44.75			
AV	13.3917G	46.52	54.00	-7.48	39.12	3	Horizontal	303	2.58	-	40.28	11.87	44.75			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6695MHz_TX

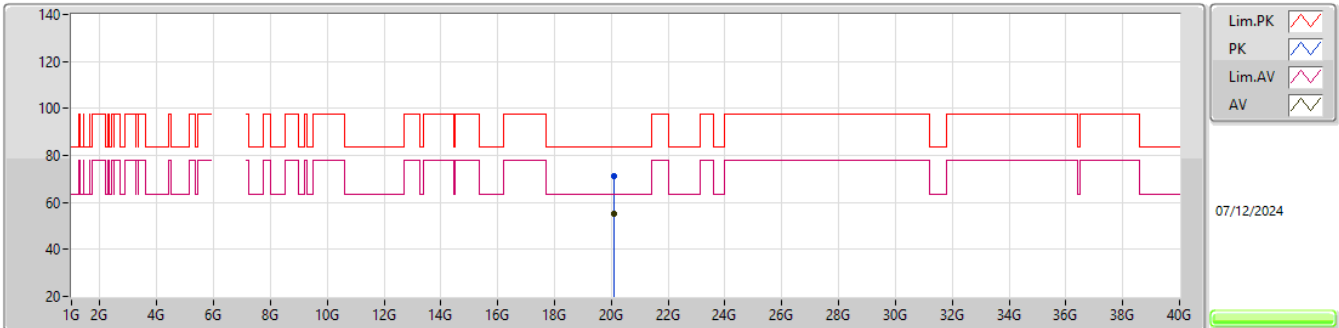EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0859G	71.21	83.54	-12.33	66.95	1	Vertical	295	1.84	-	37.80	15.24	48.78			
AV	20.08752G	54.96	63.54	-8.58	50.70	1	Vertical	295	1.84	-	37.80	15.24	48.78			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

6695MHz_TX

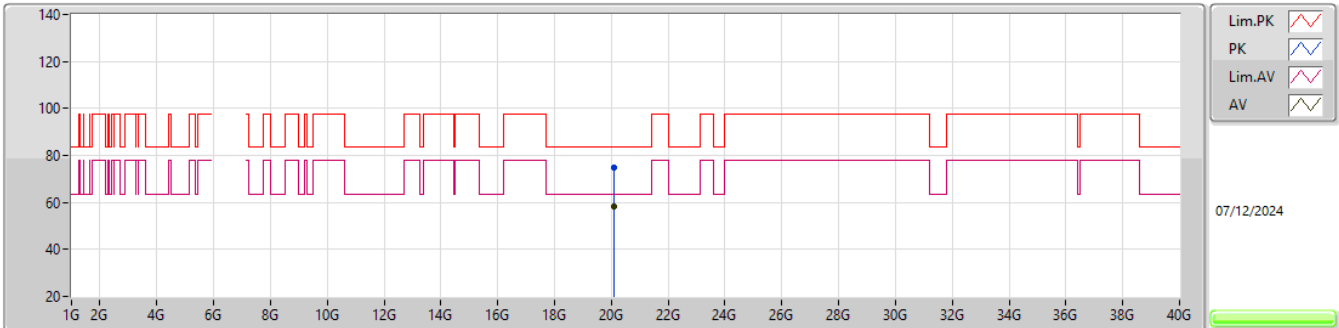


EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.08584G	74.77	83.54	-8.77	70.51	1	Horizontal	252	1.93	-	37.80	15.24	48.78			
AV	20.08773G	58.41	63.54	-5.13	54.15	1	Horizontal	252	1.93	-	37.80	15.24	48.78			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6875MHz_TX

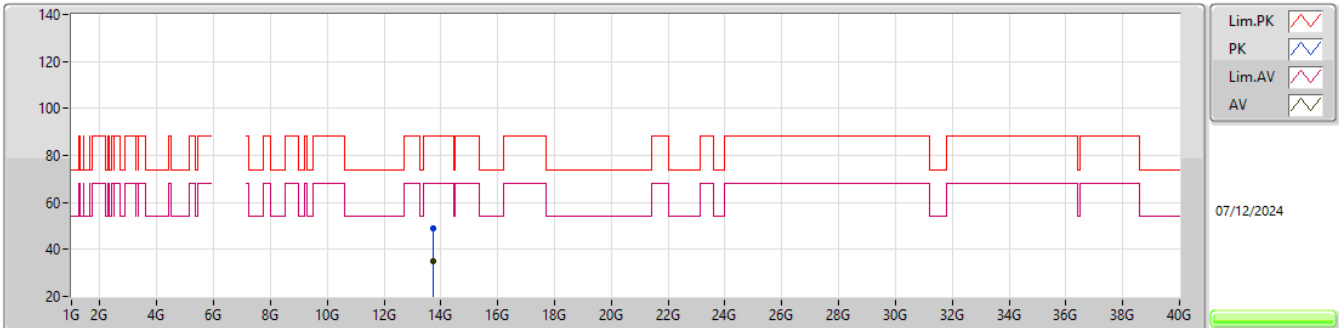EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.74188G	48.90	88.20	-39.30	40.50	3	Vertical	92	2.45	-	41.07	11.82	44.49			
RMS	13.74596G	35.21	68.20	-32.99	26.80	3	Vertical	92	2.45	-	41.08	11.82	44.49			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6875MHz_TX

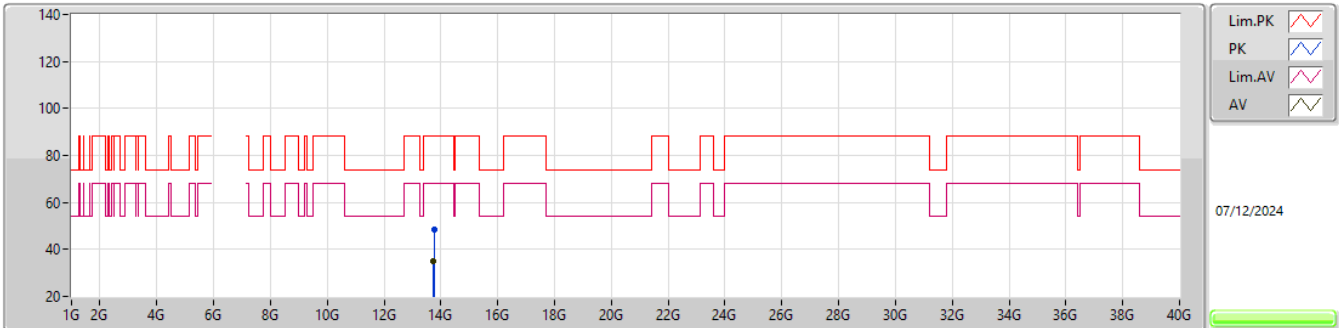EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7556G	48.54	88.20	-39.66	40.11	3	Horizontal	234	2.31	-	41.09	11.82	44.48			
RMS	13.74524G	35.04	68.20	-33.16	26.63	3	Horizontal	234	2.31	-	41.08	11.82	44.49			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6875MHz_TX

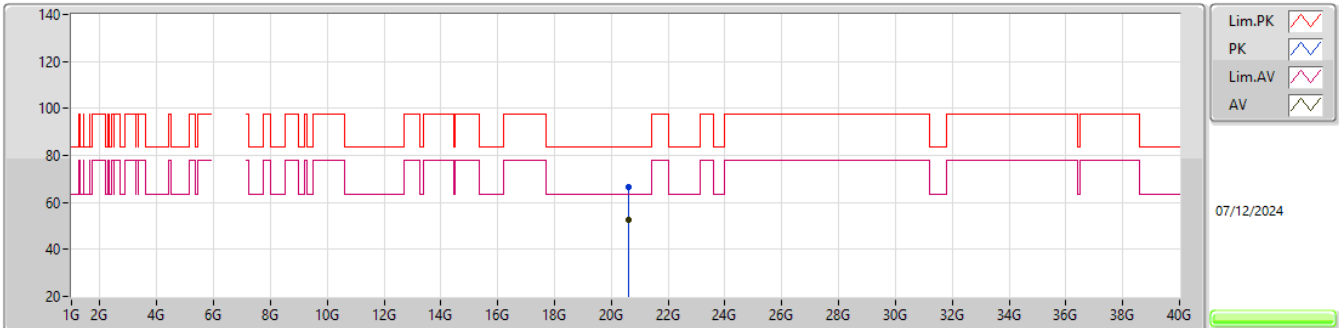EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.62077G	66.71	83.54	-16.83	61.83	1	Vertical	296	1.82	-	37.90	15.68	48.70			
AV	20.62539G	52.48	63.54	-11.06	47.60	1	Vertical	296	1.82	-	37.90	15.68	48.70			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX


6875MHz_TX

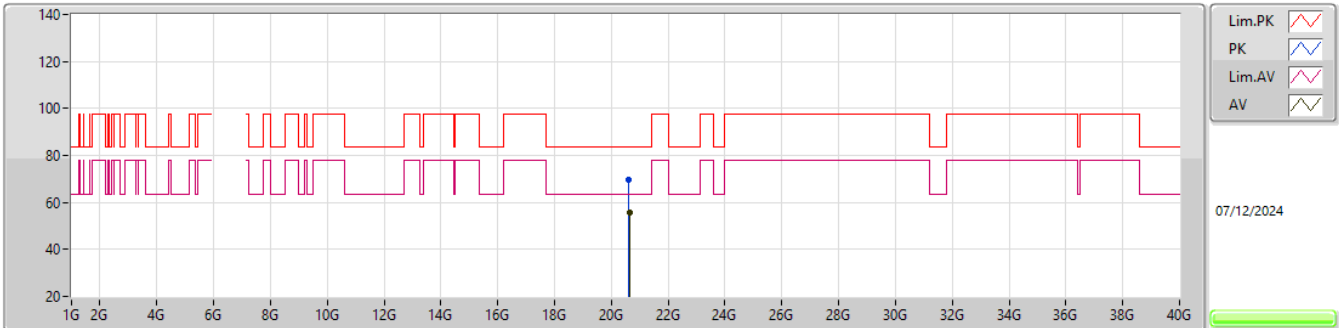EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.6226G	69.79	83.54	-13.75	64.91	1	Horizontal	249	1.70	-	37.90	15.68	48.70			
AV	20.6283G	55.73	63.54	-7.81	50.85	1	Horizontal	249	1.70	-	37.90	15.68	48.70			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6535MHz_TX

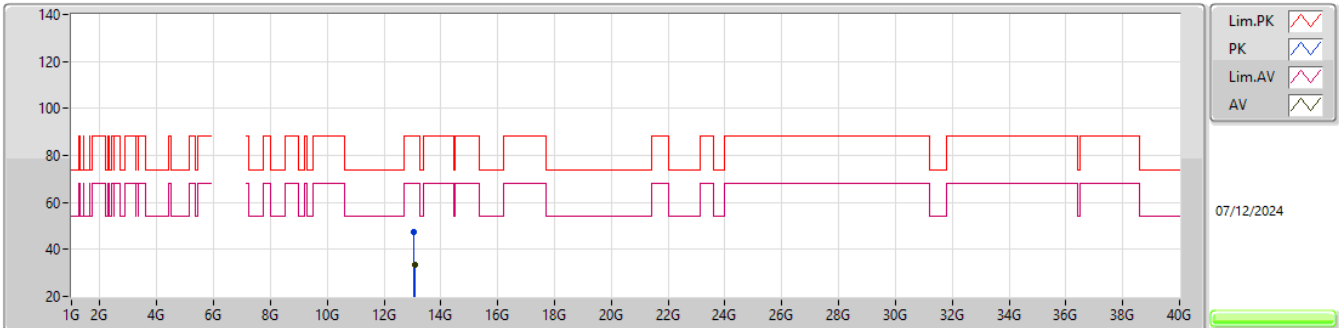EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06636G	47.46	88.20	-40.74	41.09	3	Vertical	147	2.49	-	39.47	11.92	45.02			
RMS	13.07425G	33.37	68.20	-34.83	26.96	3	Vertical	147	2.49	-	39.50	11.92	45.01			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6535MHz_TX

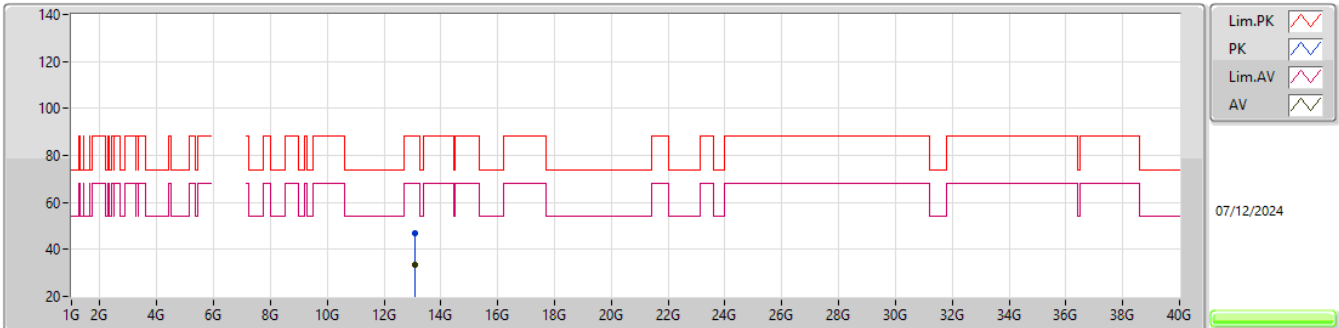EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06929G	46.69	88.20	-41.51	40.30	3	Horizontal	314	1.69	-	39.48	11.92	45.01			
RMS	13.07496G	33.41	68.20	-34.79	27.00	3	Horizontal	314	1.69	-	39.50	11.92	45.01			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6535MHz_TX

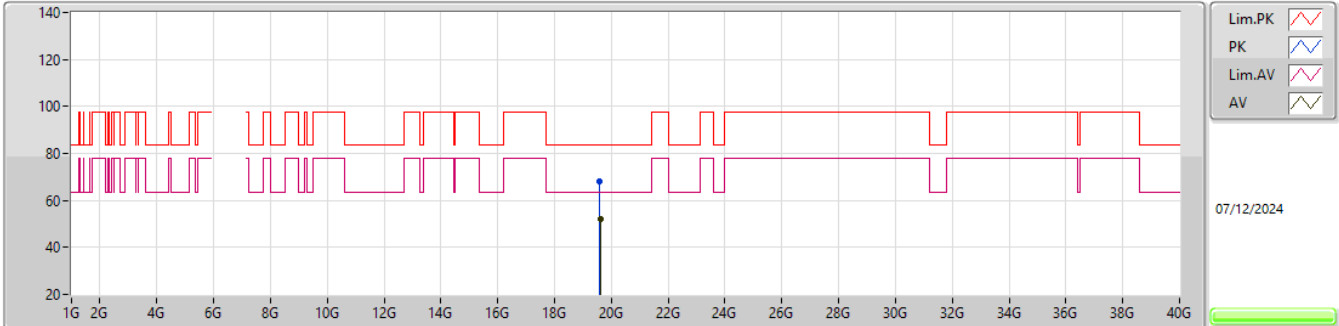EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.59948G	68.05	83.54	-15.49	63.96	1	Vertical	66	1.64	-	37.70	15.19	48.80			
AV	19.60662G	51.90	63.54	-11.64	47.81	1	Vertical	66	1.64	-	37.70	15.19	48.80			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6535MHz_TX

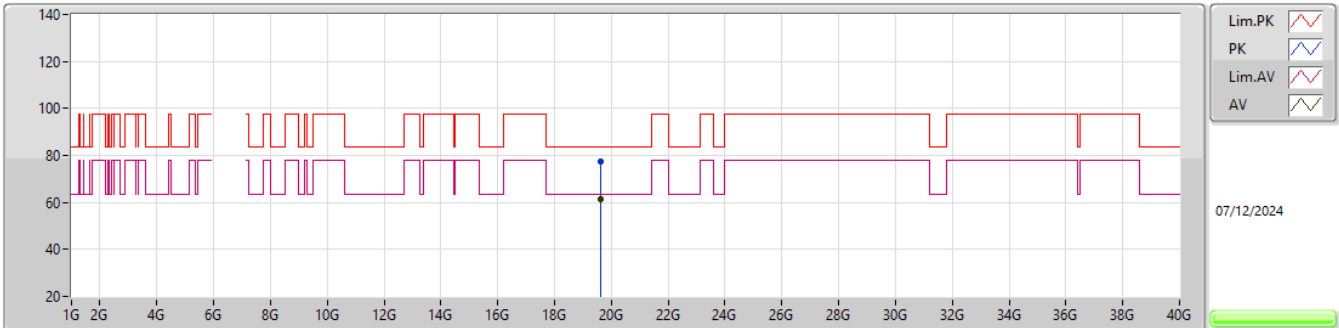EUT_X_2TX
Setting 16
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60803G	77.51	83.54	-6.03	73.42	1	Horizontal	293	1.59	-	37.70	15.19	48.80			
AV	19.60608G	61.19	63.54	-2.35	57.10	1	Horizontal	293	1.59	-	37.70	15.19	48.80			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

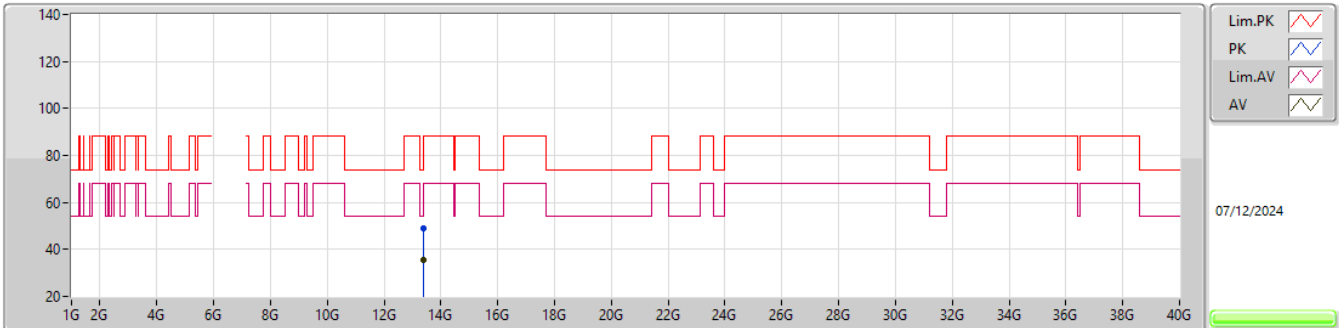


EUT_X_2TX
Setting 18.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.3939G	48.92	74.00	-25.08	41.51	3	Vertical	120	1.83	-	40.29	11.87	44.75			
AV	13.39408G	35.38	54.00	-18.62	27.97	3	Vertical	120	1.83	-	40.29	11.87	44.75			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

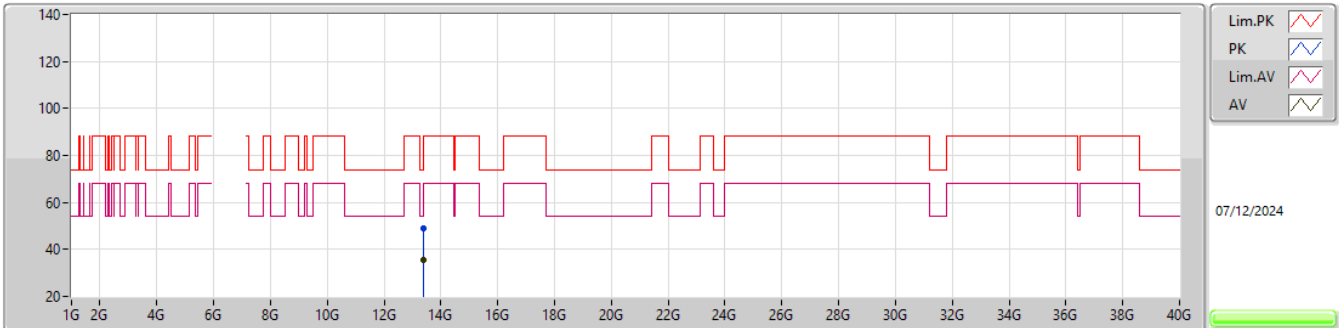


EUT_X_2TX
Setting 18.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.39294G	49.07	74.00	-24.93	41.66	3	Horizontal	160	2.26	-	40.29	11.87	44.75			
AV	13.39387G	35.40	54.00	-18.60	27.99	3	Horizontal	160	2.26	-	40.29	11.87	44.75			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

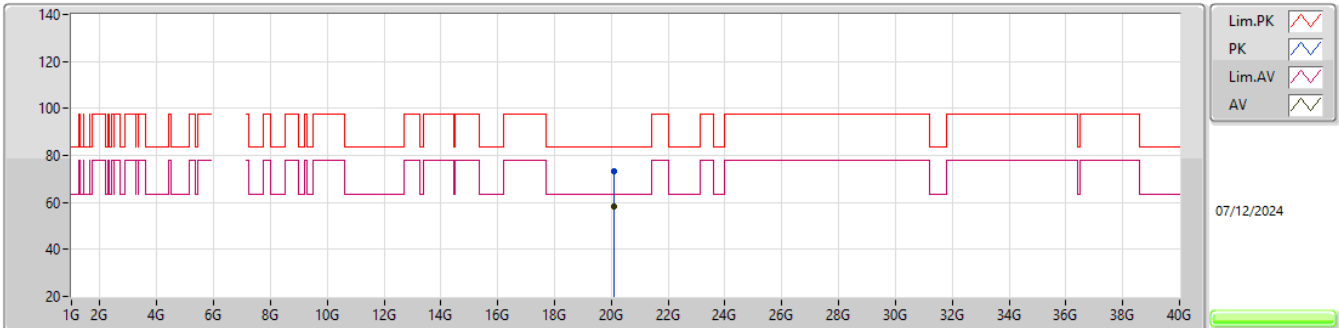


EUT_X_2TX
Setting 18.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.09001G	73.47	83.54	-10.07	69.21	1	Vertical	294	1.83	-	37.80	15.24	48.78			
AV	20.08701G	58.51	63.54	-5.03	54.25	1	Vertical	294	1.83	-	37.80	15.24	48.78			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

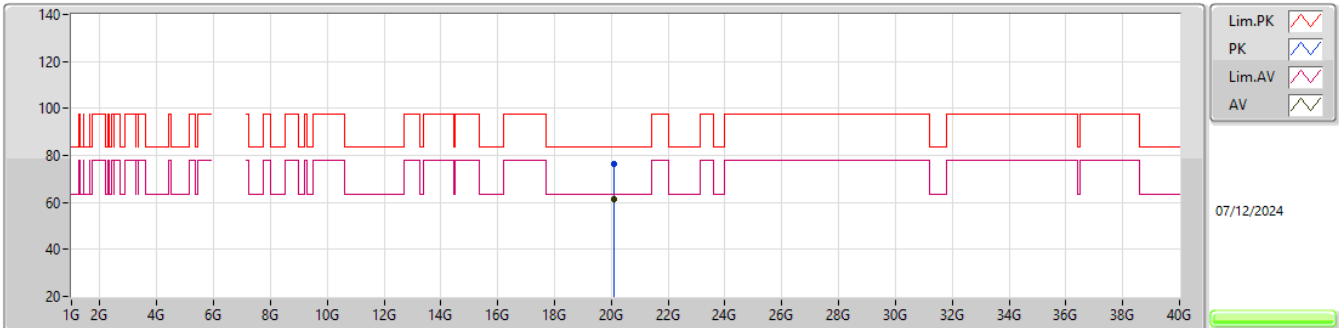


EUT_X_2TX
Setting 18.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08842G	76.31	83.54	-7.23	72.05	1	Horizontal	251	1.92	-	37.80	15.24	48.78			
AV	20.08548G	61.33	63.54	-2.21	57.07	1	Horizontal	251	1.92	-	37.80	15.24	48.78			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6875MHz_TX

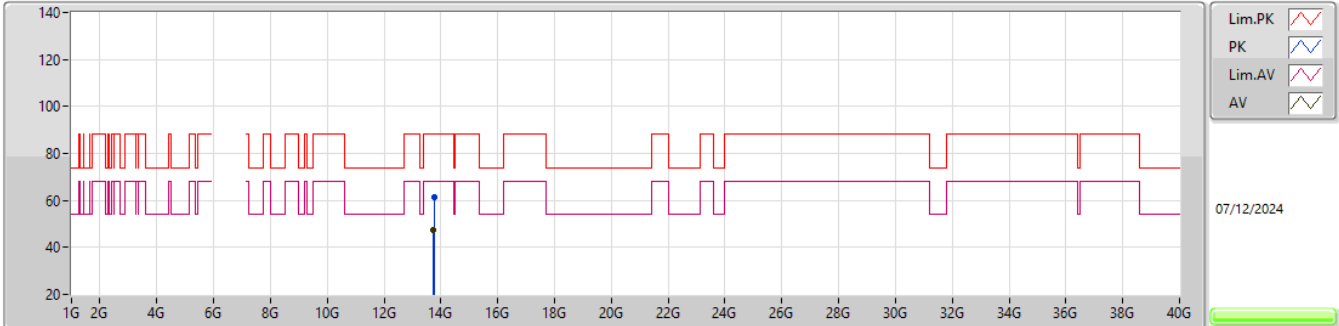EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.75188G	61.22	88.20	-26.98	39.93	3	Vertical	80	1.47	-	41.10	11.82	31.63			
RMS	13.74511G	47.60	68.20	-20.60	26.33	3	Vertical	80	1.47	-	41.08	11.82	31.63			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6875MHz_TX

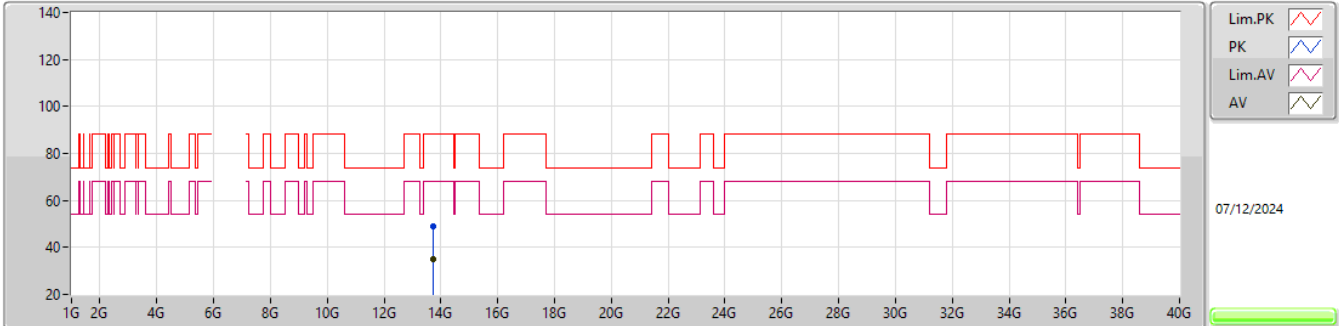EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.74868G	49.03	88.20	-39.17	40.61	3	Horizontal	85	2.33	-	41.09	11.82	44.49			
RMS	13.74534G	34.92	68.20	-33.28	26.51	3	Horizontal	85	2.33	-	41.08	11.82	44.49			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6875MHz_TX

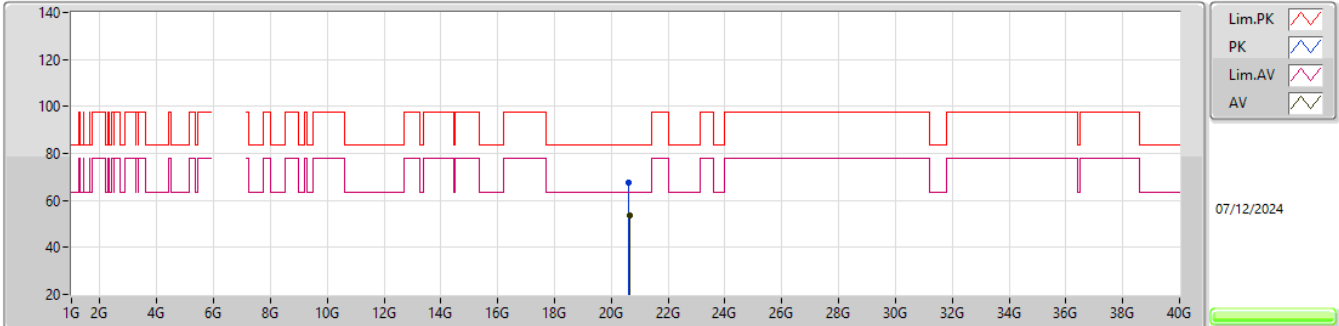EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.62065G	67.71	83.54	-15.83	62.83	1	Vertical	296	1.82	-	37.90	15.68	48.70			
AV	20.62824G	53.81	63.54	-9.73	48.93	1	Vertical	296	1.82	-	37.90	15.68	48.70			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6875MHz_TX

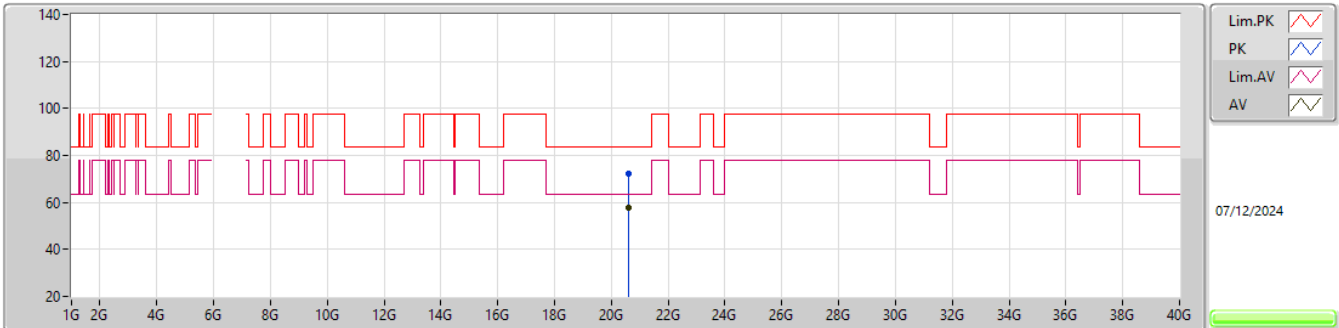EUT_X_2TX
Setting 23
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.628G	72.10	83.54	-11.44	67.22	1	Horizontal	251	1.91	-	37.90	15.68	48.70			
AV	20.62398G	57.80	63.54	-5.74	52.92	1	Horizontal	251	1.91	-	37.90	15.68	48.70			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

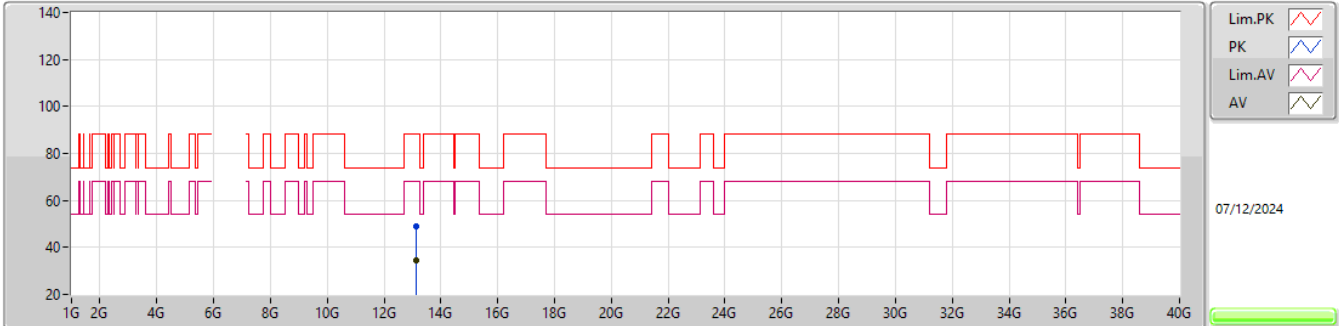


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.13163G	48.90	88.20	-39.30	42.29	3	Vertical	280	1.34	-	39.66	11.91	44.96			
RMS	13.13422G	34.26	68.20	-33.94	27.64	3	Vertical	280	1.34	-	39.67	11.91	44.96			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

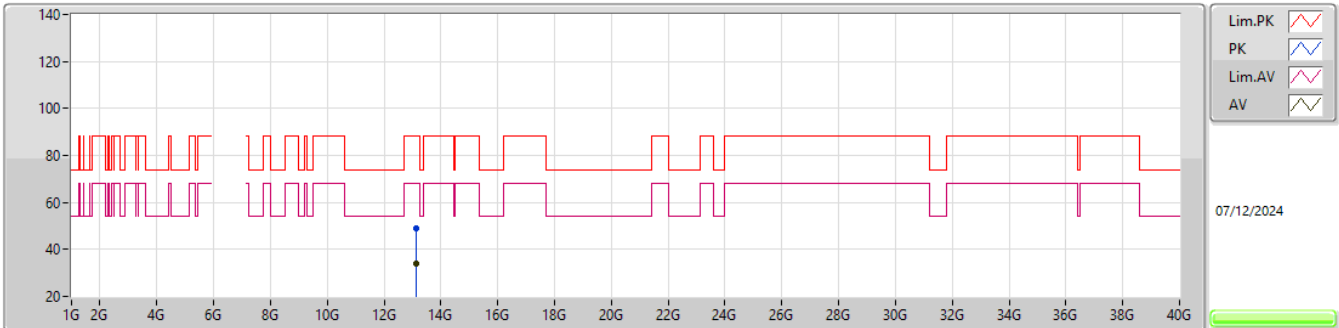


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.12843G	49.03	88.20	-39.17	42.42	3	Horizontal	258	1.22	-	39.66	11.91	44.96			
RMS	13.13443G	34.00	68.20	-34.20	27.38	3	Horizontal	258	1.22	-	39.67	11.91	44.96			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

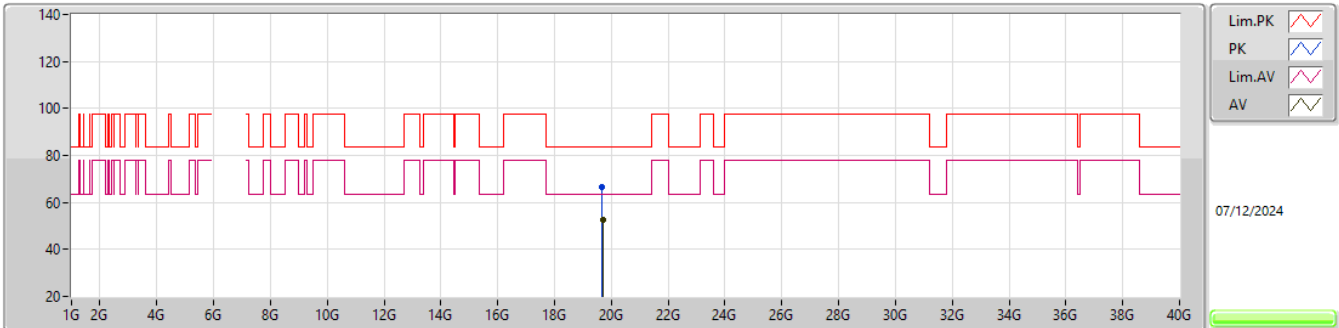


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6866G	66.74	83.54	-16.80	62.65	1	Vertical	22	1.80	-	37.70	15.19	48.80			
AV	19.69689G	52.34	63.54	-11.20	48.25	1	Vertical	22	1.80	-	37.70	15.19	48.80			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

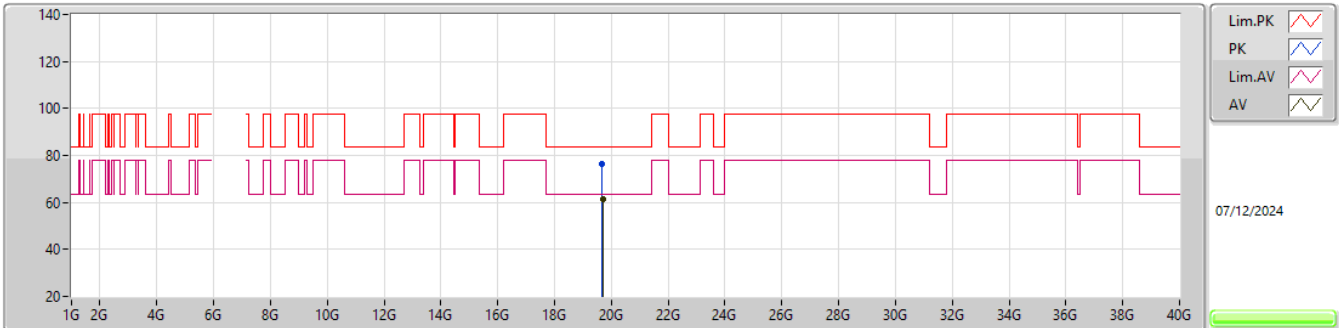


EUT_X_2TX
Setting 17.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.68645G	76.40	83.54	-7.14	72.31	1	Horizontal	293	1.59	-	37.70	15.19	48.80			
AV	19.69371G	61.44	63.54	-2.10	57.35	1	Horizontal	293	1.59	-	37.70	15.19	48.80			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6685MHz_TX

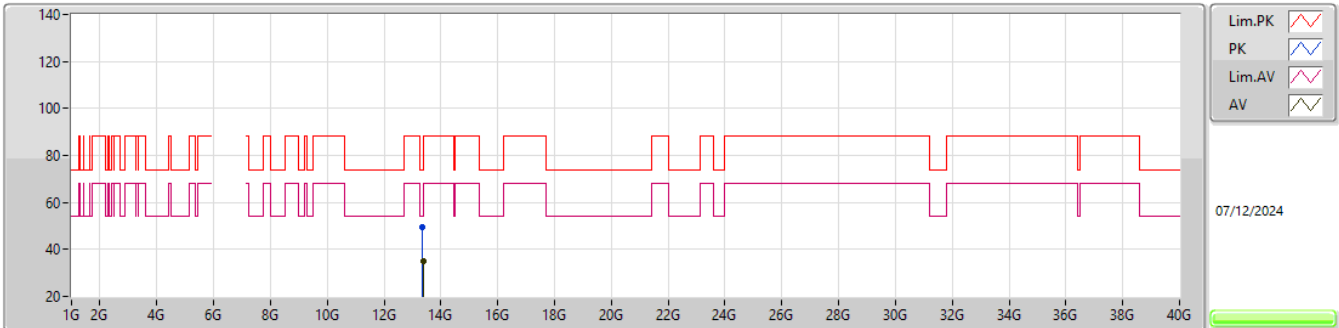EUT_X_2TX
Setting 20.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.36603G	49.45	74.00	-24.55	42.11	3	Vertical	357	1.50	-	40.23	11.88	44.77			
AV	13.37256G	35.04	54.00	-18.96	27.68	3	Vertical	357	1.50	-	40.25	11.87	44.76			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

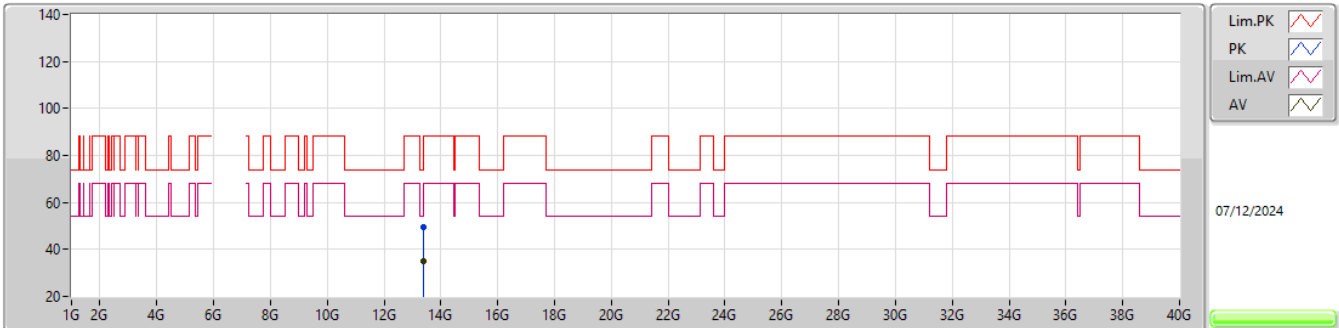


EUT_X_2TX
Setting 20.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.37244G	49.26	74.00	-24.74	41.91	3	Horizontal	24	1.09	-	40.24	11.87	44.76			
AV	13.36757G	35.11	54.00	-18.89	27.77	3	Horizontal	24	1.09	-	40.24	11.87	44.77			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

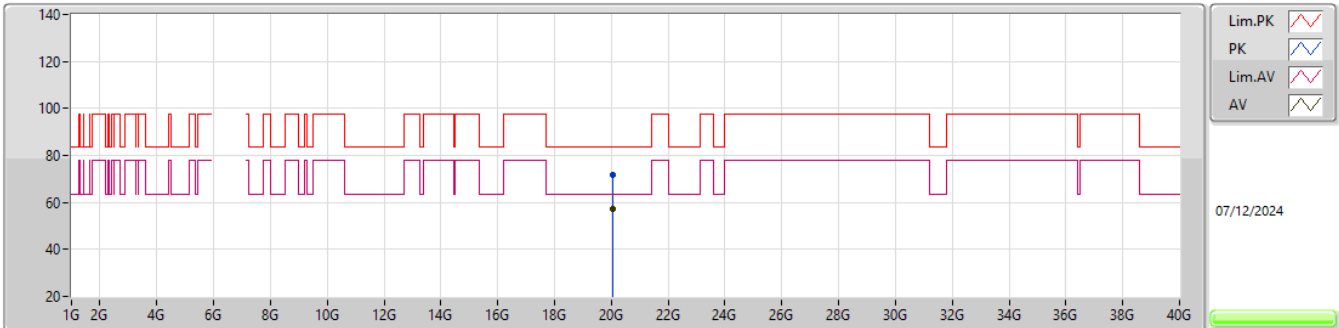


EUT_X_2TX
Setting 20.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.06256G	71.82	83.54	-11.72	67.59	1	Vertical	295	1.84	-	37.80	15.22	48.79			
AV	20.05524G	57.02	63.54	-6.52	52.79	1	Vertical	295	1.84	-	37.80	15.22	48.79			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

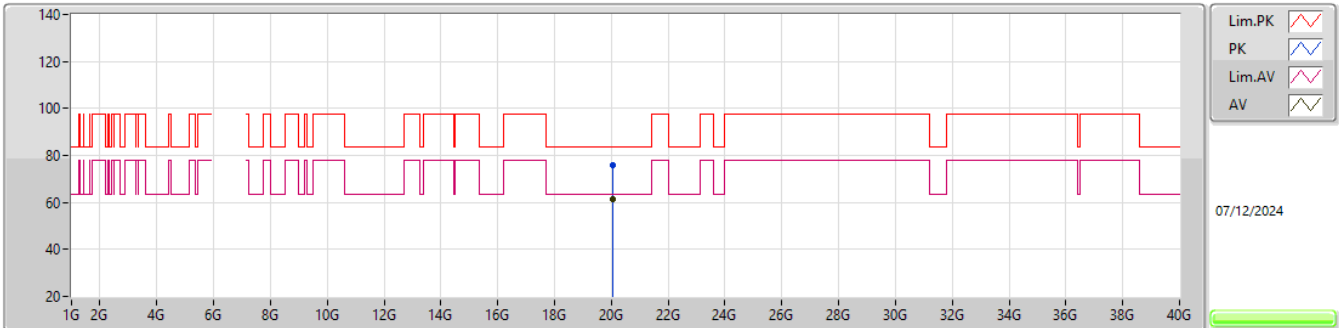


EUT_X_2TX
Setting 20.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.0619G	75.94	83.54	-7.60	71.71	1	Horizontal	253	1.92	-	37.80	15.22	48.79			
AV	20.05632G	61.38	63.54	-2.16	57.15	1	Horizontal	253	1.92	-	37.80	15.22	48.79			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6885MHz_TX

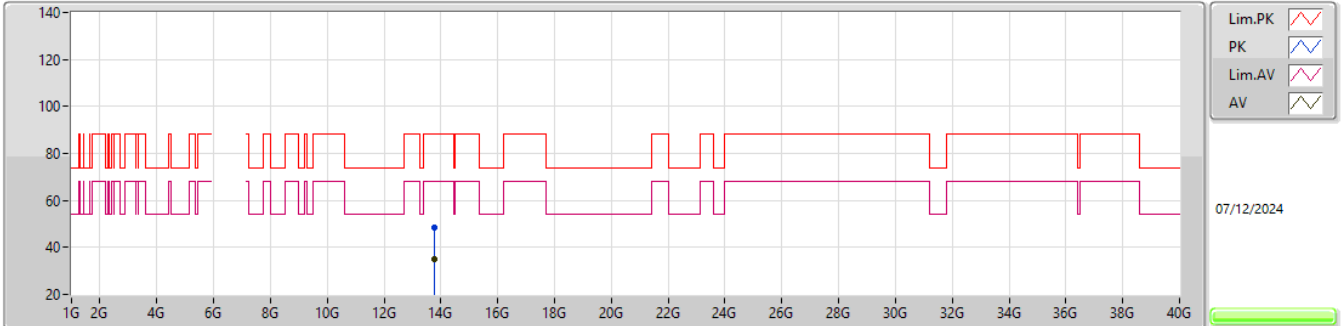


EUT_X_2TX
Setting 20.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.76743G	48.52	88.20	-39.68	40.11	3	Vertical	264	2.44	-	41.07	11.81	44.47			
RMS	13.76529G	34.89	68.20	-33.31	26.47	3	Vertical	264	2.44	-	41.07	11.82	44.47			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6885MHz_TX

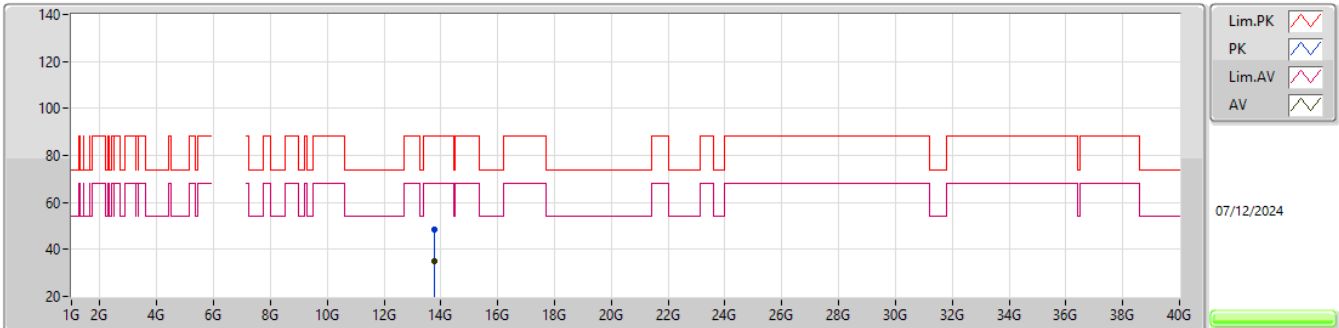EUT_X_2TX
Setting 20.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.76873G	48.65	88.20	-39.55	40.25	3	Horizontal	64	1.92	-	41.06	11.81	44.47			
RMS	13.76512G	34.87	68.20	-33.33	26.45	3	Horizontal	64	1.92	-	41.07	11.82	44.47			