



RADIO TEST REPORT

FCC ID : MSQ-USBBE7V00
Equipment : Tri-band BE6500 WiFi 7 USB Adapter
Brand Name : ASUS
Model Name : ROG USB-BE92
Applicant : ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou, Taipei City 112, Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on Oct. 29, 2024, and testing was started from Dec. 05, 2024 and completed on Jan. 08, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	11
1.3 Testing Location Information	11
1.4 Measurement Uncertainty	12
2 Test Configuration of EUT	13
2.1 Test Channel Mode	13
2.2 The Worst Case Measurement Configuration	15
2.3 EUT Operation during Test	16
2.4 Accessories	16
2.5 Support Equipment.....	16
2.6 Test Setup Diagram	17
3 Transmitter Test Result	19
3.1 AC Power-line Conducted Emissions	19
3.2 Emission Bandwidth	21
3.3 Maximum Output Power	22
3.4 Power Spectral Density	25
3.5 Unwanted Emissions.....	28
4 Test Equipment and Calibration Data	33
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.4



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Output Power	PASS	-
3.4	15.407(a)	Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Wendy Pan**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80), be (EHT80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5725-5850		5775	155 [1]
5150-5350	ac (VHT160), ax (HEW160), be (EHT160)	5250	50 [1]
5470-5725		5570	114 [1]

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	2TX
5.15-5.25GHz	802.11n HT20	20	2TX
5.15-5.25GHz	802.11ac VHT20	20	2TX
5.15-5.25GHz	802.11ax HEW20	20	2TX
5.15-5.25GHz	802.11be EHT20	20	2TX
5.15-5.25GHz	802.11n HT40	40	2TX
5.15-5.25GHz	802.11ac VHT40	40	2TX
5.15-5.25GHz	802.11ax HEW40	40	2TX
5.15-5.25GHz	802.11be EHT40	40	2TX
5.15-5.25GHz	802.11ac VHT80	80	2TX
5.15-5.25GHz	802.11ax HEW80	80	2TX
5.15-5.25GHz	802.11be EHT80	80	2TX
5.15-5.35GHz	802.11ac VHT160	160	2TX
5.15-5.35GHz	802.11ax HEW160	160	2TX
5.15-5.35GHz	802.11be EHT160	160	2TX
5.25-5.35GHz	802.11a	20	2TX



Band	Mode	BWch (MHz)	Nant
5.25-5.35GHz	802.11n HT20	20	2TX
5.25-5.35GHz	802.11ac VHT20	20	2TX
5.25-5.35GHz	802.11ax HEW20	20	2TX
5.25-5.35GHz	802.11be EHT20	20	2TX
5.25-5.35GHz	802.11n HT40	40	2TX
5.25-5.35GHz	802.11ac VHT40	40	2TX
5.25-5.35GHz	802.11ax HEW40	40	2TX
5.25-5.35GHz	802.11be EHT40	40	2TX
5.25-5.35GHz	802.11ac VHT80	80	2TX
5.25-5.35GHz	802.11ax HEW80	80	2TX
5.25-5.35GHz	802.11be EHT80	80	2TX
5.47-5.725GHz	802.11a	20	2TX
5.47-5.725GHz	802.11n HT20	20	2TX
5.47-5.725GHz	802.11ac VHT20	20	2TX
5.47-5.725GHz	802.11ax HEW20	20	2TX
5.47-5.725GHz	802.11be EHT20	20	2TX
5.47-5.725GHz	802.11n HT40	40	2TX
5.47-5.725GHz	802.11ac VHT40	40	2TX
5.47-5.725GHz	802.11ax HEW40	40	2TX
5.47-5.725GHz	802.11be EHT40	40	2TX
5.47-5.725GHz	802.11ac VHT80	80	2TX
5.47-5.725GHz	802.11ax HEW80	80	2TX
5.47-5.725GHz	802.11be EHT80	80	2TX
5.47-5.725GHz	802.11ac VHT160	160	2TX
5.47-5.725GHz	802.11ax HEW160	160	2TX
5.47-5.725GHz	802.11be EHT160	160	2TX
5.725-5.85GHz	802.11a	20	2TX
5.725-5.85GHz	802.11n HT20	20	2TX
5.725-5.85GHz	802.11ac VHT20	20	2TX
5.725-5.85GHz	802.11ax HEW20	20	2TX
5.725-5.85GHz	802.11be EHT20	20	2TX
5.725-5.85GHz	802.11n HT40	40	2TX
5.725-5.85GHz	802.11ac VHT40	40	2TX
5.725-5.85GHz	802.11ax HEW40	40	2TX
5.725-5.85GHz	802.11be EHT40	40	2TX
5.725-5.85GHz	802.11ac VHT80	80	2TX
5.725-5.85GHz	802.11ax HEW80	80	2TX
5.725-5.85GHz	802.11be EHT80	80	2TX



Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 and VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	LYNwave	ALX24M-122AA3	PIFA Antenna	N/A	Note1
2	2	LYNwave	ALX24M-122AA4	PIFA Antenna	N/A	

Note1:

Ant.	Port	Antenna Gain (dBi)						
		WLAN 2.4GHz	WLAN 5GHz			WLAN 6GHz		
			UNII1~2A	UNII2C	UNII3	UNII5	UNII6~7	UNII8
1	1	3.8	2.8	3.2	2.9	3.1	4.7	4.6
2	2	3.8	3.1	2.9	3.3	4.3	3.5	3.4

Note 2: The above information was declared by manufacturer.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

$$2.4G \ G1 = 3.8 \text{ dBi} ; G2 = 3.8 \text{ dBi} ;$$

$$5G \ \text{UNII-1} \ G1 = 2.8 \text{ dBi} ; G2 = 3.1 \text{ dBi} ;$$

$$5G \ \text{UNII-2A} \ G1 = 2.8 \text{ dBi} ; G2 = 3.1 \text{ dBi} ;$$

$$5G \ \text{UNII-2C} \ G1 = 3.2 \text{ dBi} ; G2 = 2.9 \text{ dBi} ;$$

$$5G \ \text{UNII-3} \ G1 = 2.9 \text{ dBi} ; G2 = 3.3 \text{ dBi} ;$$

$$6G \ \text{UNII-5} \ G1 = 3.1 \text{ dBi} ; G2 = 4.3 \text{ dBi} ;$$

$$6G \ \text{UNII-6} \ G1 = 4.7 \text{ dBi} ; G2 = 3.5 \text{ dBi} ;$$

$$6G \ \text{UNII-7} \ G1 = 4.7 \text{ dBi} ; G2 = 3.5 \text{ dBi} ;$$

$$6G \ \text{UNII-8} \ G1 = 4.6 \text{ dBi} ; G2 = 3.4 \text{ dBi} ;$$

$$2.4G \ DG = 6.81 \text{ dBi}$$

$$5G \ \text{UNII-1} \ DG = 5.96 \text{ dBi}$$

$$5G \ \text{UNII-2A} \ DG = 5.96 \text{ dBi}$$

$$5G \ \text{UNII-2C} \ DG = 6.06 \text{ dB}$$

$$5G \ \text{UNII-3} \ DG = 6.11 \text{ dBi}$$

$$6G \ \text{UNII-5} \ DG = 6.73 \text{ dBi}$$

$$6G \ \text{UNII-6} \ DG = 7.13 \text{ dBi}$$

$$6G \ \text{UNII-7} \ DG = 7.13 \text{ dB}$$

$$6G \ \text{UNII-8} \ DG = 7.03 \text{ dBi}$$

**Note 4: For 2.4GHz function:****For IEEE 802.11b/g/n/VHT/ax/be (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:**For IEEE 802.11a/n/ac/ax/be (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 6GHz function:**For IEEE 802.11a/ax/be (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss 1,(6D)	0.989	0.05	962.5u	10
802.11be EHT20_Nss 1,(M0)	0.989	0.05	960u	10
802.11be EHT40_Nss 1,(M0)	0.989	0.05	955u	10
802.11be EHT80_Nss 1,(M0)	0.989	0.05	995u	10
802.11be EHT160_Nss 1,(M0)	0.989	0.05	995u	10

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From host system			
Beamforming Function	☐	With beamforming	☒	Without beamforming
Weather Band	☒	With 5600~5650MHz	☐	Without 5600~5650MHz
Function	☐	Outdoor P2M	☐	Indoor P2M
	☐	Fixed P2P	☒	Client
TPC Function	☒	With TPC	☐	Without TPC
Channel Puncturing Function	☐	Supported Static Puncturing		
	☐	Supported Dynamic Puncturing		
	☒	Unsupported		
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	AX Series MP Toolkit mp_v2.0.44			

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Ken Yeh	23.3~24.7 / 61~63	Dec. 09, 2024~ Dec. 30, 2024
				Jan. 07, 2025~ Jan. 08, 2025
Radiated below 1GHz	03CH03-CB	Gordon Hung	22.2~22.6 / 59~61	Dec. 05, 2024~ Dec. 17, 2024
Radiated above 1GHz	03CH02-CB	Gordon Hung	22~23 / 61~63	Dec. 05, 2024~ Dec. 17, 2024
AC Conduction	CO01-CB	Bob Chang	23~24 / 58~60	Dec. 09, 2024

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11a_Nss1,(6Mbps)_2TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11be EHT20_Nss1,(MCS0)_2TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11be EHT40_Nss1,(MCS0)_2TX
5190MHz
5230MHz
5270MHz
5310MHz
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
5755MHz
5795MHz
802.11be EHT80_Nss1,(MCS0)_2TX



5210MHz
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
5775MHz
802.11be EHT160_Nss1,(MCS0)_2TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
5570MHz

Note:

- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160/HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT in Z axis + WLAN 2.4GHz
2	EUT in Y axis + Extension USB Cradle + WLAN 2.4GHz
Mode 2 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.	
3	EUT in Y axis + Extension USB Cradle + WLAN 5GHz
4	EUT in Y axis + Extension USB Cradle + WLAN 6GHz
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Output Power Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
After evaluating, and the worst case axis was found as below from Unwanted Emissions above 1GHz. So the measurement will follow this same test configuration.	
1	EUT in Z axis + WLAN 2.4GHz
2	EUT in X axis + WLAN 5GHz
3	EUT in X axis + WLAN 6GHz
For operating mode 3 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found as below. So the measurement will follow this same test configuration.	
1	EUT in X axis



2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories			
Equipment Name	Brand Holder	Model Name	Length
Extension USB Cradle	Always Tai Lai Co., Ltd.	Y001-1686	Shielded, 1m

2.5 Support Equipment


For AC Conduction:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	EUT NB	ASUS	P14T	N/A
B	Earphone	e-Power	GT-02	N/A
C	Mouse	Logitech	M-UAE96	N/A
D	AP Router	ASUS	RT-BE96U	MSQ-RTBE6G00
E	AP Router NB	DELL	E6430	N/A

For Radiated and RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

2.6 Test Setup Diagram

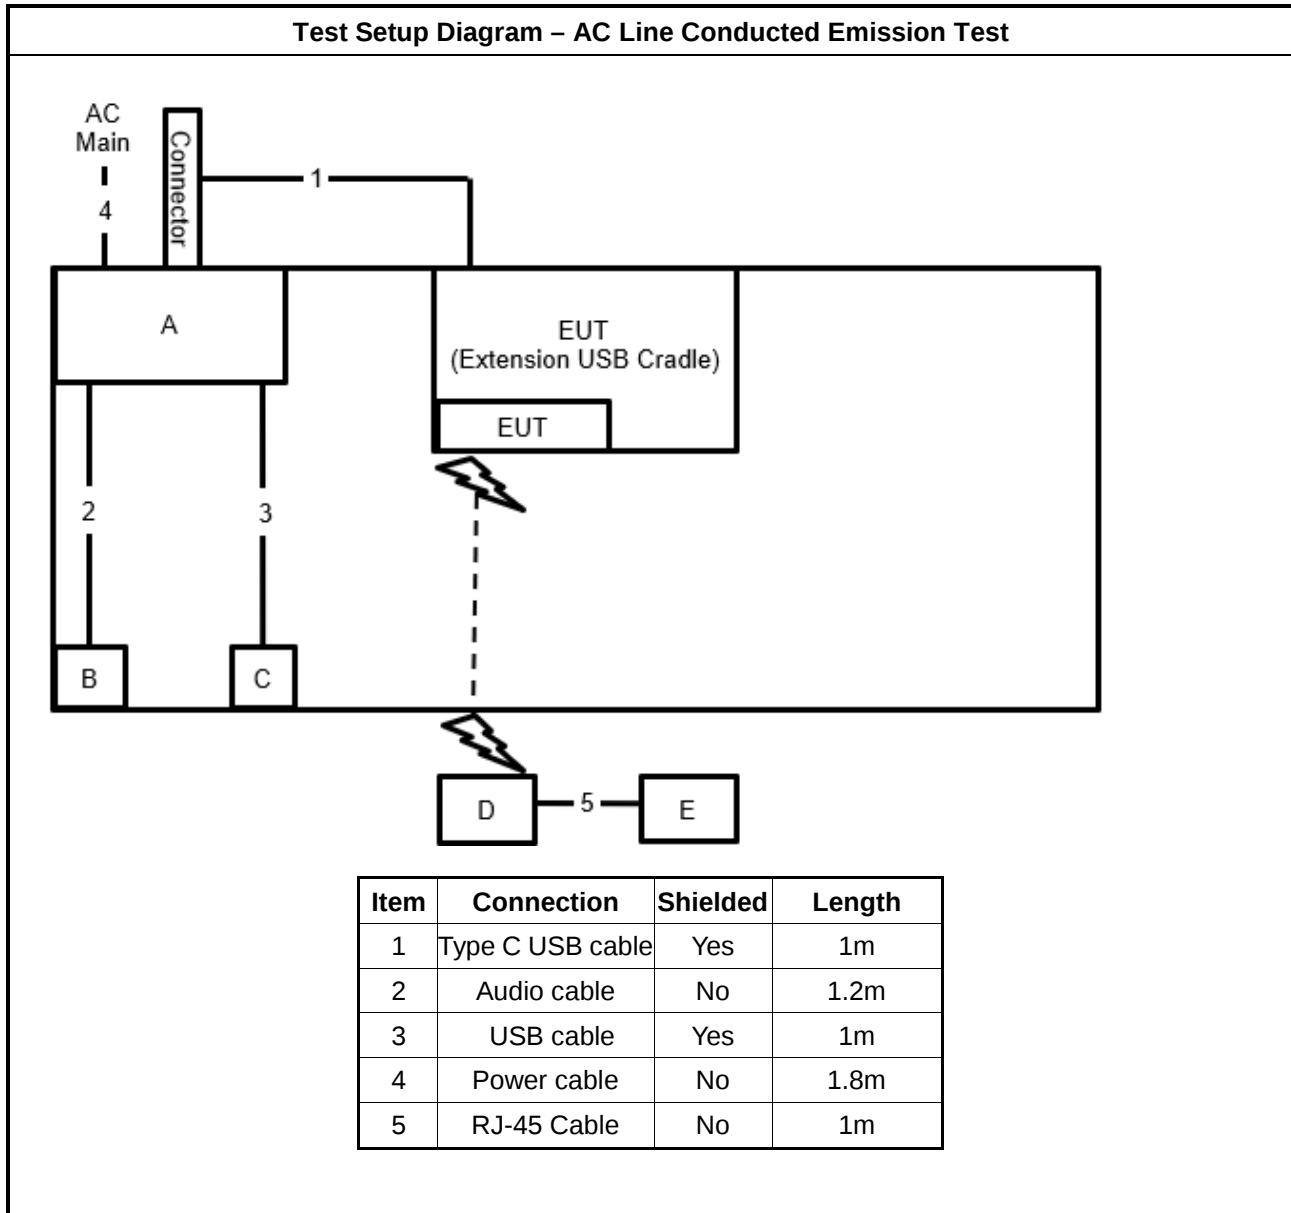

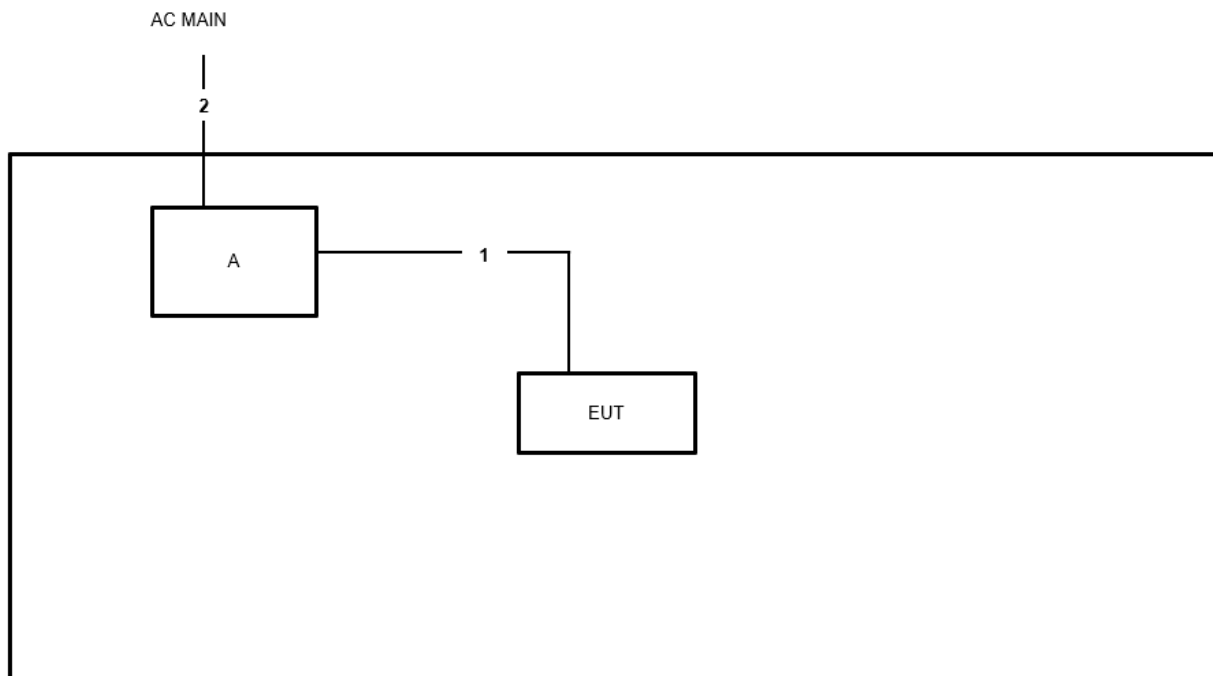Test Setup Diagram - Radiated Test


Item	Connection	Shielded	Length
1	USB Cable	Yes	1.5m
2	Power cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

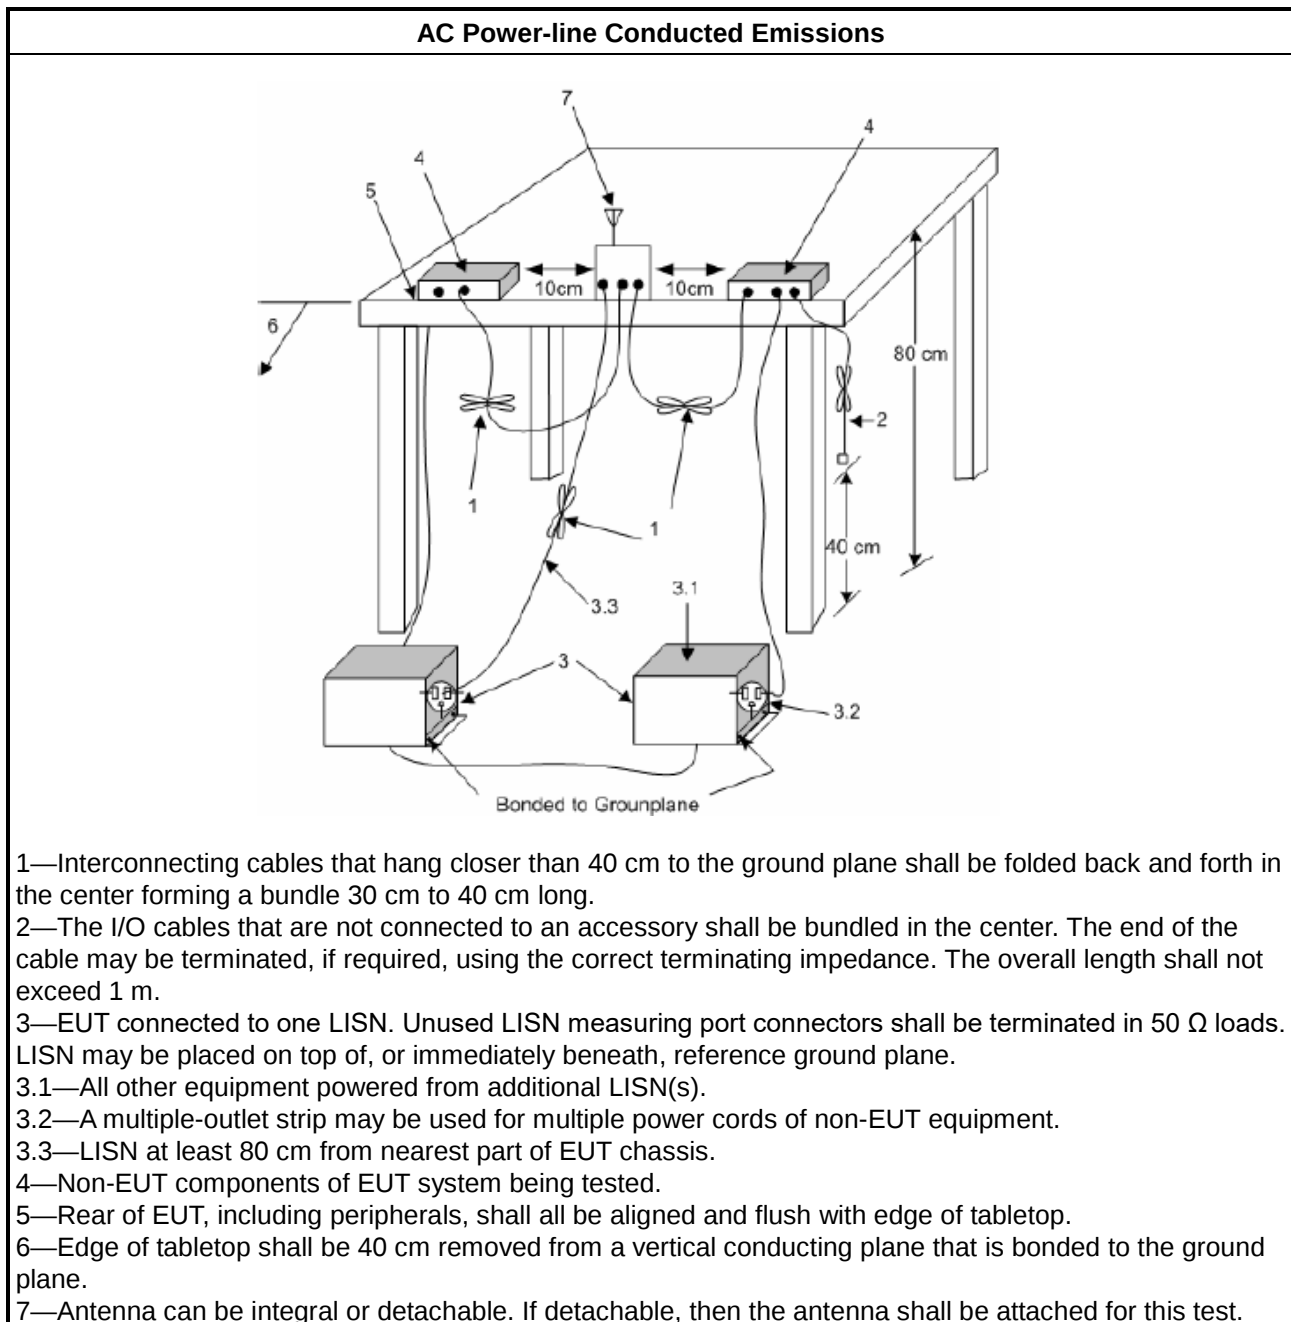

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth $\geq 500\text{kHz}$.
LE-LAN Devices	
☐	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq 500\text{kHz}$.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

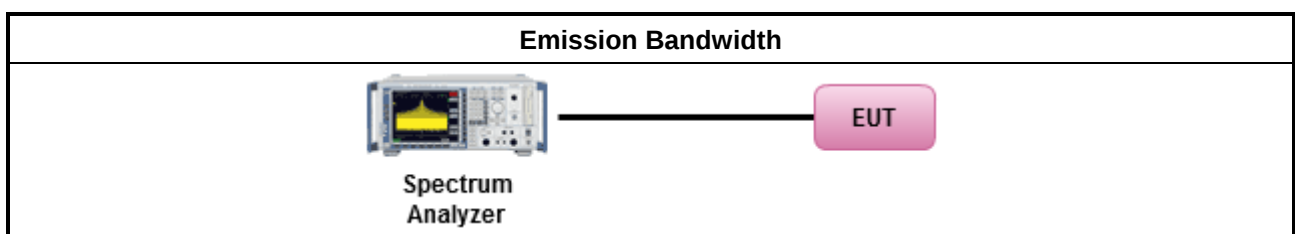

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Output Power

3.3.1 Limit

Maximum Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	The maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
☒ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
☐	The maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band:	
☐	- For other devices: The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. - Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.25-5.35 GHz band:	
☐	- For other devices: The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10 B$, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz - Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10 B$, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.	
☐ For the 5.725-5.85 GHz band:	
☐	The maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
	Average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

For Straddle channel

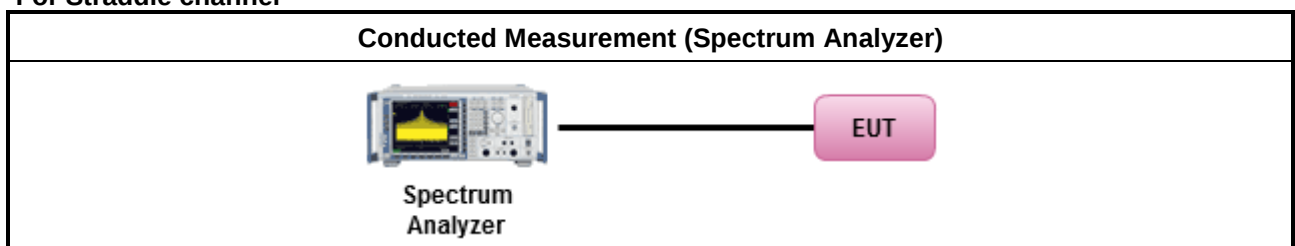

For Other test

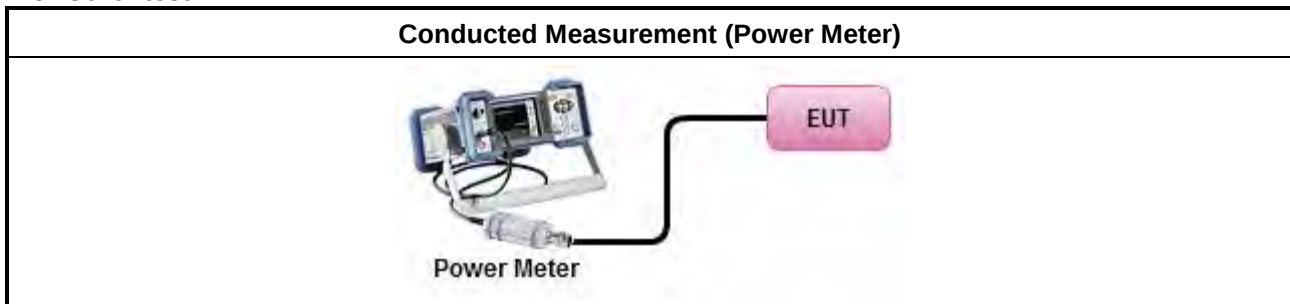

3.3.5 Test Result of Maximum Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band:
☐	The peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.725-5.85 GHz band:
☐	The peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
LE-LAN Devices	
☐	For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.
☐	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.
☐	e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; $-13 - 0.716 (\theta - 8)$ dBW/MHz for $8^\circ \leq \theta < 40^\circ$ $-35.9 - 1.22 (\theta - 40)$ dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.
☐	For the 5.725-5.85 GHz band:
☐	The peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	



3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐ For radiated measurement.	

Test Method	
	Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

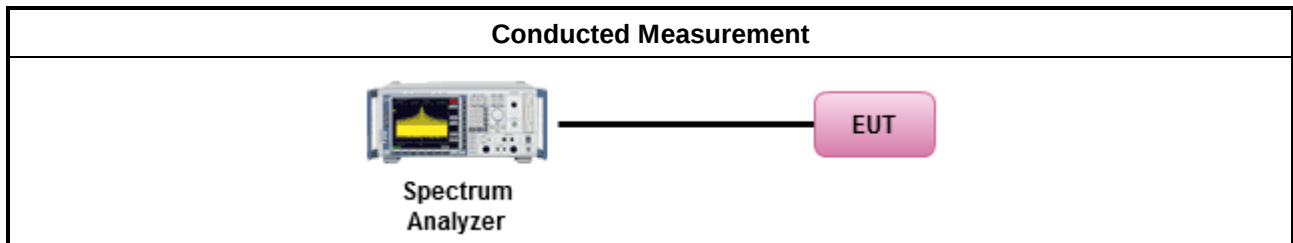

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.



Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	

3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

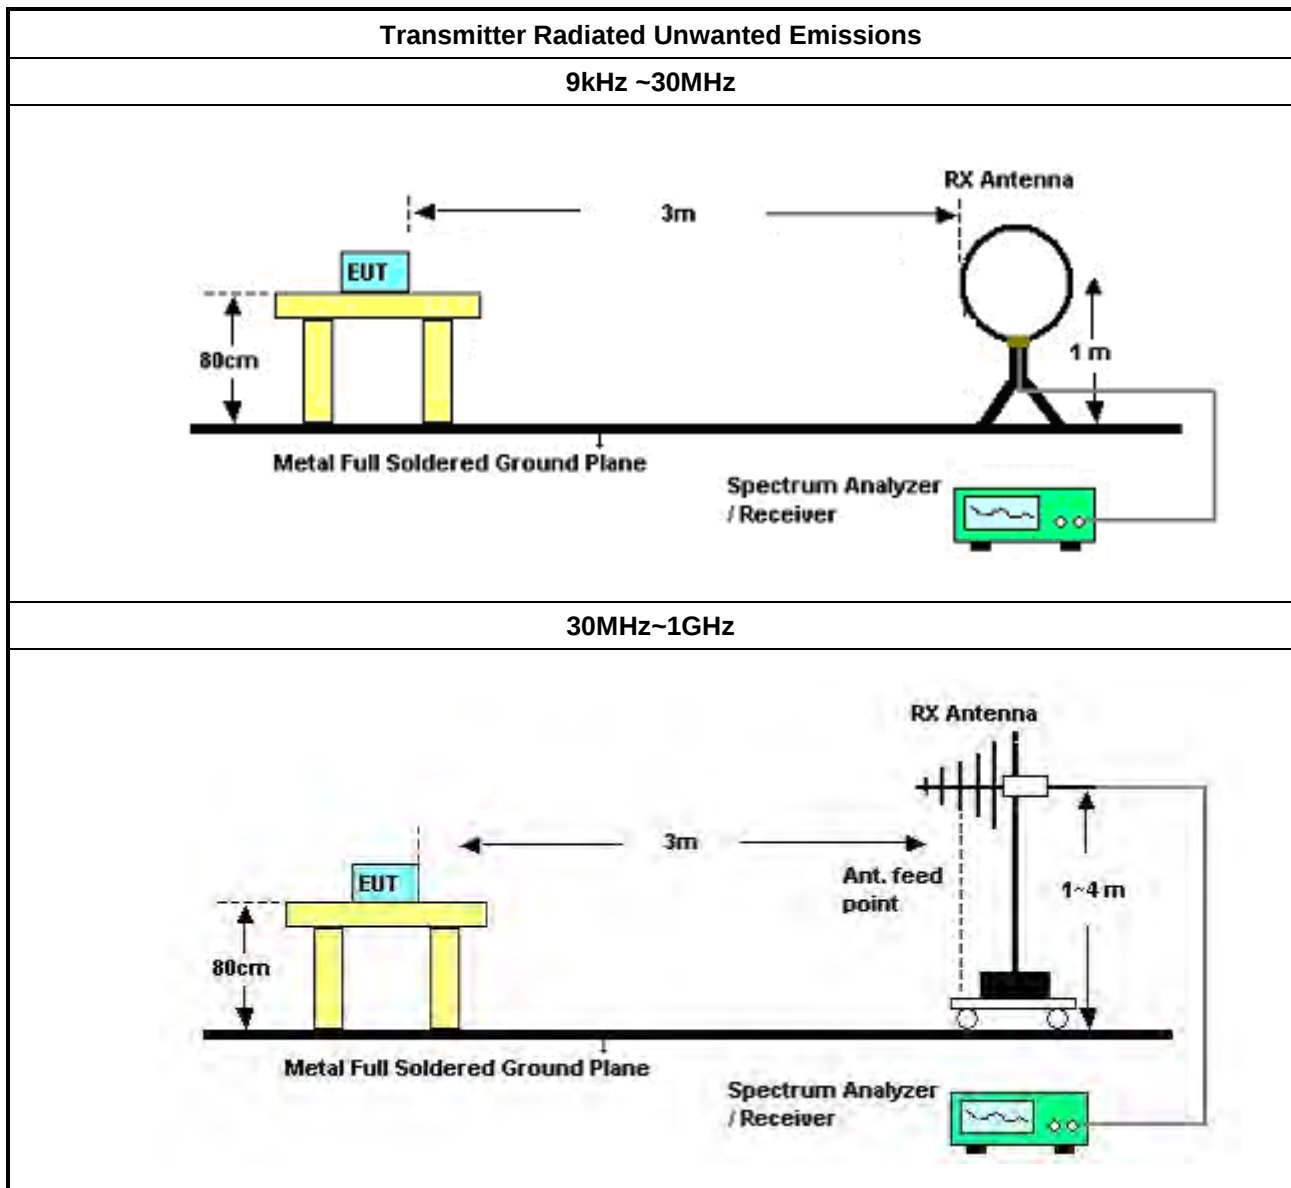

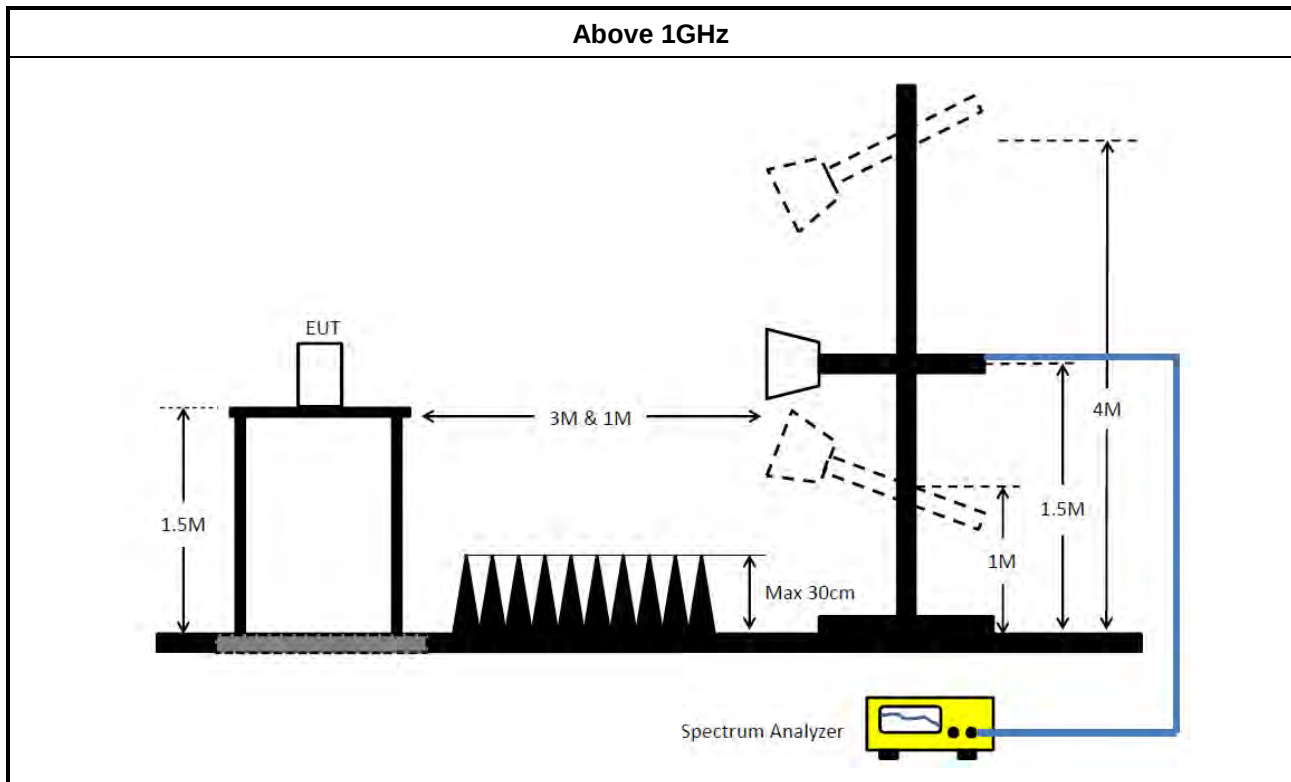

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 01, 2024	Feb. 28, 2025	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 19, 2024	Feb. 18, 2025	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 24, 2024	Apr. 23, 2025	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30 MHz	Oct. 16, 2024	Oct. 15, 2025	Radiation (03CH03-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH03-CB	30 MHz ~ 1 GHz	Jan. 18, 2024	Jan. 17, 2025	Radiation (03CH03-CB)
Bilog Antenna with 6dB Attenuator	Schaffner & EMC	CBL6112B& N-6-06	2888&AT-N060 5	30MHz ~ 1GHz	Jan. 18, 2024	Jan. 17, 2025	Radiation (03CH03-CB)
Amplifier	SGH	SGH301	20240606-1	30MHz ~ 1GHz	Jun. 04, 2024	Jun. 03, 2025	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 11, 2024	Jun. 10, 2025	Radiation (03CH03-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH03-CB)
RF Cable-low	Woken	RG402	Low Cable-02+29	30MHz ~ 1GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 24, 2024	Mar. 23, 2025	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 12, 2024	Apr. 11, 2025	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Aug. 14, 2024	Aug. 13, 2025	Radiation (03CH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11.19	5.15GHz-7.115 GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2024	May 26, 2025	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~18 GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Mar. 01, 2024	Feb. 28, 2025	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	MY45100745	50MHz~18GHz	Jul. 12, 2024	Jul. 11, 2025	Conducted (TH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11.19	5.15GHz-7.115 GHz	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	QP	154.5k	43.06	65.75	-22.69	Line

Mode 2

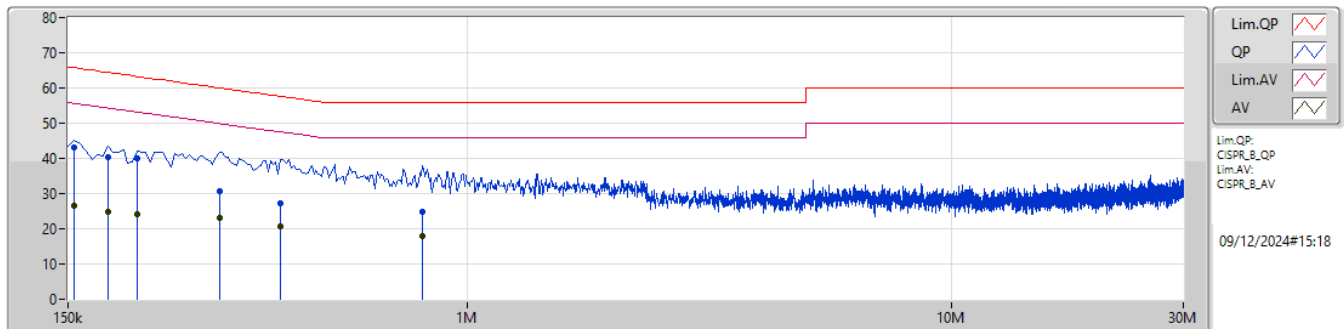

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	43.06	65.75	-22.69	10.04	Line	"Worst"	33.02	0.04	0.08	9.92						
AV	154.5k	26.70	55.75	-29.05	10.04	Line	-	16.66	0.04	0.08	9.92						
QP	181.5k	40.36	64.41	-24.05	10.05	Line	-	30.31	0.04	0.07	9.94						
AV	181.5k	24.99	54.41	-29.42	10.05	Line	-	14.94	0.04	0.07	9.94						
QP	208.5k	40.11	63.27	-23.16	10.07	Line	-	30.04	0.04	0.07	9.96						
AV	208.5k	24.29	53.27	-28.98	10.07	Line	-	14.22	0.04	0.07	9.96						
QP	307.5k	30.59	60.03	-29.44	10.16	Line	-	20.43	0.05	0.09	10.02						
AV	307.5k	23.18	50.03	-26.85	10.16	Line	-	13.02	0.05	0.09	10.02						
QP	411k	27.28	57.63	-30.35	10.21	Line	-	17.07	0.05	0.10	10.06						
AV	411k	20.61	47.63	-27.02	10.21	Line	-	10.40	0.05	0.10	10.06						
QP	807k	24.85	56.00	-31.15	10.30	Line	-	14.55	0.07	0.09	10.14						
AV	807k	17.96	46.00	-28.04	10.30	Line	-	7.66	0.07	0.09	10.14						

Mode 2

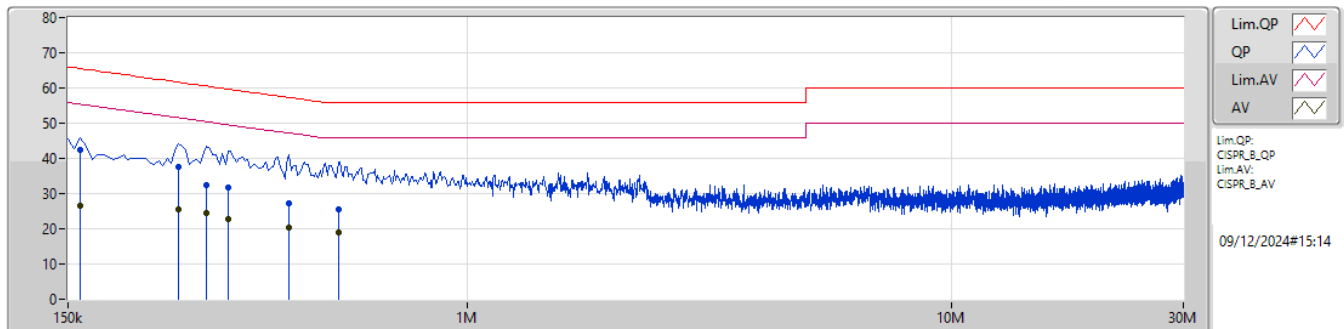

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	159k	42.41	65.52	-23.11	10.06	Neutral	"Worst"	32.35	0.06	0.08	9.92						
AV	159k	26.46	55.52	-29.06	10.06	Neutral	-	16.40	0.06	0.08	9.92						
QP	253.5k	37.43	61.64	-24.21	10.13	Neutral	-	27.30	0.06	0.08	9.99						
AV	253.5k	25.61	51.64	-26.03	10.13	Neutral	-	15.48	0.06	0.08	9.99						
QP	289.5k	32.47	60.53	-28.06	10.16	Neutral	-	22.31	0.06	0.09	10.01						
AV	289.5k	24.53	50.53	-26.00	10.16	Neutral	-	14.37	0.06	0.09	10.01						
QP	321k	31.61	59.67	-28.06	10.18	Neutral	-	21.43	0.06	0.09	10.03						
AV	321k	22.91	49.67	-26.76	10.18	Neutral	-	12.73	0.06	0.09	10.03						
QP	429k	27.08	57.28	-30.20	10.23	Neutral	-	16.85	0.06	0.10	10.07						
AV	429k	20.29	47.28	-26.99	10.23	Neutral	-	10.06	0.06	0.10	10.07						
QP	541.5k	25.61	56.00	-30.39	10.26	Neutral	-	15.35	0.07	0.10	10.09						
AV	541.5k	18.93	46.00	-27.07	10.26	Neutral	-	8.67	0.07	0.10	10.09						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.25M	16.291M	16M3D1D	17.93M	16.191M
802.11be EHT20_Nss1,(MCS0)_2TX	23.595M	18.861M	18M9D1D	19.965M	18.787M
802.11be EHT40_Nss1,(MCS0)_2TX	59.29M	37.805M	37M8D1D	39.49M	37.473M
802.11be EHT80_Nss1,(MCS0)_2TX	80.3M	76.885M	76M9D1D	80.3M	76.716M
802.11be EHT160_Nss1,(MCS0)_2TX	80.56M	77.522M	77M5D1D	80.48M	77.285M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	24.695M	16.312M	16M3D1D	18.095M	16.189M
802.11be EHT20_Nss1,(MCS0)_2TX	24.86M	18.84M	18M8D1D	20.075M	18.711M
802.11be EHT40_Nss1,(MCS0)_2TX	42.57M	37.561M	37M6D1D	39.38M	37.42M
802.11be EHT80_Nss1,(MCS0)_2TX	80.52M	76.785M	76M8D1D	80.52M	76.703M
802.11be EHT160_Nss1,(MCS0)_2TX	80.48M	77.682M	77M7D1D	80.4M	77.61M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.8M	16.243M	16M2D1D	13.695M	12.968M
802.11be EHT20_Nss1,(MCS0)_2TX	20.13M	18.751M	18M8D1D	14.76M	14.236M
802.11be EHT40_Nss1,(MCS0)_2TX	39.6M	37.576M	37M6D1D	34.685M	33.527M
802.11be EHT80_Nss1,(MCS0)_2TX	80.52M	76.843M	76M8D1D	74.625M	72.793M
802.11be EHT160_Nss1,(MCS0)_2TX	161.92M	154.868M	155MD1D	161.92M	154.745M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	15.07M	16.211M	16M2D1D	2.84M	3.371M
802.11be EHT20_Nss1,(MCS0)_2TX	16.335M	18.741M	18M7D1D	4.02M	4.638M
802.11be EHT40_Nss1,(MCS0)_2TX	36.41M	37.592M	37M6D1D	4.08M	4.223M
802.11be EHT80_Nss1,(MCS0)_2TX	75.46M	76.864M	76M9D1D	4.14M	4.216M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result



Mode	Result	Limit	Port 1-N dB	Port 1-OBW	Port 2-N dB	Port 2-OBW
		(Hz)	(Hz)	(Hz)	(Hz)	(Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	17.93M	16.223M	18.26M	16.191M
5200MHz	Pass	Inf	19.25M	16.291M	18.04M	16.239M
5240MHz	Pass	Inf	18.425M	16.274M	18.04M	16.207M
5260MHz	Pass	Inf	18.37M	16.279M	19.36M	16.248M
5300MHz	Pass	Inf	22.88M	16.299M	24.695M	16.312M
5320MHz	Pass	Inf	18.095M	16.238M	18.205M	16.189M
5500MHz	Pass	Inf	18.535M	16.224M	19.8M	16.223M
5580MHz	Pass	Inf	17.985M	16.243M	18.095M	16.203M
5700MHz	Pass	Inf	17.93M	16.199M	18.095M	16.167M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	13.695M	13.009M	13.725M	12.968M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.84M	3.371M	2.84M	3.376M
5745MHz	Pass	500k	15.07M	16.199M	15.07M	16.159M
5785MHz	Pass	500k	15.07M	16.202M	15.015M	16.172M
5825MHz	Pass	500k	15.07M	16.211M	15.07M	16.168M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	20.075M	18.827M	19.965M	18.788M
5200MHz	Pass	Inf	23.595M	18.861M	21.725M	18.836M
5240MHz	Pass	Inf	22.55M	18.795M	22.77M	18.787M
5260MHz	Pass	Inf	22.33M	18.819M	21.835M	18.801M
5300MHz	Pass	Inf	21.615M	18.84M	24.86M	18.817M
5320MHz	Pass	Inf	20.075M	18.711M	20.075M	18.713M
5500MHz	Pass	Inf	19.91M	18.739M	19.91M	18.724M
5580MHz	Pass	Inf	20.13M	18.743M	20.02M	18.741M
5700MHz	Pass	Inf	20.13M	18.728M	20.075M	18.751M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.76M	14.247M	14.79M	14.236M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.02M	4.638M	4.02M	4.648M
5745MHz	Pass	500k	16.225M	18.741M	15.29M	18.727M
5785MHz	Pass	500k	16.28M	18.719M	16.335M	18.728M
5825MHz	Pass	500k	15.675M	18.726M	15.51M	18.736M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	39.49M	37.483M	39.49M	37.473M
5230MHz	Pass	Inf	44.22M	37.759M	59.29M	37.805M
5270MHz	Pass	Inf	39.71M	37.561M	42.57M	37.556M
5310MHz	Pass	Inf	39.38M	37.42M	39.49M	37.49M
5510MHz	Pass	Inf	39.38M	37.42M	39.6M	37.388M
5550MHz	Pass	Inf	39.38M	37.543M	39.38M	37.561M
5670MHz	Pass	Inf	39.49M	37.576M	39.38M	37.544M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	34.895M	33.541M	34.685M	33.527M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.08M	4.235M	4.1M	4.223M
5755MHz	Pass	500k	35.09M	37.588M	36.41M	37.592M
5795MHz	Pass	500k	35.09M	37.577M	34.98M	37.582M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	80.3M	76.716M	80.3M	76.885M
5290MHz	Pass	Inf	80.52M	76.703M	80.52M	76.785M
5530MHz	Pass	Inf	80.3M	76.843M	80.3M	76.8M
5610MHz	Pass	Inf	80.52M	76.775M	80.52M	76.758M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	75.15M	72.793M	74.625M	72.91M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.2M	4.283M	4.14M	4.216M
5775MHz	Pass	500k	75.02M	76.688M	75.46M	76.864M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	80.48M	77.285M	80.56M	77.522M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	80.4M	77.61M	80.48M	77.682M
5570MHz	Pass	Inf	161.92M	154.868M	161.92M	154.745M





Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5180MHz

09/12/2024

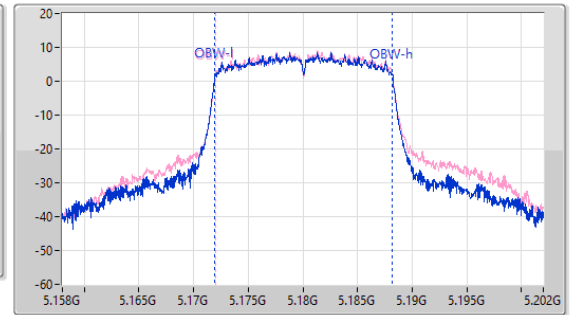
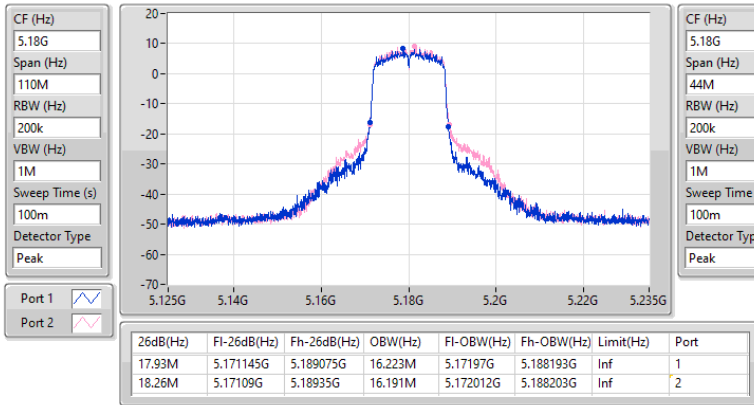

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5200MHz

09/12/2024

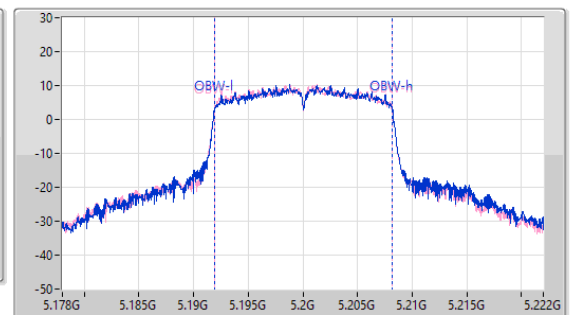
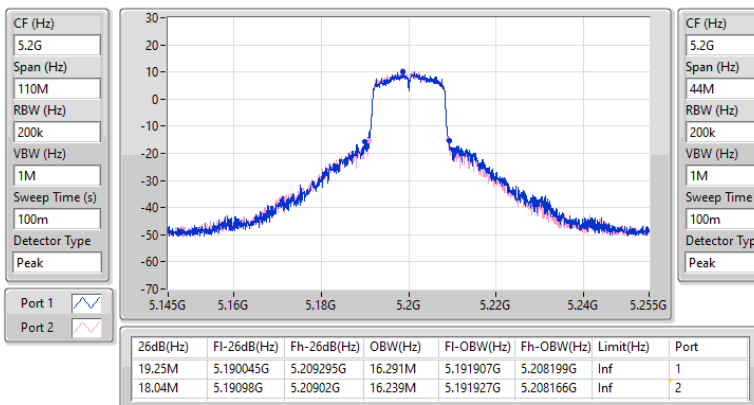


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5240MHz

09/12/2024

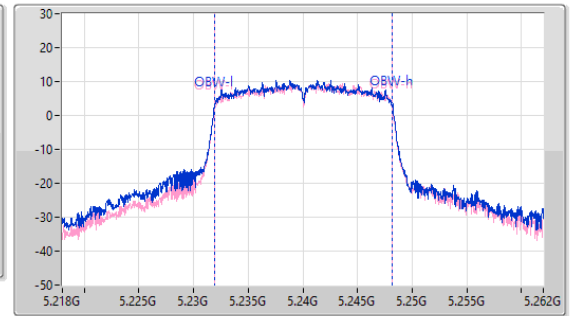
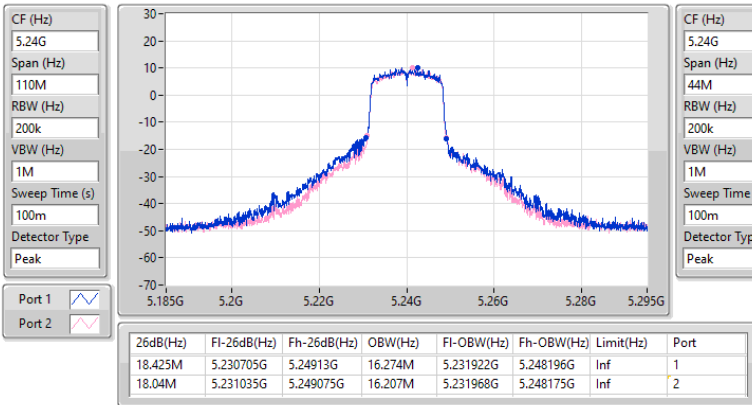

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5260MHz

09/12/2024

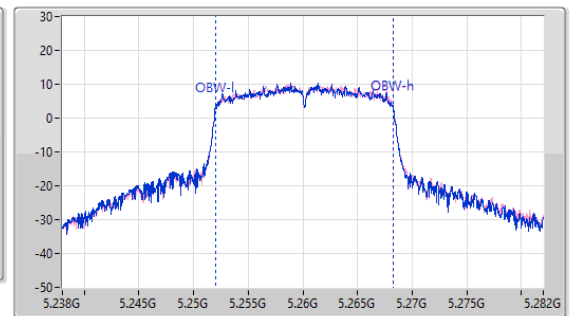
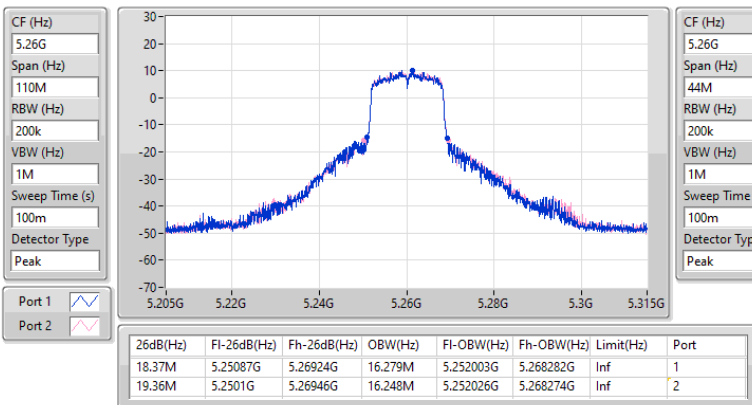


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5300MHz

09/12/2024

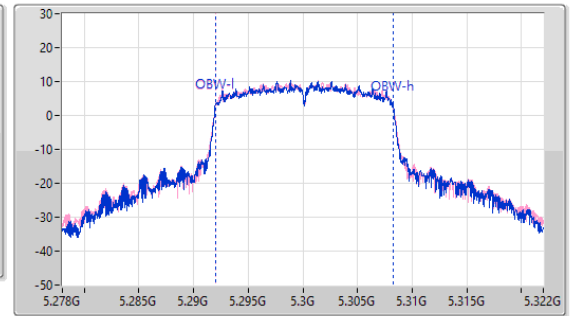
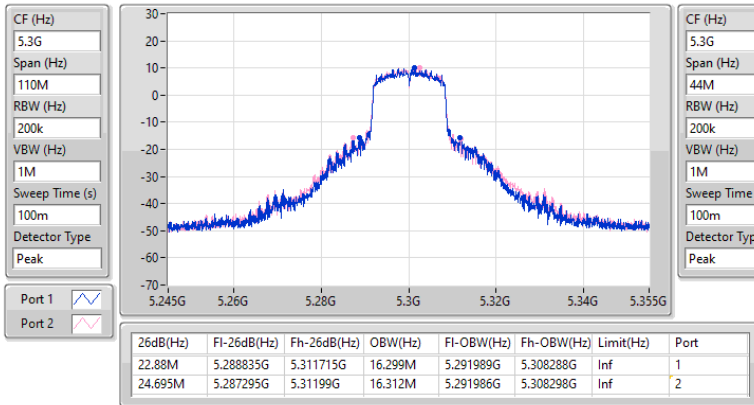

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5320MHz

09/12/2024

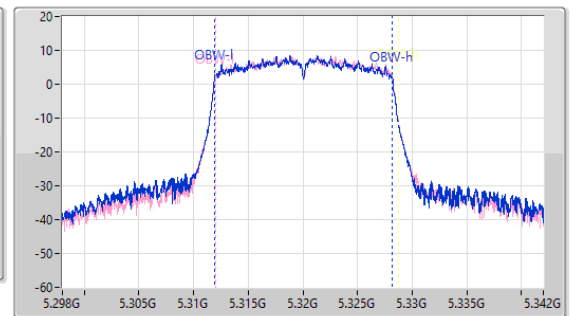
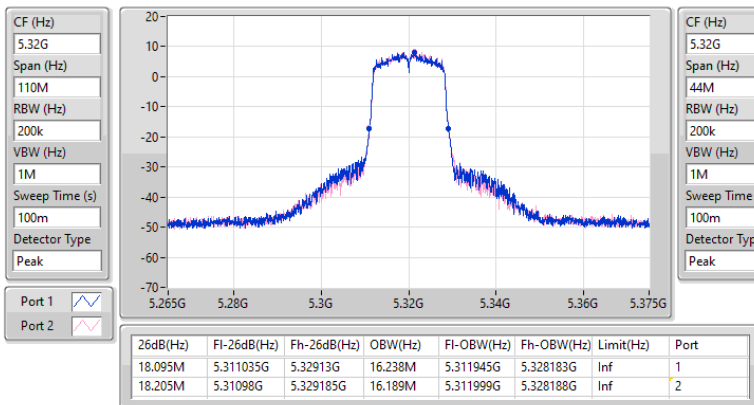


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5500MHz

09/12/2024

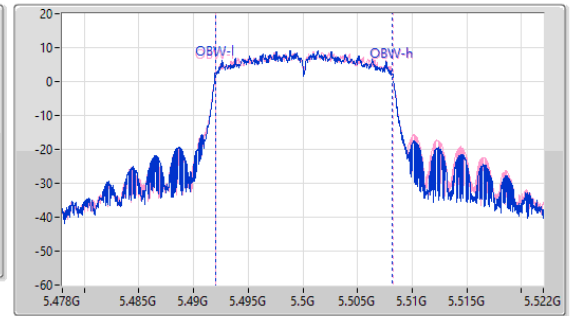
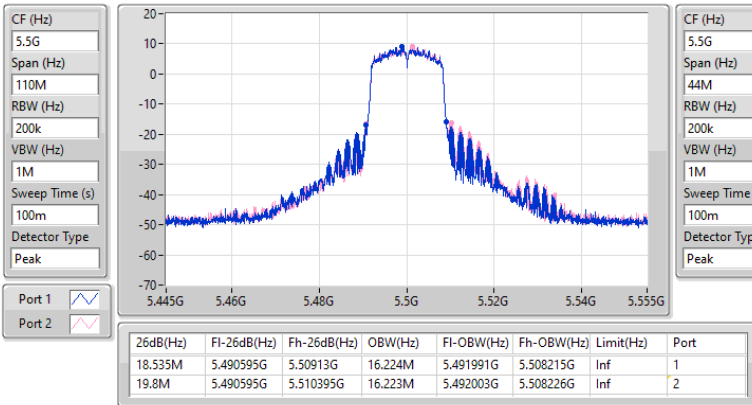

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5580MHz

09/12/2024

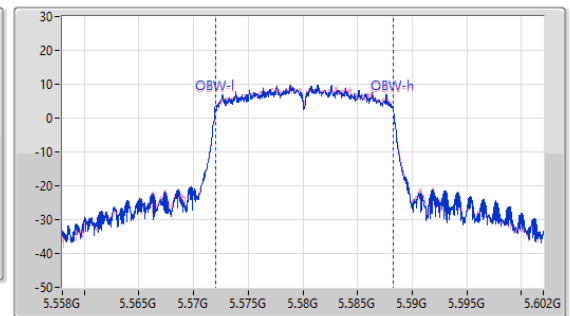
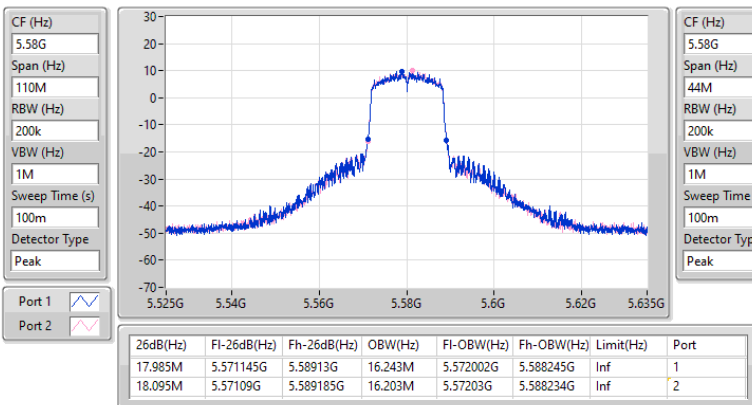


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5700MHz

09/12/2024

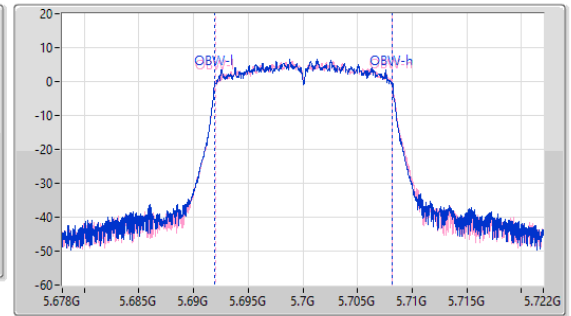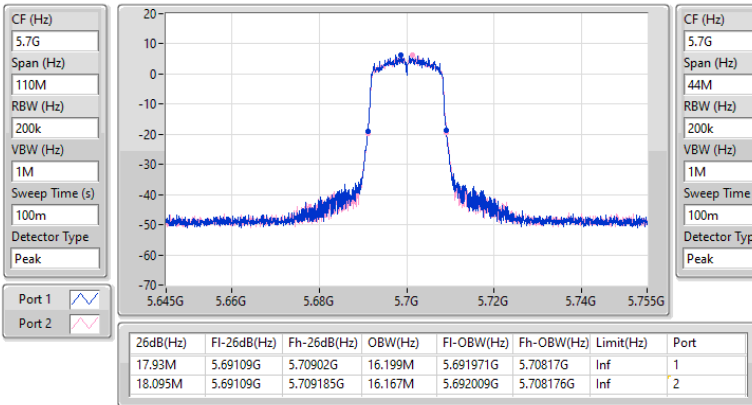
5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5720MHz Straddle 5.47-5.725GHz

09/12/2024

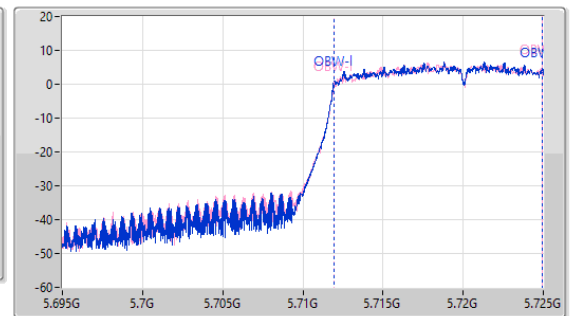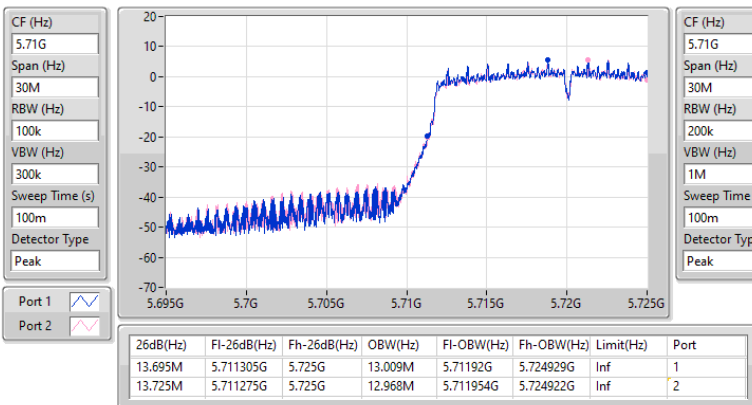


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

09/12/2024

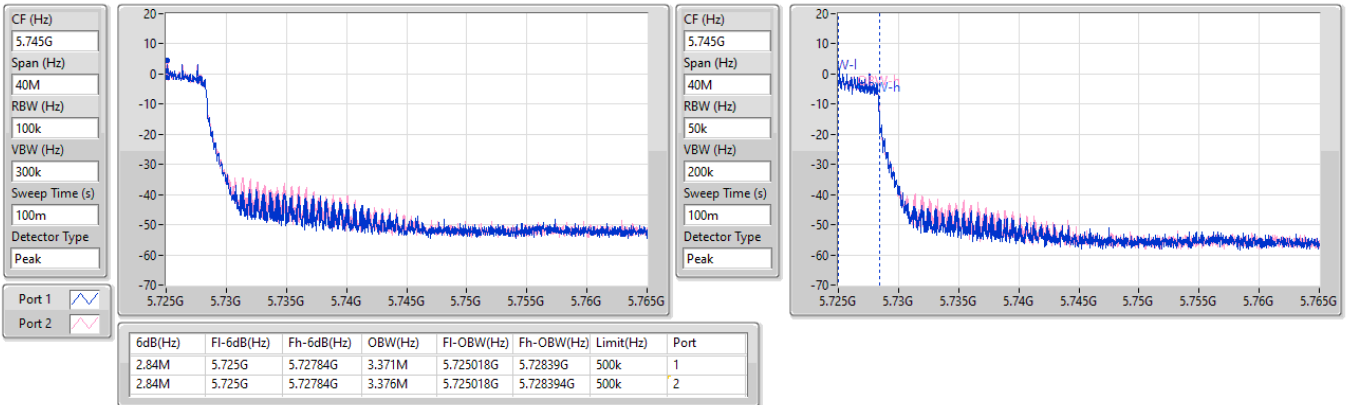


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW


5720MHz Straddle 5.725-5.85GHz

09/12/2024

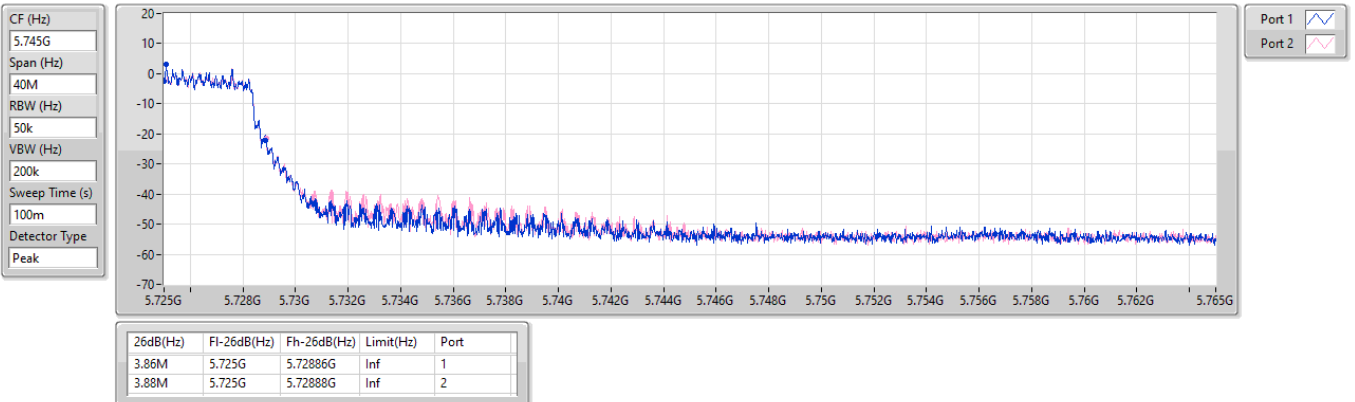


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5745MHz

09/12/2024

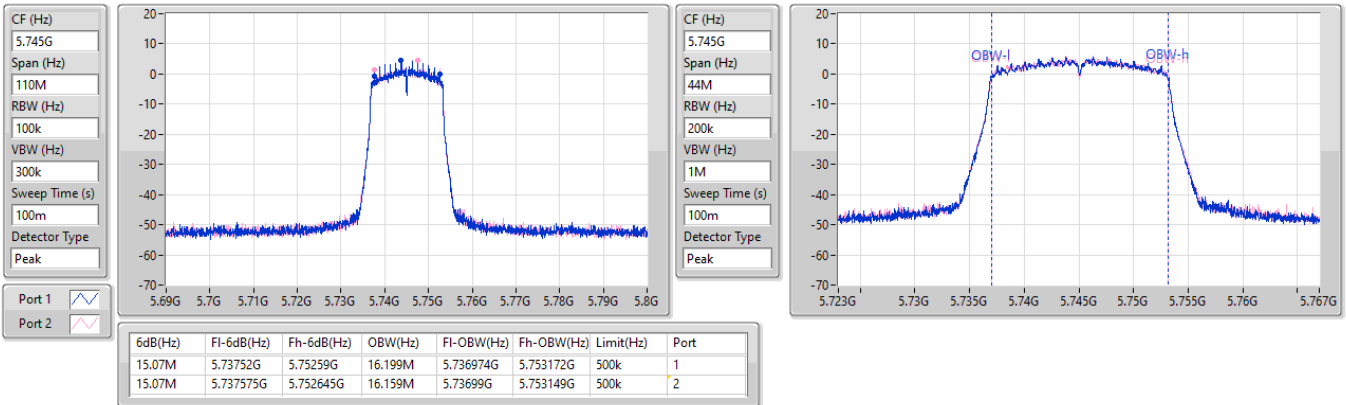

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5745MHz

09/12/2024

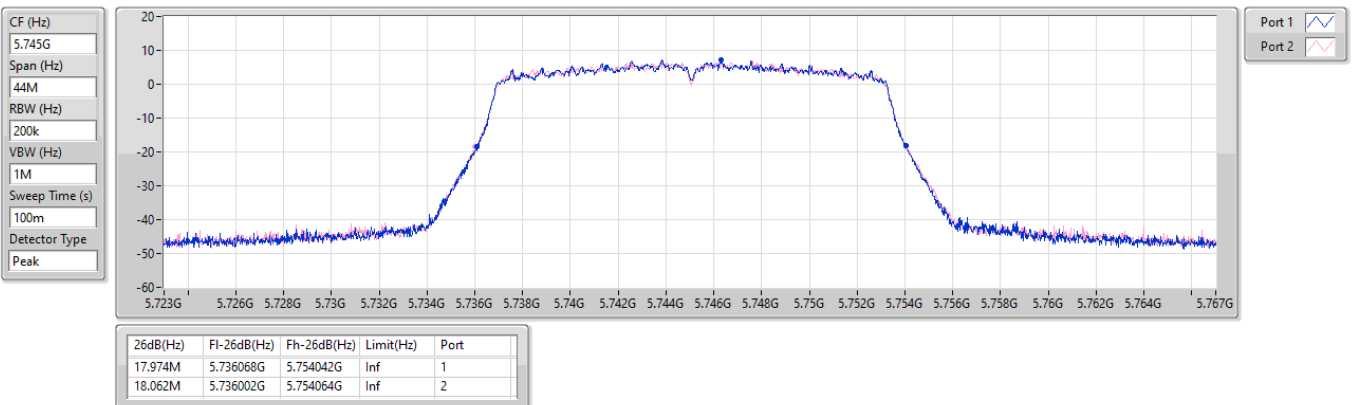


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5785MHz

09/12/2024

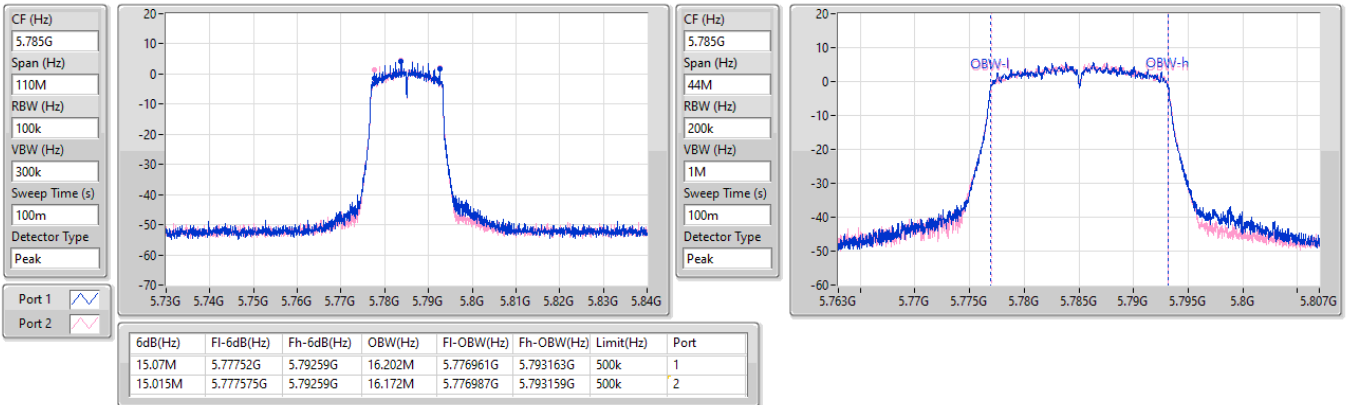

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5785MHz

09/12/2024

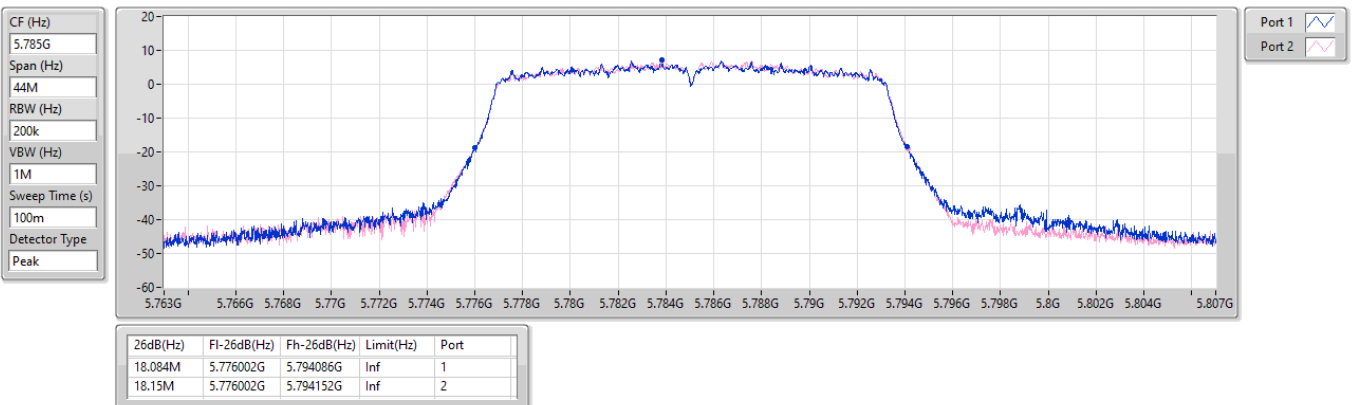


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5825MHz

09/12/2024

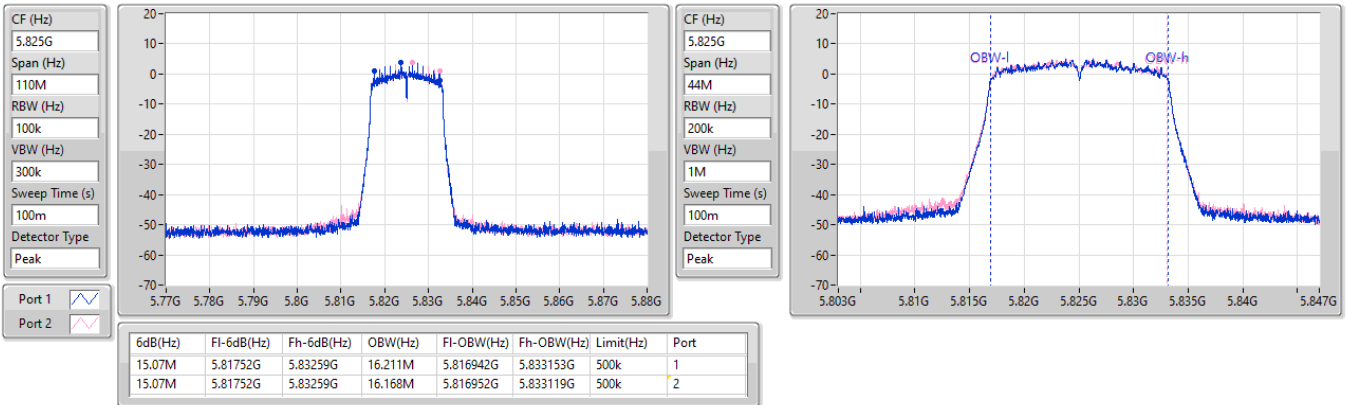
5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5825MHz

09/12/2024


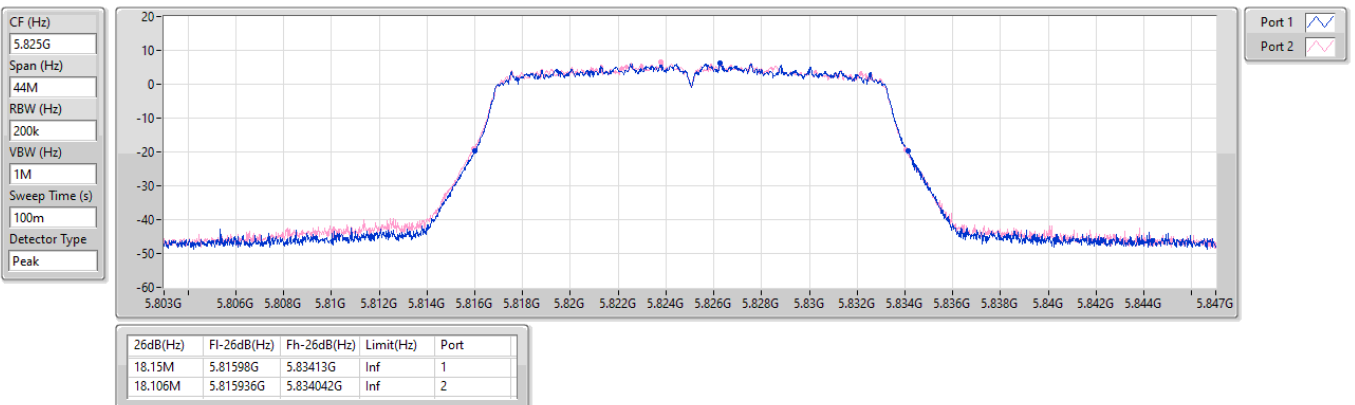


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5180MHz

09/12/2024

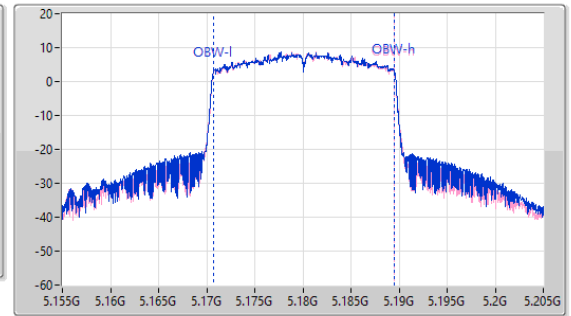
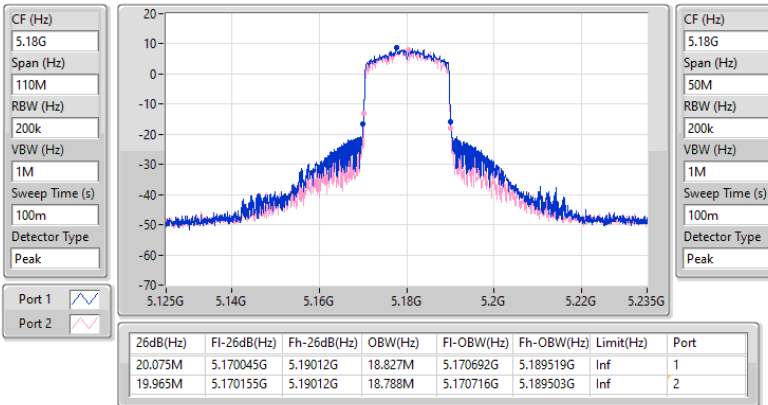


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW



5200MHz

09/12/2024

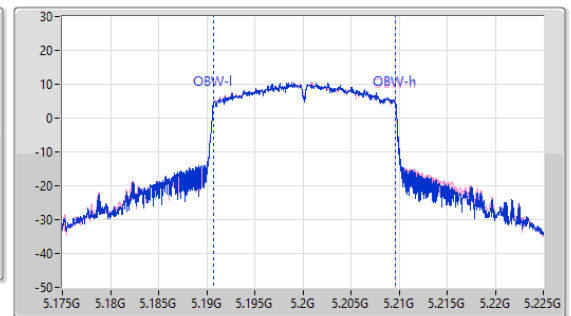
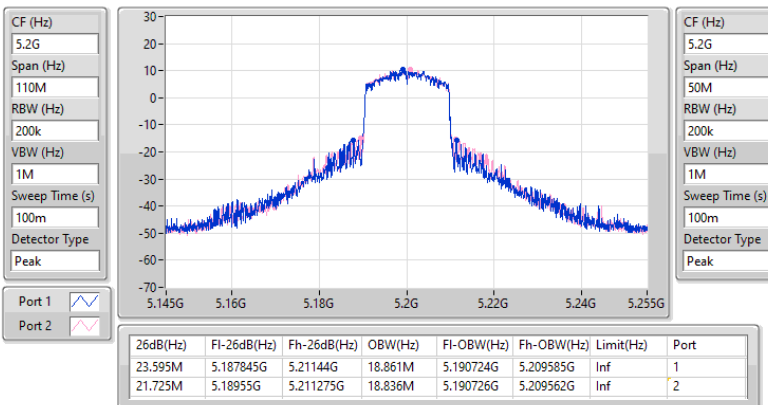


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5240MHz

09/12/2024

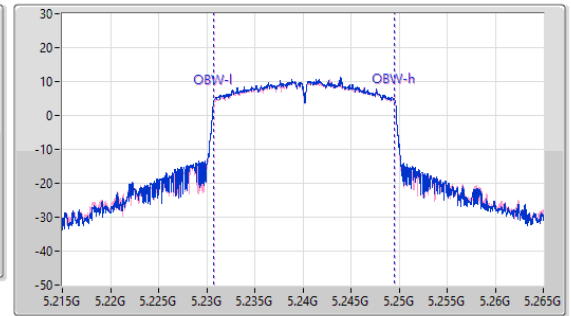
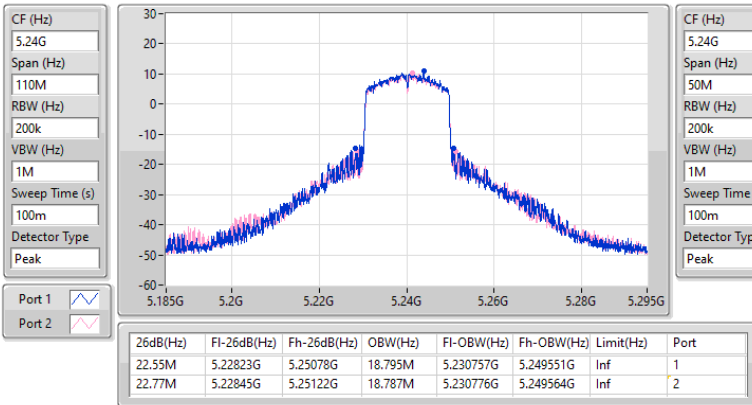

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5260MHz

09/12/2024

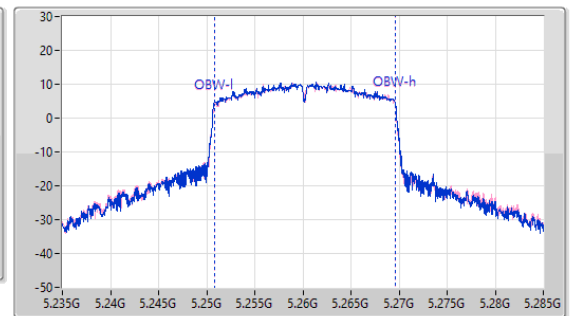
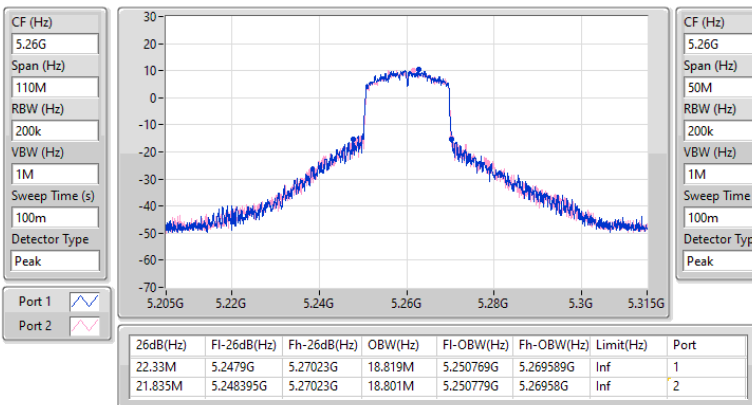


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5300MHz

09/12/2024

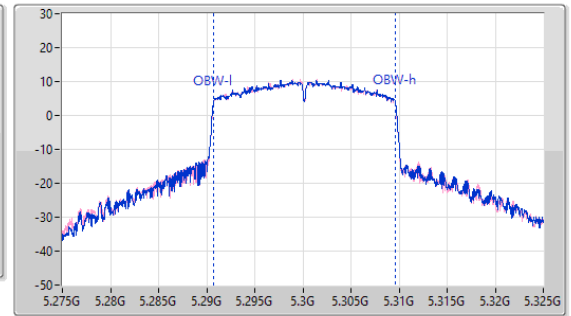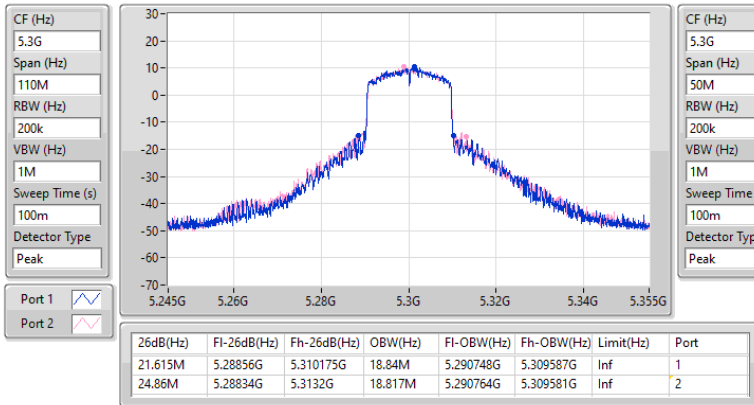
5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5320MHz

09/12/2024

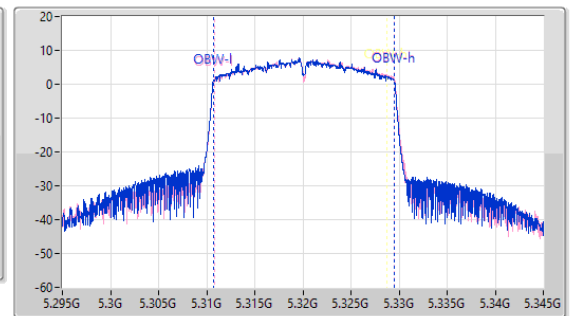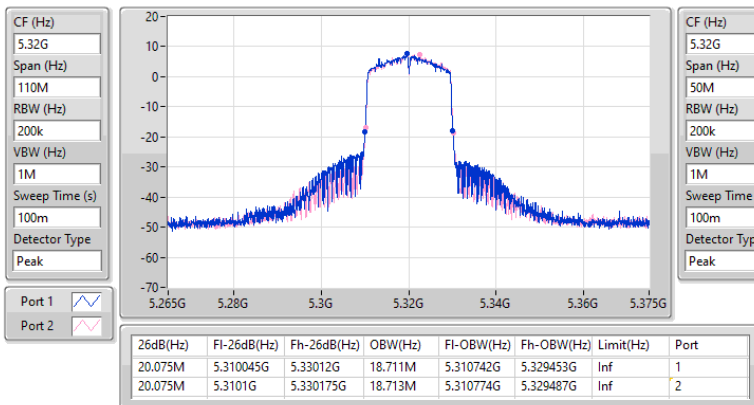


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5500MHz

09/12/2024

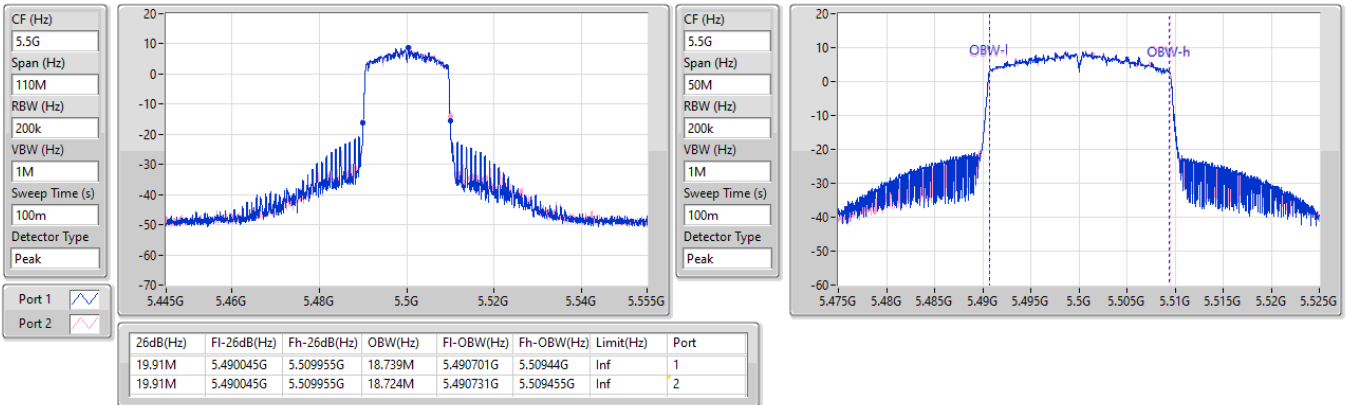


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


5580MHz

09/12/2024

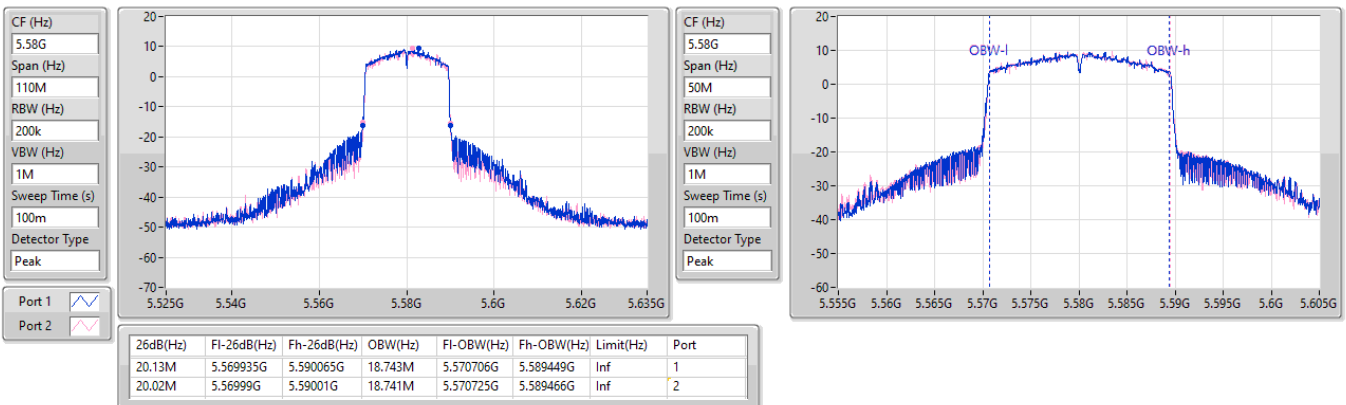


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5700MHz

09/12/2024

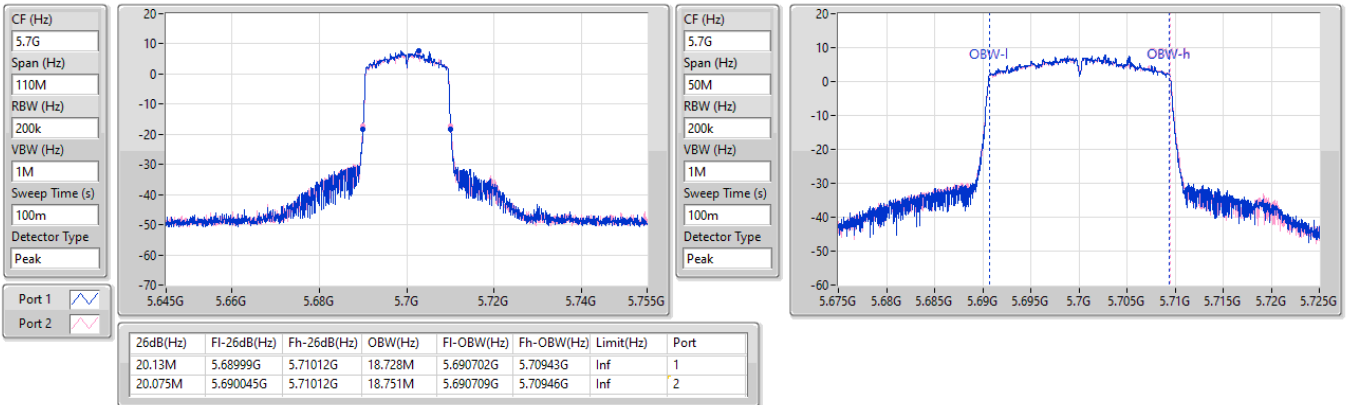
5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5720MHz Straddle 5.47-5.725GHz

09/12/2024

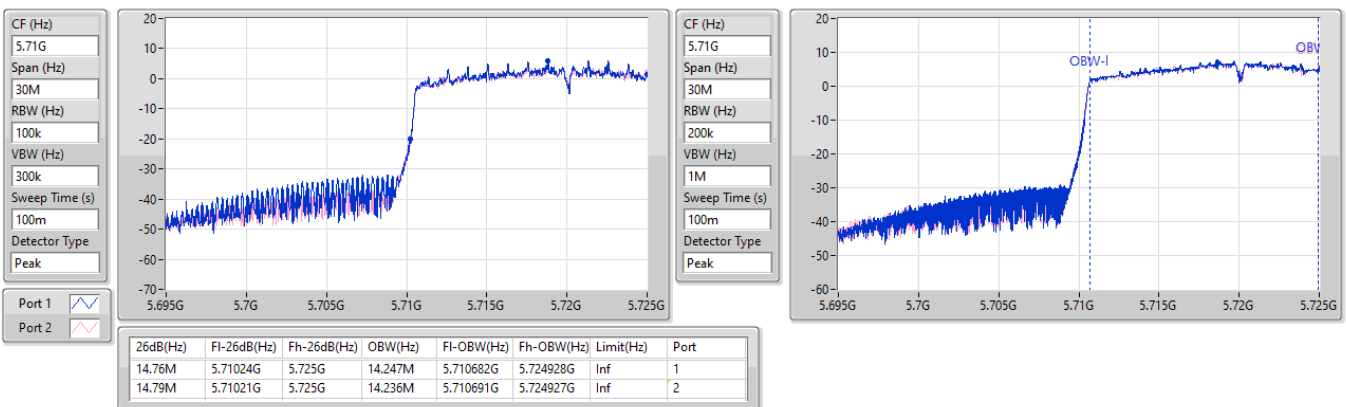


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

09/12/2024

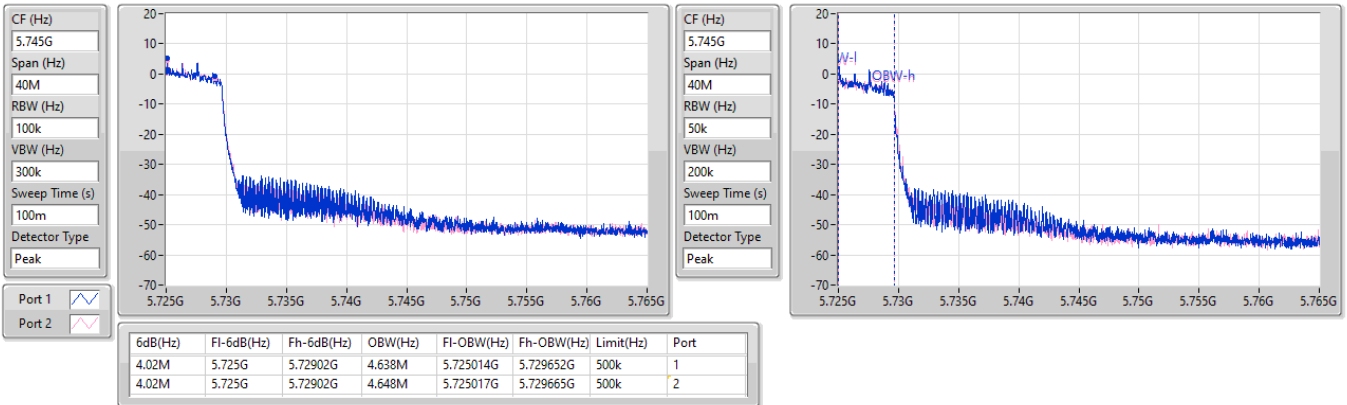


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


5720MHz Straddle 5.725-5.85GHz

09/12/2024

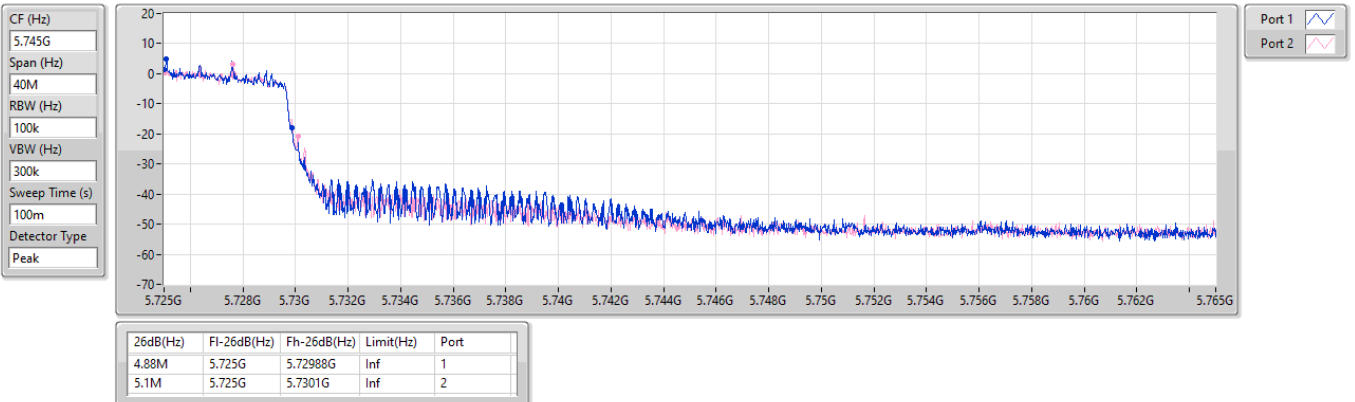


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5745MHz

09/12/2024

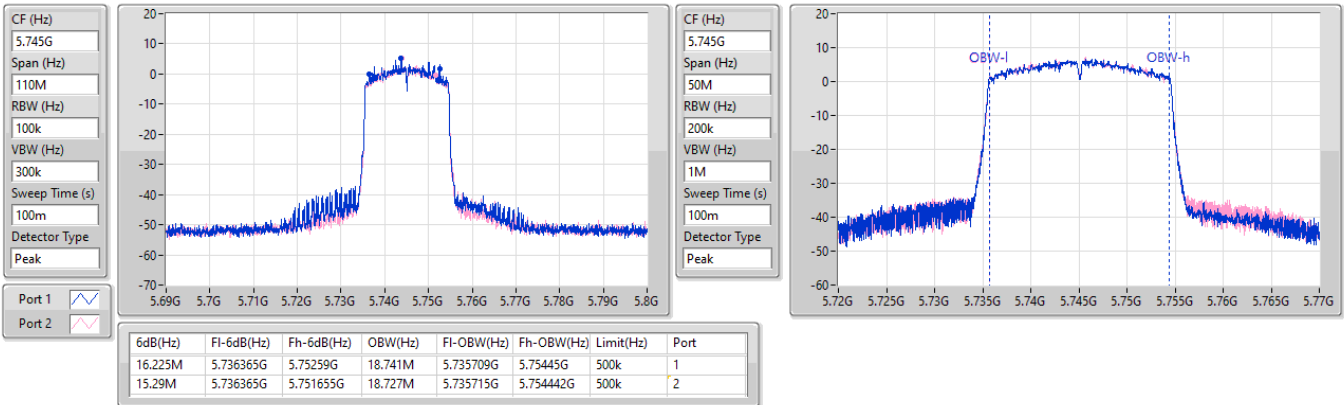

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5745MHz

09/12/2024

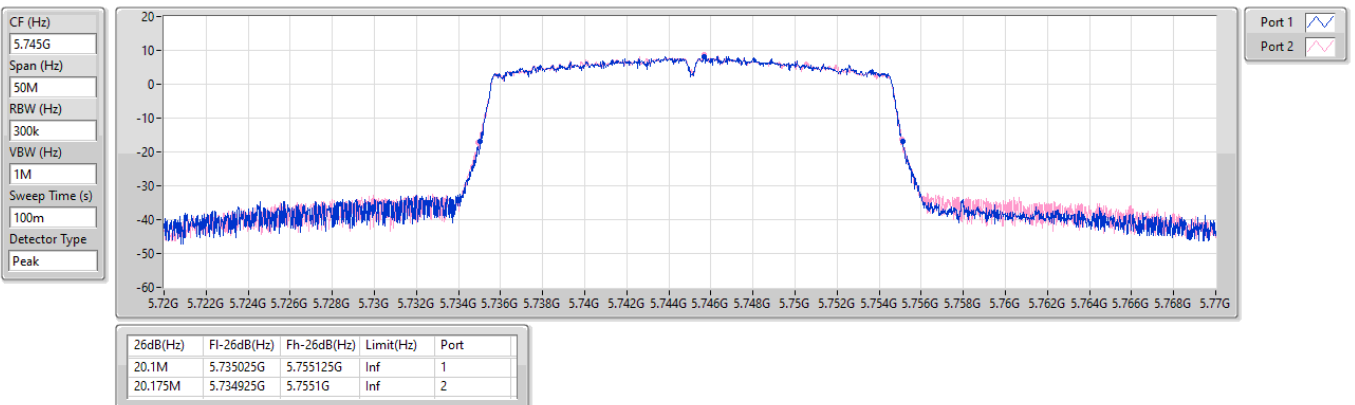


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5785MHz

09/12/2024

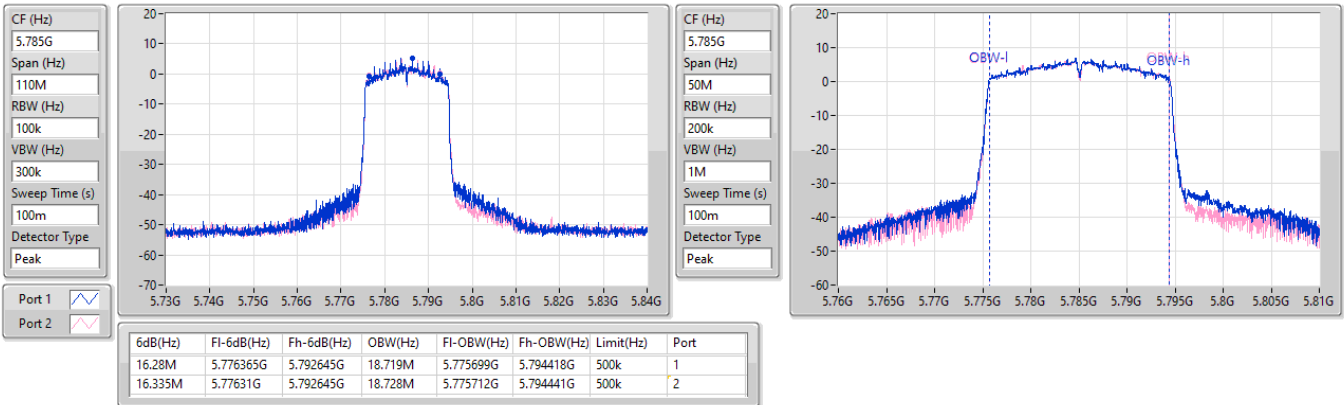
5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5785MHz

09/12/2024

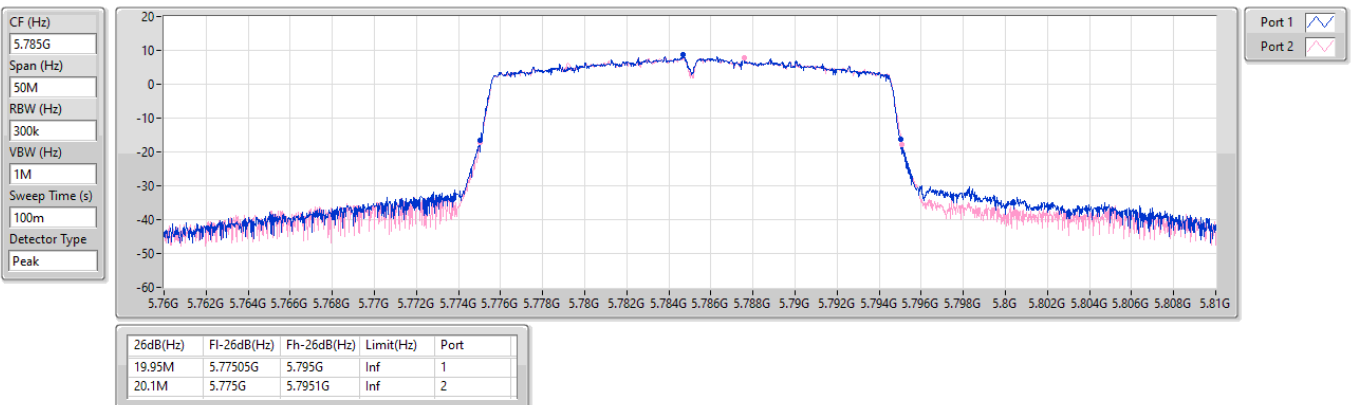


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5825MHz

09/12/2024

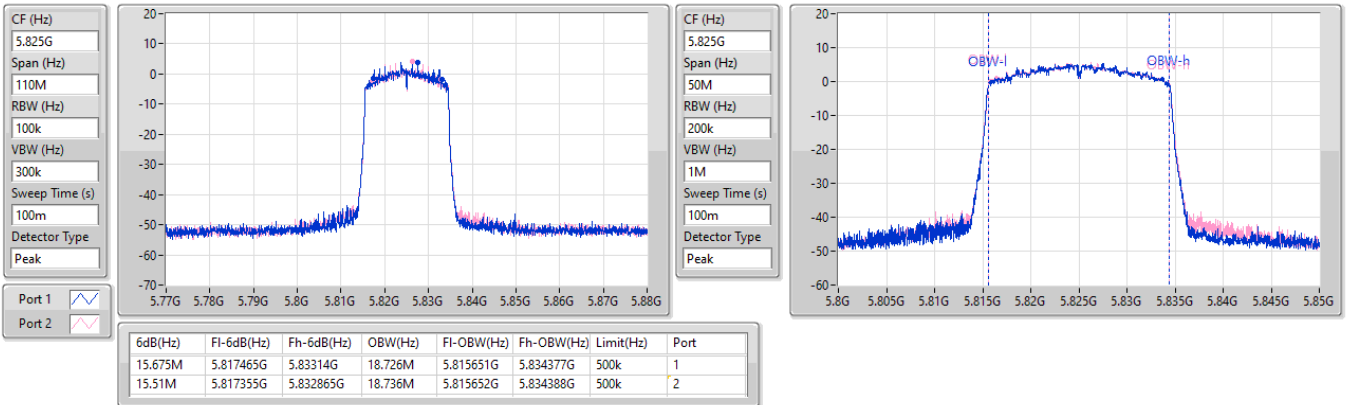


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5825MHz

09/12/2024

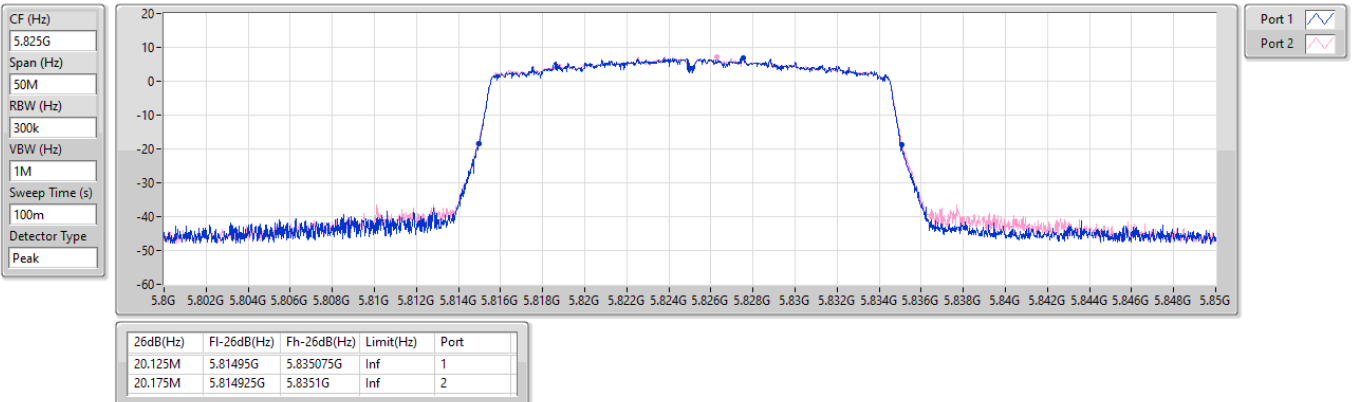


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX


EBW

5190MHz

09/12/2024

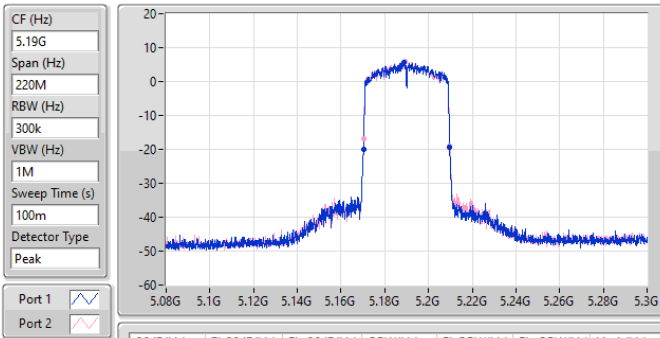

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.49M	5.1702G	5.20969G	37.483M	5.171251G	5.208733G	Inf	1
39.49M	5.17031G	5.2098G	37.473M	5.171242G	5.208715G	Inf	2

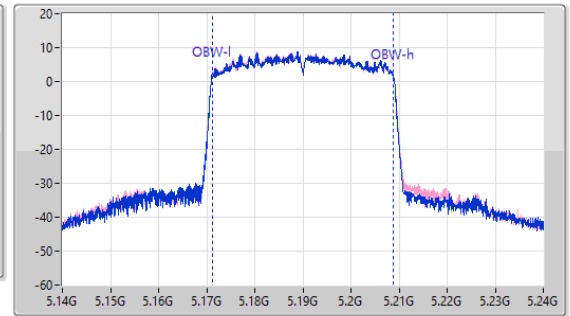


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX


EBW

5230MHz

09/12/2024

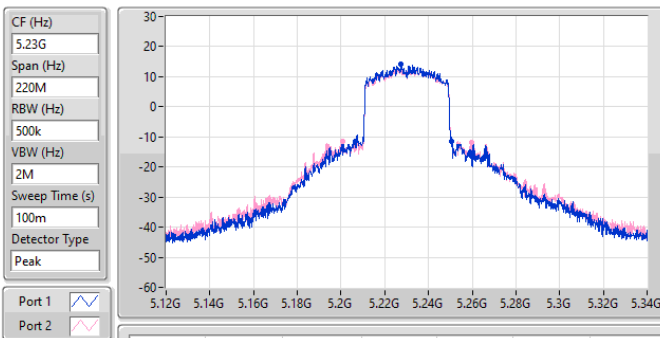


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
44.22M	5.20657G	5.25079G	37.759M	5.21123G	5.24899G	Inf	1
59.29M	5.20052G	5.25981G	37.805M	5.211229G	5.249034G	Inf	2

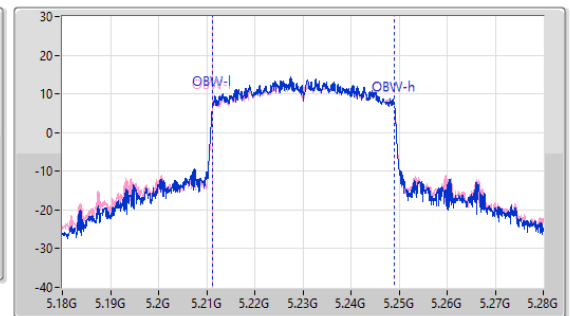


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5270MHz

09/12/2024

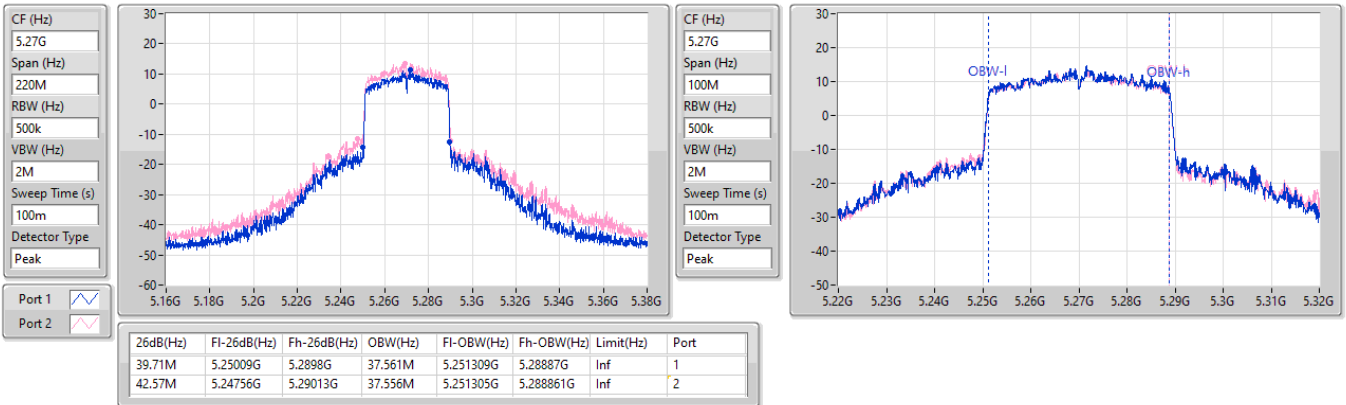
5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5310MHz

09/12/2024

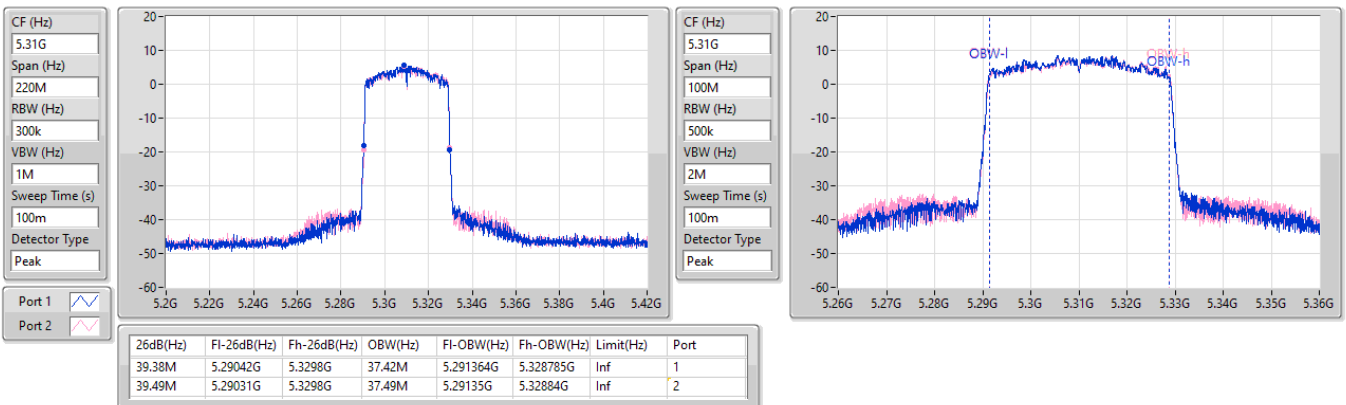


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5510MHz

09/12/2024

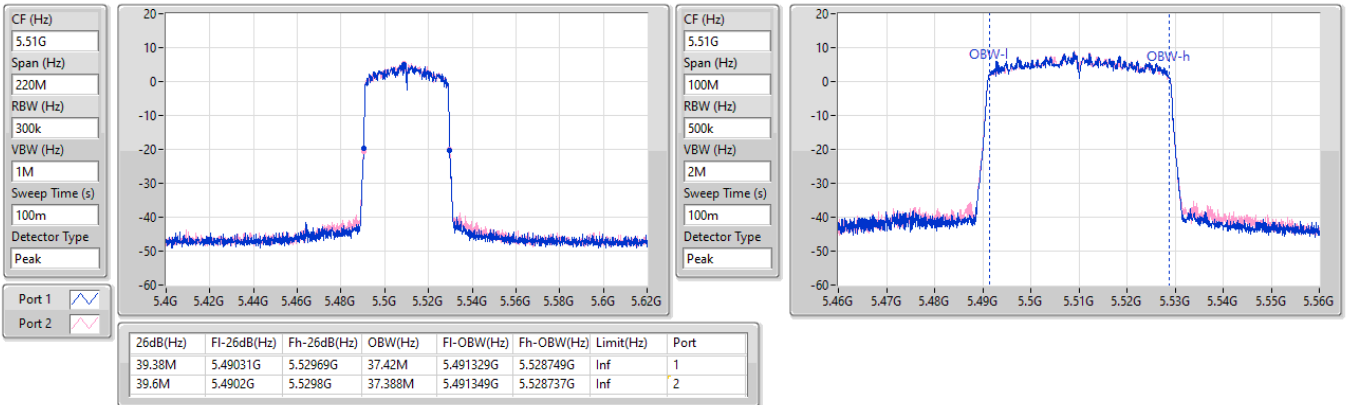


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


5550MHz

09/12/2024

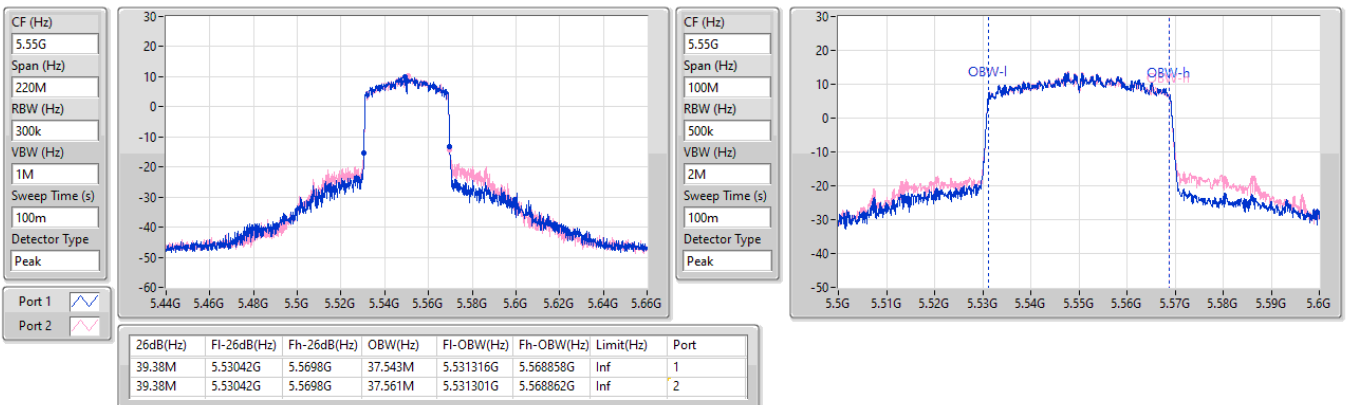


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5670MHz

09/12/2024

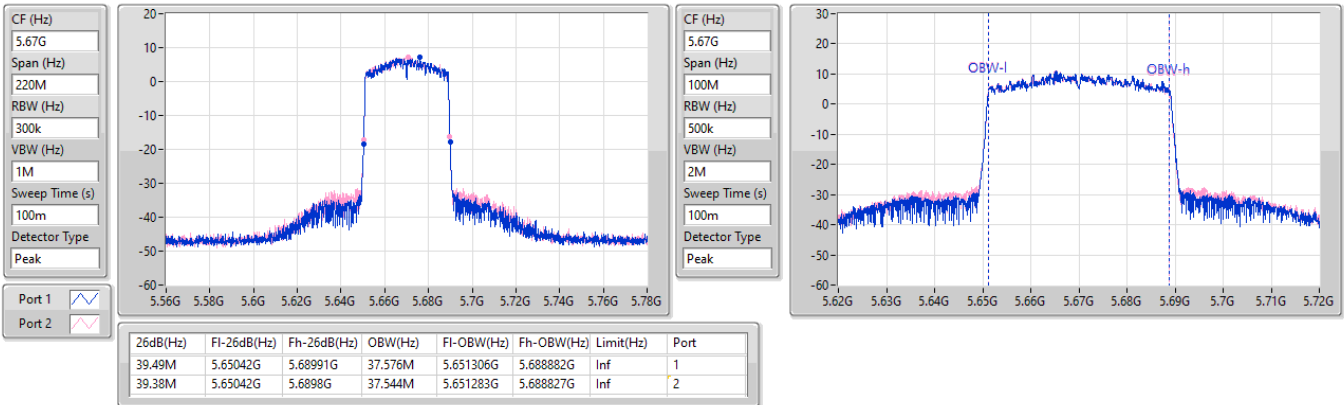

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5710MHz Straddle 5.47-5.725GHz

09/12/2024

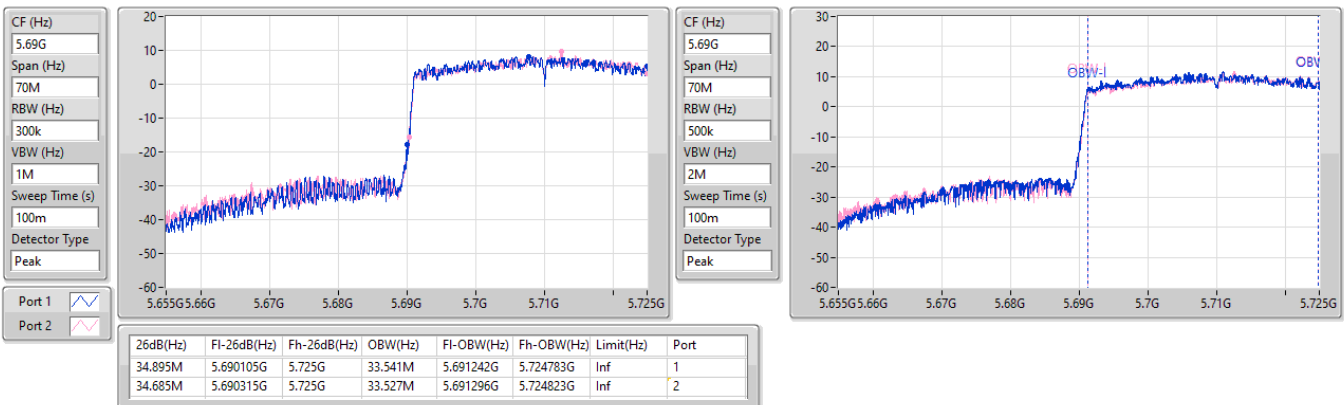


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5710MHz Straddle 5.725-5.85GHz

09/12/2024

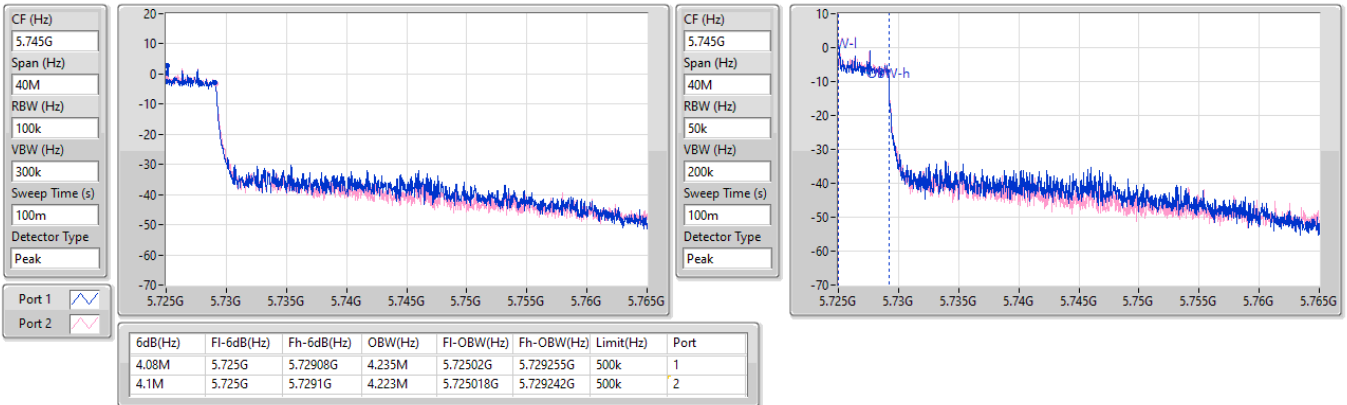

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5710MHz Straddle 5.725-5.85GHz

09/12/2024

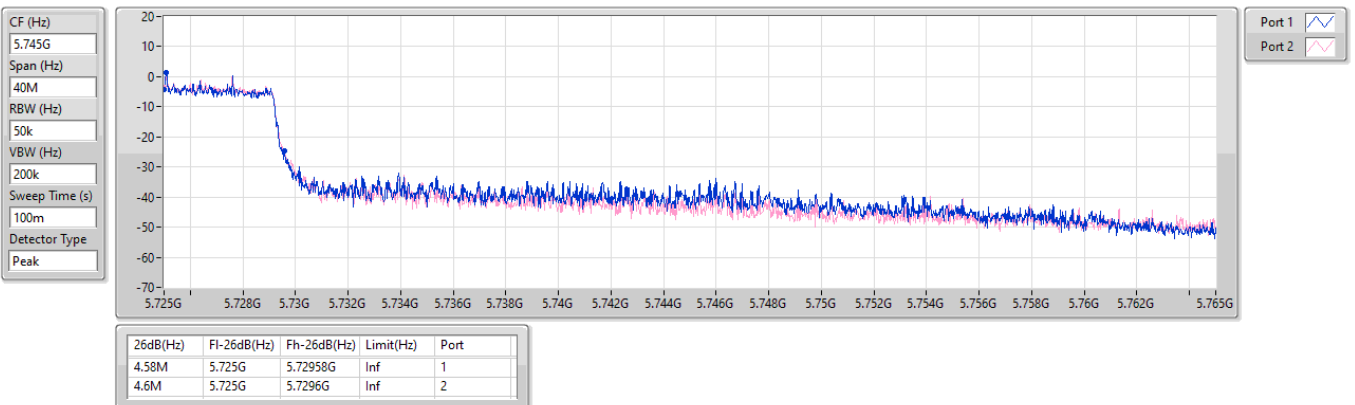


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5755MHz

09/12/2024

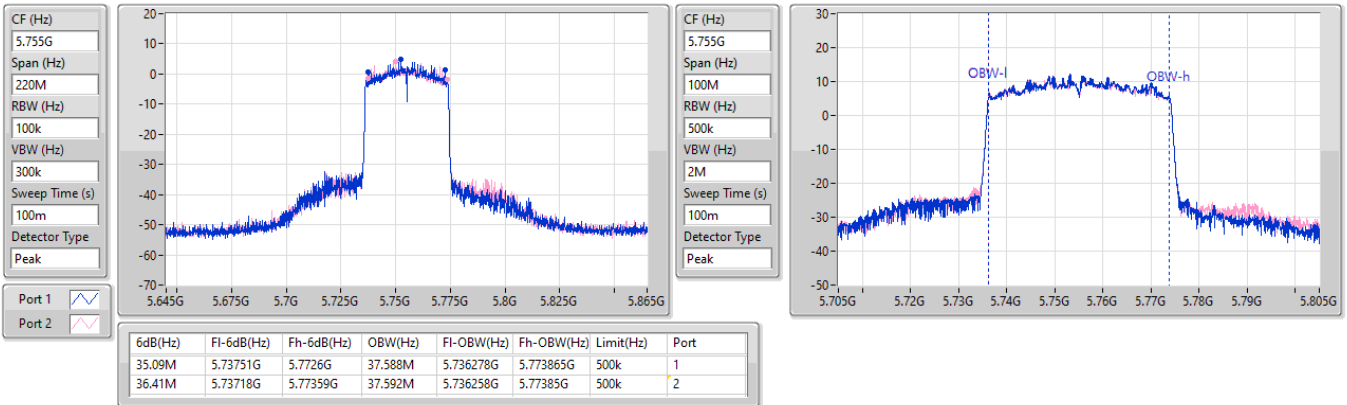
5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5755MHz

09/12/2024

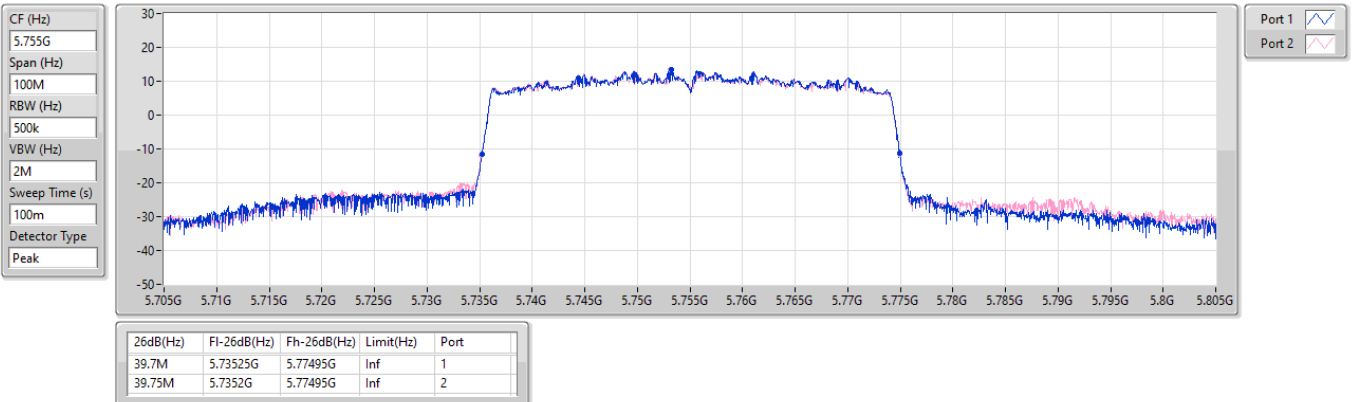


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5795MHz

09/12/2024

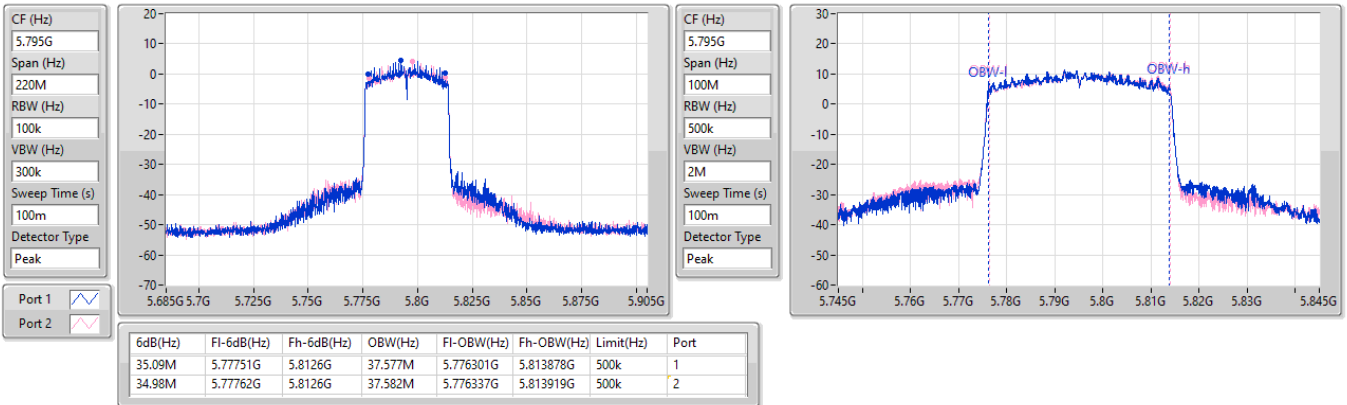


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


5795MHz

09/12/2024

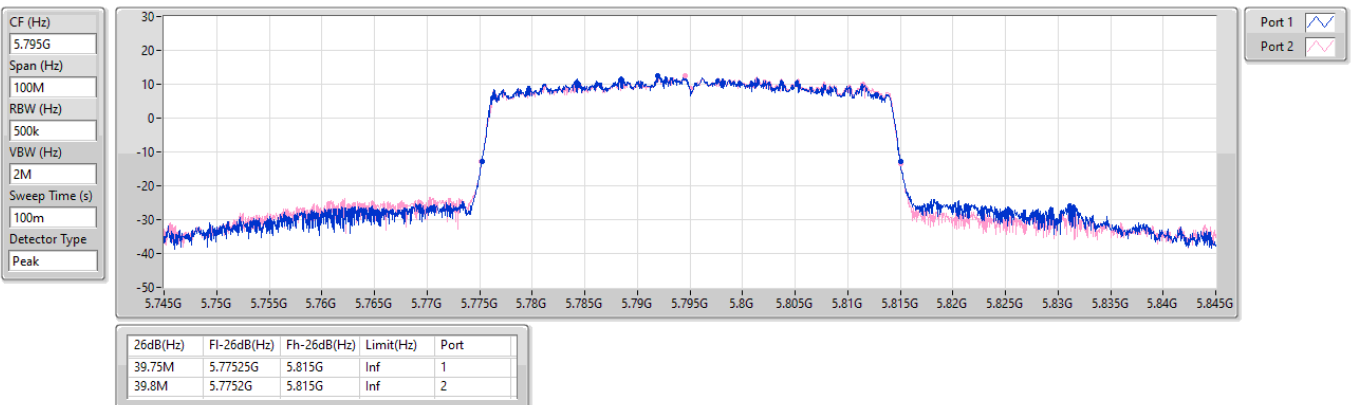


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5210MHz

09/12/2024

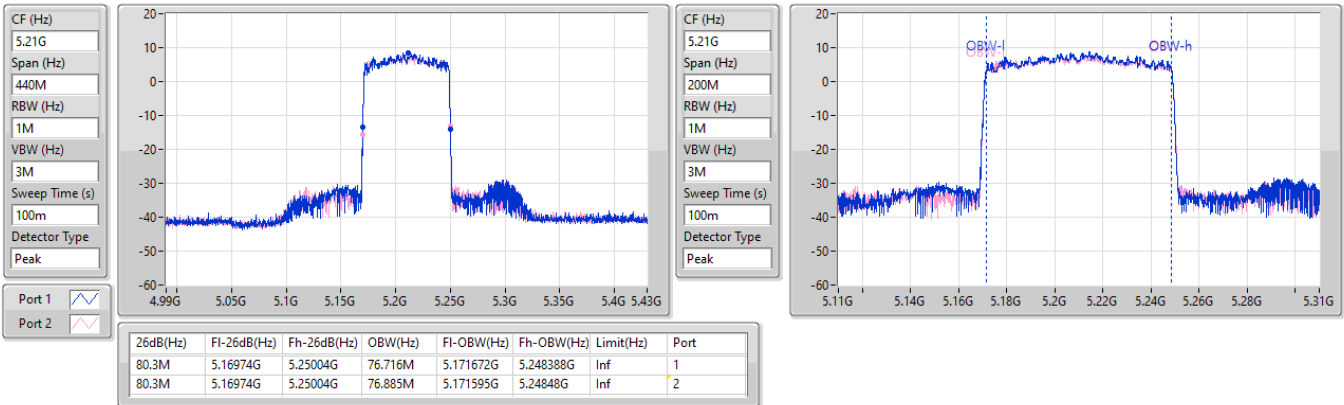

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5290MHz

09/12/2024

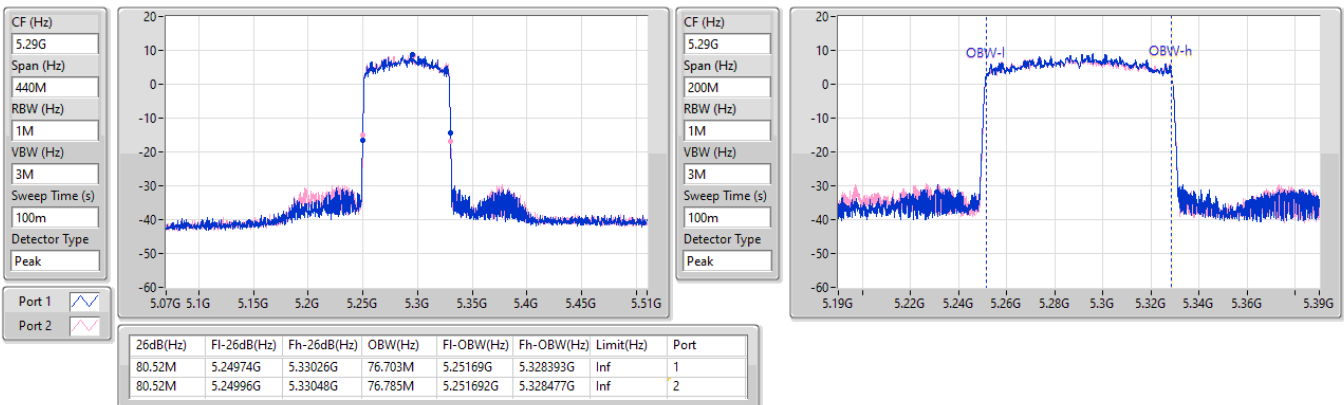


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5530MHz

09/12/2024

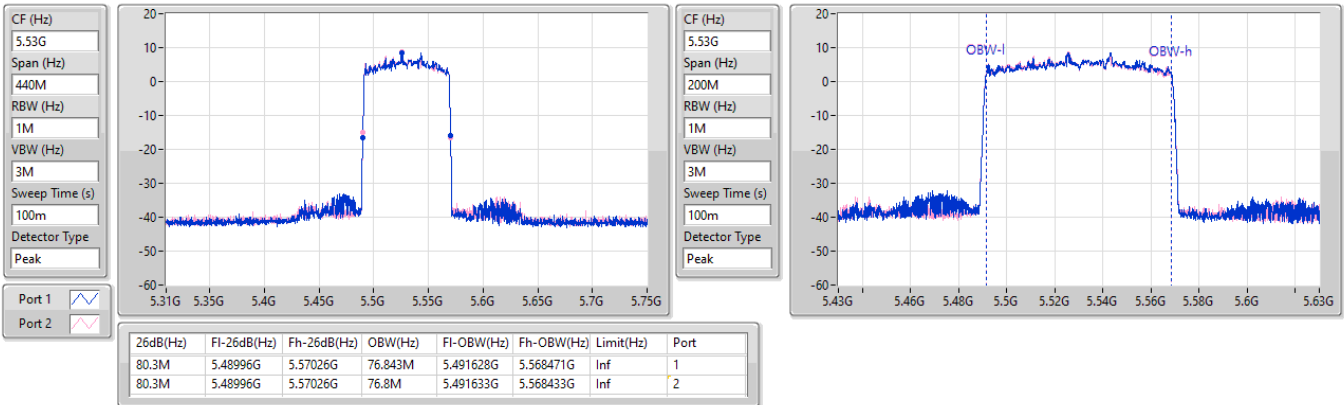
5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5610MHz

09/12/2024

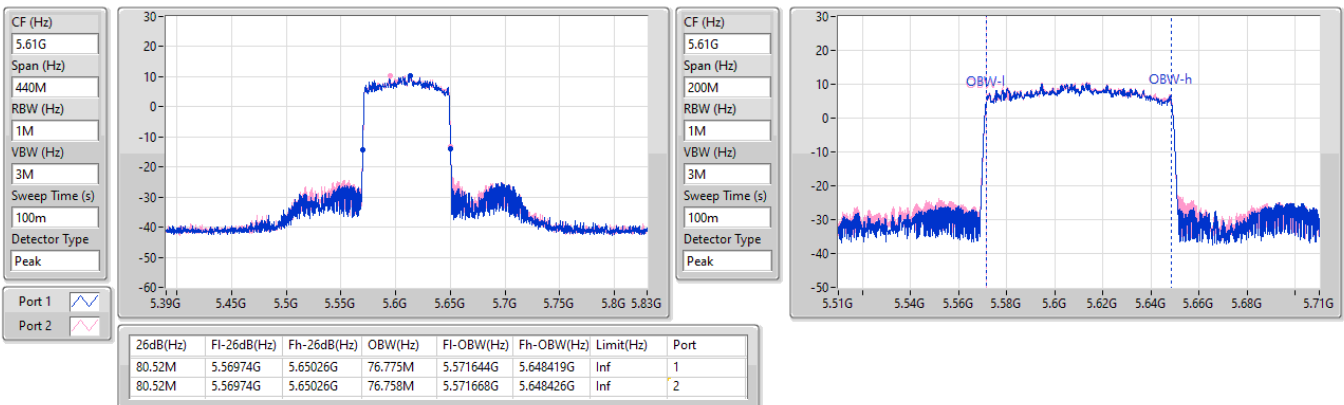


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5690MHz Straddle 5.47-5.725GHz

09/12/2024

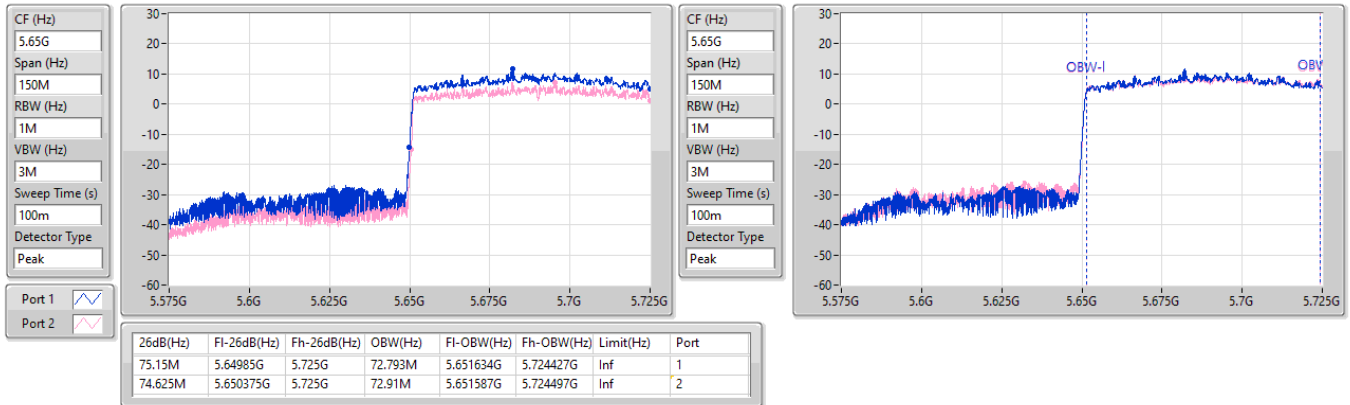


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5690MHz Straddle 5.725-5.85GHz

09/12/2024

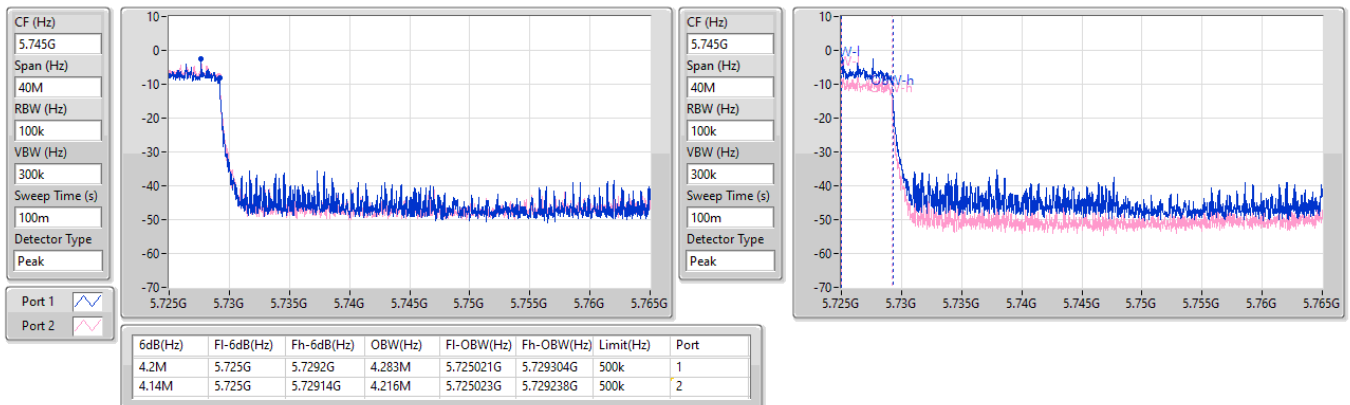


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5690MHz Straddle 5.725-5.85GHz

09/12/2024

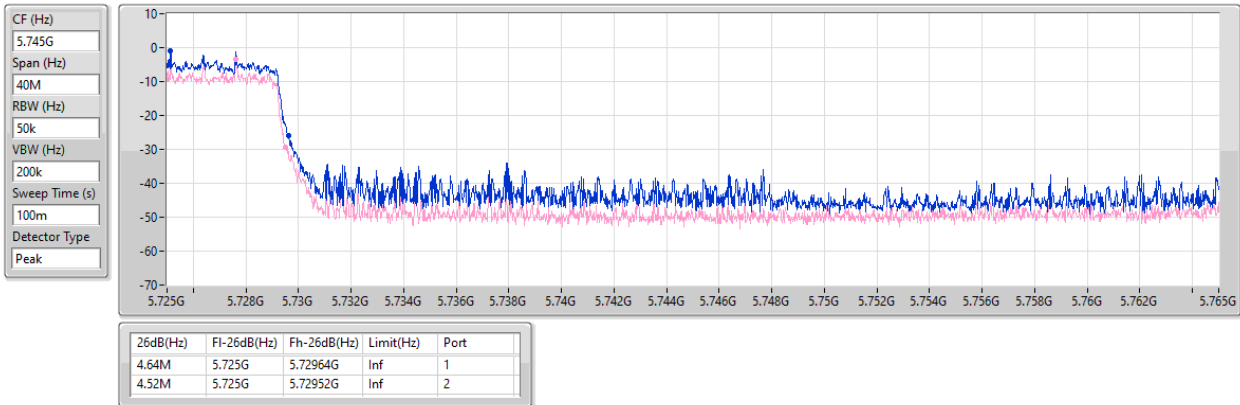


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW


5775MHz

09/12/2024

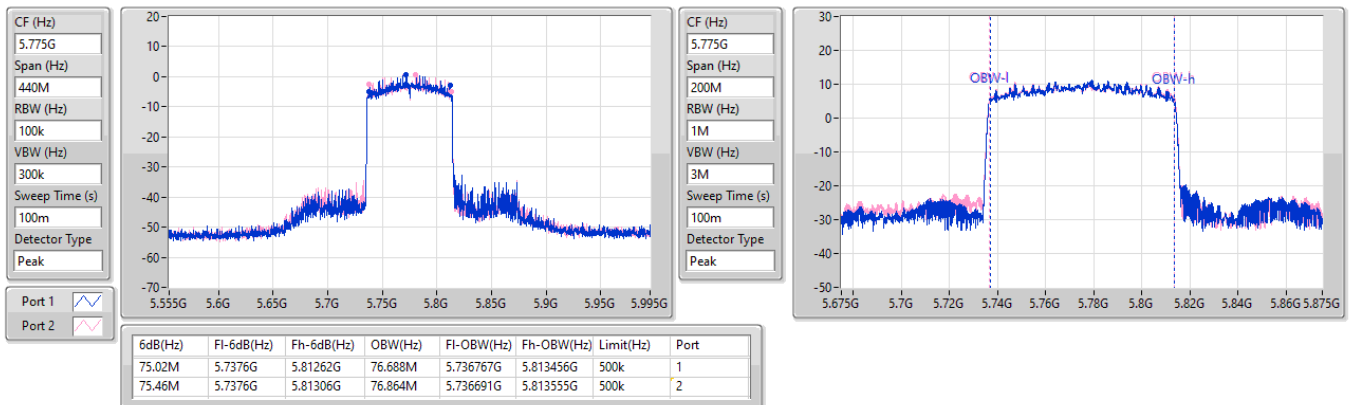


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5775MHz

09/12/2024

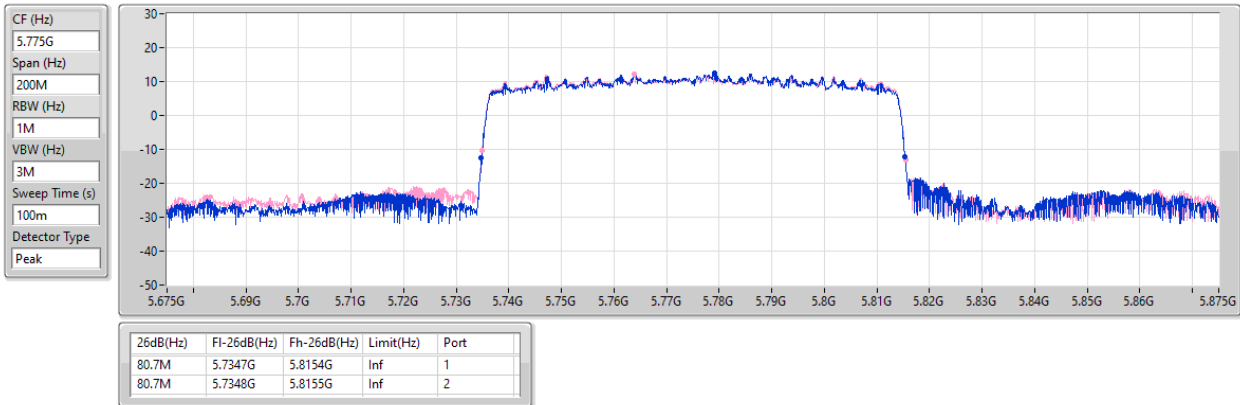

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
5250MHz Straddle 5.15-5.25GHz

09/12/2024

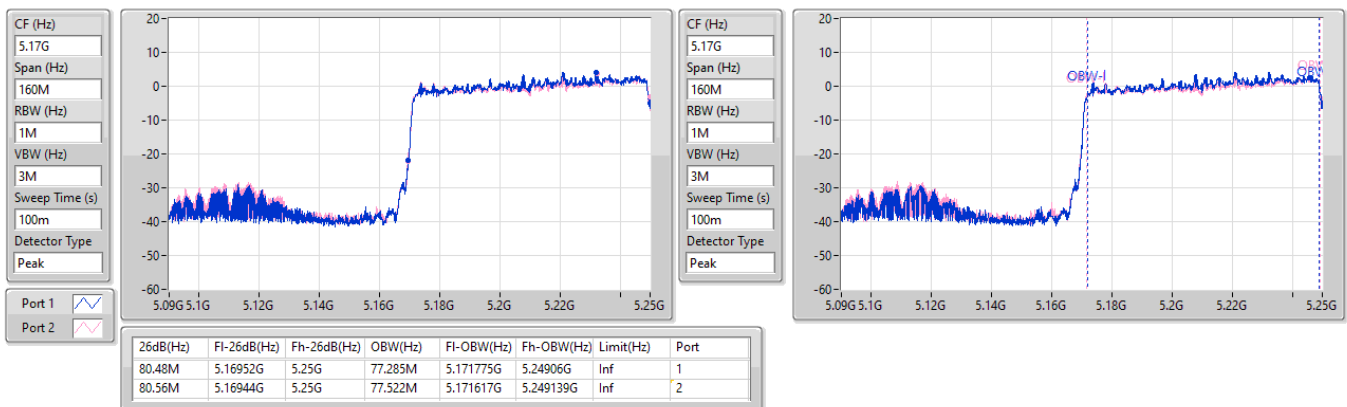


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
5250MHz Straddle 5.25-5.35GHz

10/12/2024

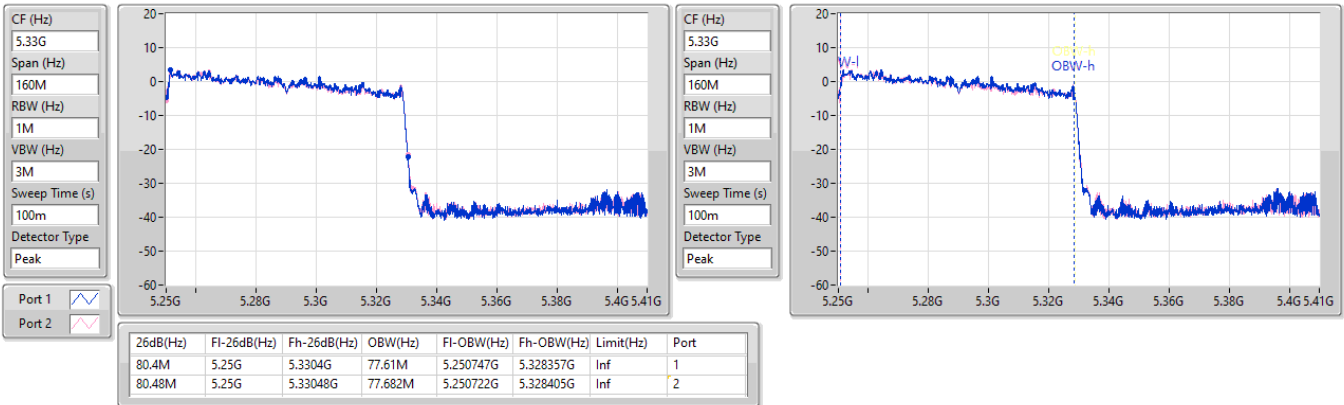
5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
5570MHz

10/12/2024

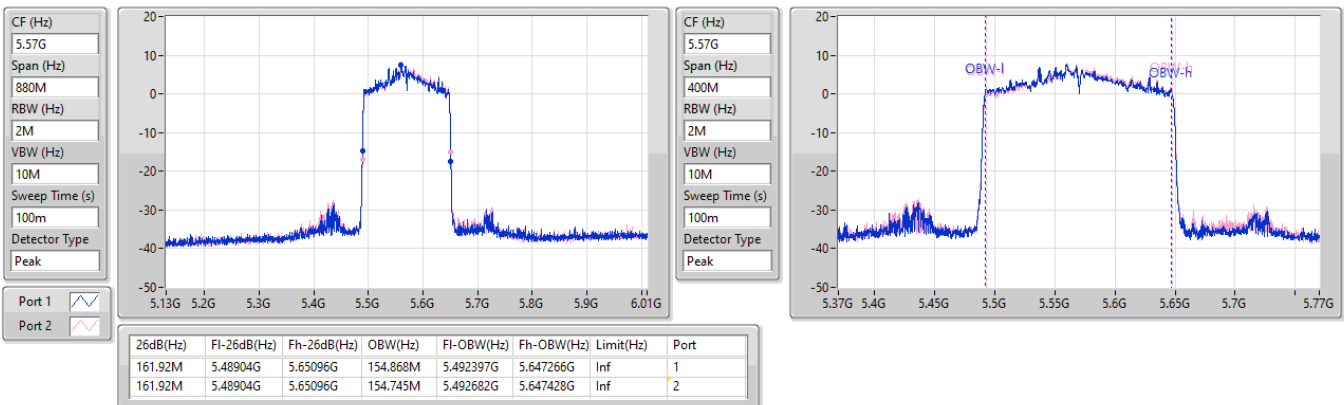

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	18.91	0.07780
802.11be EHT20_Nss1,(MCS0)_2TX	19.01	0.07962
802.11be EHT40_Nss1,(MCS0)_2TX	18.95	0.07852
802.11be EHT80_Nss1,(MCS0)_2TX	18.70	0.07413
802.11be EHT160_Nss1,(MCS0)_2TX	13.25	0.02113
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	19.39	0.08690
802.11be EHT20_Nss1,(MCS0)_2TX	19.38	0.08670
802.11be EHT40_Nss1,(MCS0)_2TX	19.26	0.08433
802.11be EHT80_Nss1,(MCS0)_2TX	18.83	0.07638
802.11be EHT160_Nss1,(MCS0)_2TX	12.54	0.01795
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	19.80	0.09550
802.11be EHT20_Nss1,(MCS0)_2TX	19.74	0.09419
802.11be EHT40_Nss1,(MCS0)_2TX	19.90	0.09772
802.11be EHT80_Nss1,(MCS0)_2TX	19.77	0.09484
802.11be EHT160_Nss1,(MCS0)_2TX	15.83	0.03828
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	18.48	0.07047
802.11be EHT20_Nss1,(MCS0)_2TX	19.35	0.08610
802.11be EHT40_Nss1,(MCS0)_2TX	19.91	0.09795
802.11be EHT80_Nss1,(MCS0)_2TX	19.78	0.09506

**Result**

Mode	Result	DG	Port 1	Port 2	Total Power	Power Limit
		(dBi)	(dBm)	(dBm)	(dBm)	(dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.10	15.87	15.82	18.86	23.98
5200MHz	Pass	3.10	15.93	15.86	18.91	23.98
5240MHz	Pass	3.10	15.89	15.73	18.82	23.98
5260MHz	Pass	3.10	16.39	16.33	19.37	23.64
5300MHz	Pass	3.10	16.34	16.36	19.36	23.98
5320MHz	Pass	3.10	16.38	16.37	19.39	23.58
5500MHz	Pass	3.20	16.81	16.77	19.80	23.68
5580MHz	Pass	3.20	16.73	16.79	19.77	23.55
5700MHz	Pass	3.20	16.10	15.97	19.05	23.54
5720MHz Straddle 5.47-5.725GHz	Pass	3.20	15.49	15.48	18.50	22.37
5720MHz Straddle 5.725-5.85GHz	Pass	3.30	8.21	8.27	11.25	30.00
5745MHz	Pass	3.30	15.41	15.52	18.48	30.00
5785MHz	Pass	3.30	15.41	15.32	18.38	30.00
5825MHz	Pass	3.30	15.03	15.18	18.12	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	3.10	15.97	15.85	18.92	23.98
5200MHz	Pass	3.10	16.13	15.83	18.99	23.98
5240MHz	Pass	3.10	16.11	15.89	19.01	23.98
5260MHz	Pass	3.10	16.43	16.27	19.36	23.98
5300MHz	Pass	3.10	16.41	16.33	19.38	23.98
5320MHz	Pass	3.10	16.38	16.31	19.36	23.98
5500MHz	Pass	3.20	16.69	16.73	19.72	23.98
5580MHz	Pass	3.20	16.65	16.79	19.73	23.98
5700MHz	Pass	3.20	16.78	16.67	19.74	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.20	16.07	15.90	19.00	22.69
5720MHz Straddle 5.725-5.85GHz	Pass	3.30	9.39	9.22	12.32	30.00
5745MHz	Pass	3.30	16.35	16.32	19.35	30.00
5785MHz	Pass	3.30	16.22	16.15	19.20	30.00
5825MHz	Pass	3.30	15.10	15.32	18.22	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	3.10	15.81	15.89	18.86	23.98
5230MHz	Pass	3.10	16.06	15.82	18.95	23.98
5270MHz	Pass	3.10	16.28	16.22	19.26	23.98
5310MHz	Pass	3.10	15.86	15.81	18.85	23.98
5510MHz	Pass	3.20	15.38	15.50	18.45	23.98
5550MHz	Pass	3.20	16.87	16.91	19.90	23.98
5670MHz	Pass	3.20	16.76	16.72	19.75	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	3.20	16.70	16.71	19.72	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.30	5.73	5.76	8.76	30.00
5755MHz	Pass	3.30	16.67	16.78	19.74	30.00
5795MHz	Pass	3.30	16.85	16.95	19.91	30.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	3.10	15.85	15.53	18.70	23.98
5290MHz	Pass	3.10	15.87	15.76	18.83	23.98
5530MHz	Pass	3.20	15.17	15.38	18.29	23.98
5610MHz	Pass	3.20	16.75	16.77	19.77	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	3.20	16.50	16.36	19.44	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.30	1.75	1.52	4.65	30.00
5775MHz	Pass	3.30	16.74	16.79	19.78	30.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.10	10.41	10.07	13.25	23.98
5250MHz Straddle 5.25-5.35GHz	Pass	3.10	9.56	9.50	12.54	23.98
5570MHz	Pass	3.20	12.68	12.95	15.83	23.98




DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

09/12/2024

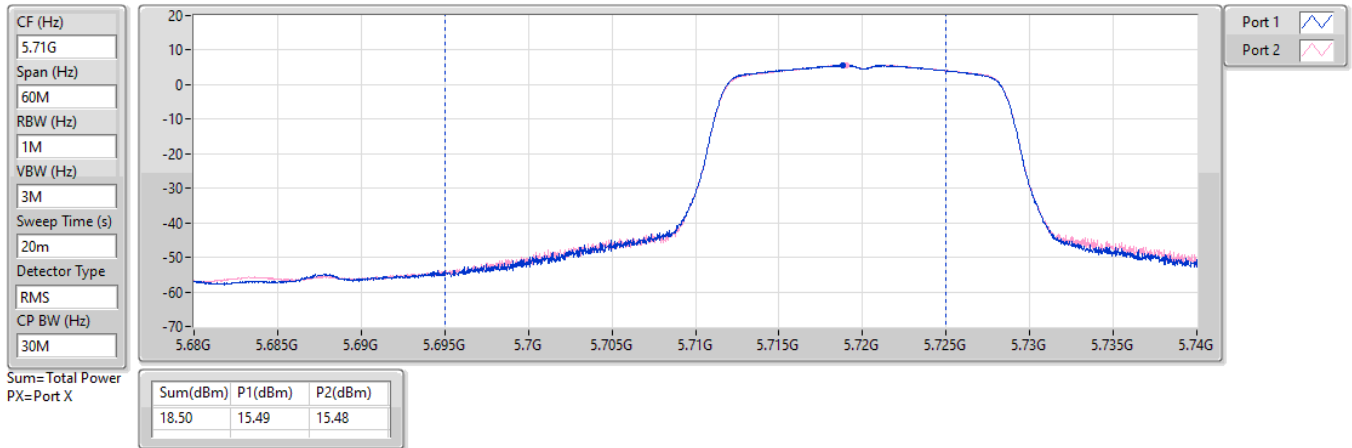


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

09/12/2024

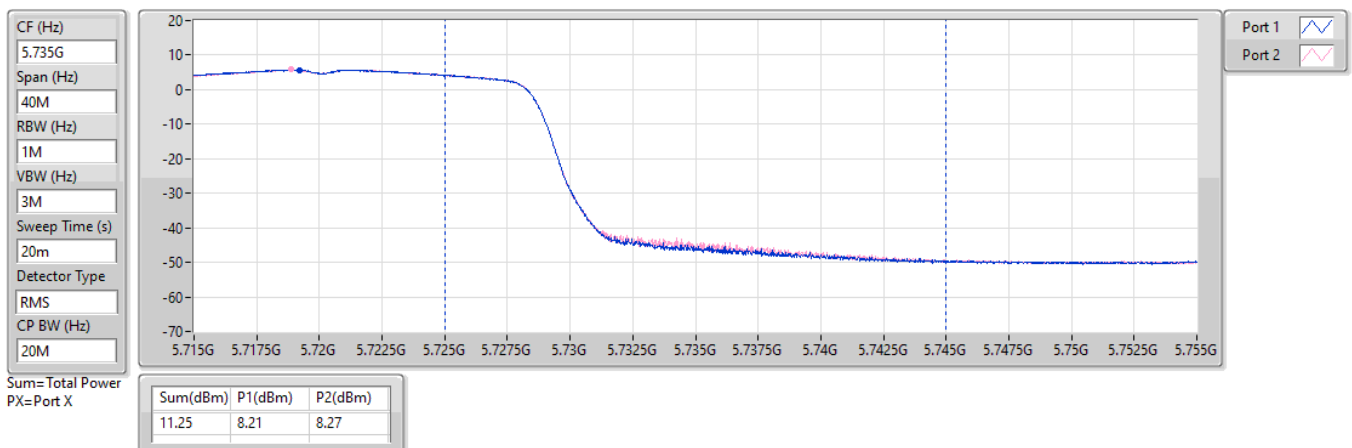


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

08/01/2025

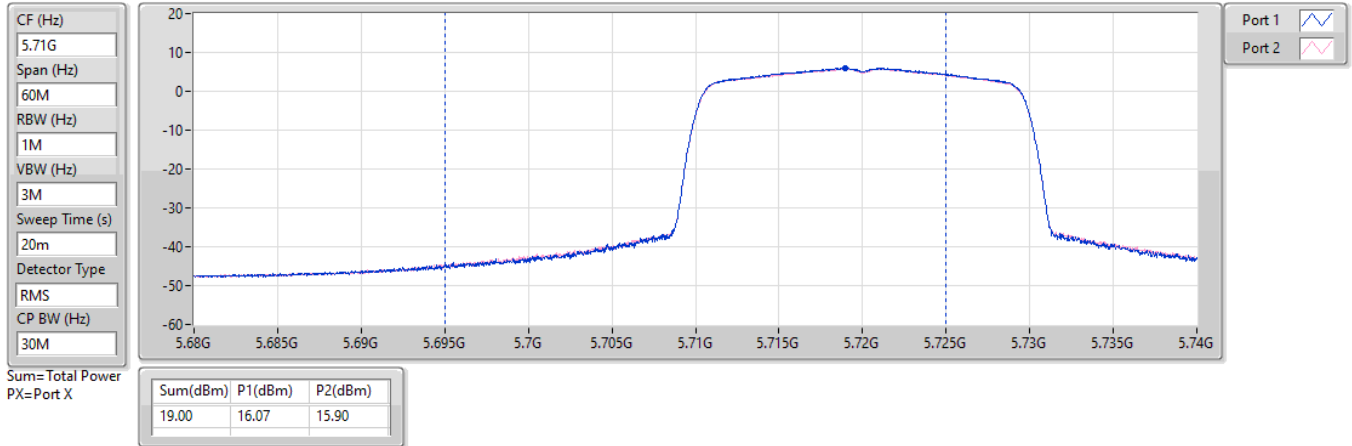


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

08/01/2025

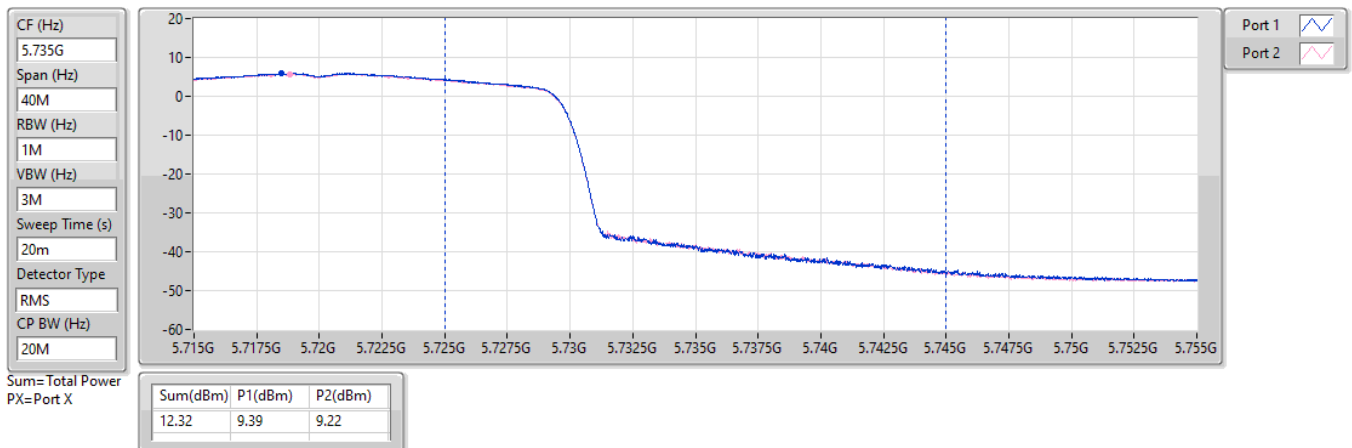


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

08/01/2025

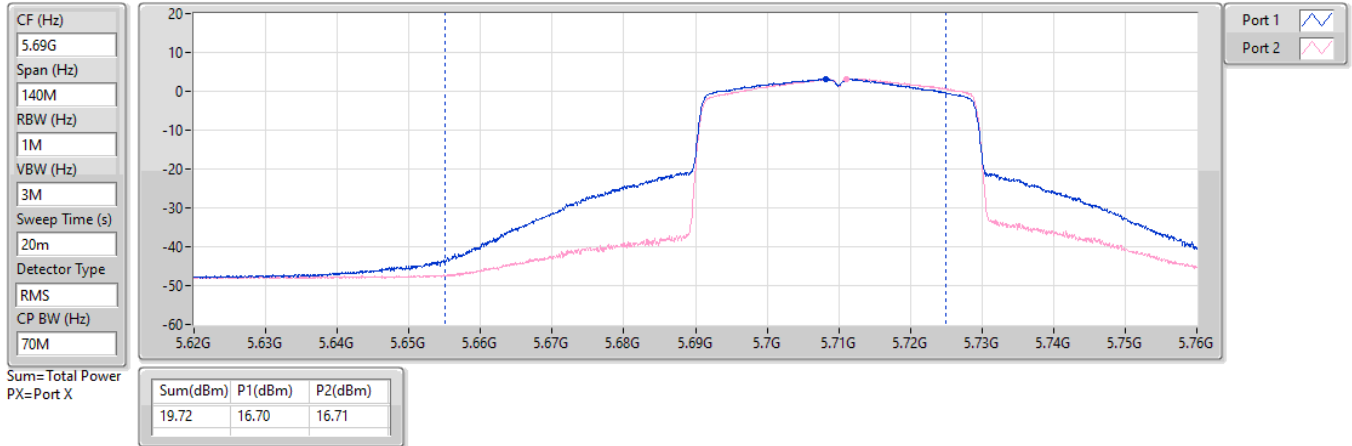


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX

08/01/2025

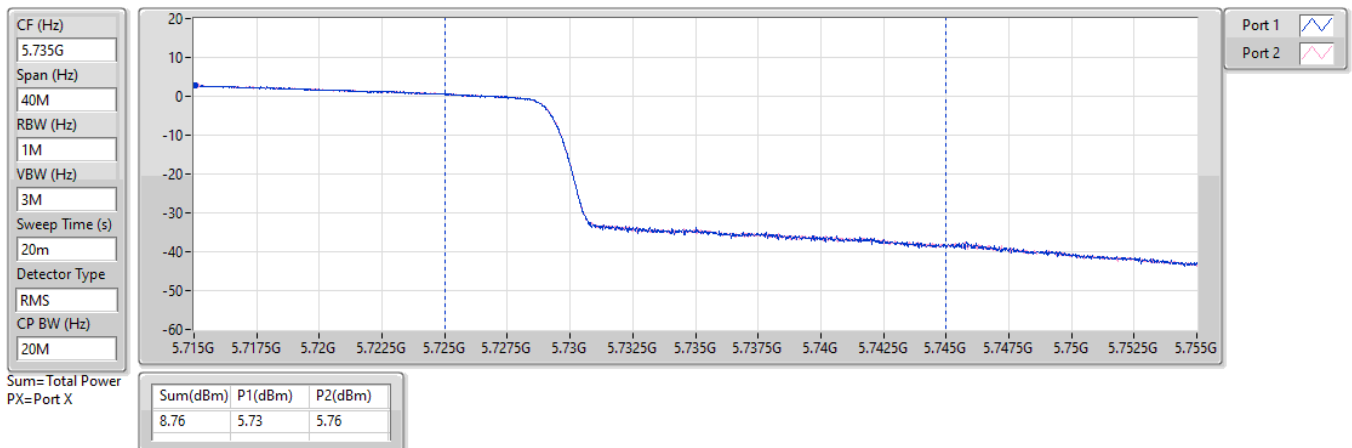


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

08/01/2025

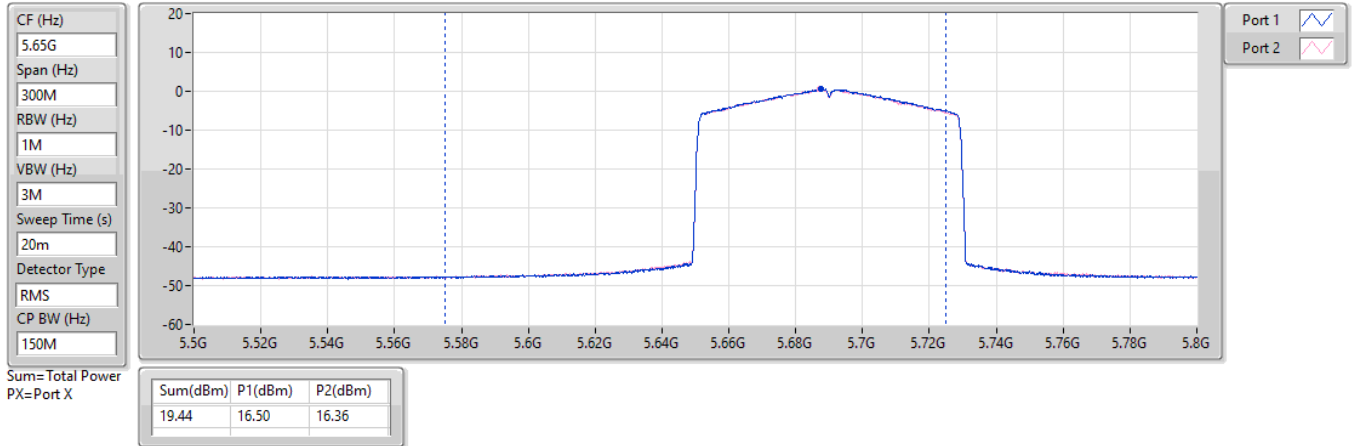


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

08/01/2025

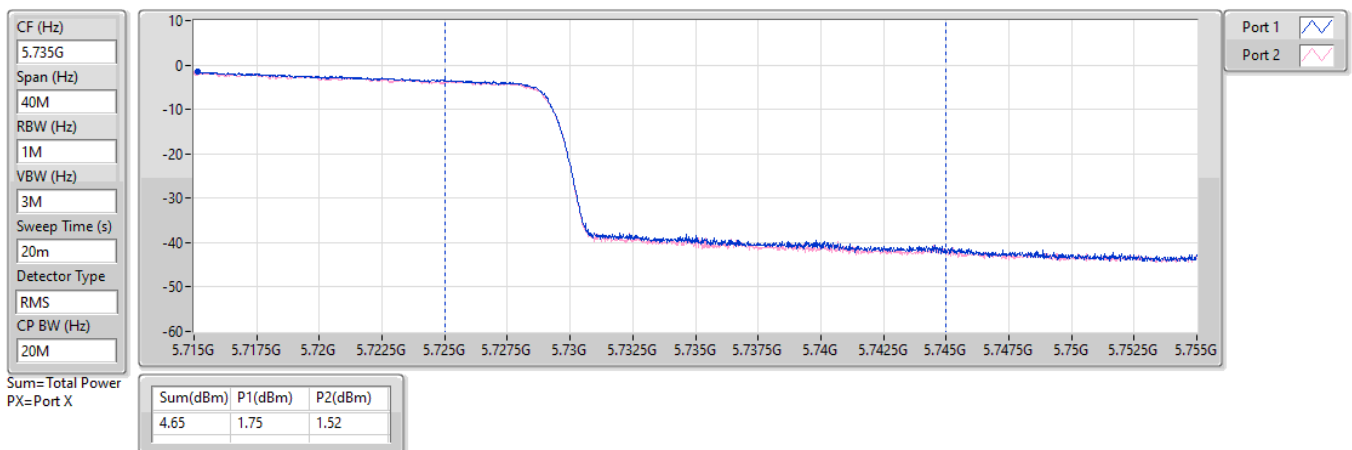


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

10/12/2024

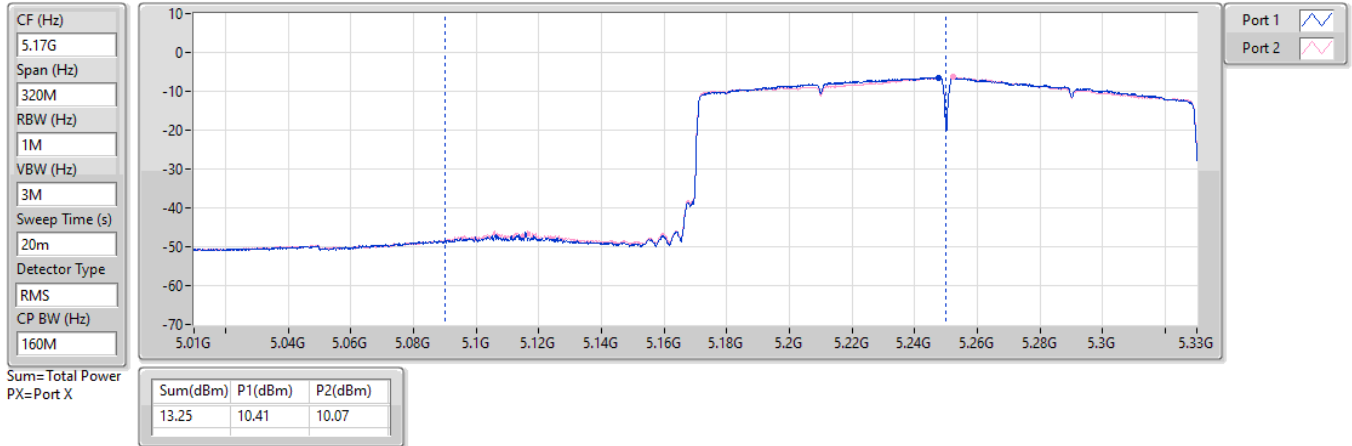


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

10/12/2024

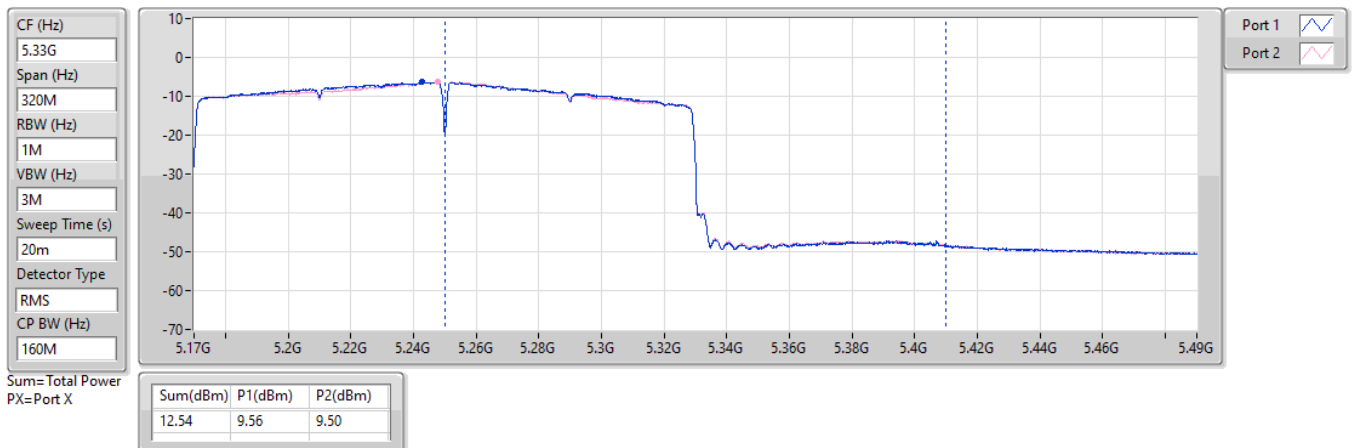

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	10.86
802.11be EHT20_Nss1,(MCS0)_2TX	10.90
802.11be EHT40_Nss1,(MCS0)_2TX	8.57
802.11be EHT80_Nss1,(MCS0)_2TX	0.11
802.11be EHT160_Nss1,(MCS0)_2TX	-4.91
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	10.88
802.11be EHT20_Nss1,(MCS0)_2TX	10.87
802.11be EHT40_Nss1,(MCS0)_2TX	8.12
802.11be EHT80_Nss1,(MCS0)_2TX	0.22
802.11be EHT160_Nss1,(MCS0)_2TX	-4.85
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_2TX	10.56
802.11be EHT20_Nss1,(MCS0)_2TX	9.96
802.11be EHT40_Nss1,(MCS0)_2TX	7.61
802.11be EHT80_Nss1,(MCS0)_2TX	1.74
802.11be EHT160_Nss1,(MCS0)_2TX	-4.88
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	5.01
802.11be EHT20_Nss1,(MCS0)_2TX	5.59
802.11be EHT40_Nss1,(MCS0)_2TX	4.76
802.11be EHT80_Nss1,(MCS0)_2TX	0.85

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	5.96	6.28	6.51	9.33	11.00
5200MHz	Pass	5.96	7.84	7.81	10.78	11.00
5240MHz	Pass	5.96	8.06	7.67	10.86	11.00
5260MHz	Pass	5.96	7.89	7.79	10.84	11.00
5300MHz	Pass	5.96	7.79	7.96	10.88	11.00
5320MHz	Pass	5.96	6.18	6.38	9.21	11.00
5500MHz	Pass	6.06	6.81	6.93	9.84	10.94
5580MHz	Pass	6.06	7.47	7.67	10.56	10.94
5700MHz	Pass	6.06	4.20	4.03	7.08	10.94
5720MHz Straddle 5.47-5.725GHz	Pass	6.06	4.19	4.22	7.17	10.94
5720MHz Straddle 5.725-5.85GHz	Pass	6.11	1.20	1.18	4.20	29.89
5745MHz	Pass	6.11	2.02	2.14	5.01	29.89
5785MHz	Pass	6.11	1.95	1.97	4.92	29.89
5825MHz	Pass	6.11	1.18	1.41	4.27	29.89
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	5.96	6.08	6.20	9.07	11.00
5200MHz	Pass	5.96	7.90	7.94	10.90	11.00
5240MHz	Pass	5.96	7.91	7.69	10.80	11.00
5260MHz	Pass	5.96	7.97	7.78	10.85	11.00
5300MHz	Pass	5.96	7.87	7.91	10.87	11.00
5320MHz	Pass	5.96	4.79	4.93	7.85	11.00
5500MHz	Pass	6.06	6.05	6.11	9.06	10.94
5580MHz	Pass	6.06	6.83	7.11	9.96	10.94
5700MHz	Pass	6.06	4.97	4.82	7.82	10.94
5720MHz Straddle 5.47-5.725GHz	Pass	6.06	4.75	4.51	7.62	10.94
5720MHz Straddle 5.725-5.85GHz	Pass	6.11	1.68	1.52	4.53	29.89
5745MHz	Pass	6.11	2.48	2.71	5.59	29.89
5785MHz	Pass	6.11	2.64	2.49	5.58	29.89
5825MHz	Pass	6.11	1.45	1.53	4.48	29.89
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	5.96	0.60	0.69	3.66	11.00
5230MHz	Pass	5.96	5.73	5.49	8.57	11.00
5270MHz	Pass	5.96	5.16	5.09	8.12	11.00
5310MHz	Pass	5.96	0.50	0.37	3.41	11.00
5510MHz	Pass	6.06	-0.18	0.09	2.85	10.94
5550MHz	Pass	6.06	4.53	4.80	7.61	10.94
5670MHz	Pass	6.06	1.83	1.97	4.89	10.94
5710MHz Straddle 5.47-5.725GHz	Pass	6.06	3.36	3.21	6.30	10.94
5710MHz Straddle 5.725-5.85GHz	Pass	6.11	-1.15	-0.76	2.05	29.89
5755MHz	Pass	6.11	1.72	1.83	4.76	29.89
5795MHz	Pass	6.11	1.40	1.28	4.28	29.89
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	5.96	-2.56	-3.22	0.11	11.00
5290MHz	Pass	5.96	-2.60	-2.91	0.22	11.00
5530MHz	Pass	6.06	-4.08	-3.94	-1.04	10.94
5610MHz	Pass	6.06	-1.44	-1.09	1.74	10.94
5690MHz Straddle 5.47-5.725GHz	Pass	6.06	-1.19	-1.55	1.60	10.94
5690MHz Straddle 5.725-5.85GHz	Pass	6.11	-6.03	-5.56	-2.84	29.89
5775MHz	Pass	6.11	-2.06	-2.21	0.85	29.89
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.96	-7.94	-7.83	-4.91	11.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.96	-7.93	-7.80	-4.85	11.00
5570MHz	Pass	6.06	-8.11	-7.69	-4.88	10.94



DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5180MHz

09/12/2024

CF (Hz)
5.18G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

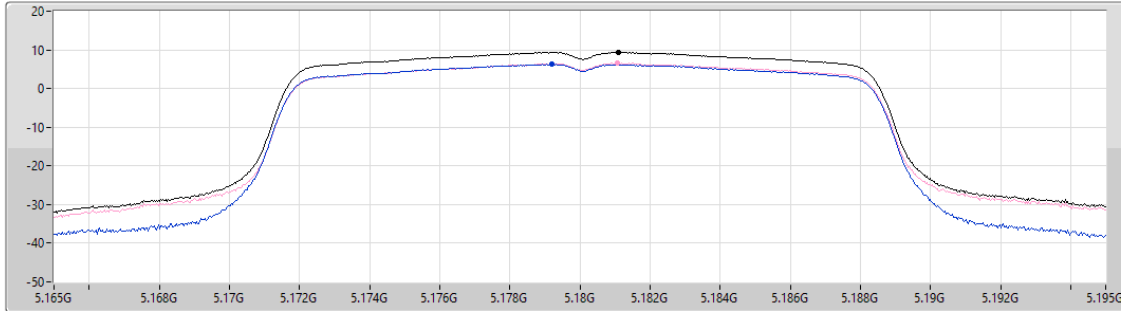

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.33	9.33	6.28	6.51

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

10/12/2024

CF (Hz)
5.2G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

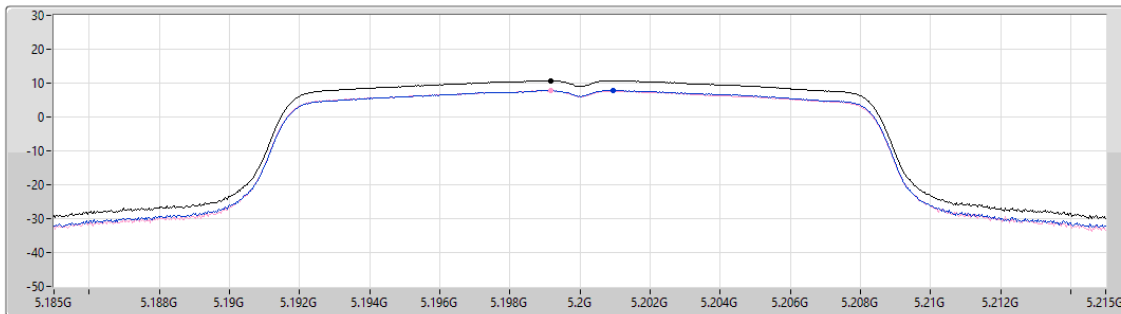

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.78	10.78	7.84	7.81

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5240MHz

09/12/2024

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

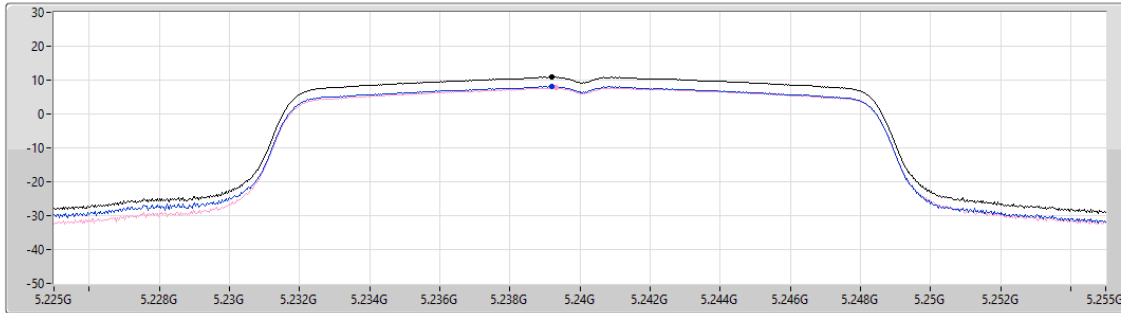

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.85	10.86	8.06	7.67

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5260MHz

10/12/2024

CF (Hz)
5.26G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

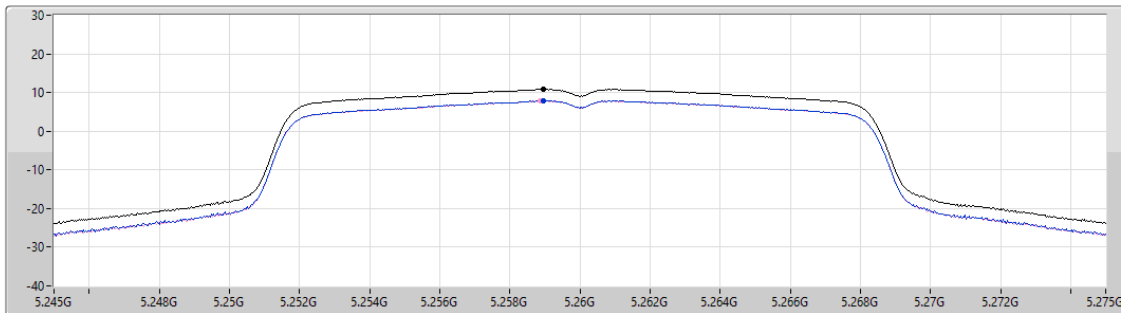

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.84	10.84	7.89	7.79


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5300MHz

09/12/2024

CF (Hz)
5.3G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

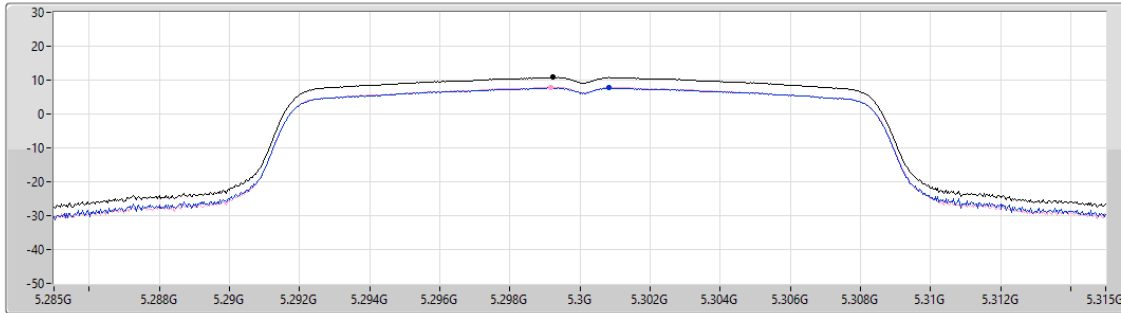

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
10.88	10.88	7.79	7.96

Sum
Port 1
Port 2


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5320MHz

09/12/2024

CF (Hz)
5.32G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

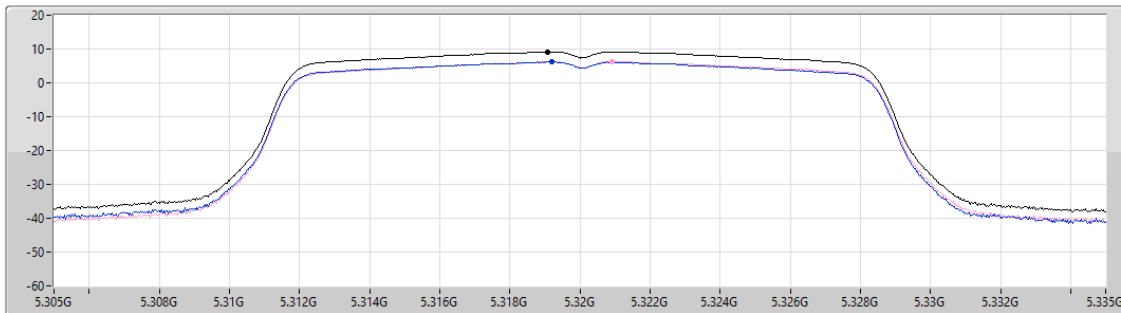

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
9.21	9.21	6.18	6.38

Sum
Port 1
Port 2


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5500MHz

09/12/2024

CF (Hz)
5.5G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

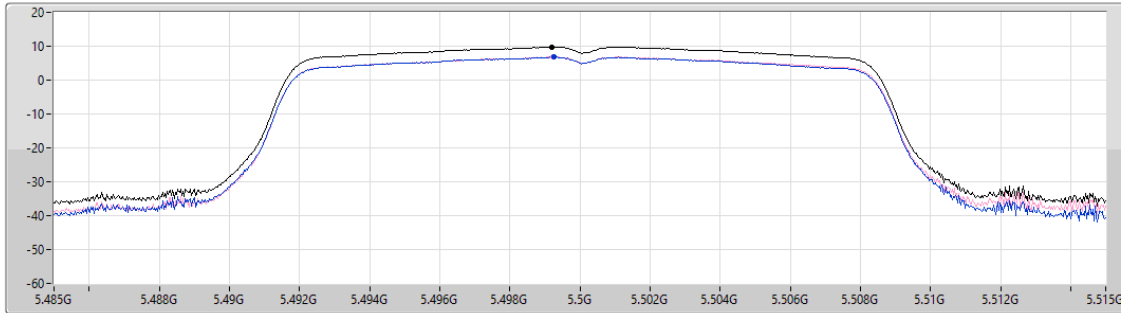

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
9.84	9.84	6.81	6.93


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5580MHz

09/12/2024

CF (Hz)
5.58G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

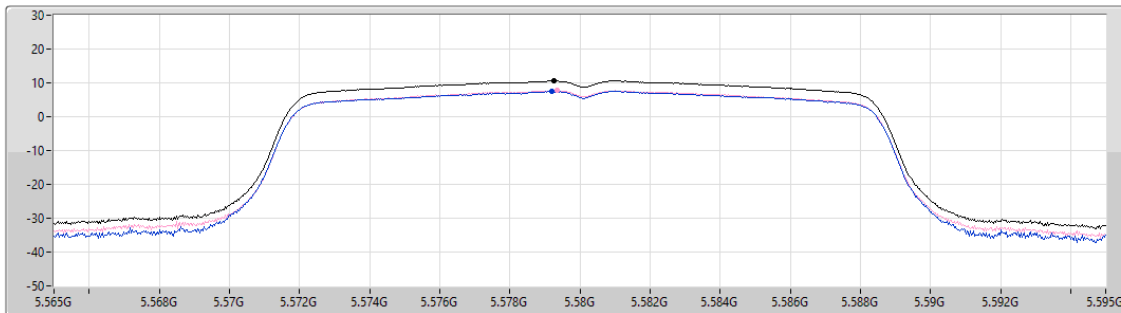


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
10.56	10.56	7.47	7.67

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5700MHz

09/12/2024

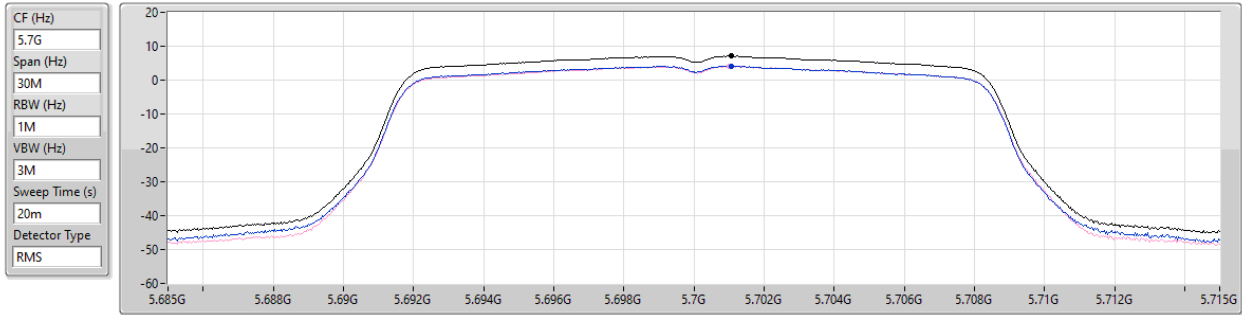


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.08	7.08	4.20	4.03

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

09/12/2024

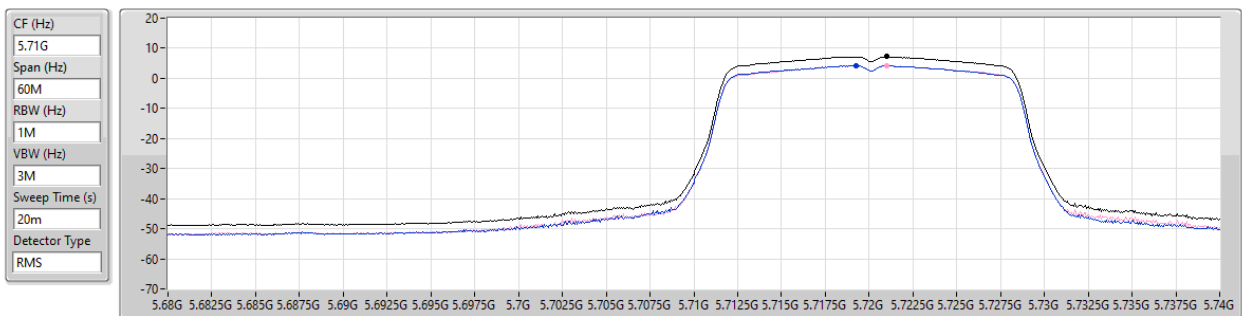


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.17	7.17	4.19	4.22

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

09/12/2024

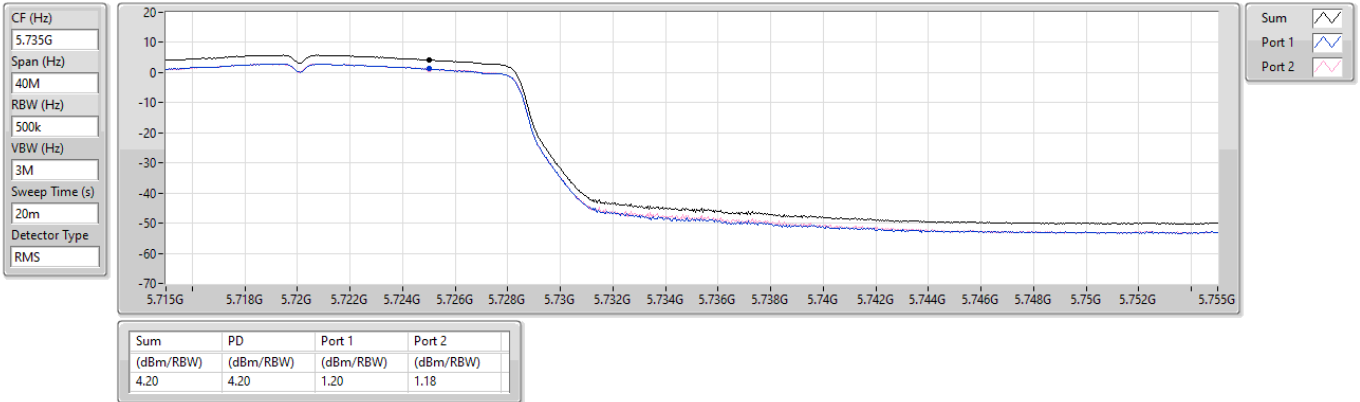


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5745MHz

09/12/2024

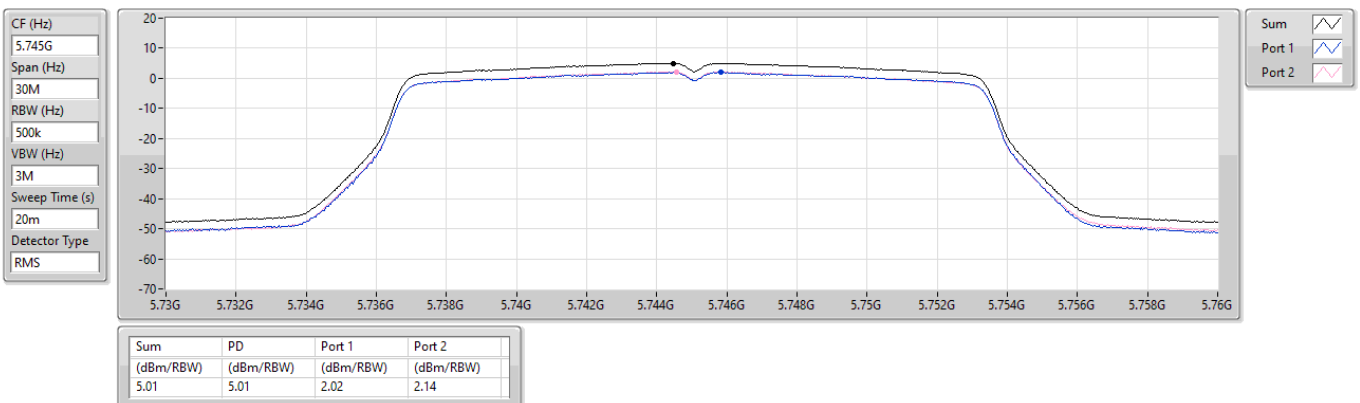

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5785MHz

09/12/2024

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

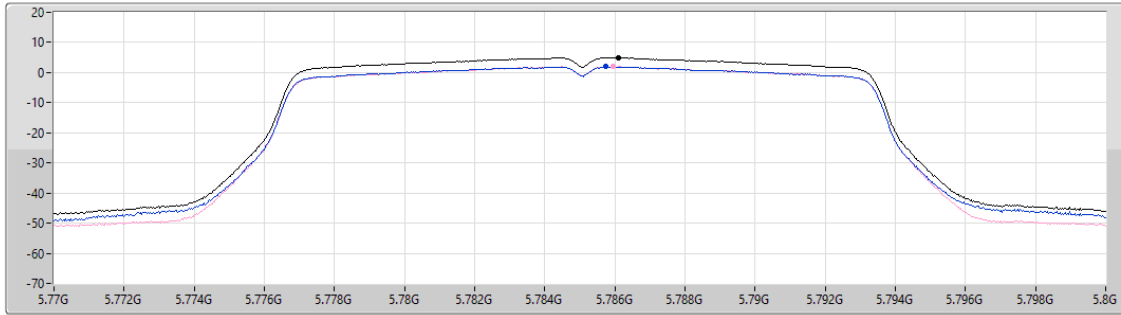

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.92	4.92	1.95	1.97

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5825MHz

09/12/2024

CF (Hz)
5.825G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

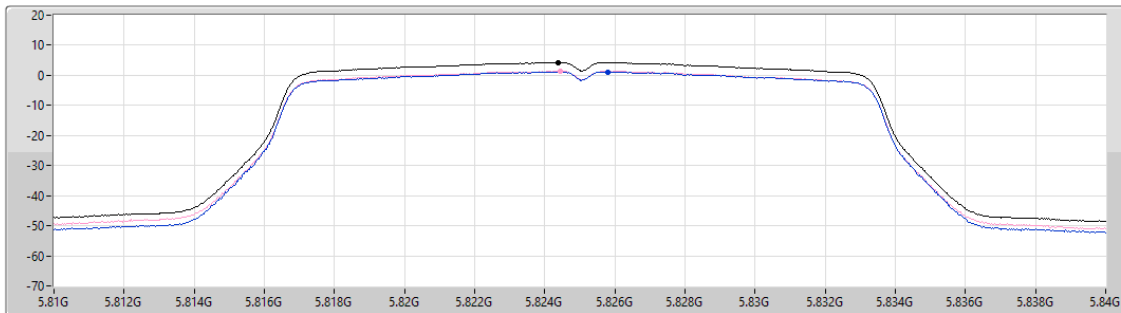

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.27	4.27	1.18	1.41


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5180MHz

09/12/2024

CF (Hz)
5.18G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

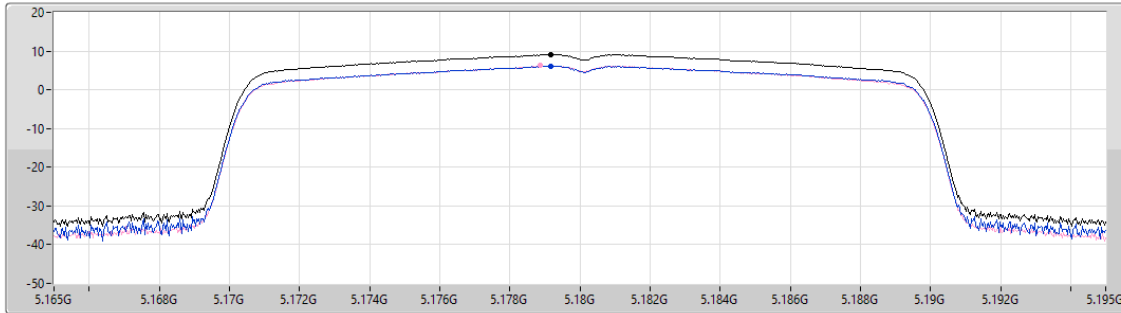

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.07	9.07	6.08	6.20


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5200MHz

10/12/2024

CF (Hz)
5.2G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

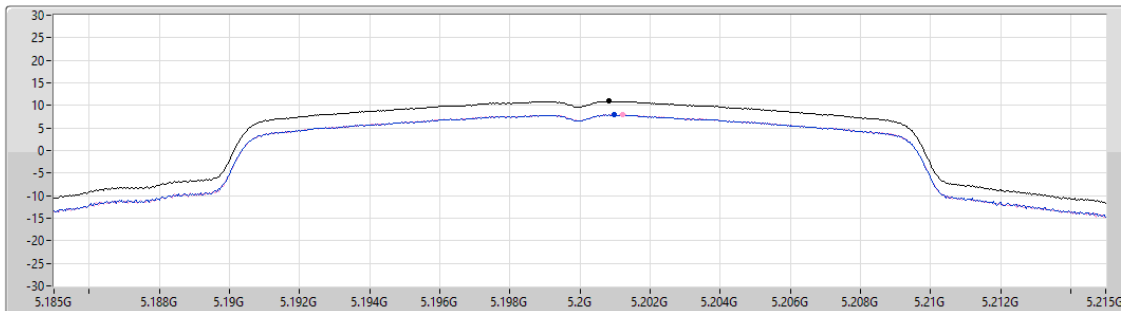

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.90	10.90	7.90	7.94


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5240MHz

09/12/2024

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

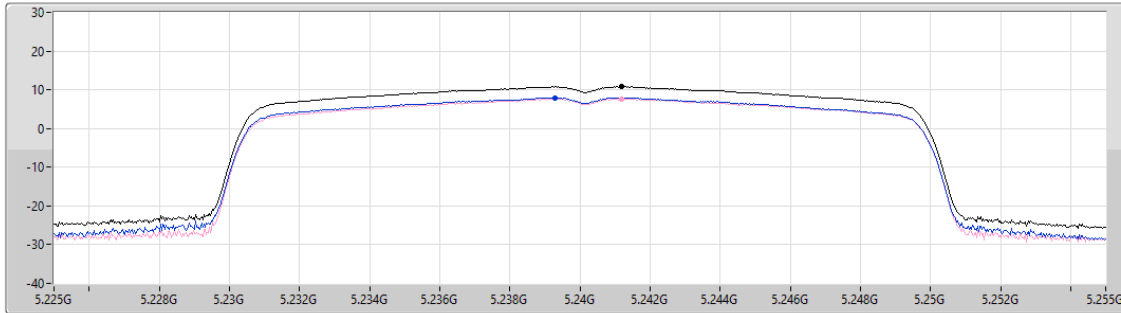

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.80	10.80	7.91	7.69

Sum
Port 1
Port 2


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5260MHz

09/12/2024

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

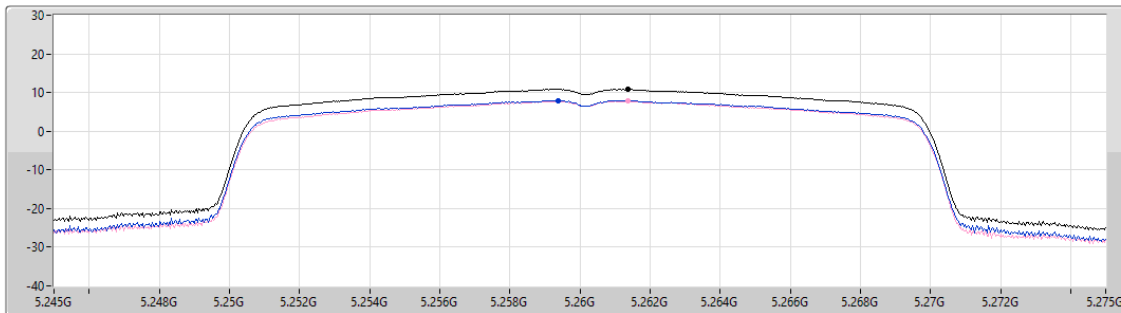

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.85	10.85	7.97	7.78

Sum
Port 1
Port 2


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5300MHz

09/12/2024

CF (Hz)
5.3G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

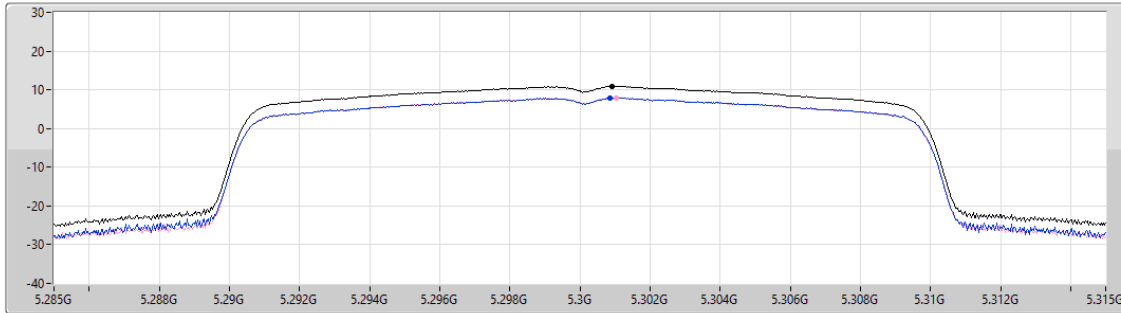

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.87	10.87	7.87	7.91


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5320MHz

09/12/2024

CF (Hz)
5.32G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

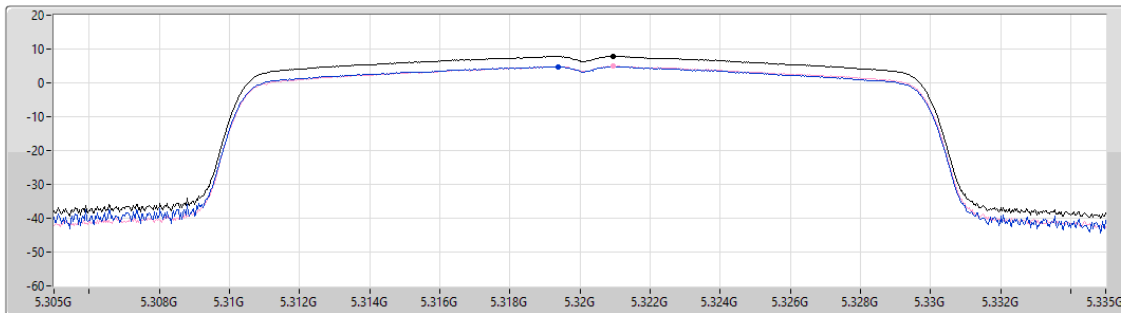

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.85	7.85	4.79	4.93


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5500MHz

09/12/2024

CF (Hz)
5.5G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

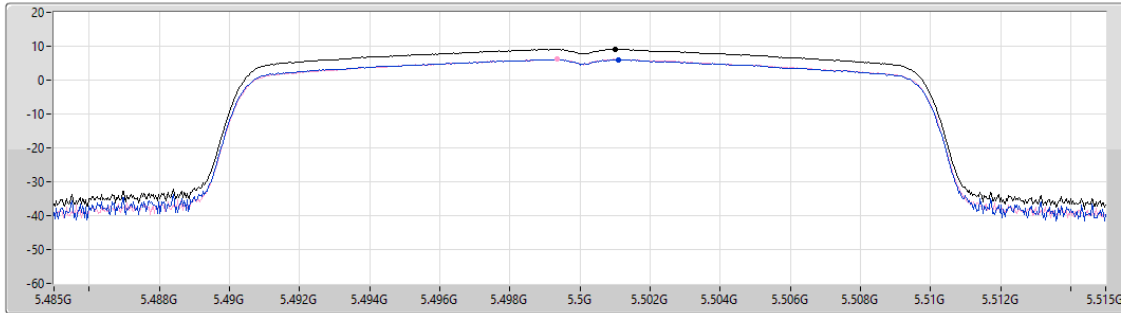

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.06	9.06	6.05	6.11

Sum
Port 1
Port 2


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5580MHz

09/12/2024

CF (Hz)
5.58G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

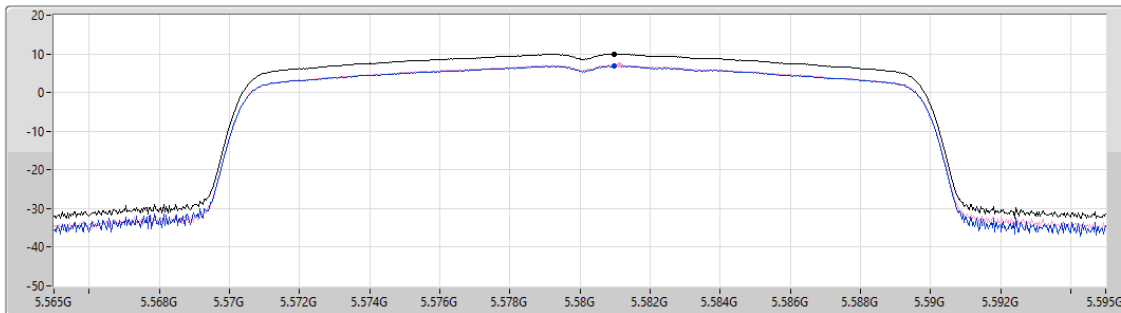

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.96	9.96	6.83	7.11

Sum
Port 1
Port 2

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5700MHz

09/12/2024

CF (Hz)
5.7G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

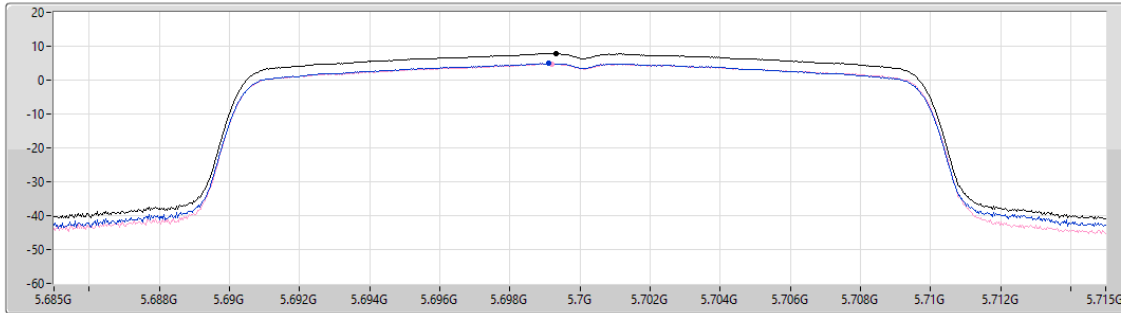

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.82	7.82	4.97	4.82

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

09/12/2024

CF (Hz)
5.71G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

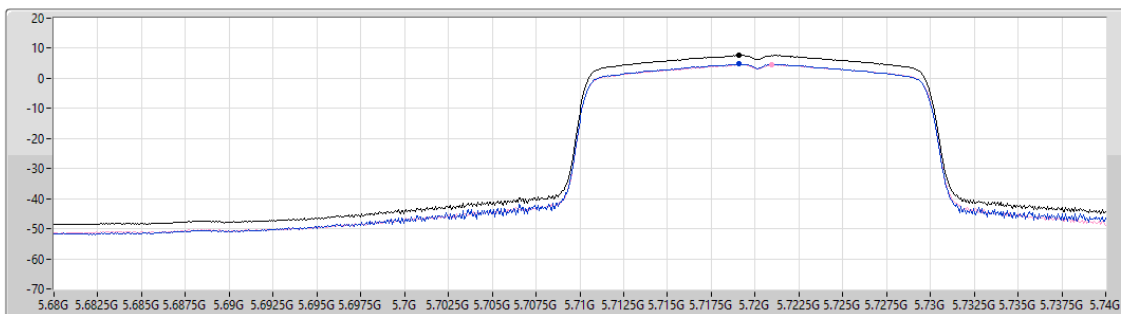

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.62	7.62	4.75	4.51

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

09/12/2024

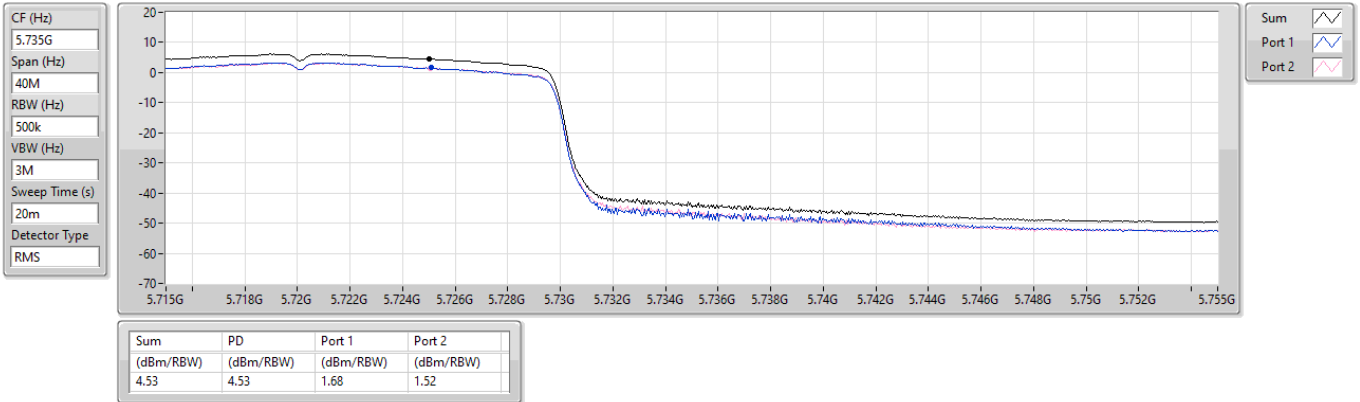


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5745MHz

09/12/2024

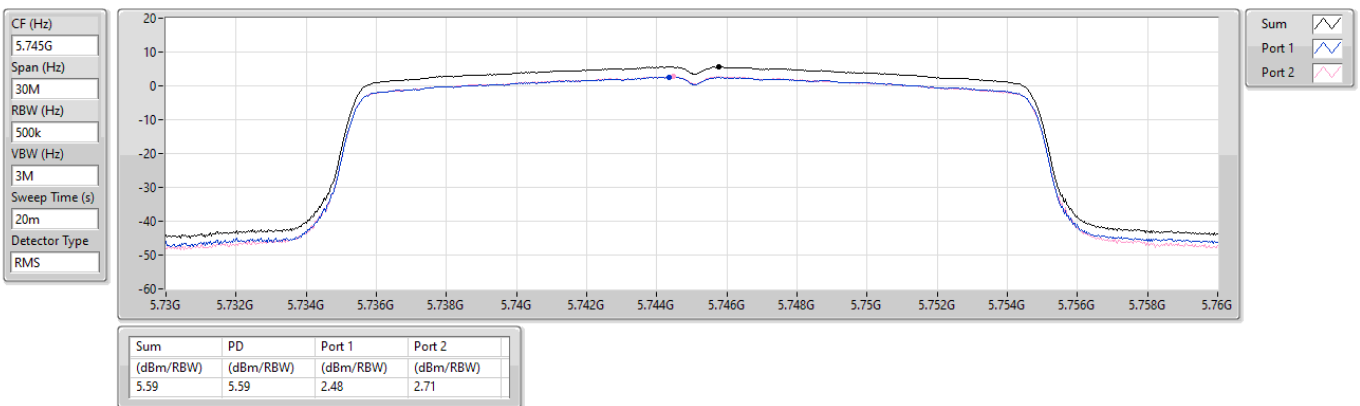


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5785MHz

09/12/2024

CF (Hz)
5.785G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

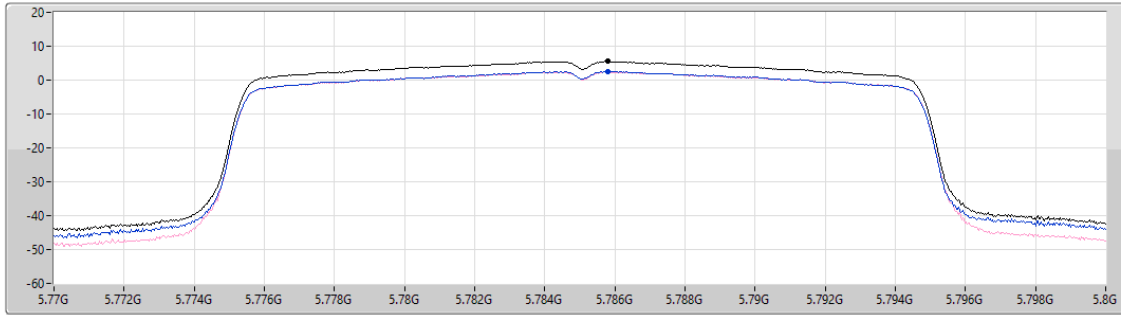

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
5.58	5.58	2.64	2.49

Sum
Port 1
Port 2


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5825MHz

09/12/2024

CF (Hz)
5.825G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

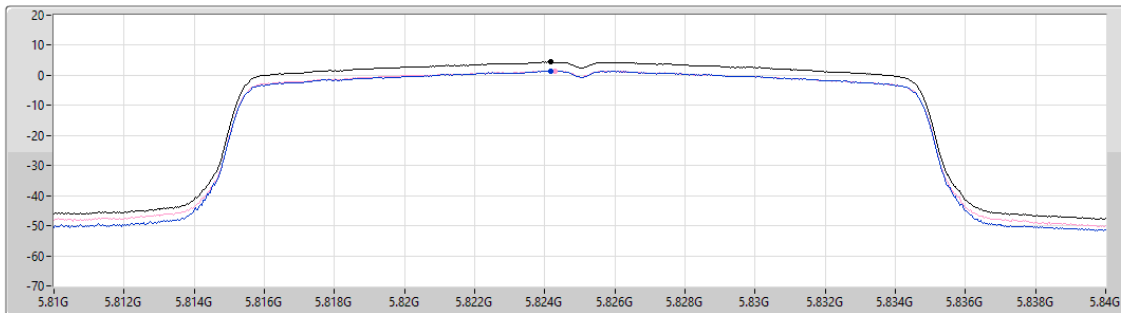

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
4.48	4.48	1.45	1.53

Sum
Port 1
Port 2

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5190MHz

09/12/2024

CF (Hz)
5.19G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

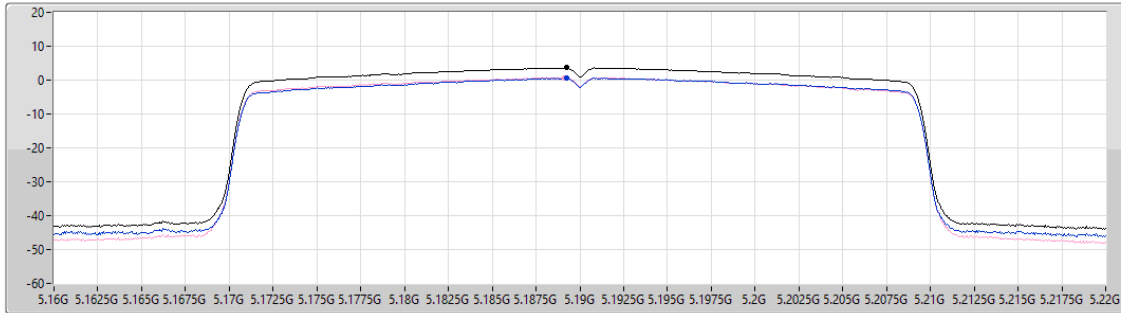

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.66	3.66	0.60	0.69

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5230MHz

09/12/2024

CF (Hz)
5.23G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

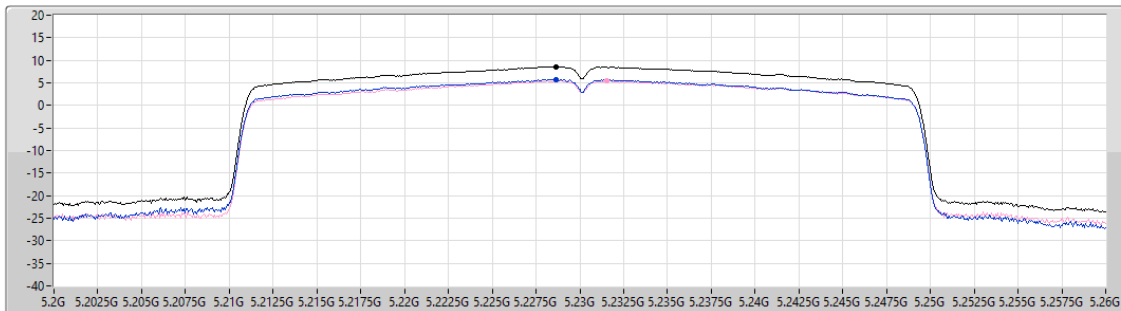

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.57	8.57	5.73	5.49


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5270MHz

09/12/2024

CF (Hz)
5.27G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

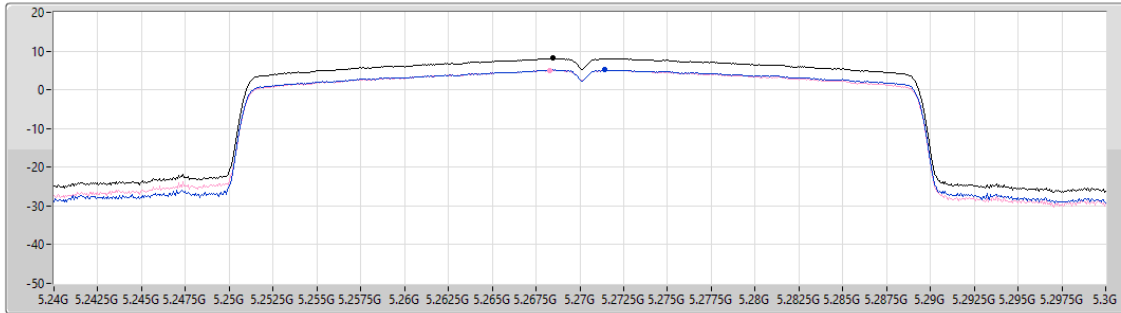

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
8.12	8.12	5.16	5.09


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5310MHz

09/12/2024

CF (Hz)
5.31G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

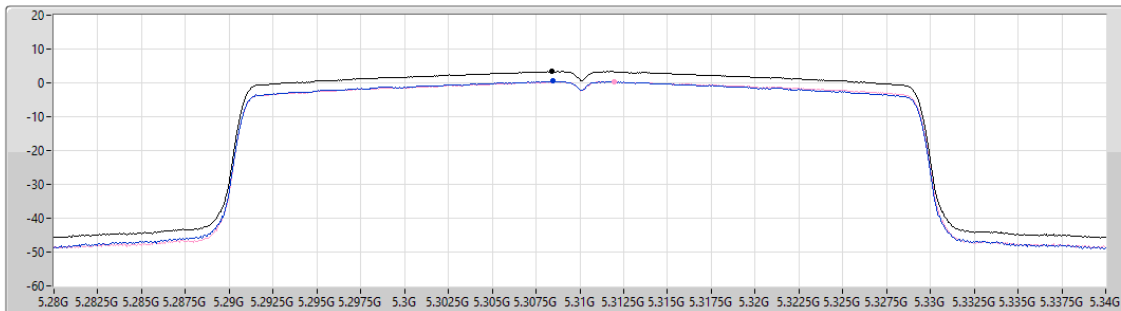

Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
3.41	3.41	0.50	0.37


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5510MHz

09/12/2024

CF (Hz)
5.51G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

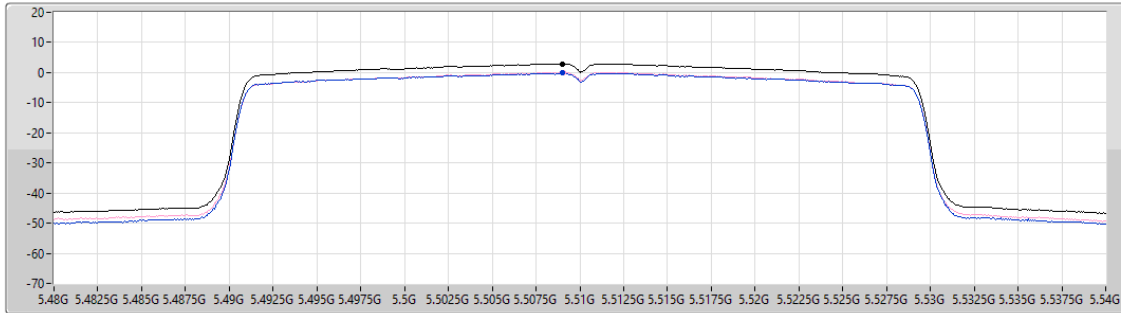

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.85	2.85	-0.18	0.09

Sum
Port 1
Port 2


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5550MHz

09/12/2024

CF (Hz)
5.55G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

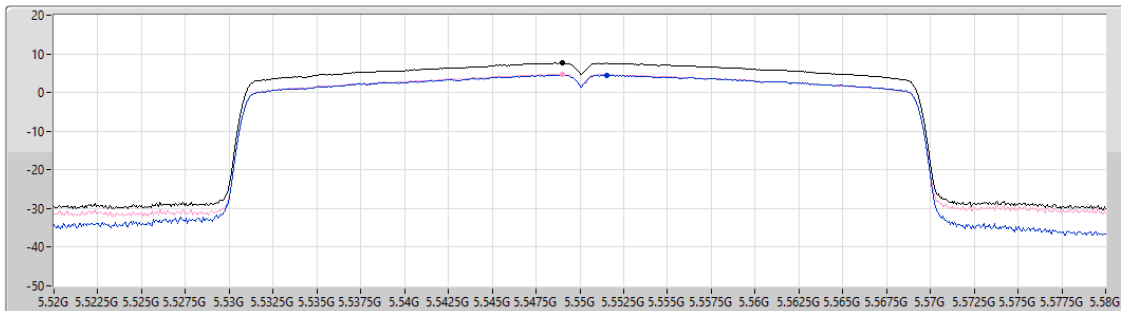

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.61	7.61	4.53	4.80

Sum
Port 1
Port 2

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5670MHz

09/12/2024

CF (Hz)
5.67G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

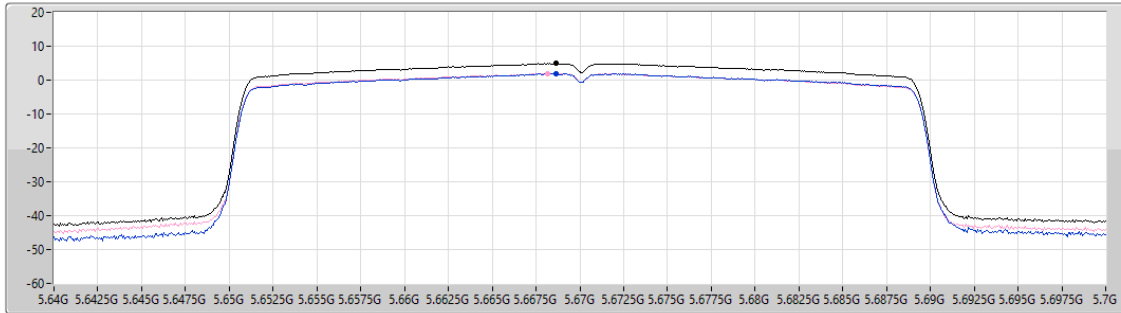

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.89	4.89	1.83	1.97

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

09/12/2024

CF (Hz)
5.69G


Span (Hz)
140M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

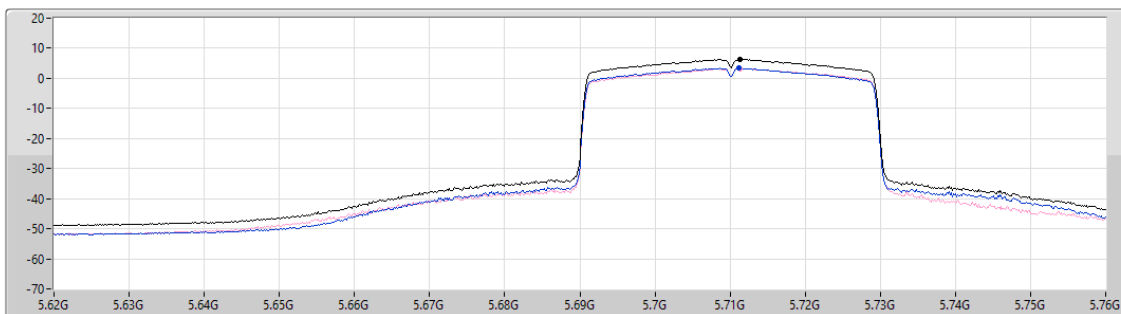

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.30	6.30	3.36	3.21

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

09/12/2024

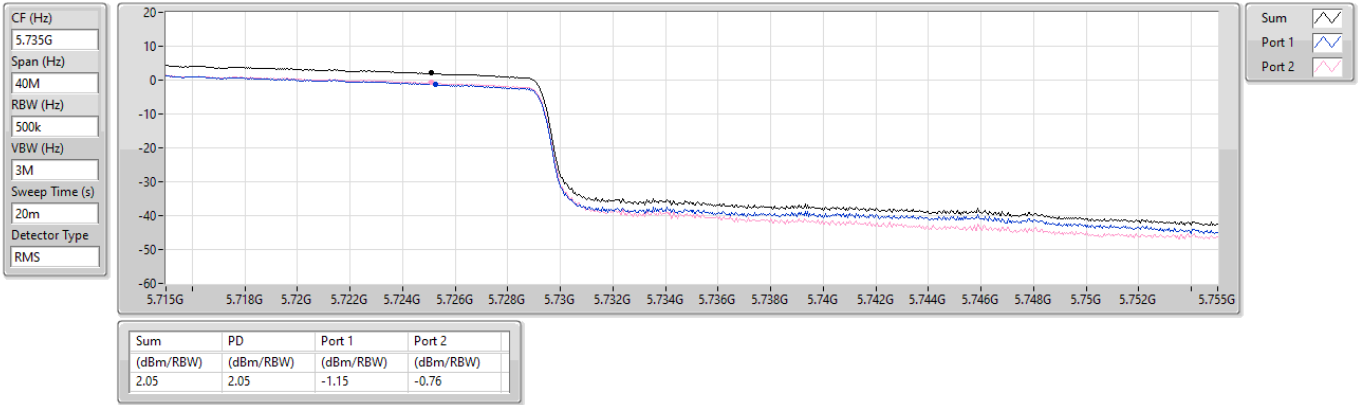


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5755MHz

09/12/2024

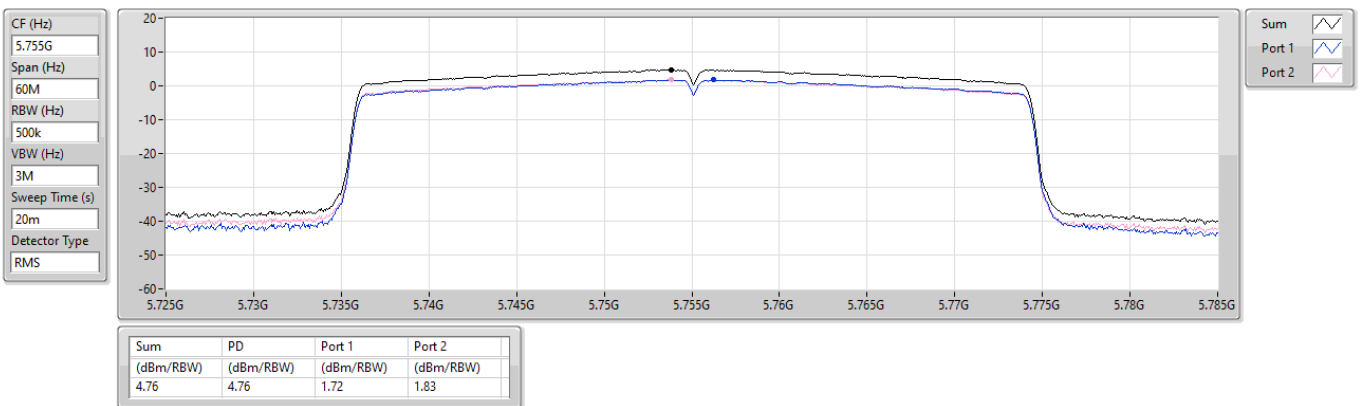


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5795MHz

09/12/2024

CF (Hz)
5.795G
Span (Hz)
60M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

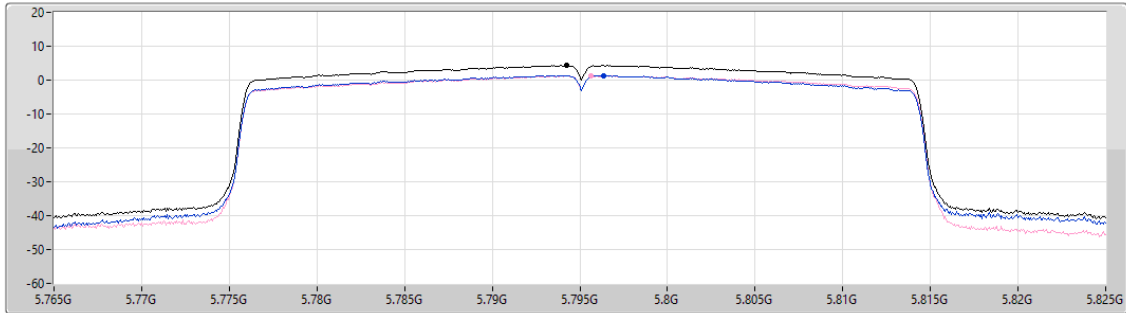

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.28	4.28	1.40	1.28

Sum
Port 1
Port 2


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5210MHz

09/12/2024

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

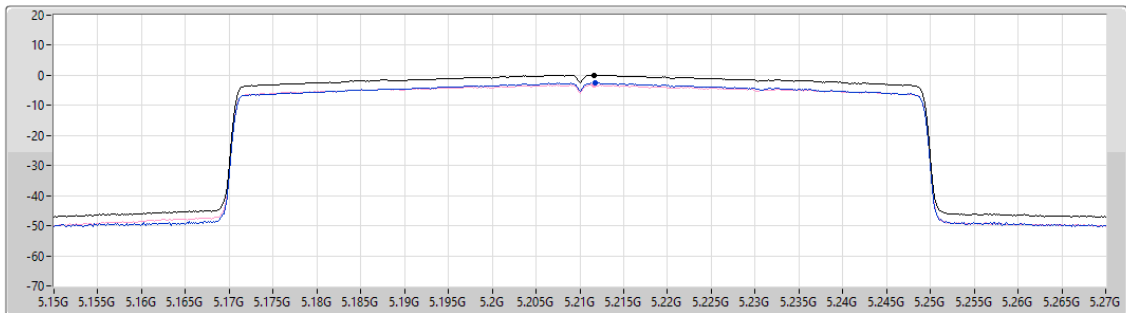

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.11	0.11	-2.56	-3.22

Sum
Port 1
Port 2


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5290MHz

09/12/2024

CF (Hz)
5.29G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

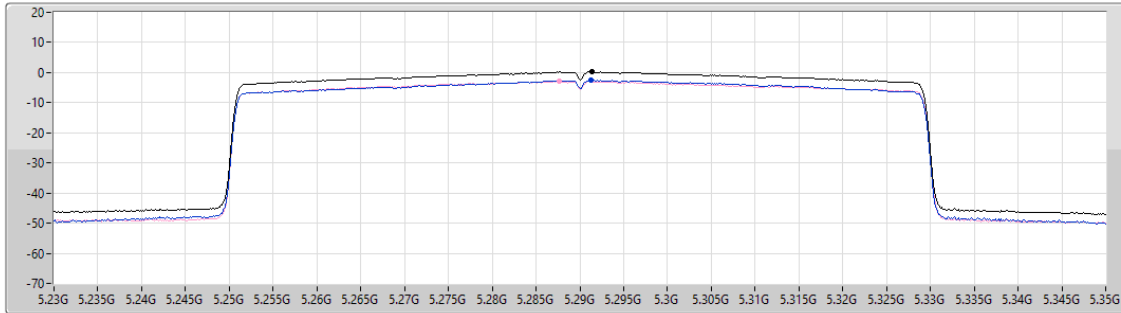

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.22	0.22	-2.60	-2.91


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5530MHz

09/12/2024

CF (Hz)
5.53G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

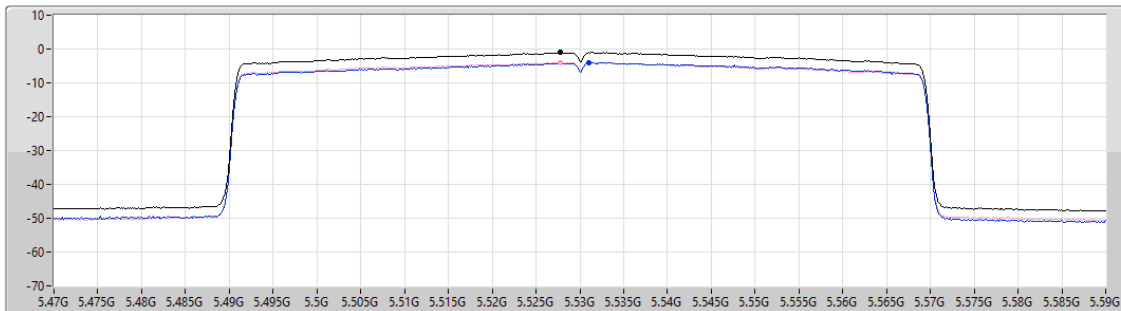

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.04	-1.04	-4.08	-3.94


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5610MHz

09/12/2024

CF (Hz)
5.61G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

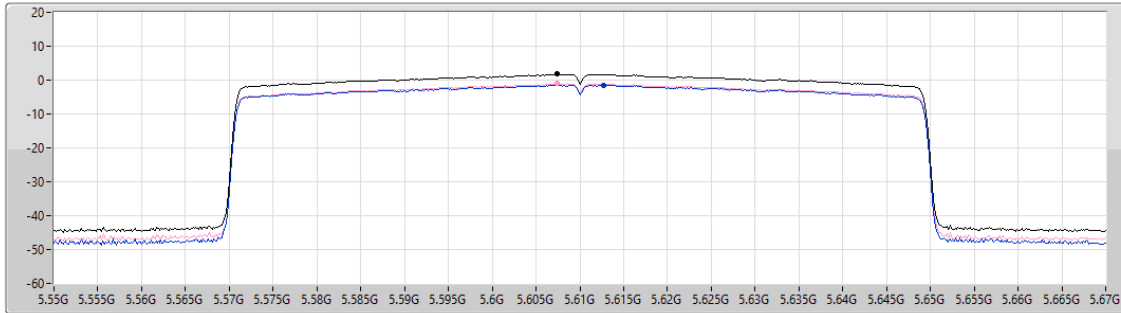

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.74	1.74	-1.44	-1.09

Sum
Port 1
Port 2


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

09/12/2024

CF (Hz)
5.65G
Span (Hz)
300M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

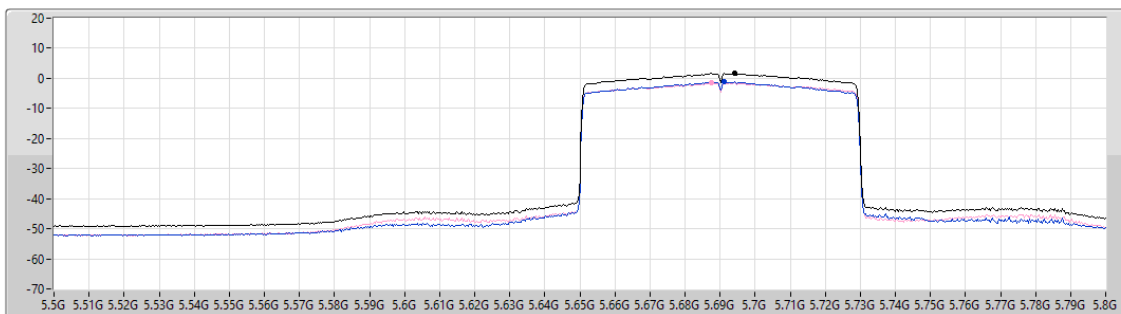

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.60	1.60	-1.19	-1.55


Sum
Port 1
Port 2

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

09/12/2024

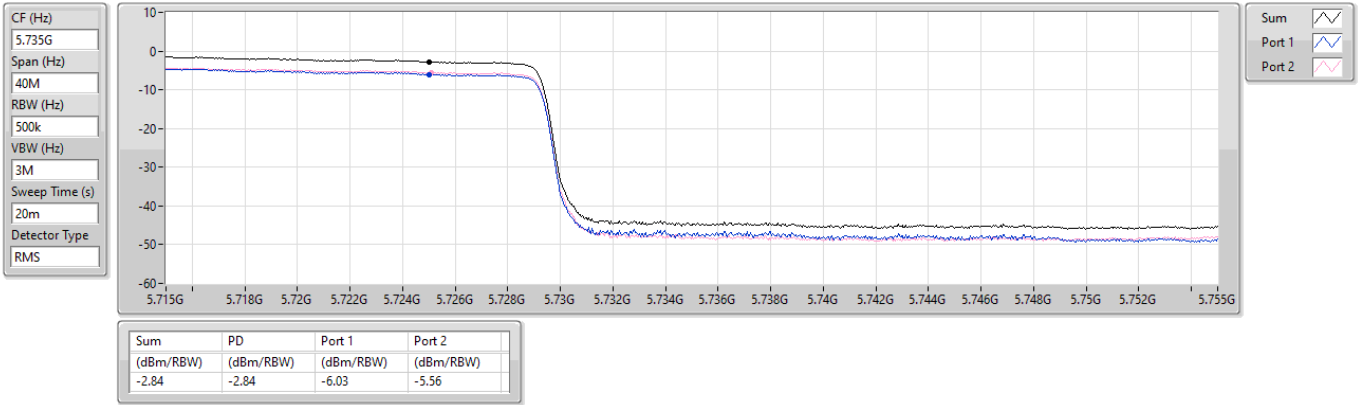


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5775MHz

09/12/2024

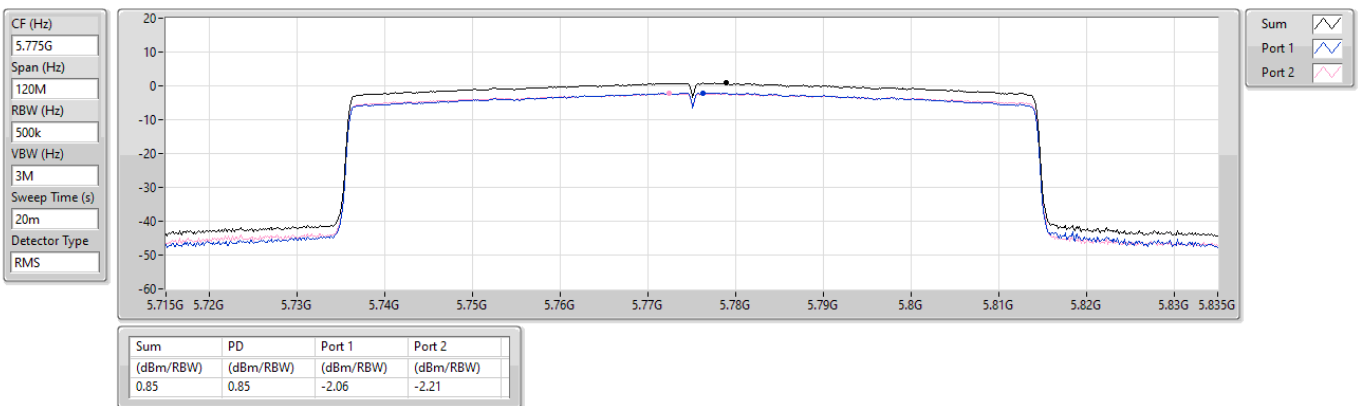


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

10/12/2024

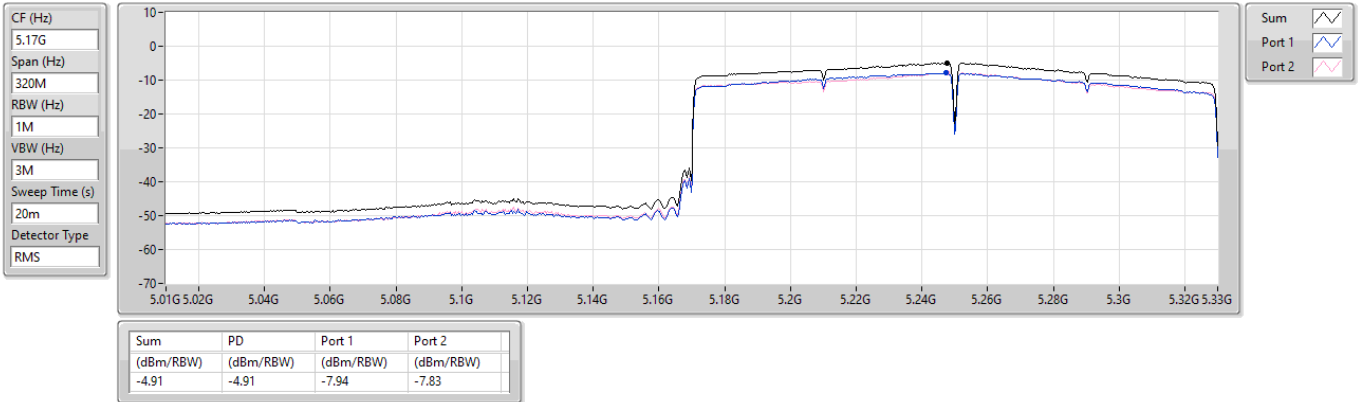


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

10/12/2024

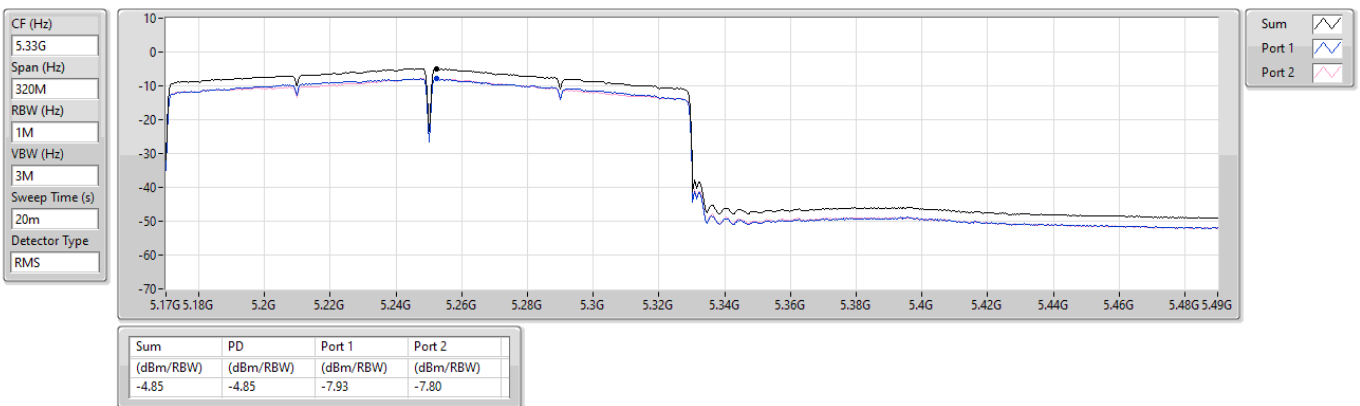


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5570MHz

10/12/2024

CF (Hz)
5.57G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

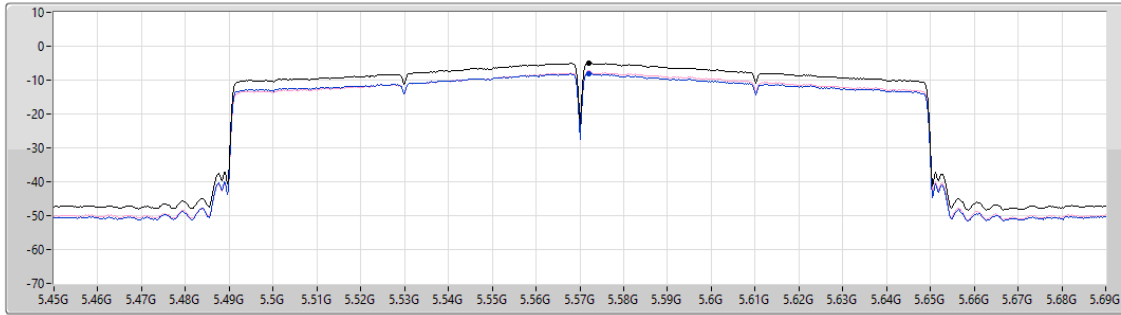

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.88	-4.88	-8.11	-7.69




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 3	Pass	QP	33.88M	35.98	40.00	-4.02	Vertical

Mode 3

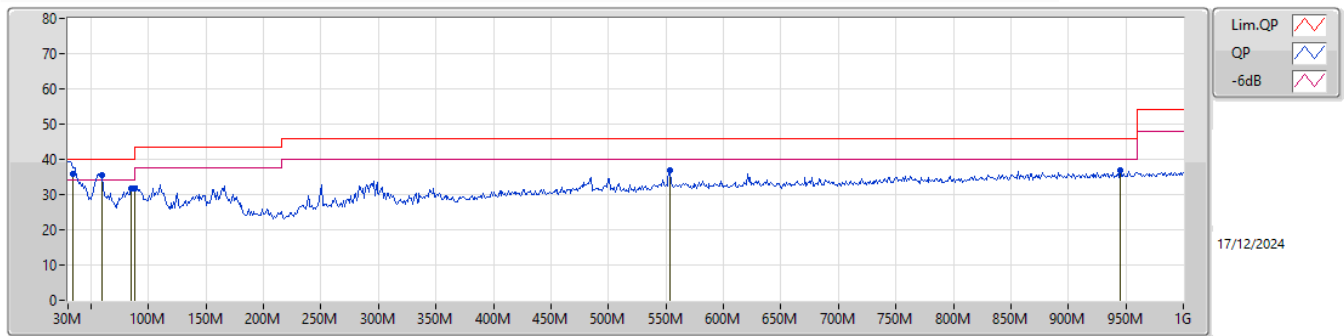

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	33.88M	35.98	40.00	-4.02	-21.10	3	Vertical	156	3.00	"Worst"	57.08	21.98	1.15	44.23		
PK	59.1M	35.47	40.00	-4.53	-30.32	3	Vertical	106	1.00	-	65.79	12.46	1.62	44.40		
PK	85.29M	31.87	40.00	-8.13	-28.42	3	Vertical	142	1.50	-	60.29	14.29	1.80	44.51		
PK	88M	31.64	43.50	-11.86	-27.82	3	Vertical	204	1.00	-	59.46	14.82	1.87	44.51		
PK	553.8M	36.81	46.00	-9.19	-14.05	3	Vertical	190	1.00	-	50.86	24.87	4.88	43.80		
PK	944.71M	37.03	46.00	-8.97	-10.20	3	Vertical	214	1.50	-	47.23	26.66	6.58	43.44		

Mode 3

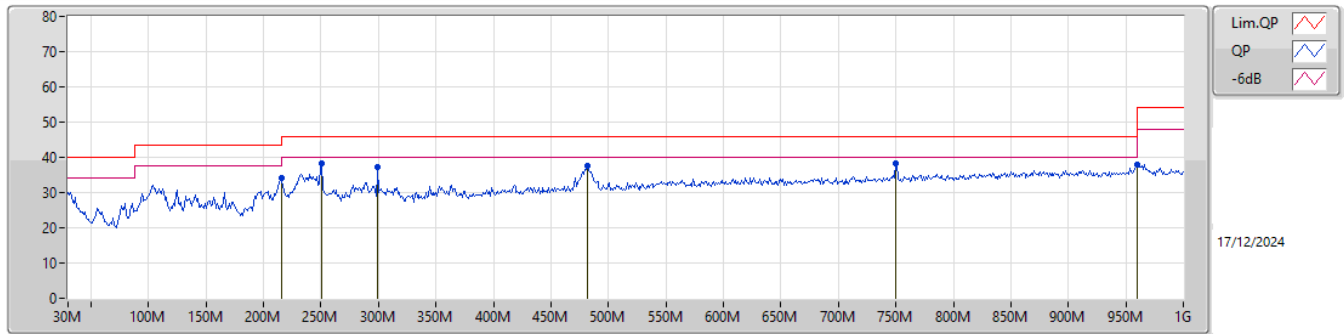

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	215.27M	34.13	43.50	-9.37	-26.52	3	Horizontal	76	1.50	-	60.65	14.75	3.11	44.38		
PK	250.19M	38.44	46.00	-7.56	-22.68	3	Horizontal	125	1.00	"Worst"	61.12	18.23	3.39	44.30		
PK	299.66M	37.15	46.00	-8.85	-21.40	3	Horizontal	194	1.00	-	58.55	19.04	3.79	44.23		
PK	482.02M	37.58	46.00	-8.42	-15.87	3	Horizontal	201	2.00	-	53.45	23.24	4.71	43.82		
PK	749.74M	38.18	46.00	-7.82	-12.05	3	Horizontal	215	1.25	-	50.23	25.58	5.81	43.44		
PK	960M	38.06	54.00	-15.94	-10.03	3	Horizontal	288	1.00	-	48.09	26.80	6.62	43.45		




Summary

Mode	Result	Type	Freq	Level	Limit	Margin	Dist	Condition	Azimuth	Height	Comments
			(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(m)		(°)	(m)	
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1.(MCS0)_2TX	Pass	PK	5.7267G	67.18	68.20	-1.02	3	Horizontal	304	2.32	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

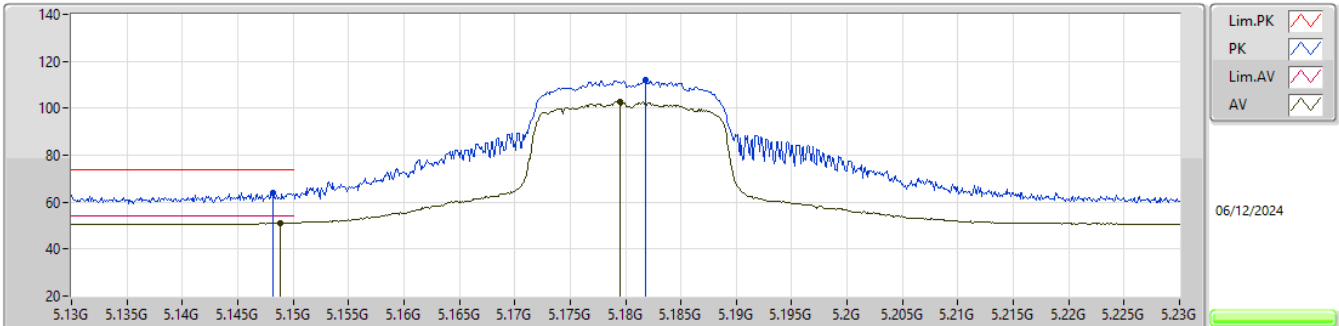


EUT_X_2TX
Setting 17.75
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1482G	64.13	74.00	-9.87	54.48	3	Vertical	88	1.28	-	33.60	6.98	30.93			
AV	5.1488G	51.10	54.00	-2.90	41.45	3	Vertical	88	1.28	-	33.60	6.98	30.93			
PK	5.1818G	111.94	Inf	-Inf	102.19	3	Vertical	88	1.28	-	33.66	7.00	30.91			
AV	5.1795G	102.91	Inf	-Inf	93.16	3	Vertical	88	1.28	-	33.66	7.00	30.91			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

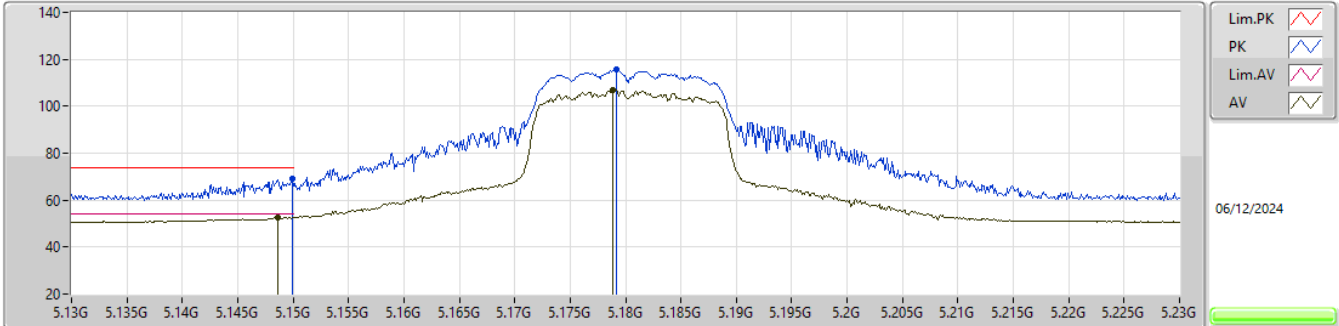


EUT_X_2TX
Setting 17.75
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1499G	69.01	74.00	-4.99	59.36	3	Horizontal	341	2.42	-	33.60	6.98	30.93			
AV	5.1486G	52.57	54.00	-1.43	42.92	3	Horizontal	341	2.42	-	33.60	6.98	30.93			
PK	5.1792G	115.54	Inf	-Inf	105.79	3	Horizontal	341	2.42	-	33.66	7.00	30.91			
AV	5.1788G	106.87	Inf	-Inf	97.12	3	Horizontal	341	2.42	-	33.66	7.00	30.91			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

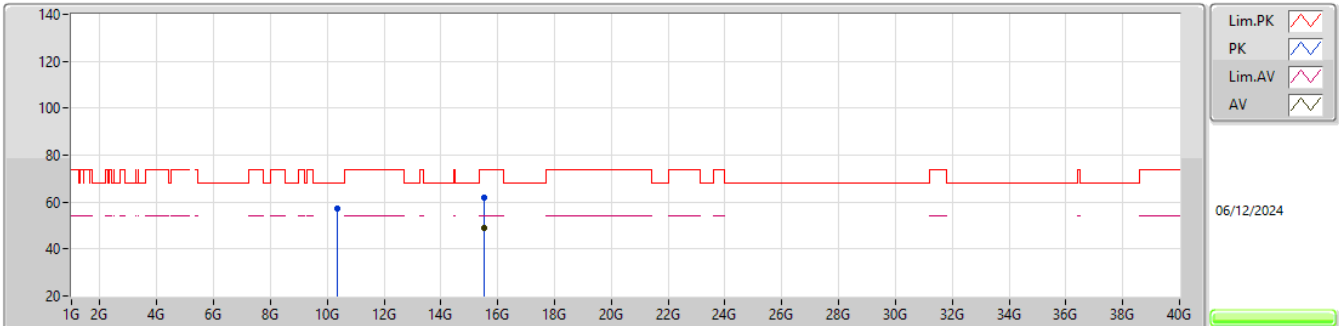


EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36076G	57.14	68.20	-11.06	38.04	3	Vertical	145	1.26	-	38.58	11.04	30.52			
PK	15.5378G	62.10	74.00	-11.90	44.16	3	Vertical	28	2.06	-	38.02	11.85	31.93			
AV	15.54026G	48.76	54.00	-5.24	30.83	3	Vertical	28	2.06	-	38.02	11.85	31.94			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

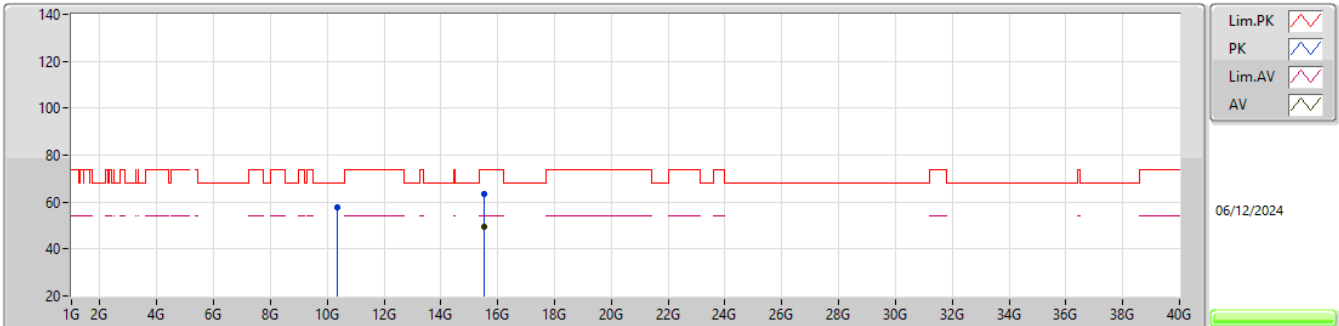


EUT_X_2TX
Setting 17.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36442G	57.88	68.20	-10.32	38.79	3	Horizontal	254	1.47	-	38.57	11.04	30.52			
PK	15.53904G	63.65	74.00	-10.35	45.71	3	Horizontal	286	1.88	-	38.02	11.85	31.93			
AV	15.54162G	49.49	54.00	-4.51	31.56	3	Horizontal	286	1.88	-	38.02	11.85	31.94			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

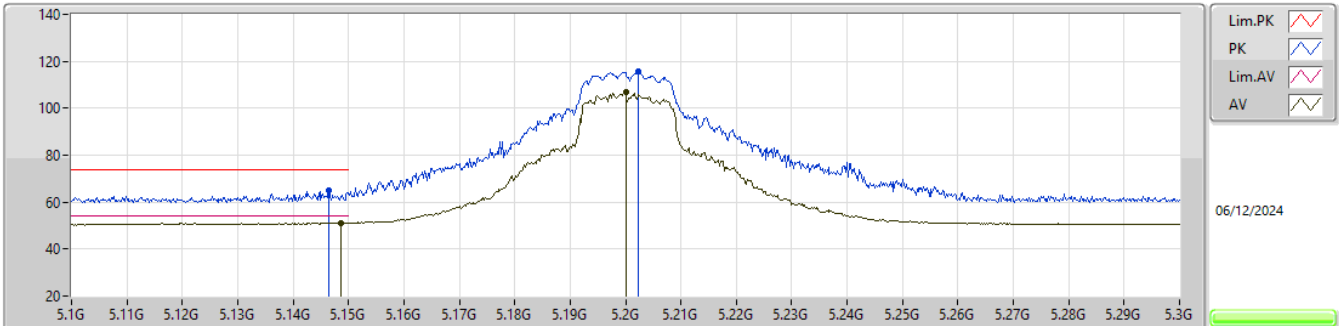


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1464G	65.13	74.00	-8.87	55.48	3	Vertical	93	1.08	-	33.60	6.98	30.93				
AV	5.1486G	51.10	54.00	-2.90	41.45	3	Vertical	93	1.08	-	33.60	6.98	30.93				
PK	5.2022G	115.73	Inf	-Inf	105.92	3	Vertical	93	1.08	-	33.70	7.01	30.90				
AV	5.2G	106.93	Inf	-Inf	97.12	3	Vertical	93	1.08	-	33.70	7.01	30.90				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

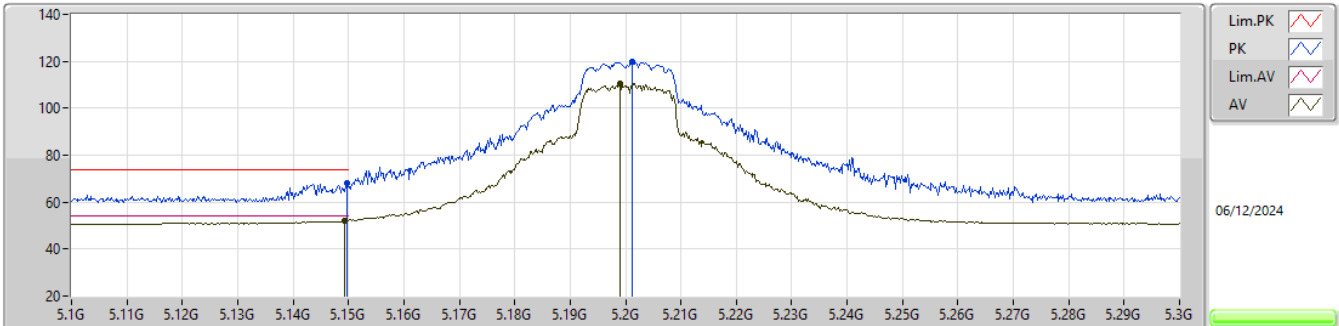


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1498G	68.29	74.00	-5.71	58.64	3	Horizontal	344	2.39	-	33.60	6.98	30.93				
AV	5.1492G	52.18	54.00	-1.82	42.53	3	Horizontal	344	2.39	-	33.60	6.98	30.93				
PK	5.2012G	119.64	Inf	-Inf	109.83	3	Horizontal	344	2.39	-	33.70	7.01	30.90				
AV	5.199G	110.75	Inf	-Inf	100.94	3	Horizontal	344	2.39	-	33.70	7.01	30.90				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

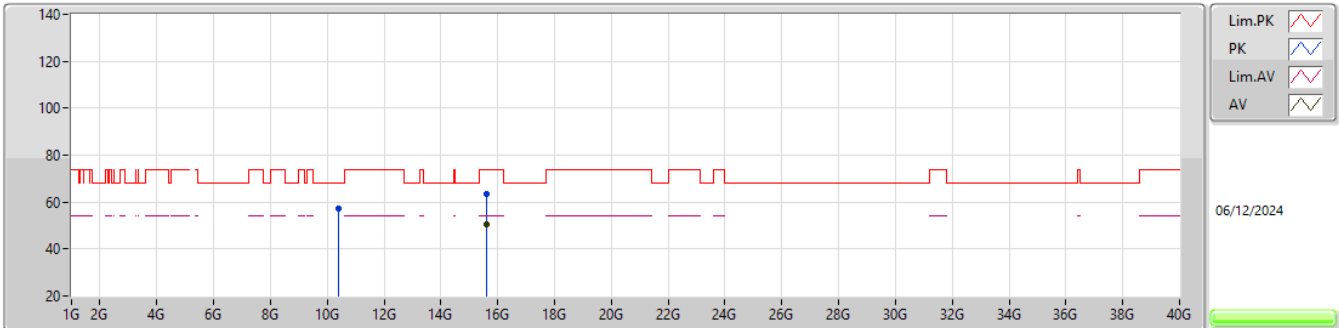


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39984G	57.24	68.20	-10.96	38.19	3	Vertical	180	1.53	-	38.50	11.06	30.51			
PK	15.6022G	63.63	74.00	-10.37	45.87	3	Vertical	24	1.99	-	37.89	11.85	31.98			
AV	15.5998G	50.39	54.00	-3.61	32.61	3	Vertical	24	1.99	-	37.90	11.85	31.97			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

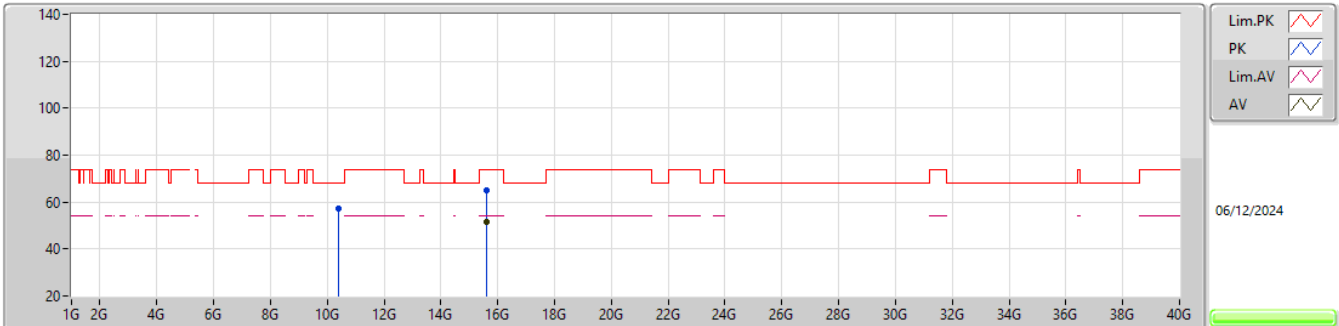


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40158G	56.99	68.20	-11.21	37.93	3	Horizontal	242	3.00	-	38.50	11.07	30.51			
PK	15.60338G	65.23	74.00	-8.77	47.47	3	Horizontal	288	1.80	-	37.89	11.85	31.98			
AV	15.59844G	51.81	54.00	-2.19	34.03	3	Horizontal	288	1.80	-	37.90	11.85	31.97			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

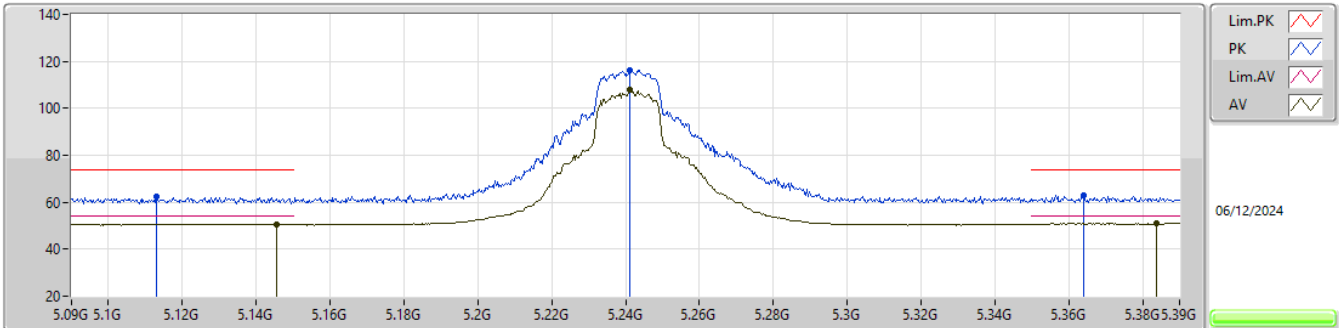


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1131G	62.33	74.00	-11.67	52.73	3	Vertical	18	2.30	-	33.60	6.95	30.95				
AV	5.1455G	50.62	54.00	-3.38	40.98	3	Vertical	18	2.30	-	33.60	6.97	30.93				
PK	5.2412G	116.21	Inf	-Inf	106.30	3	Vertical	18	2.30	-	33.78	7.00	30.87				
AV	5.2412G	107.77	Inf	-Inf	97.86	3	Vertical	18	2.30	-	33.78	7.00	30.87				
PK	5.3642G	62.73	74.00	-11.27	52.64	3	Vertical	18	2.30	-	33.93	6.97	30.81				
AV	5.3837G	51.00	54.00	-3.00	40.87	3	Vertical	18	2.30	-	33.97	6.96	30.80				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

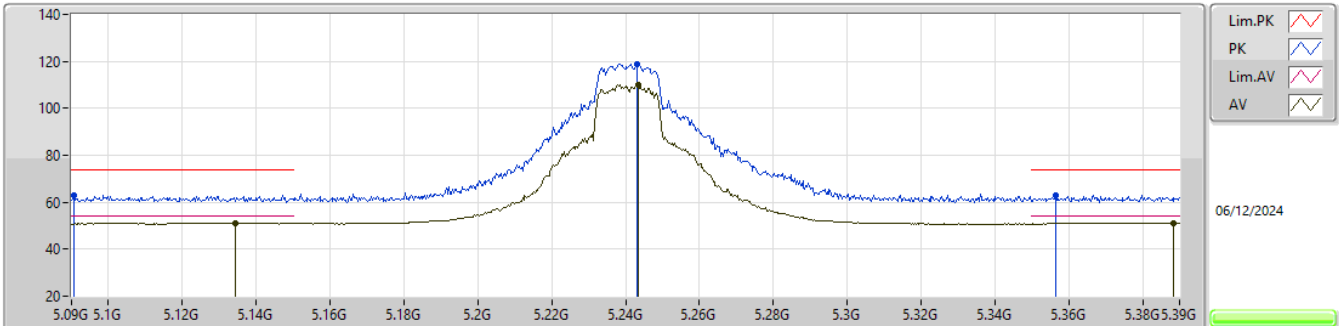


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.0906G	62.85	74.00	-11.15	53.31	3	Horizontal	354	2.36	-	33.56	6.94	30.96			
AV	5.1344G	51.06	54.00	-2.94	41.42	3	Horizontal	354	2.36	-	33.60	6.97	30.93			
PK	5.243G	119.02	Inf	-Inf	109.10	3	Horizontal	354	2.36	-	33.79	7.00	30.87			
AV	5.2436G	110.20	Inf	-Inf	100.28	3	Horizontal	354	2.36	-	33.79	7.00	30.87			
PK	5.3564G	63.03	74.00	-10.97	52.96	3	Horizontal	354	2.36	-	33.91	6.97	30.81			
AV	5.3882G	51.28	54.00	-2.72	41.13	3	Horizontal	354	2.36	-	33.98	6.96	30.79			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

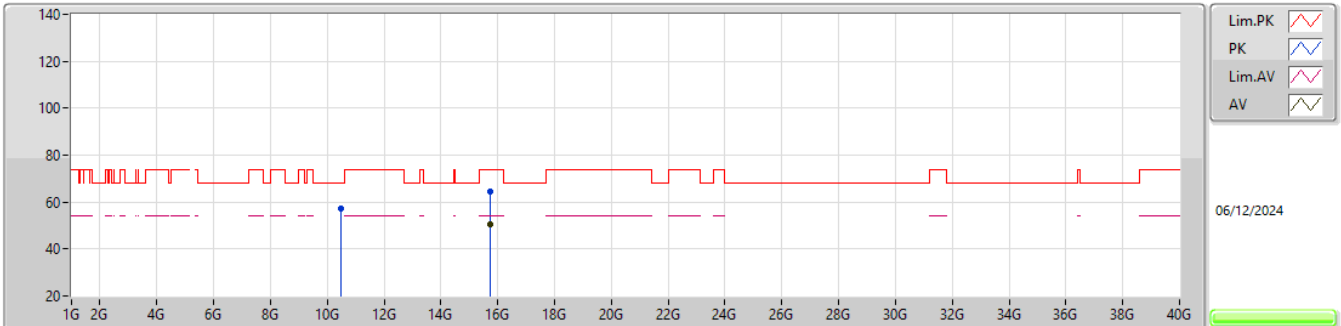


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48294G	57.43	68.20	-10.77	38.33	3	Vertical	109	2.92	-	38.47	11.12	30.49			
PK	15.7268G	64.65	74.00	-9.35	47.30	3	Vertical	170	2.68	-	37.55	11.86	32.06			
AV	15.72118G	50.43	54.00	-3.57	33.06	3	Vertical	170	2.68	-	37.56	11.86	32.05			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

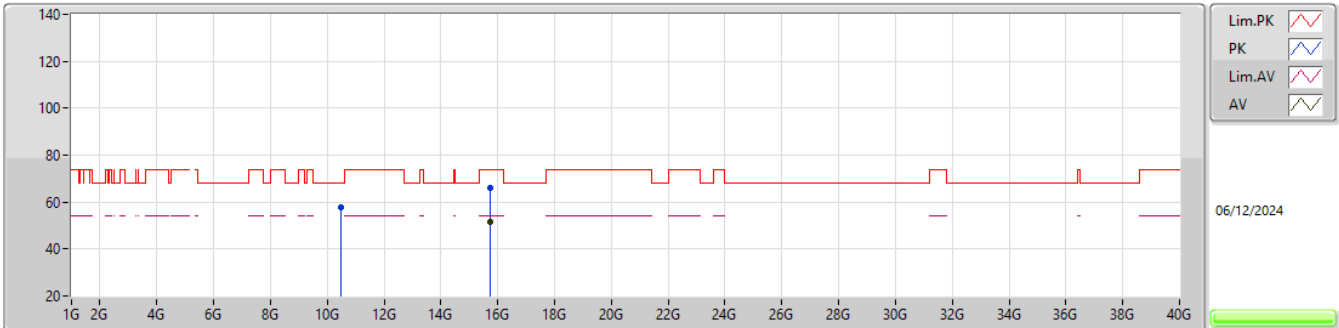


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48926G	57.87	68.20	-10.33	38.76	3	Horizontal	309	2.67	-	38.48	11.12	30.49			
PK	15.7265G	65.82	74.00	-8.18	48.46	3	Horizontal	284	1.87	-	37.55	11.86	32.05			
AV	15.72146G	51.64	54.00	-2.36	34.27	3	Horizontal	284	1.87	-	37.56	11.86	32.05			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5180MHz_TX

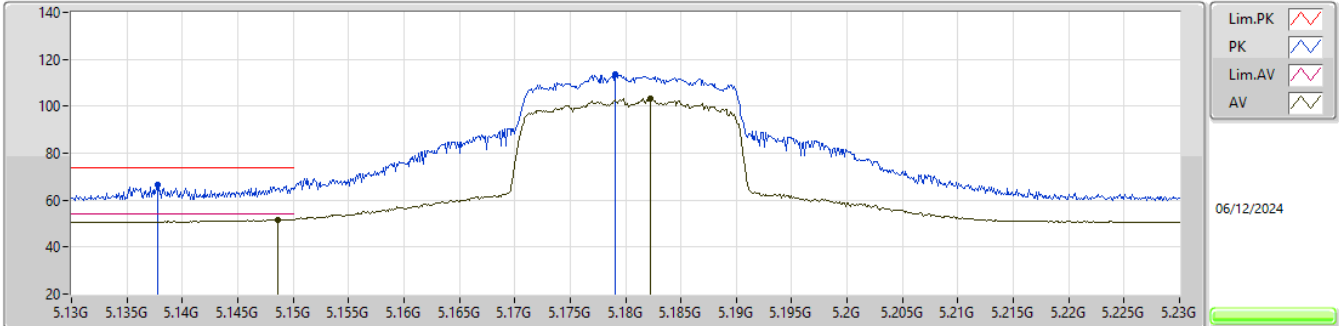


EUT_X_2TX
Setting 18
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1378G	66.56	74.00	-7.44	56.92	3	Vertical	92	1.10	-	33.60	6.97	30.93			
AV	5.1486G	51.76	54.00	-2.24	42.11	3	Vertical	92	1.10	-	33.60	6.98	30.93			
PK	5.1791G	113.74	Inf	-Inf	103.99	3	Vertical	92	1.10	-	33.66	7.00	30.91			
AV	5.1822G	103.21	Inf	-Inf	93.46	3	Vertical	92	1.10	-	33.66	7.00	30.91			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5180MHz_TX

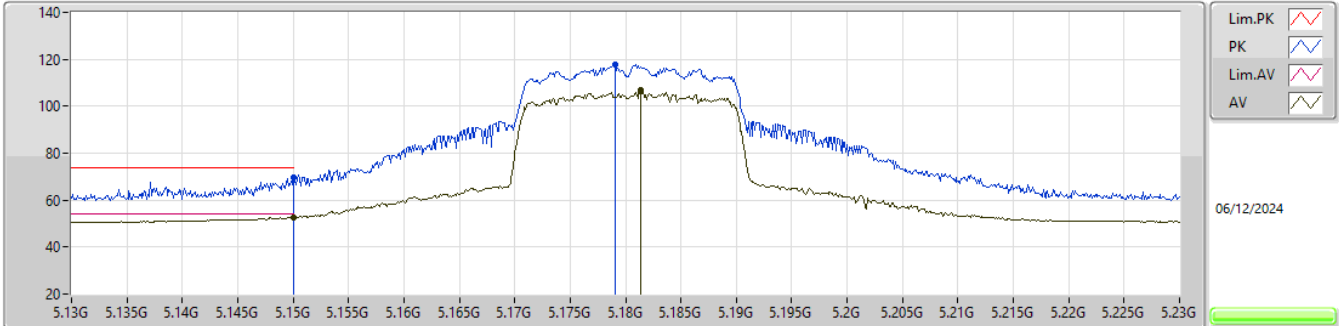


EUT_X_2TX
Setting 18
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	69.44	74.00	-4.56	59.79	3	Horizontal	342	2.39	-	33.60	6.98	30.93			
AV	5.15G	52.76	54.00	-1.24	43.11	3	Horizontal	342	2.39	-	33.60	6.98	30.93			
PK	5.1791G	117.67	Inf	-Inf	107.92	3	Horizontal	342	2.39	-	33.66	7.00	30.91			
AV	5.1814G	106.68	Inf	-Inf	96.93	3	Horizontal	342	2.39	-	33.66	7.00	30.91			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5180MHz_TX

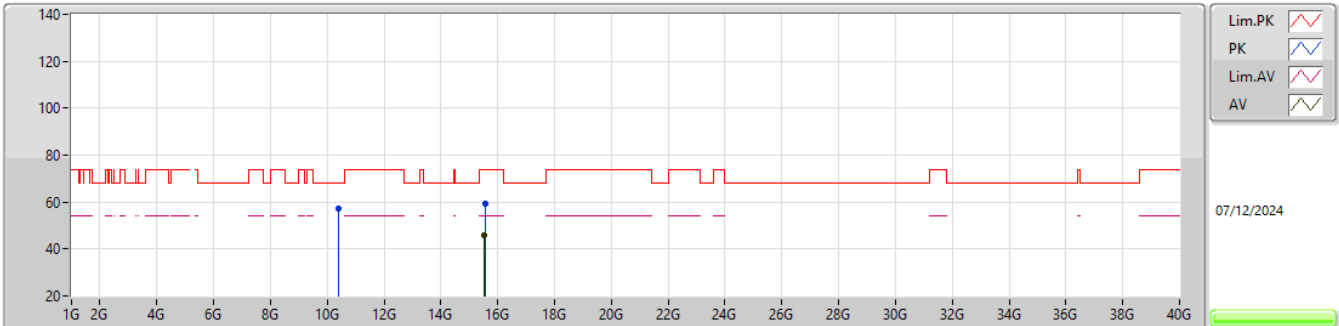


EUT_X_2TX
Setting 18
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3855G	57.24	68.20	-10.96	38.18	3	Vertical	151	2.06	-	38.53	11.05	30.52			
PK	15.5836G	59.52	74.00	-14.48	41.70	3	Vertical	217	2.70	-	37.93	11.85	31.96			
AV	15.5405G	45.84	54.00	-8.16	27.91	3	Vertical	217	2.70	-	38.02	11.85	31.94			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5180MHz_TX

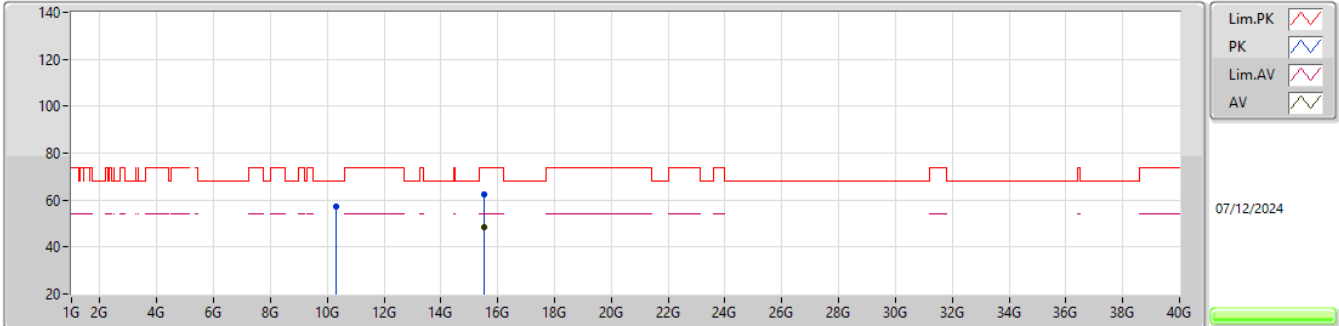


EUT_X_2TX
Setting 18
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3252G	57.33	68.20	-10.87	38.19	3	Horizontal	212	1.72	-	38.65	11.02	30.53			
PK	15.542G	62.26	74.00	-11.74	44.33	3	Horizontal	283	1.80	-	38.02	11.85	31.94			
AV	15.5416G	48.27	54.00	-5.73	30.34	3	Horizontal	283	1.80	-	38.02	11.85	31.94			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

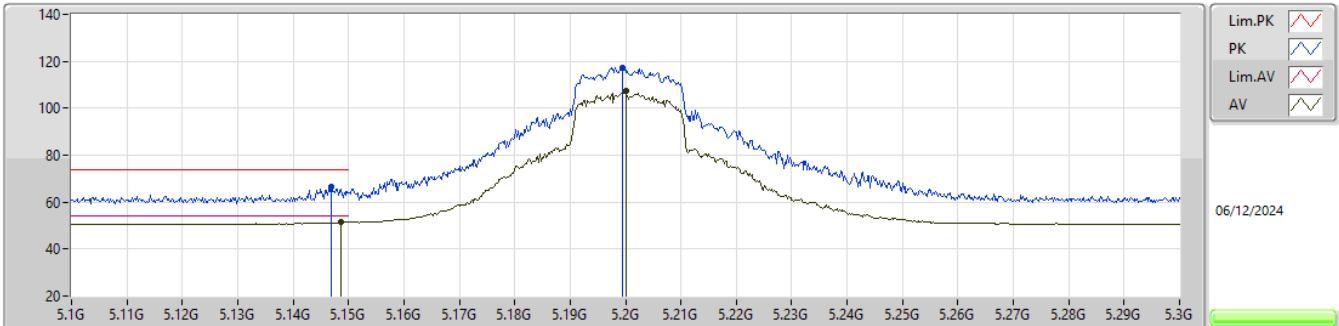


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1468G	66.66	74.00	-7.34	57.01	3	Vertical	90	1.73	-	33.60	6.98	30.93			
AV	5.1486G	51.33	54.00	-2.67	41.68	3	Vertical	90	1.73	-	33.60	6.98	30.93			
PK	5.1994G	117.43	Inf	-Inf	107.62	3	Vertical	90	1.73	-	33.70	7.01	30.90			
AV	5.2G	107.37	Inf	-Inf	97.56	3	Vertical	90	1.73	-	33.70	7.01	30.90			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

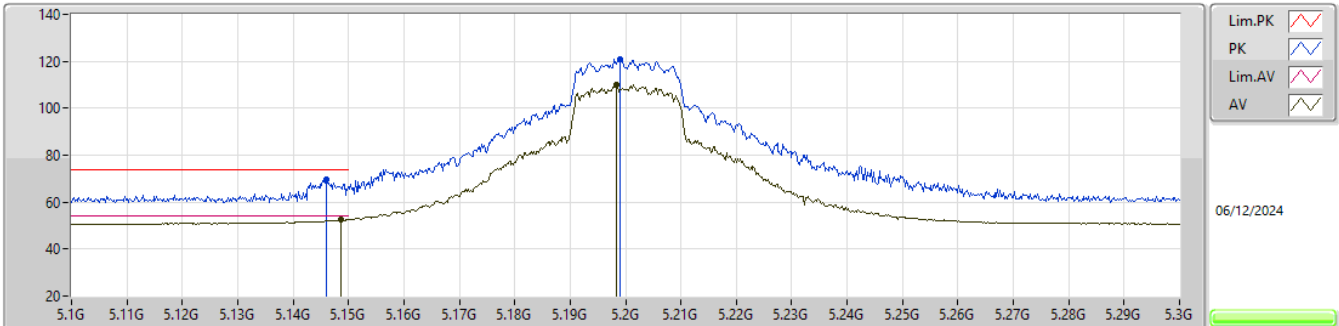


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.146G	69.42	74.00	-4.58	59.78	3	Horizontal	342	2.41	-	33.60	6.97	30.93			
AV	5.1486G	52.38	54.00	-1.62	42.73	3	Horizontal	342	2.41	-	33.60	6.98	30.93			
PK	5.199G	120.68	Inf	-Inf	110.87	3	Horizontal	342	2.41	-	33.70	7.01	30.90			
AV	5.1984G	110.17	Inf	-Inf	100.36	3	Horizontal	342	2.41	-	33.70	7.01	30.90			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

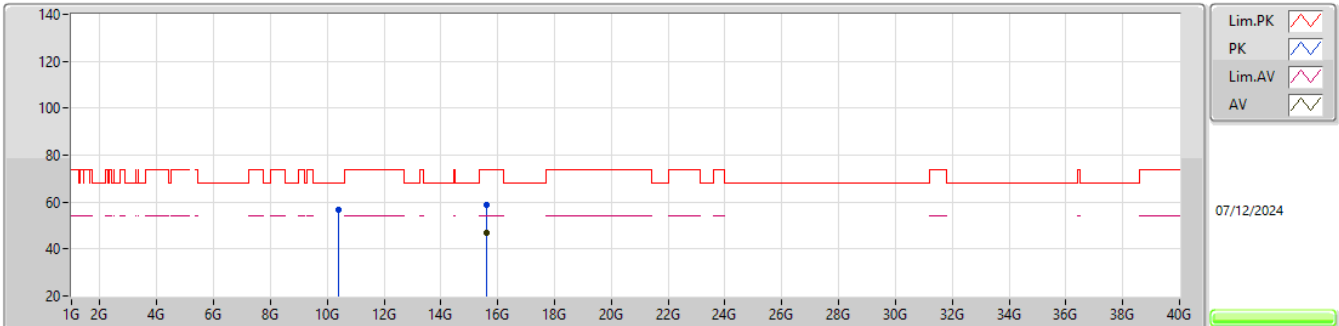


EUT_X_2TX
Setting 20.25
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3796G	56.95	68.20	-11.25	37.88	3	Vertical	40	2.24	-	38.54	11.05	30.52			
PK	15.5955G	58.72	74.00	-15.28	40.93	3	Vertical	255	2.36	-	37.91	11.85	31.97			
AV	15.599G	46.86	54.00	-7.14	29.08	3	Vertical	255	2.36	-	37.90	11.85	31.97			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

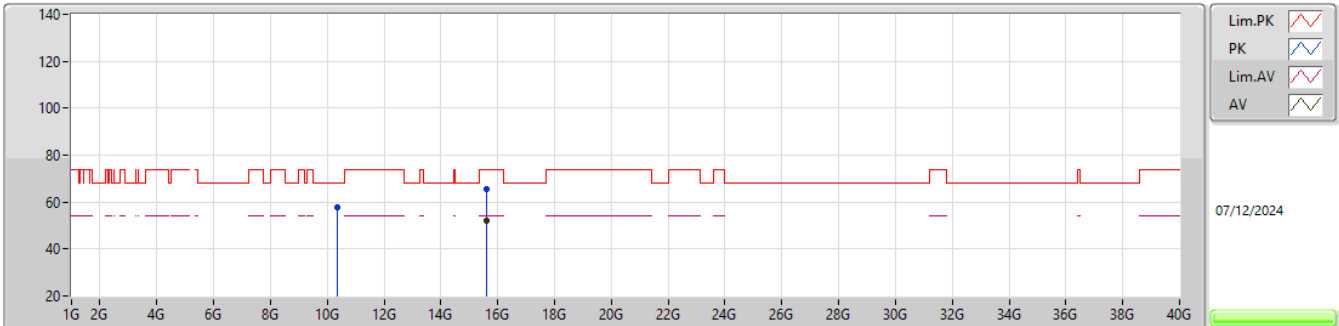


EUT_X_2TX
Setting 20.25
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3524G	57.86	68.20	-10.34	38.76	3	Horizontal	65	2.48	-	38.60	11.03	30.53			
PK	15.6084G	65.54	74.00	-8.46	47.80	3	Horizontal	284	1.80	-	37.87	11.85	31.98			
AV	15.6044G	51.86	54.00	-2.14	34.11	3	Horizontal	284	1.80	-	37.88	11.85	31.98			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

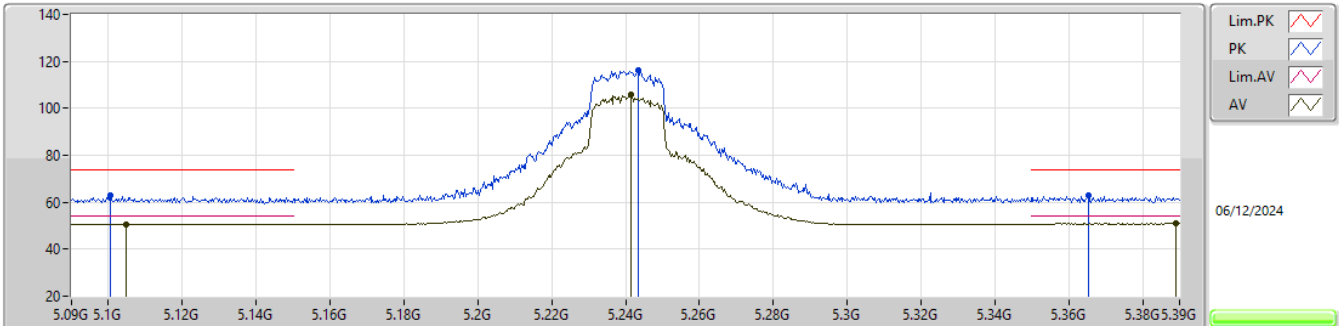


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1005G	62.96	74.00	-11.04	53.36	3	Vertical	14	2.53	-	33.60	6.95	30.95			
AV	5.1047G	50.73	54.00	-3.27	41.13	3	Vertical	14	2.53	-	33.60	6.95	30.95			
PK	5.2436G	116.08	Inf	-Inf	106.16	3	Vertical	14	2.53	-	33.79	7.00	30.87			
AV	5.2415G	106.06	Inf	-Inf	96.15	3	Vertical	14	2.53	-	33.78	7.00	30.87			
PK	5.3654G	62.80	74.00	-11.20	52.71	3	Vertical	14	2.53	-	33.93	6.97	30.81			
AV	5.3891G	51.05	54.00	-2.95	40.90	3	Vertical	14	2.53	-	33.98	6.96	30.79			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

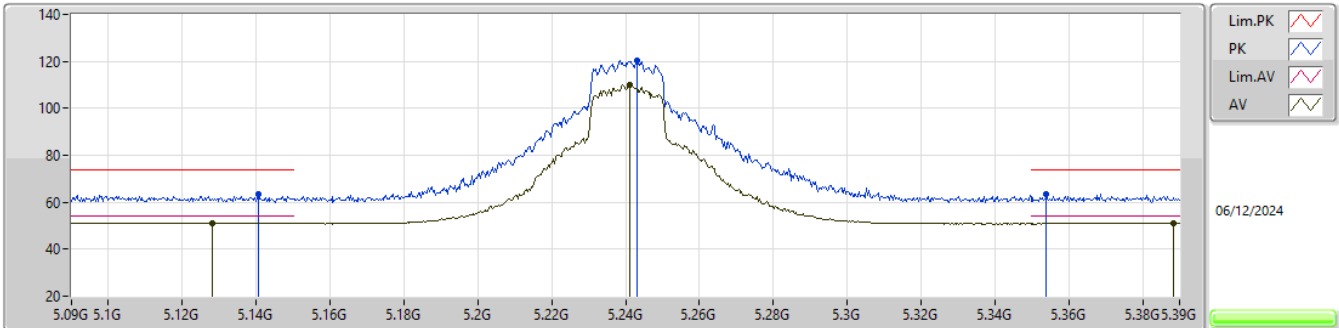


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1407G	63.19	74.00	-10.81	53.55	3	Horizontal	342	2.35	-	33.60	6.97	30.93			
AV	5.1281G	51.26	54.00	-2.74	41.64	3	Horizontal	342	2.35	-	33.60	6.96	30.94			
PK	5.243G	120.55	Inf	-Inf	110.63	3	Horizontal	342	2.35	-	33.79	7.00	30.87			
AV	5.2412G	110.23	Inf	-Inf	100.32	3	Horizontal	342	2.35	-	33.78	7.00	30.87			
PK	5.354G	63.30	74.00	-10.70	53.23	3	Horizontal	342	2.35	-	33.91	6.97	30.81			
AV	5.3885G	51.28	54.00	-2.72	41.13	3	Horizontal	342	2.35	-	33.98	6.96	30.79			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

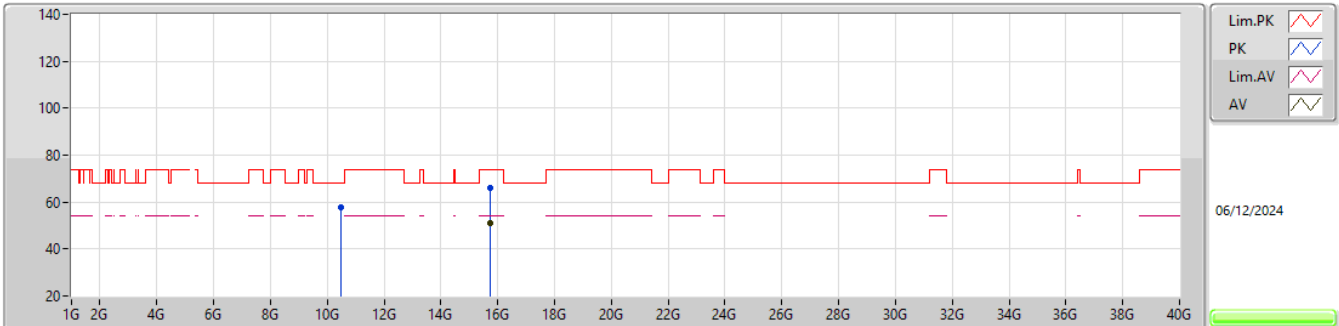


EUT_X_2TX
Setting 20.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48924G	57.99	68.20	-10.21	38.88	3	Vertical	50	2.97	-	38.48	11.12	30.49			
PK	15.72062G	66.10	74.00	-7.90	48.73	3	Vertical	177	1.97	-	37.56	11.86	32.05			
AV	15.72054G	51.01	54.00	-2.99	33.64	3	Vertical	177	1.97	-	37.56	11.86	32.05			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

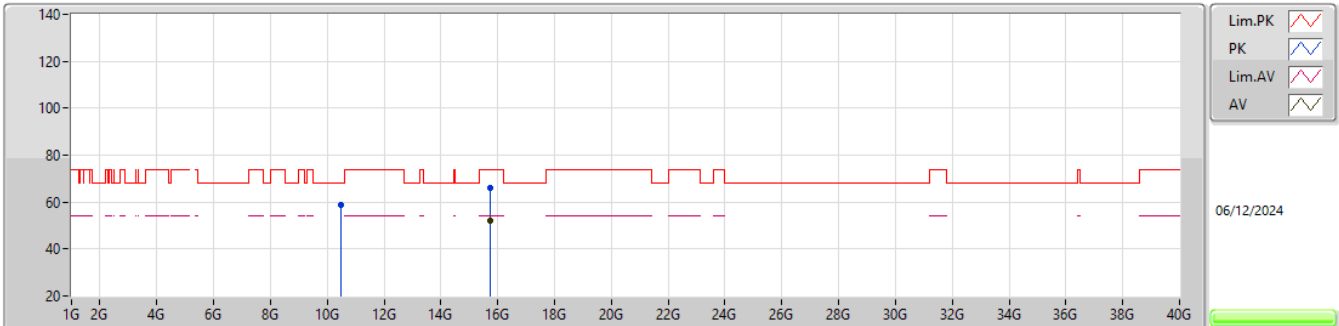


EUT_X_2TX
Setting 20.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48604G	58.73	68.20	-9.47	39.63	3	Horizontal	334	1.83	-	38.47	11.12	30.49			
PK	15.72674G	66.12	74.00	-7.88	48.77	3	Horizontal	282	1.88	-	37.55	11.86	32.06			
AV	15.72108G	51.98	54.00	-2.02	34.61	3	Horizontal	282	1.88	-	37.56	11.86	32.05			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5190MHz_TX

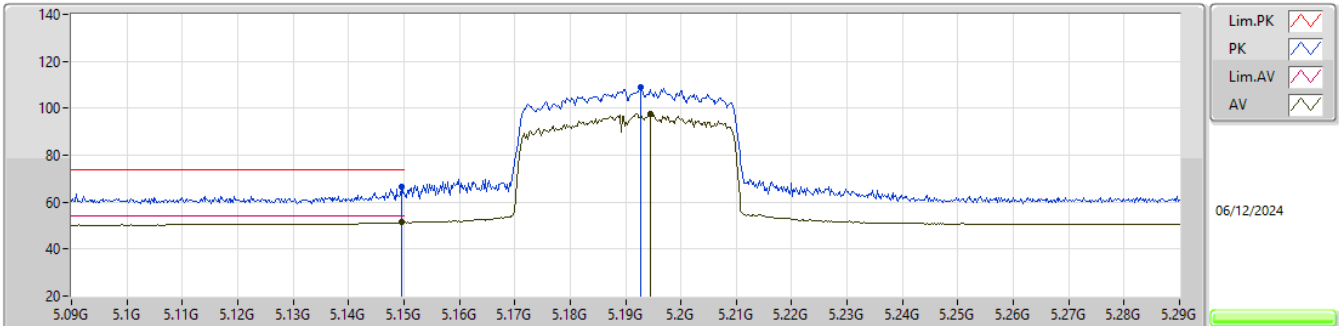


EUT_X_2TX
Setting 15.5
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1496G	66.67	74.00	-7.33	57.02	3	Vertical	267	1.00	-	33.60	6.98	30.93			
AV	5.1496G	51.33	54.00	-2.67	41.68	3	Vertical	267	1.00	-	33.60	6.98	30.93			
PK	5.1928G	108.85	Inf	-Inf	99.05	3	Vertical	267	1.00	-	33.69	7.01	30.90			
AV	5.1946G	97.49	Inf	-Inf	87.69	3	Vertical	267	1.00	-	33.69	7.01	30.90			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5190MHz_TX

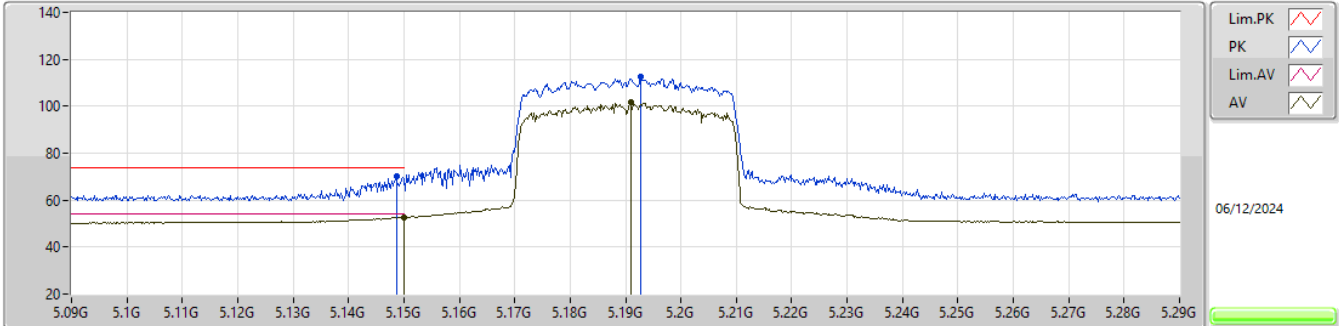


EUT_X_2TX
Setting 15.5
02-R-M-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1486G	69.97	74.00	-4.03	60.32	3	Horizontal	340	2.42	-	33.60	6.98	30.93			
AV	5.15G	52.76	54.00	-1.24	43.11	3	Horizontal	340	2.42	-	33.60	6.98	30.93			
PK	5.1928G	112.72	Inf	-Inf	102.92	3	Horizontal	340	2.42	-	33.69	7.01	30.90			
AV	5.191G	101.55	Inf	-Inf	91.77	3	Horizontal	340	2.42	-	33.68	7.00	30.90			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5190MHz_TX

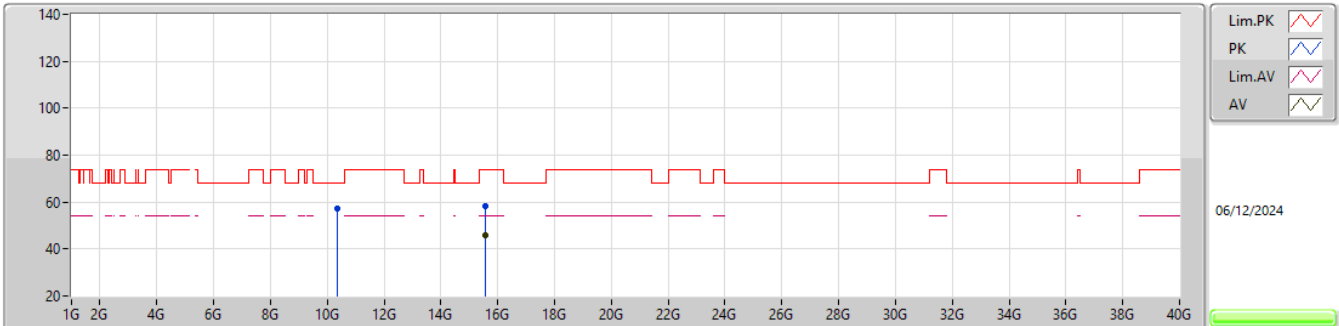


EUT_X_2TX
Setting 15.5
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3532G	57.19	68.20	-11.01	38.10	3	Vertical	243	1.25	-	38.59	11.03	30.53			
PK	15.5865G	58.12	74.00	-15.88	40.31	3	Vertical	2	3.00	-	37.93	11.85	31.97			
AV	15.5716G	45.96	54.00	-8.04	28.11	3	Vertical	2	3.00	-	37.96	11.85	31.96			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5190MHz_TX

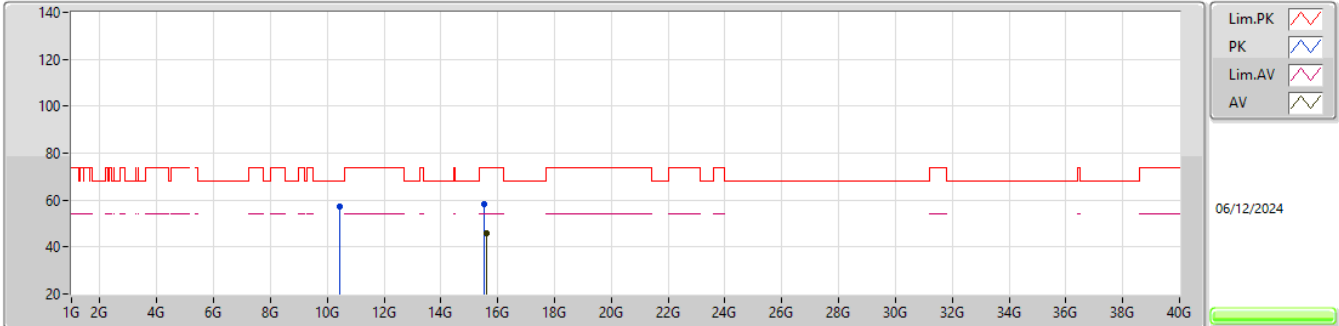


EUT_X_2TX
Setting 15.5
02-R-M-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.4271G	57.39	68.20	-10.81	38.37	3	Horizontal	339	2.02	-	38.45	11.08	30.51				
PK	15.521G	58.32	74.00	-15.68	40.33	3	Horizontal	177	1.53	-	38.06	11.85	31.92				
AV	15.5997G	45.81	54.00	-8.19	28.03	3	Horizontal	177	1.53	-	37.90	11.85	31.97				

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5230MHz_TX

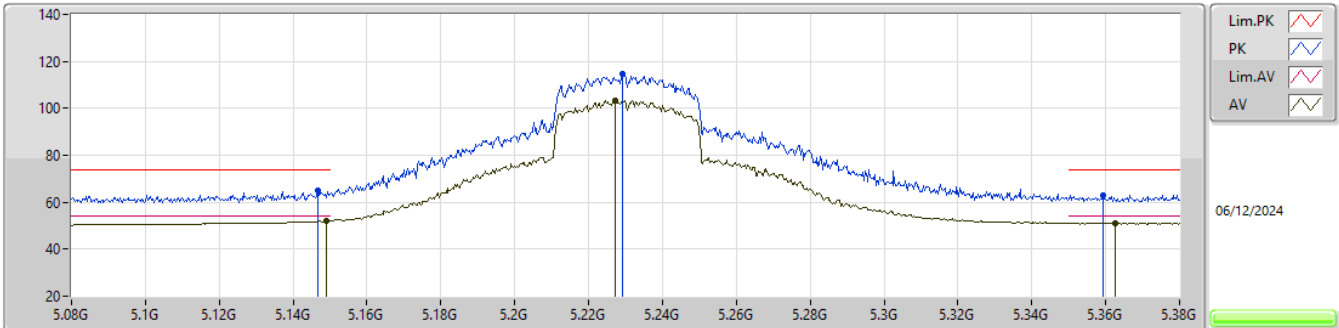


EUT_X_2TX
Setting 21.5
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1466G	65.13	74.00	-8.87	55.48	3	Vertical	89	1.02	-	33.60	6.98	30.93			
AV	5.149G	52.18	54.00	-1.82	42.53	3	Vertical	89	1.02	-	33.60	6.98	30.93			
PK	5.2291G	114.89	Inf	-Inf	105.01	3	Vertical	89	1.02	-	33.76	7.00	30.88			
AV	5.2273G	103.45	Inf	-Inf	93.58	3	Vertical	89	1.02	-	33.75	7.00	30.88			
PK	5.3593G	63.17	74.00	-10.83	53.09	3	Vertical	89	1.02	-	33.92	6.97	30.81			
AV	5.3626G	51.08	54.00	-2.92	40.99	3	Vertical	89	1.02	-	33.93	6.97	30.81			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5230MHz_TX

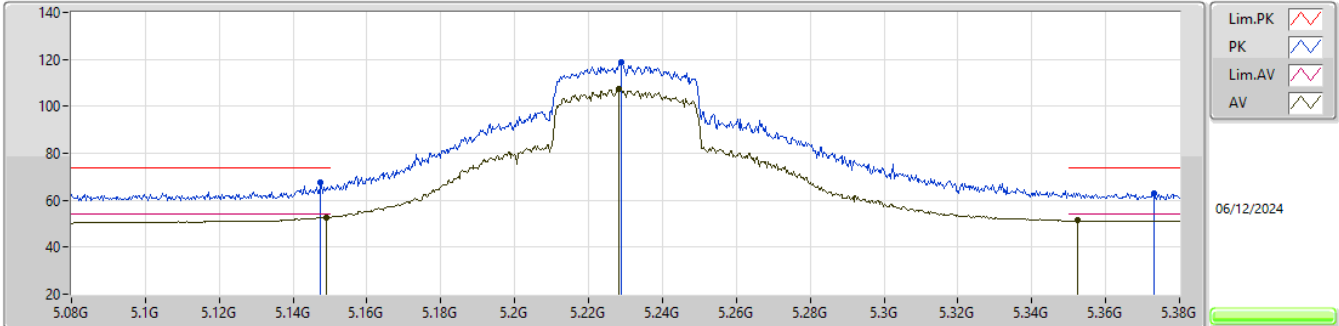


EUT_X_2TX
Setting 21.5
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1475G	67.56	74.00	-6.44	57.91	3	Horizontal	340	2.39	-	33.60	6.98	30.93			
AV	5.149G	52.76	54.00	-1.24	43.11	3	Horizontal	340	2.39	-	33.60	6.98	30.93			
PK	5.2288G	118.85	Inf	-Inf	108.97	3	Horizontal	340	2.39	-	33.76	7.00	30.88			
AV	5.2282G	107.25	Inf	-Inf	97.37	3	Horizontal	340	2.39	-	33.76	7.00	30.88			
PK	5.3731G	63.11	74.00	-10.89	52.99	3	Horizontal	340	2.39	-	33.95	6.97	30.80			
AV	5.3524G	51.45	54.00	-2.55	41.39	3	Horizontal	340	2.39	-	33.90	6.97	30.81			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5230MHz_TX

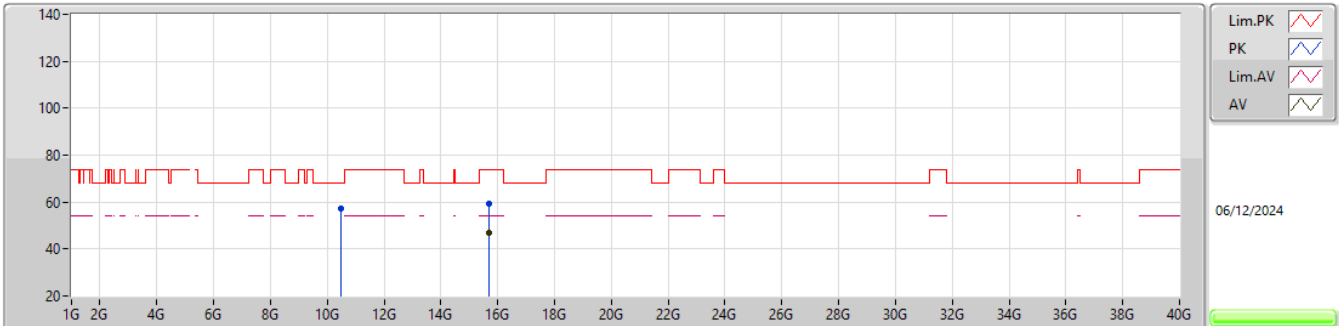


EUT_X_2TX
Setting 21.5
02-R-M-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.498G	57.39	68.20	-10.81	38.25	3	Vertical	327	2.51	-	38.50	11.13	30.49			
PK	15.687G	59.15	74.00	-14.85	41.69	3	Vertical	191	1.14	-	37.63	11.86	32.03			
AV	15.6922G	47.09	54.00	-6.91	29.64	3	Vertical	191	1.14	-	37.62	11.86	32.03			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5230MHz_TX

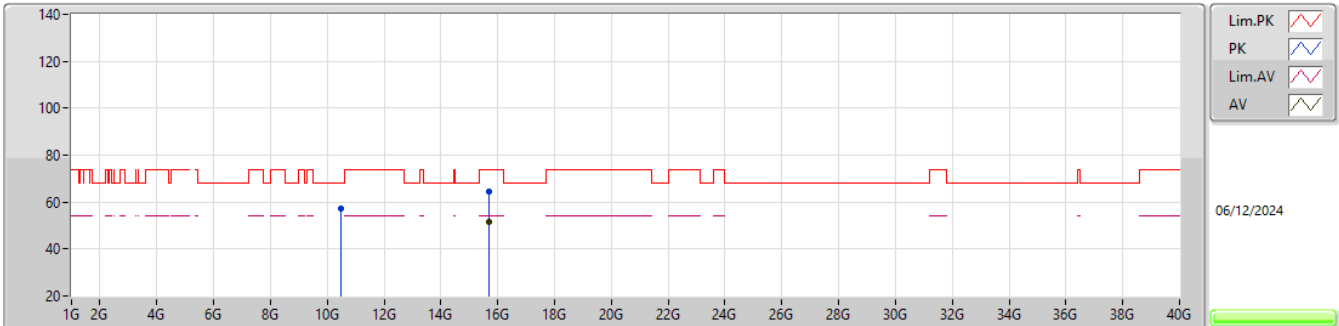


EUT_X_2TX
Setting 21.5
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5002G	57.44	68.20	-10.76	38.30	3	Horizontal	45	1.53	-	38.50	11.13	30.49			
PK	15.7025G	64.25	74.00	-9.75	46.84	3	Horizontal	281	1.91	-	37.59	11.86	32.04			
AV	15.6874G	51.74	54.00	-2.26	34.28	3	Horizontal	281	1.91	-	37.63	11.86	32.03			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

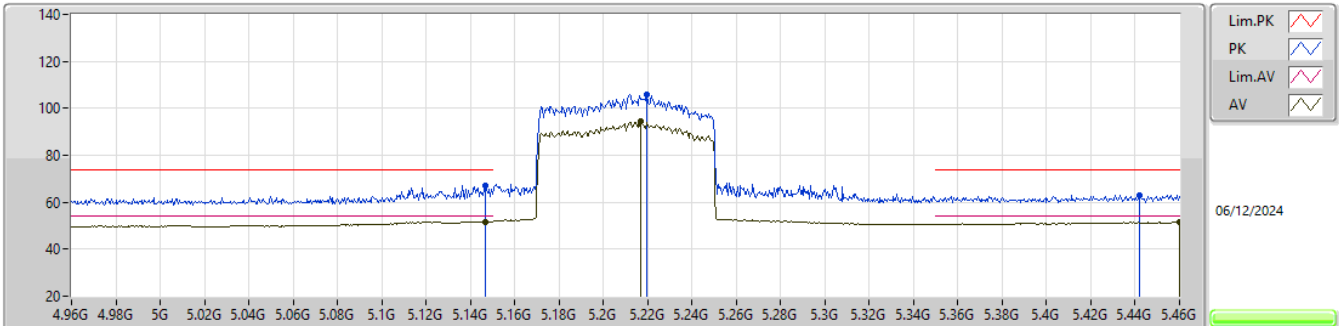


EUT_X_2TX
Setting 15.25
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1465G	67.32	74.00	-6.68	57.67	3	Vertical	91	1.15	-	33.60	6.98	30.93			
AV	5.1465G	51.76	54.00	-2.24	42.11	3	Vertical	91	1.15	-	33.60	6.98	30.93			
PK	5.2195G	105.82	Inf	-Inf	95.96	3	Vertical	91	1.15	-	33.74	7.01	30.89			
AV	5.217G	94.23	Inf	-Inf	84.38	3	Vertical	91	1.15	-	33.73	7.01	30.89			
PK	5.442G	63.02	74.00	-10.98	52.68	3	Vertical	91	1.15	-	34.00	7.10	30.76			
AV	5.46G	51.58	54.00	-2.42	41.15	3	Vertical	91	1.15	-	34.02	7.16	30.75			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

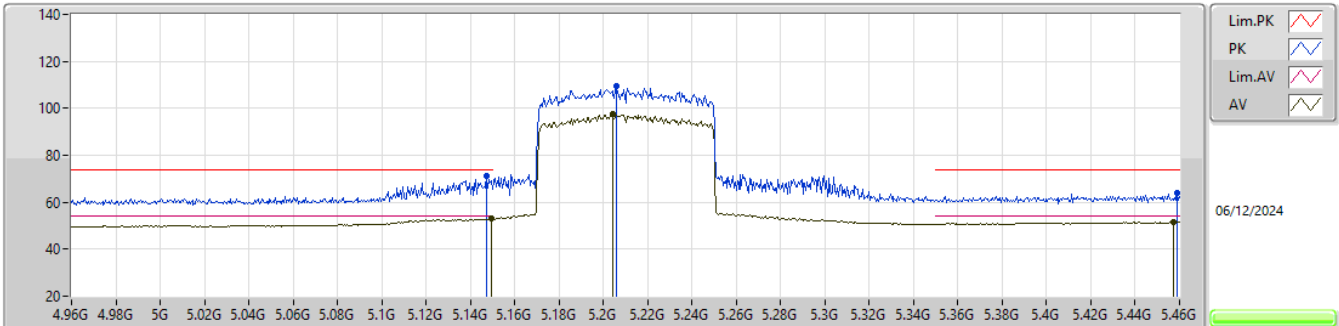


EUT_X_2TX
Setting 15.25
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1475G	71.15	74.00	-2.85	61.50	3	Horizontal	308	2.28	-	33.60	6.98	30.93			
AV	5.1495G	52.95	54.00	-1.05	43.30	3	Horizontal	308	2.28	-	33.60	6.98	30.93			
PK	5.206G	109.62	Inf	-Inf	99.79	3	Horizontal	308	2.28	-	33.71	7.01	30.89			
AV	5.204G	97.43	Inf	-Inf	87.61	3	Horizontal	308	2.28	-	33.71	7.01	30.90			
PK	5.459G	63.81	74.00	-10.19	53.39	3	Horizontal	308	2.28	-	34.02	7.15	30.75			
AV	5.457G	51.55	54.00	-2.45	41.14	3	Horizontal	308	2.28	-	34.01	7.15	30.75			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

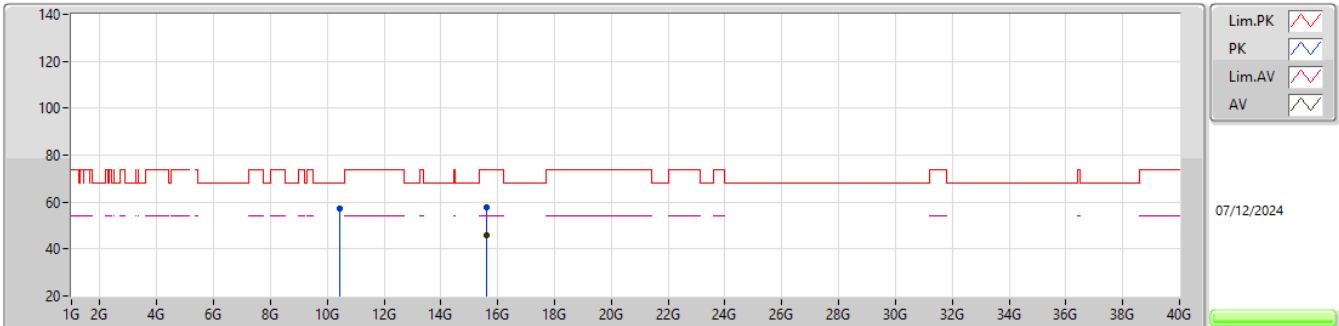


EUT_X_2TX
Setting 15.25
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4269G	57.04	68.20	-11.16	38.02	3	Vertical	57	1.29	-	38.45	11.08	30.51			
PK	15.6187G	58.01	74.00	-15.99	40.32	3	Vertical	334	2.11	-	37.83	11.85	31.99			
AV	15.6099G	45.72	54.00	-8.28	27.99	3	Vertical	334	2.11	-	37.86	11.85	31.98			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

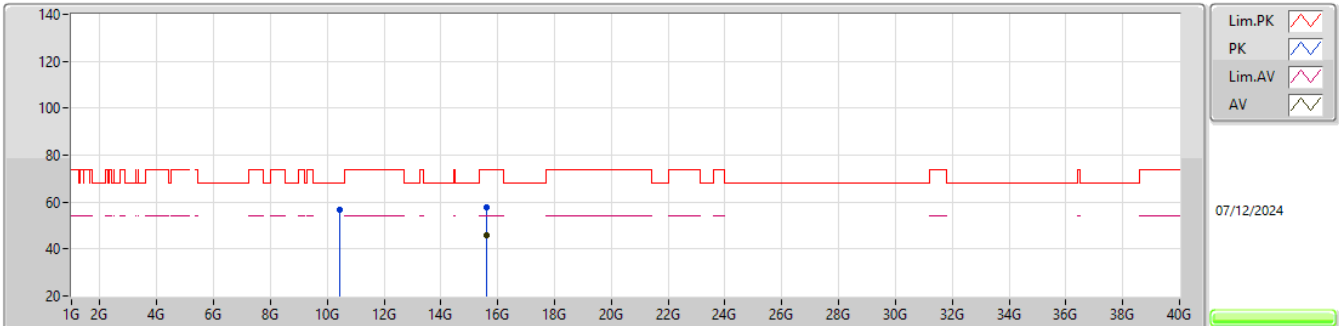


EUT_X_2TX
Setting 15.25
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4529G	56.97	68.20	-11.23	37.96	3	Horizontal	136	1.74	-	38.41	11.10	30.50			
PK	15.6091G	57.83	74.00	-16.17	40.10	3	Horizontal	193	2.38	-	37.86	11.85	31.98			
AV	15.6041G	45.77	54.00	-8.23	28.02	3	Horizontal	193	2.38	-	37.88	11.85	31.98			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

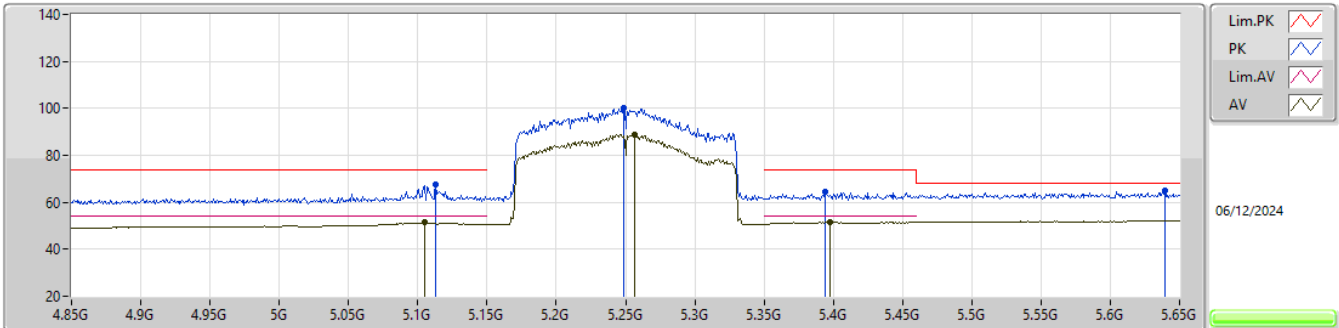


EUT_X_2TX
Setting 12.25
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1132G	67.58	74.00	-6.42	57.98	3	Vertical	11	2.54	-	33.60	6.95	30.95				
AV	5.1052G	51.41	54.00	-2.59	41.81	3	Vertical	11	2.54	-	33.60	6.95	30.95				
PK	5.2484G	100.04	Inf	-Inf	90.11	3	Vertical	11	2.54	-	33.80	7.00	30.87				
AV	5.2564G	88.92	Inf	-Inf	78.98	3	Vertical	11	2.54	-	33.81	7.00	30.87				
PK	5.394G	64.38	74.00	-9.62	54.22	3	Vertical	11	2.54	-	33.99	6.96	30.79				
AV	5.398G	51.59	54.00	-2.41	41.42	3	Vertical	11	2.54	-	34.00	6.96	30.79				
PK	5.6396G	64.76	68.20	-3.44	53.80	3	Vertical	11	2.54	-	34.00	7.66	30.70				

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

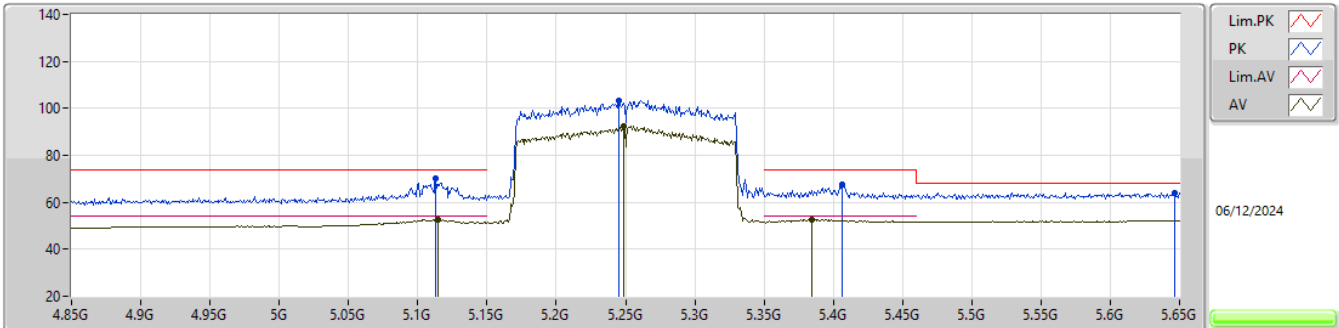


EUT_X_2TX
Setting 12.25
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1132G	70.11	74.00	-3.89	60.51	3	Horizontal	308	2.34	-	33.60	6.95	30.95				
AV	5.1148G	52.64	54.00	-1.36	43.04	3	Horizontal	308	2.34	-	33.60	6.95	30.95				
PK	5.2452G	103.49	Inf	-Inf	93.57	3	Horizontal	308	2.34	-	33.79	7.00	30.87				
AV	5.2484G	92.32	Inf	-Inf	82.39	3	Horizontal	308	2.34	-	33.80	7.00	30.87				
PK	5.4068G	67.77	74.00	-6.23	57.57	3	Horizontal	308	2.34	-	34.00	6.98	30.78				
AV	5.3844G	52.76	54.00	-1.24	42.62	3	Horizontal	308	2.34	-	33.97	6.96	30.79				
PK	5.6468G	64.20	68.20	-4.00	53.23	3	Horizontal	308	2.34	-	34.00	7.66	30.69				

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

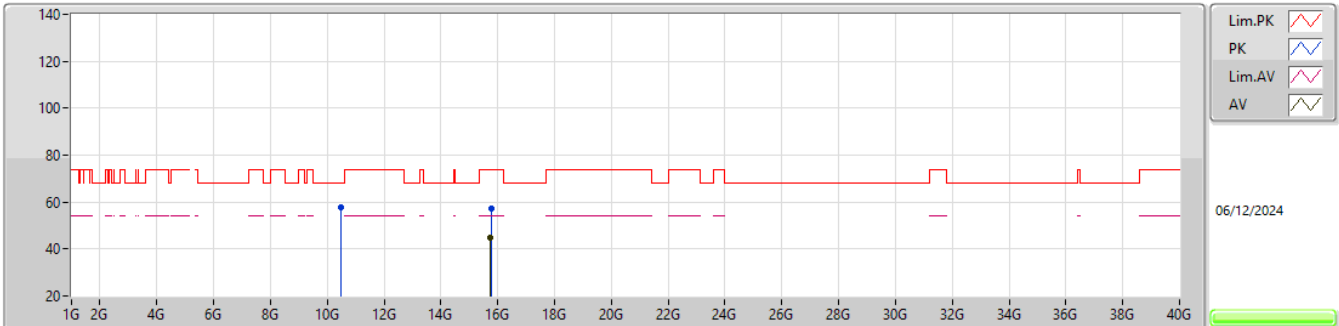


EUT_X_2TX
Setting 12.25
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50078G	57.77	68.20	-10.43	38.63	3	Vertical	2	1.97	-	38.50	11.13	30.49			
PK	15.76341G	57.26	74.00	-16.74	40.01	3	Vertical	37	2.91	-	37.47	11.86	32.08			
AV	15.73689G	44.89	54.00	-9.11	27.56	3	Vertical	37	2.91	-	37.53	11.86	32.06			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

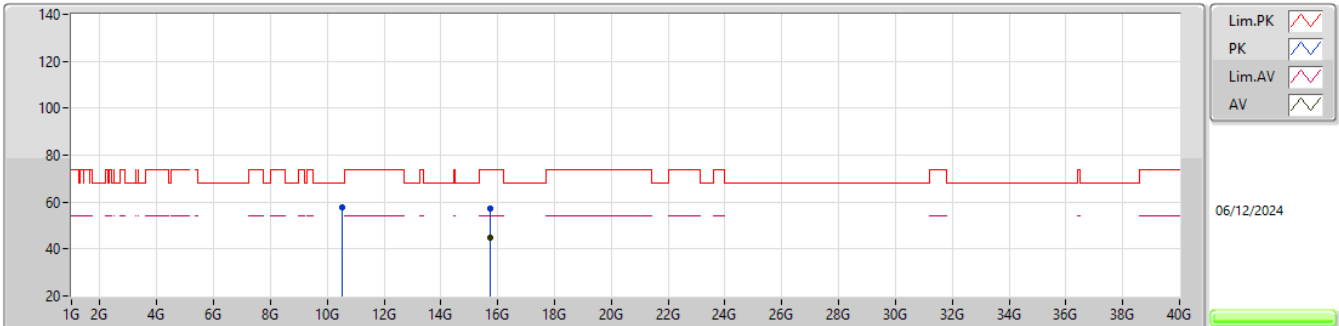


EUT_X_2TX
Setting 12.25
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50606G	57.67	68.20	-10.53	38.52	3	Horizontal	241	1.40	-	38.51	11.13	30.49			
PK	15.73593G	57.13	74.00	-16.87	39.80	3	Horizontal	276	2.97	-	37.53	11.86	32.06			
AV	15.73974G	44.87	54.00	-9.13	27.55	3	Horizontal	276	2.97	-	37.52	11.86	32.06			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

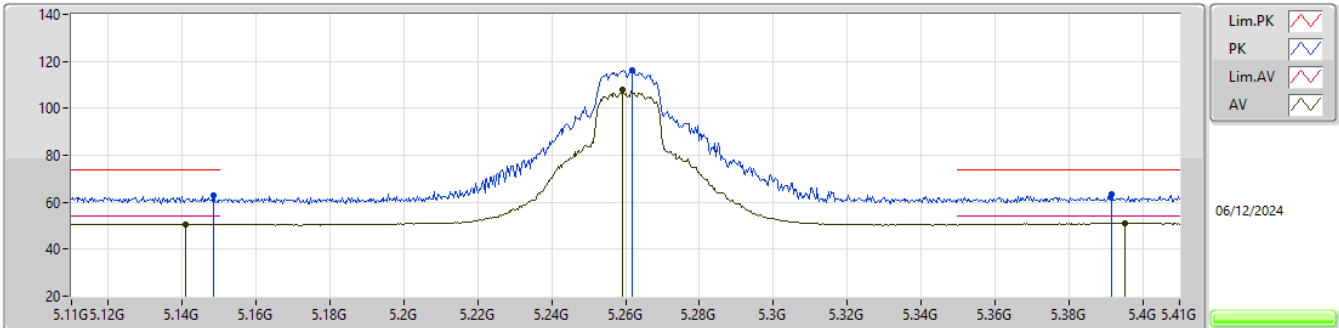


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1484G	62.70	74.00	-11.30	53.05	3	Vertical	31	2.91	-	33.60	6.98	30.93			
AV	5.1409G	50.61	54.00	-3.39	40.97	3	Vertical	31	2.91	-	33.60	6.97	30.93			
PK	5.2618G	116.45	Inf	-Inf	106.50	3	Vertical	31	2.91	-	33.82	6.99	30.86			
AV	5.2591G	107.80	Inf	-Inf	97.84	3	Vertical	31	2.91	-	33.82	7.00	30.86			
PK	5.3917G	63.48	74.00	-10.52	53.33	3	Vertical	31	2.91	-	33.98	6.96	30.79			
AV	5.3953G	51.09	54.00	-2.91	40.93	3	Vertical	31	2.91	-	33.99	6.96	30.79			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

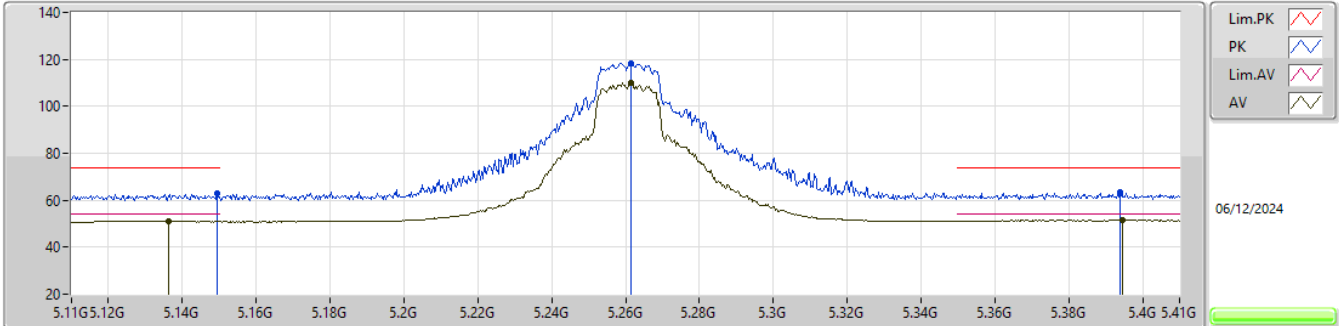


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1493G	62.70	74.00	-11.30	53.05	3	Horizontal	311	2.35	-	33.60	6.98	30.93			
AV	5.1364G	51.07	54.00	-2.93	41.43	3	Horizontal	311	2.35	-	33.60	6.97	30.93			
PK	5.2615G	118.51	Inf	-Inf	108.56	3	Horizontal	311	2.35	-	33.82	6.99	30.86			
AV	5.2615G	110.06	Inf	-Inf	100.11	3	Horizontal	311	2.35	-	33.82	6.99	30.86			
PK	5.3938G	63.50	74.00	-10.50	53.34	3	Horizontal	311	2.35	-	33.99	6.96	30.79			
AV	5.3944G	51.56	54.00	-2.44	41.40	3	Horizontal	311	2.35	-	33.99	6.96	30.79			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

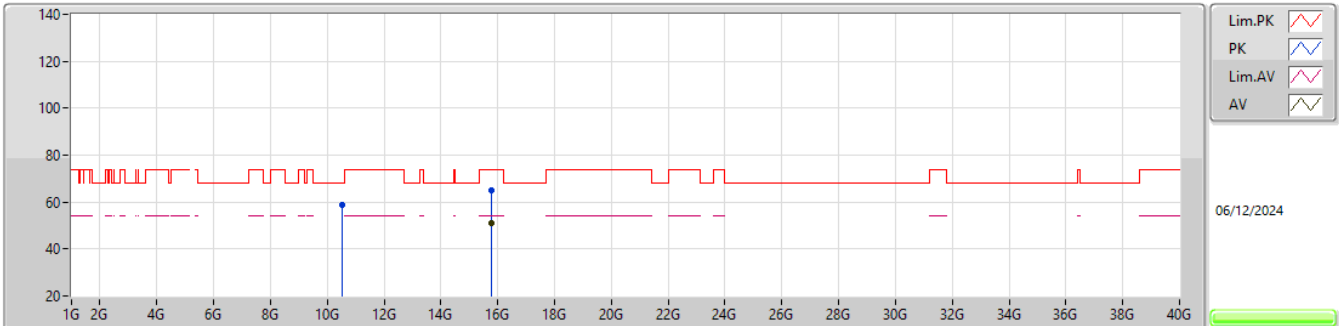


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51148G	58.89	68.20	-9.31	39.73	3	Vertical	194	1.08	-	38.52	11.13	30.49			
PK	15.78002G	65.21	74.00	-8.79	48.00	3	Vertical	167	1.94	-	37.44	11.86	32.09			
AV	15.78154G	50.86	54.00	-3.14	33.65	3	Vertical	167	1.94	-	37.44	11.86	32.09			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

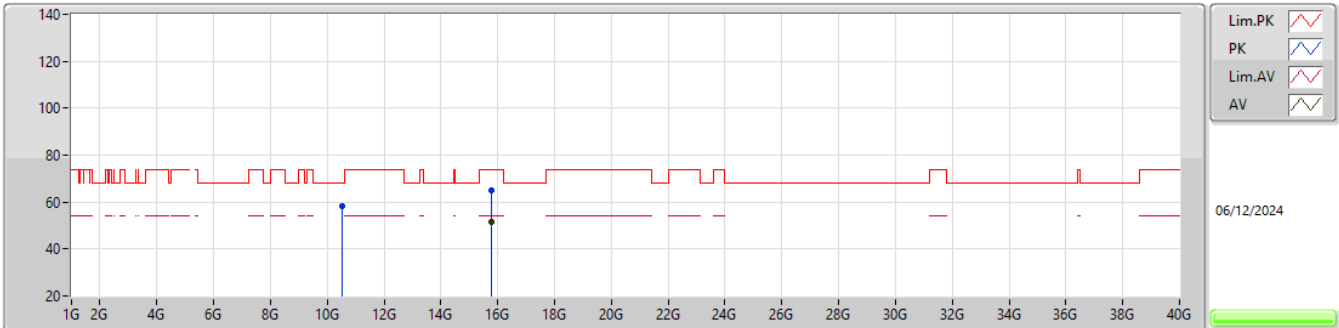


EUT_X_2TX
Setting 19.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.52006G	58.23	68.20	-9.97	39.04	3	Horizontal	227	1.04	-	38.54	11.14	30.49			
PK	15.78104G	65.17	74.00	-8.83	47.96	3	Horizontal	282	1.84	-	37.44	11.86	32.09			
AV	15.78126G	51.39	54.00	-2.61	34.18	3	Horizontal	282	1.84	-	37.44	11.86	32.09			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

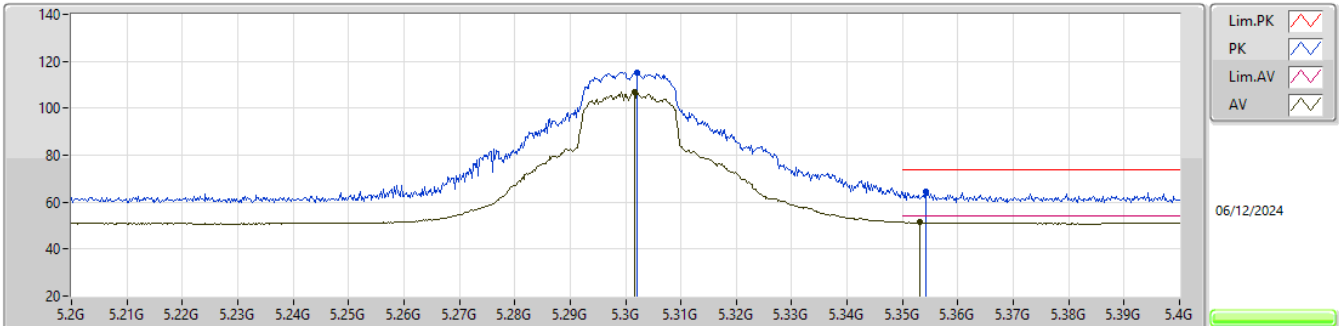


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.302G	115.27	Inf	-Inf	105.23	3	Vertical	86	1.06	-	33.90	6.98	30.84			
AV	5.3016G	106.90	Inf	-Inf	96.86	3	Vertical	86	1.06	-	33.90	6.98	30.84			
PK	5.3542G	64.27	74.00	-9.73	54.20	3	Vertical	86	1.06	-	33.91	6.97	30.81			
AV	5.3532G	51.46	54.00	-2.54	41.39	3	Vertical	86	1.06	-	33.91	6.97	30.81			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

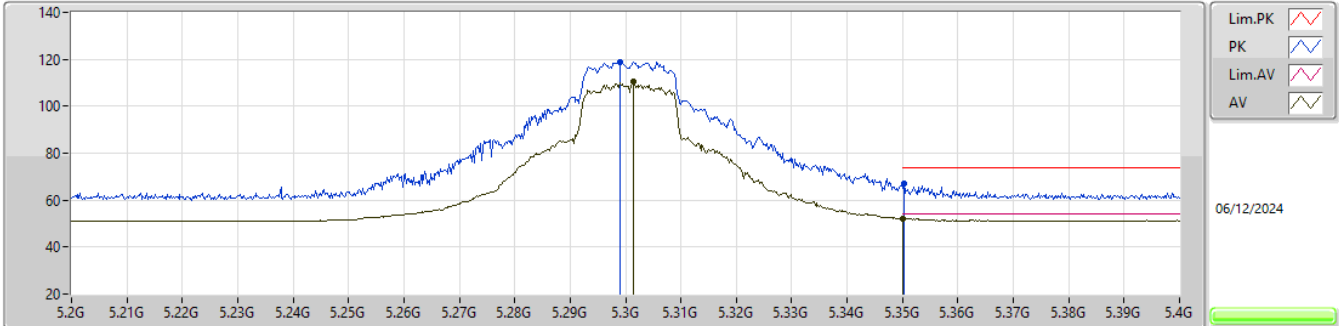


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.299G	118.70	Inf	-Inf	108.65	3	Horizontal	312	2.43	-	33.90	6.99	30.84			
AV	5.3014G	110.40	Inf	-Inf	100.36	3	Horizontal	312	2.43	-	33.90	6.98	30.84			
PK	5.3502G	67.22	74.00	-6.78	57.16	3	Horizontal	312	2.43	-	33.90	6.97	30.81			
AV	5.35G	52.28	54.00	-1.72	42.22	3	Horizontal	312	2.43	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

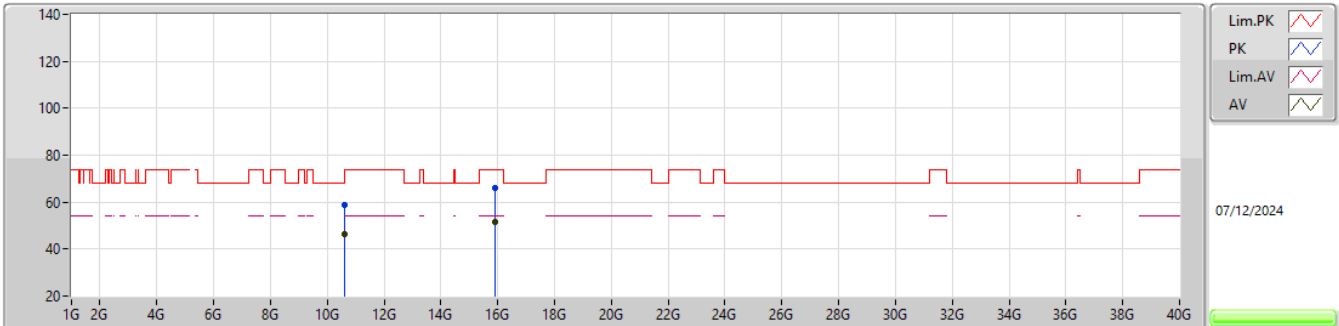


EUT_X_2TX
Setting 19.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.60638G	58.63	74.00	-15.37	39.33	3	Vertical	121	1.68	-	38.59	11.20	30.49				
AV	10.6064G	46.28	54.00	-7.72	26.98	3	Vertical	121	1.68	-	38.59	11.20	30.49				
PK	15.89872G	65.94	74.00	-8.06	48.55	3	Vertical	166	1.91	-	37.69	11.87	32.17				
AV	15.90136G	51.76	54.00	-2.24	34.37	3	Vertical	166	1.91	-	37.69	11.87	32.17				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

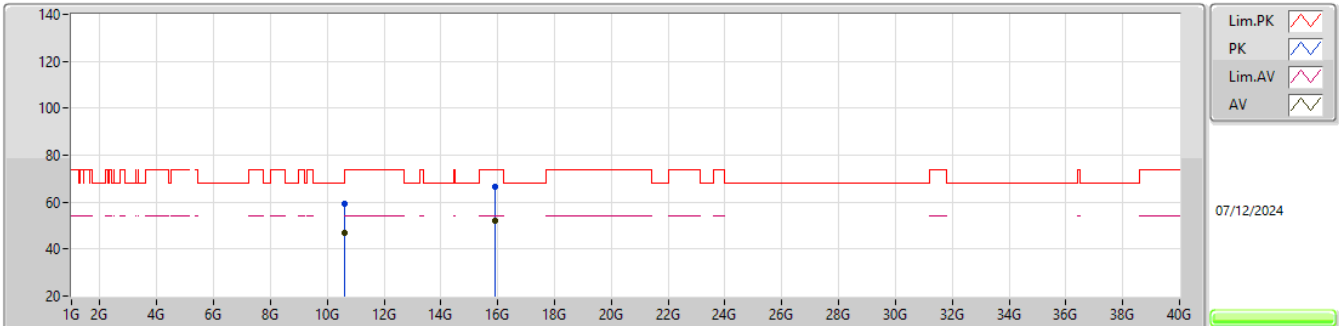


EUT_X_2TX
Setting 19.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60326G	59.11	74.00	-14.89	39.82	3	Horizontal	360	1.87	-	38.59	11.19	30.49			
AV	10.60466G	46.67	54.00	-7.33	27.38	3	Horizontal	360	1.87	-	38.59	11.19	30.49			
PK	15.89866G	66.46	74.00	-7.54	49.07	3	Horizontal	282	1.90	-	37.69	11.87	32.17			
AV	15.90272G	51.85	54.00	-2.15	34.46	3	Horizontal	282	1.90	-	37.69	11.87	32.17			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

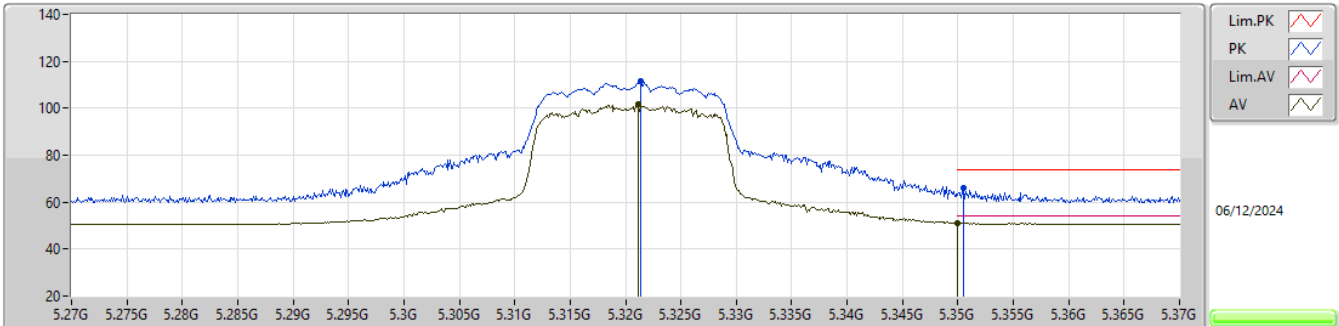


EUT_X_2TX
Setting 17.5
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3214G	111.32	Inf	-Inf	101.27	3	Vertical	196	2.19	-	33.90	6.98	30.83			
AV	5.3211G	101.72	Inf	-Inf	91.67	3	Vertical	196	2.19	-	33.90	6.98	30.83			
PK	5.3505G	66.02	74.00	-7.98	55.96	3	Vertical	196	2.19	-	33.90	6.97	30.81			
AV	5.35G	51.21	54.00	-2.79	41.15	3	Vertical	196	2.19	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

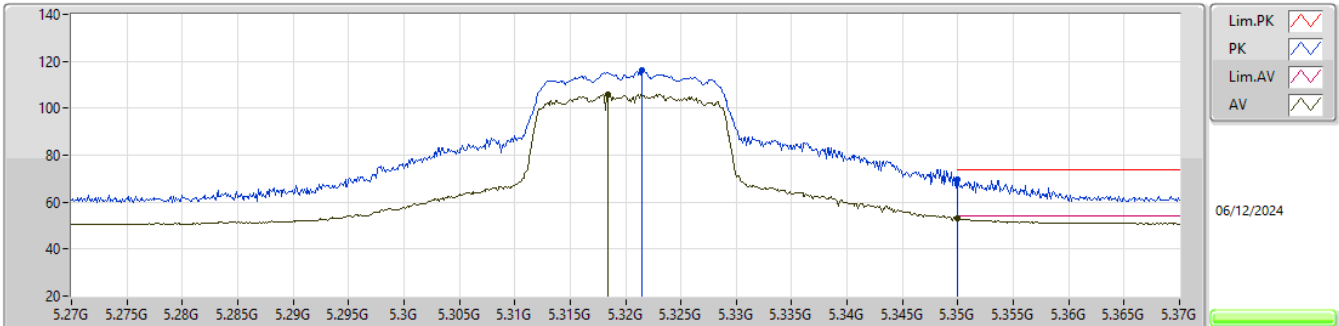


EUT_X_2TX
Setting 17.5
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3215G	116.03	Inf	-Inf	105.98	3	Horizontal	316	2.20	-	33.90	6.98	30.83			
AV	5.3184G	106.10	Inf	-Inf	96.05	3	Horizontal	316	2.20	-	33.90	6.98	30.83			
PK	5.35G	69.46	74.00	-4.54	59.40	3	Horizontal	316	2.20	-	33.90	6.97	30.81			
AV	5.35G	52.87	54.00	-1.13	42.81	3	Horizontal	316	2.20	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

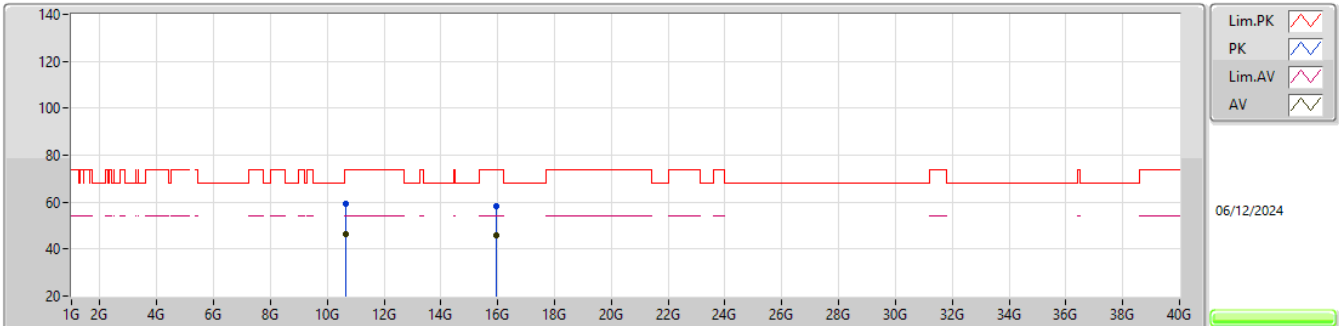


EUT_X_2TX
Setting 17.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.6407G	59.21	74.00	-14.79	39.96	3	Vertical	42	2.45	-	38.52	11.22	30.49				
AV	10.64198G	46.39	54.00	-7.61	27.14	3	Vertical	42	2.45	-	38.52	11.22	30.49				
PK	15.96214G	58.34	74.00	-15.66	41.18	3	Vertical	207	2.93	-	37.50	11.87	32.21				
AV	15.96016G	45.98	54.00	-8.02	28.81	3	Vertical	207	2.93	-	37.50	11.87	32.20				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

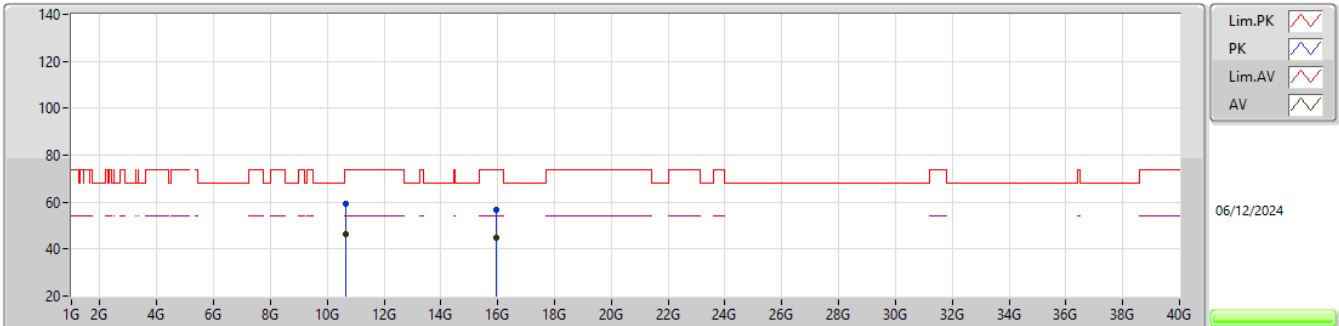


EUT_X_2TX
Setting 17.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.64586G	59.12	74.00	-14.88	39.88	3	Horizontal	263	2.65	-	38.51	11.22	30.49			
AV	10.63488G	46.49	54.00	-7.51	27.24	3	Horizontal	263	2.65	-	38.53	11.21	30.49			
PK	15.9674G	56.89	74.00	-17.11	39.73	3	Horizontal	28	1.24	-	37.50	11.87	32.21			
AV	15.96254G	44.76	54.00	-9.24	27.60	3	Horizontal	28	1.24	-	37.50	11.87	32.21			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

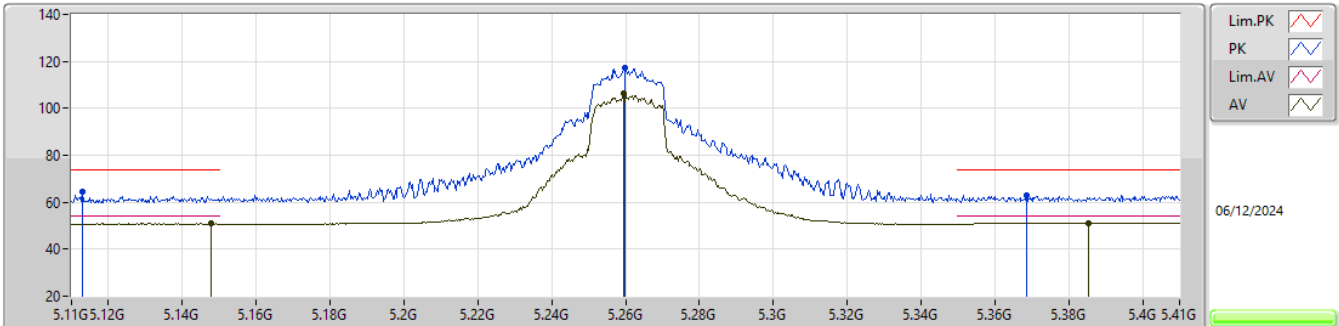


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.113G	64.36	74.00	-9.64	54.76	3	Vertical	92	1.00	-	33.60	6.95	30.95			
AV	5.1478G	50.87	54.00	-3.13	41.22	3	Vertical	92	1.00	-	33.60	6.98	30.93			
PK	5.2597G	117.36	Inf	-Inf	107.40	3	Vertical	92	1.00	-	33.82	7.00	30.86			
AV	5.2594G	106.61	Inf	-Inf	96.65	3	Vertical	92	1.00	-	33.82	7.00	30.86			
PK	5.3686G	63.14	74.00	-10.86	53.03	3	Vertical	92	1.00	-	33.94	6.97	30.80			
AV	5.3854G	51.26	54.00	-2.74	41.12	3	Vertical	92	1.00	-	33.97	6.96	30.79			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

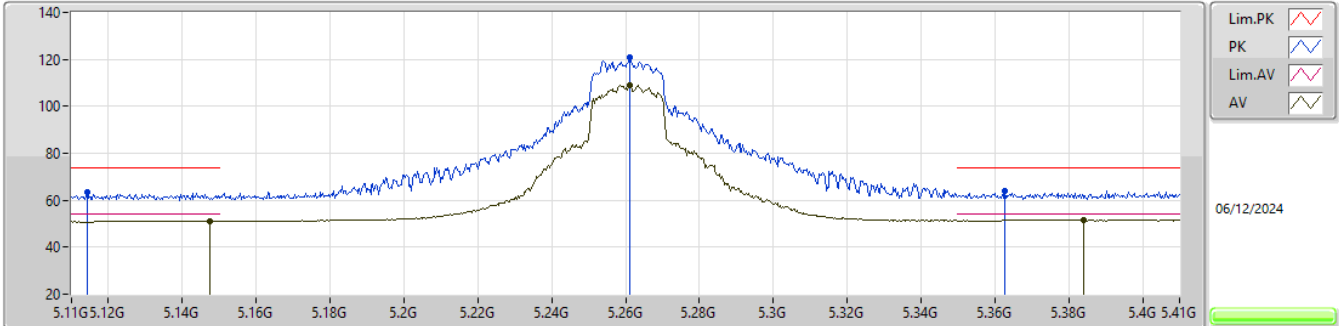


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1142G	63.60	74.00	-10.40	54.00	3	Horizontal	304	2.36	-	33.60	6.95	30.95			
AV	5.1475G	51.10	54.00	-2.90	41.45	3	Horizontal	304	2.36	-	33.60	6.98	30.93			
PK	5.2612G	120.68	Inf	-Inf	110.73	3	Horizontal	304	2.36	-	33.82	6.99	30.86			
AV	5.2612G	109.11	Inf	-Inf	99.16	3	Horizontal	304	2.36	-	33.82	6.99	30.86			
PK	5.3626G	63.97	74.00	-10.03	53.88	3	Horizontal	304	2.36	-	33.93	6.97	30.81			
AV	5.3839G	51.69	54.00	-2.31	41.56	3	Horizontal	304	2.36	-	33.97	6.96	30.80			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

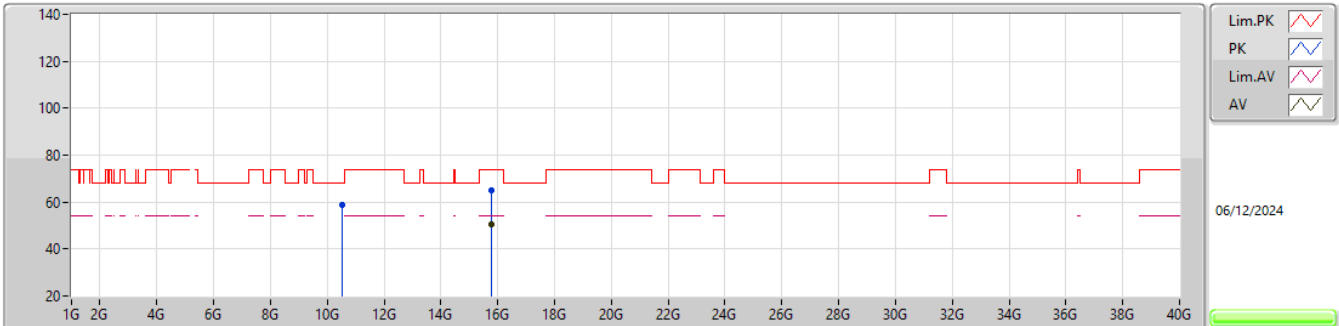


EUT_X_2TX
Setting 20.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5154G	58.60	68.20	-9.60	39.42	3	Vertical	136	2.42	-	38.53	11.14	30.49			
PK	15.7755G	64.79	74.00	-9.21	47.57	3	Vertical	167	2.03	-	37.45	11.86	32.09			
AV	15.77972G	50.76	54.00	-3.24	33.55	3	Vertical	167	2.03	-	37.44	11.86	32.09			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

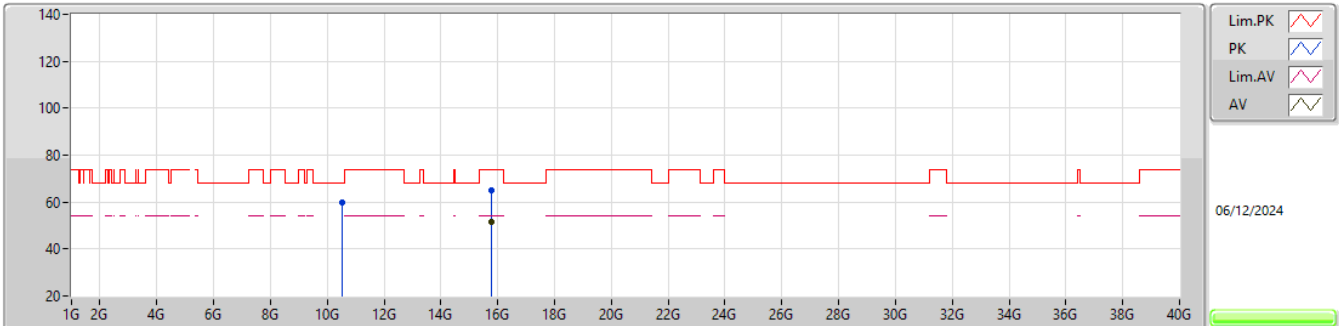


EUT_X_2TX
Setting 20.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.52346G	59.59	68.20	-8.61	40.39	3	Horizontal	332	1.80	-	38.55	11.14	30.49			
PK	15.77538G	65.15	74.00	-8.85	47.93	3	Horizontal	282	1.89	-	37.45	11.86	32.09			
AV	15.78174G	51.57	54.00	-2.43	34.36	3	Horizontal	282	1.89	-	37.44	11.86	32.09			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5300MHz_TX

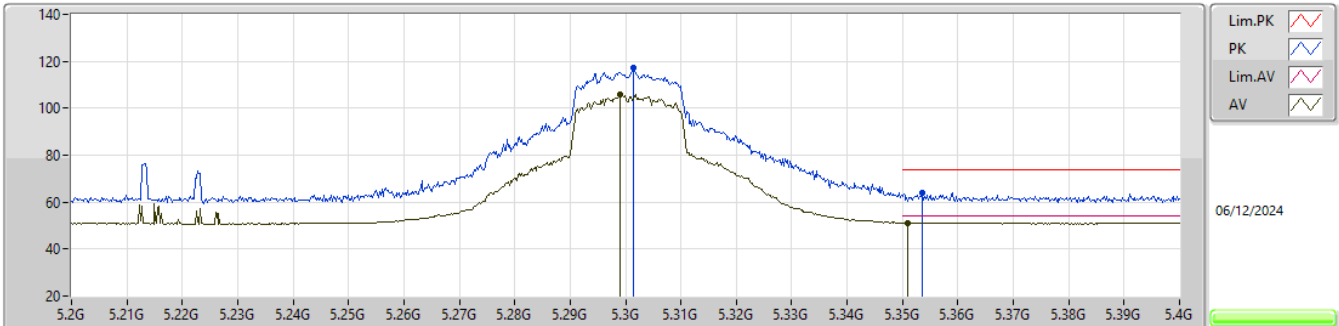


EUT_X_2TX
Setting 22
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3014G	117.02	Inf	-Inf	106.98	3	Vertical	84	1.34	-	33.90	6.98	30.84			
AV	5.299G	105.83	Inf	-Inf	95.78	3	Vertical	84	1.34	-	33.90	6.99	30.84			
PK	5.3536G	64.11	74.00	-9.89	54.04	3	Vertical	84	1.34	-	33.91	6.97	30.81			
AV	5.351G	51.22	54.00	-2.78	41.16	3	Vertical	84	1.34	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5300MHz_TX

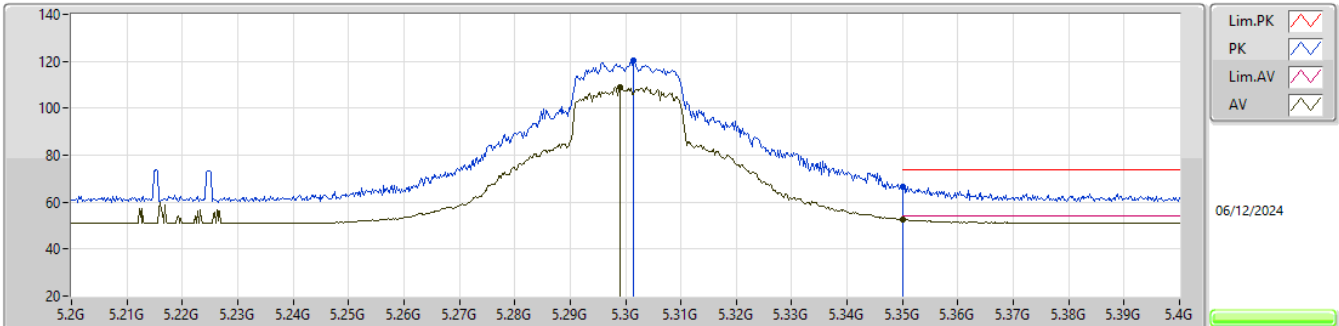


EUT_X_2TX
Setting 22
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3014G	120.59	Inf	-Inf	110.55	3	Horizontal	310	2.18	-	33.90	6.98	30.84			
AV	5.299G	109.21	Inf	-Inf	99.16	3	Horizontal	310	2.18	-	33.90	6.99	30.84			
PK	5.35G	66.74	74.00	-7.26	56.68	3	Horizontal	310	2.18	-	33.90	6.97	30.81			
AV	5.35G	52.68	54.00	-1.32	42.62	3	Horizontal	310	2.18	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5300MHz_TX

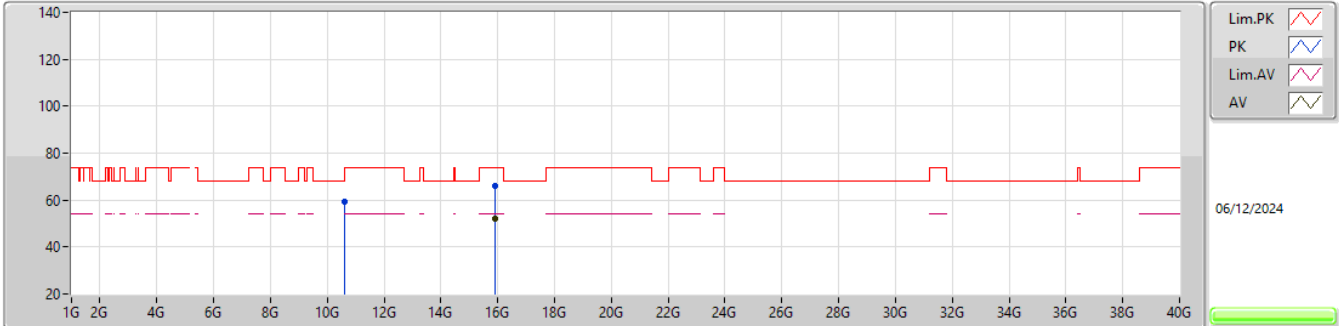


EUT_X_2TX
Setting 20.75
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.6003G	59.22	74.00	-14.78	39.92	3	Vertical	48	1.78	-	38.60	11.19	30.49				
PK	15.89488G	65.84	74.00	-8.16	48.45	3	Vertical	166	1.99	-	37.68	11.87	32.16				
AV	15.90166G	51.94	54.00	-2.06	34.55	3	Vertical	166	1.99	-	37.69	11.87	32.17				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5300MHz_TX

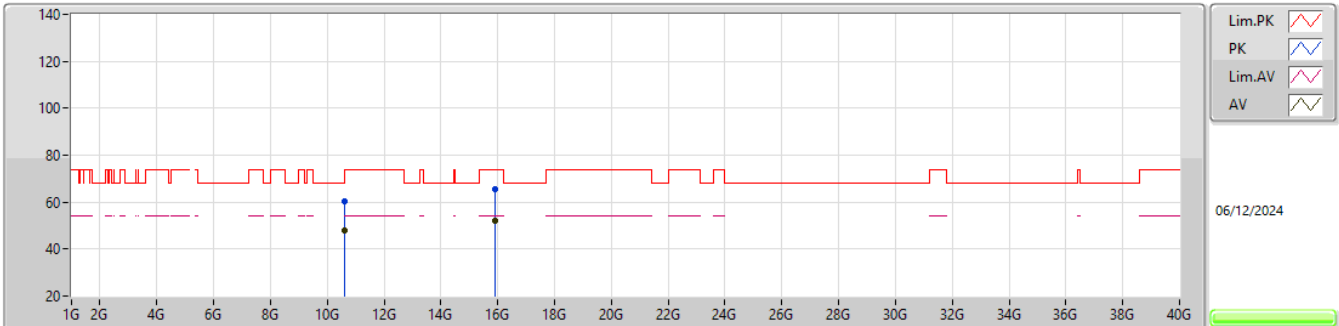


EUT_X_2TX
Setting 20.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.60462G	60.40	74.00	-13.60	41.11	3	Horizontal	318	1.87	-	38.59	11.19	30.49				
AV	10.60356G	47.99	54.00	-6.01	28.70	3	Horizontal	318	1.87	-	38.59	11.19	30.49				
PK	15.90008G	65.41	74.00	-8.59	48.01	3	Horizontal	282	1.88	-	37.70	11.87	32.17				
AV	15.90308G	51.99	54.00	-2.01	34.60	3	Horizontal	282	1.88	-	37.69	11.87	32.17				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

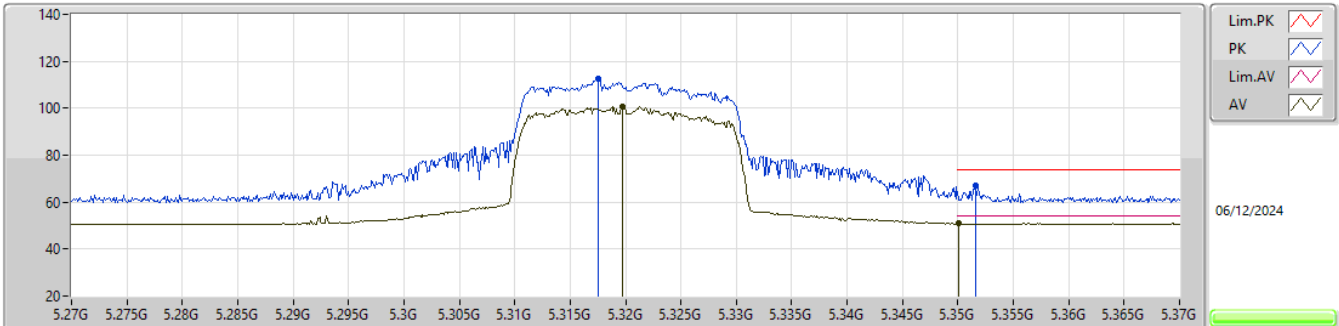


EUT_X_2TX
Setting 16.75
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3175G	112.56	Inf	-Inf	102.51	3	Vertical	263	1.03	-	33.90	6.98	30.83			
AV	5.3197G	100.86	Inf	-Inf	90.81	3	Vertical	263	1.03	-	33.90	6.98	30.83			
PK	5.3516G	67.01	74.00	-6.99	56.95	3	Vertical	263	1.03	-	33.90	6.97	30.81			
AV	5.3501G	50.98	54.00	-3.02	40.92	3	Vertical	263	1.03	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

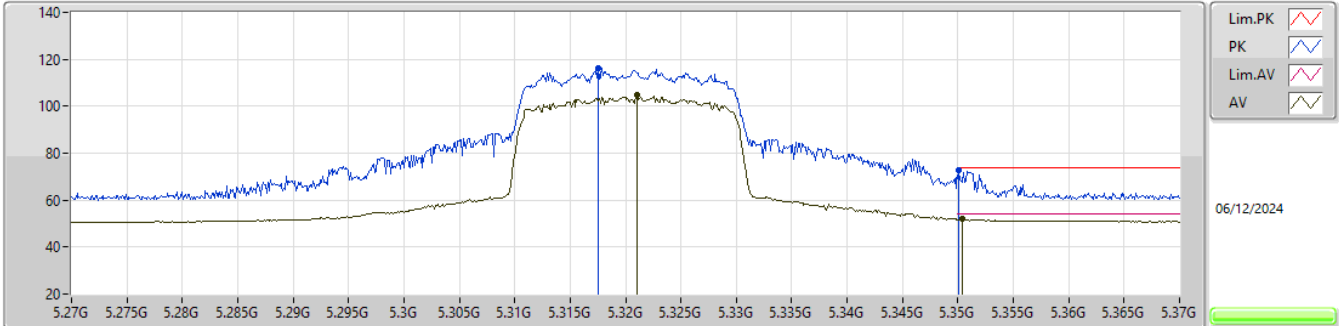


EUT_X_2TX
Setting 16.75
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3175G	116.14	Inf	-Inf	106.09	3	Horizontal	313	2.22	-	33.90	6.98	30.83				
AV	5.321G	104.57	Inf	-Inf	94.52	3	Horizontal	313	2.22	-	33.90	6.97	30.81				
PK	5.3501G	72.58	74.00	-1.42	62.52	3	Horizontal	313	2.22	-	33.90	6.97	30.81				
AV	5.3504G	52.08	54.00	-1.92	42.02	3	Horizontal	313	2.22	-	33.90	6.97	30.81				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

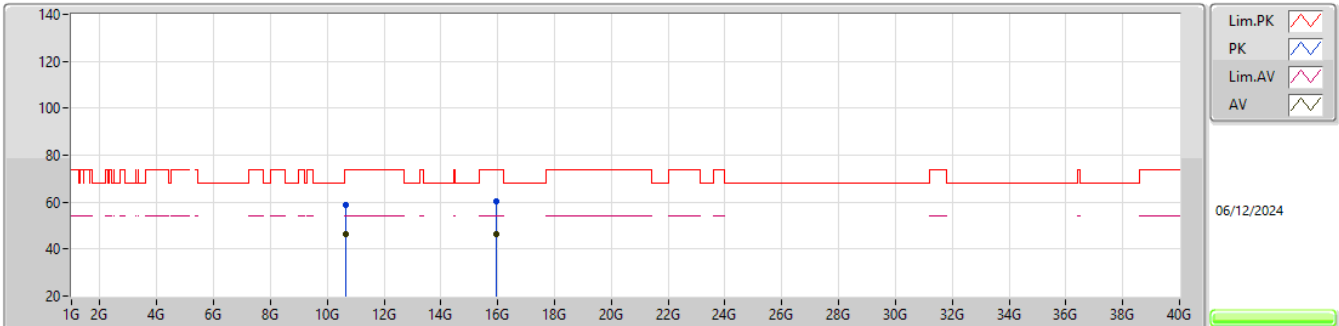


EUT_X_2TX
Setting 16.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.64158G	58.56	74.00	-15.44	39.31	3	Vertical	4	2.63	-	38.52	11.22	30.49				
AV	10.64356G	46.37	54.00	-7.63	27.13	3	Vertical	4	2.63	-	38.51	11.22	30.49				
PK	15.9598G	60.42	74.00	-13.58	43.25	3	Vertical	167	1.97	-	37.50	11.87	32.20				
AV	15.95686G	46.49	54.00	-7.51	29.32	3	Vertical	167	1.97	-	37.50	11.87	32.20				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

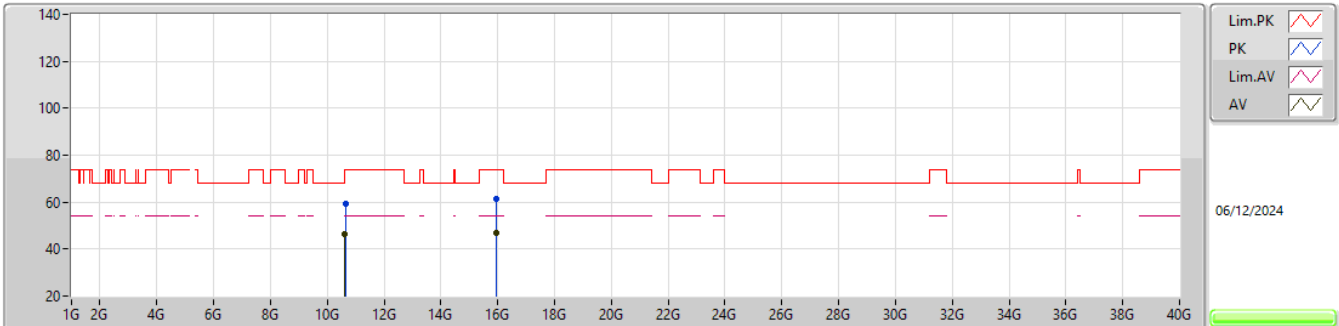


EUT X_2TX
Setting 16.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.63262G	59.37	74.00	-14.63	40.12	3	Horizontal	57	2.06	-	38.53	11.21	30.49				
AV	10.63222G	46.41	54.00	-7.59	27.15	3	Horizontal	57	2.06	-	38.54	11.21	30.49				
PK	15.95996G	61.59	74.00	-12.41	44.42	3	Horizontal	291	2.34	-	37.50	11.87	32.20				
AV	15.96612G	46.99	54.00	-7.01	29.83	3	Horizontal	291	2.34	-	37.50	11.87	32.21				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

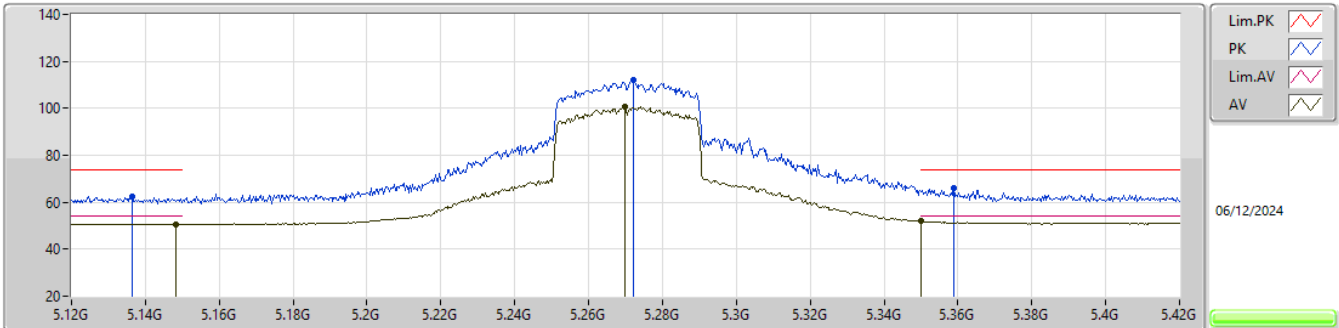


EUT_X_2TX
Setting 19.25
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1365G	62.42	74.00	-11.58	52.78	3	Vertical	84	1.54	-	33.60	6.97	30.93			
AV	5.1482G	50.63	54.00	-3.37	40.98	3	Vertical	84	1.54	-	33.60	6.98	30.93			
PK	5.2721G	112.32	Inf	-Inf	102.35	3	Vertical	84	1.54	-	33.84	6.99	30.86			
AV	5.2697G	100.87	Inf	-Inf	90.90	3	Vertical	84	1.54	-	33.84	6.99	30.86			
PK	5.3588G	65.92	74.00	-8.08	55.84	3	Vertical	84	1.54	-	33.92	6.97	30.81			
AV	5.35G	51.87	54.00	-2.13	41.81	3	Vertical	84	1.54	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

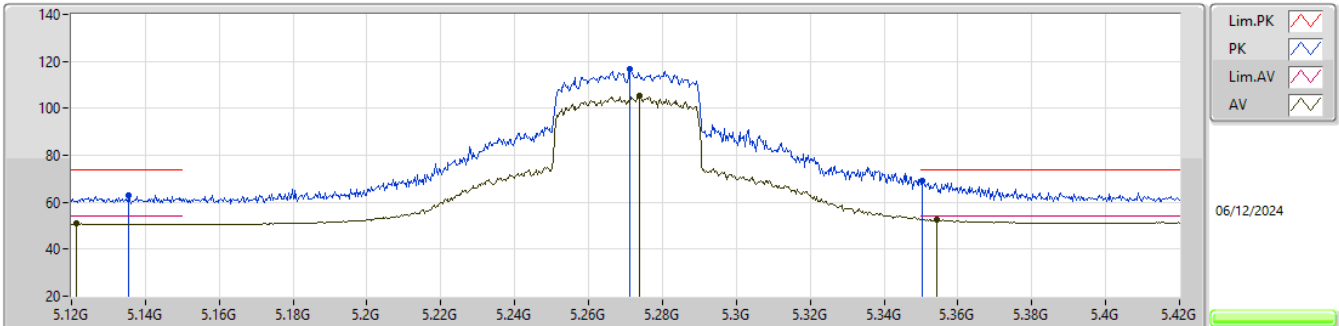


EUT_X_2TX
Setting 19.25
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1356G	62.78	74.00	-11.22	53.14	3	Horizontal	300	2.46	-	33.60	6.97	30.93			
AV	5.1212G	50.79	54.00	-3.21	41.17	3	Horizontal	300	2.46	-	33.60	6.96	30.94			
PK	5.2712G	116.60	Inf	-Inf	106.63	3	Horizontal	300	2.46	-	33.84	6.99	30.86			
AV	5.2739G	105.11	Inf	-Inf	95.13	3	Horizontal	300	2.46	-	33.85	6.99	30.86			
PK	5.3504G	69.09	74.00	-4.91	59.03	3	Horizontal	300	2.46	-	33.90	6.97	30.81			
AV	5.3543G	52.71	54.00	-1.29	42.64	3	Horizontal	300	2.46	-	33.91	6.97	30.81			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

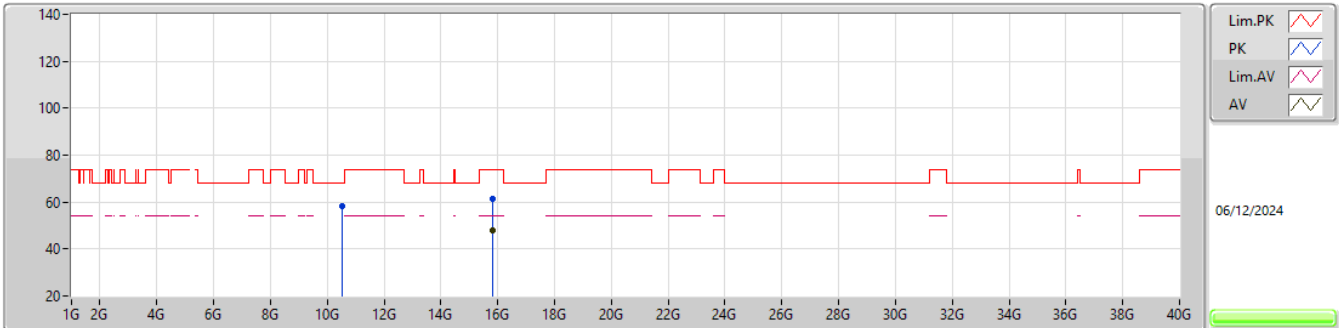


EUT_X_2TX
Setting 19.25
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5448G	58.46	68.20	-9.74	39.20	3	Vertical	24	2.07	-	38.59	11.16	30.49			
PK	15.8195G	61.13	74.00	-12.87	43.94	3	Vertical	166	1.96	-	37.44	11.86	32.11			
AV	15.8121G	48.04	54.00	-5.96	30.87	3	Vertical	166	1.96	-	37.42	11.86	32.11			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

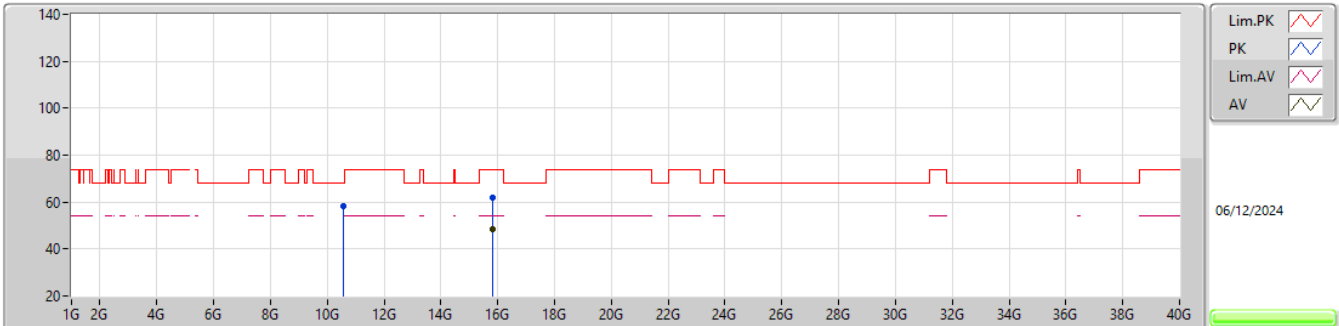


EUT_X_2TX
Setting 19.25
02-R-M-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.5657G	58.02	68.20	-10.18	38.74	3	Horizontal	71	1.63	-	38.60	11.17	30.49				
PK	15.816G	61.70	74.00	-12.30	44.52	3	Horizontal	281	1.90	-	37.43	11.86	32.11				
AV	15.8135G	48.42	54.00	-5.58	31.24	3	Horizontal	281	1.90	-	37.43	11.86	32.11				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

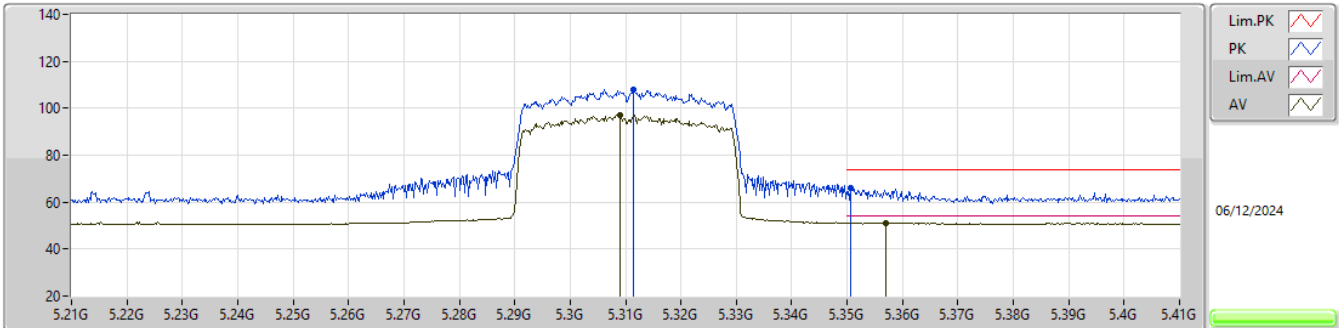


EUT_X_2TX
Setting 15
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3114G	107.73	Inf	-Inf	97.69	3	Vertical	87	1.34	-	33.90	6.98	30.84			
AV	5.309G	97.22	Inf	-Inf	87.18	3	Vertical	87	1.34	-	33.90	6.98	30.84			
PK	5.3506G	66.11	74.00	-7.89	56.05	3	Vertical	87	1.34	-	33.90	6.97	30.81			
AV	5.357G	51.26	54.00	-2.74	41.19	3	Vertical	87	1.34	-	33.91	6.97	30.81			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

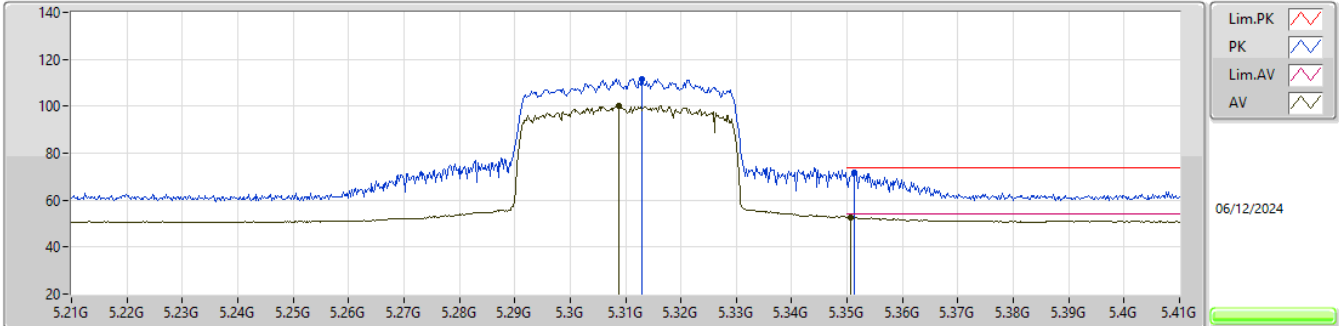


EUT_X_2TX
Setting 15
02-R-M-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.313G	111.70	Inf	-Inf	101.65	3	Horizontal	301	2.19	-	33.90	6.98	30.83			
AV	5.3088G	100.35	Inf	-Inf	90.31	3	Horizontal	301	2.19	-	33.90	6.98	30.84			
PK	5.3514G	71.92	74.00	-2.08	61.86	3	Horizontal	301	2.19	-	33.90	6.97	30.81			
AV	5.3506G	52.68	54.00	-1.32	42.62	3	Horizontal	301	2.19	-	33.90	6.97	30.81			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

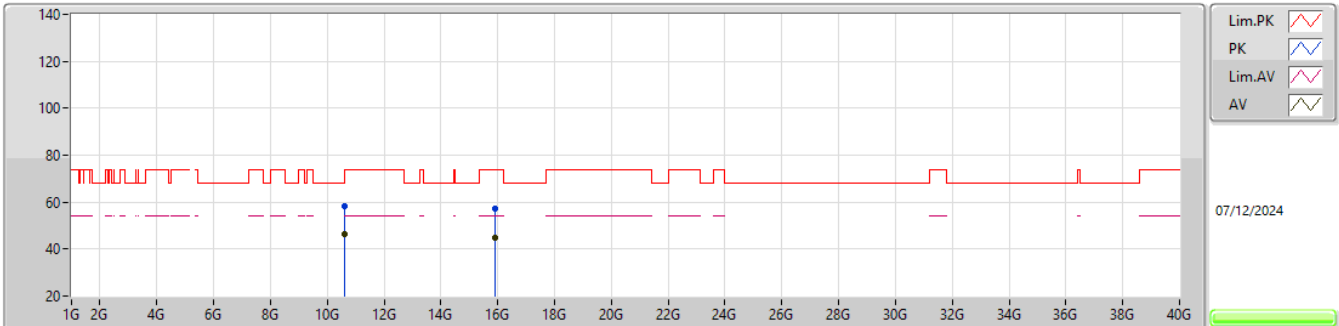


EUT_X_2TX
Setting 15
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.5905G	58.48	68.20	-9.72	39.19	3	Vertical	194	1.29	-	38.60	11.18	30.49				
AV	10.6317G	46.21	54.00	-7.79	26.95	3	Vertical	194	1.29	-	38.54	11.21	30.49				
PK	15.9077G	57.02	74.00	-16.98	39.65	3	Vertical	317	2.29	-	37.67	11.87	32.17				
AV	15.8931G	44.86	54.00	-9.14	27.48	3	Vertical	317	2.29	-	37.67	11.87	32.16				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

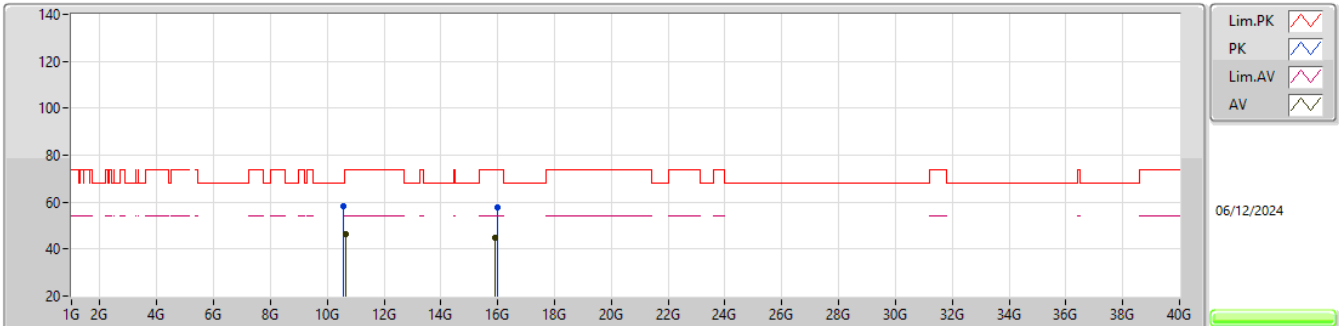


EUT_X_2TX
Setting 15
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5875G	58.35	68.20	-9.85	39.06	3	Horizontal	167	2.84	-	38.60	11.18	30.49			
AV	10.6471G	46.17	54.00	-7.83	26.93	3	Horizontal	167	2.84	-	38.51	11.22	30.49			
PK	15.9781G	57.60	74.00	-16.40	40.45	3	Horizontal	333	2.36	-	37.50	11.87	32.22			
AV	15.8997G	44.84	54.00	-9.16	27.44	3	Horizontal	333	2.36	-	37.70	11.87	32.17			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

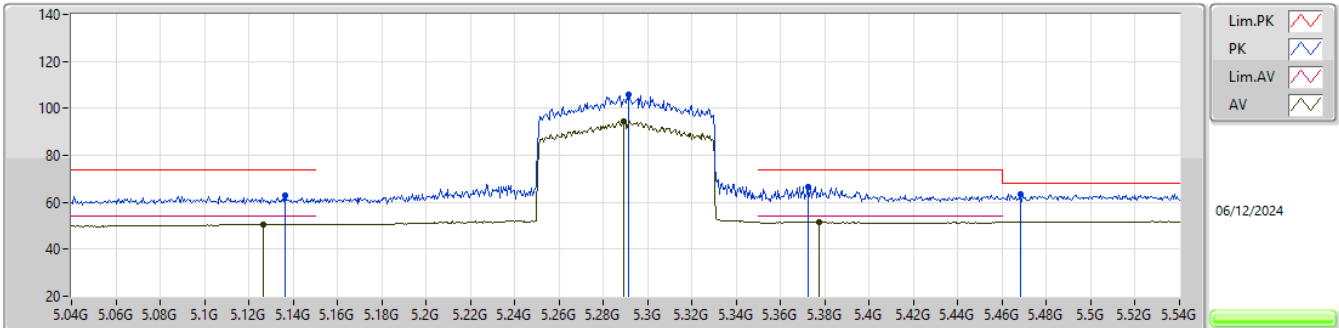


EUT_X_2TX
Setting 15
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1365G	62.84	74.00	-11.16	53.20	3	Vertical	88	1.05	-	33.60	6.97	30.93			
AV	5.1265G	50.56	54.00	-3.44	40.94	3	Vertical	88	1.05	-	33.60	6.96	30.94			
PK	5.2915G	105.97	Inf	-Inf	95.95	3	Vertical	88	1.05	-	33.88	6.99	30.85			
AV	5.289G	94.60	Inf	-Inf	84.58	3	Vertical	88	1.05	-	33.88	6.99	30.85			
PK	5.3725G	66.73	74.00	-7.27	56.61	3	Vertical	88	1.05	-	33.95	6.97	30.80			
AV	5.3775G	51.65	54.00	-2.35	41.53	3	Vertical	88	1.05	-	33.95	6.97	30.80			
PK	5.468G	63.27	68.20	-4.93	52.80	3	Vertical	88	1.05	-	34.04	7.18	30.75			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

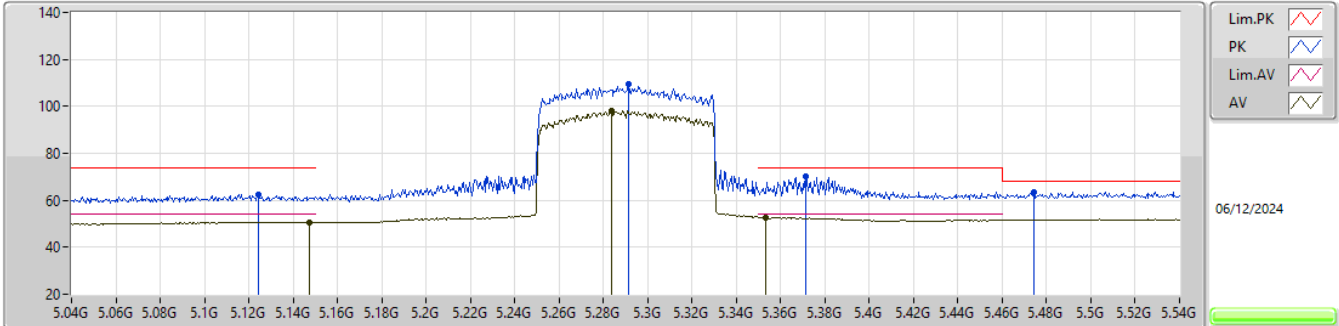


EUT_X_2TX
Setting 15
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1245G	62.31	74.00	-11.69	52.69	3	Horizontal	306	2.44	-	33.60	6.96	30.94			
AV	5.1475G	50.63	54.00	-3.37	40.98	3	Horizontal	306	2.44	-	33.60	6.98	30.93			
PK	5.2915G	109.65	Inf	-Inf	99.63	3	Horizontal	306	2.44	-	33.88	6.99	30.85			
AV	5.2835G	97.96	Inf	-Inf	87.95	3	Horizontal	306	2.44	-	33.87	6.99	30.85			
PK	5.3715G	70.20	74.00	-3.80	60.09	3	Horizontal	306	2.44	-	33.94	6.97	30.80			
AV	5.353G	52.71	54.00	-1.29	42.64	3	Horizontal	306	2.44	-	33.91	6.97	30.81			
PK	5.4745G	63.59	68.20	-4.61	53.07	3	Horizontal	306	2.44	-	34.05	7.21	30.74			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

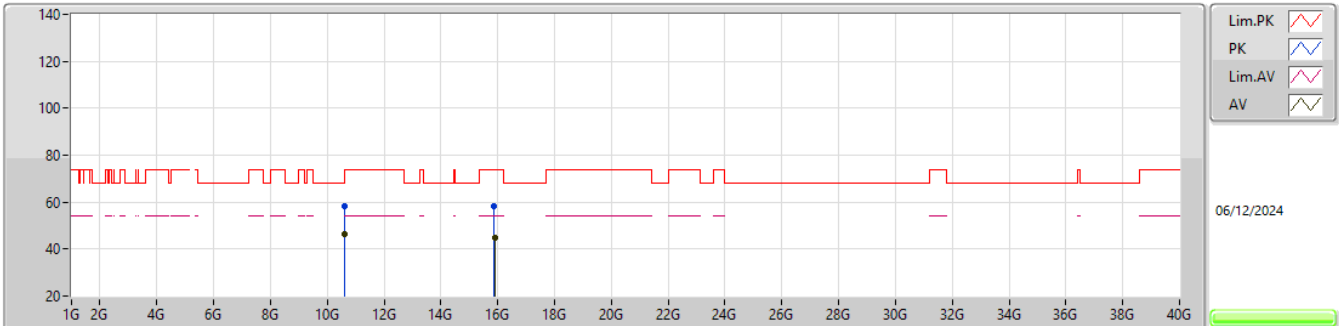


EUT_X_2TX
Setting 15
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.611G	58.12	74.00	-15.88	38.83	3	Vertical	145	2.81	-	38.58	11.20	30.49			
AV	10.6162G	46.15	54.00	-7.85	26.87	3	Vertical	145	2.81	-	38.57	11.20	30.49			
PK	15.8768G	58.32	74.00	-15.68	41.00	3	Vertical	269	2.56	-	37.61	11.86	32.15			
AV	15.9034G	44.83	54.00	-9.17	27.44	3	Vertical	269	2.56	-	37.69	11.87	32.17			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

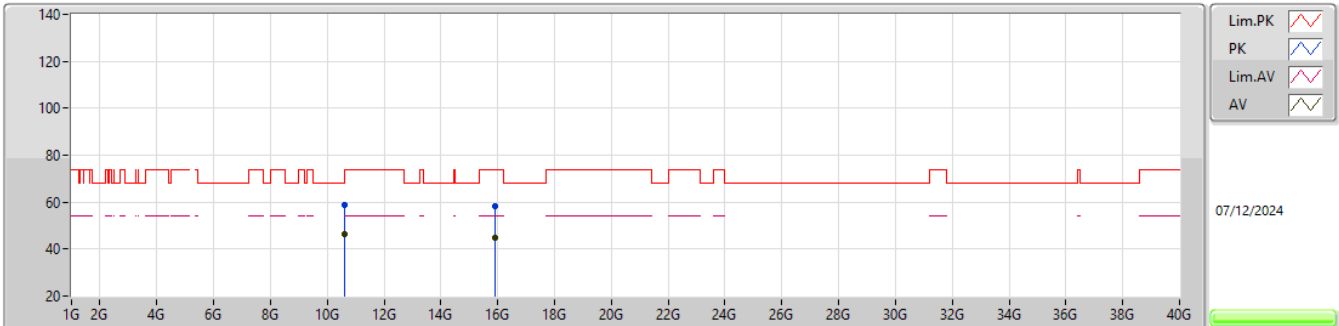


EUT_X_2TX
Setting 15
02-R-M-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.6177G	58.94	74.00	-15.06	39.67	3	Horizontal	19	1.40	-	38.56	11.20	30.49			
AV	10.61G	46.17	54.00	-7.83	26.88	3	Horizontal	19	1.40	-	38.58	11.20	30.49			
PK	15.9093G	58.23	74.00	-15.77	40.87	3	Horizontal	208	1.98	-	37.66	11.87	32.17			
AV	15.8992G	44.84	54.00	-9.16	27.44	3	Horizontal	208	1.98	-	37.70	11.87	32.17			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

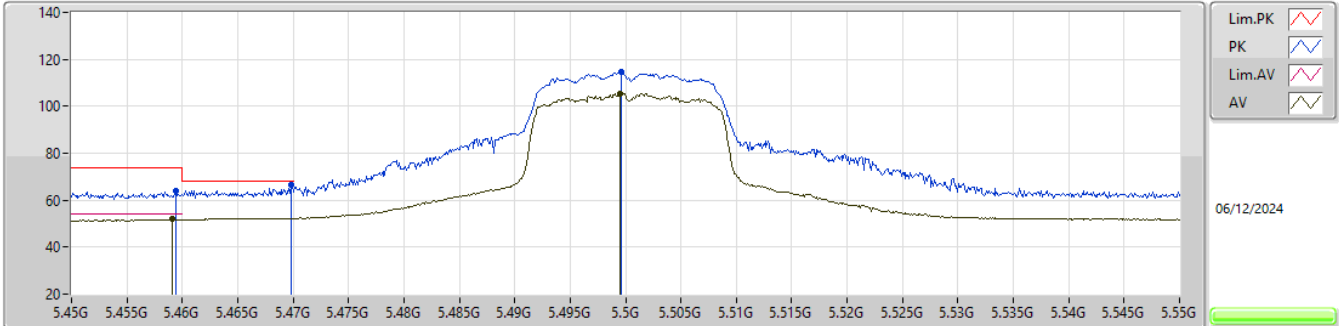


EUT_X_2TX
Setting 17.5
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4594G	63.89	74.00	-10.11	53.46	3	Vertical	84	1.40	-	34.02	7.16	30.75			
AV	5.4591G	51.82	54.00	-2.18	41.39	3	Vertical	84	1.40	-	34.02	7.16	30.75			
PK	5.4698G	66.63	68.20	-1.57	56.15	3	Vertical	84	1.40	-	34.04	7.19	30.75			
PK	5.4996G	114.53	Inf	-Inf	103.87	3	Vertical	84	1.40	-	34.10	7.29	30.73			
AV	5.4995G	105.44	Inf	-Inf	94.78	3	Vertical	84	1.40	-	34.10	7.29	30.73			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

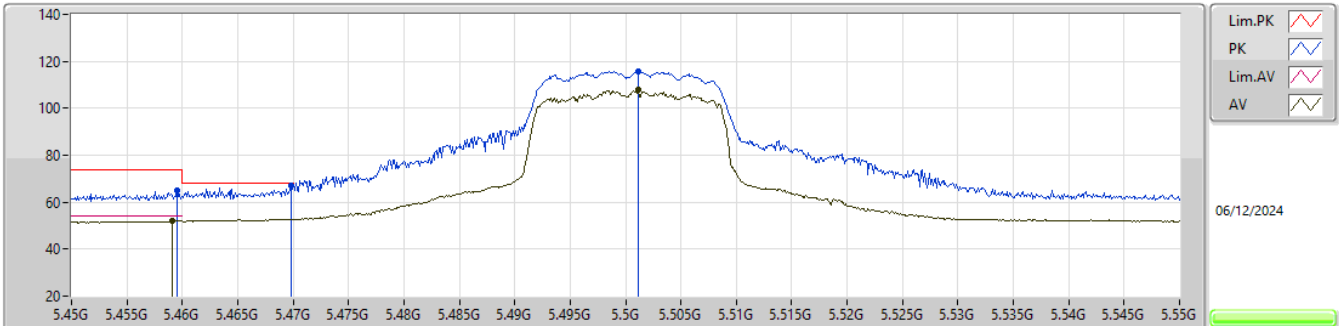EUT_X_2TX
Setting 17.5
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4595G	64.80	74.00	-9.20	54.37	3	Horizontal	304	2.26	-	34.02	7.16	30.75			
AV	5.4591G	51.82	54.00	-2.18	41.39	3	Horizontal	304	2.26	-	34.02	7.16	30.75			
PK	5.4698G	67.10	68.20	-1.10	56.62	3	Horizontal	304	2.26	-	34.04	7.19	30.75			
PK	5.5011G	115.74	Inf	-Inf	105.08	3	Horizontal	304	2.26	-	34.10	7.29	30.73			
AV	5.5012G	107.68	Inf	-Inf	97.02	3	Horizontal	304	2.26	-	34.10	7.29	30.73			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

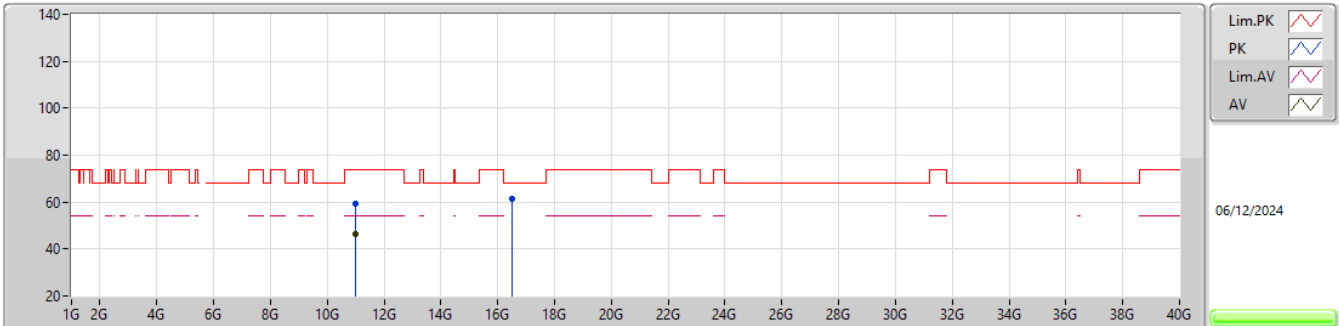EUT_X_2TX
Setting 17.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00678G	59.40	74.00	-14.60	39.83	3	Vertical	355	1.25	-	38.60	11.45	30.48			
AV	10.99718G	46.28	54.00	-7.72	26.72	3	Vertical	355	1.25	-	38.60	11.44	30.48			
PK	16.49836G	61.62	68.20	-6.58	42.77	3	Vertical	155	1.35	-	38.79	12.11	32.05			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

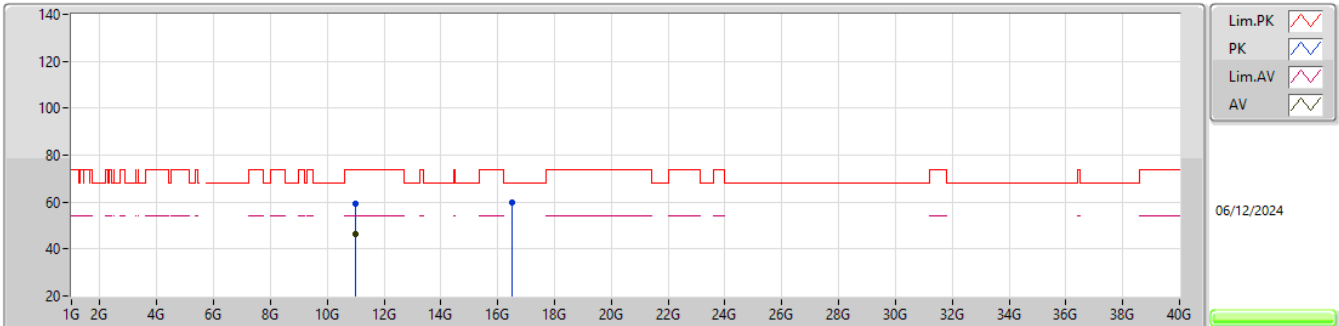EUT_X_2TX
Setting 17.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00972G	59.07	74.00	-14.93	39.50	3	Horizontal	50	1.69	-	38.60	11.45	30.48			
AV	11.00218G	46.41	54.00	-7.59	26.84	3	Horizontal	50	1.69	-	38.60	11.45	30.48			
PK	16.49482G	59.57	68.20	-8.63	40.74	3	Horizontal	229	2.27	-	38.77	12.11	32.05			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

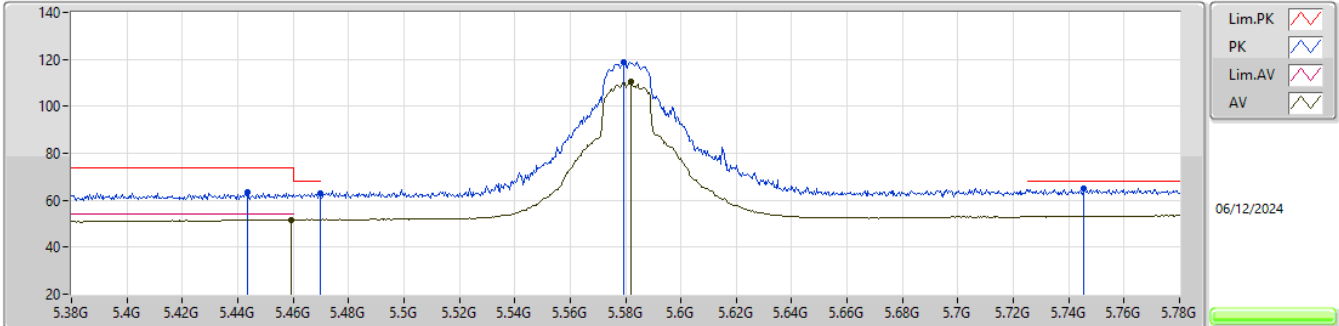


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4436G	63.42	74.00	-10.58	53.08	3	Vertical	85	1.08	-	34.00	7.10	30.76			
PK	5.4696G	62.95	68.20	-5.25	52.47	3	Vertical	85	1.08	-	34.04	7.19	30.75			
AV	5.4592G	51.58	54.00	-2.42	41.15	3	Vertical	85	1.08	-	34.02	7.16	30.75			
PK	5.5792G	118.63	Inf	-Inf	107.79	3	Vertical	85	1.08	-	34.00	7.55	30.71			
AV	5.582G	110.33	Inf	-Inf	99.48	3	Vertical	85	1.08	-	34.00	7.56	30.71			
PK	5.7456G	65.16	68.20	-3.04	54.08	3	Vertical	85	1.08	-	34.00	7.75	30.67			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

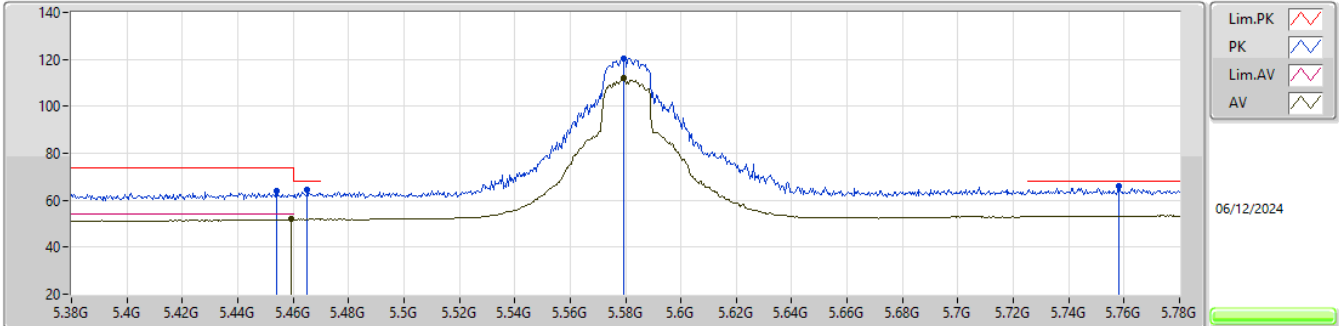


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.454G	64.07	74.00	-9.93	53.68	3	Horizontal	309	2.15	-	34.01	7.14	30.76			
AV	5.4592G	51.82	54.00	-2.18	41.39	3	Horizontal	309	2.15	-	34.02	7.16	30.75			
PK	5.4652G	64.40	68.20	-3.80	53.94	3	Horizontal	309	2.15	-	34.03	7.18	30.75			
PK	5.5792G	120.57	Inf	-Inf	109.73	3	Horizontal	309	2.15	-	34.00	7.55	30.71			
AV	5.5792G	111.93	Inf	-Inf	101.09	3	Horizontal	309	2.15	-	34.00	7.55	30.71			
PK	5.758G	65.91	68.20	-2.29	54.80	3	Horizontal	309	2.15	-	34.02	7.76	30.67			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5580MHz_TX

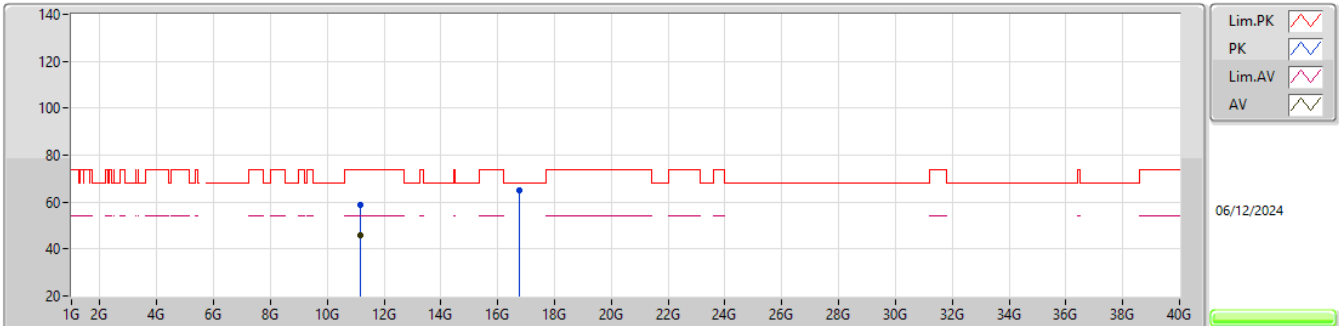EUT X_2TX
Setting 18.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.167G	58.93	74.00	-15.07	39.34	3	Vertical	123	2.00	-	38.60	11.55	30.56			
AV	11.16054G	46.03	54.00	-7.97	26.43	3	Vertical	123	2.00	-	38.60	11.55	30.55			
PK	16.7411G	64.81	68.20	-3.39	44.69	3	Vertical	175	1.92	-	39.98	12.22	32.08			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5580MHz_TX

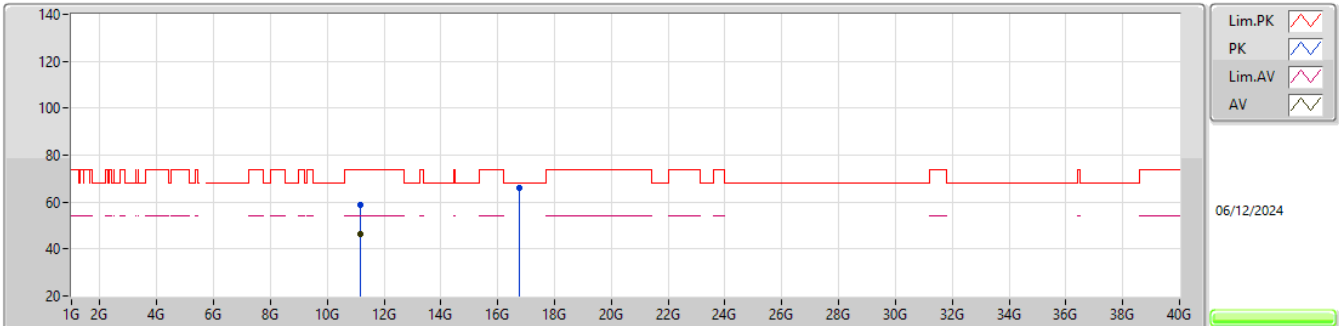EUT X_2TX
Setting 18.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16556G	58.74	74.00	-15.26	39.15	3	Horizontal	43	1.40	-	38.60	11.55	30.56			
AV	11.16136G	46.15	54.00	-7.85	26.55	3	Horizontal	43	1.40	-	38.60	11.55	30.55			
PK	16.74268G	66.12	68.20	-2.08	45.99	3	Horizontal	275	1.85	-	39.99	12.22	32.08			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

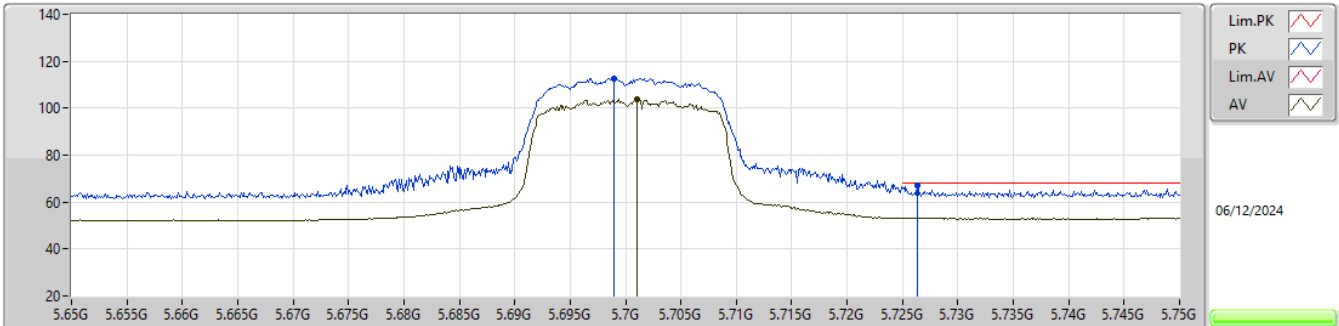


EUT_X_2TX
Setting 15.25
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.699G	112.65	Inf	-Inf	101.62	3	Vertical	82	1.05	-	34.00	7.71	30.68			
AV	5.701G	103.96	Inf	-Inf	92.93	3	Vertical	82	1.05	-	34.00	7.71	30.68			
PK	5.7263G	66.98	68.20	-1.22	55.93	3	Vertical	82	1.05	-	34.00	7.73	30.68			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

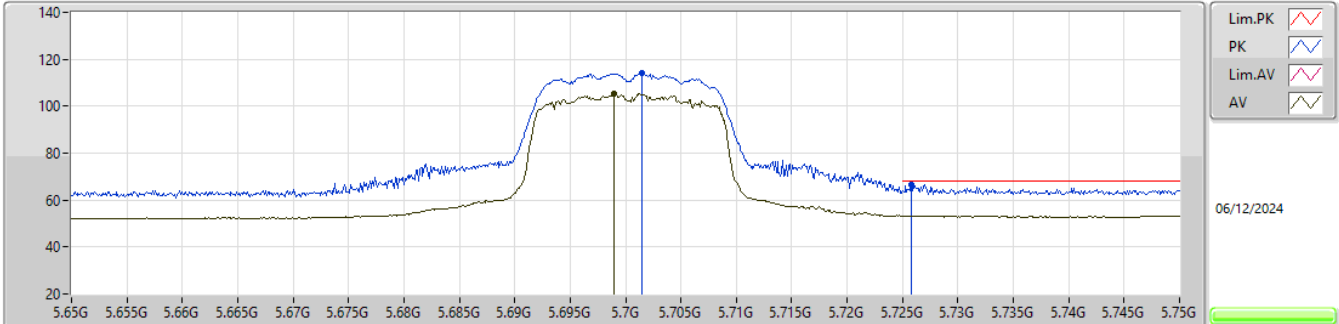


EUT_X_2TX
Setting 15.25
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7015G	114.00	Inf	-Inf	102.97	3	Horizontal	306	2.10	-	34.00	7.71	30.68				
AV	5.699G	105.49	Inf	-Inf	94.46	3	Horizontal	306	2.10	-	34.00	7.71	30.68				
PK	5.7258G	66.77	68.20	-1.43	55.72	3	Horizontal	306	2.10	-	34.00	7.73	30.68				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

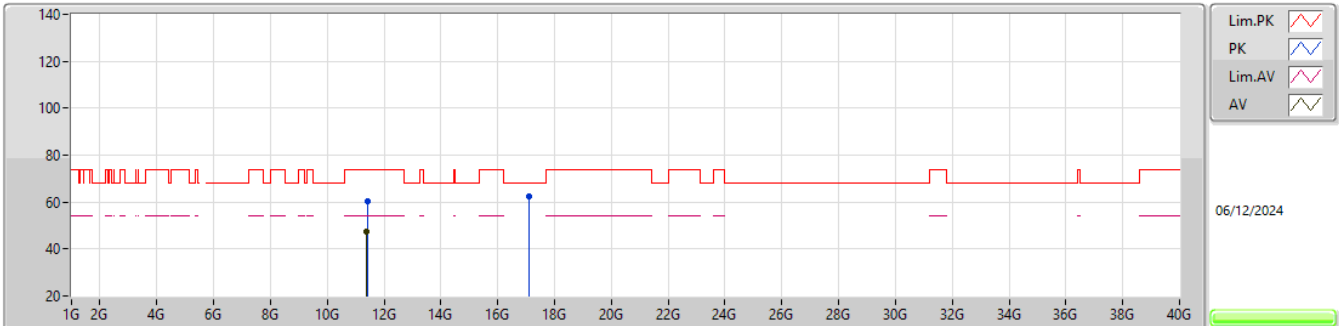


EUT_X_2TX
Setting 15.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40172G	60.32	74.00	-13.68	40.48	3	Vertical	50	1.71	-	38.80	11.70	30.66			
AV	11.40016G	47.43	54.00	-6.57	27.59	3	Vertical	50	1.71	-	38.80	11.70	30.66			
PK	17.09742G	62.44	68.20	-5.76	40.72	3	Vertical	31	2.89	-	41.49	12.39	32.16			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

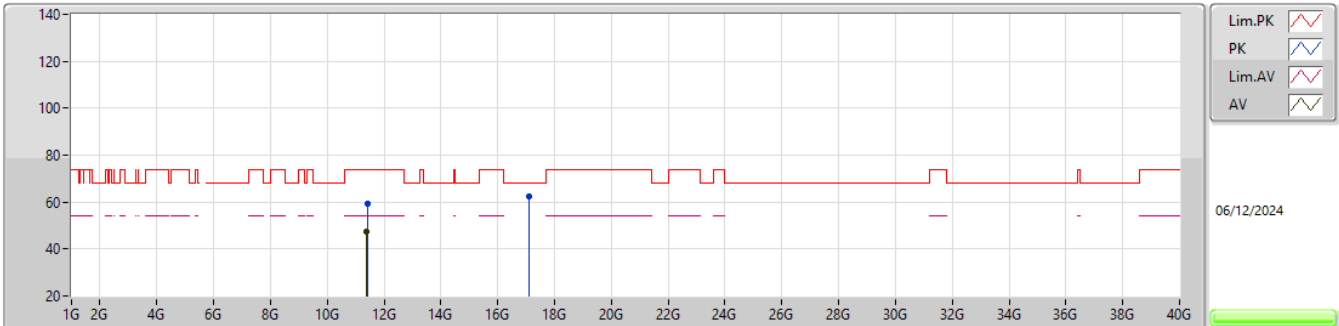


EUT_X_2TX
Setting 15.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40334G	59.40	74.00	-14.60	39.56	3	Horizontal	2	1.12	-	38.81	11.70	30.67			
AV	11.3964G	47.41	54.00	-6.59	27.58	3	Horizontal	2	1.12	-	38.79	11.70	30.66			
PK	17.09832G	62.32	68.20	-5.88	40.59	3	Horizontal	272	1.64	-	41.50	12.39	32.16			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

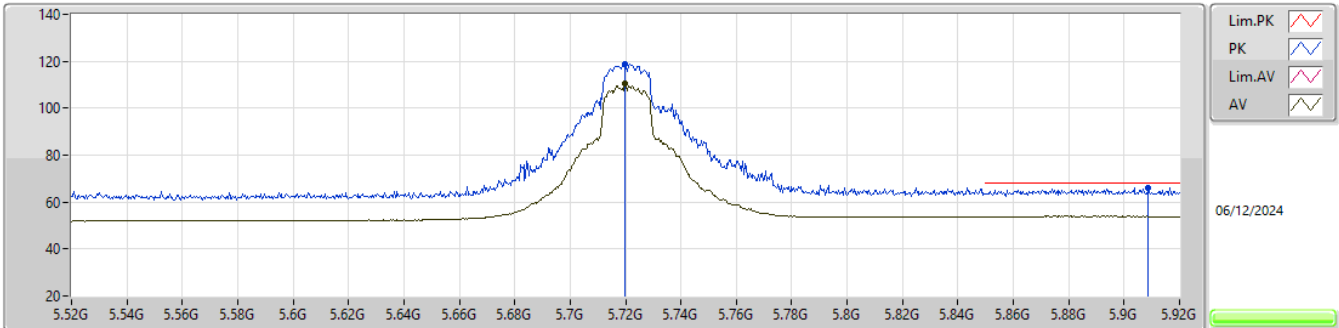EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.7196G	119.03	Inf	-Inf	107.98	3	Vertical	88	1.02	-	34.00	7.73	30.68				
AV	5.7196G	110.30	Inf	-Inf	99.25	3	Vertical	88	1.02	-	34.00	7.73	30.68				
PK	5.9088G	66.20	68.20	-2.00	54.76	3	Vertical	88	1.02	-	34.20	7.87	30.63				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

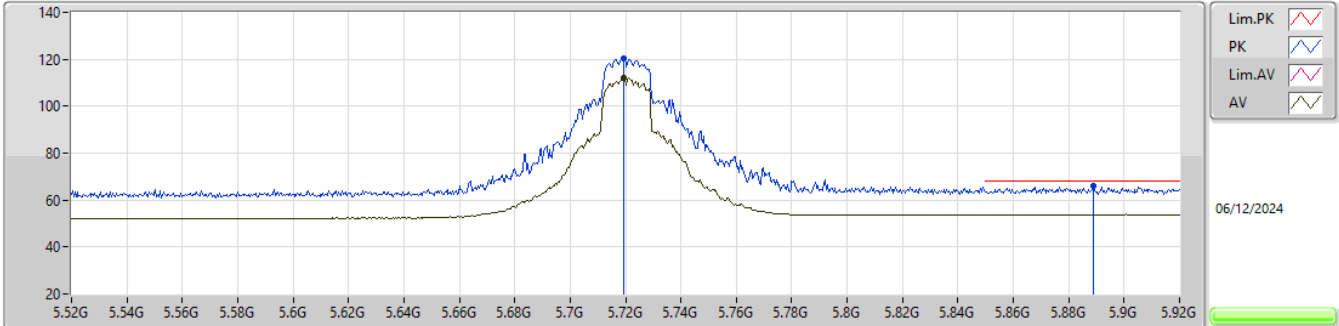


EUT_X_2TX
Setting 23
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7192G	120.59	Inf	-Inf	109.54	3	Horizontal	310	2.28	-	34.00	7.73	30.68				
AV	5.7192G	111.97	Inf	-Inf	100.92	3	Horizontal	310	2.28	-	34.00	7.73	30.68				
PK	5.8888G	65.86	68.20	-2.34	54.48	3	Horizontal	310	2.28	-	34.16	7.86	30.64				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

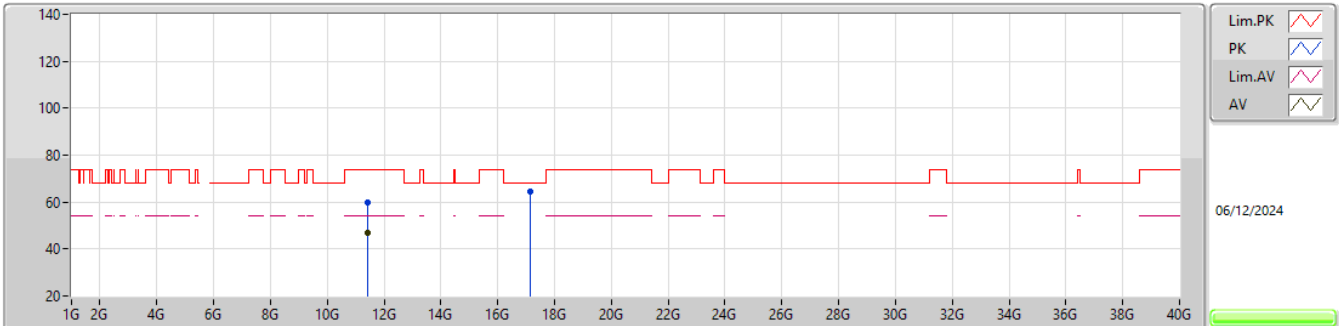EUT_X_2TX
Setting 15.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43068G	59.73	74.00	-14.27	39.83	3	Vertical	46	2.55	-	38.86	11.72	30.68			
AV	11.43028G	46.65	54.00	-7.35	26.75	3	Vertical	46	2.55	-	38.86	11.72	30.68			
PK	17.1635G	64.26	68.20	-3.94	42.17	3	Vertical	299	2.22	-	41.85	12.42	32.18			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

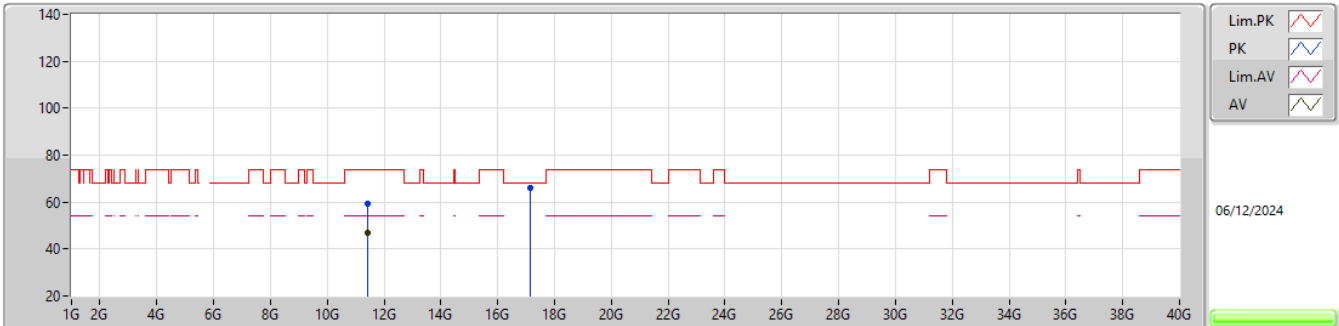


EUT_X_2TX
Setting 15.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43122G	59.42	74.00	-14.58	39.52	3	Horizontal	326	2.26	-	38.86	11.72	30.68			
AV	11.43022G	46.65	54.00	-7.35	26.75	3	Horizontal	326	2.26	-	38.86	11.72	30.68			
PK	17.16296G	66.06	68.20	-2.14	43.97	3	Horizontal	284	3.00	-	41.85	12.42	32.18			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5500MHz_TX

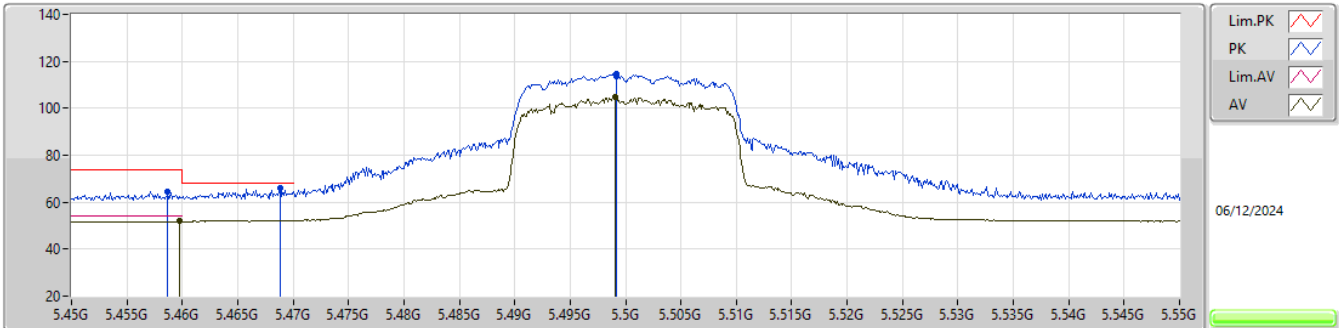


EUT_X_2TX
Setting 17.5
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4587G	64.56	74.00	-9.44	54.14	3	Vertical	84	1.17	-	34.02	7.15	30.75			
AV	5.4597G	51.82	54.00	-2.18	41.39	3	Vertical	84	1.17	-	34.02	7.16	30.75			
PK	5.4688G	65.98	68.20	-2.22	55.50	3	Vertical	84	1.17	-	34.04	7.19	30.75			
PK	5.4992G	114.86	Inf	-Inf	104.20	3	Vertical	84	1.17	-	34.10	7.29	30.73			
AV	5.4991G	104.88	Inf	-Inf	94.22	3	Vertical	84	1.17	-	34.10	7.29	30.73			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5500MHz_TX

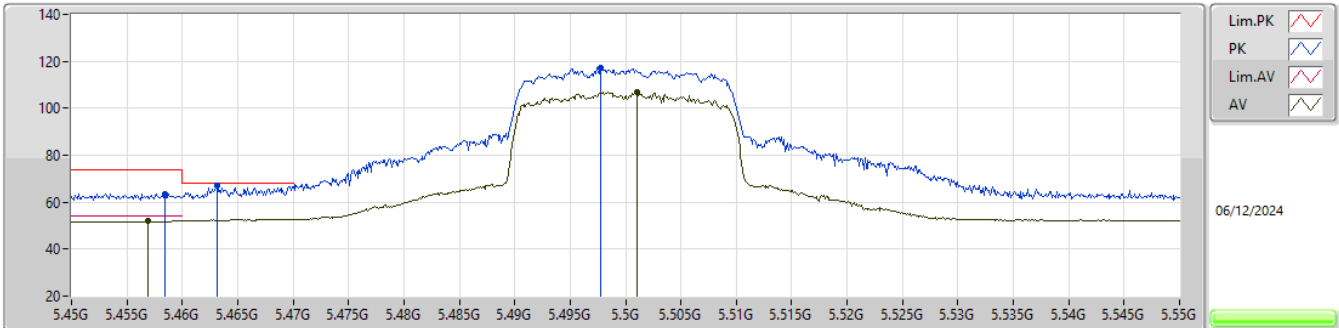EUT_X_2TX
Setting 17.5
02-R-M-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4584G	63.69	74.00	-10.31	53.27	3	Horizontal	309	2.40	-	34.02	7.15	30.75			
AV	5.4569G	52.03	54.00	-1.97	41.62	3	Horizontal	309	2.40	-	34.01	7.15	30.75			
PK	5.4631G	67.05	68.20	-1.15	56.60	3	Horizontal	309	2.40	-	34.03	7.17	30.75			
PK	5.4977G	117.33	Inf	-Inf	106.68	3	Horizontal	309	2.40	-	34.10	7.28	30.73			
AV	5.501G	107.06	Inf	-Inf	96.40	3	Horizontal	309	2.40	-	34.10	7.29	30.73			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5500MHz_TX

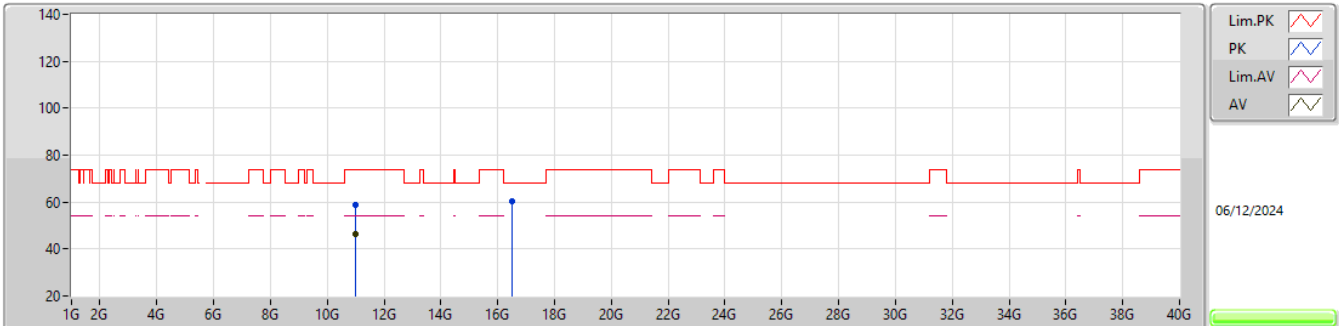


EUT_X_2TX
Setting 17.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99088G	59.04	74.00	-14.96	39.48	3	Vertical	334	2.48	-	38.60	11.44	30.48			
AV	11.00268G	46.31	54.00	-7.69	26.74	3	Vertical	334	2.48	-	38.60	11.45	30.48			
PK	16.49678G	60.55	68.20	-7.65	41.71	3	Vertical	178	1.83	-	38.78	12.11	32.05			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5500MHz_TX

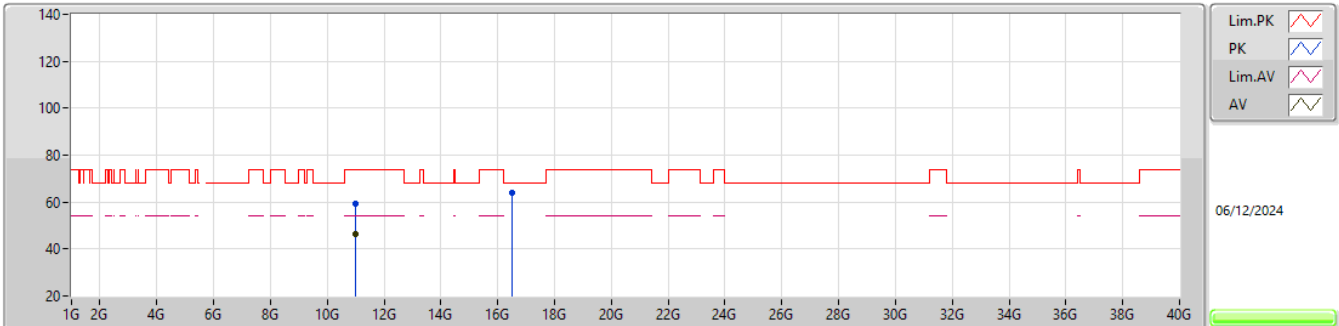EUT_X_2TX
Setting 17.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0019G	59.12	74.00	-14.88	39.55	3	Horizontal	306	1.83	-	38.60	11.45	30.48			
AV	11.0017G	46.41	54.00	-7.59	26.84	3	Horizontal	306	1.83	-	38.60	11.45	30.48			
PK	16.50546G	64.17	68.20	-4.03	45.27	3	Horizontal	287	2.34	-	38.84	12.11	32.05			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5580MHz_TX

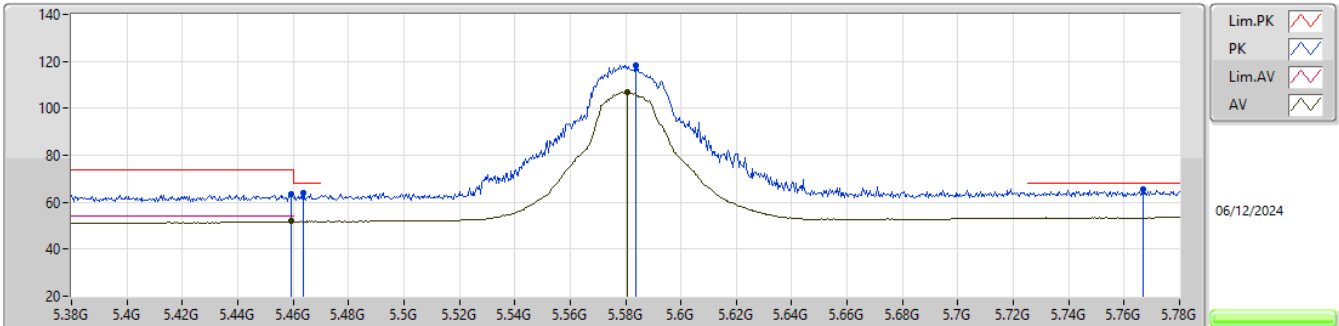


EUT_X_2TX
Setting 23
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4592G	63.64	74.00	-10.36	53.21	3	Vertical	82	1.21	-	34.02	7.16	30.75			
AV	5.4592G	51.82	54.00	-2.18	41.39	3	Vertical	82	1.21	-	34.02	7.16	30.75			
PK	5.4636G	63.80	68.20	-4.40	53.35	3	Vertical	82	1.21	-	34.03	7.17	30.75			
PK	5.5836G	118.29	Inf	-Inf	107.43	3	Vertical	82	1.21	-	34.00	7.57	30.71			
AV	5.5808G	106.98	Inf	-Inf	96.13	3	Vertical	82	1.21	-	34.00	7.56	30.71			
PK	5.7668G	65.39	68.20	-2.81	54.26	3	Vertical	82	1.21	-	34.03	7.77	30.67			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5580MHz_TX

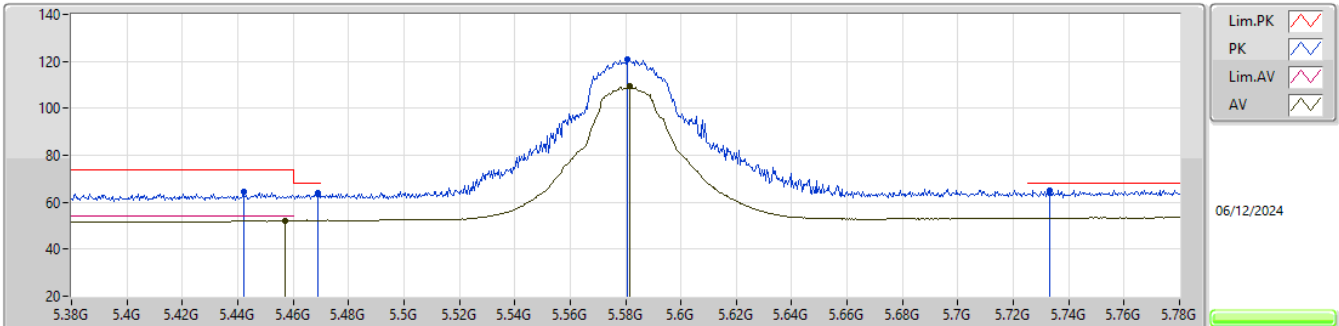


EUT_X_2TX
Setting 23
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.442G	64.45	74.00	-9.55	54.11	3	Horizontal	306	2.19	-	34.00	7.10	30.76			
PK	5.4688G	64.02	68.20	-4.18	53.54	3	Horizontal	306	2.19	-	34.04	7.19	30.75			
AV	5.4572G	52.26	54.00	-1.74	41.85	3	Horizontal	306	2.19	-	34.01	7.15	30.75			
PK	5.5808G	121.02	Inf	-Inf	110.17	3	Horizontal	306	2.19	-	34.00	7.56	30.71			
AV	5.5816G	109.26	Inf	-Inf	98.41	3	Horizontal	306	2.19	-	34.00	7.56	30.71			
PK	5.7332G	64.97	68.20	-3.23	53.90	3	Horizontal	306	2.19	-	34.00	7.74	30.67			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5580MHz_TX

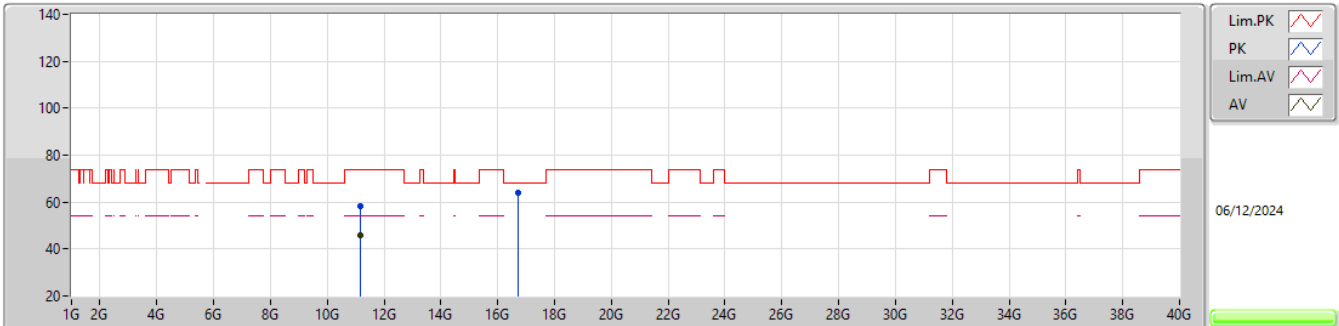


EUT_X_2TX
Setting 18.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16394G	58.24	74.00	-15.76	38.65	3	Vertical	217	2.28	-	38.60	11.55	30.56			
AV	11.15386G	46.11	54.00	-7.89	26.52	3	Vertical	217	2.28	-	38.60	11.54	30.55			
PK	16.73928G	63.78	68.20	-4.42	43.66	3	Vertical	174	1.93	-	39.98	12.22	32.08			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5580MHz_TX

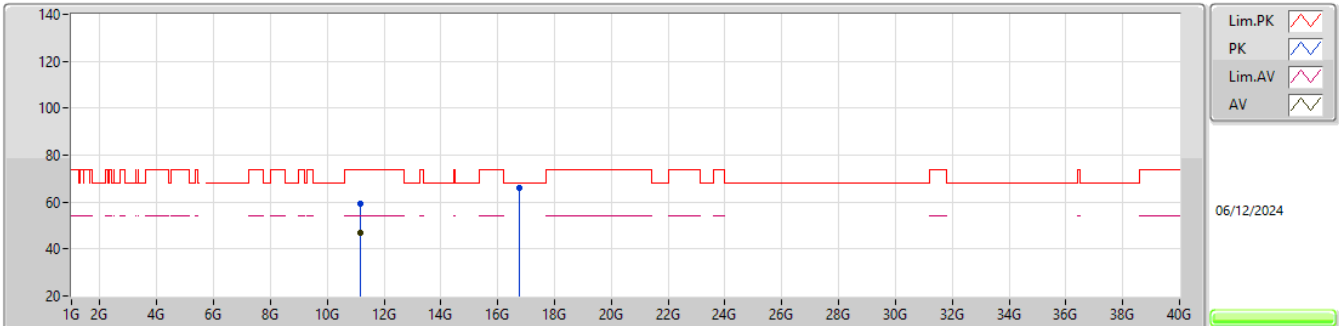


EUT_X_2TX
Setting 18.25
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16768G	59.30	74.00	-14.70	39.71	3	Horizontal	328	1.80	-	38.60	11.55	30.56			
AV	11.16084G	46.99	54.00	-7.01	27.39	3	Horizontal	328	1.80	-	38.60	11.55	30.55			
PK	16.74212G	65.84	68.20	-2.36	45.72	3	Horizontal	274	1.83	-	39.98	12.22	32.08			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

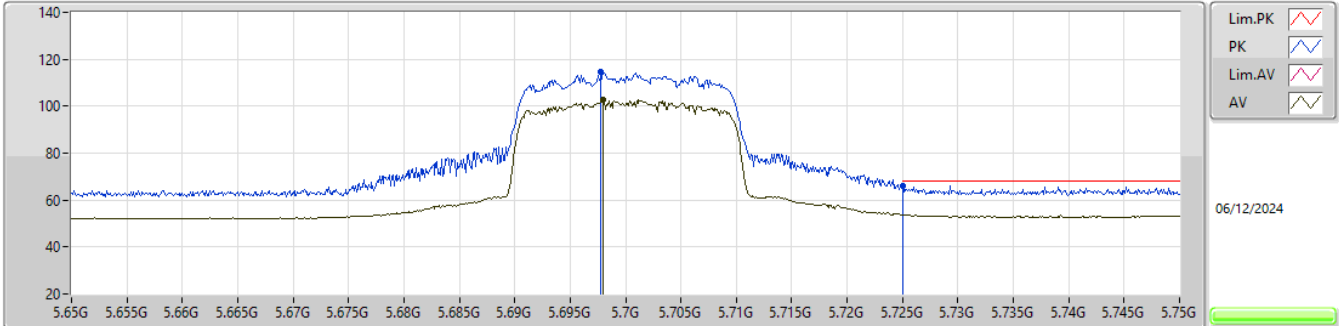


EUT_X_2TX
Setting 16.75
02-R-M-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6978G	114.84	Inf	-Inf	103.81	3	Vertical	246	2.59	-	34.00	7.71	30.68			
AV	5.698G	102.76	Inf	-Inf	91.73	3	Vertical	246	2.59	-	34.00	7.71	30.68			
PK	5.725G	66.23	68.20	-1.97	55.18	3	Vertical	246	2.59	-	34.00	7.73	30.68			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

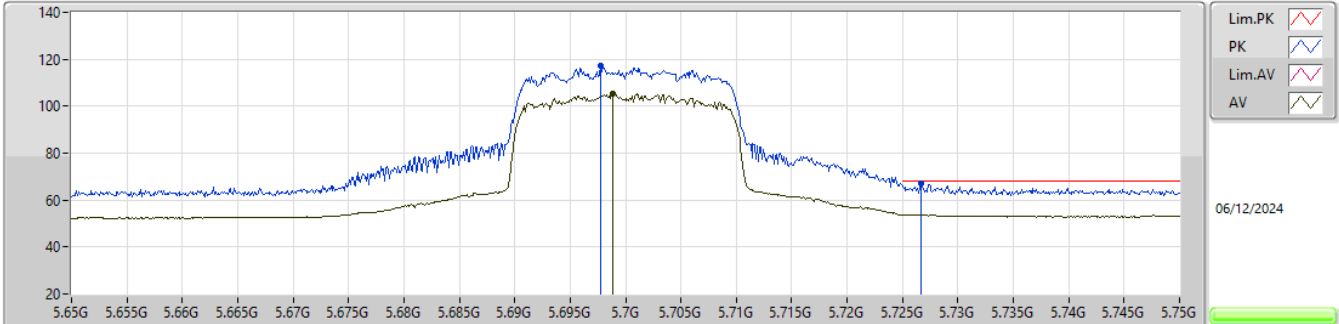


EUT_X_2TX
Setting 16.75
02-R-M-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6978G	117.45	Inf	-Inf	106.42	3	Horizontal	304	2.32	-	34.00	7.71	30.68			
AV	5.6988G	105.40	Inf	-Inf	94.37	3	Horizontal	304	2.32	-	34.00	7.71	30.68			
PK	5.7267G	67.18	68.20	-1.02	56.13	3	Horizontal	304	2.32	-	34.00	7.73	30.68			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5700MHz_TX

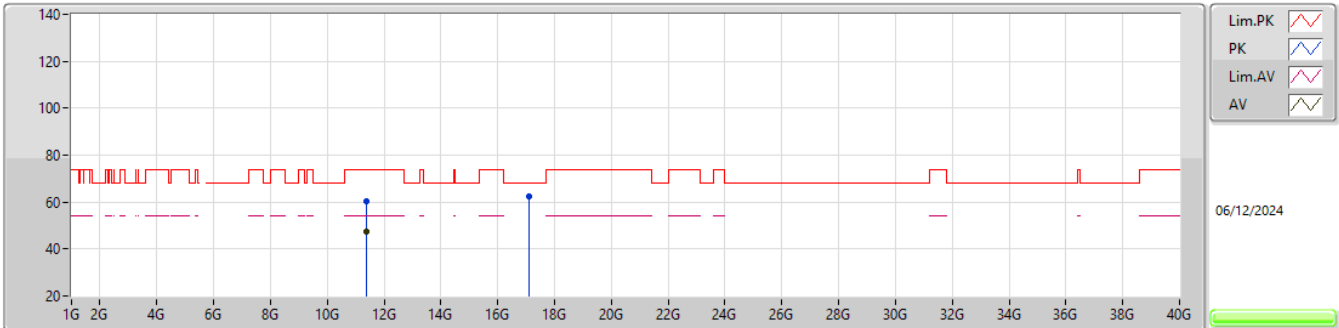EUT X_2TX
Setting 16.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40126G	60.50	74.00	-13.50	40.66	3	Vertical	251	2.11	-	38.80	11.70	30.66			
AV	11.39884G	47.33	54.00	-6.67	27.49	3	Vertical	251	2.11	-	38.80	11.70	30.66			
PK	17.1045G	62.57	68.20	-5.63	40.81	3	Vertical	220	1.85	-	41.53	12.39	32.16			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

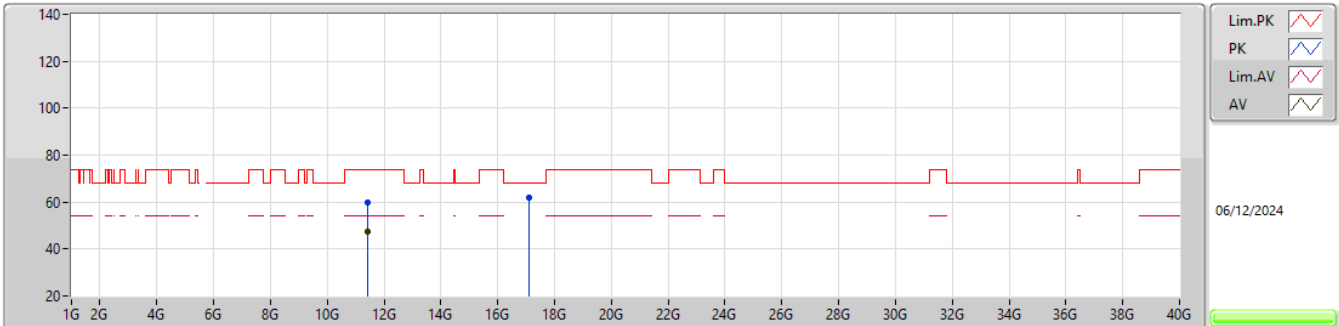


EUT_X_2TX
Setting 16.75
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40474G	59.73	74.00	-14.27	39.89	3	Horizontal	1	1.82	-	38.81	11.70	30.67			
AV	11.4048G	47.35	54.00	-6.65	27.51	3	Horizontal	1	1.82	-	38.81	11.70	30.67			
PK	17.09444G	61.92	68.20	-6.28	40.19	3	Horizontal	280	1.44	-	41.49	12.39	32.15			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

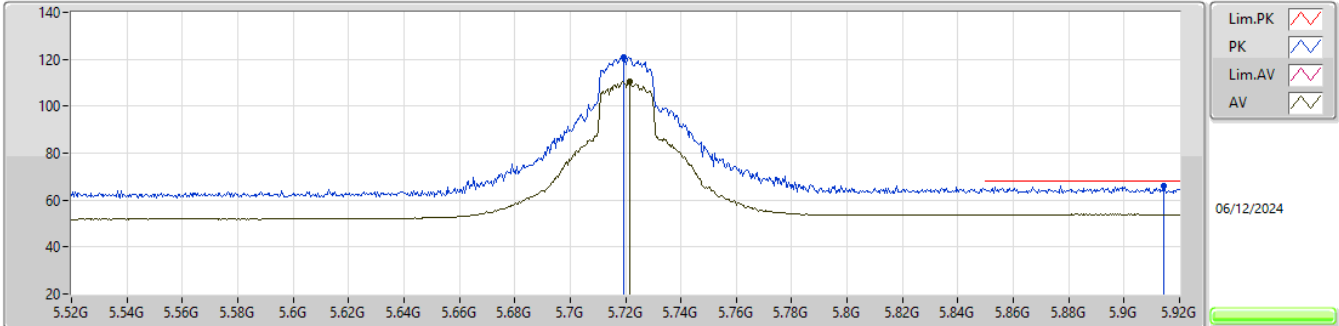


EUT_X_2TX
Setting 23
02-R-M-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7192G	120.90	Inf	-Inf	109.85	3	Vertical	85	1.18	-	34.00	7.73	30.68				
AV	5.7216G	110.50	Inf	-Inf	99.45	3	Vertical	85	1.18	-	34.00	7.73	30.68				
PK	5.9144G	65.96	68.20	-2.24	54.52	3	Vertical	85	1.18	-	34.20	7.87	30.63				

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

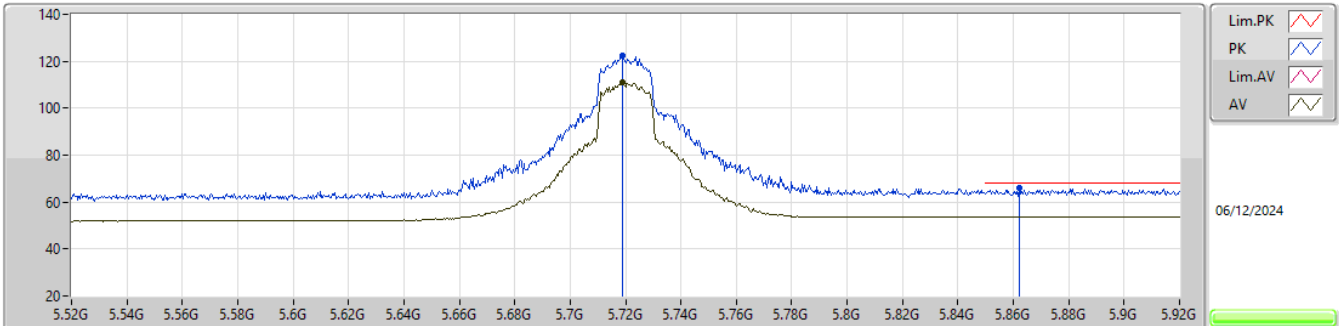EUT X_2TX
Setting 23
02-R-M-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7188G	122.21	Inf	-Inf	111.16	3	Horizontal	310	2.39	-	34.00	7.73	30.68				
AV	5.7188G	110.99	Inf	-Inf	99.94	3	Horizontal	310	2.39	-	34.00	7.73	30.68				
PK	5.862G	65.93	68.20	-2.27	54.68	3	Horizontal	310	2.39	-	34.05	7.84	30.64				

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

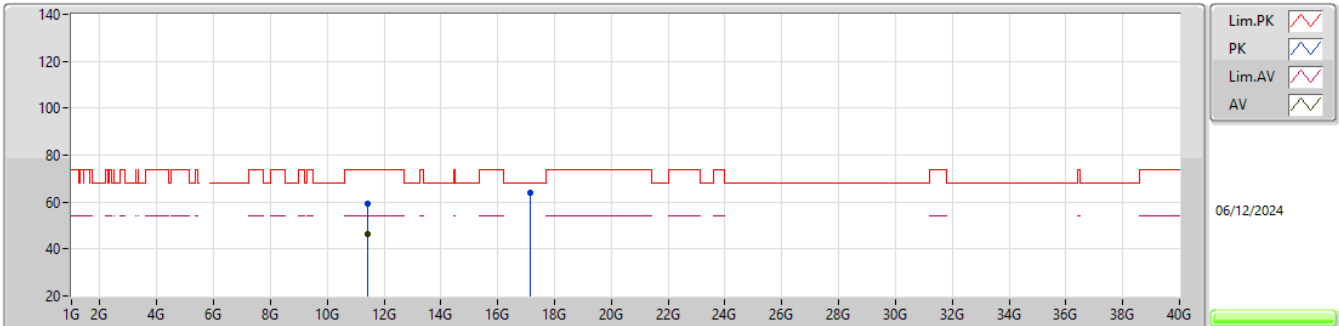EUT X_2TX
Setting 16.5
02-R-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43126G	59.26	74.00	-14.74	39.36	3	Vertical	39	1.75	-	38.86	11.72	30.68			
AV	11.43178G	46.62	54.00	-7.38	26.72	3	Vertical	39	1.75	-	38.86	11.72	30.68			
PK	17.16358G	63.90	68.20	-4.30	41.81	3	Vertical	176	1.92	-	41.85	12.42	32.18			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

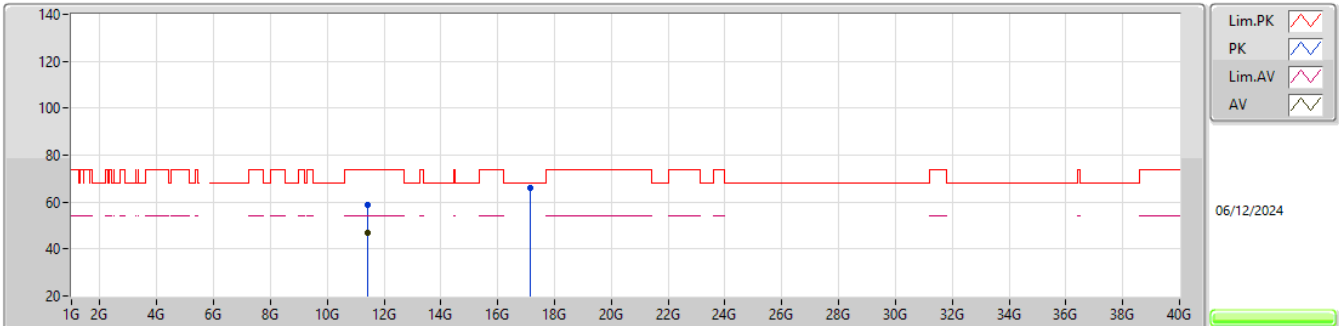EUT_X_2TX
Setting 16.5
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4358G	58.61	74.00	-15.39	38.70	3	Horizontal	257	2.85	-	38.87	11.72	30.68			
AV	11.43132G	46.73	54.00	-7.27	26.83	3	Horizontal	257	2.85	-	38.86	11.72	30.68			
PK	17.16272G	66.09	68.20	-2.11	44.00	3	Horizontal	282	3.00	-	41.85	12.42	32.18			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5510MHz_TX

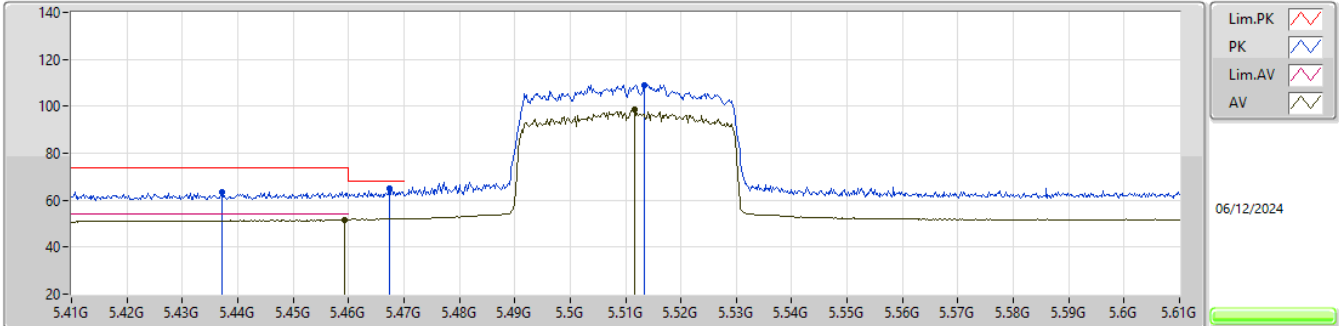


EUT_X_2TX
Setting 14
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4372G	63.58	74.00	-10.42	53.27	3	Vertical	85	1.03	-	34.00	7.08	30.77			
PK	5.4674G	65.11	68.20	-3.09	54.65	3	Vertical	85	1.03	-	34.03	7.18	30.75			
AV	5.4592G	51.58	54.00	-2.42	41.15	3	Vertical	85	1.03	-	34.02	7.16	30.75			
PK	5.5134G	109.09	Inf	-Inf	98.42	3	Vertical	85	1.03	-	34.07	7.33	30.73			
AV	5.5116G	98.69	Inf	-Inf	88.01	3	Vertical	85	1.03	-	34.08	7.33	30.73			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5510MHz_TX

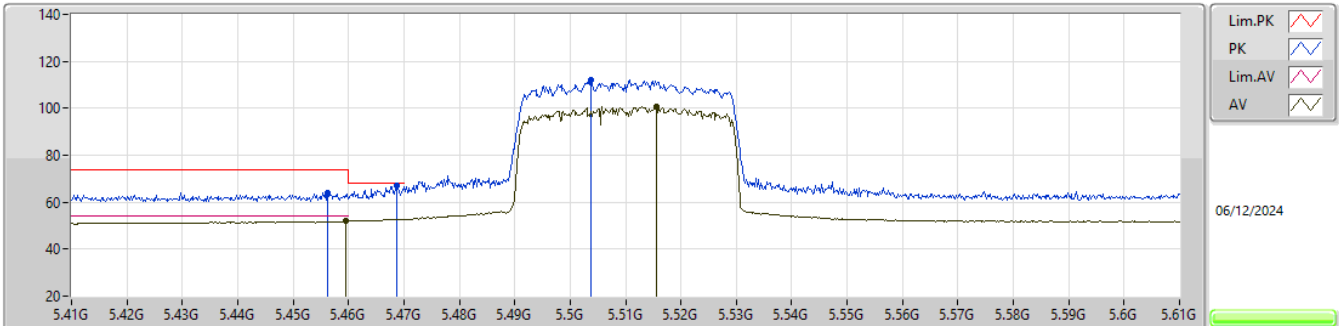


EUT_X_2TX
Setting 14
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4562G	63.92	74.00	-10.08	53.51	3	Horizontal	305	2.31	-	34.01	7.15	30.75			
AV	5.4596G	51.82	54.00	-2.18	41.39	3	Horizontal	305	2.31	-	34.02	7.16	30.75			
PK	5.4688G	66.97	68.20	-1.23	56.49	3	Horizontal	305	2.31	-	34.04	7.19	30.75			
PK	5.5038G	111.98	Inf	-Inf	101.32	3	Horizontal	305	2.31	-	34.09	7.30	30.73			
AV	5.5156G	100.92	Inf	-Inf	90.24	3	Horizontal	305	2.31	-	34.07	7.34	30.73			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5510MHz_TX

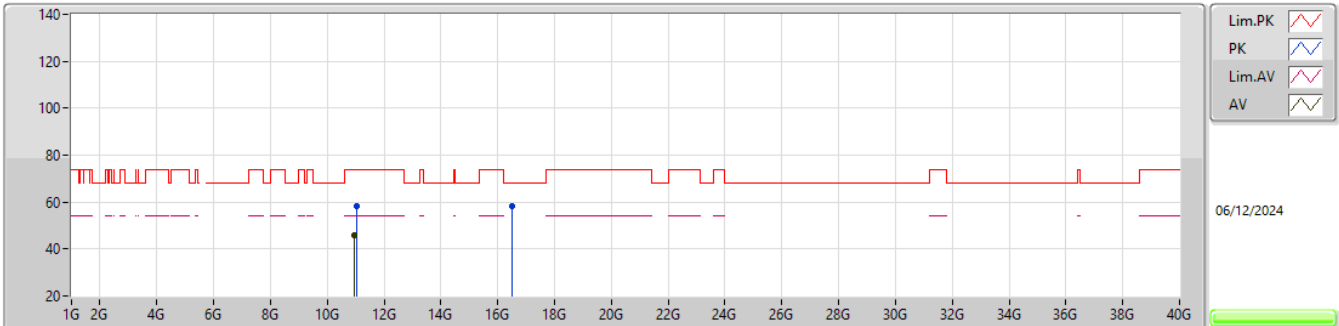EUT_X_2TX
Setting 14
02-R-M-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0464G	58.31	74.00	-15.69	38.74	3	Vertical	298	1.92	-	38.60	11.47	30.50			
AV	10.97G	46.12	54.00	-7.88	26.57	3	Vertical	298	1.92	-	38.60	11.43	30.48			
PK	16.5178G	58.49	68.20	-9.71	39.48	3	Vertical	274	2.38	-	38.94	12.12	32.05			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5510MHz_TX

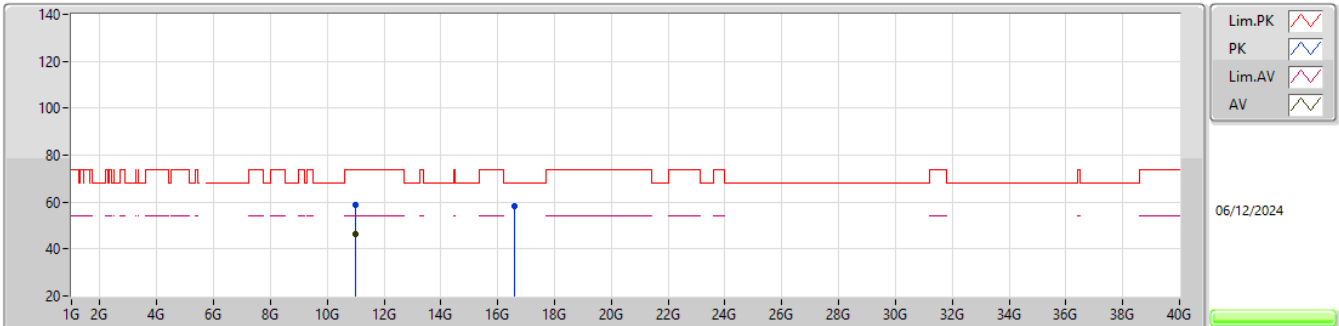EUT X_2TX
Setting 14
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.98G	58.69	74.00	-15.31	39.14	3	Horizontal	292	2.74	-	38.60	11.43	30.48				
AV	10.9798G	46.16	54.00	-7.84	26.61	3	Horizontal	292	2.74	-	38.60	11.43	30.48				
PK	16.5754G	58.49	68.20	-9.71	39.01	3	Horizontal	311	2.83	-	39.40	12.14	32.06				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

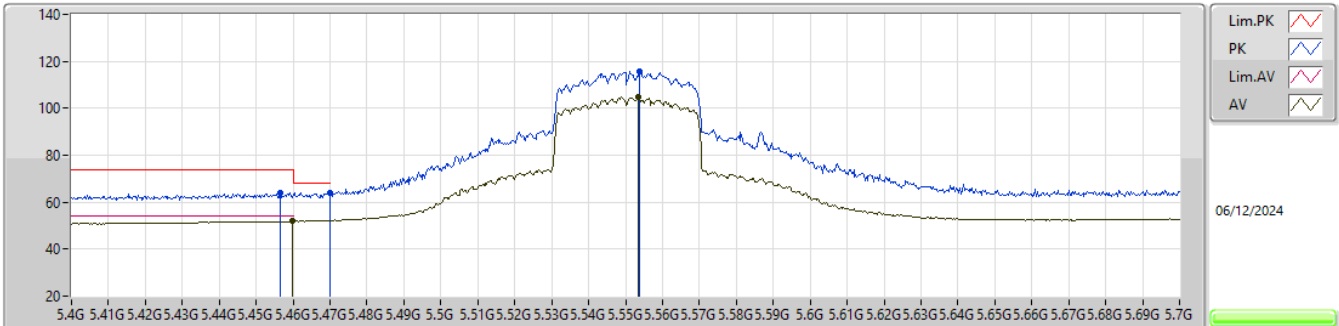


EUT_X_2TX
Setting 19.25
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4564G	63.92	74.00	-10.08	53.51	3	Vertical	82	1.24	-	34.01	7.15	30.75			
AV	5.4597G	51.82	54.00	-2.18	41.39	3	Vertical	82	1.24	-	34.02	7.16	30.75			
PK	5.4699G	63.97	68.20	-4.23	53.49	3	Vertical	82	1.24	-	34.04	7.19	30.75			
PK	5.5539G	115.79	Inf	-Inf	105.04	3	Vertical	82	1.24	-	34.00	7.47	30.72			
AV	5.5536G	104.88	Inf	-Inf	94.13	3	Vertical	82	1.24	-	34.00	7.47	30.72			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

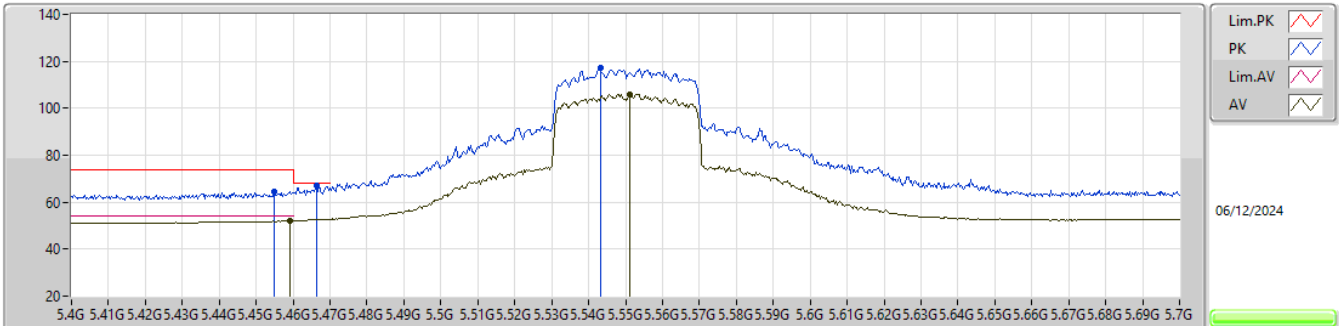


EUT_X_2TX
Setting 19.25
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4549G	64.58	74.00	-9.42	54.19	3	Horizontal	305	2.19	-	34.01	7.14	30.76			
AV	5.4591G	52.06	54.00	-1.94	41.63	3	Horizontal	305	2.19	-	34.02	7.16	30.75			
PK	5.4663G	66.90	68.20	-1.30	56.44	3	Horizontal	305	2.19	-	34.03	7.18	30.75			
PK	5.5431G	117.38	Inf	-Inf	106.66	3	Horizontal	305	2.19	-	34.01	7.43	30.72			
AV	5.5512G	105.99	Inf	-Inf	95.25	3	Horizontal	305	2.19	-	34.00	7.46	30.72			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

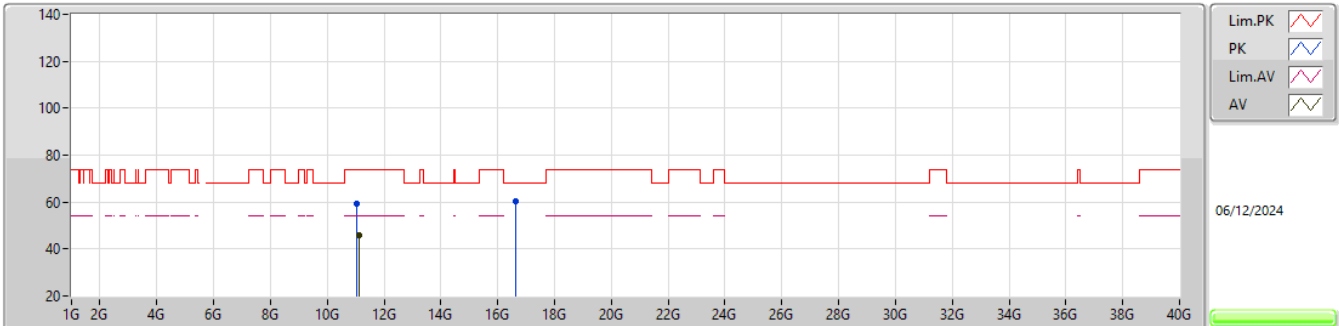


EUT_X_2TX
Setting 18.75
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.0535G	59.16	74.00	-14.84	39.58	3	Vertical	124	1.26	-	38.60	11.48	30.50			
AV	11.1178G	45.76	54.00	-8.24	26.17	3	Vertical	124	1.26	-	38.60	11.52	30.53			
PK	16.6403G	60.12	68.20	-8.08	40.26	3	Vertical	16	2.47	-	39.76	12.17	32.07			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5550MHz_TX

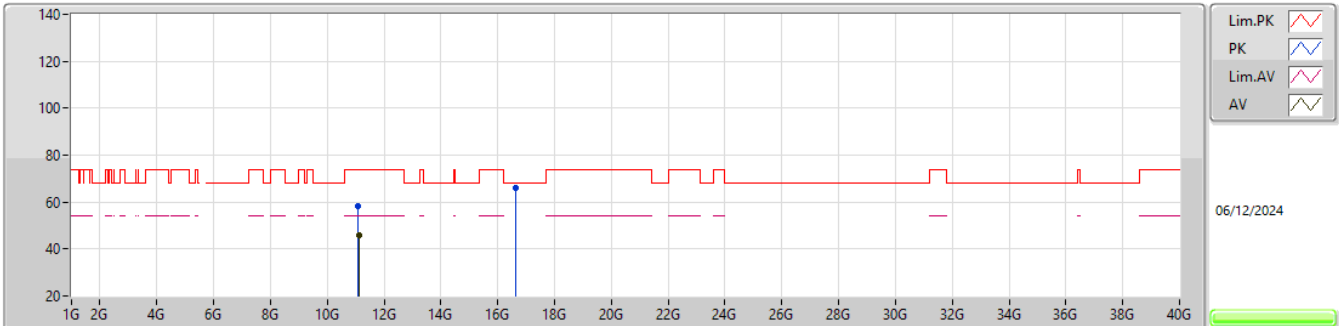EUT X_2TX
Setting 18.75
02-R-M-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.0879G	58.17	74.00	-15.83	38.59	3	Horizontal	236	1.80	-	38.60	11.50	30.52				
AV	11.1359G	45.82	54.00	-8.18	26.23	3	Horizontal	236	1.80	-	38.60	11.53	30.54				
PK	16.647G	66.03	68.20	-2.17	46.13	3	Horizontal	290	2.33	-	39.79	12.18	32.07				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5670MHz_TX

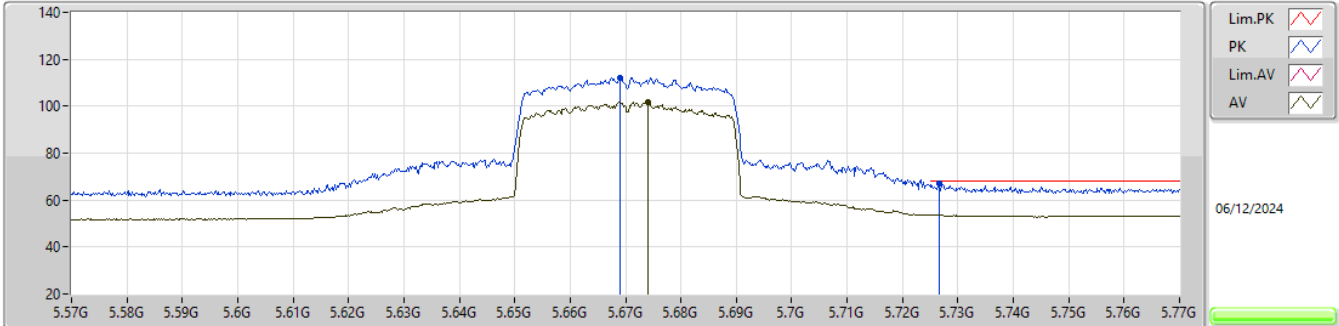


EUT_X_2TX
Setting 16
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.669G	112.05	Inf	-Inf	101.06	3	Vertical	84	1.24	-	34.00	7.68	30.69			
AV	5.674G	101.72	Inf	-Inf	90.72	3	Vertical	84	1.24	-	34.00	7.69	30.69			
PK	5.7266G	66.93	68.20	-1.27	55.88	3	Vertical	84	1.24	-	34.00	7.73	30.68			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5670MHz_TX

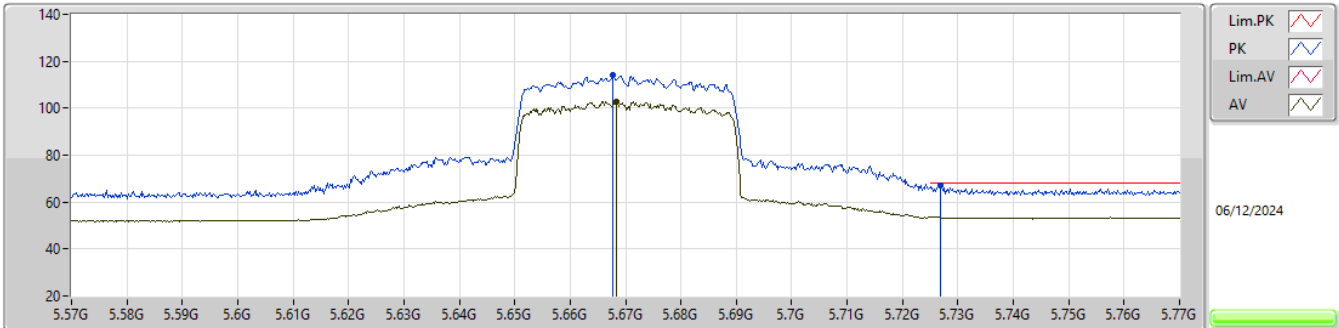EUT_X_2TX
Setting 16
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6678G	114.24	Inf	-Inf	103.25	3	Horizontal	302	2.35	-	34.00	7.68	30.69			
AV	5.6684G	102.83	Inf	-Inf	91.84	3	Horizontal	302	2.35	-	34.00	7.68	30.69			
PK	5.7268G	67.04	68.20	-1.16	55.99	3	Horizontal	302	2.35	-	34.00	7.73	30.68			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5670MHz_TX

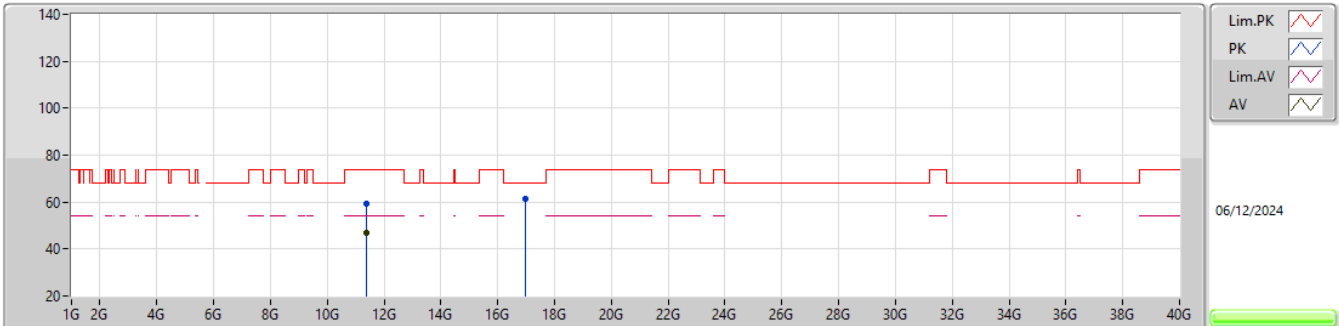


EUT_X_2TX
Setting 16
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.3762G	59.26	74.00	-14.74	39.48	3	Vertical	240	1.29	-	38.75	11.68	30.65			
AV	11.3889G	47.08	54.00	-6.92	27.27	3	Vertical	240	1.29	-	38.78	11.69	30.66			
PK	16.9945G	61.55	68.20	-6.65	39.95	3	Vertical	14	2.95	-	41.38	12.34	32.12			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5670MHz_TX

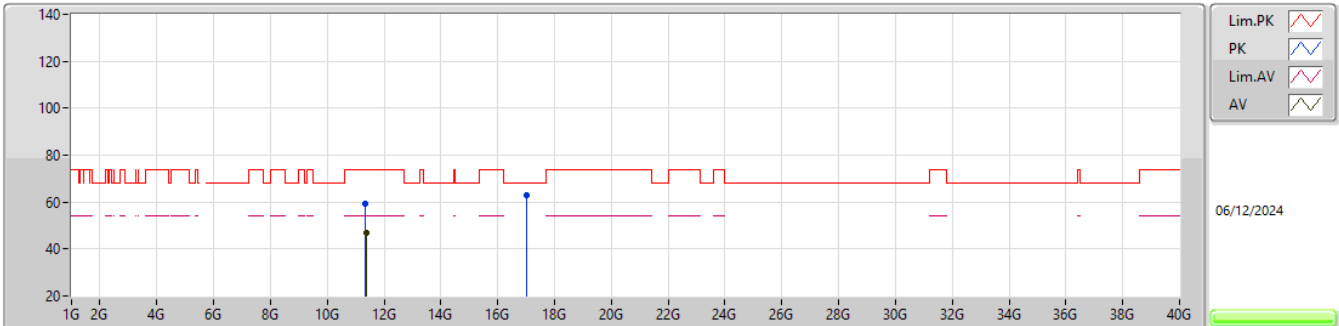EUT_X_2TX
Setting 16
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.3326G	59.42	74.00	-14.58	39.69	3	Horizontal	86	1.07	-	38.70	11.66	30.63			
AV	11.3727G	47.10	54.00	-6.90	27.32	3	Horizontal	86	1.07	-	38.75	11.68	30.65			
PK	17.0286G	62.87	68.20	-5.33	41.24	3	Horizontal	295	2.96	-	41.40	12.36	32.13			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

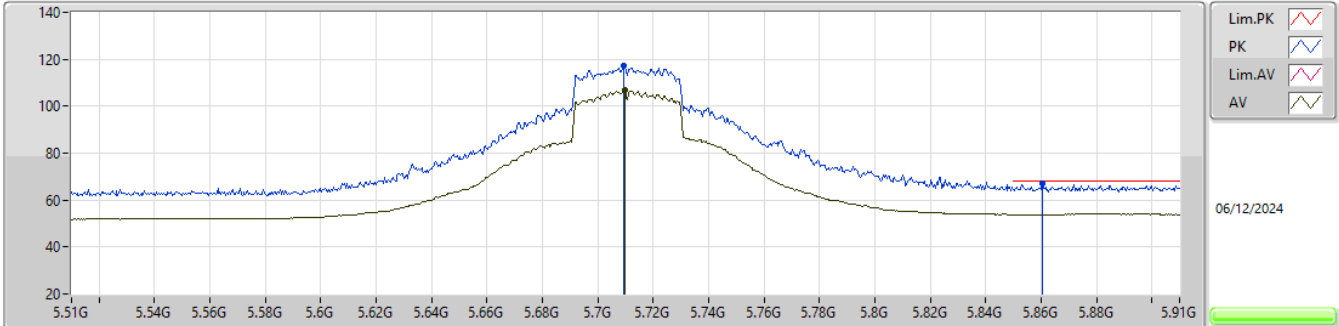


EUT_X_2TX
Setting 23
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.7092G	117.25	Inf	-Inf	106.21	3	Vertical	86	1.26	-	34.00	7.72	30.68				
AV	5.7096G	106.67	Inf	-Inf	95.63	3	Vertical	86	1.26	-	34.00	7.72	30.68				
PK	5.8604G	67.06	68.20	-1.14	55.82	3	Vertical	86	1.26	-	34.04	7.84	30.64				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

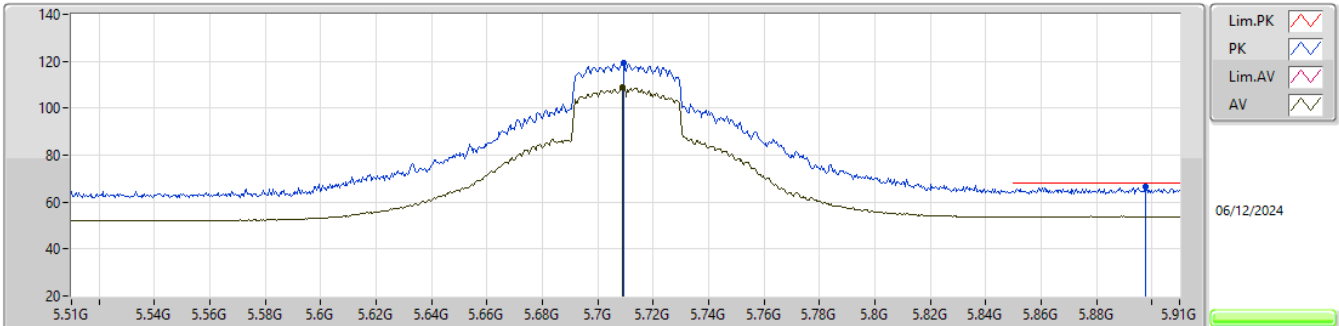


EUT_X_2TX
Setting 23
02-R-M-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7092G	119.24	Inf	-Inf	108.20	3	Horizontal	303	2.30	-	34.00	7.72	30.68			
AV	5.7088G	108.83	Inf	-Inf	97.79	3	Horizontal	303	2.30	-	34.00	7.72	30.68			
PK	5.8976G	66.50	68.20	-1.70	55.08	3	Horizontal	303	2.30	-	34.19	7.86	30.63			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

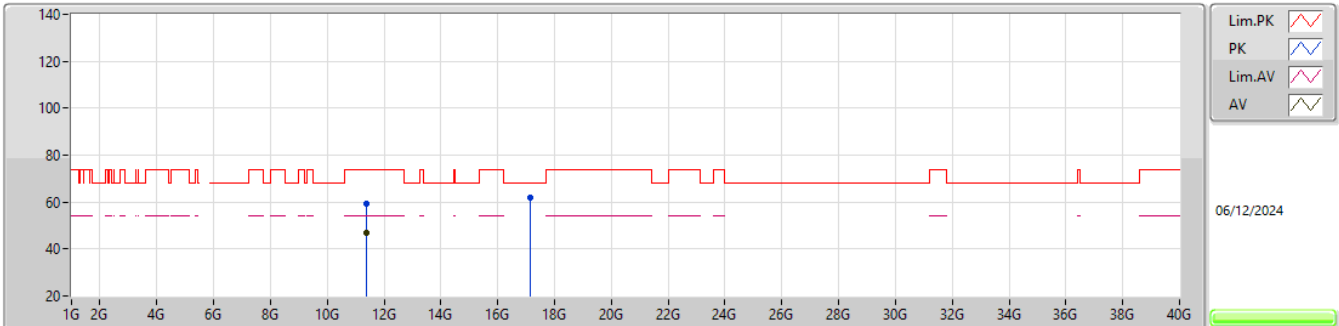EUT_X_2TX
Setting 17.75
02-R-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.3863G	59.09	74.00	-14.91	39.29	3	Vertical	24	2.03	-	38.77	11.69	30.66			
AV	11.3973G	47.12	54.00	-6.88	27.29	3	Vertical	24	2.03	-	38.79	11.70	30.66			
PK	17.1478G	61.99	68.20	-6.21	39.95	3	Vertical	202	1.71	-	41.79	12.42	32.17			