



Test Report

Product Name : Dual-band Wireless-N Adapter
Model No. : USB-N66
FCC ID. : MSQ-USBN66

Applicant : ASUSTeK COMPUTER INC.

Address : No. 15, Li-Te Rd., Peitou, Taipei 112, Taiwan R.O.C.

Date of Receipt : 2012/02/04
Issued Date : 2012/03/16
Report No. : 122109R-RFUSP46V01
Report Version : V1.0

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

Test Report Certification

Issued Date : 2012/03/16

Report No. : 122109R-RFUSP46V01



Product Name : Dual-band Wireless-N Adapter
 Applicant : ASUSTeK COMPUTER INC.
 Address : No. 15, Li-Te Rd., Peitou, Taipei 112, Taiwan R.O.C.
 Manufacturer : ASUSTeK COMPUTER INC.
 Model No. : USB-N66
 FCC ID. : MSQ-USBN66
 EUT Voltage : DC 5V (Power by PC)
 Trade Name : ASUS
 Applicable Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.407:2010
 ANSI C63.4: 2009
 Test Result : Complied

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

Documented By : 

 (Carol Tsai / Adm. Specialist)

Reviewed By : 

 (Chris Liu / Engineer)

Approved By : 

 (Roy Wang / Manager)

TABLE OF CONTENTS

Description	Page
1. General Information.....	5
1.1. EUT Description	5
1.2. Operational Description.....	10
1.3. Test Mode.....	11
1.4. Tested System Details.....	12
1.5. Configuration of tested System	13
1.6. EUT Exercise Software	14
1.7. Test Facility	15
2. Conducted Emission	17
2.1. Test Equipment	17
2.2. Test Setup	17
2.3. Limits.....	18
2.4. Test Procedure	18
2.5. Test Specification	18
2.6. Uncertainty	18
2.7. Test Result	19
2.8. Test Photo	21
3. 99% & 26dB Bandwidth	22
3.1. Test Equipment	22
3.2. Test Setup	22
3.3. Limits.....	22
3.4. Test Procedure	22
3.5. Uncertainty	22
3.6. Test Result	23
4. Peak Transmit Output.....	41
4.1. Test Equipment	41
4.2. Test Setup	41
4.3. Limits.....	42
4.4. Test Procedure	42
4.5. Uncertainty	42
4.6. Test Result	43
5. Peak Power Spectrum Density	70
5.1. Test Equipment	70
5.2. Test Setup	70

5.3.	Limits	70
5.4.	Test Procedure	71
5.5.	Uncertainty	71
5.6.	Test Result	72
6.	Peak Excursion	92
6.1.	Test Equipment	92
6.2.	Test Setup	92
6.3.	Limits	92
6.4.	Test Procedure	92
6.5.	Uncertainty	92
6.6.	Test Result	93
7.	Radiated Emission.....	111
7.1.	Test Equipment	111
7.2.	Test Setup	111
7.3.	Limits	112
7.4.	Test Procedure	113
7.5.	Uncertainty	113
7.6.	Test Result	114
7.7.	Test Photo	138
8.	Band Edge	140
8.1.	Test Equipment	140
8.2.	Test Setup	140
8.3.	Limits	141
8.4.	Test Procedure	142
8.5.	Uncertainty	142
8.6.	Test Result	143
9.	Frequency Stability.....	155
9.1.	Test Equipment	155
9.2.	Test Setup	155
9.3.	Limits	155
9.4.	Test Procedure	155
9.5.	Uncertainty	155
9.6.	Test Result	156
	Attachement	170
	EUT Photograph	170

1. General Information

1.1. EUT Description

Product Name	Dual-band Wireless-N Adapter
Product Type	WLAN (3TX, 3RX)
Trade Name	ASUS
Model No.	USB-N66
Frequency Range -IEEE 802.11a & IEEE 802.11n (20MHz)	5180~5240MHz
Frequency Range- IEEE 802.11n (40MHz)	5190~5230MHz
Channel Number - IEEE 802.11a & IEEE 802.11n (20MHz))	4
Channel Number- IEEE 802.11n (40MHz)	2
Type of Modulation (IEEE 802.11a/n)	Orthogonal Frequency Division Multiplexing (OFDM)
Data Speed (IEEE 802.11a)	6Mbps,9Mbps,12Mbps,18Mbps,24Mbps,36Mbps,48Mbps,54Mbps
Data Speed (IEEE 802.11n)	Support a subset of the combination of GI, MCS 0~MCS 23 and bandwidth defined in 802.11n
Antenna Gain	4dBi
Channel Control	AUTO/Manual
Antenna Type	Dual band dipole antenna

Component	
USB Cable	Shielded, 0.5m

IEEE 802.11n

MCS Index	Modulation	R	N _{BPSCS}	N _{CBPS}		N _{DBPS}		Data Rate(Mb/s)			
				20MHz	40MHz	20MHz	40MHz	800ns GI		400ns GI (Note1)	
								20MHz	40MHz	20MHz	40MHz
0	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.2	15.0
1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.4	30.0
2	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.7	45.0
3	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.9	60.0
4	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.3	90.0
5	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.8	120.0
6	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.0	135.0
7	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.2	150.0

Note 1: Support of 400ns GI is optional on transmit and receive.

Table 1 – MCS parameters for TX Antenna number = 1

MCS Index	Modulation	R	N _{BPSCS}	N _{CBPS}		N _{DBPS}		Data Rate(Mb/s)			
				20MHz	40MHz	20MHz	40MHz	800ns GI		400ns GI (Note1)	
								20MHz	40MHz	20MHz	40MHz
8	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.4	30.0
9	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.9	60.0
10	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.3	90.0
11	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.8	120.0
12	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.7	180.0
13	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.6	240.0
14	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.0	270.0
15	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.4	300.0

Note 1: Support of 400ns GI is optional on transmit and receive.

Table 2 – MCS parameters for TX Antenna number = 2

MCS Index	Modulation	R	N _{BPSCS}	N _{CBPS}		N _{DBPS}		Data Rate(Mb/s)			
				20MHz	40MHz	20MHz	40MHz	800ns GI		400ns GI (Note1)	
								20MHz	40MHz	20MHz	40MHz
16	BPSK	1/2	1	156	324	78	162	19.5	40.5	21.7	45.0
17	QPSK	1/2	2	312	648	156	324	39.0	81.0	43.3	90.0
18	QPSK	3/4	2	312	648	234	486	58.5	121.5	65.0	135.0
19	16-QAM	1/2	4	624	1296	312	648	78.0	162.0	86.7	180.0
20	16-QAM	3/4	4	624	1296	468	972	117.0	243.0	130.0	270.0
21	64-QAM	2/3	6	936	1944	624	1296	156.0	324.0	173.3	360.0
22	64-QAM	3/4	6	936	1944	702	1458	175.5	364.5	195.0	405.0
23	64-QAM	5/6	6	936	1944	780	1620	195.0	405.0	216.7	450.0

Note 1: Support of 400ns GI is optional on transmit and receive.

Table 3 – MCS parameters for TX Antenna number = 3

Symbol	Explanation
R	Code rate
N _{BPSC}	Number of coded bits per single carrier
N _{CBPS}	Number of coded bits per symbol
N _{DBPS}	Number of data bits per symbol
GI	guard interval

IEEE 802.11a & IEEE 802.11n (20MHz)

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	40	5200MHz	44	5220MHz	48	5240MHz

IEEE 802.11n (40MHz)

Working Frequency of Each Channel			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz

Note:

1. This device is a Dual-band Wireless-N Adapter including 2.4GHz b/g/n and 5GHz a/n (3x3) transmitting and receiving function.
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.407.
3. Regards to the frequency band operation; the lowest , middle and highest frequency of channel were selected to perform the test, and then shown on this report.
4. The function of the 2.4GHz & 5.8GHz transmitting is measured and makes a test report of the report number: 122109R-RFUSP42V01.
5. This device is a composite device in accordance with Part 15 regulations. The receiving function receiving was tested and its test report number is 122109R-RFUSP37V02 under Declaration of Conformity.

1.3. Test Mode

Quietek has verified the construction and function in typical operation. The preliminary tests were performed in different data rate, and to find the worst condition, which was shown in this test report. The following table is the final test mode.

TX	Mode 1: Transmit
----	------------------


Test Items	Mode	Channel	Antenna	Result
Conducted Emission	11n(40MHz)	38	0/1/2	Complies
99 % & 26dB Bandwidth	a	36/44/48	0	Complies
	11n(20MHz)	36/44/48	0/1/2	Complies
	11n(40MHz)	38/46	0/1/2	Complies
Peak Transmit Output	a	36/44/48	0	Complies
	11n(20MHz)	36/44/48	0+1+2	Complies
	11n(40MHz)	38/46	0+1+2	Complies
Peak Power Spectrum Density	a	36/44/48	0	Complies
	11n(20MHz)	36/44/48	0+1+2	Complies
	11n(40MHz)	38/46	0+1+2	Complies
Power Excursion	a	36/44/48	0	Complies
	11n(20MHz)	36/44/48	0/1/2	Complies
	11n(40MHz)	38/46	0/1/2	Complies
Radiated Emission (under1G)	a	36	0	Complies
	11n(20MHz)	36	0/1/2	Complies
	11n(40MHz)	38	0/1/2	Complies
Radiated Emission (above1G)	a	36/44/48	0	Complies
	11n(20MHz)	36/44/48	0/1/2	Complies
	11n(40MHz)	38/46	0/1/2	Complies
Band Edge	a	36	0	Complies
	11n(20MHz)	36	0/1/2	Complies
	11n(40MHz)	38	0/1/2	Complies
Frequency Stability	a	36/48	0	Complies
	11n(20MHz)	36/48	0/1/2	Complies
	11n(40MHz)	38/46	0/1/2	Complies

1.4. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC IC	Power Cord	
1	Notebook PC	DELL	PP37L	CD8BNG1	DoC	Non-Shielded, 1.8m
2	Monitor	CHI MEI	A170E1-09	3UC120954 XA0131	DoC	Non-Shielded, 1.8m
3	Notebook PC	HP	HSTNN-146C	CNU8253S 1X	DoC	Non-Shielded, 1.8m
4	Microphone & Earphone	TOKTO	SX-MI	N/A	DoC	--
5	USB 2.0 Flash Memory	Sony	USM2GJX	N/A	DoC	--

1.5. Configuration of tested System

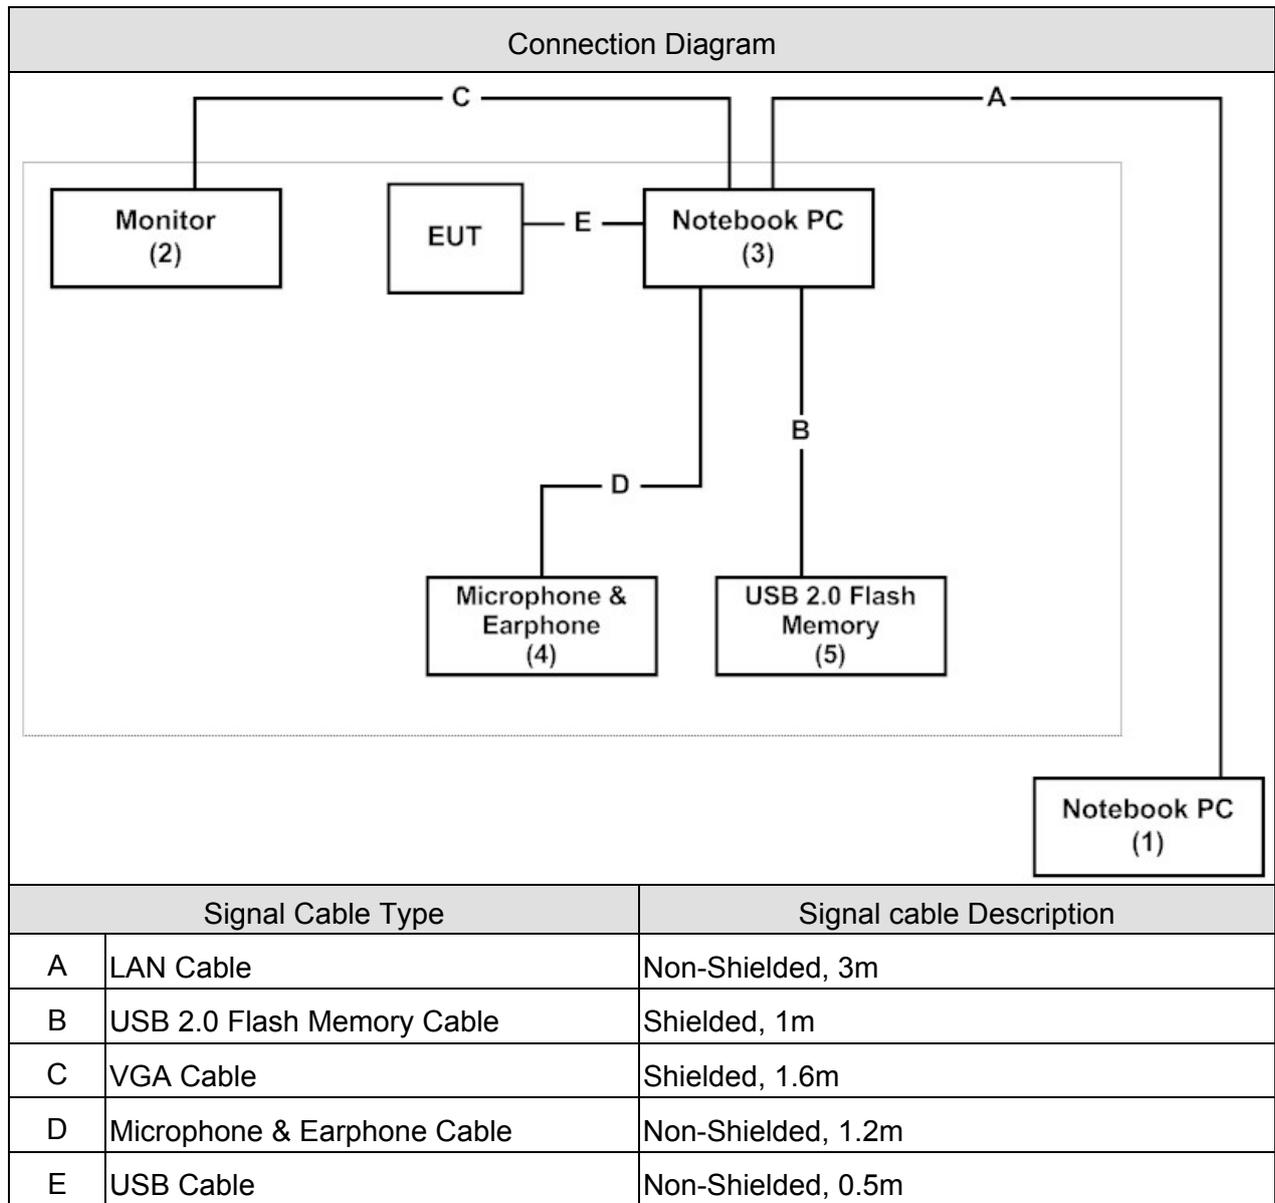

1.6. EUT Exercise Software

1	Setup the EUT as shown in Section 1.5.
2	Execute the "RT3573QA" program on the EUT.
3	Configure the test mode, the test channel, and the data rate.
4	Press "Start TX" to start the continuous transmitting.
5	Verify that the EUT works properly.

1.7. Test Facility

Ambient conditions in the laboratory:

Items	Test Item	Required (IEC 68-1)	Actual
Temperature (°C)	FCC PART 15 C 15.407 Conducted Emission	15 - 35	20
Humidity (%RH)		25 - 75	50
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.407 99 % & 26dB Bandwidth	15 - 35	25
Humidity (%RH)		25 - 75	45
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.407 Peal Transmit Power	15 - 35	25
Humidity (%RH)		25 - 75	45
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.407 Peak Power Spectrum	15 - 35	25
Humidity (%RH)		25 - 75	45
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.407 Density	15 - 35	25
Humidity (%RH)		25 - 75	45
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.407 Power Excursion	15 - 35	25
Humidity (%RH)		25 - 75	45
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.407 Radiated Emission	15 - 35	25
Humidity (%RH)		25 - 75	48
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.407 Band Edge	15 - 35	25
Humidity (%RH)		25 - 75	48
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.407 Frequency Stability	15 - 35	25
Humidity (%RH)		25 - 75	48
Barometric pressure (mbar)		860 - 1060	950-1000

Site Description: September 27, 2010 File on
Federal Communications Commission
Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 365520



Accredited by TAF
Accreditation Number: 1313
Effective through: December 27, 2013



Accredited by NVLAP
NVLAP Lab Code: 200347-0
Effective through: September 30, 2012



Site Name: Quietek Corporation
Site Address: No. 75-2, 3rd Lin, Wangye Keng, Yonghxing
Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan
TEL : 886-3-5928858 / FAX : 886-3-5928859
E-Mail : service@quietek.com

2. Conducted Emission

2.1. Test Equipment


The following test equipments are used during the test:

Conducted Emission / SR3

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
LISN	R&S	ENV216	100096	2012/09/06
LISN	R&S	ESH3-Z5	836679/022	2013/02/06
Test Receiver	R&S	ESCS 30	825442/017	2013/01/01

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

2.2. Test Setup

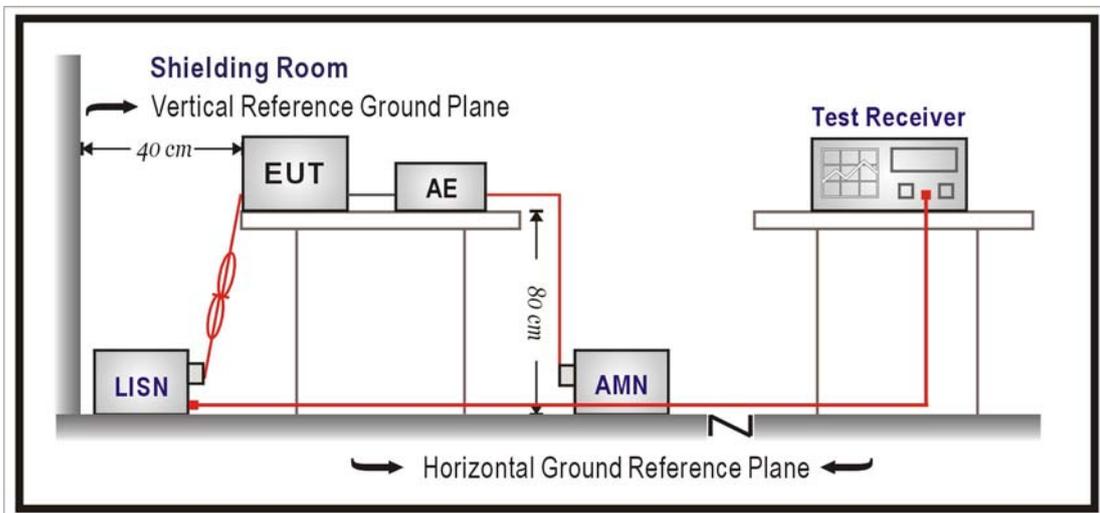

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 Limits (dBuV)		
Frequency MHz	QP	AV
0.15 - 0.50	66-56	56-46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT was setup according to ANSI C63.4: 2009 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs.) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

2.5. Test Specification


According to FCC Part 15 Subpart C Paragraph 15.207:2010

2.6. Uncertainty

The measurement uncertainty is defined as ± 2.26 dB.

2.7. Test Result

Site : SR3	Time : 2012/02/09 - 10:08
Limit : CISPR_B_00M_QP	Margin : 6
Probe : SR3_LISN(16A)-1_0907 - Line1	Power : AC 120V/60Hz
EUT : Dual-band Wireless-N Adapter	Note : 5.2G

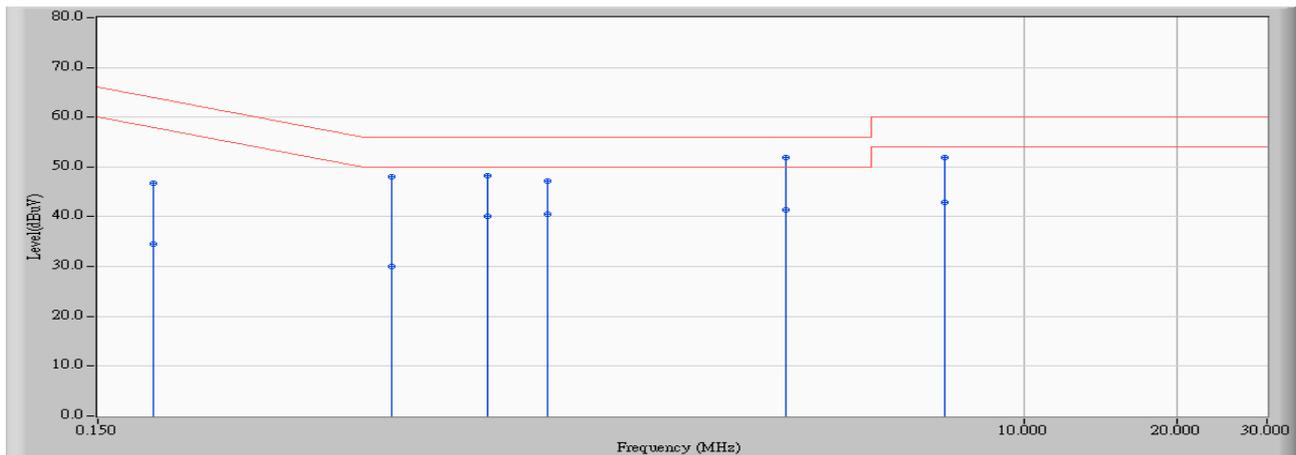


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type	
1	0.193	9.657	37.030	46.687	-17.221	63.908	QUASPEAK	
2	0.193	9.657	24.980	34.637	-19.271	53.908	AVERAGE	
3	0.568	9.712	38.340	48.052	-7.948	56.000	QUASPEAK	
4	0.568	9.712	20.330	30.042	-15.958	46.000	AVERAGE	
5	0.880	9.761	38.550	48.311	-7.689	56.000	QUASPEAK	
6	0.880	9.761	30.410	40.171	-5.829	46.000	AVERAGE	
7	1.150	9.803	37.430	47.232	-8.768	56.000	QUASPEAK	
8	1.150	9.803	30.770	40.572	-5.428	46.000	AVERAGE	
9	*	3.384	9.988	41.990	51.978	-4.022	56.000	QUASPEAK
10	3.384	9.988	31.370	41.358	-4.642	46.000	AVERAGE	
11	6.955	10.087	41.850	51.936	-8.064	60.000	QUASPEAK	
12	6.955	10.087	32.770	42.856	-7.144	50.000	AVERAGE	

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SR3	Time : 2012/02/09 - 10:12
Limit : CISPR_B_00M_QP	Margin : 6
Probe : SR3_LISN(16A)-1_0907 - Line2	Power : AC 120V/60Hz
EUT : Dual-band Wireless-N Adapter	Note : 5.2G

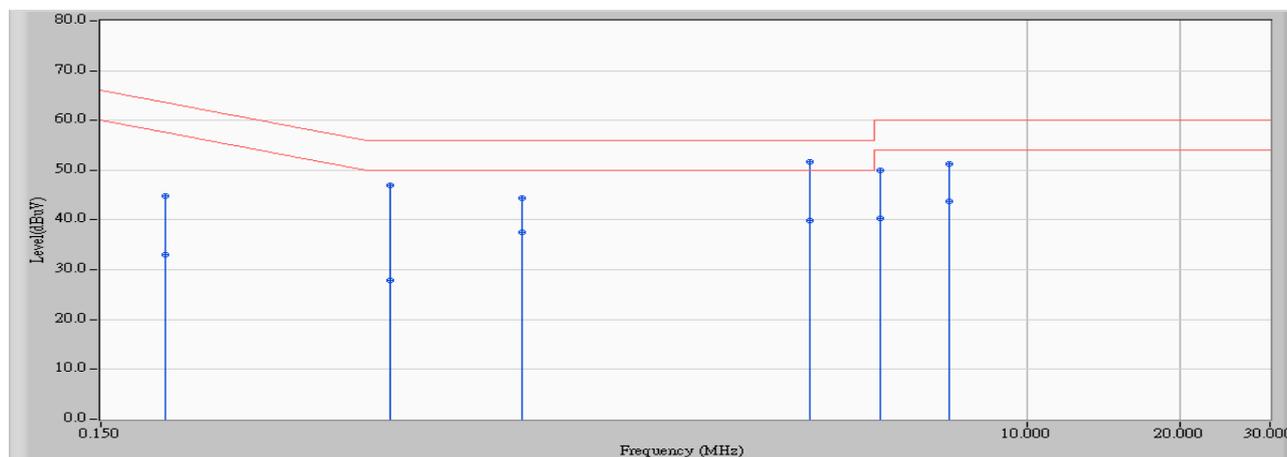

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	0.201	9.668	35.070	44.738	-18.840	63.578	QUASPEAK
2	0.201	9.668	23.430	33.098	-20.480	53.578	AVERAGE
3	0.556	9.718	37.190	46.908	-9.092	56.000	QUASPEAK
4	0.556	9.718	18.230	27.948	-18.052	46.000	AVERAGE
5	1.013	9.782	34.590	44.372	-11.628	56.000	QUASPEAK
6	1.013	9.782	27.670	37.452	-8.548	46.000	AVERAGE
7	* 3.724	10.019	41.730	51.749	-4.251	56.000	QUASPEAK
8	3.724	10.019	29.790	39.809	-6.191	46.000	AVERAGE
9	5.123	10.088	39.920	50.008	-9.992	60.000	QUASPEAK
10	5.123	10.088	30.190	40.278	-9.722	50.000	AVERAGE
11	6.998	10.127	41.170	51.297	-8.703	60.000	QUASPEAK
12	6.998	10.127	33.530	43.657	-6.343	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

3. 99% & 26dB Bandwidth

3.1. Test Equipment


The following test equipments are used during the radiated emission tests:

99% & 26dB Bandwidth / SR7

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Spectrum Analyzer	R&S	FSP	100561	2013/02/19

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

3.2. Test Setup

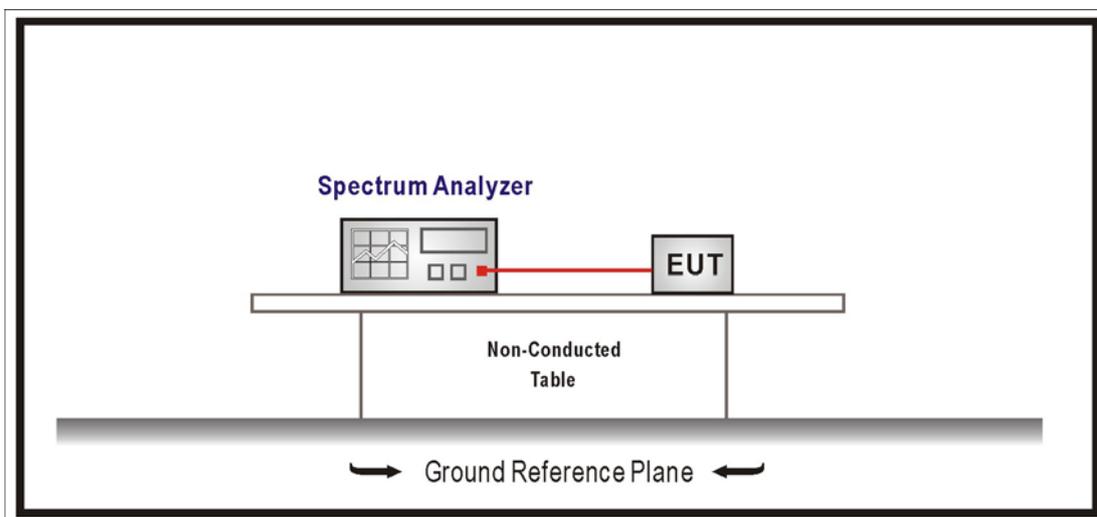

3.3. Limits

No Required

3.4. Test Procedure

The EUT was tested according to U-NII test procedure of March 2012 KDB 789033. Set RBW 1% of the emission bandwidth, VBW equal to 3 times the RBW.

3.5. Uncertainty

The measurement uncertainty is defined as $\pm 150\text{Hz}$

3.6. Test Result


Product	Dual-band Wireless-N Adapter		
Test Item	99% & 26dB Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

802.11a					
Channel No.	Frequency (MHz)	26dB BW (MHz)	99 % OBW (MHz)	Required Limit (MHz)	Result
36	5180	20.36	16.90	--	PASS
44	5220	20.39	17.13	--	PASS
48	5240	19.65	16.78	--	PASS

99% & 26dB Bandwidth – Channel 36



99% & 26dB Bandwidth – Channel 44

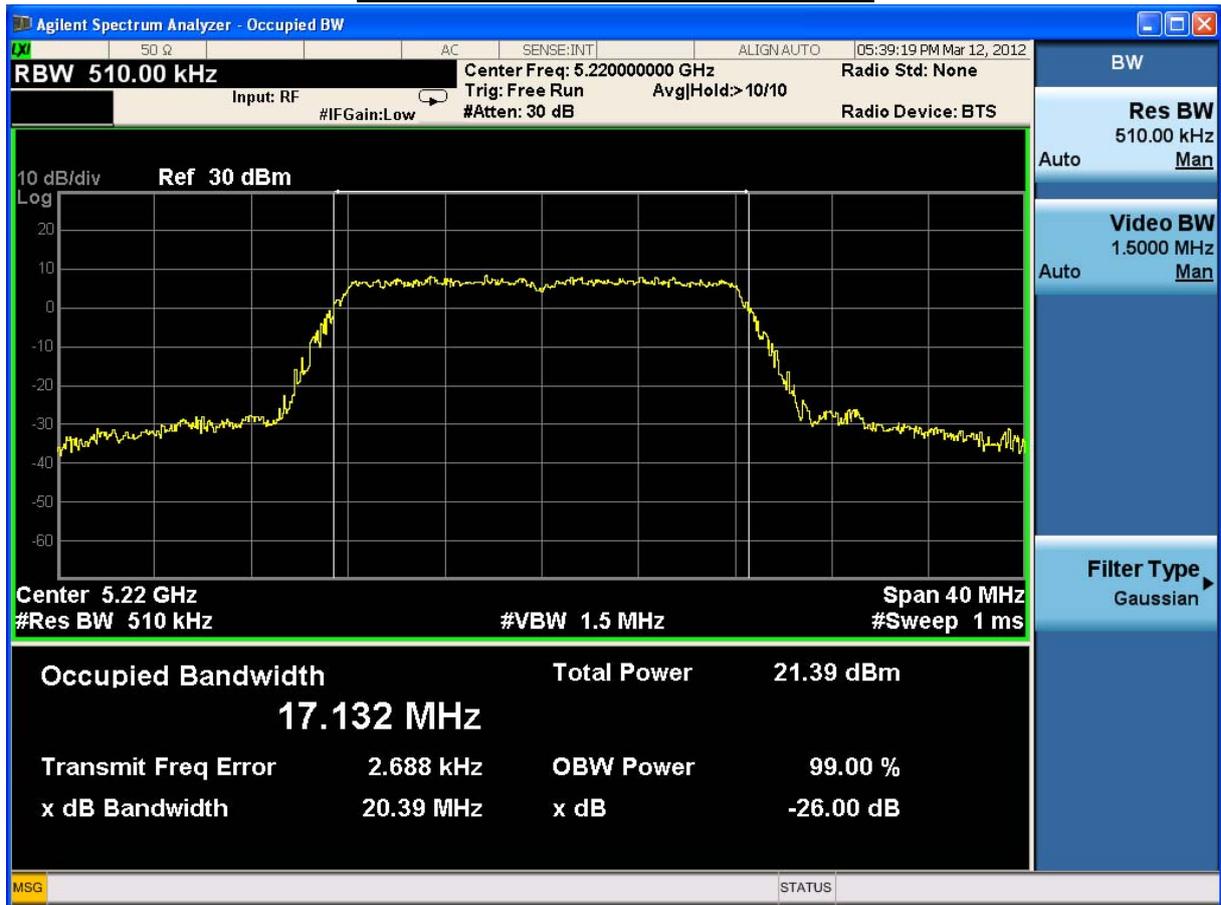


99% & 26dB Bandwidth – Channel 48



Product	Dual-band Wireless-N Adapter		
Test Item	99% & 26dB Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

802.11n_20M(ANT 0)					
Channel No.	Frequency (MHz)	26dB BW (MHz)	99 % OBW (MHz)	Required Limit (MHz)	Result
36	5180	20.00	17.56	--	PASS
44	5220	20.11	17.58	--	PASS
48	5240	19.95	17.55	--	PASS


99% & 26dB Bandwidth – Channel 36

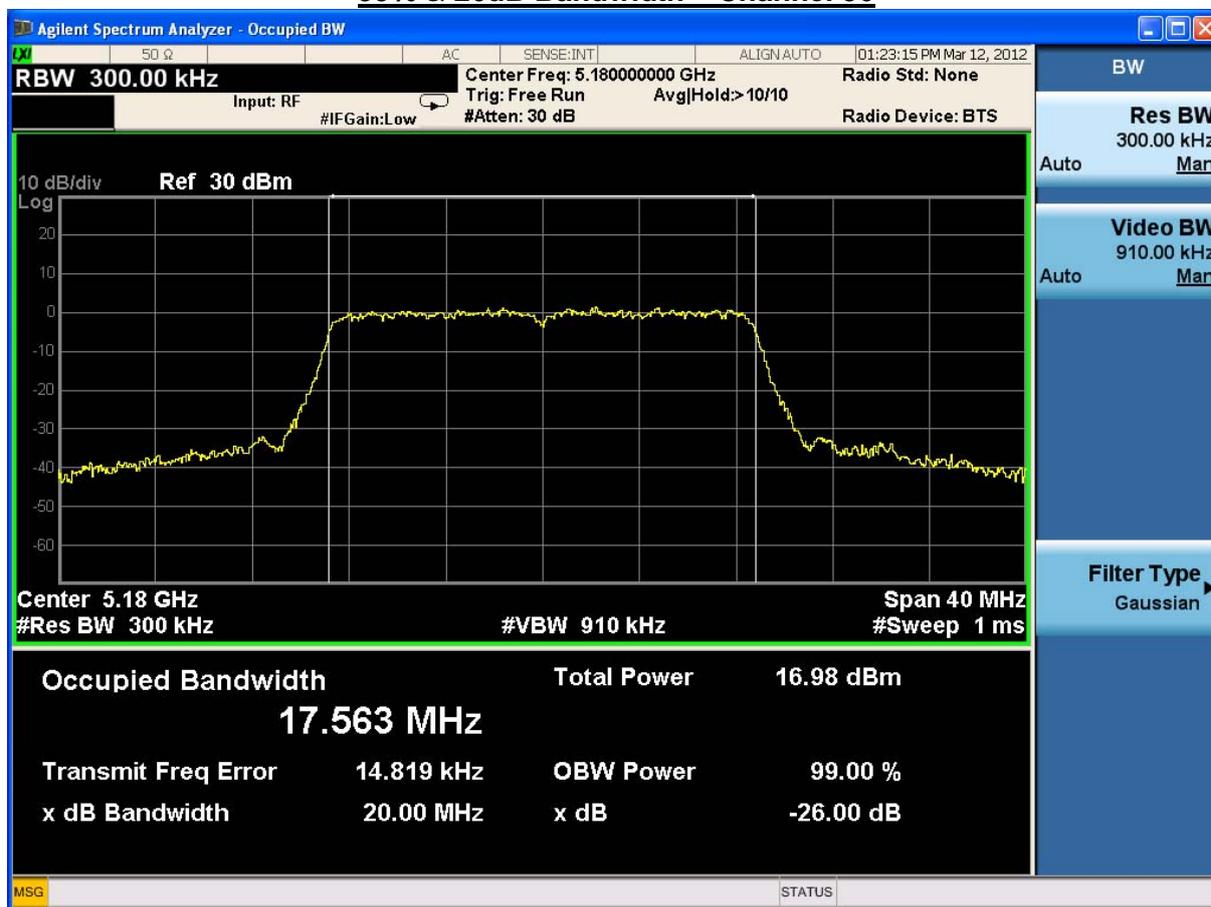

99% & 26dB Bandwidth – Channel 44



99% & 26dB Bandwidth – Channel 48

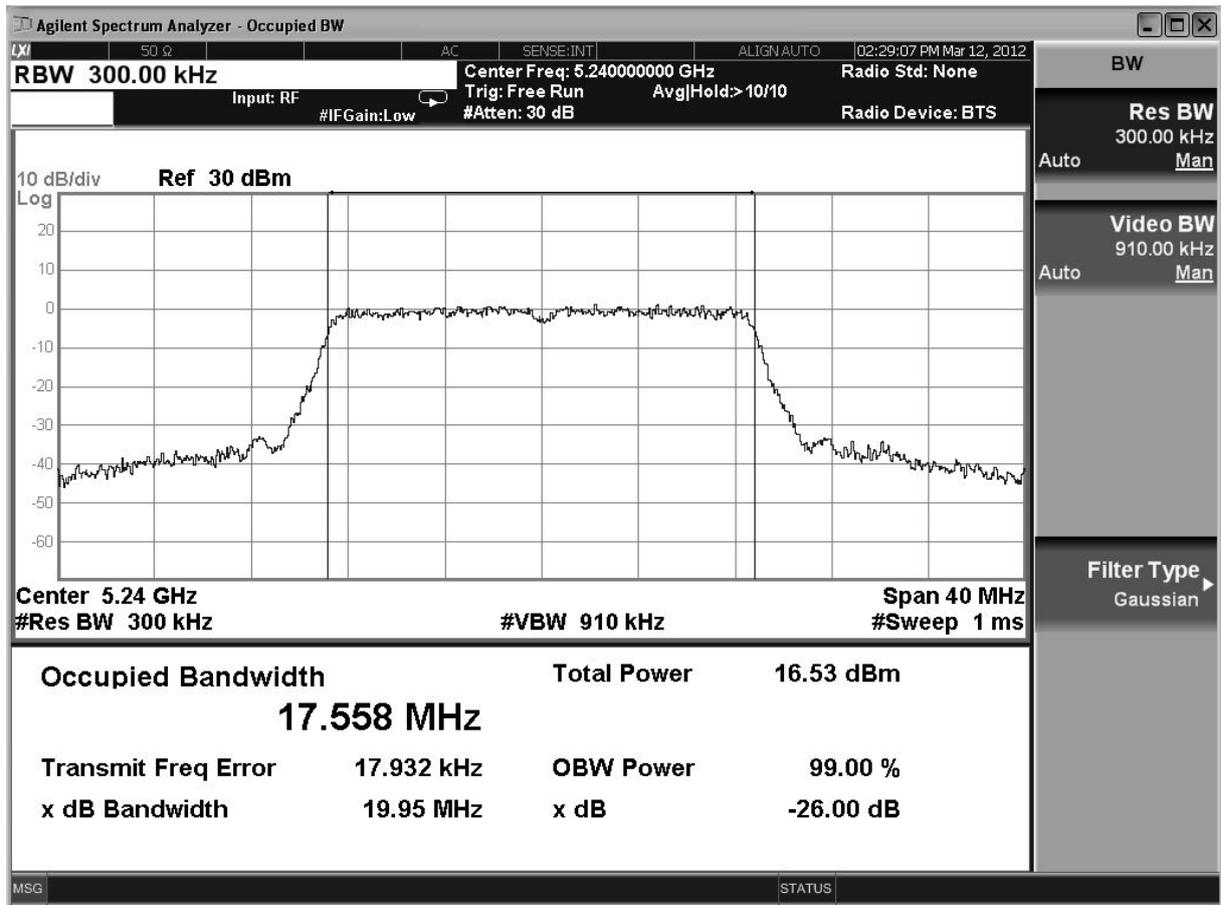


Product	Dual-band Wireless-N Adapter		
Test Item	99% & 26dB Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

802.11n_20M(ANT 1)

Channel No.	Frequency (MHz)	26dB BW (MHz)	99 % OBW (MHz)	Required Limit (MHz)	Result
36	5180	19.79	17.55	--	PASS
44	5220	19.84	17.55	--	PASS
48	5240	19.66	17.53	--	PASS


99% & 26dB Bandwidth – Channel 36

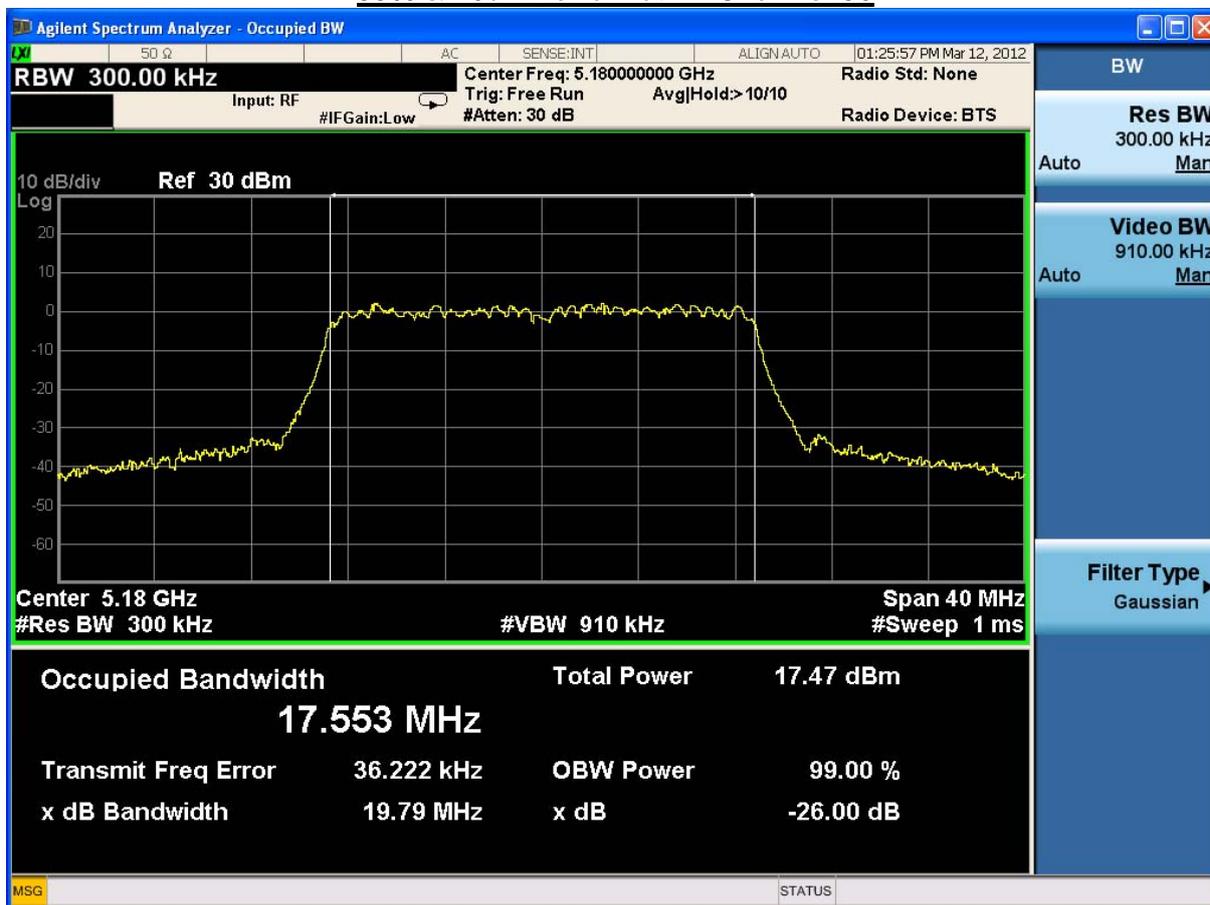

99% & 26dB Bandwidth – Channel 44



99% & 26dB Bandwidth – Channel 48

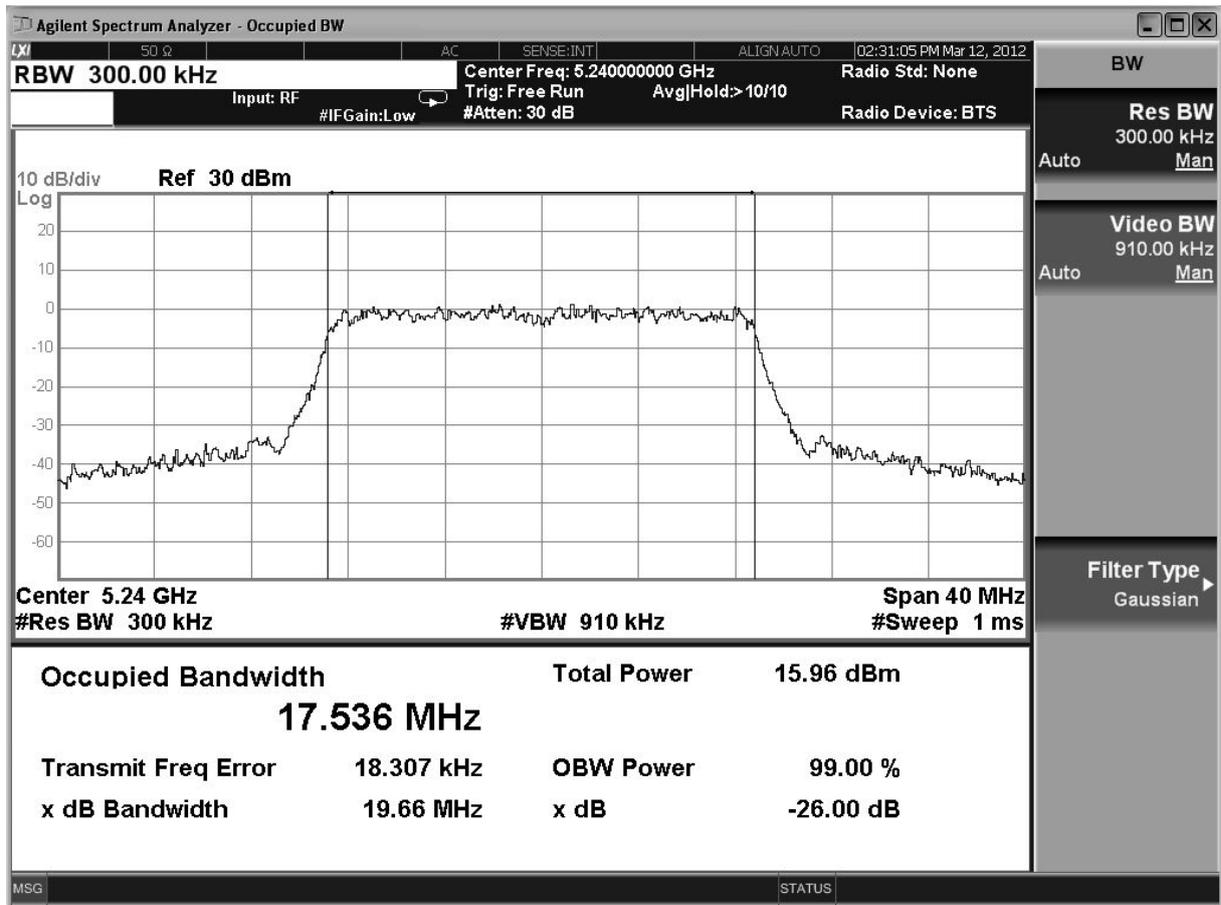


Product	Dual-band Wireless-N Adapter		
Test Item	99% & 26dB Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7


802.11n_20M(ANT 2)

Channel No.	Frequency (MHz)	26dB BW (MHz)	99 % OBW (MHz)	Required Limit (MHz)	Result
36	5180	19.81	17.56	--	PASS
44	5220	19.99	17.56	--	PASS
48	5240	20.01	17.56	--	PASS


99% & 26dB Bandwidth – Channel 36

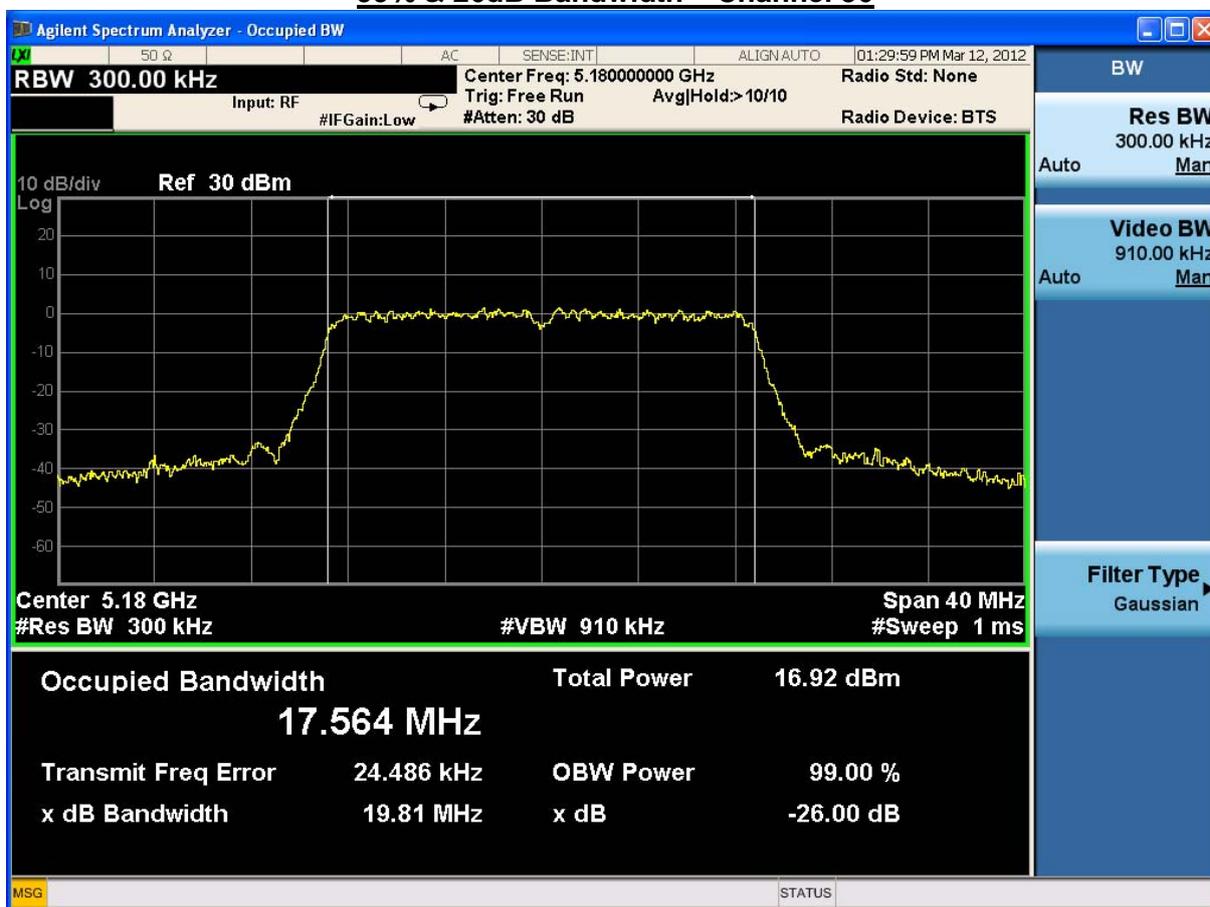

99% & 26dB Bandwidth – Channel 44

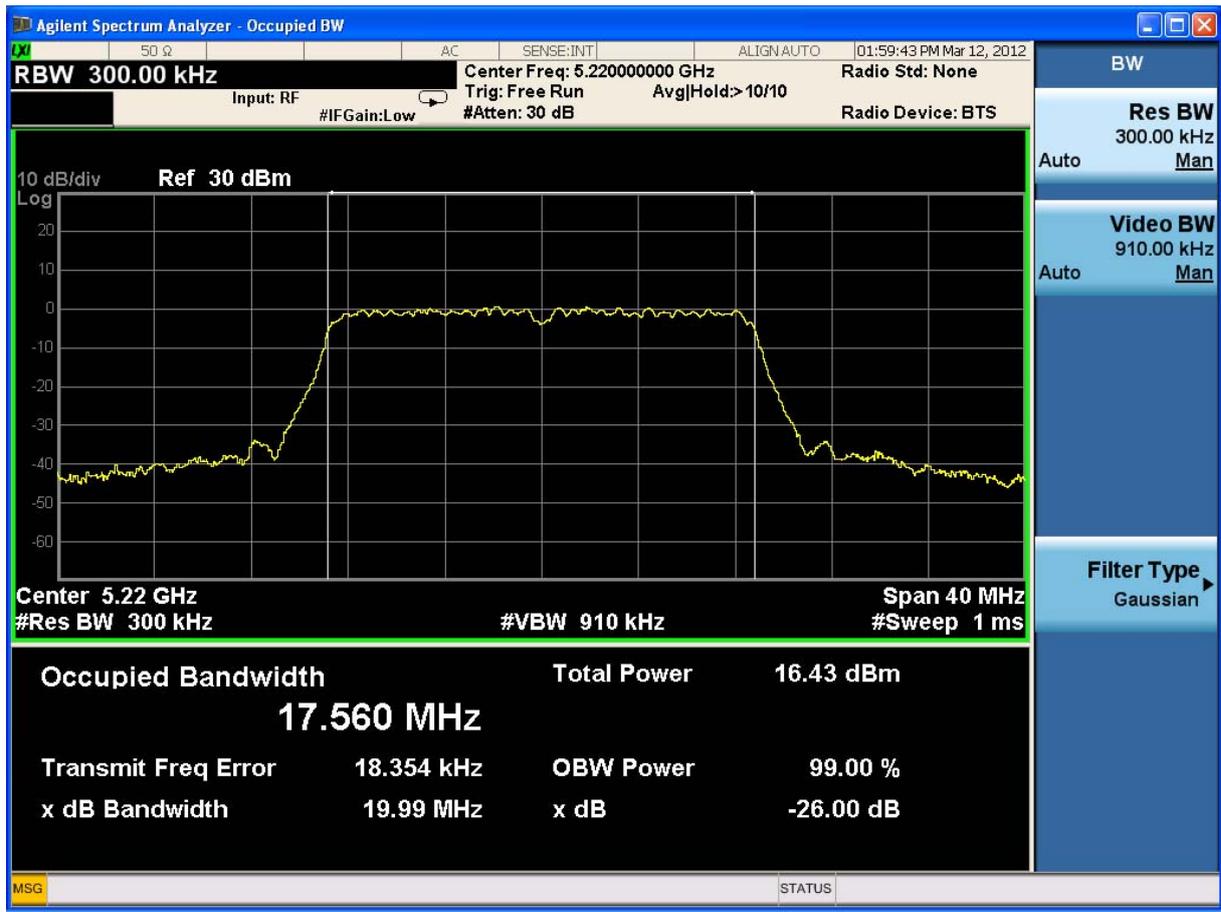


99% & 26dB Bandwidth – Channel 48

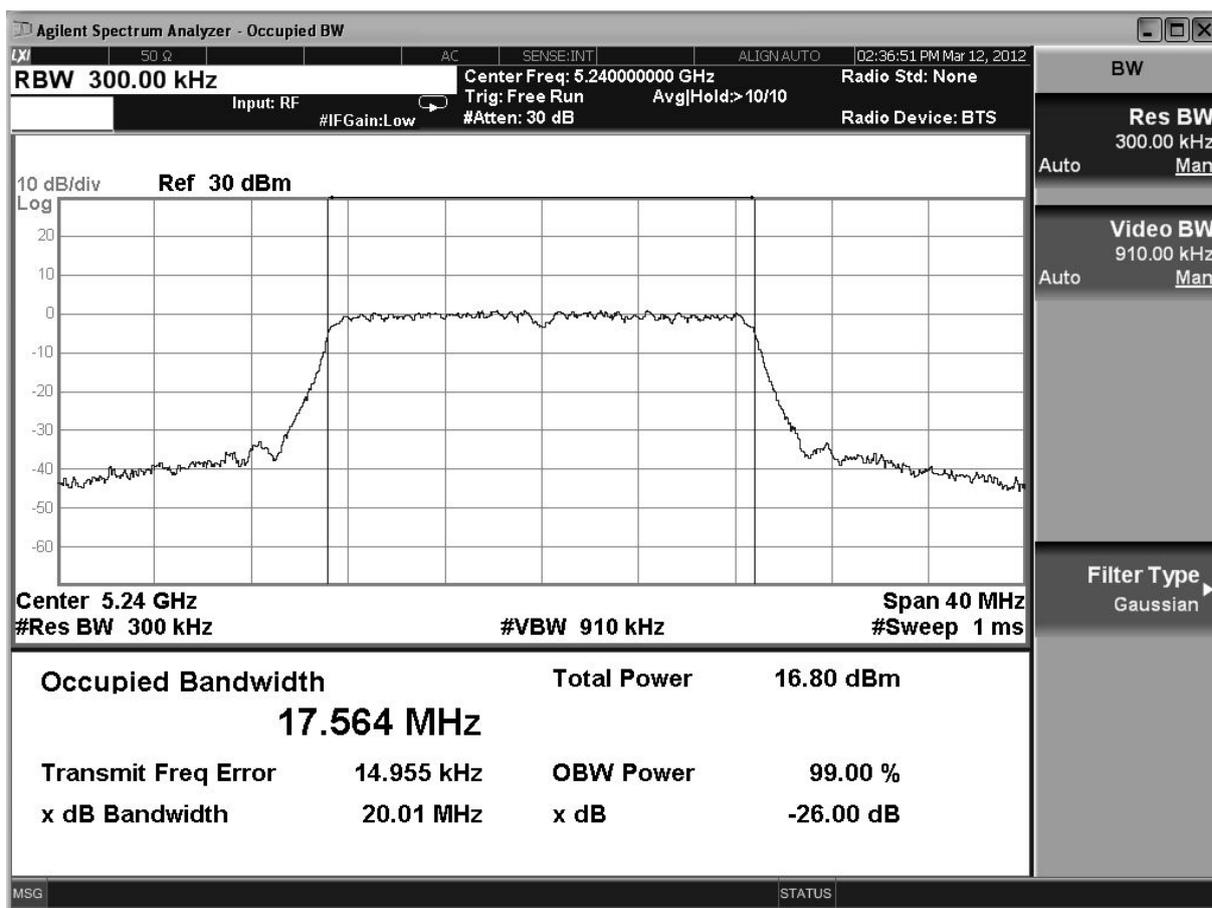


Product	Dual-band Wireless-N Adapter		
Test Item	99% & 26dB Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

802.11n_40M(ANT 0)					
Channel No.	Frequency (MHz)	26dB BW (MHz)	99 % OBW (MHz)	Required Limit (MHz)	Result
38	5190	38.54	35.92	--	PASS
46	5230	40.14	36.01	--	PASS

99% & 26dB Bandwidth – Channel 38

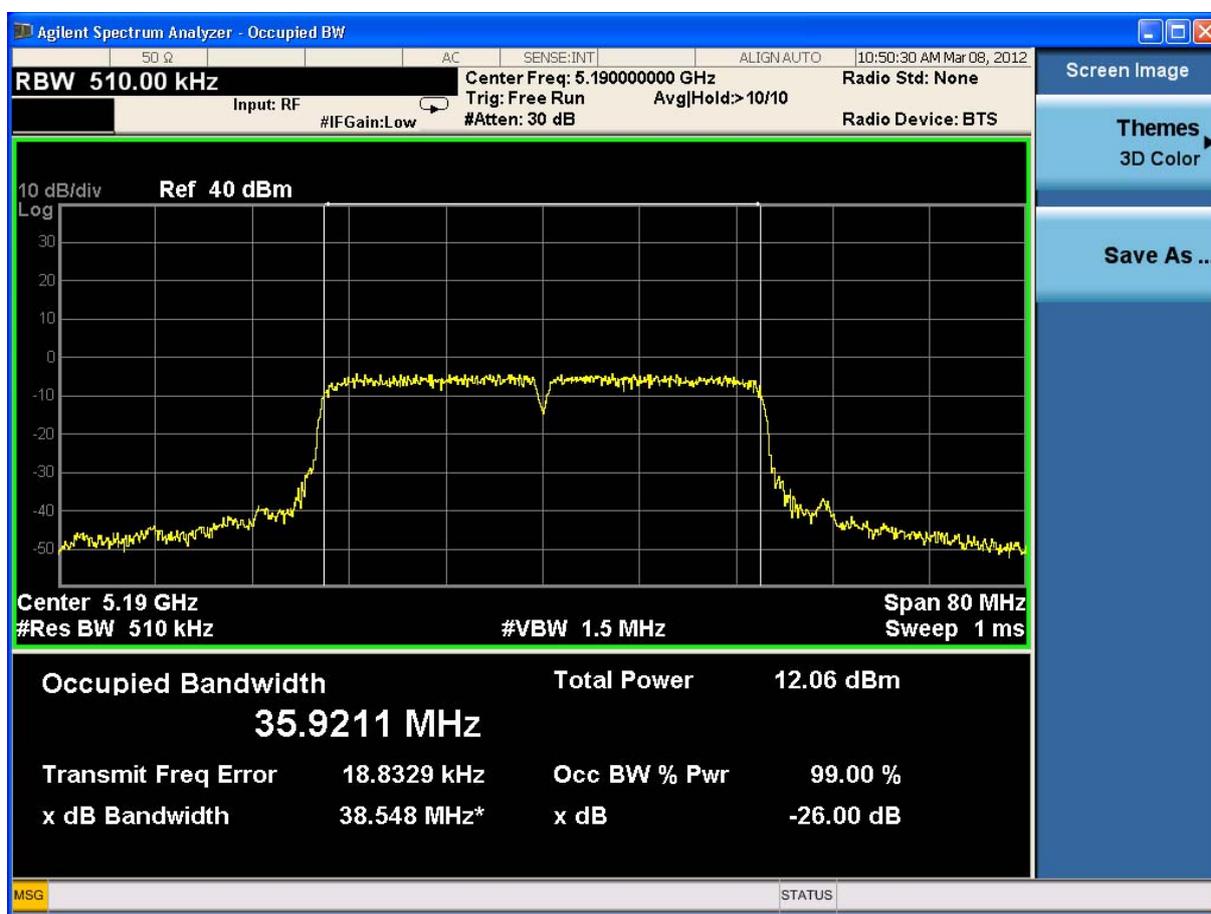

99% & 26dB Bandwidth – Channel 46

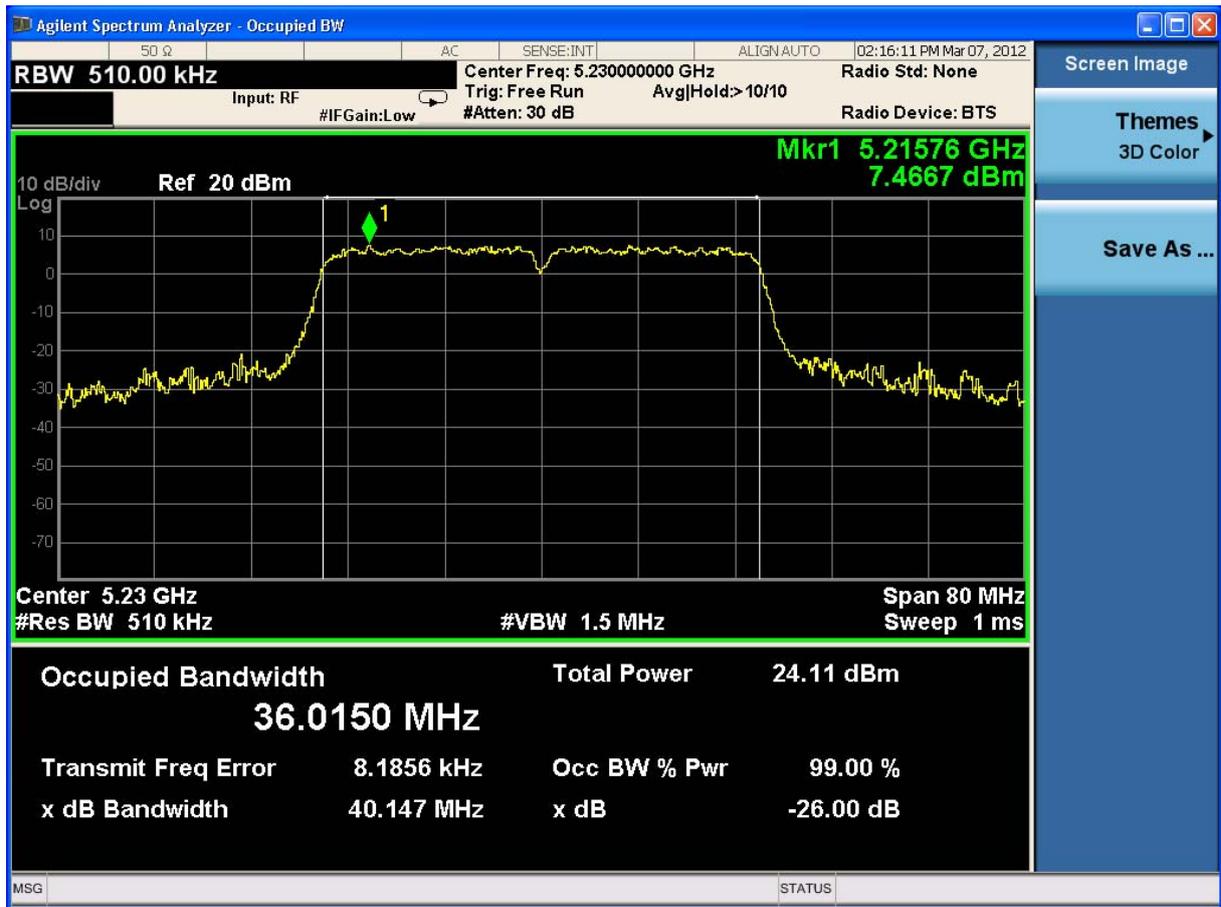


Product	Dual-band Wireless-N Adapter		
Test Item	99% & 26dB Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/07	Test Site	SR7


802.11n_40M(ANT 1)

Channel No.	Frequency (MHz)	26dB BW (MHz)	99 % OBW (MHz)	Required Limit (MHz)	Result
38	5190	39.87	35.92	--	PASS
46	5230	39.76	35.94	--	PASS

99% & 26dB Bandwidth – Channel 38

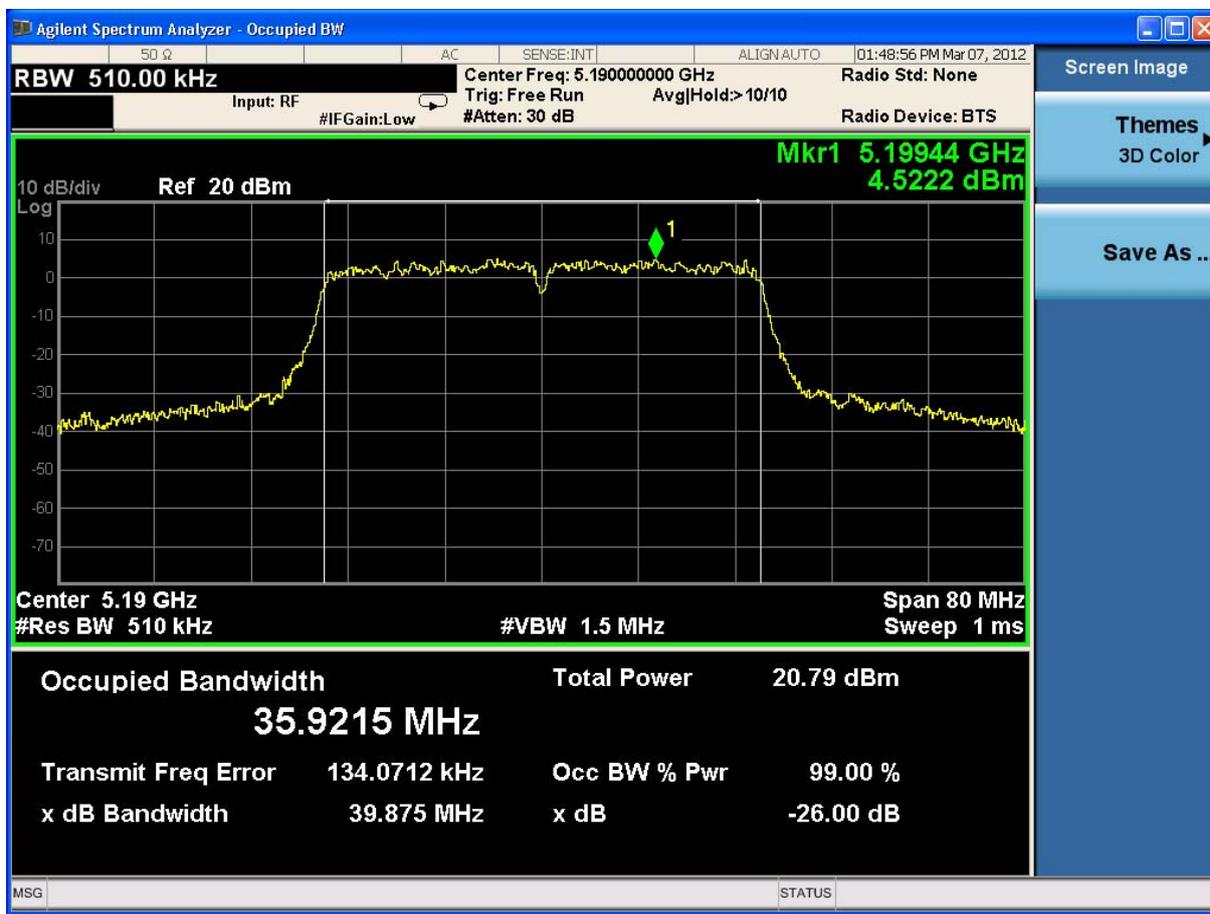

99% & 26dB Bandwidth – Channel 46

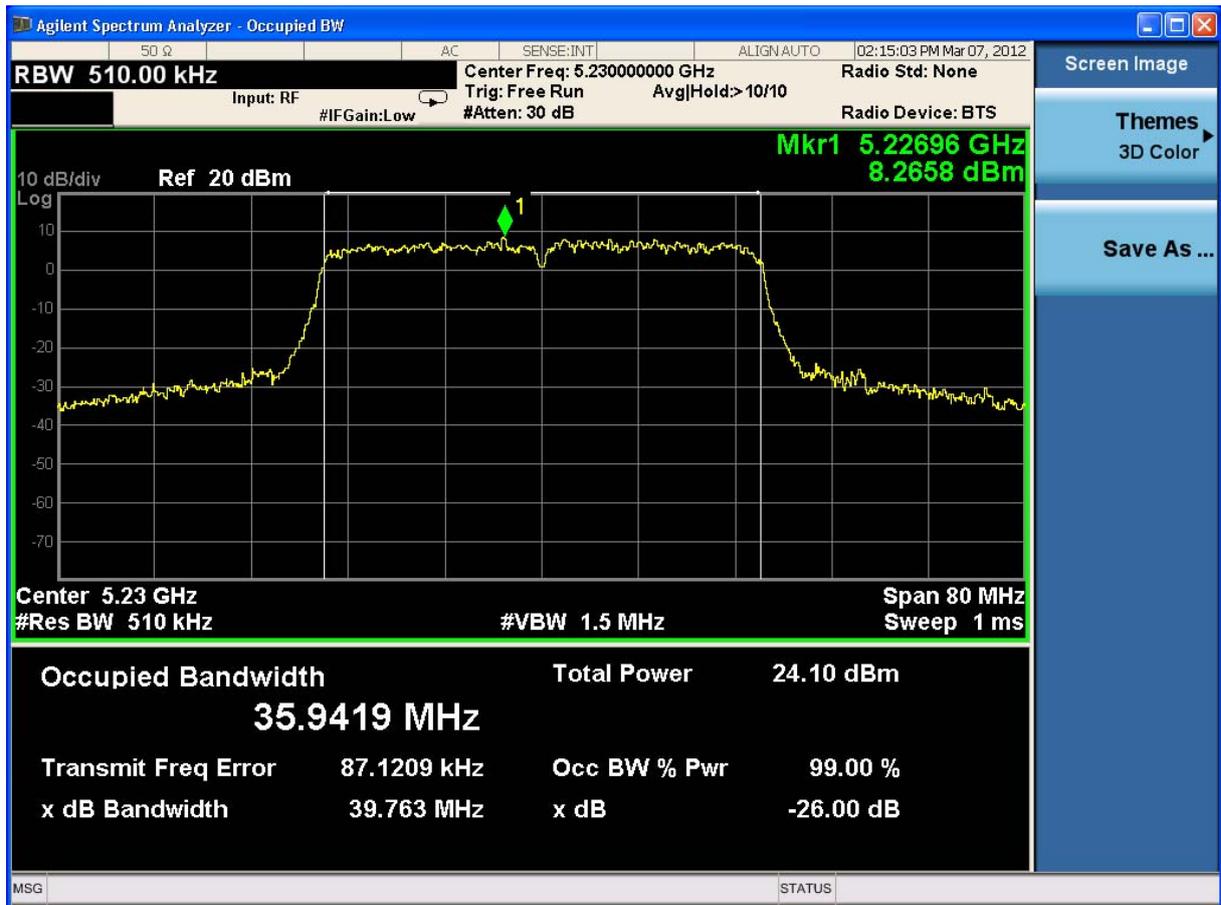


Product	Dual-band Wireless-N Adapter		
Test Item	99% & 26dB Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7


802.11n_40M(ANT 2)

Channel No.	Frequency (MHz)	26dB BW (MHz)	99 % OBW (MHz)	Required Limit (MHz)	Result
38	5190	39.08	35.90	--	PASS
46	5230	40.20	35.84	--	PASS

99% & 26dB Bandwid

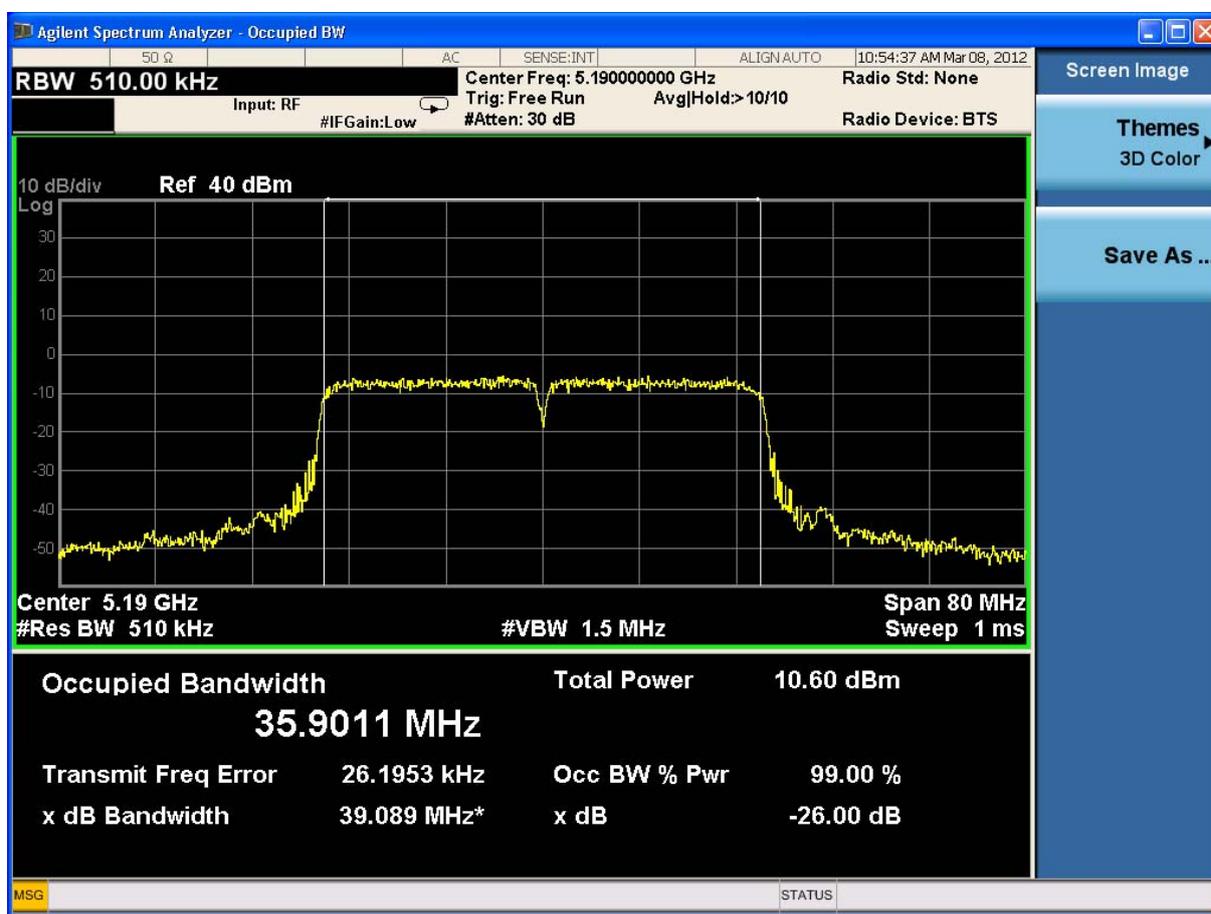

99% & 26dB Bandwidth – Channel 46

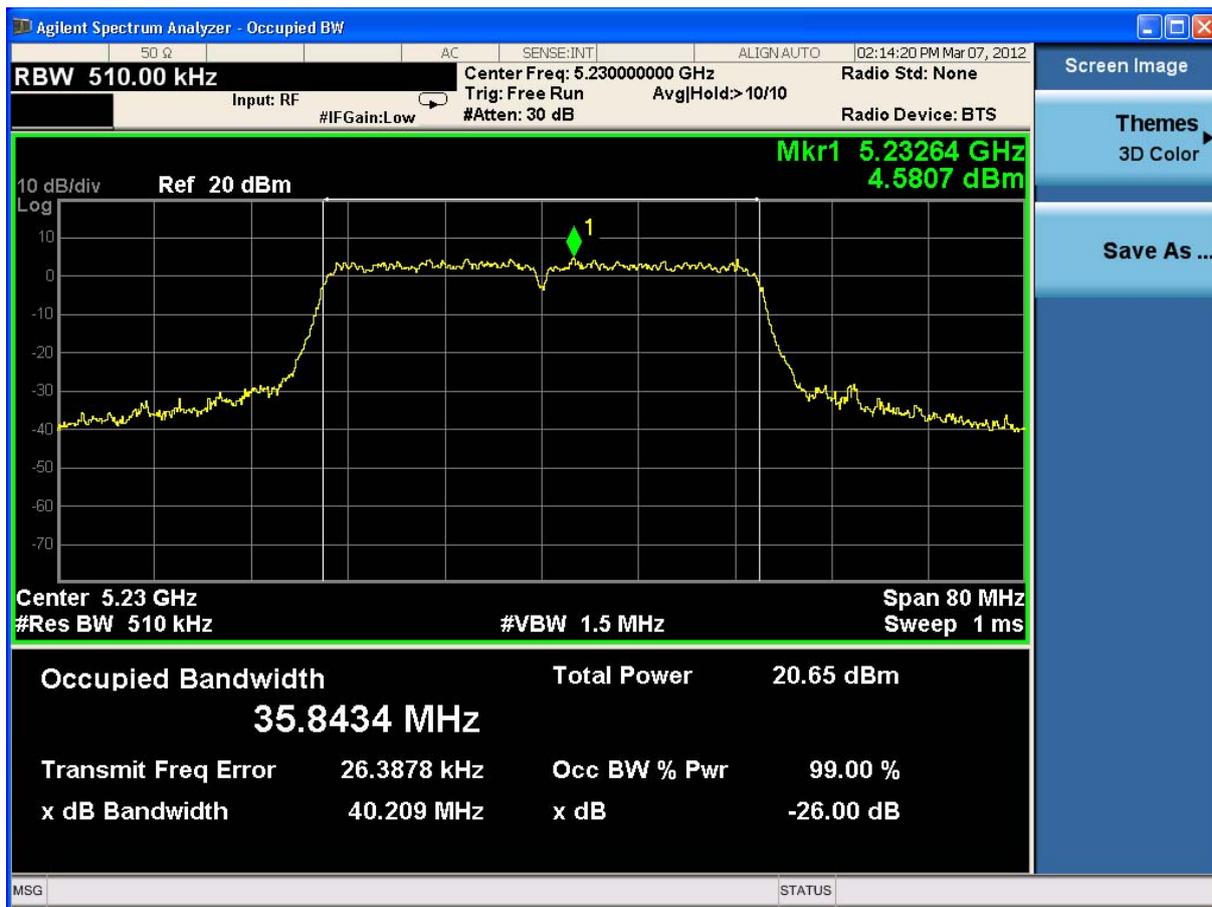

4. Peak Transmit Output

4.1. Test Equipment


The following test equipments are used during the radiated emission tests:

Peak Transmit Output / SR7

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Spectrum Analyzer	R&S	FSP	100561	2013/02/19

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

4.2. Test Setup

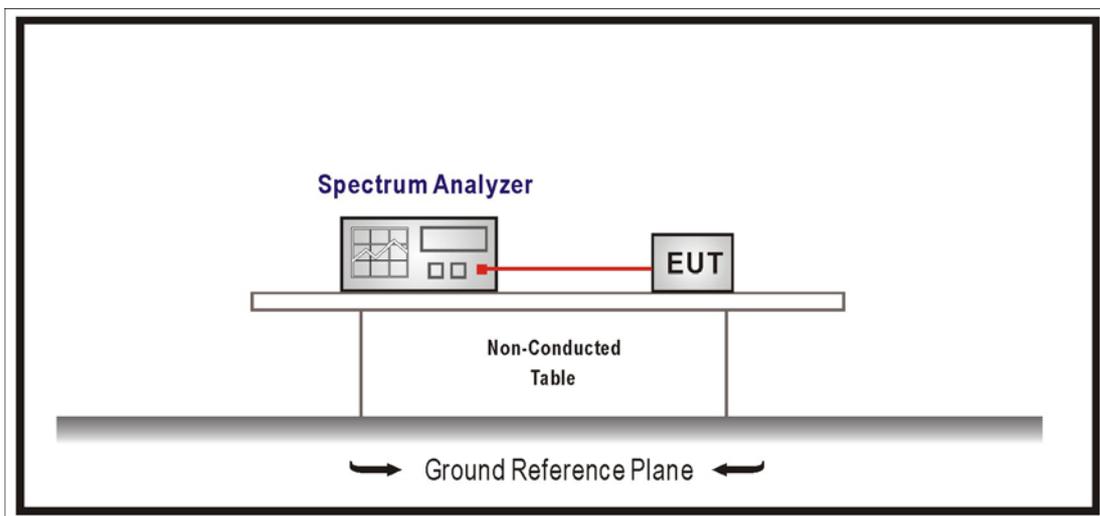

4.3. Limits

1. For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10\log B$, where B is the 26dB emission bandwidth in MHz. If transmitting antenna of directional gain greater than 6 dBi are used, the peak transmit power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
2. For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10\log B$, where B is the 26dB emission bandwidth in MHz. If transmitting antenna of directional gain greater than 6 dBi are used, the peak transmit power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.825 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 1W or $17 \text{ dBm} + 10\log B$, where B is the 26dB emission bandwidth in MHz. If transmitting antenna of directional gain greater than 6 dBi are used, the peak transmit power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

4.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to U-NII test procedure of March 2012 KDB 789033 for compliance to FCC 47CFR Subpart E requirements. The Method SA-1 of the Maximum conducted output power was used.

Set RBW=1MHz, VBW=3MHz with RMS detector and trace average 100 traces in power averaging mode. Set span to encompass the entire emission bandwidth (EBW) of the signal. Compute power by integrating the spectrum across the 26 dB EBW of the signal.

4.5. Uncertainty

The measurement uncertainty is defined as $\pm 1.27 \text{ dB}$

4.6. Test Result

Product	Dual-band Wireless-N Adapter		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

802.11a						
Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Required Limit		Result
				Fixed Limit (dBm)	4+10logB Limit (dBm)	
36	5180	20.36	14.97	≤17	≤17.08	Pass
44	5220	20.39	14.96	≤ 17	≤17.09	Pass
48	5240	19.65	14.91	≤ 17	≤16.93	Pass

The worst emission of data rate is 6 Mbps.

Peak Power Output (dBm)									
Channel No	Frequency (MHz)	Data Rate							Required Limit
		6	12	18	24	36	48	54	
36	5180	14.97	--	--	--	--	--	--	17dBm or 4dBm+10logB
44	5220	14.96	14.67	14.64	14.61	14.52	14.44	14.34	
48	5240	14.91	--	--	--	--	--	--	

Peak transmit Power - Channel 36



Peak transmit Power - Channel 44



Peak transmit Power - Channel 48



Product	Dual-band Wireless-N Adapter		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

IEEE 802.11n(20MHz)_ANT 0						
Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Required Limit		Result
				Fixed Limit (dBm)	4+10logB Limit (dBm)	
36	5180	20.00	10.37	≤17	≤17.01	Pass
44	5220	19.81	10.39	≤ 17	≤17.03	Pass
48	5240	19.95	10.45	≤ 17	≤16.99	Pass

The worst emission of data rate is 19.5Mbps.

Peak Power Output (dBm)										
MCS Index		16	17	18	19	20	21	22	23	Required Limit
Channel No	Frequency (MHz)	Data Rate								
		19.5	39	58.5	78	117	156	175.5	195	
36	5180	10.37	--	--	--	--	--	--	--	17dBm or 4dBm+10logB
44	5220	10.13	09.97	09.95	09.93	09.91	09.90	09.87	09.85	
48	5240	10.45	--	--	--	--	--	--	--	

Peak transmit Power - Channel 36



Peak transmit Power - Channel 44



Peak transmit Power - Channel 48



Product	Dual-band Wireless-N Adapter		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

IEEE 802.11n(20MHz)_ANT 1						
Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Required Limit		Result
				Fixed Limit (dBm)	4+10logB Limit (dBm)	
36	5180	19.79	10.32	≤17	≤16.96	Pass
44	5220	19.84	10.32	≤ 17	≤16.97	Pass
48	5240	19.66	10.18	≤ 17	≤16.93	Pass

The worst emission of data rate is 19.5Mbps.

Peak Power Output (dBm)										
MCS Index		16	17	18	19	20	21	22	23	Required Limit
Channel No	Frequency (MHz)	Data Rate								
		19.5	39	58.5	78	117	156	175.5	195	
36	5180	10.32	--	--	--	--	--	--	--	17dBm or 4dBm+10logB
44	5220	10.32	10.10	10.08	10.07	10.04	10.00	09.98	09.94	
48	5240	10.18	--	--	--	--	--	--	--	


Peak transmit Power - Channel 36



Peak transmit Power - Channel 44



Peak transmit Power - Channel 48

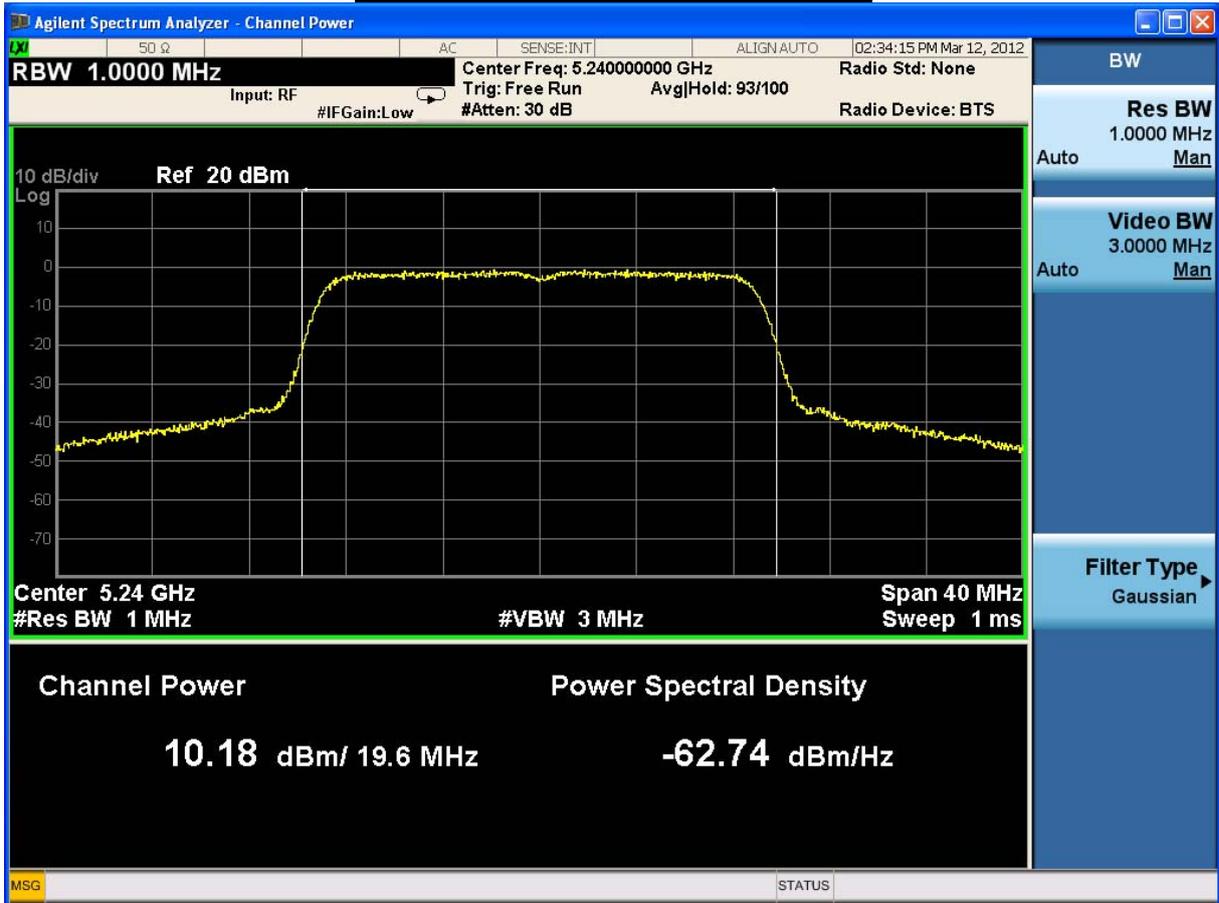

Product	Dual-band Wireless-N Adapter		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

IEEE 802.11n(20MHz)_ANT 2						
Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Required Limit		Result
				Fixed Limit (dBm)	4+10logB Limit (dBm)	
36	5180	19.81	10.27	≤17	≤16.96	Pass
44	5220	19.99	9.91	≤ 17	≤17.00	Pass
48	5240	20.01	10.01	≤ 17	≤17.01	Pass


The worst emission of data rate is 19.5Mbps.

Peak Power Output (dBm)										
MCS Index		16	17	18	19	20	21	22	23	Required Limit
Channel No	Frequency (MHz)	Data Rate								
		19.5	39	58.5	78	117	156	175.5	195	
36	5180	10.27	--	--	--	--	--	--	--	17dBm or 4dBm+10logB
44	5220	9.91	09.80	09.78	09.67	09.64	09.58	09.54	09.50	
48	5240	10.01	--	--	--	--	--	--	--	

Peak transmit Power - Channel 36



Peak transmit Power - Channel 44

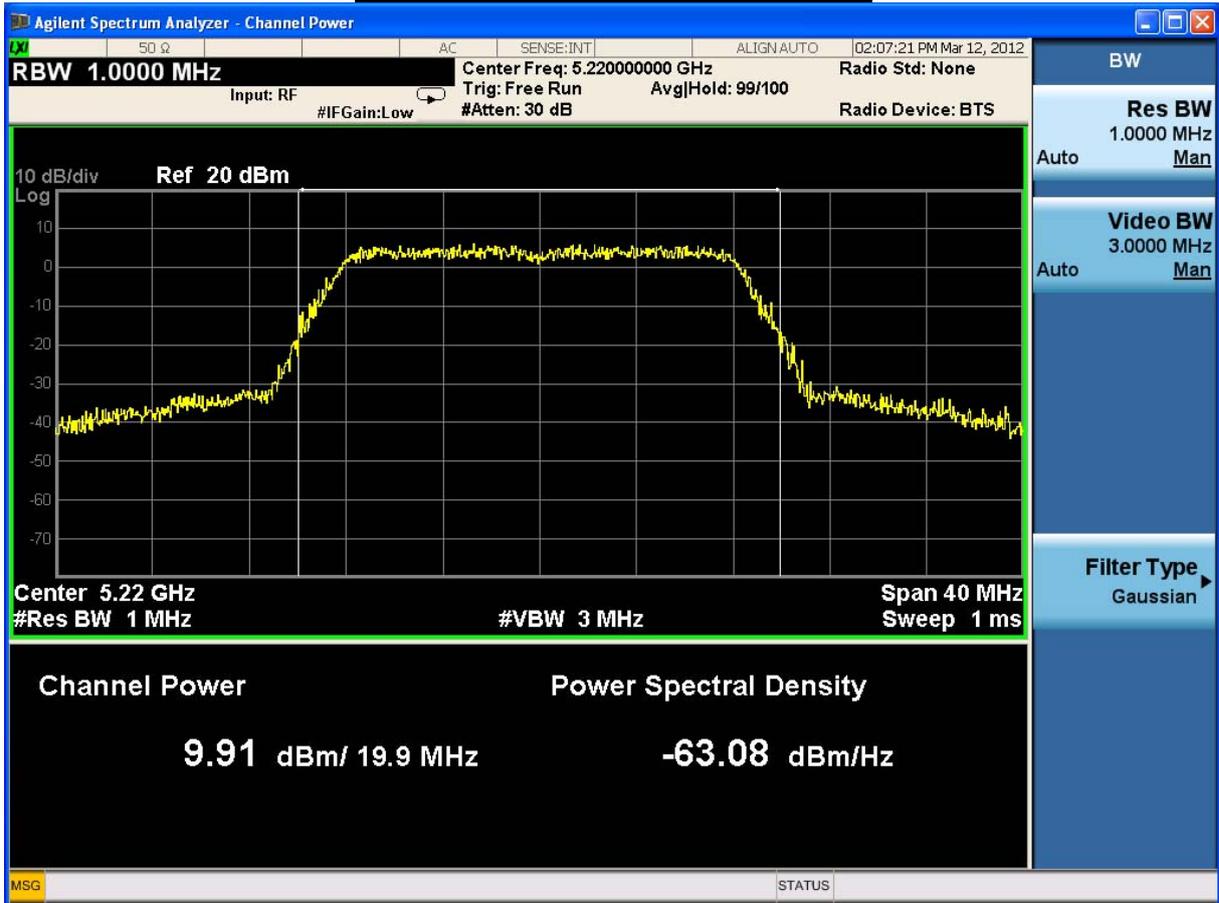

Peak transmit Power - Channel 48



Product	Dual-band Wireless-N Adapter		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

IEEE 802.11n(20MHz)_ANT 0+1+2					
Channel No.	Frequency (MHz)	Total Output Power		Required Limit (dBm)	Result
		(dBm)	(mW)		
36	5180	15.09	32.30	≤17	Pass
44	5220	14.98	31.50	≤17	Pass
48	5240	14.99	31.54	≤17	Pass

Peak Power Output (dBm)										
MCS Index		8	9	10	11	12	13	14	15	Required Limit
Channel No	Frequency (MHz)	Data Rate								
		19.5	39	58.5	78	117	156	175.5	195	
36	5180	15.09	--	--	--	--	--	--	--	<u>17dBm or 4dBm+10logB</u>
44	5220	14.98	14.86	14.84	14.83	14.80	14.78	14.74	14.71	<u>17dBm or 4dBm+10logB</u>
48	5240	14.99	--	--	--	--	--	--	--	<u>17dBm or 4dBm+10logB</u>

Product	Dual-band Wireless-N Adapter		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

IEEE 802.11n(40MHz)_ANT 0						
Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Required Limit		Result
				Fixed Limit (dBm)	4+10logB Limit (dBm)	
38	5190	38.55	12.17	≤17	≤19.86	Pass
46	5230	40.14	12.07	≤ 17	≤20.03	Pass


The worst emission of data rate is 40.5 Mbps

Peak Power Output (dBm)										
MCS Index		16	17	18	19	20	21	22	23	Required Limit
Channel No	Frequency (MHz)	Data Rate								
		40.5	81.0	121.5	162.0	243.0	324.0	364.5	405.0	
38	5190	12.17	11.84	11.75	11.74	11.70	11.65	11.64	11.60	17dBm or 4dBm+10logB
46	5230	12.07	--	--	--	--	--	--	--	

Peak transmit Power - Channel 38



Peak transmit Power - Channel 46

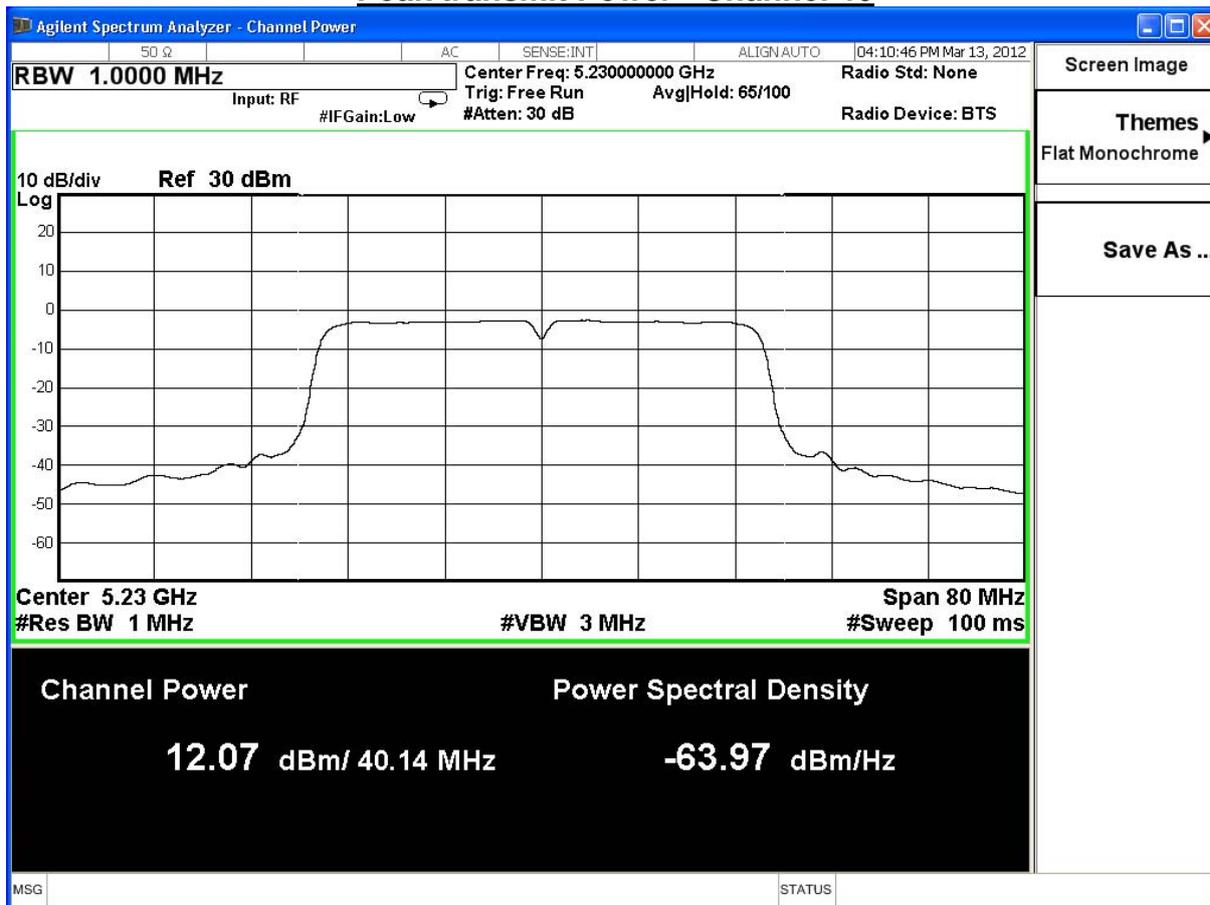

Product	Dual-band Wireless-N Adapter		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/07	Test Site	SR7

IEEE 802.11n(40MHz)_ANT 1						
Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Required Limit		Result
				Fixed Limit (dBm)	4+10logB Limit (dBm)	
38	5190	39.878	13.09	≤17	≤20.00	Pass
46	5230	39.76	12.17	≤ 17	≤19.99	Pass


The worst emission of data rate is 40.5 Mbps

Peak Power Output (dBm)										
MCS Index		16	17	18	19	20	21	22	23	Required Limit
Channel No	Frequency (MHz)	Data Rate								
		40.5	81.0	121.5	162.0	243.0	324.0	364.5	405.0	
38	5190	13.09	11.24	11.12	11.09	11.01	10.95	10.94	10.90	17dBm or 4dBm+10logB
46	5230	12.17	--	--	--	--	--	--	--	

Peak transmit Power - Channel 38



Peak transmit Power - Channel 46

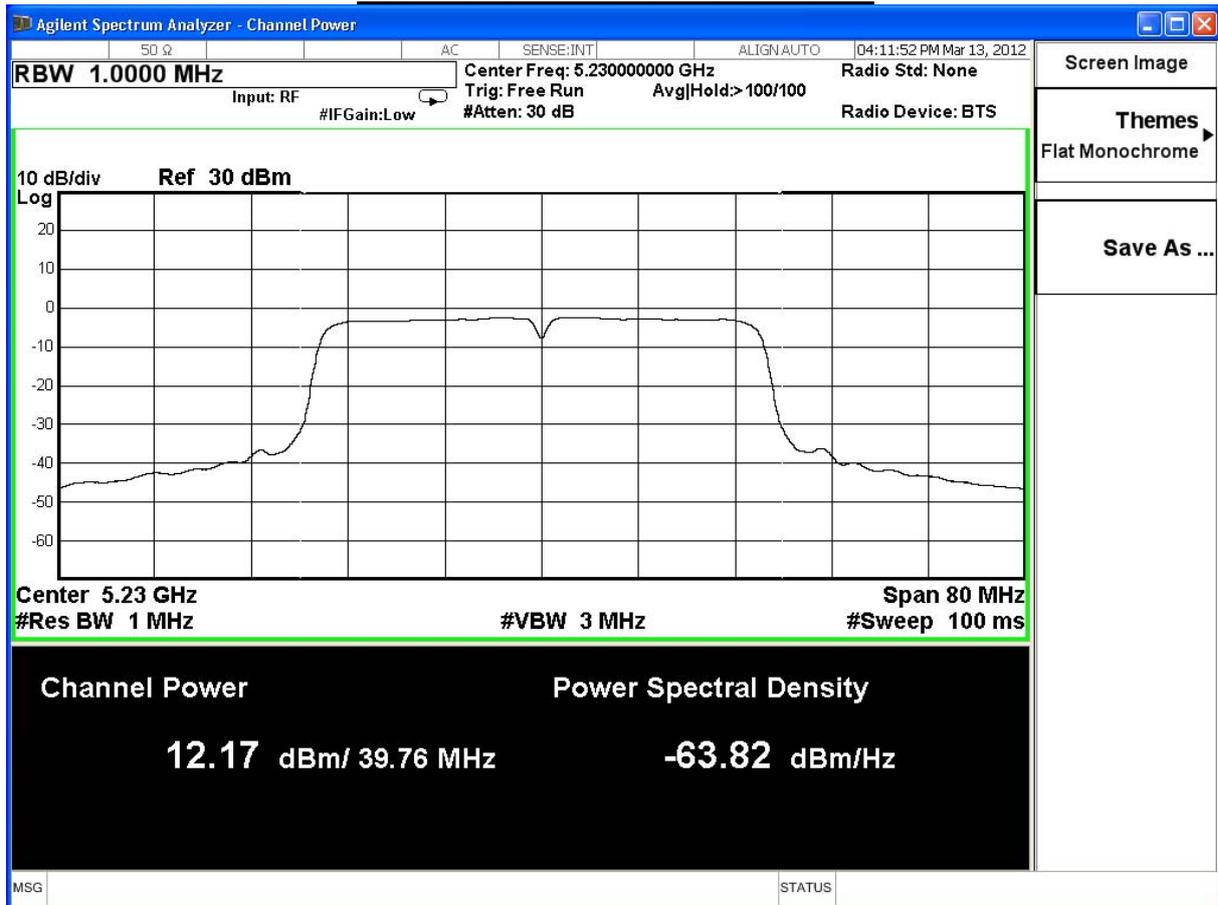


Product	Dual-band Wireless-N Adapter		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

IEEE 802.11n(40MHz)_ANT 2						
Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Required Limit		Result
				Fixed Limit (dBm)	4+10logB Limit (dBm)	
38	5190	39.08	10.49	≤17	≤19.91	Pass
46	5230	40.20	12.20	≤ 17	≤20.04	Pass


The worst emission of data rate is 40.5 Mbps

Peak Power Output (dBm)										
MCS Index		16	17	18	19	20	21	22	23	Required Limit
Channel No	Frequency (MHz)	Data Rate								
		40.5	81.0	121.5	162.0	243.0	324.0	364.5	405.0	
38	5190	10.49	11.87	11.84	11.75	11.64	11.60	11.57	11.48	17dBm or 4dBm+10logB
46	5230	12.20	--	--	--	--	--	--	--	

Peak transmit Power - Channel 38

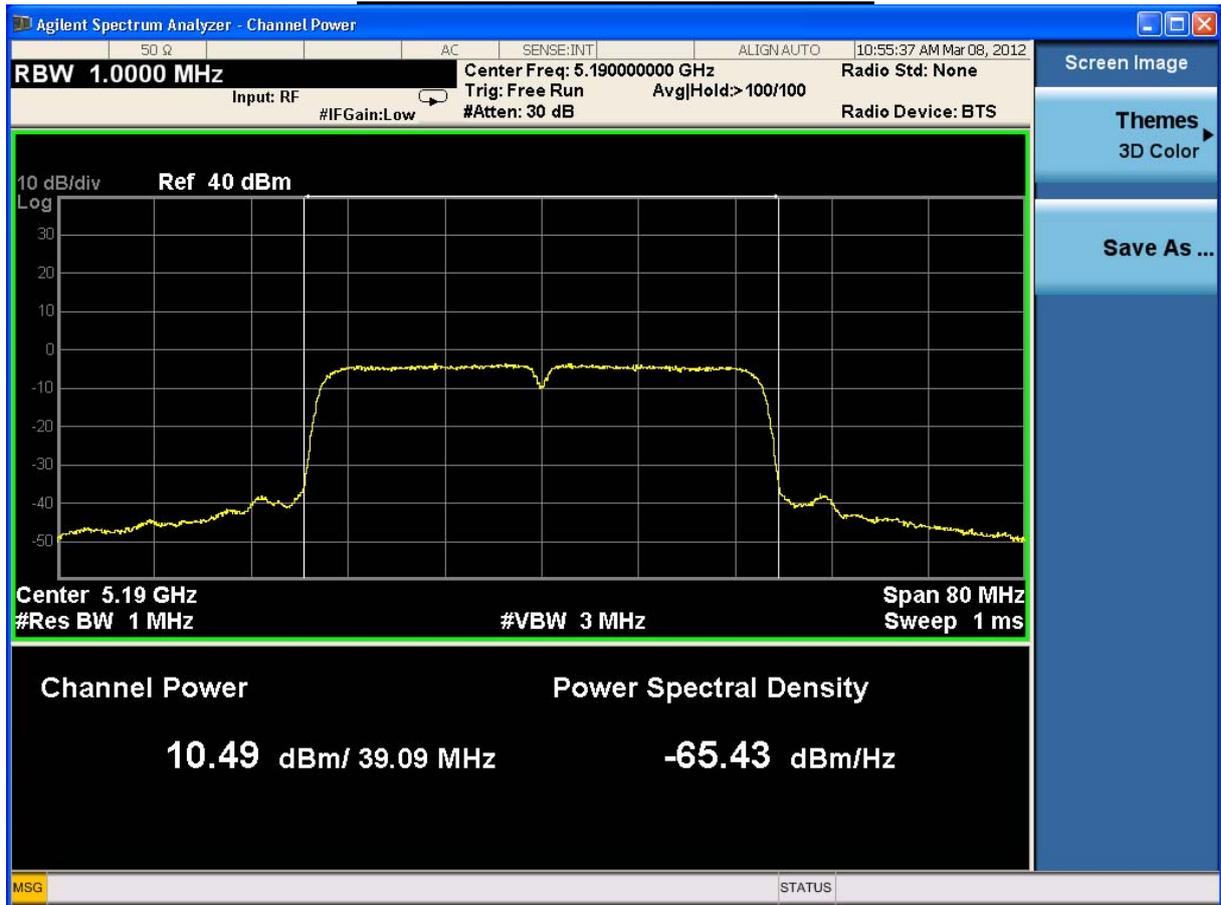

Peak transmit Power - Channel 46

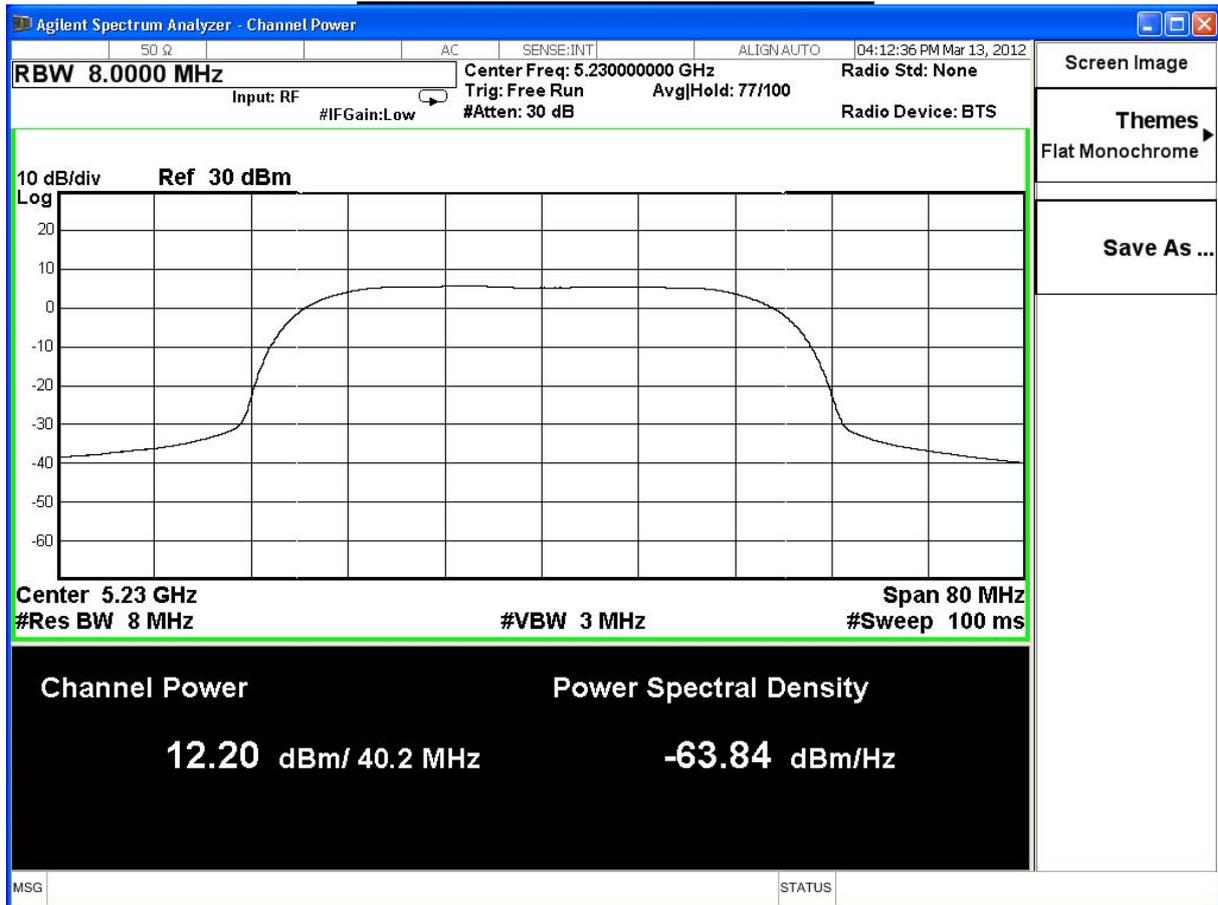

Product	Dual-band Wireless-N Adapter		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Transmit		
Date of Test	2012/03/12	Test Site	SR7

IEEE 802.11n(40MHz)_ANT 0+1+2					
Channel No.	Frequency (MHz)	Total Output Power		Required Limit (dBm)	Result
		(dBm)	(mW)		
38	5190	16.82	48.05	≤17	Pass
46	5230	16.92	49.18	≤17	Pass

The worst emission of data rate is 40.5 Mbps

Peak Power Output (dBm)										
MCS Index		16	17	18	19	20	21	22	23	Required Limit
Channel No	Frequency (MHz)	Data Rate								
		40.5	81.0	121.5	162.0	243.0	324.0	364.5	405.0	
38	5190	16.82	16.43	16.35	16.31	16.23	16.18	16.17	16.11	17dBm or 4dBm+10logB
46	5230	16.92	--	--	--	--	--	--	--	