

MEASUREMENT REPORT of *ADSL Wireless Modem Router*

Applicant : ASUSTek Computer Inc.
EUT : ADSL Wireless Modem Router
Model No. : 6388-A1-XXX; 6218-A1-XXX
FCC ID : MSQ6218-A1

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by *Training Research Co., Ltd.*, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

Applicant : ASUSTek Computer Inc.
Applicant Address : 4F, No. 150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.
Product Name : ADSL Wireless Modem Router
Model : 6388-A1-XXX; 6218-A1-XXX
Report No. : A5415133
Test Date : January 4, 2005

Prepared by: 
Jack Tsai

Approved by: 
Frank Tsai

Conditions of issue :

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**

★ NVLAP LAB CODE: 200174-0

Federal Communications Commission

Declaration of Conformity (DoC)

for the following equipment:

Product name : ADSL Wireless Modem Router
 Model name : 6388-A1-XXX; 6218-A1-XXX
 Trade name : ASUS

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : A5415133

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation

Manufacturer	USA local representative
Company name: ASUSTeK Computer Inc.	To be determined
Computer address: 4/F, 150, Li-Te Rd., Peitou, Taipei, Taiwan	
ZIP / Postal code 112	
Contact person: Lawrence Yu	
Title: Manager	
Internet e-mail address: lawrence_yu@asus.com.tw	
Tel / Fax: 886-2-28943447 / 886-2-28950113	

Tables of Contents

I. GENERAL	6
1.1 Introduction	6
1.2 Description of EUT	6
1.3 Test method	7
1.4 Description of Support Equipment	7
1.5 Configuration of System Under Test	10
1.6 Verify the Frequency and Channel	12
1.7 Test Procedure	13
1.8 Location of the Test Site	13
1.9 General Test Condition	13
II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators	14
III. Section 15.203 : Antenna Requirement	15
IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	16
4.1 Test Condition & Setup	16
4.2 List of Test Instruments	17
4.3 Test Result of Conducted Emissions	18
RX mode.....	18
IEEE 802.11b	19
IEEE 802.11g	20
V. Section 15.247(a) : Technical Description of the EUT	22
VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System	23
6.1 Test Condition & Setup	23
6.2 Test Instruments Configuration	23
6.3 List of Test Instruments	23
6.4 Test Result of Bandwidth	23
Channel 01	24
Channel 06	25
Channel 11	26

VII. Section 15.247(b) : Power Output 27

7.1 Test Condition & Setup 27

7.2 List of Test Instruments 27

7.3 Test Result 27

VIII. Section 15.247(c) : Spurious Emissions (Radiated) 28

8.1 Test Condition & Setup 28

8.2 List of Test Instruments 30

8.3 Test Result of Spurious Radiated Emissions 31

 RX mode 31

 IEEE 802.11b CH 01 33

 IEEE 802.11b CH 06 35

 IEEE 802.11b CH 11 37

 IEEE 802.11g CH 01 39

 IEEE 802.11g CH 06 41

 IEEE 802.11g CH 11 43

8.4 Test Result of Bandedge..... 45

 IEEE 802.11b CH 01 46

 IEEE 802.11b CH 11 47

 IEEE 802.11g CH 01 48

 IEEE 802.11g CH 11 49

IX. Section 15.247(d) : Power Spectral Density 50

9.1 Test Condition & Setup 50

9.2 Test Instruments Configuration 50

9.3 List of Test Instruments..... 50

9.4 Test Result of Power Spectral Density 51

 Channel 01 52

 Channel 06 53

 Channel 11 54

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

Granted FCC ID	:	MSQ6218-A1
Product Name	:	ADSL Wireless Modem Router
Model Name	:	6388-A1-XXX; 6218-A1-XXX
Frequency Range	:	2.412 GHz ~ 2.462GHz
Support Channel	:	11 Channels
Modulation Skill	:	DBPSK, DQPSK, CCK, OFDM
Power Type	:	Powered by the AC to AC adapter, Model: AA-1570DT I/P: 120VAC, 60Hz, 15W O/P: 15VAC, 700mA 183cm length, non-shielded, no ferrite core (AC to Adapter) 182cm length, non-shielded, no ferrite core (Adapter to Router)
Data Cable	:	RJ45 cable x1, 60cm length, non-shielded, no ferrite core RJ45 cable x2, 1m length, non-shielded, no ferrite core RJ45 cable x1, 30m length, non-shielded, no ferrite core RJ11 cable x1, 2m length, non-shielded, no ferrite core RJ11 cable x1, 30m length, non-shielded, no ferrite core

1.3 Test method

- 1.3.1 The LAN2, LAN3 and PHONE ports of EUT are termination by RJ45/RJ11 cables.
- 1.3.2 The LAN1 port connected to far LAN card.
- 1.3.3 The LINE port connected to ADSL evaluation module located remotely.
- 1.3.4 Connected the LAN4 port of EUT with the LAN interface of PC. Using PC and software provided by the manufacturer to control EUT, the test is performed under the specific conditions.
- 1.3.5 Set different data rate and channel (CH01/CH06/CH11) being tested and repeat the procedures above.
 - (a) Radiated for Intentional test:
 - making EUT to the mode of continuous transmission
 - (b) Conducted test and Radiated for unintentional test:
 - making EUT to the linking (Rx/Tx) mode with far support equipments

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : **IBM 8434**
Model No. : IVG
Serial No. : 99CCZG9
FCC ID : N/A, DoC (Declaration of Confirmation) Approved
BSMI : R33026
Power type : 100 ~ 127VAC/6A, 200 ~ 240VAC/3A, 50 ~ 60Hz, Switching
Power cord : Non-shielded, 1.8m length, Plastic hood, No ferrite core

Monitor : **HP 15' Color Monitor**
Model No. : D8894A
Serial No. : CN02364355
FCC ID : ARSCM356N
BSMI : 3882A031
Power type : 100 ~ 240 VAC / 1.5A, 50 ~ 60 Hz, Switching
Power cord : Non-shielded, 1.80m length, Plastic hood, No ferrite core
Data cable : Shielded, 1.50m length, Plastic hood, with ferrite core

Printer : **EPSON**
Model No. : B241A
Serial No. : FAPY155090
FCC ID : N/A, DoC Approved
BSMI : R33126
Power type : Switching adaptor
Power cord : Non-shielded, 198cm length, No ferrite core
Data cable : Shielded, 1.50m length, No ferrite core

PS/2 Mouse : **HP**
Model No. : M-S69
Serial No. : 334684-002 323614-001
FCC ID : DoC Approved
BSMI : R41126
Power type : By PC
Power cord : Shielded, 1.90m length, No ferrite core

PS/2 Keyboard : **HP**
Model No. : 5181
Serial No. : BE21700405
FCC ID : DoC Approved
BSMI : 3892C981
Power type : By PC
Data cable : Shielded, 1.73m length, no ferrite core

Modem : **ACEEX**
Model No. : DM-1414
Serial No. : 9010583
FCC ID : IFAXDM1414
Power type : Linear
Power cord : Non-shielded, 1.9m length, No ferrite cord
Data cable : RS232, Shielded, 1.2m length, No ferrite core
RJ11C x 2, 7' length non-shielded, No ferrite core

USB Game pad : Logitech
Model No. : G-UC3B
Serial No. : AE3500500
FCC ID : DoC Approved
BSMI : 4902A047
Power type : Powered by PC
Power Cable : Shielded, 187cm length, Plastic hood, No ferrite core.

LAN Card : D-Link
Model No. : DFE-530TX
Serial No. : 0050BAE32FF3
FCC ID : N/A, DoC Approved

ADSL Emulator : GLOBESPAN SEMICONDUCTOR INC.
Model No. : GDS-0205-04
Serial No. : 077 3.1


Notebook PC : Twinhead
Model No. : N222S
Serial No. : SY3261000988
FCC ID : DoC (Declaration of Confirmation) Approved
BSMI : 71001018

Power adaptor : LI Shin International Enterprise Corp.
Model No. : LSE9802A2060
Serial No. : A20231065818
BSMI : 3882B381
Power type : 100 ~ 240VAC / 50 ~ 60Hz, 1.5A, Switching
Power cord : Non-shielded, 1.0m length, Plastic hood, No ferrite core
(Main power to adaptor)
Shielded, 1.5m length, Plastic hood, ferrite core
(DC plug to adaptor)

WLAN Card : Gemtek Technology Co., Ltd.
Model No. : C911003
FCC ID : MXF-C911003

1.5 Configuration of System Under Test


1.5.1 Conducted and Radiated for Unintentional

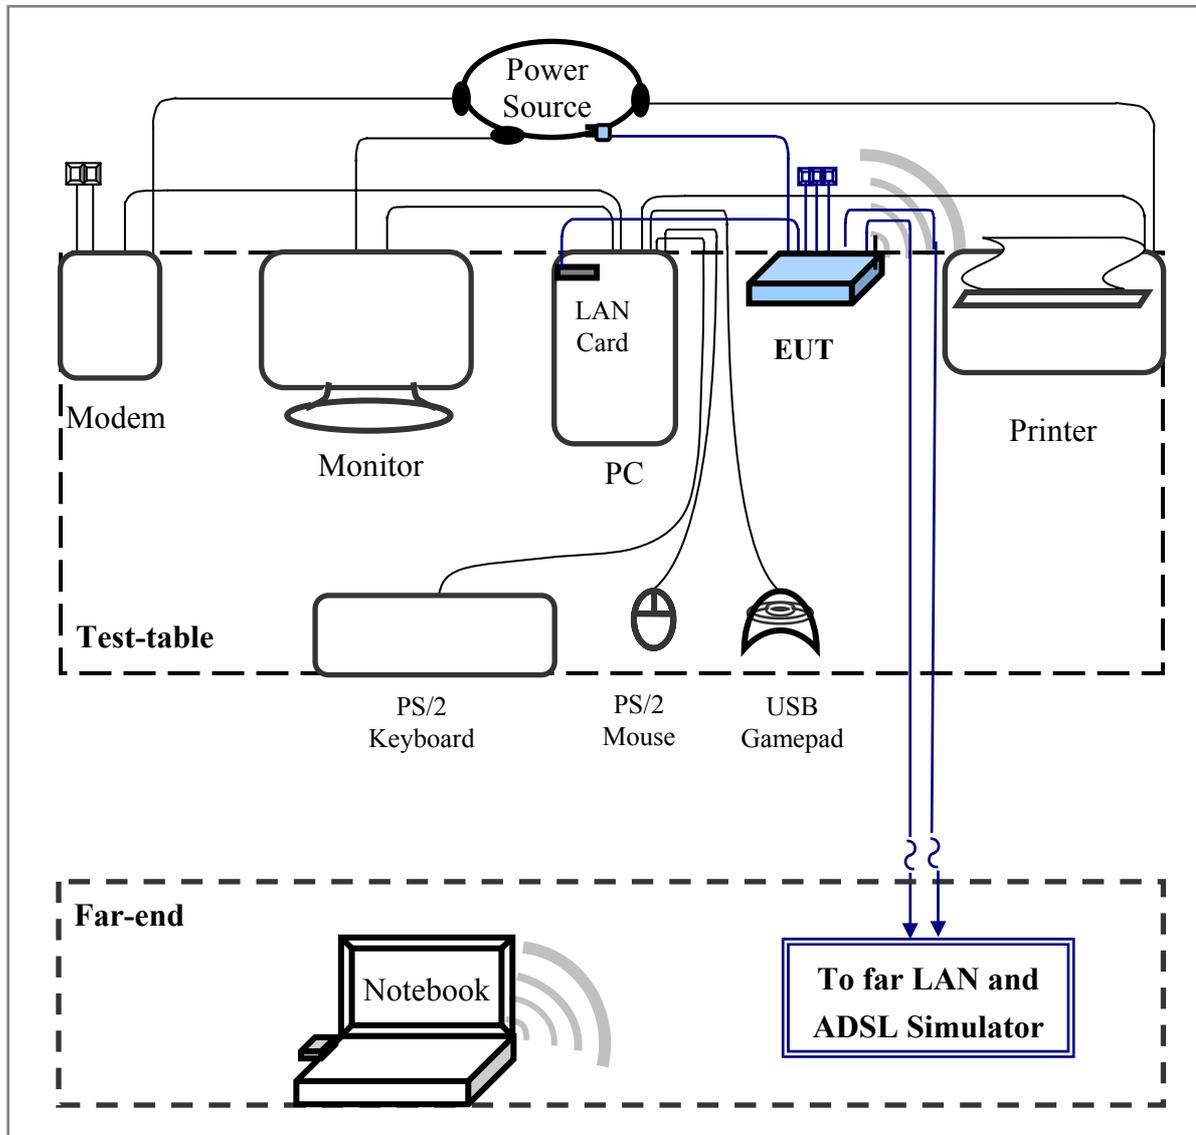

Connections of Equipment

- PC:**
- *Parallel Port --- a printer
 - *VGA Port --- a monitor
 - *Serial Port --- an external modem
 - *USB Port --- a USB gamepad
 - *LAN Interface --- EUT
 - *PS/2-key Port --- a PS/2 keyboard
 - *PS/2-mouse Port --- a PS/2 mouse

1.5.2 Radiated of Intentional

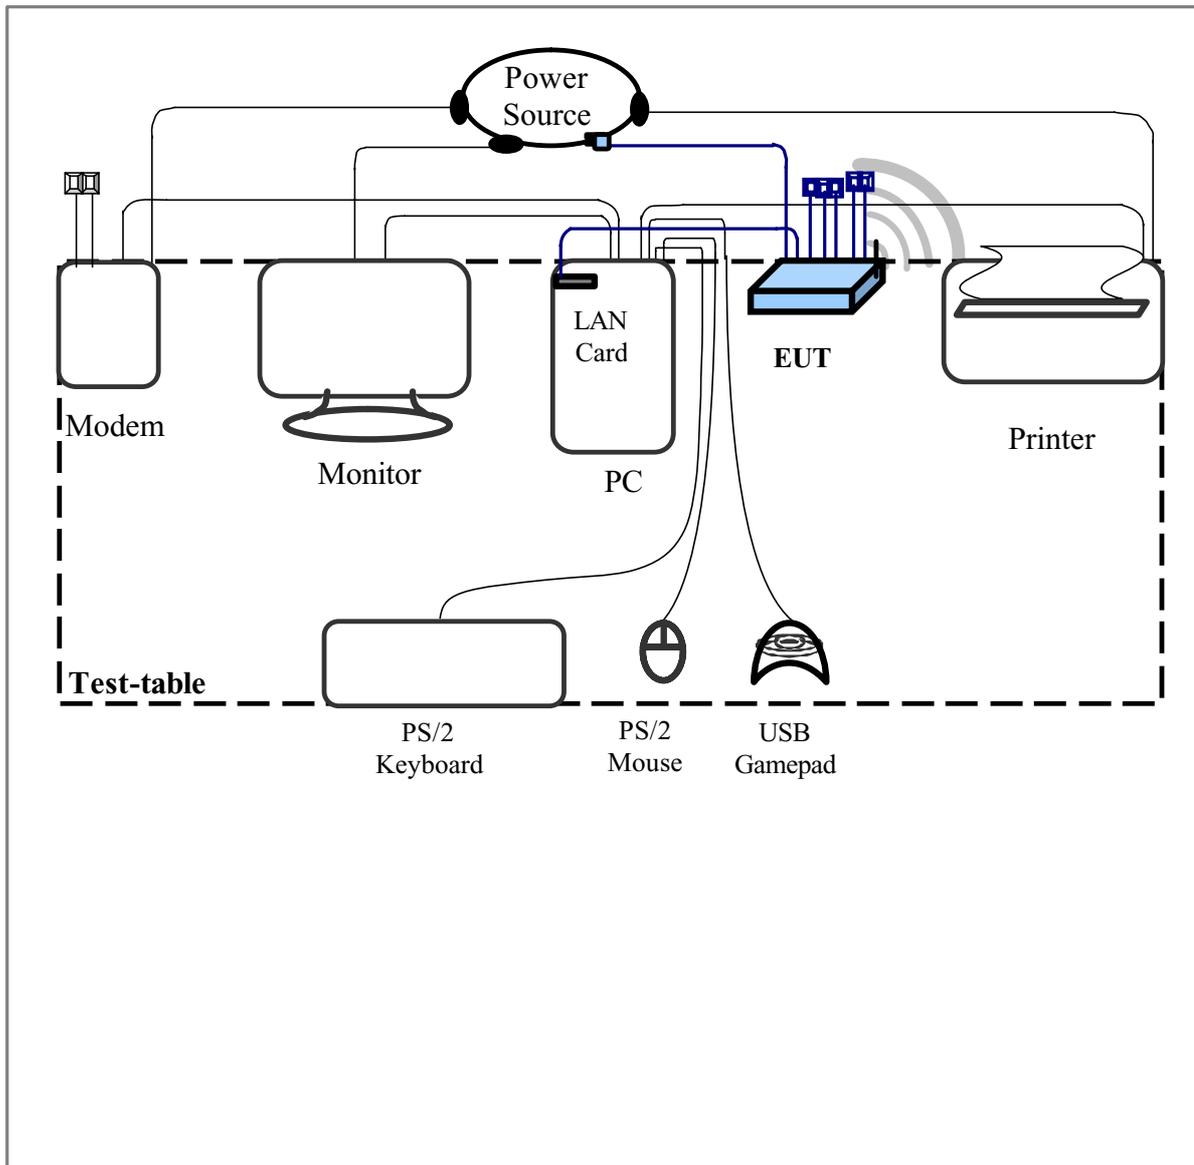

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by LAN port.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a LAN interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Sect.15.107 (Conducted limits) and Section15.109 (Radiated emission limits) is same as Section15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT can be equipped with un-detachable antenna. The external antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector. The antenna requirement stated in Section 15.203 is inapplicable to this EUT.

The custom antenna specification of list as below:

Manufacturer : Wha Yu Industrial Co., Ltd.
Part No : C660-510003-A
Connector : SMA Plug Reverse
Antenna Type : Dipole Antenna
Antenna Gain : 1.80dBi

VI. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

4.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	08/05/05
RF Filter Section	85460A	HP	3448A00217	08/05/05
LISN (EUT)	LISN-01	TRC	99-05	10/07/05
LISN (Support E.)	LISN-01	TRC	9912-03, 04	11/04/05
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	05/20/05
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	05/20/05
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	05/20/05
Coaxial Cable (2 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	05/20/05
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	05/20/05
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	05/20/05
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	05/20/05

4.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: RX mode

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBµV)	QP (dBµV)	Average (dBµV)	QP-limit (dBµV)	AVG-limit (dBµV)	Margin (dB)
Line 1	269.695	54.93	69.67	16.05	64.49	54.49	-13.13
	301.175	55.14	49.54	27.79	62.94	52.94	-12.03
	4053.000	37.45	---	---	56.00	46.00	-8.55
	5540.000	41.45	---	---	60.00	50.00	-8.55
	7360.000	45.75	---	---	60.00	50.00	-4.25
	8861.955	47.74	47.52	42.21	60.00	50.00	-7.79
	9967.860	50.40	51.94	44.24	60.00	50.00	-5.76
	11442.450	51.05	50.78	42.26	60.00	50.00	-7.74
	14730.000	46.29	---	---	60.00	50.00	-3.71
	17350.000	43.69	---	---	60.00	50.00	-6.31
Line 2	223.935	55.31	48.80	14.65	63.69	53.69	-14.89
	290.940	55.31	48.40	14.19	62.14	52.14	-13.74
	322.540	53.85	47.49	12.59	60.83	50.83	-13.34
	4053.000	36.21	---	---	56.00	46.00	-9.79
	5160.000	38.46	---	---	60.00	50.00	-11.54
	7010.000	43.09	---	---	60.00	50.00	-6.91
	9964.435	52.23	52.13	44.73	60.00	50.00	-5.27
	11441.020	51.14	51.01	43.05	60.00	50.00	-6.95
	12916.740	51.00	49.75	41.01	60.00	50.00	-8.99
	15130.030	49.72	50.07	41.31	60.00	50.00	-8.69

NOTE:

- (1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit

Test mode: IEEE 802.11b Channel 1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	186.675	55.38	50.08	23.43	64.71	54.71	-14.63
	299.550	55.48	49.65	26.30	61.97	51.97	-12.32
	317.405	54.16	48.65	14.74	60.97	50.97	-12.32
	8484.060	47.90	46.56	40.39	60.00	50.00	-9.61
	11806.06	51.28	51.06	45.04	60.00	50.00	-4.96
	14019.45	47.30	47.26	39.22	60.00	50.00	-10.78
Line 2	200.060	55.79	49.25	25.10	64.40	54.40	-15.15
	255.450	55.55	48.75	16.96	62.74	52.74	-13.99
	305.345	55.04	48.19	17.93	61.49	51.49	-13.30
	9961.730	49.59	51.78	45.16	60.00	50.00	-4.84
	11803.370	51.81	51.15	45.18	60.00	50.00	-4.82
	14387.450	47.65	50.40	41.08	60.00	50.00	-8.92

Test mode: IEEE 802.11b Channel 6

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	277.840	55.57	49.82	16.14	62.54	52.54	-12.72
	299.370	55.84	49.69	26.07	61.71	51.71	-12.02
	325.135	53.17	48.06	14.47	60.74	50.74	-12.68
	10695.800	52.80	49.95	41.88	60.00	50.00	-8.12
	11802.500	51.83	51.33	45.26	60.00	50.00	-4.74
	14016.490	48.10	47.79	38.93	60.00	50.00	-11.07
Line 2	187.090	56.48	49.50	23.78	64.94	54.94	-15.44
	251.330	55.73	48.69	17.87	62.94	52.94	-14.25
	298.565	55.24	48.57	27.54	61.57	51.57	-13.00
	9957.860	52.82	52.52	45.43	60.00	50.00	-4.57
	10694.46	51.90	50.06	42.68	60.00	50.00	-7.32
	14751.06	52.03	51.24	41.67	60.00	50.00	-8.33

Test mode: IEEE 802.11b Channel 11

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	184.180	55.07	50.05	19.43	64.77	54.77	-14.72
	253.505	55.00	49.76	18.73	63.29	53.29	-13.53
	298.470	55.69	49.72	25.00	61.97	51.97	-12.25
	320.180	53.78	48.44	14.50	60.89	50.89	-12.45
	10322.750	49.52	51.62	45.64	60.00	50.00	-4.36
	13273.880	49.12	48.50	42.15	60.00	50.00	-7.85
Line 2	254.030	55.55	48.75	18.39	63.20	53.20	-14.45
	298.035	55.82	48.54	26.84	61.80	51.80	-13.26
	339.270	52.58	46.64	10.35	60.34	50.34	-13.70
	9953.875	53.13	52.79	45.74	60.00	50.00	-4.26
	11429.290	52.21	51.76	43.84	60.00	50.00	-6.16
	14376.910	50.92	50.68	41.29	60.00	50.00	-8.71

Test mode: IEEE 802.11g Channel 1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	165.950	55.49	50.14	15.28	65.31	55.31	-15.17
	194.360	54.94	49.73	17.65	64.49	54.49	-14.76
	278.560	54.15	49.87	15.22	62.54	52.54	-12.67
	308.630	54.33	49.54	14.84	61.23	51.23	-11.69
	8150.000	46.68	---	---	60.00	50.00	-3.32
	9636.160	50.83	51.17	44.26	60.00	50.00	-5.74
Line 2	164.045	55.37	49.41	14.05	65.40	55.40	-15.99
	242.395	54.01	48.47	13.02	63.14	53.14	-14.67
	297.435	54.01	48.06	14.06	61.71	51.71	-13.65
	354.270	51.18	45.46	7.86	59.91	49.91	-14.45
	9999.095	51.02	50.97	44.68	60.00	50.00	-5.32
	15178.61	47.56	47.17	39.62	60.00	50.00	-10.38

Test mode: IEEE 802.11g Channel 6

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	165.725	55.49	50.11	15.46	65.31	55.31	-15.20
	288.390	54.92	49.37	14.57	62.23	52.23	-12.86
	299.315	54.69	49.26	14.87	61.49	51.49	-12.23
	8470.000	46.31	---	---	60.00	50.00	-3.69
	9982.305	50.27	50.76	44.63	60.00	50.00	-5.37
	14419.910	47.08	45.66	37.46	60.00	50.00	-12.54
Line 2	204.915	55.06	48.80	13.37	64.29	54.29	-15.49
	269.950	54.92	48.40	12.45	62.46	52.46	-14.06
	309.485	54.36	48.19	11.49	61.23	51.23	-13.04
	8470.000	46.82	---	---	60.00	50.00	-3.18
	10349.380	50.78	48.38	40.62	60.00	50.00	-9.38
	14782.540	48.59	49.51	40.67	60.00	50.00	-9.33

Test mode: IEEE 802.11g Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	180.520	55.33	50.22	15.74	64.94	54.94	-14.72
	272.445	54.94	49.69	15.17	62.66	52.66	-12.97
	297.260	55.01	49.60	15.32	61.57	51.57	-11.97
	8120.000	45.94	---	---	60.00	50.00	-4.06
	9600.250	51.02	49.57	41.97	60.00	50.00	-8.03
	12187.500	49.37	48.64	41.15	60.00	50.00	-8.85
Line 2	187.350	56.06	49.46	14.84	64.71	54.71	-15.25
	232.670	55.37	48.76	13.37	63.54	53.54	-14.78
	281.460	55.35	48.67	12.85	62.23	52.23	-13.56
	321.575	54.15	47.73	11.46	60.89	50.89	-13.16
	11077.94	51.54	51.37	44.60	60.00	50.00	-5.40
	14401.38	51.14	51.19	40.19	60.00	50.00	-8.81

V. Section 15.247 (a): Technical description of the EUT


Direct Sequence System is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

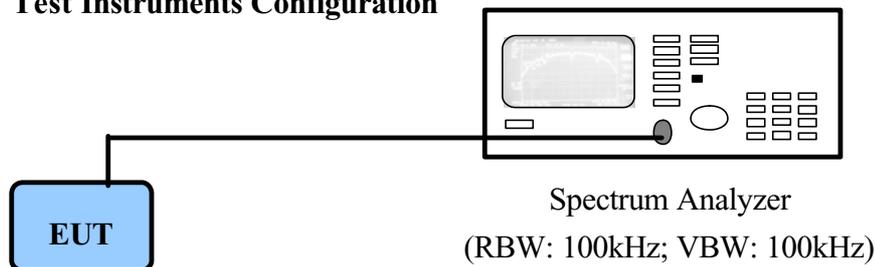

PC to control the EUT at maximal power output and channel number and set antenna kit

6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/02/05

6.4 Test Result of Bandwidth


Channel	802.11b	802.11g
01	14.88 MHz	16.72 MHz
06	14.72 MHz	16.64 MHz
11	14.72 MHz	16.60 MHz

- Note:
- The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)=100kHz and set the $span \gg RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 - The attachments show these on the following pages.

6dB Bandwidth of Channel 1 (The minimum 6dB BW at least 500kHz)




IEEE 802.11b

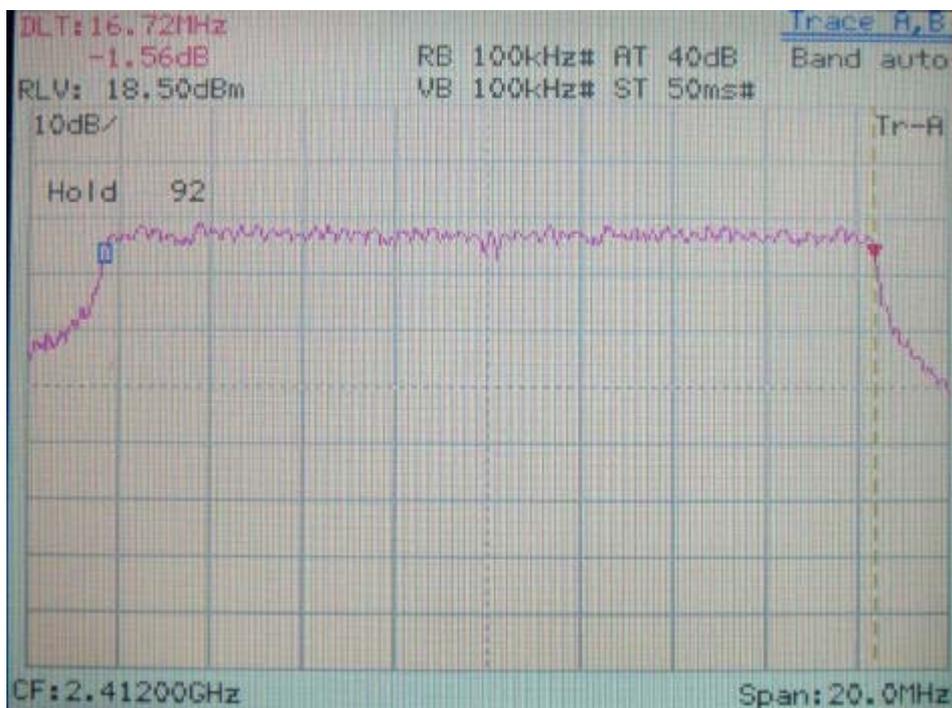


IEEE 802.11g

6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)

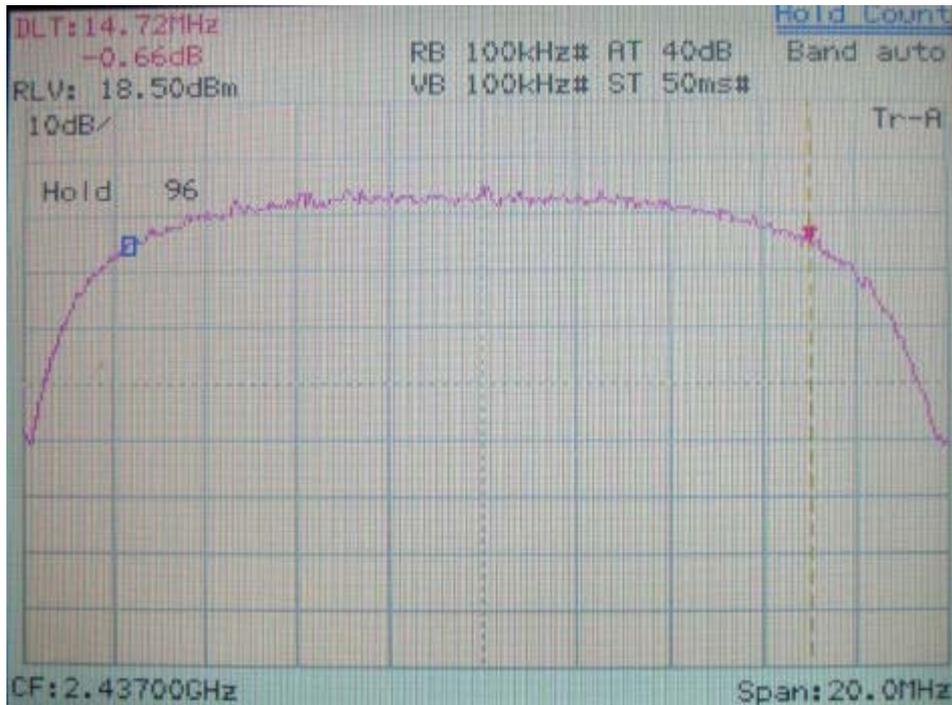


IEEE 802.11b

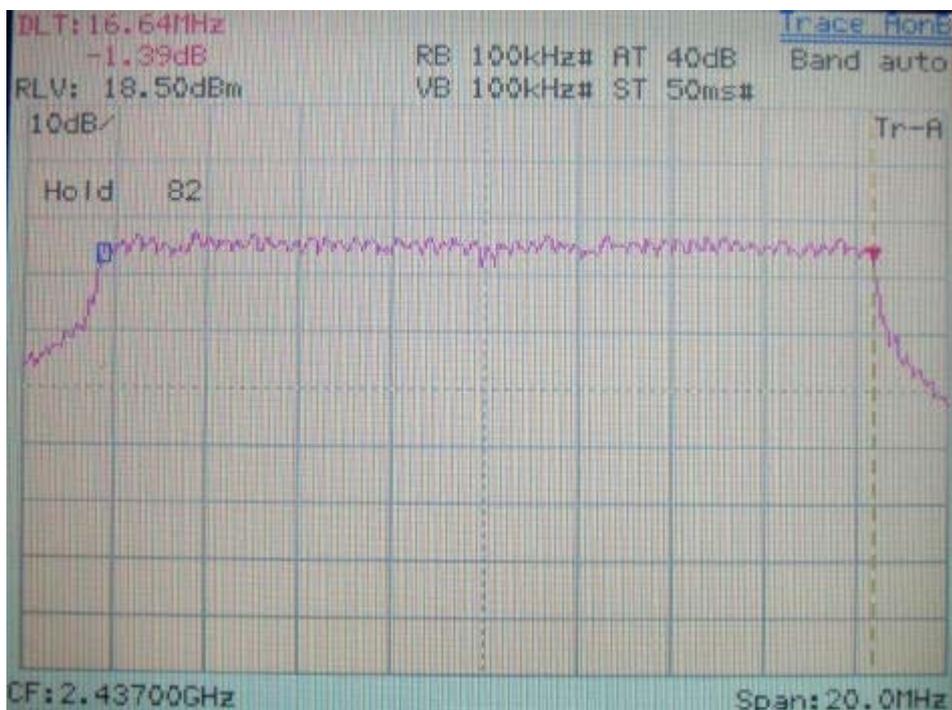


IEEE 802.11g

6dB Bandwidth of Channel 11 (The minimum 6dB BW at least 500kHz)

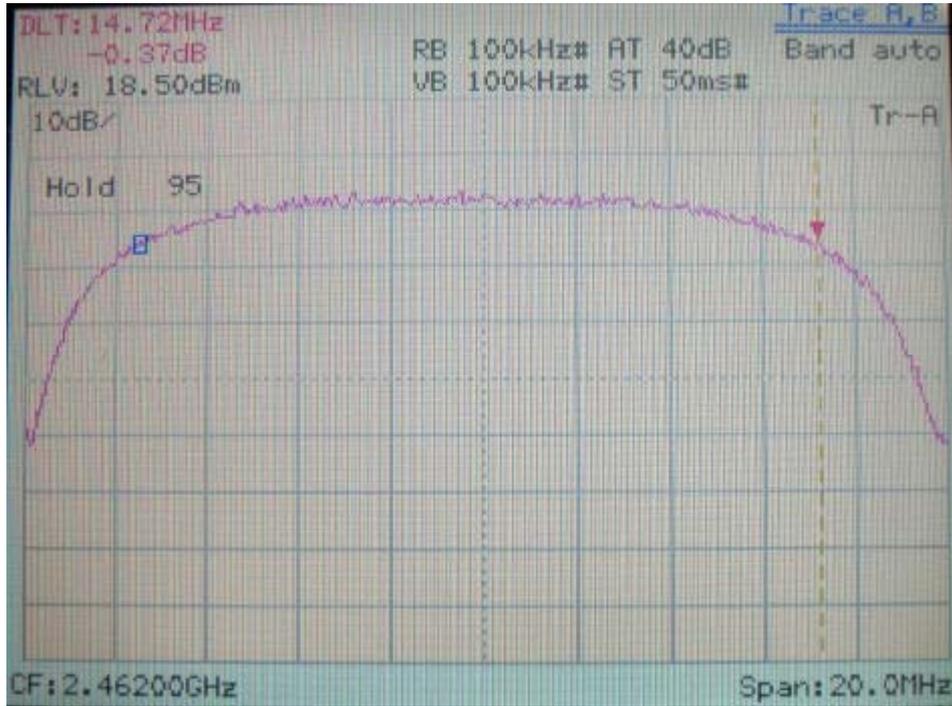


IEEE 802.11b

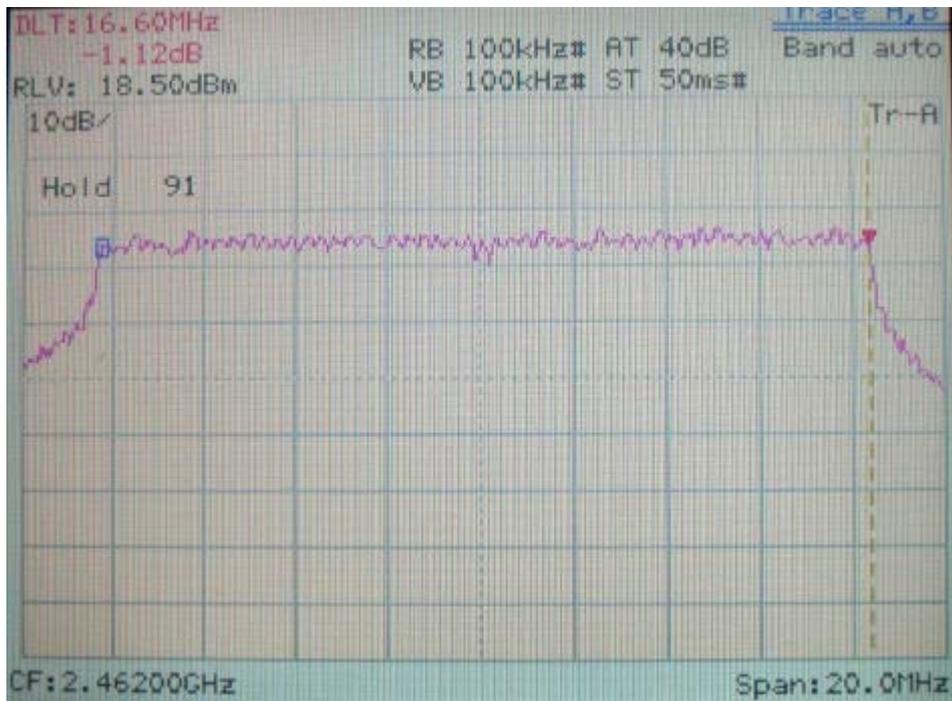

IEEE 802.11g

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup

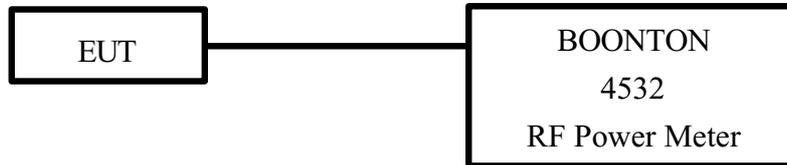

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	04/16/05
Peak Power Sensor	57340	BOONTON	2696	04/16/05

7.3 Test Result

Formula:

$$\text{RF Output of EUT} + |\text{Cable Loss}| = \text{Output Peak Power}$$

Channel	RF Output	Cable Loss	Output Peak Power	
	dBm	dBm	dBm	mW
802.11b CH01	13.10	1.00	14.10	25.70
802.11b CH06	13.16	1.00	14.16	26.06
802.11b CH11	13.08	1.00	14.08	25.59
802.11g CH01	15.97	1.00	16.97	49.77
802.11g CH06	15.38	1.00	16.38	43.45
802.11g CH11	15.21	1.00	16.21	41.78

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30MHz to 1000MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + (\text{Cable Loss} - \text{Amplifier Gain}) + \text{Switching Box Loss}$$

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + (\text{Cable Loss} - \text{Amplifier Gain}) + \text{Switching Box Loss}$$

8.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	08/05/05
RF Filter Section	85460A	HP	3448A00217	08/05/05
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	10/11/05
Pre-amplifier	PA1F	TRC	1FAC	05/20/05
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/05
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/05
Spectrum Analyzer	8564E	HP	3720A00840	08/13/05
Microwave Preamplifier	84125C	HP	US36433002	08/13/05
Horn Antenna	3115	EMCO	9104-3668	12/27/05
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	10/15/05
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	10/15/05
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	01/11/06
Pre-amplifier	PA2F	TRC	2F1GZ	03/20/05
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	03/20/05
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	03/20/05

8.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

Test mode: RX mode for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
67.59	29.36	1.00	142	1.55	30.91	40.00	-9.09
188.84	39.60	1.00	285	-3.67	35.93	43.50	-7.57
251.89	40.43	1.00	338	-4.05	36.38	46.00	-9.62
313.12	39.50	1.00	150	-3.45	36.05	46.00	-9.95
375.00	44.96	1.00	210	-1.87	43.09	46.00	-2.91
875.00	32.58	1.00	60	7.60	40.18	46.00	-5.82

Test mode: RX mode for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
37.54	29.76	1.00	222	6.11	35.87	40.00	-4.13
106.99	34.93	1.00	93	-1.63	33.30	43.50	-10.20
126.39	36.85	1.00	195	-2.46	34.39	43.50	-9.11
313.12	39.25	1.00	248	-3.45	35.80	46.00	-10.20
375.56	40.38	1.00	193	-1.85	38.53	46.00	-7.47
625.00	35.34	1.00	258	7.56	42.90	46.00	-3.10

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: RX mode for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2034.17	1.00	263	35.91	---	4.49	40.40	---	73.96	53.96	-13.56
4074.17	1.00	67	30.74	---	12.62	43.36	---	73.96	53.96	-10.60
7176.67	1.00	325	25.24	---	21.27	46.51	---	73.96	53.96	-7.45
11150.42	1.00	289	27.24	---	21.98	49.22	---	73.96	53.96	-4.74
21885.21	1.00	13	49.16	---	3.01	52.17	---	73.96	53.96	-1.79

Test mode: RX mode for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2034.17	1.00	156	37.41	---	4.49	41.90	---	73.96	53.96	-12.06
4081.25	1.00	204	32.57	---	12.63	45.20	---	73.96	53.96	-8.76
5625.42	1.00	287	28.24	---	17.30	45.54	---	73.96	53.96	-8.42
11370.00	1.00	142	27.74	---	21.35	49.09	---	73.96	53.96	-4.87
24938.12	1.00	96	48.49	---	3.08	51.57	---	73.96	53.96	-2.39

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
148.82	36.21	1.00	251	-3.11	33.10	43.50	-10.40
188.23	39.97	1.00	274	-3.68	36.29	43.50	-7.21
251.28	40.11	1.00	326	-4.04	36.07	46.00	-9.93
313.12	39.97	1.00	152	-3.45	36.52	46.00	-9.48
375.00	44.66	1.00	215	-1.87	42.79	46.00	-3.21
625.94	30.31	1.00	64	7.60	37.91	46.00	-8.09

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.56	24.59	1.00	190	5.85	30.44	40.00	-9.56
125.79	35.39	1.00	227	-2.43	32.96	43.50	-10.54
251.89	38.64	1.00	273	-4.05	34.59	46.00	-11.41
313.12	39.18	1.00	233	-3.45	35.73	46.00	-10.27
375.00	38.69	1.00	222	-1.87	36.82	46.00	-9.18
625.00	34.54	1.00	224	7.56	42.10	46.00	-3.90

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1889.28	1.00	210	43.36	25.67	9.82	53.18	35.49	73.96	53.96	-18.47
1954.17	1.00	340	38.66	---	8.81	47.47	---	73.96	53.96	-6.49
2037.50	1.00	143	39.50	---	8.20	47.70	---	73.96	53.96	-6.26
9650.42	1.00	104	36.77	---	11.47	48.24	---	73.96	53.96	-5.72
12061.04	1.00	239	39.44	---	9.81	49.25	---	73.96	53.96	-4.71

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1900.05	1.00	59	44.63	23.33	9.65	54.28	32.98	73.96	53.96	-19.68
2365.62	1.00	153	44.33	35.67	9.11	53.44	44.78	73.96	53.96	-9.18
2616.52	1.00	129	45.83	37.33	9.71	55.54	47.04	73.96	53.96	-6.92
9650.42	1.00	313	37.44	---	11.47	48.91	---	73.96	53.96	-5.05
12061.04	1.00	338	39.94	---	9.81	49.75	---	73.96	53.96	-4.21
24120.00	1.00	211	46.32	---	3.40	49.72	---	73.96	53.96	-4.24

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.70	24.59	1.00	42	5.83	30.42	40.00	-9.58
187.50	39.43	1.00	280	-3.68	35.75	43.50	-7.75
313.12	40.06	1.00	142	-3.45	36.61	46.00	-9.39
375.00	44.64	1.00	218	-1.87	42.77	46.00	-3.23
625.00	29.36	1.00	64	7.56	36.92	46.00	-9.08
875.00	21.75	1.00	232	13.94	35.69	46.00	-10.31

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
38.95	25.04	1.00	201	5.93	30.97	40.00	-9.03
125.00	34.43	1.00	239	-2.39	32.04	43.50	-11.46
188.84	36.60	1.00	171	-3.67	32.93	43.50	-10.57
313.12	39.71	1.00	231	-3.45	36.26	46.00	-9.74
376.17	39.05	1.00	189	-1.82	37.23	46.00	-8.77
625.00	34.35	1.00	251	7.56	41.91	46.00	-4.09

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1887.50	1.00	123	37.66	---	9.85	47.51	---	73.96	53.96	-6.45
1954.17	1.00	351	38.33	---	8.81	47.14	---	73.96	53.96	-6.82
2062.50	1.00	138	39.83	---	8.27	48.10	---	73.96	53.96	-5.86
2612.50	1.00	165	38.33	---	9.70	48.03	---	73.96	53.96	-5.93
9747.08	1.00	15	36.60	---	11.89	48.49	---	73.96	53.96	-5.47
12187.92	1.00	54	39.60	---	9.74	49.34	---	73.96	53.96	-4.62

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1954.17	1.00	151	39.66	---	8.81	48.47	---	73.96	53.96	-5.49
2062.50	1.00	186	40.33	---	8.27	48.60	---	73.96	53.96	-5.36
2616.72	1.00	92	45.33	37.00	9.71	55.04	46.71	73.96	53.96	-7.25
9747.08	1.00	166	36.10	---	11.89	47.99	---	73.96	53.96	-5.97
12187.92	1.00	159	40.44	---	9.74	50.18	---	73.96	53.96	-3.78
24371.46	1.00	290	47.49	---	3.26	50.75	---	73.96	53.96	-3.21

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
187.50	39.28	1.00	277	-3.68	35.60	43.50	-7.90
251.28	39.20	1.00	193	-4.04	35.16	46.00	-10.84
313.12	40.36	1.00	148	-3.45	36.91	46.00	-9.09
375.00	44.64	1.00	215	-1.87	42.77	46.00	-3.23
625.00	29.52	1.00	169	7.57	37.09	46.00	-8.91
875.00	21.77	1.00	232	13.94	35.71	46.00	-10.29

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
38.95	25.71	1.00	191	5.93	31.64	40.00	-8.36
126.39	36.26	1.00	276	-2.46	33.80	43.50	-9.70
188.84	35.91	1.00	178	-3.67	32.24	43.50	-11.26
313.12	39.38	1.00	243	-3.45	35.93	46.00	-10.07
375.00	39.15	1.00	189	-1.87	37.28	46.00	-8.72
625.00	34.57	1.00	245	7.56	42.13	46.00	-3.87

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBmV		dB/m	dBmV/m		dBmV/m		dB
1887.50	1.00	285	40.66	---	9.85	50.51	---	73.96	53.96	-3.45
2087.50	1.00	187	39.50	---	8.34	47.84	---	73.96	53.96	-6.12
2308.51	1.00	152	45.00	37.33	8.95	53.95	46.28	73.96	53.96	-7.68
2616.67	1.00	151	40.83	---	9.71	50.54	---	73.96	53.96	-3.42
9849.79	1.00	182	36.28	---	11.93	48.21	---	73.96	53.96	-5.75
24619.37	1.00	246	46.82	---	3.01	49.83	---	73.96	53.96	-4.13

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBmV		dB/m	dBmV/m		dBmV/m		dB
1887.50	1.00	345	40.33	---	9.85	50.18	---	73.96	53.96	-3.78
2087.50	1.00	131	41.16	---	8.34	49.50	---	73.96	53.96	-4.46
2305.96	1.00	137	50.17	42.00	8.95	59.12	50.95	73.96	53.96	-3.01
2617.96	1.00	189	46.50	39.67	9.71	56.21	49.38	73.96	53.96	-4.58
7384.79	1.00	64	36.94	---	10.42	47.36	---	73.96	53.96	-6.60
9849.79	1.00	184	36.11	---	11.93	48.04	---	73.96	53.96	-5.92

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
67.59	27.91	1.00	309	1.55	29.46	40.00	-10.54
187.50	41.95	1.00	258	-3.68	38.27	43.50	-5.23
251.28	40.14	1.00	216	-4.04	36.10	46.00	-9.90
312.50	42.99	1.00	203	-3.47	39.52	46.00	-6.48
375.00	44.74	1.00	211	-1.87	42.87	46.00	-3.13
625.00	31.46	1.00	32	7.56	39.02	46.00	-6.98

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
43.77	26.48	1.00	229	4.89	31.37	40.00	-8.63
106.99	36.23	1.00	73	-1.63	34.60	43.50	-8.90
143.97	37.37	1.00	90	-2.97	34.40	43.50	-9.10
188.84	38.50	1.00	308	-3.67	34.83	43.50	-8.67
376.17	38.72	1.00	351	-1.82	36.90	46.00	-9.10
625.00	34.96	1.00	266	7.56	42.52	46.00	-3.48

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1885.42	1.00	297	40.16	---	9.88	50.04	---	73.96	53.96	-3.92
2037.50	1.00	150	39.33	---	8.20	47.53	---	73.96	53.96	-6.43
7233.75	1.00	99	36.94	---	10.07	47.01	---	73.96	53.96	-6.95
9650.42	1.00	163	36.61	---	11.47	48.08	---	73.96	53.96	-5.88
12061.04	1.00	146	39.44	---	9.81	49.25	---	73.96	53.96	-4.71
24120.00	1.00	315	46.49	---	3.40	49.89	---	73.96	53.96	-4.07

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1886.58	1.00	84	43.52	22.67	9.86	53.38	32.53	73.96	53.96	-20.58
2037.50	1.00	215	40.00	---	8.20	48.20	---	73.96	53.96	-5.76
2625.00	1.00	122	39.34	---	9.72	49.06	---	73.96	53.96	-4.90
4823.12	1.00	135	40.44	---	3.76	44.20	---	73.96	53.96	-9.76
7233.75	1.00	360	35.78	---	10.07	45.85	---	73.96	53.96	-8.11
9650.42	1.00	79	36.27	---	11.47	47.74	---	73.96	53.96	-6.22
12061.04	1.00	345	39.44	---	9.81	49.25	---	73.96	53.96	-4.71

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
149.43	37.58	1.00	275	-3.12	34.46	43.50	-9.04
187.50	42.03	1.00	281	-3.68	38.35	43.50	-5.15
251.28	40.93	1.00	238	-4.04	36.89	46.00	-9.11
313.12	42.21	1.00	225	-3.45	38.76	46.00	-7.24
375.00	44.85	1.00	206	-1.87	42.98	46.00	-3.02
625.00	31.24	1.00	50	7.56	38.80	46.00	-7.20

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
43.77	26.69	1.00	203	4.89	31.58	40.00	-8.42
69.70	26.55	1.00	290	1.37	27.92	40.00	-12.08
143.97	37.85	1.00	79	-2.97	34.88	43.50	-8.62
188.23	38.37	1.00	240	-3.68	34.69	43.50	-8.81
376.17	39.53	1.00	217	-1.82	37.71	46.00	-8.29
625.00	35.04	1.00	266	7.56	42.60	46.00	-3.40

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1887.50	1.00	223	42.00	---	9.85	51.85	---	73.96	53.96	-2.11
2062.50	1.00	213	40.00	---	8.27	48.27	---	73.96	53.96	-5.69
7312.29	1.00	35	36.11	---	10.30	46.41	---	73.96	53.96	-7.55
9747.08	1.00	123	35.94	---	11.89	47.83	---	73.96	53.96	-6.13
12187.92	1.00	0	40.94	---	9.74	50.68	---	73.96	53.96	-3.28
21934.79	1.00	214	46.82	---	3.09	49.91	---	73.96	53.96	-4.05

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1887.50	1.00	106	42.83	---	9.85	52.68	---	73.96	53.96	-1.28
2062.50	1.00	167	40.50	---	8.27	48.77	---	73.96	53.96	-5.19
2612.50	1.00	93	40.50	---	9.70	50.20	---	73.96	53.96	-3.76
9747.08	1.00	1	35.77	---	11.89	47.66	---	73.96	53.96	-6.30
12187.92	1.00	187	39.44	---	9.74	49.18	---	73.96	53.96	-4.78
21934.79	1.00	177	47.16	---	3.09	50.25	---	73.96	53.96	-3.71
24371.46	1.00	197	47.33	---	3.26	50.59	---	73.96	53.96	-3.37

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
167.62	39.41	1.00	282	-3.71	35.70	43.50	-7.80
187.50	41.63	1.00	285	-3.68	37.95	43.50	-5.55
250.00	41.89	1.00	244	-4.01	37.88	46.00	-8.12
312.50	45.66	1.00	211	-3.47	42.19	46.00	-3.81
375.00	44.64	1.00	207	-1.87	42.77	46.00	-3.23
625.00	30.64	1.00	63	7.56	38.20	46.00	-7.80

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.56	24.58	1.00	216	5.85	30.43	40.00	-9.57
125.79	35.68	1.00	246	-2.43	33.25	43.50	-10.25
250.67	38.53	1.00	235	-4.02	34.51	46.00	-11.49
312.50	39.51	1.00	240	-3.47	36.04	46.00	-9.96
375.00	39.08	1.00	186	-1.87	37.21	46.00	-8.79
625.00	34.50	1.00	247	7.56	42.06	46.00	-3.94

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1886.48	1.00	250	44.02	22.67	9.86	53.88	32.53	73.96	53.96	-20.08
2087.50	1.00	207	40.66	---	8.34	49.00	---	73.96	53.96	-4.96
2312.50	1.00	173	39.67	---	8.96	48.63	---	73.96	53.96	-5.33
2610.42	1.00	186	37.33	---	9.70	47.03	---	73.96	53.96	-6.93
9849.79	1.00	206	36.28	---	11.93	48.21	---	73.96	53.96	-5.75
12308.75	1.00	30	38.27	---	9.56	47.83	---	73.96	53.96	-6.13

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1885.42	1.00	52	40.33	---	9.88	50.21	---	73.96	53.96	-3.75
2087.50	1.00	168	40.66	---	8.34	49.00	---	73.96	53.96	-4.96
2314.08	1.00	148	46.66	35.50	8.97	55.63	44.47	73.96	53.96	-9.49
2614.81	1.00	136	43.16	33.00	9.71	52.87	42.71	73.96	53.96	-11.25
9849.79	1.00	301	36.94	---	11.93	48.87	---	73.96	53.96	-5.09
12308.75	1.00	203	38.11	---	9.56	47.67	---	73.96	53.96	-6.29
22157.92	1.00	325	46.32	---	3.25	49.57	---	73.96	53.96	-4.39

8.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

Channel 1 of IEEE 802.11b

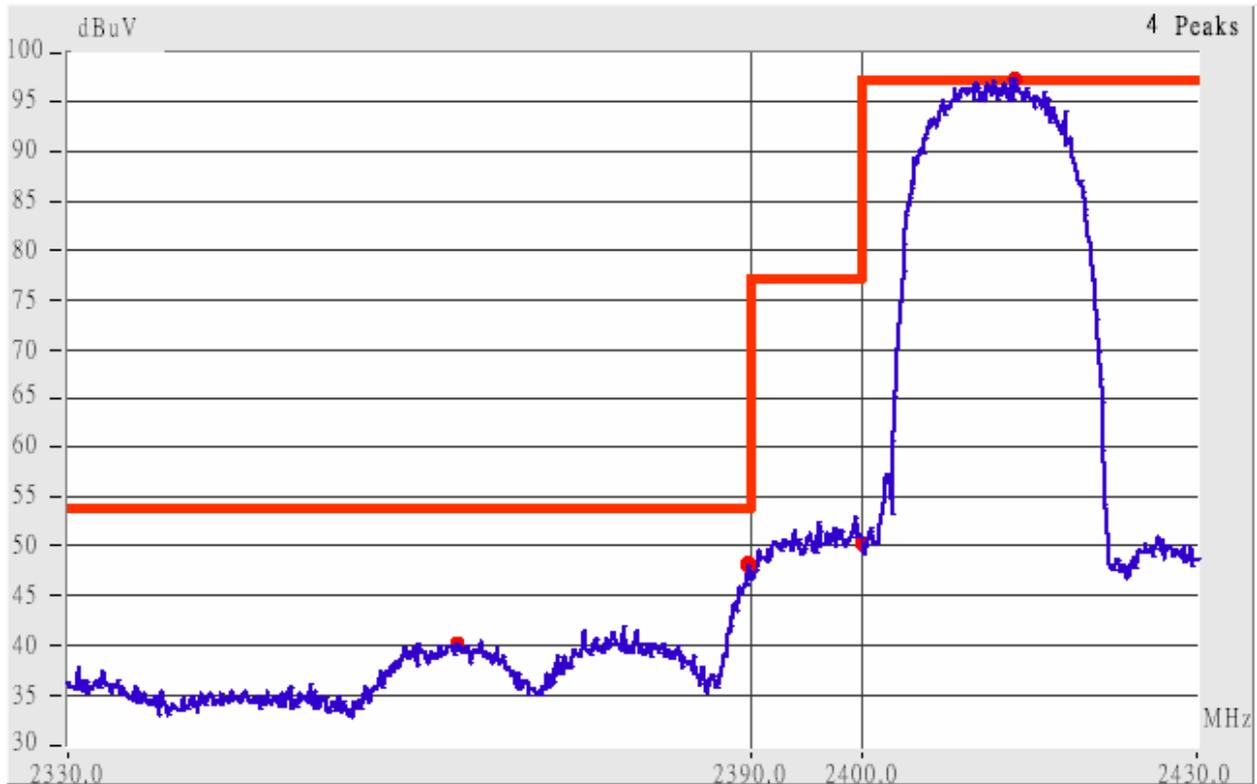


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2369.27	Hor	1.00	163	9.12	45.29	---	74.00	53.96	-8.67
2390.02	Hor	1.00	150	9.18	48.85	---	74.00	53.96	-5.11
2388.84	Ver	1.00	61	9.18	54.51	45.85	74.00	53.96	-8.11
2390.37	Ver	1.00	102	9.18	55.52	48.68	74.00	53.96	-5.28

Channel 11 of IEEE 802.11b

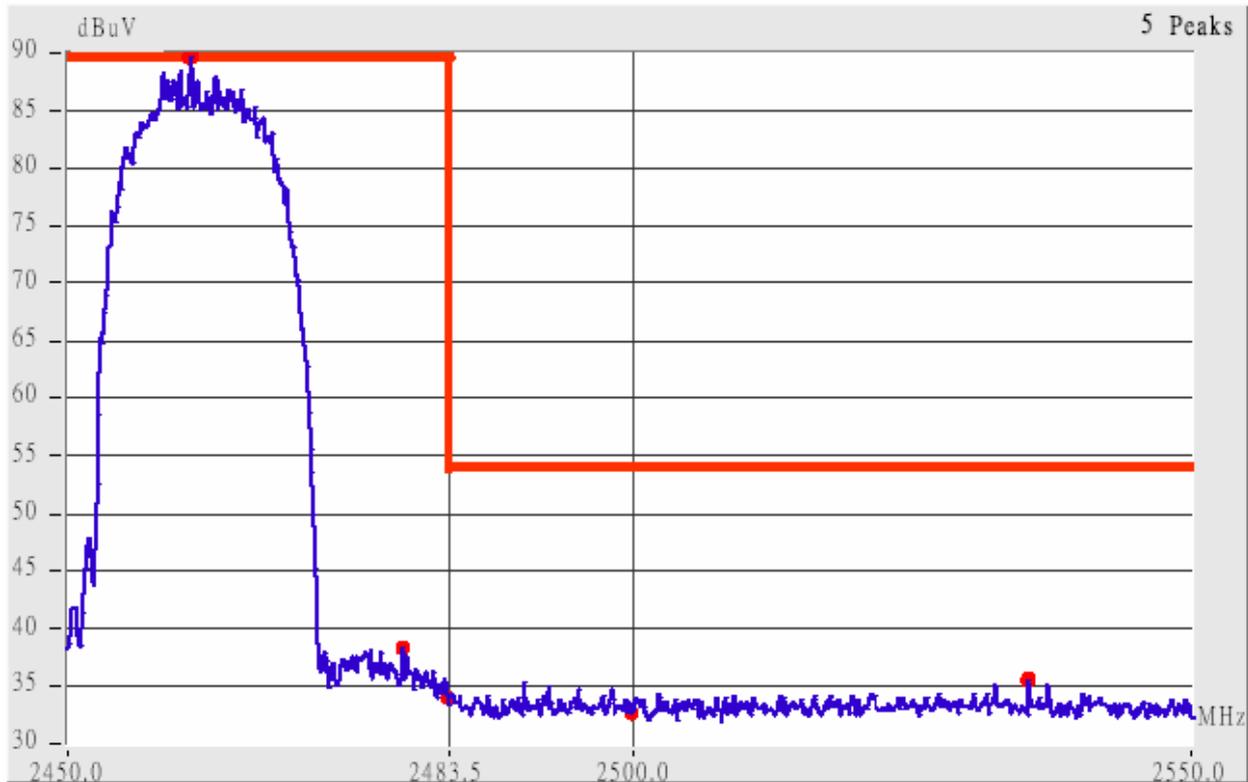


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 3. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2490.44	Hor	1.00	258	9.46	44.30	---	74.00	53.96	-9.66
2504.50	Hor	1.00	0	9.50	44.50	---	74.00	53.96	-9.46
2483.50	Ver	1.00	198	9.44	48.61	---	74.00	53.96	-5.35
2492.02	Ver	1.00	233	9.46	47.30	---	74.00	53.96	-6.66
2500.01	Ver	1.00	204	9.49	44.49	---	74.00	53.96	-9.47
2512.90	Ver	1.00	332	9.51	46.18	---	74.00	53.96	-7.78

Channel 1 of IEEE 802.11g

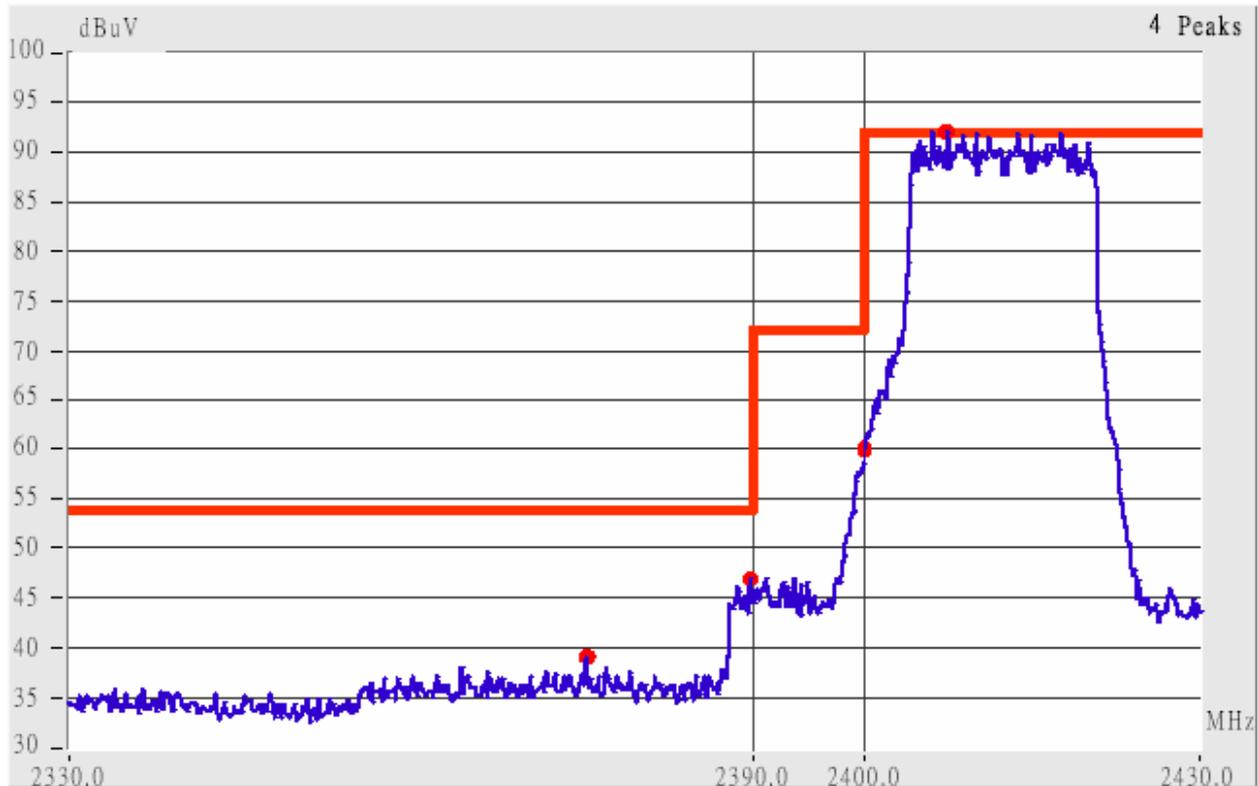


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

- 5. The lobe left by the fundamental side is already 20dB below the highest emission level.
- 6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2388.50	Hor	1.00	171	9.18	49.68	---	74.00	53.96	-4.28
2390.02	Hor	1.00	171	9.18	47.52	---	74.00	53.96	-6.44
2388.35	Ver	1.00	119	9.18	56.18	44.85	74.00	53.96	-9.11
2389.57	Ver	1.00	131	9.18	55.02	45.01	74.00	53.96	-8.95

Channel 11 of IEEE 802.11g

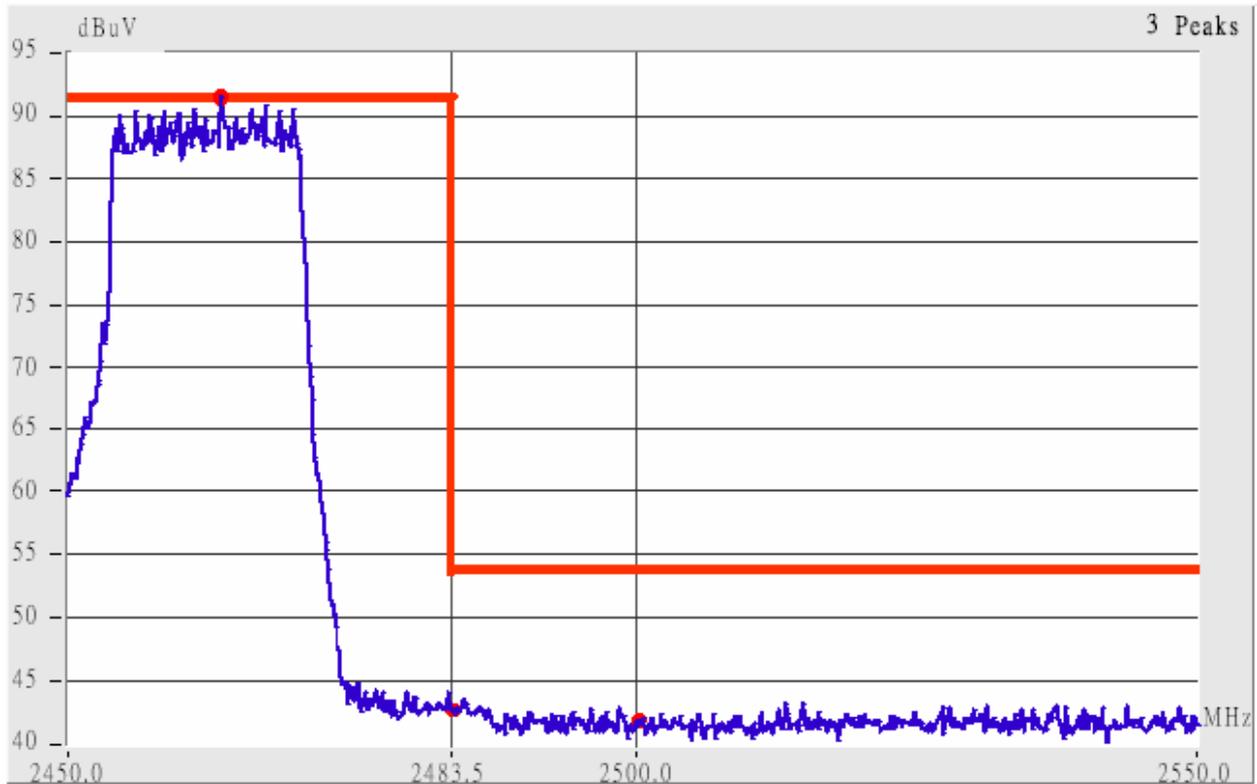

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 7. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2491.03	Hor	1.00	324	9.46	44.46	---	74.00	53.96	-9.50
2518.27	Hor	1.00	48	9.52	44.36	---	74.00	53.96	-9.60
2483.50	Ver	1.00	249	9.44	47.94	---	74.00	53.96	-6.02
2485.48	Ver	1.00	274	9.45	49.28	---	74.00	53.96	-4.68
2500.01	Ver	1.00	188	9.49	44.82	---	74.00	53.96	-9.14
2502.28	Ver	1.00	258	9.49	46.33	---	74.00	53.96	-7.63

IX. Section 15.247(d): Power Spectral Density

9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

9.2 Test Instruments Configuration

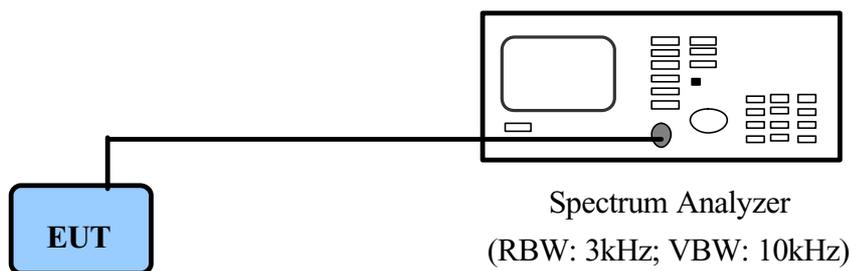

P.S.: PC to control the EUT at maximal power output and channel Number and set antenna kit

9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/02/05

9.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.

IEEE 802.11b

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-6.67	1.00	-5.67	8.00	-13.67
CH 06	-8.14	1.00	-7.14	8.00	-15.14
CH 11	-8.98	1.00	-7.98	8.00	-15.98


IEEE 802.11g

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-17.89	1.00	-16.89	8.00	-24.89
CH 06	-18.03	1.00	-17.03	8.00	-25.03
CH 11	-19.34	1.00	-18.34	8.00	-26.34


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$

Power Spectral Density for Channel 01

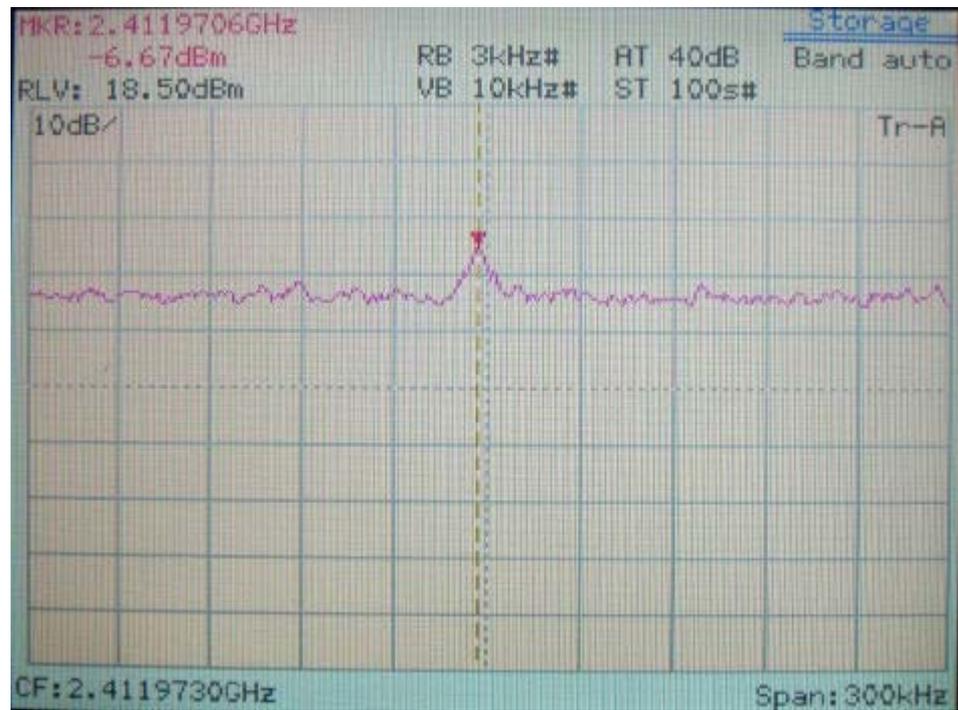


IEEE 802.11b

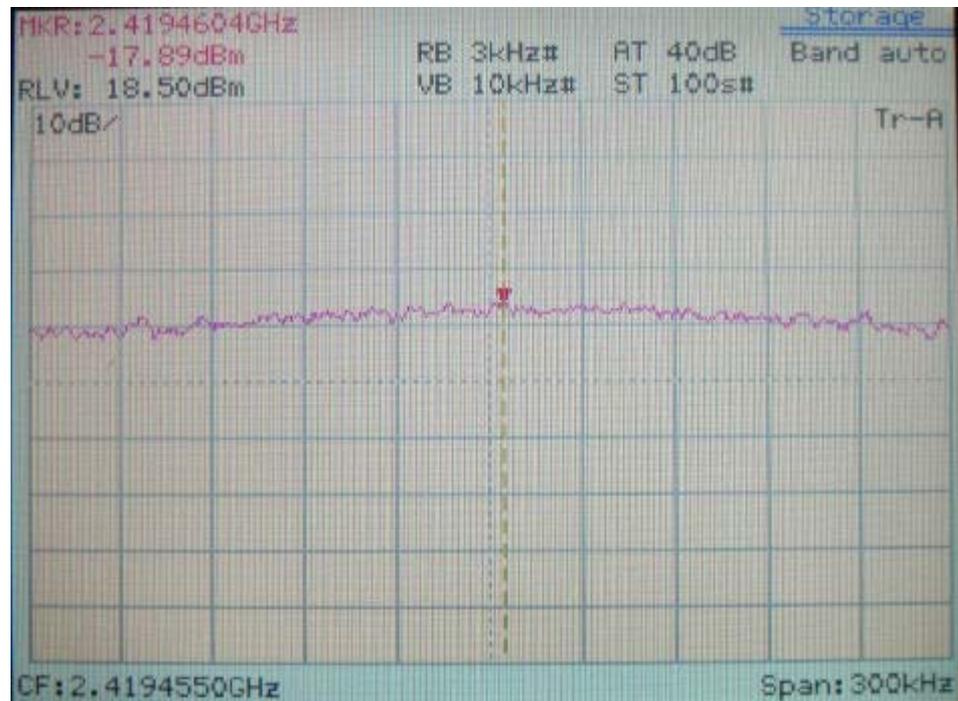


IEEE 802.11g

Power Spectral Density for Channel 06

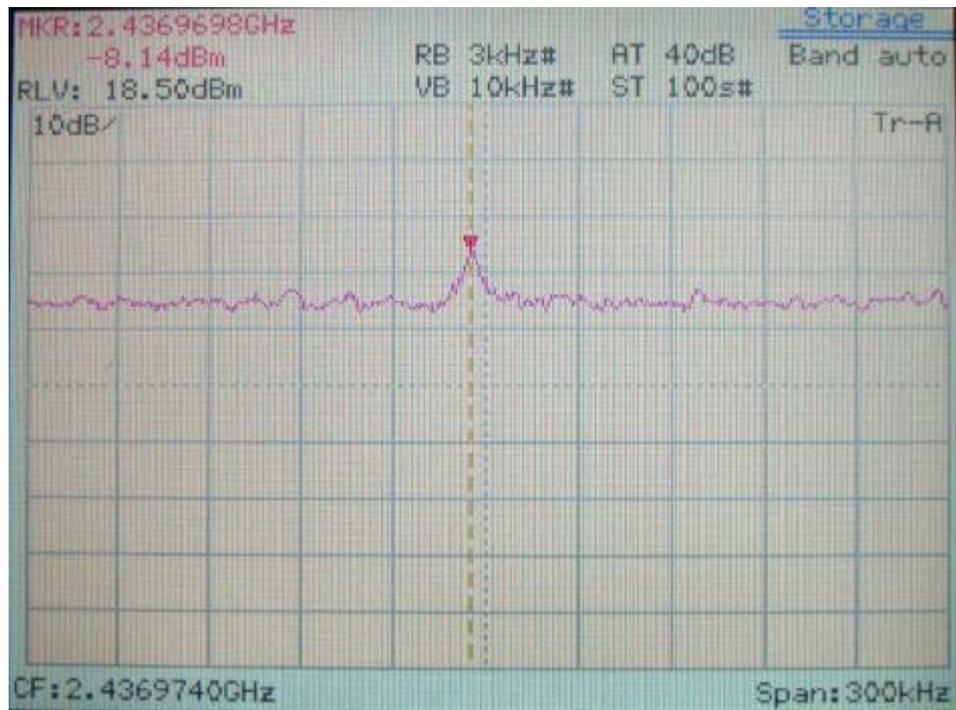


IEEE 802.11b

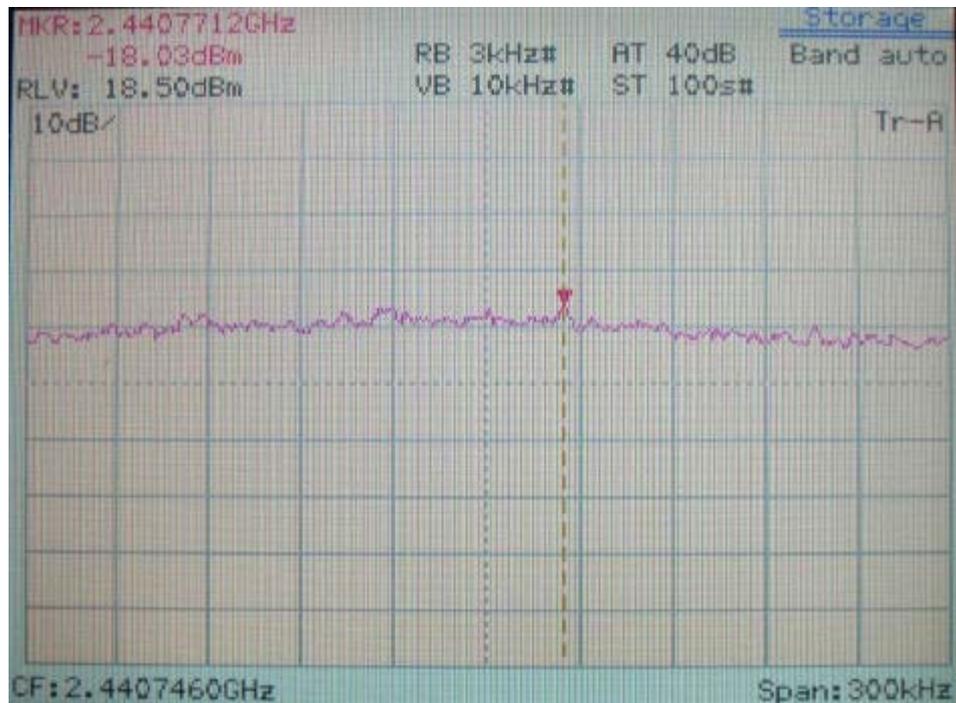


IEEE 802.11g

Power Spectral Density for Channel 11

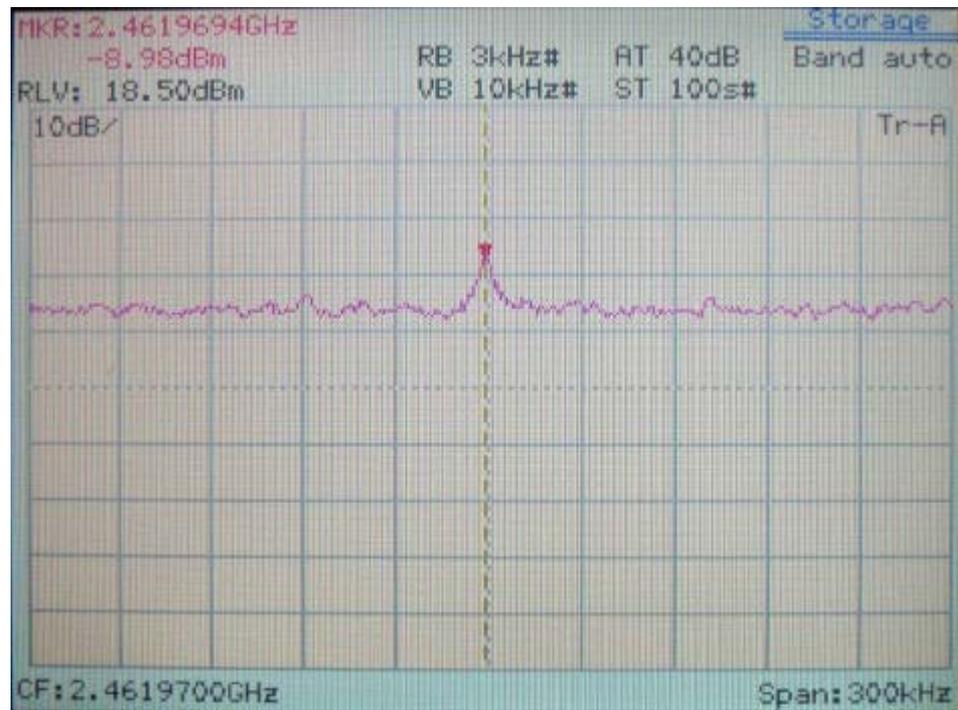

IEEE 802.11b

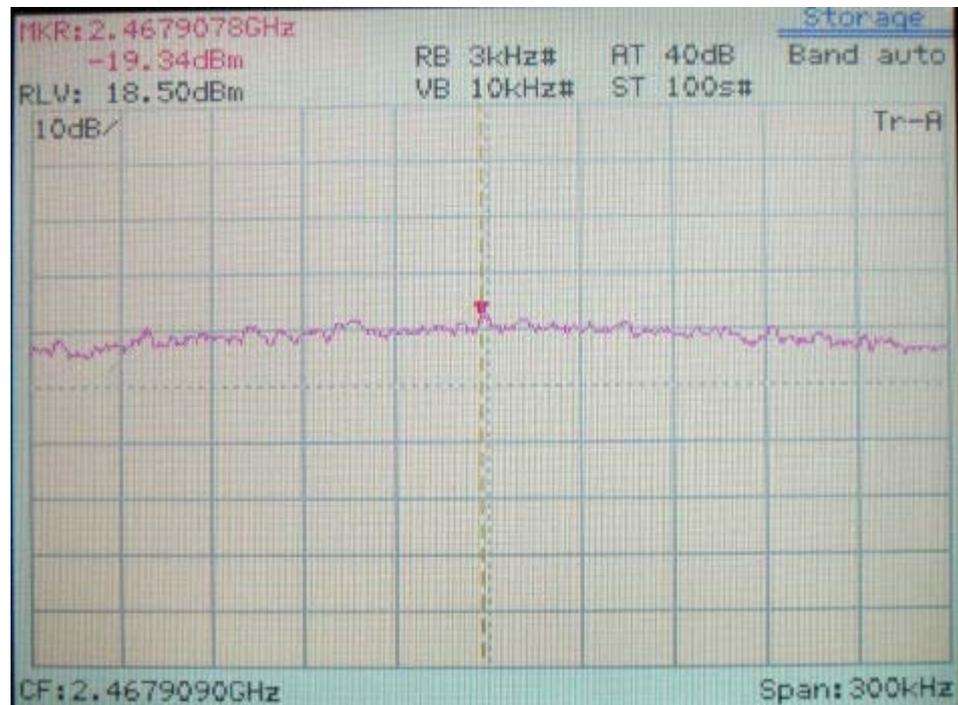

IEEE 802.11g