


Band Edge

SISO A

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

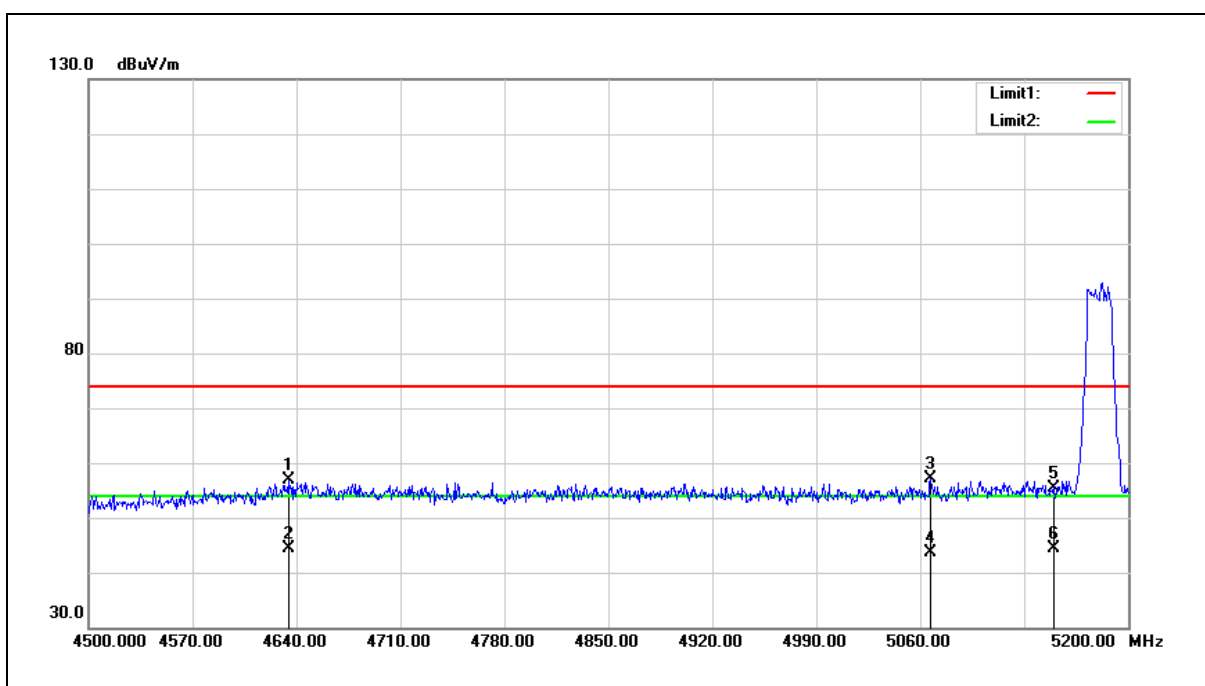

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4634.400	51.81	4.99	56.80	74.00	-17.20	peak
2	4634.400	39.36	4.99	44.35	54.00	-9.65	AVG
3	5067.000	51.22	5.88	57.10	74.00	-16.90	peak
4	5067.000	37.81	5.88	43.69	54.00	-10.31	AVG
5	5150.000	49.23	6.07	55.30	74.00	-18.70	peak
6	5150.000	38.33	6.07	44.40	54.00	-9.60	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

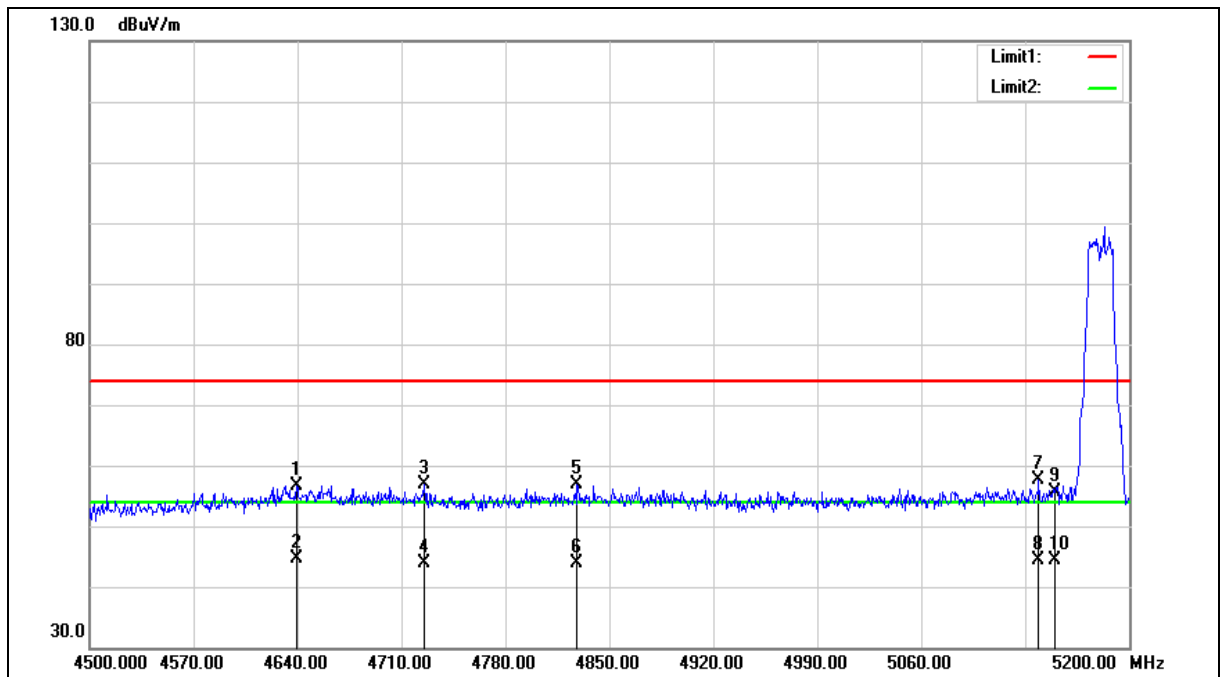

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4639.300	51.68	5.00	56.68	74.00	-17.32	peak
2	4639.300	39.57	5.00	44.57	54.00	-9.43	AVG
3	4725.400	51.66	5.17	56.83	74.00	-17.17	peak
4	4725.400	38.67	5.17	43.84	54.00	-10.16	AVG
5	4828.300	51.50	5.38	56.88	74.00	-17.12	peak
6	4828.300	38.52	5.38	43.90	54.00	-10.10	AVG
7	5139.100	51.68	6.05	57.73	74.00	-16.27	peak
8	5139.100	38.41	6.05	44.46	54.00	-9.54	AVG
9	5150.000	49.54	6.07	55.61	74.00	-18.39	peak
10	5150.000	38.34	6.07	44.41	54.00	-9.59	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

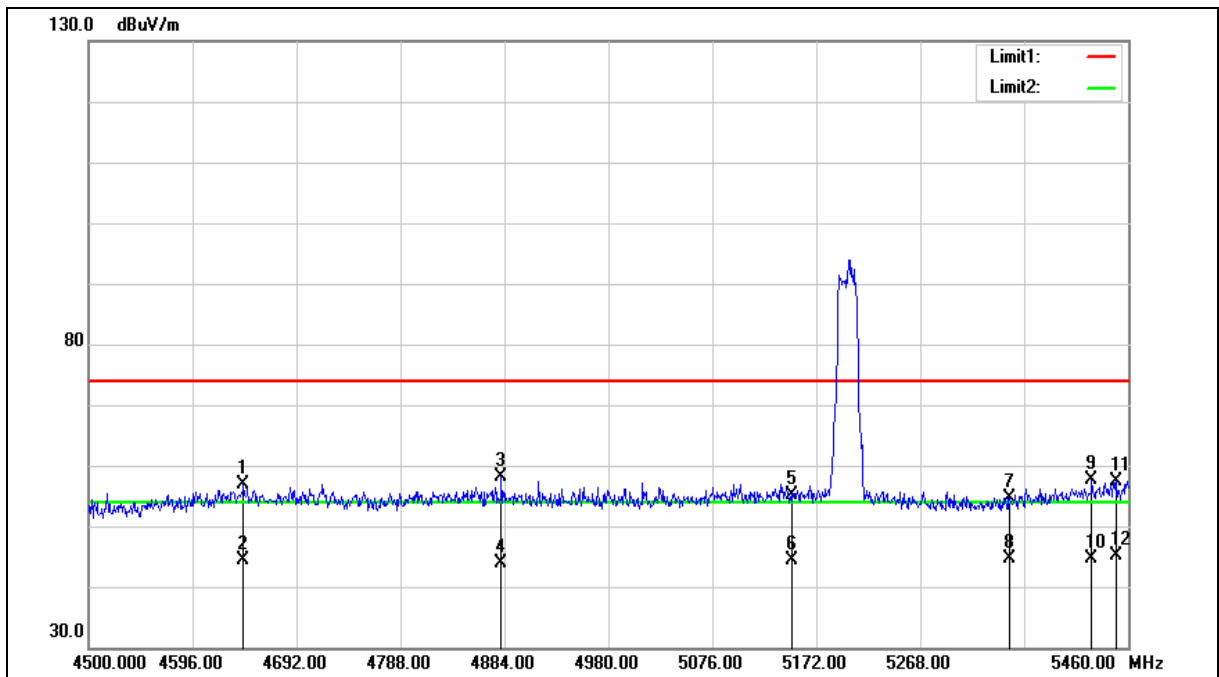

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4643.040	51.86	5.01	56.87	74.00	-17.13	peak
2	4643.040	39.47	5.01	44.48	54.00	-9.52	AVG
3	4881.120	52.72	5.48	58.20	74.00	-15.80	peak
4	4881.120	38.32	5.48	43.80	54.00	-10.20	AVG
5	5150.000	49.06	6.07	55.13	74.00	-18.87	peak
6	5150.000	38.32	6.07	44.39	54.00	-9.61	AVG
7	5350.000	48.12	6.52	54.64	74.00	-19.36	peak
8	5350.000	38.02	6.52	44.54	54.00	-9.46	AVG
9	5426.400	50.83	6.70	57.53	74.00	-16.47	peak
10	5426.400	38.05	6.70	44.75	54.00	-9.25	AVG
11	5449.440	50.72	6.75	57.47	74.00	-16.53	peak
12	5449.440	38.28	6.75	45.03	54.00	-8.97	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

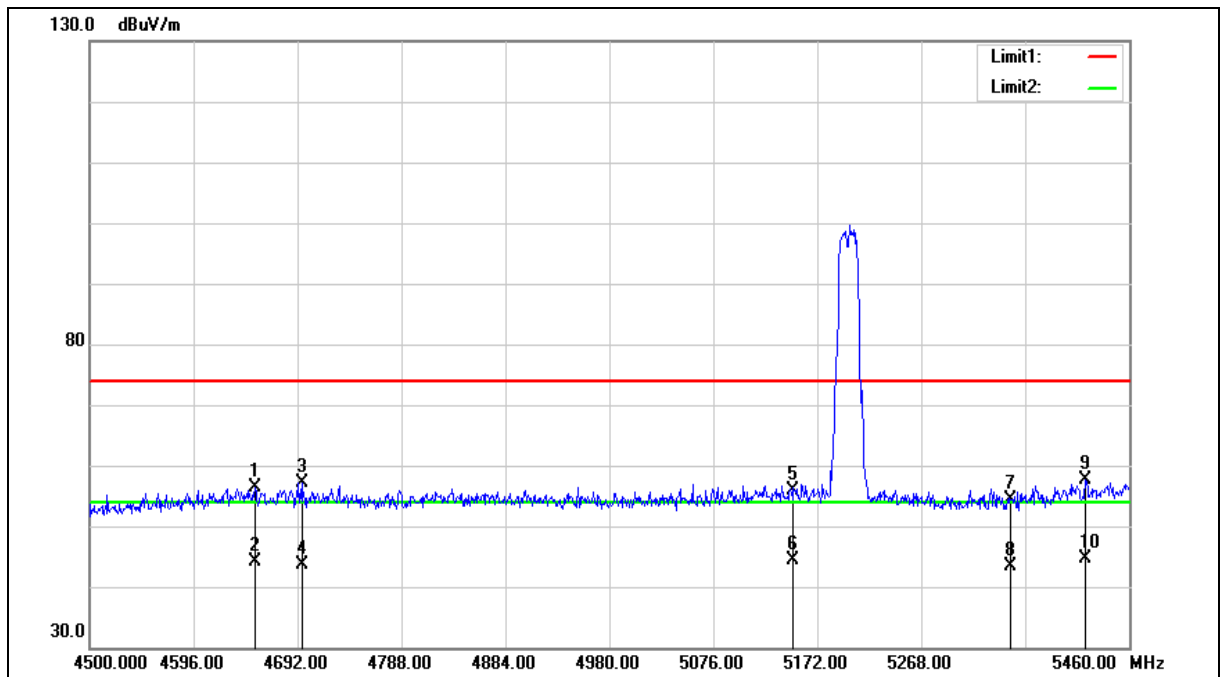

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4652.640	51.35	5.02	56.37	74.00	-17.63	peak
2	4652.640	39.05	5.02	44.07	54.00	-9.93	AVG
3	4695.840	51.96	5.10	57.06	74.00	-16.94	peak
4	4695.840	38.59	5.10	43.69	54.00	-10.31	AVG
5	5150.000	49.73	6.07	55.80	74.00	-18.20	peak
6	5150.000	38.35	6.07	44.42	54.00	-9.58	AVG
7	5350.000	47.77	6.52	54.29	74.00	-19.71	peak
8	5350.000	36.74	6.52	43.26	54.00	-10.74	AVG
9	5419.680	50.86	6.69	57.55	74.00	-16.45	peak
10	5419.680	37.98	6.69	44.67	54.00	-9.33	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

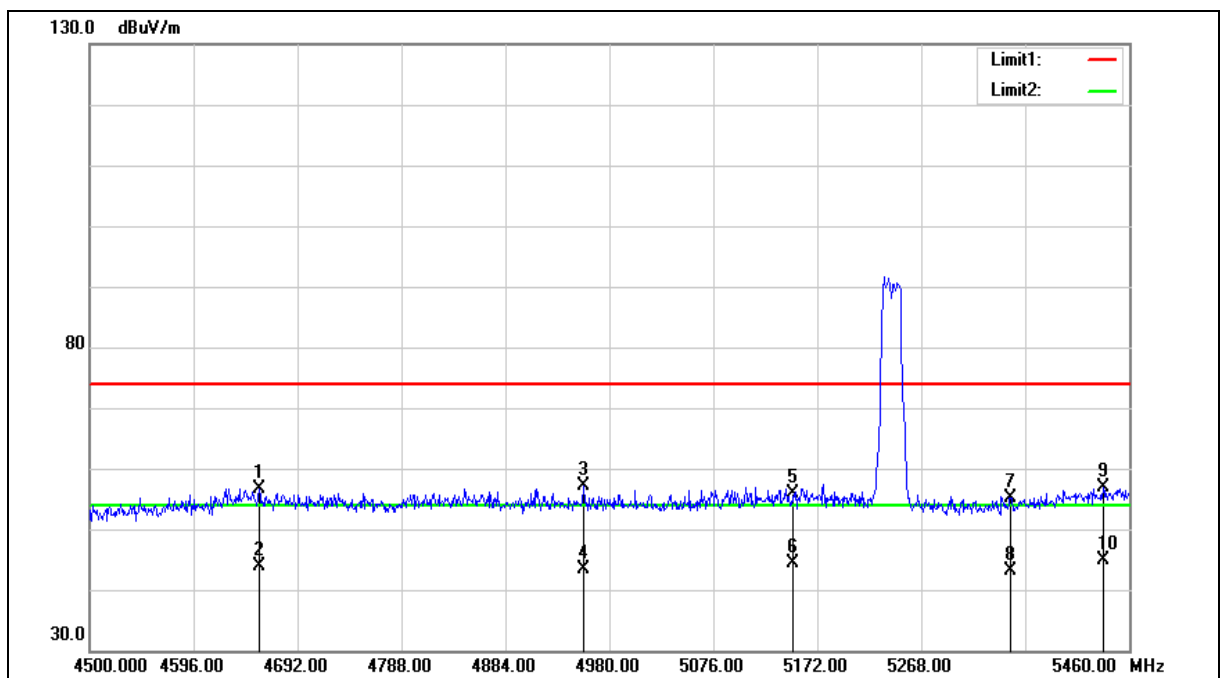

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4656.480	51.71	5.02	56.73	74.00	-17.27	peak
2	4656.480	38.85	5.02	43.87	54.00	-10.13	AVG
3	4956.000	51.49	5.63	57.12	74.00	-16.88	peak
4	4956.000	37.82	5.63	43.45	54.00	-10.55	AVG
5	5150.000	49.93	6.07	56.00	74.00	-18.00	peak
6	5150.000	38.36	6.07	44.43	54.00	-9.57	AVG
7	5350.000	48.67	6.52	55.19	74.00	-18.81	peak
8	5350.000	36.69	6.52	43.21	54.00	-10.79	AVG
9	5436.000	50.24	6.71	56.95	74.00	-17.05	peak
10	5436.000	38.16	6.71	44.87	54.00	-9.13	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

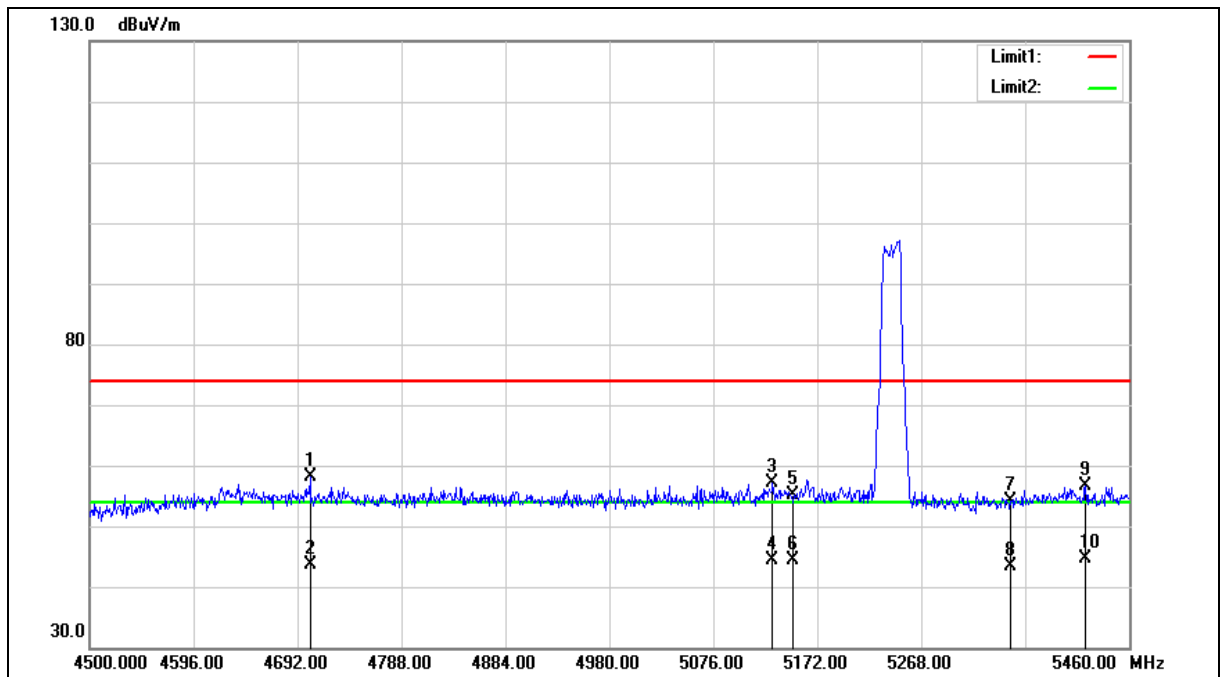

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4703.520	52.95	5.13	58.08	74.00	-15.92	peak
2	4703.520	38.59	5.13	43.72	54.00	-10.28	AVG
3	5130.720	51.06	6.03	57.09	74.00	-16.91	peak
4	5130.720	38.36	6.03	44.39	54.00	-9.61	AVG
5	5150.000	49.07	6.07	55.14	74.00	-18.86	peak
6	5150.000	38.37	6.07	44.44	54.00	-9.56	AVG
7	5350.000	47.67	6.52	54.19	74.00	-19.81	peak
8	5350.000	36.82	6.52	43.34	54.00	-10.66	AVG
9	5419.680	49.94	6.69	56.63	74.00	-17.37	peak
10	5419.680	37.94	6.69	44.63	54.00	-9.37	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

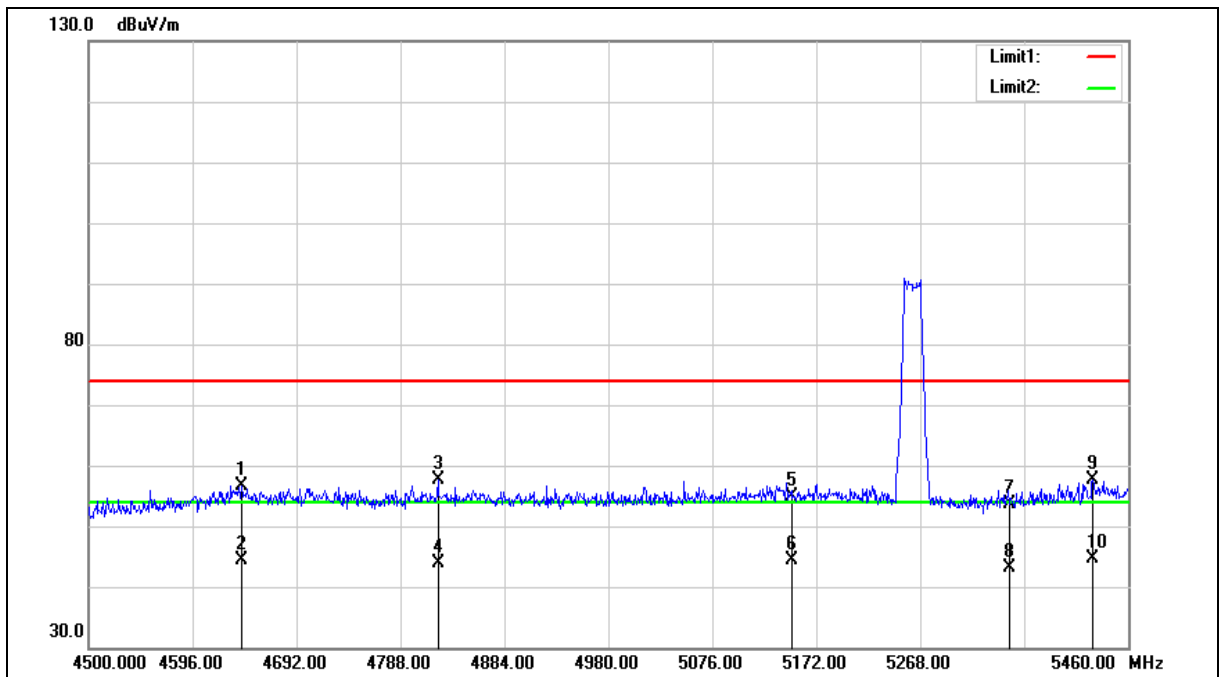

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4641.120	51.70	5.00	56.70	74.00	-17.30	peak
2	4641.120	39.47	5.00	44.47	54.00	-9.53	AVG
3	4822.560	52.21	5.37	57.58	74.00	-16.42	peak
4	4822.560	38.54	5.37	43.91	54.00	-10.09	AVG
5	5150.000	48.75	6.07	54.82	74.00	-19.18	peak
6	5150.000	38.36	6.07	44.43	54.00	-9.57	AVG
7	5350.000	47.20	6.52	53.72	74.00	-20.28	peak
8	5350.000	36.68	6.52	43.20	54.00	-10.80	AVG
9	5427.360	50.81	6.70	57.51	74.00	-16.49	peak
10	5427.360	38.03	6.70	44.73	54.00	-9.27	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

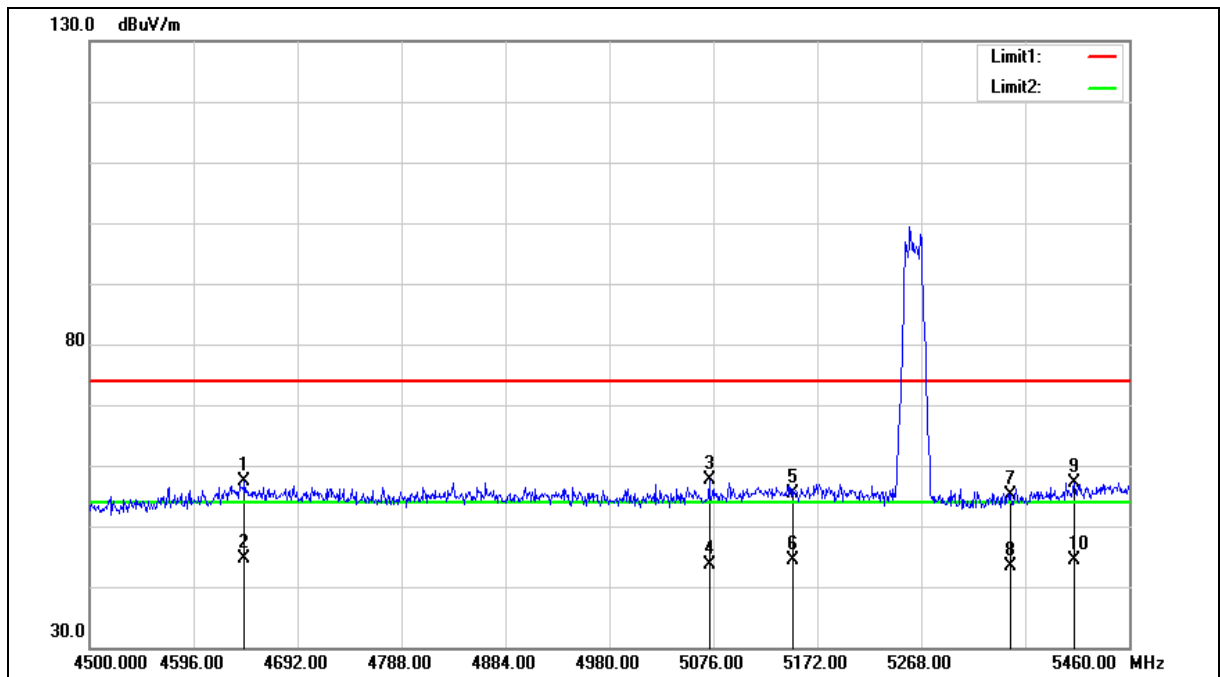

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4643.040	52.25	5.01	57.26	74.00	-16.74	peak
2	4643.040	39.58	5.01	44.59	54.00	-9.41	AVG
3	5072.160	51.65	5.89	57.54	74.00	-16.46	peak
4	5072.160	37.84	5.89	43.73	54.00	-10.27	AVG
5	5150.000	49.43	6.07	55.50	74.00	-18.50	peak
6	5150.000	38.28	6.07	44.35	54.00	-9.65	AVG
7	5350.000	48.50	6.52	55.02	74.00	-18.98	peak
8	5350.000	36.75	6.52	43.27	54.00	-10.73	AVG
9	5409.120	50.43	6.65	57.08	74.00	-16.92	peak
10	5409.120	37.85	6.65	44.50	54.00	-9.50	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

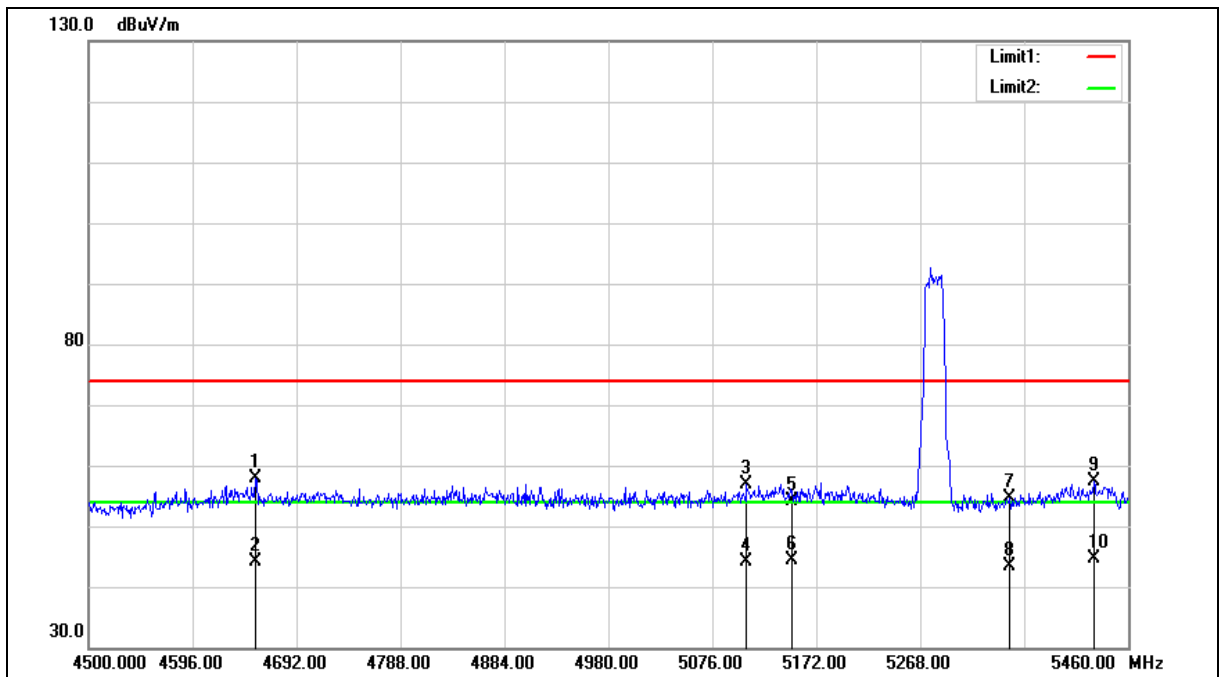

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4653.600	52.82	5.02	57.84	74.00	-16.16	peak
2	4653.600	39.01	5.02	44.03	54.00	-9.97	AVG
3	5107.680	50.94	5.97	56.91	74.00	-17.09	peak
4	5107.680	38.22	5.97	44.19	54.00	-9.81	AVG
5	5150.000	48.17	6.07	54.24	74.00	-19.76	peak
6	5150.000	38.38	6.07	44.45	54.00	-9.55	AVG
7	5350.000	48.03	6.52	54.55	74.00	-19.45	peak
8	5350.000	36.77	6.52	43.29	54.00	-10.71	AVG
9	5428.320	50.80	6.70	57.50	74.00	-16.50	peak
10	5428.320	38.05	6.70	44.75	54.00	-9.25	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

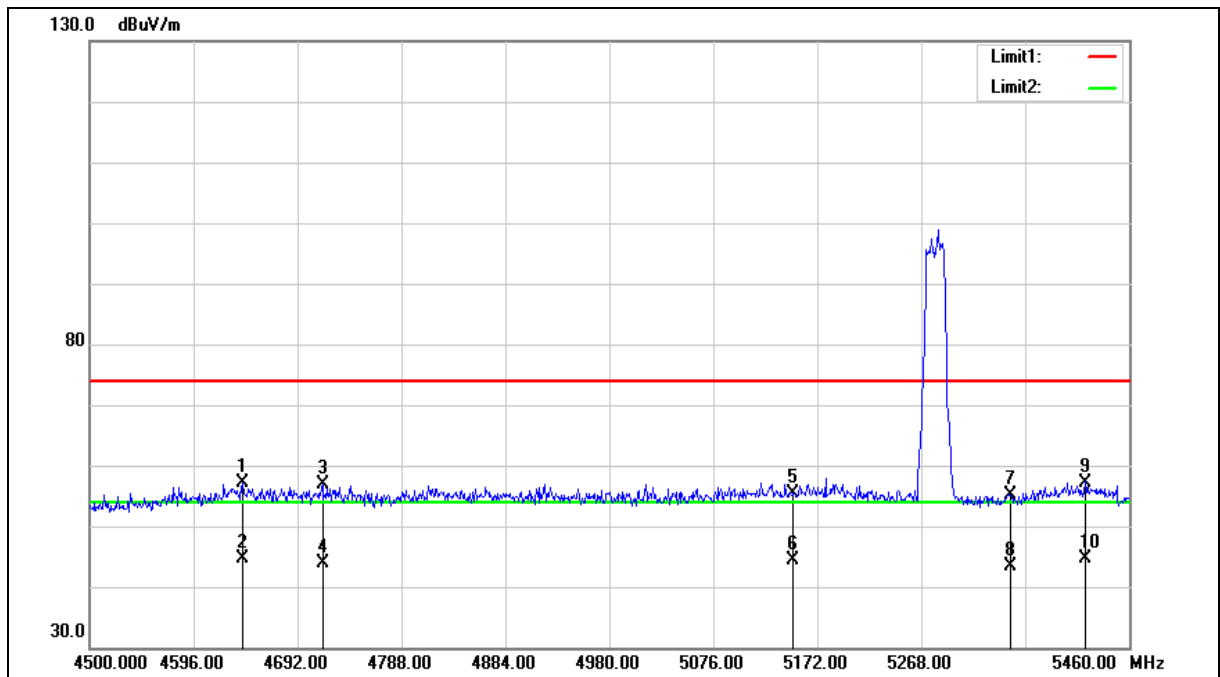

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4641.120	52.22	5.00	57.22	74.00	-16.78	peak
2	4641.120	39.60	5.00	44.60	54.00	-9.40	AVG
3	4715.040	51.85	5.15	57.00	74.00	-17.00	peak
4	4715.040	38.70	5.15	43.85	54.00	-10.15	AVG
5	5150.000	49.20	6.07	55.27	74.00	-18.73	peak
6	5150.000	38.32	6.07	44.39	54.00	-9.61	AVG
7	5350.000	48.57	6.52	55.09	74.00	-18.91	peak
8	5350.000	36.78	6.52	43.30	54.00	-10.70	AVG
9	5419.680	50.56	6.69	57.25	74.00	-16.75	peak
10	5419.680	38.01	6.69	44.70	54.00	-9.30	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

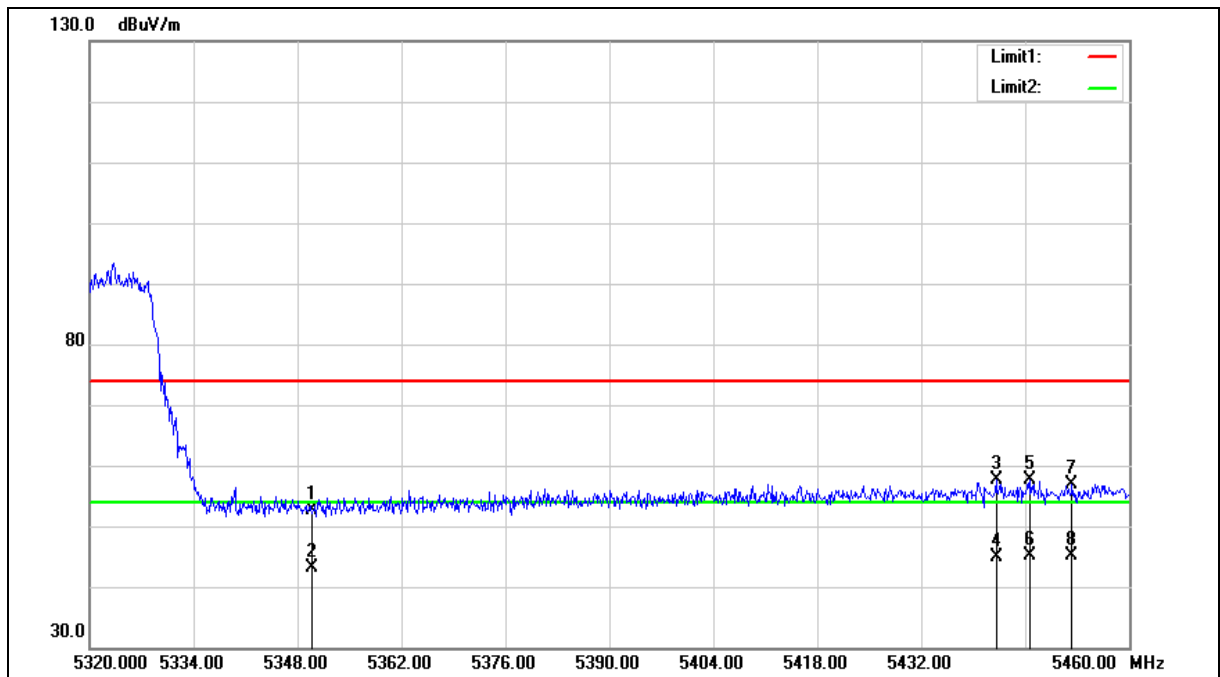

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	46.21	6.52	52.73	74.00	-21.27	peak
2	5350.000	36.68	6.52	43.20	54.00	-10.80	AVG
3	5442.080	50.80	6.74	57.54	74.00	-16.46	peak
4	5442.080	38.24	6.74	44.98	54.00	-9.02	AVG
5	5446.700	50.89	6.74	57.63	74.00	-16.37	peak
6	5446.700	38.35	6.74	45.09	54.00	-8.91	AVG
7	5452.300	50.11	6.75	56.86	74.00	-17.14	peak
8	5452.300	38.32	6.75	45.07	54.00	-8.93	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

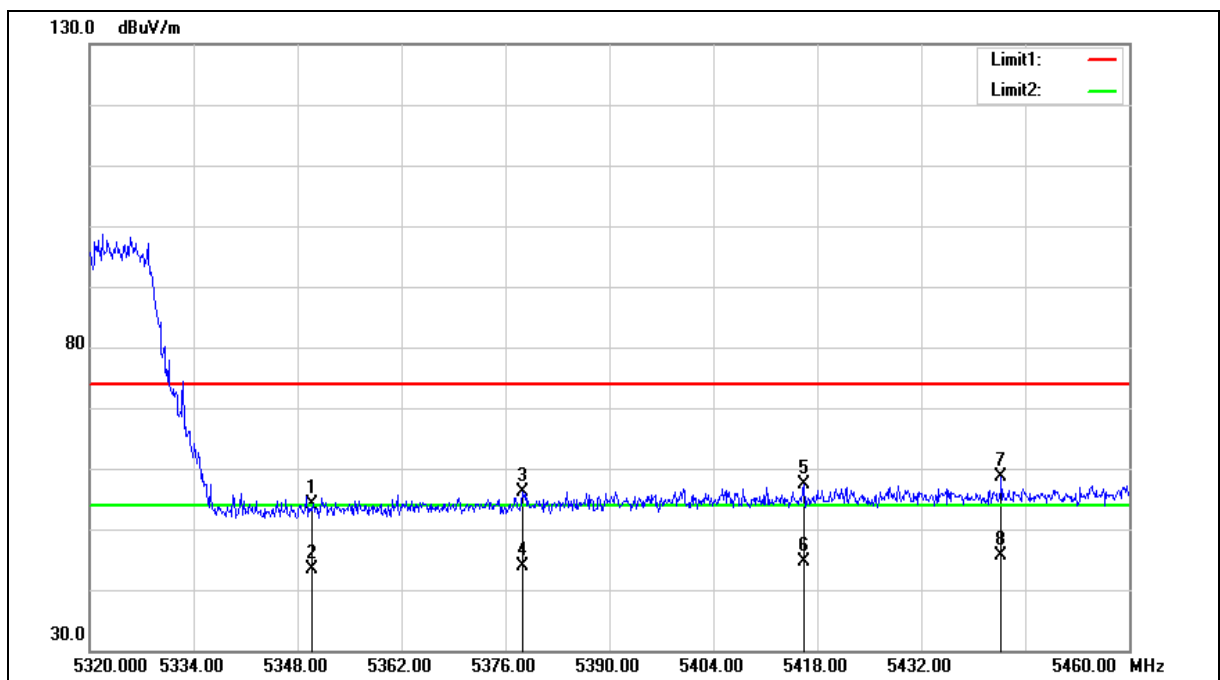

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.57	6.52	54.09	74.00	-19.91	peak
2	5350.000	36.83	6.52	43.35	54.00	-10.65	AVG
3	5378.240	49.59	6.58	56.17	74.00	-17.83	peak
4	5378.240	37.27	6.58	43.85	54.00	-10.15	AVG
5	5416.180	50.59	6.67	57.26	74.00	-16.74	peak
6	5416.180	37.94	6.67	44.61	54.00	-9.39	AVG
7	5442.780	51.80	6.74	58.54	74.00	-15.46	peak
8	5442.780	38.91	6.74	45.65	54.00	-8.35	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

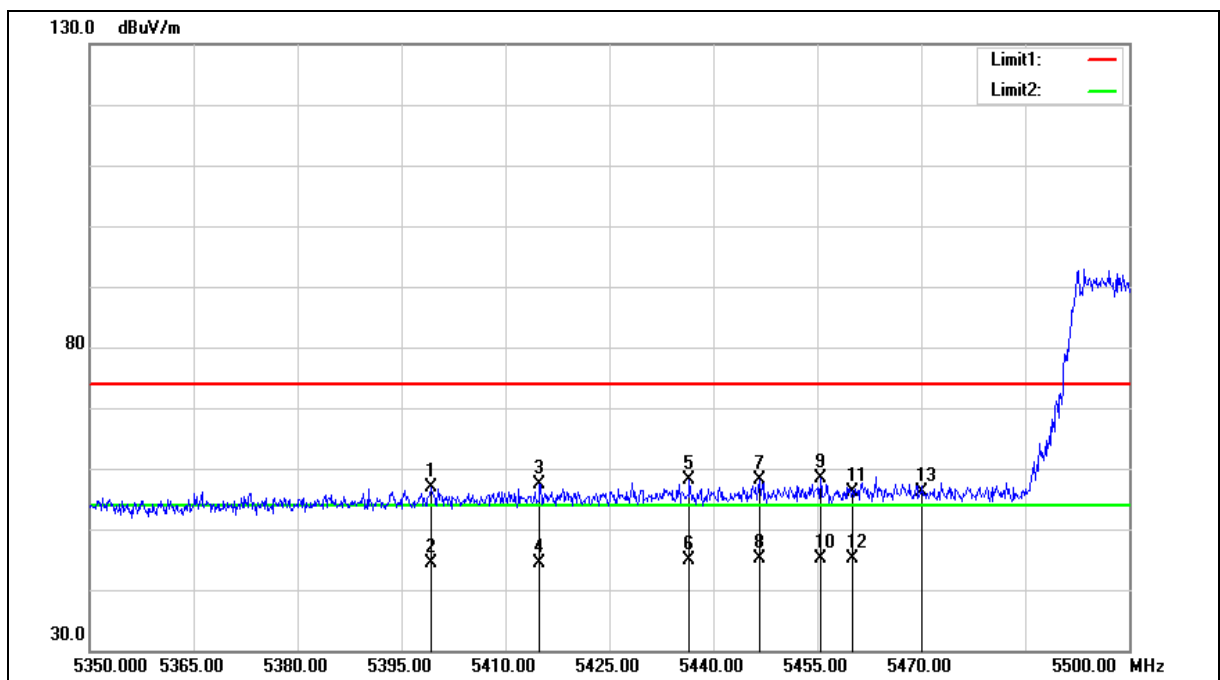

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5399.200	50.37	6.63	57.00	74.00	-17.00	peak
2	5399.200	37.65	6.63	44.28	54.00	-9.72	AVG
3	5414.950	50.81	6.67	57.48	74.00	-16.52	peak
4	5414.950	37.83	6.67	44.50	54.00	-9.50	AVG
5	5436.550	51.30	6.72	58.02	74.00	-15.98	peak
6	5436.550	38.17	6.72	44.89	54.00	-9.11	AVG
7	5446.750	51.38	6.74	58.12	74.00	-15.88	peak
8	5446.750	38.35	6.74	45.09	54.00	-8.91	AVG
9	5455.450	51.57	6.76	58.33	74.00	-15.67	peak
10	5455.450	38.29	6.76	45.05	54.00	-8.95	AVG
11	5460.000	49.48	6.77	56.25	74.00	-17.75	peak
12	5460.000	38.33	6.77	45.10	54.00	-8.90	AVG
13	5470.000	49.25	6.80	56.05	68.20	-12.15	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

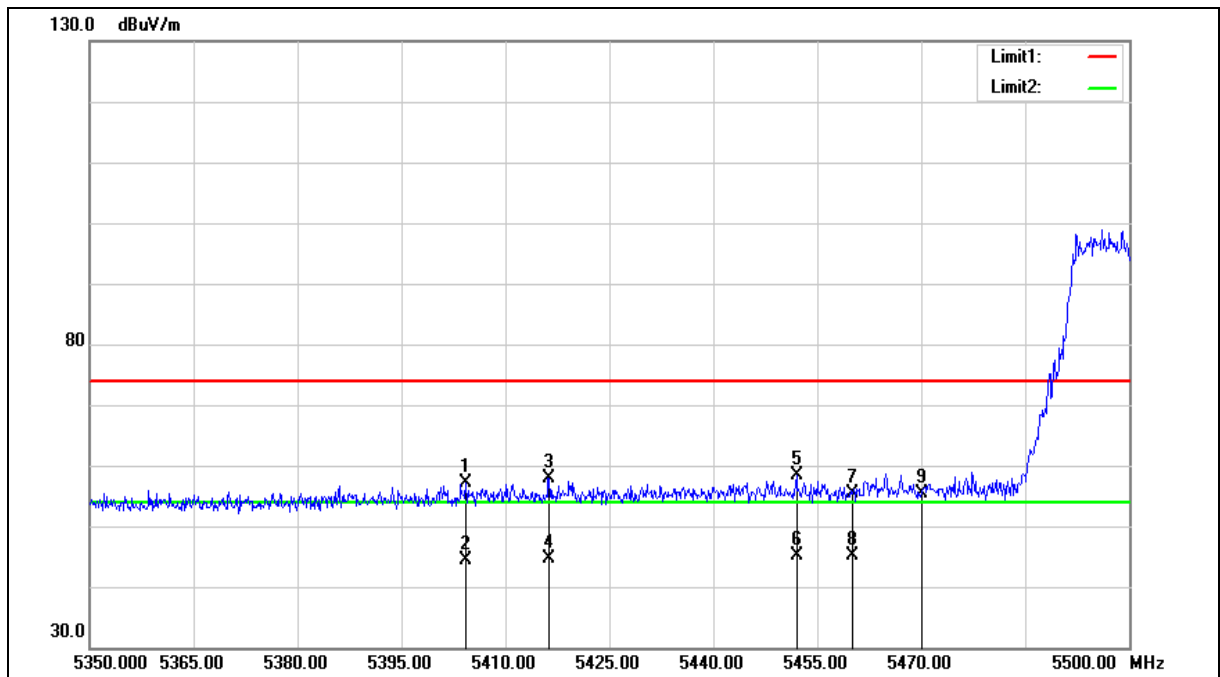

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5404.300	50.37	6.64	57.01	74.00	-16.99	peak
2	5404.300	37.79	6.64	44.43	54.00	-9.57	AVG
3	5416.300	51.30	6.67	57.97	74.00	-16.03	peak
4	5416.300	37.86	6.67	44.53	54.00	-9.47	AVG
5	5452.000	51.71	6.75	58.46	74.00	-15.54	peak
6	5452.000	38.39	6.75	45.14	54.00	-8.86	AVG
7	5460.000	48.64	6.77	55.41	74.00	-18.59	peak
8	5460.000	38.40	6.77	45.17	54.00	-8.83	AVG
9	5470.000	48.66	6.80	55.46	68.20	-12.74	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

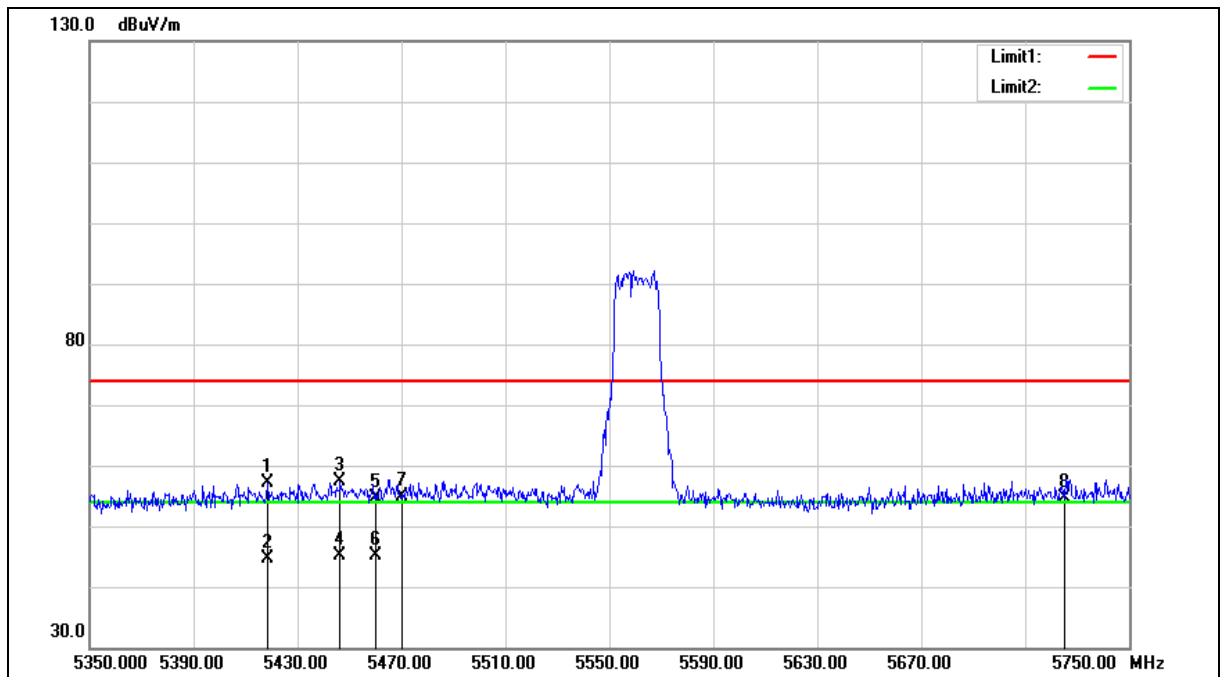

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5418.400	50.40	6.68	57.08	74.00	-16.92	peak
2	5418.400	37.94	6.68	44.62	54.00	-9.38	AVG
3	5446.400	50.69	6.74	57.43	74.00	-16.57	peak
4	5446.400	38.27	6.74	45.01	54.00	-8.99	AVG
5	5460.000	47.77	6.77	54.54	74.00	-19.46	peak
6	5460.000	38.29	6.77	45.06	54.00	-8.94	AVG
7	5470.000	48.02	6.80	54.82	68.20	-13.38	peak
8	5725.000	47.33	7.32	54.65	68.20	-13.55	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

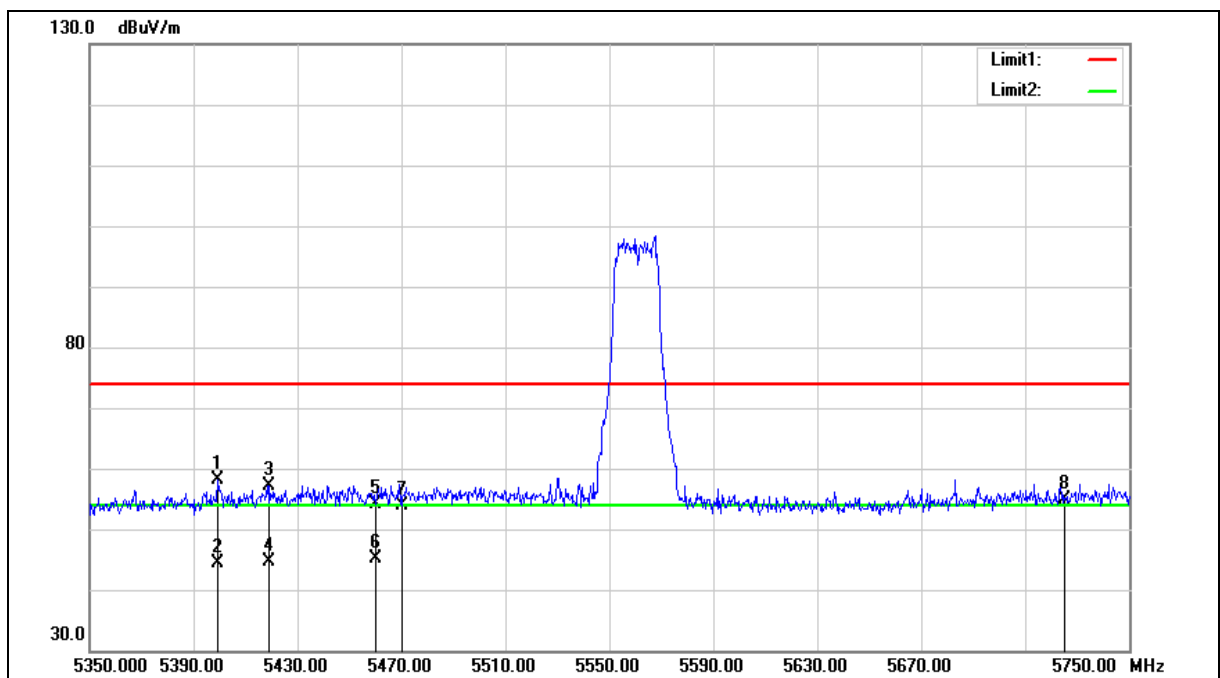

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5399.200	51.54	6.63	58.17	74.00	-15.83	peak
2	5399.200	37.70	6.63	44.33	54.00	-9.67	AVG
3	5419.200	50.55	6.68	57.23	74.00	-16.77	peak
4	5419.200	37.92	6.68	44.60	54.00	-9.40	AVG
5	5460.000	47.31	6.77	54.08	74.00	-19.92	peak
6	5460.000	38.36	6.77	45.13	54.00	-8.87	AVG
7	5470.000	47.15	6.80	53.95	68.20	-14.25	peak
8	5725.000	47.66	7.32	54.98	68.20	-13.22	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

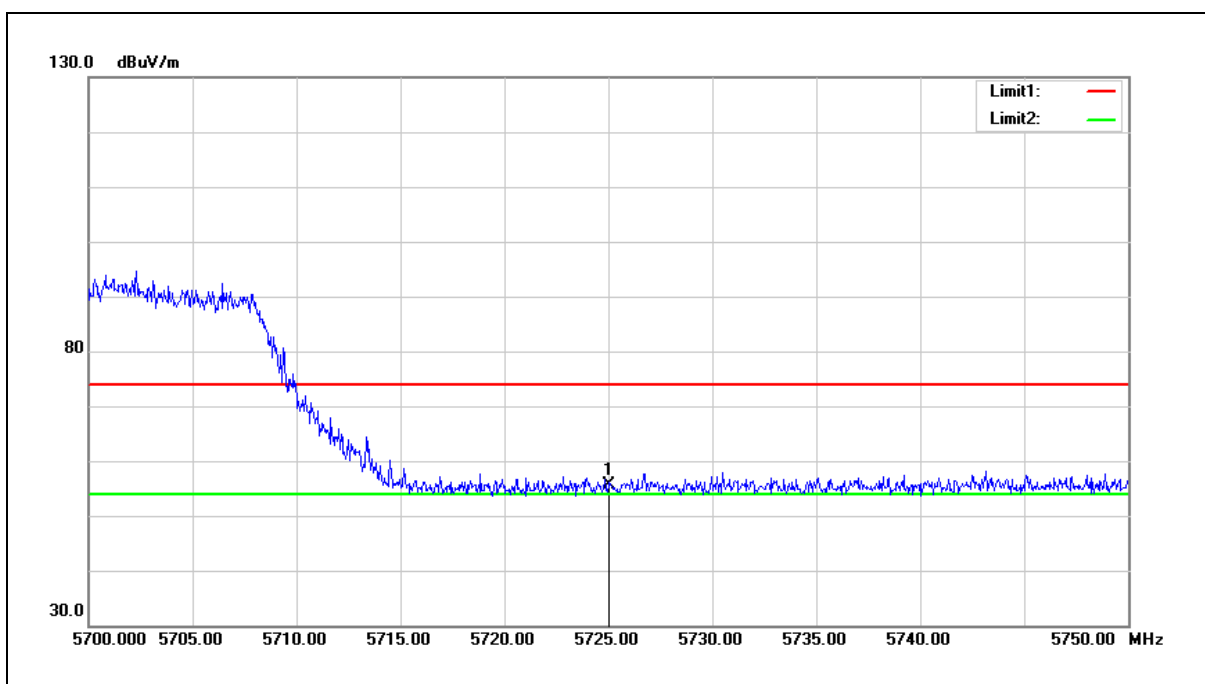

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	48.42	7.32	55.74	68.20	-12.46	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

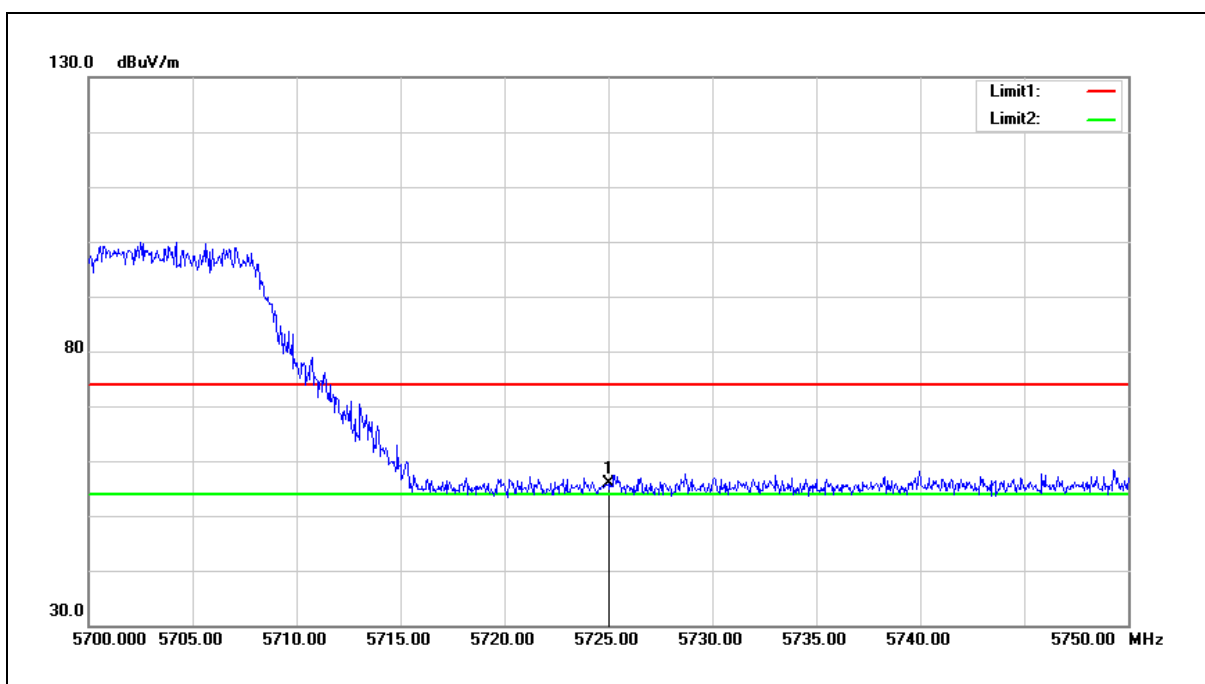


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	48.52	7.32	55.84	68.20	-12.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

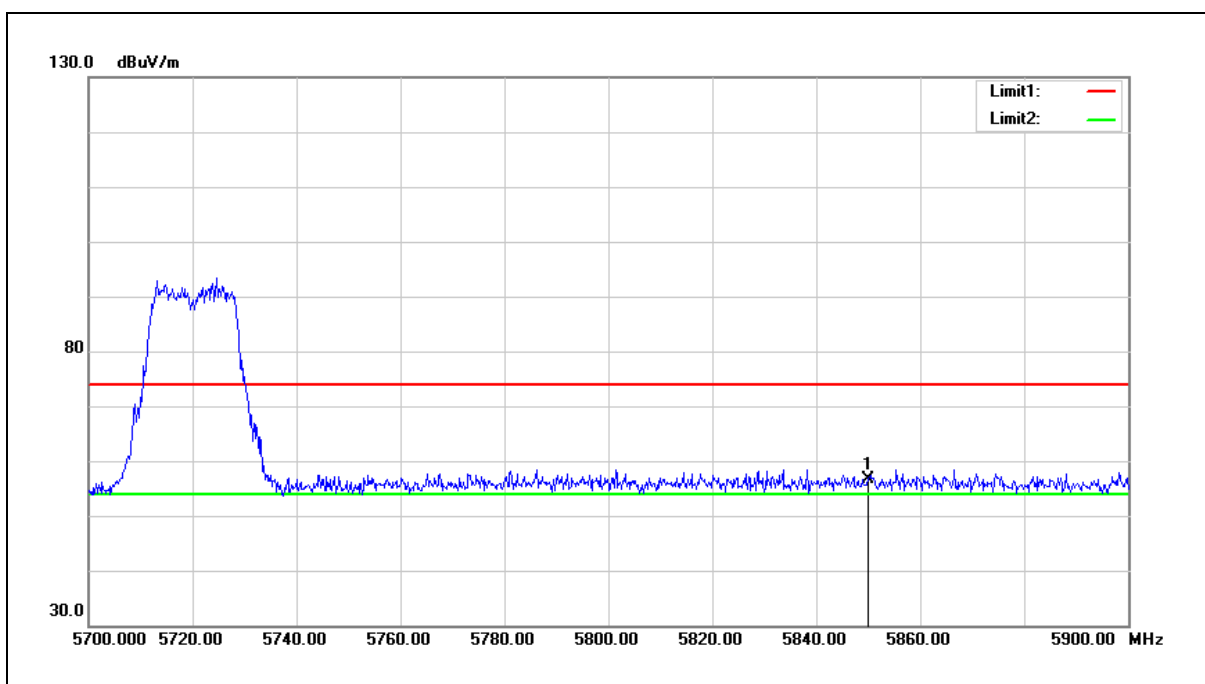


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.96	7.59	56.55	68.20	-11.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

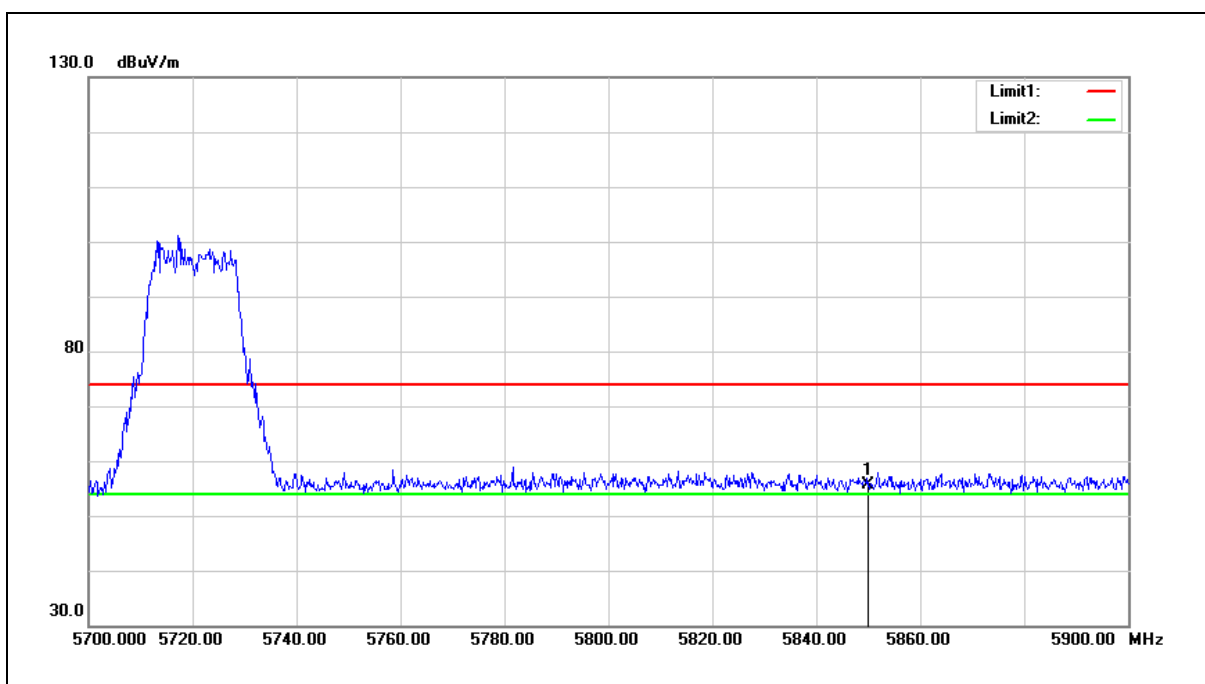


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.08	7.59	55.67	68.20	-12.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

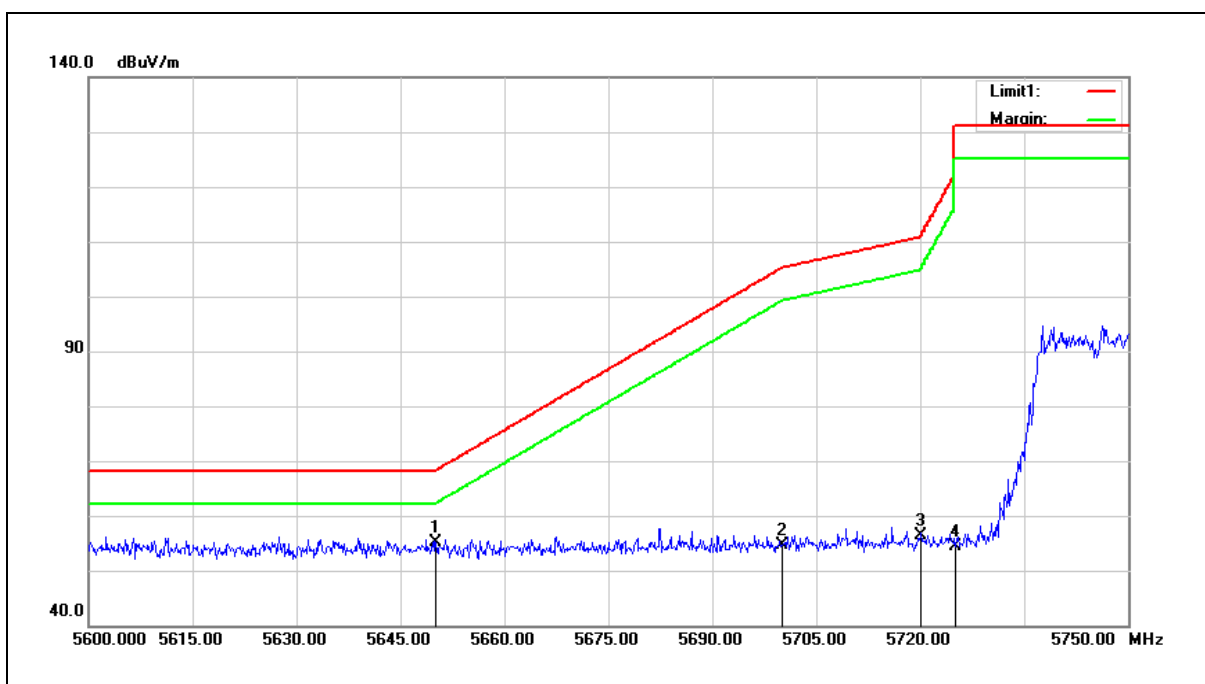


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.88	7.17	55.05	68.20	-13.15	peak
2	5700.000	47.26	7.27	54.53	105.20	-50.67	peak
3	5720.000	49.12	7.31	56.43	110.80	-54.37	peak
4	5725.000	47.18	7.32	54.50	122.20	-67.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

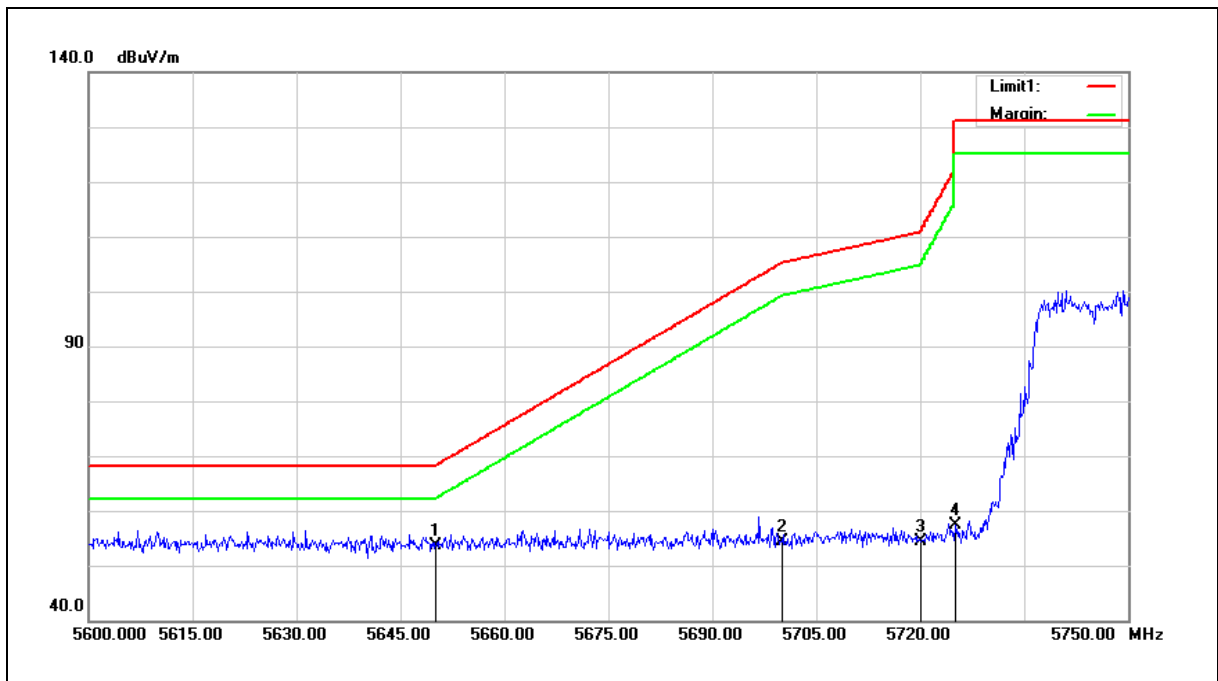

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.52	7.17	53.69	68.20	-14.51	peak
2	5700.000	47.18	7.27	54.45	105.20	-50.75	peak
3	5720.000	47.11	7.31	54.42	110.80	-56.38	peak
4	5725.000	49.94	7.32	57.26	122.20	-64.94	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

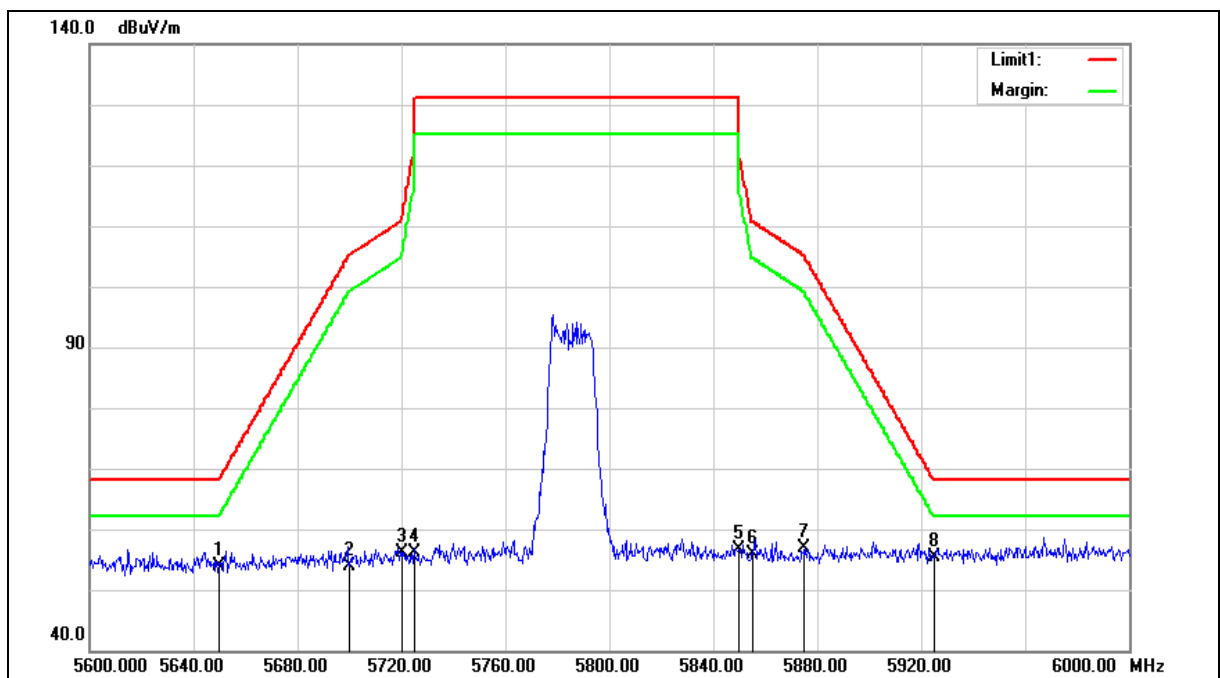

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.67	7.17	53.84	68.20	-14.36	peak
2	5700.000	46.63	7.27	53.90	105.20	-51.30	peak
3	5720.000	48.93	7.31	56.24	110.80	-54.56	peak
4	5725.000	48.80	7.32	56.12	122.20	-66.08	peak
5	5850.000	48.93	7.59	56.52	122.20	-65.68	peak
6	5855.000	48.33	7.60	55.93	110.80	-54.87	peak
7	5875.000	49.15	7.64	56.79	105.20	-48.41	peak
8	5925.000	47.51	7.75	55.26	68.20	-12.94	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

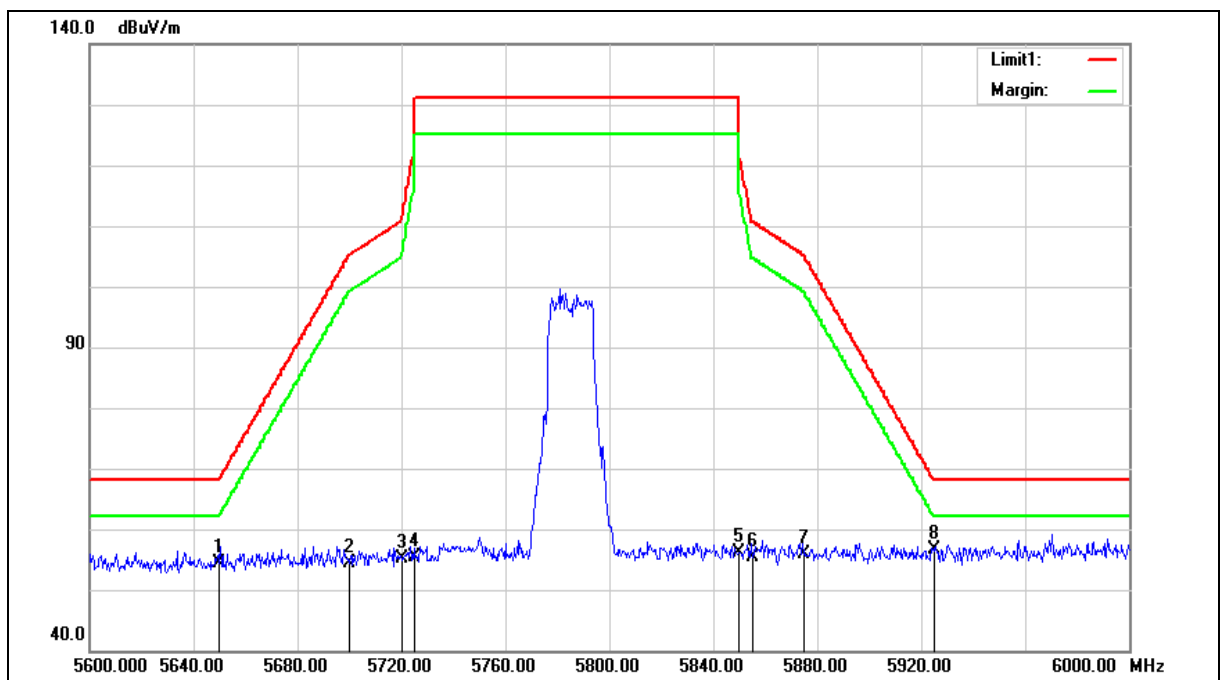

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.15	7.17	54.32	68.20	-13.88	peak
2	5700.000	47.13	7.27	54.40	105.20	-50.80	peak
3	5720.000	47.93	7.31	55.24	110.80	-55.56	peak
4	5725.000	47.94	7.32	55.26	122.20	-66.94	peak
5	5850.000	48.64	7.59	56.23	122.20	-65.97	peak
6	5855.000	47.89	7.60	55.49	110.80	-55.31	peak
7	5875.000	48.31	7.64	55.95	105.20	-49.25	peak
8	5925.000	48.96	7.75	56.71	68.20	-11.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

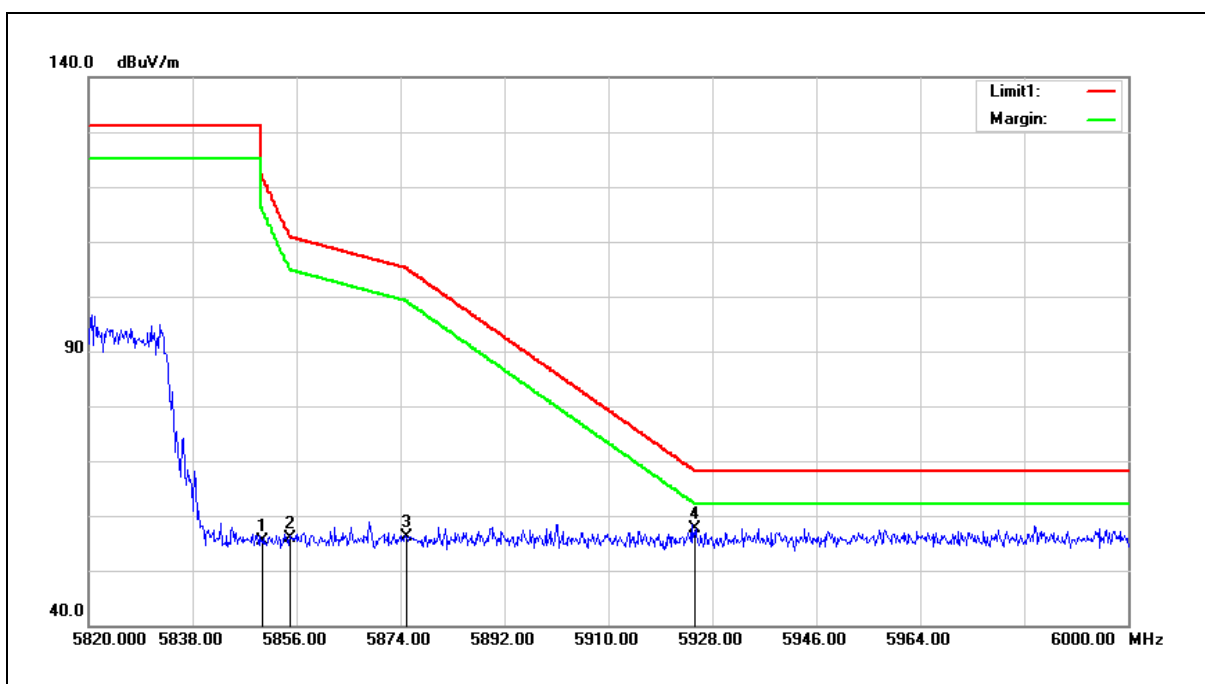


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.89	7.59	55.48	122.20	-66.72	peak
2	5855.000	48.35	7.60	55.95	110.80	-54.85	peak
3	5875.000	48.59	7.64	56.23	105.20	-48.97	peak
4	5925.000	49.86	7.75	57.61	68.20	-10.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

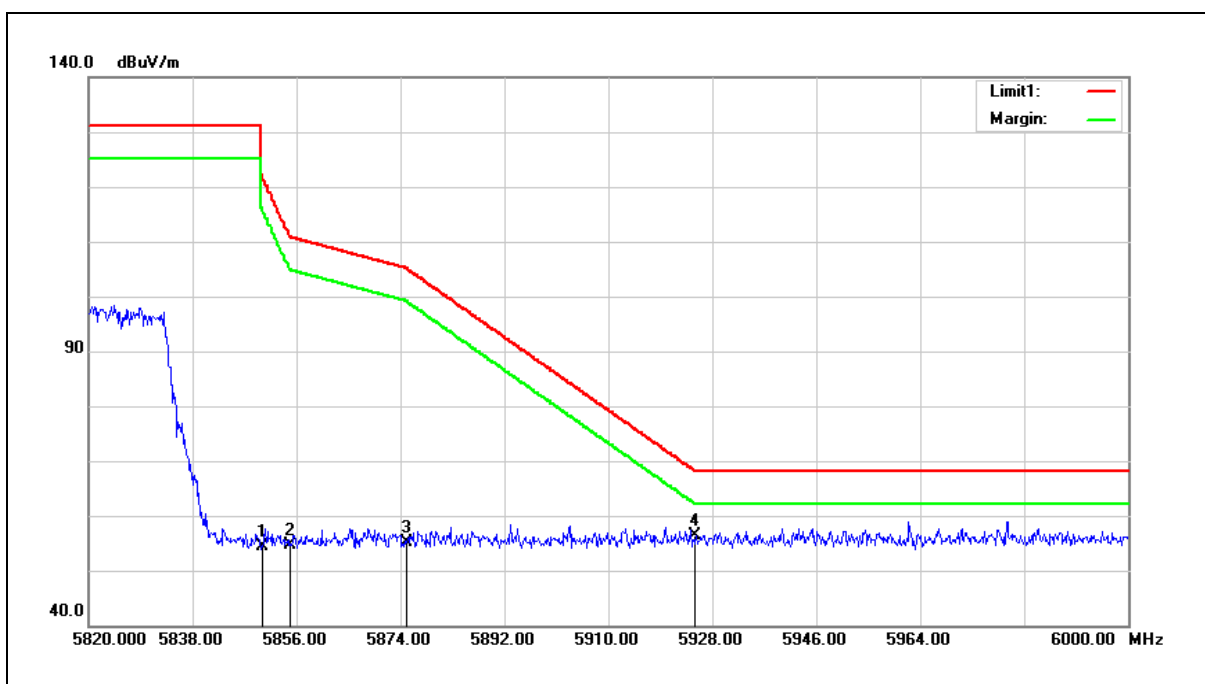

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	46.80	7.59	54.39	122.20	-67.81	peak
2	5855.000	47.06	7.60	54.66	110.80	-56.14	peak
3	5875.000	47.48	7.64	55.12	105.20	-50.08	peak
4	5925.000	48.53	7.75	56.28	68.20	-11.92	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

SISO B

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

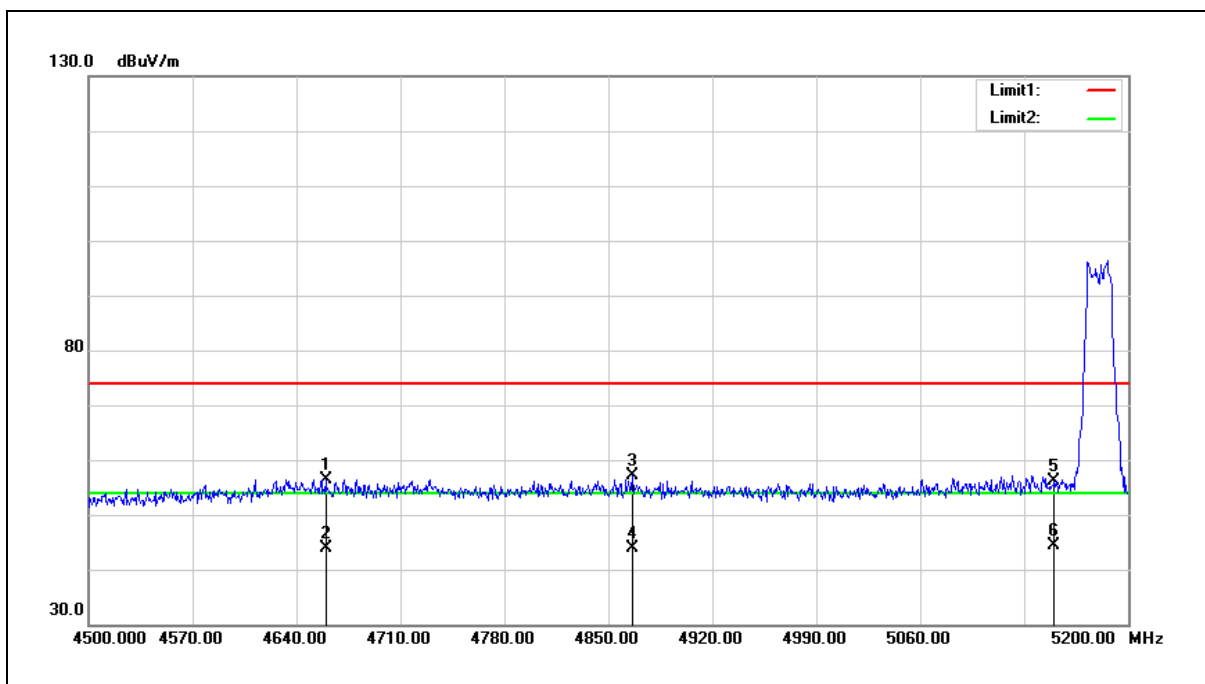

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4659.600	51.36	5.03	56.39	74.00	-17.61	peak
2	4659.600	38.93	5.03	43.96	54.00	-10.04	AVG
3	4866.100	51.65	5.45	57.10	74.00	-16.90	peak
4	4866.100	38.38	5.45	43.83	54.00	-10.17	AVG
5	5150.000	50.07	6.07	56.14	74.00	-17.86	peak
6	5150.000	38.41	6.07	44.48	54.00	-9.52	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

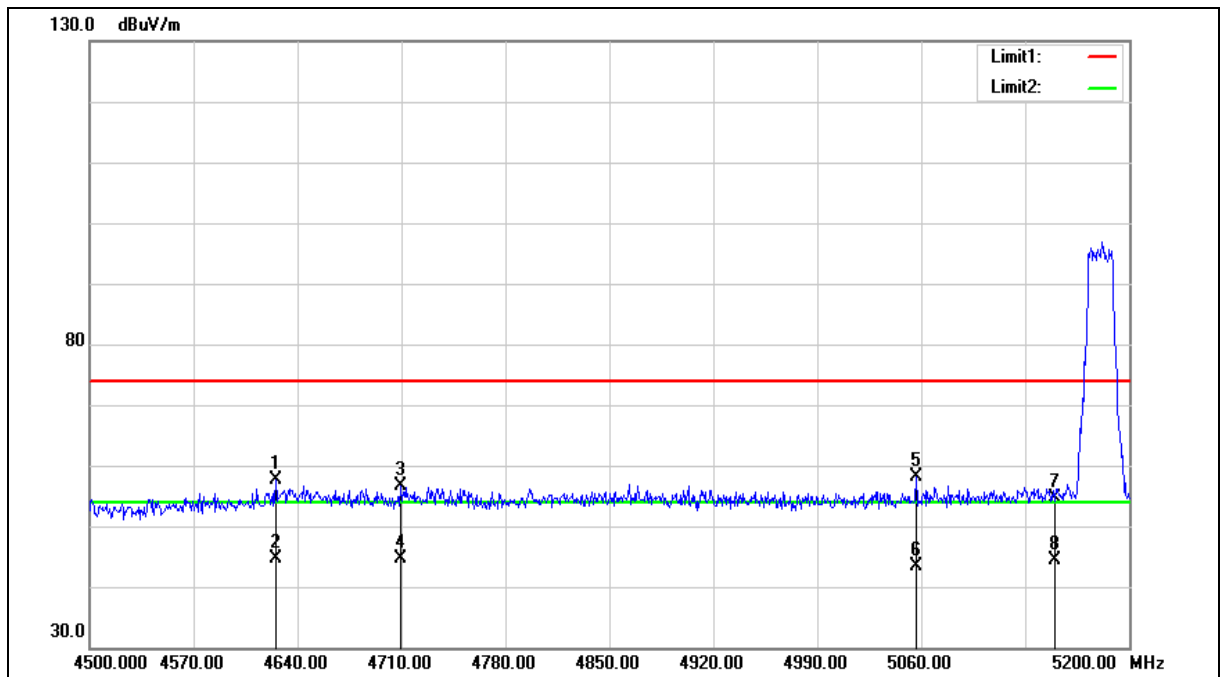



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4625.300	52.57	4.96	57.53	74.00	-16.47	peak
2	4625.300	39.71	4.96	44.67	54.00	-9.33	AVG
3	4709.300	51.51	5.14	56.65	74.00	-17.35	peak
4	4709.300	39.44	5.14	44.58	54.00	-9.42	AVG
5	5056.500	52.21	5.85	58.06	74.00	-15.94	peak
6	5056.500	37.59	5.85	43.44	54.00	-10.56	AVG
7	5150.000	48.59	6.07	54.66	74.00	-19.34	peak
8	5150.000	38.30	6.07	44.37	54.00	-9.63	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

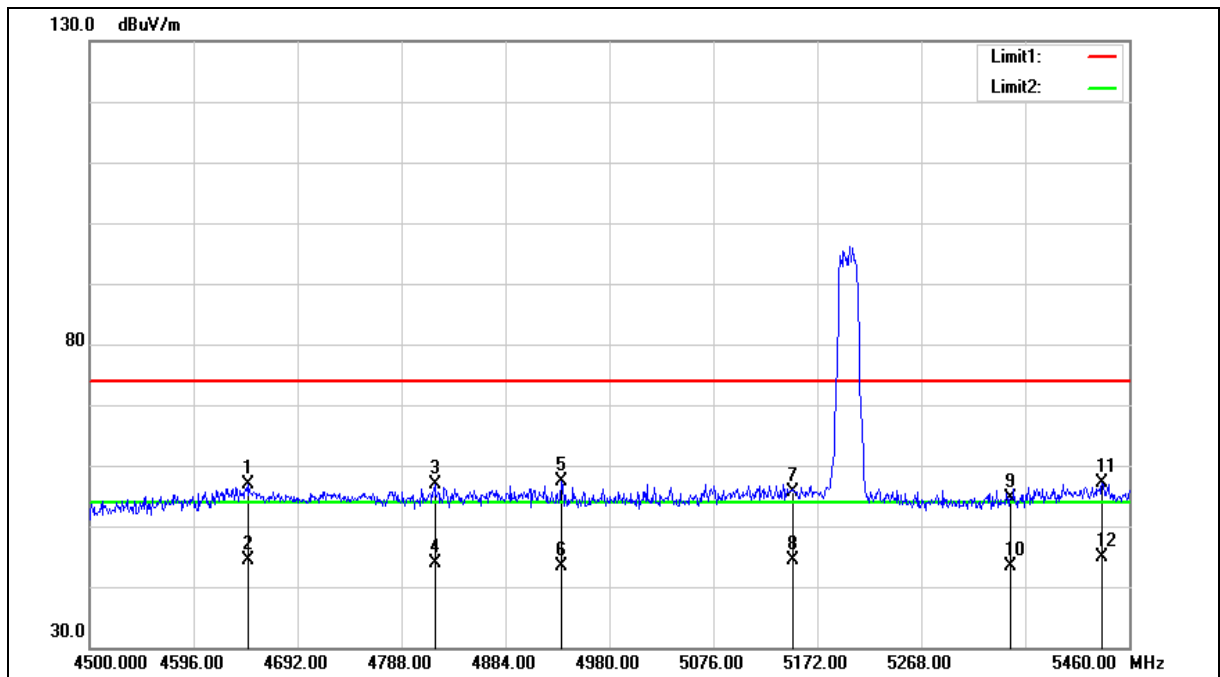

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4646.880	51.80	5.01	56.81	74.00	-17.19	peak
2	4646.880	39.34	5.01	44.35	54.00	-9.65	AVG
3	4818.720	51.52	5.36	56.88	74.00	-17.12	peak
4	4818.720	38.57	5.36	43.93	54.00	-10.07	AVG
5	4935.840	51.68	5.60	57.28	74.00	-16.72	peak
6	4935.840	37.85	5.60	43.45	54.00	-10.55	AVG
7	5150.000	49.49	6.07	55.56	74.00	-18.44	peak
8	5150.000	38.34	6.07	44.41	54.00	-9.59	AVG
9	5350.000	48.00	6.52	54.52	74.00	-19.48	peak
10	5350.000	36.77	6.52	43.29	54.00	-10.71	AVG
11	5435.040	50.51	6.71	57.22	74.00	-16.78	peak
12	5435.040	38.15	6.71	44.86	54.00	-9.14	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

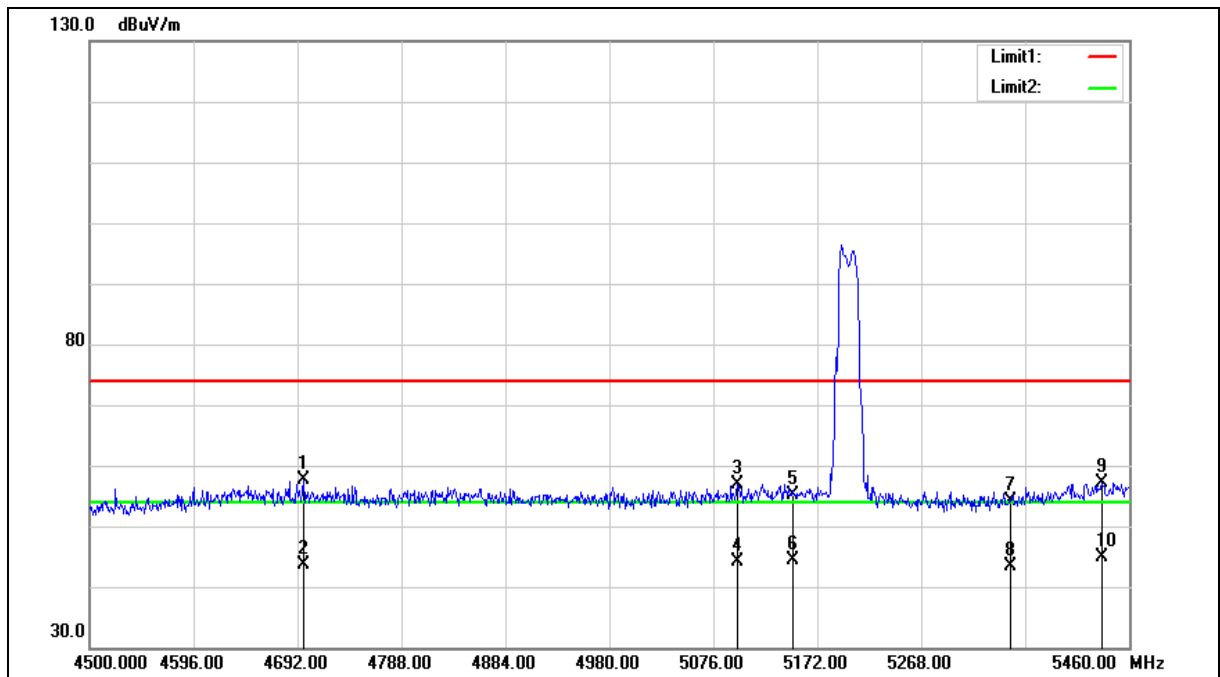

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4697.760	52.47	5.11	57.58	74.00	-16.42	peak
2	4697.760	38.56	5.11	43.67	54.00	-10.33	AVG
3	5098.080	50.85	5.96	56.81	74.00	-17.19	peak
4	5098.080	38.12	5.96	44.08	54.00	-9.92	AVG
5	5150.000	49.17	6.07	55.24	74.00	-18.76	peak
6	5150.000	38.40	6.07	44.47	54.00	-9.53	AVG
7	5350.000	47.64	6.52	54.16	74.00	-19.84	peak
8	5350.000	36.78	6.52	43.30	54.00	-10.70	AVG
9	5435.040	50.42	6.71	57.13	74.00	-16.87	peak
10	5435.040	38.19	6.71	44.90	54.00	-9.10	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

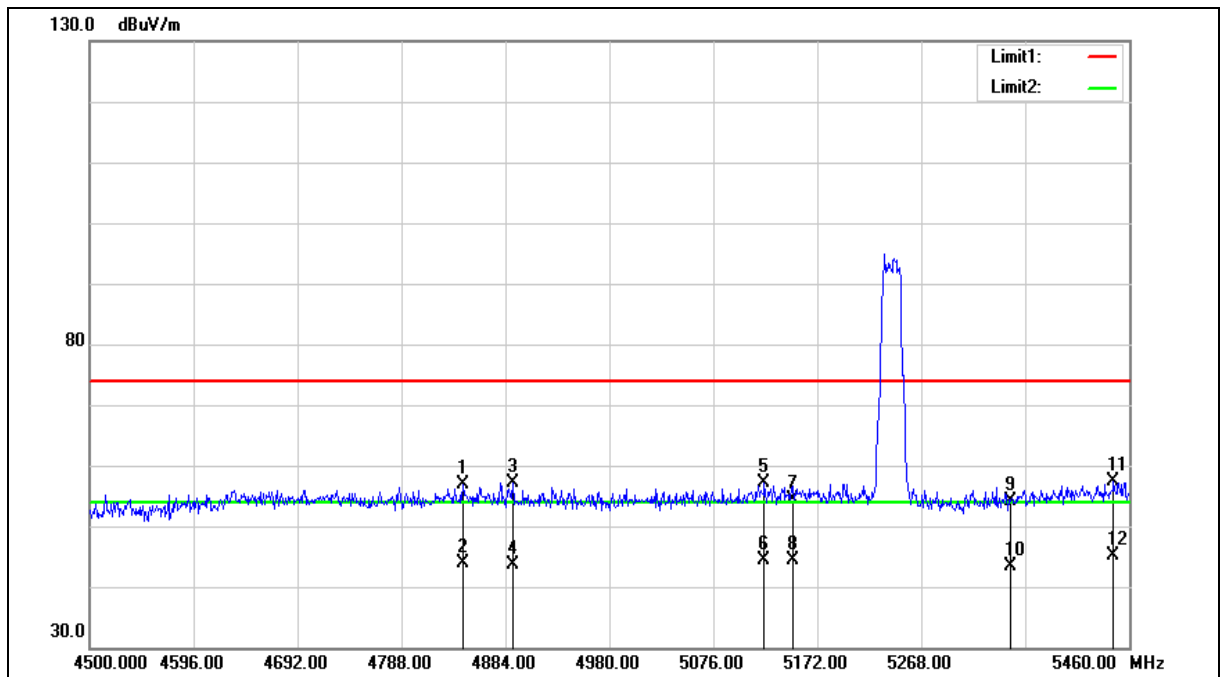

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.640	51.57	5.42	56.99	74.00	-17.01	peak
2	4844.640	38.42	5.42	43.84	54.00	-10.16	AVG
3	4890.720	51.59	5.50	57.09	74.00	-16.91	peak
4	4890.720	38.21	5.50	43.71	54.00	-10.29	AVG
5	5123.040	51.15	6.01	57.16	74.00	-16.84	peak
6	5123.040	38.30	6.01	44.31	54.00	-9.69	AVG
7	5150.000	48.43	6.07	54.50	74.00	-19.50	peak
8	5150.000	38.32	6.07	44.39	54.00	-9.61	AVG
9	5350.000	47.68	6.52	54.20	74.00	-19.80	peak
10	5350.000	36.78	6.52	43.30	54.00	-10.70	AVG
11	5445.600	50.52	6.74	57.26	74.00	-16.74	peak
12	5445.600	38.29	6.74	45.03	54.00	-8.97	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

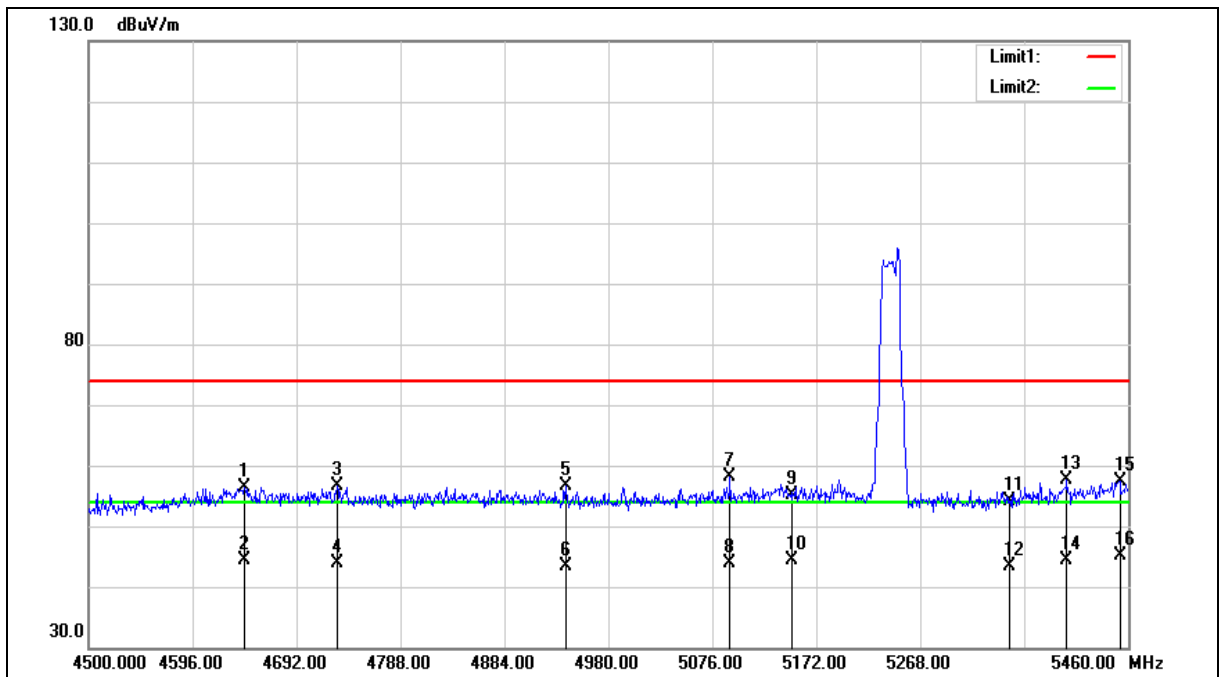



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.000	51.33	5.01	56.34	74.00	-17.66	peak
2	4644.000	39.32	5.01	44.33	54.00	-9.67	AVG
3	4729.440	51.33	5.18	56.51	74.00	-17.49	peak
4	4729.440	38.72	5.18	43.90	54.00	-10.10	AVG
5	4940.640	51.11	5.61	56.72	74.00	-17.28	peak
6	4940.640	37.65	5.61	43.26	54.00	-10.74	AVG
7	5092.320	52.15	5.95	58.10	74.00	-15.90	peak
8	5092.320	38.00	5.95	43.95	54.00	-10.05	AVG
9	5150.000	49.17	6.07	55.24	74.00	-18.76	peak
10	5150.000	38.29	6.07	44.36	54.00	-9.64	AVG
11	5350.000	47.65	6.52	54.17	74.00	-19.83	peak
12	5350.000	36.82	6.52	43.34	54.00	-10.66	AVG
13	5403.360	51.09	6.64	57.73	74.00	-16.27	peak
14	5403.360	37.86	6.64	44.50	54.00	-9.50	AVG
15	5452.320	50.62	6.75	57.37	74.00	-16.63	peak
16	5452.320	38.37	6.75	45.12	54.00	-8.88	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

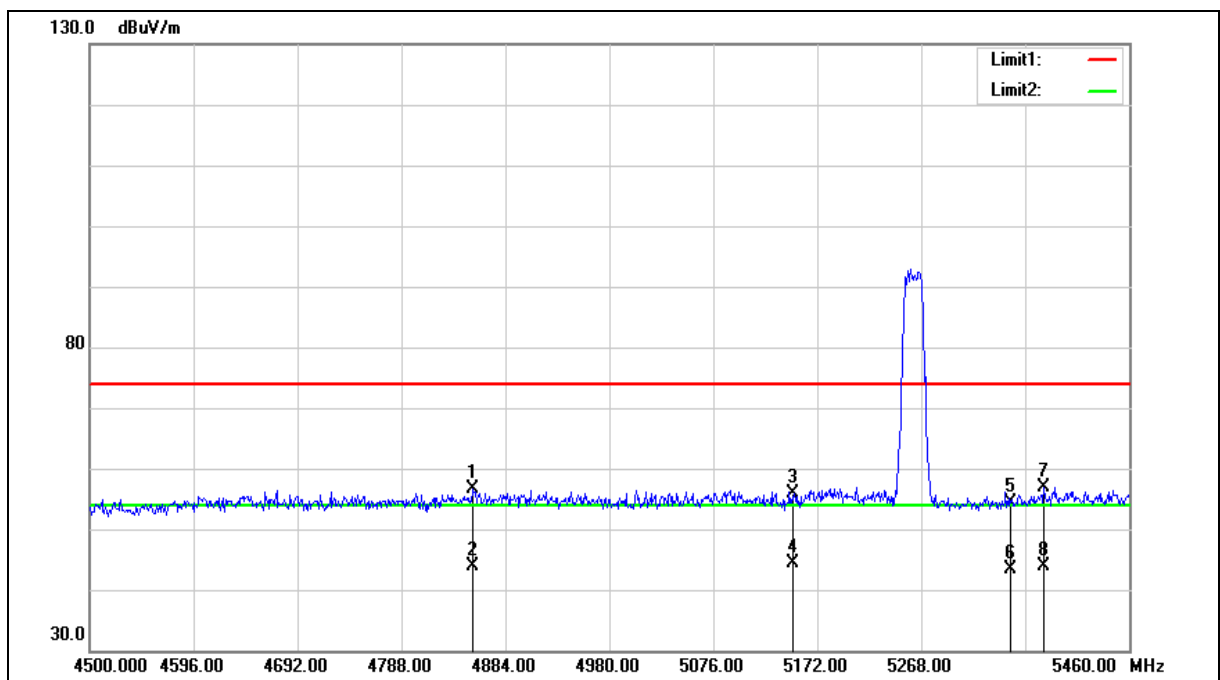

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4854.240	51.21	5.43	56.64	74.00	-17.36	peak
2	4854.240	38.48	5.43	43.91	54.00	-10.09	AVG
3	5150.000	49.90	6.07	55.97	74.00	-18.03	peak
4	5150.000	38.40	6.07	44.47	54.00	-9.53	AVG
5	5350.000	47.78	6.52	54.30	74.00	-19.70	peak
6	5350.000	36.82	6.52	43.34	54.00	-10.66	AVG
7	5381.280	50.32	6.59	56.91	74.00	-17.09	peak
8	5381.280	37.28	6.59	43.87	54.00	-10.13	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

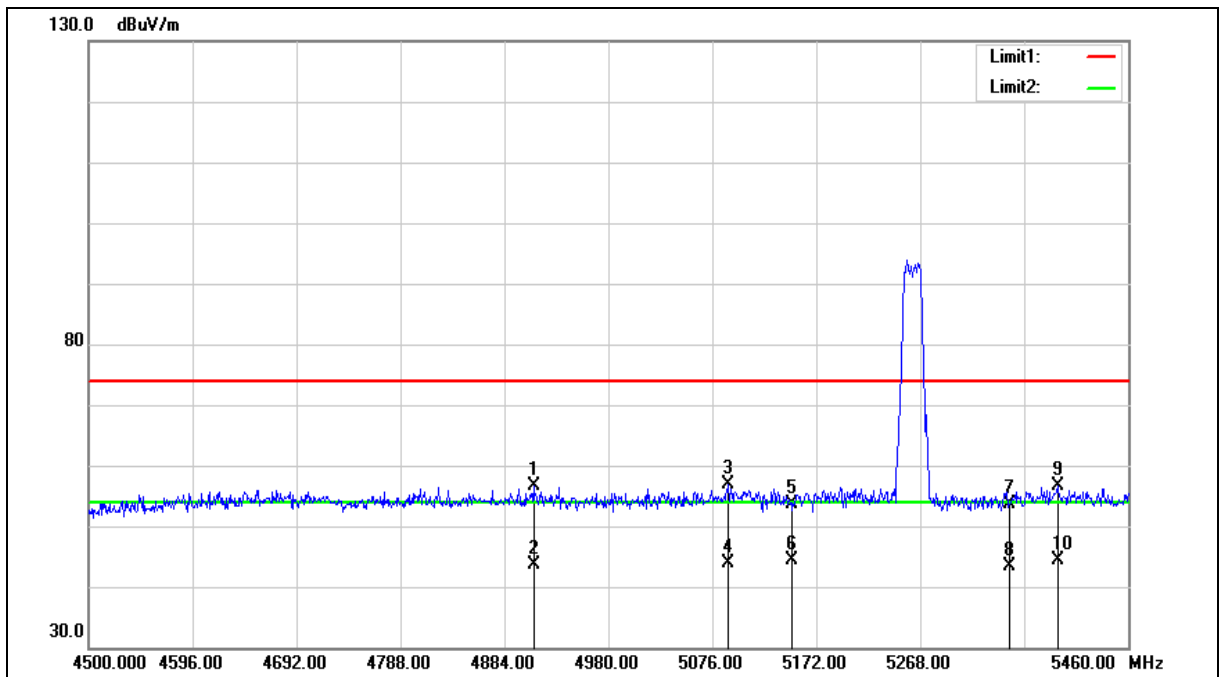

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4910.880	51.00	5.55	56.55	74.00	-17.45	peak
2	4910.880	38.02	5.55	43.57	54.00	-10.43	AVG
3	5090.400	50.94	5.94	56.88	74.00	-17.12	peak
4	5090.400	37.97	5.94	43.91	54.00	-10.09	AVG
5	5150.000	47.66	6.07	53.73	74.00	-20.27	peak
6	5150.000	38.35	6.07	44.42	54.00	-9.58	AVG
7	5350.000	47.08	6.52	53.60	74.00	-20.40	peak
8	5350.000	36.89	6.52	43.41	54.00	-10.59	AVG
9	5394.720	49.98	6.62	56.60	74.00	-17.40	peak
10	5394.720	37.67	6.62	44.29	54.00	-9.71	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

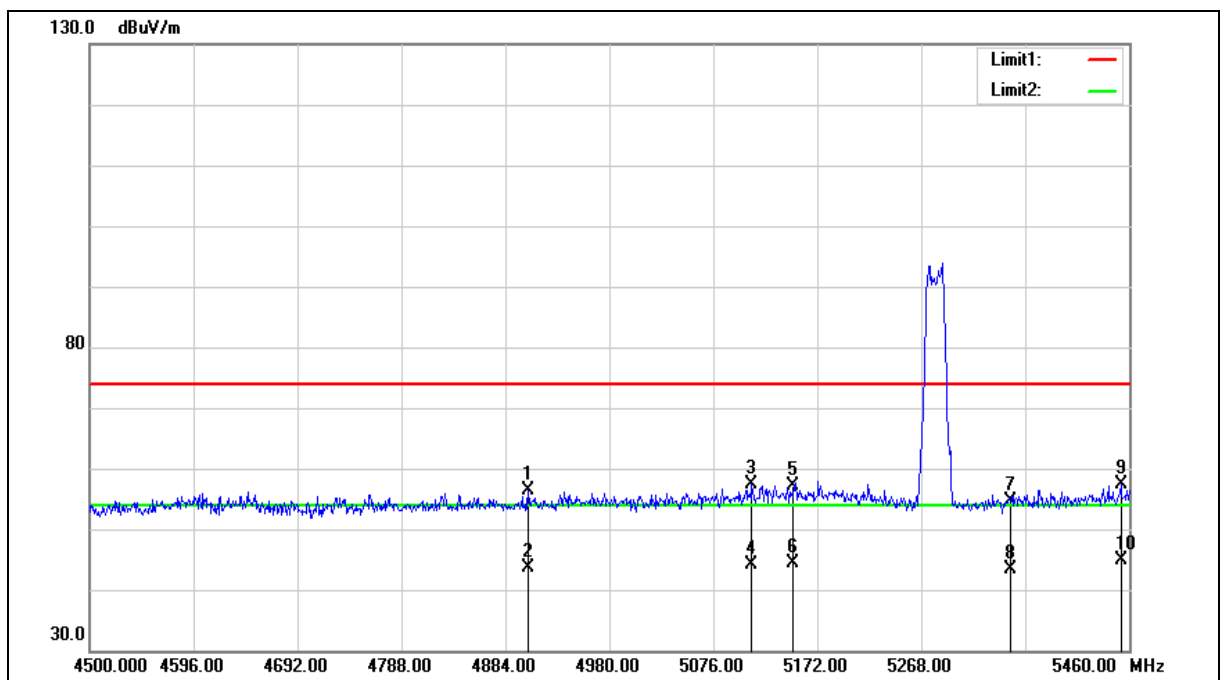

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.120	50.72	5.54	56.26	74.00	-17.74	peak
2	4905.120	38.10	5.54	43.64	54.00	-10.36	AVG
3	5111.520	51.48	5.98	57.46	74.00	-16.54	peak
4	5111.520	38.15	5.98	44.13	54.00	-9.87	AVG
5	5150.000	51.05	6.07	57.12	74.00	-16.88	peak
6	5150.000	38.30	6.07	44.37	54.00	-9.63	AVG
7	5350.000	48.07	6.52	54.59	74.00	-19.41	peak
8	5350.000	36.77	6.52	43.29	54.00	-10.71	AVG
9	5452.320	50.59	6.75	57.34	74.00	-16.66	peak
10	5452.320	38.23	6.75	44.98	54.00	-9.02	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

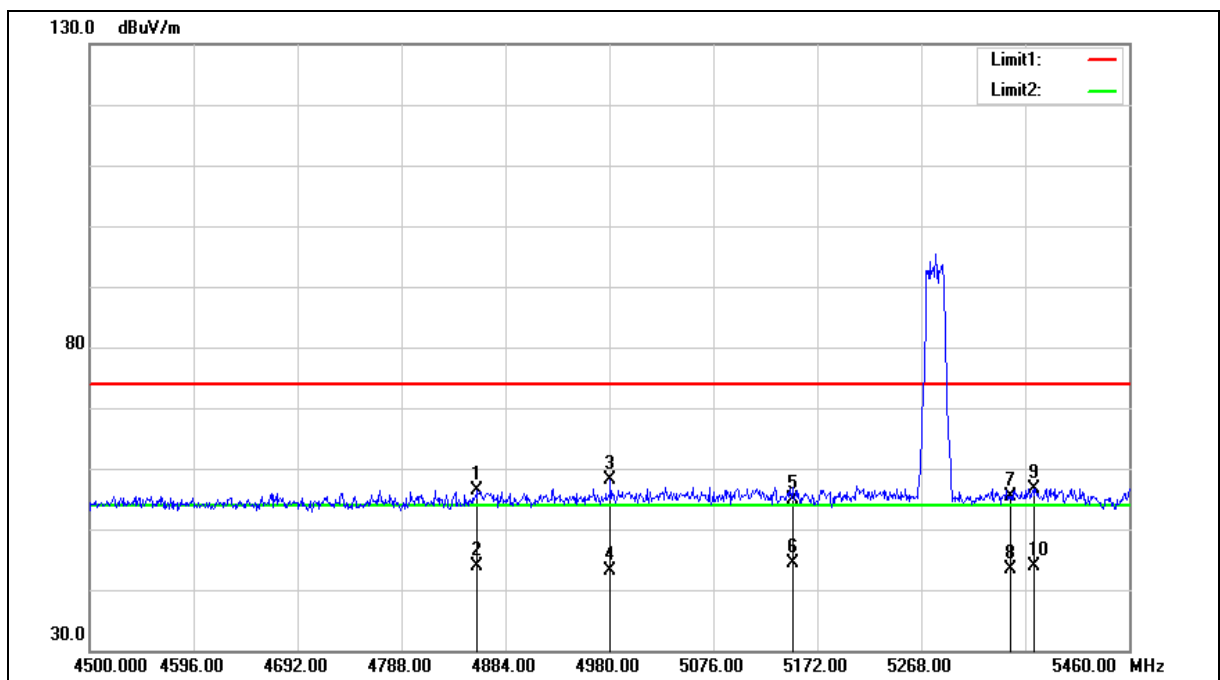

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4858.080	50.92	5.44	56.36	74.00	-17.64	peak
2	4858.080	38.33	5.44	43.77	54.00	-10.23	AVG
3	4980.960	52.48	5.69	58.17	74.00	-15.83	peak
4	4980.960	37.48	5.69	43.17	54.00	-10.83	AVG
5	5150.000	48.81	6.07	54.88	74.00	-19.12	peak
6	5150.000	38.26	6.07	44.33	54.00	-9.67	AVG
7	5350.000	48.78	6.52	55.30	74.00	-18.70	peak
8	5350.000	36.82	6.52	43.34	54.00	-10.66	AVG
9	5371.680	50.12	6.57	56.69	74.00	-17.31	peak
10	5371.680	37.20	6.57	43.77	54.00	-10.23	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

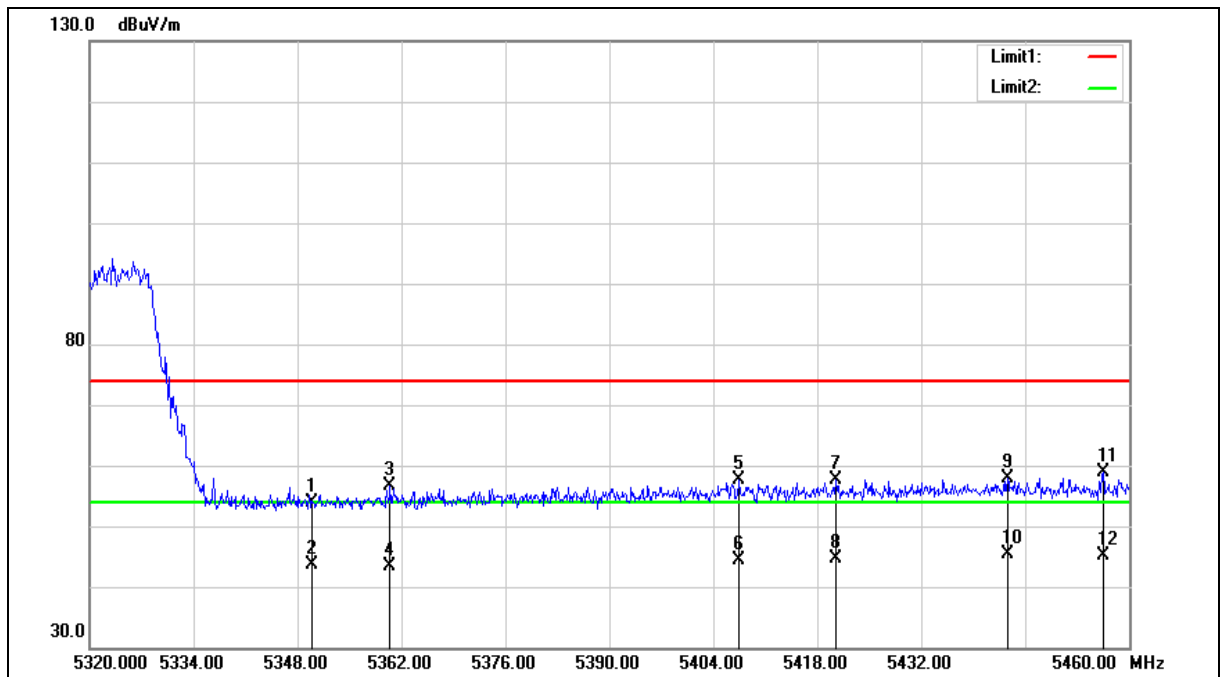

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.27	6.52	53.79	74.00	-20.21	peak
2	5350.000	37.10	6.52	43.62	54.00	-10.38	AVG
3	5360.460	50.06	6.54	56.60	74.00	-17.40	peak
4	5360.460	36.82	6.54	43.36	54.00	-10.64	AVG
5	5407.500	51.01	6.64	57.65	74.00	-16.35	peak
6	5407.500	37.77	6.64	44.41	54.00	-9.59	AVG
7	5420.520	51.00	6.69	57.69	74.00	-16.31	peak
8	5420.520	37.98	6.69	44.67	54.00	-9.33	AVG
9	5443.620	51.10	6.74	57.84	74.00	-16.16	peak
10	5443.620	38.75	6.74	45.49	54.00	-8.51	AVG
11	5456.500	52.00	6.76	58.76	74.00	-15.24	peak
12	5456.500	38.32	6.76	45.08	54.00	-8.92	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

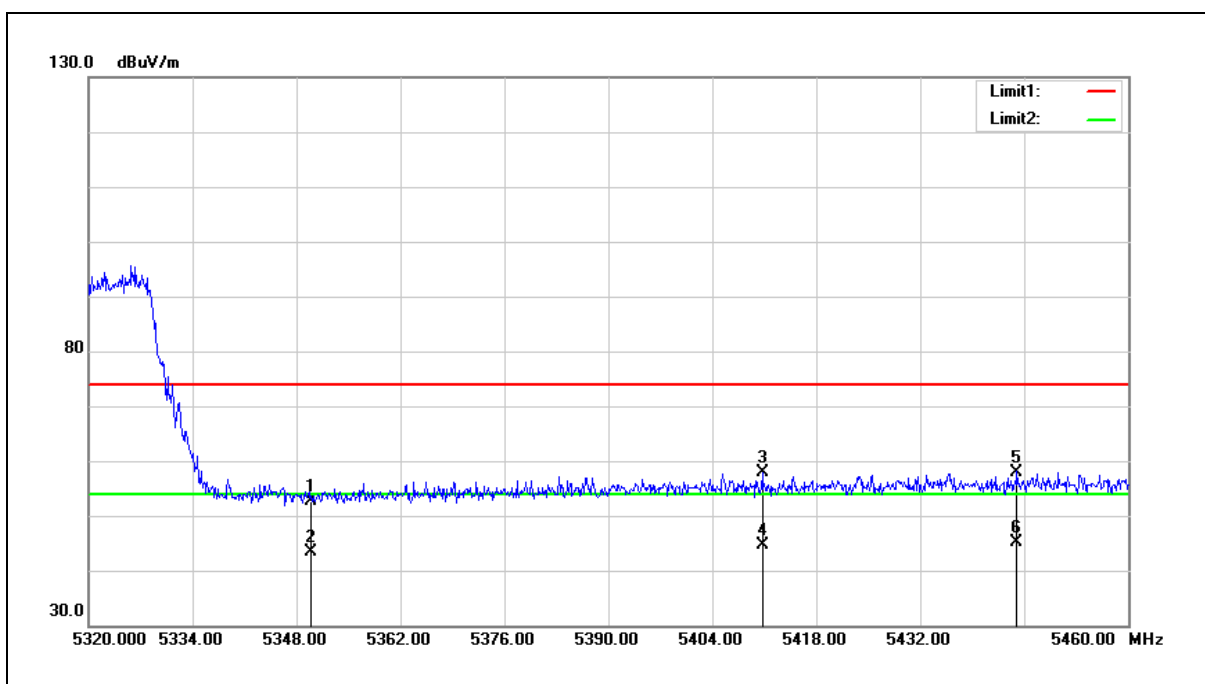

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	46.12	6.52	52.64	74.00	-21.36	peak
2	5350.000	36.86	6.52	43.38	54.00	-10.62	AVG
3	5410.720	51.20	6.65	57.85	74.00	-16.15	peak
4	5410.720	37.97	6.65	44.62	54.00	-9.38	AVG
5	5445.020	51.26	6.74	58.00	74.00	-16.00	peak
6	5445.020	38.39	6.74	45.13	54.00	-8.87	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

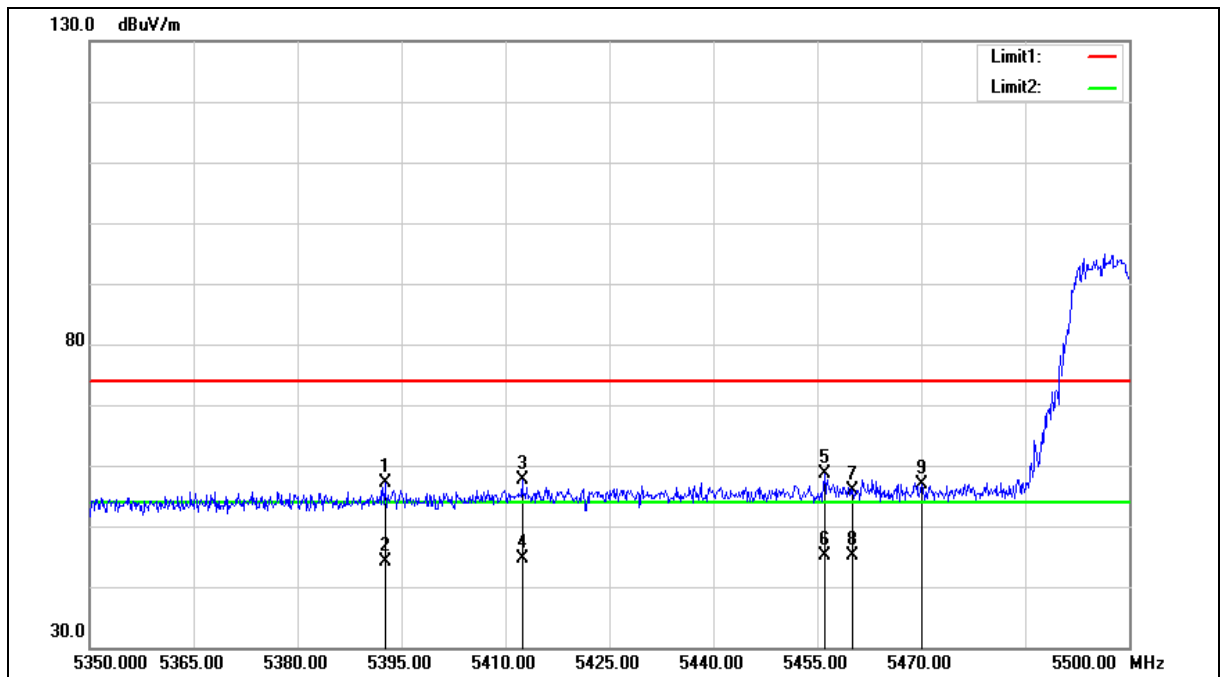

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5392.600	50.41	6.62	57.03	74.00	-16.97	peak
2	5392.600	37.45	6.62	44.07	54.00	-9.93	AVG
3	5412.400	51.03	6.65	57.68	74.00	-16.32	peak
4	5412.400	37.89	6.65	44.54	54.00	-9.46	AVG
5	5456.050	51.84	6.76	58.60	74.00	-15.40	peak
6	5456.050	38.35	6.76	45.11	54.00	-8.89	AVG
7	5460.000	49.20	6.77	55.97	74.00	-18.03	peak
8	5460.000	38.36	6.77	45.13	54.00	-8.87	AVG
9	5470.000	50.11	6.80	56.91	68.20	-11.29	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

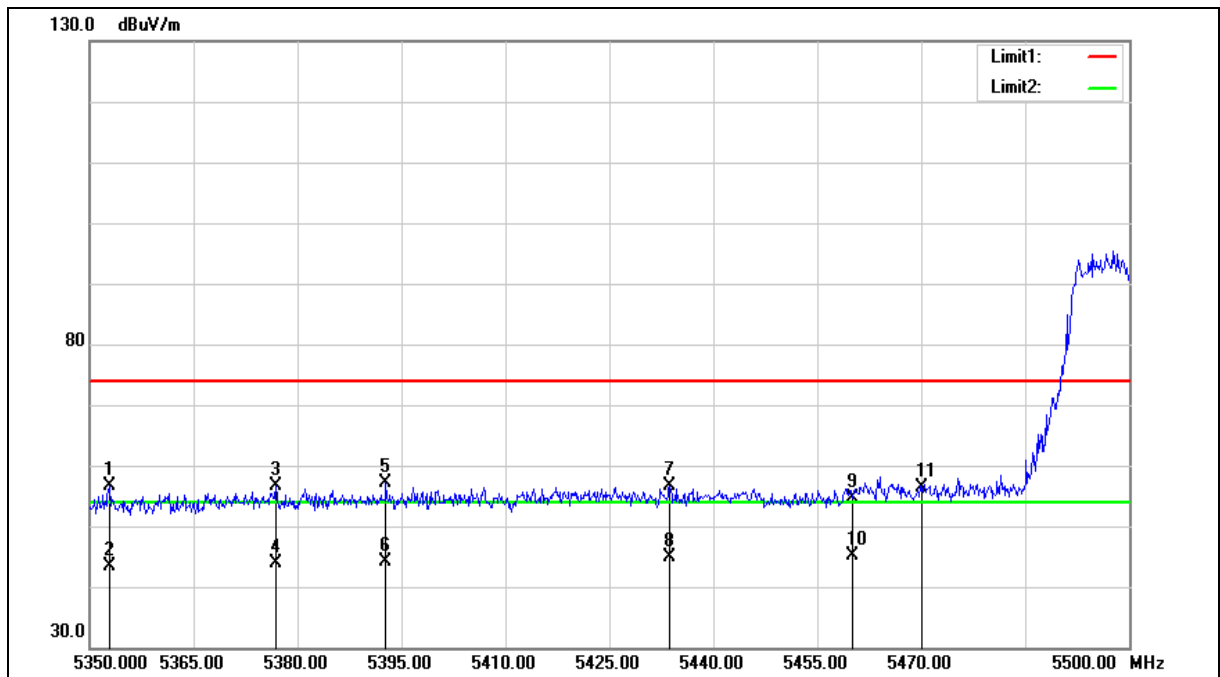



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5352.850	50.04	6.53	56.57	74.00	-17.43	peak
2	5352.850	36.78	6.53	43.31	54.00	-10.69	AVG
3	5376.850	50.05	6.58	56.63	74.00	-17.37	peak
4	5376.850	37.28	6.58	43.86	54.00	-10.14	AVG
5	5392.750	50.61	6.62	57.23	74.00	-16.77	peak
6	5392.750	37.55	6.62	44.17	54.00	-9.83	AVG
7	5433.700	49.91	6.71	56.62	74.00	-17.38	peak
8	5433.700	38.25	6.71	44.96	54.00	-9.04	AVG
9	5460.000	47.83	6.77	54.60	74.00	-19.40	peak
10	5460.000	38.37	6.77	45.14	54.00	-8.86	AVG
11	5470.000	49.54	6.80	56.34	68.20	-11.86	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

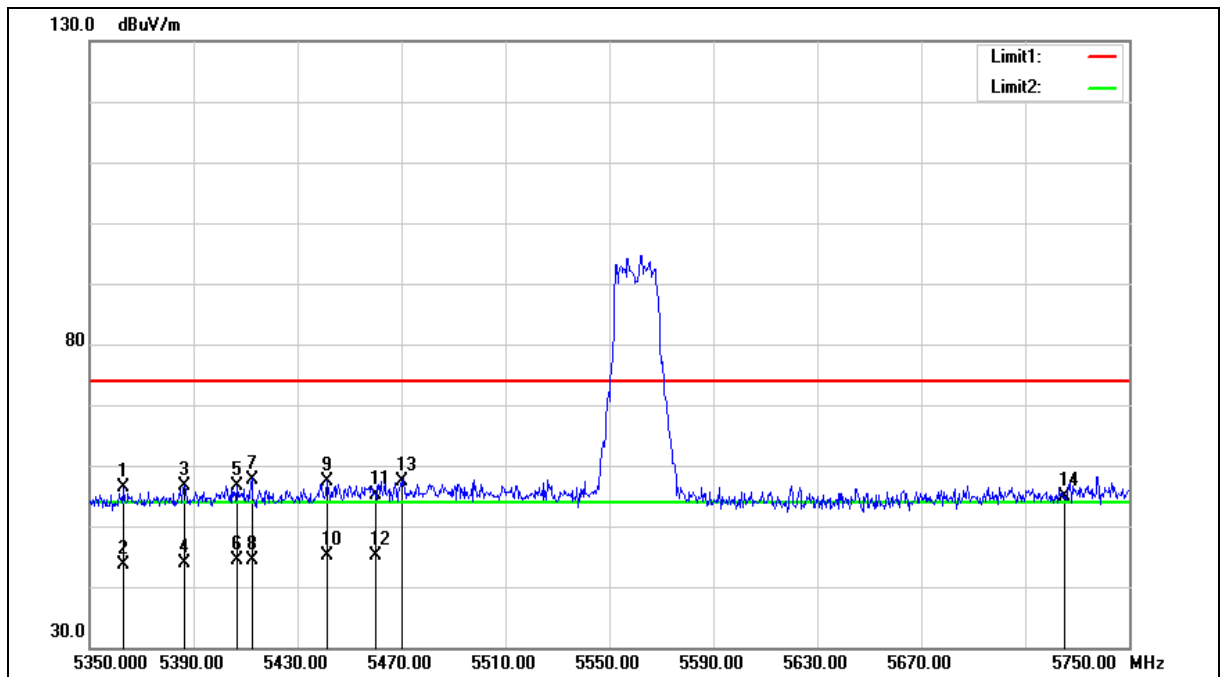

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5363.200	49.77	6.55	56.32	74.00	-17.68	peak
2	5363.200	36.98	6.55	43.53	54.00	-10.47	AVG
3	5386.400	49.99	6.60	56.59	74.00	-17.41	peak
4	5386.400	37.32	6.60	43.92	54.00	-10.08	AVG
5	5406.800	50.06	6.64	56.70	74.00	-17.30	peak
6	5406.800	37.76	6.64	44.40	54.00	-9.60	AVG
7	5412.400	51.10	6.65	57.75	74.00	-16.25	peak
8	5412.400	37.81	6.65	44.46	54.00	-9.54	AVG
9	5441.200	50.77	6.73	57.50	74.00	-16.50	peak
10	5441.200	38.28	6.73	45.01	54.00	-8.99	AVG
11	5460.000	48.39	6.77	55.16	74.00	-18.84	peak
12	5460.000	38.37	6.77	45.14	54.00	-8.86	AVG
13	5470.000	50.52	6.80	57.32	68.20	-10.88	peak
14	5725.000	47.66	7.32	54.98	68.20	-13.22	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

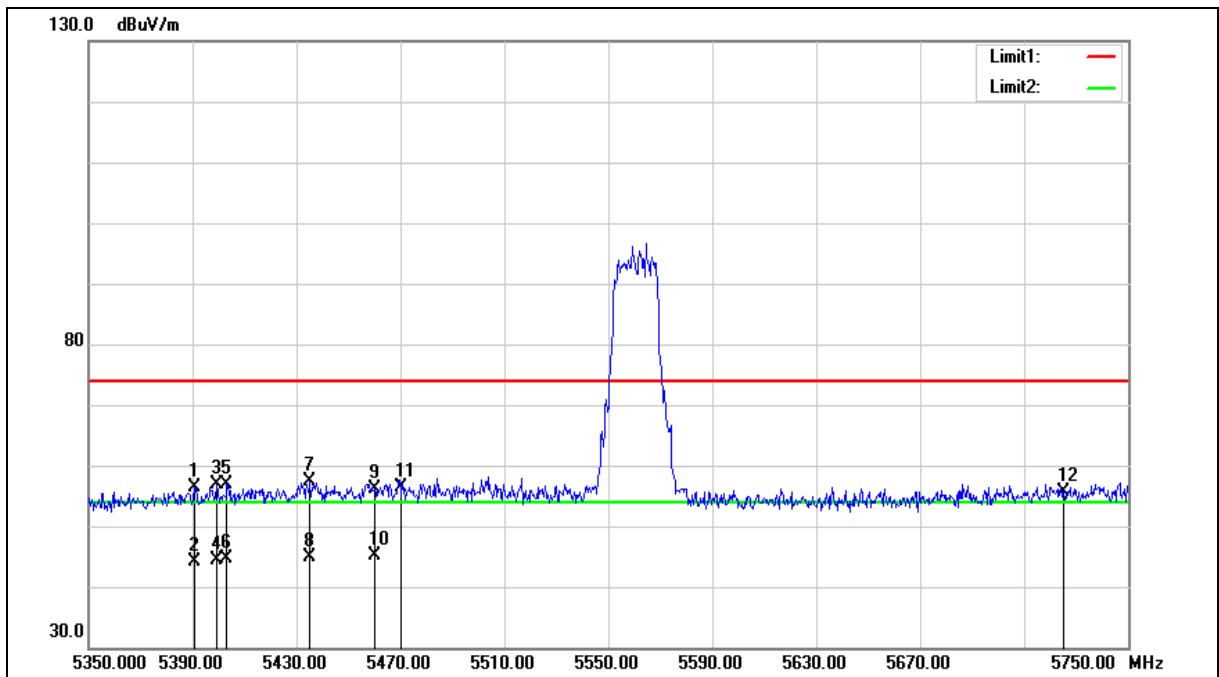

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5390.800	49.71	6.61	56.32	74.00	-17.68	peak
2	5390.800	37.46	6.61	44.07	54.00	-9.93	AVG
3	5399.200	50.31	6.63	56.94	74.00	-17.06	peak
4	5399.200	37.77	6.63	44.40	54.00	-9.60	AVG
5	5403.200	50.36	6.64	57.00	74.00	-17.00	peak
6	5403.200	37.90	6.64	44.54	54.00	-9.46	AVG
7	5435.200	50.69	6.71	57.40	74.00	-16.60	peak
8	5435.200	38.22	6.71	44.93	54.00	-9.07	AVG
9	5460.000	49.25	6.77	56.02	74.00	-17.98	peak
10	5460.000	38.41	6.77	45.18	54.00	-8.82	AVG
11	5470.000	49.63	6.80	56.43	68.20	-11.77	peak
12	5725.000	48.32	7.32	55.64	68.20	-12.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

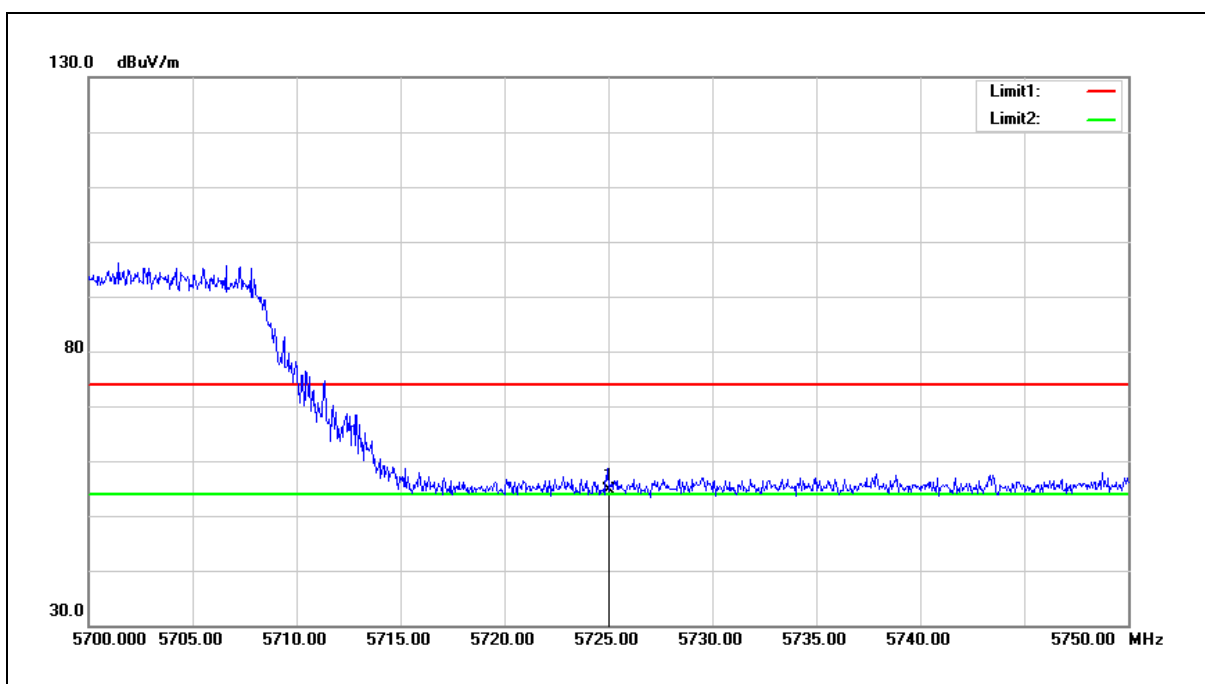

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	47.33	7.32	54.65	68.20	-13.55	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

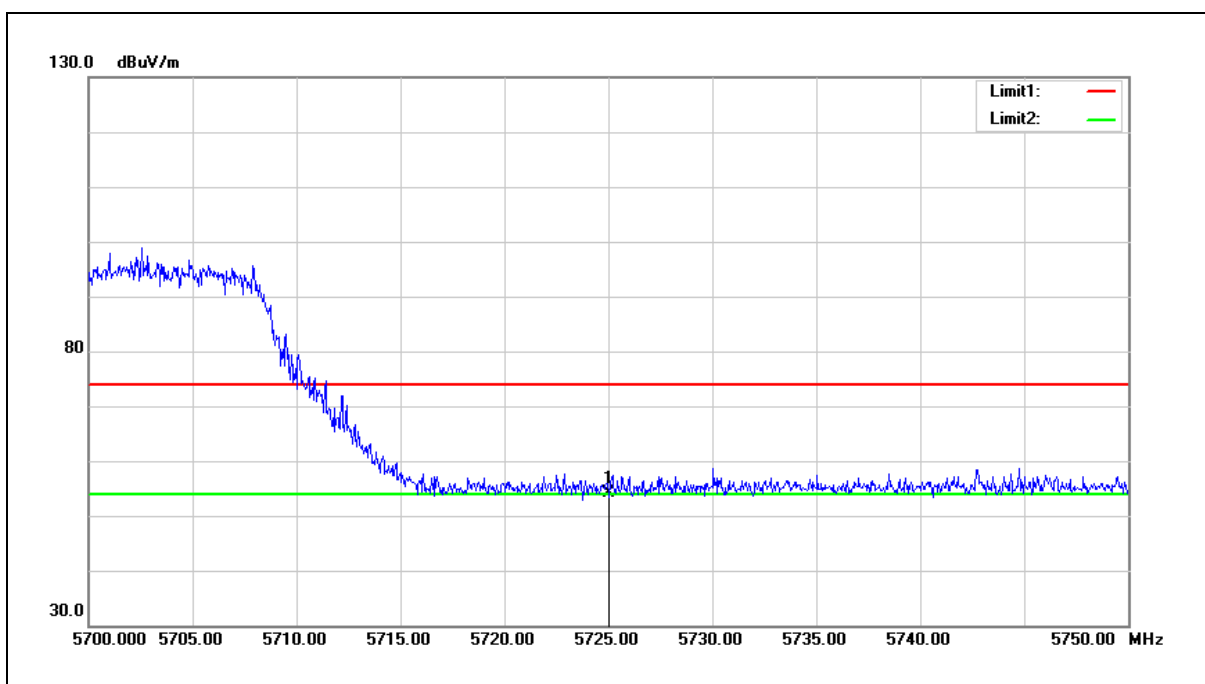


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	46.70	7.32	54.02	68.20	-14.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

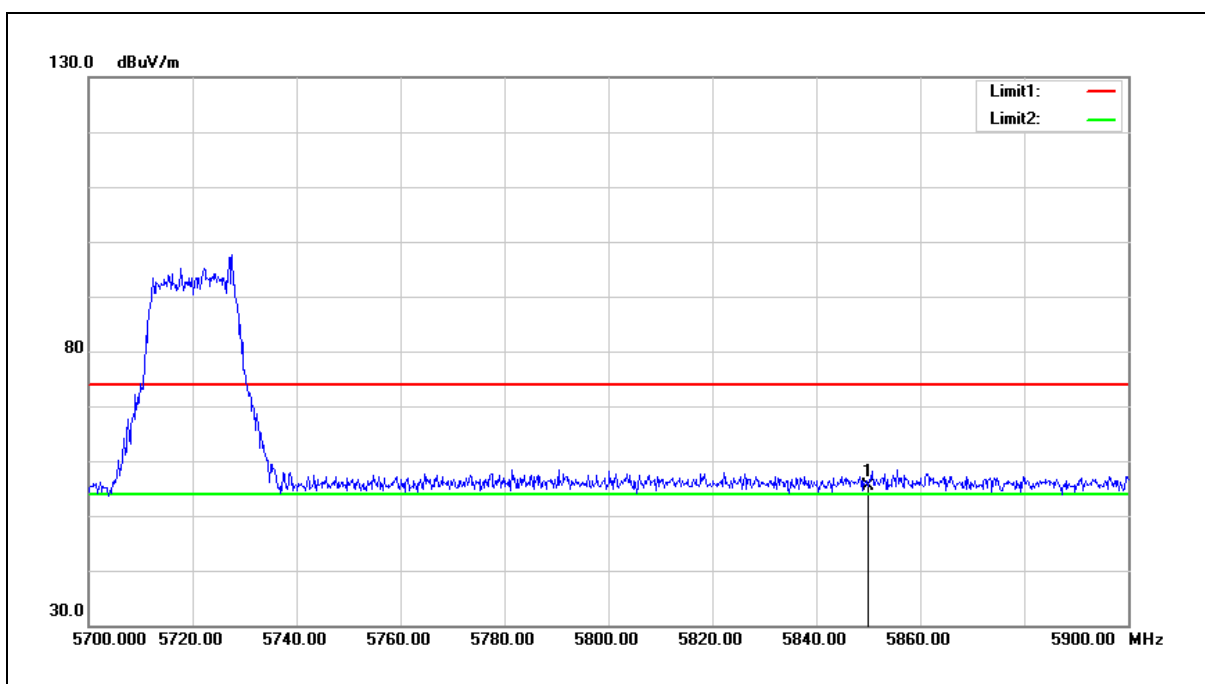


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.82	7.59	55.41	68.20	-12.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

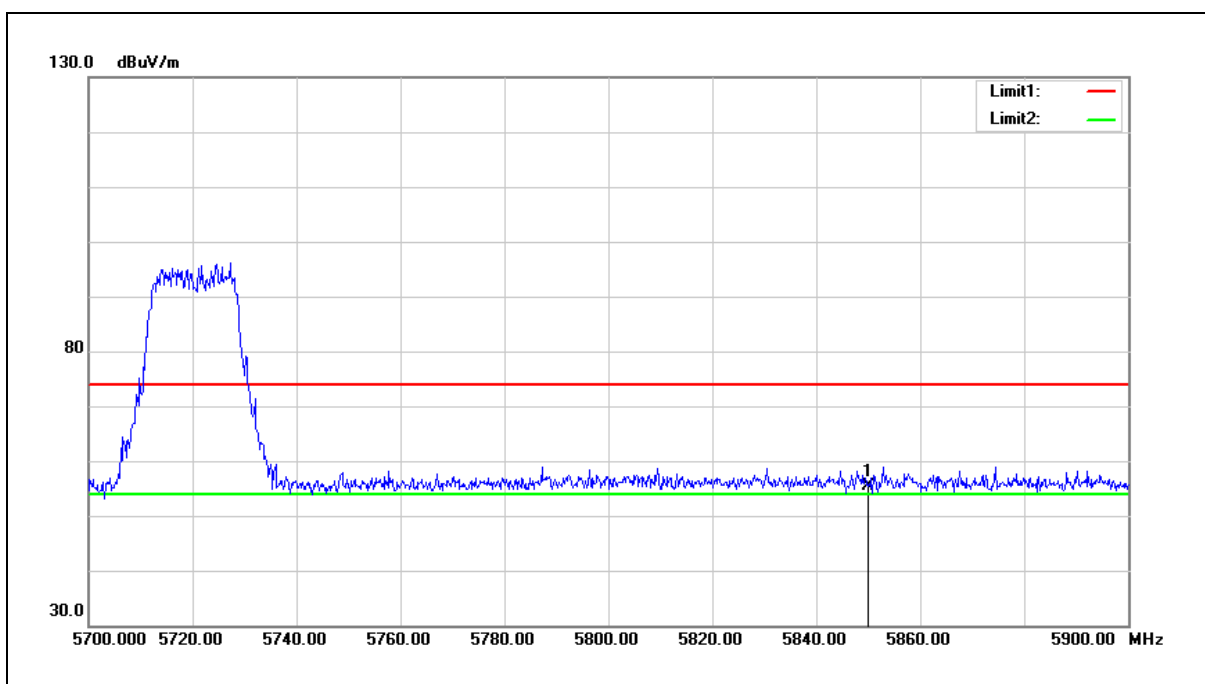


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.82	7.59	55.41	68.20	-12.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

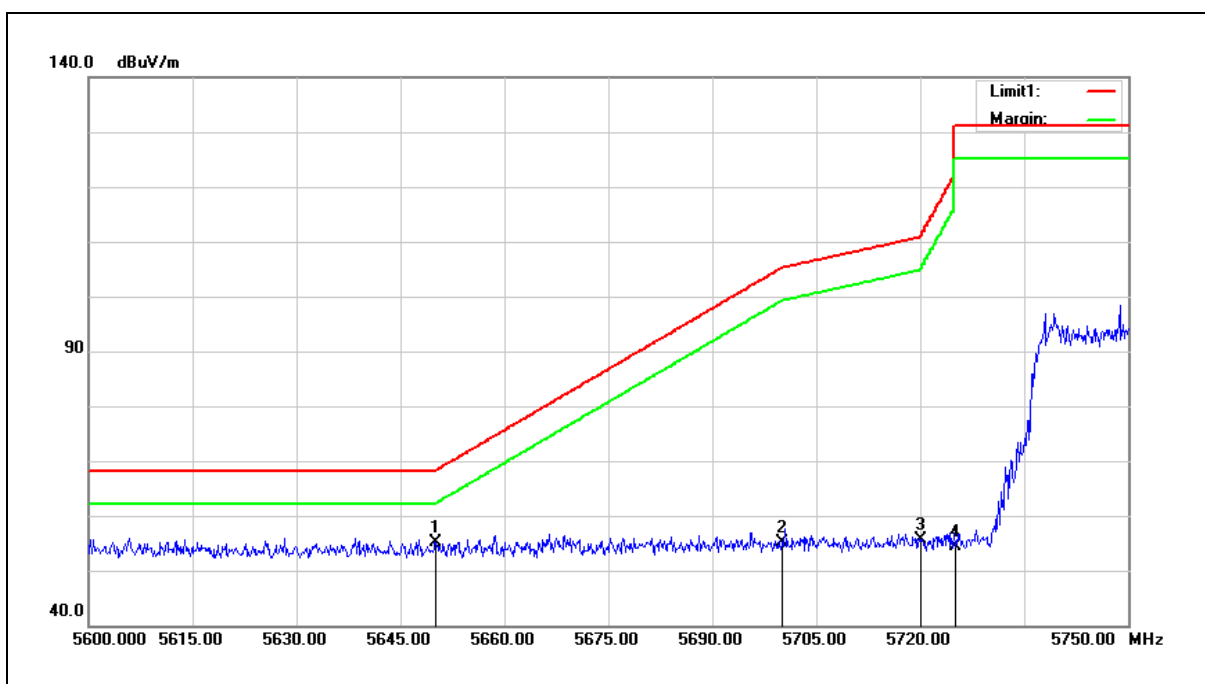


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.84	7.17	55.01	68.20	-13.19	peak
2	5700.000	47.80	7.27	55.07	105.20	-50.13	peak
3	5720.000	48.37	7.31	55.68	110.80	-55.12	peak
4	5725.000	46.96	7.32	54.28	122.20	-67.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

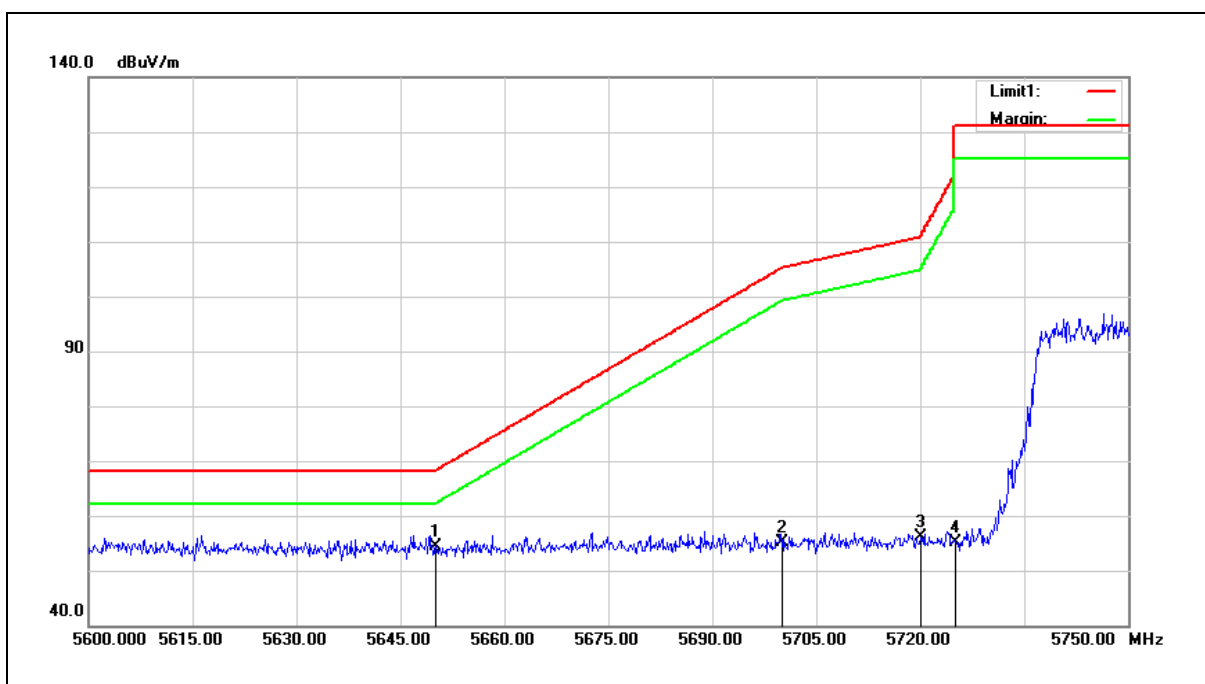

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.33	7.17	54.50	68.20	-13.70	peak
2	5700.000	47.93	7.27	55.20	105.20	-50.00	peak
3	5720.000	48.72	7.31	56.03	110.80	-54.77	peak
4	5725.000	47.88	7.32	55.20	122.20	-67.00	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

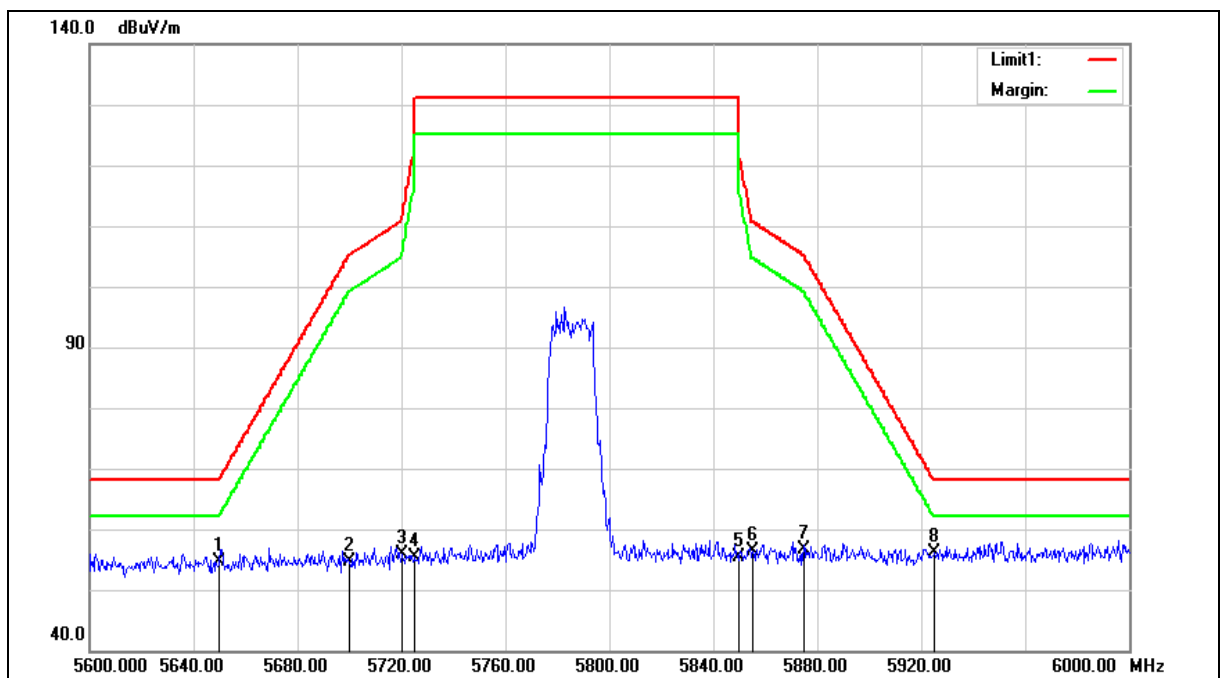

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.38	7.17	54.55	68.20	-13.65	peak
2	5700.000	47.38	7.27	54.65	105.20	-50.55	peak
3	5720.000	48.50	7.31	55.81	110.80	-54.99	peak
4	5725.000	47.98	7.32	55.30	122.20	-66.90	peak
5	5850.000	47.75	7.59	55.34	122.20	-66.86	peak
6	5855.000	48.78	7.60	56.38	110.80	-54.42	peak
7	5875.000	49.05	7.64	56.69	105.20	-48.51	peak
8	5925.000	48.38	7.75	56.13	68.20	-12.07	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

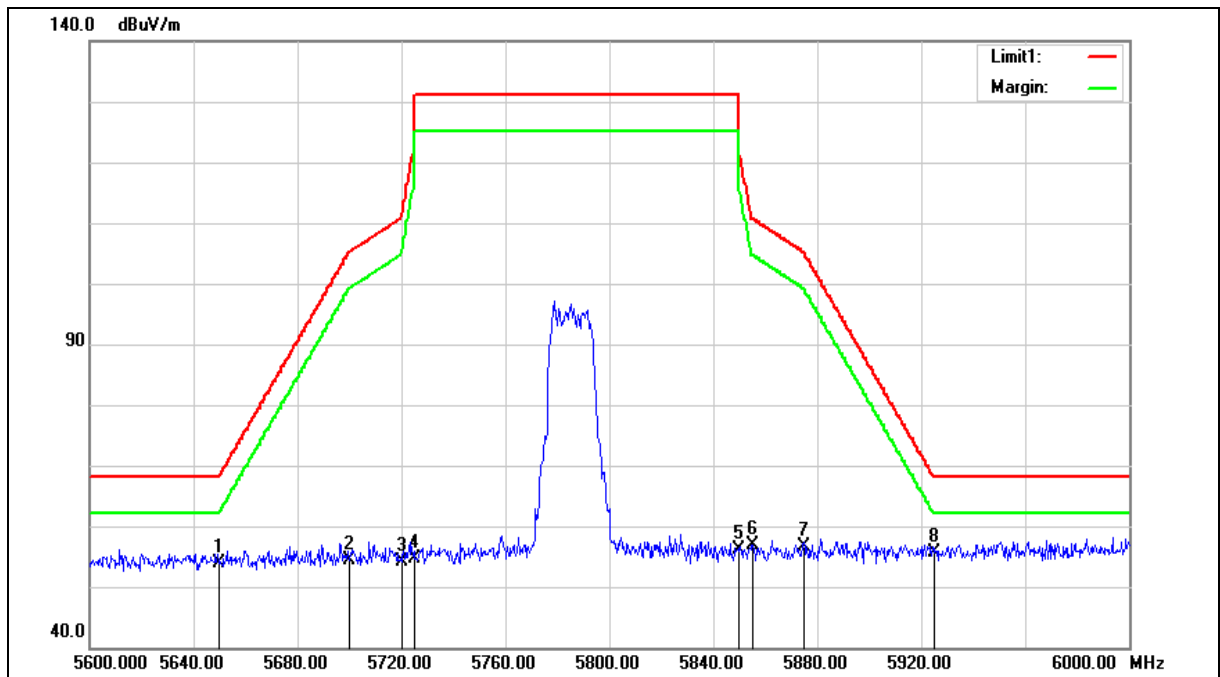

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.67	7.17	53.84	68.20	-14.36	peak
2	5700.000	47.00	7.27	54.27	105.20	-50.93	peak
3	5720.000	46.93	7.31	54.24	110.80	-56.56	peak
4	5725.000	47.19	7.32	54.51	122.20	-67.69	peak
5	5850.000	48.59	7.59	56.18	122.20	-66.02	peak
6	5855.000	49.33	7.60	56.93	110.80	-53.87	peak
7	5875.000	48.87	7.64	56.51	105.20	-48.69	peak
8	5925.000	47.91	7.75	55.66	68.20	-12.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

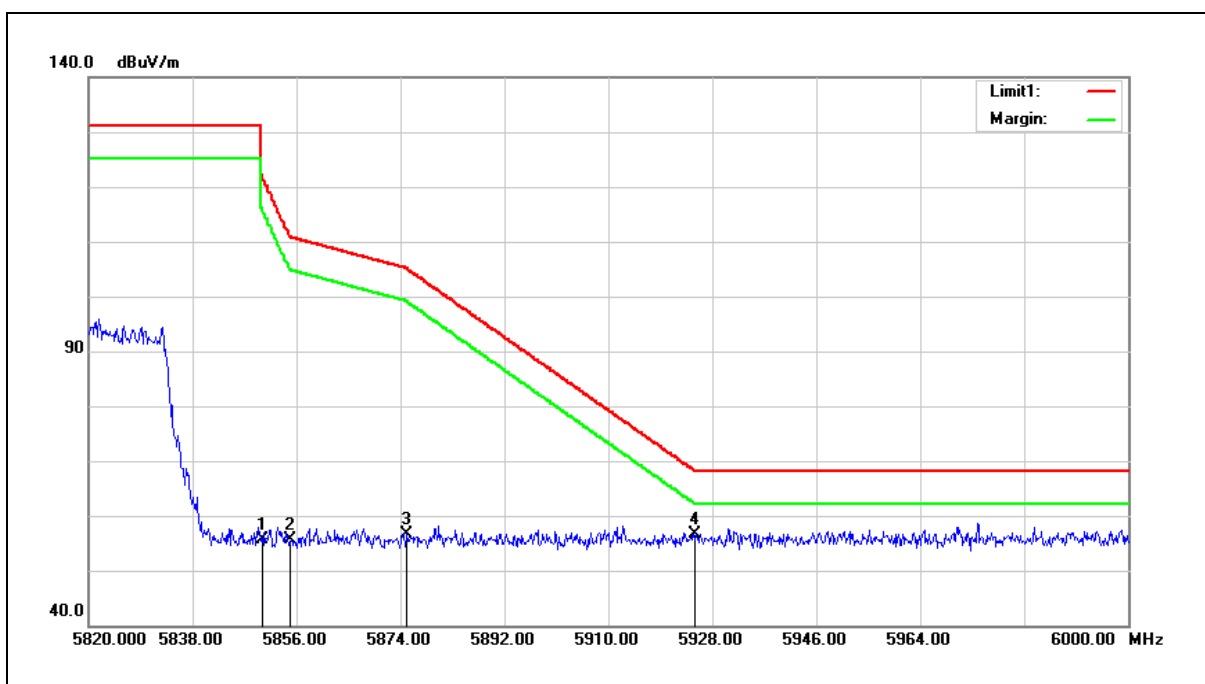


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.03	7.59	55.62	122.20	-66.58	peak
2	5855.000	48.04	7.60	55.64	110.80	-55.16	peak
3	5875.000	49.00	7.64	56.64	105.20	-48.56	peak
4	5925.000	48.98	7.75	56.73	68.20	-11.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

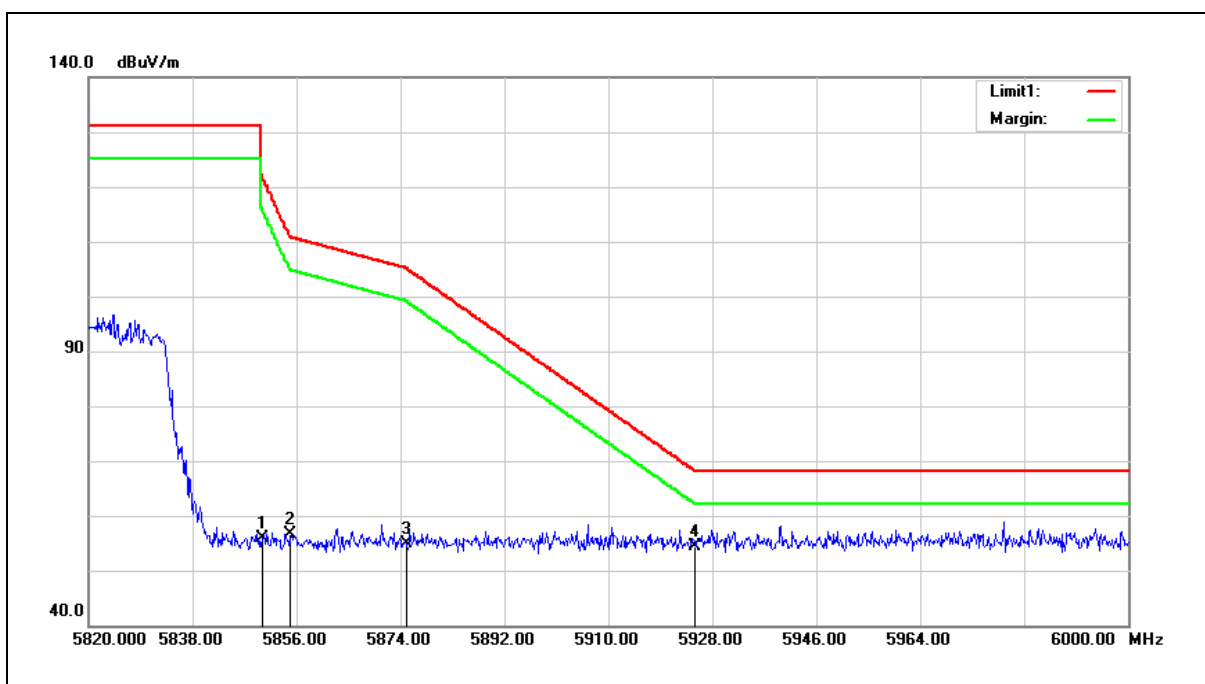

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.27	7.59	55.86	122.20	-66.34	peak
2	5855.000	49.13	7.60	56.73	110.80	-54.07	peak
3	5875.000	47.22	7.64	54.86	105.20	-50.34	peak
4	5925.000	46.63	7.75	54.38	68.20	-13.82	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

MIMO A+B

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

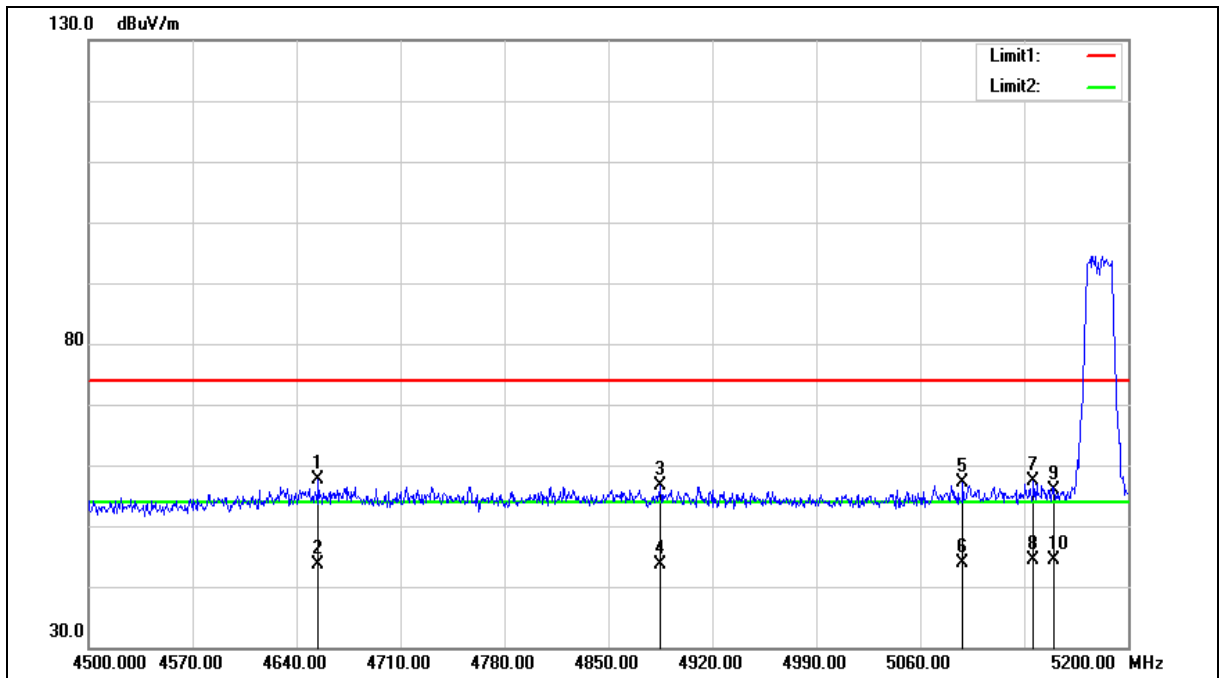

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4654.700	52.61	5.02	57.63	74.00	-16.37	peak
2	4654.700	38.71	5.02	43.73	54.00	-10.27	AVG
3	4885.000	51.21	5.49	56.70	74.00	-17.30	peak
4	4885.000	38.21	5.49	43.70	54.00	-10.30	AVG
5	5088.700	51.25	5.94	57.19	74.00	-16.81	peak
6	5088.700	38.02	5.94	43.96	54.00	-10.04	AVG
7	5136.300	51.34	6.04	57.38	74.00	-16.62	peak
8	5136.300	38.33	6.04	44.37	54.00	-9.63	AVG
9	5150.000	49.93	6.07	56.00	74.00	-18.00	peak
10	5150.000	38.35	6.07	44.42	54.00	-9.58	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

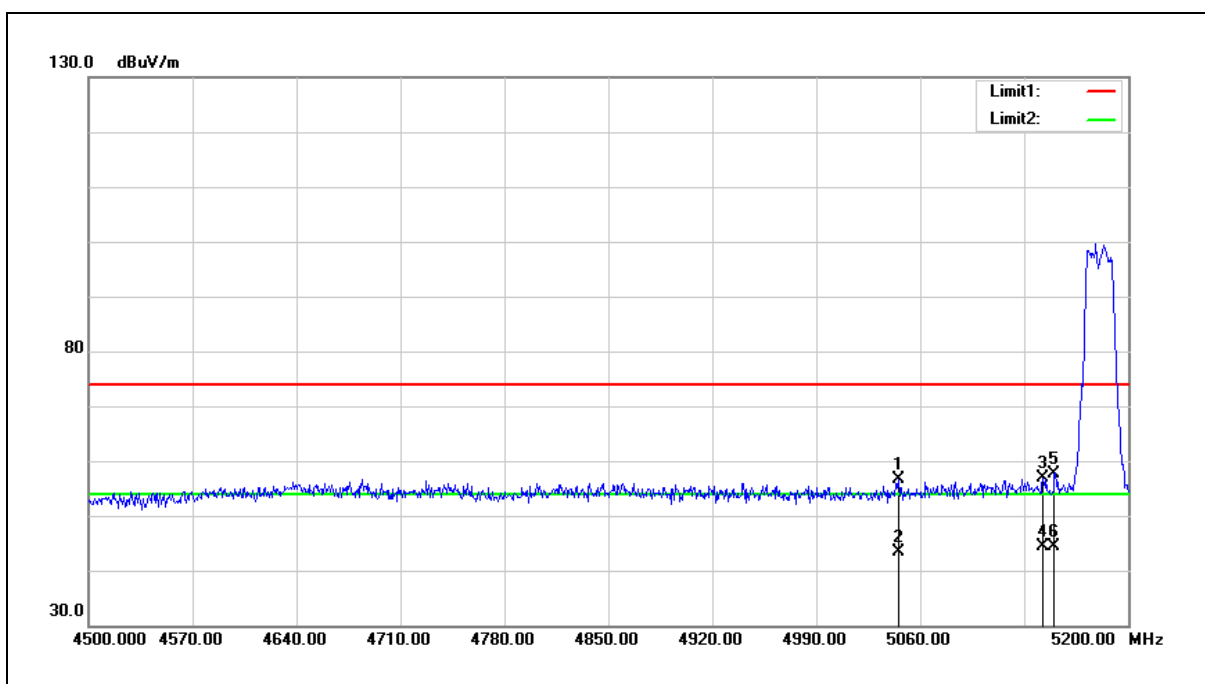

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5045.300	50.81	5.83	56.64	74.00	-17.36	peak
2	5045.300	37.45	5.83	43.28	54.00	-10.72	AVG
3	5142.600	50.82	6.06	56.88	74.00	-17.12	peak
4	5142.600	38.38	6.06	44.44	54.00	-9.56	AVG
5	5150.000	51.56	6.07	57.63	74.00	-16.37	peak
6	5150.000	38.28	6.07	44.35	54.00	-9.65	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

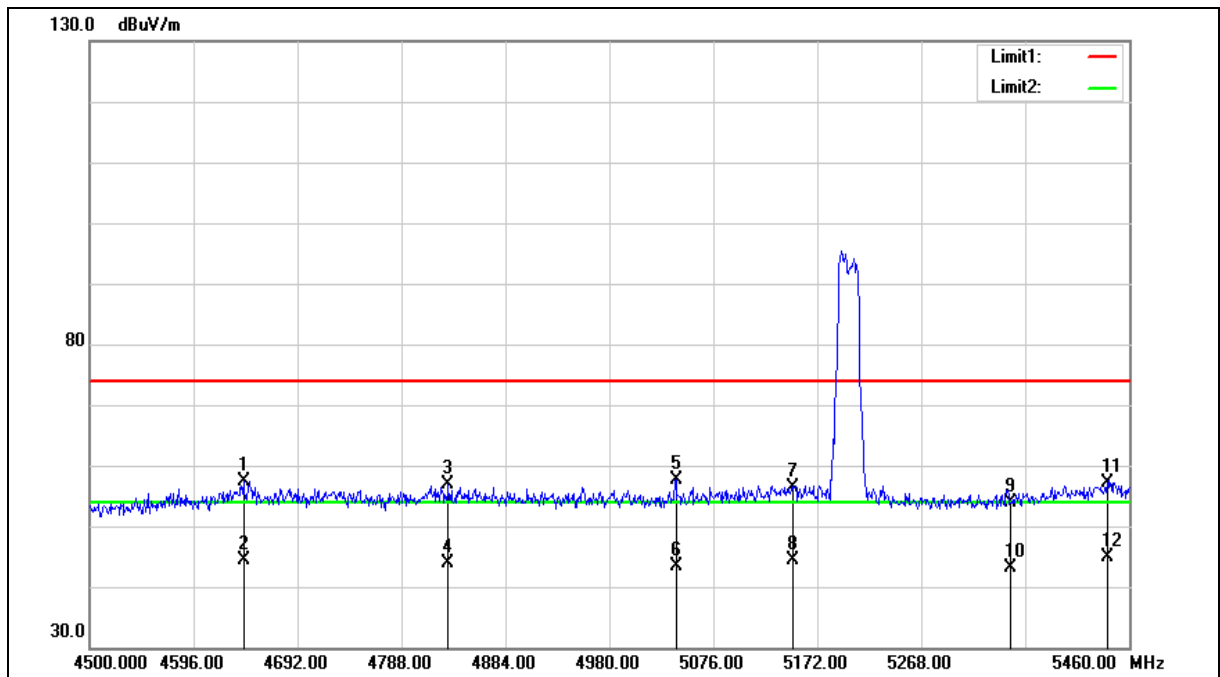

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4642.080	52.40	5.00	57.40	74.00	-16.60	peak
2	4642.080	39.39	5.00	44.39	54.00	-9.61	AVG
3	4831.200	51.38	5.38	56.76	74.00	-17.24	peak
4	4831.200	38.45	5.38	43.83	54.00	-10.17	AVG
5	5041.440	51.74	5.82	57.56	74.00	-16.44	peak
6	5041.440	37.52	5.82	43.34	54.00	-10.66	AVG
7	5150.000	50.36	6.07	56.43	74.00	-17.57	peak
8	5150.000	38.32	6.07	44.39	54.00	-9.61	AVG
9	5350.000	47.41	6.52	53.93	74.00	-20.07	peak
10	5350.000	36.58	6.52	43.10	54.00	-10.90	AVG
11	5439.840	50.34	6.73	57.07	74.00	-16.93	peak
12	5439.840	38.15	6.73	44.88	54.00	-9.12	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

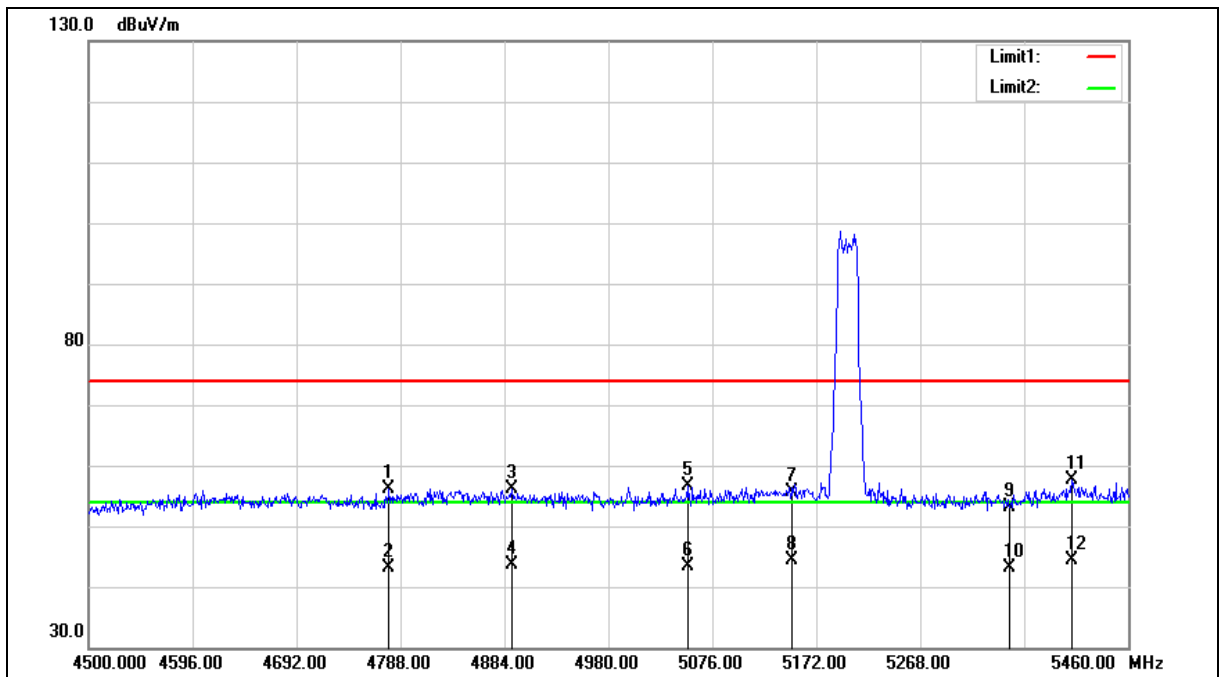

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4777.440	50.85	5.27	56.12	74.00	-17.88	peak
2	4777.440	37.88	5.27	43.15	54.00	-10.85	AVG
3	4890.720	50.66	5.50	56.16	74.00	-17.84	peak
4	4890.720	38.11	5.50	43.61	54.00	-10.39	AVG
5	5052.960	50.82	5.85	56.67	74.00	-17.33	peak
6	5052.960	37.53	5.85	43.38	54.00	-10.62	AVG
7	5150.000	49.48	6.07	55.55	74.00	-18.45	peak
8	5150.000	38.27	6.07	44.34	54.00	-9.66	AVG
9	5350.000	46.52	6.52	53.04	74.00	-20.96	peak
10	5350.000	36.67	6.52	43.19	54.00	-10.81	AVG
11	5408.160	50.88	6.64	57.52	74.00	-16.48	peak
12	5408.160	37.84	6.64	44.48	54.00	-9.52	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

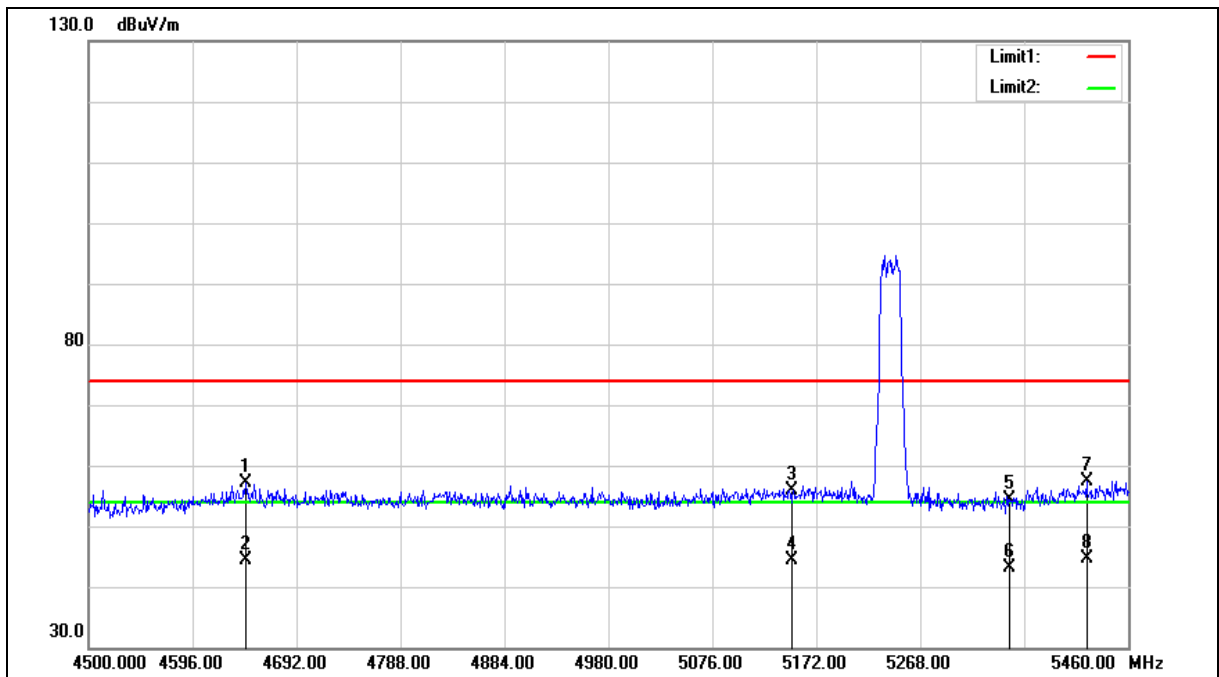

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.960	52.09	5.01	57.10	74.00	-16.90	peak
2	4644.960	39.46	5.01	44.47	54.00	-9.53	AVG
3	5150.000	49.75	6.07	55.82	74.00	-18.18	peak
4	5150.000	38.22	6.07	44.29	54.00	-9.71	AVG
5	5350.000	47.96	6.52	54.48	74.00	-19.52	peak
6	5350.000	36.59	6.52	43.11	54.00	-10.89	AVG
7	5421.600	50.75	6.69	57.44	74.00	-16.56	peak
8	5421.600	37.87	6.69	44.56	54.00	-9.44	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

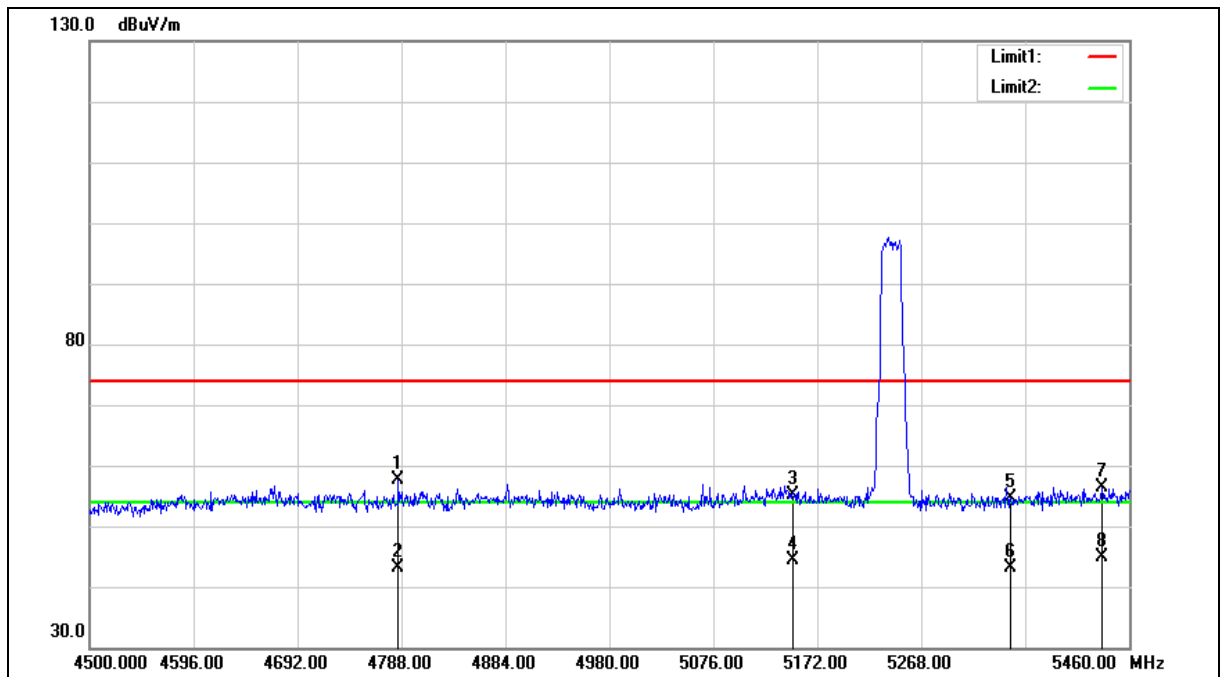

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.120	52.34	5.29	57.63	74.00	-16.37	peak
2	4785.120	37.95	5.29	43.24	54.00	-10.76	AVG
3	5150.000	49.03	6.07	55.10	74.00	-18.90	peak
4	5150.000	38.27	6.07	44.34	54.00	-9.66	AVG
5	5350.000	48.13	6.52	54.65	74.00	-19.35	peak
6	5350.000	36.61	6.52	43.13	54.00	-10.87	AVG
7	5435.040	49.63	6.71	56.34	74.00	-17.66	peak
8	5435.040	38.09	6.71	44.80	54.00	-9.20	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

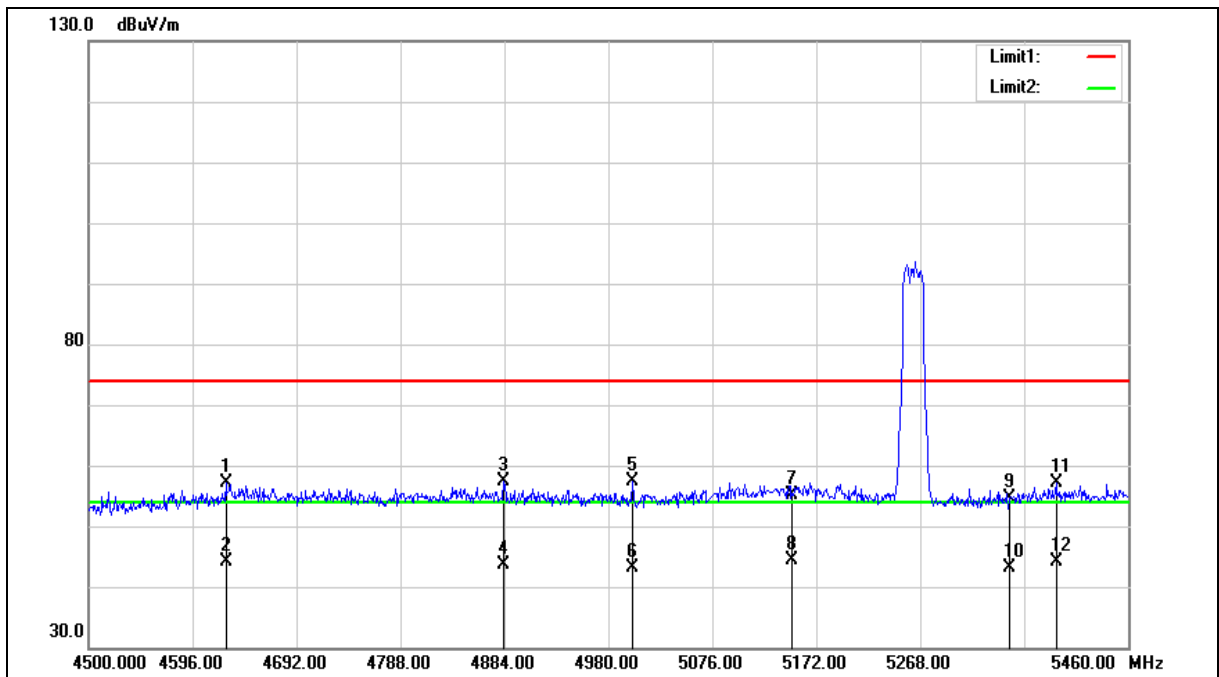

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4626.847	52.10	4.96	57.06	74.00	-16.94	peak
2	4626.847	39.19	4.96	44.15	54.00	-9.85	AVG
3	4883.423	51.83	5.49	57.32	74.00	-16.68	peak
4	4883.423	38.23	5.49	43.72	54.00	-10.28	AVG
5	5002.583	51.64	5.73	57.37	74.00	-16.63	peak
6	5002.583	37.51	5.73	43.24	54.00	-10.76	AVG
7	5150.000	49.10	6.07	55.17	74.00	-18.83	peak
8	5150.000	38.29	6.07	44.36	54.00	-9.64	AVG
9	5350.000	48.17	6.52	54.69	74.00	-19.31	peak
10	5350.000	36.61	6.52	43.13	54.00	-10.87	AVG
11	5393.694	50.43	6.62	57.05	74.00	-16.95	peak
12	5393.694	37.53	6.62	44.15	54.00	-9.85	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

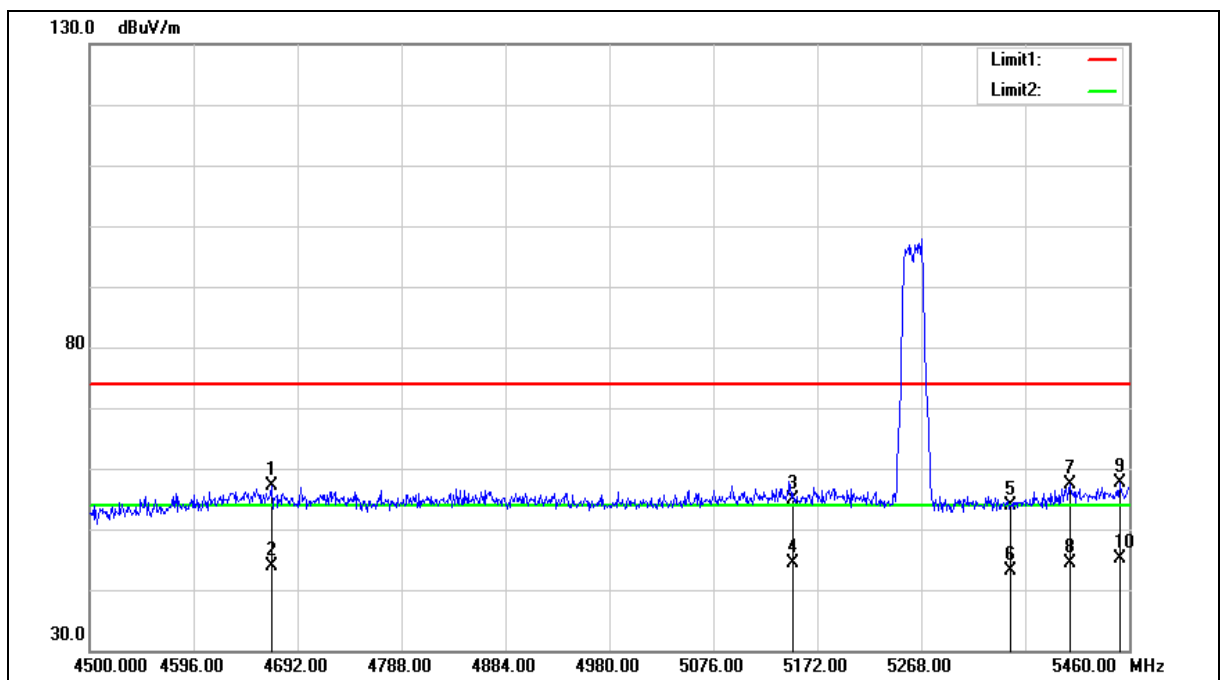

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4668.000	51.98	5.05	57.03	74.00	-16.97	peak
2	4668.000	38.84	5.05	43.89	54.00	-10.11	AVG
3	5150.000	48.80	6.07	54.87	74.00	-19.13	peak
4	5150.000	38.32	6.07	44.39	54.00	-9.61	AVG
5	5350.000	47.42	6.52	53.94	74.00	-20.06	peak
6	5350.000	36.65	6.52	43.17	54.00	-10.83	AVG
7	5405.280	50.73	6.64	57.37	74.00	-16.63	peak
8	5405.280	37.82	6.64	44.46	54.00	-9.54	AVG
9	5451.360	50.86	6.75	57.61	74.00	-16.39	peak
10	5451.360	38.26	6.75	45.01	54.00	-8.99	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

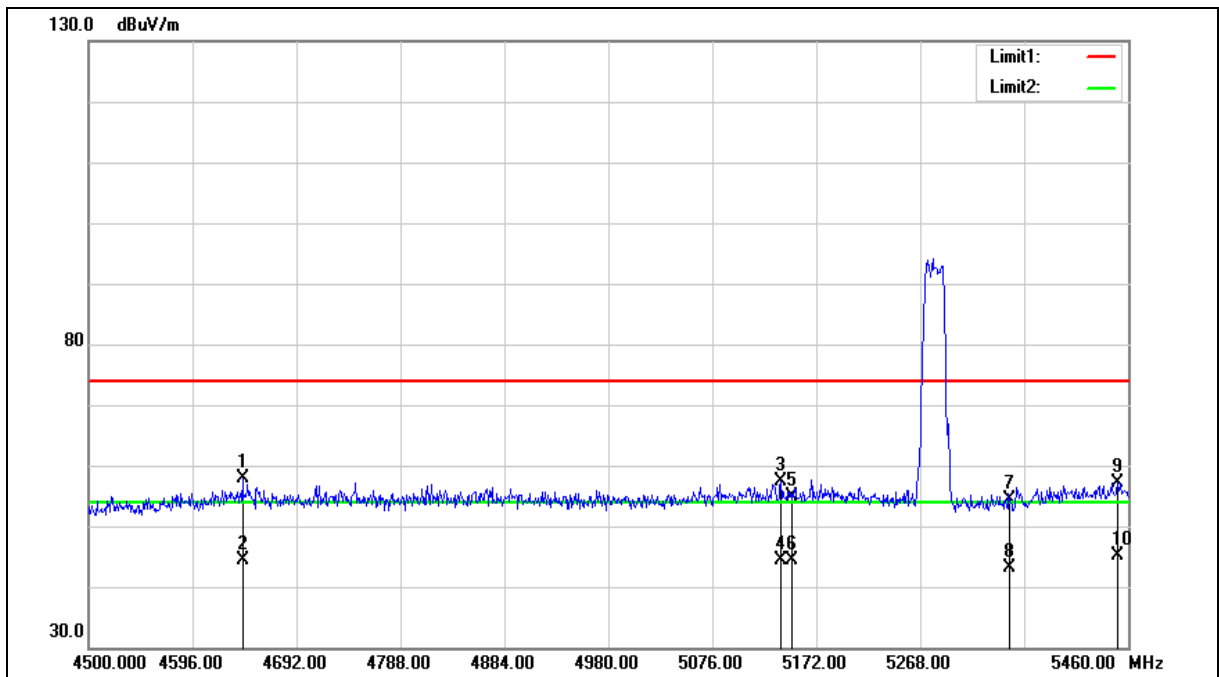



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4642.080	52.94	5.00	57.94	74.00	-16.06	peak
2	4642.080	39.45	5.00	44.45	54.00	-9.55	AVG
3	5139.360	51.34	6.05	57.39	74.00	-16.61	peak
4	5139.360	38.34	6.05	44.39	54.00	-9.61	AVG
5	5150.000	48.69	6.07	54.76	74.00	-19.24	peak
6	5150.000	38.35	6.07	44.42	54.00	-9.58	AVG
7	5350.000	47.90	6.52	54.42	74.00	-19.58	peak
8	5350.000	36.65	6.52	43.17	54.00	-10.83	AVG
9	5450.400	50.41	6.75	57.16	74.00	-16.84	peak
10	5450.400	38.28	6.75	45.03	54.00	-8.97	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

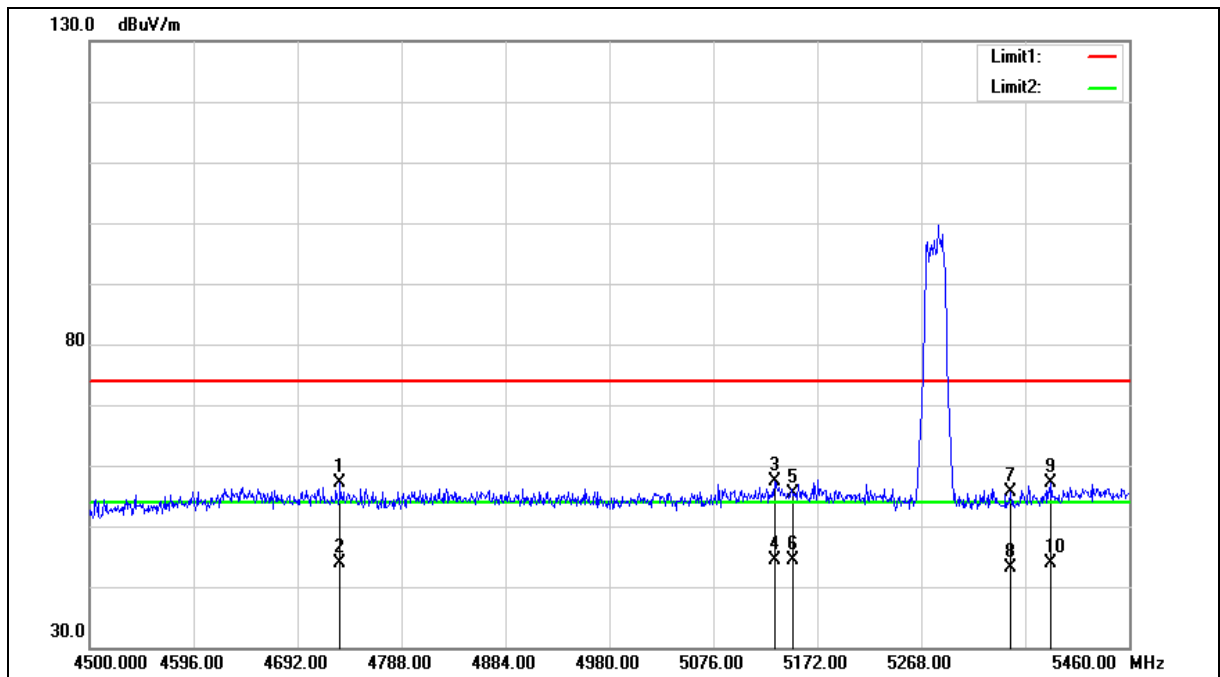

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4731.360	52.03	5.18	57.21	74.00	-16.79	peak
2	4731.360	38.60	5.18	43.78	54.00	-10.22	AVG
3	5132.640	51.36	6.03	57.39	74.00	-16.61	peak
4	5132.640	38.28	6.03	44.31	54.00	-9.69	AVG
5	5150.000	49.25	6.07	55.32	74.00	-18.68	peak
6	5150.000	38.29	6.07	44.36	54.00	-9.64	AVG
7	5350.000	49.07	6.52	55.59	74.00	-18.41	peak
8	5350.000	36.67	6.52	43.19	54.00	-10.81	AVG
9	5388.000	50.43	6.61	57.04	74.00	-16.96	peak
10	5388.000	37.37	6.61	43.98	54.00	-10.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

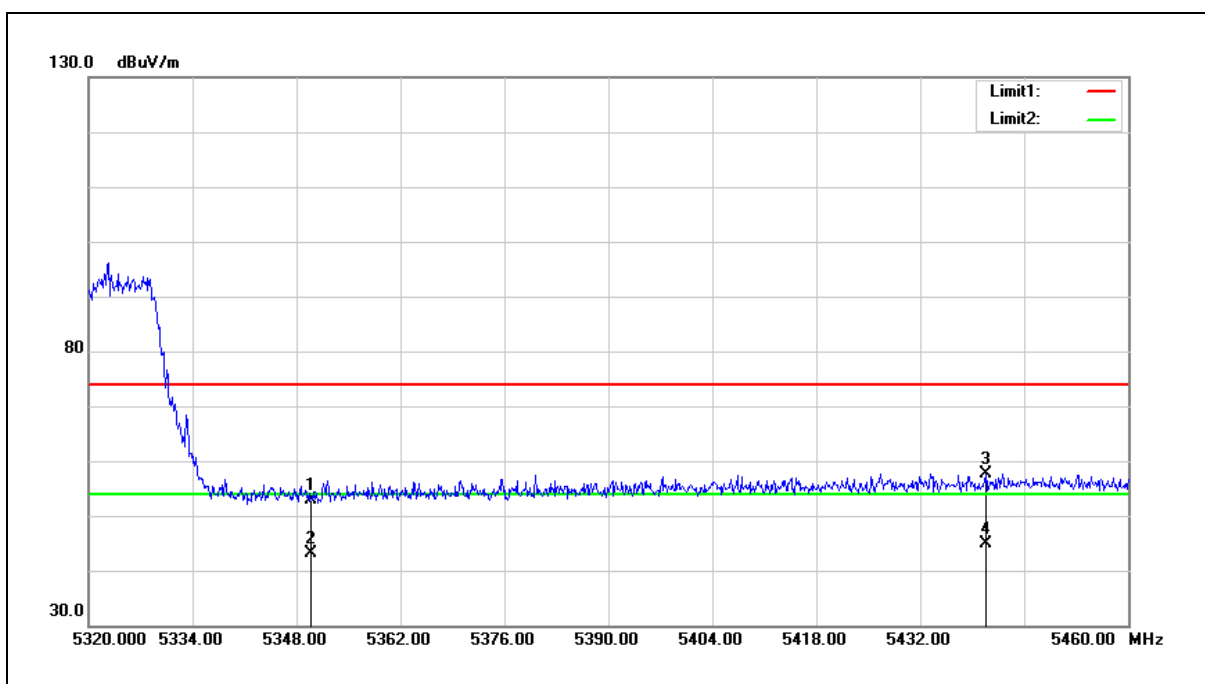


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	46.40	6.52	52.92	74.00	-21.08	peak
2	5350.000	36.62	6.52	43.14	54.00	-10.86	AVG
3	5440.820	50.92	6.73	57.65	74.00	-16.35	peak
4	5440.820	38.16	6.73	44.89	54.00	-9.11	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

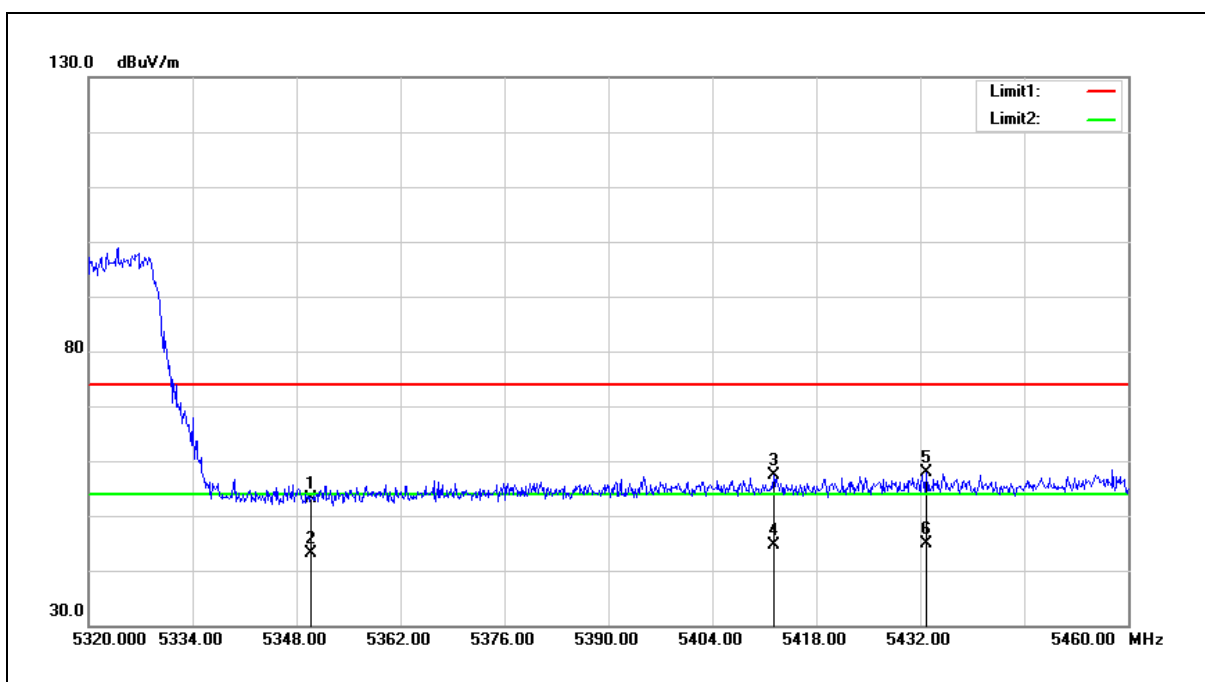

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	46.63	6.52	53.15	74.00	-20.85	peak
2	5350.000	36.63	6.52	43.15	54.00	-10.85	AVG
3	5412.260	50.67	6.65	57.32	74.00	-16.68	peak
4	5412.260	37.86	6.65	44.51	54.00	-9.49	AVG
5	5432.840	51.24	6.71	57.95	74.00	-16.05	peak
6	5432.840	38.17	6.71	44.88	54.00	-9.12	AVG


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

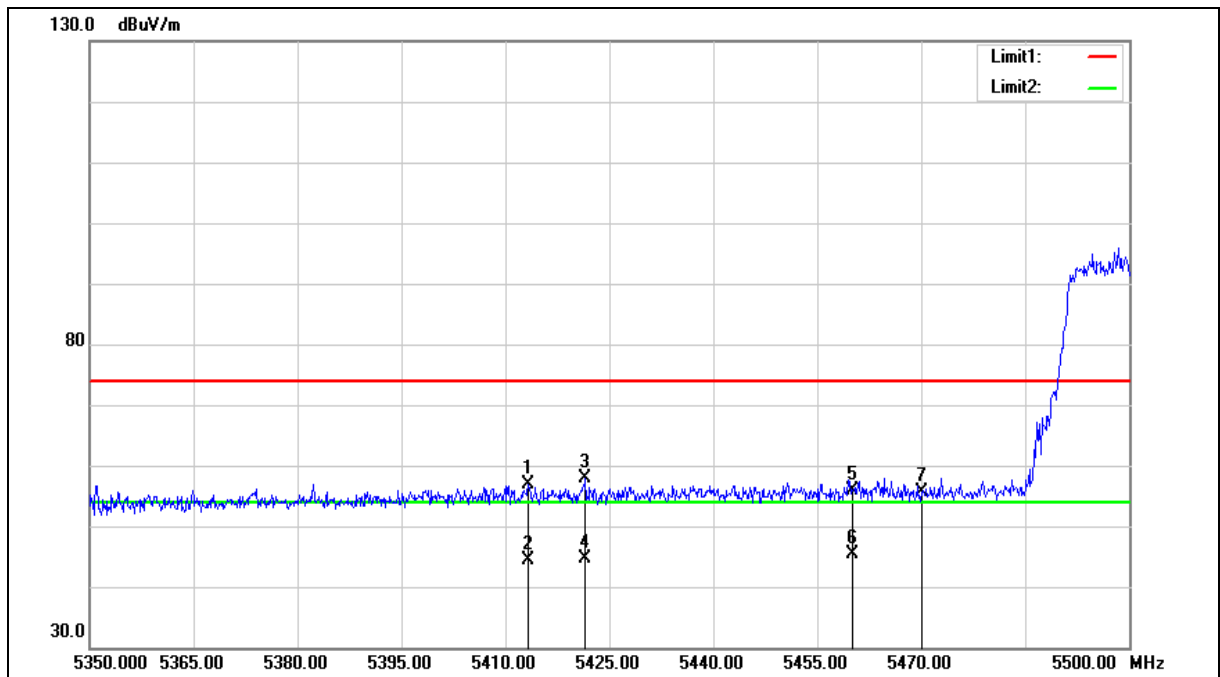



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5413.300	50.34	6.66	57.00	74.00	-17.00	peak
2	5413.300	37.73	6.66	44.39	54.00	-9.61	AVG
3	5421.550	51.07	6.69	57.76	74.00	-16.24	peak
4	5421.550	37.93	6.69	44.62	54.00	-9.38	AVG
5	5460.000	49.05	6.77	55.82	74.00	-18.18	peak
6	5460.000	38.73	6.77	45.50	54.00	-8.50	AVG
7	5470.000	48.72	6.80	55.52	68.20	-12.68	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

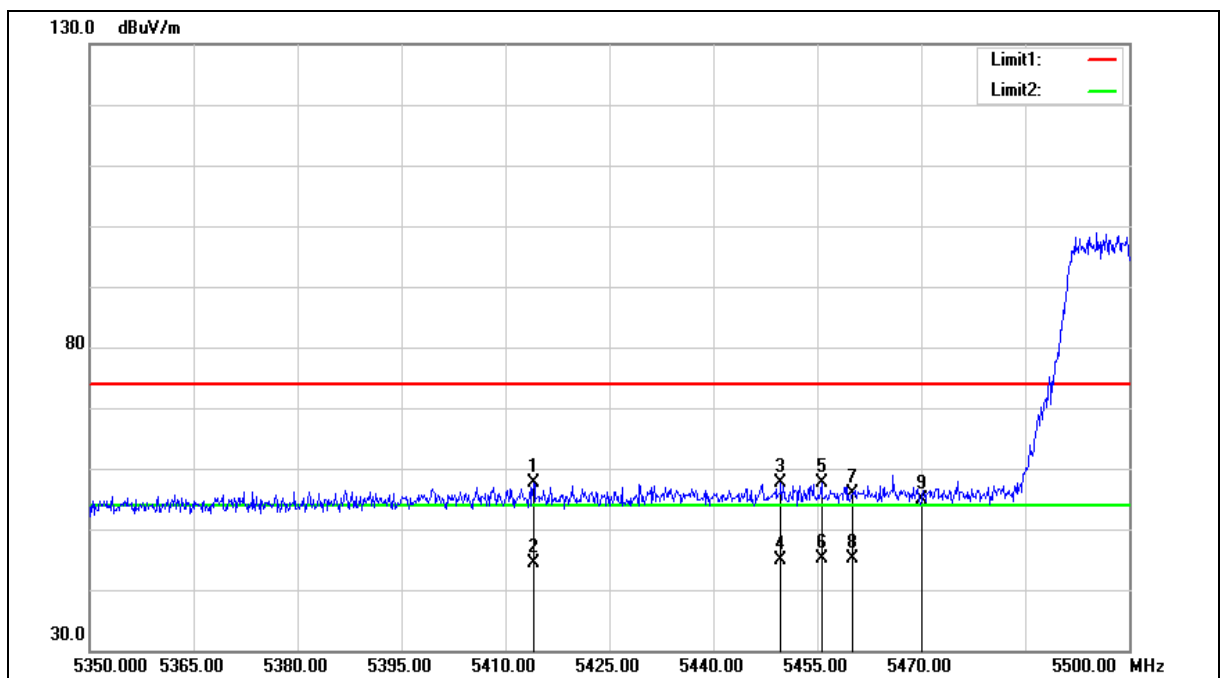

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5414.050	50.92	6.67	57.59	74.00	-16.41	peak
2	5414.050	37.80	6.67	44.47	54.00	-9.53	AVG
3	5449.750	50.89	6.75	57.64	74.00	-16.36	peak
4	5449.750	38.17	6.75	44.92	54.00	-9.08	AVG
5	5455.600	50.98	6.76	57.74	74.00	-16.26	peak
6	5455.600	38.30	6.76	45.06	54.00	-8.94	AVG
7	5460.000	49.23	6.77	56.00	74.00	-18.00	peak
8	5460.000	38.36	6.77	45.13	54.00	-8.87	AVG
9	5470.000	48.04	6.80	54.84	68.20	-13.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

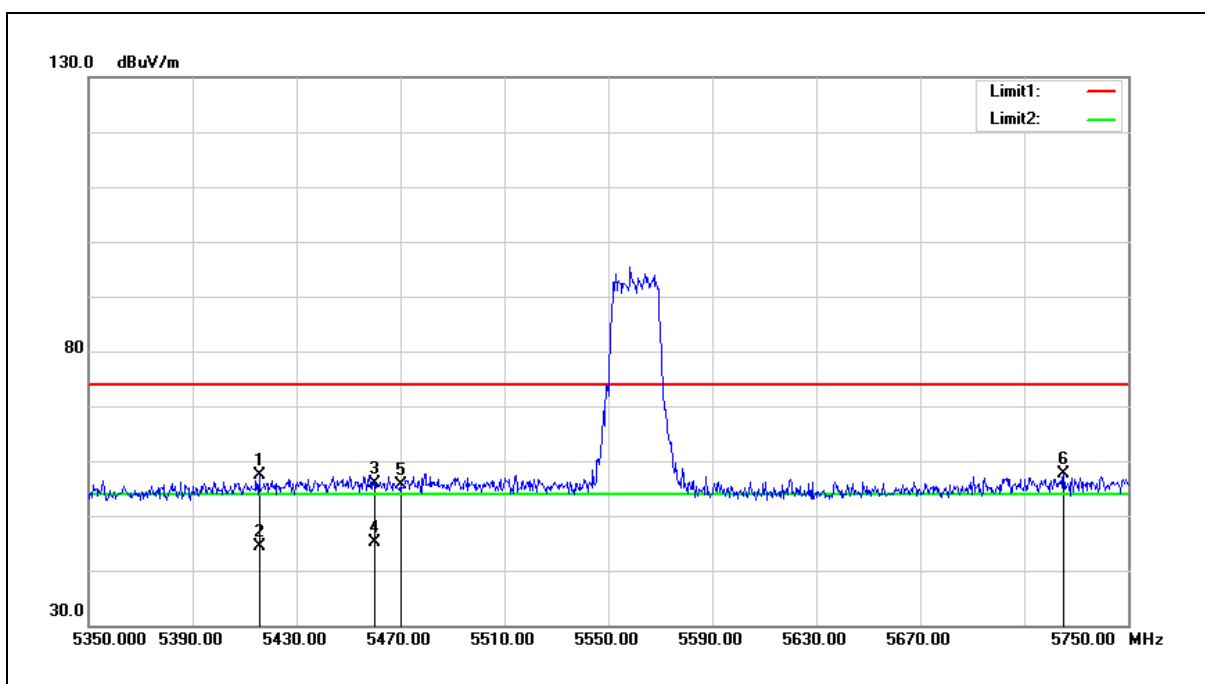

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5415.600	50.70	6.67	57.37	74.00	-16.63	peak
2	5415.600	37.82	6.67	44.49	54.00	-9.51	AVG
3	5460.000	49.12	6.77	55.89	74.00	-18.11	peak
4	5460.000	38.27	6.77	45.04	54.00	-8.96	AVG
5	5470.000	48.79	6.80	55.59	68.20	-12.61	peak
6	5725.000	50.20	7.32	57.52	68.20	-10.68	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

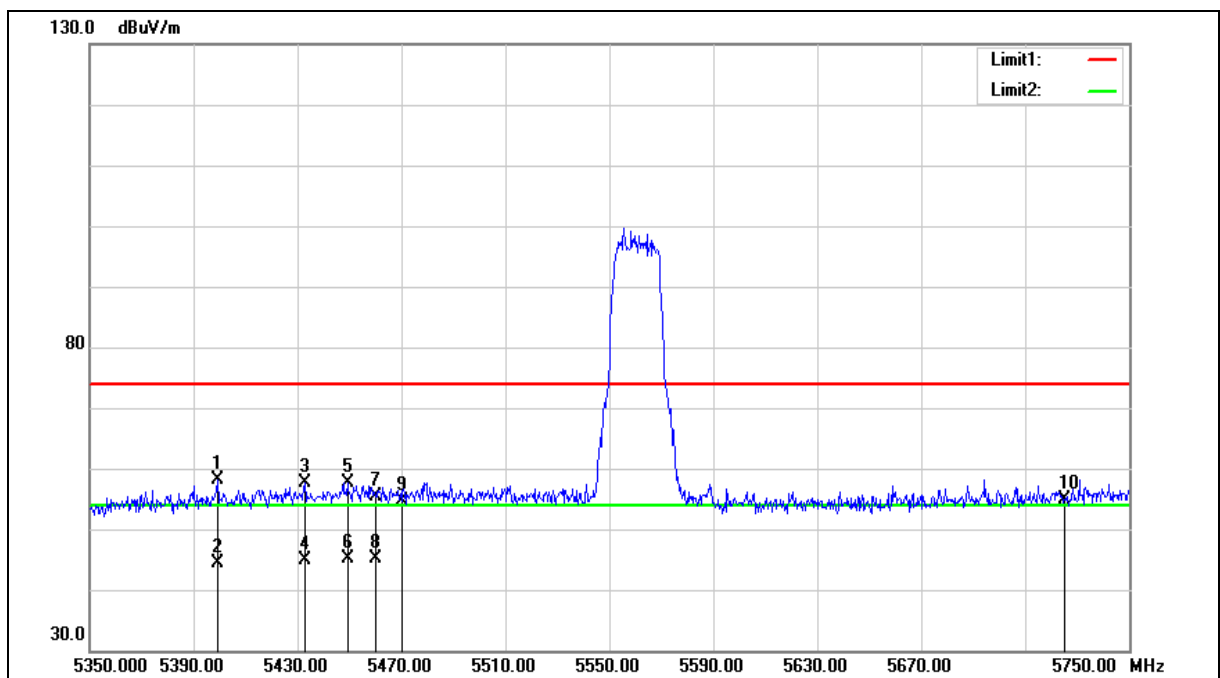

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5399.200	51.52	6.63	58.15	74.00	-15.85	peak
2	5399.200	37.67	6.63	44.30	54.00	-9.70	AVG
3	5432.800	50.90	6.71	57.61	74.00	-16.39	peak
4	5432.800	38.10	6.71	44.81	54.00	-9.19	AVG
5	5449.200	50.93	6.75	57.68	74.00	-16.32	peak
6	5449.200	38.27	6.75	45.02	54.00	-8.98	AVG
7	5460.000	48.50	6.77	55.27	74.00	-18.73	peak
8	5460.000	38.38	6.77	45.15	54.00	-8.85	AVG
9	5470.000	47.72	6.80	54.52	68.20	-13.68	peak
10	5725.000	47.53	7.32	54.85	68.20	-13.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

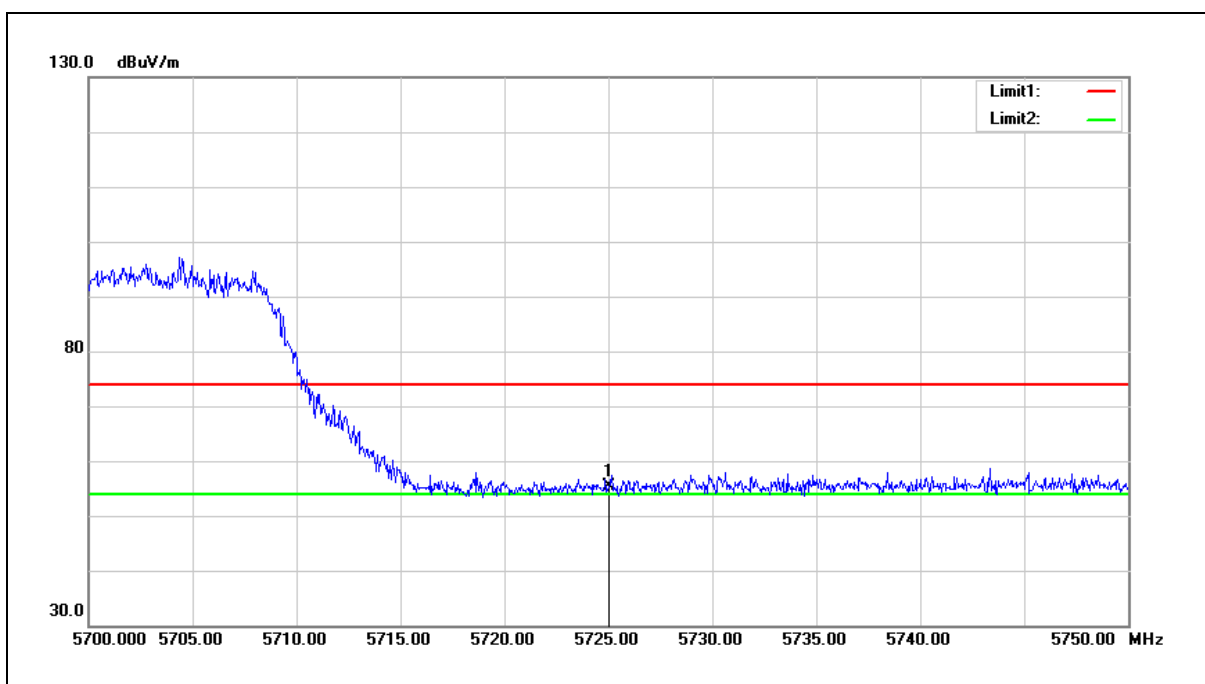


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	48.05	7.32	55.37	68.20	-12.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

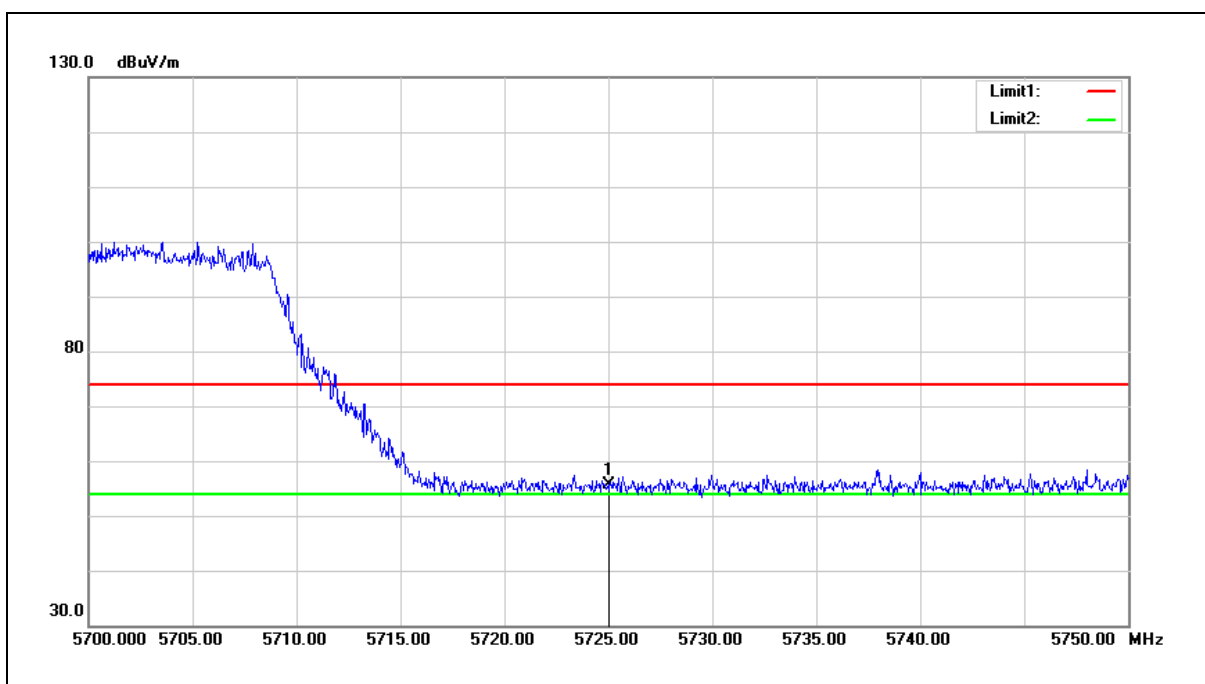


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	48.29	7.32	55.61	68.20	-12.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

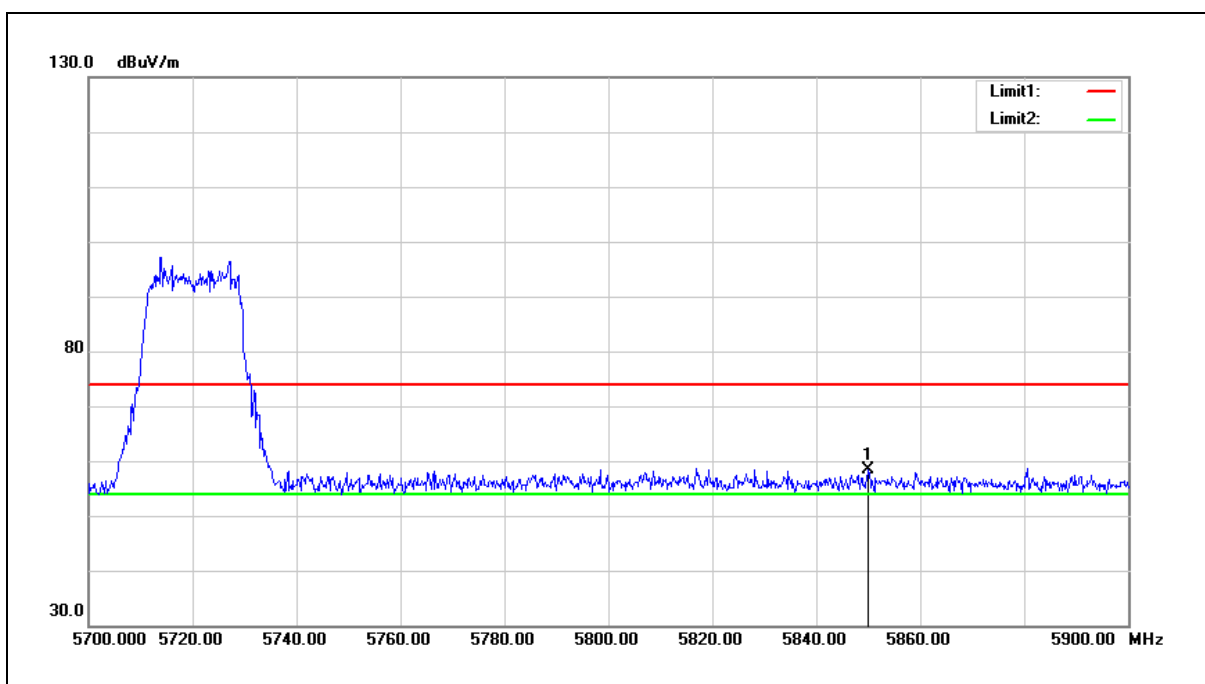


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	50.69	7.59	58.28	68.20	-9.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

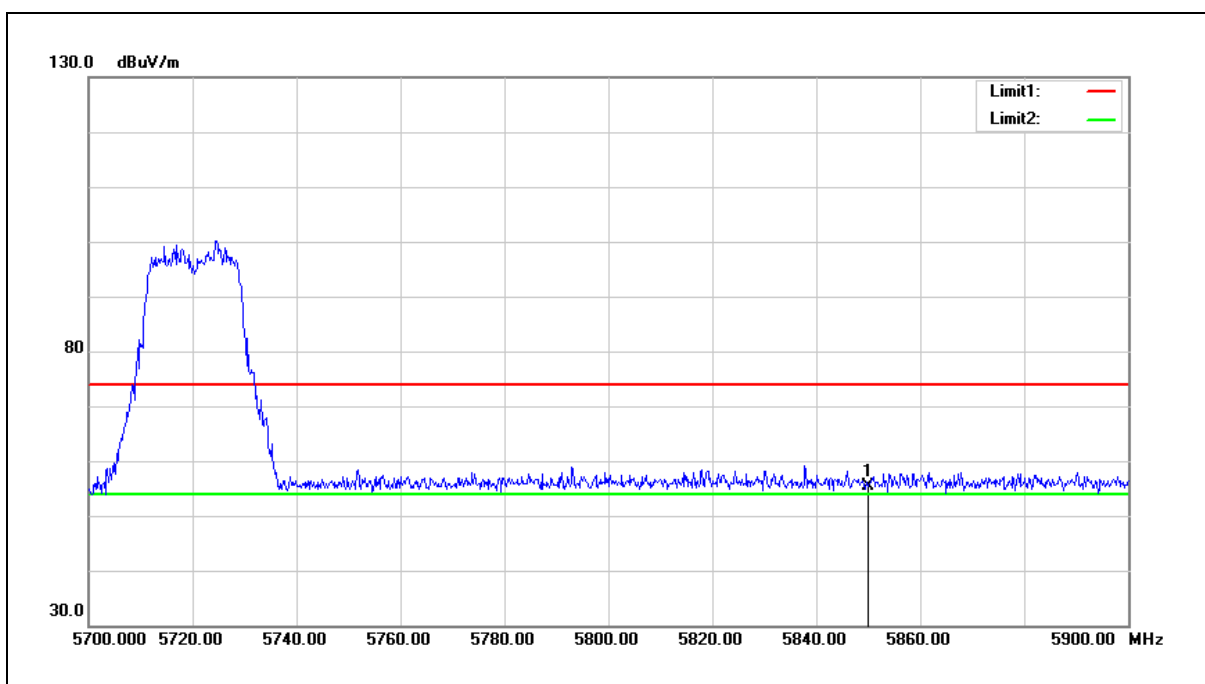


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.89	7.59	55.48	68.20	-12.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

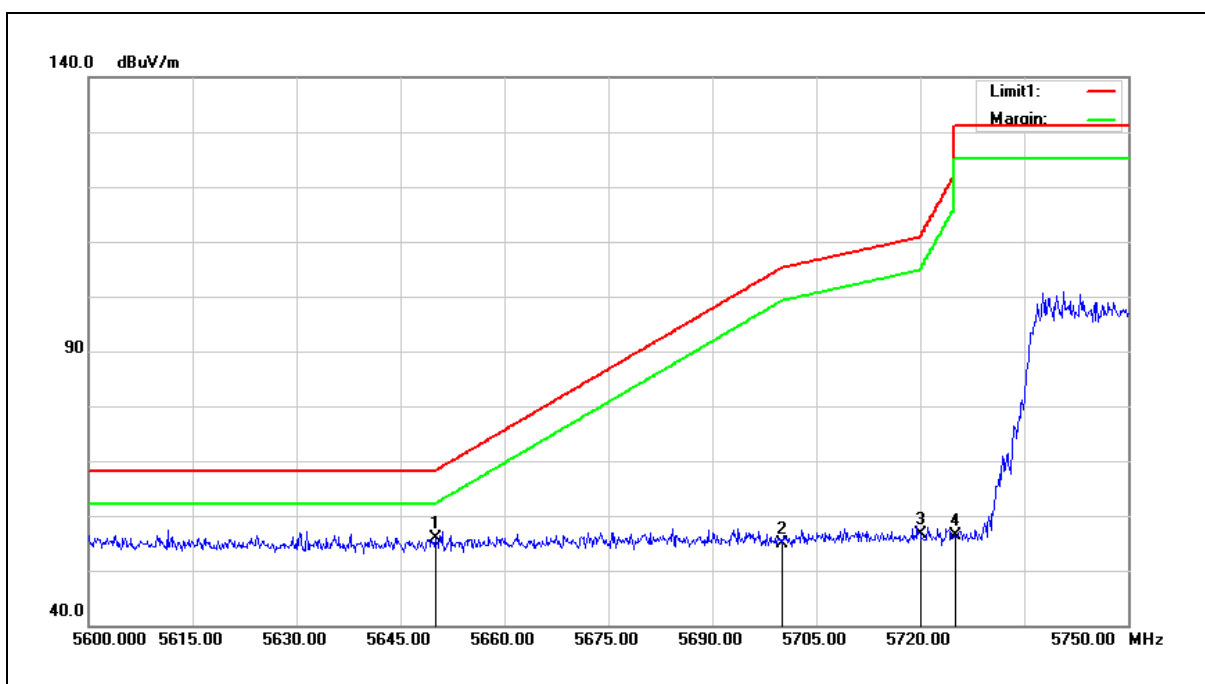


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.64	7.17	55.81	68.20	-12.39	peak
2	5700.000	47.67	7.27	54.94	105.20	-50.26	peak
3	5720.000	49.30	7.31	56.61	110.80	-54.19	peak
4	5725.000	48.98	7.32	56.30	122.20	-65.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

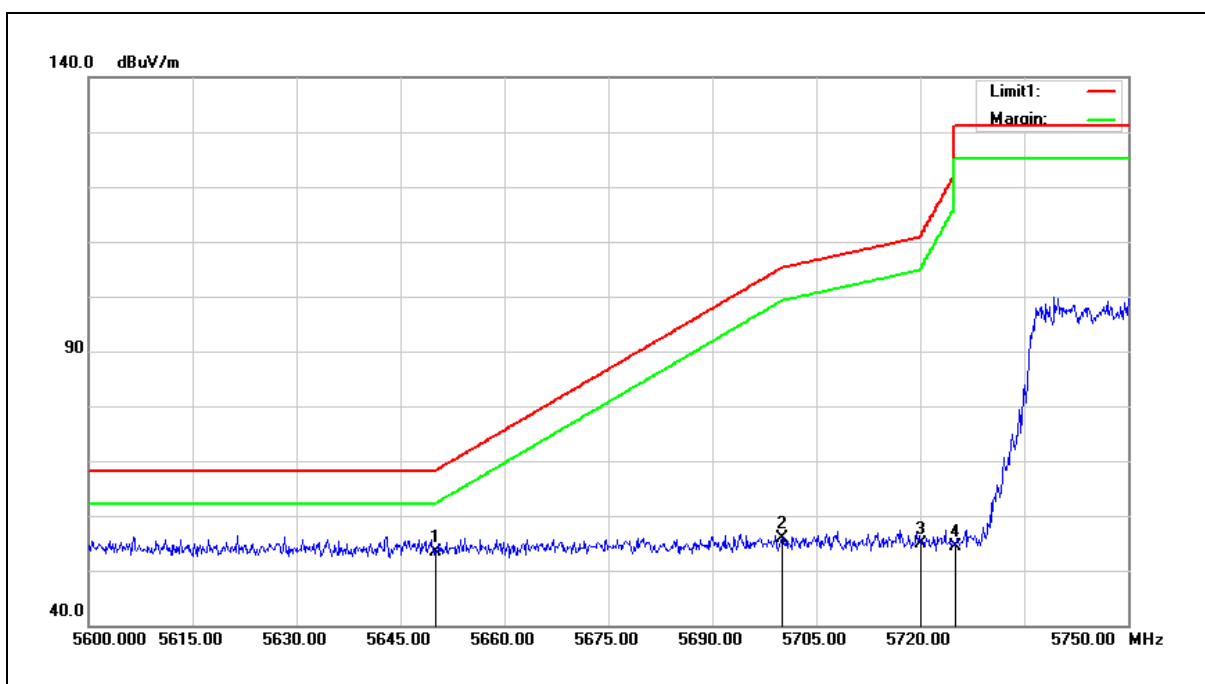

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.28	7.17	53.45	68.20	-14.75	peak
2	5700.000	48.57	7.27	55.84	105.20	-49.36	peak
3	5720.000	47.58	7.31	54.89	110.80	-55.91	peak
4	5725.000	47.01	7.32	54.33	122.20	-67.87	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

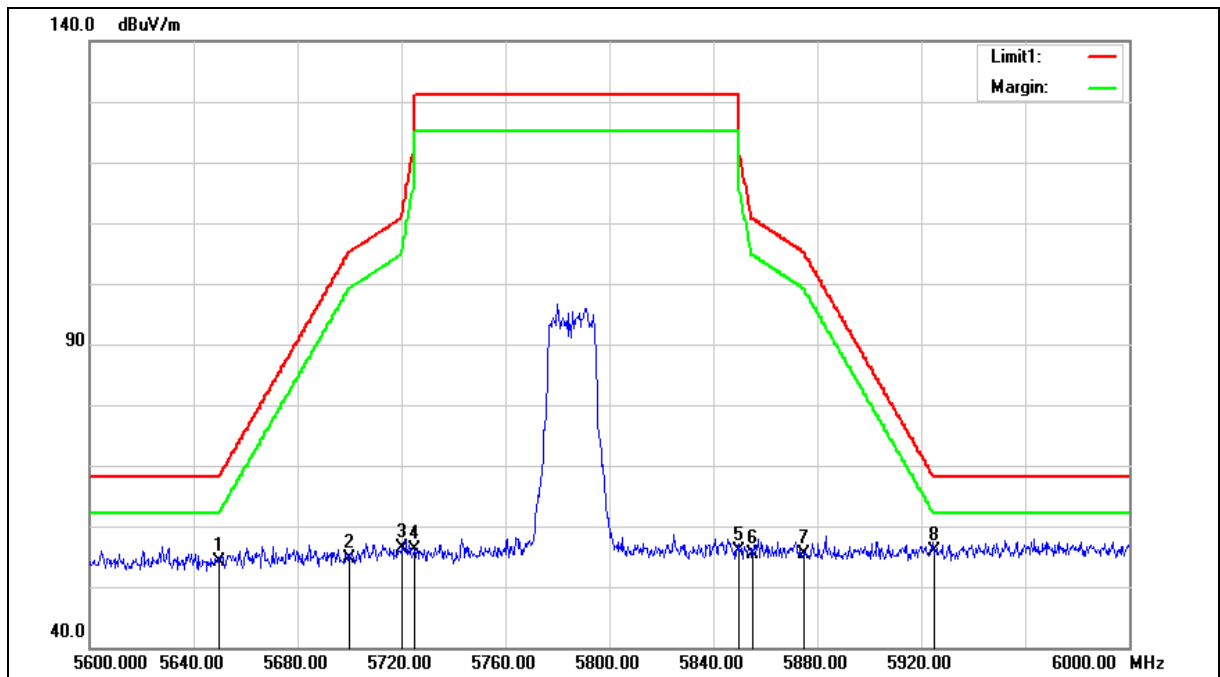

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.96	7.17	54.13	68.20	-14.07	peak
2	5700.000	47.38	7.27	54.65	105.20	-50.55	peak
3	5720.000	49.04	7.31	56.35	110.80	-54.45	peak
4	5725.000	48.76	7.32	56.08	122.20	-66.12	peak
5	5850.000	48.39	7.59	55.98	122.20	-66.22	peak
6	5855.000	47.66	7.60	55.26	110.80	-55.54	peak
7	5875.000	47.68	7.64	55.32	105.20	-49.88	peak
8	5925.000	48.16	7.75	55.91	68.20	-12.29	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

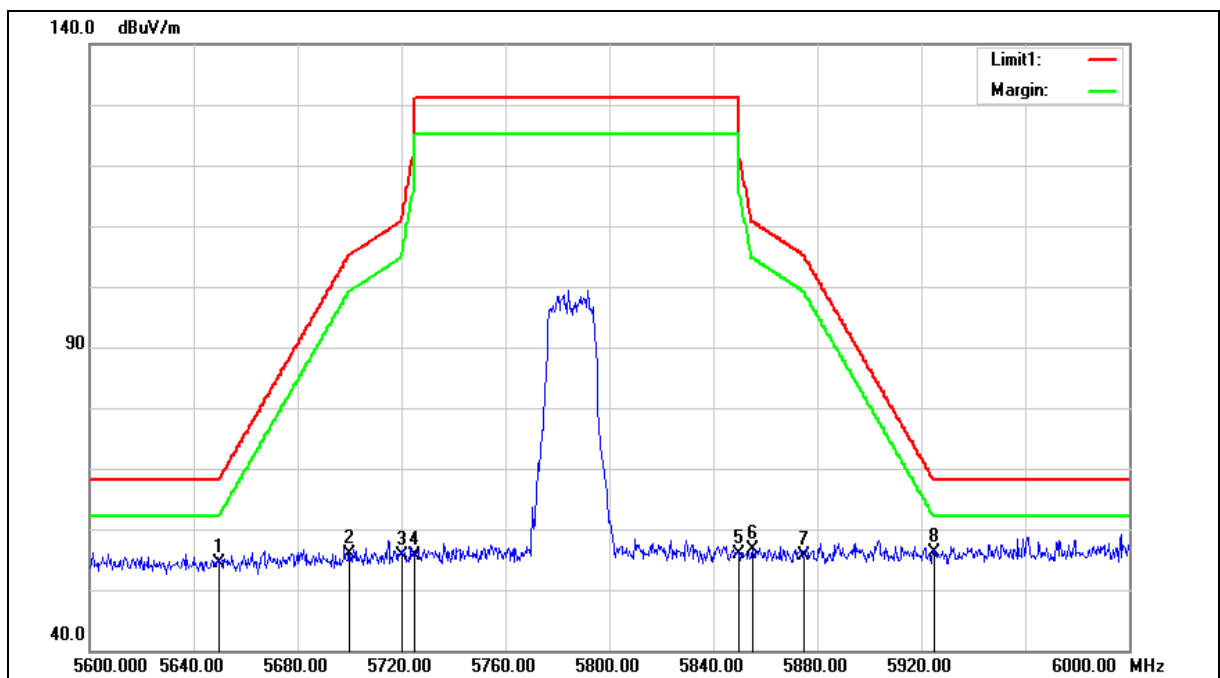

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.22	7.17	54.39	68.20	-13.81	peak
2	5700.000	48.72	7.27	55.99	105.20	-49.21	peak
3	5720.000	48.28	7.31	55.59	110.80	-55.21	peak
4	5725.000	48.30	7.32	55.62	122.20	-66.58	peak
5	5850.000	48.21	7.59	55.80	122.20	-66.40	peak
6	5855.000	49.13	7.60	56.73	110.80	-54.07	peak
7	5875.000	48.06	7.64	55.70	105.20	-49.50	peak
8	5925.000	48.35	7.75	56.10	68.20	-12.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

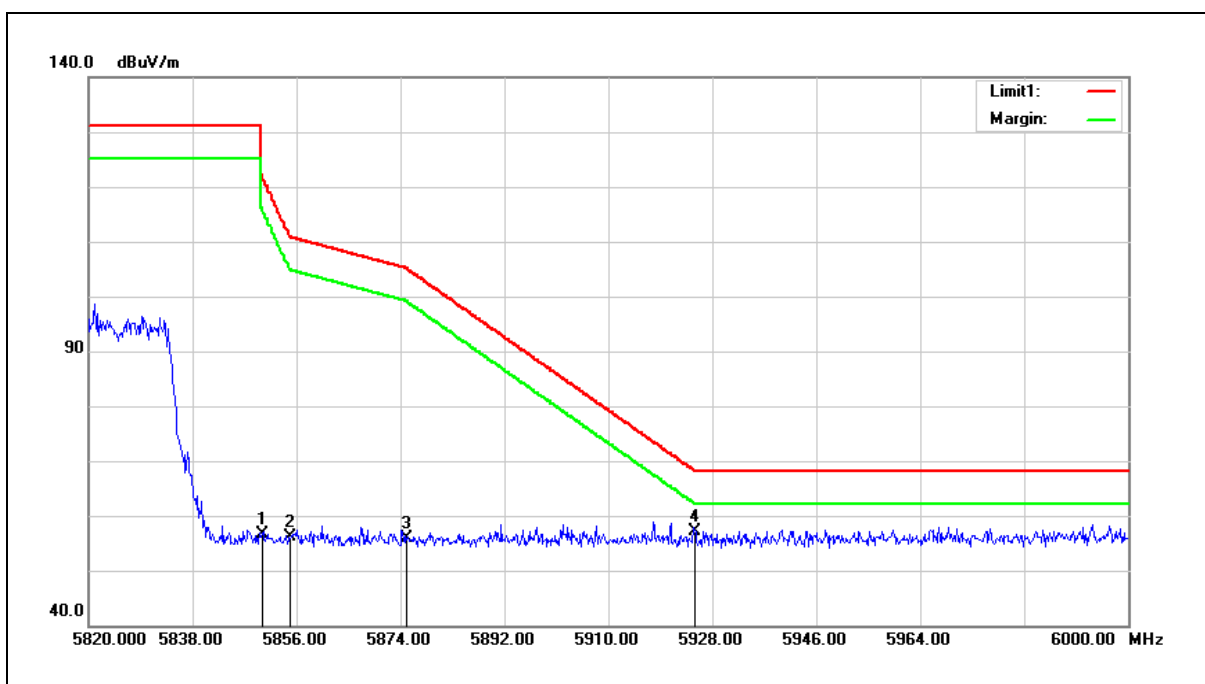


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	49.15	7.59	56.74	122.20	-65.46	peak
2	5855.000	48.56	7.60	56.16	110.80	-54.64	peak
3	5875.000	48.33	7.64	55.97	105.20	-49.23	peak
4	5925.000	49.35	7.75	57.10	68.20	-11.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

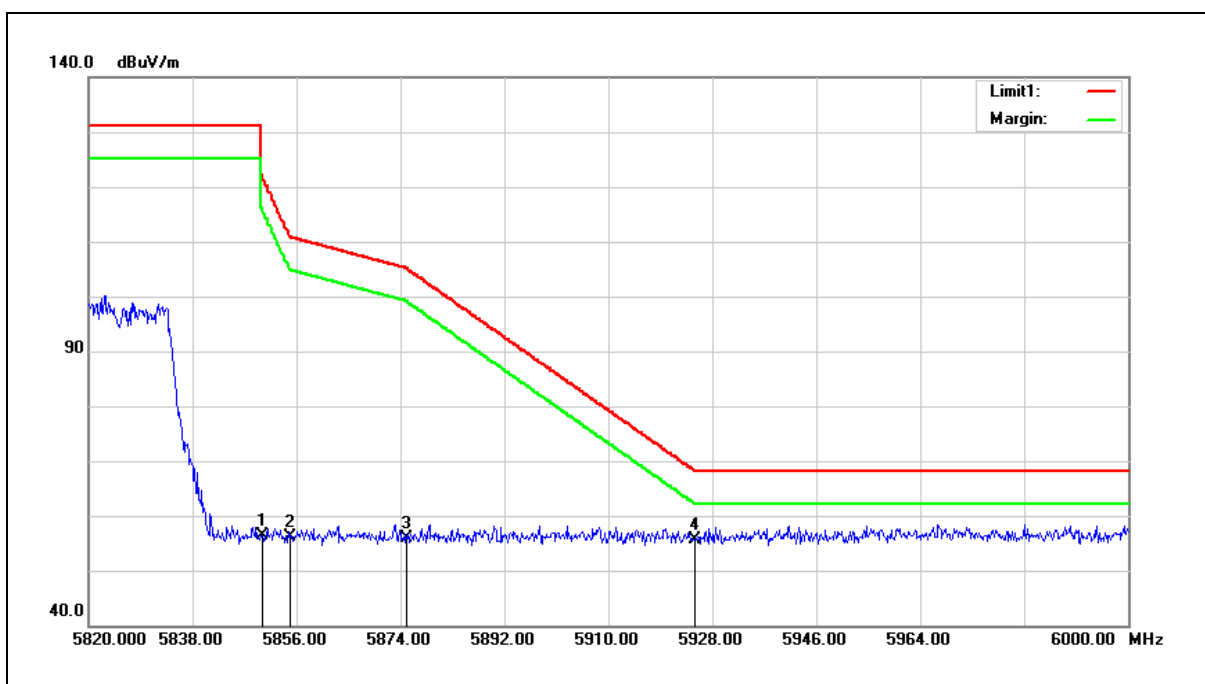

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.73	7.59	56.32	122.20	-65.88	peak
2	5855.000	48.56	7.60	56.16	110.80	-54.64	peak
3	5875.000	48.23	7.64	55.87	105.20	-49.33	peak
4	5925.000	47.88	7.75	55.63	68.20	-12.57	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

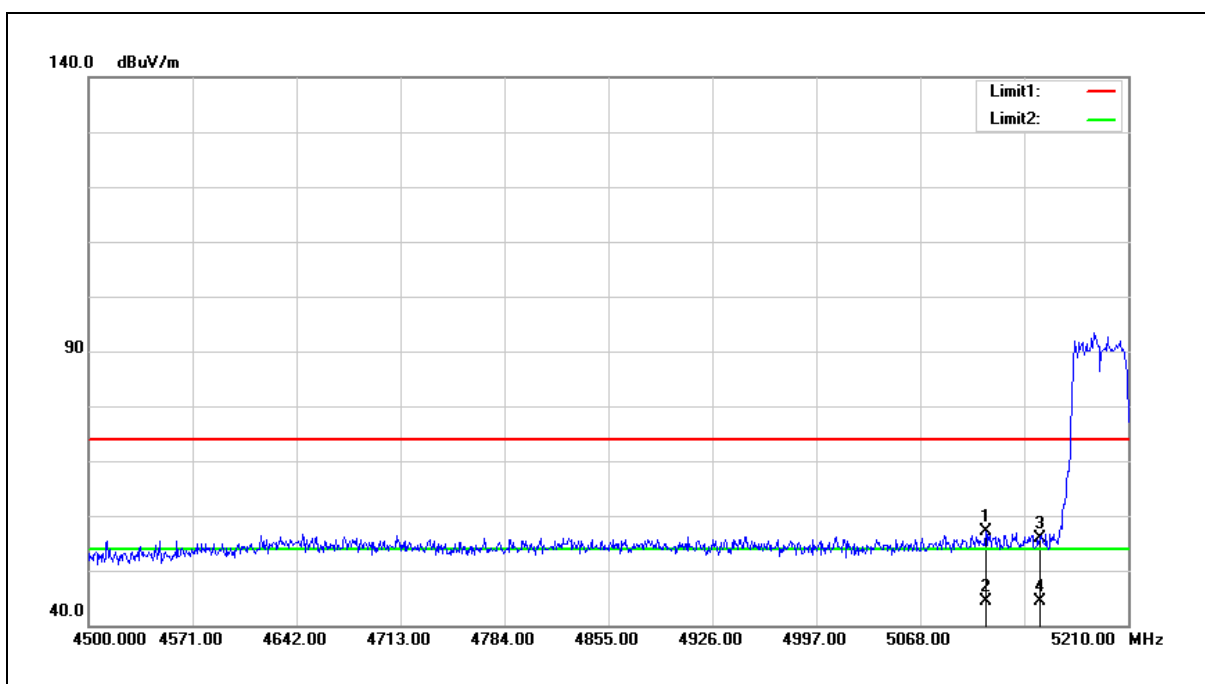

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5112.730	51.13	5.99	57.12	74.00	-16.88	peak
2	5112.730	38.43	5.99	44.42	54.00	-9.58	AVG
3	5150.000	49.87	6.07	55.94	74.00	-18.06	peak
4	5150.000	38.38	6.07	44.45	54.00	-9.55	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

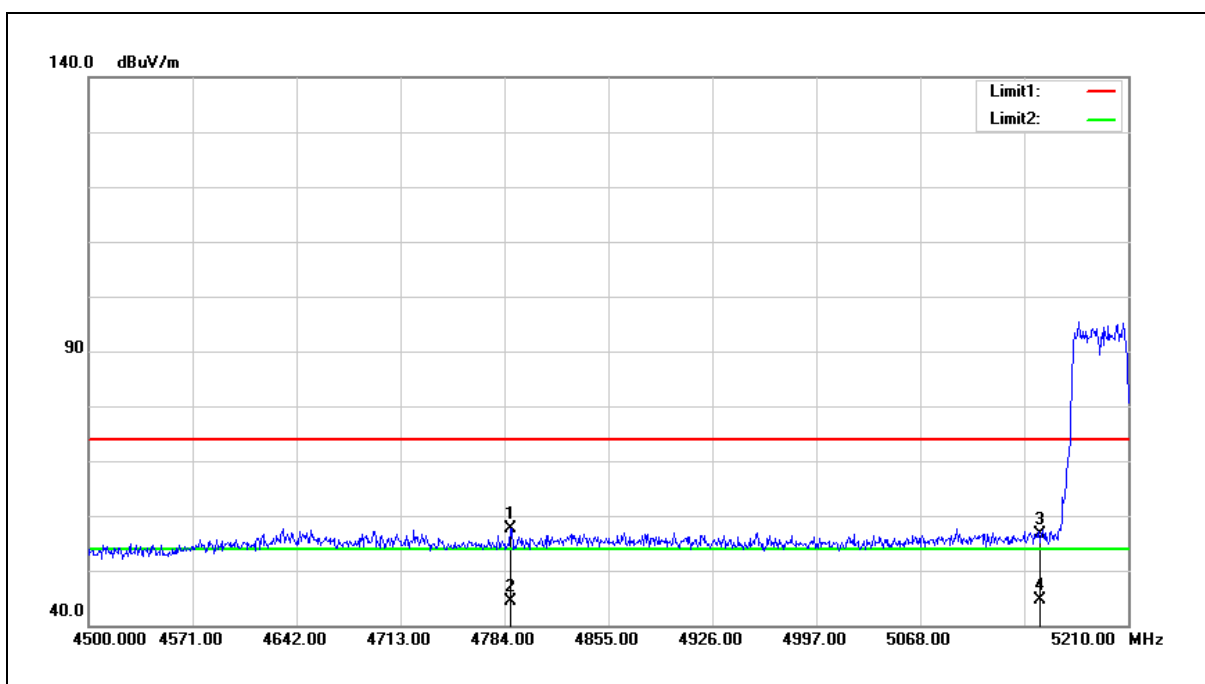

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4788.260	52.30	5.30	57.60	74.00	-16.40	peak
2	4788.260	39.20	5.30	44.50	54.00	-9.50	AVG
3	5150.000	50.53	6.07	56.60	74.00	-17.40	peak
4	5150.000	38.55	6.07	44.62	54.00	-9.38	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

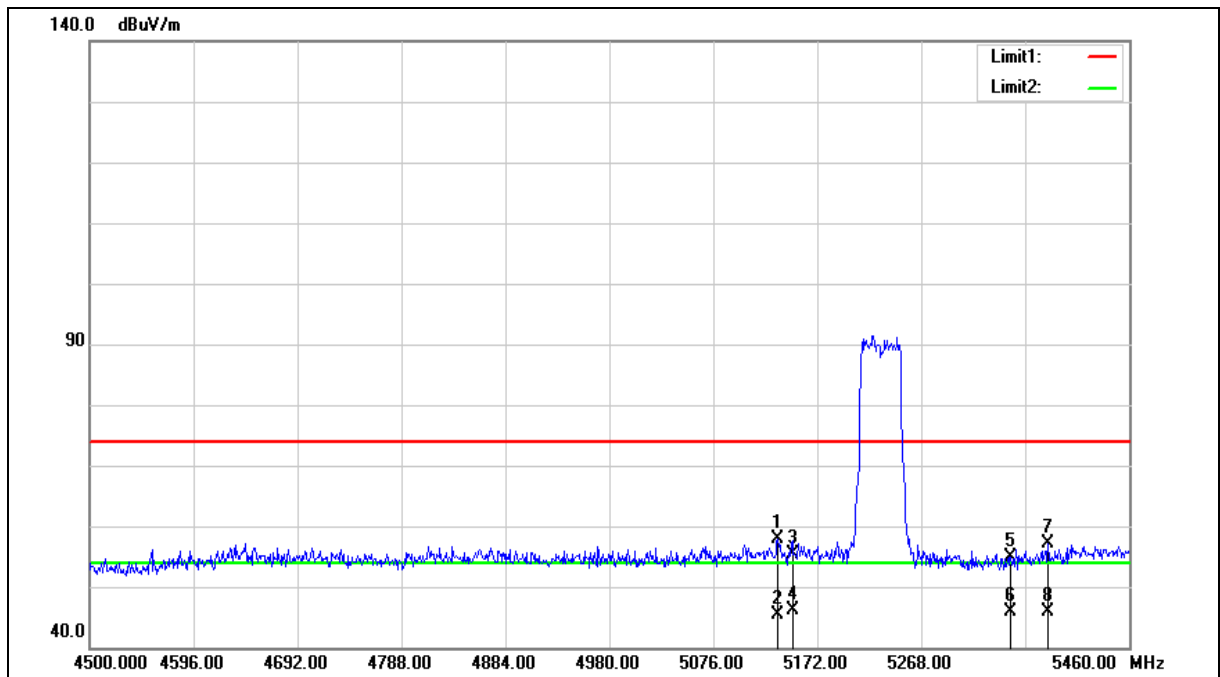

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5135.520	51.73	6.03	57.76	74.00	-16.24	peak
2	5135.520	39.30	6.03	45.33	54.00	-8.67	AVG
3	5150.000	49.41	6.07	55.48	74.00	-18.52	peak
4	5150.000	40.14	6.07	46.21	54.00	-7.79	AVG
5	5350.000	48.36	6.52	54.88	74.00	-19.12	peak
6	5350.000	39.26	6.52	45.78	54.00	-8.22	AVG
7	5385.120	50.51	6.59	57.10	74.00	-16.90	peak
8	5385.120	39.23	6.59	45.82	54.00	-8.18	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

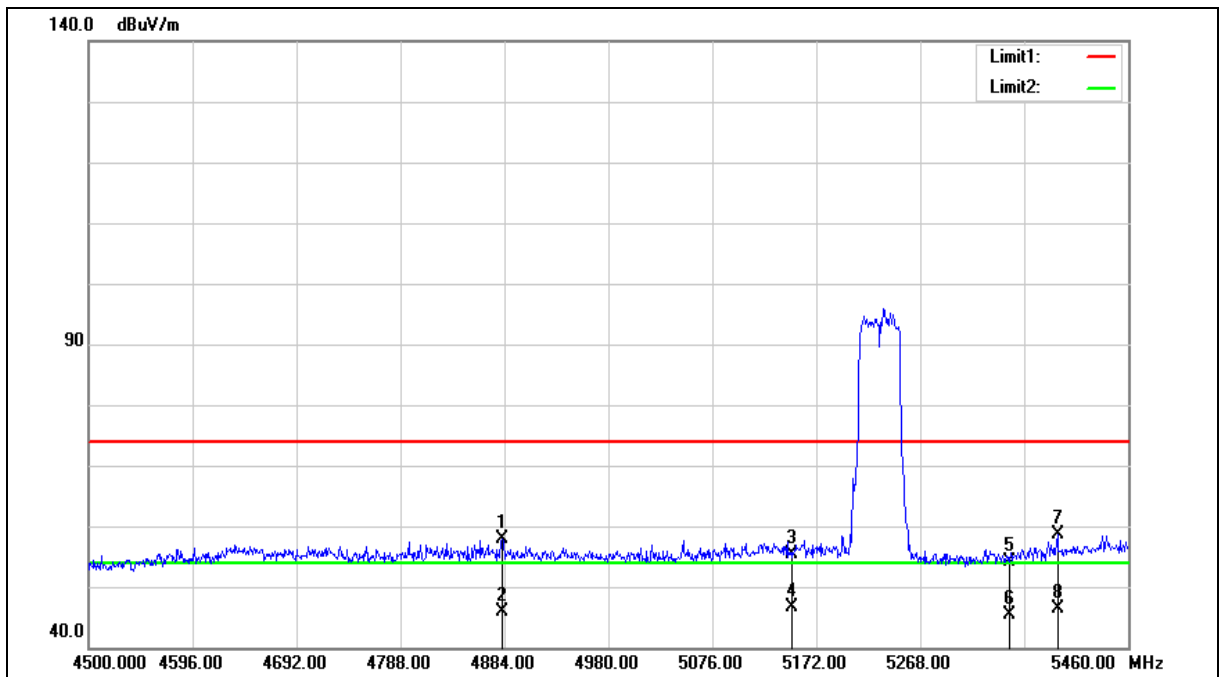

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.080	52.43	5.48	57.91	74.00	-16.09	peak
2	4882.080	40.47	5.48	45.95	54.00	-8.05	AVG
3	5150.000	49.33	6.07	55.40	74.00	-18.60	peak
4	5150.000	40.52	6.07	46.59	54.00	-7.41	AVG
5	5350.000	47.62	6.52	54.14	74.00	-19.86	peak
6	5350.000	38.83	6.52	45.35	54.00	-8.65	AVG
7	5394.720	52.09	6.62	58.71	74.00	-15.29	peak
8	5394.720	39.70	6.62	46.32	54.00	-7.68	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

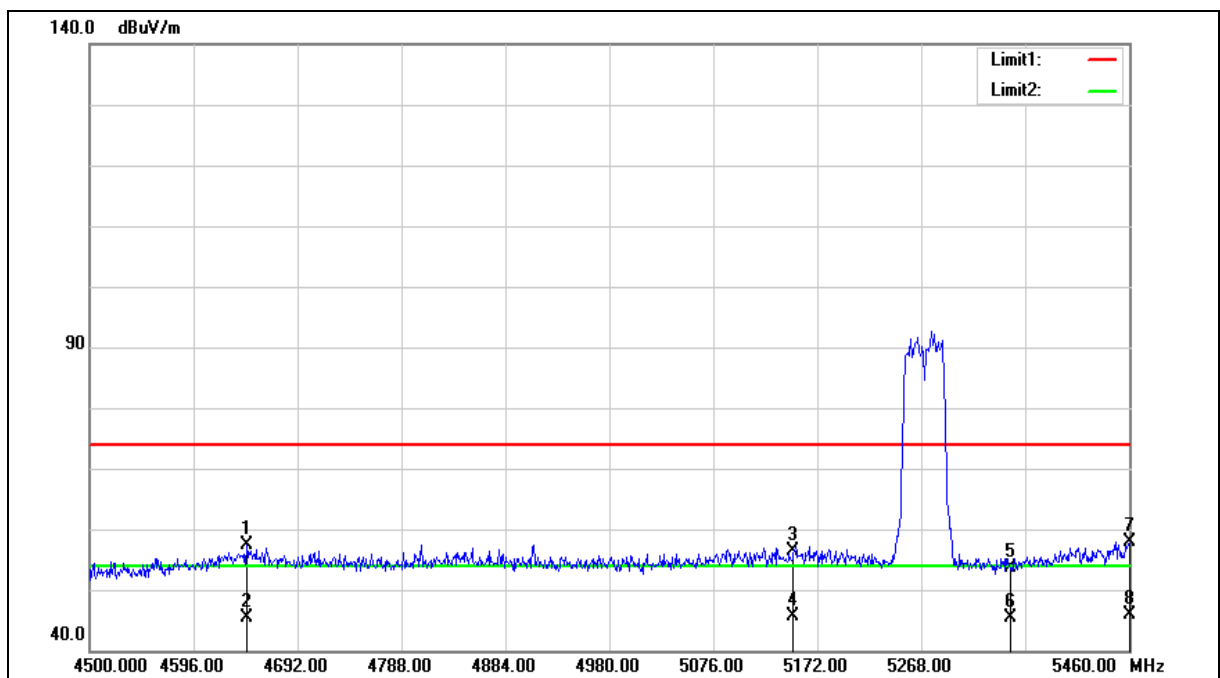

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.960	52.46	5.01	57.47	74.00	-16.53	peak
2	4644.960	40.31	5.01	45.32	54.00	-8.68	AVG
3	5150.000	50.30	6.07	56.37	74.00	-17.63	peak
4	5150.000	39.67	6.07	45.74	54.00	-8.26	AVG
5	5350.000	47.04	6.52	53.56	74.00	-20.44	peak
6	5350.000	38.93	6.52	45.45	54.00	-8.55	AVG
7	5460.000	51.14	6.77	57.91	74.00	-16.09	peak
8	5460.000	39.09	6.77	45.86	54.00	-8.14	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

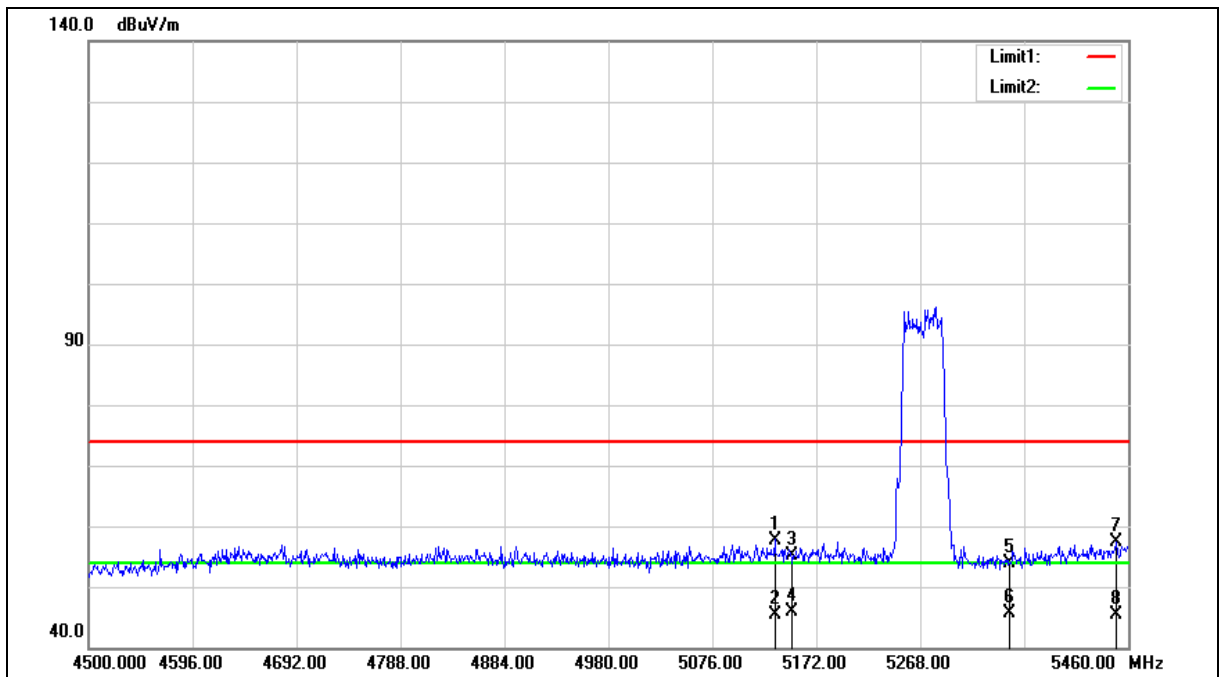

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5133.600	51.72	6.03	57.75	74.00	-16.25	peak
2	5133.600	39.35	6.03	45.38	54.00	-8.62	AVG
3	5150.000	49.05	6.07	55.12	74.00	-18.88	peak
4	5150.000	39.90	6.07	45.97	54.00	-8.03	AVG
5	5350.000	47.32	6.52	53.84	74.00	-20.16	peak
6	5350.000	38.99	6.52	45.51	54.00	-8.49	AVG
7	5448.480	50.52	6.75	57.27	74.00	-16.73	peak
8	5448.480	38.71	6.75	45.46	54.00	-8.54	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

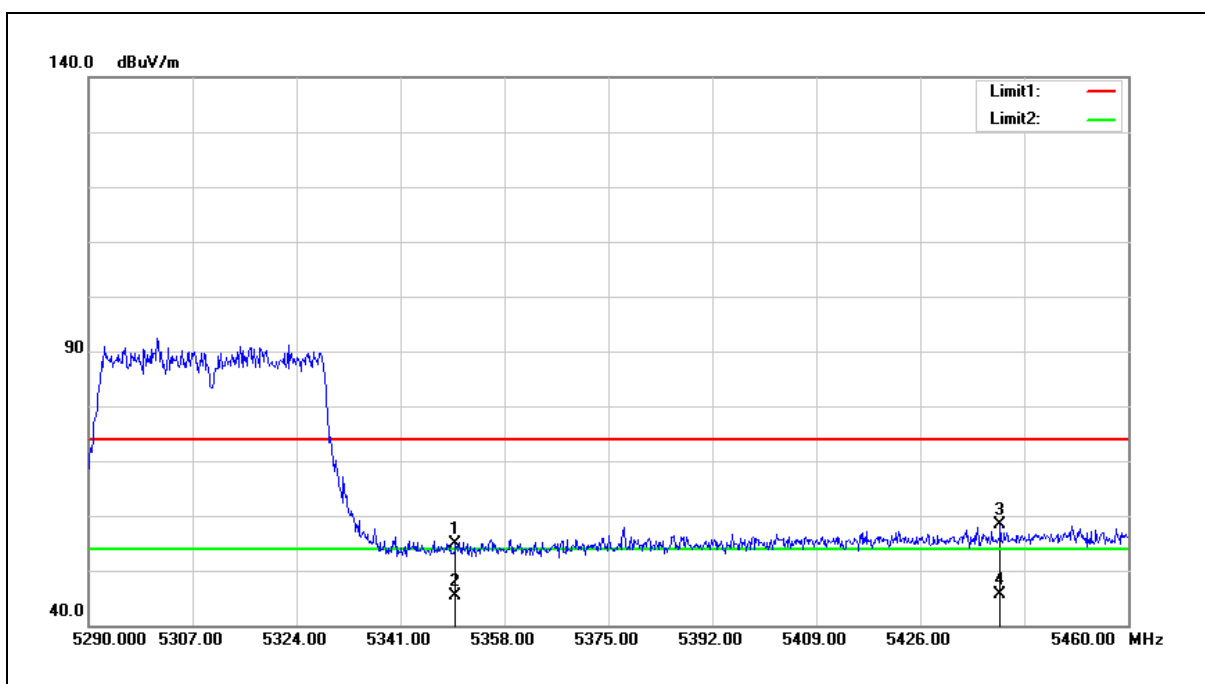

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.26	6.52	54.78	74.00	-19.22	peak
2	5350.000	38.87	6.52	45.39	54.00	-8.61	AVG
3	5439.090	51.54	6.73	58.27	74.00	-15.73	peak
4	5439.090	38.89	6.73	45.62	54.00	-8.38	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

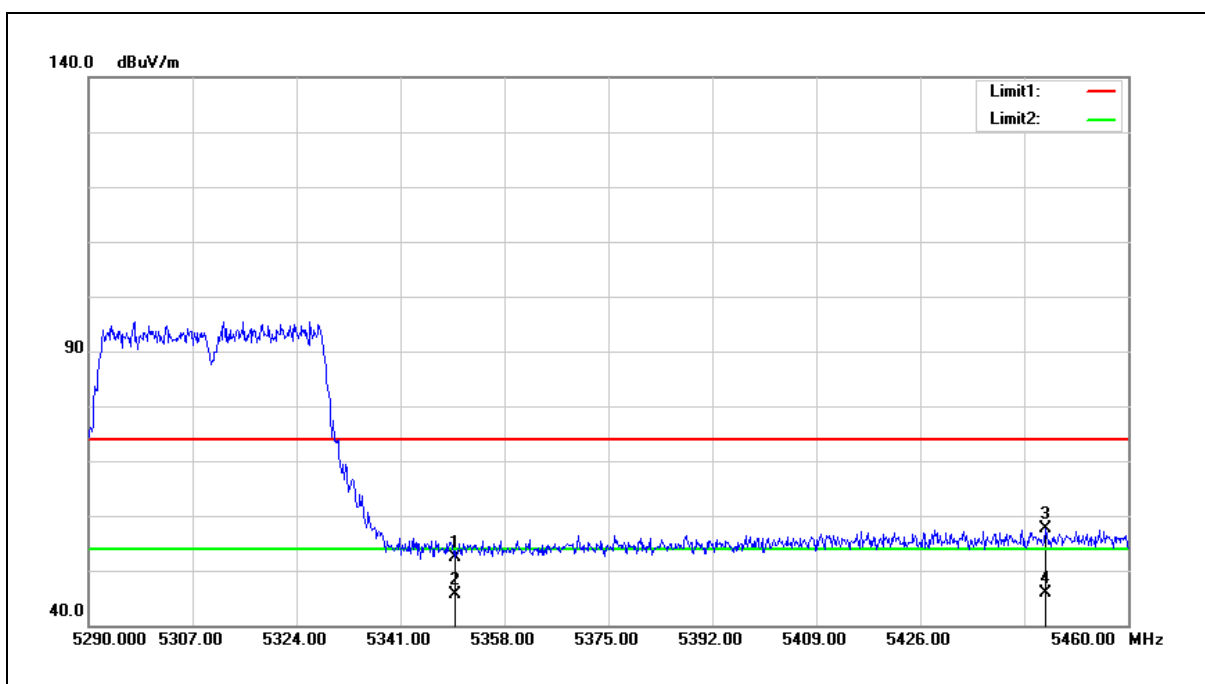


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	45.91	6.52	52.43	74.00	-21.57	peak
2	5350.000	39.04	6.52	45.56	54.00	-8.44	AVG
3	5446.400	50.95	6.74	57.69	74.00	-16.31	peak
4	5446.400	39.13	6.74	45.87	54.00	-8.13	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

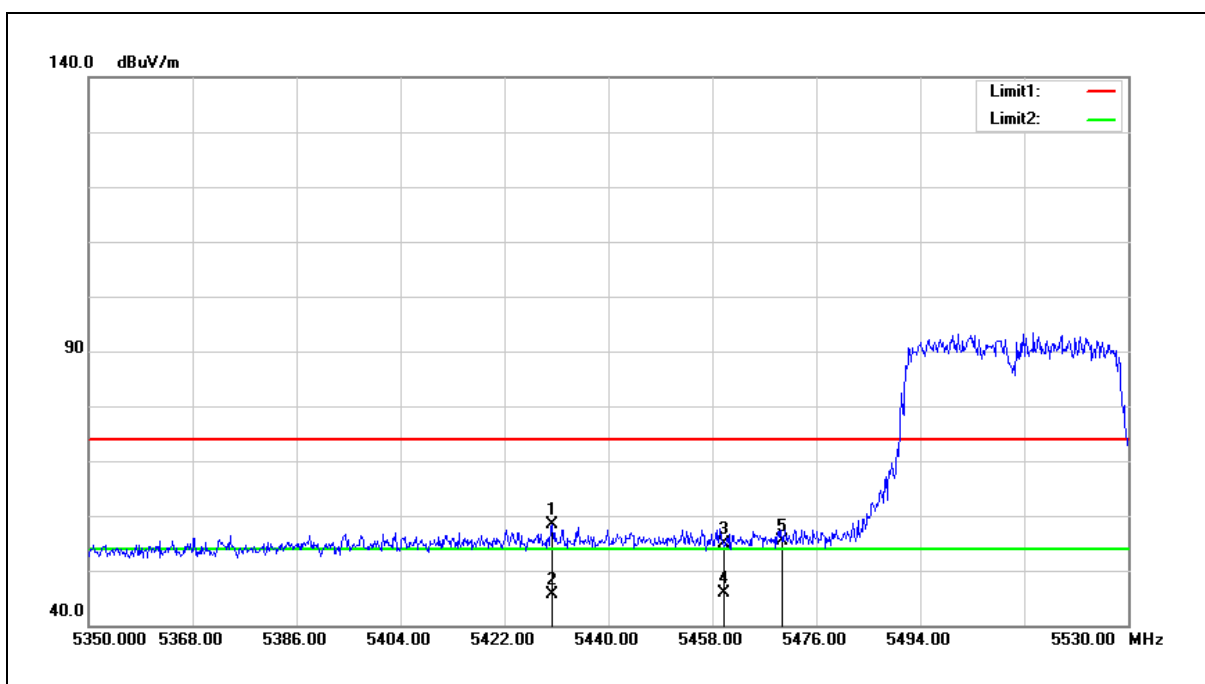


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.280	51.78	6.70	58.48	74.00	-15.52	peak
2	5430.280	38.97	6.70	45.67	54.00	-8.33	AVG
3	5460.000	48.16	6.77	54.93	74.00	-19.07	peak
4	5460.000	39.00	6.77	45.77	54.00	-8.23	AVG
5	5470.000	48.50	6.80	55.30	68.20	-12.9	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

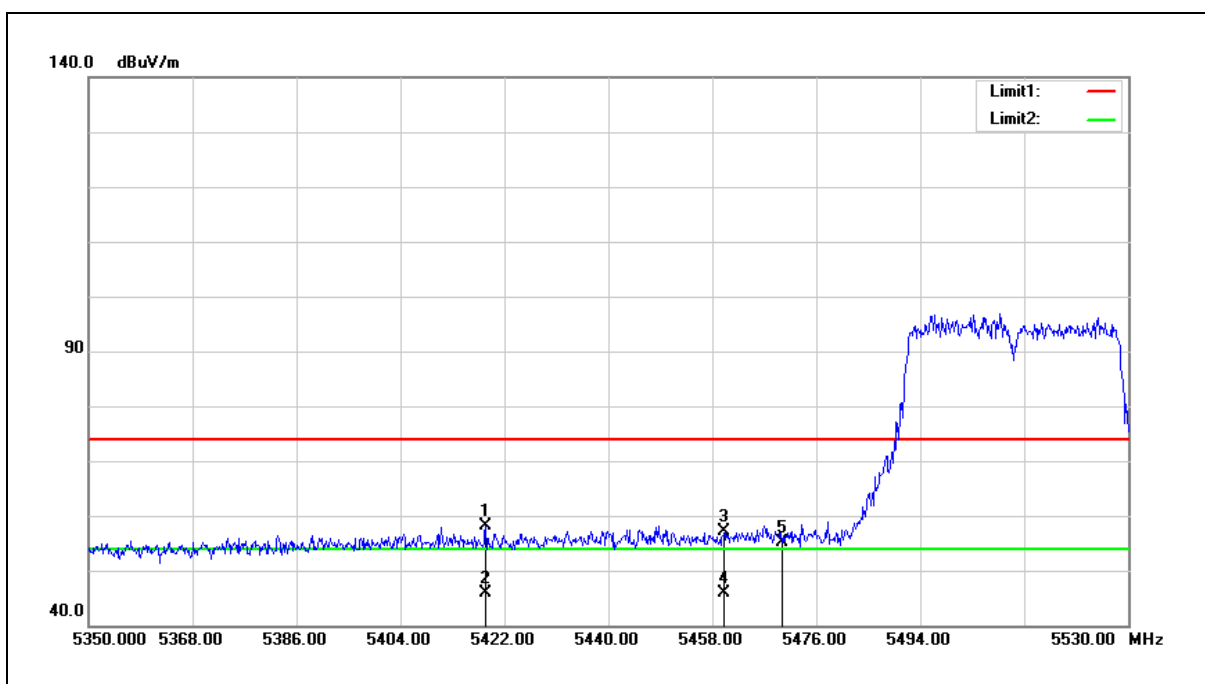

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5418.760	51.49	6.68	58.17	74.00	-15.83	peak
2	5418.760	39.08	6.68	45.76	54.00	-8.24	AVG
3	5460.000	50.25	6.77	57.02	74.00	-16.98	peak
4	5460.000	39.06	6.77	45.83	54.00	-8.17	AVG
5	5470.000	48.28	6.80	55.08	68.20	-13.12	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

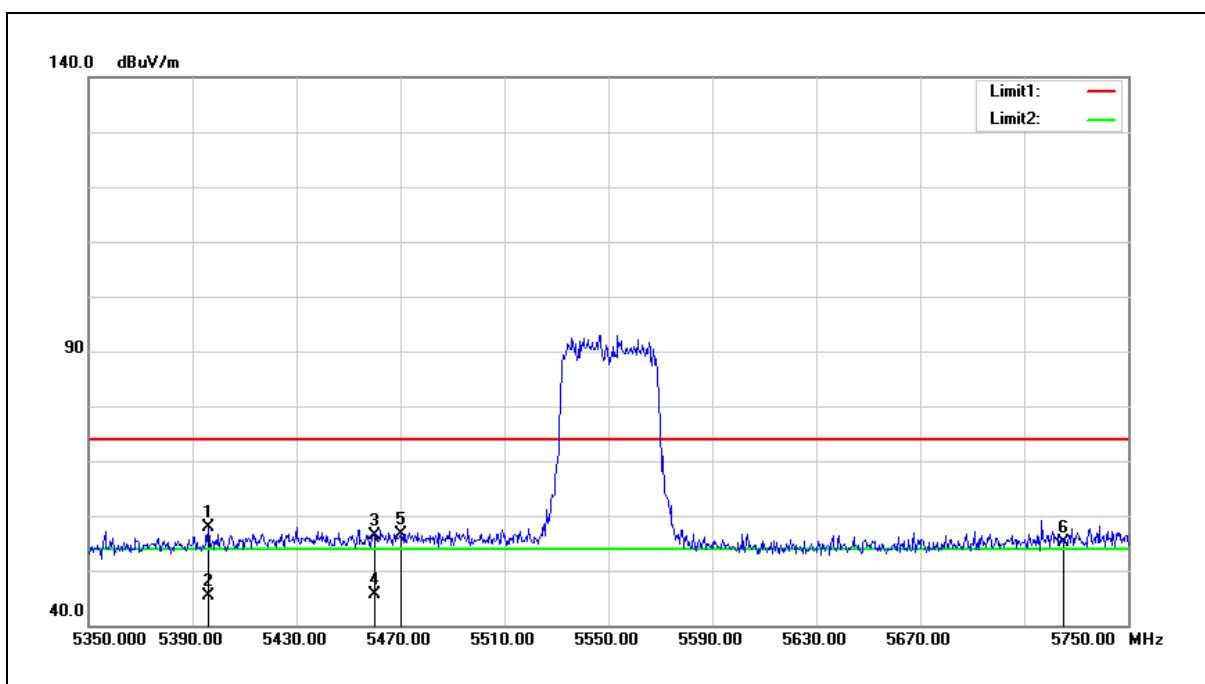


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5396.000	51.37	6.62	57.99	74.00	-16.01	peak
2	5396.000	38.86	6.62	45.48	54.00	-8.52	AVG
3	5460.000	49.59	6.77	56.36	74.00	-17.64	peak
4	5460.000	38.84	6.77	45.61	54.00	-8.39	AVG
5	5470.000	49.85	6.80	56.65	68.20	-11.55	peak
6	5725.000	47.71	7.32	55.03	68.20	-13.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

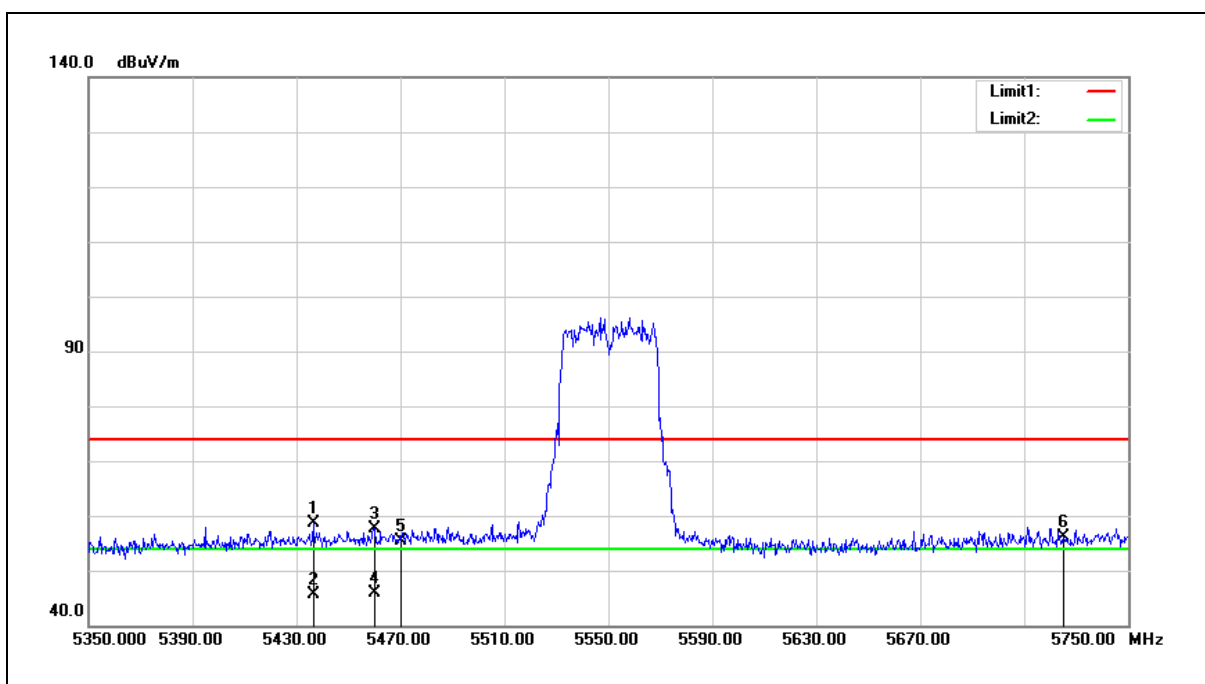


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5436.400	51.88	6.72	58.60	74.00	-15.40	peak
2	5436.400	38.94	6.72	45.66	54.00	-8.34	AVG
3	5460.000	50.79	6.77	57.56	74.00	-16.44	peak
4	5460.000	39.02	6.77	45.79	54.00	-8.21	AVG
5	5470.000	48.61	6.80	55.41	68.20	-12.79	peak
6	5725.000	48.81	7.32	56.13	68.20	-12.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

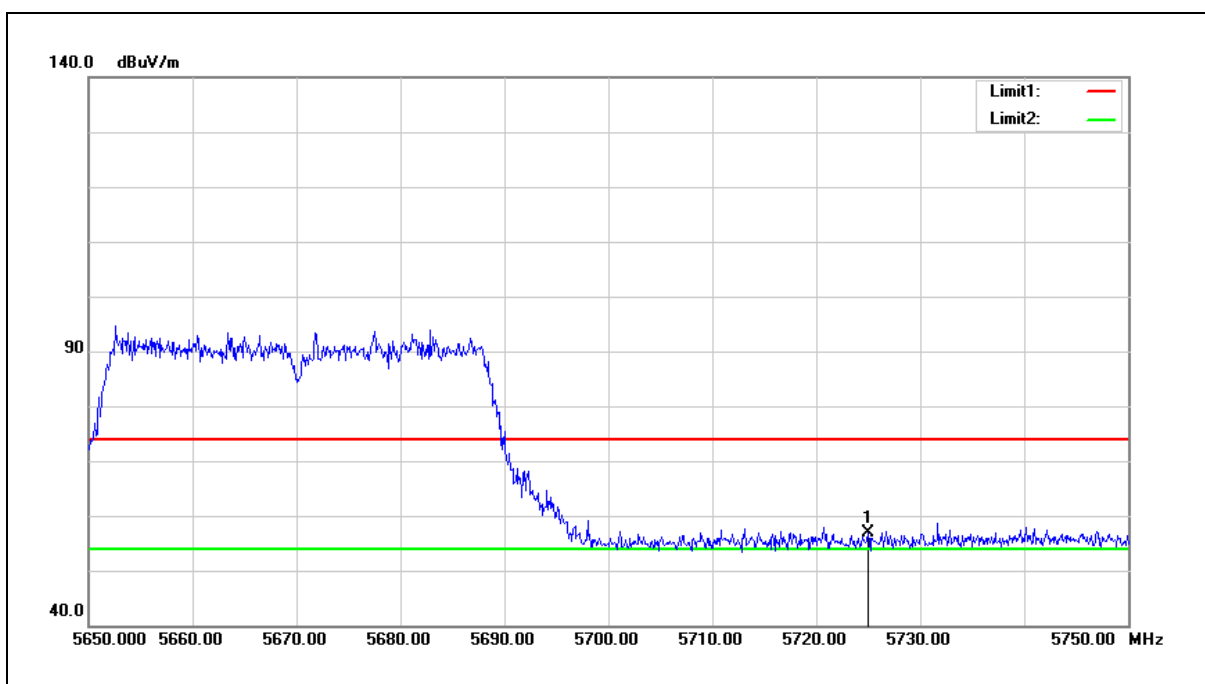

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	49.55	7.32	56.87	68.20	-11.33	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

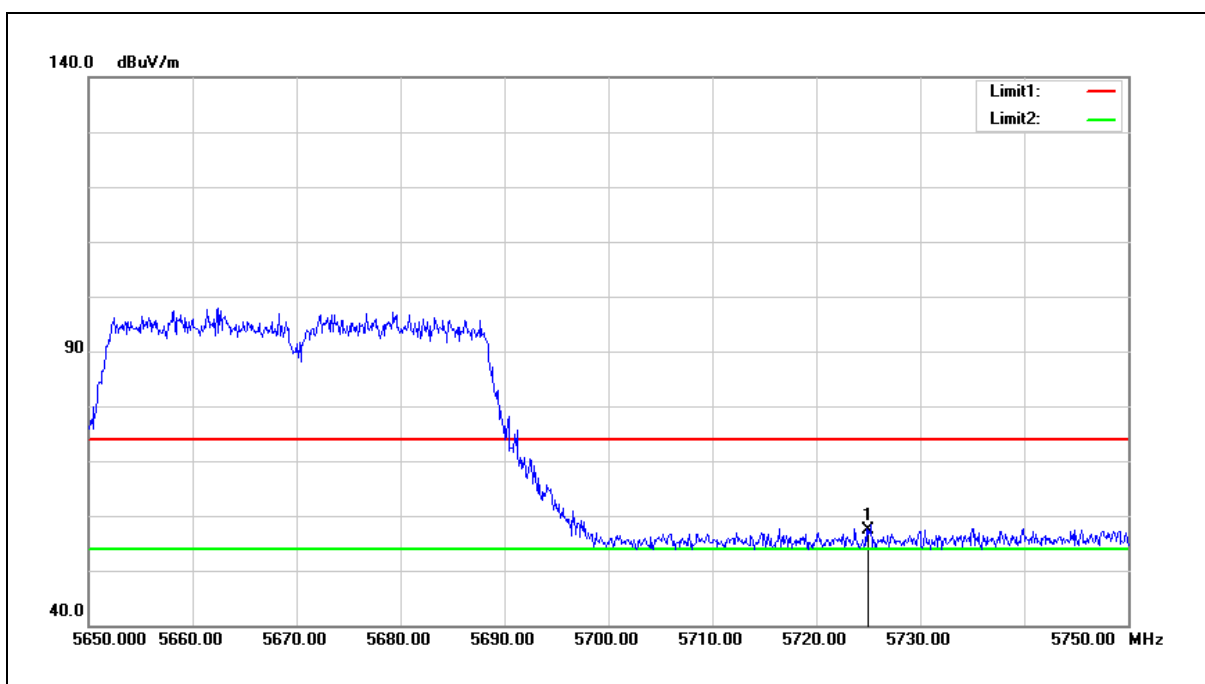

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	49.95	7.32	57.27	68.20	-10.93	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5710 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

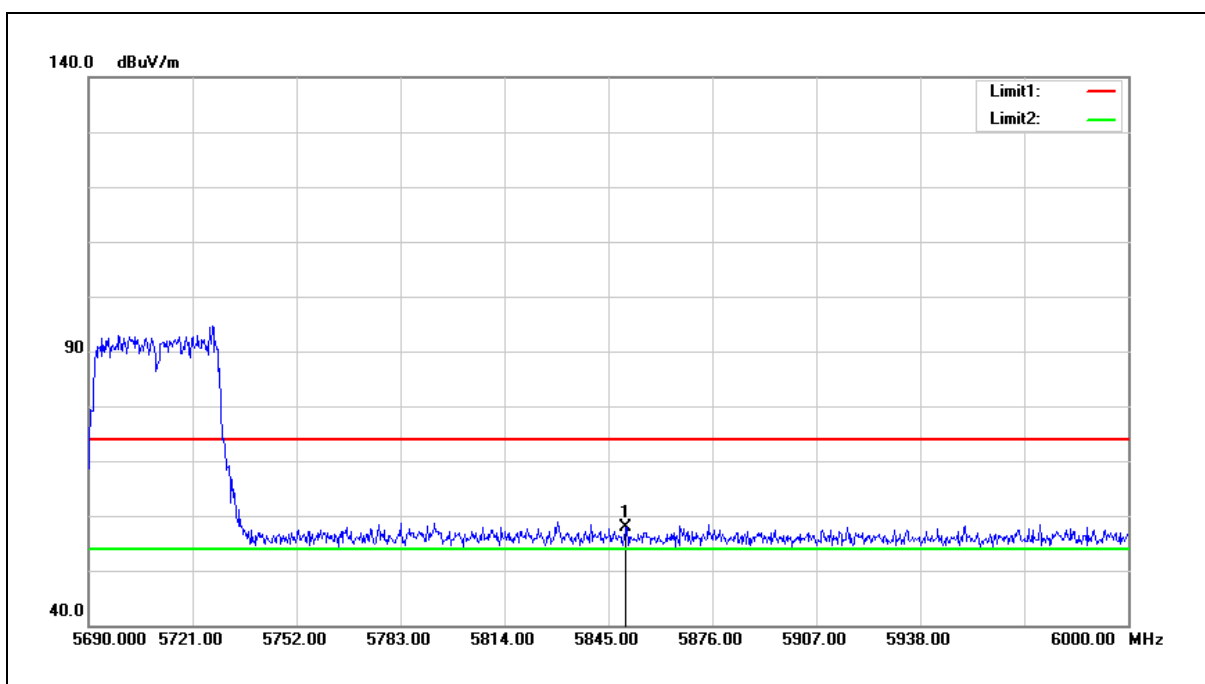

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	50.26	7.59	57.85	68.20	-10.35	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5710 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

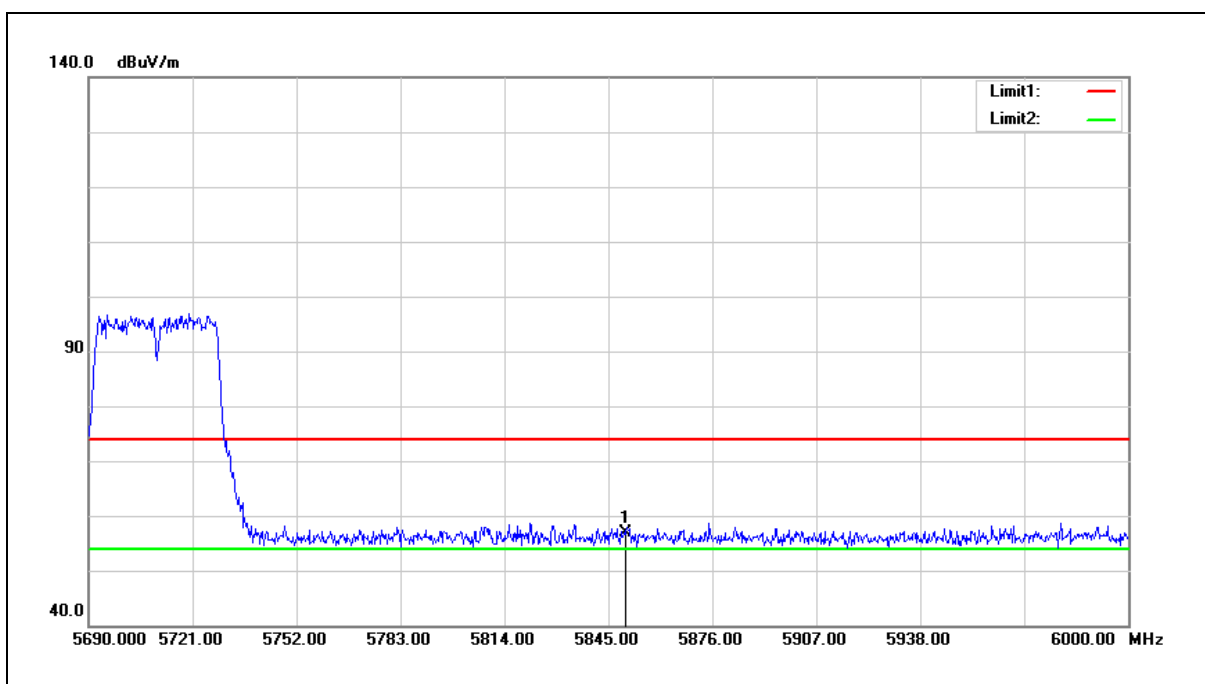


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	49.39	7.59	56.98	68.20	-11.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

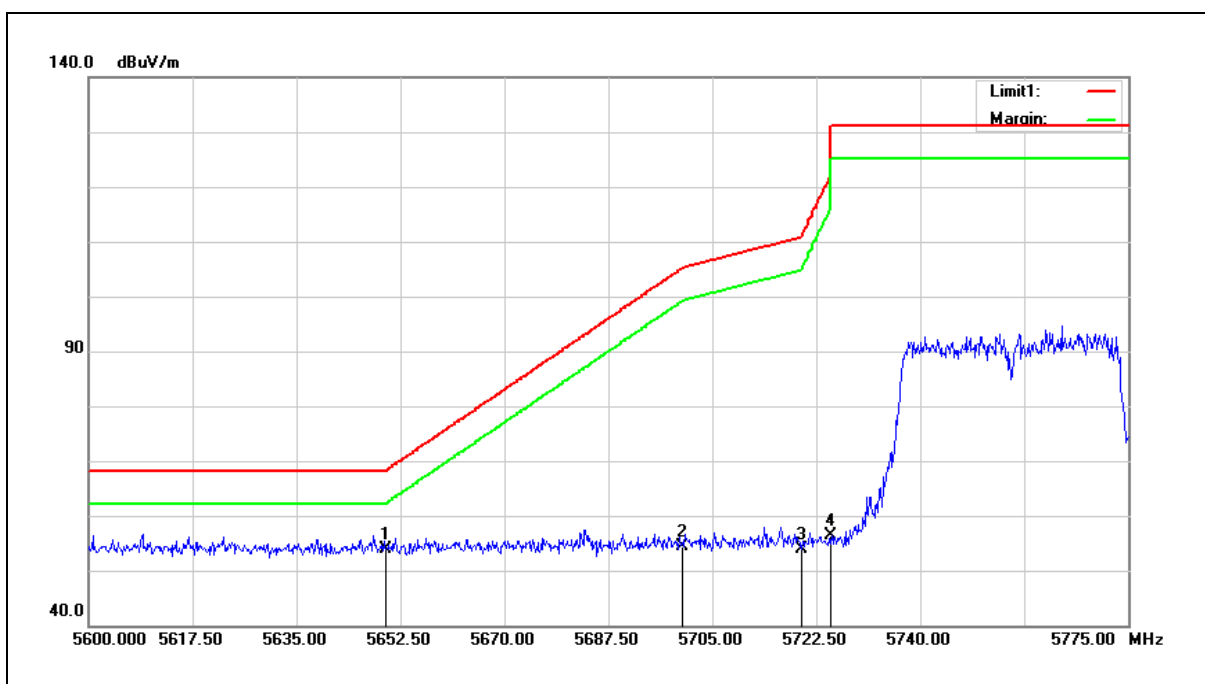


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.76	7.17	53.93	68.20	-14.27	peak
2	5700.000	47.02	7.27	54.29	105.20	-50.91	peak
3	5720.000	46.45	7.31	53.76	110.80	-57.04	peak
4	5725.000	49.09	7.32	56.41	122.20	-65.79	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

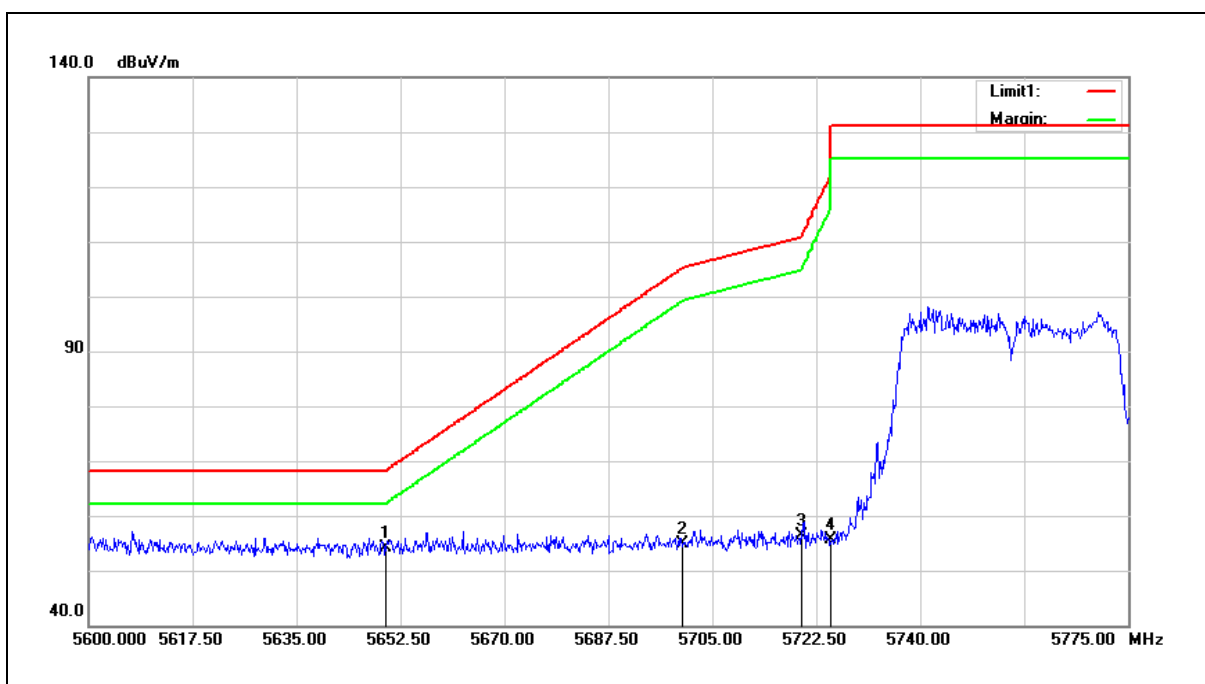


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.93	7.17	54.10	68.20	-14.10	peak
2	5700.000	47.53	7.27	54.80	105.20	-50.40	peak
3	5720.000	49.10	7.31	56.41	110.80	-54.39	peak
4	5725.000	48.24	7.32	55.56	122.20	-66.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

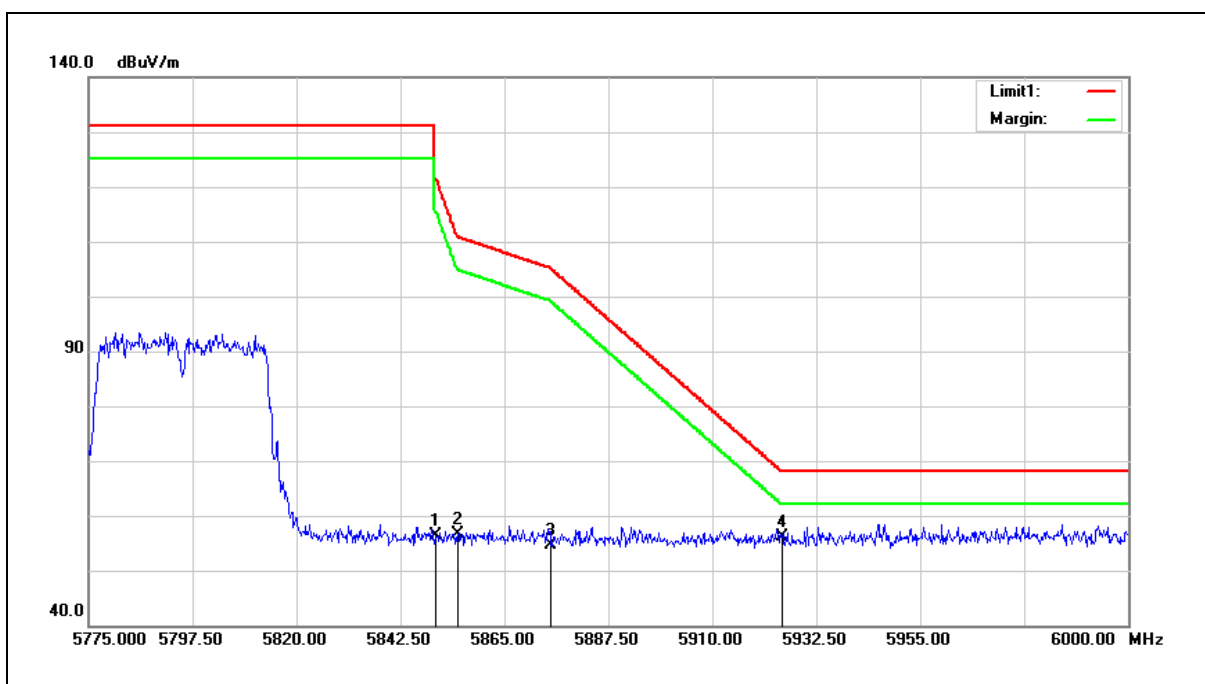


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.84	7.59	56.43	122.20	-65.77	peak
2	5855.000	48.93	7.60	56.53	110.80	-54.27	peak
3	5875.000	47.08	7.64	54.72	105.20	-50.48	peak
4	5925.000	48.44	7.75	56.19	68.20	-12.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

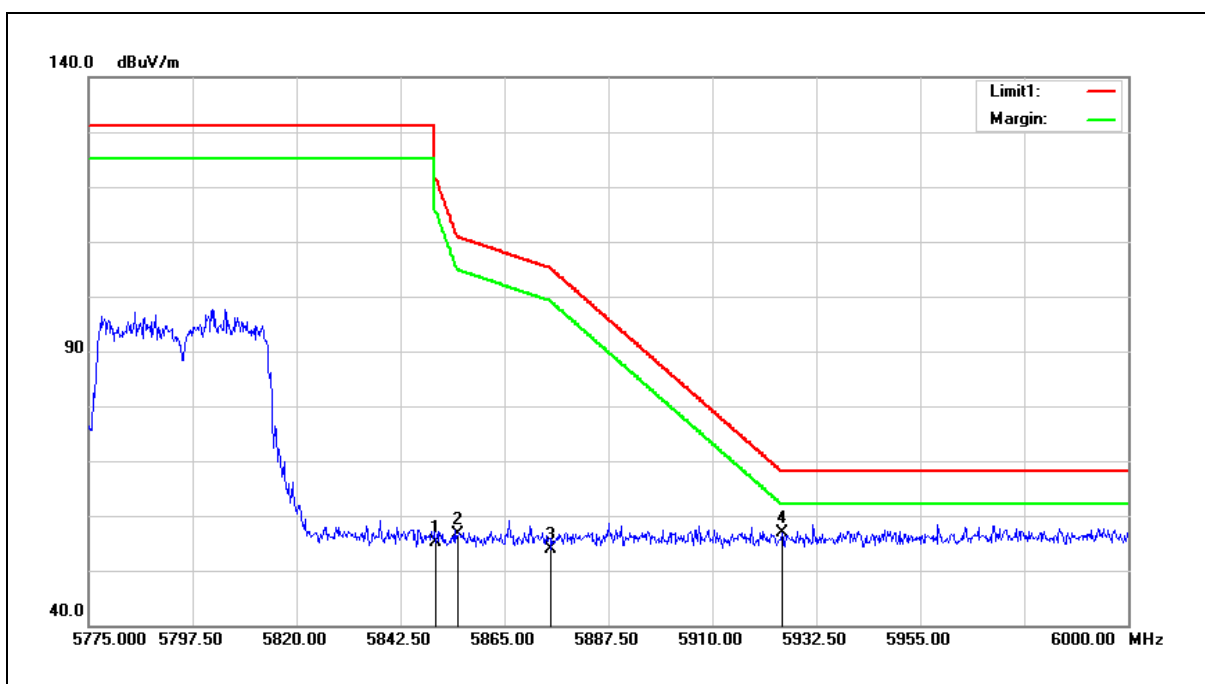

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.57	7.59	55.16	122.20	-67.04	peak
2	5855.000	48.92	7.60	56.52	110.80	-54.28	peak
3	5875.000	46.34	7.64	53.98	105.20	-51.22	peak
4	5925.000	49.05	7.75	56.80	68.20	-11.40	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

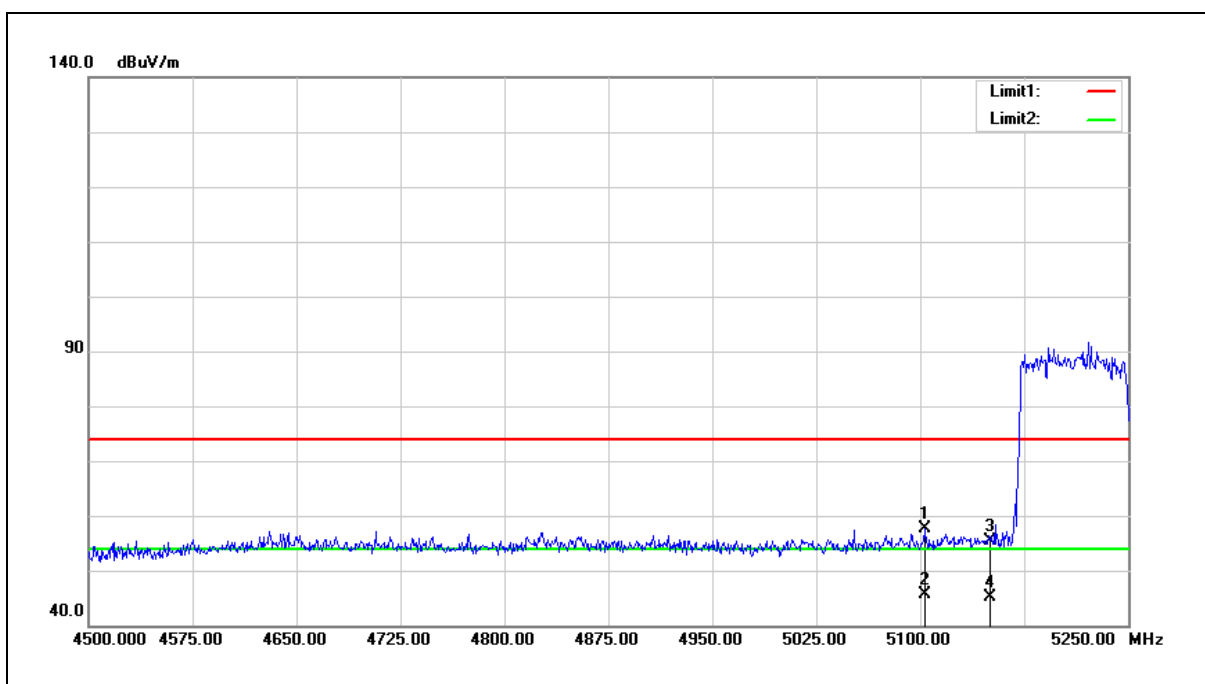


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5103.000	51.58	5.97	57.55	74.00	-16.45	peak
2	5103.000	39.58	5.97	45.55	54.00	-8.45	AVG
3	5150.000	49.39	6.07	55.46	74.00	-18.54	peak
4	5150.000	39.14	6.07	45.21	54.00	-8.79	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

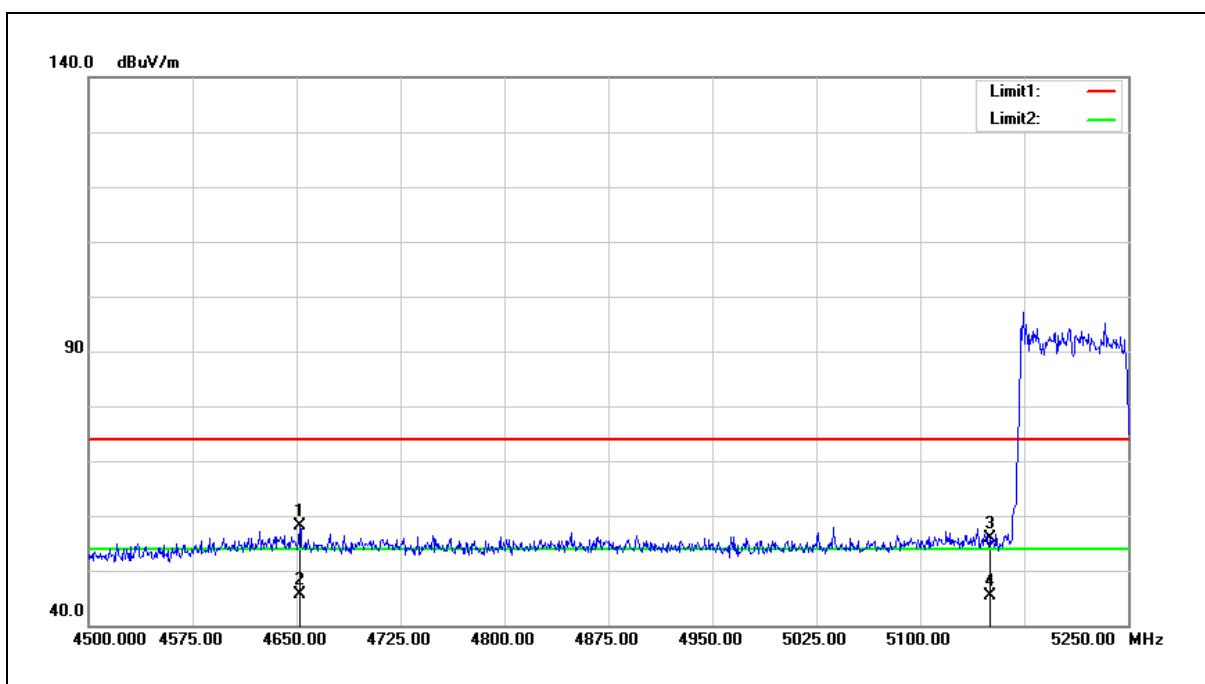

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4652.250	53.09	5.01	58.10	74.00	-15.90	peak
2	4652.250	40.70	5.01	45.71	54.00	-8.29	AVG
3	5150.000	49.84	6.07	55.91	74.00	-18.09	peak
4	5150.000	39.27	6.07	45.34	54.00	-8.66	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

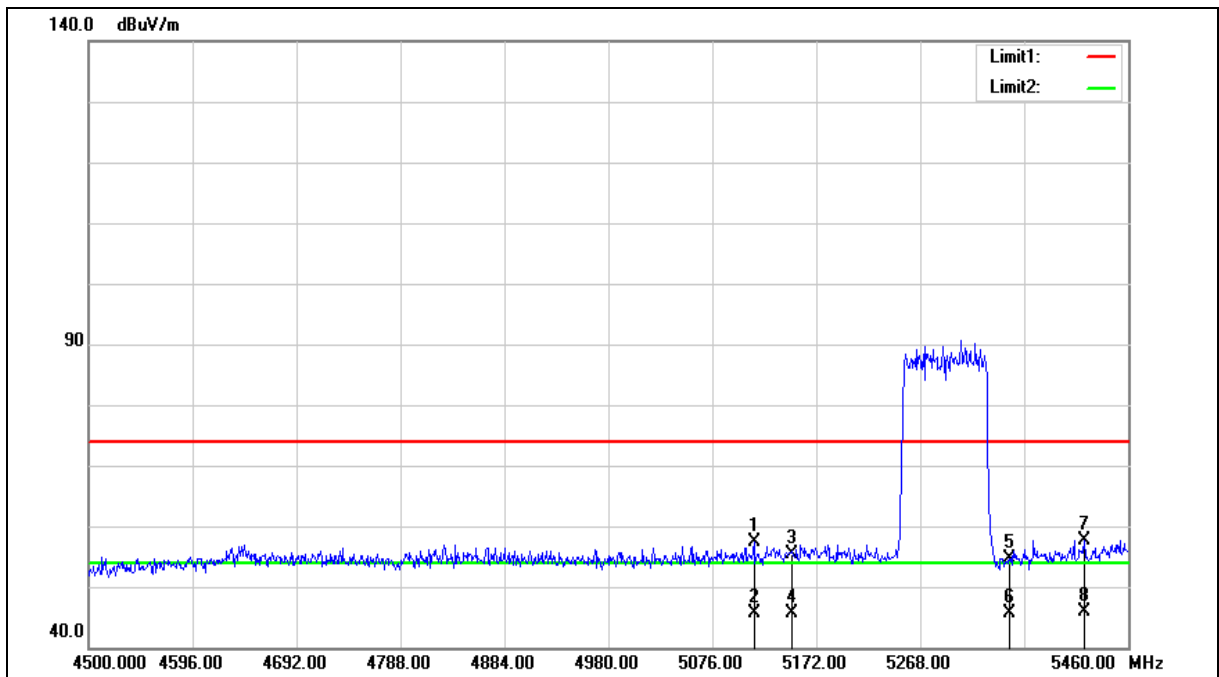



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5114.400	51.26	6.00	57.26	74.00	-16.74	peak
2	5114.400	39.65	6.00	45.65	54.00	-8.35	AVG
3	5150.000	49.30	6.07	55.37	74.00	-18.63	peak
4	5150.000	39.52	6.07	45.59	54.00	-8.41	AVG
5	5350.000	48.22	6.52	54.74	74.00	-19.26	peak
6	5350.000	39.18	6.52	45.70	54.00	-8.30	AVG
7	5419.680	50.89	6.69	57.58	74.00	-16.42	peak
8	5419.680	39.20	6.69	45.89	54.00	-8.11	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

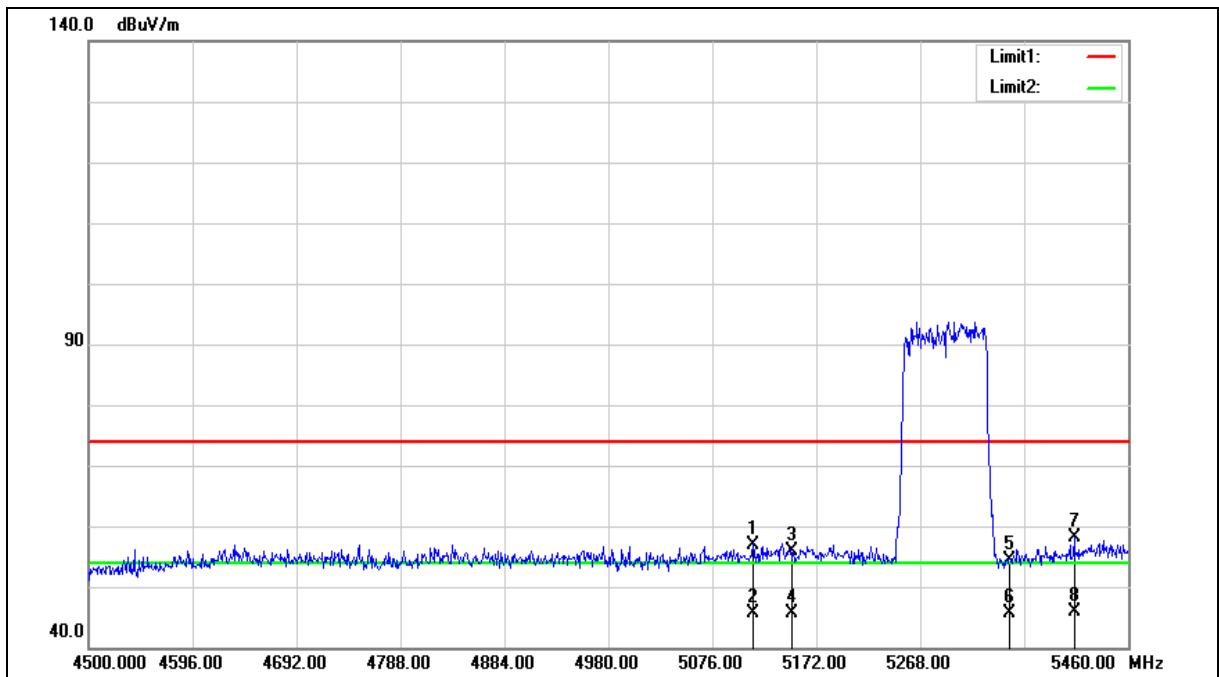

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5113.440	51.01	5.99	57.00	74.00	-17.00	peak
2	5113.440	39.58	5.99	45.57	54.00	-8.43	AVG
3	5150.000	49.76	6.07	55.83	74.00	-18.17	peak
4	5150.000	39.67	6.07	45.74	54.00	-8.26	AVG
5	5350.000	47.98	6.52	54.50	74.00	-19.50	peak
6	5350.000	39.01	6.52	45.53	54.00	-8.47	AVG
7	5410.080	51.55	6.65	58.20	74.00	-15.80	peak
8	5410.080	39.20	6.65	45.85	54.00	-8.15	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

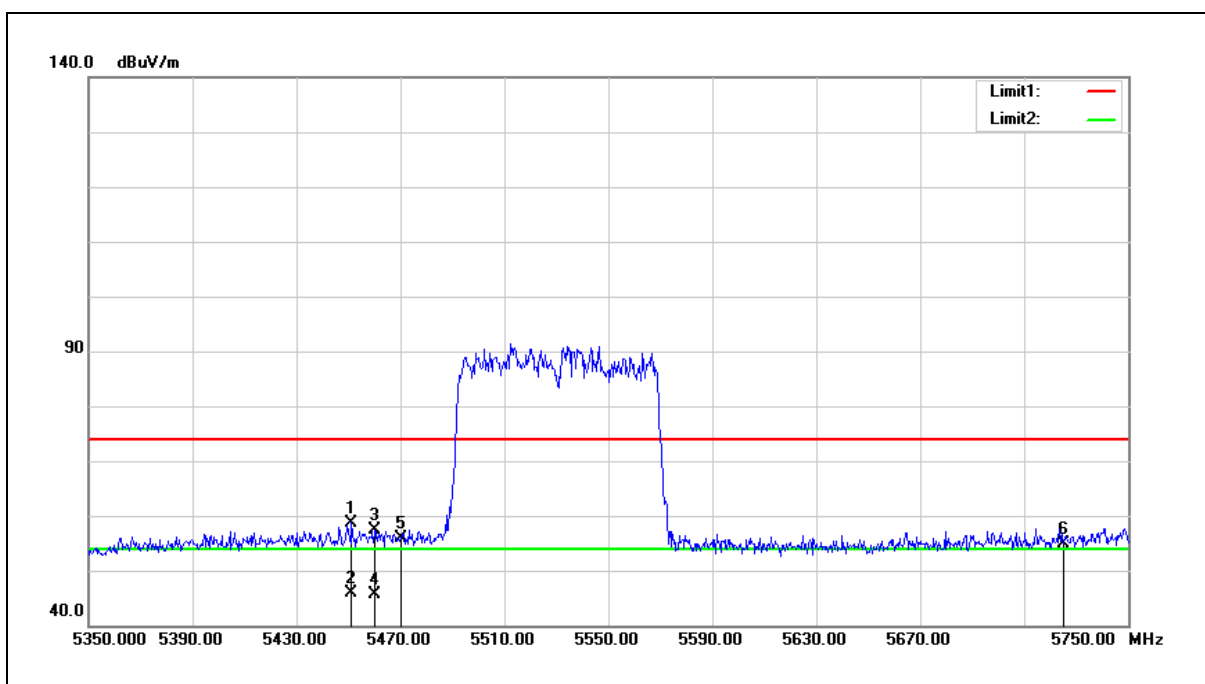


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5451.200	52.00	6.75	58.75	74.00	-15.25	peak
2	5451.200	39.06	6.75	45.81	54.00	-8.19	AVG
3	5460.000	50.66	6.77	57.43	74.00	-16.57	peak
4	5460.000	38.85	6.77	45.62	54.00	-8.38	AVG
5	5470.000	48.97	6.80	55.77	68.20	-12.43	peak
6	5725.000	47.56	7.32	54.88	68.20	-13.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

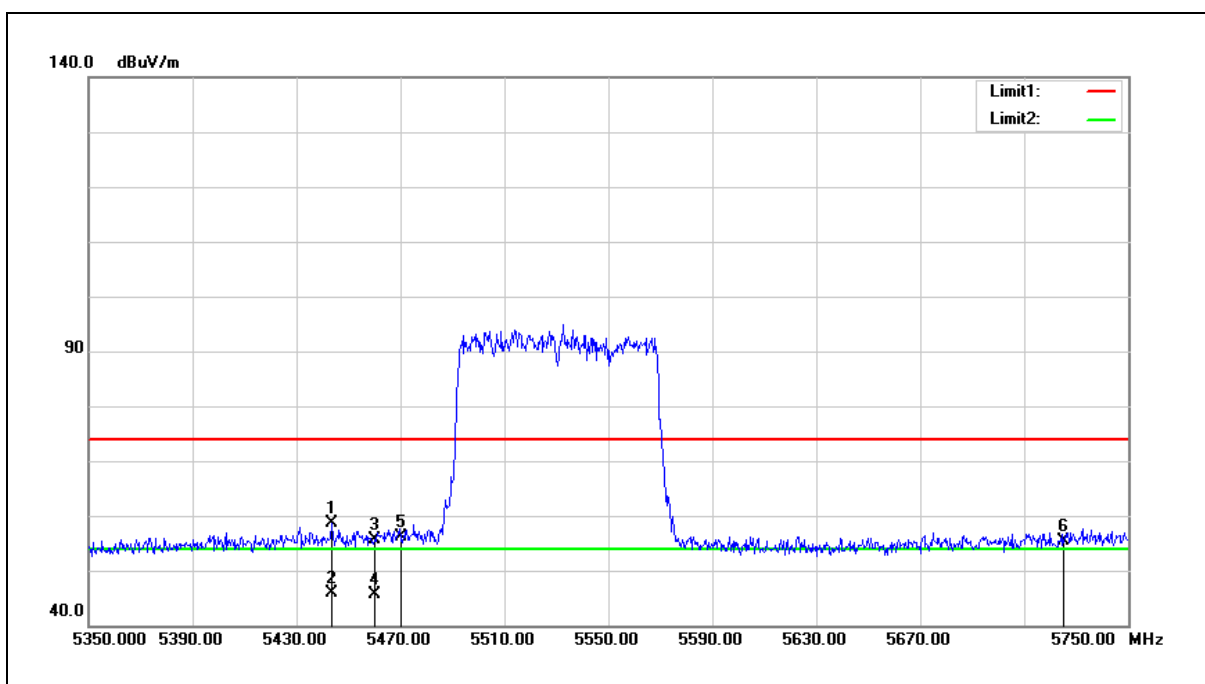

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.600	52.01	6.74	58.75	74.00	-15.25	peak
2	5443.600	39.15	6.74	45.89	54.00	-8.11	AVG
3	5460.000	48.81	6.77	55.58	74.00	-18.42	peak
4	5460.000	38.98	6.77	45.75	54.00	-8.25	AVG
5	5470.000	49.36	6.80	56.16	68.20	-12.04	peak
6	5725.000	48.09	7.32	55.41	68.20	-12.79	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

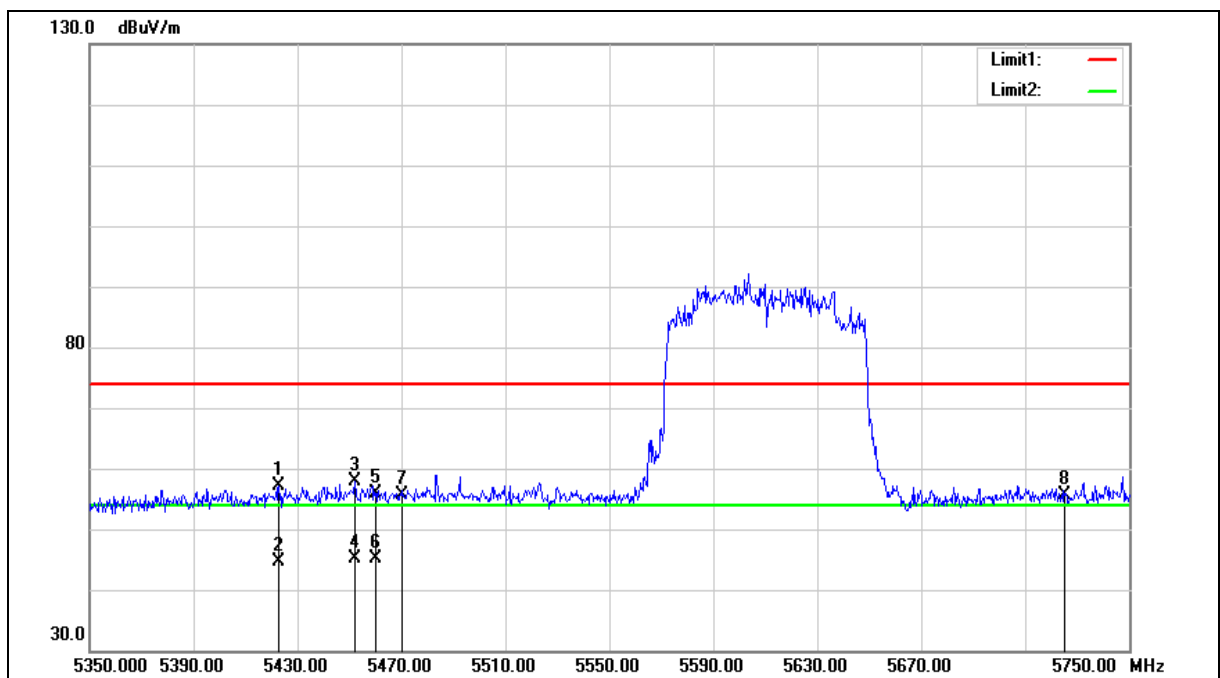

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5422.800	50.47	6.69	57.16	74.00	-16.84	peak
2	5422.800	37.97	6.69	44.66	54.00	-9.34	AVG
3	5452.000	51.04	6.75	57.79	74.00	-16.21	peak
4	5452.000	38.38	6.75	45.13	54.00	-8.87	AVG
5	5460.000	49.18	6.77	55.95	74.00	-18.05	peak
6	5460.000	38.39	6.77	45.16	54.00	-8.84	AVG
7	5470.000	48.76	6.80	55.56	68.20	-12.64	peak
8	5725.000	48.42	7.32	55.74	68.20	-12.46	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

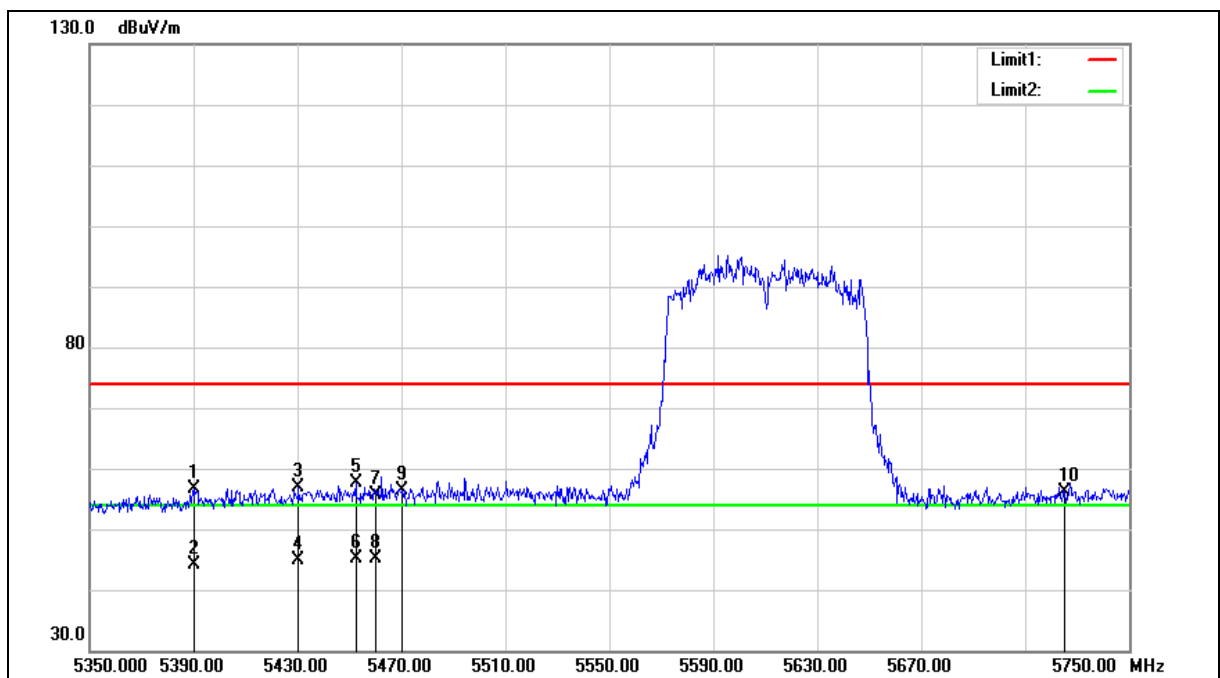

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5390.000	49.90	6.61	56.51	74.00	-17.49	peak
2	5390.000	37.47	6.61	44.08	54.00	-9.92	AVG
3	5430.400	50.24	6.70	56.94	74.00	-17.06	peak
4	5430.400	38.17	6.70	44.87	54.00	-9.13	AVG
5	5452.400	50.81	6.75	57.56	74.00	-16.44	peak
6	5452.400	38.42	6.75	45.17	54.00	-8.83	AVG
7	5460.000	48.77	6.77	55.54	74.00	-18.46	peak
8	5460.000	38.38	6.77	45.15	54.00	-8.85	AVG
9	5470.000	49.59	6.80	56.39	68.20	-11.81	peak
10	5725.000	48.70	7.32	56.02	68.20	-12.18	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5690 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

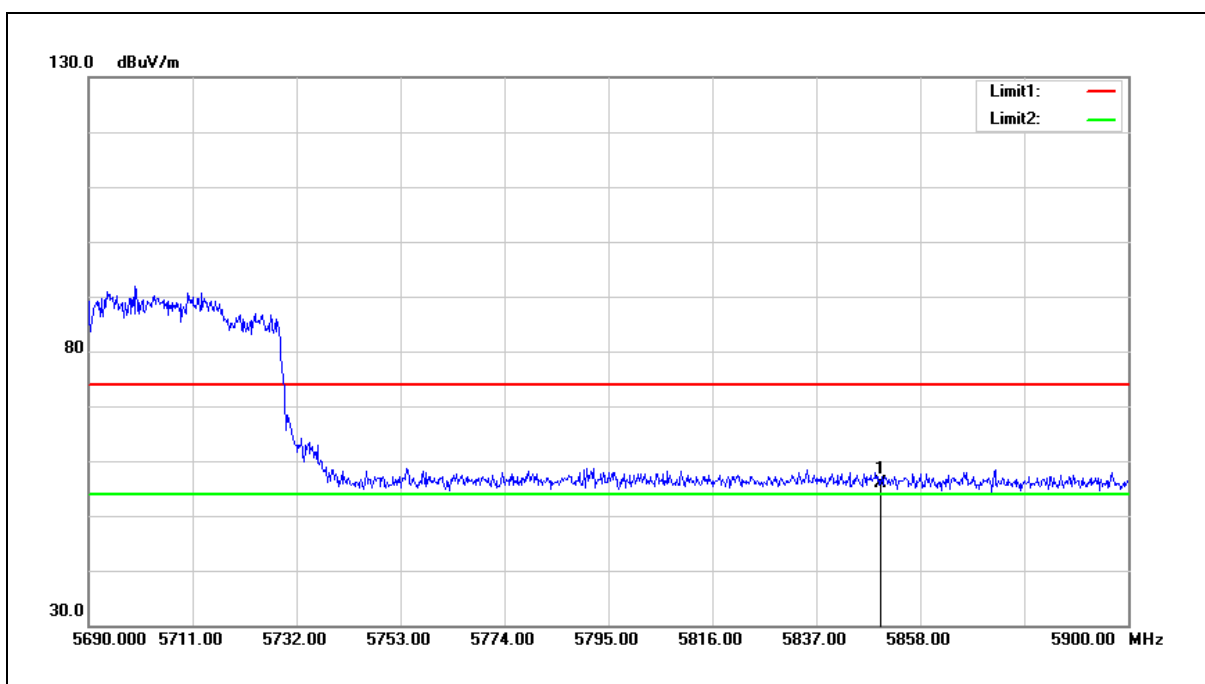

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.33	7.59	55.92	68.20	-12.28	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5690 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

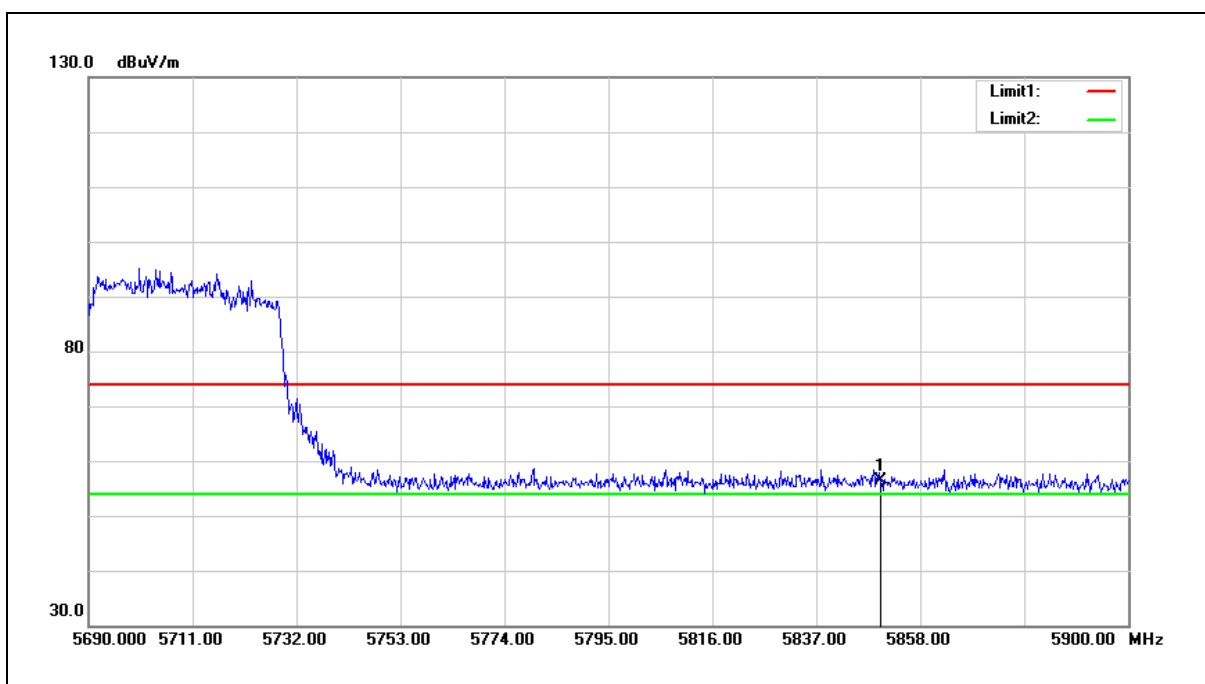


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.72	7.59	56.31	68.20	-11.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

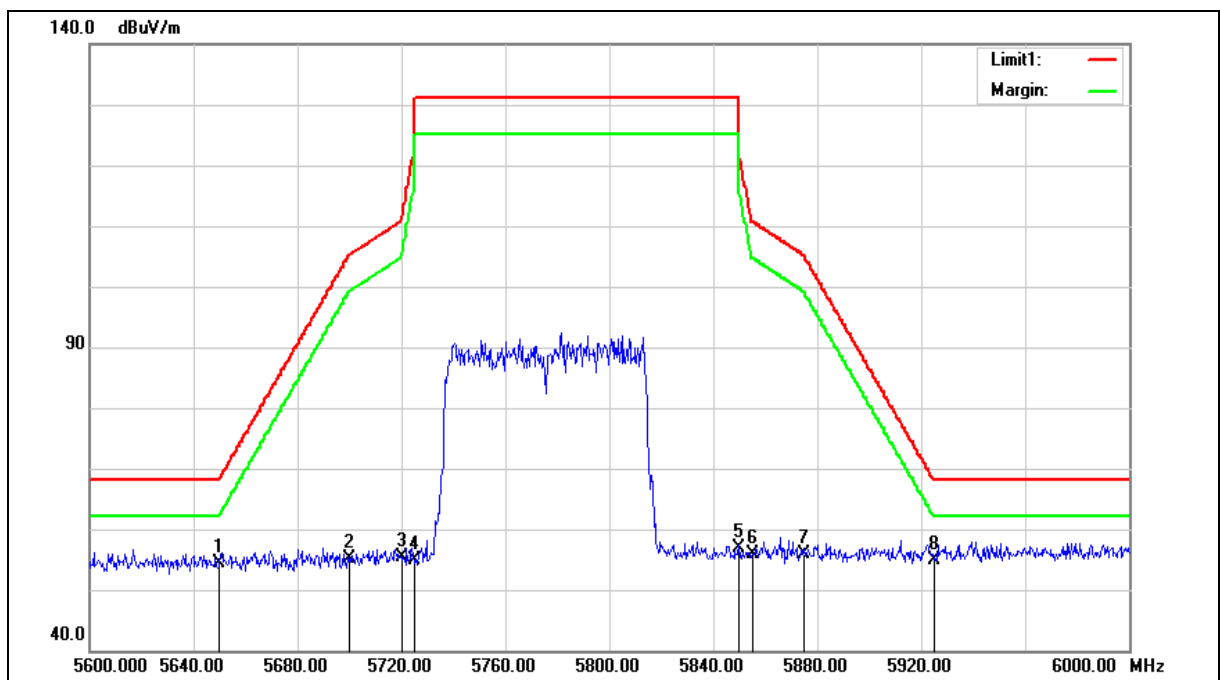

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.10	7.17	54.27	68.20	-13.93	peak
2	5700.000	47.89	7.27	55.16	105.20	-50.04	peak
3	5720.000	48.14	7.31	55.45	110.80	-55.35	peak
4	5725.000	47.62	7.32	54.94	122.20	-67.26	peak
5	5850.000	49.41	7.59	57.00	122.20	-65.20	peak
6	5855.000	48.34	7.60	55.94	110.80	-54.86	peak
7	5875.000	48.16	7.64	55.80	105.20	-49.40	peak
8	5925.000	47.24	7.75	54.99	68.20	-13.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

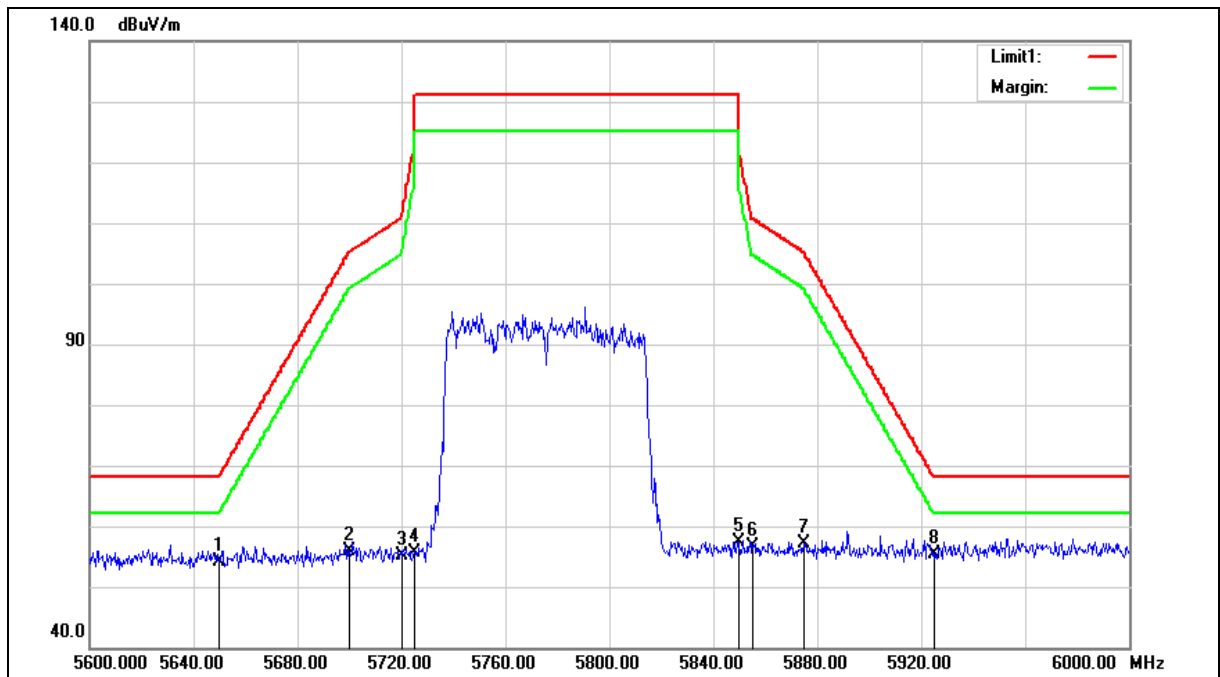

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.93	7.17	54.10	68.20	-14.10	peak
2	5700.000	48.58	7.27	55.85	105.20	-49.35	peak
3	5720.000	47.85	7.31	55.16	110.80	-55.64	peak
4	5725.000	48.24	7.32	55.56	122.20	-66.64	peak
5	5850.000	49.82	7.59	57.41	122.20	-64.79	peak
6	5855.000	48.95	7.60	56.55	110.80	-54.25	peak
7	5875.000	49.49	7.64	57.13	105.20	-48.07	peak
8	5925.000	47.53	7.75	55.28	68.20	-12.92	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

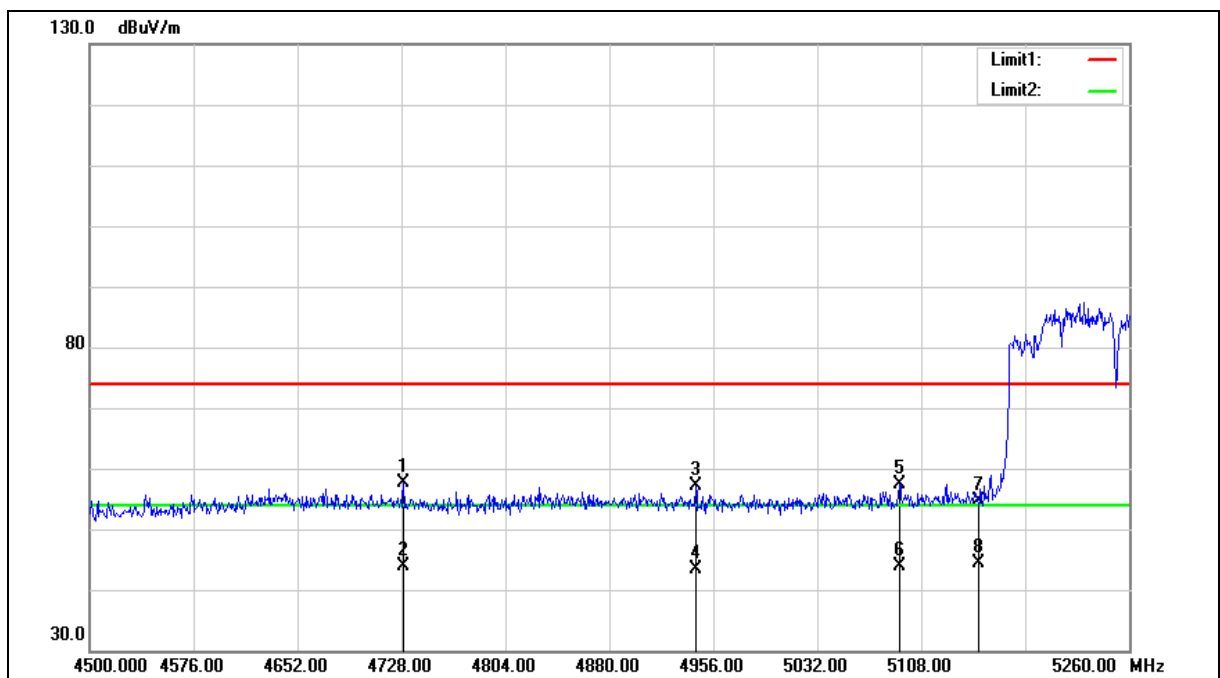



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4729.520	52.46	5.18	57.64	74.00	-16.36	peak
2	4729.520	38.61	5.18	43.79	54.00	-10.21	AVG
3	4943.080	51.60	5.62	57.22	74.00	-16.78	peak
4	4943.080	37.88	5.62	43.50	54.00	-10.50	AVG
5	5092.040	51.34	5.95	57.29	74.00	-16.71	peak
6	5092.040	38.05	5.95	44.00	54.00	-10.00	AVG
7	5150.000	48.57	6.07	54.64	74.00	-19.36	peak
8	5150.000	38.34	6.07	44.41	54.00	-9.59	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

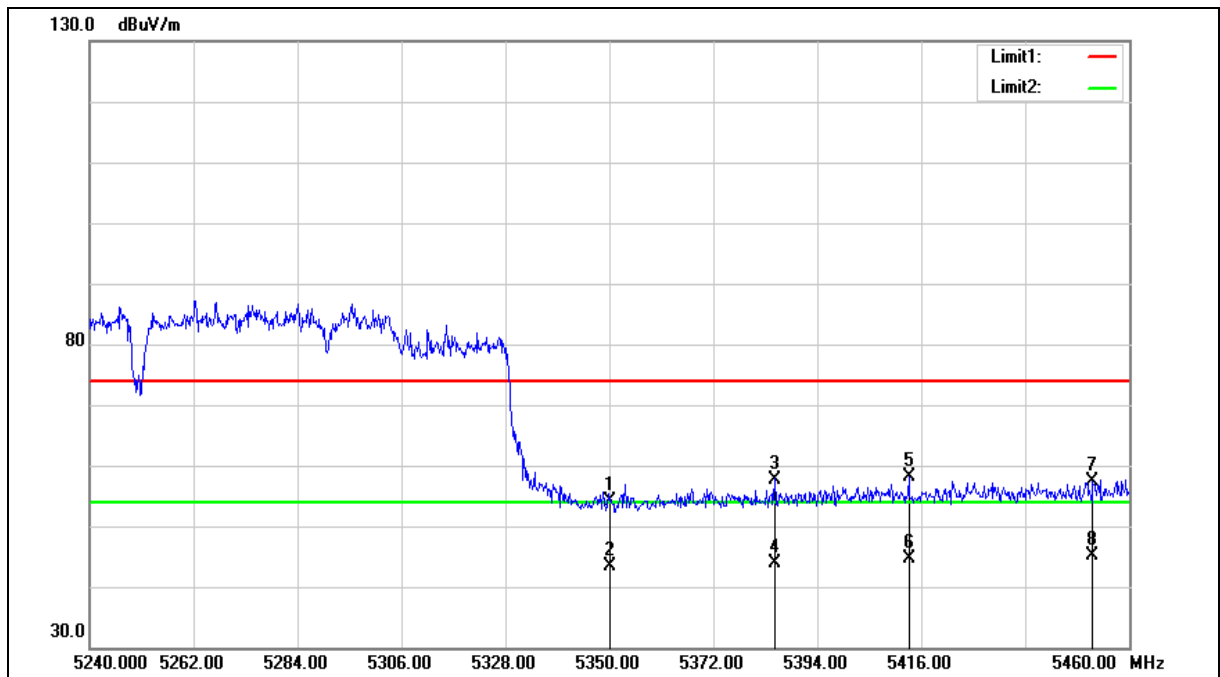

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.70	6.52	54.22	74.00	-19.78	peak
2	5350.000	36.81	6.52	43.33	54.00	-10.67	AVG
3	5384.980	51.16	6.59	57.75	74.00	-16.25	peak
4	5384.980	37.32	6.59	43.91	54.00	-10.09	AVG
5	5413.360	51.39	6.66	58.05	74.00	-15.95	peak
6	5413.360	37.91	6.66	44.57	54.00	-9.43	AVG
7	5452.300	50.62	6.75	57.37	74.00	-16.63	peak
8	5452.300	38.29	6.75	45.04	54.00	-8.96	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

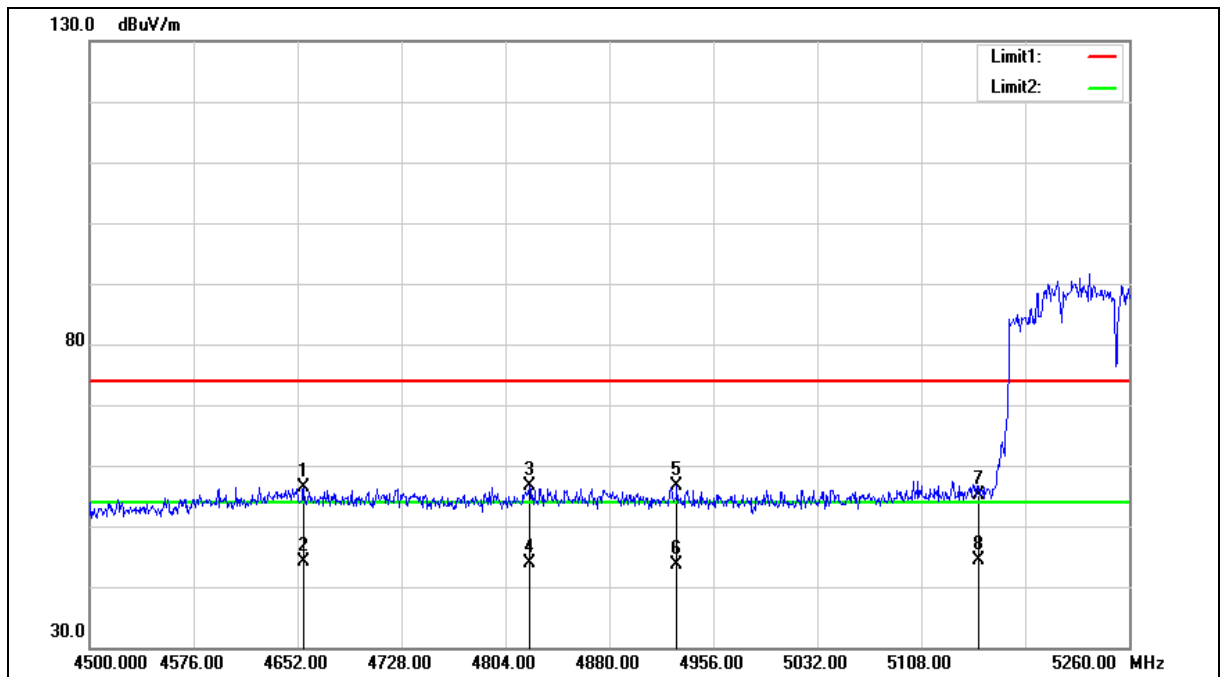



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4656.560	51.44	5.02	56.46	74.00	-17.54	peak
2	4656.560	39.00	5.02	44.02	54.00	-9.98	AVG
3	4821.480	51.17	5.36	56.53	74.00	-17.47	peak
4	4821.480	38.58	5.36	43.94	54.00	-10.06	AVG
5	4929.400	50.97	5.59	56.56	74.00	-17.44	peak
6	4929.400	38.00	5.59	43.59	54.00	-10.41	AVG
7	5150.000	48.97	6.07	55.04	74.00	-18.96	peak
8	5150.000	38.35	6.07	44.42	54.00	-9.58	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

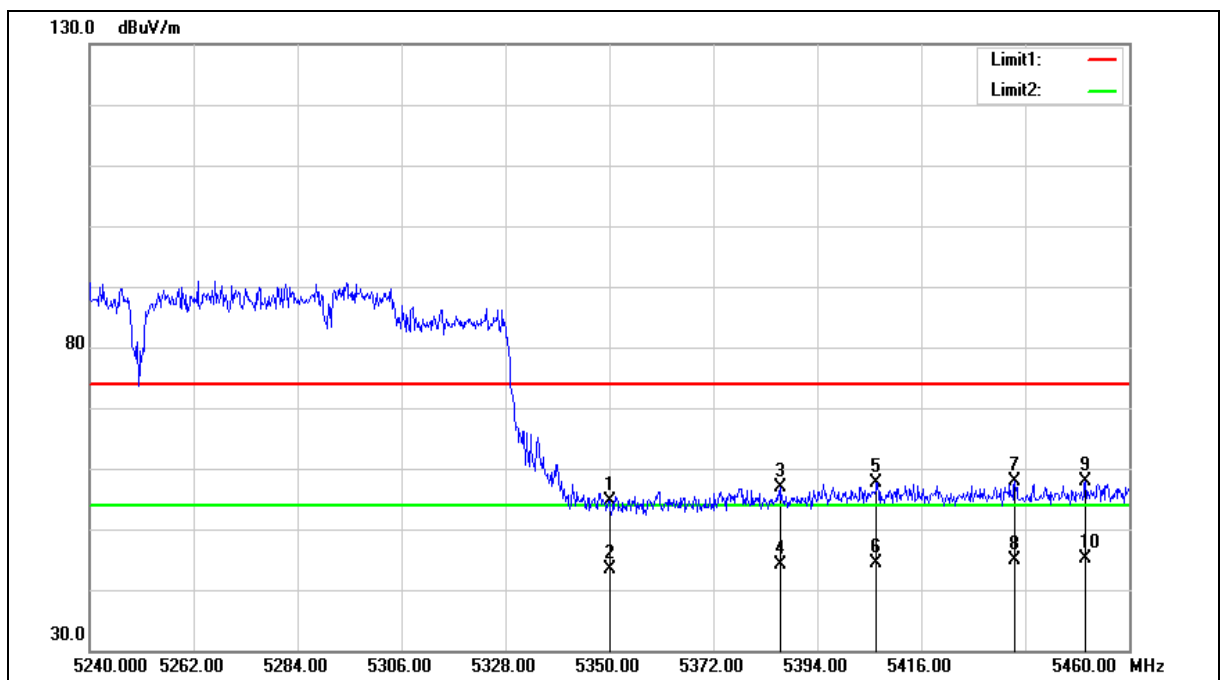

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.22	6.52	54.74	74.00	-19.26	peak
2	5350.000	36.76	6.52	43.28	54.00	-10.72	AVG
3	5386.300	50.32	6.60	56.92	74.00	-17.08	peak
4	5386.300	37.49	6.60	44.09	54.00	-9.91	AVG
5	5406.540	51.04	6.64	57.68	74.00	-16.32	peak
6	5406.540	37.82	6.64	44.46	54.00	-9.54	AVG
7	5435.800	51.08	6.71	57.79	74.00	-16.21	peak
8	5435.800	38.17	6.71	44.88	54.00	-9.12	AVG
9	5450.760	51.07	6.75	57.82	74.00	-16.18	peak
10	5450.760	38.34	6.75	45.09	54.00	-8.91	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

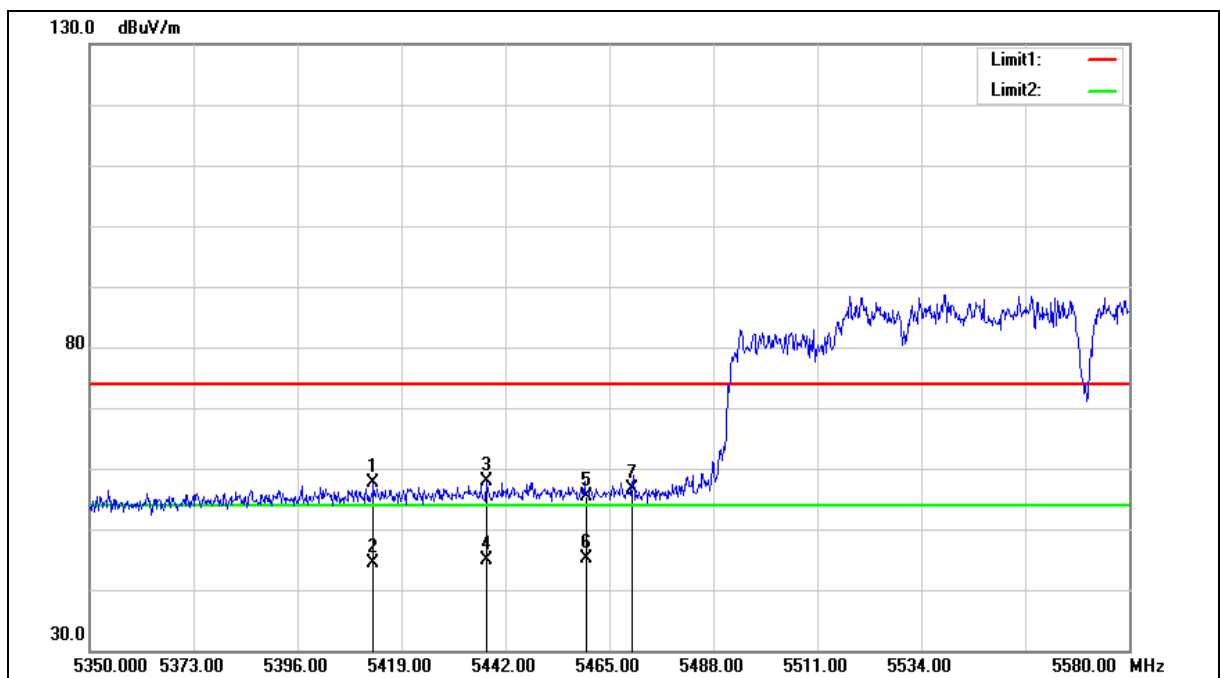

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5412.790	50.87	6.66	57.53	74.00	-16.47	peak
2	5412.790	37.83	6.66	44.49	54.00	-9.51	AVG
3	5437.860	51.08	6.73	57.81	74.00	-16.19	peak
4	5437.860	38.15	6.73	44.88	54.00	-9.12	AVG
5	5460.000	48.61	6.77	55.38	74.00	-18.62	peak
6	5460.000	38.30	6.77	45.07	54.00	-8.93	AVG
7	5470.000	49.95	6.80	56.75	68.20	-11.45	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

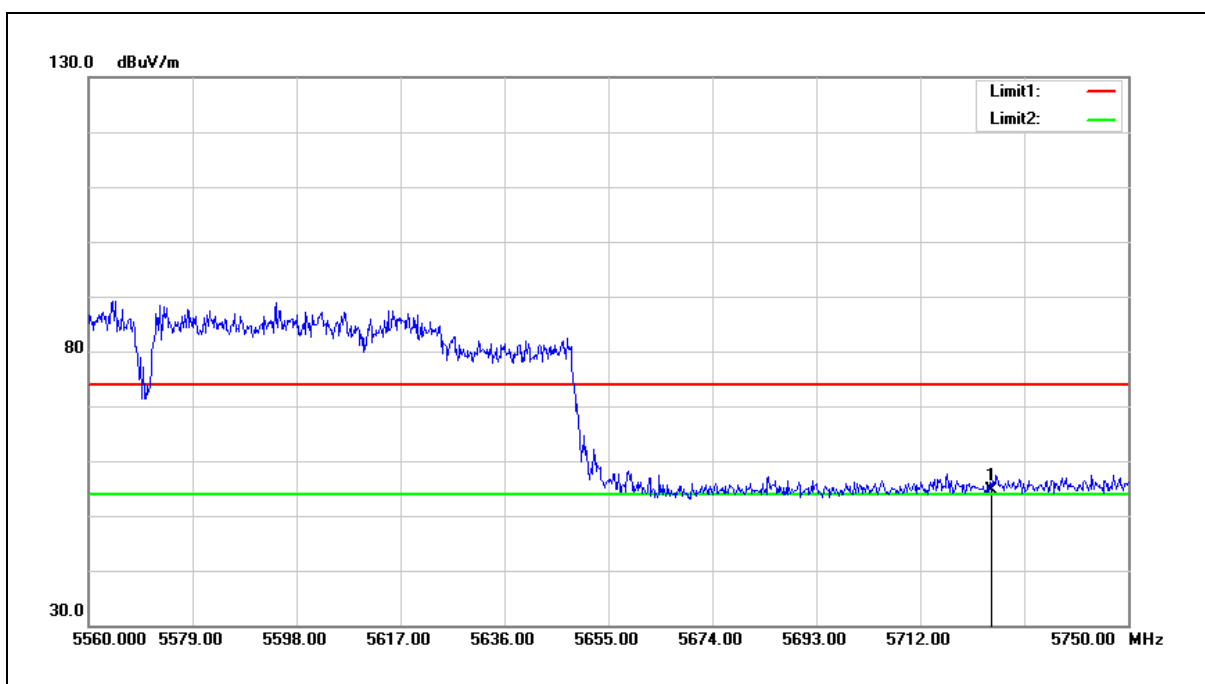

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	47.26	7.32	54.58	68.20	-13.62	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

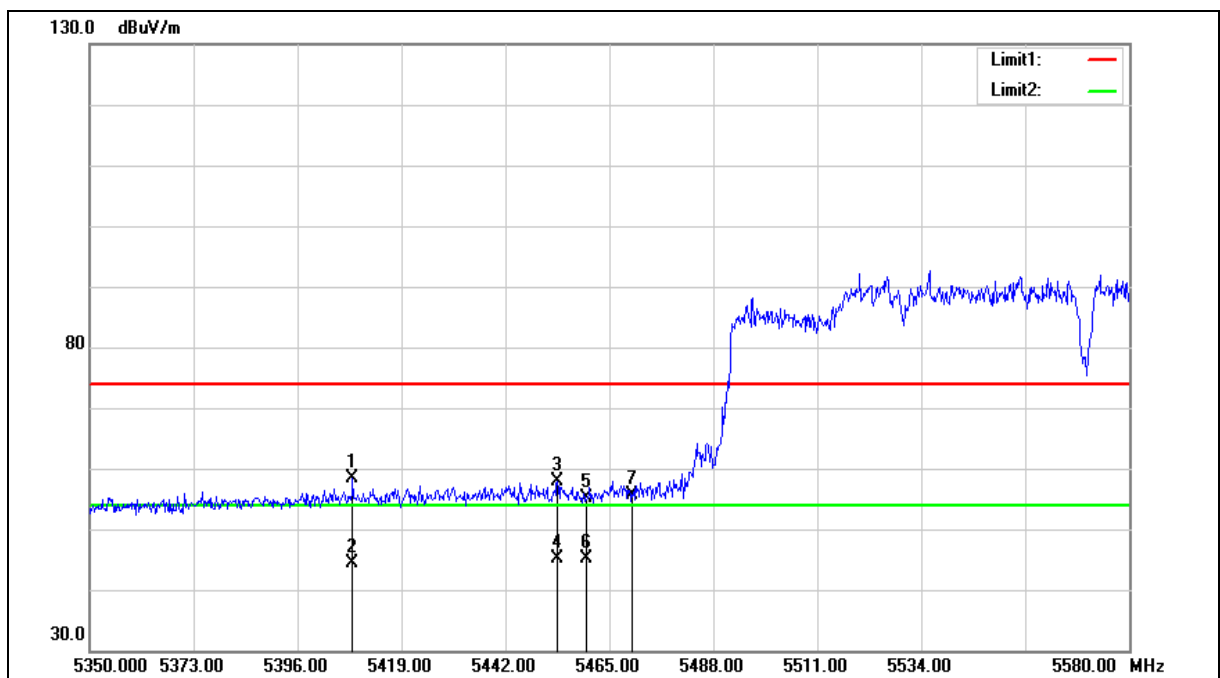



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5408.190	51.84	6.64	58.48	74.00	-15.52	peak
2	5408.190	37.85	6.64	44.49	54.00	-9.51	AVG
3	5453.500	51.16	6.76	57.92	74.00	-16.08	peak
4	5453.500	38.35	6.76	45.11	54.00	-8.89	AVG
5	5460.000	48.37	6.77	55.14	74.00	-18.86	peak
6	5460.000	38.35	6.77	45.12	54.00	-8.88	AVG
7	5470.000	48.81	6.80	55.61	68.20	-12.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

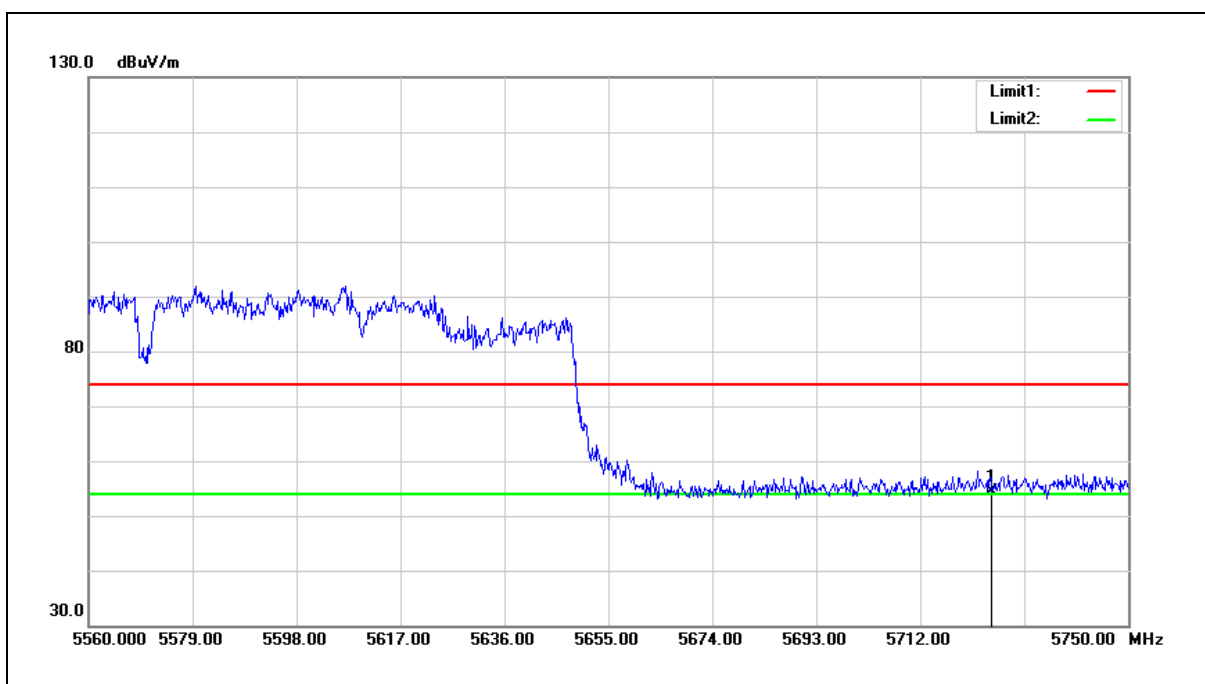

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	47.12	7.32	54.44	68.20	-13.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

5.3. Maximum Conducted Output Power Measurement

SISO

Test Mode		Mode 2: IEEE 802.11a Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5180.0	6 M	10.53	0.011	10.54	0.011	≤ 24.00
5200.0		10.52	0.011	10.51	0.011	
5220.0		10.53	0.011	10.46	0.011	
5240.0		10.48	0.011	10.48	0.011	
5260.0		10.80	0.012	10.64	0.012	≤ 24.00
5280.0		10.83	0.012	10.75	0.012	
5300.0		10.72	0.012	10.62	0.012	
5320.0		10.52	0.011	10.52	0.011	
5500.0		10.54	0.011	10.48	0.011	≤ 24.00
5520.0		10.61	0.012	10.38	0.011	
5540.0		10.53	0.011	10.31	0.011	
5560.0		10.46	0.011	10.42	0.011	
5580.0		10.71	0.012	10.52	0.011	
5600.0		10.61	0.012	10.67	0.012	
5620.0		10.53	0.011	10.41	0.011	
5640.0		10.59	0.011	10.29	0.011	
5660.0		10.61	0.012	10.21	0.010	
5680.0		10.51	0.011	10.34	0.011	
5700.0		10.39	0.011	10.41	0.011	
5720.0		10.56	0.011	10.36	0.011	
5745.0		10.92	0.012	10.91	0.012	≤ 30.00
5765.0		10.83	0.012	10.81	0.012	
5785.0		10.81	0.012	10.89	0.012	
5805.0		10.86	0.012	10.81	0.012	
5825.0		10.95	0.012	10.67	0.012	

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 3: IEEE 802.11n 5GHz 20 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5180.0	6.5 M	10.43	0.011	10.53	0.011	≤ 24.00
5200.0		10.63	0.012	10.67	0.012	
5220.0		10.58	0.011	10.48	0.011	
5240.0		10.52	0.011	10.51	0.011	
5260.0		10.70	0.012	10.69	0.012	≤ 24.00
5280.0		10.67	0.012	10.79	0.012	
5300.0		10.63	0.012	10.49	0.011	
5320.0		10.48	0.011	10.46	0.011	
5500.0		10.41	0.011	10.47	0.011	≤ 24.00
5520.0		10.52	0.011	10.28	0.011	
5540.0		10.67	0.012	10.17	0.010	
5560.0		10.43	0.011	10.36	0.011	
5580.0		10.69	0.012	10.32	0.011	
5600.0		10.62	0.012	10.58	0.011	
5620.0		10.71	0.012	10.28	0.011	
5640.0		10.67	0.012	10.24	0.011	
5660.0		10.65	0.012	10.29	0.011	
5680.0		10.71	0.012	10.25	0.011	
5700.0		10.34	0.011	10.46	0.011	
5720.0		10.69	0.012	10.37	0.011	
5745.0		10.71	0.012	10.84	0.012	≤ 30.00
5765.0		10.68	0.012	10.75	0.012	
5785.0		10.56	0.011	10.91	0.012	
5805.0		10.61	0.012	10.71	0.012	
5825.0		10.69	0.012	10.67	0.012	

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 4: IEEE 802.11n 5GHz 40 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5190.0	13.5 M	10.56	0.011	10.46	0.011	≤ 24.00
5230.0		10.38	0.011	10.58	0.011	
5270.0		10.42	0.011	10.88	0.012	≤ 24.00
5310.0		10.43	0.011	10.57	0.011	
5510.0		10.53	0.011	10.41	0.011	≤ 24.00
5550.0		10.56	0.011	10.52	0.011	
5590.0		10.62	0.012	10.41	0.011	
5630.0		10.56	0.011	10.52	0.011	
5670.0		10.57	0.011	10.56	0.011	
5710.0		10.41	0.011	10.31	0.011	
5755.0		10.75	0.012	10.70	0.012	≤ 30.00
5795.0		10.77	0.012	10.71	0.012	

Test Mode		Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5210.0	29.3 M	10.44	0.011	10.57	0.011	≤ 24.00
5290.0		10.11	0.010	10.61	0.012	≤ 24.00
5530.0		10.19	0.010	10.43	0.011	≤ 24.00
5610.0		10.21	0.010	10.42	0.011	
5690.0		10.38	0.011	10.54	0.011	
5775.0		10.17	0.010	10.63	0.012	≤ 30.00

Test Mode		Mode 6: IEEE 802.11ac 160 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5250.0	65 M	10.57	0.011	10.52	0.011	≤ 24.00
5570.0		10.43	0.011	10.51	0.011	≤ 24.00

Note: The relevant measured result has the offset with cable loss already.

MIMO

Test Mode		Mode 3: IEEE 802.11n 5GHz 20 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180.0	13 M	10.55	0.011	10.50	0.011	13.54	0.023	≤ 24.00
5200.0		10.54	0.011	10.52	0.011	13.54	0.023	
5220.0		10.56	0.011	10.52	0.011	13.55	0.023	
5240.0		10.48	0.011	10.56	0.011	13.53	0.023	
5260.0		10.63	0.012	10.42	0.011	13.54	0.023	≤ 24.00
5280.0		10.48	0.011	10.37	0.011	13.44	0.022	
5300.0		10.52	0.011	10.42	0.011	13.48	0.022	
5320.0		10.63	0.012	10.52	0.011	13.59	0.023	
5500.0		10.52	0.011	10.58	0.011	13.56	0.023	≤ 24.00
5520.0		10.61	0.012	10.42	0.011	13.53	0.023	
5540.0		10.69	0.012	10.48	0.011	13.60	0.023	
5560.0		10.38	0.011	10.42	0.011	13.41	0.022	
5580.0		10.52	0.011	10.51	0.011	13.53	0.023	
5600.0		10.64	0.012	10.62	0.012	13.64	0.023	
5620.0		10.59	0.011	10.41	0.011	13.51	0.022	
5640.0		10.55	0.011	10.37	0.011	13.47	0.022	
5660.0		10.61	0.012	10.39	0.011	13.51	0.022	
5680.0		10.52	0.011	10.49	0.011	13.52	0.022	
5700.0		10.42	0.011	10.44	0.011	13.44	0.022	
5720.0		10.40	0.011	10.52	0.011	13.47	0.022	
5745.0		10.67	0.012	10.71	0.012	13.70	0.023	≤ 30.00
5765.0		10.62	0.012	10.82	0.012	13.73	0.024	
5785.0		10.59	0.011	10.76	0.012	13.69	0.023	
5805.0		10.60	0.011	10.73	0.012	13.68	0.023	
5825.0		10.65	0.012	10.62	0.012	13.65	0.023	

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 4: IEEE 802.11n 5GHz 40 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5190.0	27 M	10.51	0.011	10.51	0.011	13.52	0.022	≤ 24.00
5230.0		10.58	0.011	10.48	0.011	13.54	0.023	
5270.0		10.72	0.012	10.68	0.012	13.71	0.023	≤ 24.00
5310.0		10.58	0.011	10.52	0.011	13.56	0.023	
5510.0		10.53	0.011	10.62	0.012	13.59	0.023	≤ 24.00
5550.0		10.46	0.011	10.43	0.011	13.46	0.022	
5590.0		10.43	0.011	10.52	0.011	13.49	0.022	
5630.0		10.38	0.011	10.51	0.011	13.46	0.022	
5670.0		10.43	0.011	10.51	0.011	13.48	0.022	
5710.0		10.35	0.011	10.41	0.011	13.39	0.022	
5755.0		10.45	0.011	10.68	0.012	13.58	0.023	≤ 30.00
5795.0		10.39	0.011	10.81	0.012	13.62	0.023	

Test Mode		Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5210.0	58.6 M	10.55	0.011	10.48	0.011	13.53	0.023	≤ 24.00
5290.0		10.46	0.011	10.52	0.011	13.50	0.022	≤ 24.00
5530.0		10.56	0.011	10.51	0.011	13.55	0.023	≤ 24.00
5610.0		10.57	0.011	10.42	0.011	13.51	0.022	
5690.0		10.38	0.011	10.34	0.011	13.37	0.022	
5775.0		10.44	0.011	10.78	0.012	13.62	0.023	≤ 30.00

Test Mode		Mode 6: IEEE 802.11ac 160 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5250.0	130 M	10.57	0.011	10.52	0.011	13.56	0.023	≤ 24.00
5570.0		10.56	0.011	10.57	0.011	13.58	0.023	≤ 24.00

Note: The relevant measured result has the offset with cable loss already.



5.4. 26 dB RF Bandwidth Measurement

C2PC, No need for verification.

5.5. 6 dB RF Bandwidth Measurement

C2PC, No need for verification.

5.6. Maximum Power Spectral Density Measurement

C2PC, No need for verification.

5.7. Frequency Stability Measurement

C2PC, No need for verification.

----END----