

MEASUREMENT REPORT
of
ASUS MyPal A626 Pocket PC

Applicant : ASUSTek Computer Inc.
EUT : ASUS MyPal A626 Pocket PC
Model No. : A626
FCC ID : MSQA626
Report No. : A5415060996

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 **FAX : 886-2-26934440**

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by *Training Research Co., Ltd.*, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

Applicant : ASUSTek Computer Inc.
Applicant address : 4Fl., No. 150, Li-Te Rd., Peitou, Taipei, Taiwan
Product Name : ASUS MyPal A626 Pocket PC
Model Name : A626
FCC ID : MSQA626
Report No. : A5415060996
Test Date : November 22, 2006

Prepared by:


Jack Tsai

Approved by:


Frank Tsai**Conditions of issue :**

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**



NVLAP LAB CODE 200174-0

Report No.: A5415060996, FCC Part 15 for DTS

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Federal Communications Commission
Declaration of Conformity
(DoC)

For the Following Equipment:

Product name : ASUS MyPal A626 Pocket PC

Model name : A626

Trade name : ASUS

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : A5415060996

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,
including interference that may cause undesired operation

<i>Manufacturer</i>	<i>USA local representative</i>
Company name: ASUSTeK Computer Inc.	To be determined
Computer address: 4/F, 150, Li-Te Rd., Peitou, Taipei, Taiwan	
ZIP / Postal code: 112	
Contact person: Lawrence Yu	
Title: Manager	
Internet e-mail address: Lawrence_yu@asus.com.tw	
Tel / Fax: 886-2-28943447 / 886-2-28950113	

Report No.: A5415060996, FCC Part 15 for DTS

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Tables of Contents

I. GENERAL	6
1.1 Introduction	6
1.2 Description of EUT	6
1.3 Test method	7
1.4 Description of Support Equipment	8
1.5 Configuration of System Under Test	10
1.6 Verify the Frequency and Channel	13
1.7 Test Procedure	14
1.8 Location of the Test Site	14
1.9 General Test Condition	14
II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators	15
III. Section 15.203 : Antenna Requirement	16
IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	17
4.1 Test Condition & Setup	17
4.2 List of Test Instruments	18
4.3 Test Result of Conducted Emissions	19
USB LINK	19
Adapter (a) model: P005WA05OW	20
Adapter (b) model: JSP050090UU	39
V. Section 15.247(a) : Technical Description of the EUT	58
VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System	59
6.1 Test Condition & Setup	59
6.2 Test Instruments Configuration	59
6.3 List of Test Instruments	59
6.4 Test Result of Bandwidth	59
Channel 01	60
Channel 06	61
Channel 11	62

VII. Section 15.247(b) : Power Output	63
7.1 Test Condition & Setup	63
7.2 List of Test Instruments	63
7.3 Test Result	63
VIII. Section 15.247(c) : Spurious Emissions (Radiated)	64
8.1 Test Condition & Setup	64
8.2 List of Test Instruments	66
8.3 Test Result of Spurious Radiated Emissions	67
USB LINK	67
RX mode	68
IEEE 802.11b for WLAN	69
IEEE 802.11g for WLAN	75
WLAN (IEEE802.11b) + BT (Normal mode)	81
WLAN (IEEE802.11g) + BT (Normal mode)	87
WLAN (IEEE802.11b) + BT (E.D.R. mode)	93
WLAN (IEEE802.11g) + BT (E.D.R. mode)	99
8.4 Test Result of Bandedge	105
IEEE 802.11b for WLAN	106
IEEE 802.11g for WLAN	108
WLAN (IEEE802.11b) + BT (Normal mode)	110
WLAN (IEEE802.11g) + BT (Normal mode)	112
WLAN (IEEE802.11b) + BT (E.D.R. mode)	114
WLAN (IEEE802.11g) + BT (E.D.R. mode)	116
IX. Section 15.247(d) : Power Spectral Density	118
9.1 Test Condition & Setup	118
9.2 Test Instruments Configuration	118
9.3 List of Test Instruments	118
9.4 Test Result of Power Spectral Density	119
Channel 01	120
Channel 06	121
Channel 11	122

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID	:	MSQA626
Product Name	:	ASUS MyPal A626 Pocket PC
Model Name	:	A626
Frequency Range	:	2412MHz to 2462MHz
Support Channel	:	11 Channels
Channel Spacing	:	5 MHz
Modulation Skill	:	DBPSK / DQPSK / CCK/OFDM
Power Type	:	(1) Battery-powered by the client's device, or (2) Power adapter (a) Mfg.: PIE Model: P005WA05OW I/P: 100-240VAC, 50-60Hz, 0.15A ; O/P: 5VDC, 1.0A 154cm length, shielded, without ferrite core (b) Mfg.: TPT Model: JSP050090UU I/P: 100-240VAC, 50-60Hz, 0.3A ; O/P: 5VDC, 0.9A, 4.5W 154cm length, shielded, without ferrite core (3) Car charger by vehicle battery 180cm length, non-shielded, without ferrite core
Data Cable	:	USB cable: (USB to mini USB) 69cm length, shielded, ferrite core

1.3 Test method

A) PDA connected to PC by USB cable:

- (1) The POWER jack (Mini USB) of PDA is connected with the AC power source via a power adaptor.
- (2) The Mini-USB jack of PDA is connected with the USB cable to USB port of PC.
- (3) The HEADPHONE jack of PDA is connected with the earphone.

B) PDA connected to Vehicle Battery by Car charger:

- (1) The POWER jack (Mini USB) of PDA is connected with Vehicle Battery via a Car charger.
- (2) The HEADPHONE jack of PDA is connected with the earphone.

C) PDA with AC Adaptor (EUT Stand on three orthogonal planes respectively, record worst-case in report):

- (1) The POWER jack (Mini USB) of PDA is connected with the AC power source via a power adaptor.
- (2) The HEADPHONE jack of PDA is connected with the earphone.

Notes: A, B and C modes were pre-tested, the C mode worst case one, was chosen for final test.

:

Test setting:

:

- (1) Using software provided by the applicant to linking EUT. The software is operated under the Windows to control the EUT in the unintentional and intentional test.
- (2) Set different channel (CH1/CH6/CH11, co-location for Bluetooth including normal and E.D.R. mode) being tested and repeat the procedures above.
 - (a) Radiated for intentional test:
making EUT to the mode of continuous TX or RX
 - (b) Conducted and radiated for unintentional test:
making EUT to the linking mode with another PDA.

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : IBM 8434

Model No : IVG

Serial No. : 99CCZG9

FCC ID : Doc Approved

BSMI : R33026

Power type : 100 ~ 127VAC/200 ~ 240VAC, 6A/3A, 50 ~ 60Hz, Switching

Power cord : Non-shielded, 1.8m long, Plastic hood, No ferrite core

Flat Panel Monitor : IBM

Model No : 6636-AB1

Serial No : 23T5592

FCC ID : Doc Approved

BSMI : R33037

Data cable : Shielded, 1.170 m length, Plastic hood, two ferrite cores

Power type : 100 ~ 240VAC, 1.5A, 50/60Hz, Switching

Power cord : Non-shielded, 1.80 m length, Plastic hood, without ferrite core

Keyboard : HP

Model No. : 5181

Serial No. : BE21700405

FCC ID : Doc Approved

檢磁 : 3892C981

Power type : By PC

Data cable : Shielded, 1.70m length, with ferrite core

Mouse : HP

Model No. : M-UR89

Serial No. : LZS21750238

FCC ID : Doc Approved

檢磁 : 3892D767

Power type : By PC

Power cord : Shielded, 1.80m length, No ferrite core

Fax/Modem : **Aceex**
Model No. : DM-1414
Serial No. : 9010582
FCC ID : IFAXDM1414
Power type : 110 VAC / 50 ~ 60 Hz, Switching
Power Cord : Non-shielded, 1.90m long, Plastic hoods, and no ferrite bead
Data Cable : RS-232→Shielded, 1.30m long, Metal hoods , No bead
RJ-11Cx2→Non-shielded, 7' long, Plastic hoods, No bead


Printer : **HP**
Model No. : C6464A
Serial No. : TH16LEB5PK
FCC ID : N/A, DoC Approved
BSMI : 3892H381
Power type : Switching adaptor
Power cord : Non-shielded, 173cm long, No ferrite core
(between adaptor and AC source)
Non-shielded, 180cm long, with ferrite core
(between printer and adaptor)
Data cable : Shielded, 1.70m long, No ferrite core

Earphones : **PHILIPS**
Model No : SBC-HE033
Serial No. : 670904
Power type : By EUT
Data Cable : Non-shielded, 1.05 m length, No ferrite core

CF card : **NIKON**
Model No. : EC-16CF
Serial No. : 4027012
FCC ID : N/A (CE approval)
Power type : By PDA

1.5 Configuration of System Under Test

1.5.1 Conducted and Radiated of Unintentional

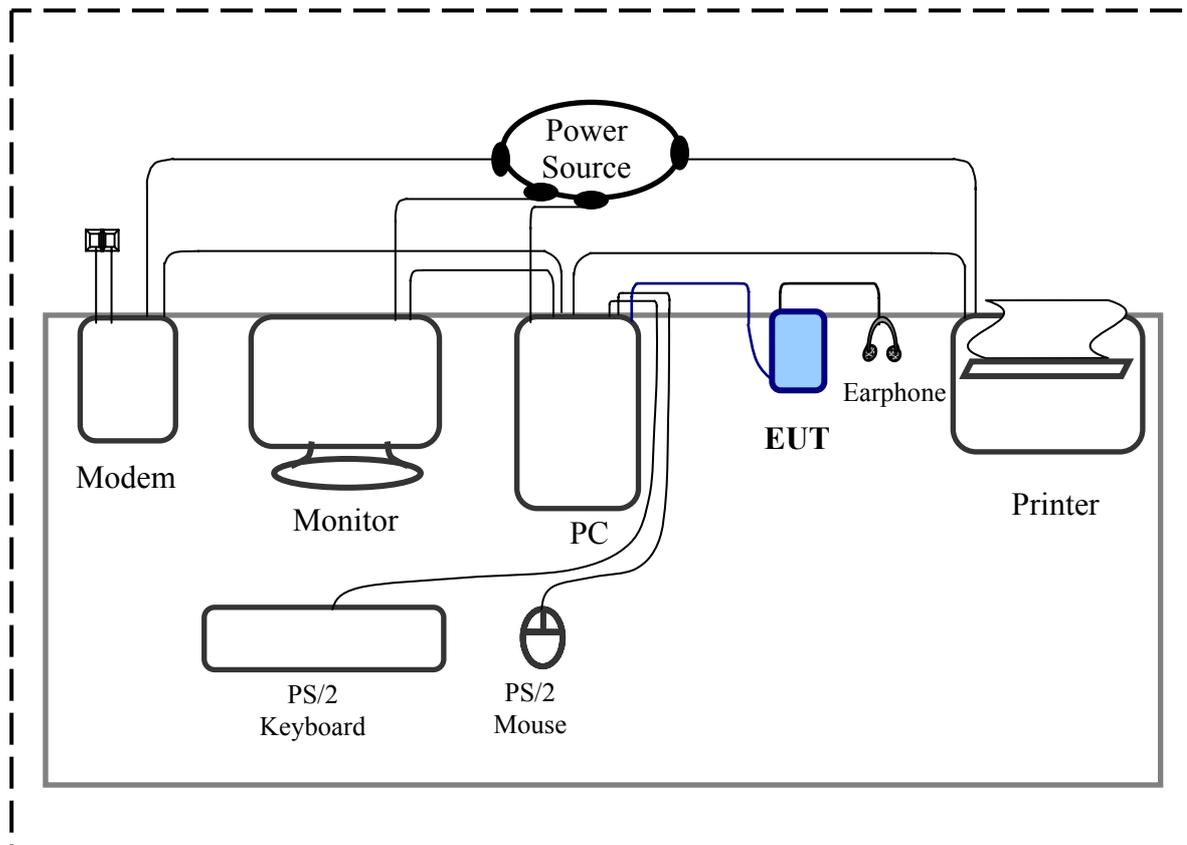

Connections of Equipment

PC:

- *VGA Port --- a monitor
- *Serial A-Port --- an external modem
- *Parallel Port --- a printer
- *PS/2 Ports --- a PS/2 keyboard and PS/2 mouse
- *USB B-Port --- EUT

EUT:


Earphone:

- *Data cable x 1 --- 105cm length, non-shielded, no ferrite core


CF socket:

- *CF Card

1.5.2 Radiated of Unintentional

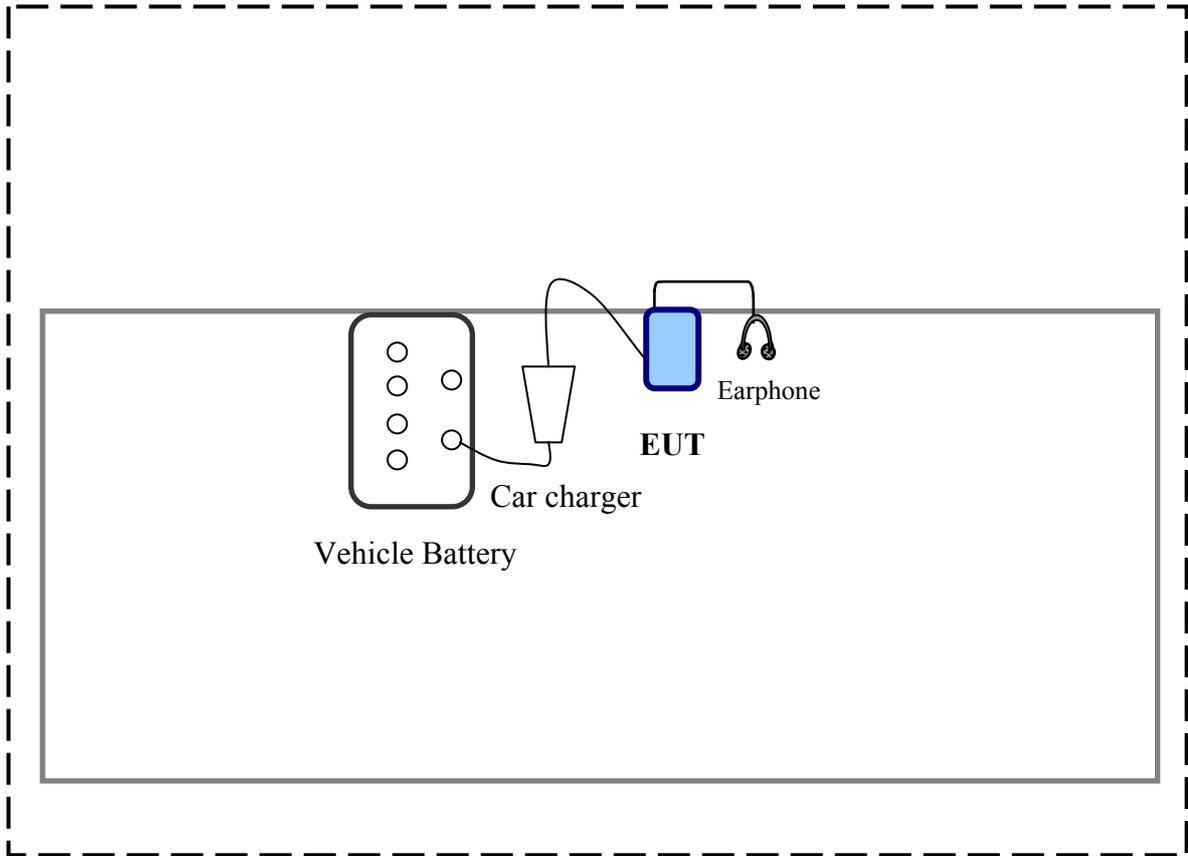

1.5.3 Conducted and Radiated of Intentional

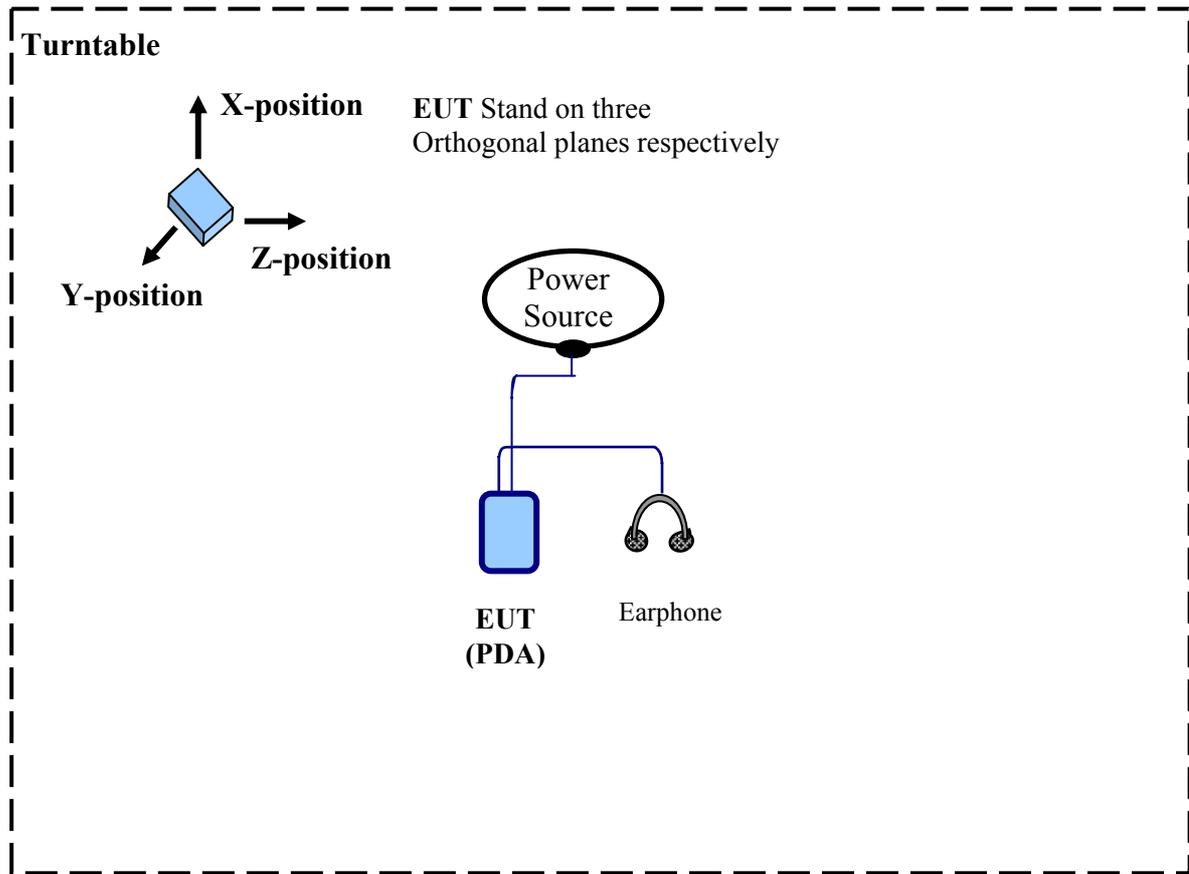

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a USB interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Section 15.107 (Conducted limits) and Section 15.109 (Radiated emission limits) is same as Section 15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT can be equipped with undetachable antenna. The internal antenna is affixed to the EUT using a unique connector, there is no external antenna or external connector employed. The antenna requirement stated in Section 15.203 is inapplicable to this EUT.

The custom antenna specification of list as below:

Manufacturer	:	WAVEFAR TECHNOLOGY CO., LTD.
Model	:	WTE06011
Antenna Type	:	Chip Antenna Module
Antenna Gain	:	0.5 dBi (Max.)

IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3.

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

4.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	12/01/06
RF Filter Section	85460A	HP	3448A00217	12/01/06
LISN (EUT)	LISN-01	TRC	99-05	12/10/06
LISN (Support E.)	LISN-01	TRC	9912-03, 04	11/26/06
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	05/20/07
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	05/20/07
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	05/20/07
Coaxial Cable (2 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	05/20/07
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	05/20/07
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	05/20/07
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	05/20/07
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	05/20/07

4.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test Mode: (A) mode for USB LINK

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBµV)</i>	<i>QP (dBµV)</i>	<i>Average (dBµV)</i>	<i>QP-limit (dBµV)</i>	<i>AVG-limit (dBµV)</i>	<i>Margin (dB)</i>
Line 1	182.000	48.95	---	---	65.09	55.09	-6.14
	240.000	34.74	---	---	63.43	53.43	-18.69
	370.000	35.72	---	---	59.71	49.71	-13.99
	610.000	28.53	---	---	56.00	46.00	-17.47
	911.000	27.57	---	---	56.00	46.00	-18.43
	2029.000	21.99	---	---	56.00	46.00	-24.01
	5310.000	24.55	---	---	60.00	50.00	-25.45
	8970.000	36.28	---	---	60.00	50.00	-13.72
	13160.000	39.72	---	---	60.00	50.00	-10.28
	27600.000	31.12	---	---	60.00	50.00	-18.88
Line 2	183.000	51.24	---	---	65.06	55.06	-3.82
	245.000	38.34	---	---	63.29	53.29	-14.95
	366.000	36.56	---	---	59.83	49.83	-13.27
	674.000	29.16	---	---	56.00	46.00	-16.84
	2029.000	21.39	---	---	56.00	46.00	-24.61
	5130.000	24.83	---	---	60.00	50.00	-25.17
	9240.000	35.74	---	---	60.00	50.00	-14.26
	12680.000	41.01	---	---	60.00	50.00	-8.99
	18410.000	33.10	---	---	60.00	50.00	-16.90
	27600.000	29.67	---	---	60.00	50.00	-20.33

NOTE:

- (1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit

Adapter (a) model: P005WA050W

Test Mode: (C) mode for RX

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	182.000	33.32	---	---	65.09	55.09	-21.77
	243.000	32.20	---	---	63.34	53.34	-21.14
	504.000	32.42	---	---	56.00	46.00	-13.58
	563.000	31.72	---	---	56.00	46.00	-14.28
	1398.000	25.88	---	---	56.00	46.00	-20.12
	6080.000	27.02	---	---	60.00	50.00	-22.98
	10480.000	33.63	---	---	60.00	50.00	-16.37
	15570.000	29.97	---	---	60.00	50.00	-20.03
Line 2	169.000	33.60	---	---	65.46	55.46	-21.86
	224.000	30.32	---	---	63.89	53.89	-23.57
	391.000	26.42	---	---	59.11	49.11	-22.69
	563.000	29.30	---	---	56.00	46.00	-16.70
	1359.000	21.71	---	---	56.00	46.00	-24.29
	2094.000	22.04	---	---	56.00	46.00	-23.96
	6390.000	26.97	---	---	60.00	50.00	-23.03
	10950.000	31.92	---	---	60.00	50.00	-18.08
	15570.000	29.14	---	---	60.00	50.00	-20.86

Test Mode: (C) Mode IEEE 802.11b for WLAN CH01

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	345.000	36.49	---	---	60.43	50.43	-13.94
	518.000	36.87	---	---	56.00	46.00	-9.13
	781.000	37.88	---	---	56.00	46.00	-8.12
	972.000	38.04	---	---	56.00	46.00	-7.96
	2532.000	38.73	---	---	56.00	46.00	-7.27
	3542.000	40.03	---	---	56.00	46.00	-5.97
	3702.000	40.17	---	---	56.00	46.00	-5.83
	10890.000	39.08	---	---	60.00	50.00	-10.92
	12310.000	38.75	---	---	60.00	50.00	-11.25
Line 2	175.000	37.31	---	---	65.29	55.29	-17.98
	394.000	35.97	---	---	59.03	49.03	-13.06
	485.000	36.19	---	---	56.43	46.43	-10.24
	563.000	37.76	---	---	56.00	46.00	-8.24
	2094.000	34.67	---	---	56.00	46.00	-11.33
	3477.000	36.14	---	---	56.00	46.00	-9.86
	20680.000	36.45	---	---	60.00	50.00	-13.55

Test Mode: (C) Mode IEEE 802.11b for WLAN CH06

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	167.000	34.85	---	---	65.51	55.51	-20.66
	384.000	37.71	---	---	59.31	49.31	-11.60
	552.000	39.10	---	---	56.00	46.00	-6.90
	710.000	38.43	---	---	56.00	46.00	-7.57
	2329.000	39.62	---	---	56.00	46.00	-6.38
	3445.000	38.75	---	---	56.00	46.00	-7.25
	3510.000	39.67	---	---	56.00	46.00	-6.33
	11120.000	39.88	---	---	60.00	50.00	-10.12
	19820.000	38.12	---	---	60.00	50.00	-11.88
Line 2	163.000	36.90	---	---	65.63	55.63	-18.73
	174.000	37.13	---	---	65.31	55.31	-18.18
	391.000	37.53	---	---	59.11	49.11	-11.58
	480.000	35.79	---	---	56.57	46.57	-10.78
	569.000	37.76	---	---	56.00	46.00	-8.24
	876.000	36.04	---	---	56.00	46.00	-9.96
	2415.000	34.85	---	---	56.00	46.00	-11.15
	3413.000	35.35	---	---	56.00	46.00	-10.65
	11290.000	36.00	---	---	60.00	50.00	-14.00

Test Mode: (C) Mode IEEE 802.11b for WLAN CH11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	171.000	34.71	---	---	65.40	55.40	-20.69
	377.000	36.77	---	---	59.51	49.51	-12.74
	542.000	39.55	---	---	56.00	46.00	-6.45
	717.000	39.08	---	---	56.00	46.00	-6.92
	1176.000	38.64	---	---	56.00	46.00	-7.36
	2158.000	38.67	---	---	56.00	46.00	-7.33
	2351.000	38.30	---	---	56.00	46.00	-7.70
	3542.000	39.44	---	---	56.00	46.00	-6.56
	11230.000	38.68	---	---	60.00	50.00	-11.32
Line 2	172.000	36.99	---	---	65.37	55.37	-18.38
	391.000	37.50	---	---	59.11	49.11	-11.61
	485.000	36.35	---	---	56.43	46.43	-10.08
	547.000	36.77	---	---	56.00	46.00	-9.23
	563.000	37.27	---	---	56.00	46.00	-8.73
	876.000	35.79	---	---	56.00	46.00	-10.21
	3574.000	35.90	---	---	56.00	46.00	-10.10
	11670.000	33.79	---	---	60.00	50.00	-16.21
	20110.000	35.53	---	---	60.00	50.00	-14.47

Test Mode: (C) Mode IEEE 802.11g for WLAN CH01

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	387.000	40.36	---	---	59.23	49.23	-8.87
	552.000	39.86	---	---	56.00	46.00	-6.14
	850.000	39.53	---	---	56.00	46.00	-6.47
	1102.000	39.46	---	---	56.00	46.00	-6.54
	3445.000	40.27	---	---	56.00	46.00	-5.73
	3606.000	41.18	---	---	56.00	46.00	-4.82
	11060.000	40.36	---	---	60.00	50.00	-9.64
	12680.000	40.43	---	---	60.00	50.00	-9.57
Line 2	183.000	35.97	---	---	65.06	55.06	-19.09
	377.000	37.15	---	---	59.51	49.51	-12.36
	547.000	37.20	---	---	56.00	46.00	-8.80
	710.000	35.47	---	---	56.00	46.00	-10.53
	1102.000	34.85	---	---	56.00	46.00	-11.15
	2179.000	35.12	---	---	56.00	46.00	-10.88
	3413.000	37.08	---	---	56.00	46.00	-8.92
	11060.000	36.28	---	---	60.00	50.00	-13.72

Test Mode: (C) Mode IEEE 802.11g for WLAN CH06

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	384.000	39.65	---	---	59.31	49.31	-9.66
	850.000	39.37	---	---	56.00	46.00	-6.63
	945.000	39.05	---	---	56.00	46.00	-6.95
	1017.000	38.82	---	---	56.00	46.00	-7.18
	2051.000	38.36	---	---	56.00	46.00	-7.64
	2458.000	39.01	---	---	56.00	46.00	-6.99
	3606.000	41.04	---	---	56.00	46.00	-4.96
	11000.000	40.43	---	---	60.00	50.00	-9.57
	13780.000	38.94	---	---	60.00	50.00	-11.06
Line 2	185.000	36.37	---	---	65.00	55.00	-18.63
	384.000	36.46	---	---	59.31	49.31	-12.85
	466.000	36.09	---	---	56.97	46.97	-10.88
	563.000	36.87	---	---	56.00	46.00	-9.13
	876.000	35.19	---	---	56.00	46.00	-10.81
	2201.000	35.05	---	---	56.00	46.00	-10.95
	3606.000	36.70	---	---	56.00	46.00	-9.30
	10830.000	34.48	---	---	60.00	50.00	-15.52
	20110.000	34.65	---	---	60.00	50.00	-15.35

Test Mode: (C) Mode IEEE 802.11g for WLAN CH11

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	180.000	34.36	---	---	65.14	55.14	-20.78
	387.000	39.74	---	---	59.23	49.23	-9.49
	558.000	39.96	---	---	56.00	46.00	-6.04
	858.000	38.70	---	---	56.00	46.00	-7.30
	1113.000	39.29	---	---	56.00	46.00	-6.71
	2532.000	39.35	---	---	56.00	46.00	-6.65
	3574.000	41.26	---	---	56.00	46.00	-4.74
	12000.000	40.01	---	---	60.00	50.00	-9.99
	20300.000	38.26	---	---	60.00	50.00	-11.74
Line 2	175.000	36.63	---	---	65.29	55.29	-18.66
	391.000	36.11	---	---	59.11	49.11	-13.00
	552.000	36.63	---	---	56.00	46.00	-9.37
	1102.000	34.69	---	---	56.00	46.00	-11.31
	2506.000	34.23	---	---	56.00	46.00	-11.77
	3413.000	36.00	---	---	56.00	46.00	-10.00
	10190.000	35.14	---	---	60.00	50.00	-14.86
	11670.000	35.21	---	---	60.00	50.00	-14.79

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	174.000	34.55	---	---	65.31	55.31	-20.76
	394.000	40.15	---	---	59.03	49.03	-8.88
	558.000	40.03	---	---	56.00	46.00	-5.97
	867.000	39.62	---	---	56.00	46.00	-6.38
	2480.000	39.32	---	---	56.00	46.00	-6.68
	3638.000	41.91	---	---	56.00	46.00	-4.09
	11560.000	40.01	---	---	60.00	50.00	-9.99
	20580.000	40.28	---	---	60.00	50.00	-9.72
Line 2	167.000	37.95	---	---	65.51	55.51	-17.56
	384.000	37.29	---	---	59.31	49.31	-12.02
	558.000	36.60	---	---	56.00	46.00	-9.40
	902.000	35.58	---	---	56.00	46.00	-10.42
	1102.000	35.67	---	---	56.00	46.00	-10.33
	2286.000	33.93	---	---	56.00	46.00	-12.07
	3542.000	36.32	---	---	56.00	46.00	-9.68
	6300.000	31.32	---	---	60.00	50.00	-18.68
	11940.000	34.36	---	---	60.00	50.00	-15.64
	20200.000	35.18	---	---	60.00	50.00	-14.82

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Middle

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	384.000	39.60	---	---	59.31	49.31	-9.71
	558.000	40.34	---	---	56.00	46.00	-5.66
	651.000	37.71	---	---	56.00	46.00	-8.29
	1102.000	39.86	---	---	56.00	46.00	-6.14
	2480.000	39.44	---	---	56.00	46.00	-6.56
	3574.000	41.84	---	---	56.00	46.00	-4.16
	4809.000	36.30	---	---	56.00	46.00	-9.70
	11780.000	40.76	---	---	60.00	50.00	-9.24
	20010.000	38.00	---	---	60.00	50.00	-12.00
Line 2	174.000	37.29	---	---	65.31	55.31	-18.02
	387.000	36.56	---	---	59.23	49.23	-12.67
	552.000	37.90	---	---	56.00	46.00	-8.10
	850.000	35.67	---	---	56.00	46.00	-10.33
	2286.000	33.51	---	---	56.00	46.00	-12.49
	3606.000	37.71	---	---	56.00	46.00	-8.29
	11450.000	35.10	---	---	60.00	50.00	-14.90
	20390.000	35.56	---	---	60.00	50.00	-14.44

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBµV)	QP (dBµV)	Average (dBµV)	QP-limit (dBµV)	AVG-limit (dBµV)	Margin (dB)
Line 1	180.000	34.03	---	---	65.14	55.14	-21.11
	384.000	39.99	---	---	59.31	49.31	-9.32
	558.000	38.68	---	---	56.00	46.00	-7.32
	1102.000	38.68	---	---	56.00	46.00	-7.32
	2506.000	39.41	---	---	56.00	46.00	-6.59
	3477.000	41.31	---	---	56.00	46.00	-4.69
	4714.000	37.25	---	---	56.00	46.00	-8.75
	11610.000	41.01	---	---	60.00	50.00	-8.99
	20490.000	38.28	---	---	60.00	50.00	-11.72
Line 2	182.000	36.90	---	---	65.09	55.09	-18.19
	384.000	37.90	---	---	59.31	49.31	-11.41
	563.000	36.72	---	---	56.00	46.00	-9.28
	850.000	35.12	---	---	56.00	46.00	-10.88
	2458.000	33.16	---	---	56.00	46.00	-12.84
	3606.000	35.97	---	---	56.00	46.00	-10.03
	6000.000	31.17	---	---	60.00	50.00	-18.83
	11170.000	34.23	---	---	60.00	50.00	-15.77
	19520.000	34.65	---	---	60.00	50.00	-15.35

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	384.000	40.13	---	---	59.31	49.31	-9.18
	710.000	38.96	---	---	56.00	46.00	-7.04
	1102.000	39.29	---	---	56.00	46.00	-6.71
	2201.000	38.67	---	---	56.00	46.00	-7.33
	3574.000	40.57	---	---	56.00	46.00	-5.43
	5130.000	36.70	---	---	60.00	50.00	-13.30
	11780.000	41.06	---	---	60.00	50.00	-8.94
	20300.000	38.54	---	---	60.00	50.00	-11.46
	25150.000	38.34	---	---	60.00	50.00	-11.66
Line 2	183.000	37.31	---	---	65.06	55.06	-17.75
	384.000	37.08	---	---	59.31	49.31	-12.23
	558.000	36.79	---	---	56.00	46.00	-9.21
	850.000	35.10	---	---	56.00	46.00	-10.90
	1282.000	33.68	---	---	56.00	46.00	-12.32
	2415.000	33.05	---	---	56.00	46.00	-12.95
	3542.000	35.58	---	---	56.00	46.00	-10.42
	4714.000	30.32	---	---	56.00	46.00	-15.68
	10830.000	33.23	---	---	60.00	50.00	-16.77
	20110.000	34.56	---	---	60.00	50.00	-15.44

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	384.000	38.73	---	---	59.31	49.31	-10.58
	558.000	38.89	---	---	56.00	46.00	-7.11
	731.000	37.76	---	---	56.00	46.00	-8.24
	1134.000	38.36	---	---	56.00	46.00	-7.64
	1977.000	36.63	---	---	56.00	46.00	-9.37
	2532.000	38.43	---	---	56.00	46.00	-7.57
	3542.000	42.10	---	---	56.00	46.00	-3.90
	11780.000	39.05	---	---	60.00	50.00	-10.95
	19920.000	38.40	---	---	60.00	50.00	-11.60
Line 2	185.000	37.18	---	---	65.00	55.00	-17.82
	384.000	36.74	---	---	59.31	49.31	-12.57
	563.000	36.63	---	---	56.00	46.00	-9.37
	1295.000	33.51	---	---	56.00	46.00	-12.49
	2051.000	33.37	---	---	56.00	46.00	-12.63
	3413.000	35.33	---	---	56.00	46.00	-10.67
	4571.000	30.94	---	---	56.00	46.00	-15.06
	10780.000	33.65	---	---	60.00	50.00	-16.35
	19920.000	34.63	---	---	60.00	50.00	-15.37

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	384.000	38.96	---	---	59.31	49.31	-10.35
	558.000	39.65	---	---	56.00	46.00	-6.35
	858.000	38.13	---	---	56.00	46.00	-7.87
	1198.000	38.34	---	---	56.00	46.00	-7.66
	2437.000	38.53	---	---	56.00	46.00	-7.47
	3413.000	38.36	---	---	56.00	46.00	-7.64
	3574.000	40.85	---	---	56.00	46.00	-5.15
	10890.000	38.41	---	---	60.00	50.00	-11.59
	11400.000	38.94	---	---	60.00	50.00	-11.06
	22910.000	38.12	---	---	60.00	50.00	-11.88
Line 2	179.000	34.39	---	---	65.17	55.17	-20.78
	558.000	38.96	---	---	56.00	46.00	-7.04
	858.000	38.62	---	---	56.00	46.00	-7.38
	1198.000	37.38	---	---	56.00	46.00	-8.62
	2437.000	38.48	---	---	56.00	46.00	-7.52
	3317.000	40.15	---	---	56.00	46.00	-5.85
	11120.000	40.34	---	---	60.00	50.00	-9.66
	24080.000	38.13	---	---	60.00	50.00	-11.87

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	185.000	34.71	---	---	65.00	55.00	-20.29
	380.000	37.57	---	---	59.43	49.43	-11.86
	558.000	37.04	---	---	56.00	46.00	-8.96
	945.000	38.11	---	---	56.00	46.00	-7.89
	1411.000	35.14	---	---	56.00	46.00	-10.86
	2480.000	38.89	---	---	56.00	46.00	-7.11
	3702.000	39.53	---	---	56.00	46.00	-6.47
	11060.000	40.03	---	---	60.00	50.00	-9.97
	21410.000	38.47	---	---	60.00	50.00	-11.53
Line 2	171.000	36.28	---	---	65.40	55.40	-19.12
	277.000	33.23	---	---	62.37	52.37	-19.14
	380.000	37.90	---	---	59.43	49.43	-11.53
	558.000	36.23	---	---	56.00	46.00	-9.77
	867.000	34.34	---	---	56.00	46.00	-11.66
	1308.000	33.72	---	---	56.00	46.00	-12.28
	2506.000	33.09	---	---	56.00	46.00	-12.91
	3542.000	35.12	---	---	56.00	46.00	-10.88
	11720.000	34.03	---	---	60.00	50.00	-15.97
	20300.000	35.84	---	---	60.00	50.00	-14.16

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	34.14	---	---	65.09	55.09	-20.95
	380.000	38.53	---	---	59.43	49.43	-10.90
	552.000	38.25	---	---	56.00	46.00	-7.75
	867.000	37.76	---	---	56.00	46.00	-8.24
	2437.000	38.13	---	---	56.00	46.00	-7.87
	3574.000	40.34	---	---	56.00	46.00	-5.66
	11340.000	40.29	---	---	60.00	50.00	-9.71
	19720.000	37.16	---	---	60.00	50.00	-12.84
Line 2	187.000	37.20	---	---	64.94	54.94	-17.74
	384.000	36.51	---	---	59.31	49.31	-12.80
	466.000	35.47	---	---	56.97	46.97	-11.50
	558.000	35.79	---	---	56.00	46.00	-10.21
	832.000	34.88	---	---	56.00	46.00	-11.12
	2243.000	33.28	---	---	56.00	46.00	-12.72
	3445.000	34.50	---	---	56.00	46.00	-11.50
	11000.000	34.83	---	---	60.00	50.00	-15.17
	20960.000	35.09	---	---	60.00	50.00	-14.91

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	179.000	33.98	---	---	65.17	55.17	-21.19
	387.000	37.95	---	---	59.23	49.23	-11.28
	558.000	38.16	---	---	56.00	46.00	-7.84
	1113.000	38.32	---	---	56.00	46.00	-7.68
	2158.000	38.06	---	---	56.00	46.00	-7.94
	3702.000	40.36	---	---	56.00	46.00	-5.64
	6000.000	34.96	---	---	60.00	50.00	-15.04
	12060.000	39.46	---	---	60.00	50.00	-10.54
	19720.000	37.75	---	---	60.00	50.00	-12.25
Line 2	183.000	37.11	---	---	65.06	55.06	-17.95
	377.000	37.81	---	---	59.51	49.51	-11.70
	552.000	36.63	---	---	56.00	46.00	-9.37
	850.000	35.69	---	---	56.00	46.00	-10.31
	1295.000	33.72	---	---	56.00	46.00	-12.28
	2506.000	33.04	---	---	56.00	46.00	-12.96
	3542.000	35.12	---	---	56.00	46.00	-10.88
	4857.000	31.97	---	---	56.00	46.00	-14.03
	11060.000	33.37	---	---	60.00	50.00	-16.63
	20200.000	35.18	---	---	60.00	50.00	-14.82

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	380.000	40.10	---	---	59.43	49.43	-9.33
	558.000	38.60	---	---	56.00	46.00	-7.40
	876.000	39.01	---	---	56.00	46.00	-6.99
	1134.000	37.81	---	---	56.00	46.00	-8.19
	2179.000	38.39	---	---	56.00	46.00	-7.61
	2636.000	37.06	---	---	56.00	46.00	-8.94
	3606.000	39.65	---	---	56.00	46.00	-6.35
	10950.000	39.94	---	---	60.00	50.00	-10.06
	20770.000	37.72	---	---	60.00	50.00	-12.28
Line 2	185.000	37.22	---	---	65.00	55.00	-17.78
	373.000	36.56	---	---	59.63	49.63	-13.07
	558.000	38.02	---	---	56.00	46.00	-7.98
	876.000	34.98	---	---	56.00	46.00	-11.02
	1295.000	33.25	---	---	56.00	46.00	-12.75
	2480.000	33.18	---	---	56.00	46.00	-12.82
	3413.000	36.44	---	---	56.00	46.00	-9.56
	5030.000	30.94	---	---	60.00	50.00	-19.06
	12060.000	35.38	---	---	60.00	50.00	-14.62

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	187.000	33.93	---	---	64.94	54.94	-21.01
	387.000	36.21	---	---	59.23	49.23	-13.02
	558.000	39.51	---	---	56.00	46.00	-6.49
	867.000	37.90	---	---	56.00	46.00	-8.10
	1144.000	39.05	---	---	56.00	46.00	-6.95
	2558.000	38.48	---	---	56.00	46.00	-7.52
	3477.000	40.54	---	---	56.00	46.00	-5.46
	6270.000	36.25	---	---	60.00	50.00	-13.75
	11450.000	39.86	---	---	60.00	50.00	-10.14
Line 2	187.000	37.38	---	---	64.94	54.94	-17.56
	380.000	35.65	---	---	59.43	49.43	-13.78
	558.000	37.25	---	---	56.00	46.00	-8.75
	867.000	35.05	---	---	56.00	46.00	-10.95
	2094.000	32.80	---	---	56.00	46.00	-13.20
	3445.000	36.16	---	---	56.00	46.00	-9.84
	7650.000	40.06	---	---	60.00	50.00	-9.94
	11170.000	36.19	---	---	60.00	50.00	-13.81
	19820.000	34.40	---	---	60.00	50.00	-15.60

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	183.000	34.81	---	---	65.06	55.06	-20.25
	387.000	37.48	---	---	59.23	49.23	-11.75
	558.000	38.27	---	---	56.00	46.00	-7.73
	876.000	38.32	---	---	56.00	46.00	-7.68
	1144.000	37.99	---	---	56.00	46.00	-8.01
	2610.000	37.90	---	---	56.00	46.00	-8.10
	3477.000	41.31	---	---	56.00	46.00	-4.69
	10730.000	39.10	---	---	60.00	50.00	-10.90
	19620.000	37.75	---	---	60.00	50.00	-12.25
Line 2	183.000	37.06	---	---	65.06	55.06	-18.00
	384.000	36.74	---	---	59.31	49.31	-12.57
	558.000	38.02	---	---	56.00	46.00	-7.98
	1208.000	33.16	---	---	56.00	46.00	-12.84
	2394.000	33.77	---	---	56.00	46.00	-12.23
	3445.000	37.55	---	---	56.00	46.00	-8.45
	11560.000	35.08	---	---	60.00	50.00	-14.92
	19820.000	35.29	---	---	60.00	50.00	-14.71

Adapter (b) model: JSP050090UU

Test Mode: (C) mode for RX

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	174.000	51.38	---	---	65.31	55.31	-3.93
	578.825	48.26	47.24	39.03	56.00	46.00	-6.97
	923.050	48.61	47.30	38.88	56.00	46.00	-7.12
	1328.100	48.63	47.16	38.47	56.00	46.00	-7.53
	2543.145	53.75	51.78	41.43	56.00	46.00	-4.22
	3755.020	51.47	48.32	37.46	56.00	46.00	-7.68
	4625.300	53.53	49.85	37.62	56.00	46.00	-6.15
	7570.000	47.92	---	---	60.00	50.00	-2.08
	10730.000	46.99	---	---	60.00	50.00	-3.01
	20490.000	38.47	---	---	60.00	50.00	-11.53
Line 2	175.000	48.90	---	---	65.29	55.29	-6.39
	288.000	46.90	---	---	62.06	52.06	-5.16
	802.000	44.63	---	---	56.00	46.00	-1.37
	1269.000	47.80	45.33	38.41	56.00	46.00	-7.59
	2596.610	51.15	47.80	40.42	56.00	46.00	-5.58
	4500.580	49.73	46.11	36.36	56.00	46.00	-9.64
	6870.000	45.84	---	---	60.00	50.00	-4.16
	19620.000	40.18	---	---	60.00	50.00	-9.82

Test Mode: (C) Mode IEEE 802.11b for WLAN CH01

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	182.000	52.41	---	---	65.09	55.09	-2.68
	366.000	47.54	---	---	59.83	49.83	-2.29
	605.215	46.34	47.64	36.14	56.00	46.00	-8.36
	969.930	46.53	45.03	36.93	56.00	46.00	-9.07
	2367.035	48.30	46.28	36.21	56.00	46.00	-9.72
	4248.245	52.16	48.69	38.99	56.00	46.00	-7.01
	5800.000	47.18	---	---	60.00	50.00	-2.82
	8230.000	44.75	---	---	60.00	50.00	-5.25
Line 2	182.000	53.70	---	---	65.09	55.09	-1.39
	302.000	49.57	---	---	61.66	51.66	-2.09
	604.000	44.17	---	---	56.00	46.00	-1.83
	1208.000	43.75	---	---	56.00	46.00	-2.25
	2488.430	46.46	44.02	35.09	56.00	46.00	-10.91
	4185.055	49.13	44.92	33.73	56.00	46.00	-11.08
	6050.000	44.24	---	---	60.00	50.00	-5.76
	9880.000	41.15	---	---	60.00	50.00	-8.85

Test Mode: (C) Mode IEEE 802.11b for WLAN CH06

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.990	54.21	53.33	42.58	65.09	55.09	-11.76
	363.000	46.53	---	---	59.91	49.91	-3.38
	666.875	46.74	44.96	33.85	56.00	46.00	-11.04
	971.370	46.37	45.20	37.14	56.00	46.00	-8.86
	1216.280	46.85	44.61	34.53	56.00	46.00	-11.39
	2428.260	49.20	47.29	37.74	56.00	46.00	-8.26
	4126.230	51.77	47.88	37.55	56.00	46.00	-8.12
	5770.000	47.02	---	---	60.00	50.00	-2.98
	7190.000	45.56	---	---	60.00	50.00	-4.44
Line 2	182.000	53.07	---	---	65.09	55.09	-2.02
	300.000	48.93	---	---	61.71	51.71	-2.78
	547.000	43.36	---	---	56.00	46.00	-2.64
	963.000	43.06	---	---	56.00	46.00	-2.94
	2308.000	41.26	---	---	56.00	46.00	-4.74
	4062.195	48.51	44.29	32.64	56.00	46.00	-11.71
	7050.000	44.61	---	---	60.00	50.00	-5.39
	11290.000	40.03	---	---	60.00	50.00	-9.97

Test Mode: (C) Mode IEEE 802.11b for WLAN CH11

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	302.000	49.18	---	---	61.66	51.66	-2.48
	664.025	47.68	42.16	29.65	56.00	46.00	-13.84
	910.955	46.72	45.43	37.07	56.00	46.00	-8.93
	1144.000	44.91	---	---	56.00	46.00	-1.09
	2427.685	49.48	47.60	37.68	56.00	46.00	-8.32
	4126.595	53.28	47.52	36.76	56.00	46.00	-8.48
	6110.000	46.12	---	---	60.00	50.00	-3.88
	10240.000	43.20	---	---	60.00	50.00	-6.80
Line 2	183.000	52.85	---	---	65.06	55.06	-2.21
	302.000	49.50	---	---	61.66	51.66	-2.16
	604.000	43.77	---	---	56.00	46.00	-2.23
	963.000	43.53	---	---	56.00	46.00	-2.47
	2487.885	46.83	44.22	35.26	56.00	46.00	-10.74
	4063.965	48.79	45.58	35.58	56.00	46.00	-10.42
	6360.000	45.75	---	---	60.00	50.00	-4.25
	10780.000	41.11	---	---	60.00	50.00	-8.89

Test Mode: (C) Mode IEEE 802.11g for WLAN CH01

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	179.955	54.75	54.03	43.77	65.14	55.14	-11.11
	240.435	48.28	47.60	39.33	63.34	53.34	-14.01
	655.250	53.32	43.23	35.37	56.00	46.00	-10.63
	958.860	48.35	47.07	36.58	56.00	46.00	-8.93
	1435.965	48.86	45.46	38.96	56.00	46.00	-7.04
	2330.925	52.09	48.01	38.33	56.00	46.00	-7.67
	2954.635	49.45	44.21	30.02	56.00	46.00	-11.79
	4419.755	52.85	50.23	40.09	56.00	46.00	-5.77
	6390.000	47.94	---	---	60.00	50.00	-2.06
	11060.000	47.66	---	---	60.00	50.00	-2.34
Line 2	179.315	52.07	51.38	40.84	65.17	55.17	-13.79
	300.000	50.53	---	---	61.71	51.71	-1.18
	658.170	48.72	47.58	40.37	56.00	46.00	-5.63
	837.175	47.64	46.37	38.85	56.00	46.00	-7.15
	2387.045	48.56	46.66	38.32	56.00	46.00	-7.68
	3163.330	44.93	42.05	33.85	56.00	46.00	-12.15
	4117.595	52.50	49.71	41.93	56.00	46.00	-4.07
	6360.000	47.27	---	---	60.00	50.00	-2.73
	10240.000	45.82	---	---	60.00	50.00	-4.18
	12250.000	45.12	---	---	60.00	50.00	-4.88

Test Mode: (C) Mode IEEE 802.11g for WLAN CH06

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	180.000	53.53	---	---	65.14	55.14	-1.61
	367.500	49.73	44.65	36.00	59.91	49.91	-13.91
	484.820	45.49	44.07	36.59	56.43	46.43	-9.84
	728.005	44.17	40.15	30.95	56.00	46.00	-15.05
	1155.270	46.58	44.11	32.29	56.00	46.00	-11.89
	2366.500	49.16	47.31	37.30	56.00	46.00	-8.69
	3695.890	47.66	41.72	31.85	56.00	46.00	-14.15
	4242.305	52.60	48.08	37.78	56.00	46.00	-7.92
	5800.000	48.23	---	---	60.00	50.00	-1.77
	8650.000	44.00	---	---	60.00	50.00	-6.00
Line 2	180.000	52.43	---	---	65.14	55.14	-2.71
	302.000	49.85	---	---	61.66	51.66	-1.81
	363.000	48.40	---	---	59.91	49.91	-1.51
	480.000	45.03	---	---	56.57	46.57	-1.54
	911.000	44.26	---	---	56.00	46.00	-1.74
	1269.000	43.50	---	---	56.00	46.00	-2.50
	2415.000	44.54	---	---	56.00	46.00	-1.46
	4126.150	49.62	45.59	34.60	56.00	46.00	-10.41
	5630.000	45.42	---	---	60.00	50.00	-4.58
	11230.000	40.90	---	---	60.00	50.00	-9.10

Test Mode: (C) Mode IEEE 802.11g for WLAN CH11

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	182.855	55.30	54.35	43.45	65.09	55.09	-10.74
	363.000	47.68	---	---	59.91	49.91	-2.23
	605.710	47.39	45.12	37.57	56.00	46.00	-8.43
	1035.605	46.72	42.19	31.99	56.00	46.00	-13.81
	1275.480	47.18	45.93	37.93	56.00	46.00	-8.07
	2488.270	49.30	47.21	36.81	56.00	46.00	-8.79
	4252.585	53.58	48.39	37.76	56.00	46.00	-7.61
	5830.000	46.55	---	---	60.00	50.00	-3.45
	8610.000	45.89	---	---	60.00	50.00	-4.11
Line 2	181.550	54.77	53.77	41.64	65.09	55.09	-11.32
	302.000	49.97	---	---	61.66	51.66	-1.69
	421.000	42.82	---	---	58.26	48.26	-5.44
	662.000	42.05	---	---	56.00	46.00	-3.95
	963.000	44.68	---	---	56.00	46.00	-1.32
	2485.615	47.37	44.56	34.33	56.00	46.00	-11.44
	4130.265	49.38	44.91	32.84	56.00	46.00	-11.09
	5800.000	46.19	---	---	60.00	50.00	-3.81
	7150.000	43.93	---	---	60.00	50.00	-6.07

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	181.280	57.72	57.11	46.99	65.09	55.09	-7.98
	241.710	51.10	49.79	41.37	63.43	53.43	-12.06
	483.425	47.51	46.36	38.03	56.43	46.43	-8.40
	784.175	47.34	45.77	35.09	56.00	46.00	-10.23
	1502.010	48.87	47.05	37.41	56.00	46.00	-8.59
	2461.570	49.51	46.89	36.29	56.00	46.00	-9.11
	3064.795	50.08	47.82	36.67	56.00	46.00	-8.18
	4146.180	53.55	49.24	38.20	56.00	46.00	-6.76
	6520.000	48.73	---	---	60.00	50.00	-1.27
Line 2	180.740	54.18	53.59	42.87	65.09	55.09	-11.50
	480.005	46.89	45.45	35.72	56.43	46.43	-10.71
	599.620	48.39	46.60	37.92	56.00	46.00	-8.08
	1256.000	44.74	---	---	56.00	46.00	-1.26
	2396.640	48.37	45.71	36.58	56.00	46.00	-9.42
	2995.630	47.79	45.92	36.54	56.00	46.00	-9.46
	4189.060	51.72	48.87	38.72	56.00	46.00	-7.13
	6460.000	48.18	---	---	60.00	50.00	-1.82

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBµV)	QP (dBµV)	Average (dBµV)	QP-limit (dBµV)	AVG-limit (dBµV)	Margin (dB)
Line 1	179.000	51.69	---	---	65.17	55.17	-3.48
	541.635	49.01	47.27	37.95	56.00	46.00	-8.05
	777.690	48.05	37.63	25.85	56.00	46.00	-18.37
	1025.730	47.86	46.00	36.18	56.00	46.00	-9.82
	1621.505	41.69	35.83	24.91	56.00	46.00	-20.17
	2111.445	48.57	46.78	36.22	56.00	46.00	-9.22
	2649.405	52.38	50.18	39.92	56.00	46.00	-5.82
	4102.415	52.97	47.79	34.97	56.00	46.00	-8.21
	5740.000	48.96	---	---	60.00	50.00	-1.04
Line 2	179.000	50.77	---	---	65.17	55.17	-4.40
	417.000	46.73	---	---	58.37	48.37	-1.64
	540.195	44.09	40.22	31.75	56.00	46.00	-14.25
	782.010	44.32	43.20	34.35	56.00	46.00	-11.65
	1325.040	46.52	45.13	37.45	56.00	46.00	-8.55
	2225.560	43.38	40.82	30.14	56.00	46.00	-15.18
	2649.720	48.30	45.95	37.46	56.00	46.00	-8.54
	4279.920	51.62	47.23	38.26	56.00	46.00	-7.74
	6110.000	47.88	---	---	60.00	50.00	-2.12

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	52.38	---	---	65.14	55.14	-2.76
	485.085	48.11	46.99	39.31	56.57	46.57	-7.26
	725.775	48.13	47.05	37.98	56.00	46.00	-8.02
	1021.230	46.66	31.78	17.80	56.00	46.00	-24.22
	1325.265	46.09	34.00	20.50	56.00	46.00	-22.00
	1999.310	44.16	41.78	31.26	56.00	46.00	-14.22
	2486.160	51.07	48.97	40.43	56.00	46.00	-5.57
	4364.620	52.75	49.47	38.87	56.00	46.00	-6.53
	6020.000	48.37	---	---	60.00	50.00	-1.63
Line 2	179.000	50.41	---	---	65.17	55.17	-4.76
	425.140	48.02	44.90	34.92	58.26	48.26	-13.34
	546.905	44.81	43.30	33.95	56.00	46.00	-12.05
	787.705	43.68	41.45	31.36	56.00	46.00	-14.55
	1089.910	44.02	39.67	31.12	56.00	46.00	-14.88
	2544.625	46.41	41.43	31.54	56.00	46.00	-14.46
	3872.505	47.51	43.16	30.50	56.00	46.00	-12.84
	5600.000	48.07	---	---	60.00	50.00	-1.93
	7500.000	45.62	---	---	60.00	50.00	-4.38

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBµV)	QP (dBµV)	Average (dBµV)	QP-limit (dBµV)	AVG-limit (dBµV)	Margin (dB)
Line 1	183.125	57.75	56.75	44.62	65.09	55.09	-8.34
	365.820	47.84	45.80	37.93	69.83	59.83	-11.90
	545.830	43.95	42.32	34.31	56.00	46.00	-11.69
	731.000	44.97	---	---	56.00	46.00	-1.03
	1093.745	45.04	43.59	35.23	56.00	46.00	-10.77
	2608.050	44.42	41.82	32.09	56.00	46.00	-13.91
	4372.850	52.38	47.39	36.12	56.00	46.00	-8.61
	6140.000	46.68	---	---	60.00	50.00	-3.32
	8040.000	45.25	---	---	60.00	50.00	-4.75
Line 2	182.225	54.79	54.00	40.80	65.09	55.09	-11.09
	302.615	48.48	44.37	31.29	61.57	51.57	-17.20
	487.520	41.88	37.59	28.19	56.43	46.43	-18.24
	850.000	43.61	---	---	56.00	46.00	-2.39
	1219.000	44.09	---	---	56.00	46.00	-1.91
	2610.000	44.39	---	---	56.00	46.00	-1.61
	4253.240	52.08	46.47	36.30	56.00	46.00	-9.53
	5890.000	44.65	---	---	60.00	50.00	-5.35
	11720.000	40.89	---	---	60.00	50.00	-9.11

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Middle

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	182.000	51.12	---	---	65.09	55.09	-3.97
	305.000	48.11	---	---	61.57	51.57	-3.46
	669.650	49.38	47.83	39.83	56.00	46.00	-6.17
	1034.220	47.43	46.04	38.75	56.00	46.00	-7.25
	1451.000	43.88	---	---	56.00	46.00	-2.12
	2067.920	47.06	45.39	37.60	56.00	46.00	-8.40
	2428.620	48.99	44.85	34.70	56.00	46.00	-11.15
	4253.260	55.08	52.07	41.55	56.00	46.00	-3.93
	6550.000	46.78	---	---	60.00	50.00	-3.22
Line 2	182.000	51.07	---	---	65.09	55.09	-4.02
	243.000	48.55	---	---	63.34	53.34	-4.79
	547.000	44.35	---	---	56.00	46.00	-1.65
	668.000	43.22	---	---	56.00	46.00	-2.78
	1028.000	44.23	---	---	56.00	46.00	-1.77
	1518.000	43.22	---	---	56.00	46.00	-2.78
	2480.000	44.83	---	---	56.00	46.00	-1.17
	4321.975	52.15	47.58	37.71	56.00	46.00	-8.29
	6140.000	44.67	---	---	60.00	50.00	-5.33

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBµV)	QP (dBµV)	Average (dBµV)	QP-limit (dBµV)	AVG-limit (dBµV)	Margin (dB)
Line 1	182.000	53.36	---	---	65.09	55.09	-1.73
	363.000	47.84	---	---	59.91	49.91	-2.07
	665.825	49.20	46.81	39.21	56.00	46.00	-6.79
	1031.870	48.27	46.95	39.00	56.00	46.00	-7.00
	1332.415	45.16	44.12	36.08	56.00	46.00	-9.92
	2364.245	49.01	46.43	37.61	56.00	46.00	-8.39
	2843.270	45.28	40.20	27.55	56.00	46.00	-15.80
	3995.065	52.82	48.26	37.64	56.00	46.00	-7.74
	5570.000	47.51	---	---	60.00	50.00	-2.49
Line 2	180.000	52.82	---	---	65.14	55.14	-2.32
	300.000	49.24	---	---	61.71	51.71	-2.47
	363.000	48.74	---	---	59.91	49.91	-1.17
	608.410	46.50	45.61	36.30	56.00	46.00	-9.70
	963.000	44.83	---	---	56.00	46.00	-1.17
	1333.000	42.93	---	---	56.00	46.00	-3.07
	2433.960	46.00	42.40	31.21	56.00	46.00	-13.60
	4314.550	52.59	48.19	38.68	56.00	46.00	-7.32
	5680.000	45.11	---	---	60.00	50.00	-4.89

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	51.58	---	---	65.09	55.09	-3.51
	365.295	52.11	51.26	42.84	59.91	49.91	-7.07
	608.860	47.91	47.08	38.36	56.00	46.00	-7.64
	731.135	48.09	46.44	38.66	56.00	46.00	-7.34
	1095.725	46.78	45.53	37.75	56.00	46.00	-8.25
	2012.000	44.53	---	---	56.00	46.00	-1.47
	2433.390	46.85	44.76	35.85	56.00	46.00	-10.15
	3711.985	48.46	45.05	35.31	56.00	46.00	-10.69
	4254.000	54.04	50.88	40.17	56.00	46.00	-5.12
	5210.000	46.64	---	---	60.00	50.00	-3.36
Line 2	182.000	52.01	---	---	65.09	55.09	-3.08
	365.820	50.41	49.39	40.43	59.83	49.83	-9.40
	607.645	45.60	44.58	35.40	56.00	46.00	-10.60
	724.000	43.68	---	---	56.00	46.00	-2.32
	1155.000	43.52	---	---	56.00	46.00	-2.48
	1582.000	42.56	---	---	56.00	46.00	-3.44
	2415.000	43.61	---	---	56.00	46.00	-2.39
	4319.430	51.67	47.06	37.74	56.00	46.00	-8.26
	6670.000	44.58	---	---	60.00	50.00	-5.42

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBµV)	QP (dBµV)	Average (dBµV)	QP-limit (dBµV)	AVG-limit (dBµV)	Margin (dB)
Line 1	365.880	52.18	51.19	42.80	59.91	49.91	-7.11
	729.625	48.16	46.61	39.22	56.00	46.00	-6.78
	1035.920	46.23	44.69	36.47	56.00	46.00	-9.53
	1582.000	44.21	---	---	56.00	46.00	-1.79
	2008.735	45.95	44.19	35.28	56.00	46.00	-10.72
	2431.520	47.08	44.79	35.82	56.00	46.00	-10.18
	3772.520	49.75	46.60	37.11	56.00	46.00	-8.89
	4321.185	54.04	50.94	40.36	56.00	46.00	-5.06
	6550.000	46.96	---	---	60.00	50.00	-3.04
Line 2	182.000	51.12	---	---	65.09	55.09	-3.97
	305.000	48.92	---	---	61.57	51.57	-2.65
	365.955	50.50	49.34	40.54	59.83	49.83	-9.29
	608.455	45.67	44.67	35.64	56.00	46.00	-10.36
	1091.000	44.02	---	---	56.00	46.00	-1.98
	2051.000	42.59	---	---	56.00	46.00	-3.41
	2977.000	41.28	---	---	56.00	46.00	-4.72
	3952.465	48.75	42.95	33.48	56.00	46.00	-12.52
	4435.110	51.51	45.82	35.93	56.00	46.00	-10.07

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Highest

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	182.000	50.96	---	---	65.09	55.09	-4.13
	365.190	52.15	51.26	42.92	59.83	49.83	-6.91
	669.845	47.84	46.82	38.38	56.00	46.00	-7.62
	1032.510	46.34	45.11	37.10	56.00	46.00	-8.90
	1155.000	44.60	---	---	56.00	46.00	-1.40
	1629.000	44.39	---	---	56.00	46.00	-1.61
	2491.215	47.48	45.11	36.88	56.00	46.00	-9.12
	4197.840	54.04	50.73	40.40	56.00	46.00	-5.27
	6200.000	45.83	---	---	60.00	50.00	-4.17
Line 2	182.000	51.53	---	---	65.09	55.09	-3.56
	365.610	50.54	49.32	40.67	59.91	49.91	-9.24
	668.000	44.83	---	---	56.00	46.00	-1.17
	1091.000	43.74	---	---	56.00	46.00	-2.26
	1582.000	41.37	---	---	56.00	46.00	-4.63
	2415.000	43.40	---	---	56.00	46.00	-2.60
	4140.125	50.89	44.98	34.53	56.00	46.00	-11.02
	6490.000	44.49	---	---	60.00	50.00	-5.51

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	51.32	---	---	65.09	55.09	-3.77
	365.100	52.54	51.33	42.89	59.83	49.83	-6.94
	605.755	48.00	45.32	36.02	56.00	46.00	-9.98
	1095.680	46.78	45.65	37.75	56.00	46.00	-8.25
	1582.405	45.69	44.12	35.06	56.00	46.00	-10.94
	2066.455	46.04	44.47	36.31	56.00	46.00	-9.69
	2493.735	47.74	45.52	37.31	56.00	46.00	-8.69
	4197.325	54.23	51.02	40.88	56.00	46.00	-4.98
	5600.000	46.14	---	---	60.00	50.00	-3.86
Line 2	183.000	50.27	---	---	65.06	55.06	-4.79
	302.000	49.06	---	---	61.66	51.66	-2.60
	364.560	50.41	49.21	40.47	59.83	49.83	-9.36
	730.550	45.49	44.22	36.20	56.00	46.00	-9.80
	1091.000	42.72	---	---	56.00	46.00	-3.28
	2480.000	43.83	---	---	56.00	46.00	-2.17
	4140.525	51.10	45.51	35.17	56.00	46.00	-10.49
	5660.000	45.56	---	---	60.00	50.00	-4.44

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R mode) CH Middle

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBµV)</i>	<i>QP (dBµV)</i>	<i>Average (dBµV)</i>	<i>QP-limit (dBµV)</i>	<i>AVG-limit (dBµV)</i>	<i>Margin (dB)</i>
Line 1	182.000	51.25	---	---	65.09	55.09	-3.84
	365.565	52.22	51.32	42.97	59.91	49.91	-6.94
	669.125	48.11	47.01	38.59	56.00	46.00	-7.41
	1034.120	46.64	45.39	37.67	56.00	46.00	-8.33
	1941.000	43.61	---	---	56.00	46.00	-2.39
	2491.700	47.81	45.23	37.16	56.00	46.00	-8.84
	3768.330	49.54	46.54	37.24	56.00	46.00	-8.76
	4376.825	53.85	50.81	40.37	56.00	46.00	-5.19
	6550.000	45.90	---	---	60.00	50.00	-4.10
Line 2	182.000	51.65	---	---	65.09	55.09	-3.44
	365.910	50.56	49.27	40.43	59.83	49.83	-9.40
	668.000	44.72	---	---	56.00	46.00	-1.28
	1091.000	42.79	---	---	56.00	46.00	-3.21
	2051.000	42.82	---	---	56.00	46.00	-3.18
	3445.000	43.74	---	---	56.00	46.00	-2.26
	4259.350	52.22	46.70	37.49	56.00	46.00	-8.51
	5290.000	45.02	---	---	60.00	50.00	-4.98
	6490.000	44.51	---	---	60.00	50.00	-5.49

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	51.28	---	---	65.09	55.09	-3.81
	365.565	52.70	51.42	43.07	59.91	49.91	-6.84
	608.365	48.20	47.15	38.58	56.00	46.00	-7.42
	669.605	48.11	47.02	38.60	56.00	46.00	-7.40
	1095.725	46.94	45.69	37.97	56.00	46.00	-8.03
	1519.800	45.67	44.31	36.68	56.00	46.00	-9.32
	2480.000	44.65	---	---	56.00	46.00	-1.35
	4311.955	54.09	49.98	38.62	56.00	46.00	-6.02
	6490.000	46.41	---	---	60.00	50.00	-3.59
Line 2	182.000	51.28	---	---	65.09	55.09	-3.81
	364.665	50.54	49.29	40.68	69.91	59.91	-9.23
	730.210	45.74	44.38	36.18	56.00	46.00	-9.82
	1155.000	43.86	---	---	56.00	46.00	-2.14
	2051.000	41.30	---	---	56.00	46.00	-4.70
	2558.000	42.47	---	---	56.00	46.00	-3.53
	4313.940	51.39	46.49	37.02	56.00	46.00	-8.98
	5340.000	45.30	---	---	60.00	50.00	-4.70
	6550.000	43.66	---	---	60.00	50.00	-6.34

V. Section 15.247 (a): Technical description of the EUT


Based on the Section 2.1, *Direct Sequence System* is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the Direct sequence spread spectrum system.

VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

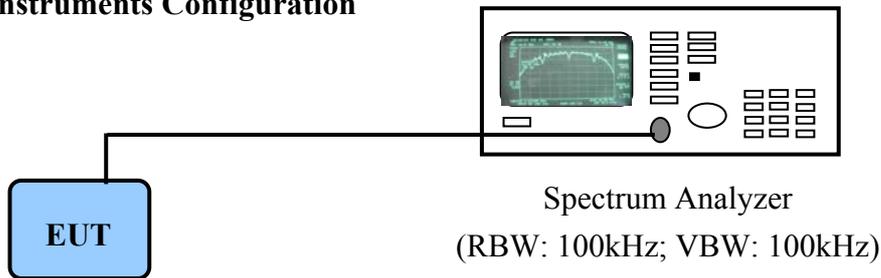

P.S.: The computer to control the EUT at maximal power output and channel Number and set antenna kit

6.3 List of Test Instruments


Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	02/15/06

6.4 Test Result of Bandwidth


Channel	802.11b	802.11g
01	9.28 MHz	16.84 MHz
06	9.28 MHz	16.84 MHz
11	9.28 MHz	16.80 MHz

- Note:
1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)=100kHz and set the span>>RBW. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 2. The attachments show these on the following pages.

6dB Bandwidth of Channel 1: 10.24MHz (The minimum 6dB BW at least 500kHz)

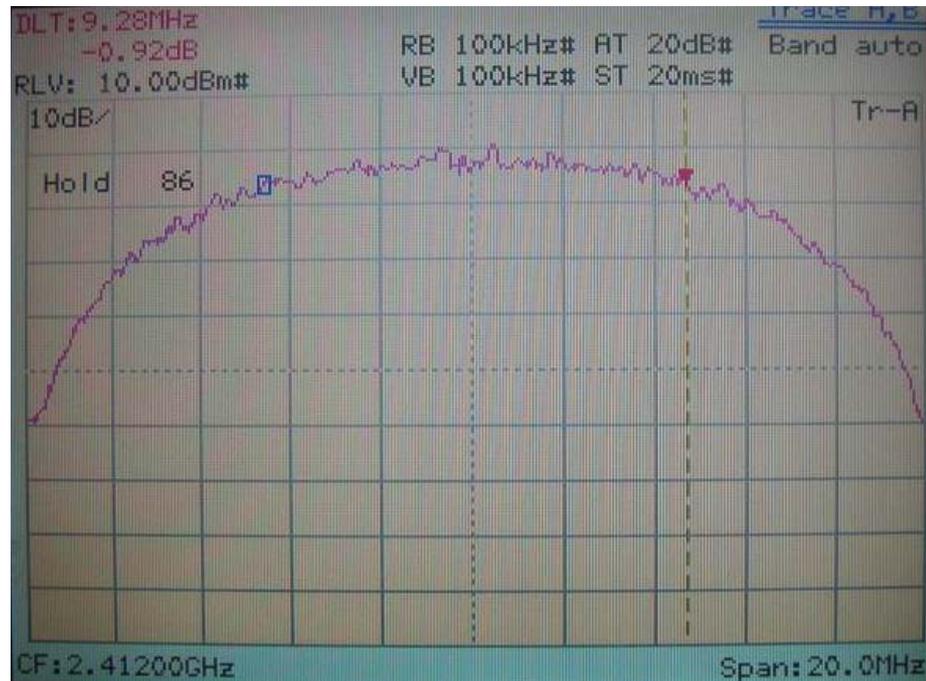


IEEE 802.11b

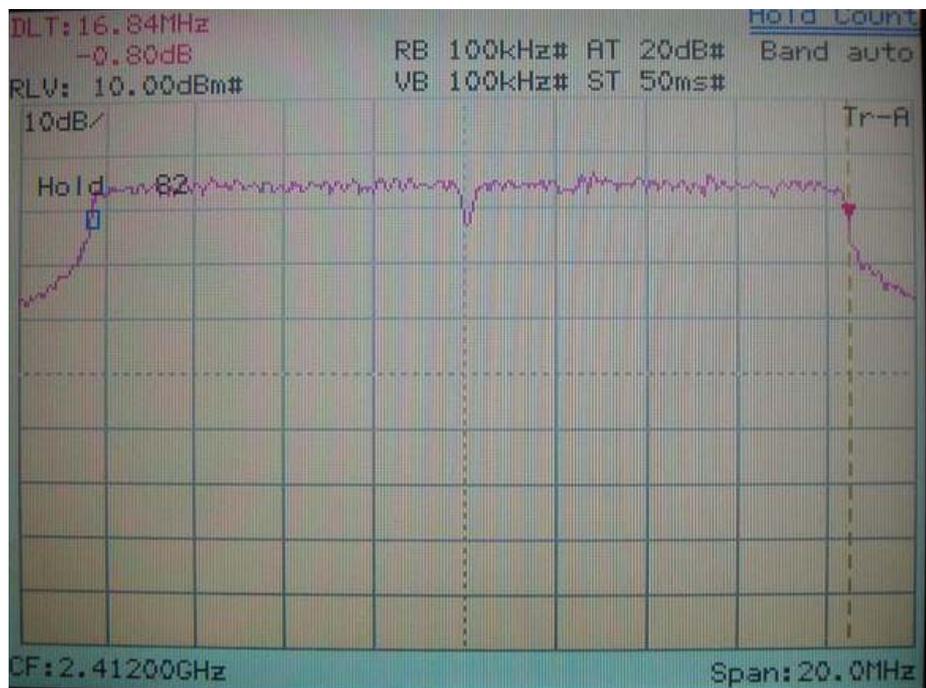


IEEE 802.11g

6dB Bandwidth of Channel 6: 10.326MHz (The minimum 6dB BW at least 500kHz)

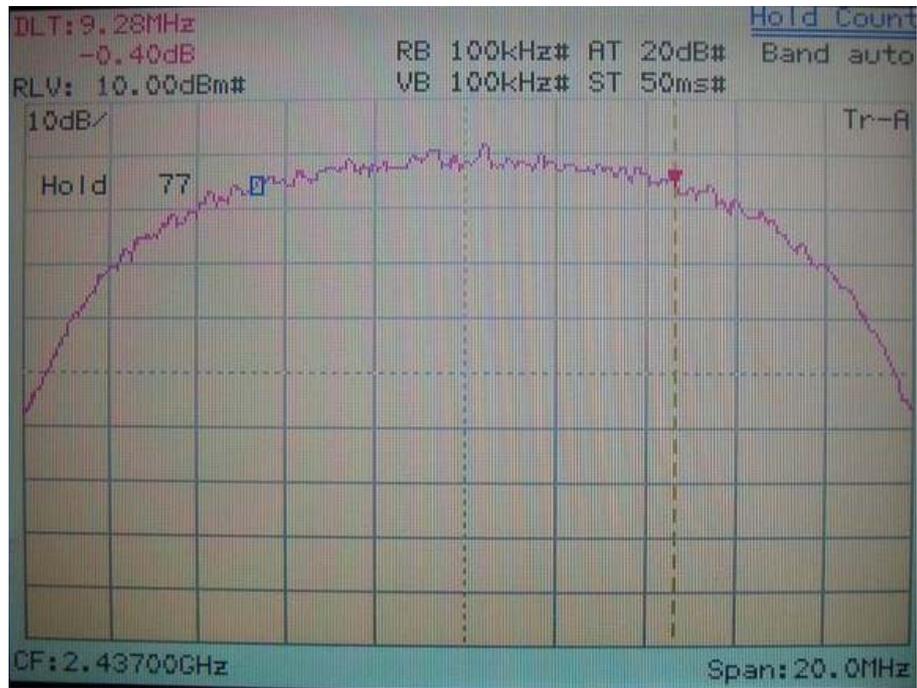


IEEE 802.11b

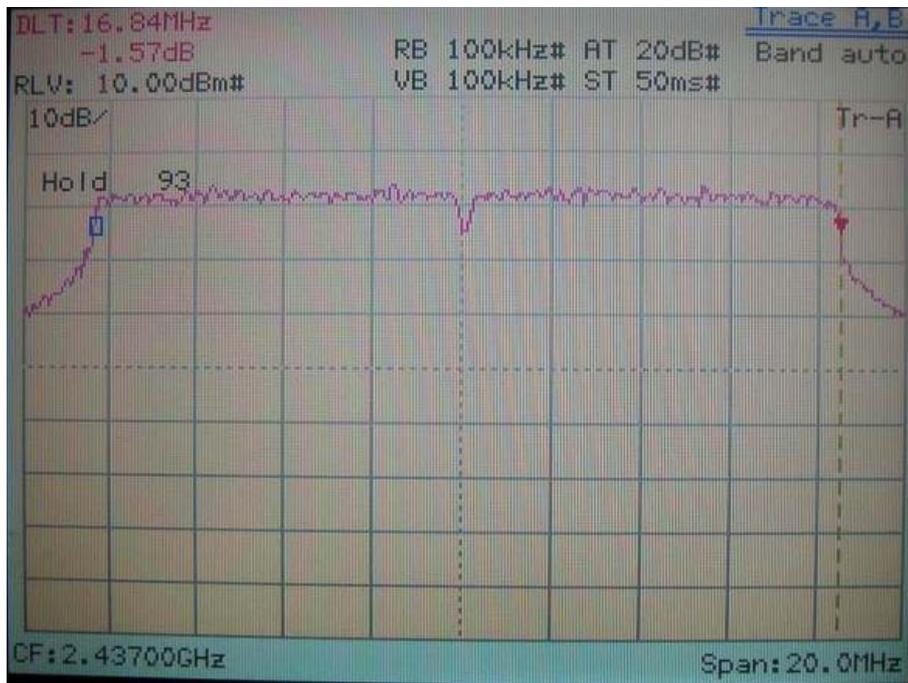


IEEE 802.11g

6dB Bandwidth of Channel 11: 10.28MHz (The minimum 6dB BW at least 500kHz)

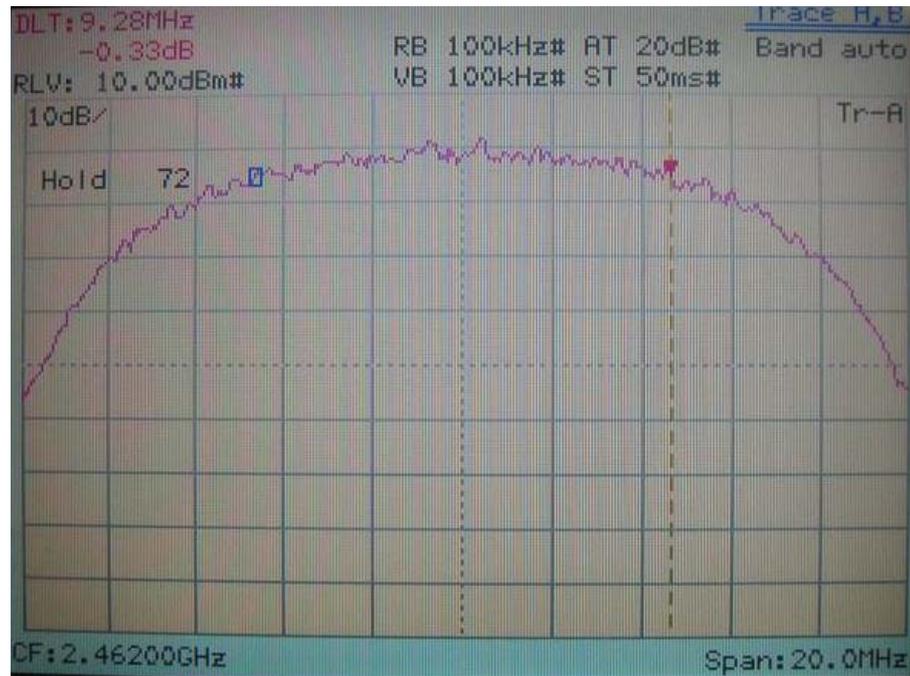


IEEE 802.11b

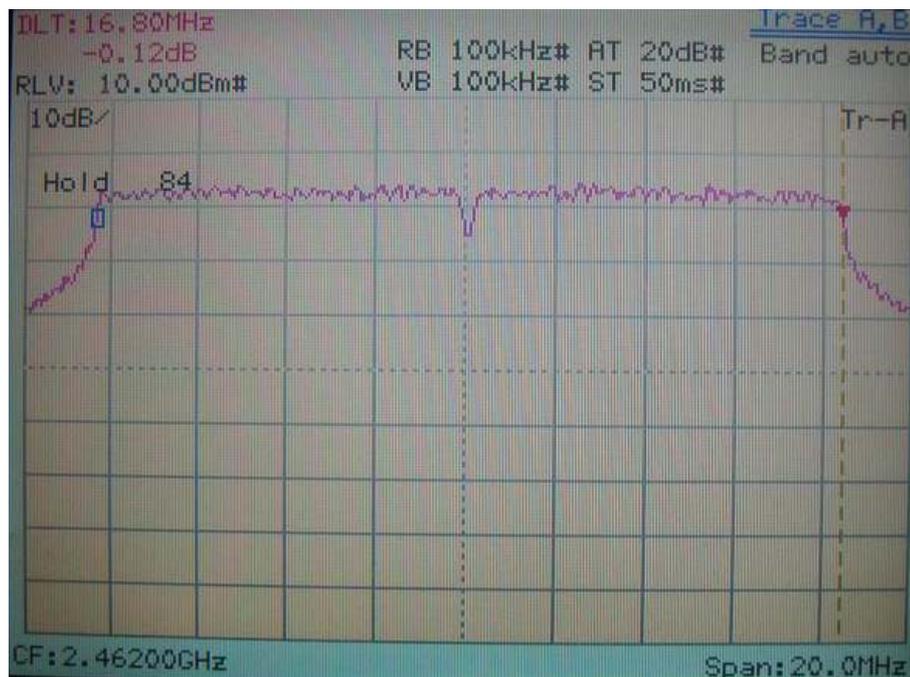

IEEE 802.11g

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup

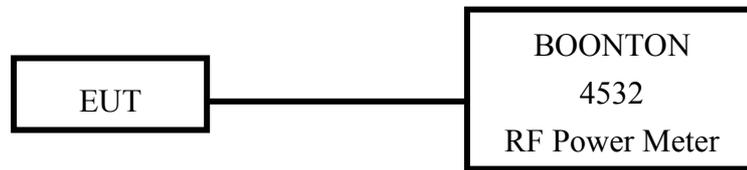

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	05/18/07
Peak Power Sensor	57340	BOONTON	2696	05/18/07

7.3 Test Result

Formula:

RF output power of EUT + |Cable loss| = Output peak power

Channel	RF Output	Cable Loss	Output Peak Power	
	dBm	dBm	dBm	mW
802.11b CH01	14.52	1.00	15.52	35.64
802.11b CH06	14.67	1.00	15.67	36.89
802.11b CH11	14.43	1.00	15.43	34.91
802.11g CH01	17.90	1.00	18.90	77.62
802.11g CH06	18.12	1.00	19.12	81.66
802.11g CH11	18.06	1.00	19.06	80.54

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, stand on three orthogonal planes respectively and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

8.2 List of Test Instruments

				<u>Calibration Date</u>
Instrument Name	Model	Brand	Serial No.	Next time
EMI Receiver	8546A	HP	3520A00242	12/01/06
RF Filter Section	85460A	HP	3448A00217	12/01/06
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	02/17/07
Pre-amplifier	PA1F	TRC	1FAC	05/20/07
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/07
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/07
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/07
Spectrum Analyzer	8564E	HP	3720A00840	02/07/07
Microwave Preamplifier	84125C	HP	US36433002	02/07/07
Horn Antenna	3115	EMCO	9104-3668	01/23/07
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	02/09/07
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	02/09/07
Pre-amplifier	84125C	HP	US36433002	02/07/07
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	01/26/07
Pre-amplifier	PA2F	TRC	2F1GZ	06/20/07
Coaxial Cable (3 miter)	A30A30-0058-50FS T118	JYEBAO	MSA-05	06/20/07
Coaxial Cable (1 meter)	A30A30-0058-50FS T118	JYEBAO	MSA-04	06/20/07

8.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following. (worst case)

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: USB LINK mode for 30MHz to 25GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
202.17	25.01	1.00	53	-3.56	21.45	43.50	-22.05
307.66	28.30	1.00	0	-3.24	25.06	46.00	-20.94
565.92	22.46	1.00	223	5.12	27.58	46.00	-18.42
632.61	24.63	1.00	192	7.45	32.08	46.00	-13.92
9577.92	21.15	1.00	351	23.15	44.30	53.96	-9.66
24229.79	46.62	1.00	285	2.87	49.49	53.96	-4.47

Test mode: USB LINK mode for 30MHz to 25GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
168.22	24.91	1.00	251	-3.76	21.15	43.50	-22.35
502.87	23.83	1.00	159	2.41	26.24	46.00	-19.76
564.71	23.91	1.00	145	5.08	28.99	46.00	-17.01
598.66	23.00	1.00	152	6.22	29.22	46.00	-16.78
9138.75	21.12	1.00	316	23.00	44.12	53.96	-9.84
19197.08	47.68	1.00	257	1.60	49.28	53.96	-4.68

Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: RX mode for 30MHz to 25GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
89.41	29.70	1.00	243	0.01	29.71	43.50	-13.79
154.89	30.95	1.00	93	-3.56	27.39	43.50	-16.11
193.69	33.99	1.00	63	-3.61	30.38	43.50	-13.12
318.57	34.74	1.00	287	-3.10	31.64	46.00	-14.36
19338.75	46.83	1.00	294	1.60	48.43	53.96	-5.53
24364.37	45.17	1.00	324	3.23	48.40	53.96	-5.56

Test mode: RX mode for 30MHz to 25GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
89.41	28.31	1.00	260	5.35	33.66	40.00	-6.34
89.41	30.64	1.00	173	0.01	30.65	43.50	-12.85
288.26	34.22	1.00	287	-3.82	30.40	46.00	-15.60
870.26	20.35	1.00	117	13.76	34.11	46.00	-11.89
19859.37	46.49	1.00	179	1.90	48.39	53.96	-5.57
21963.12	46.99	1.00	260	2.98	49.97	53.96	-3.99

Test mode: WLAN IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
89.41	27.99	1.00	252	0.01	28.00	43.50	-15.50
193.69	35.55	1.00	275	-3.61	31.94	43.50	-11.56
285.84	32.40	1.00	295	-3.88	28.52	46.00	-17.48
468.92	22.99	1.00	229	1.39	24.38	46.00	-21.62
940.59	20.13	1.00	360	15.55	35.68	46.00	-10.32
992.72	19.49	1.00	194	17.16	36.65	54.00	-17.35

Test mode: WLAN IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
42.12	32.39	1.00	208	5.12	37.51	40.00	-2.49
89.41	28.60	1.00	241	0.01	28.61	43.50	-14.89
141.55	36.69	1.00	13	-3.81	32.88	43.50	-10.62
146.40	34.74	1.00	172	-3.02	31.72	43.50	-11.78
272.50	35.51	1.00	185	-4.10	31.41	46.00	-14.59
287.05	38.19	1.00	106	-3.69	34.50	46.00	-11.50

Test mode: WLAN IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2150.00	1.00	277	37.00	---	8.51	45.51	---	73.96	53.96	-8.45
12061.04	1.00	182	37.54	---	9.81	47.35	---	73.96	53.96	-6.61
19296.25	1.00	144	48.00	---	1.60	49.60	---	73.96	53.96	-4.36
21708.12	1.00	92	45.89	---	2.87	48.76	---	73.96	53.96	-5.20
24120.00	1.00	137	45.54	---	3.40	48.94	---	73.96	53.96	-5.02

Test mode: WLAN IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2152.08	1.00	281	38.16	---	8.52	46.68	---	73.96	53.96	-7.28
12061.04	1.00	205	37.46	---	9.81	47.27	---	73.96	53.96	-6.69
19296.25	1.00	171	48.00	---	1.60	49.60	---	73.96	53.96	-4.36
21708.12	1.00	94	45.58	---	2.87	48.45	---	73.96	53.96	-5.51
24120.00	1.00	160	45.23	---	3.40	48.63	---	73.96	53.96	-5.33

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: WLAN IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
89.41	27.58	1.00	253	0.01	27.59	43.50	-15.91
194.90	34.75	1.00	53	-3.58	31.17	43.50	-12.33
273.71	32.26	1.00	77	-4.17	28.09	46.00	-17.91
291.90	31.83	1.00	77	-3.70	28.13	46.00	-17.87
467.71	23.50	1.00	227	1.36	24.86	46.00	-21.14
941.80	20.99	1.00	147	15.58	36.57	46.00	-9.43

Test mode: WLAN IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
43.34	31.48	1.00	264	4.90	36.38	40.00	-3.62
89.41	30.25	1.00	159	0.01	30.26	43.50	-13.24
148.82	35.27	1.00	0	-3.54	31.73	43.50	-11.77
174.29	34.61	1.00	20	-3.81	30.80	43.50	-12.70
285.84	38.25	1.00	83	-3.88	34.37	46.00	-11.63
940.59	21.42	1.00	182	15.55	36.97	46.00	-9.03

Test mode: WLAN IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2327.08	1.00	308	36.50	---	9.01	45.51	---	73.96	53.96	-8.45
12187.92	1.00	96	39.71	---	9.74	49.45	---	73.96	53.96	-4.51
19494.58	1.00	107	47.01	---	1.69	48.70	---	73.96	53.96	-5.26
21934.79	1.00	36	46.08	---	3.09	49.17	---	73.96	53.96	-4.79
24371.46	1.00	312	45.46	---	3.26	48.72	---	73.96	53.96	-5.24

Test mode: WLAN IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2152.08	1.00	349	38.83	---	8.52	47.35	---	73.96	53.96	-6.61
12187.92	1.00	72	39.40	---	9.74	49.14	---	73.96	53.96	-4.82
19494.58	1.00	111	46.95	---	1.69	48.64	---	73.96	53.96	-5.32
21934.79	1.00	36	46.24	---	3.09	49.33	---	73.96	53.96	-4.63
24371.46	1.00	299	45.81	---	3.26	49.07	---	73.96	53.96	-4.89

Test mode: WLAN IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
89.41	27.95	1.00	223	0.01	27.96	43.50	-15.54
142.76	40.25	1.00	323	-3.09	37.16	43.50	-6.34
193.69	35.79	1.00	53	-3.61	32.18	43.50	-11.32
200.96	34.59	1.00	273	-3.50	31.09	43.50	-12.41
284.62	31.72	1.00	307	-3.90	27.82	46.00	-18.18
797.51	21.15	1.00	24	11.91	33.06	46.00	-12.94

Test mode: WLAN IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
43.34	30.35	1.00	170	4.90	35.25	40.00	-4.75
83.35	26.95	1.00	100	0.49	27.44	40.00	-12.56
140.34	33.53	1.00	163	-2.91	30.62	43.50	-12.88
147.61	36.48	1.00	323	-3.45	33.03	43.50	-10.47
162.16	34.36	1.00	203	-3.56	30.80	43.50	-12.70
277.35	37.02	1.00	257	-4.08	32.94	46.00	-13.06

Test mode: WLAN IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2331.25	1.00	243	38.83	---	9.02	47.85	---	73.96	53.96	-6.11
9849.79	1.00	31	35.37	---	11.93	47.30	---	73.96	53.96	-6.66
19696.46	1.00	77	46.73	---	1.81	48.54	---	73.96	53.96	-5.42
22157.92	1.00	216	45.57	---	3.25	48.82	---	73.96	53.96	-5.14
24619.37	1.00	67	46.38	---	3.01	49.39	---	73.96	53.96	-4.57

Test mode: WLAN IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2152.08	1.00	353	39.33	---	8.52	47.85	---	73.96	53.96	-6.11
12308.75	1.00	276	37.96	---	9.56	47.52	---	73.96	53.96	-6.44
19696.46	1.00	51	46.54	---	1.81	48.35	---	73.96	53.96	-5.61
22157.92	1.00	235	45.74	---	3.25	48.99	---	73.96	53.96	-4.97
24619.37	1.00	54	46.77	---	3.01	49.78	---	73.96	53.96	-4.18

Test mode: WLAN IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
83.35	28.19	1.00	230	0.49	28.68	40.00	-11.32
193.69	36.50	1.00	283	-3.61	32.89	43.50	-10.61
290.69	32.54	1.00	137	-3.75	28.79	46.00	-17.21
467.71	23.68	1.00	207	1.36	25.04	46.00	-20.96
941.80	20.99	1.00	339	15.58	36.57	46.00	-9.43

Test mode: WLAN IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
43.34	31.29	1.00	127	4.90	36.19	40.00	-3.81
89.41	28.90	1.00	60	0.01	28.91	43.50	-14.59
147.61	33.56	1.00	160	-3.45	30.11	43.50	-13.39
284.62	34.00	1.00	93	-3.90	30.10	46.00	-15.90
466.50	23.73	1.00	293	1.32	25.05	46.00	-20.95
981.81	20.68	1.00	83	16.80	37.48	54.00	-16.52

Test mode: WLAN IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2745.83	1.00	147	34.84	---	9.95	44.79	---	73.96	53.96	-9.17
9650.42	1.00	141	35.77	---	11.47	47.24	---	73.96	53.96	-6.72
19296.25	1.00	146	48.06	---	1.60	49.66	---	73.96	53.96	-4.30
21708.12	1.00	86	45.74	---	2.87	48.61	---	73.96	53.96	-5.35
24120.00	1.00	163	45.72	---	3.40	49.12	---	73.96	53.96	-4.84

Test mode: WLAN IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2339.58	1.00	125	38.00	---	9.04	47.04	---	73.96	53.96	-6.92
9650.42	1.00	152	35.80	---	11.47	47.27	---	73.96	53.96	-6.69
19296.25	1.00	151	47.97	---	1.60	49.57	---	73.96	53.96	-4.39
21708.12	1.00	65	45.66	---	2.87	48.53	---	73.96	53.96	-5.43
24120.00	1.00	141	45.62	---	3.40	49.02	---	73.96	53.96	-4.94

Test mode: WLAN IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
142.76	27.23	1.00	223	-3.09	24.14	43.50	-19.36
194.90	33.68	1.00	53	-3.58	30.10	43.50	-13.40
227.64	33.89	1.00	57	-4.09	29.80	46.00	-16.20
293.11	31.26	1.00	37	-3.64	27.62	46.00	-18.38
941.80	21.18	1.00	175	15.58	36.76	46.00	-9.24
998.79	20.87	1.00	161	17.36	38.23	54.00	-15.77

Test mode: WLAN IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
42.12	30.18	1.00	250	5.12	35.30	40.00	-4.70
89.41	31.11	1.00	173	0.01	31.12	43.50	-12.38
148.82	34.63	1.00	183	-3.54	31.09	43.50	-12.41
162.16	31.90	1.00	203	-3.56	28.34	43.50	-15.16
285.84	34.88	1.00	87	-3.88	31.00	46.00	-15.00
981.81	20.68	1.00	134	16.80	37.48	54.00	-16.52

Test mode: WLAN IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2656.25	1.00	169	35.34	---	9.78	45.12	---	73.96	53.96	-8.84
12187.92	1.00	84	39.53	---	9.74	49.27	---	73.96	53.96	-4.69
19494.58	1.00	100	47.01	---	1.69	48.70	---	73.96	53.96	-5.26
21934.79	1.00	30	46.61	---	3.09	49.70	---	73.96	53.96	-4.26
24371.46	1.00	321	45.67	---	3.26	48.93	---	73.96	53.96	-5.03

Test mode: WLAN IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2152.08	1.00	278	37.83	---	8.52	46.35	---	73.96	53.96	-7.61
12187.92	1.00	98	39.71	---	9.74	49.45	---	73.96	53.96	-4.51
19494.58	1.00	92	46.76	---	1.69	48.45	---	73.96	53.96	-5.51
21934.79	1.00	44	46.16	---	3.09	49.25	---	73.96	53.96	-4.71
24371.46	1.00	318	45.81	---	3.26	49.07	---	73.96	53.96	-4.89

Test mode: WLAN IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
83.35	26.57	1.00	251	0.49	27.06	40.00	-12.94
148.82	33.18	1.00	83	-3.54	29.64	43.50	-13.86
162.16	34.17	1.00	92	-3.56	30.61	43.50	-12.89
193.69	37.29	1.00	261	-3.61	33.68	43.50	-9.82
290.69	37.08	1.00	294	-3.75	33.33	46.00	-12.67
946.65	20.96	1.00	257	15.67	36.63	46.00	-9.37

Test mode: WLAN IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
43.34	32.13	1.00	230	4.90	37.03	40.00	-2.97
89.41	30.48	1.00	173	0.01	30.49	43.50	-13.01
142.76	31.56	1.00	183	-3.09	28.47	43.50	-15.03
148.82	34.68	1.00	163	-3.54	31.14	43.50	-12.36
221.57	34.40	1.00	117	-4.03	30.37	46.00	-15.63
916.34	20.99	1.00	247	15.07	36.06	46.00	-9.94

Test mode: WLAN IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2339.58	1.00	93	39.00	---	9.04	48.04	---	73.96	53.96	-5.92
12308.75	1.00	261	37.96	---	9.56	47.52	---	73.96	53.96	-6.44
19696.46	1.00	55	46.54	---	1.81	48.35	---	73.96	53.96	-5.61
22157.92	1.00	233	45.35	---	3.25	48.60	---	73.96	53.96	-5.36
24619.37	1.00	51	46.66	---	3.01	49.67	---	73.96	53.96	-4.29

Test mode: WLAN IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2356.25	1.00	83	39.16	---	9.09	48.25	---	73.96	53.96	-5.71
12308.75	1.00	261	37.96	---	9.56	47.52	---	73.96	53.96	-6.44
19696.46	1.00	69	46.77	---	1.81	48.58	---	73.96	53.96	-5.38
22157.92	1.00	244	45.84	---	3.25	49.09	---	73.96	53.96	-4.87
24619.37	1.00	50	46.38	---	3.01	49.39	---	73.96	53.96	-4.57

Test mode: WLAN (IEEE 802.11b)+BT (Normal mode) CH Lowest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
70.01	22.33	1.00	73	1.31	23.64	40.00	-16.36
208.24	29.76	1.00	192	-3.85	25.91	43.50	-17.59
265.23	26.62	1.00	213	-4.26	22.36	46.00	-23.64
314.94	27.74	1.00	77	-3.15	24.59	46.00	-21.41
459.22	22.68	1.00	77	1.11	23.79	46.00	-22.21
858.14	21.54	1.00	135	13.36	34.90	46.00	-11.10

Test mode: WLAN (IEEE 802.11b) + BT (Normal mode) CH Lowest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
50.61	28.59	1.00	129	3.79	32.38	40.00	-7.62
129.43	30.38	1.00	119	-2.63	27.75	43.50	-15.75
141.55	31.24	1.00	168	-3.00	28.24	43.50	-15.26
160.95	31.83	1.00	63	-3.52	28.31	43.50	-15.19
204.60	29.53	1.00	49	-3.68	25.85	43.50	-17.65
879.96	21.61	1.00	217	14.08	35.69	46.00	-10.31

Test mode: WLAN (IEEE 802.11b)+BT (Normal mode) CH Lowest for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4805.00	1.00	183	46.10	---	3.69	49.79	---	73.96	53.96	-4.17
12012.71	1.00	33	39.60	---	10.01	49.61	---	73.96	53.96	-4.35
19296.25	1.00	280	47.77	---	1.60	49.37	---	73.96	53.96	-4.59
24020.83	1.00	10	45.40	---	3.14	48.54	---	73.96	53.96	-5.42
24120.00	1.00	196	46.29	---	3.40	49.69	---	73.96	53.96	-4.27

Test mode: WLAN (IEEE 802.11b) + BT (Normal mode) CH Lowest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4804.10	1.00	265	50.11	47.77	3.68	53.79	51.45	73.96	53.96	-2.51
12061.04	1.00	183	39.60	---	9.81	49.41	---	73.96	53.96	-4.55
19296.25	1.00	274	47.99	---	1.60	49.59	---	73.96	53.96	-4.37
24020.83	1.00	0	45.66	---	3.14	48.80	---	73.96	53.96	-5.16
24120.00	1.00	200	46.16	---	3.40	49.56	---	73.96	53.96	-4.40

Test mode: WLAN (IEEE 802.11b)+BT (Normal mode) CH Middle for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
37.27	19.78	1.00	248	5.98	25.76	40.00	-14.24
122.15	24.00	1.00	227	-2.31	21.69	43.50	-21.81
199.75	29.76	1.00	213	-3.46	26.30	43.50	-17.20
214.30	29.72	1.00	206	-3.97	25.75	43.50	-17.75
314.94	27.83	1.00	7	-3.15	24.68	46.00	-21.32
807.21	20.90	1.00	154	12.16	33.06	46.00	-12.94

Test mode: WLAN (IEEE 802.11b) + BT (Normal mode) CH Middle for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
50.61	29.10	1.00	129	3.79	32.89	40.00	-7.11
89.41	27.60	1.00	269	0.01	27.61	43.50	-15.89
141.55	32.74	1.00	178	-3.00	29.74	43.50	-13.76
154.89	33.18	1.00	66	-3.56	29.62	43.50	-13.88
207.02	29.75	1.00	17	-3.79	25.96	43.50	-17.54
972.11	21.54	1.00	318	16.47	38.01	54.00	-15.99

Test mode: WLAN (IEEE 802.11b)+BT (Normal mode) CH Middle for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
12187.92	1.00	0	39.10	---	9.74	48.84	---	73.96	53.96	-5.12
12206.04	1.00	76	39.28	---	9.79	49.07	---	73.96	53.96	-4.89
21970.21	1.00	49	46.92	---	2.95	49.87	---	73.96	53.96	-4.09
24371.46	1.00	21	47.27	---	3.26	50.53	---	73.96	53.96	-3.43
24410.42	1.00	123	46.85	---	3.10	49.95	---	73.96	53.96	-4.01

Test mode: WLAN (IEEE 802.11b) + BT (Normal mode) CH Middle for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4883.54	1.00	252	46.11	---	3.99	50.10	---	73.96	53.96	-3.86
12206.04	1.00	312	39.44	---	9.79	49.23	---	73.96	53.96	-4.73
21970.21	1.00	45	47.16	---	2.95	50.11	---	73.96	53.96	-3.85
24371.46	1.00	29	47.33	---	3.26	50.59	---	73.96	53.96	-3.37
24410.42	1.00	137	46.82	---	3.10	49.92	---	73.96	53.96	-4.04

Test mode: WLAN (IEEE 802.11b)+BT(Normal mode) CH Highest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
32.42	20.81	1.00	232	7.34	28.15	40.00	-11.85
89.41	23.76	1.00	121	0.01	23.77	43.50	-19.73
208.24	30.81	1.00	211	-3.85	26.96	43.50	-16.54
314.94	28.88	1.00	76	-3.15	25.73	46.00	-20.27
716.27	21.73	1.00	115	9.59	31.32	46.00	-14.68
967.26	21.14	1.00	87	16.31	37.45	54.00	-16.55

Test mode: WLAN (IEEE 802.11b)+ BT (Normal mode) CH Highest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
50.61	36.85	1.00	121	-3.79	33.06	40.00	-6.94
141.55	31.38	1.00	93	-3.00	28.38	43.50	-15.12
156.10	33.07	1.00	170	-3.54	29.53	43.50	-13.97
207.02	30.87	1.00	336	-3.79	27.08	43.50	-16.42
681.11	21.05	1.00	232	8.84	29.89	46.00	-16.11
864.20	22.02	1.00	343	13.56	35.58	46.00	-10.42

Test mode: WLAN (IEEE 802.11b)+BT (Normal mode) CH Highest for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
12308.75	1.00	350	38.61	---	9.56	48.17	---	73.96	53.96	-5.79
19696.46	1.00	245	46.71	---	1.81	48.52	---	73.96	53.96	-5.44
22157.92	1.00	23	46.34	---	3.25	49.59	---	73.96	53.96	-4.37
24619.37	1.00	150	45.93	---	3.01	48.94	---	73.96	53.96	-5.02
24800.00	1.00	116	47.20	---	2.22	49.42	---	73.96	53.96	-4.54

Test mode: WLAN (IEEE 802.11b) + BT (Normal mode) CH Highest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
19696.46	1.00	245	46.99	---	1.81	48.80	---	73.96	53.96	-5.16
22157.92	1.00	11	46.15	---	3.25	49.40	---	73.96	53.96	-4.56
22320.83	1.00	224	45.16	---	3.33	48.49	---	73.96	53.96	-5.47
24619.37	1.00	137	45.99	---	3.01	49.00	---	73.96	53.96	-4.96
24800.00	1.00	127	46.99	---	2.22	49.21	---	73.96	53.96	-4.75

Test mode: WLAN (IEEE 802.11g)+BT (Normal mode) CH Lowest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
32.42	20.25	1.00	135	7.34	27.59	40.00	-12.41
123.36	25.39	1.00	232	-2.36	23.03	43.50	-20.47
194.90	30.61	1.00	197	-3.58	27.03	43.50	-16.47
205.81	32.75	1.00	204	-3.73	29.02	43.50	-14.48
314.94	28.77	1.00	97	-3.15	25.62	46.00	-20.38
864.20	21.26	1.00	248	13.56	34.82	46.00	-11.18

Test mode: WLAN (IEEE 802.11g) + BT (Normal mode) CH Lowest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
50.61	29.53	1.00	93	3.79	33.32	40.00	-6.68
129.43	32.37	1.00	93	-2.63	29.74	43.50	-13.76
142.76	32.81	1.00	357	-3.09	29.72	43.50	-13.78
162.16	35.05	1.00	93	-3.56	31.49	43.50	-12.01
199.75	32.58	1.00	343	-3.46	29.12	43.50	-14.38
207.02	32.61	1.00	38	-3.79	28.82	43.50	-14.68

Test mode: WLAN (IEEE 802.11g)+BT (Normal mode) CH Lowest for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4805.00	1.00	173	46.13	---	3.69	49.82	---	73.96	53.96	-4.14
12012.71	1.00	42	39.34	---	10.01	49.35	---	73.96	53.96	-4.61
19296.25	1.00	269	48.28	---	1.60	49.88	---	73.96	53.96	-4.08
24020.83	1.00	3	45.85	---	3.14	48.99	---	73.96	53.96	-4.97
24120.00	1.00	192	46.06	---	3.40	49.46	---	73.96	53.96	-4.50

Test mode: WLAN (IEEE 802.11g) + BT (Normal mode) CH Lowest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4804.10	1.00	274	49.99	47.96	3.68	53.67	51.64	73.96	53.96	-2.32
12061.04	1.00	180	39.69	---	9.81	49.50	---	73.96	53.96	-4.46
19296.25	1.00	260	48.06	---	1.60	49.66	---	73.96	53.96	-4.30
24020.83	1.00	0	45.71	---	3.14	48.85	---	73.96	53.96	-5.11
24120.00	1.00	186	45.94	---	3.40	49.34	---	73.96	53.96	-4.62

Test mode: WLAN (IEEE 802.11g)+BT (Normal mode) CH Middle for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
31.21	19.77	1.00	192	7.79	27.56	40.00	-12.44
89.41	23.54	1.00	66	0.01	23.55	43.50	-19.95
194.90	31.66	1.00	192	-3.58	28.08	43.50	-15.42
207.02	32.75	1.00	206	-3.79	28.96	43.50	-14.54
316.15	27.51	1.00	84	-3.13	24.38	46.00	-21.62
820.55	21.07	1.00	45	12.45	33.52	46.00	-12.48

Test mode: WLAN (IEEE 802.11g) + BT (Normal mode) CH Middle for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
49.40	28.66	1.00	107	3.98	32.64	40.00	-7.36
129.43	34.57	1.00	114	-2.63	31.94	43.50	-11.56
160.95	35.03	1.00	31	-3.52	31.51	43.50	-11.99
207.02	32.37	1.00	350	-3.79	28.58	43.50	-14.92
652.01	21.39	1.00	280	8.13	29.52	46.00	-16.48
996.36	21.10	1.00	45	17.28	38.38	54.00	-15.62

Test mode: WLAN (IEEE 802.11g)+BT (Normal mode) CH Middle for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
12187.92	1.00	3	39.33	---	9.74	49.07	---	73.96	53.96	-4.89
12206.04	1.00	78	39.31	---	9.79	49.10	---	73.96	53.96	-4.86
21970.21	1.00	34	47.10	---	2.95	50.05	---	73.96	53.96	-3.91
24371.46	1.00	36	47.21	---	3.26	50.47	---	73.96	53.96	-3.49
24410.42	1.00	126	46.74	---	3.10	49.84	---	73.96	53.96	-4.12

Test mode: WLAN (IEEE 802.11g) + BT (Normal mode) CH Middle for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4883.54	1.00	244	46.26	---	3.99	50.25	---	73.96	53.96	-3.71
12206.04	1.00	300	39.69	---	9.79	49.48	---	73.96	53.96	-4.48
21970.21	1.00	40	47.19	---	2.95	50.14	---	73.96	53.96	-3.82
24371.46	1.00	37	47.50	---	3.26	50.76	---	73.96	53.96	-3.20
24410.42	1.00	146	46.80	---	3.10	49.90	---	73.96	53.96	-4.06

Test mode: WLAN (IEEE 802.11g)+BT(Normal mode) CH Highest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
32.42	19.93	1.00	220	7.34	27.27	40.00	-12.73
89.41	26.82	1.00	133	0.01	26.83	43.50	-16.67
200.96	30.48	1.00	216	-3.50	26.98	43.50	-16.52
314.94	27.22	1.00	83	-3.15	24.07	46.00	-21.93
626.55	21.36	1.00	106	7.23	28.59	46.00	-17.41
946.65	21.25	1.00	327	15.67	36.92	46.00	-9.08

Test mode: WLAN (IEEE 802.11g)+ BT (Normal mode) CH Highest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
49.40	28.27	1.00	100	3.98	32.25	40.00	-7.75
128.21	30.65	1.00	100	-2.58	28.07	43.50	-15.43
141.55	31.51	1.00	10	-3.00	28.51	43.50	-14.99
160.95	33.77	1.00	0	-3.52	30.25	43.50	-13.25
200.96	31.16	1.00	343	-3.50	27.66	43.50	-15.84
991.51	20.34	1.00	318	17.12	37.46	54.00	-16.54

Test mode: WLAN (IEEE 802.11g)+BT (Normal mode) CH Highest for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
12308.75	1.00	350	38.59	---	9.56	48.15	---	73.96	53.96	-5.81
19696.46	1.00	247	46.89	---	1.81	48.70	---	73.96	53.96	-5.26
22157.92	1.00	9	46.24	---	3.25	49.49	---	73.96	53.96	-4.47
24619.37	1.00	151	46.24	---	3.01	49.25	---	73.96	53.96	-4.71
24800.00	1.00	119	47.06	---	2.22	49.28	---	73.96	53.96	-4.68

Test mode: WLAN (IEEE 802.11g) + BT (Normal mode) CH Highest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
19696.46	1.00	258	47.20	---	1.81	49.01	---	73.96	53.96	-4.95
19799.17	1.00	295	46.72	---	1.90	48.62	---	73.96	53.96	-5.34
22157.92	1.00	17	46.36	---	3.25	49.61	---	73.96	53.96	-4.35
24619.37	1.00	143	45.85	---	3.01	48.86	---	73.96	53.96	-5.10
24800.00	1.00	139	46.91	---	2.22	49.13	---	73.96	53.96	-4.83

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Lowest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
37.27	21.03	1.00	24	5.98	27.01	40.00	-12.99
89.41	24.56	1.00	241	0.01	24.57	43.50	-18.93
193.69	30.28	1.00	192	-3.61	26.67	43.50	-16.83
213.09	31.98	1.00	213	-3.96	28.02	43.50	-15.48
265.23	28.74	1.00	220	-4.26	24.48	46.00	-21.52
928.46	21.55	1.00	241	15.31	36.86	46.00	-9.14

Test mode: WLAN (IEEE 802.11b) + BT (E.D.R. mode) CH Lowest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
50.61	30.24	1.00	121	3.79	34.03	40.00	-5.97
83.35	34.60	1.00	128	0.49	35.09	40.00	-4.91
154.89	34.42	1.00	156	-3.56	30.86	43.50	-12.64
160.95	34.05	1.00	66	-3.52	30.53	43.50	-12.97
733.25	22.20	1.00	227	9.89	32.09	46.00	-13.91
996.36	21.19	1.00	42	17.28	38.47	54.00	-15.53

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Lowest for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4805.00	1.00	196	45.98	---	3.69	49.67	---	73.96	53.96	-4.29
12012.71	1.00	42	39.58	---	10.01	49.59	---	73.96	53.96	-4.37
19296.25	1.00	288	47.81	---	1.60	49.41	---	73.96	53.96	-4.55
24020.83	1.00	12	45.95	---	3.14	49.09	---	73.96	53.96	-4.87
24120.00	1.00	198	46.14	---	3.40	49.54	---	73.96	53.96	-4.42

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Lowest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4804.10	1.00	278	49.97	47.55	3.68	53.65	51.23	73.96	53.96	-2.73
12012.71	1.00	131	38.92	---	10.01	48.93	---	73.96	53.96	-5.03
12061.04	1.00	188	39.65	---	9.81	49.46	---	73.96	53.96	-4.50
19296.25	1.00	293	47.83	---	1.60	49.43	---	73.96	53.96	-4.53
24120.00	1.00	200	45.90	---	3.40	49.30	---	73.96	53.96	-4.66

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Middle for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
38.49	21.63	1.00	248	5.78	27.41	40.00	-12.59
200.96	32.67	1.00	199	-3.50	29.17	43.50	-14.33
207.02	31.15	1.00	206	-3.79	27.36	43.50	-16.14
314.94	30.47	1.00	112	-3.15	27.32	46.00	-18.68
719.91	21.16	1.00	52	9.65	30.81	46.00	-15.19
981.81	20.59	1.00	28	16.80	37.39	54.00	-16.61

Test mode: WLAN (IEEE 802.11b) + BT (E.D.R. mode) CH Middle for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
50.61	29.89	1.00	94	3.79	33.68	40.00	-6.32
89.41	28.04	1.00	262	0.01	28.05	43.50	-15.45
141.55	33.86	1.00	171	-3.00	30.86	43.50	-12.64
153.68	34.62	1.00	164	-3.58	31.04	43.50	-12.46
208.24	34.39	1.00	0	-3.85	30.54	43.50	-12.96
997.58	20.77	1.00	62	17.32	38.09	54.00	-15.91

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Middle for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
12187.92	1.00	12	39.10	---	9.74	48.84	---	73.96	53.96	-5.12
12206.04	1.00	83	39.57	---	9.79	49.36	---	73.96	53.96	-4.60
21970.21	1.00	51	46.88	---	2.95	49.83	---	73.96	53.96	-4.13
24371.46	1.00	33	47.36	---	3.26	50.62	---	73.96	53.96	-3.34
24410.42	1.00	128	46.54	---	3.10	49.64	---	73.96	53.96	-4.32

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Middle for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4883.54	1.00	265	45.91	---	3.99	49.90	---	73.96	53.96	-4.06
12206.04	1.00	306	39.24	---	9.79	49.03	---	73.96	53.96	-4.93
21970.21	1.00	57	47.02	---	2.95	49.97	---	73.96	53.96	-3.99
24371.46	1.00	38	47.38	---	3.26	50.64	---	73.96	53.96	-3.32
24410.42	1.00	146	47.05	---	3.10	50.15	---	73.96	53.96	-3.81

Test mode: WLAN (IEEE 802.11b)+BT(E.D.R. mode) CH Highest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
40.91	20.83	1.00	308	5.35	26.18	40.00	-13.82
135.49	24.44	1.00	52	-2.79	21.65	43.50	-21.85
207.02	30.25	1.00	197	-3.79	26.46	43.50	-17.04
314.94	30.54	1.00	69	-3.15	27.39	46.00	-18.61
798.72	20.72	1.00	175	11.95	32.67	46.00	-13.33
980.60	20.82	1.00	59	16.76	37.58	54.00	-16.42

Test mode: WLAN (IEEE 802.11b) + BT (E.D.R. mode) CH Highest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
49.40	29.12	1.00	185	3.98	33.10	40.00	-6.90
122.15	31.85	1.00	115	-2.31	29.54	43.50	-13.96
141.55	31.95	1.00	178	-3.00	28.95	43.50	-14.55
160.95	34.17	1.00	17	-3.52	30.65	43.50	-12.85
207.02	31.01	1.00	24	-3.79	27.22	43.50	-16.28
941.80	21.56	1.00	252	15.58	37.14	46.00	-8.86

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Highest e for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
19696.46	1.00	242	47.26	---	1.81	49.07	---	73.96	53.96	-4.89
22157.92	1.00	2	46.13	---	3.25	49.38	---	73.96	53.96	-4.58
22320.83	1.00	215	45.37	---	3.33	48.70	---	73.96	53.96	-5.26
24619.37	1.00	145	46.00	---	3.01	49.01	---	73.96	53.96	-4.95
24800.00	1.00	117	46.91	---	2.22	49.13	---	73.96	53.96	-4.83

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Highest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
19696.46	1.00	235	47.00	---	1.81	48.81	---	73.96	53.96	-5.15
22157.92	1.00	10	46.40	---	3.25	49.65	---	73.96	53.96	-4.31
22320.83	1.00	225	45.43	---	3.33	48.76	---	73.96	53.96	-5.20
24619.37	1.00	122	46.10	---	3.01	49.11	---	73.96	53.96	-4.85
24800.00	1.00	130	46.93	---	2.22	49.15	---	73.96	53.96	-4.81

Test mode: WLAN (IEEE 802.11g)+BT (E.D.R. mode) CH Lowest for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
53.04	22.02	1.00	227	3.35	25.37	40.00	-14.63
122.15	24.21	1.00	192	-2.31	21.90	43.50	-21.60
141.55	23.55	1.00	332	-3.00	20.55	43.50	-22.95
207.02	31.50	1.00	192	-3.79	27.71	43.50	-15.79
314.94	31.11	1.00	77	-3.15	27.96	46.00	-18.04
946.65	20.91	1.00	112	15.67	36.58	46.00	-9.42

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Lowest for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
49.40	29.72	1.00	164	3.98	33.70	40.00	-6.30
122.15	31.97	1.00	122	-2.31	29.66	43.50	-13.84
128.21	34.02	1.00	80	-2.58	31.44	43.50	-12.06
141.55	35.23	1.00	171	-3.00	32.23	43.50	-11.27
160.95	35.57	1.00	80	-3.52	32.05	43.50	-11.45
199.75	31.94	1.00	110	-3.46	28.48	43.50	-15.02

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Lowest for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4805.00	1.00	182	45.84	---	3.69	49.53	---	73.96	53.96	-4.43
12012.71	1.00	43	39.81	---	10.01	49.82	---	73.96	53.96	-4.14
19296.25	1.00	273	48.26	---	1.60	49.86	---	73.96	53.96	-4.10
24020.83	1.00	6	45.60	---	3.14	48.74	---	73.96	53.96	-5.22
24120.00	1.00	197	46.29	---	3.40	49.69	---	73.96	53.96	-4.27

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Lowest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4804.10	1.00	272	49.83	47.51	3.68	53.51	51.19	73.96	53.96	-2.77
12012.71	1.00	126	38.80	---	10.01	48.81	---	73.96	53.96	-5.15
12061.04	1.00	186	39.65	---	9.81	49.46	---	73.96	53.96	-4.50
19296.25	1.00	284	47.77	---	1.60	49.37	---	73.96	53.96	-4.59
24120.00	1.00	215	46.16	---	3.40	49.56	---	73.96	53.96	-4.40

Test mode: WLAN (IEEE 802.11g)+BT (E.D.R. mode) CH Middle for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
89.41	24.75	1.00	232	0.01	24.76	43.50	-18.74
193.69	30.19	1.00	197	-3.61	26.58	43.50	-16.92
207.02	31.29	1.00	218	-3.79	27.50	43.50	-16.00
314.94	31.34	1.00	76	-3.15	28.19	46.00	-17.81
489.54	22.79	1.00	132	1.98	24.77	46.00	-21.23
1000.00	20.76	1.00	157	17.40	38.16	54.00	-15.84

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Middle for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
50.61	29.20	1.00	122	3.79	32.99	40.00	-7.01
128.21	31.85	1.00	122	-2.58	29.27	43.50	-14.23
141.55	32.25	1.00	171	-3.00	29.25	43.50	-14.25
160.95	34.66	1.00	31	-3.52	31.14	43.50	-12.36
207.02	32.39	1.00	10	-3.79	28.60	43.50	-14.90
922.40	21.30	1.00	76	15.19	36.49	46.00	-9.51

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Middle for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
12187.92	1.00	7	39.29	---	9.74	49.03	---	73.96	53.96	-4.93
12206.04	1.00	81	39.37	---	9.79	49.16	---	73.96	53.96	-4.80
21970.21	1.00	42	47.37	---	2.95	50.32	---	73.96	53.96	-3.64
24371.46	1.00	32	47.05	---	3.26	50.31	---	73.96	53.96	-3.65
24410.42	1.00	146	46.87	---	3.10	49.97	---	73.96	53.96	-3.99

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Middle for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4883.54	1.00	246	46.38	---	3.99	50.37	---	73.96	53.96	-3.59
12206.04	1.00	325	39.65	---	9.79	49.44	---	73.96	53.96	-4.52
21970.21	1.00	48	47.45	---	2.95	50.40	---	73.96	53.96	-3.56
24371.46	1.00	25	47.25	---	3.26	50.51	---	73.96	53.96	-3.45
24410.42	1.00	148	46.56	---	3.10	49.66	---	73.96	53.96	-4.30

Test mode: WLAN (IEEE 802.11g)+BT(E.D.R. mode) CH Highest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
31.21	20.00	1.00	346	7.79	27.79	40.00	-12.21
89.41	26.04	1.00	213	0.01	26.05	43.50	-17.45
194.90	31.03	1.00	178	-3.58	27.45	43.50	-16.05
200.96	30.55	1.00	206	-3.50	27.05	43.50	-16.45
314.94	30.47	1.00	98	-3.15	27.32	46.00	-18.68
978.17	21.14	1.00	59	16.68	37.82	54.00	-16.18

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
49.40	30.29	1.00	136	3.98	34.27	40.00	-5.73
89.41	28.21	1.00	206	0.01	28.22	43.50	-15.28
160.95	35.14	1.00	31	-3.52	31.62	43.50	-11.88
207.02	32.46	1.00	353	-3.79	28.67	43.50	-14.83
280.99	32.04	1.00	105	-3.99	28.05	46.00	-17.95
996.36	20.03	1.00	154	17.28	37.31	54.00	-16.69

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
19696.46	1.00	257	46.81	---	1.81	48.62	---	73.96	53.96	-5.34
19799.17	1.00	300	46.60	---	1.90	48.50	---	73.96	53.96	-5.46
22157.92	1.00	20	46.36	---	3.25	49.61	---	73.96	53.96	-4.35
24619.37	1.00	132	46.26	---	3.01	49.27	---	73.96	53.96	-4.69
24800.00	1.00	130	47.08	---	2.22	49.30	---	73.96	53.96	-4.66

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
19696.46	1.00	254	47.16	---	1.81	48.97	---	73.96	53.96	-4.99
22157.92	1.00	26	45.97	---	3.25	49.22	---	73.96	53.96	-4.74
22320.83	1.00	236	45.02	---	3.33	48.35	---	73.96	53.96	-5.61
24619.37	1.00	138	46.14	---	3.01	49.15	---	73.96	53.96	-4.81
24800.00	1.00	117	47.20	---	2.22	49.42	---	73.96	53.96	-4.54

8.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

IEEE 802.11b Ch01

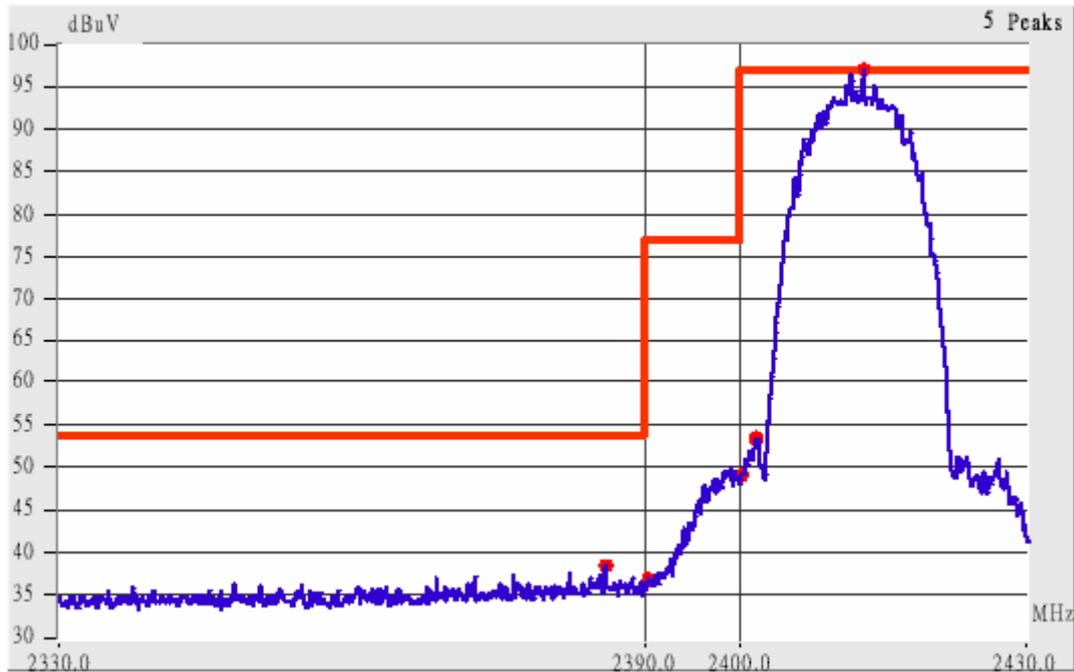


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2366.45	Hor	1.00	62	9.12	47.62	---	73.96	53.96	-6.34
2390.02	Hor	1.00	58	9.18	47.52	---	73.96	53.96	-6.44
2379.51	Ver	1.00	151	9.15	46.15	---	73.96	53.96	-7.81
2390.02	Ver	1.00	144	9.18	46.35	---	73.96	53.96	-7.61

IEEE 802.11b Ch11

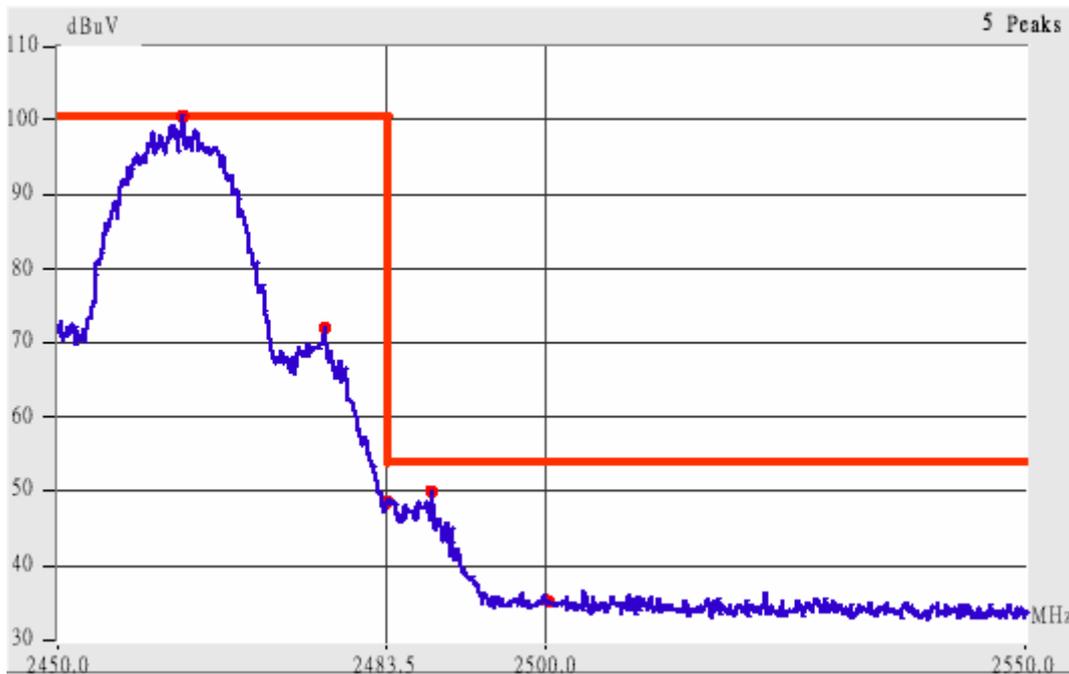


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2483.18	Hor	1.00	225	9.44	55.11	45.27	73.96	53.96	-8.69
2487.30	Hor	1.00	213	9.45	55.29	44.28	73.96	53.96	-9.68
2500.01	Hor	1.00	269	9.49	43.66	---	73.96	53.96	-10.30
2516.05	Hor	1.00	206	9.52	45.69	---	73.96	53.96	-8.27
2483.16	Ver	1.00	217	9.44	54.78	45.94	73.96	53.96	-8.02
2487.37	Ver	1.00	252	9.45	55.79	44.95	73.96	53.96	-9.01
2500.01	Ver	1.00	244	9.49	44.99	---	73.96	53.96	-8.97
2518.56	Ver	1.00	27	9.52	45.52	---	73.96	53.96	-8.44

IEEE 802.11g Ch01

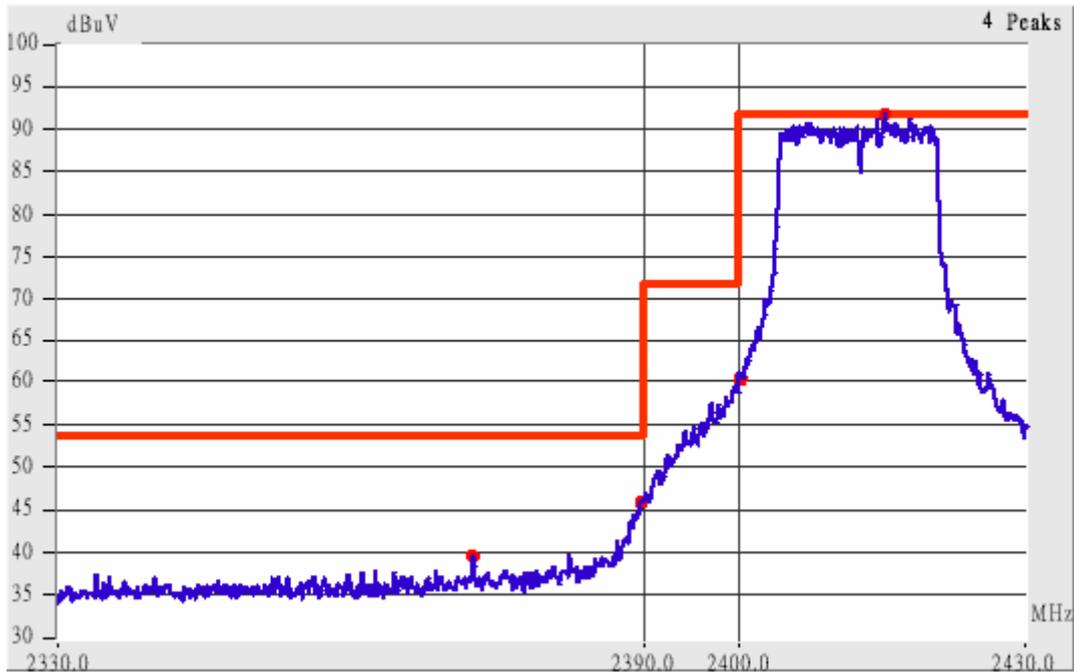


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

3. The lobe left by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2387.31	Hor	1.00	100	9.17	56.34	39.34	73.96	53.96	-14.62
2390.08	Hor	1.00	217	9.18	60.35	44.01	73.96	53.96	-9.95
2385.74	Ver	1.00	75	9.17	52.00	---	73.96	53.96	-1.96
2390.45	Ver	1.00	113	9.18	57.85	42.18	73.96	53.96	-11.78

IEEE 802.11g Ch11

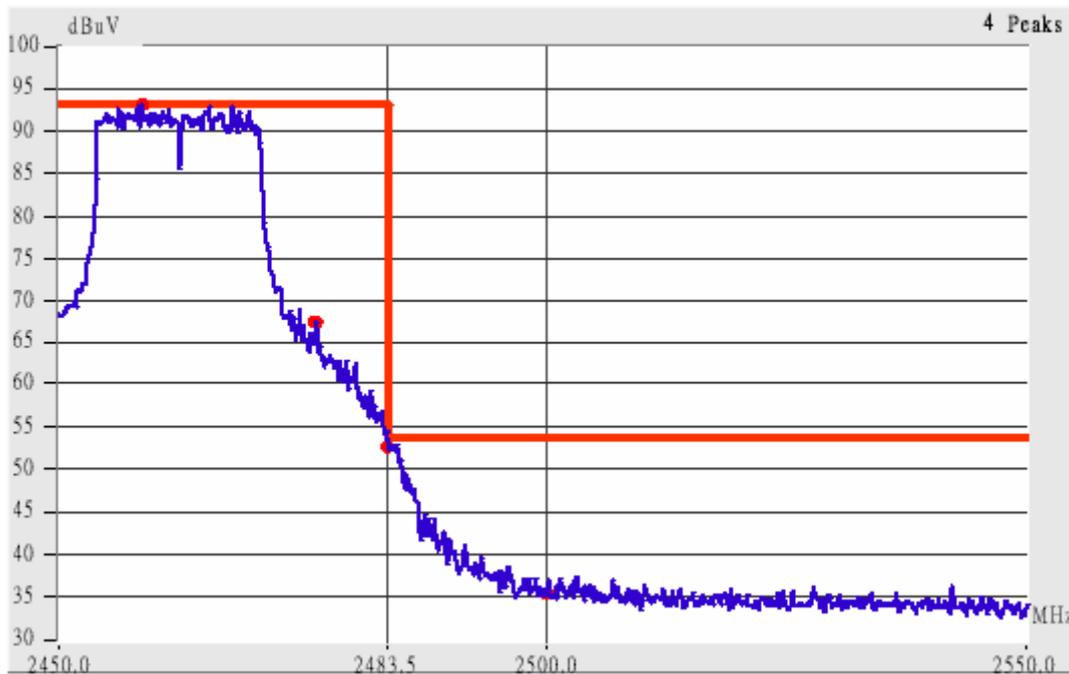


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 3. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2482.93	Hor	1.00	146	9.44	66.44	51.44	73.96	53.96	-2.52
2484.90	Hor	1.00	159	9.45	61.12	45.62	73.96	53.96	-8.34
2500.01	Hor	1.00	165	9.49	44.82	---	73.96	53.96	-9.14
2513.60	Hor	1.00	246	9.52	46.02	---	73.96	53.96	-7.94
2483.19	Ver	1.00	167	9.44	66.61	49.11	73.96	53.96	-4.85
2485.79	Ver	1.00	355	9.45	61.78	40.95	73.96	53.96	-12.18
2500.01	Ver	1.00	355	9.49	46.32	---	73.96	53.96	-7.64
2514.53	Ver	1.00	167	9.52	46.18	---	73.96	53.96	-7.78

WLAN (IEEE 802.11b) + BT (Normal mode) CH Lowest

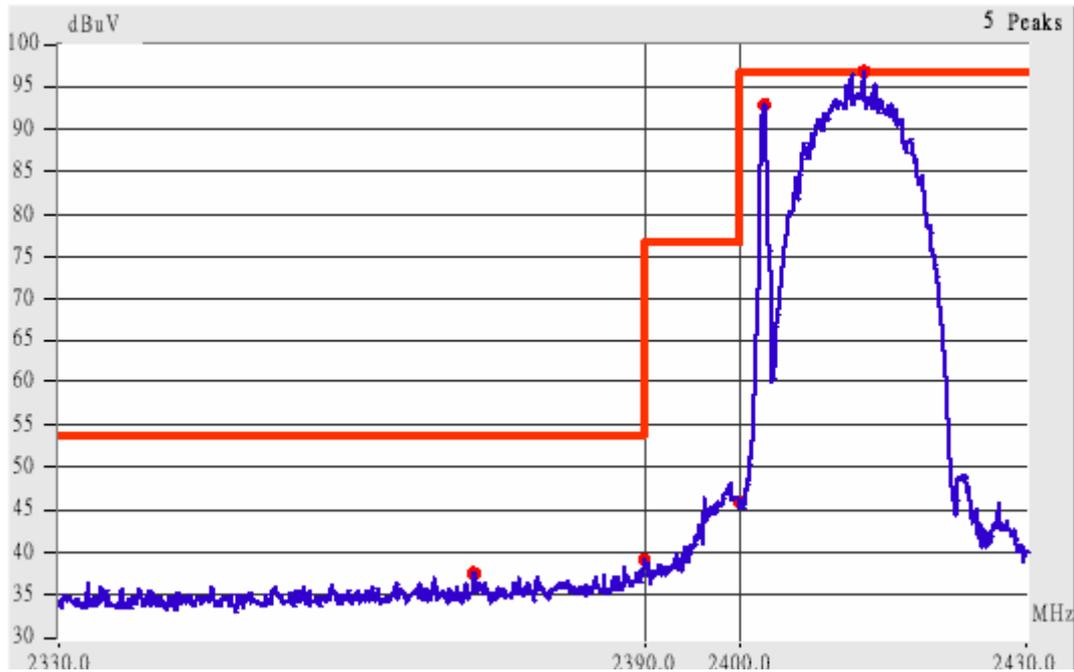

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

- 5. The lobe left by the fundamental side is already 20dB below the highest emission level.
- 6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2362.45	Hor	1.00	220	9.10	46.27	---	73.96	53.96	-7.69
2390.02	Hor	1.00	7	9.18	49.35	---	73.96	53.96	-4.61
2369.43	Ver	1.00	135	9.12	46.46	---	73.96	53.96	-7.50
2390.02	Ver	1.00	107	9.18	46.85	---	73.96	53.96	-7.11

WLAN (IEEE 802.11b) + BT (Normal mode) CH Highest




This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 5. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.18	Hor	1.00	66	9.44	54.94	46.61	73.96	53.96	-7.35
2487.01	Hor	1.00	58	9.45	53.95	43.45	73.96	53.96	-10.51
2500.01	Hor	1.00	193	9.49	44.66	---	73.96	53.96	-9.30
2511.44	Hor	1.00	67	9.51	45.18	---	73.96	53.96	-8.78
2483.50	Ver	1.00	167	9.44	48.78	---	73.96	53.96	-5.18
2487.64	Ver	1.00	259	9.46	50.46	---	73.96	53.96	-3.50
2500.01	Ver	1.00	133	9.49	43.66	---	73.96	53.96	-10.30
2512.37	Ver	1.00	257	9.51	45.01	---	73.96	53.96	-8.95

WLAN (IEEE 802.11g) + BT (Normal mode) CH Lowest

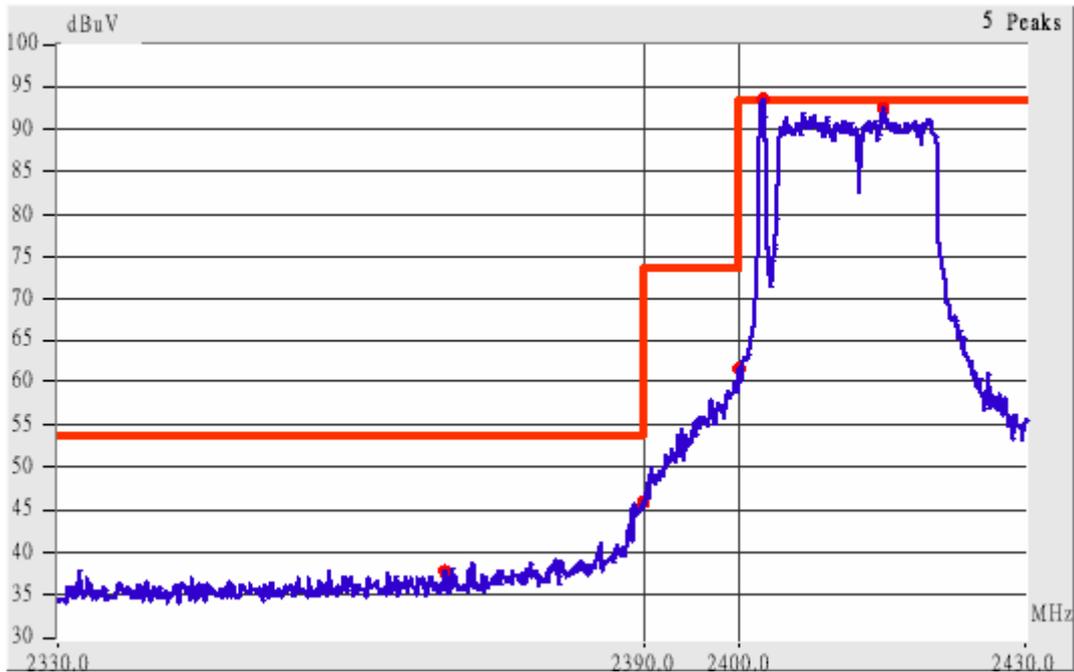


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

- 7. The lobe left by the fundamental side is already 20dB below the highest emission level.
- 8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2379.89	Hor	1.00	20	9.15	49.99	---	73.96	53.96	-3.97
2390.14	Hor	1.00	111	9.18	56.68	41.35	73.96	53.96	-12.61
2373.33	Ver	1.00	121	9.14	45.64	---	73.96	53.96	-8.32
2390.02	Ver	1.00	127	9.18	49.35	---	73.96	53.96	-4.61

WLAN (IEEE 802.11g) + BT (Normal mode) CH Highest

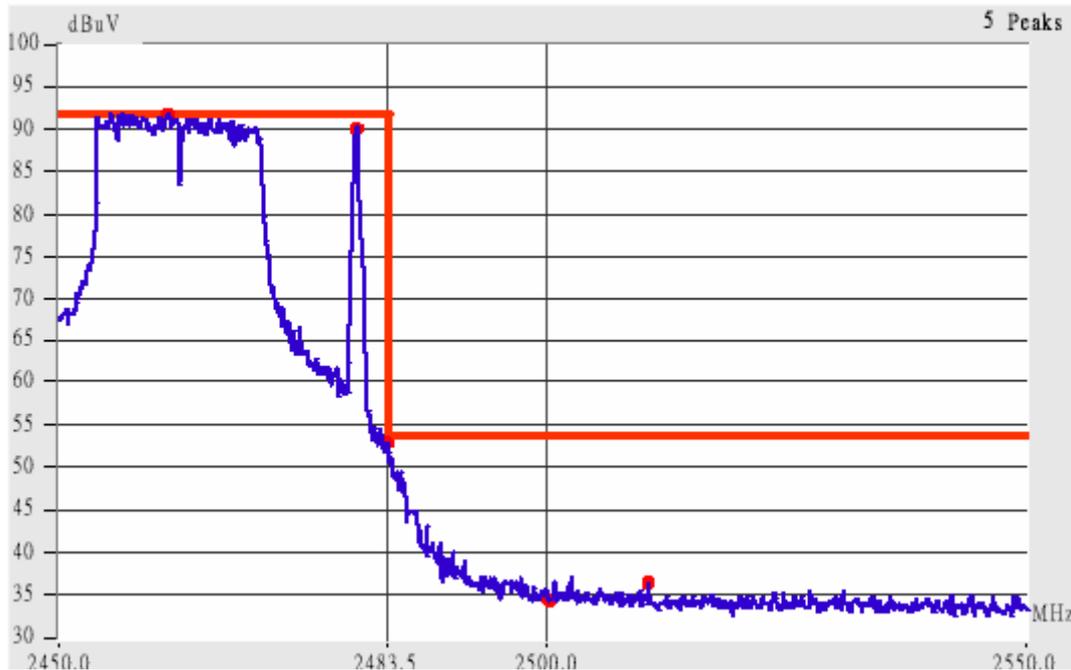


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 7. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2482.88	Hor	1.00	202	9.44	63.94	52.27	73.96	53.96	-1.69
2490.62	Hor	1.00	209	9.46	51.96	---	73.96	53.96	-2.00
2500.01	Hor	1.00	97	9.49	44.82	---	73.96	53.96	-9.14
2525.09	Hor	1.00	36	9.54	45.54	---	73.96	53.96	-8.42
2482.93	Ver	1.00	156	9.44	60.94	47.94	73.96	53.96	-6.02
2491.49	Ver	1.00	323	9.47	49.30	---	73.96	53.96	-4.66
2500.01	Ver	1.00	203	9.49	44.16	---	73.96	53.96	-9.80
2515.99	Ver	1.00	83	9.52	44.69	---	73.96	53.96	-9.27

WLAN (IEEE 802.11b) + BT (E.D.R. mode) CH Lowest

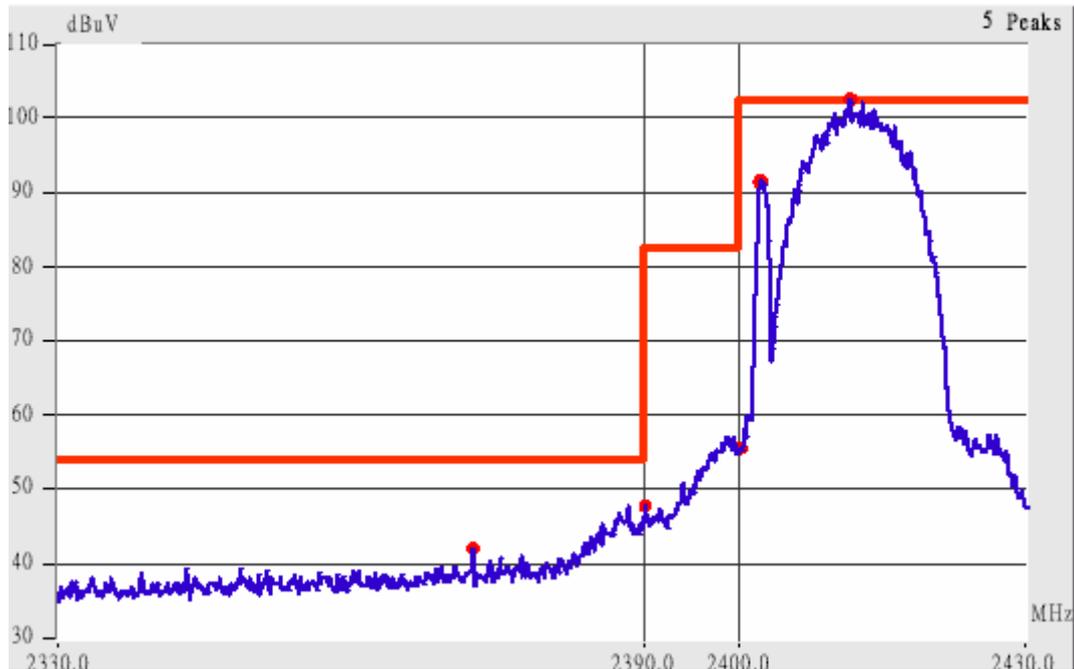


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

9. The lobe left by the fundamental side is already 20dB below the highest emission level.

10. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2379.02	Hor	1.00	25	9.15	47.32	---	73.96	53.96	-6.64
2390.02	Hor	1.00	293	9.18	50.18	---	73.96	53.96	-3.78
2381.35	Ver	1.00	33	9.16	45.99	---	73.96	53.96	-7.97
2390.02	Ver	1.00	227	9.18	46.85	---	73.96	53.96	-7.11

WLAN (IEEE 802.11b) + BT (E.D.R. mode) CH Highest

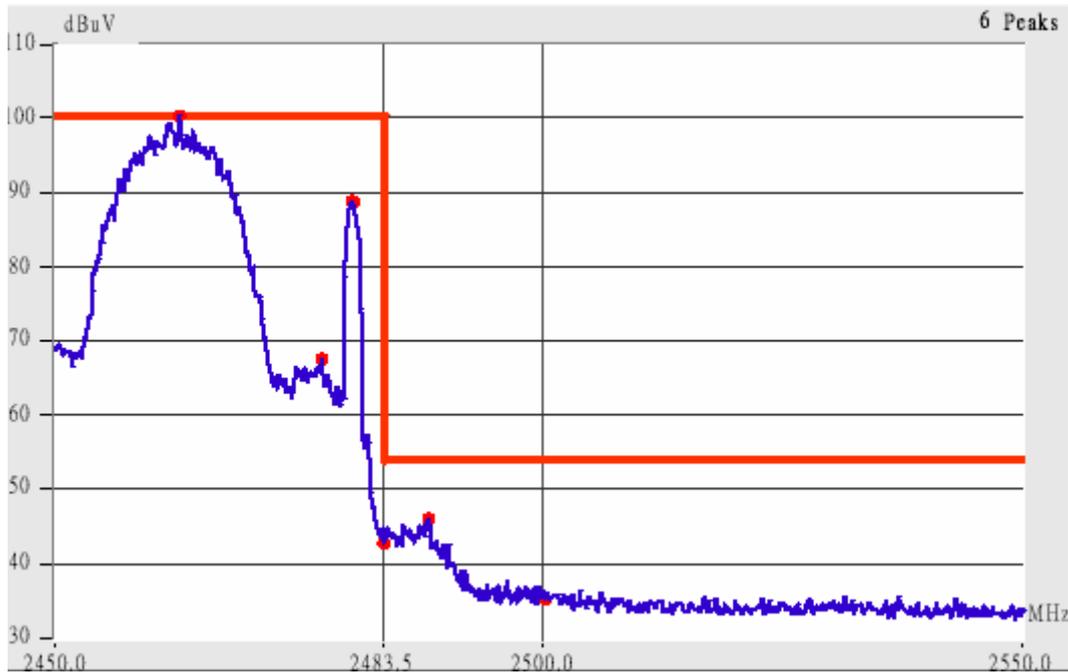


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 9. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 10. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.15	Hor	1.00	64	9.44	54.78	47.94	73.96	53.96	-6.02
2487.74	Hor	1.00	64	9.46	55.62	43.29	73.96	53.96	-10.67
2500.01	Hor	1.00	184	9.49	46.16	---	73.96	53.96	-7.80
2517.22	Hor	1.00	342	9.52	45.19	---	73.96	53.96	-8.77
2483.50	Ver	1.00	142	9.44	50.11	---	73.96	53.96	-3.85
2486.24	Ver	1.00	317	9.45	51.45	---	73.96	53.96	-2.51
2500.01	Ver	1.00	337	9.49	45.16	---	73.96	53.96	-8.80
2514.36	Ver	1.00	202	9.52	45.52	---	73.96	53.96	-8.44

WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Lowest

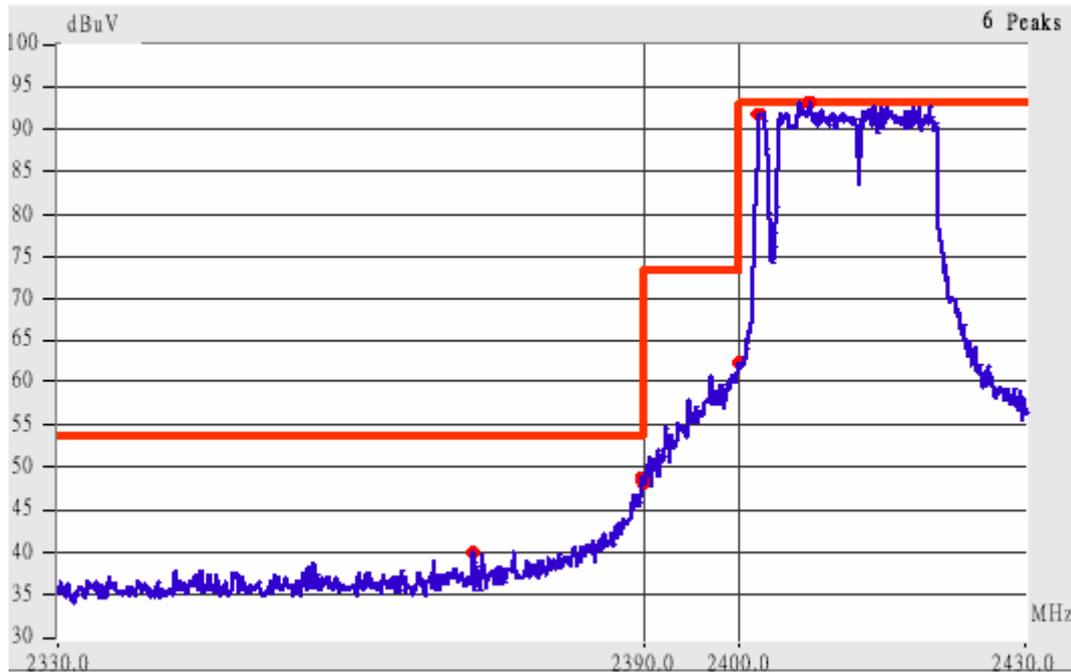


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

11. The lobe left by the fundamental side is already 20dB below the highest emission level.

12. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2379.67	Hor	1.00	332	9.15	50.82	---	73.96	53.96	-3.14
2390.47	Hor	1.00	41	9.18	63.18	49.01	73.96	53.96	-4.95
2378.91	Ver	1.00	237	9.15	48.15	---	73.96	53.96	-5.81
2389.79	Ver	1.00	232	9.18	59.68	42.35	73.96	53.96	-11.61

WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest

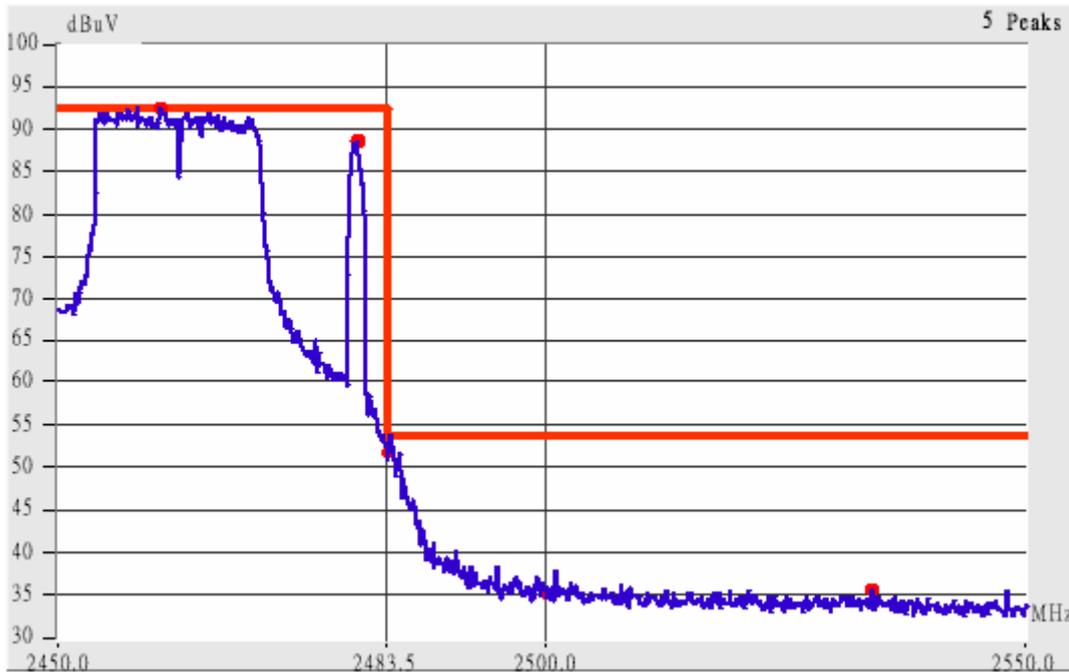

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

11. The lobe right by the fundamental side is already 20dB below the highest emission level.

12. The emissions recorded in the restricted band do comply with the Part 15.209(a) – as below


Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2482.91	Hor	1.00	202	9.44	65.61	52.44	73.96	53.96	-1.52
2490.73	Hor	1.00	199	9.46	50.30	---	73.96	53.96	-3.66
2500.01	Hor	1.00	102	9.49	45.16	---	73.96	53.96	-8.80
2513.54	Hor	1.00	153	9.52	46.18	---	73.96	53.96	-7.78
2483.03	Ver	1.00	148	9.44	62.44	47.94	73.96	53.96	-6.02
2488.52	Ver	1.00	212	9.46	50.46	---	73.96	53.96	-3.50
2500.01	Ver	1.00	301	9.49	43.49	---	73.96	53.96	-10.47
2512.32	Ver	1.00	277	9.51	45.51	---	73.96	53.96	-8.45

IX. Section 15.247(d): Power Spectral Density

9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

9.2 Test Instruments Configuration

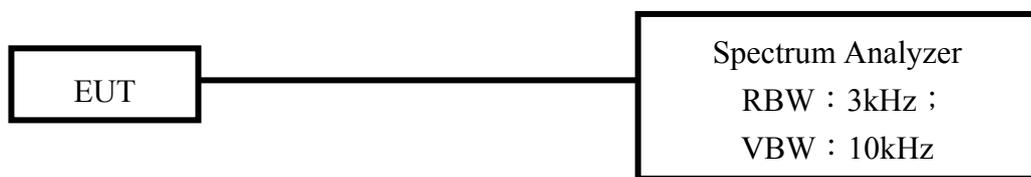

9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	02/15/07

9.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.

IEEE 802.11b

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-15.59	1.00	-14.59	8.00	-22.59
CH 06	-15.45	1.00	-14.45	8.00	-22.45
CH 11	-15.64	1.00	-14.64	8.00	-22.64


IEEE 802.11g

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-19.03	1.00	-18.03	8.00	-26.03
CH 06	-19.39	1.00	-18.39	8.00	-26.39
CH 11	-19.37	1.00	-18.37	8.00	-26.37


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$

Channel 01 of Power Spectral Density

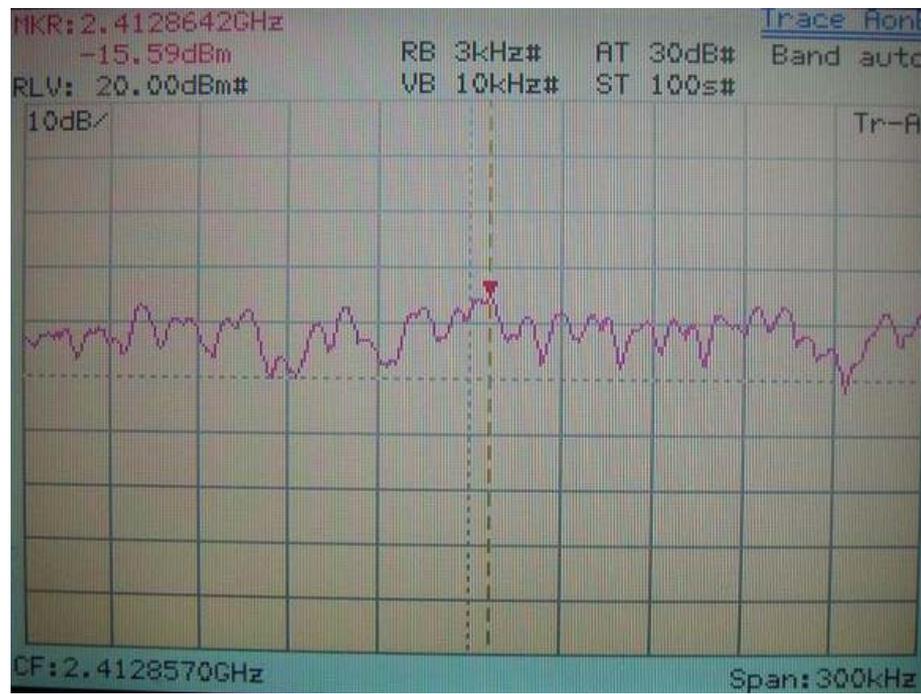


IEEE 802.11b

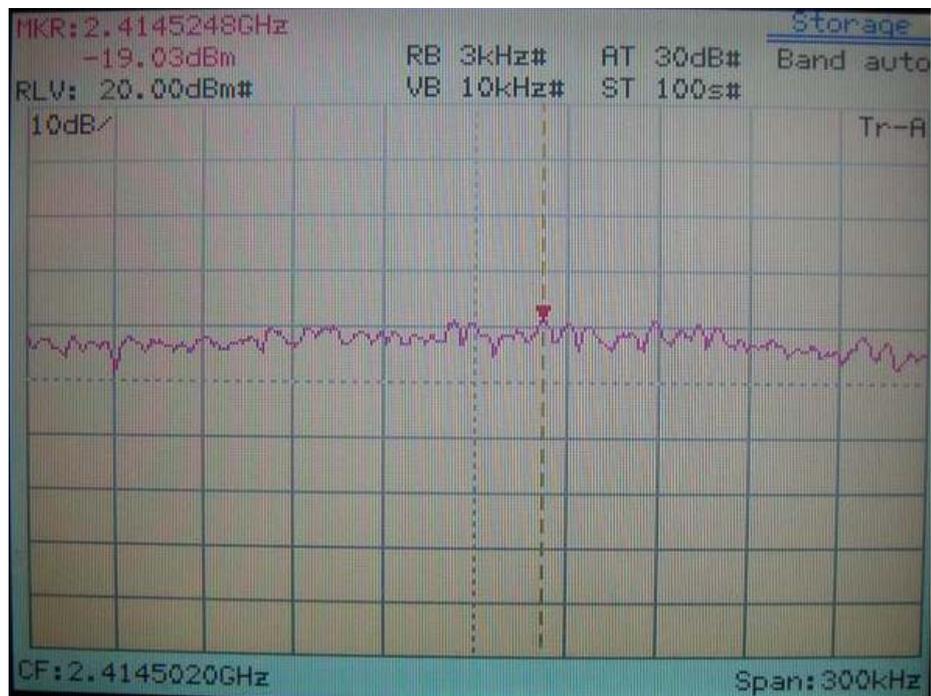


IEEE 802.11g

Channel 06 of Power Spectral Density

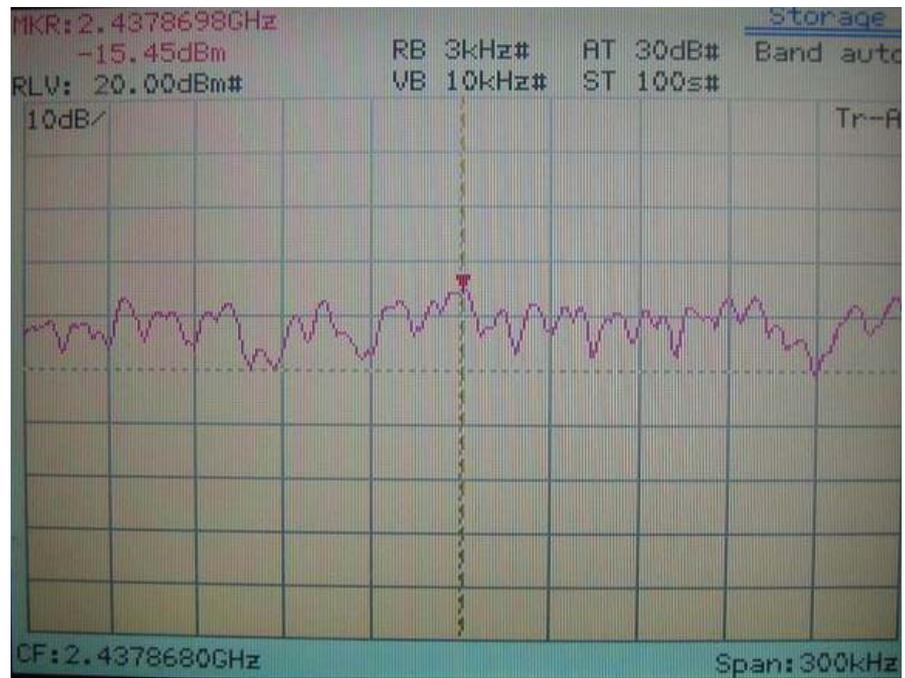


IEEE 802.11b

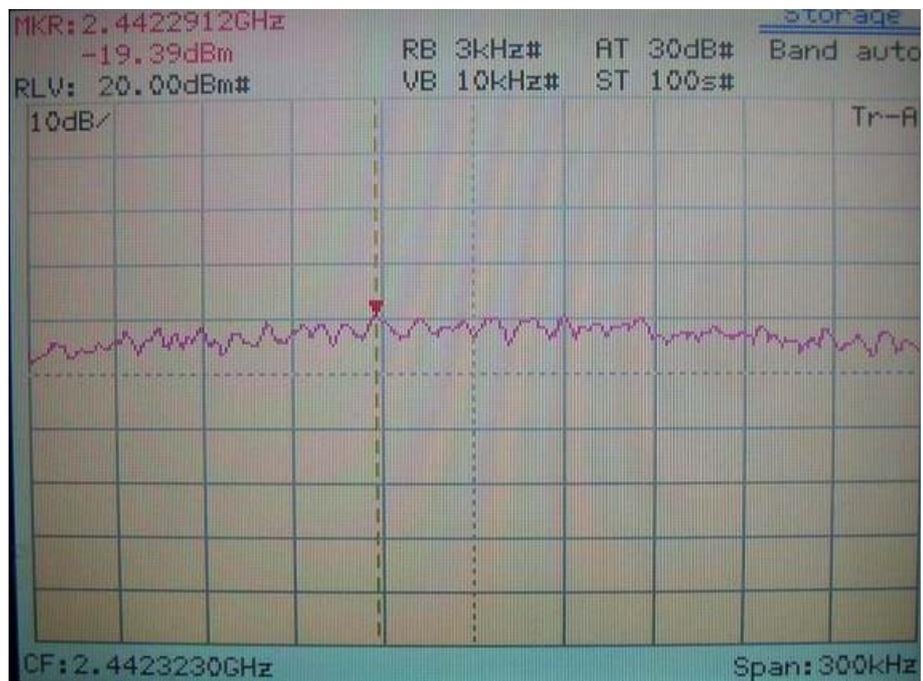


IEEE 802.11g

Channel 11 of Power Spectral Density

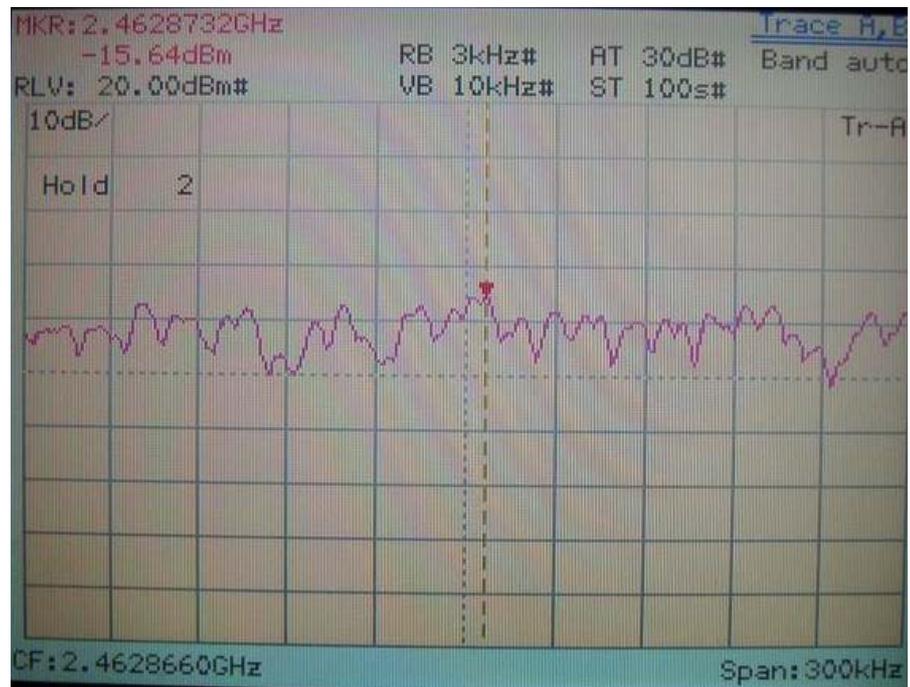

IEEE 802.11b

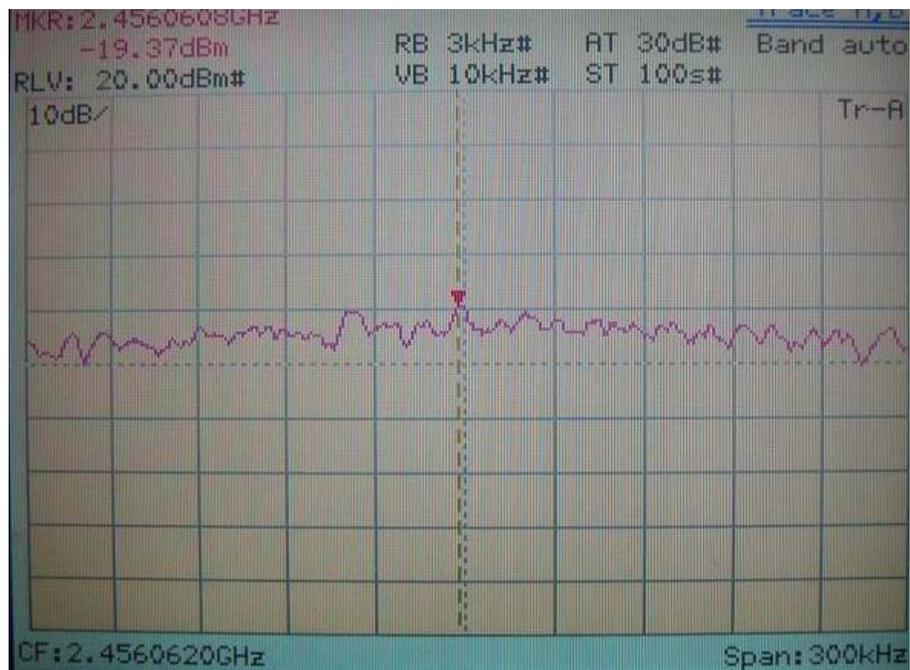

IEEE 802.11g