

Measurement of Maximum Permissible Exposure

1. Foreword

In adopt with the Human Exposure IEEE C95.1, and according to the FCC 1.1310. The *Maximum Permissible Exposure (MPE)* is obligated to measure in order to prove the safety of radiation harmfulness to the human body.

The *Gain* of the antenna used is measured in an *Anechoic chamber*. The *maximum total power to the antenna* is to be recorded. By adopting the ***Friis Transmission Formula*** and the *power gain of the antenna*, we can find the distance right away from the product, where the limit of the MPE is.

2. Description of EUT

FCC ID	:	MSQAAM6KVIB6
Product Name	:	4-Port Wireless Ethernet Router
Model Name	:	AAM6XXXVI-B6; 6218-I1-XXX
Frequency Range	:	2.412GHz ~ 2.462GHz
Channel Spacing	:	5MHz
Support Channel	:	11 Channels
Modulation Skill	:	DBPSK, DQPSK, CCK, OFDM
Power Type	:	Powered by the AC to AC adapter, Model: AA-151A I/P: 120VAC, 60Hz, 20W O/P: 15VAC, 1A 185cm length, non-shielded, no ferrite core

3. Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	100	6
3.0-30	1842/f	4.89/f	900/f ²	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	100	30
1.34-30	824/f	2.19/f	180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

[The EUT is tested in transmit and receive modes and in the first, middle and the last channel separately. The following shows only our observation have the greatest emissions.]

According to OET BULLETIN 56 Fourth Edition/August 1999, Equation for Predicting RF Fields:

Friis Transmission Formula:
$$S = \frac{PG}{4\pi R^2} = \frac{109.14 \times 1.51}{4\pi(20)^2} = 0.03279 \text{ mW/cm}^2$$

Estimated safe separation:
$$R = \sqrt{\frac{PG}{4\pi}} = \sqrt{\frac{109.14 \times 1.51}{4\pi}} = 3.621 \text{ cm}$$

Remarks: "The safe estimated separation that the user must maintain from the antenna is at least 3.62cm"

Where: S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)


The Numeric gain G of antenna with a gain specified in dB is determined by:

$$G = \text{Log}^{-1} (\text{dB antenna gain} / 10)$$

$$G = \text{Log}^{-1} (1.8 / 10) = 1.51356$$

Appendix

Antenna Specification

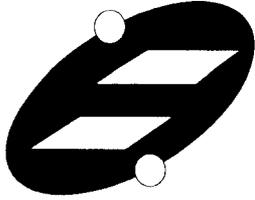

WHA YU INDUSTRIAL CO., LTD. (HEAD OFFICE)
 TAI HWA ELECTRONIC CO., LTD.(CHINA)
 SHANGHAI HUA YU ELECTRONIC CO., LTD.(CHINA)
 AEON TECH CO., LTD. (CHINA)

SPECIFICATION FOR APPROVAL

CUSTOMER: 華碩電腦股份有限公司


PART NAME: RF Antenna Cable Assembly

PART NO.:

REVISION:

W. Y. P/NO.: C660-510047-A

REV.: XI

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
APPROVED BY :		
DATE :		

WHA YU GROUP

WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)

譚裕實業股份有限公司

Address: #70 Shui Li Road, Hsin Chu City, Taiwan, R.O.C.

Tel:+886-3-5714225(REP.)

Fax:+ 886-3-5713853 · + 886-3-5723600

TAI HWA ELECTRONIC CO., LTD. (CHINA)

台樺電業製品廠

Address: Pak Ho District, Hiu Street Town, Dong Guan City, Guangdong, China

Tel: + 86-769-5599375 · + 86-769-5912375

Fax: + 86-769-5599376

HUA HONG INTERNATIONAL LTD.

華弘國際有限公司

Rm.1103A,President Commercial Centre,608 Nathan Road,Mong Kok,Kowloon,Hong Kong

Tel: + 86-852-27712210

Fax: + 86-852-23843747

SHANGHAI HUA YU ELECTRONIC CO., LTD. (CHINA)

上海譚裕電子有限公司

Address:3586,Wai Qing Song Road, Qing Pu County, Shanghai China

Tel: + 86-21-59741348 · + 86-21-59744101~4

Fax: + 86-21-59741347

SU ZHOU AEON TECH CO., LTD. (CHINA)

蘇州華廣電通有限公司

Address:Limin North Road, LiLi Town,LiLi Industrial Park,LinHu Economic Zone

Wujiang City,Jiangsu Province,China

Tel: + 86-512-63627980

Fax: + 86-512-63627981

RF Antenna Cable Assembly

Specification

1. Electrical Properties :



- 1.1 Frequency Range..... 2.4GHz ~ 2.5GHz
- 1.2 Impedance 50 Nominal
- 1.3 VSWR 1.92 or less
- 1.4 Return Loss..... -10 dB or less
- 1.5 Electrical Wave..... 1/2 Dipole
- 1.6 Gain(peak)..... 1.8dBi (exclude cable loss)
- 1.7 Admitted Power..... 1W

2. Physical Properties :


- 2.1 Cable..... 1.13 Coaxial Cable
- 2.2 Antenna Cover..... TPE
- 2.3 Antenna Base..... PC
- 2.4 Operating Temp. -20 ~ +65
- 2.5 Storage Temp. -30 ~ +75
- 2.6 Color Black
- 2.7 Connector..... I-PEX MHF Plug Connector

CG-

REV	DATE	DESCRIPTION
XI	3/31-2005	New Issue

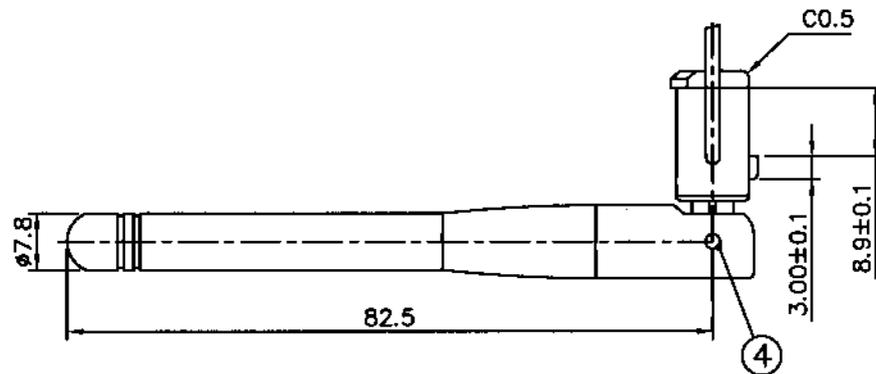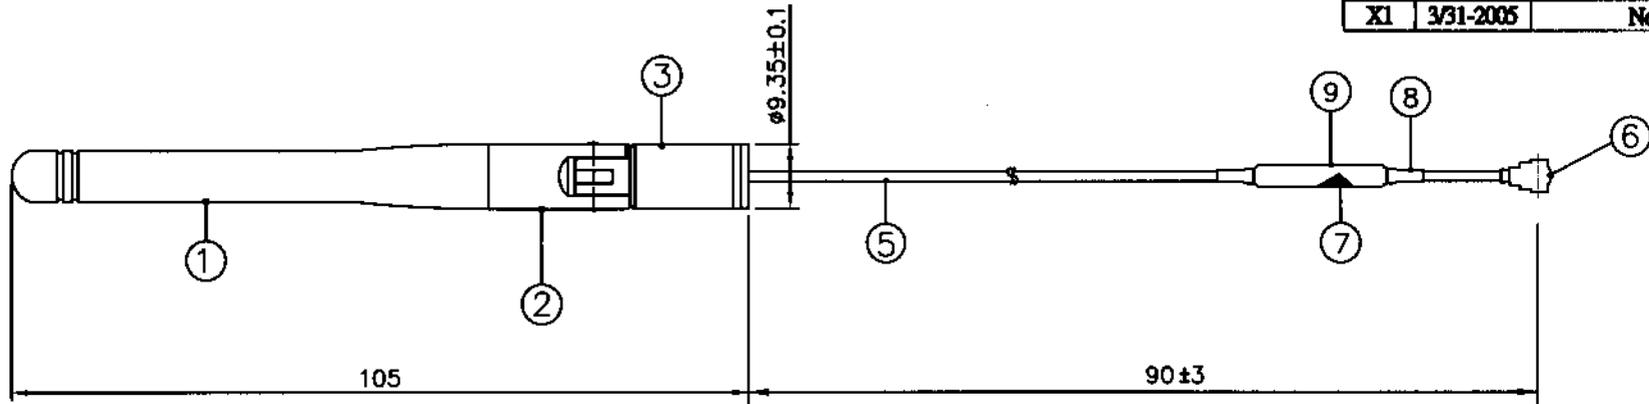

PE Bag
Shrink Line

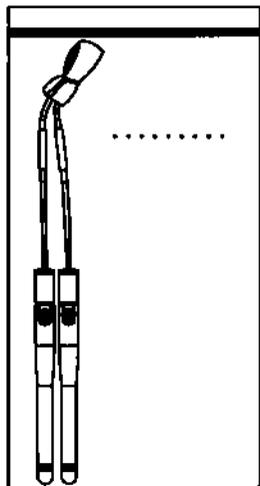

Packing : 25 pcs/bag

9	Tube	Heat Shrink Tube	1	
8	Tube	Heat Shrink Tube	2	
7	Core	RH 4*25*1.5	1	
6	Connector	MHF Connector	1	
5	Cable	∅1.13 Coaxial Cable	1	
4	Rivet	Brass , Zn Plated (Black)	2	
3	Antenna Base	PC ; Color : Black	1	
2	Antenna Base	PC ; Color : Black	1	
1	Antenna Body	TPE ; Color : Black	1	
NO	DESCRIPTION	QTY	REMARK	

CUSTOMER'S SIGNATURE

XX	±3.0	APPROVED	<i>程淑娟</i>
X	±2.0	CHECKED	<i>柯昆中</i>
I	±1.0	DRAWING	<i>柯昆中</i>
XX	±0.5		<i>3/31-05</i>
XXX	±0.1		

CUSTOMER: 華碩電腦股份有限公司

PART NO :

PARTNAME: RF Antenna Cable Assembly

W.Y P/NO : C660-510047-A

REV UNIT FILE :

XI m/m SHEET: 1/1



Wha Yu
INDUSTRIAL CO.,LTD.

華裕實業股份有限公司

THIS DRAWING, AND ITS INHERENT DESIGN CONCEPTS, ARE THE PROPERTY OF WHA YU AND AS SUCH MAY NOT BE COPIED, REPRODUCED, OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF WHA YU.




華裕實業股份有限公司

WHA YU INDUSTRIAL CO., LTD


RF Antenna Assembly

P/NO :C660-540047-A SPEC : 2.4GHz

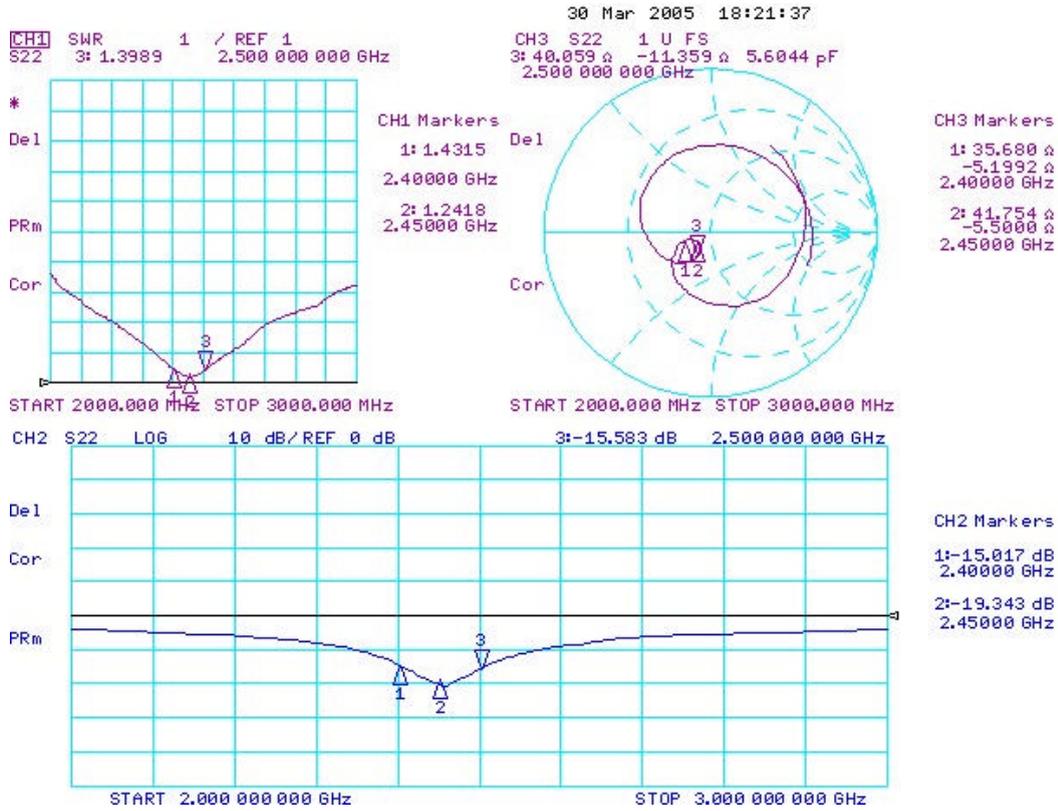

3/31/2005

Far-field amplitude of C660-510047-A-V.nsi

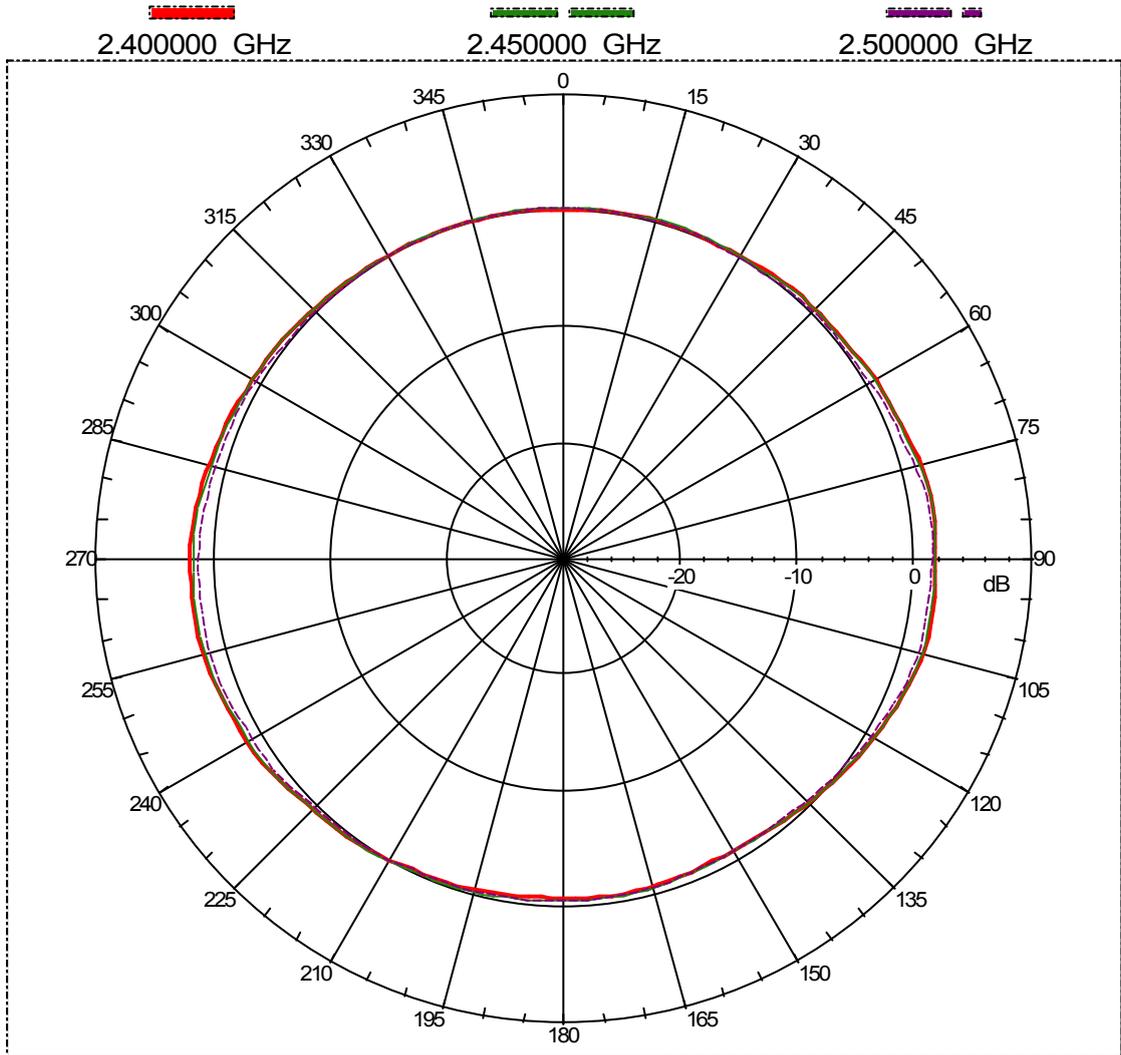

Far-field amplitude of C660-510047-A-H.nsi

