



FCC RF Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone (Mobile Phone)
BRAND NAME : ASUS
MODEL NAME : ASUS_AI2205_E, ASUS_AI2205_F
FCC ID : MSQAI2205
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Feb. 09, 2023 ~ Mar. 09, 2023

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION.....5

1.1 Applicant5

1.2 Manufacturer.....5

1.3 Product Feature of Equipment Under Test.....5

1.4 Product Specification of Equipment Under Test.....6

1.5 Modification of EUT6

1.6 Testing Location7

1.7 Test Software.....7

1.8 Applicable Standards.....8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....9

2.1 Carrier Frequency Channel9

2.2 Test Mode.....10

2.3 Connection Diagram of Test System.....11

2.4 Support Unit used in test configuration and system12

2.5 EUT Operation Test Setup12

2.6 Measurement Results Explanation Example.....12

3 TEST RESULT13

3.1 Number of Channel Measurement13

3.2 Hopping Channel Separation Measurement14

3.3 Dwell Time Measurement.....15

3.4 20dB and 99% Bandwidth Measurement16

3.5 Output Power Measurement.....17

3.6 Conducted Band Edges Measurement20

3.7 Conducted Spurious Emission Measurement21

3.8 Radiated Band Edges and Spurious Emission Measurement22

3.9 AC Conducted Emission Measurement.....26

3.10 Antenna Requirements.....28

4 LIST OF MEASURING EQUIPMENT.....29

5 UNCERTAINTY OF EVALUATION.....30

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	-	Report only	-
3.4	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 11.88 dB at 53.28 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.07 dB at 0.15 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

ASUSTeK COMPUTER INC.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.2 Manufacturer

ASUSTeK COMPUTER INC.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	ASUS Phone (Mobile Phone)
Brand Name	ASUS
Model Name	ASUS_AI2205_E, ASUS_AI2205_F
FCC ID	MSQAI2205
IMEI Code	Conducted: 357795480101637/357795480101645 Conduction: 355156850100851/355156850100869 Radiation: 355156850101099/355156850101107
HW Version	R2.0
SW Version	Android 13
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four SKUs of EUT for this project. The differences between them are summary below, According to the difference, we evaluate SKU1 (ASUS_AI2205_F) to perform RF test.

Sample list				
	SKU1	SKU2	SKU3	SKU4
Model name	ASUS_AI2205_F	ASUS_AI2205_E	ASUS_AI2205_F	ASUS_AI2205_E
Config.	US(Pro)	US(Entry)	US(Pro)	US(Entry)
RF module board	US(Pro)	US(Entry)	US(Pro)	US(Entry)
LCD+Touch front frame	AI2205 FRONT CASE ASSY WW			
DDR	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B
UFS	512G(Kioxia)(UFS4.0) Kioxia / THGJFJT2T85BAT0	512G(Samsung)(UFS4.0) Samsung /KLUF8RHHD-B0G1	512G(Kioxia)(UFS4.0) Kioxia / THGJFJT2T85BAT0	512G(Samsung)(UFS4.0) Samsung /KLUF8RHHD-B0G1
MB	AI2205_MB	AI2205_MB	AI2205_MB	AI2205_MB
Back cover	WW-Dark-Ult	WW-Light-Entry	WW-Dark-Ult	WW-Light-Entry
Battery	SCUD / C21P2101	SWD / C21P2101	SWD / C21P2101	SCUD / C21P2101
Rear Camera 50+13M	SHINETECH/CDN60B	TRIPLEWIN/CASDA-002A 1	TRIPLEWIN/CASDA-002A 1	SHINETECH/CDN60B



Front Camera 32M	TSPRECISION/TVHF2170	SHINETECH/ST-CMG07B	SHINETECH/ST-CMG07B	TSPRECISION/TVHF2170
Rear Camera 5M	HUNAN KINGCOME/KBFE378	TSPRECISION/TV8F2224	TSPRECISION/TV8F2224	HUNAN KINGCOME/KBFE378
PCB	COMPEQ	COMPEQ	COMPEQ	COMPEQ
CPU	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS			

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	<p><MIMO Ant. 4+5> Bluetooth BR(1Mbps) : 17.80 dBm (0.0603 W) Bluetooth EDR (2Mbps) : 17.56 dBm (0.0570 W) Bluetooth EDR (3Mbps) : 17.99 dBm (0.0630 W) <MIMO Ant. 5+6> Bluetooth BR(1Mbps) : 17.43 dBm (0.0553 W) Bluetooth EDR (2Mbps) : 17.55 dBm (0.0569 W) Bluetooth EDR (3Mbps) : 17.89 dBm (0.0615 W)</p>
99% Occupied Bandwidth	<p><MIMO Ant. 4+5> Bluetooth BR(1Mbps) : 0.881 MHz Bluetooth EDR (2Mbps) : 1.184 MHz Bluetooth EDR (3Mbps) : 1.187 MHz <MIMO Ant. 5+6> Bluetooth BR(1Mbps) : 0.878 MHz Bluetooth EDR (2Mbps) : 1.238 MHz Bluetooth EDR (3Mbps) : 1.226 MHz</p>
Antenna Type / Gain	<p><Ant.4>: PIFA Antenna / -0.8 dBi <Ant.5>: PIFA Antenna / -0.6 dBi <Ant.6>: PIFA Antenna / -5.0 dBi</p>
Type of Modulation	<p>Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π/4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK</p>

Note:

1. For SISO & MIMO mode, the whole testing has assessed MIMO mode to cover SISO mode.
2. MIMO mode only support CDD mode.
3. The device supports Bluetooth BR/EDR MIMO Ant.5+4 for Normal mode and switch to MIMO Ant.5+6 for Camera mode.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π/4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable 1(Charging from Adaptor 1) + Battery 1		
Remark:			
1. For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performed with Adapter 1 and USB Cable 1.			


CO-location mode
Bluetooth CH78 (Ant 4+5) TX + LTE Band48_BW_20M Link Bluetooth CH78 (Ant 5+6) TX + LTE Band48_BW_20M Link

2.3 Connection Diagram of Test System

AC Conducted Emission:

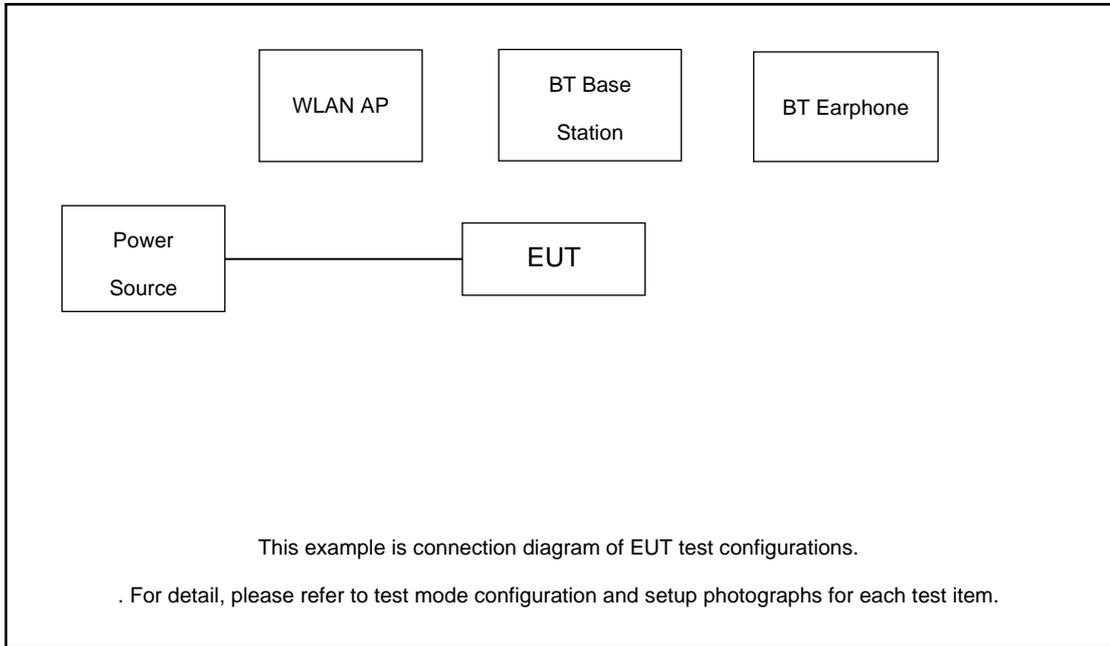

Radiated Emission:

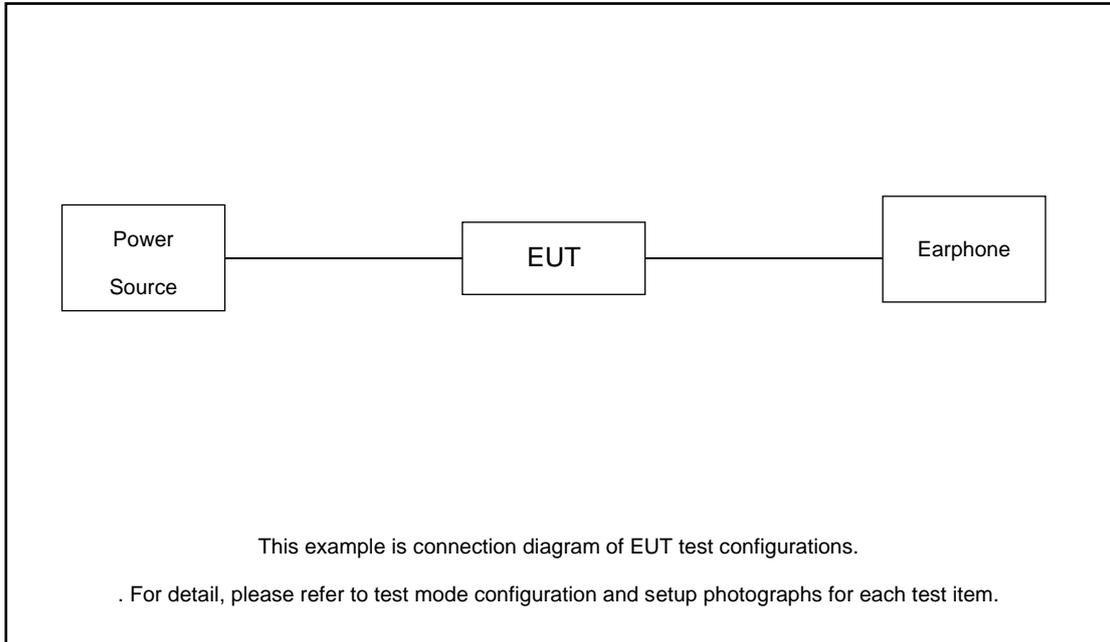



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.0 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 2.0 + 10 = 12.0 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

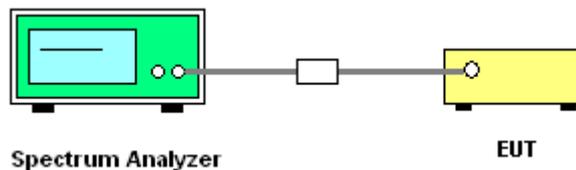

3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

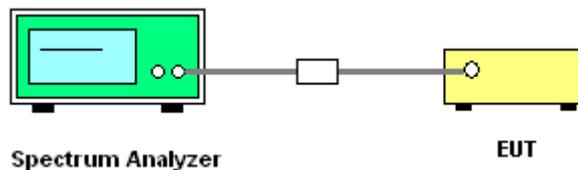

3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

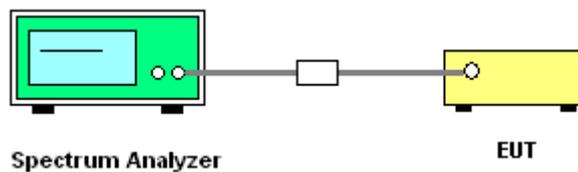

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

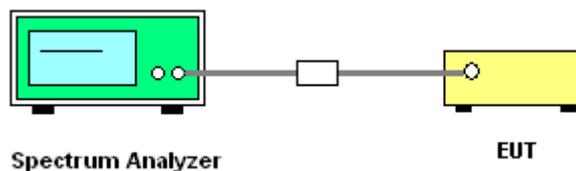

3.4.5 Test Result of 20dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

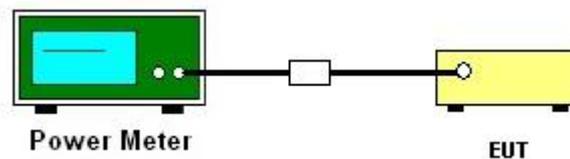



3.5.5 Test Result of Peak Output Power

<MIMO Ant. 4+5> Normal Mode

DH	CH.	NTX	Ant5	Ant4	Total Peak Power (dBm)	Power Limit (dBm)	Test Result
			Peak Power (dBm)	Peak Power (dBm)			
DH5	0	2	13.81	12.85	16.37	20.97	Pass
	39	2	15.88	13.32	17.80	20.97	Pass
	78	2	13.83	11.24	15.74	20.97	Pass

2DH	CH.	NTX	Ant5	Ant4	Total Peak Power (dBm)	Power Limit (dBm)	Test Result
			Peak Power (dBm)	Peak Power (dBm)			
2DH5	0	2	12.72	11.9	15.34	20.97	Pass
	39	2	15.38	13.51	17.56	20.97	Pass
	78	2	13.07	10.85	15.11	20.97	Pass

3DH	CH.	NTX	Ant5	Ant4	Total Peak Power (dBm)	Power Limit (dBm)	Test Result
			Peak Power (dBm)	Peak Power (dBm)			
3DH5	0	2	13.26	12.29	15.81	20.97	Pass
	39	2	15.87	13.86	17.99	20.97	Pass
	78	2	13.17	11.36	15.37	20.97	Pass



<MIMO Ant. 5+6> Camera Mode

DH	CH.	NTX	Ant5	Ant6	Total Peak Power (dBm)	Power Limit (dBm)	Test Result
			Peak Power (dBm)	Peak Power (dBm)			
DH5	0	2	13.83	11.98	16.01	20.97	Pass
	39	2	15.86	12.24	17.43	20.97	Pass
	78	2	13.85	9.59	15.23	20.97	Pass

2DH	CH.	NTX	Ant5	Ant6	Total Peak Power (dBm)	Power Limit (dBm)	Test Result
			Peak Power (dBm)	Peak Power (dBm)			
2DH5	0	2	12.74	11.10	15.01	20.97	Pass
	39	2	15.39	13.49	17.55	20.97	Pass
	78	2	13.33	9.06	14.71	20.97	Pass

3DH	CH.	NTX	Ant5	Ant6	Total Peak Power (dBm)	Power Limit (dBm)	Test Result
			Peak Power (dBm)	Peak Power (dBm)			
3DH5	0	2	13.28	11.41	15.46	20.97	Pass
	39	2	15.89	13.57	17.89	20.97	Pass
	78	2	13.54	9.63	15.02	20.97	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

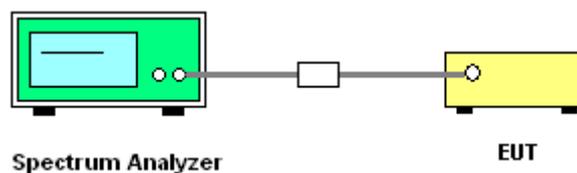

3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

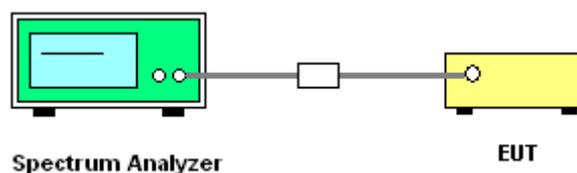

3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

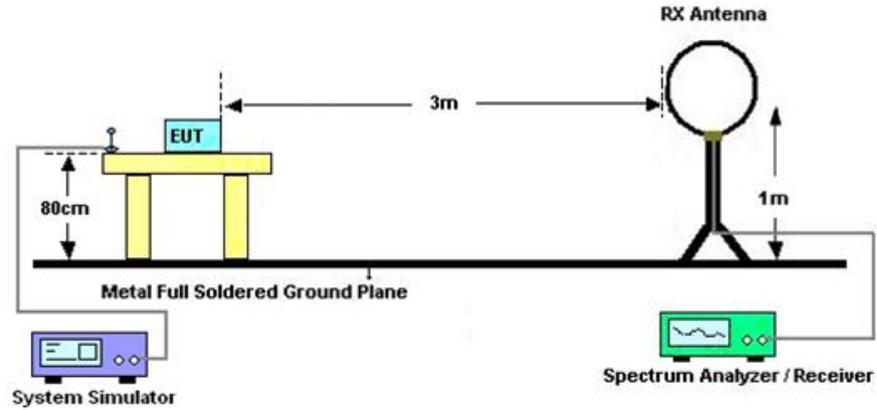

For radiated emissions from 30MHz to 1GHz

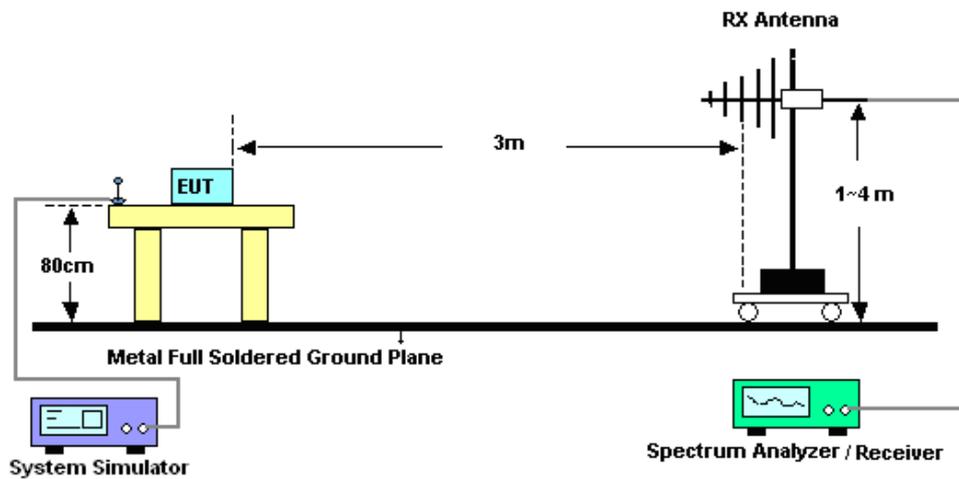

For radiated emissions above 1GHz

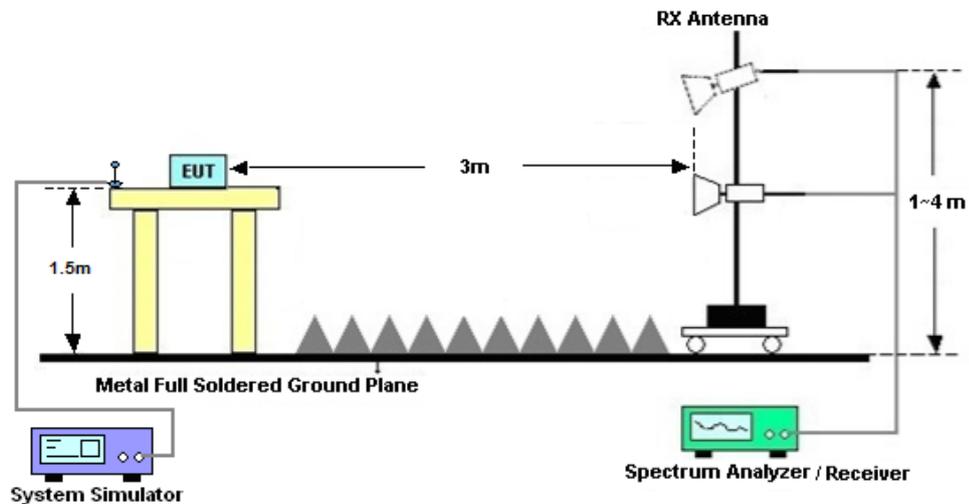



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

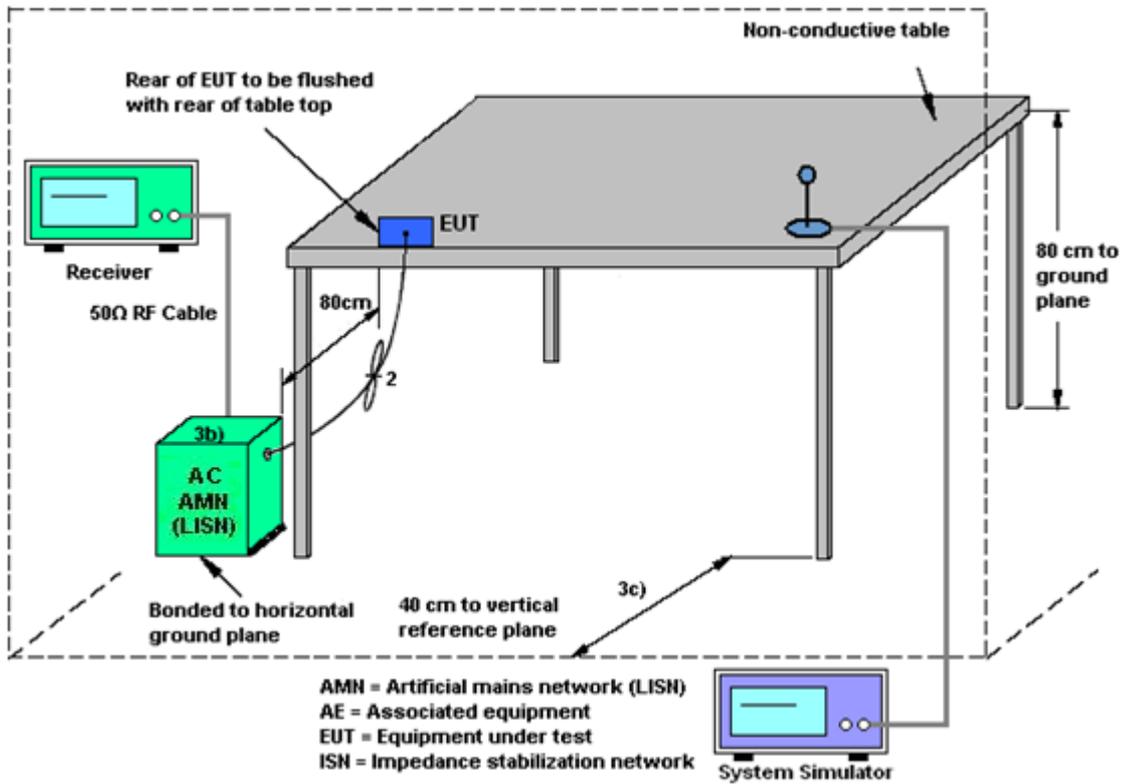

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Feb. 09, 2023~ Feb. 10, 2023	Jul. 06, 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Feb. 09, 2023~ Feb. 10, 2023	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Feb. 09, 2023~ Feb. 10, 2023	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 07, 2022	Feb. 09, 2023~ Feb. 10, 2023	Jul. 06, 2023	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 19, 2022	Feb. 15, 2023~ Mar. 08, 2023	Oct. 18, 2023	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 07, 2022	Feb. 15, 2023~ Mar. 08, 2023	Jul. 06, 2023	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Feb. 15, 2023~ Mar. 08, 2023	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Apr. 27, 2022	Feb. 15, 2023~ Mar. 08, 2023	Apr. 27, 2023	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBE CK	BBHA9120D	9120D-147 4	1GHz~18GHz	Jul. 07, 2022	Feb. 15, 2023~ Mar. 08, 2023	Jul. 06, 2023	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBE CK	BBHA9170	9170#679	15GHz~40GHz	Jul. 07, 2022	Feb. 15, 2023~ Mar. 08, 2023	Jul. 06, 2023	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 19, 2022	Feb. 15, 2023~ Mar. 08, 2023	Oct. 18, 2023	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P- R	1943528	1GHz~18GHz	Oct. 19, 2022	Feb. 15, 2023~ Mar. 08, 2023	Oct. 18, 2023	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz	Jul. 06, 2022	Feb. 15, 2023~ Mar. 08, 2023	Jul. 05, 2023	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY572801 36	500MHz~26.5G Hz	Sep. 30, 2022	Feb. 15, 2023~ Mar. 08, 2023	Sep. 29, 2023	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F11905001 9	N/A	Nov. 10, 2022	Feb. 15, 2023~ Mar. 08, 2023	Nov. 10, 2023	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 15, 2023~ Mar. 08, 2023	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 15, 2023~ Mar. 08, 2023	NCR	Radiation (03CH04-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Feb. 28, 2023~ Mar. 09, 2023	Apr. 08, 2023	Conducted (TH01-SZ)
Pulse Power Senor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	Feb. 28, 2023~ Mar. 09, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	Feb. 28, 2023~ Mar. 09, 2023	Dec. 26, 2023	Conducted (TH01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.012 %

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2 dB
---------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---------------------------------------------------------------------	-------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 24~26 °C, 45~55 %RH

Test Date: 2023/2/28~2023/3/9

Test Engineer: Zhang Xue Yi

MIMO <Ant 4+5>



20dB Emission Bandwidth



Test Result

TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant5	2402	0.96	2401.52	2402.48	---	---
	An4	2402	0.96	2401.52	2402.48	---	---
	Ant5	2441	0.96	2440.52	2441.49	---	---
	An4	2441	0.96	2440.52	2441.48	---	---
	Ant5	2480	0.99	2479.50	2480.48	---	---
	An4	2480	0.96	2479.52	2480.48	---	---
2DH5	Ant5	2402	1.33	2401.33	2402.65	---	---
	An4	2402	1.33	2401.33	2402.66	---	---
	Ant5	2441	1.34	2440.33	2441.66	---	---
	An4	2441	1.34	2440.33	2441.66	---	---
	Ant5	2480	1.33	2479.33	2480.65	---	---
	An4	2480	1.34	2479.32	2480.66	---	---
3DH5	Ant5	2402	1.32	2401.33	2402.65	---	---
	An4	2402	1.31	2401.34	2402.65	---	---
	Ant5	2441	1.31	2440.34	2441.65	---	---
	An4	2441	1.32	2440.34	2441.66	---	---
	Ant5	2480	1.31	2479.34	2480.65	---	---
	An4	2480	1.32	2479.34	2480.65	---	---





Test Graphs

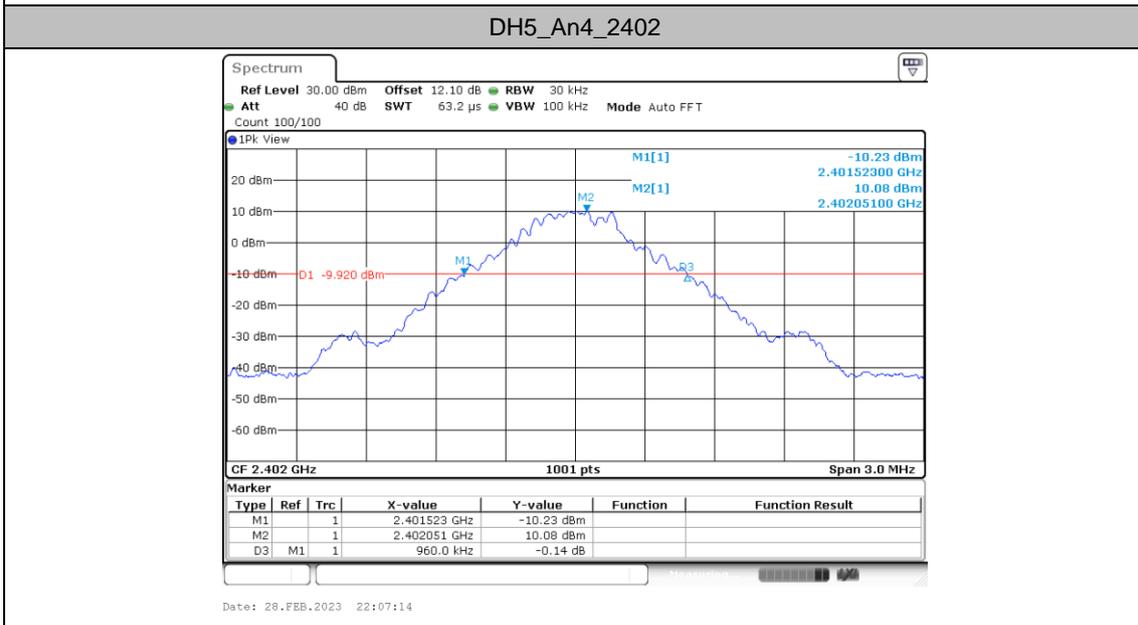
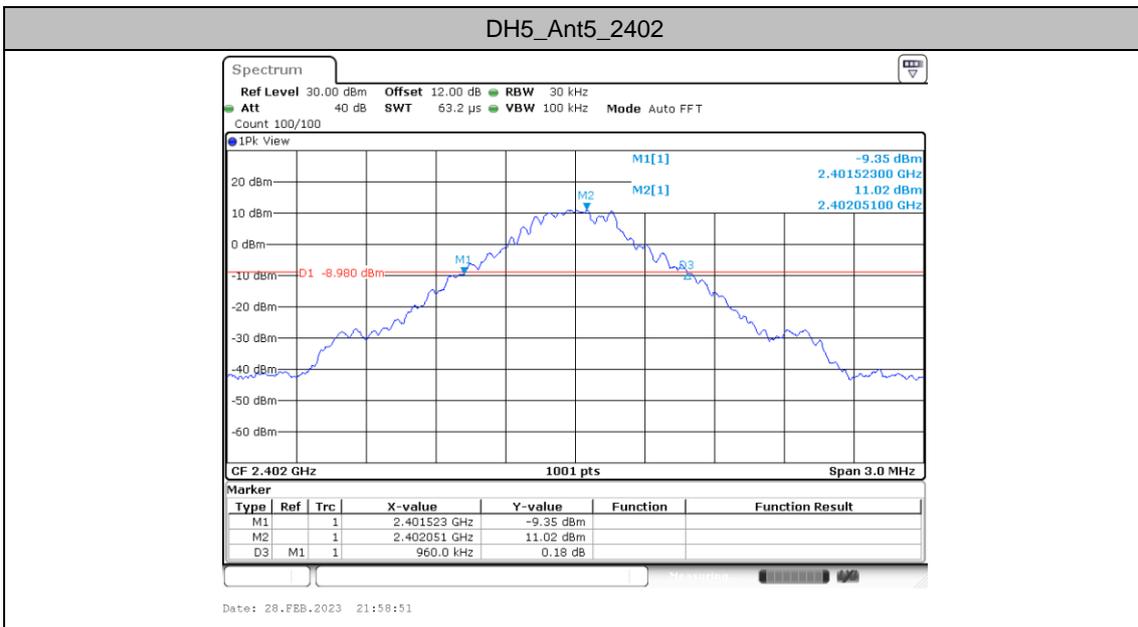


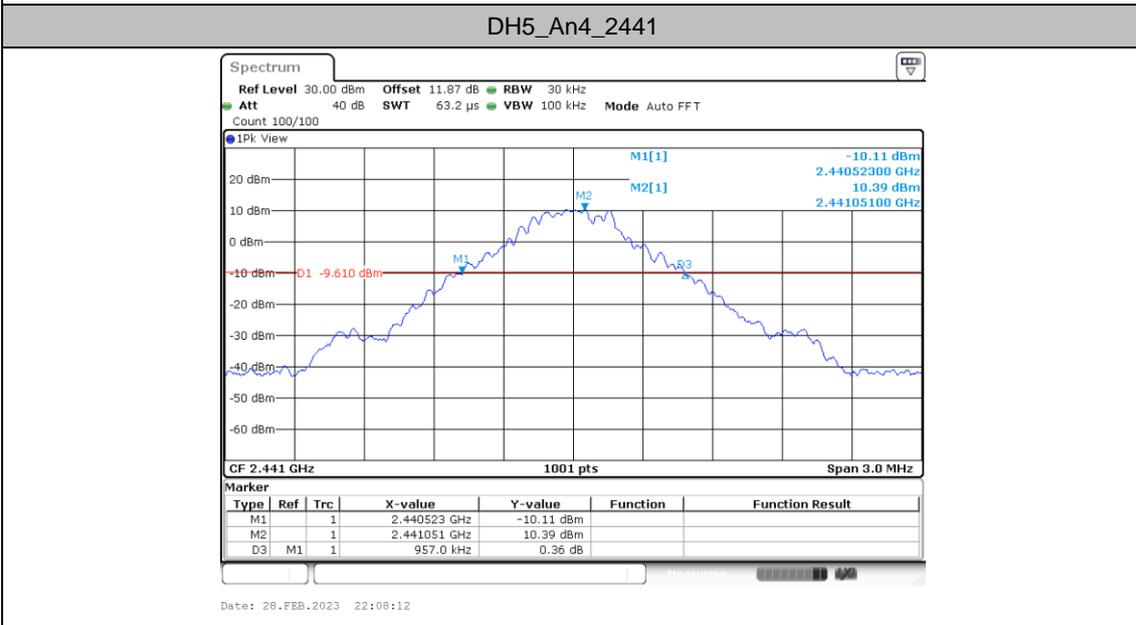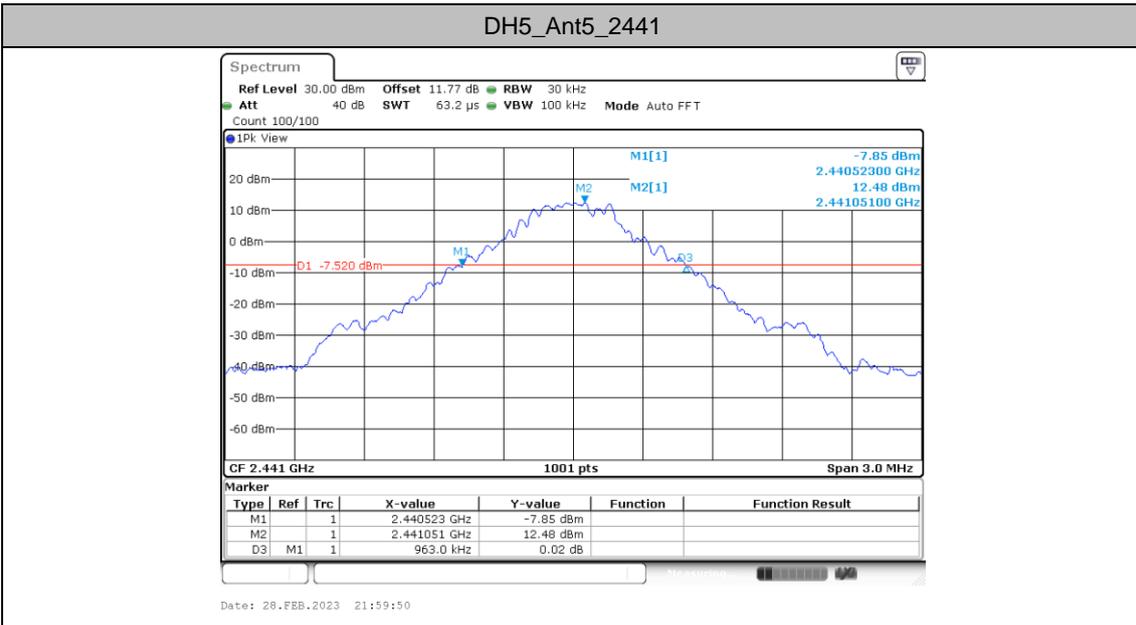





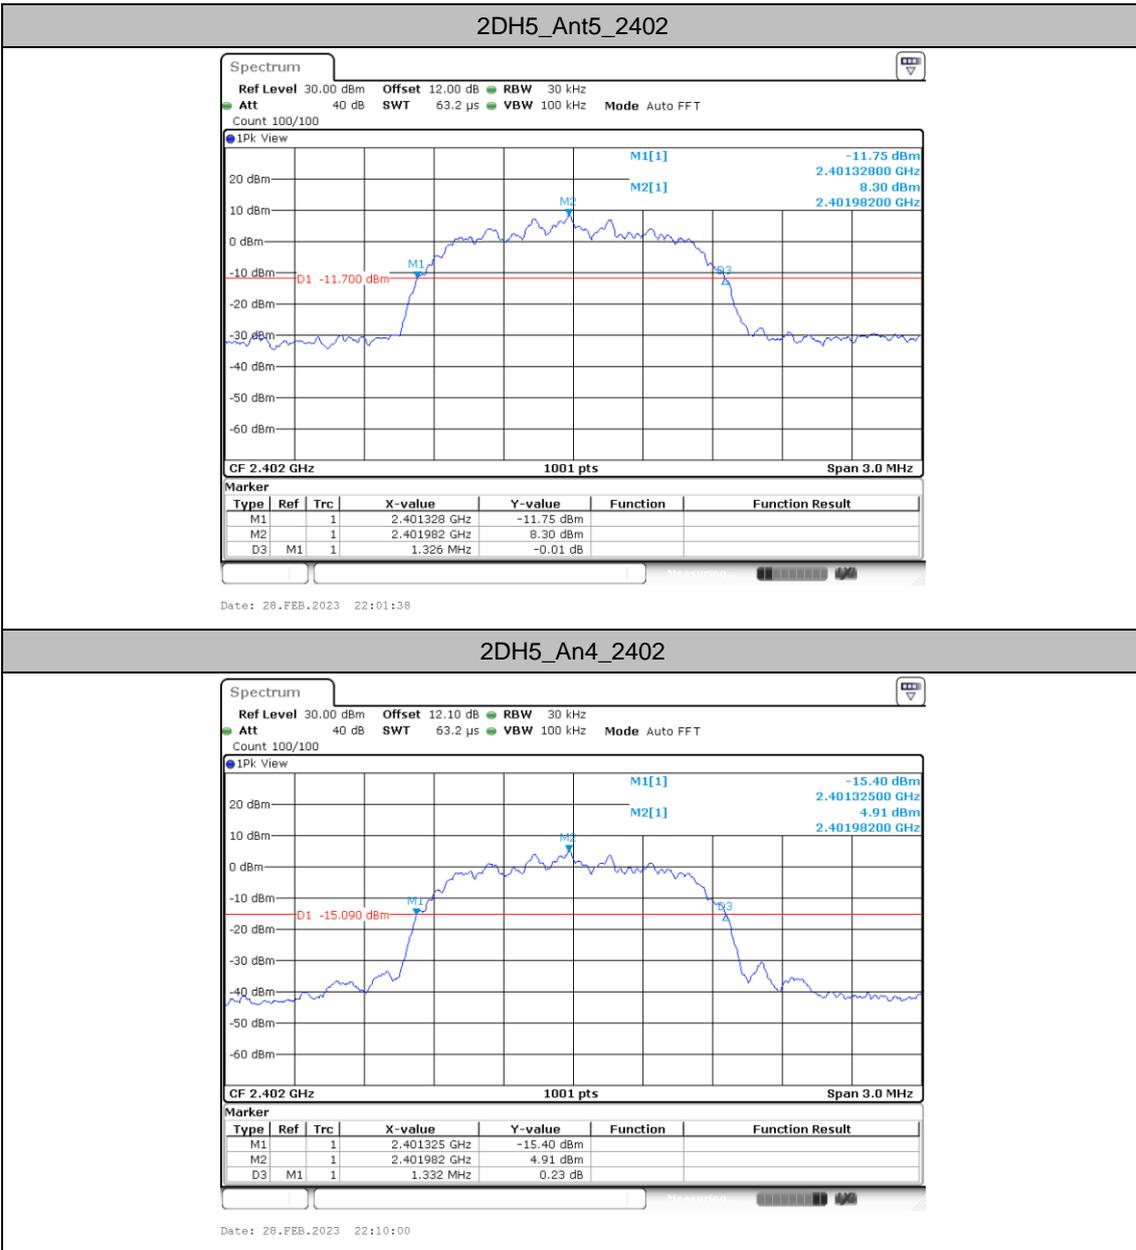


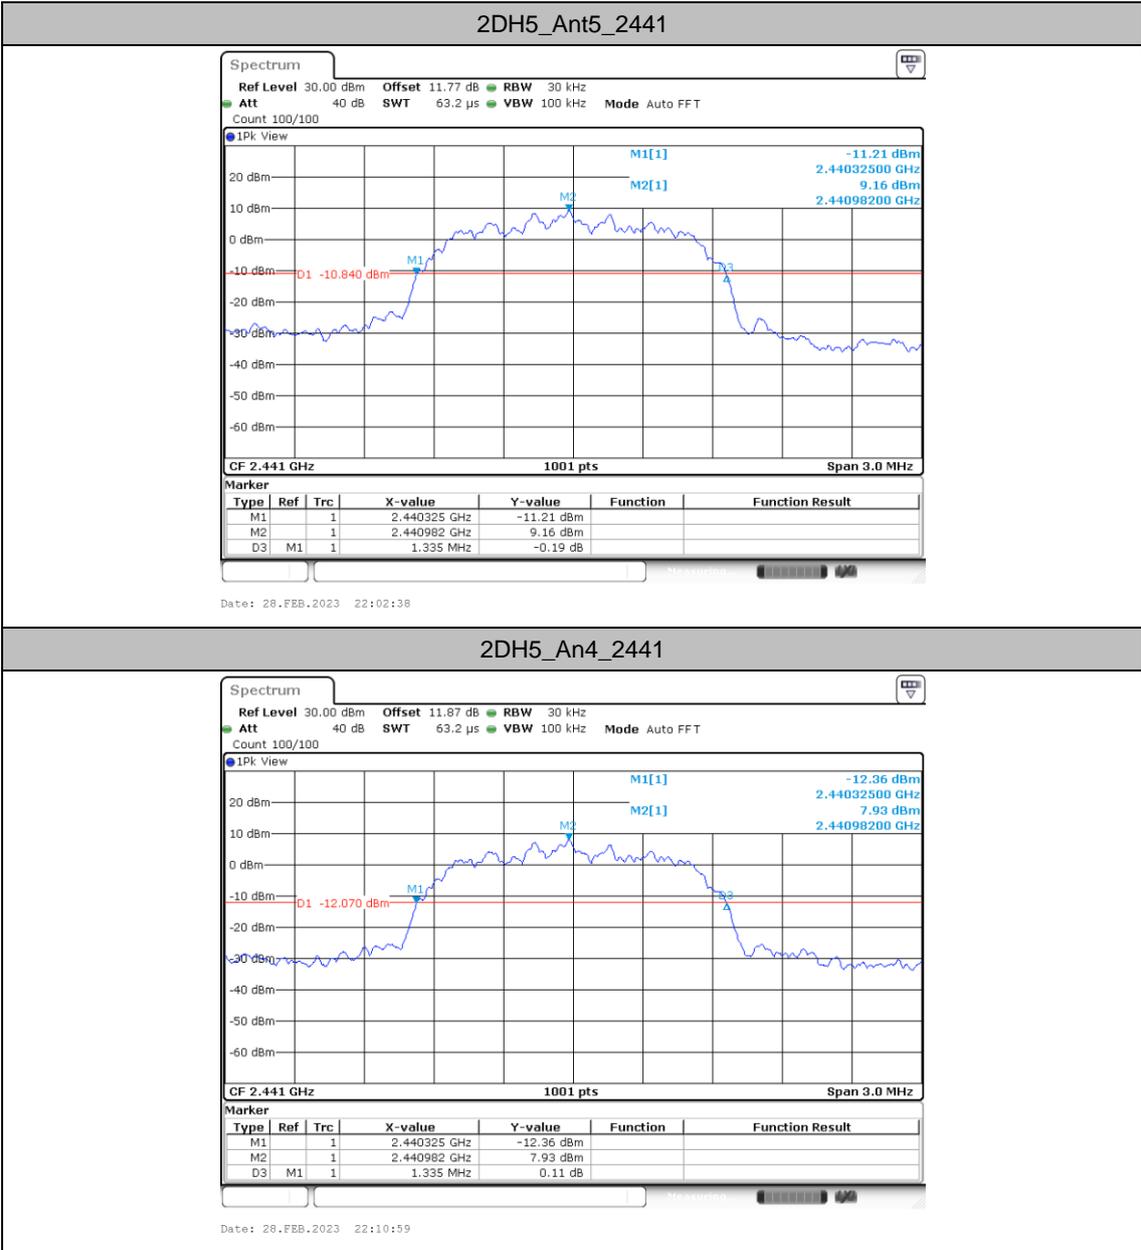

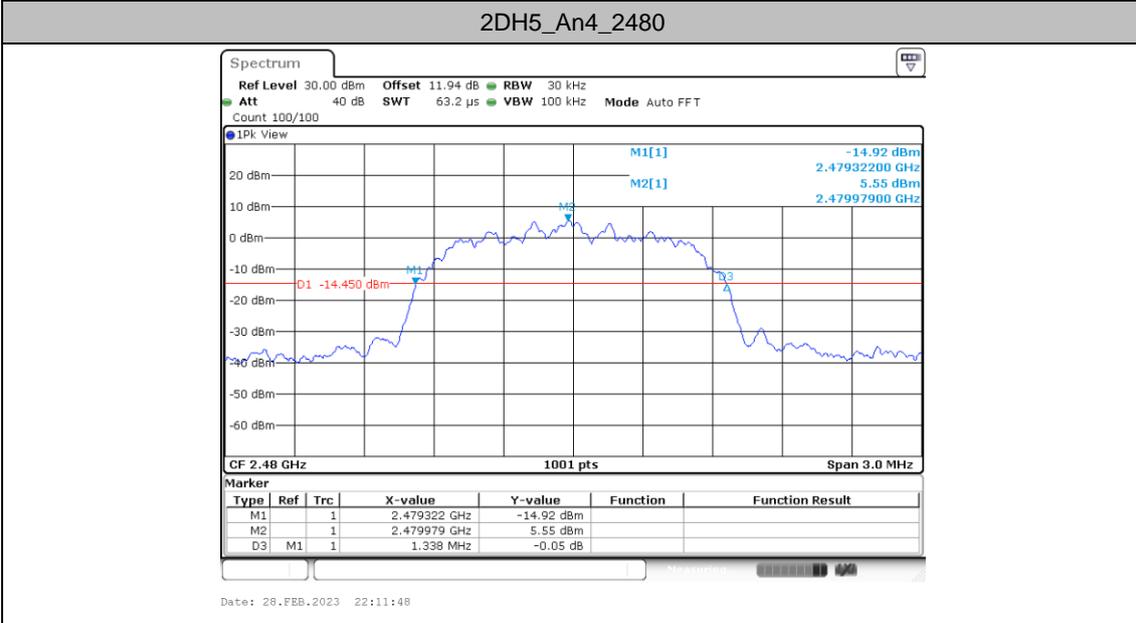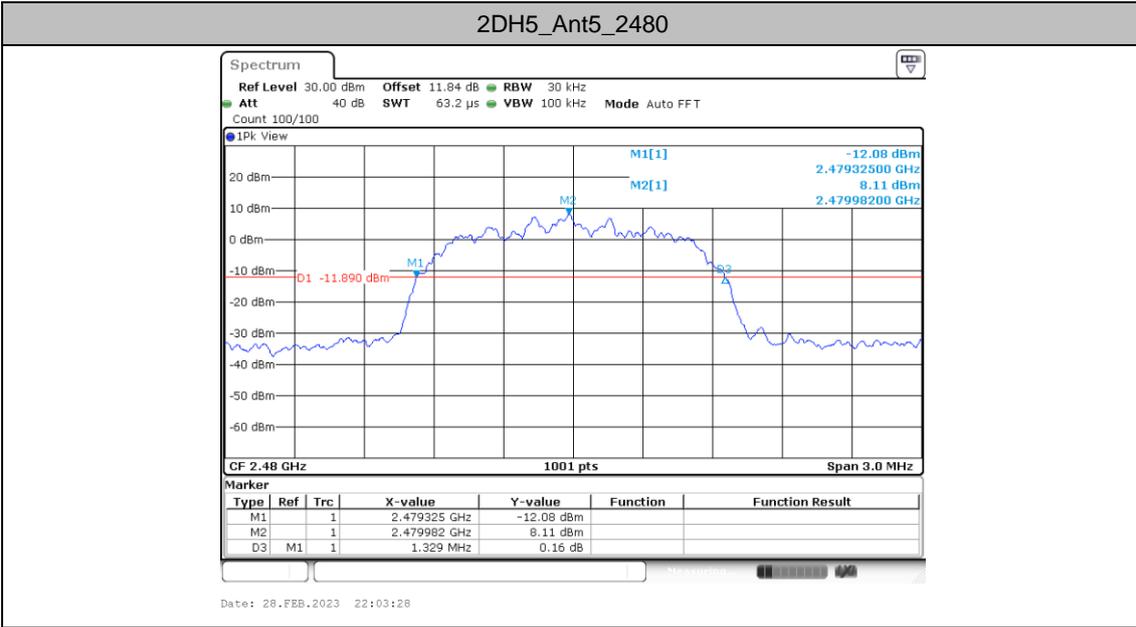

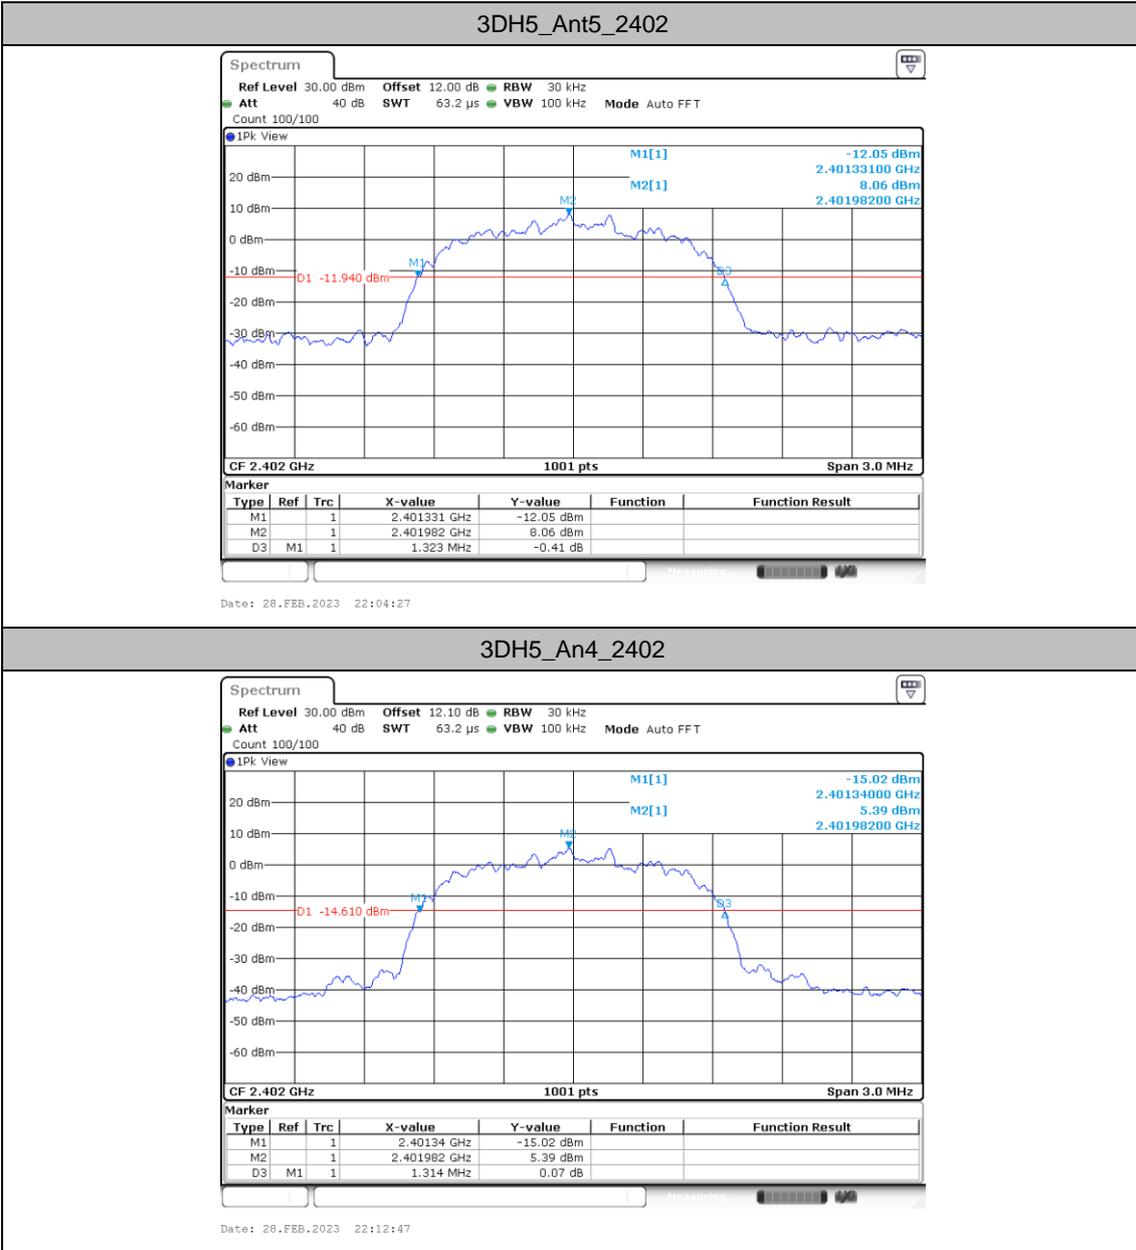

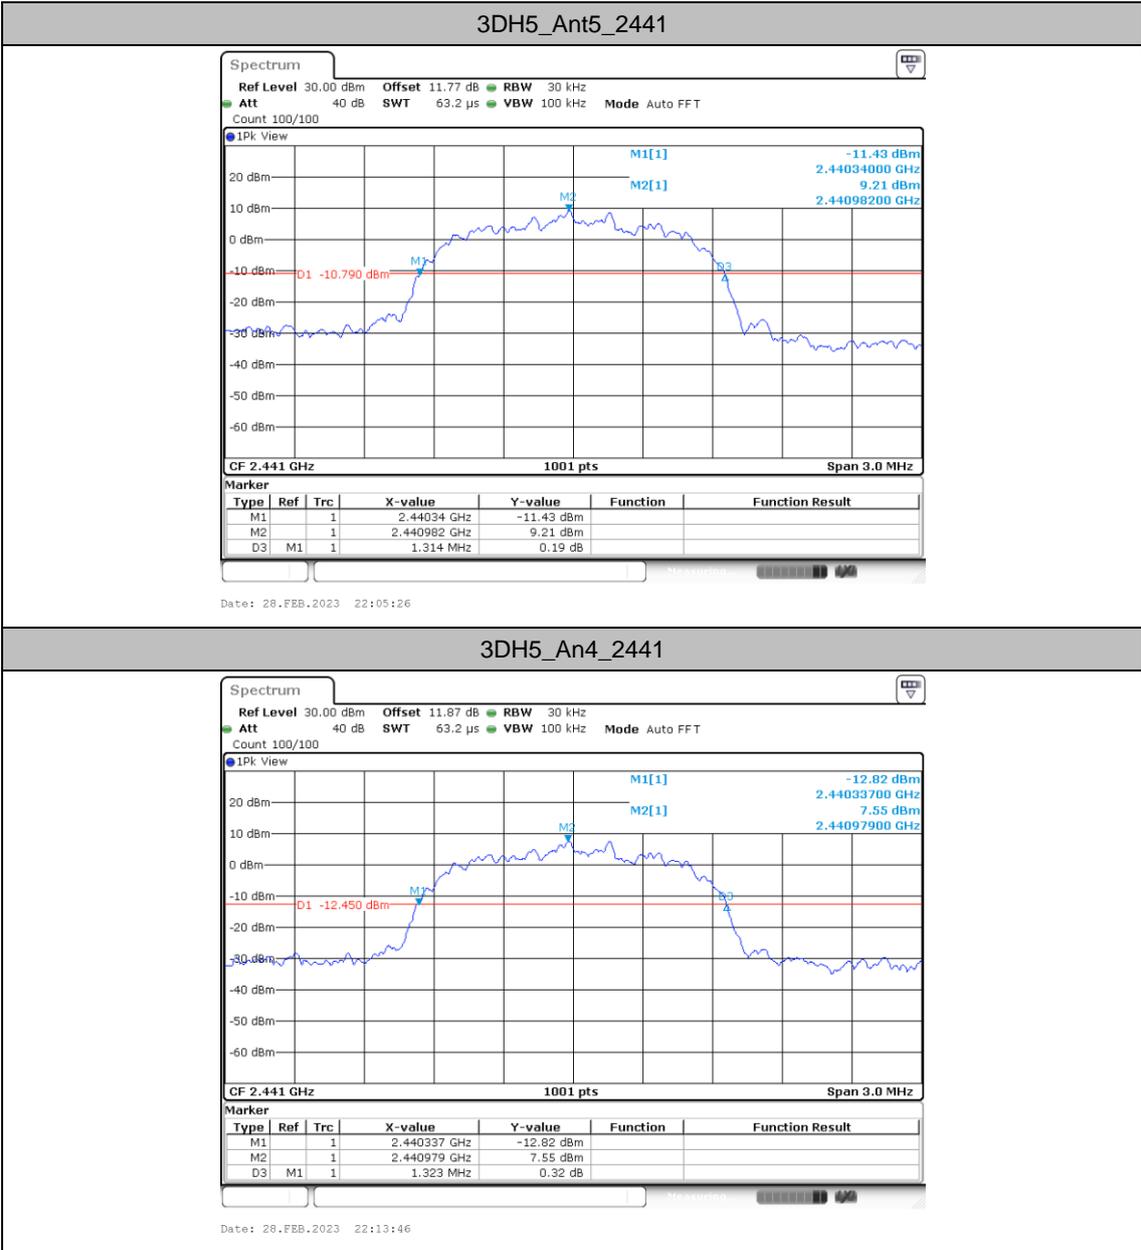

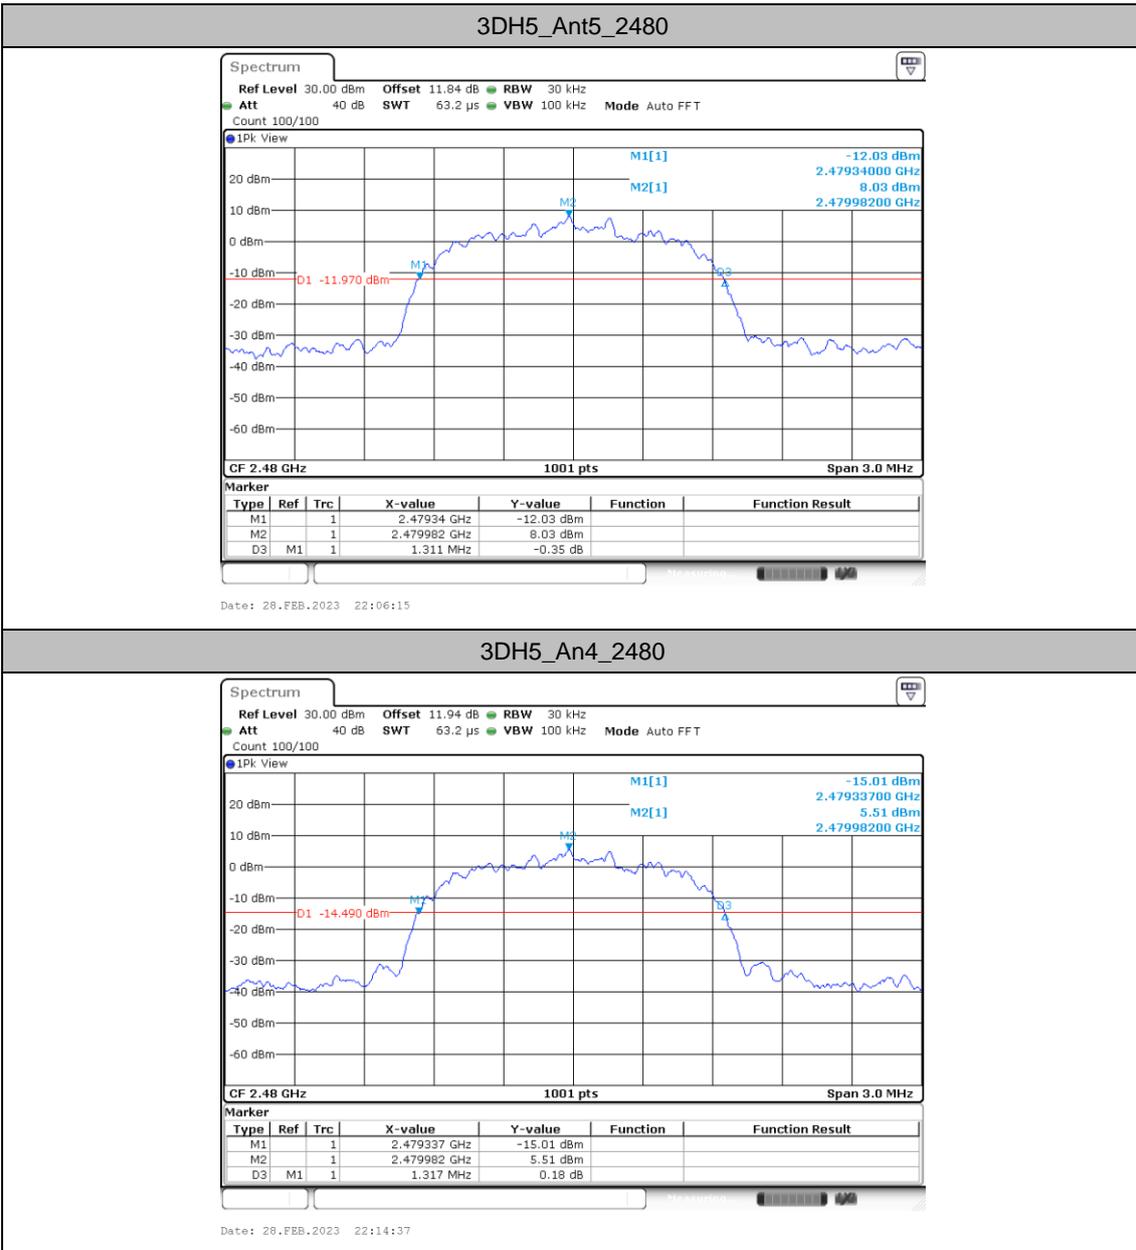





Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant5	2402	0.872	2401.5594	2402.4316	---	---
	An4	2402	0.866	2401.5624	2402.4286	---	---
	Ant5	2441	0.875	2440.5564	2441.4316	---	---
	An4	2441	0.869	2440.5594	2441.4286	---	---
	Ant5	2480	0.881	2479.5504	2480.4316	---	---
	An4	2480	0.872	2479.5534	2480.4256	---	---
2DH5	Ant5	2402	1.184	2401.4006	2402.5844	---	---
	An4	2402	1.181	2401.4036	2402.5844	---	---
	Ant5	2441	1.184	2440.4006	2441.5844	---	---
	An4	2441	1.181	2440.4036	2441.5844	---	---
	Ant5	2480	1.181	2479.4006	2480.5814	---	---
	An4	2480	1.181	2479.4006	2480.5814	---	---
3DH5	Ant5	2402	1.187	2401.4006	2402.5874	---	---
	An4	2402	1.181	2401.4036	2402.5844	---	---
	Ant5	2441	1.181	2440.4036	2441.5844	---	---
	An4	2441	1.184	2440.4036	2441.5874	---	---
	Ant5	2480	1.184	2479.4006	2480.5844	---	---
	An4	2480	1.181	2479.4036	2480.5844	---	---




Test Graphs

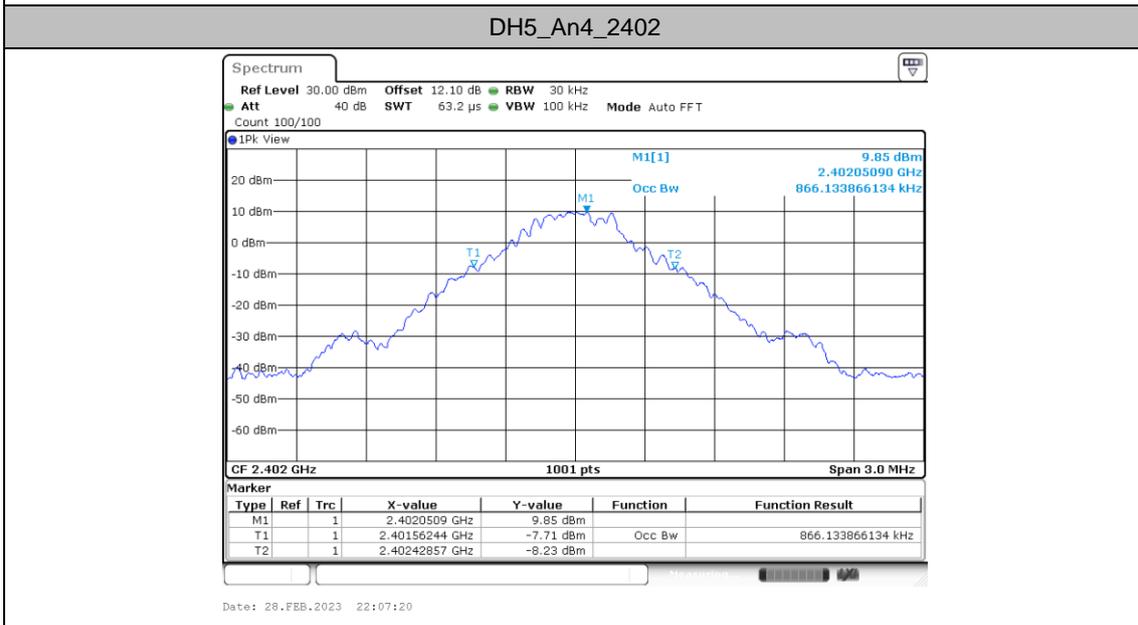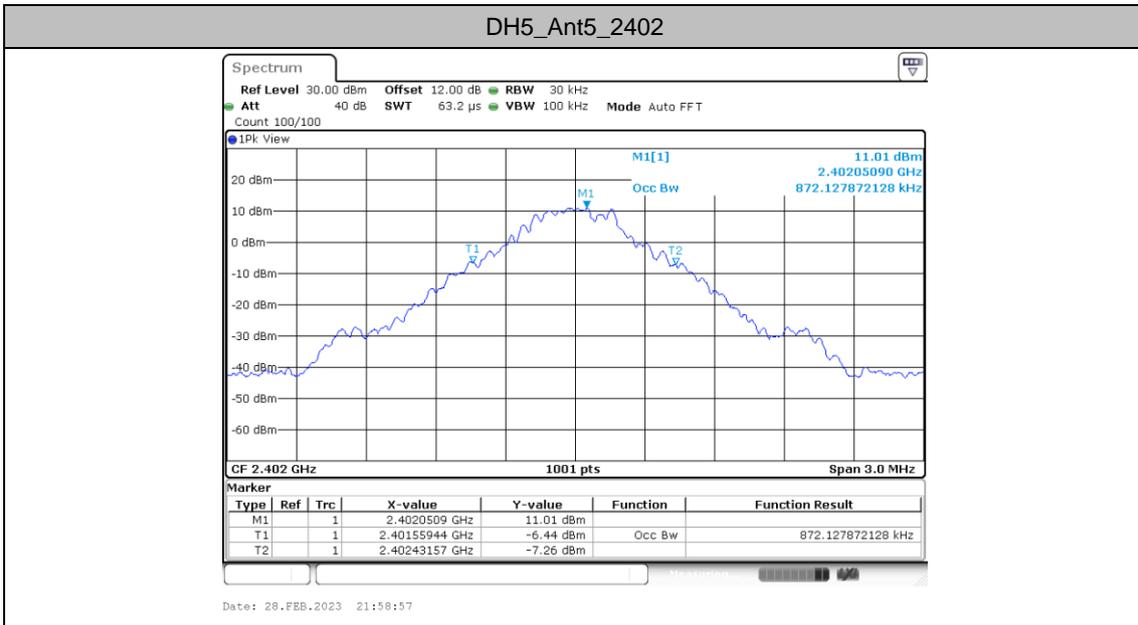




DH5_Ant5_2441

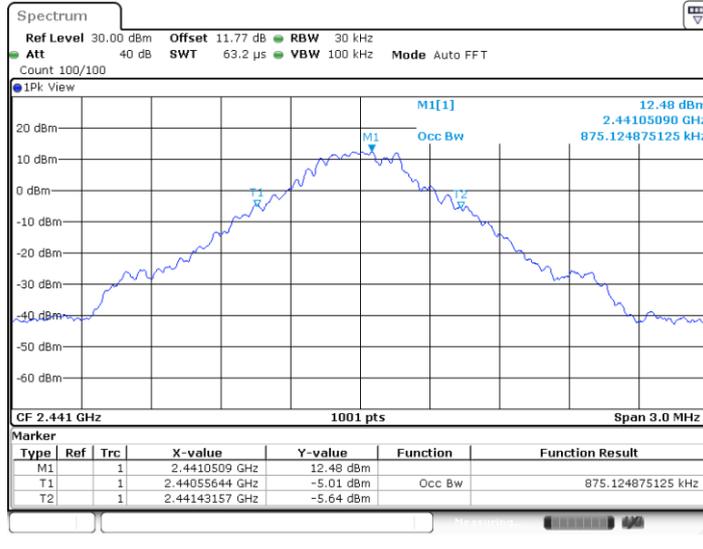


DH5_An4_2441

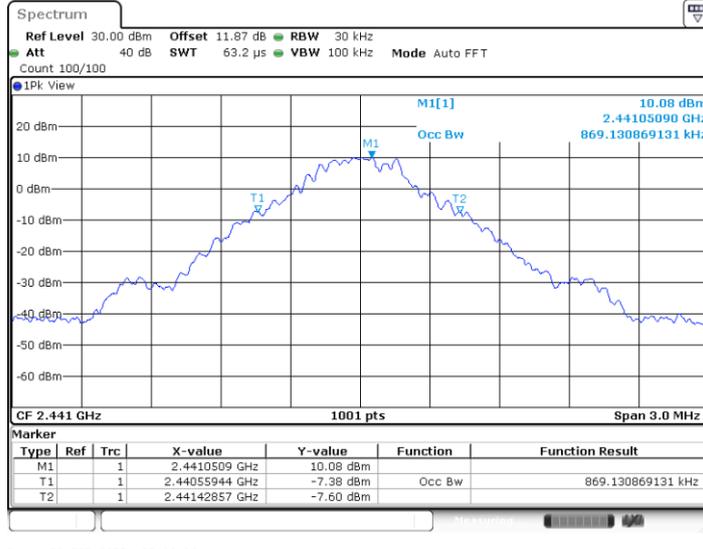




DH5_Ant5_2480

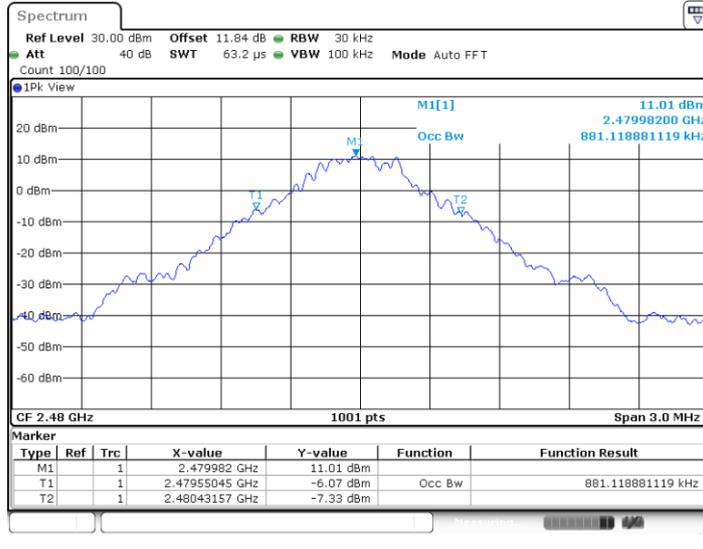


DH5_An4_2480

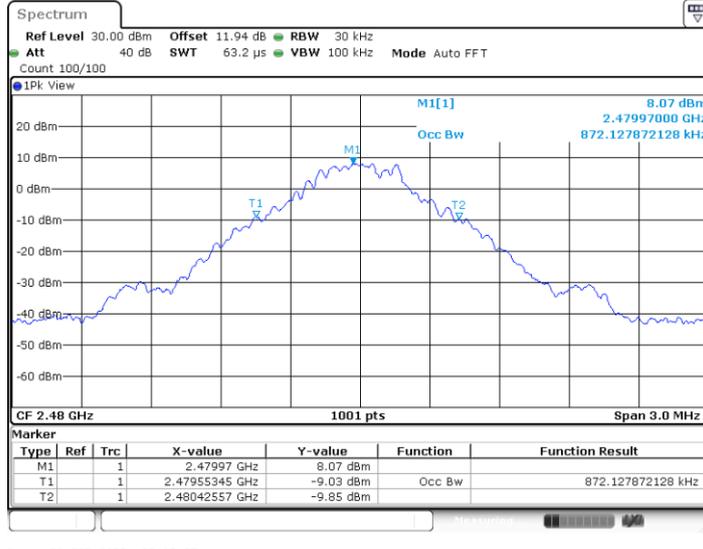




2DH5_Ant5_2402

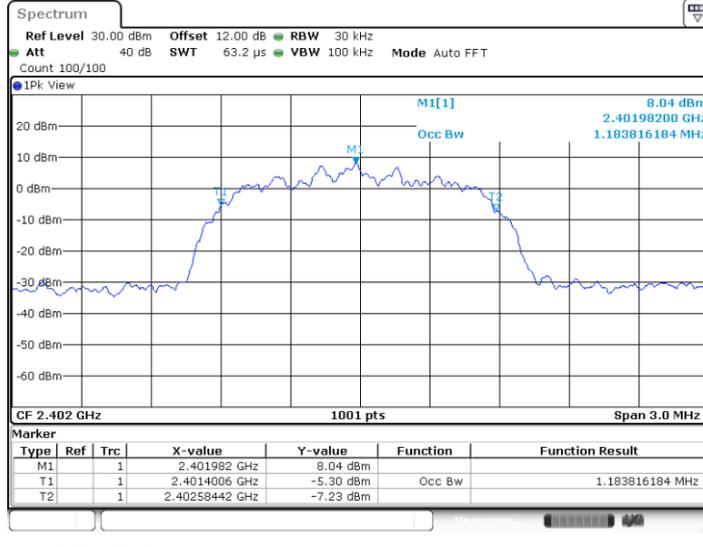

Date: 28.FEB.2023 22:01:44


2DH5_An4_2402

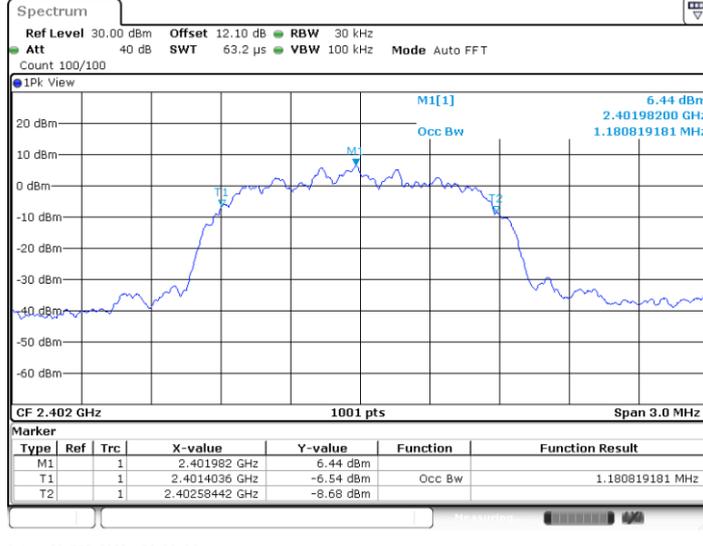


Date: 28.FEB.2023 22:10:06




2DH5_Ant5_2441

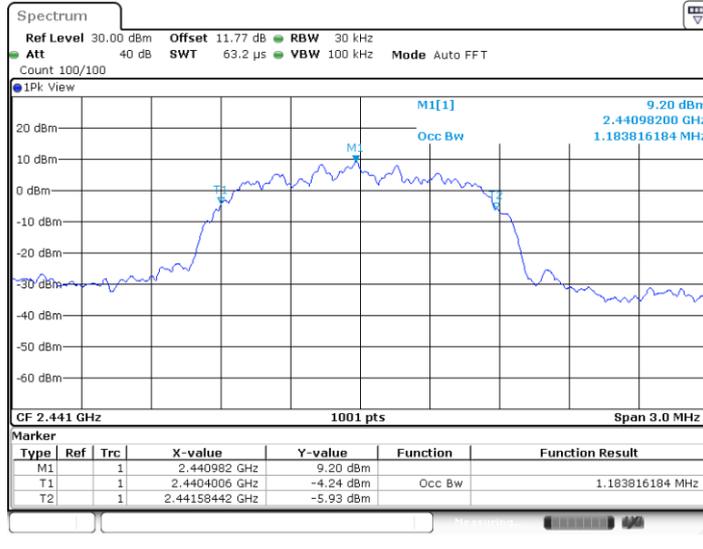


2DH5_An4_2441

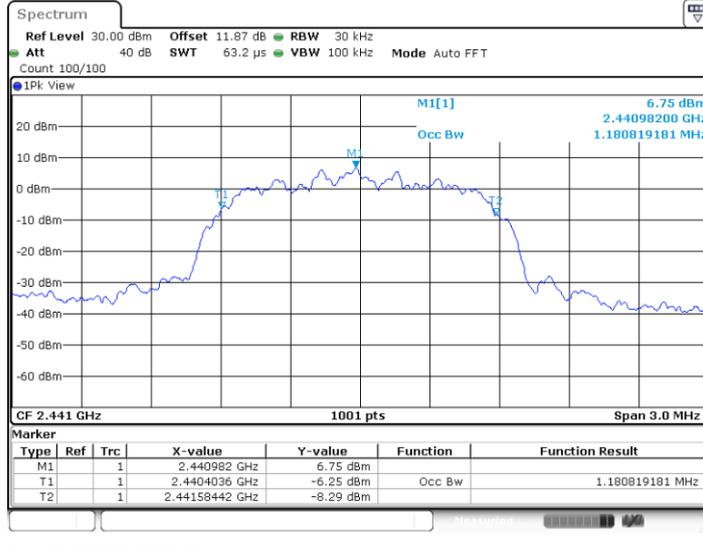

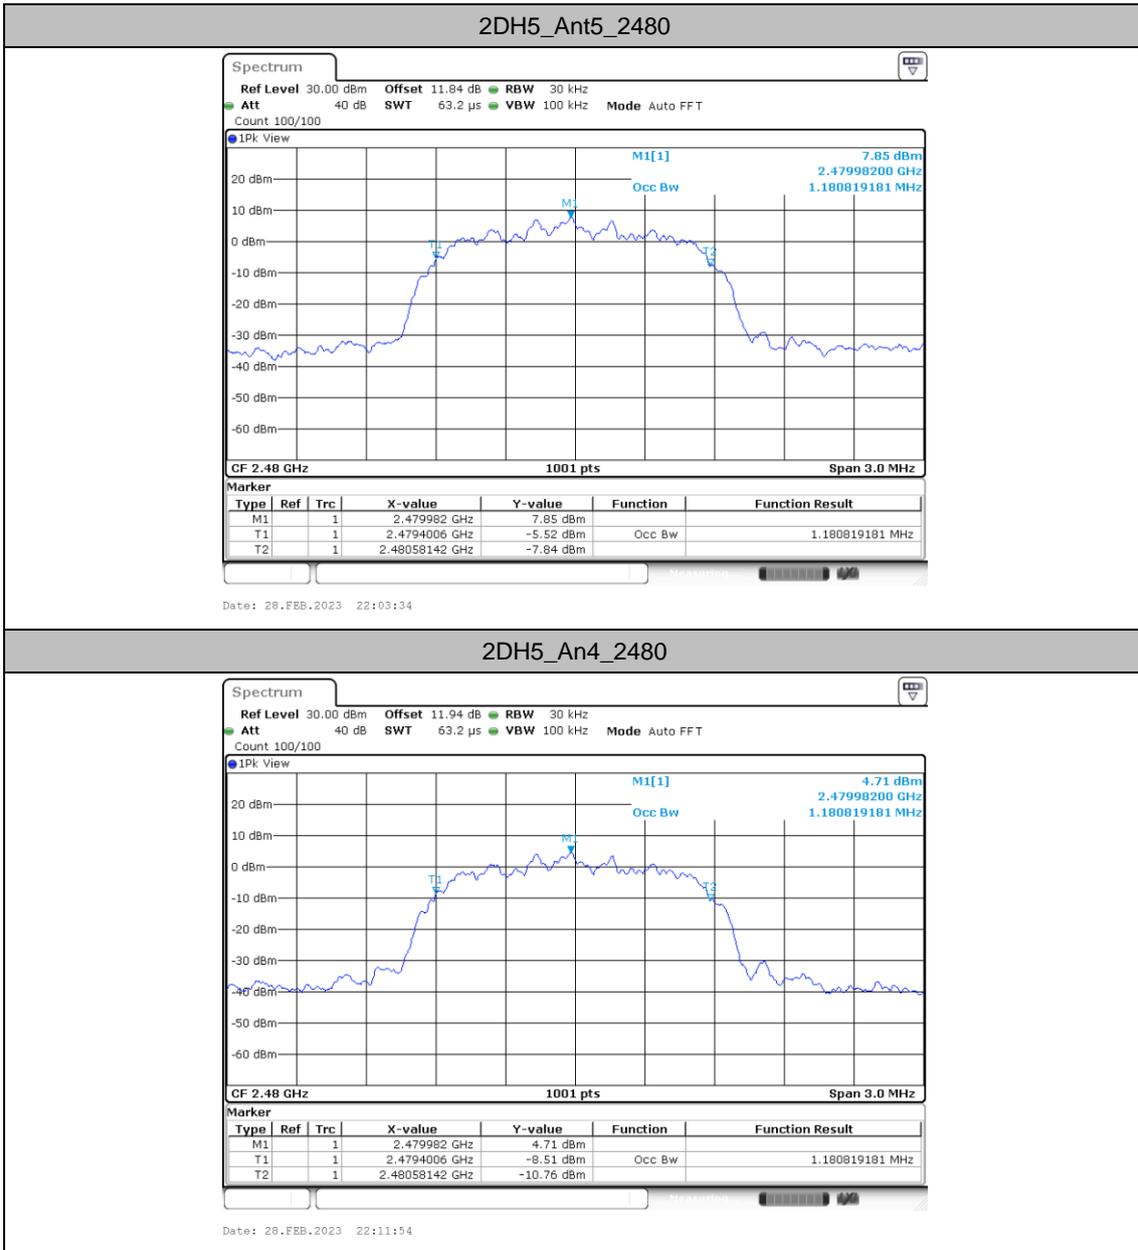



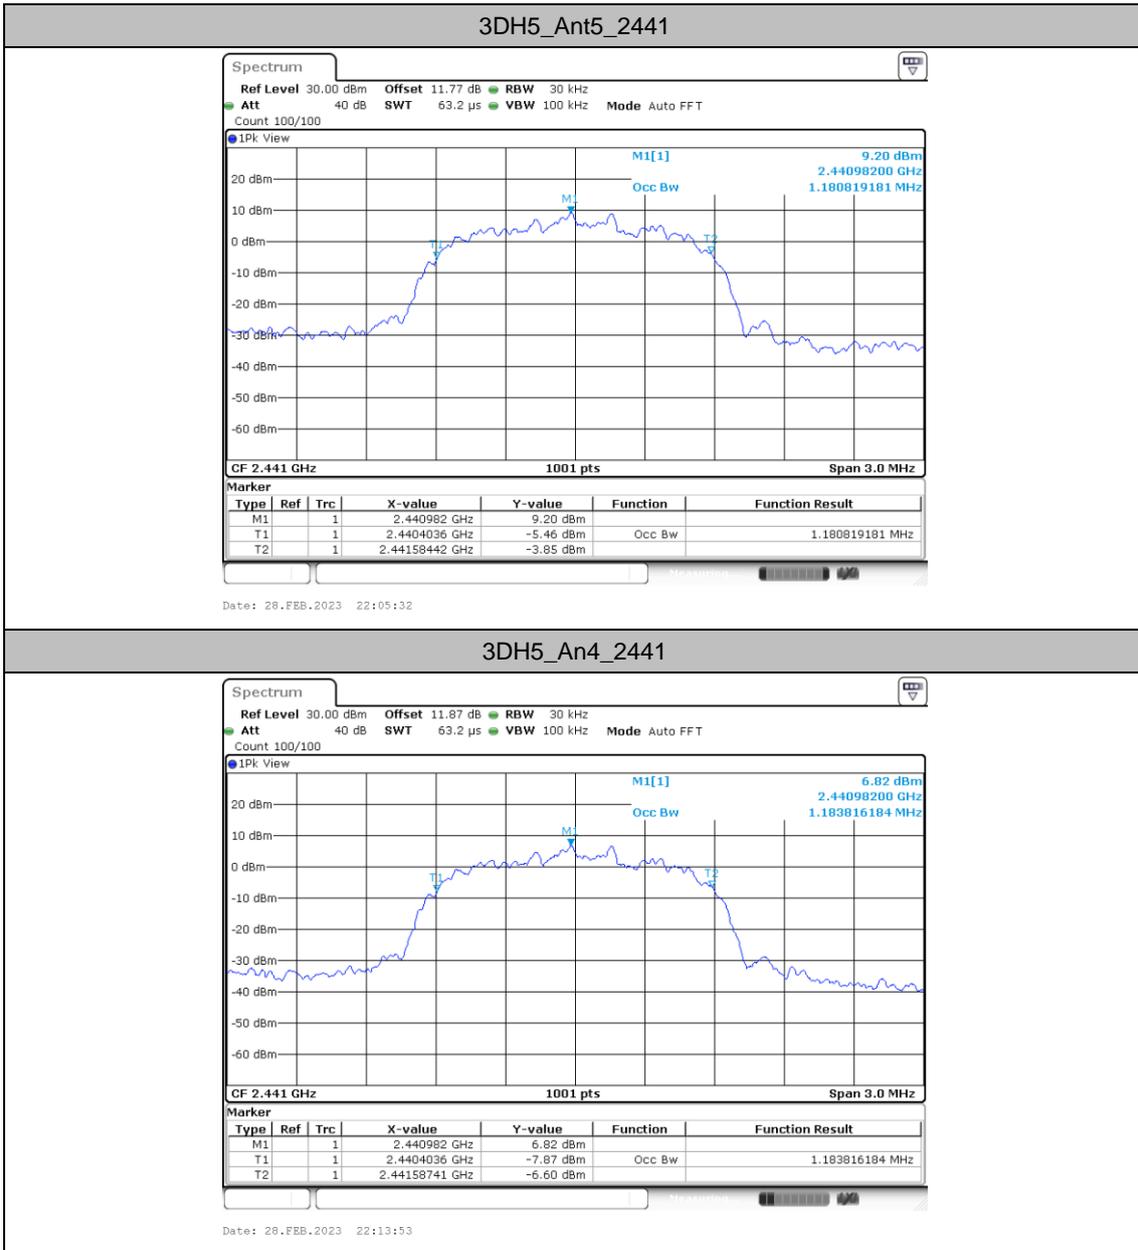







Carrier frequency separation

Test Result

TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant5	Hop	1.003	≥0.660	PASS
	An4	Hop	1	≥0.660	PASS
2DH5	Ant5	Hop	1.003	≥0.893	PASS
	An4	Hop	0.994	≥0.893	PASS
3DH5	Ant5	Hop	1	≥0.880	PASS
	An4	Hop	0.936	≥0.880	PASS




Test Graphs

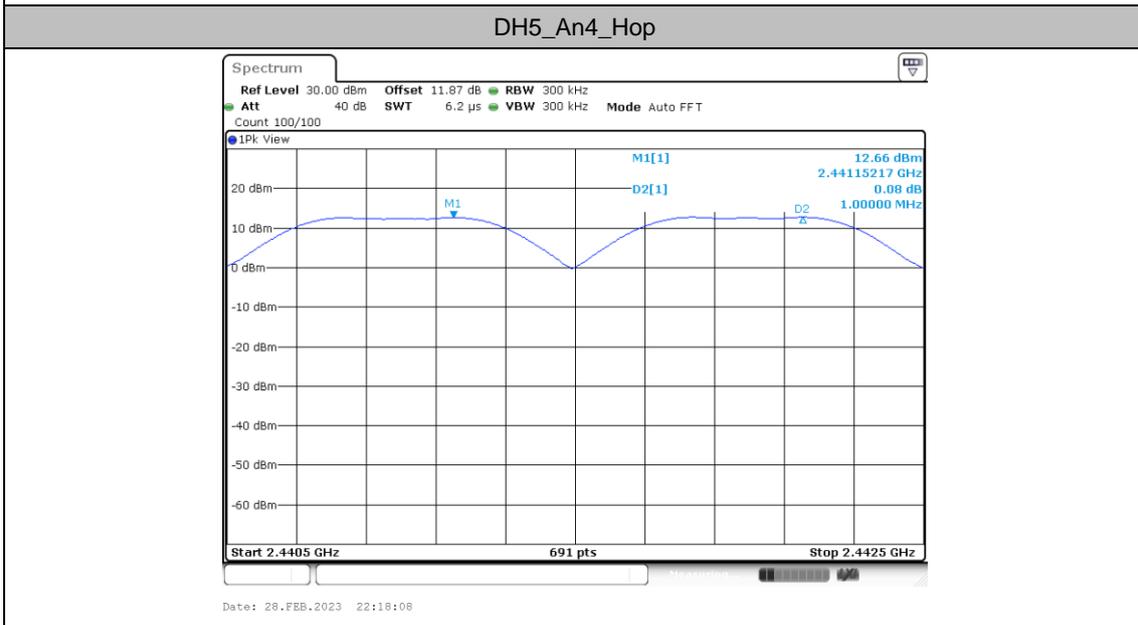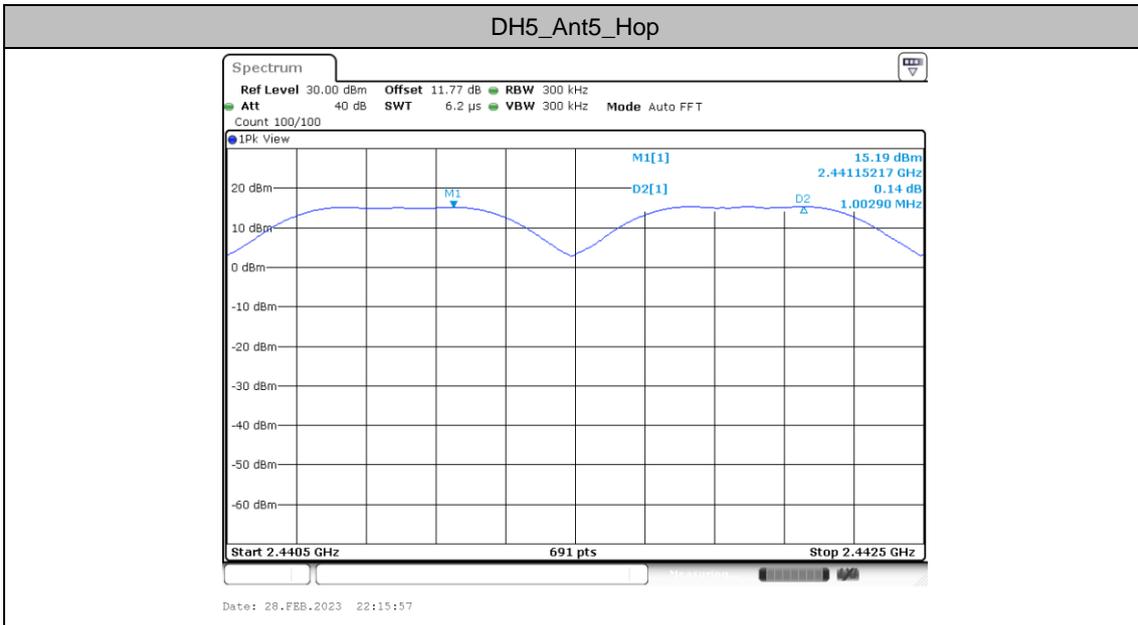




2DH5_Ant5_Hop

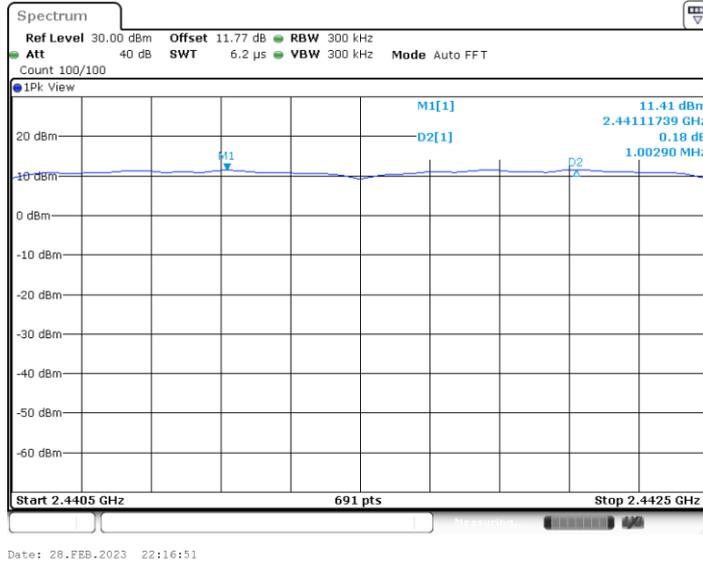


2DH5_An4_Hop

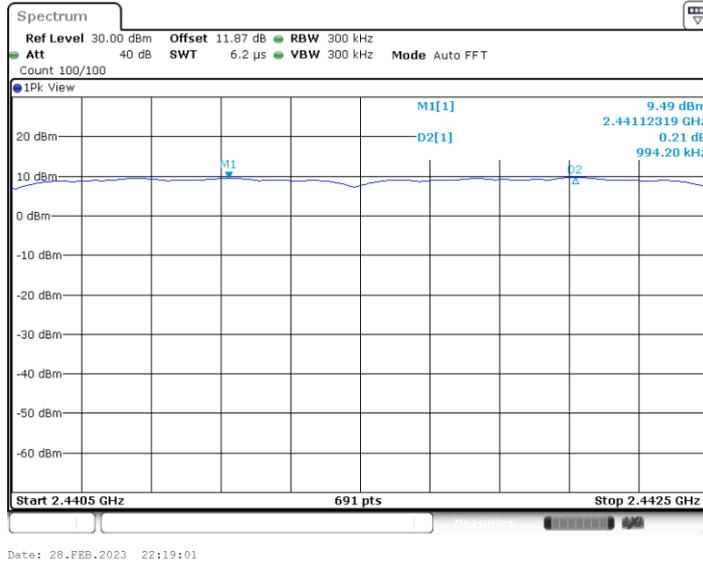




3DH5_Ant5_Hop

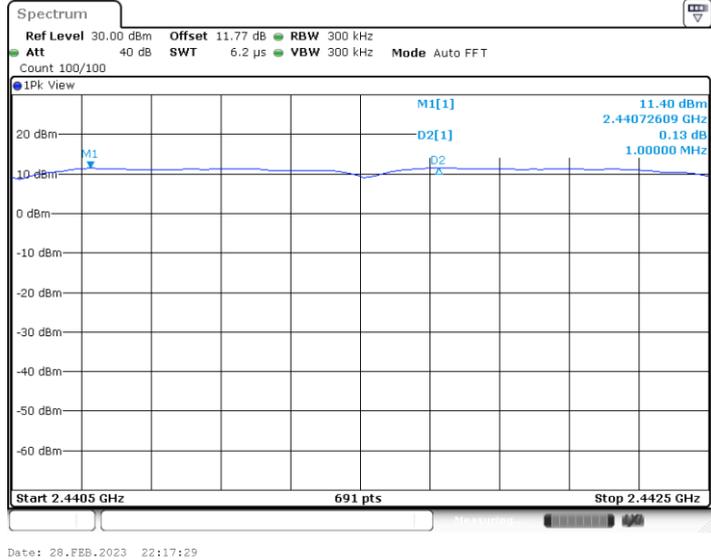

3DH5_An4_Hop

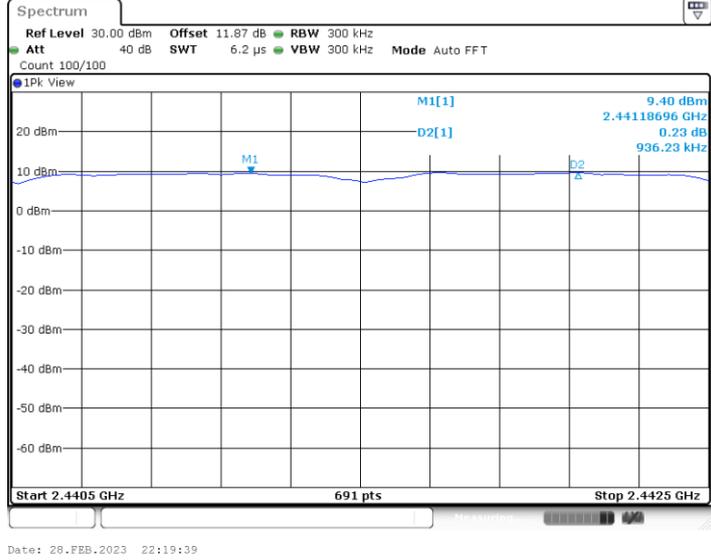




Time of occupancy

Test Result

TestMode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
3DH5	Ant5+Ant4	Hop	2.870	106.67	0.306	≤0.4	PASS

Test Graphs

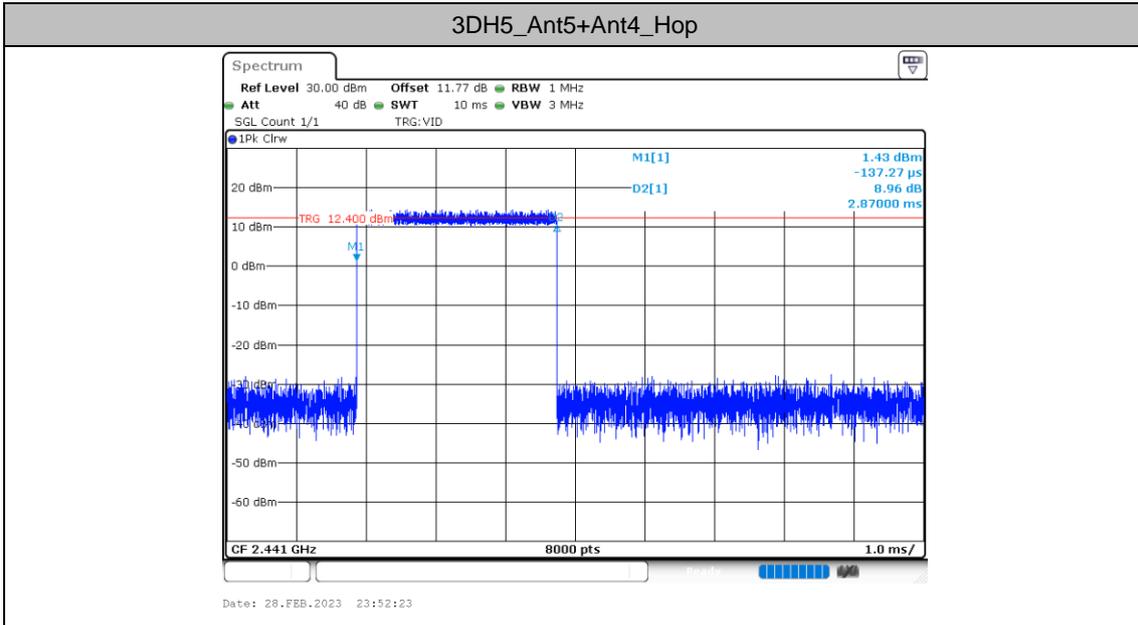





Number of hopping channels

Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant5	Hop	79	≥15	PASS
	An4	Hop	79	≥15	PASS



Test Graphs

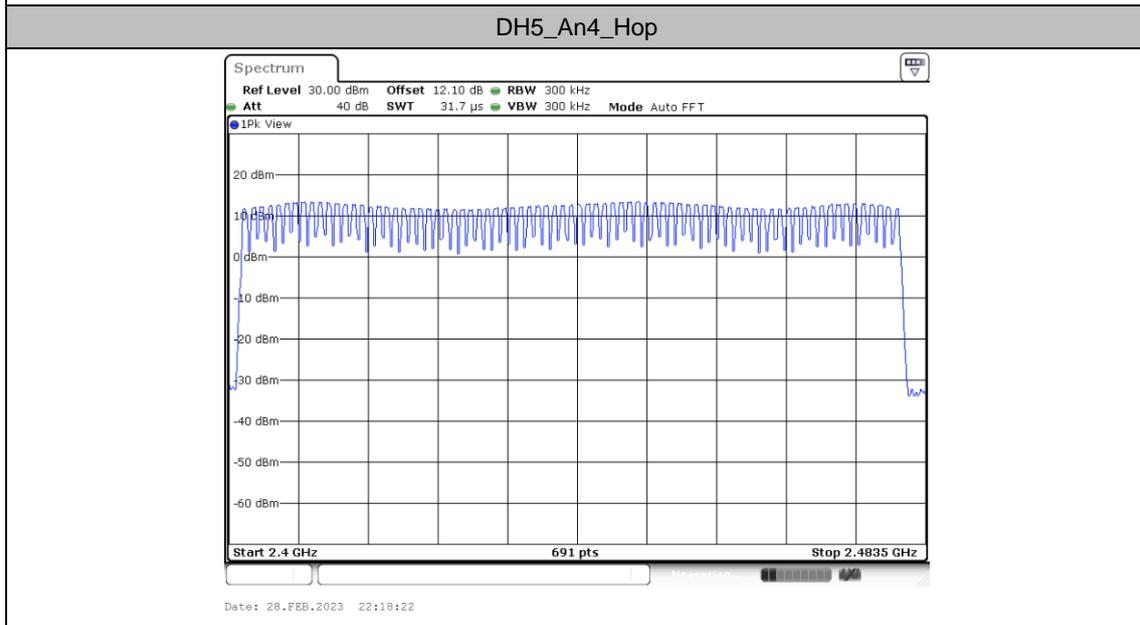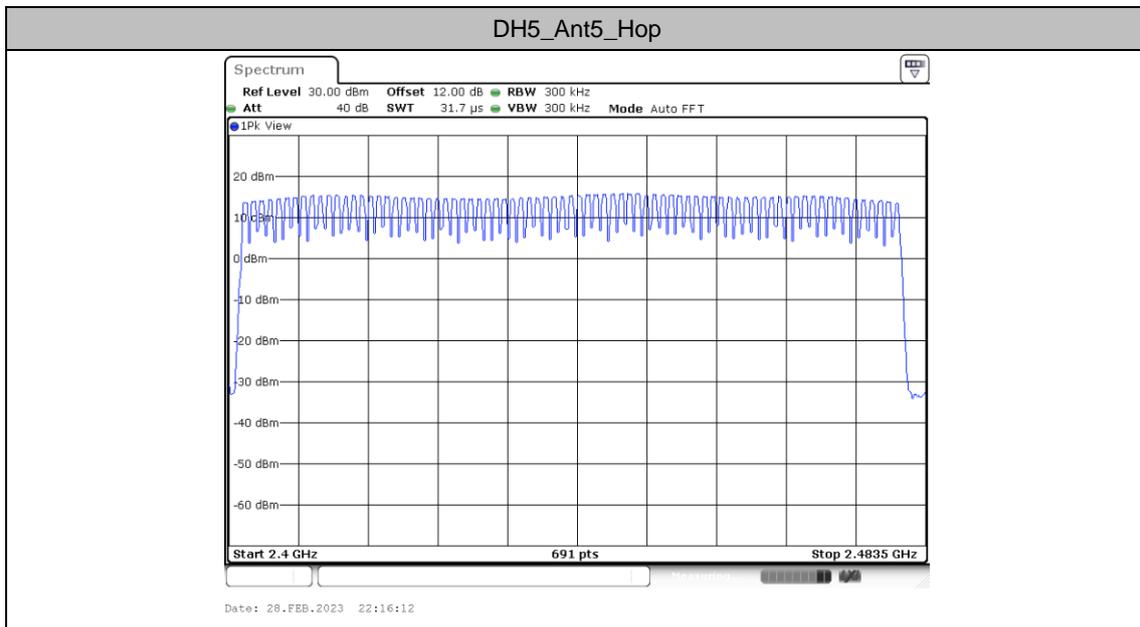





Band edge measurements


Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant5	Low	2402	13.79	-45.57	≤-6.21	PASS
	An4	Low	2402	12.40	-44.69	≤-7.6	PASS
	Ant5	High	2480	13.52	-45.04	≤-6.48	PASS
	An4	High	2480	10.86	-44.8	≤-9.14	PASS
	Ant5	Low	Hop_2402	13.17	-45.55	≤-6.83	PASS
	An4	Low	Hop_2402	11.64	-45.4	≤-8.36	PASS
	Ant5	High	Hop_2480	14.26	-44.83	≤-5.74	PASS
	An4	High	Hop_2480	12.07	-44.82	≤-7.93	PASS
2DH5	Ant5	Low	2402	10.75	-42.87	≤-9.25	PASS
	An4	Low	2402	9.30	-42.25	≤-10.7	PASS
	Ant5	High	2480	10.60	-44.67	≤-9.4	PASS
	An4	High	2480	7.64	-44.71	≤-12.36	PASS
	Ant5	Low	Hop_2402	9.07	-45.18	≤-10.93	PASS
	An4	Low	Hop_2402	5.91	-45.38	≤-14.09	PASS
	Ant5	High	Hop_2480	10.20	-45.58	≤-9.8	PASS
	An4	High	Hop_2480	7.59	-44.72	≤-12.41	PASS
3DH5	Ant5	Low	2402	10.84	-42.23	≤-9.16	PASS
	An4	Low	2402	9.37	-36.19	≤-10.63	PASS
	Ant5	High	2480	10.68	-44.7	≤-9.32	PASS
	An4	High	2480	7.77	-44.49	≤-12.23	PASS
	Ant5	Low	Hop_2402	9.67	-45.48	≤-10.33	PASS
	An4	Low	Hop_2402	6.82	-45.15	≤-13.18	PASS
	Ant5	High	Hop_2480	11.69	-44.97	≤-8.31	PASS
	An4	High	Hop_2480	8.06	-44.83	≤-11.94	PASS




Test Graphs

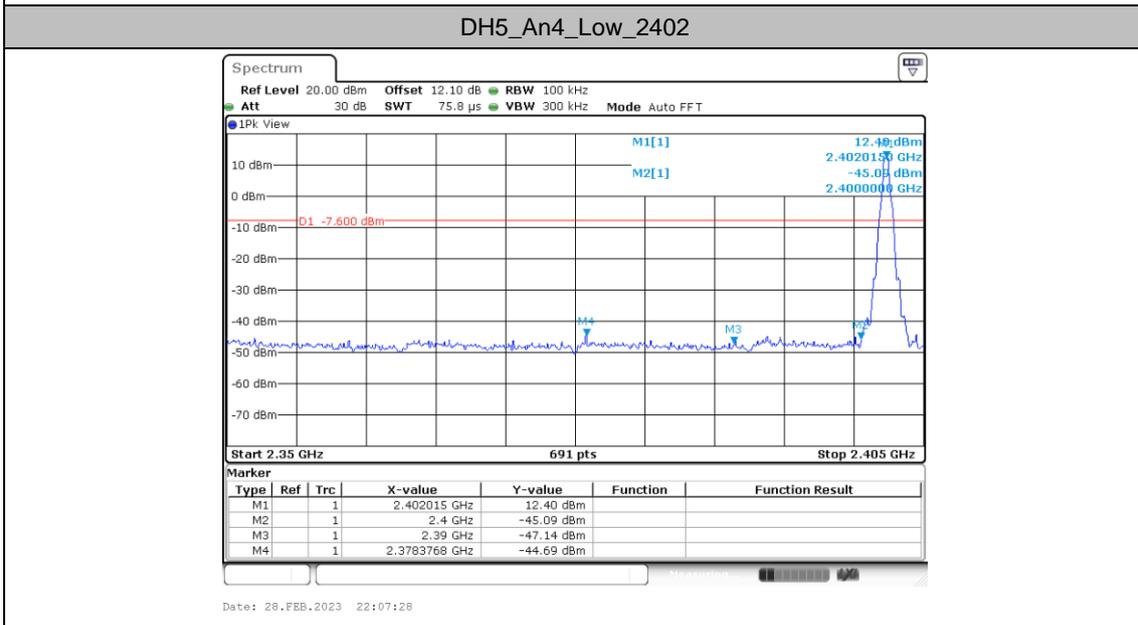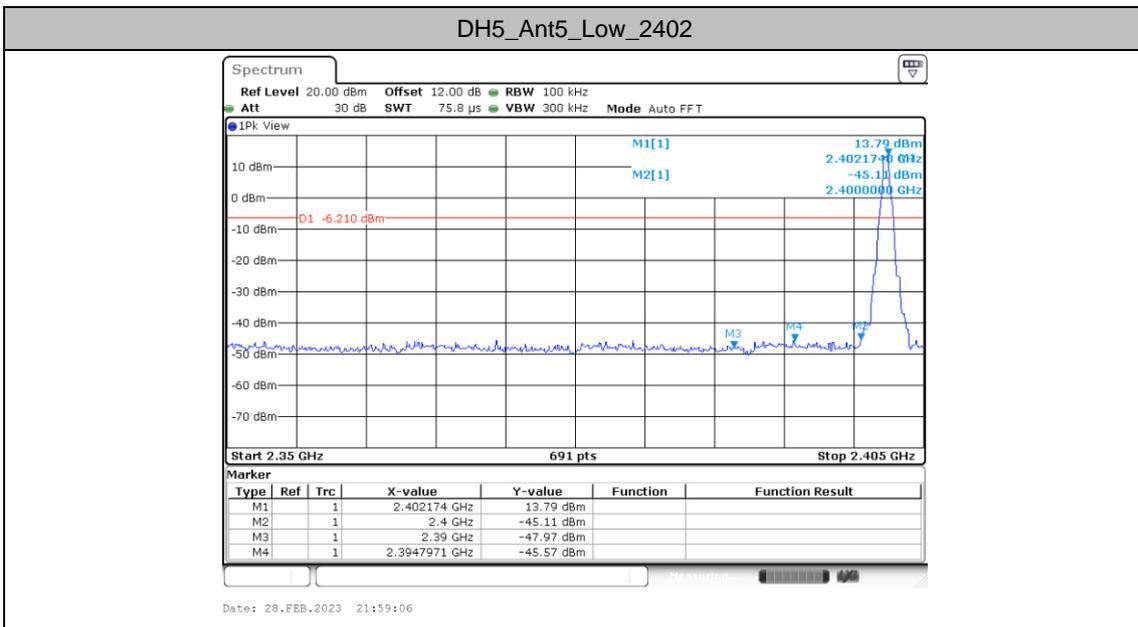

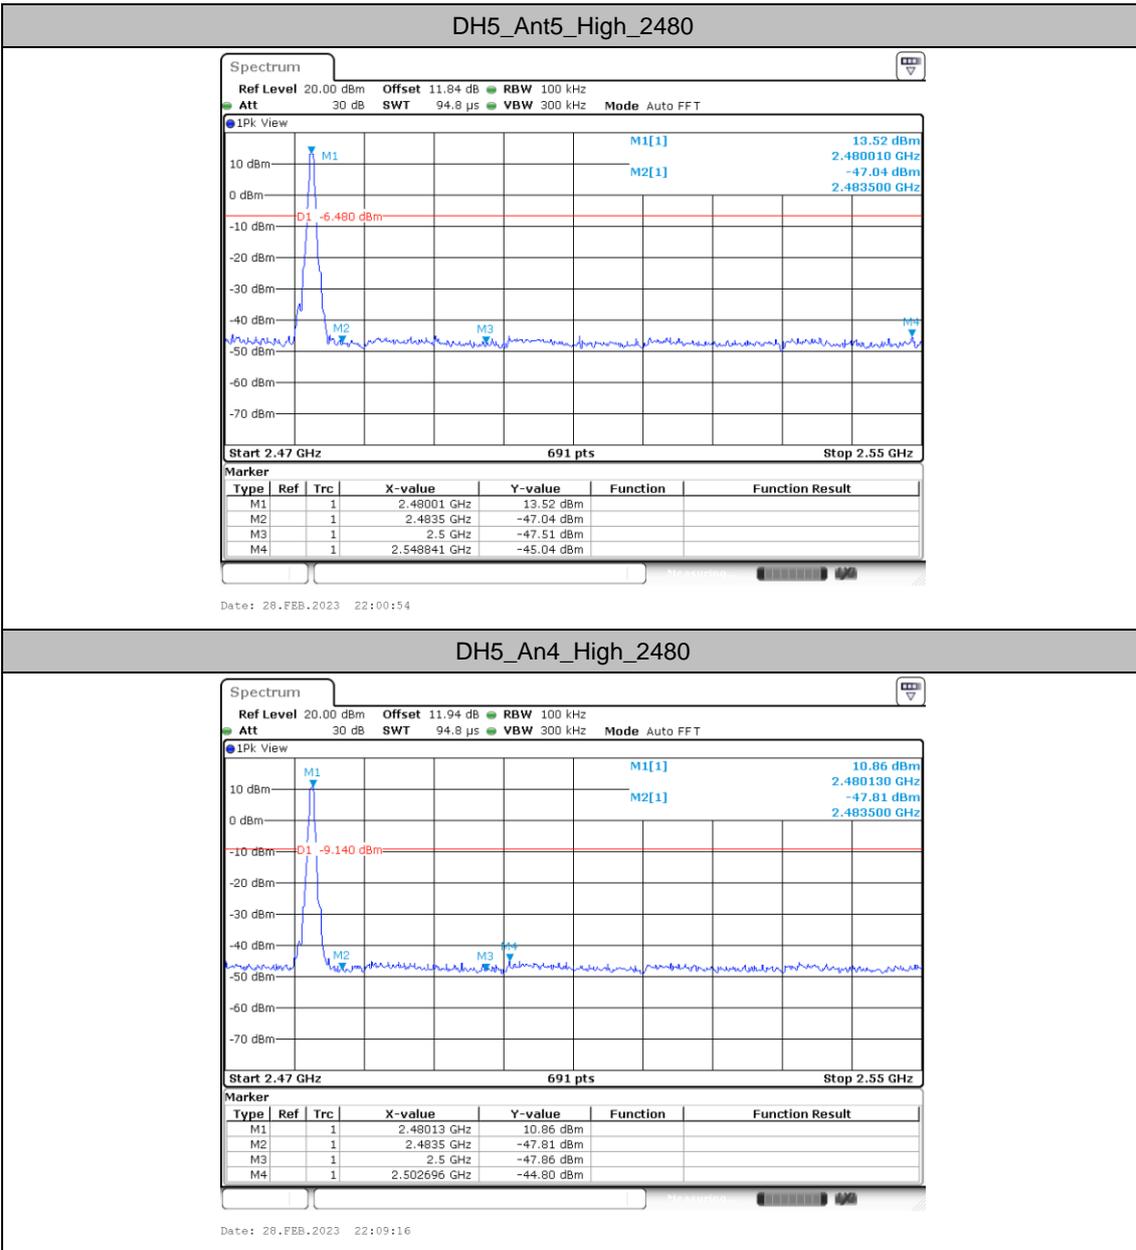





DH5_Ant5_Low_Hop_2402

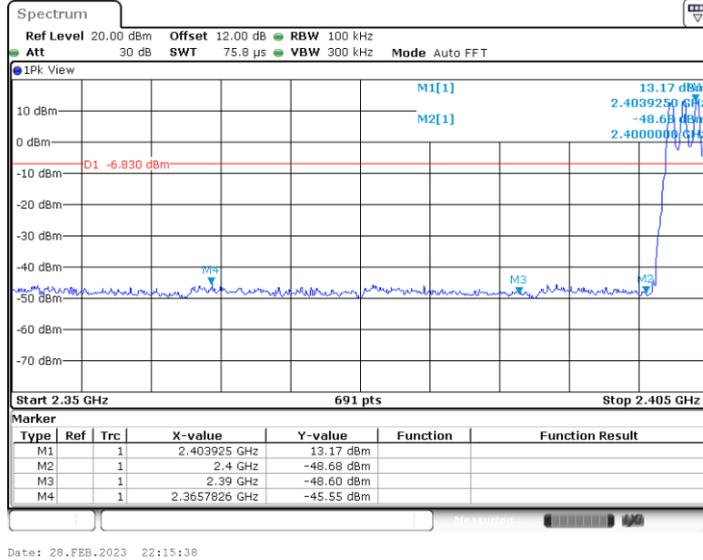


DH5_An4_Low_Hop_2402

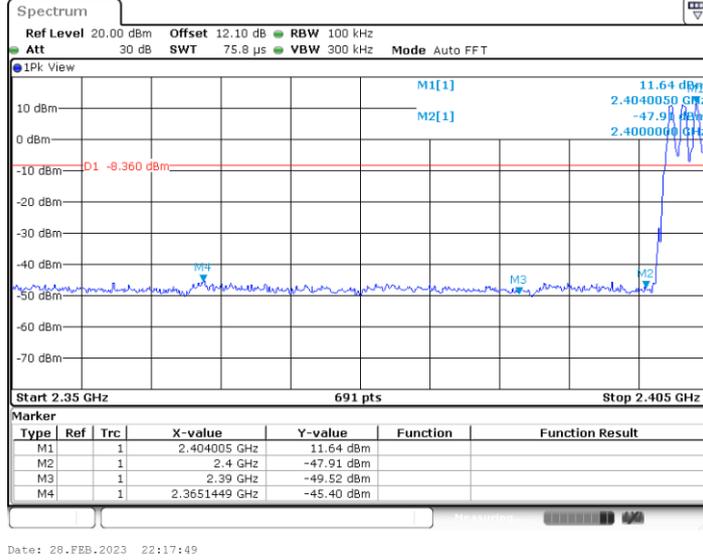

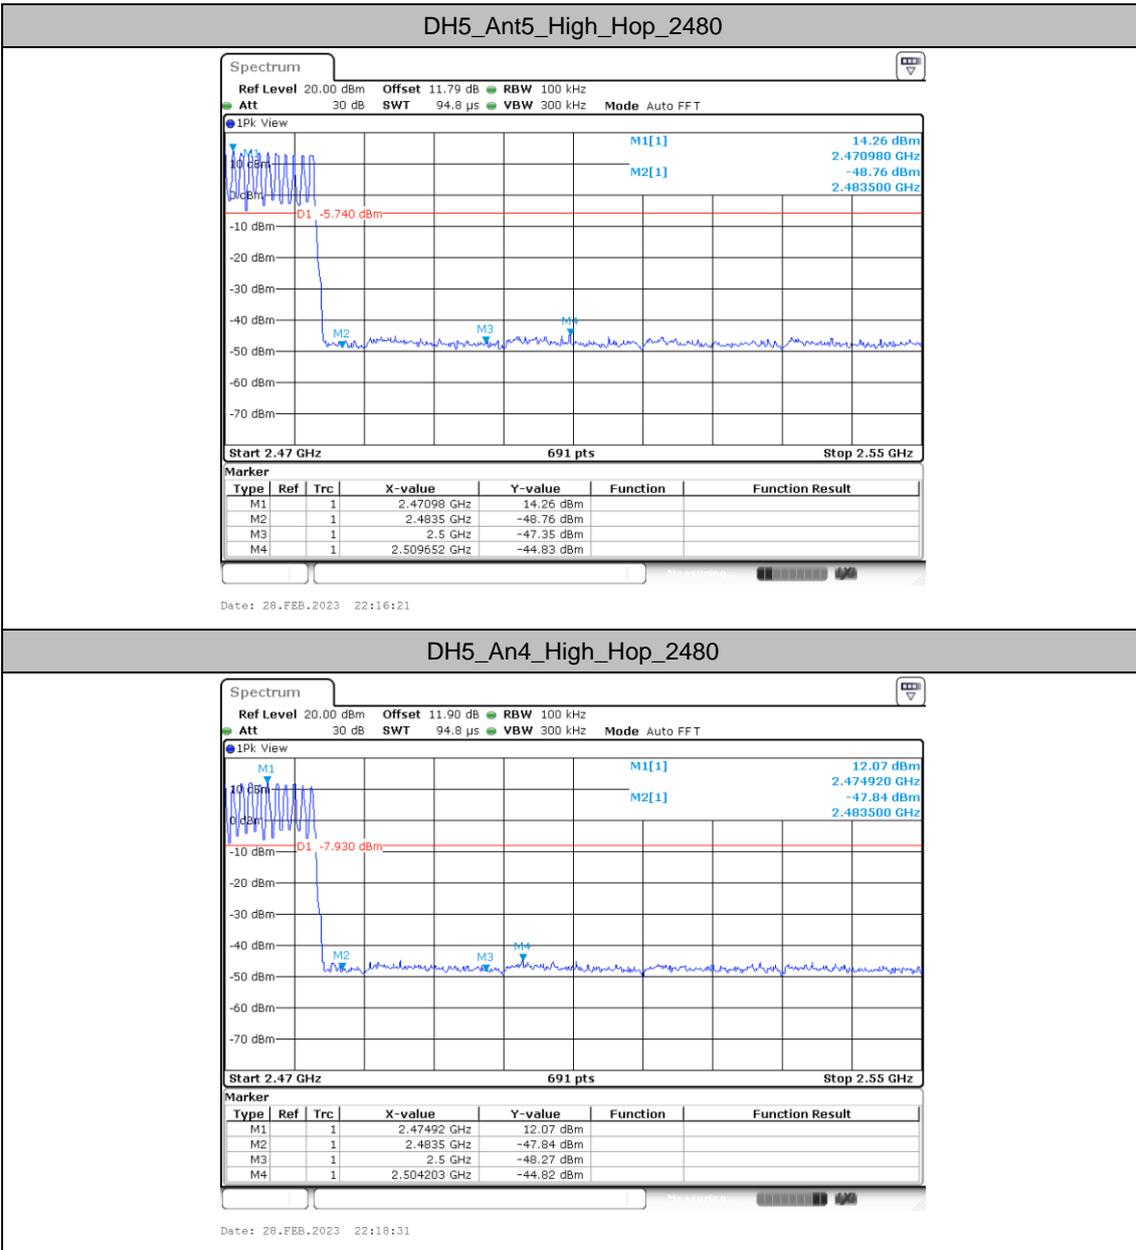






2DH5_Ant5_Low_2402

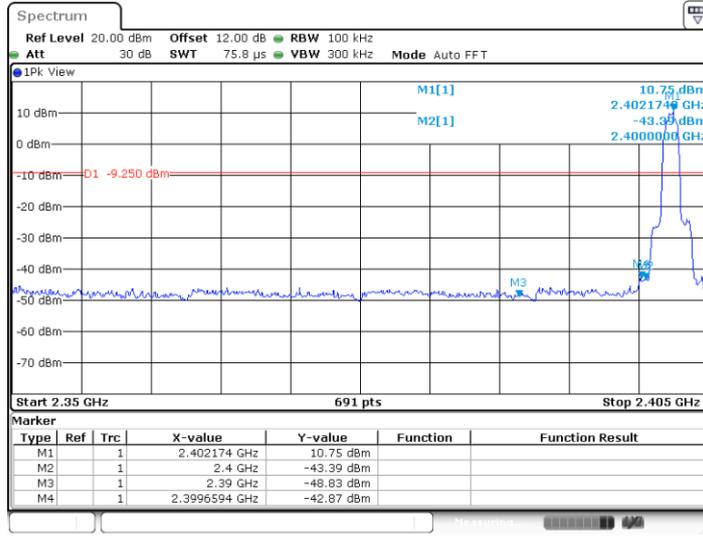


2DH5_An4_Low_2402

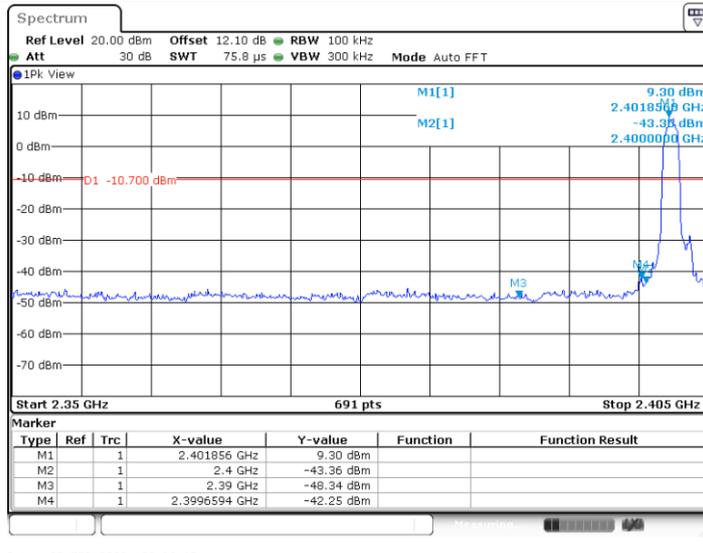

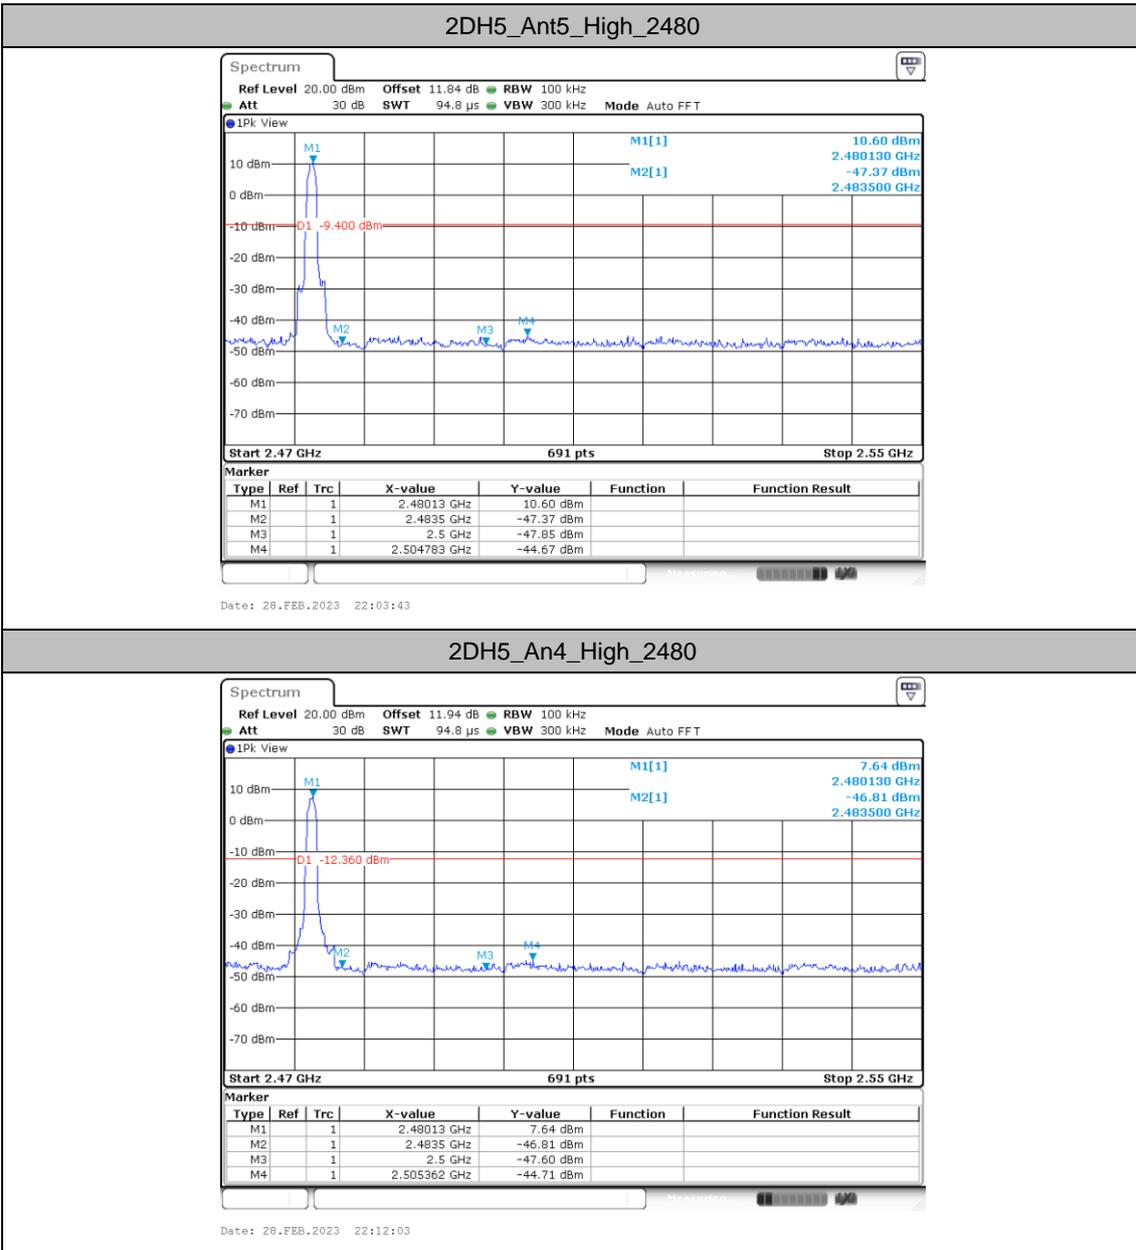


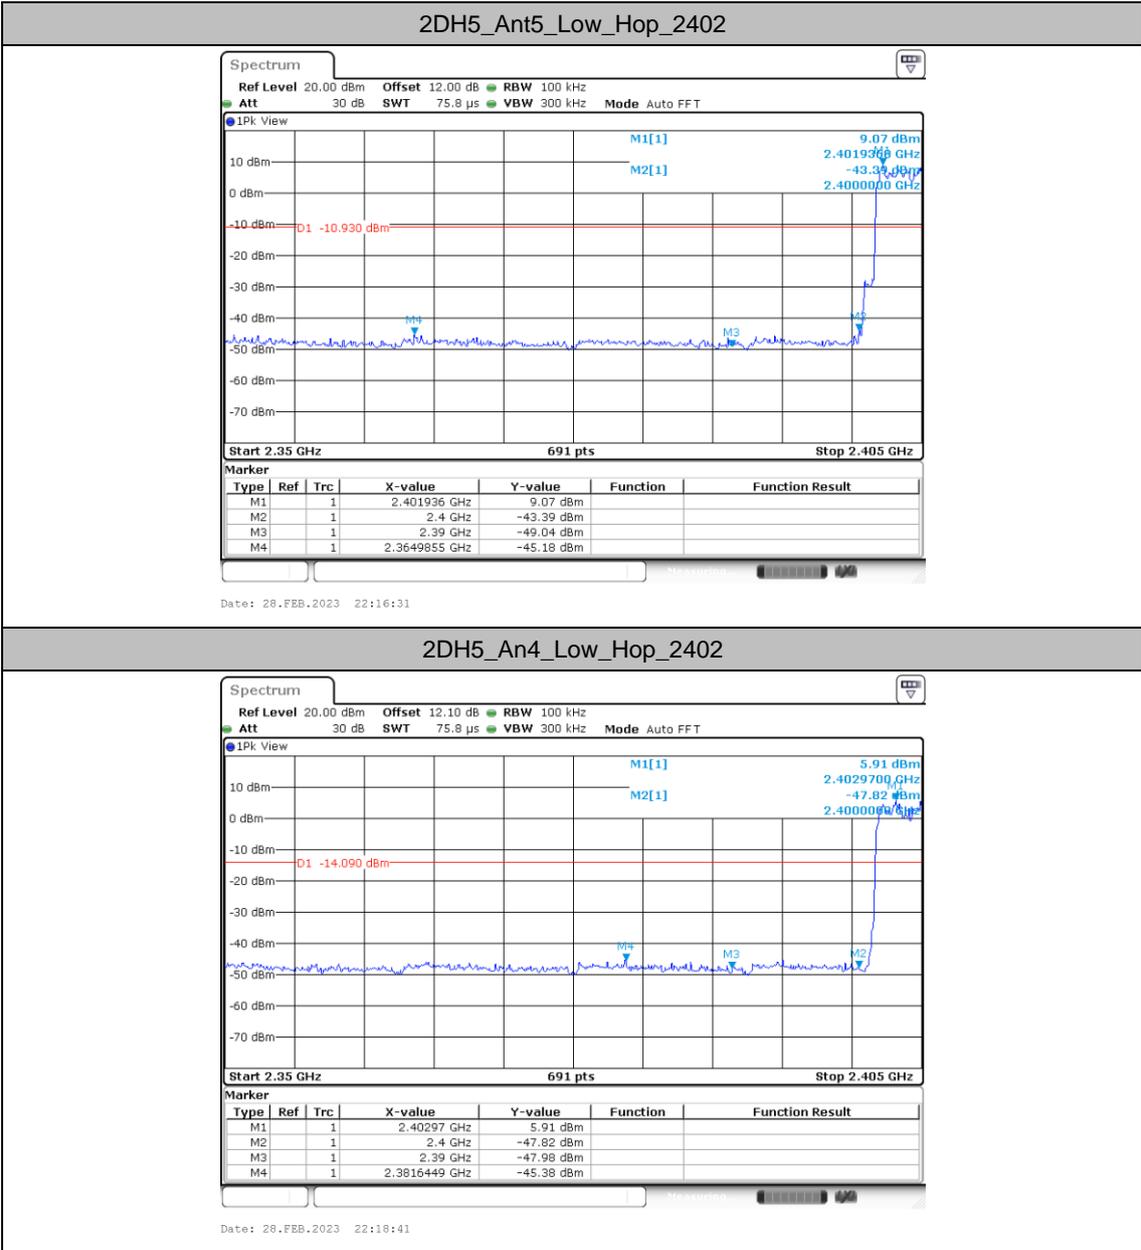
2DH5_An4_Low_Hop_2402

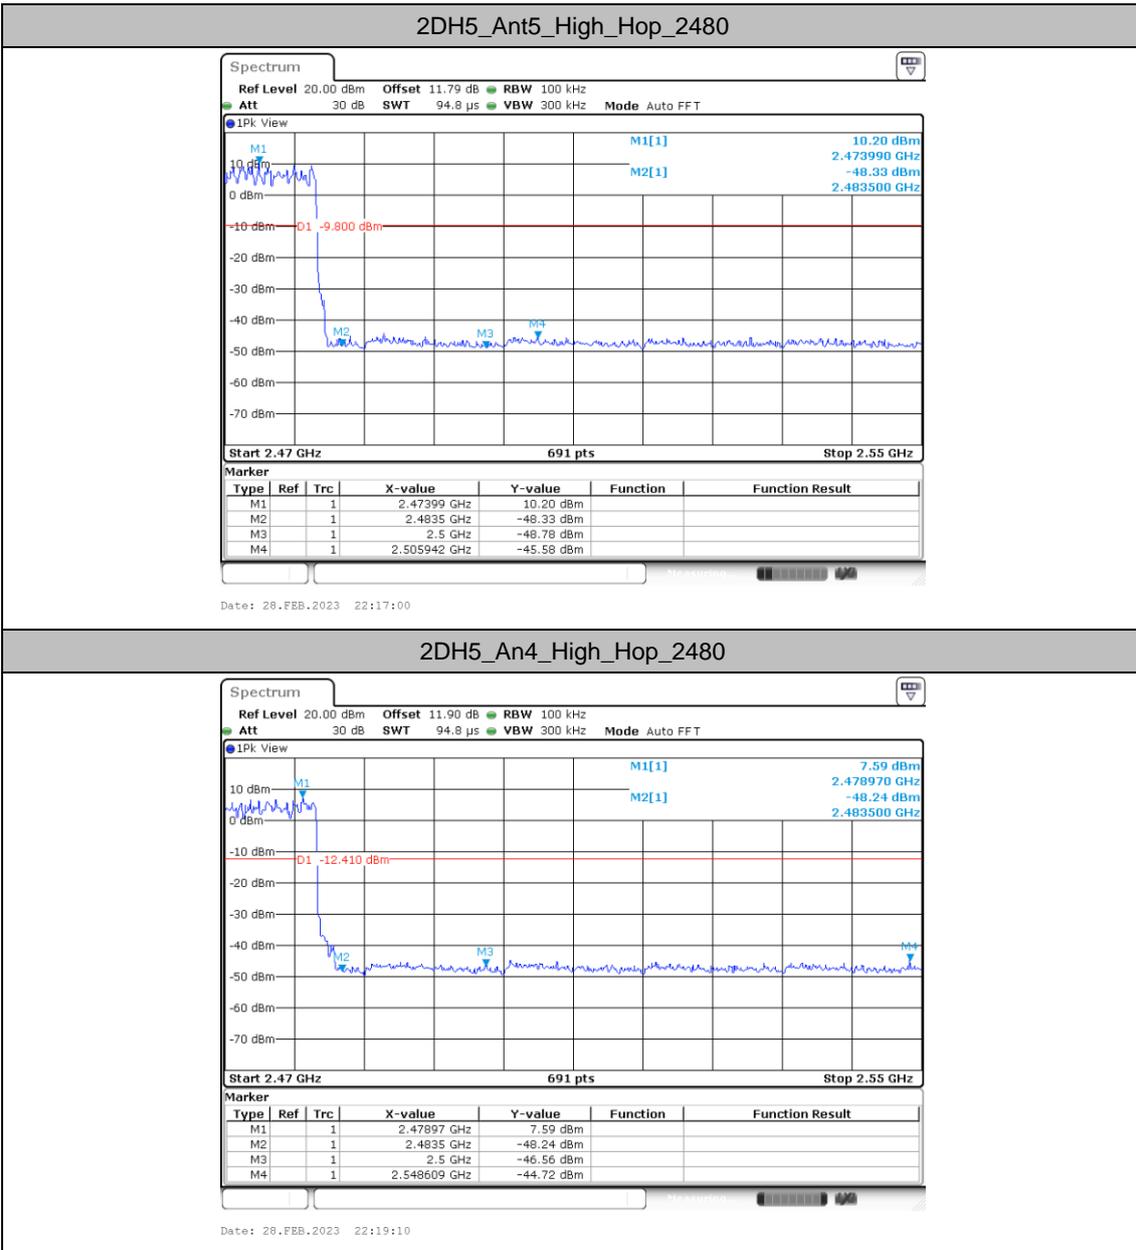






3DH5_Ant5_Low_2402

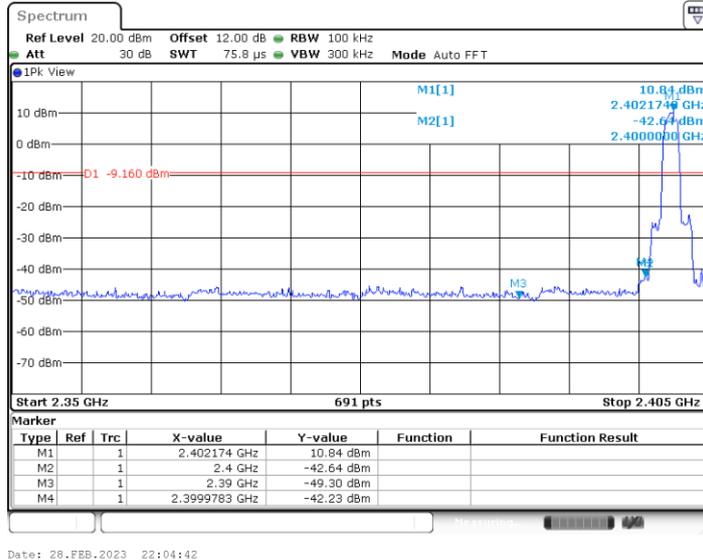

3DH5_An4_Low_2402

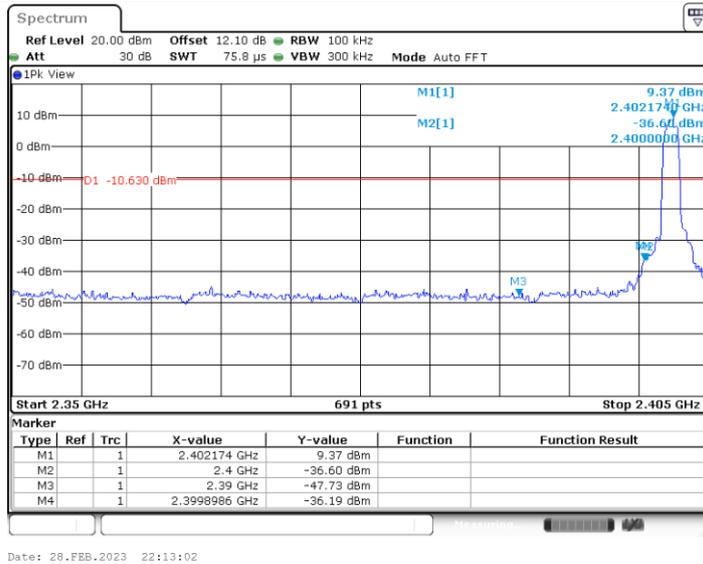

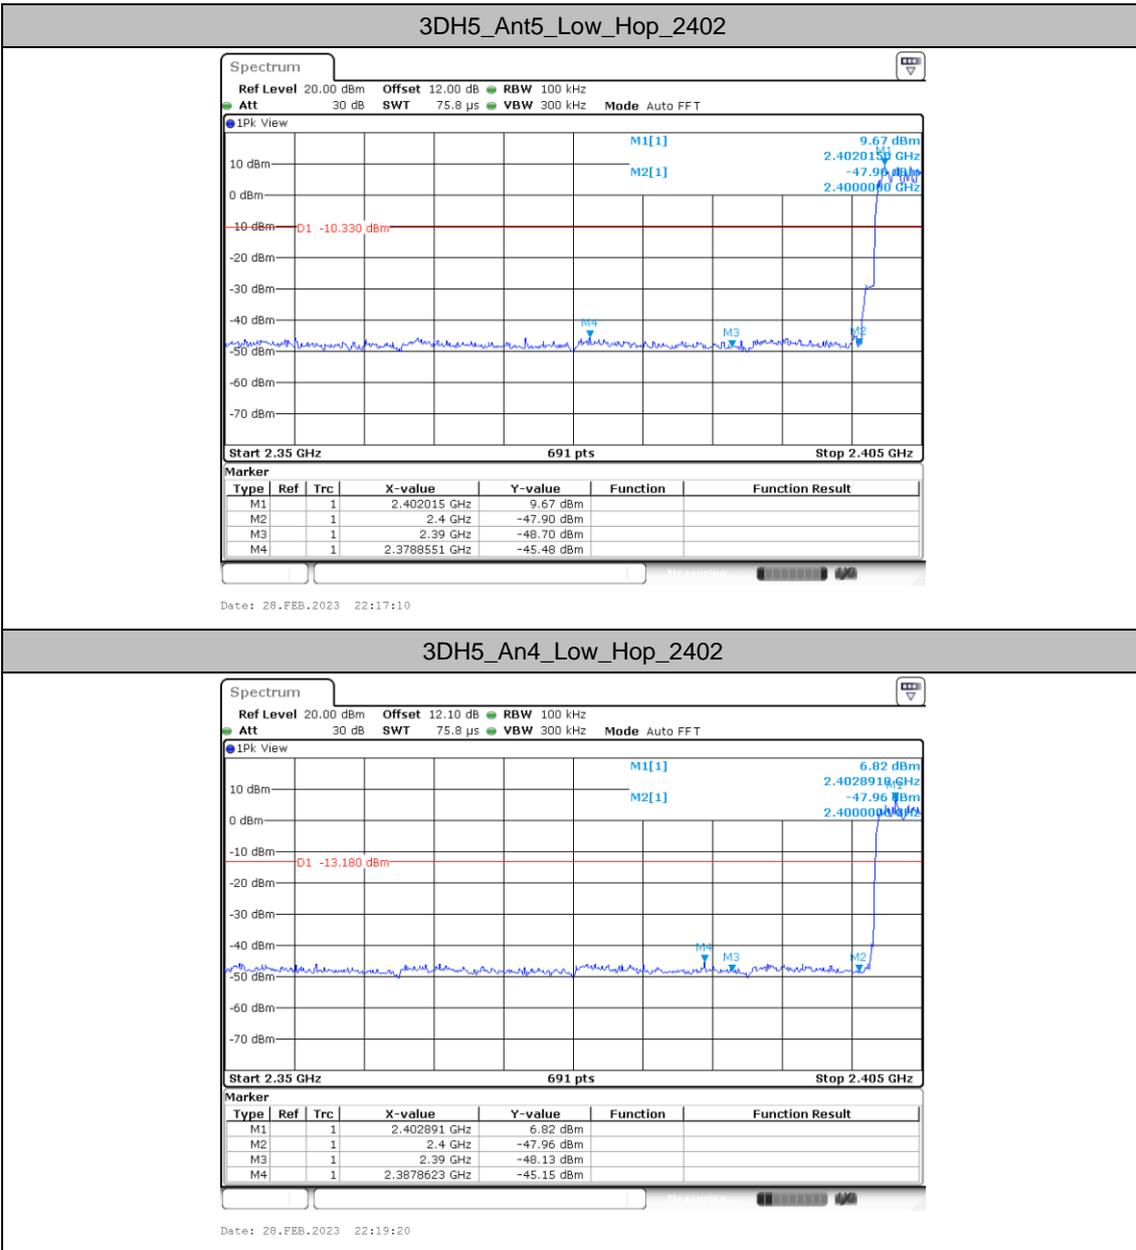
3DH5_An4_Low_Hop_2402

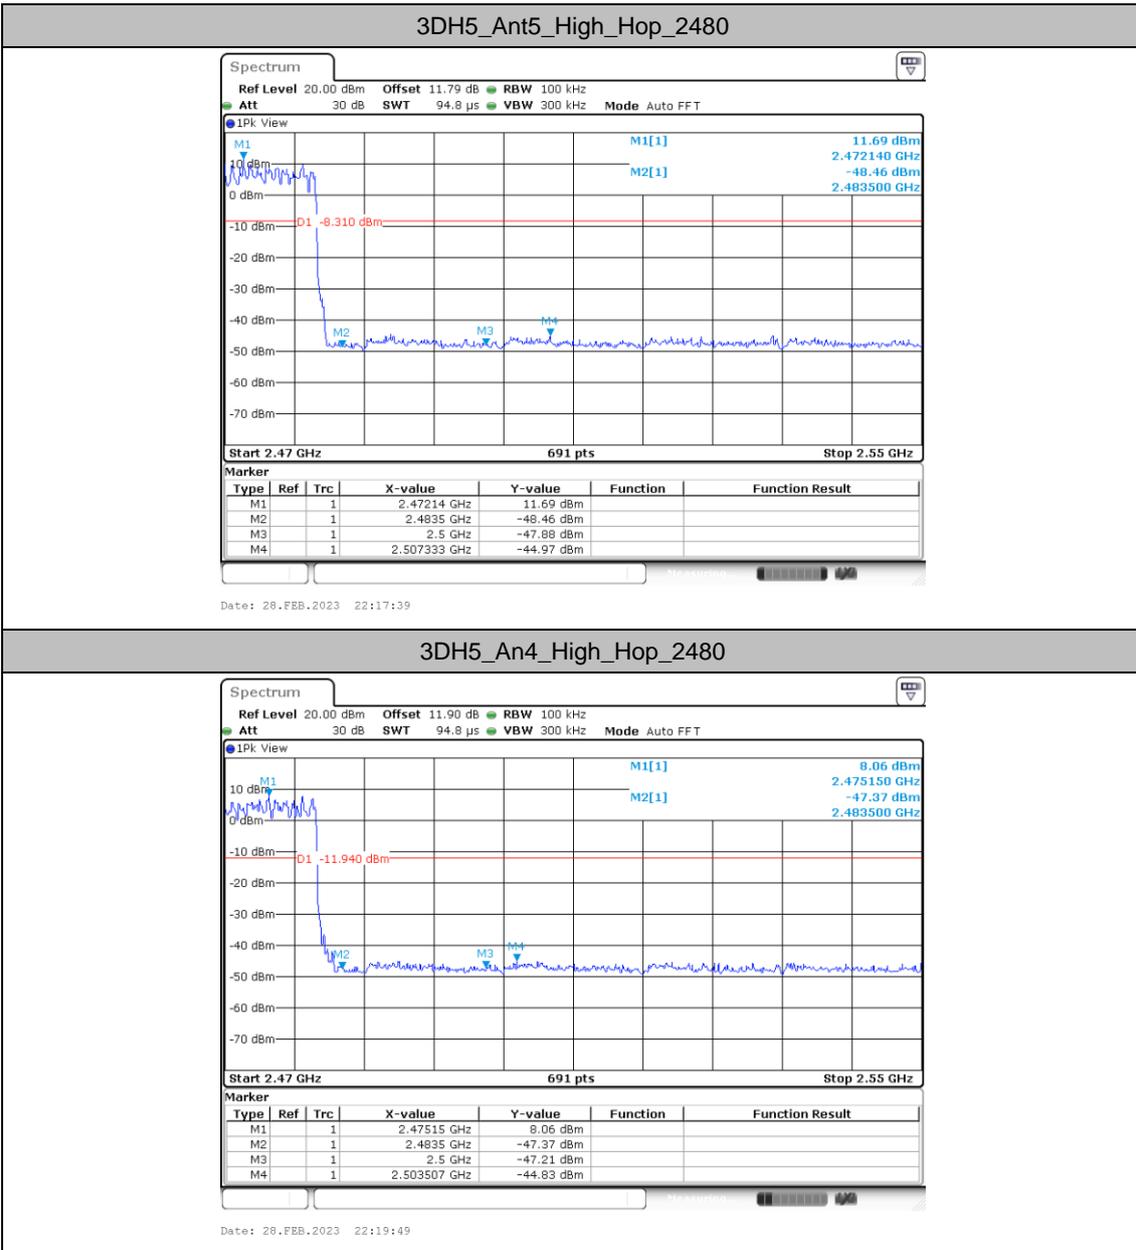



Conducted Spurious Emission

Test Result



TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant5	2402	Reference	13.89	13.89	---	PASS
			30~1000	13.89	-56.61	≤-6.11	PASS
			1000~26500	13.89	-46.28	≤-6.11	PASS
	An4	2402	Reference	12.74	12.74	---	PASS
			30~1000	12.74	-56.1	≤-7.26	PASS
			1000~26500	12.74	-46.38	≤-7.26	PASS
	Ant5	2441	Reference	15.35	15.35	---	PASS
			30~1000	15.35	-55.72	≤-4.65	PASS
			1000~26500	15.35	-45.91	≤-4.65	PASS
	An4	2441	Reference	12.82	12.82	---	PASS
			30~1000	12.82	-55.66	≤-7.18	PASS
			1000~26500	12.82	-46.31	≤-7.18	PASS
	Ant5	2480	Reference	13.81	13.81	---	PASS
			30~1000	13.81	-56.71	≤-6.19	PASS
			1000~26500	13.81	-46.74	≤-6.19	PASS
	An4	2480	Reference	10.91	10.91	---	PASS
			30~1000	10.91	-56.69	≤-9.09	PASS
			1000~26500	10.91	-46.14	≤-9.09	PASS
2DH5	Ant5	2402	Reference	10.81	10.81	---	PASS
			30~1000	10.81	-56.43	≤-9.19	PASS
			1000~26500	10.81	-46.41	≤-9.19	PASS
	An4	2402	Reference	9.38	9.38	---	PASS
			30~1000	9.38	-55.76	≤-10.62	PASS
			1000~26500	9.38	-46.27	≤-10.62	PASS
	Ant5	2441	Reference	11.99	11.99	---	PASS
			30~1000	11.99	-56.58	≤-8.01	PASS
			1000~26500	11.99	-46.91	≤-8.01	PASS
	An4	2441	Reference	9.65	9.65	---	PASS
			30~1000	9.65	-56.5	≤-10.35	PASS
			1000~26500	9.65	-46.63	≤-10.35	PASS
	Ant5	2480	Reference	10.61	10.61	---	PASS
			30~1000	10.61	-56.15	≤-9.39	PASS
			1000~26500	10.61	-46.8	≤-9.39	PASS



	An4	2480	Reference	7.65	7.65	---	PASS
			30~1000	7.65	-56.33	≤ -12.35	PASS
			1000~26500	7.65	-46.32	≤ -12.35	PASS
3DH5	Ant5	2402	Reference	10.91	10.91	---	PASS
			30~1000	10.91	-56.51	≤ -9.09	PASS
			1000~26500	10.91	-45.29	≤ -9.09	PASS
	An4	2402	Reference	9.49	9.49	---	PASS
			30~1000	9.49	-56.37	≤ -10.51	PASS
			1000~26500	9.49	-46.5	≤ -10.51	PASS
	Ant5	2441	Reference	12.10	12.10	---	PASS
			30~1000	12.10	-56.52	≤ -7.9	PASS
			1000~26500	12.10	-46.97	≤ -7.9	PASS
	An4	2441	Reference	9.80	9.80	---	PASS
			30~1000	9.80	-56.83	≤ -10.2	PASS
			1000~26500	9.80	-46.62	≤ -10.2	PASS
	Ant5	2480	Reference	10.68	10.68	---	PASS
			30~1000	10.68	-56.09	≤ -9.32	PASS
			1000~26500	10.68	-46.21	≤ -9.32	PASS
	An4	2480	Reference	7.74	7.74	---	PASS
			30~1000	7.74	-55.04	≤ -12.26	PASS
			1000~26500	7.74	-46.22	≤ -12.26	PASS




Test Graphs

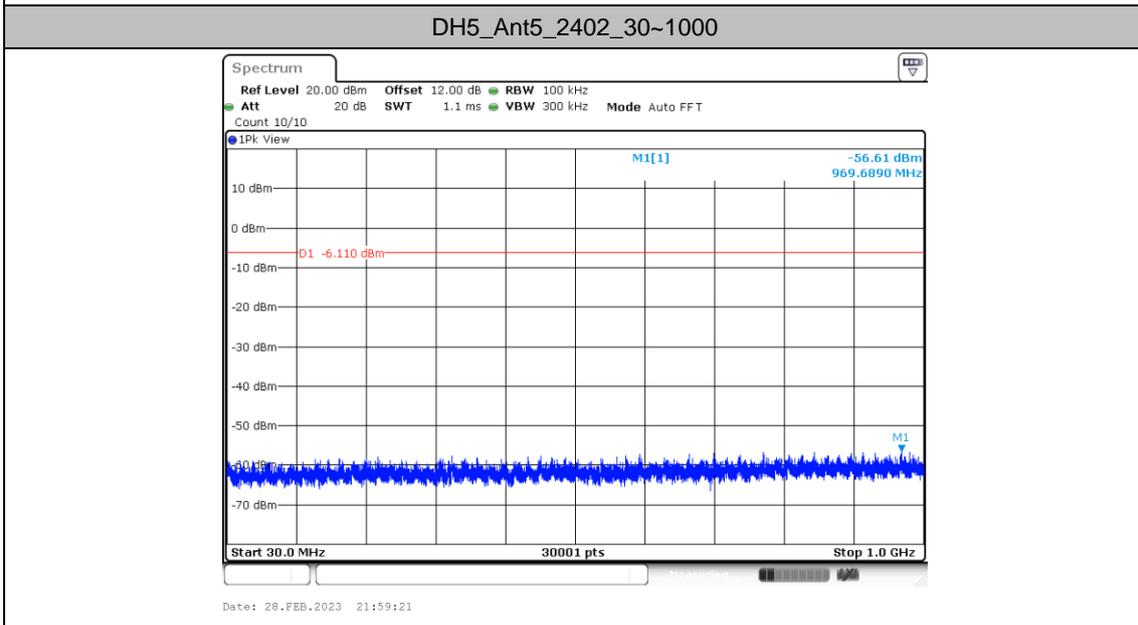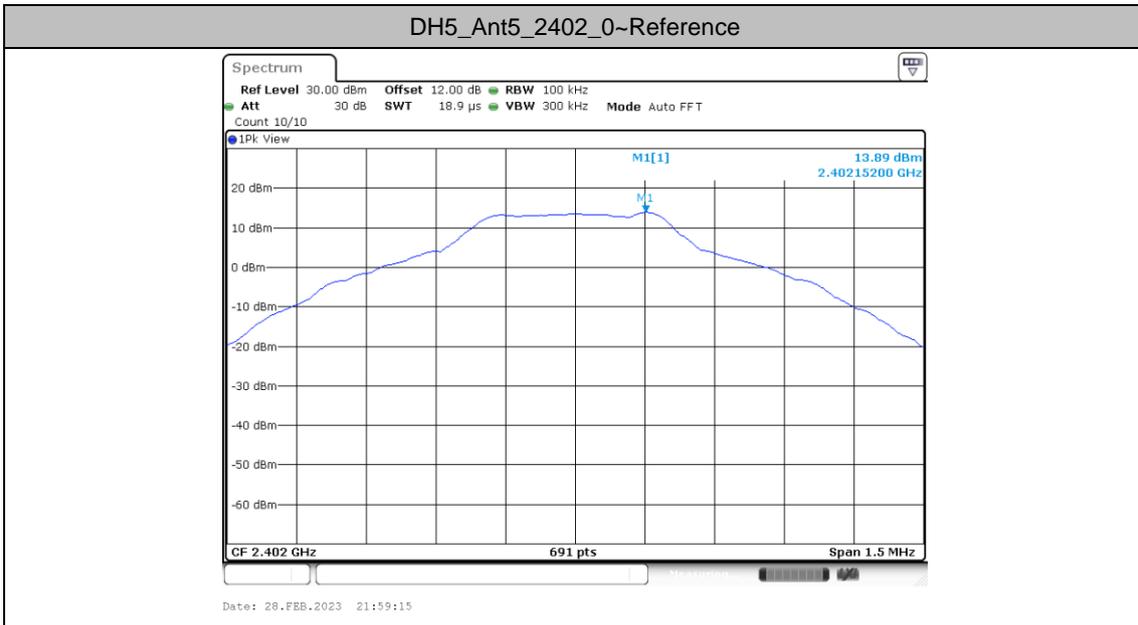




DH5_Ant5_2402_1000~26500

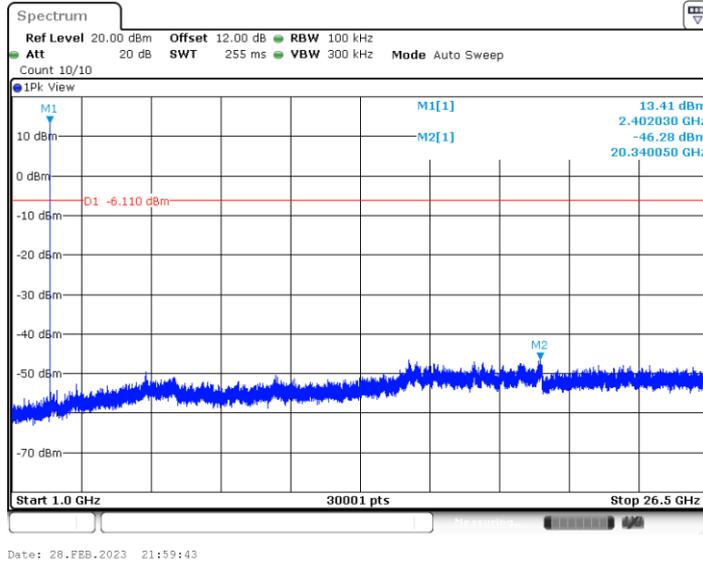


DH5_An4_2402_0~Reference

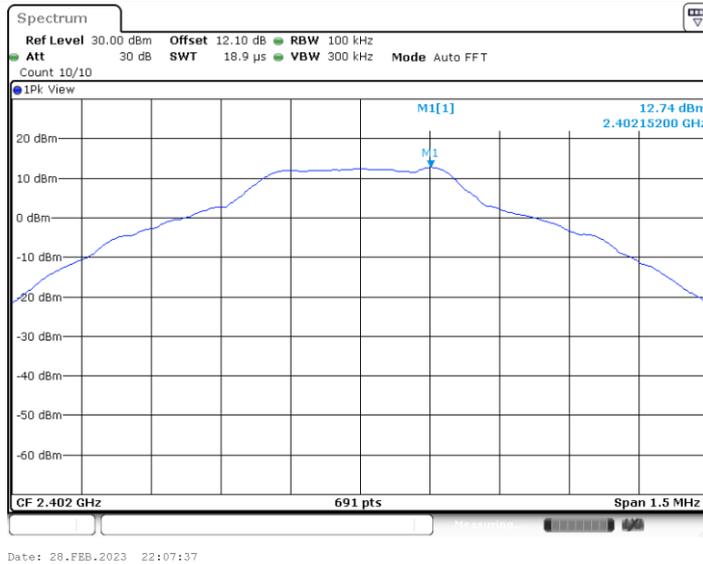




DH5_An4_2402_30~1000

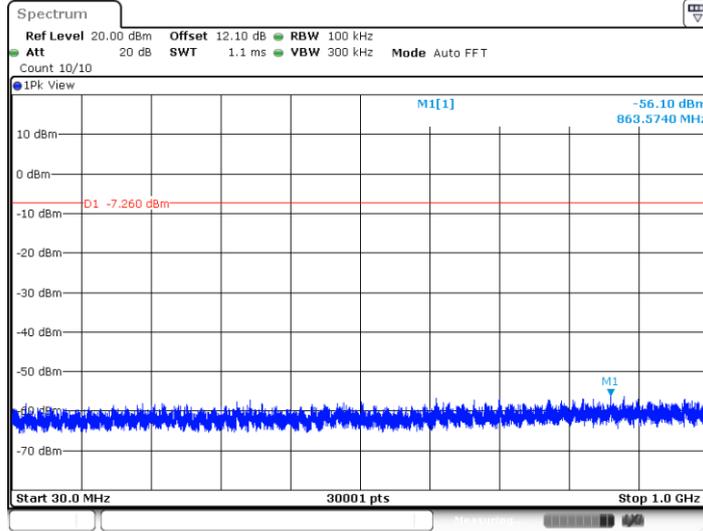

Date: 28.FEB.2023 22:07:43


DH5_An4_2402_1000~26500

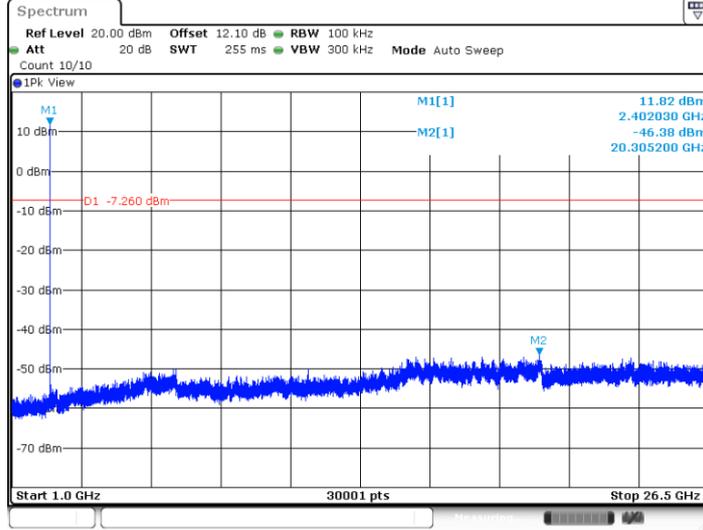


Date: 28.FEB.2023 22:08:05




DH5_Ant5_2441_0~Reference

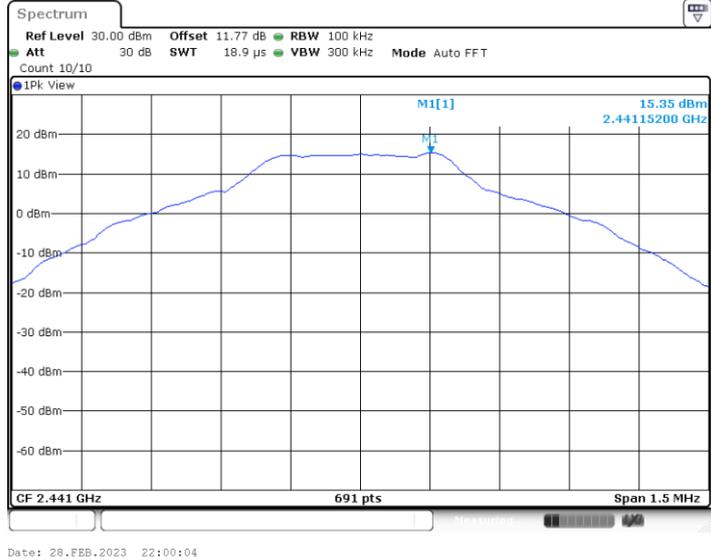


DH5_Ant5_2441_30~1000

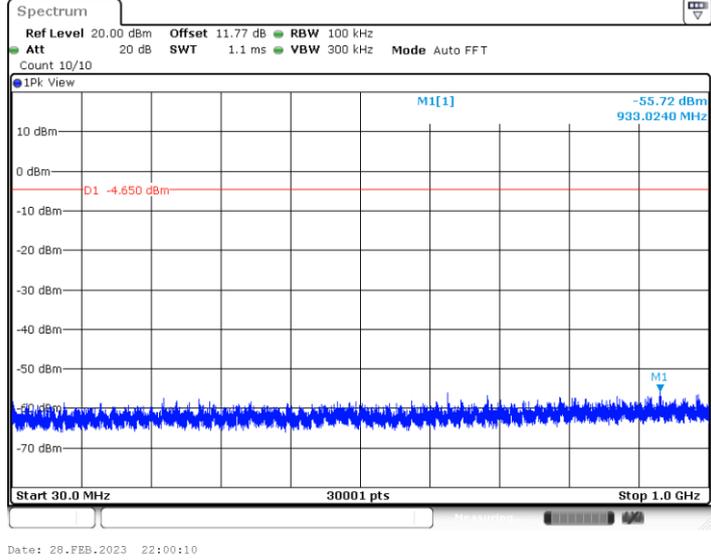

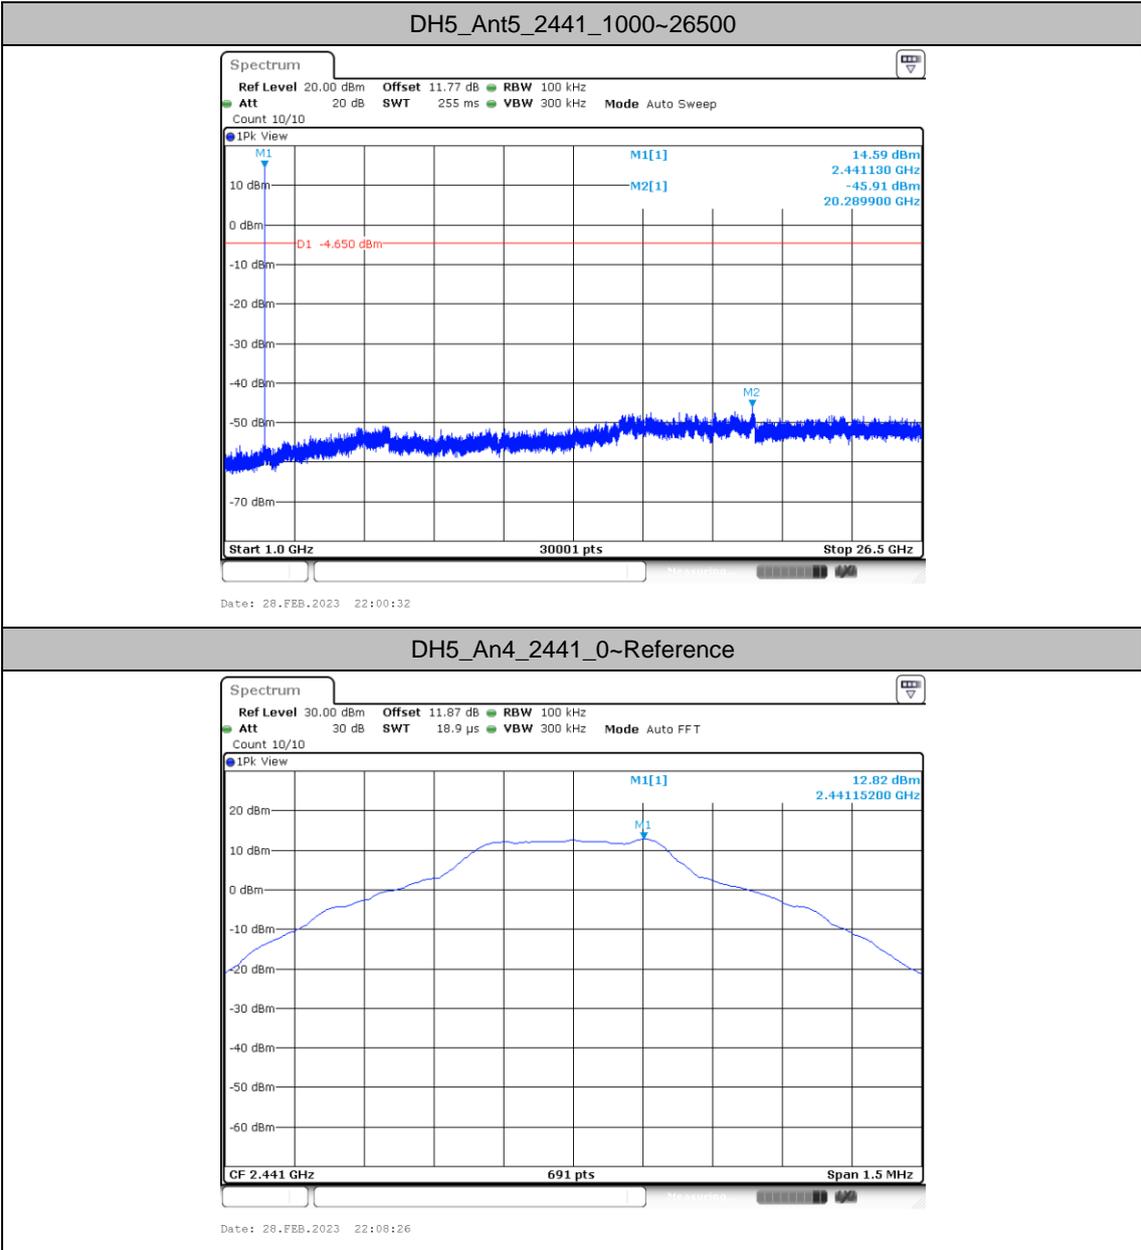





DH5_An4_2441_30~1000

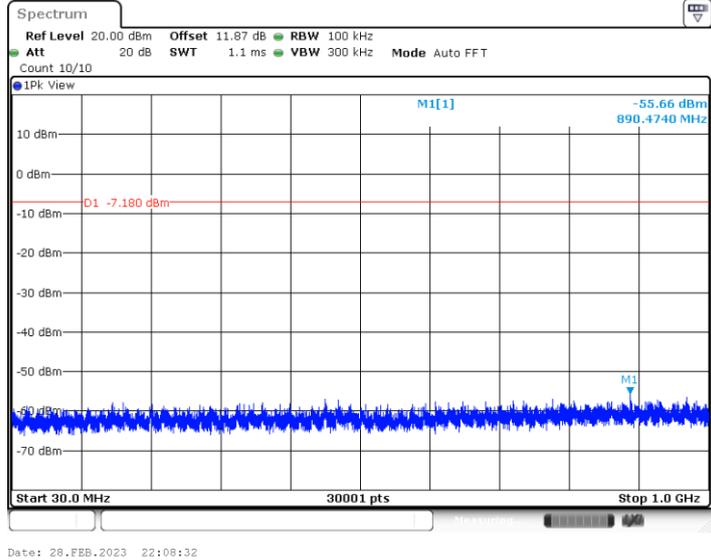


DH5_An4_2441_1000~26500

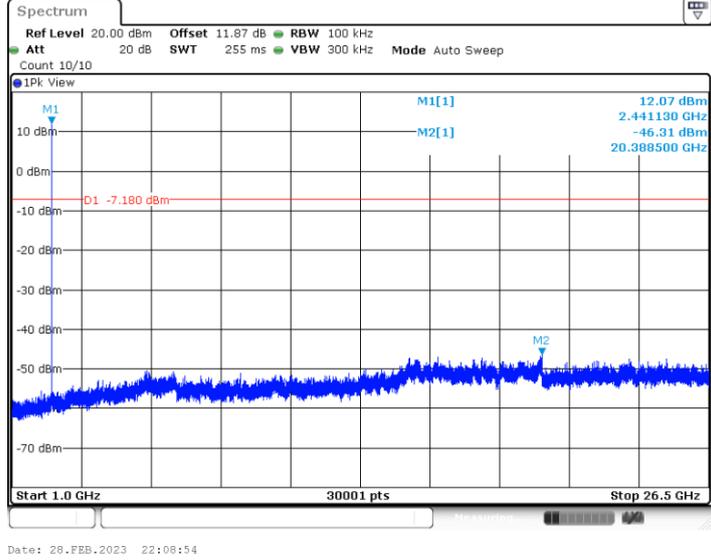

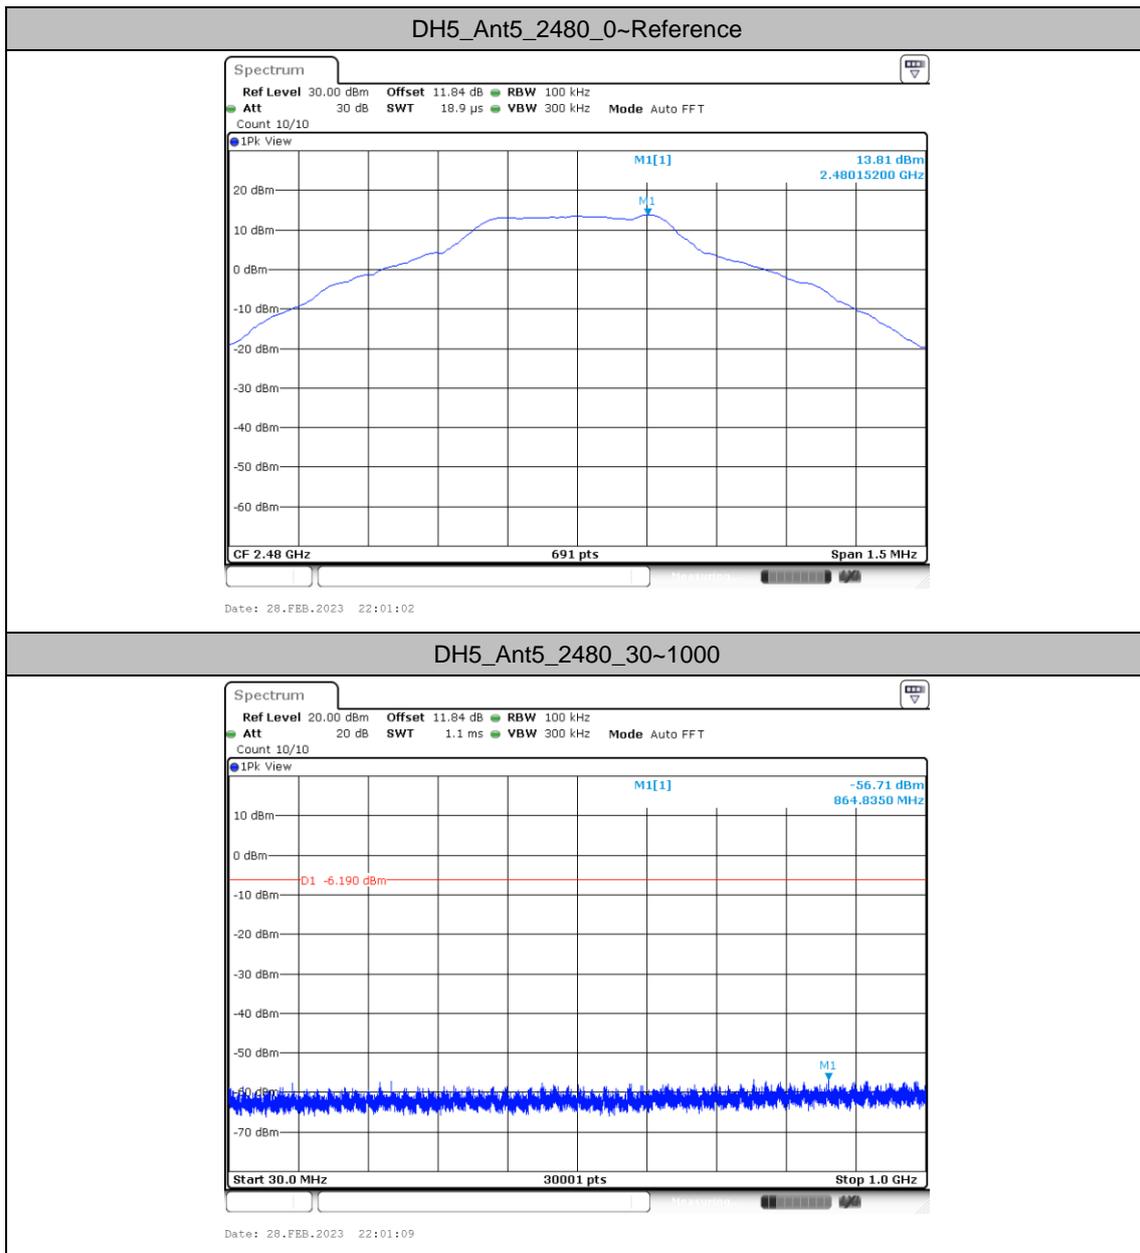




DH5_Ant5_2480_1000~26500

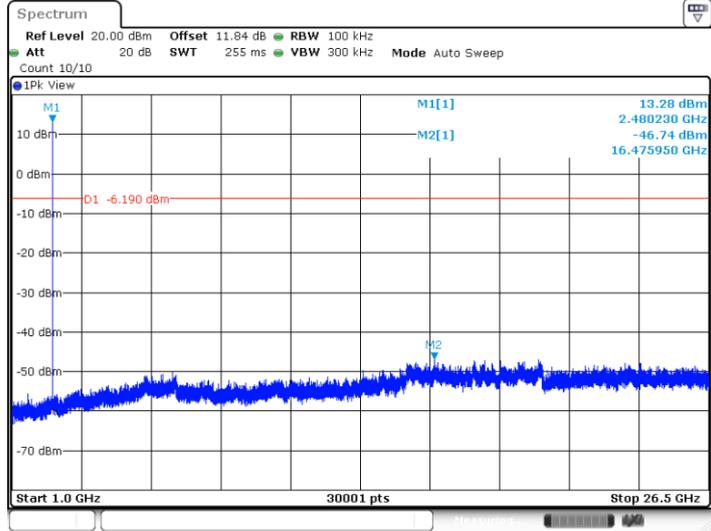

Date: 28.FEB.2023 22:01:31

DH5_An4_2480_0~Reference

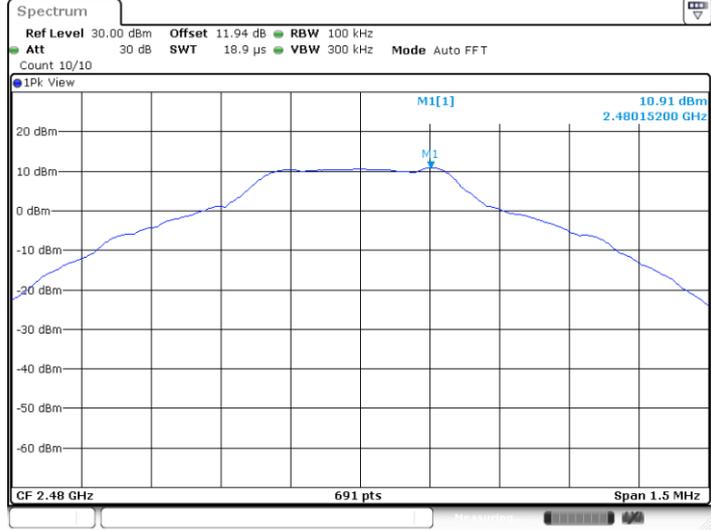

Date: 28.FEB.2023 22:09:24