



FCC RF Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone (Mobile Phone)
BRAND NAME : ASUS
MODEL NAME : ASUS_AI2205_E, ASUS_AI2205_F
FCC ID : MSQAI2205
STANDARD : 47 CFR Part 2, 22, 24, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Feb. 05, 2023 ~ Feb. 27, 2023

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY...3
SUMMARY OF TEST RESULT...4
1 GENERAL DESCRIPTION...5
1.1 Applicant...5
1.2 Manufacturer...5
1.3 Product Feature of Equipment Under Test...5
1.4 Product Specification of Equipment Under Test...6
1.5 Modification of EUT...7
1.6 Maximum ERP/EIRP Power and Emission Designator...7
1.7 Testing Location...9
1.8 Test Software...9
1.9 Applicable Standards...9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST...10
2.1 Test Mode...10
2.2 Connection Diagram of Test System...12
2.3 Support Unit used in test configuration and system...12
2.4 Measurement Results Explanation Example...12
2.5 Frequency List of Low/Middle/High Channels...13
3 CONDUCTED TEST ITEMS...15
3.1 Measuring Instruments...15
3.2 Test Setup...15
3.3 Test Result of Conducted Test...15
3.4 Conducted Output Power and ERP/EIRP...16
3.5 Peak-to-Average Ratio...17
3.6 Occupied Bandwidth...18
3.7 Conducted Band Edge...19
3.8 Conducted Spurious Emission...21
3.9 Frequency Stability...22
4 RADIATED TEST ITEMS...23
4.1 Measuring Instruments...23
4.2 Test Setup...23
4.3 Test Result of Radiated Test...24
4.4 Radiated Spurious Emission...25
5 LIST OF MEASURING EQUIPMENT...26
6 UNCERTAINTY OF EVALUATION...27
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG2D3005H	Rev. 01	Initial issue of report	Apr. 11, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5, n26)	ERP < 7 Watt		
	§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (5G NR n12, n71)	ERP < 3 Watt		
	§24.232(c)	Equivalent Isotropic Radiated Power (5G NR n2, n25)	EIRP < 2Watt		
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(g)	Conducted Band Edge Measurement (5G NR n5, n26) (5G NR n2, n25) (5G NR n12, n71)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(g)	Conducted Spurious Emission (5G NR n5, n26) (5G NR n2, n25) (5G NR n12, n71)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm	PASS	-
	§24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(g)	Radiated Spurious Emission (5G NR n5, n26) (5G NR n2, n25) (5G NR n12, n71)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 25.43 dB at 10122.360 MHz

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

ASUSTeK COMPUTER INC.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.2 Manufacturer

ASUSTeK COMPUTER INC.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	ASUS Phone (Mobile Phone)
Brand Name	ASUS
Model Name	ASUS_AI2205_E, ASUS_AI2205_F
FCC ID	MSQAI2205
IMEI Code	Conducted : 355156850100810/355156850100828 Radiation : 355156850101156/355156850101164
HW Version	R2.0
SW Version	Android 13
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four SKUs of EUT for this project. The differences between them are summary below,
According to the difference, we evaluate SKU1 (ASUS_AI2205_F) to perform RF test.

Sample list				
	SKU1	SKU2	SKU3	SKU4
Model name	ASUS_AI2205_F	ASUS_AI2205_E	ASUS_AI2205_F	ASUS_AI2205_E
Config.	US(Pro)	US(Entry)	US(Pro)	US(Entry)
RF module board	US(Pro)	US(Entry)	US(Pro)	US(Entry)
LCD+Touch front frame	AI2205 FRONT CASE ASSY WW	AI2205 FRONT CASE ASSY WW	AI2205 FRONT CASE ASSY WW	AI2205 FRONT CASE ASSY WW
DDR	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B
UFS	512G(Kioxia)(UFS4.0) Kioxia / THGJFJT2T85BAT0	512G(Samsung)(UFS4.0) Samsung /KLUFG8RHHD-B0G1	512G(Kioxia)(UFS4.0) Kioxia / THGJFJT2T85BAT0	512G(Samsung)(UFS4.0) Samsung /KLUFG8RHHD-B0G1
MB	AI2205_MB	AI2205_MB	AI2205_MB	AI2205_MB
Back cover	WW-Dark-Ult	WW-Light-Entry	WW-Dark-Ult	WW-Light-Entry
Battery	SCUD / C21P2101	SWD / C21P2101	SWD / C21P2101	SCUD / C21P2101
Rear Camera 50+13M	SHINETECH/CDN60B	TRIPLEWIN/CASDA-002A 1	TRIPLEWIN/CASDA-002A 1	SHINETECH/CDN60B



Front Camera 32M	TSPRECISION/TVHF2170	SHINETECH/ST-CMG07B	SHINETECH/ST-CMG07B	TSPRECISION/TVHF2170
Rear Camera 5M	HUNAN KINGCOME/KBFE378	TSPRECISION/TV8F2224	TSPRECISION/TV8F2224	HUNAN KINGCOME/KBFE378
PCB	COMPEQ	COMPEQ	COMPEQ	COMPEQ
CPU	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS			

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 824 MHz ~ 849 MHz 5G NR n71: 663 MHz ~ 698 MHz
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n12: 729 MHz ~ 746 MHz 5G NR n25 : 1930 MHz ~ 1995 MHz 5G NR n26 : 869 MHz ~ 894 MHz 5G NR n71: 617 MHz ~ 652 MHz
Bandwidth	n2, n5, n25, n26, n71: 5MHz / 10MHz / 15MHz / 20MHz n12: 5MHz / 10MHz / 15MHz
SCS	15kHz
Antenna Gain	<Ant. 0> n5: -3.33 dBi n12: -2.56 dBi n26: -3.33 dBi n71: -2.77 dBi <Ant. 1> n2: -0.14 dBi n25: -0.14 dBi <Ant. 2> n2: -5.81 dBi n5: -5.71 dBi n12: -6.43 dBi n25: -5.81 dBi n26: -5.71 dBi n71: -6.07 dBi <Ant. 7> n2: -3.92 dBi n25: -3.92 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum ERP/EIRP is calculated from output power and antenna gain, only the maximum ERP/EIRP are shown in the report, Ant. 0 for 5G NR n5/n12 /n26/n71 and Ant. 1 for 5G NR n2/n25.
2. The device supports two PAs for 5G NR n2/n25 (main PA on Ant.1 and other PA on Ant.7), the maximum power of main PA is higher than the other PA, therefore, we chose main PA to calculate the EIRP and show in the report.



3. 5G NR n2/n5/n25/n71 support SA mode and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode.
4. 5G NR n12/n26 support SA mode only.
5. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
6. The EN-DC mode combination could be referred to the product spec.
7. When temperature lower than -10 °C, EUT will be shut down automatically, thus Frequency Stability item only test -10~50 °C.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power and Emission Designator

5G NR n2		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1907.5	0.2938	4M49G7D	0.2275	4M48W7D
10	1855.0 ~ 1905.0	0.2938	9M30G7D	0.2286	9M31W7D
15	1857.5 ~ 1902.5	0.3034	14M1G7D	0.2307	14M1W7D
20	1860.0 ~ 1900.0	0.2972	19M0G7D	0.2355	19M0W7D

5G NR n25		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1912.5	0.2972	4M49G7D	0.2323	4M48W7D
10	1855.0 ~ 1910.0	0.2944	9M30G7D	0.2296	9M31W7D
15	1857.5 ~ 1907.5	0.3069	14M1G7D	0.2393	14M1W7D
20	1860.0 ~ 1905.0	0.3090	19M0G7D	0.2382	19M0W7D

5G NR n5		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0927	4M48G7D	0.0721	4M49W7D
10	829.0 ~ 844.0	0.0902	9M26G7D	0.0701	9M27W7D
15	831.5 ~ 841.5	0.0940	14M1G7D	0.0721	14M1W7D
20	834.0 ~ 839.0	0.0942	18M9G7D	0.0723	18M9W7D



5G NR n26		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0933	4M48G7D	0.0728	4M49W7D
10	829.0 ~ 844.0	0.0927	9M26G7D	0.0724	9M27W7D
15	831.5 ~ 841.5	0.0946	14M1G7D	0.0738	14M1W7D
20	834.0 ~ 839.0	0.0948	18M9G7D	0.0740	18M9W7D

5G NR n12		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	701.5 ~ 713.5	0.0927	4M48G7D	0.0698	4M47W7D
10	704.0~ 711.0	0.0893	9M27G7D	0.0698	9M28W7D
15	706.5 ~ 708.5	0.0929	14M1G7D	0.0753	14M1W7D

5G NR n71		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	665.5 ~ 695.5	0.1199	4M48G7D	0.0923	4M48W7D
10	668.0 ~ 693.0	0.1186	9M27G7D	0.0920	9M28W7D
15	670.5 ~ 690.5	0.1175	14M1G7D	0.0914	14M1W7D
20	673.0 ~ 688.0	0.1202	18M9G7D	0.0920	18M9W7D

Note:

1. 5G NR n26 overlaps the entire frequency range of 5G NR n5. Therefore, the test results provided in this report covers 5G NR n26 as well as 5G NR n5
2. 5G NR n25 overlaps the entire frequency range of 5G NR n2. Therefore, the test results provided in this report covers 5G NR n25 as well as 5G NR n2.
3. All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.



1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People’s Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22, 24, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.(Y/Z-Plane)

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)					Modulation					RB #		Test Channel			
		5	10	15	20	25	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H	
Max. Output Power	n2	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v
	n12	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v
	n26	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v
	n71	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n12		v		-	-	v	v				v	v	v	v	v	
	n25				v	-	v	v				v	v	v	v	v	
	n26				v	-	v	v				v	v	v	v	v	
	n71				v	-	v	v				v	v	v	v	v	
26dB and 99% Bandwidth	n12	v	v	v	-	-	v	v	v	v	v		v		v		
	n25	v	v	v	v	-	v	v	v	v	v		v		v		
	n26	v	v	v	v	-	v	v	v	v	v		v		v		
	n71	v	v	v	v	-	v	v	v	v	v		v		v		



Test Items	5G NR	Bandwidth (MHz)					Modulation					RB #		Test Channel		
		5	10	15	20	25	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H
Conducted Band Edge	n12	v	v	v	-	-	v	v				v	v	v		v
	n25	v	v		v	-	v	v				v	v	v		v
	n26	v	v		v	-	v	v				v	v	v		v
	n71	v	v		v	-	v	v				v	v	v		v
Conducted Spurious Emission	n12	v	v	v	-	-	v	v				v		v	v	v
	n25	v	v		v	-	v	v				v		v	v	v
	n26	v	v		v	-	v	v				v		v	v	v
	n71	v	v		v	-	v	v				v		v	v	v
Frequency Stability	n12		v		-	-		v					v		v	
	n25				v	-		v					v		v	
	n26				v	-		v					v		v	
	n71				v	-		v					v		v	
E.R.P / E.I.R.P	n2	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v
	n12	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v
	n26	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v
	n71	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n12	Worst Case											v	v	v	
	n25	Worst Case											v	v	v	
	n26	Worst Case											v	v	v	
	n71	Worst Case											v	v	v	
Note	<p>1. The mark "v" means that this configuration is chosen for testing</p> <p>2. The mark "-" means that this bandwidth is not supported.</p> <p>3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</p> <p>4. Frequency Stability : Normal Voltage = 7.78V ; Low Voltage =7.30V. ; High Voltage =8.70V</p>															

2.2 Connection Diagram of Test System

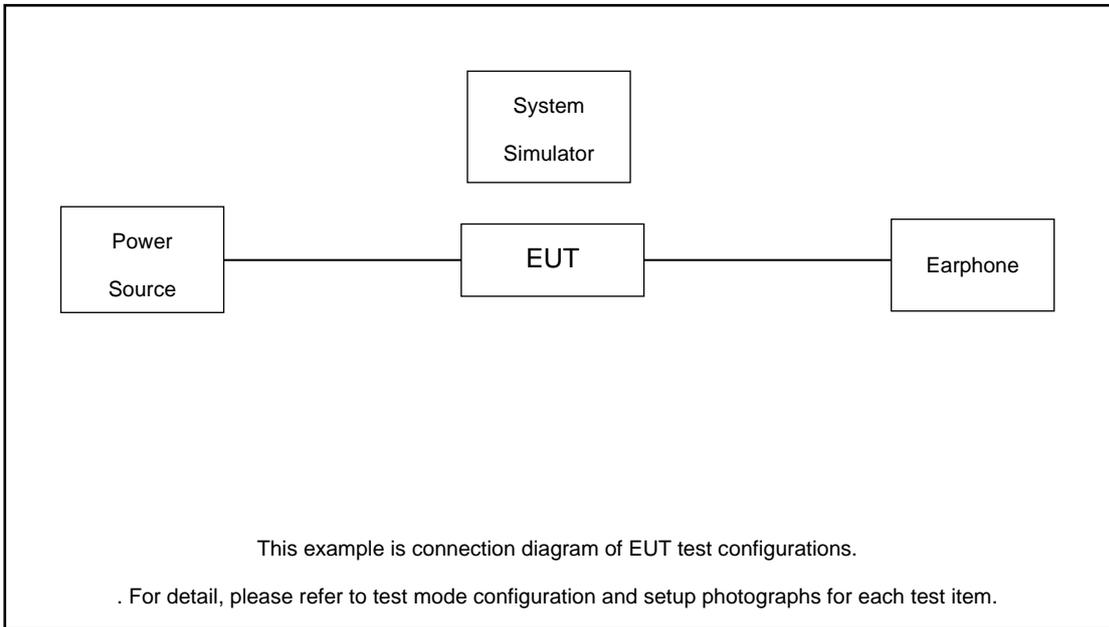

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.6 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 7.6 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5



5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5

5G NR n26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	175800	176300	176800
	Frequency	834	836.5	839
15	Channel	175300	176300	177300
	Frequency	831.5	836.5	841.5
10	Channel	174800	176300	177800
	Frequency	829	836.5	844
5	Channel	174300	176300	178300
	Frequency	826.5	836.5	846.5

5G NR n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

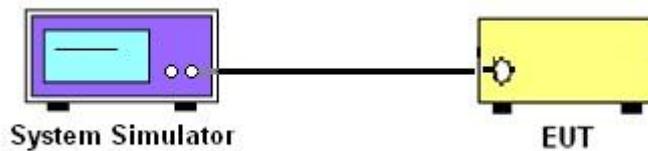

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

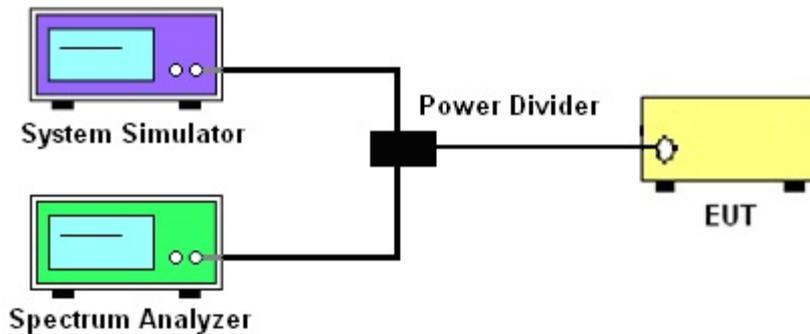

3.2.3 Frequency Stability

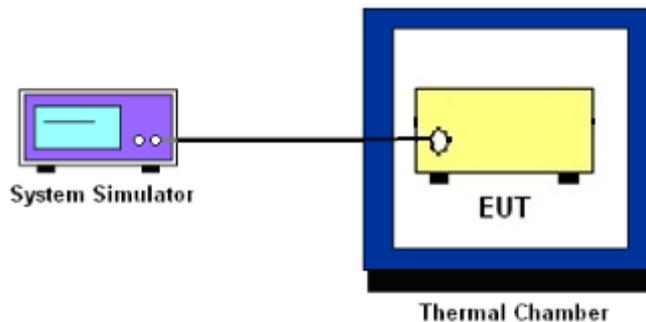

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26.

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR n12, n71.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.



3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -10°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

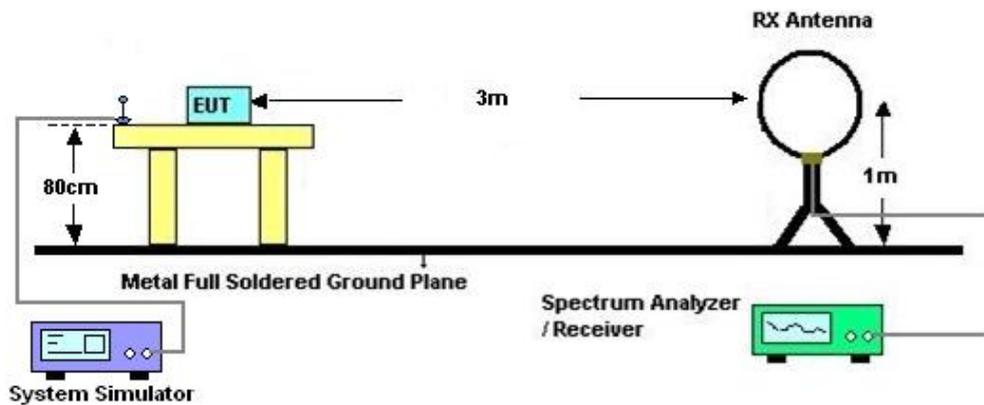

4.2.2 For radiated test from 30MHz to 1GHz

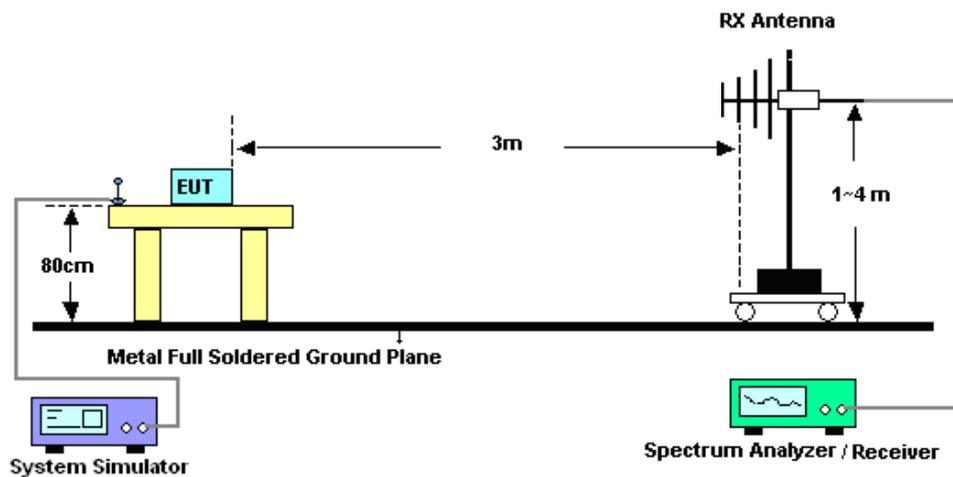

4.2.3 For radiated test above 1GHz

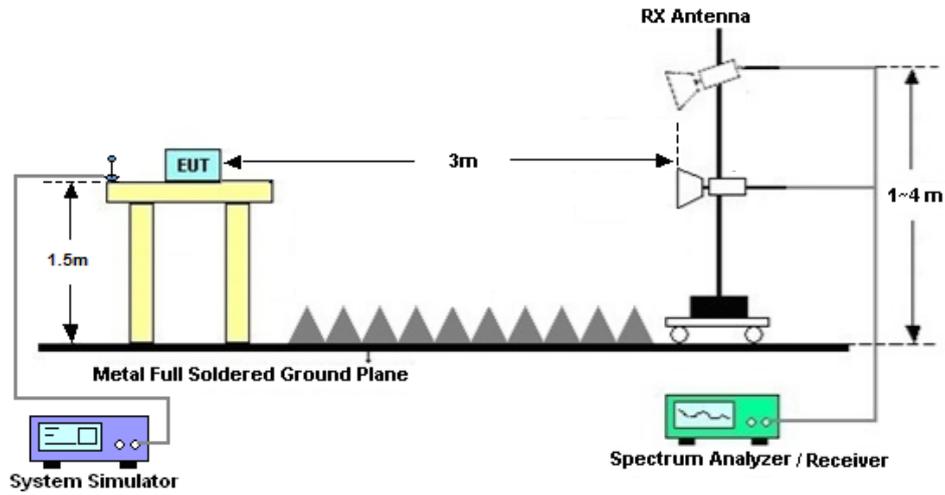

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)] \text{ (dB)}$
= $[30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
= -13dBm.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 26, 2022	Feb. 05, 2023~ Feb. 27, 2023	Dec. 25, 2023	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2022	Feb. 05, 2023~ Feb. 27, 2023	Dec. 24, 2023	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 07, 2022	Feb. 05, 2023~ Feb. 27, 2023	Jul. 06, 2023	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 26, 2022	Feb. 10, 2023	Dec. 25, 2023	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Feb. 10, 2023	Jul. 27, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 19, 2022	Feb. 10, 2023	Oct. 18, 2023	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Sep. 28, 2022	Feb. 10, 2023	Sep. 27, 2023	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Feb. 10, 2023	Jul. 06, 2023	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 10, 2022	Feb. 10, 2023	Apr. 09, 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Feb. 10, 2023	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Feb. 10, 2023	Oct. 18, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 06, 2022	Feb. 10, 2023	Jul. 05, 2023	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Nov. 10, 2022	Feb. 10, 2023	Nov. 09, 2023	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 10, 2023	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 10, 2023	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required



6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.48 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.53 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.02 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Kuo	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N2-Ant 1

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-0.14dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	24.74	24.6	0.2884
2	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	23.69	23.55	0.2265
2	15	5	376000	1880.0	DFT-s-OFDM QPSK	1@1	24.67	24.53	0.2838
2	15	5	376000	1880.0	DFT-s-OFDM 16 QAM	1@1	23.64	23.5	0.2239
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@1	24.82	24.68	0.2938
2	15	5	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	23.71	23.57	0.2275
2	15	10	371000	1855.0	DFT-s-OFDM QPSK	1@1	24.82	24.68	0.2938
2	15	10	371000	1855.0	DFT-s-OFDM 16 QAM	1@1	23.73	23.59	0.2286
2	15	10	376000	1880.0	DFT-s-OFDM QPSK	1@1	24.7	24.56	0.2858
2	15	10	376000	1880.0	DFT-s-OFDM 16 QAM	1@1	23.64	23.5	0.2239
2	15	10	381000	1905.0	DFT-s-OFDM QPSK	1@1	24.79	24.65	0.2917
2	15	10	381000	1905.0	DFT-s-OFDM 16 QAM	1@1	23.73	23.59	0.2286
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	24.96	24.82	0.3034
2	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	23.77	23.63	0.2307
2	15	15	376000	1880.0	DFT-s-OFDM QPSK	1@1	24.79	24.65	0.2917
2	15	15	376000	1880.0	DFT-s-OFDM 16 QAM	1@1	23.74	23.6	0.2291
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@1	24.83	24.69	0.2944
2	15	15	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	23.71	23.57	0.2275
2	15	20	372000	1860.0	DFT-s-OFDM PI/2 BPSK	50@25	24.74	24.6	0.2884
2	15	20	372000	1860.0	DFT-s-OFDM PI/2 BPSK	1@1	24.75	24.61	0.2891
2	15	20	372000	1860.0	DFT-s-OFDM PI/2 BPSK	1@104	24.72	24.58	0.2871

2	15	20	372000	1860.0	DFT-s-OFDM QPSK	50@25	24.76	24.62	0.2897
2	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@1	24.87	24.73	0.2972
2	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@104	24.78	24.64	0.2911
2	15	20	372000	1860.0	DFT-s-OFDM 16 QAM	50@25	23.75	23.61	0.2296
2	15	20	372000	1860.0	DFT-s-OFDM 16 QAM	1@1	23.82	23.68	0.2333
2	15	20	372000	1860.0	DFT-s-OFDM 16 QAM	1@104	23.86	23.72	0.2355
2	15	20	372000	1860.0	DFT-s-OFDM 64 QAM	50@25	22.24	22.1	0.1622
2	15	20	372000	1860.0	DFT-s-OFDM 64 QAM	1@1	22.44	22.3	0.1698
2	15	20	372000	1860.0	DFT-s-OFDM 64 QAM	1@104	22.47	22.33	0.171
2	15	20	372000	1860.0	DFT-s-OFDM 256 QAM	50@25	20.23	20.09	0.1021
2	15	20	372000	1860.0	DFT-s-OFDM 256 QAM	1@1	20.02	19.88	0.0973
2	15	20	372000	1860.0	DFT-s-OFDM 256 QAM	1@104	20.01	19.87	0.0971
2	15	20	372000	1860.0	CP-OFDM QPSK	53@26	23.29	23.15	0.2065
2	15	20	372000	1860.0	CP-OFDM QPSK	1@1	23.35	23.21	0.2094
2	15	20	372000	1860.0	CP-OFDM QPSK	1@104	23.28	23.14	0.2061
2	15	20	376000	1880.0	DFT-s-OFDM PI/2 BPSK	50@25	24.74	24.6	0.2884
2	15	20	376000	1880.0	DFT-s-OFDM PI/2 BPSK	1@1	24.71	24.57	0.2864
2	15	20	376000	1880.0	DFT-s-OFDM PI/2 BPSK	1@104	24.54	24.4	0.2754
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	50@25	24.68	24.54	0.2844
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	1@1	24.83	24.69	0.2944
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	1@104	24.65	24.51	0.2825
2	15	20	376000	1880.0	DFT-s-OFDM 16 QAM	50@25	23.66	23.52	0.2249
2	15	20	376000	1880.0	DFT-s-OFDM 16 QAM	1@1	23.77	23.63	0.2307
2	15	20	376000	1880.0	DFT-s-OFDM 16 QAM	1@104	23.66	23.52	0.2249
2	15	20	376000	1880.0	DFT-s-OFDM 64 QAM	50@25	22.22	22.08	0.1614
2	15	20	376000	1880.0	DFT-s-OFDM 64 QAM	1@1	22.33	22.19	0.1656
2	15	20	376000	1880.0	DFT-s-OFDM 64 QAM	1@104	22.3	22.16	0.1644

2	15	20	376000	1880.0	DFT-s-OFDM 256 QAM	50@25	-36.1	-36.24	0.0
2	15	20	376000	1880.0	DFT-s-OFDM 256 QAM	1@1	19.97	19.83	0.0962
2	15	20	376000	1880.0	DFT-s-OFDM 256 QAM	1@104	19.87	19.73	0.094
2	15	20	376000	1880.0	CP-OFDM QPSK	53@26	23.19	23.05	0.2018
2	15	20	376000	1880.0	CP-OFDM QPSK	1@1	23.22	23.08	0.2032
2	15	20	376000	1880.0	CP-OFDM QPSK	1@104	22.81	22.67	0.1849
2	15	20	380000	1900.0	DFT-s-OFDM PI/2 BPSK	50@25	24.66	24.52	0.2831
2	15	20	380000	1900.0	DFT-s-OFDM PI/2 BPSK	1@1	24.62	24.48	0.2805
2	15	20	380000	1900.0	DFT-s-OFDM PI/2 BPSK	1@104	24.69	24.55	0.2851
2	15	20	380000	1900.0	DFT-s-OFDM QPSK	50@25	24.61	24.47	0.2799
2	15	20	380000	1900.0	DFT-s-OFDM QPSK	1@1	24.8	24.66	0.2924
2	15	20	380000	1900.0	DFT-s-OFDM QPSK	1@104	24.7	24.56	0.2858
2	15	20	380000	1900.0	DFT-s-OFDM 16 QAM	50@25	23.59	23.45	0.2213
2	15	20	380000	1900.0	DFT-s-OFDM 16 QAM	1@1	23.74	23.6	0.2291
2	15	20	380000	1900.0	DFT-s-OFDM 16 QAM	1@104	23.78	23.64	0.2312
2	15	20	380000	1900.0	DFT-s-OFDM 64 QAM	50@25	22.19	22.05	0.1603
2	15	20	380000	1900.0	DFT-s-OFDM 64 QAM	1@1	22.21	22.07	0.1611
2	15	20	380000	1900.0	DFT-s-OFDM 64 QAM	1@104	22.37	22.23	0.1671
2	15	20	380000	1900.0	DFT-s-OFDM 256 QAM	50@25	20.1	19.96	0.0991
2	15	20	380000	1900.0	DFT-s-OFDM 256 QAM	1@1	19.96	19.82	0.0959
2	15	20	380000	1900.0	DFT-s-OFDM 256 QAM	1@104	19.92	19.78	0.0951
2	15	20	380000	1900.0	CP-OFDM QPSK	53@26	23.16	23.02	0.2004
2	15	20	380000	1900.0	CP-OFDM QPSK	1@1	23.39	23.25	0.2113
2	15	20	380000	1900.0	CP-OFDM QPSK	1@104	23.23	23.09	0.2037

FR1 N5-Ant 0

Transmitter Conducted Output Power And ERP, ($G_T - L_C$)=- 3.33dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP (dBm)	ERP (W)
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	25.15	19.67	0.0927
5	15	5	165300	826.5	DFT-s-OFDM 16 QAM	1@1	24.06	18.58	0.0721
5	15	5	167300	836.5	DFT-s-OFDM QPSK	1@1	24.99	19.51	0.0893
5	15	5	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.82	18.34	0.0682
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@1	24.66	19.18	0.0828
5	15	5	169300	846.5	DFT-s-OFDM 16 QAM	1@1	23.54	18.06	0.0640
5	15	10	165800	829	DFT-s-OFDM QPSK	1@1	25.03	19.55	0.0902
5	15	10	165800	829	DFT-s-OFDM 16 QAM	1@1	23.94	18.46	0.0701
5	15	10	167300	836.5	DFT-s-OFDM QPSK	1@1	24.93	19.45	0.0881
5	15	10	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.86	18.38	0.0689
5	15	10	168800	844	DFT-s-OFDM QPSK	1@1	24.66	19.18	0.0828
5	15	10	168800	844	DFT-s-OFDM 16 QAM	1@1	23.62	18.14	0.0652
5	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	25.06	19.58	0.0908
5	15	15	166300	831.5	DFT-s-OFDM 16 QAM	1@1	24.06	18.58	0.0721
5	15	15	167300	836.5	DFT-s-OFDM QPSK	1@1	25.21	19.73	0.0940
5	15	15	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.03	18.55	0.0716
5	15	15	168300	841.5	DFT-s-OFDM QPSK	1@1	24.94	19.46	0.0883
5	15	15	168300	841.5	DFT-s-OFDM 16 QAM	1@1	23.87	18.39	0.0690
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	50@25	24.88	19.4	0.0871
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@1	25	19.52	0.0895
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@104	24.27	18.79	0.0757
5	15	20	166800	834	DFT-s-OFDM QPSK	50@25	24.91	19.43	0.0877
5	15	20	166800	834	DFT-s-OFDM QPSK	1@1	25.22	19.74	0.0942
5	15	20	166800	834	DFT-s-OFDM QPSK	1@104	24.3	18.82	0.0762
5	15	20	166800	834	DFT-s-OFDM 16 QAM	50@25	23.84	18.36	0.0685
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@1	24.05	18.57	0.0719
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@104	23.55	18.07	0.0641
5	15	20	166800	834	DFT-s-OFDM 64 QAM	50@25	22.35	16.87	0.0486

5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@1	22.67	17.19	0.0524
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@104	22.11	16.63	0.0460
5	15	20	166800	834	DFT-s-OFDM 256 QAM	50@25	20.26	14.78	0.0301
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@1	20.33	14.85	0.0305
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@104	19.66	14.18	0.0262
5	15	20	166800	834	CP-OFDM QPSK	53@26	23.41	17.93	0.0621
5	15	20	166800	834	CP-OFDM QPSK	1@1	23.47	17.99	0.0630
5	15	20	166800	834	CP-OFDM QPSK	1@104	22.55	17.07	0.0509
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	24.83	19.35	0.0861
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	24.92	19.44	0.0879
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@104	24.25	18.77	0.0753
5	15	20	167300	836.5	DFT-s-OFDM QPSK	50@25	24.81	19.33	0.0857
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@1	25.09	19.61	0.0914
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@104	24.26	18.78	0.0755
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	50@25	23.75	18.27	0.0671
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.95	18.47	0.0703
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@104	23.45	17.97	0.0627
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	50@25	22.35	16.87	0.0486
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@1	22.6	17.12	0.0515
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@104	21.99	16.51	0.0448
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	50@25	20.09	14.61	0.0289
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@1	20.19	14.71	0.0296
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@104	19.78	14.3	0.0269
5	15	20	167300	836.5	CP-OFDM QPSK	53@26	23.32	17.84	0.0608
5	15	20	167300	836.5	CP-OFDM QPSK	1@1	23.52	18.04	0.0637
5	15	20	167300	836.5	CP-OFDM QPSK	1@104	22.43	16.95	0.0495
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	50@25	24.63	19.15	0.0822
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@1	24.9	19.42	0.0875
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@104	24.23	18.75	0.0750
5	15	20	167800	839	DFT-s-OFDM QPSK	50@25	24.68	19.2	0.0832
5	15	20	167800	839	DFT-s-OFDM QPSK	1@1	25.15	19.67	0.0927
5	15	20	167800	839	DFT-s-OFDM QPSK	1@104	24.3	18.82	0.0762
5	15	20	167800	839	DFT-s-OFDM 16 QAM	50@25	23.69	18.21	0.0662
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@1	24.07	18.59	0.0723
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@104	23.48	18	0.0631

5	15	20	167800	839	DFT-s-OFDM 64 QAM	50@25	22.17	16.69	0.0467
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@1	22.64	17.16	0.0520
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@104	22.04	16.56	0.0453
5	15	20	167800	839	DFT-s-OFDM 256 QAM	50@25	20.15	14.67	0.0293
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@1	20.21	14.73	0.0297
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@104	19.67	14.19	0.0262
5	15	20	167800	839	CP-OFDM QPSK	53@26	23.21	17.73	0.0593
5	15	20	167800	839	CP-OFDM QPSK	1@1	23.44	17.96	0.0625
5	15	20	167800	839	CP-OFDM QPSK	1@104	22.87	17.39	0.0548

FR1 N12-Ant 0

Transmitter Conducted Output Power And ERP, (G_T - L_C)=-2.56dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP (dBm)	ERP (W)
12	15	5	140300	701.5	DFT-s-OFDM QPSK	1@1	24.38	19.67	0.0927
12	15	5	140300	701.5	DFT-s-OFDM 16 QAM	1@1	23.05	18.34	0.0682
12	15	5	141500	707.5	DFT-s-OFDM QPSK	1@1	24.21	19.5	0.0891
12	15	5	141500	707.5	DFT-s-OFDM 16 QAM	1@1	23.07	18.36	0.0685
12	15	5	142700	713.5	DFT-s-OFDM QPSK	1@1	24.13	19.42	0.0875
12	15	5	142700	713.5	DFT-s-OFDM 16 QAM	1@1	23.15	18.44	0.0698
12	15	10	140800	704	DFT-s-OFDM QPSK	1@1	24.14	19.43	0.0877
12	15	10	140800	704	DFT-s-OFDM 16 QAM	1@1	23.15	18.44	0.0698
12	15	10	141500	707.5	DFT-s-OFDM QPSK	1@1	24.22	19.51	0.0893
12	15	10	141500	707.5	DFT-s-OFDM 16 QAM	1@1	23	18.29	0.0675
12	15	10	142200	711	DFT-s-OFDM QPSK	1@1	24.12	19.41	0.0873
12	15	10	142200	711	DFT-s-OFDM 16 QAM	1@1	23.1	18.39	0.0690
12	15	15	141300	706.5	DFT-s-OFDM PI/2 BPSK	36@18	24.22	19.51	0.0893
12	15	15	141300	706.5	DFT-s-OFDM PI/2 BPSK	1@1	24.13	19.42	0.0875
12	15	15	141300	706.5	DFT-s-OFDM PI/2 BPSK	1@77	24.19	19.48	0.0887
12	15	15	141300	706.5	DFT-s-OFDM QPSK	36@18	24.21	19.5	0.0891
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@1	24.31	19.6	0.0912
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@77	24.13	19.42	0.0875
12	15	15	141300	706.5	DFT-s-OFDM 16 QAM	36@18	23.26	18.55	0.0716

12	15	15	141300	706.5	DFT-s-OFDM 16 QAM	1@1	23.18	18.47	0.0703
12	15	15	141300	706.5	DFT-s-OFDM 16 QAM	1@77	23.29	18.58	0.0721
12	15	15	141300	706.5	DFT-s-OFDM 64 QAM	36@18	21.83	17.12	0.0515
12	15	15	141300	706.5	DFT-s-OFDM 64 QAM	1@1	21.88	17.17	0.0521
12	15	15	141300	706.5	DFT-s-OFDM 64 QAM	1@77	21.95	17.24	0.0530
12	15	15	141300	706.5	DFT-s-OFDM 256 QAM	36@18	19.66	14.95	0.0313
12	15	15	141300	706.5	DFT-s-OFDM 256 QAM	1@1	19.44	14.73	0.0297
12	15	15	141300	706.5	DFT-s-OFDM 256 QAM	1@77	19.59	14.88	0.0308
12	15	15	141300	706.5	CP-OFDM QPSK	39@19	20.71	16	0.0398
12	15	15	141300	706.5	CP-OFDM QPSK	1@1	22.78	18.07	0.0641
12	15	15	141300	706.5	CP-OFDM QPSK	1@77	22.98	18.27	0.0671
12	15	15	141500	707.5	DFT-s-OFDM PI/2 BPSK	36@18	24.24	19.53	0.0897
12	15	15	141500	707.5	DFT-s-OFDM PI/2 BPSK	1@1	24.12	19.41	0.0873
12	15	15	141500	707.5	DFT-s-OFDM PI/2 BPSK	1@77	24.26	19.55	0.0902
12	15	15	141500	707.5	DFT-s-OFDM QPSK	36@18	24.28	19.57	0.0906
12	15	15	141500	707.5	DFT-s-OFDM QPSK	1@1	24.25	19.54	0.0899
12	15	15	141500	707.5	DFT-s-OFDM QPSK	1@77	24.39	19.68	0.0929
12	15	15	141500	707.5	DFT-s-OFDM 16 QAM	36@18	23.27	18.56	0.0718
12	15	15	141500	707.5	DFT-s-OFDM 16 QAM	1@1	23.29	18.58	0.0721
12	15	15	141500	707.5	DFT-s-OFDM 16 QAM	1@77	23.34	18.63	0.0729
12	15	15	141500	707.5	DFT-s-OFDM 64 QAM	36@18	21.79	17.08	0.0511
12	15	15	141500	707.5	DFT-s-OFDM 64 QAM	1@1	21.82	17.11	0.0514
12	15	15	141500	707.5	DFT-s-OFDM 64 QAM	1@77	22.07	17.36	0.0545
12	15	15	141500	707.5	DFT-s-OFDM 256 QAM	36@18	21.72	17.01	0.0502
12	15	15	141500	707.5	DFT-s-OFDM 256 QAM	1@1	19.5	14.79	0.0301

12	15	15	141500	707.5	DFT-s-OFDM 256 QAM	1@77	19.5	14.79	0.0301
12	15	15	141500	707.5	CP-OFDM QPSK	39@19	22.8	18.09	0.0644
12	15	15	141500	707.5	CP-OFDM QPSK	1@1	22.85	18.14	0.0652
12	15	15	141500	707.5	CP-OFDM QPSK	1@77	22.77	18.06	0.0640
12	15	15	141700	708.5	DFT-s-OFDM PI/2 BPSK	36@18	24.24	19.53	0.0897
12	15	15	141700	708.5	DFT-s-OFDM PI/2 BPSK	1@1	24.1	19.39	0.0869
12	15	15	141700	708.5	DFT-s-OFDM PI/2 BPSK	1@77	24.34	19.63	0.0918
12	15	15	141700	708.5	DFT-s-OFDM QPSK	36@18	24.21	19.5	0.0891
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@1	24.28	19.57	0.0906
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@77	24.35	19.64	0.0920
12	15	15	141700	708.5	DFT-s-OFDM 16 QAM	36@18	23.27	18.56	0.0718
12	15	15	141700	708.5	DFT-s-OFDM 16 QAM	1@1	23.22	18.51	0.0710
12	15	15	141700	708.5	DFT-s-OFDM 16 QAM	1@77	23.48	18.77	0.0753
12	15	15	141700	708.5	DFT-s-OFDM 64 QAM	36@18	21.75	17.04	0.0506
12	15	15	141700	708.5	DFT-s-OFDM 64 QAM	1@1	21.79	17.08	0.0511
12	15	15	141700	708.5	DFT-s-OFDM 64 QAM	1@77	22.09	17.38	0.0547
12	15	15	141700	708.5	DFT-s-OFDM 256 QAM	36@18	19.54	14.83	0.0304
12	15	15	141700	708.5	DFT-s-OFDM 256 QAM	1@1	19.5	14.79	0.0301
12	15	15	141700	708.5	DFT-s-OFDM 256 QAM	1@77	19.67	14.96	0.0313
12	15	15	141700	708.5	CP-OFDM QPSK	39@19	22.78	18.07	0.0641
12	15	15	141700	708.5	CP-OFDM QPSK	1@1	22.75	18.04	0.0637
12	15	15	141700	708.5	CP-OFDM QPSK	1@77	22.69	17.98	0.0628


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	0.0039	PASS	NV
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	0.0029	PASS	LV
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	0.0051	PASS	HV
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	0.0070	PASS	-10°C
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	0.0056	PASS	0°C
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	0.0030	PASS	10°C
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	0.0039	PASS	20°C
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	0.0030	PASS	30°C
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	0.0040	PASS	40°C
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	0.0062	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
12	15	15	141300	706.5	DFT-s-OFDM PI/2 BPSK	75@0	3.87	13	PASS
12	15	15	141300	706.5	DFT-s-OFDM PI/2 BPSK	1@0	3.92	13	PASS
12	15	15	141300	706.5	DFT-s-OFDM QPSK	75@0	4.57	13	PASS
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@0	4.23	13	PASS
12	15	15	141500	707.5	DFT-s-OFDM PI/2 BPSK	75@0	3.86	13	PASS
12	15	15	141500	707.5	DFT-s-OFDM PI/2 BPSK	1@0	3.93	13	PASS
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	4.55	13	PASS
12	15	15	141500	707.5	DFT-s-OFDM QPSK	1@0	4.24	13	PASS
12	15	15	141700	708.5	DFT-s-OFDM PI/2 BPSK	75@0	3.96	13	PASS
12	15	15	141700	708.5	DFT-s-OFDM PI/2 BPSK	1@0	3.66	13	PASS
12	15	15	141700	708.5	DFT-s-OFDM QPSK	75@0	4.5	13	PASS
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@0	3.98	13	PASS

N12(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

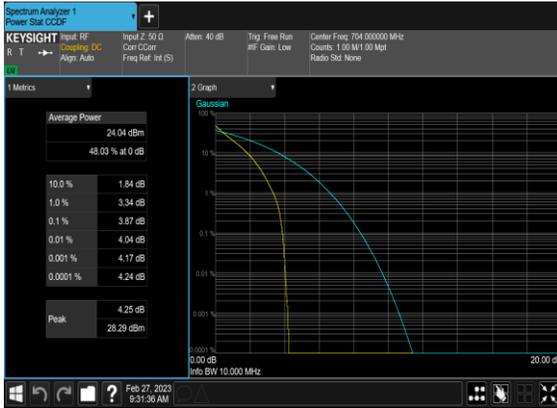

N12(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH




N12(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH



N12(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



N12(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

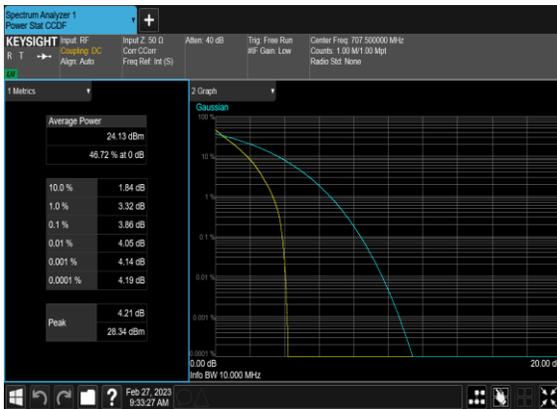

N12(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH



N12(10M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH



N12(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



N12(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH



N12(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH



N12(10M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH



N12(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH



Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
12	15	5	141500	707.5	DFT-s-OFDM PI/2 BPSK	25@0	4.4818	5.014
12	15	5	141500	707.5	DFT-s-OFDM QPSK	25@0	4.4665	4.959
12	15	5	141500	707.5	CP-OFDM QPSK	25@0	4.4724	5.086
12	15	5	141500	707.5	CP-OFDM 16 QAM	25@0	4.4745	5.124
12	15	5	141500	707.5	CP-OFDM 64 QAM	25@0	4.4642	5.027
12	15	5	141500	707.5	CP-OFDM 256 QAM	25@0	4.4722	4.996
12	15	10	141500	707.5	DFT-s-OFDM PI/2 BPSK	50@0	8.889	9.543
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	8.9044	9.547
12	15	10	141500	707.5	CP-OFDM QPSK	52@0	9.2703	10.06
12	15	10	141500	707.5	CP-OFDM 16 QAM	52@0	9.2834	9.967
12	15	10	141500	707.5	CP-OFDM 64 QAM	52@0	9.2579	9.86
12	15	10	141500	707.5	CP-OFDM 256 QAM	52@0	9.2717	9.921
12	15	15	141500	707.5	DFT-s-OFDM PI/2 BPSK	75@0	13.368	14.33
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	13.384	14.24
12	15	15	141500	707.5	CP-OFDM QPSK	79@0	14.059	14.78
12	15	15	141500	707.5	CP-OFDM 16 QAM	79@0	14.106	15.0
12	15	15	141500	707.5	CP-OFDM 64 QAM	79@0	14.091	14.76
12	15	15	141500	707.5	CP-OFDM 256 QAM	79@0	14.067	14.86

N12(5M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH



N12(5M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH



N12(5M)_CP-OFDM_QPSK_Outer_Full_Mid_CH



N12(5M)_CP-OFDM_16QAM_Outer_Full_Mid_CH



N12(5M)_CP-OFDM_64QAM_Outer_Full_Mid_CH



N12(5M)_CP-OFDM_256QAM_Outer_Full_Mid_CH



N12(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH



N12(10M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH



N12(10M)_CP-OFDM_QPSK_Outer_Full_Mid_CH




N12(10M)_CP-OFDM_16QAM_Outer_Full_Mid_CH



N12(10M)_CP-OFDM_64QAM_Outer_Full_Mid_CH



N12(10M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

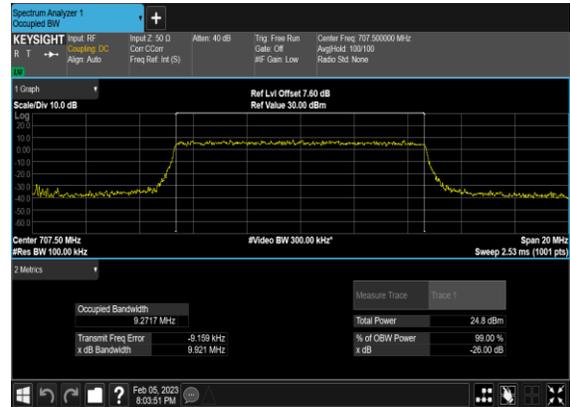

N12(15M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH



N12(15M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH



N12(15M)_CP- OFDM_QPSK_Outer_Full_Mid_CH



N12(15M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH



N12(15M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH



N12(15M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH



Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
12	15	5	140300	701.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	5	140300	701.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	5	140300	701.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	5	140300	701.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	5	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	5	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	5	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	5	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	5	142700	713.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	5	142700	713.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	5	142700	713.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	5	142700	713.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	10	140800	704.0	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	10	140800	704.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	10	140800	704.0	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	10	140800	704.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	10	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	10	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	10	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	10	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	10	142200	711.0	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	10	142200	711.0	DFT-s-OFDM BPSK	1@0	see graph	PASS

12	15	10	142200	711.0	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	10	142200	711.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	15	141300	706.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	15	141300	706.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	15	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	15	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	15	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	15	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	15	141700	708.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	15	141700	708.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@0	see graph	PASS

N12(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH



N12(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



N12(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH



N12(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



N12(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH



N12(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH



N12(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH



N12(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



N12(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH



N12(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH




N12(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH



N12(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH



N12(15M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

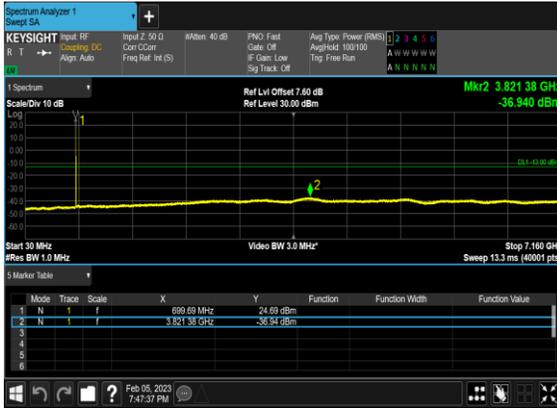

N12(15M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



N12(15M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH



N12(15M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



N12(15M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH



N12(15M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH



Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
12	15	5	140300	701.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	5	140300	701.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	5	140300	701.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
12	15	5	140300	701.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
12	15	5	142700	713.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
12	15	5	142700	713.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
12	15	5	142700	713.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
12	15	5	142700	713.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
12	15	10	140800	704.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	10	140800	704.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	10	140800	704.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
12	15	10	140800	704.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
12	15	10	142200	711.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
12	15	10	142200	711.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
12	15	10	142200	711.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
12	15	10	142200	711.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
12	15	15	141300	706.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	15	141300	706.5	DFT-s-OFDM BPSK	75@0	see graph	PASS
12	15	15	141300	706.5	DFT-s-OFDM QPSK	75@0	see graph	PASS
12	15	15	141700	708.5	DFT-s-OFDM BPSK	1@78	see graph	PASS
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@78	see graph	PASS
12	15	15	141700	708.5	DFT-s-OFDM BPSK	75@0	see graph	PASS
12	15	15	141700	708.5	DFT-s-OFDM QPSK	75@0	see graph	PASS

N12(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N12(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH




N12(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH




N12(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

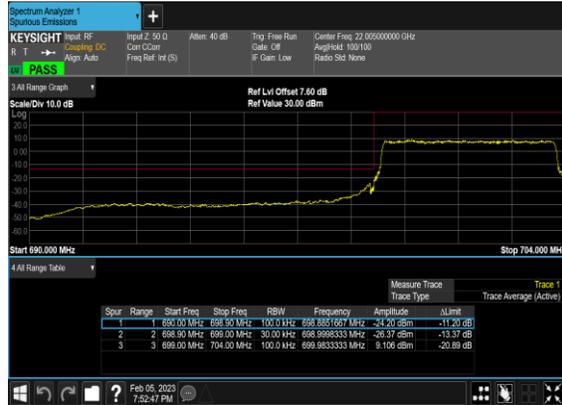

N12(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

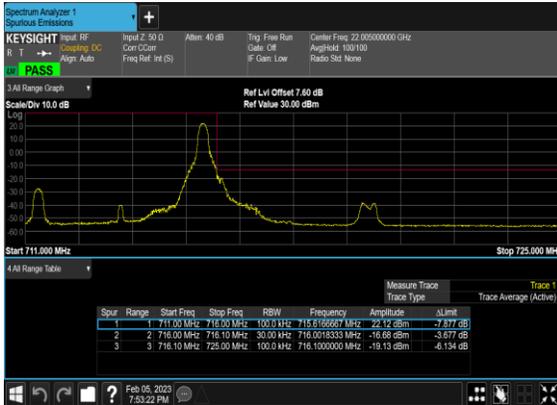

N12(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

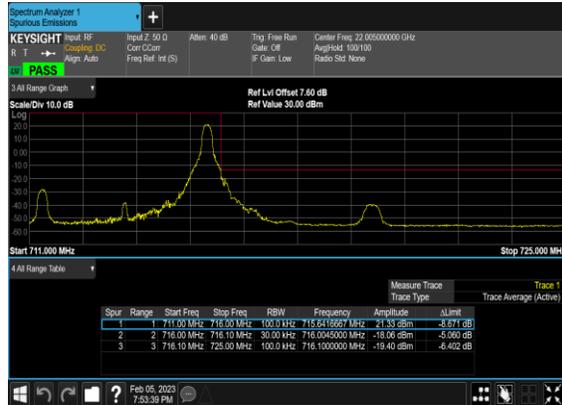


N12(5M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH




N12(5M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH




N12(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

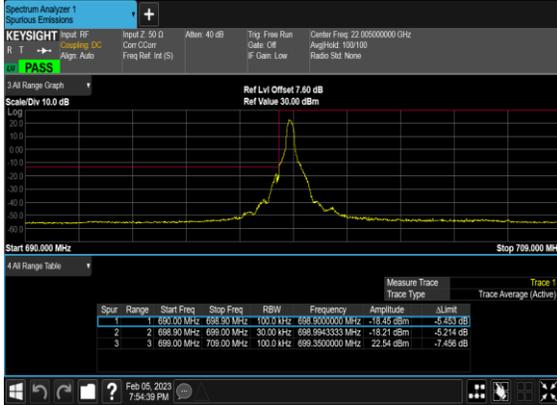


N12(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

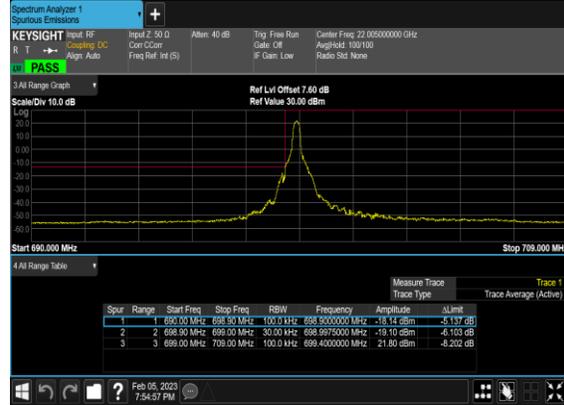


N12(10M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

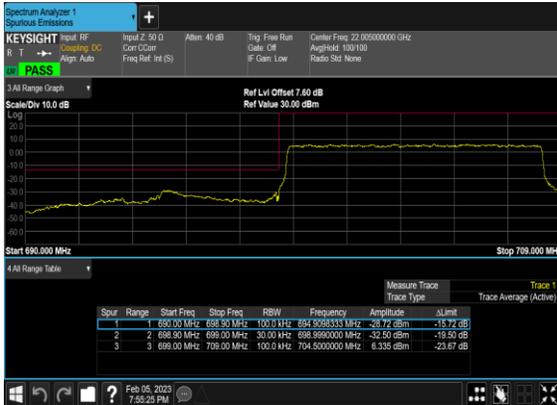


N12(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

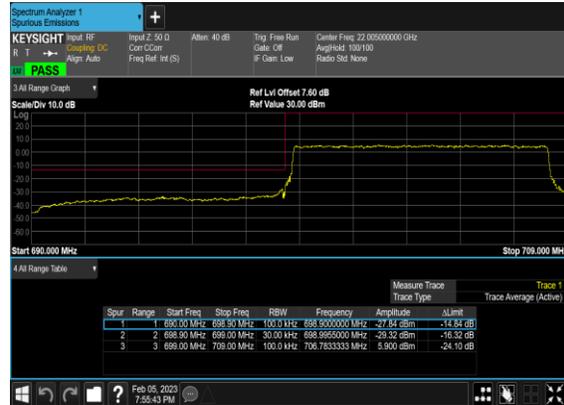

N12(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

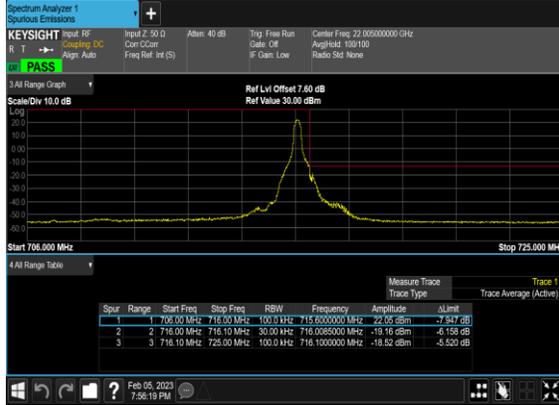

N12(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

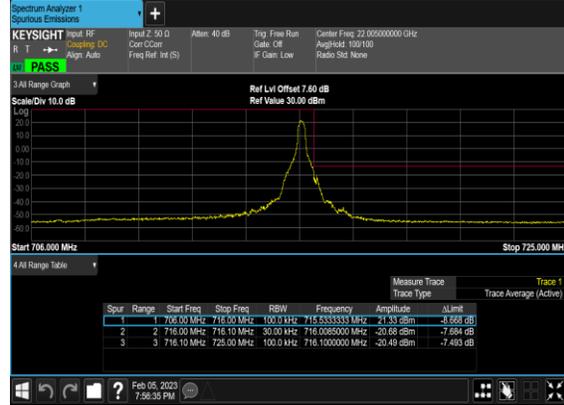


N12(10M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH




N12(10M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH



N12(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

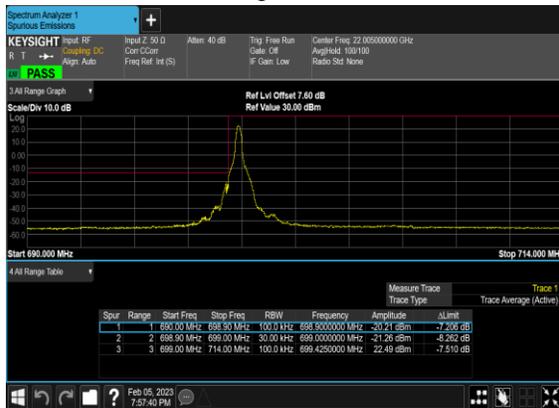

N12(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

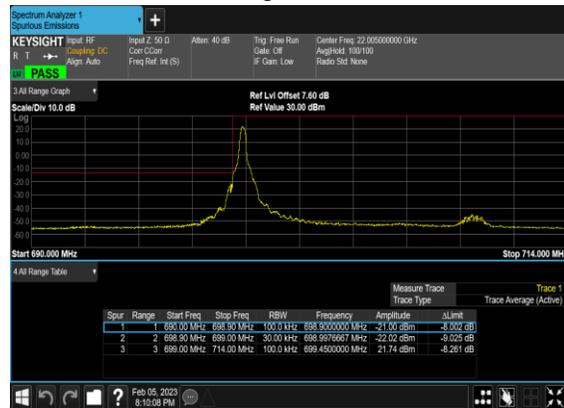


N12(15M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH




N12(15M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH



N12(15M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

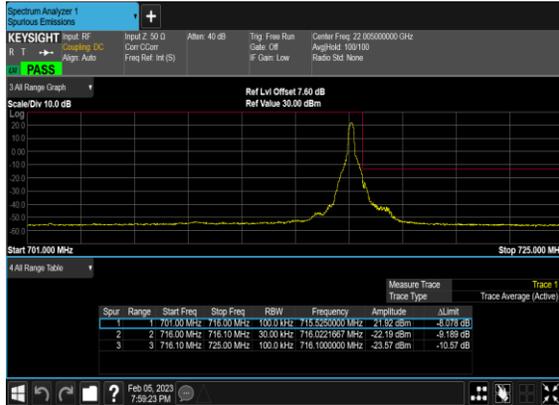

N12(15M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

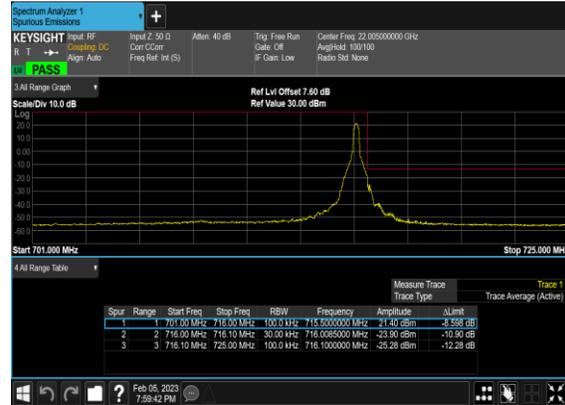

N12(15M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH



N12(15M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH



FR1 N25-Ant 1

**Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-
0.14dB**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	24.87	24.73	0.2972
25	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	23.8	23.66	0.2323
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.85	24.71	0.2958
25	15	5	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.72	23.58	0.2280
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@1	24.78	24.64	0.2911
25	15	5	382500	1912.5	DFT-s-OFDM 16 QAM	1@1	23.64	23.5	0.2239
25	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	24.81	24.67	0.2931
25	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	23.75	23.61	0.2296
25	15	10	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.71	24.57	0.2864
25	15	10	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.65	23.51	0.2244
25	15	10	382000	1910	DFT-s-OFDM QPSK	1@1	24.83	24.69	0.2944
25	15	10	382000	1910	DFT-s-OFDM 16 QAM	1@1	23.68	23.54	0.2259
25	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	24.92	24.78	0.3006
25	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	23.93	23.79	0.2393
25	15	15	376500	1882.5	DFT-s-OFDM QPSK	1@1	25.01	24.87	0.3069
25	15	15	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.88	23.74	0.2366
25	15	15	381500	1907.5	DFT-s-OFDM QPSK	1@1	24.8	24.66	0.2924
25	15	15	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	23.77	23.63	0.2307
25	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	50@25	24.89	24.75	0.2985
25	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@1	24.83	24.69	0.2944
25	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@104	24.78	24.64	0.2911
25	15	20	372000	1860	DFT-s-OFDM QPSK	50@25	24.9	24.76	0.2992
25	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	24.92	24.78	0.3006
25	15	20	372000	1860	DFT-s-OFDM QPSK	1@104	24.81	24.67	0.2931
25	15	20	372000	1860	DFT-s-OFDM 16 QAM	50@25	23.84	23.7	0.2344
25	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	23.91	23.77	0.2382
25	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@104	23.91	23.77	0.2382
25	15	20	372000	1860	DFT-s-OFDM 64 QAM	50@25	22.39	22.25	0.1679

25	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@1	22.58	22.44	0.1754
25	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@104	22.47	22.33	0.1710
25	15	20	372000	1860	DFT-s-OFDM 256 QAM	50@25	20.36	20.22	0.1052
25	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@1	20.17	20.03	0.1007
25	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@104	20.12	19.98	0.0995
25	15	20	372000	1860	CP-OFDM QPSK	53@26	23.45	23.31	0.2143
25	15	20	372000	1860	CP-OFDM QPSK	1@1	23.44	23.3	0.2138
25	15	20	372000	1860	CP-OFDM QPSK	1@104	23.37	23.23	0.2104
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	50@25	24.88	24.74	0.2979
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.74	24.6	0.2884
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@104	24.72	24.58	0.2871
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	50@25	24.75	24.61	0.2891
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@1	25.04	24.9	0.3090
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@104	24.86	24.72	0.2965
25	15	20	376500	1882.5	DFT-s-OFDM 16 QAM	50@25	23.75	23.61	0.2296
25	15	20	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.87	23.73	0.2360
25	15	20	376500	1882.5	DFT-s-OFDM 16 QAM	1@104	23.86	23.72	0.2355
25	15	20	376500	1882.5	DFT-s-OFDM 64 QAM	50@25	22.3	22.16	0.1644
25	15	20	376500	1882.5	DFT-s-OFDM 64 QAM	1@1	22.42	22.28	0.1690
25	15	20	376500	1882.5	DFT-s-OFDM 64 QAM	1@104	22.5	22.36	0.1722
25	15	20	376500	1882.5	DFT-s-OFDM 256 QAM	50@25	20.14	20	0.1000
25	15	20	376500	1882.5	DFT-s-OFDM 256 QAM	1@1	20.07	19.93	0.0984
25	15	20	376500	1882.5	DFT-s-OFDM 256 QAM	1@104	20.06	19.92	0.0982
25	15	20	376500	1882.5	CP-OFDM QPSK	53@26	23.31	23.17	0.2075
25	15	20	376500	1882.5	CP-OFDM QPSK	1@1	23.42	23.28	0.2128
25	15	20	376500	1882.5	CP-OFDM QPSK	1@104	23.03	22.89	0.1945
25	15	20	381000	1905	DFT-s-OFDM PI/2 BPSK	50@25	24.74	24.6	0.2884
25	15	20	381000	1905	DFT-s-OFDM PI/2 BPSK	1@1	24.75	24.61	0.2891
25	15	20	381000	1905	DFT-s-OFDM PI/2 BPSK	1@104	24.73	24.59	0.2877
25	15	20	381000	1905	DFT-s-OFDM QPSK	50@25	24.77	24.63	0.2904
25	15	20	381000	1905	DFT-s-OFDM QPSK	1@1	24.91	24.77	0.2999
25	15	20	381000	1905	DFT-s-OFDM QPSK	1@104	24.78	24.64	0.2911
25	15	20	381000	1905	DFT-s-OFDM 16 QAM	50@25	23.74	23.6	0.2291
25	15	20	381000	1905	DFT-s-OFDM 16 QAM	1@1	23.86	23.72	0.2355
25	15	20	381000	1905	DFT-s-OFDM 16 QAM	1@104	23.89	23.75	0.2371

25	15	20	381000	1905	DFT-s-OFDM 64 QAM	50@25	22.29	22.15	0.1641
25	15	20	381000	1905	DFT-s-OFDM 64 QAM	1@1	22.39	22.25	0.1679
25	15	20	381000	1905	DFT-s-OFDM 64 QAM	1@104	22.48	22.34	0.1714
25	15	20	381000	1905	DFT-s-OFDM 256 QAM	50@25	20.06	19.92	0.0982
25	15	20	381000	1905	DFT-s-OFDM 256 QAM	1@1	20.05	19.91	0.0979
25	15	20	381000	1905	DFT-s-OFDM 256 QAM	1@104	20.08	19.94	0.0986
25	15	20	381000	1905	CP-OFDM QPSK	53@26	23.42	23.28	0.2128
25	15	20	381000	1905	CP-OFDM QPSK	1@1	23.38	23.24	0.2109
25	15	20	381000	1905	CP-OFDM QPSK	1@104	22.98	22.84	0.1923

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0039	PASS	NV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0040	PASS	LV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0055	PASS	HV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0050	PASS	-10°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0060	PASS	0°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0024	PASS	10°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0039	PASS	20°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0027	PASS	30°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0058	PASS	40°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0058	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
25	15	20	372000	1860.0	DFT-s-OFDM PI/2 BPSK	100@0	3.97	13	PASS
25	15	20	372000	1860.0	DFT-s-OFDM PI/2 BPSK	1@0	4.11	13	PASS
25	15	20	372000	1860.0	DFT-s-OFDM QPSK	100@0	4.61	13	PASS
25	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@0	3.79	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	100@0	3.96	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@0	4.14	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	4.57	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@0	3.78	13	PASS
25	15	20	381000	1905.0	DFT-s-OFDM PI/2 BPSK	100@0	4.03	13	PASS
25	15	20	381000	1905.0	DFT-s-OFDM PI/2 BPSK	1@0	4.12	13	PASS
25	15	20	381000	1905.0	DFT-s-OFDM QPSK	100@0	4.73	13	PASS
25	15	20	381000	1905.0	DFT-s-OFDM QPSK	1@0	3.78	13	PASS

N25(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH



N25(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH




N25(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH




N25(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



N25(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

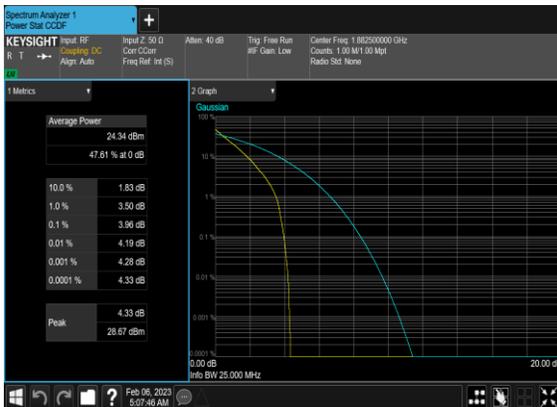

N25(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

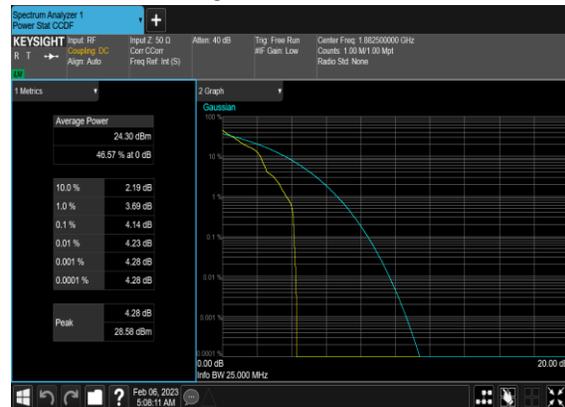

N25(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH



N25(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH




N25(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH



N25(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH



N25(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

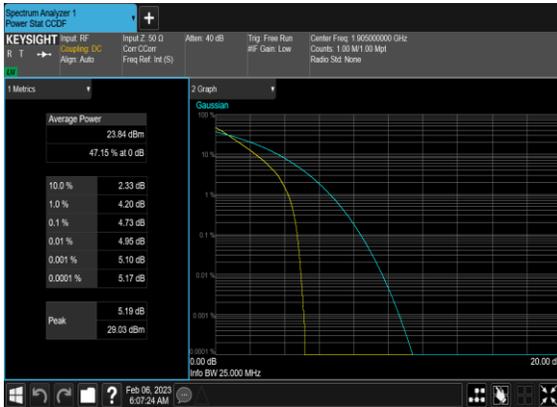

N25(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH



Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
25	15	5	376500	1882.5	DFT-s-OFDM PI/2 BPSK	25@0	4.4791	5.049
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	25@0	4.4754	4.977
25	15	5	376500	1882.5	CP-OFDM QPSK	25@0	4.4673	5.031
25	15	5	376500	1882.5	CP-OFDM 16 QAM	25@0	4.4755	5.154
25	15	5	376500	1882.5	CP-OFDM 64 QAM	25@0	4.4649	5.017
25	15	5	376500	1882.5	CP-OFDM 256 QAM	25@0	4.4765	5.031
25	15	10	376500	1882.5	DFT-s-OFDM PI/2 BPSK	50@0	8.9044	9.509
25	15	10	376500	1882.5	DFT-s-OFDM QPSK	50@0	8.9189	9.615
25	15	10	376500	1882.5	CP-OFDM QPSK	52@0	9.2782	10.13
25	15	10	376500	1882.5	CP-OFDM 16 QAM	52@0	9.3076	10.08
25	15	10	376500	1882.5	CP-OFDM 64 QAM	52@0	9.2614	9.887
25	15	10	376500	1882.5	CP-OFDM 256 QAM	52@0	9.2938	9.937
25	15	15	376500	1882.5	DFT-s-OFDM PI/2 BPSK	75@0	13.394	14.22
25	15	15	376500	1882.5	DFT-s-OFDM QPSK	75@0	13.384	14.34
25	15	15	376500	1882.5	CP-OFDM QPSK	79@0	14.089	14.85
25	15	15	376500	1882.5	CP-OFDM 16 QAM	79@0	14.091	14.99
25	15	15	376500	1882.5	CP-OFDM 64 QAM	79@0	14.134	14.9
25	15	15	376500	1882.5	CP-OFDM 256 QAM	79@0	14.092	14.72
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	100@0	17.916	18.63
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	17.854	18.77
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	18.899	19.87
25	15	20	376500	1882.5	CP-OFDM 16 QAM	106@0	18.957	19.83
25	15	20	376500	1882.5	CP-OFDM 64 QAM	106@0	18.861	19.84
25	15	20	376500	1882.5	CP-OFDM 256 QAM	106@0	18.92	19.84

N25(5M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH



N25(5M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH



N25(5M)_CP-OFDM_QPSK_Outer_Full_Mid_CH



N25(5M)_CP-OFDM_16QAM_Outer_Full_Mid_CH



N25(5M)_CP-OFDM_64QAM_Outer_Full_Mid_CH



N25(5M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

