

Report No.: SUCR240900031702

Rev.: Λ1 Page: 1 of 43

HAC (T-Coil) Test Report

Application No.: SUCR2409000317WM

Applicant: ASUSTeK COMPUTER INC.

Address of Applicant: 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

Manufacturer: ASUSTeK COMPUTER INC.

Address of 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

Manufacturer:

EUT Description: ASUS Phone (Mobile Phone) ASUSAI2501E; ASUSAI2501D Model No:

FCC ID: MSQAI2501

Trade Mark: **ASUS**

Standards: ANSI C63.19-2019

CFR 47 FCC Part 20

Date of Receipt: 2024-08-25

Date of Test: 2024-09-03 to 2024-11-01

Date of Issue: 2024-11-08

Test Result: PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Prepared by: Leon Liu/ Project

Manager

Approved by: Nick HU/ Technical

Nick Hu

Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR240900031702

Rev.: Page: 2 of 43

	Revision Record								
Version	Version Description Date Remark								
01		2024-11-08	Original						

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's solde responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory



Report No.: SUCR240900031702

Rev.: Page: 3 of 43

TEST SUMMARY

Frequency Band	HAC T-coil Test Results
GSM 850	PASS
PCS 1900	PASS
WCDMA band 2	PASS
WCDMA band 4	PASS
WCDMA band 5	PASS
LTE band 2	PASS
LTE band 4	PASS
LTE band 5	PASS
LTE band 7	PASS
LTE band 12	PASS
LTE band 17	PASS
LTE band 25	PASS
LTE band 26	PASS
LTE band 30	PASS
LTE band 66	PASS
LTE band 71	PASS
LTE band 38	PASS
LTE band 41	PASS
LTE band 42	PASS
LTE band 43	PASS
LTE band 48	PASS
FR1 n2	PASS
FR1 n5	PASS
FR1 n7	PASS
FR1 n12	PASS
FR1 n25	PASS
FR1 n26	PASS
FR1 n38	PASS
FR1 n41	PASS
FR1 n48	PASS
FR1 n66	PASS
FR1 n77	PASS
FR1 n78	PASS
WLAN2.4GHz	PASS
WLAN5GHz	PASS
WLAN6GHz	PASS
	HAC ResultS: PASS

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory



Report No.: SUCR240900031702

Rev.: 4 of 43 Page:

CONTENTS

1	GEN	ERAL INFORMATION	6
	1.2 1.3 1.4 1.5 1.5.1 1.5.2	,	
2	CALI	BRATION CERTIFICATE	14
3	HAC	(T-COIL) MEASUREMENT SYSTEM	15
	3.4 3.5 3.6 3.7	Measurement System Diagram for SPEAG Robotic T-Coil Measurement System Calibration Audio Magnetic Probe AM1DV3 Test Arch Phone Holder AMCC- Audio Magnetic Calibration Coil AMMI - Audio Magnetic Measurement Instrument	16 23 24 24 24
4	MEA	SUREMENT UNCERTAINTY EVALUATION	26
5	HAC	(T-COIL) MEASUREMENT	28
	5.1 5.2 5.3	T-Coil Performance Requirements T-Coil measurement points and reference plane T-Coil Measurement Procedure	28 30 31
6	T-CO	DIL TESTING FOR CMRS VOICE	33
	6.1 6.2 6.3	General Description GSM Tests Results UMTS Tests Results	33
7	T-CO	OIL TESTING FOR CMRS IP VOICE	35
	7.2	VoLTE Tests Results VoWiFi Tests Results T-Coil testing for OTT VoIP Application	38
8	EQU	IPMENT LIST	42
9	CALI	BRATION CERTIFICATE	43
10) PHO	TOGRAPHS	43

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory



Report No.: SUCR240900031702

Rev.: Page: 5 of 43

11	EUT CONSTRUCTIONAL DETAILS	43
APP	ENDIX A: DETAILED TEST RESULTS	43
APP	ENDIX B: CALIBRATION CERTIFICATE	43
APP	ENDIX C: PHOTOGRAPHS	43
APP	ENDIX D: EUT CONSTRUCTIONAL DETAILS	43

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory



Report No.: SUCR240900031702

Rev.: 01 Page: 6 of 43

1 General Information

1.1 Introduction

The purpose of this standard is to provide tests and establish requirements for hearing aids and for WDs that allow a hearing aid user to effectively use a WD when both the hearing aid and WD meet the requirements of this standard. The various parameters required in order to demonstrate compatibility are measured. The design of the standard is such that when a hearing aid and a WD achieve the specified requirements, as measured by the methodology of this standard, the user of a hearing aid can effectively use a WD In order to provide for the usability of a hearing aid with a WD, several factors are coordinated, as follows:

- a) The field strength emitted by a WD must not exceed the RF immunity of the hearing aid.
- b) The T-Coil baseband H-field transmission of the WD must be compatible with the T-Coil mode of the hearing aid.
- c) The magnetic noise from the WD in the T-Coil band must not degrade the reception quality to unacceptable levels.

Both the WD's RF and audio-band emissions are measured. Hence, the following measurements are made for the WDs:

- a) RF amplitude modulation characteristics and power level or, optionally, near-feld E-field emissions
- b) T-Coil mode, magnetie signal strength in the audio band.
- c) T-Coil mode, magnetic noise in the audio band
- d) T-Coil mode, magnetic signal frequency response in the audio band

Corresponding to these quantities, the hearing aid is measured for the following:

- 1) RF immunity in microphone mode
- 2) RF immunity in T-Coil mode

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01 Page: 7 of 43

1.2 Details of Client

Applicant:	ASUSTeK COMPUTER INC.
Address:	1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan
Manufacturer:	ASUSTeK COMPUTER INC.
Address:	1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.3 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Alger Du

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

S-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: Page: 8 of 43

1.5 General Description of EUT

Device Type:	portable device					
Exposure Category:	uncontrolled enviror	ment / general population				
Product Name:	ASUS Phone (Mobil	ASUS Phone (Mobile Phone)				
Model No. (EUT):	ASUSAI2501E; ASL	JSAI2501D				
Trade Mark:	ASUS					
FCC ID:	MSQAI2501					
Product Phase:	Identical Prototype					
IMEI:		90100917 /351480090100925 90100693 /351480090100701				
Hardware Version:	RC.02					
Software Version:	35.1400.1400.10					
Antenna Type:	Internal Antenna					
		; WCDMA: QPSK;16QAM;				
	LTE: QPSK,16QAM					
Modulation Mode:		6QAM,64QAM,256QAM,CP-OFDM				
		; BT: GFSK, π/4DQPSK,8DPSK				
Device Class:	В	•				
GPRS Multi-slots Class:	10	EGPRS Multi-slots Class:	10			
HSDPA UE Category:	24	HSUPA UE Category	6			
	4,tested with power	<u> </u>	-			
	1,tested with power level 0(GSM1900)					
Power Class	3, tested with power control "all 1"(WCDMA Band)					
		3, tested with power control Max Power(LTE Band)				
	Band	Tx (MHz)	Rx (MHz)			
	GSM 850	824 - 849 MHz	869 - 894 MHz			
	PCS 1900	1850 - 1910 MHz	1930 - 1990 MHz			
	WCDMA band 2	1850 -1910 MHz	1930 - 1990 MHz			
	WCDMA band 4	1710 -1755MHz	2110 - 2155MHz			
	WCDMA band 5	824 - 849MHz	869 - 894MHz			
	LTE band 2	1850 - 1910 MHz	1930 - 1990 MHz			
	LTE band 4	1710 - 1755 MHz	2110 - 2155 MHz			
	LTE band 5	824 - 849 MHz	869 - 894 MHz			
	LTE band 7	2500 - 2570 MHz	2620 - 2690 MHz			
	LTE band 12	699 - 716 MHz	729 - 746 MHz			
Frequency Bands:	LTE band 17	704 - 716 MHz	734 - 746 MHz			
	LTE band 25	1850 - 1915 MHz	1930 - 1995 MHz			
	LTE band 26	814 - 849 MHz	859 - 894 MHz			
	LTE band 30	2305 - 2315 MHz	2350 - 2360 MHz			
	LTE band 38	2570 - 2620 MHz	2570 - 2620 MHz			
	LTE band 41	2496 - 2690 MHz	2496 - 2690 MHz			
	LTE band 42	3400 - 3600 MHz	3400 - 3600 MHz			
	LTE band 48	3550 - 3700 MHz	3550 - 3700 MHz			
	LTE band 66	1710 - 1780 MHz	2110 - 2200 MHz			
	FR1 n2	1850 - 1910 MHz	1930 - 1990 MHz			
	FR1 n5	824 - 849 MHz	869 - 894 MHz			
	FR1 n7	2500 - 2570 MHz	2620 - 2690 MHz			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory



Report No.: SUCR240900031702

Rev.: 01 Page: 9 of 43

	FR1 n12	699 - 716 MHz	729 - 746 MHz	
	FR1 n25	1850 - 1915 MHz	1930 - 1995 MHz	
	FR1 n26	814 - 849 MHz	859 - 894 MHz	
	FR1 n38	2570 - 2620 MHz	2570 - 2620 MHz	
	FR1 n41	2496 - 2690 MHz	2496 - 2690 MHz	
	FR1 n48	3550 - 3700 MHz	3550 - 3700 MHz	
	FR1 n66	1710 - 1780 MHz	2110 - 2200 MHz	
	FR1 n77	3300 - 4200 MHz	3300 - 4200 MHz	
	FR1 n78	3300 - 3800 MHz	3300 - 3800 MHz	
	WLAN2.4GHz	2412-2462 MHz	2412-2462 MHz	
	VALLANIS OLI-	5180~5240MHz	5180~5240MHz	
		5260~5320MHz	5260~5320MHz	
	WLAN5GHz	5500~5720MHz	5500~5720MHz	
		5745~5825MHz	5745~5825MHz	
	WLAN6GHz	5925-6425MHz	5925-6425MHz	
	Bluetooth	2400~2483.5	2400~2483.5	
	Model:	C21P2401		
Dattama Informactions	Normal Voltage:	7.8V		
Battery Information:	Rated capacity:	5800 mAh		
	Manufacturer:	SCUD (FUJIAN) Electronics Co., Ltd.		
	•	Note:		

*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

As per the differences put forward by the manufacturer, Sample 2 merely tests the worst-case scenario of Sample 1.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980




Report No.: SUCR240900031702

Rev.: 01

Page: 10 of 43

1.5.1 DUT Antenna Locations(Back view)

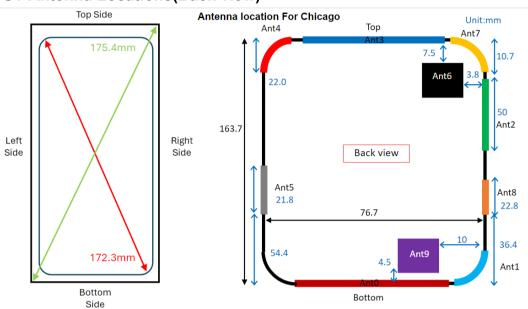

Ant0: Main Antenna Tx/Rx

1.GSM 850/900 MHz

2 WCDMA Band 5/6/8/19

3.LTE Band 5/8/12/17/18/19/20/26/71(Tx/Rx),

2/4/25/29/30/66(only Rx)

4.sub-6G n5G

n5/n8/n12/n18/n20/n26/n71(Tx/Rx),

n2/n25/n29/n30/n66(only Rx)

Ant1: Main Antenna Tx/Rx 1.GSM 1800/1900 MHz

2.WCDMA Band 1/2/4

3.LTE Band 1/2/3/4/7/25/30/34/38/39/40

/41/66(Tx/Rx), 32(only Rx)

4.sub-6G n5G

n1/n2/n3/n7/n25/n30/n38/n40/n41#1/n66

Ant2: Div. Antenna Tx/Rx

1.GSM 850/900/1800/1900 MHz(only Rx)

2.WCDMA Band 1/2/4/5/6/8/19

3.LTE Band

1/2/3/4/5/7/8/12/17/18/19/20/25/26/30/34/38/39/4

0/41/66/71(Tx/Rx), 29/32(only Rx)

4.sub-6G n5G

n1/n2/n3/n5/n7/n8/n12/n18/n20/n25/n26/n29/n30/

n38/n40/n41/n66/n71

Ant3: GPS L1/L5 Antenna Ant4: WIFI Antenna Tx/Rx 1 2 4/5/6 GHz Ant5: WIFI Antenna Tx/Rx 1. 2.4/5/6 GHz

Ant6: sub-6G n5G Antenna Tx/Rx 1.LTE Band 42/43/48

2.sub-6G n5G n48/n77/n78/n79

Ant7: sub-6G n5G&M/HB ENDC Antenna Tx/Rx

1.LTE Band 2/4/25/30/42/43/48/66

2 sub-6G n5G

n2/n4/n25/30/n48/n66/n77/n78/n79

Ant8: sub-6G n5G Antenna Tx/Rx

1.LTE Band 42/43/48, 38/41(only Rx)

2.sub-6G n5G n38/n41#0/n48/n77/n78/n79

Ant9: sub-6G n5G Antenna Tx/Rx

1.LTE Band 42/43/48, 38/41(only Rx) 2.sub-6G n5G n38/n41/n48/n77/n78/n79

Note:

1) The diversity Antenna (RX) does not support transmitter function.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 11 of 43

1.5.2 List of air interfaces/frequency bands

Air Interface	Band (MHz)	Туре	ANSI C63.19	Simultaneous Transmitter	Name of Voice Service	Power Reduction
	850		Tested	Transmitter	Service	
GSM	1900	VO	Yes	BT, Wi-Fi	CMRS Voice	NO
GSIVI	EDGE	VD	Yes	DI, WI-FI	Google Meet*	NO
	Band II	VD	163		Google Meet	
	Band IV	VO	Yes	BT, Wi-Fi	CMRS Voice	
WCDMA	Band V	VO	103		OWING VOICE	NO
	HSPA	VD	Yes		Google Meet*	
	LTE band 2	• • • •	1.00		Coogle Most	
	LTE band 4					
	LTE band 5					
	LTE band 7					
	LTE band 12				VoLTE	
LTE FDD	LTE band 17	VD	Yes	BT, Wi-Fi	Google Meet*	NO
	LTE band 25					
	LTE band 26					
	LTE band 30					
	LTE band 66					
	LTE band 38					NO
	LTE band 41	VD	Yes	BT, Wi-Fi	VoLTE Google Meet*	
LTE TDD	LTE band 42					
	LTE band 48					
	FR1 n2			BT, Wi-Fi	Google Meet*	NO
	FR1 n5		No			
	FR1 n7					
FR1 FDD	FR1 n12	DT				
	FR1 n25					
	FR1 n26					
	FR1 n66					
	FR1 n38					
	FR1 n41					
FR1 TDD	FR1 n48	DT	No	BT, Wi-Fi	Google Meet*	NO
	FR1 n77					
	FR1 n78					
	2450					
	5200					
Wi-Fi	5300	VD	Yes	WWAN	Google Meet*	NO
vvi-Fi	5500	۷۵	162	V V V MAIN	Google Meet*	NO
	5800					
	U-NII 5					
ВТ	2450	DT	No(1)	WWAN	NA	NO

VO: Legacy Cellular Voice Service

DT: Digital Transport (no voice)

VD: IP Voice Service over Digital Transport

*ANSI C63.19-2019 use table 6.1 to establish the Normal speech input level and NOTE 2 of table 6.1 identifies the group of VoIP voice services that use –16 dBm0 as the normal speech input level.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: cn.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

00 t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240900031702

Rev.: 01

Page: 12 of 43

Remark:

- 1.The WLAN6GHz U-NII 6/7/8 were above 6GHz and were not evaluated due to outside of the current scope of ANSI C63.19 and FCC HAC regulations.
- 2. The WLAN6GHz UNI-5 was evaluated for operations which are entirely below 6GHz, above 6 GHz were not evaluated due outside of the current scope of ANSI C63.19 and FCC HAC regulations.
- 3. Because features of Google Meet allow the option of voice-only communications, Meet has been tested for HAC/T-Coil compatibility to ensure the best user experience.
- 4. The Google Meet and google Fi the audio path, parameter and audio codec are all the same, therefore, the Google Meet is evaluation for this device to show compliance.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

13 of 43 Page:

1.6 Test Specification

Identity	Document Title
CFR 47 FCC Part 20	§20.19 Hearing aid-compatible mobile handsets.
	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices
KDB 285076 D01	HAC Guidance v06
KDB 285076 D02	T-Coil testing v04

1.7 ANSI C63.19-2019 limits

GSM operating modes:

- The primary group shall include at least 25 measurement points.
- The secondary group shall include at least 125 contiguous measurement points.

Non-2G GSM operating modes:

- · The primary group shall include at least 75 measurement points.
- · The secondary group shall include at least 300 contiguous measurement points

Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying oints and t least one transverse row containing at least 15 contiguous qualifying points.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 14 of 43

2 Calibration certificate

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%

Table 1: The Ambient Conditions

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Standards Technical Services (Suzhou) Co., Ltd SGS-CSTC

Report No.: SUCR240900031702

Rev.: Λ1

Page: 15 of 43

HAC (T-Coil) Measurement System

3.1 Measurement System Diagram for SPEAG Robotic

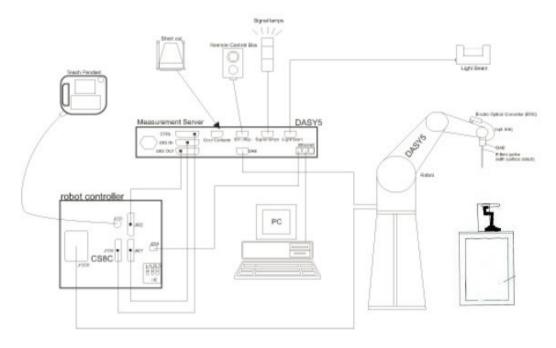


Fig. 1. The SPEAG Robotic Diagram

The DASY8 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- · An Audio Magnetic probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, ADconversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- · DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch SAM phantom
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sqs.com

Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 16 of 43

3.2 T-Coil Measurement

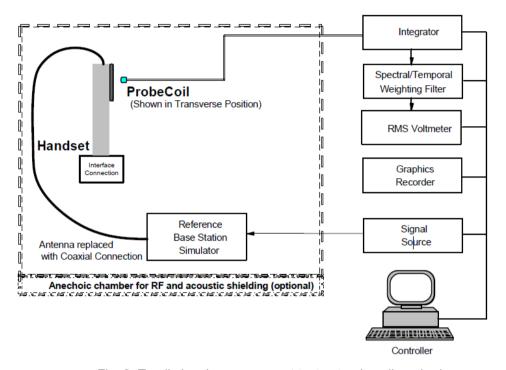


Fig. 2. T-coil signal measurement test setup-in call method

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 17 of 43

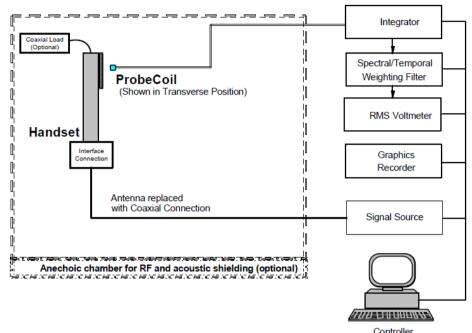


Fig. 3. T-coil signal measurement test setup-test mode method.

The reference axis is normal to the reference plane and passes through the center of the acoustie output (or the center of the whole array); or may be centered on or near a secondary inductive source. The actual location of the reference axis and resultant measurement area shall be noted in the test report.

The measurement area shall be 50 mm by 50 mm. The measurement area for both desired ABM signal and undesired ABM field may be located where the transverse magnetic measurements are optimum with regard to the requirements. However, the measurement area should be in the vicinity of the acoustic output of the WD and shall be in the same half of the phone as the WD receiver. In a WD handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.

Measurements of desired ABM signal strength and undesired ABM field are made at 2.0 mm +0.5 mm or 4 mm intervals in an X-Y measurement area patter over the entire measurement area (676 measurement points total); either all measured or measured plus interpolated.

Note.

- #. The EUT do not use the special HAC SW.
- #. Setting the maximum volume for EUT during the measurement.
- #. For the measurement, it doesn't use the "post-test measurement processing of results".
- #. Per KDB 285076 D01v06, handsets that that have the ability to support concurrent connections using simultaneous transmissions shall be independently tested for each air interface/band given in ANSI C63.19-2019. At the present time ANSI C63.19 does not provide simultaneous transmission test procedures.
- # Define the all applicable inpot audio level as below according to c63 and KDB 285076 D02v04:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd Wireless Laboraton

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 18 of 43

GSM input Level: -16dB UMTS input Level: -16dB VOLTE input Level: -16dB VOWIFI input Level: -16dB VONR input Level: -16dB OTT input Level: -16dB

For GSM/UMTS/VoLTE/VOWIF test setup and input level, the correct input level definition is via a communication tester CMW500 "Decoder Cal" and "Codec Cal" to set the correct audio input levels.

For VONR test setup and input level, the correct input level definition is via a communication tester CMX500 and External DAU USB sound card "Decoder Cal" and "Codec Cal" to set the correct audio input levels.

CMW500 and External DAU USB sound card is able to output 1 kHz audio signal equivalent to 3.14dBm0 at "Decoder Cal". configuration, the signal reference is used to adjust the AMMI gain setting to reach-16Bm0 for GSM/UMTS/VoLTE/VONR. CMW500/CMX500 input is calibrated and the relation between the analog input voltage and the internal level in dBm0 can be determined.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 19 of 43

3.2.1 Define the input level for GSM/UMTS/LTE/WLAN

- 1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. The same level as for the 1kHz sine signal.
- 2. The below calculation formula is an example and showing how to determine the input level for the device.

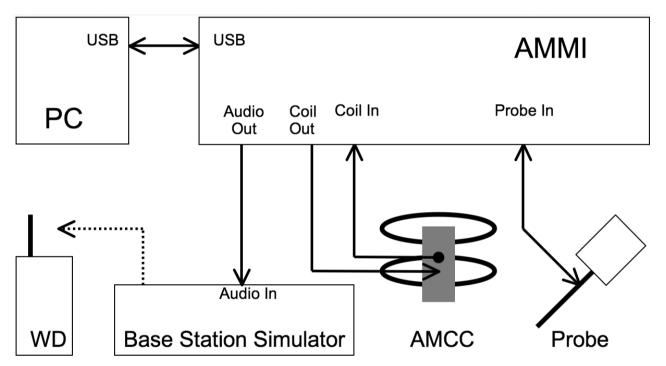


Fig. 2. T-coil signal measurement test setup

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd Wireless Laborator South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 20 of 43

The predefined signal types have the following differences / factors compared to the 1kHz sine signal:

Signal [file name]	Duration [s]	Peak-to- RMS [dB]	RMS [dB]	Required gain factor *)	Gain setting
1kHz sine		3.0	0.0	1.00	
48k_1.025kHz_10s.wav	10	3.0	0.0	1.00	
48k_1kHz_3.15kHz_10s.wav	10	6.0	-3.0	1.42	
48k_315Hz_1kHz_10s.wav	10	6.0	-2.9	1.40	
48k_csek_8k_441_white_10s.wav	10	13.8	-10.5	3.34	
48k_multisine_50-5000_10s.wav	10	11.1	-7.9	2.49	
48k_voice_1kHz_1s.wav	1	16.2	-12.7	4.33	
48k_voice_300-3000_2s.wav	2	21.6	-18.6	8.48	

^(*) The gain for the specific signal shall typically be multiplied by this factor to acheive approx. the same level as for the 1kHz sine signal.

Insert the gain applicable for your setup in the last column of the table.

Input Level for GSM/UMTS/VoLTE/VOWIFI

ipat Level for G					
Gain Value	dBm0	Full scal Voltage	dB	AMMI audio out dBv (RMS)	AMCC Coil Out (dBv (RMS)
	3.14	1.5		0.55	
100	5.53		40	2.94	3.09
8.39	-16		18.4 7		-18.44
Signal Type	Duratio n (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting
1kHz sine	-	3	0	1	8.39
48k_voice_1kHz	1	15.74	-12.7	4.33	36.32
48k_voice_300- 3000	2	21.57	-18.6	8.48	71.13

Define the input level for OTT.

- 1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. The same level as for the 1kHz sine signal.
- 2. The below calculation formula is an example and showing how to determine the input level for the device.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory



Report No.: SUCR240900031702

Rev.: 01

Page: 21 of 43

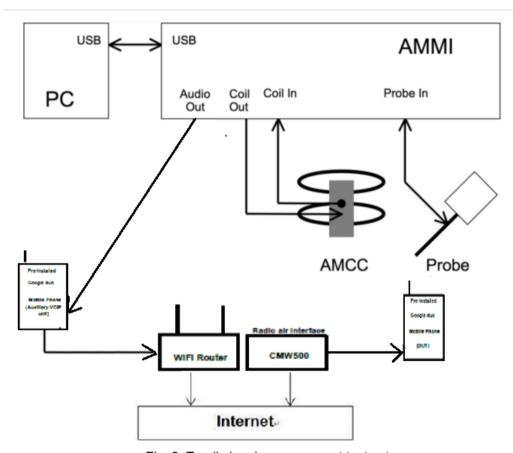


Fig. 2. T-coil signal measurement test setup

- #. Voice over Internet Protocol (VoIP) such as Google Meet application, also called IP telephony, is a methodology and group of technologies for the delivery of voice communications and multimedia sessions over Internet Protocol (IP) networks, such as the Internet. The terms Internet telephony, broadband telephony, and broadband phone service specifically refer to the provisioning of communications services (voice, fax, SMS, voice-messaging) over the public Internet, rather than via the public switched telephone network (PSTN)
- #. The Google Meet service support code and bitrate are list in section9, the customized Google Meet software is installed on a mobile phone which is used as the Auxiliary for the test. The software enables audio coding rate to be changed, and reports the input digital audio level before audio processing which can be used to calibrate the input audio level
- .#. This device comes with the preinstalled VoIP application that supports the Google Meet service and related codec. The test configuration establishes a call between the device under test and an auxiliary handset via the Google Meet server
- #. The test setup used for Google Meet VoIP call is via the data application unit on the 2G/3G/4G/5G/WiFi simulate base station, connected to the internet via the Google Meet serverr to the auxiliary device. The auxiliary device runs special software that allows the codecs and bit rate to be fixed to a specific value.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GGS-CSTC Standards Technical Services (Suzhou) Co., Ltd Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

0 t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240900031702

Rev.: 01

4.33

8.48

Page: 22 of 43

Please refer to section9, an assessment was made of each of the different codec bit rates to determine the worst case for each of the different OTT transport (WiFi, LTE, GSM, WCDMA,NR)

#. The auxiliary device includes software that displays the audio level in dBFS which allows calibration of the system to establish the -16dBm0 reference level. After establishing the voice call between auxiliary device and device under test the audio output from the AMMI is injected into the auxiliary device. The gain factor to establish a reference level of -16dBm0 for use during the test is determined as detailed in the next page based on the 0dBFull Scale (0dBFS) value being equivalent to 3.14dBm0.

Input Level for OTT

48k voice 1kHz

48k voice 300-3000

2

input Level for OT	<u> </u>							
Gain Value		20* log(gain)		Α	MCC Coil Out		Level	
(linear)		dB			(dBv RMS)		dBm0	
				0.533				
10		20		-18.39				
9.75		19.78		-22.61			-16	
Signal Type	Duration (s)	Peak to l (dB)	_	RMS (dB)	Gain Factor	G	ain Setting	
1kHz sine	-	3		0	1		9.75	

-12.7

-18.6

15.74

21.57

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd Wireless Laboraton South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn

42.23

82.71



Report No.: SUCR240900031702

Rev.: 01

Page: 23 of 43

3.3 System Calibration

For correct and calibrated measurement of the voltages and ABM field, DASY will perform a calibration job as below.

In phase 1, the audio output is switched off, and a 200 mVpp symmetric rectangular signal of 1 kHz is generated and internally connected directly to both channels of the sampling unit (Coil in, Probe in).

In phase 2, the audio output is off, and a 20 mVpp symmetric 100 Hz signal is internally connected. The signals during phases 1 and 2 are available at the output on the rear panel of the AMMI. However, the output must not be loaded, in order to avoid influencing the calibration. An RMS voltmeter would indicate 100 mVRMS during the first phase and 10 mVRMS during the second phase. After the first two phases, the two input channels are both calibrated for absolute measurements of voltages. The resulting factors are displayed above the multi-meter window.

After phases 1 and 2, the input channels are calibrated to measure exact voltages. This is required to use the inputs for measuring voltages with their peak and RMS value.

In phase 3, a multi-sine signal covering each third-octave band from 50 Hz to 10 kHz is generated and applied to both audio outputs. The probe should be positioned in the center of the AMCC and aligned in the z-direction, the field orientation of the AMCC. The "Coil In" channel is measuring the voltage over the AMCC internal shunt, which is proportional to the magnetic field in the AMCC. At the same time, the "Probe In" channel samples the amplified

signal picked up by the probe coil and provides it to a numerical integrator. The ratio of the two voltages in each third-octave filter leads to the spectral representation over the frequency band of interest. The Coil signal is scaled in dBV, and the Probe signal is first integrated and normalized to show dB A/m. The ratio probe-to-coil at the frequency of 1 kHz is the sensitivity which will be used in the consecutive T-Coil jobs.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.ferms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 24 of 43


3.4 Audio Magnetic Probe AM1DV3

Description	Active single sensor probe for both axial and radial measurement scans- Fully RF shielded, compatible with DAE, with adapted probe cup	-
Dynamic Range	0.1 KHz to 20 KHz	
Sensitivity	<-50dB A/m @ 1KHz	
Internal Amp	20dB	1
Dimensions	300X18mm	
		AM1DV3 Audio Probe

3.5 Test Arch

Description	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	
Dimensions	length: 370 mm width: 370 mm height: 370 mm	Test Arch

3.6 Phone Holder

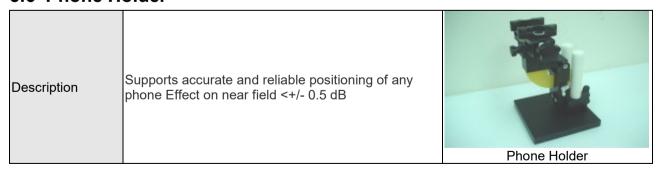

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: cn.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

) t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240900031702


Rev.: 01

Page: 25 of 43

3.7 AMCC- Audio Magnetic Calibration Coil

Allows calibration of the complete measurement setup, the two horizontal coils create a homogeneous magnetic field in the z direction.

Refer to Appendix 5 for more detail on AMCC coil



3.8 AMMI - Audio Magnetic Measurement Instrument

	-USB interface to PC	
Description	- Probe signal digitization and power supply- Test signal generation for wireless device (via base station simulator)- Autocalibration and interfaces to AMCC for complete setup-calibration	AMMI AMMI
Data Rate	48 KHz / 24bit	
Dynamic Range	85 dB	
Dimensions:	19" X 65 X 270mm	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240900031702

Rev.:

Page: 26 of 43

Measurement uncertainty evaluation

4 Weasure	inent un	certainty e	vaiuati	UII			
Error Description	Uncertainty Value (%)	Probability Dist.	Divisor	ci ABM1	ci ABM2	Standard Uncertainty ABM1 (%)	Standard Uncertainty ABM2 (%)
Related to probe sensitivity							
Reference level	±3.0	R	$\sqrt{3}$	1	1	±3.0	±3.0
AMCC geometry	±0.4	R	$\sqrt{3}$	1	1	±0.2	±0.2
AMCC current	±0.6	R	$\sqrt{3}$	1	1	±0.4	±0.4
Probe positioning during calibration	±0.2	R	$\sqrt{3}$	1	1	±0.1	±0.1
Noise distribution	±0.7	R	$\sqrt{3}$	0.0143	1	±0.0	±0.4
Frequency slope	±5.9	R	$\sqrt{3}$	0.1	1	±0.3	±3.5
Related to probe system							
Repeatability / drift	±1.0	R	$\sqrt{3}$	1	1	±0.6	±0.6
Linearity / dynamic range	±0.6	N	1	1	1	±0.4	±0.4
Audio noise	±1.0	R	$\sqrt{3}$	0.1	1	±0.1	±0.6
Probe angle	±2.3	R	$\sqrt{3}$	1	1	±1.4	±1.4
Spectral Processing	±0.9	R	$\sqrt{3}$	1	1	±0.5	±0.5
Integration time	±0.6	N	1	1	5	±0.6	±3.0
Field distribution	±0.2	R	$\sqrt{3}$	1	1	±0.1	±0.1
Test signal							
Reference signal spectrum response	±0.6	R	$\sqrt{3}$	0	1	±0.0	±0.4
Positioning							
Probe positioning	±1.9	R	$\sqrt{3}$	1	1	±1.1	±1.1
Phantom Thickness	±0.9	R	$\sqrt{3}$	1	1	±0.5	±0.5
DUT positioning	±1.9	R	$\sqrt{3}$	1	1	±1.1	±1.1
External Contributions							
RF interference	±0.0	R	$\sqrt{3}$	1	0.3	±0.0	±0.0
Test Signal Variation	±2.0	R	$\sqrt{3}$	1	1	±1.2	±1.2

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory



Report No.: SUCR240900031702

Rev.:

Page: 27 of 43

Combined Std. Uncertainty (ABM Field)	$u_c' = \sqrt{\sum_{i=1}^{20} c_i^2 u_i^2}$	±4.1	±6.2
Expanded Std. Uncertainty (K=2)		±8.2	±12.4

Table 2: Measurement uncertainties for T-Coil

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory



SUCR240900031702 Report No.:

Rev.: Λ1

28 of 43 Page:

HAC (T-Coil) Measurement

5.1 T-Coil Performance Requirements

In order to be rated for T-Coil use, a WD shall meet the requirements for signal level and signal quality contained in this part.

1) T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be ≥ -18 dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.

2) Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. Figure 1 and Figure 2 provide the boundaries for the specified frequency.

These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

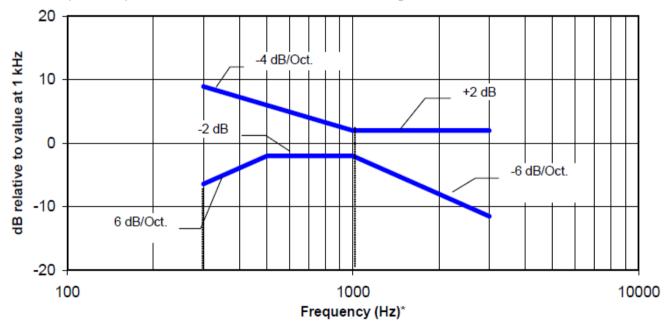


Figure 1—Magnetic field frequency response for WDs with a field ≤ -15 dB (A/m) at 1 kHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 29 of 43

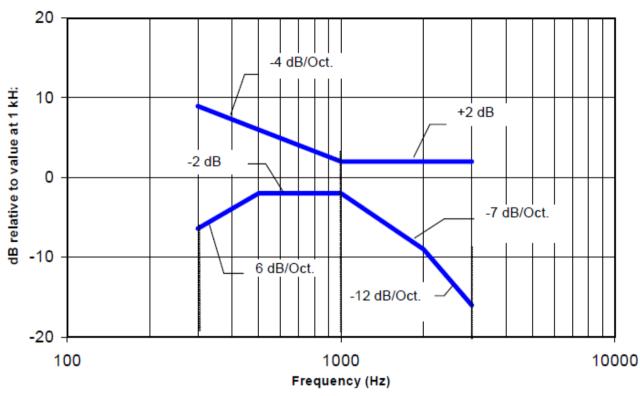


Figure 2 —Magnetic field frequency response for WDs with a field that exceeds -15dB(A/m) at 1 kHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd Wireless Laboraton South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240900031702


Rev.: Λ1

Page: 30 of 43

5.2 T-Coil measurement points and reference plane

Figure 3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

- The area is 5 cm by 5 cm.
- The area is centered on the audio frequency output transducer of the EUT.
- The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- The measurement plane is parallel to, and 10 mm in front of, the reference plane.

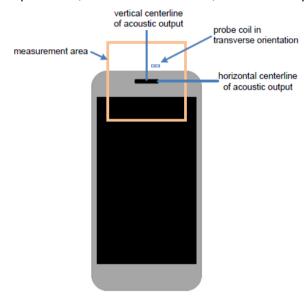




Figure A.4—Measurement and reference planes probe orientation for WD audio frequency magnetic field measurements

Figure 3 Axis and planes for WD audio frequency magnetic field measurements

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.ferms-and-Conditions and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 31 of 43

5.3 T-Coil Measurement Procedure

According to ANSI C63.19-2019, section4:

This subclause describes the procedures used to measure the ABM (T-Coi) performance of the WD. Measurements shall be performed over a meastrement area 50 mm square, in the measurement plane, as specified in A.3. The measurement area shall be scanned with a uniform measurement point spacing of 2.0 mm \pm 0.5 mm in each X=Y axis of the plane, yielding 676 measurement points with approximately even spacing throughout the area.

Optionally, measurement point spacing may be increased to 4 mm, with interpolation employed to yield the required 676 equivalent measurement points distributed uniformly over the 50 mm square measurement area. Interpolated points shall be derived from the average of the linear representations of the field strengths of the nearest two or four equidistant measured points. The area of measurement is increased to a 52 mm square so that edge rows and columns of the required 50 mm square can be either measured or interpolated with none extrapolated.

In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal shall be made at the same locations. Measurements shall not include undesired influence from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load might be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there could still be RF leakage from the WD, which could interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. Al measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 6.1. If the device display can be tumed off during a phone call, then that may be done during the measurement as well. If tested with the display in the off state this shall be documented in the test report.

Measurements shall be performed with the probe coil oriented in the transverse direction, aligned in the plane of the measurement area and perpendicular to the long dimension of the WD. A multi-stage sequence consists of first measuring the field strength of the desired T-Coil signal(desired ABM signal) that is useful to a hearing aid.

T-Coil at each specified measurement point. The undesired magnetic component (undesired ABM field) is then measured in the same transverse orientation at each of the same measurement point.

The following steps summarize the basic test flow for determining desired ABM signal and undesired ABM field. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of desired ABM signal level.

To minimize the need to test every WD operating mode to the telecoil requirements of Clause 6, it is permissible to exclude some subset of supported configurations. For a given WD, every mode that supports voice communication shall be considered for telecoil testing. However, if it can be demonstrated that a certain configuration will not be the worst-case telecoil configuration, such configurations may be excluded from the fall telecoil scans of 6.4.}4 For example, operating modes may be pre-screened by scanning for both desired ABM signal and udesired ABM field at a lower measurement point density than the final scans, thus saving considerable testing time by eliminating configurations that are excellent performers from more detailed testing for worst-case.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240900031702

Rev.: 01

Page: 32 of 43

Many factors could affect telecoil test results. RF power level and amplitude modulation characteristics as well as the specific curent paths within the WD associated with the RF output stage(s), the display, and processing circuitry could affect the undesired ABM field. Audio codec implementation and acoustic receiver characteristies could also affect the desired ABM signal).

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: Λ1

Page: 33 of 43

6 T-Coil testing for CMRS Voice

6.1 **General Description**

1. Codec Investigation:

This clause describes the measurement of the baseband (audio frequency) magnetic T-Coil signal from a WD. The goal is to evaluate the size of the area where a user could position their WD relative to their hearing aid's telecoil and receive an acceptable magnetically coupled signal. Three quantities are measured and evaluated. The first is the field strength of the desired signal at the center of the audio band (desired ABM signal). The second is the frequency response of the desired signal measured across the audio band. The third is the field strength of the undesired audio band magnetic field.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of

changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of

observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a

service/air interface.

b. According to the ANSI C63.19 2019 section 6.3.4, test middle channel of each frequency band for HAC

for each orientation to determine worst HAC T-Coil.

c. Opening the Hearing-aid can improve the HAC T-Coil performance of the earpiece.

6.2 **GSM Tests Results**

Codec Investigation:

Air Interface	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Frequency Response	Date
GSM850	Voice	190	Sample1	AMR NB FR	33	301	PASS	2024/9/3
GSM850	Voice	190	Sample1	EFR (FR V2)	44	336	PASS	2024/9/3
GSM850	Voice	190	Sample1	AMR WB FR	44	323	PASS	2024/9/3

Remark: According to codec investigation, the worst codec is AMR NB FR

Air Interface Investigation:

/coa	oo iii vooligali	O	7 til Internace investigation											
Air Interface	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count		Date						
GSM1900	Voice	661	Sample1	AMR NB FR	42	342	PASS	2024/9/3						
GSM850	Voice	190	Sample1	AMR NB FR	39	310	PASS	2024/9/3						

Remark:

- 1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

01 Rev.:

34 of 43 Page:

6.3 **UMTS Tests Results**

Codec Investigation:

	out on total guarant												
Air Interface	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency	Date			
WCDMA II	Voice	9400	Sample1	AMR NB 4.75Kbps	131	659	26	26	PASS	2024/9/13			
WCDMA II	Voice	9400	Sample1	AMR WB 6.60Kbps	130	653	26	26	PASS	2024/9/13			
WCDMA II	Voice	9400	Sample1	AMR NB12.2Kbps	132	655	26	26	PASS	2024/9/13			
WCDMA II	Voice	9400	Sample1	AMR WB 23.85Kbps	133	658	26	26	PASS	2024/9/13			

Remark: According to codec investigation, the worst codec is AMR WB 6.60Kbps

Air Interface Investigation:

Air Interface	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency	Date
WCDMA IV	Voice	1412	Sample1	AMR WB 6.60Kbps	121	653	26	26	PASS	2024/9/13
WCDMA V	Voice	4183	Sample1	AMR WB 6.60Kbps	121	656	26	26	PASS	2024/9/13
WCDMA V	Voice	4183	Sample1	AMR WB 6.60Kbps	118	649	26	26	PASS	2024/9/13

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 35 of 43

7 T-Coil testing for CMRS IP Voice

7.1 VoLTE Tests Results

1. Codec Investigation:

For a voice service/air interface, investigate the variations of codec configurations (NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel / band, the following worst investigation codec would be remarked to be used for the testing for the handset.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands / channel / bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the

handset.

b. Select LTE FDD one frequency band to do measurement at the worst Primary Group Contiguous Point Count position was additionally performed with varying the BWs/Modulations/RB size to verify the variation to find out worst configuration, the observed variation is very little to be within 1.5 dB which is much less than the margin from the rating threshold.

LTE FDD Codec Investigation:

Air Interface	BW	Modulation	RB	RB	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency	Date
LTE Band 2	20	QPSK	1	0	18900	AMR NB 4.75Kbps	133	659	26	26	PASS	2024/9/13
LTE Band 2	20	QPSK	1	0	18900	AMR NB 12.2Kbps	136	659	26	26	PASS	2024/9/13
LTE Band 2	20	QPSK	1	0	18900	AMR WB 6.60Kbps	130	653	26	26	PASS	2024/9/13
LTE Band 2	20	QPSK	1	0	18900	AMR WB 23.85Kbps	148	657	26	26	PASS	2024/9/13
LTE Band 2	20	QPSK	50	0	18900	AMR WB 6.60Kbps	134	652	26	26	PASS	2024/9/13
LTE Band 2	20	QPSK	100	0	18900	AMR WB 6.60Kbps	131	650	26	26	PASS	2024/9/13
LTE Band 2	20	16QAM	1	0	18900	AMR WB 6.60Kbps	135	654	26	26	PASS	2024/9/13
LTE Band 2	20	64QAM	1	0	18900	AMR WB 6.60Kbps	137	652	26	26	PASS	2024/9/14
LTE Band 2	20	256QAM	1	0	18900	AMR WB 6.60Kbps	133	656	26	26	PASS	2024/9/14
LTE Band 2	15	QPSK	1	0	18900	AMR WB 6.60Kbps	138	654	26	26	PASS	2024/9/14
LTE Band 2	10	QPSK	1	0	18900	AMR WB 6.60Kbps	135	652	26	26	PASS	2024/9/14
LTE Band 2	5	QPSK	1	0	18900	AMR WB 6.60Kbps	133	649	26	26	PASS	2024/9/14
LTE Band 2	3	QPSK	1	0	18900	AMR WB 6.60Kbps	135	652	26	26	PASS	2024/9/14
LTE Band 2	1.4	QPSK	1	0	18900	AMR WB 6.60Kbps	136	654	26	26	PASS	2024/9/14

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd Wireless Laboraton South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240900031702

01 Rev.:

36 of 43 Page:

Remark:

- Select Worst worst codec Bandwidth/Modulation/RB Size from LTE FDD Test results to do LTE FDD
- Select Worst Bandwidth/Modulation/RB Size from LTE FDD Test results to do LTE FDD
- According to codec investigation, the worst codec is AMR WB 6.60Kbps

Air interface:

Air Interface	BW	Modulation	RB	RB	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary	Secondary Group Max Transverse	Frequency	Date
LTE Band 4	20	QPSK	1	0	20175	Sample 1	AMR WB 6.60Kbps	130	653	26	26	PASS	2024/9/14
LTE Band 5	10	QPSK	1	0	20525	Sample 1	AMR WB 6.60Kbps	130	652	26	26	PASS	2024/9/14
LTE Band 7	20	QPSK	1	0	21100	Sample 1	AMR WB 6.60Kbps	126	652	26	26	PASS	2024/9/14
LTE Band 12	10	QPSK	1	0	23095	Sample 1	AMR WB 6.60Kbps	128	652	26	26	PASS	2024/9/14
LTE Band 17	10	QPSK	1	0	23790	Sample 1	AMR WB 6.60Kbps	124	648	26	26	PASS	2024/9/14
LTE Band 25	20	QPSK	1	0	26365	Sample 1	AMR WB 6.60Kbps	131	654	26	26	PASS	2024/9/14
LTE Band 26	15	QPSK	1	0	26865	Sample 1	AMR WB 6.60Kbps	128	649	26	26	PASS	2024/9/14
LTE Band 30	10	QPSK	1	0	27710	Sample 1	AMR WB 6.60Kbps	125	651	26	26	PASS	2024/9/14
LTE Band 66	20	QPSK	1	0	132322	Sample 1	AMR WB 6.60Kbps	117	650	26	26	PASS	2024/9/14
LTE Band 66	20	QPSK	1	0	132322	Sample 2	AMR WB 6.60Kbps	118	653	26	26	PASS	2024/9/14

- 1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A

LTE TDD Codec Investigation:

Air Interface	BW	Modulation	RB	RB	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal			Date
LTE Band 41	20	QPSK	1	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	97	552	26	26	PASS	2024/9/20
LTE Band 41	20	QPSK	1	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	92	554	26	26	PASS	2024/9/20
LTE Band 41	20	QPSK	1	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	89	549	26	26	PASS	2024/9/20
LTE Band 41	20	QPSK	1	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	98	553	26	26	PASS	2024/9/20
LTE Band 41	20	QPSK	50	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	102	564	26	26	PASS	2024/9/20
LTE Band 41	20	QPSK	100	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	105	566	26	26	PASS	2024/9/20
LTE Band 41	20	16QAM	1	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	101	560	26	26	PASS	2024/9/20
LTE Band 41	20	64QAM	1	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	106	564	26	26	PASS	2024/9/20
LTE Band 41	20	256QAM	1	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	105	563	26	26	PASS	2024/9/21
LTE Band 41	15	QPSK	1	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	102	567	26	26	PASS	2024/9/21

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 37 of 43

LTE Band 41	10	QPSK	1	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	108	562	26	26	PASS	2024/9/21
LTE Band 41	5	QPSK	1	0	40620	ROG Phone 9 Pro	AMR WB 6.60Kbps	102	566	26	26	PASS	2024/9/21

Remark:

- Select Worst worst codec Bandwidth/Modulation/RB Size from LTE TDD Test results to do LTE TDD
- 2. Select Worst Bandwidth/Modulation/RB Size from LTE TDD Test results to do LTE TDD
- 3. According to codec investigation, the worst codec is AMR WB 6.60Kbps

LTE TDD Air interface:

Air Interface	BW	Modulation	RB	RB	Channel	Sample	Codec	Primary Group Contiguous Point Count		Secondary Group Max Longitudinal		Frequency	Date
LTE Band 38	20	QPSK	1	0	38000	ROG Phone 9 Pro	AMR WB 6.60Kbps	115	615	26	26	PASS	2024/9/21
LTE Band 42	20	QPSK	1	0	42590	ROG Phone 9 Pro	AMR WB 6.60Kbps	108	606	26	26	PASS	2024/9/23
LTE Band 43	20	QPSK	1	0	44590	ROG Phone 9 Pro	AMR WB 6.60Kbps	104	596	26	26	PASS	2024/9/23
LTE Band 48	20	QPSK	1	0	55990	ROG Phone 9 Pro	AMR WB 6.60Kbps	106	595	26	26	PASS	2024/9/23
LTE Band 41	20	QPSK	1	0	40620	ROG Phone 9	AMR WB 6.60Kbps	76	504	25	26	PASS	2024/9/23

Remark:

Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: cn.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.: 01

Page: 38 of 43

7.2 VoWiFi Tests Results

1. Codec Investigation:

For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of

changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the

observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice

service/air interface and the following worst configure would be remarked to be used for the testing for the handset.

b. Select WLAN 2.4GHz, WLAN5GHz and WLAN6GHz one frequency band to do measurement at the worst Primary Group Contiguous Point Count position was additionally performed with varying the BWs/Modulations/data rate to verify the variation to find out worst configuration, the observed variation is very little to be within 1 dB which is much less than the margin from the rating threshold.

Air Interface	BW	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency	Date
802.11b	20	1M	6	ROG Phone 9 Pro	AMR NB 4.75Kbps	133	650	26	26	PASS	2024/9/25
802.11b	20	1M	6	ROG Phone 9 Pro	AMR NB12.2Kbps	129	644	26	26	PASS	2024/9/25
802.11b	20	1M	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	123	656	26	26	PASS	2024/9/25
802.11b	20	1M	6	ROG Phone 9 Pro	AMR WB 23.85Kbps	146	650	26	26	PASS	2024/9/25
802.11b	20	11M	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	129	652	26	26	PASS	2024/9/25
802.11g	20	6M	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	113	654	26	26	PASS	2024/9/25
802.11g	20	54M	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	120	655	26	26	PASS	2024/9/25
802.11n-HT20	20	MCS0	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	116	661	26	26	PASS	2024/9/25
802.11n-HT20	20	MCS7	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	119	662	26	26	PASS	2024/9/25
802.11n-HT40	40	MCS0	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	115	676	26	26	PASS	2024/9/25
802.11n-HT40	40	MCS7	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	121	676	26	26	PASS	2024/9/25
802.11ax-HE20	20	MCS0	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	103	590	26	26	PASS	2024/9/26
802.11ax-HE20	20	MCS7	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	112	602	26	26	PASS	2024/9/26
802.11ax-HE40	40	MCS0	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	99	584	26	26	PASS	2024/9/26
802.11ax-HE40	40	MCS7	6	ROG Phone 9 Pro	AMR WB 6.60Kbps	103	589	26	26	PASS	2024/9/26
802.11a	20	6M	40	ROG Phone 9 Pro	AMR WB 6.60Kbps	137	663	26	26	PASS	2024/9/26
802.11a	20	54M	40	ROG Phone 9 Pro	AMR WB 6.60Kbps	139	665	26	26	PASS	2024/9/26
802.11ac-VHT20	20	MCS0	40	ROG Phone 9 Pro	AMR WB 6.60Kbps	140	660	26	26	PASS	2024/9/26
802.11ac-VHT20	20	MCS7	40	ROG Phone 9 Pro	AMR WB 6.60Kbps	145	664	26	26	PASS	2024/9/26
802.11ac-VHT40	40	MCS0	38	ROG Phone 9 Pro	AMR WB 6.60Kbps	139	660	26	26	PASS	2024/9/26
802.11ac-VHT40	40	MCS7	38	ROG Phone 9 Pro	AMR WB 6.60Kbps	144	662	26	26	PASS	2024/9/26
802.11ac-VHT80	80	MCS0	42	ROG Phone 9 Pro	AMR WB 6.60Kbps	141	655	26	26	PASS	2024/9/26
802.11ac-VHT80	80	MCS7	42	ROG Phone 9 Pro	AMR WB 6.60Kbps	139	658	26	26	PASS	2024/9/26
802.11ac-VHT160	160	MCS0	50	ROG Phone 9 Pro	AMR WB 6.60Kbps	138	660	26	26	PASS	2024/9/26
802.11ac-VHT160	160	MCS7	50	ROG Phone 9 Pro	AMR WB 6.60Kbps	140	661	26	26	PASS	2024/9/26
802.11ax-HE80	80	MCS0	42	ROG Phone 9 Pro	AMR WB 6.60Kbps	139	653	26	26	PASS	2024/9/26

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240900031702

01 Rev.:

39 of 43 Page:

802.11ax-HE80	80	MCS7	42	ROG Phone 9 Pro AMR WB 6.60Kbp	144	660	26	26	PASS	2024/9/26
802.11ax-HE160	160	MCS0	50	ROG Phone 9 Pro AMR WB 6.60Kbp	142	657	26	26	PASS	2024/9/26
802.11ax-HE160	160	MCS7	50	ROG Phone 9 Pro AMR WB 6.60Kbp	138	658	26	26	PASS	2024/9/26

Remark:

- According to codec investigation, the worst codec is AMR WB 6.60Kbps
- According to codec investigation, WiFi the worst codec is AMR WB 6.60Kbps

Air interface:

Air Interface	BW	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count		Secondary Group Max Transverse		Date
802.11ax-HE40	40	MCS0	54	ROG Phone 9 Pro	AMR WB 6.60Kbps	139	658	26	26	PASS	2024/9/25
802.11ax-HE40	40	MCS0	118	ROG Phone 9 Pro	AMR WB 6.60Kbps	133	622	26	26	PASS	2024/9/26
802.11ax-HE40	40	MCS0	159	ROG Phone 9 Pro	AMR WB 6.60Kbps	131	657	26	26	PASS	2024/9/26
802.11ax-HE40	40	MCS0	5	ROG Phone 9 Pro	AMR WB 6.60Kbps	108	675	26	26	PASS	2024/10/16
802.11ax-HE40	40	MCS0	6	ROG Phone 9	AMR WB 6.60Kbps	120	649	26	26	PASS	2024/9/29

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory



Report No.: SUCR240900031702

Rev.: 01

Page: 40 of 43

7.3 T-Coil testing for OTT VoIP Application

- 1. The Google Meet only support OPUS audio codec and support 6kbps to 75kbps bitrate.
- 2. The test setup used for OTT VoIP call is the DUT connect to the CMW500/CMX500 and via the data application unit on CMW500/CMX500 connection to the Internet, the Auxiliary EUT is connected to the WiFi access point, the channel/Modulation/Frequency bands/data rate is configured on the CMW500/CMX500 for the DUT unit. For the Auxiliary VoIP unit which is used to configure the audio codec rate and determine the audio.
- 3. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following tests results which the worst-case codec would be remarked to be used for the testing for the handset.
- 4. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of

changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the

observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.

Air interface:

GSM:

Air Interface	Modulation	Channel	Sample	Codec	Primary Group	Secondary Group Contiguous Point Count		Date
GSM850	EDGE	190	ROG Phone 9 Pro	OPUS 6kbps	40	319	PASS	2024/11/1
GSM850	EDGE	190	ROG Phone 9 Pro	OPUS 40kbps	45	320	PASS	2024/11/1
GSM850	EDGE	190	ROG Phone 9 Pro	OPUS 75kbps	44	322	PASS	2024/11/1
GSM850	EDGE	190	ROG Phone 9	OPUS 6kbps	42	322	PASS	2024/11/1

WCDMA:

Air Interface	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count		Secondary Group Max Transverse	Frequency	Date
WCDMA V	HSPA	4183	ROG Phone 9 Pro	OPUS 6kbps	80	654	26	26	PASS	2024/11/1
WCDMA V	HSPA	4183	ROG Phone 9 Pro	OPUS 40kbps	87	652	26	26	PASS	2024/11/1
WCDMA V	HSPA	4183	ROG Phone 9 Pro	OPUS 75kbps	85	651	26	26	PASS	2024/11/1
WCDMA V	HSPA	4183	ROG Phone 9	OPUS 6kbps	85	650	26	26	PASS	2024/11/1

LTE FDD:

Air Interface	BW(MHz)	Modulation	RB Size	RB offset	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Group Max	Frequency	Date
LTE Band 66	20	QPSK	1	0	132322	ROG Phone 9 Pro	OPUS 6kbps	123	657	26	26	PASS	2024/11/1
LTE Band 66	20	QPSK	1	0	132322	ROG Phone 9 Pro	OPUS 40kbps	125	648	26	26	PASS	2024/11/1
LTE Band 66	20	QPSK	1	0	132322	ROG Phone 9 Pro	OPUS 75kbps	128	650	26	26	PASS	2024/11/1

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: cn.Doccheck@sgs.com

GS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

5000 t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240900031702

01 Rev.:

41 of 43 Page:

Band 66 20 QPSK 1 0 132322 ROG Phone 9 OPUS 6kbps 127 652 26 2	PAS	PASS 2	2024/11/1	
--	-----	--------	-----------	--

LTE TDD:

Air Interface	BW(MHz)	Modulation	RB Size	RB offset	Channel	Sample	Codec	Primary Group Contiguous Point Count				Frequency	Date
LTE Band 41	20	QPSK	1	0	40620	ROG Phone 9 Pro	OPUS 6kbps	82	535	26	26	PASS	2024/11/1
LTE Band 41	20	QPSK	1	0	40620	ROG Phone 9 Pro	OPUS 40kbps	87	539	26	26	PASS	2024/11/1
LTE Band 41	20	QPSK	1	0	40620	ROG Phone 9 Pro	OPUS 75kbps	90	544	26	26	PASS	2024/11/1
LTE Band 41	20	QPSK	1	0	40620	ROG Phone 9	OPUS 6kbps	89	536	26	26	PASS	2024/11/1

FR1 NR:

TIXI MX.													
Air Interface	BW(MHz)	Modulation	RB Size	RB offset	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Group Max	Frequency	Date
FR1 n41	100	DFT-s- OFDM QPSK	1	1	518598	ROG Phone 9 Pro	OPUS 6kbps	89	524	26	26	PASS	2024/11/1
FR1 n41	100	DFT-s- OFDM QPSK	1	1	518598	ROG Phone 9 Pro	OPUS 40kbps	96	533	26	26	PASS	2024/11/1
FR1 n41	100	DFT-s- OFDM QPSK	1	1	518598	ROG Phone 9 Pro	OPUS 75kbps	92	531	26	26	PASS	2024/11/1
FR1 n41	100	DFT-s- OFDM QPSK	1	1	518598	ROG Phone 9	OPUS 6kbps	95	533	26	26	PASS	2024/11/1

WIFI:

Air Interface	BW	Modulation	Channel	Sample	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse		Date
802.11ax-HE40	40	MCS0	6	ROG Phone 9 Pro	OPUS 6kbps	127	655	26	26	PASS	2024/11/1
802.11ax-HE40	40	MCS0	6	ROG Phone 9 Pro	OPUS 40kbps	129	651	26	26	PASS	2024/11/1
802.11ax-HE40	40	MCS0	6	ROG Phone 9 Pro	OPUS 75kbps	133	654	26	26	PASS	2024/11/1
802.11ax-HE40	40	MCS0	6	ROG Phone 9	OPUS 6kbps	130	652	26	26	PASS	2024/11/1

- 1. Phone Condition: Air Link; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A.
- 3. According to the manufacturer's statement, NR OTT selects the worst mode in LTE for testing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.:

42 of 43 Page:

8 **Equipment list**

	<u> </u>										
	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date					
	Software	SPEAG	DASY8	NA	NCR	NCR					
	DAE	SPEAG	DAE4	1740	2023-11-03	2024-11-02					
\boxtimes	Audio Magnetic 1D Field Probe	SPEAG	AM1DV3	3115	2024-08-15	2025-08-14					
	Test Arch SD HAC	SPEAG	NA	NA	NCR	NCR					
\boxtimes	Audio Magnetic Measuring Instrument	SPEAG	AMMI	1028	NCR	NCR					
	Audio Magnetic	SPEAG	AMCC	1143	N/A	N/A					
	Universal Radio Communication Tester	R&S	CMW500	111637	2024-09-10	2025-09-09					
\boxtimes	RADIO COMMUNICATION TESTR	R&S	CMX500	101930	2024-02-01	2025-01-31					
\boxtimes	Humidity and Temperature Indicator	MingGao	MingGao	NA	2024-06-13	2025-06-12					

Note:

1. All the equipments are within the valid period when the tests are performed.

2. NCR: "No-Calibration Required".

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980



Report No.: SUCR240900031702

Rev.:

43 of 43 Page:

9 Calibration certificate

Please see the Appendix B

Photographs 10

Please see the Appendix C

11 **EUT Constructional Details**

Please see the Appendix D

Appendix A: Detailed Test Results

Appendix B: Calibration certificate

Appendix C: Photographs

Appendix D: EUT Constructional Details

---End of Report---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's Indiangs at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980