

FCC SAR Test Report (Class II Permissive Change)

Product Name : Intel Wireless-AX200

Model No. : AX200D2WL

Applicant : ASUSTeK COMPUTER INC.

Address : 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

Date of Receipt : 2020/10/31

Issued Date : 2020/12/14

Report No. : 20A0961R-E3082130003

Report Version : V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: 2020/12/14

Report No.: 20A0961R-E3082130003



Product Name : Intel Wireless-AX200
Applicant : ASUSTeK COMPUTER INC.
Address : 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan
Manufacturer : Intel Mobile Communications
Model No. : AX200D2WL
Trade Name : Intel
FCC ID : MSQAX200D2L
Applicable Standard : IEEE 1528-2013
KDB 447498 D01 v06
KDB 865664 D01 V01r04
Measurement : 47CFR § 2.1093
procedures : KDB 248227 D01 v02r02
KDB 616217 D04 V01r02
Test Result : Max. SAR Measurement (1g)
2.4GHz: **1.052** W/kg
5 GHz: **1.149** W/kg
Application Type : Certification

The above equipment has been tested by DEKRA, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report.

Documented By :



(Senior Adm. Specialist / Joanne Lin)

Tested By :



(Senior Engineer / Vorana Chen)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. General Information.....	5
1.1 EUT Description	5
1.2 Antenna List.....	6
1.3 SAR Test Exclusion Calculation	7
2.1 Test Environment.....	11
2.2 Hall Effect and Gravity Sensor Evaluation Procedure	12
2. SAR Measurement System	13
2.1 DASY5 System Description	13
2.1.1 Applications	14
2.1.2 Area Scans	14
2.1.3 Zoom Scan (Cube Scan Averaging)	14
2.1.4 Uncertainty of Inter-/Extrapolation and Averaging	14
2.2 DASY5 E-Field Probe.....	15
2.2.1 Isotropic E-Field Probe Specification.....	15
2.3 Boundary Detection Unit and Probe Mounting Device.....	16
2.4 DATA Acquisition Electronics (DAE) and Measurement Server	16
2.5 Robot.....	17
2.6 Light Beam Unit.....	17
2.7 Device Holder	18
2.8 SAM Twin Phantom.....	18
3. Tissue Simulating Liquid	19
3.1 The composition of the tissue simulating liquid.....	19
3.2 Tissue Calibration Result.....	19
3.3 Tissue Dielectric Parameters for Head and Body Phantoms	21
4. SAR Measurement Procedure	22
4.1 SAR System Check	22
4.1.1 Dipoles.....	22
4.1.2 System Check Result	22
4.2 SAR Measurement Procedure.....	24
5. SAR Exposure Limits	25
6. Test Equipment List.....	26
7. Measurement Uncertainty	28
8. Conducted Power Measurement (Including tolerance allowed for production unit).....	30
9. Test Results.....	35
9.1 SAR Test Results Summary	35
9.2 Simultaneous Transmission.....	37
9.2.1 Simultaneous transmission of MIMO in 802.11 test exclusion considerations	37
9.2.2 Simultaneous transmission of Wi-Fi and other wireless technologies	38
10. SAR measurement variability	39
Appendix	40
Appendix A. SAR System Check Data	
Appendix B. SAR measurement Data	
Appendix C. Test Setup Photographs & EUT Photographs	
Appendix D. Probe Calibration Data	
Appendix E. Dipole Calibration Data	

Revision History

Report No.	Version	Description	Issued Date
20A0961R-E3082130003	V1.0	Initial issue of report.	2020/12/14

1. General Information

1.1 EUT Description

Product Name	Intel Wireless-AX200				
Trade Name	Intel				
Model No.	AX200D2WL				
FCC ID	MSQAX200D2L				
TX Frequency	802.11b/g/n/ax-20MHz: 2412-2472MHz 802.11n/ax-40MHz: 2422-2462MHz 802.11a/n/ax-20: 5180-5320MHz,5500-5720MHz, 5745-5825MHz 802.11n/ax-40MHz: 5190-5310MHz, 5510-5710MHz, 5755-5795MHz 802.11ac/ax-80MHz: 5210-5290MHz, 5530-5690MHz, 5775MHz 802.11ac/ax-160: 5250MHz, 5570MHz BT: 2402-2480MHz				
Channel separation	802.11b/g/n-20/ax-20/n-40/ax40: 5 MHz 802.11a/n/ac/ax-20MHz: 20MHz 802.11n-40/ac/ax-40MHz: 40MHz, 802.11ac/ax-80MHz: 80MHz 802.11ac/ax-160MHz: 320MHz, BT: 1MHz, BLE: 2MHz				
Number of Channels	802.11b/g/n/ax-20MHz: 13, n/ax-40MHz: 9 802.11a/n/ax-20MHz: 25; 802.11n/ax-40MHz: 12,802.11ac/ax-80MHz: 6 802.11ac/ax-160MHz: 2, BT: 79, BLE: 40				
Data Rate	802.11b: 1-11Mbps, 802.11a/g: 6-54Mbps, 802.11n: up to 300Mbps 802.11ac-80MHz: up to 866.7MHz, 802.11ac-160MHz: up to 1733MHz 802.11ax-20MHz:17.2-286.8Mbps, 802.11ax-40MHz:34.4-573.5Mbps 802.11ax-80MHz: 72.1-1201Mbps, 802.11ax-160MHz:144.1-2402Mbps BT: 3Mbps, BLE: 1Mbps				
Type of Modulation	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11a/g/n/ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) FHSS: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)				
Antenna Type	PIFA Antenna				
Device Category	Portable				
RF Exposure Environment	Uncontrolled				
Summary of test result –Reported 1g SAR (W/Kg)					
Test configuration	DTS(Main)	DTS(Aux)	U-NII(Main)	U-NII(Aux)	DSS(BT)
Body-Standalone	1.052	1.067	1.149	1.141	0.247
Body-Simultaneous	DTS (Main + Aux)		U-NII (Main + Aux)		U-NII (Main+Aux)+ DTS(BT)
	2.066 (SPLSR=0.009)		2.29 (SPLSR=0.011)		2.537 (SPLSR=0.012)

Note:

(1) This is to request a Class II permissive change for FCC ID: MSQAX200D2L, originally granted on 05/09/2019. The major change filed under this application is:

Change #1:

Additional Chassis added, ASUSTeK, model number: CM5500FD,CL5500FD,CM5500FDA,CL5500FDA.

Brand	Model	Difference
ASUS	CM5500FD	All models are electrically identical, different model names are for marketing purpose.
	CL5500FD	
	CM5500FDA	
	CL5500FDA	
The representative test sample is CM5500FDA.		

#2 Reduce Main and Aux Wi-Fi Output Power through the Gravity Sensor(G-sensor) and BIOS respectively , and SAR were evaluated accordingly (Bluetooth Output Power don't be changed).

#3 Add an antennas to WLAN module which have the same antenna's type (PIFA) with original grant, and each antenna gain is lower.

(2) AX200D2W modular declaration compliance distance is 19mm which is smaller than 25mm of bystander requirement, so bystander SAR test exclusion.

1.2 Antenna List

No.	Manufacturer	Part No.	ASUS Part No.	Antenna Type	Peak Gain
1	AWAN (For:NB)	AYF6Y-100048 (Main) AYF6Y-100049 (Aux)	1415-088P000 (Main) 1415-088H000 (Aux)	PIFA	-0.88dBi for 2.4GHz 2.19dBi for 5.15~5.25GHz 2.19dBi for 5.25~5.35GHz 2.95dBi for 5.47~5.725GHz 2.95dBi for 5.725~5.850GHz
2	AWAN (For:PAD)	AYF6Y-100048 (Main) AYF6Y-100049 (Aux)	1415-088P000 (Main) 1415-088H000 (Aux)	PIFA	0.92dBi for 2.4GHz 2.76dBi for 5.15~5.25GHz 2.68dBi for 5.25~5.35GHz 2.6dBi for 5.47~5.725GHz 1.8dBi for 5.725~5.850GHz

Note:

- (1) AWAN (P/N: AYF6Y-100048 (Main) and ASUS (P/N: 1415-088P000 (Main) both antennas are identical.
AWAN (P/N: AYF6Y-100049 (Aux) and ASUS (P/N: 1415-088H000 (Aux) both antennas are identical.

1.3 SAR Test Exclusion Calculation

According to KDB Publication 447498 D01, section 4.3.1, per the calculations of item 1 (Power(mW)/separation (mm)*sqrt(f(GHz))≤3.0), SAR is required as shown in the table below where calculated values are greater than 3.0 :

According to KDB Publication 616217 D04, section 4.2.b), When between the antenna and user is more than 5mm, edge SAR is not required for NB mode.

NB Mode SAR exclusion calculations for WiFi-SISO and Bluetooth for antenna < 50mm from the user :

Antenna	Tx	Frequency (MHz)	Output Power		Separation distances (mm)						Calculated Threshold Value (≤3.0 SAR is not required)					
			dBm	mW	Back	Right	Left	Top	Bottom	Front	Back	Right	Left	Top	Bottom	Front
Main	WiFi	2462	19.5	89	206	341	4	235	3	16	>50mm	>50mm	28.0	>50mm	28.0	8.7
Main	WiFi	5240	18	63	206	341	4	235	3	16	>50mm	>50mm	28.9	>50mm	28.9	9.0
Main	WiFi	5320	18	63	206	341	4	235	3	16	>50mm	>50mm	29.1	>50mm	29.1	9.1
Main	WiFi	5700	17.5	56	206	341	4	235	3	16	>50mm	>50mm	26.9	>50mm	26.9	8.4
Main	WiFi	5825	18	63	206	341	4	235	3	16	>50mm	>50mm	30.5	>50mm	30.5	9.5

NB Mode SAR exclusion calculations for WiFi-SISO and Bluetooth for antenna > 50mm from the user :


Antenna	Tx	Frequency (MHz)	Output Power		Separation distances (mm)						Calculated Threshold Value (SAR test exclusion power,mW)					
			dBm	mW	Back	Right	Left	Top	Bottom	Front	Back	Right	Left	Top	Bottom	Front
Main	WiFi	2462	19.5	89	206	341	4	235	3	16	1655.6	3005.6	<50mm	1945.6	<50mm	<50mm
Main	WiFi	5240	18	63	206	341	4	235	3	16	1625.5	2975.5	<50mm	1915.5	<50mm	<50mm
Main	WiFi	5320	18	63	206	341	4	235	3	16	1625.0	2975.0	<50mm	1915.0	<50mm	<50mm
Main	WiFi	5700	17.5	56	206	341	4	235	3	16	1622.8	2972.8	<50mm	1912.8	<50mm	<50mm
Main	WiFi	5825	18	63	206	341	4	235	3	16	1622.2	2972.2	<50mm	1912.2	<50mm	<50mm

NB Mode SAR exclusion calculations for WiFi-SISO and Bluetooth for antenna < 50mm from the user :

Antenna	Tx	Frequency (MHz)	Output Power		Separation distances (mm)						Calculated Threshold Value (≤ 3.0 SAR is not required)					
			dBm	mW	Back	Right	Left	Top	Bottom	Front	Back	Right	Left	Top	Bottom	Front
Aux	WiFi	2462	20.00	100	206	4	341	235	3	16	>50mm	31.4	>50mm	>50mm	31.4	9.8
Aux	WiFi	5240	18.00	63	206	4	341	235	3	16	>50mm	28.9	>50mm	>50mm	28.9	9.0
Aux	WiFi	5320	18.00	63	206	4	341	235	3	16	>50mm	29.1	>50mm	>50mm	29.1	9.1
Aux	WiFi	5700	18.00	63	206	4	341	235	3	16	>50mm	30.1	>50mm	>50mm	30.1	9.4
Aux	WiFi	5825	18.00	63	206	4	341	235	3	16	>50mm	30.5	>50mm	>50mm	30.5	9.5
Aux	BT	2480	10.00	10	206	4	341	235	3	16	>50mm	3.1	>50mm	>50mm	3.1	1.0

NB Mode SAR exclusion calculations for WiFi-SISO and Bluetooth for antenna > 50mm from the user :

Antenna	Tx	Frequency (MHz)	Output Power		Separation distances (mm)						Calculated Threshold Value (SAR test exclusion power,mW)					
			dBm	mW	Back	Right	Left	Top	Bottom	Front	Back	Right	Left	Top	Bottom	Front
Aux	WiFi	2462	20.00	100	206	4	341	235	3	16	1655.6	<50mm	3005.6	1945.6	<50mm	<50mm
Aux	WiFi	5240	18.00	63	206	4	341	235	3	16	1625.5	<50mm	2975.5	1915.5	<50mm	<50mm
Aux	WiFi	5320	18.00	63	206	4	341	235	3	16	1625.0	<50mm	2975.0	1915.0	<50mm	<50mm
Aux	WiFi	5700	18.00	63	206	4	341	235	3	16	1622.8	<50mm	2972.8	1912.8	<50mm	<50mm
Aux	WiFi	5825	18.00	63	206	4	341	235	3	16	1622.2	<50mm	2972.2	1912.2	<50mm	<50mm
Aux	BT	2480	10.00	10	206	4	341	235	3	16	1655.3	<50mm	3005.3	1945.3	<50mm	<50mm

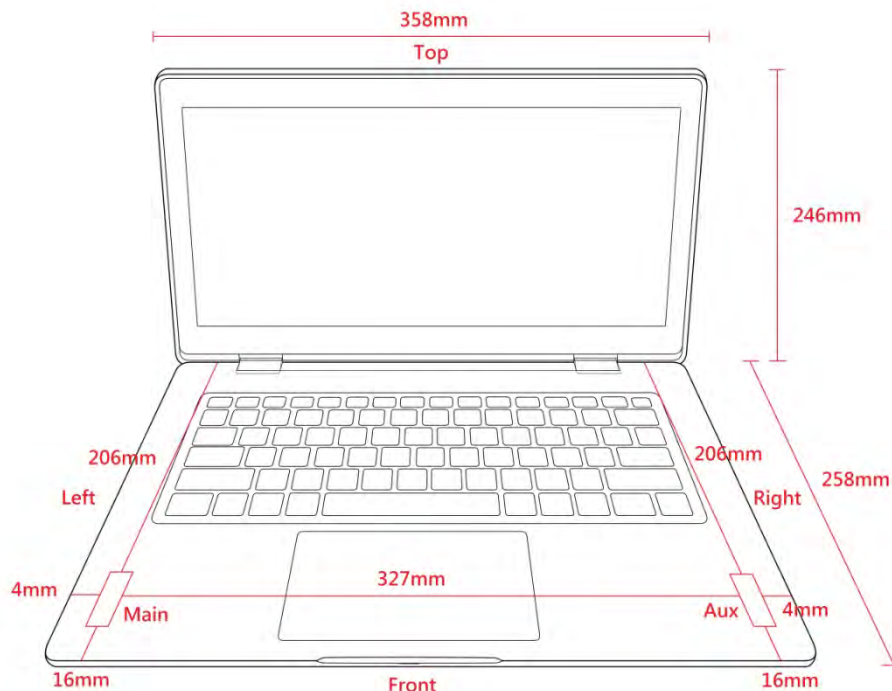

PAD Mode SAR exclusion calculations for WiFi-SISO and Bluetooth for antenna < 50mm from the user :

Antenna	Tx	Frequency (MHz)	Output Power		Separation distances (mm)						Calculated Threshold Value (≤ 3.0 SAR is not required)					
			dBm	mW	Back	Right	Left	Top	Bottom	Front	Back	Right	Left	Top	Bottom	Front
Main	WiFi	2462	13.5	22	3	341	4	16	195	9	7.0	>50mm	7.0	2.2	>50mm	3.9
Main	WiFi	5240	10	10	3	341	4	16	195	9	4.6	>50mm	4.6	1.4	>50mm	2.5
Main	WiFi	5320	10	10	3	341	4	16	195	9	4.6	>50mm	4.6	1.4	>50mm	2.6
Main	WiFi	5700	9.5	9	3	341	4	16	195	9	4.3	>50mm	4.3	1.3	>50mm	2.4
Main	WiFi	5825	10.5	11	3	341	4	16	195	9	5.4	>50mm	5.4	1.7	>50mm	3.0

PAD Mode SAR exclusion calculations for WiFi-SISO and Bluetooth for antenna > 50mm from the user :


Antenna	Tx	Frequency (MHz)	Output Power		Separation distances (mm)						Calculated Threshold Value (SAR test exclusion power,mW)					
			dBm	mW	Back	Right	Left	Top	Bottom	Front	Back	Right	Left	Top	Bottom	Front
Main	WiFi	2462	13.5	22	3	341	4	16	195	9	<50mm	3005.6	<50mm	<50mm	1545.6	<50mm
Main	WiFi	5240	10	10	3	341	4	16	195	9	<50mm	2975.5	<50mm	<50mm	1515.5	<50mm
Main	WiFi	5320	10	10	3	341	4	16	195	9	<50mm	2975.0	<50mm	<50mm	1515.0	<50mm
Main	WiFi	5700	9.5	9	3	341	4	16	195	9	<50mm	2972.8	<50mm	<50mm	1512.8	<50mm
Main	WiFi	5825	10.5	11	3	341	4	16	195	9	<50mm	2972.2	<50mm	<50mm	1512.2	<50mm

PAD Mode SAR exclusion calculations for WiFi-SISO and Bluetooth for antenna < 50mm from the user :

Antenna	Tx	Frequency (MHz)	Output Power		Separation distances (mm)						Calculated Threshold Value (≤ 3.0 SAR is not required)					
			dBm	mW	Back	Right	Left	Top	Bottom	Front	Back	Right	Left	Top	Bottom	Front
Aux	WiFi	2462	16.00	40	3	4	341	16	195	9	12.5	12.5	>50mm	3.9	>50mm	6.9
Aux	WiFi	5240	11.00	13	3	4	341	16	195	9	5.8	5.8	>50mm	1.8	>50mm	3.2
Aux	WiFi	5320	11.00	13	3	4	341	16	195	9	5.8	5.8	>50mm	1.8	>50mm	3.2
Aux	WiFi	5700	11.50	14	3	4	341	16	195	9	6.7	6.7	>50mm	2.1	>50mm	3.7
Aux	WiFi	5825	11.50	14	3	4	341	16	195	9	6.8	6.8	>50mm	2.1	>50mm	3.8
Aux	BT	2480	10.00	10	3	4	341	16	195	9	3.1	3.1	>50mm	1.0	>50mm	1.7

PAD Mode SAR exclusion calculations for WiFi-SISO and Bluetooth for antenna > 50mm from the user :

Antenna	Tx	Frequency (MHz)	Output Power		Separation distances (mm)						Calculated Threshold Value (SAR test exclusion power,mW)					
			dBm	mW	Back	Right	Left	Top	Bottom	Front	Back	Right	Left	Top	Bottom	Front
Aux	WiFi	2462	16.00	40	3	4	341	16	195	9	<50mm	<50mm	3005.6	<50mm	1545.6	<50mm
Aux	WiFi	5240	11.00	13	3	4	341	16	195	9	<50mm	<50mm	2975.5	<50mm	1515.5	<50mm
Aux	WiFi	5320	11.00	13	3	4	341	16	195	9	<50mm	<50mm	2975.0	<50mm	1515.0	<50mm
Aux	WiFi	5700	11.50	14	3	4	341	16	195	9	<50mm	<50mm	2972.8	<50mm	1512.8	<50mm
Aux	WiFi	5825	11.50	14	3	4	341	16	195	9	<50mm	<50mm	2972.2	<50mm	1512.2	<50mm
Aux	BT	2480	10.00	10	3	4	341	16	195	9	<50mm	<50mm	3005.3	<50mm	1545.3	<50mm

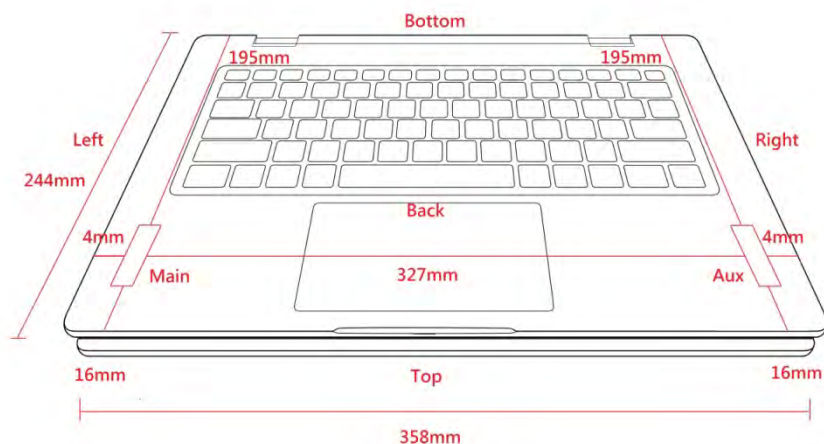

1.4 Test Environment

Ambient conditions in the laboratory:

Test Date: Nov. 19, 2020

Items	Required	Actual
Temperature (°C)	18-25	22.4 ± 2
Humidity (%RH)	30-70	52

Test Date: Nov. 23, 2020

Items	Required	Actual
Temperature (°C)	18-25	23.3 ± 2
Humidity (%RH)	30-70	50

USA : **FCC Registration Number: TW3023**

Canada : **IC Registration Number: 4075A**

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No.5-22, Ruishukeng, Linkou Dist.,
New Taipei City 24451, Taiwan, R.O.C.
Phone number : 886-2-8601-3788
Fax number : 886-2-8601-3789
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.5 Hall Effect and Gravity Sensor Evaluation Procedure


The test procedure is according to the document (2019-11-13-4.1 RF_Exposure JN) that presented on November 2019 TCBC workshop.

The following guidance should be applied to laptops/tablets that use Hall Effect or gravity sensors to detect lid angle for the purpose of power reduction:

1. With the lid is in closed mode (0 degrees), open the screen in 10 degree steps until laptop mode is obtained
2. Lower the screen 5 degrees. Closed mode should be re-obtained. If not, keep lowering in 5 degree steps.
3. Open the screen in 1 degree steps until laptop mode is re-obtained
4. Continue opening the screen in 1 degree steps until at least 5 degrees past where laptop mode was obtained
5. Then continue opening the screen in 10 degree steps until tablet mode is obtained
6. Power measurements should be taken at each step
7. Reverse this procedure going from tablet mode back down to closed mode
8. Related verification results please refer to OPDes file.

2. SAR Measurement System

2.1 DASY5 System Description

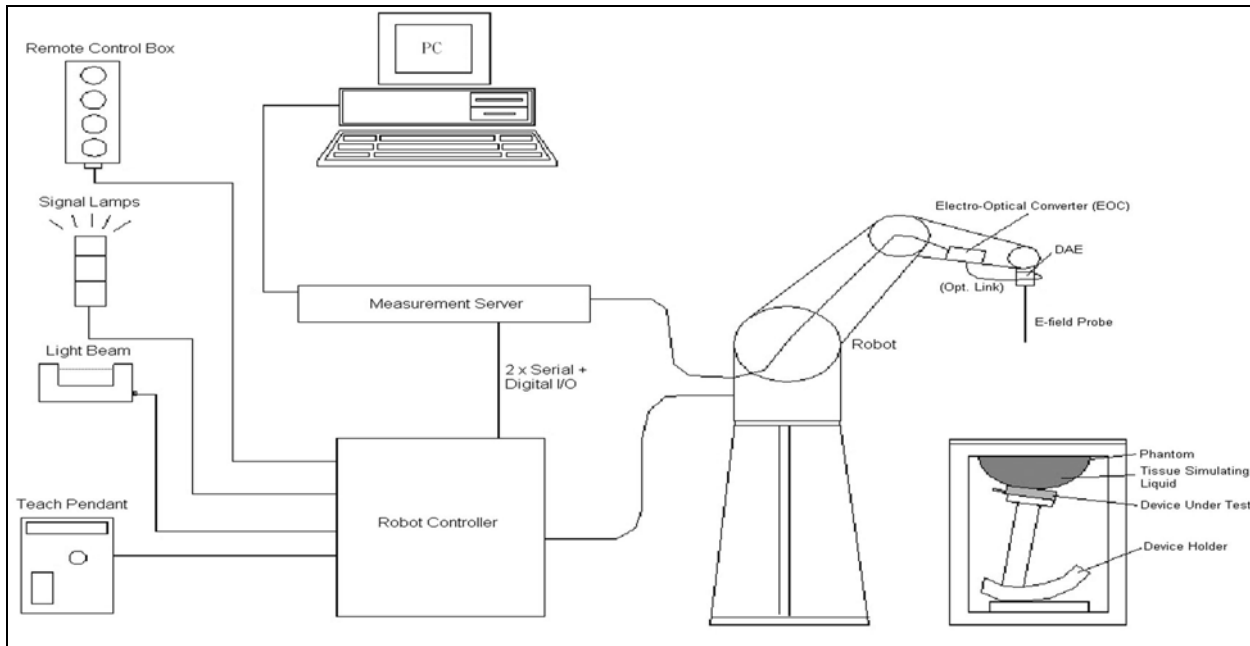

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

2.1.1 Applications

Predefined procedures and evaluations for automated compliance testing with all worldwide standards, e.g., IEEE 1528, OET 65, IEC 62209-1, IEC 62209-2, EN 50360, EN 50383 and others.

2.1.2 Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2013, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan).

2.1.3 Zoom Scan (Cube Scan Averaging)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x7 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

2.1.4 Uncertainty of Inter-/Extrapolation and Averaging

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Postprocessor, DASY5 allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions of IEEE 1528. The three analytical functions shown in equations as below are used to describe the possible range of the expected SAR distributions for the tested handsets. The field gradients are covered by the spatially flat distribution f1, the spatially steep distribution f3 and f2 accounts for H-field cancellation on the phantom/tissue surface.

$$f_1(x, y, z) = Ae^{-\frac{z}{2a}} \cos^2 \left(\frac{\pi}{2} \frac{\sqrt{x'^2 + y'^2}}{5a} \right)$$

$$f_2(x, y, z) = Ae^{-\frac{z}{a}} \frac{a^2}{a^2 + x'^2} \left(3 - e^{-\frac{2z}{a}} \right) \cos^2 \left(\frac{\pi}{2} \frac{y'}{3a} \right)$$

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

2.2 DASY5 E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN 62209-1, IEC 62209, etc.) under ISO 17025. The calibration data are in Appendix D.

2.2.1 Isotropic E-Field Probe Specification

Model	Ex3DV4	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

2.3 Boundary Detection Unit and Probe Mounting Device

The DASY probes use a precise connector and an additional holder for the probe, consisting of a plastic tube and a flexible silicon ring to center the probe. The connector at the DAE is flexibly mounted and held in the default position with magnets and springs. Two switching systems in the connector mount detect frontal and lateral probe collisions and trigger the necessary software response.



2.4 DATA Acquisition Electronics (DAE) and Measurement Server

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chipdisk and 128MB RAM. The necessary circuits for communication with the DAE electronics box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.



2.5 Robot

The DASY5 system uses the high precision robots TX90 XL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY5 system, the CS8C robot controller version from Stäubli is used.

The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



2.6 Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



2.7 Device Holder

The DASY5 device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY5 device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



2.8 SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

3. Tissue Simulating Liquid

3.1 The composition of the tissue simulating liquid

INGREDIENT (% Weight)	2450MHz Head	5200MHz Head	5800MHz Head
Water	46.7	67.63	68.29
Salt	0.00	0.00	0.00
Sugar	0.00	0.00	0.00
HEC	0.00	0.00	0.00
Preventol	0.00	0.00	0.00
DGBE	53.3	3.38	2.44
Triton X-100	0.00	28.99	29.27

3.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using APREL Dielectric Probe Kit and Agilent E5071C Vector Network Analyzer.

Head Tissue Simulate Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
2450 MHz	Reference result $\pm 5\%$ window	39.2 37.24 to 41.16	1.8 1.71 to 1.89	N/A
	23-Nov-20	38.89	1.78	22.1
2412 MHz	Low channel	39.03	1.73	22.1
2437 MHz	Mid channel	38.94	1.76	22.1
2480 MHz	High channel	38.77	1.81	22.1

Head Tissue Simulate Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [S/m]	
5250 MHz	Reference result $\pm 5\%$ window	35.95 34.15 to 37.75	4.71 4.47 to 4.95	N/A
	19-Nov-20	35.78	4.68	21.6
5190 MHz	Low channel	35.95	4.60	21.6
5270 MHz	Mid channel	35.73	4.71	21.6
5290 MHz	High channel	35.67	4.74	21.6

Head Tissue Simulate Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [S/m]	
5600 MHz	Reference result $\pm 5\%$ window	35.5 33.73 to 37.28	5.07 4.82 to 5.32	N/A
	19-Nov-20	34.82	5.17	21.6
5530 MHz	Low channel	35.03	5.06	21.6
5610 MHz	Mid channel	34.79	5.17	21.6
5690 MHz	High channel	34.57	5.27	21.6

Head Tissue Simulate Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [S/m]	
5800 MHz	Reference result $\pm 5\%$ window	35.3 33.54 to 37.07	5.27 5.01 to 5.53	N/A
	19-Nov-20	34.26	5.42	21.6
5775 MHz	Channel 155	34.33	5.38	21.6

3.3 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.


Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

4. SAR Measurement Procedure

4.1 SAR System Check

4.1.1 Dipoles

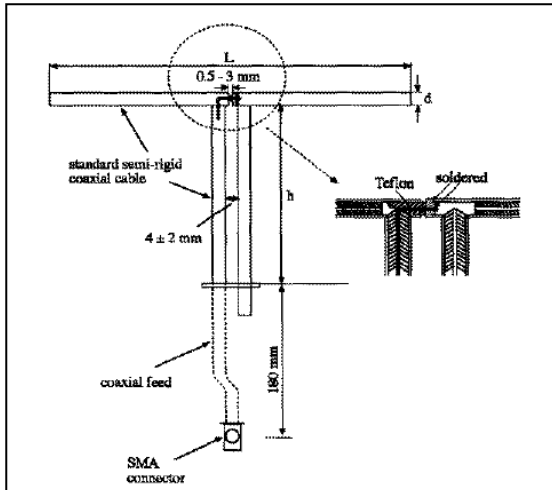

The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles.

Frequency	L (mm)	h (mm)	d (mm)
2450MHz	51.5	30.4	3.6
5200M~5800MHz	20.6	40.3	3.6

4.1.2 System Check Result

System Performance Check at 2450MHz				
Dipole Kit: D2450V2				
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
2450 MHz	Reference result ± 10% window	53.1 47.79 to 58.41	24.6 22.14 to 27.06	N/A
	23-Nov-20	50.4	23.2	22.1
Note: (1) The power level is used 250mW (2) All SAR values are normalized to 1W forward power. (3) The reference result is from Appendix E.				

System Performance Check at 5250MHz**Dipole Kit: D5GHzV2**

Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
5250 MHz	Reference result ± 10% window	81.6 73.44 to 89.76	23.2 20.88 to 25.52	N/A
	19-Nov-20	77.5	22.1	21.6

Note: (1) The power level is used 100mW
 (2) All SAR values are normalized to 1W forward power.
 (3) The reference result is from Appendix E.

System Performance Check at 5600MHz**Dipole Kit: D5GHzV2**

Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
5600 MHz	Reference result ± 10% window	85.9 77.31 to 94.49	24.2 21.78 to 26.62	N/A
	19-Nov-20	80.7	22.7	21.6

Note: (1) The power level is used 100mW
 (2) All SAR values are normalized to 1W forward power.
 (3) The reference result is from Appendix E.

System Performance Check at 5800MHz**Dipole Kit: D5GHzV2**

Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
5800 MHz	Reference result ± 10% window	82.0 73.80 to 90.20	22.8 20.52 to 25.08	N/A
	19-Nov-20	80.3	22.3	21.6

Note: (1) The power level is used 100mW
 (2) All SAR values are normalized to 1W forward power.
 (3) The reference result is from Appendix E.

4.2 SAR Measurement Procedure

The Dasy5 calculates SAR using the following equation,

$$SAR = \frac{\sigma |E|^2}{\rho}$$

σ : represents the simulated tissue conductivity

ρ : represents the tissue density

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm²) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm³).

5. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg
Spatial Average SAR (whole body)	0.08 W/kg
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00 W/kg

6. Test Equipment List

Instrument	Manufacturer	Model No.	Serial No.	Last Calibration	Next Calibration
Stäubli Robot TX60L	Stäubli	TX60L	F09/5BL1A1/A06	2009/05/18	only once
Controller	Speag	CS8c	N/A	2009/05/18	only once
Reference Dipole 2450MHz	Speag	D2450V2	930	2019/11/21	2022/11/20
Reference Dipole 5GHz	Speag	D5GHzV2	1041	2020/05/25	2023/05/24
SAM Twin Phantom	Speag	QD000 P40 CA	Tp 1515	N/A	N/A
Device Holder	Speag	N/A	N/A	N/A	N/A
Data Acquisition Electronic	Speag	DAE4	679	2020/05/06	2021/05/05
E-Field Probe	Speag	EX3DV4	3975	2020/05/20	2021/05/19
SAR Software	Speag	DASY52	V52.10.0.1446	N/A	N/A
Aprél Dipole Spaccer	Aprél	ALS-DS-U	QTK-295	N/A	N/A
Power Amplifier	Mini-Circuit	ZHL-42	D051404-20	N/A	N/A
Directional Coupler	Agilent	87300C	MY44300353	N/A	N/A ¹
Attenuator	Woken	WATT-218FS-10	N/A	N/A	N/A ¹
Attenuator	Mini-Circuit	BW-S20W2+	N/A	N/A	N/A ¹
Vector Network	Agilent	E5071C	MY46106342	2020/10/04	2021/10/03
Signal Generator	Anritsu	MG3694A	041902	2020/08/31	2021/08/30
Power Meter	Anritsu	ML2496A	1548003	2019/12/17	2020/12/16
Wide Bandwidth Sensor	Anritsu	MA2411B	1531024	2019/12/17	2020/12/16

Note: 1. System Check, the path loss measured by the network analyzer, includes the signal generator, amplifier, cable, attenuator and directional coupler.

Note:

Per KDB 865664 D01 requirements for dipole calibration, the following are recommended FCC procedures for SAR dipole calibration.

1. After a dipole is damaged and properly repaired to meet required specifications
2. When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions;
3. When the most recent return-loss, measured at least annually, deviates by more than 20% from the previous measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification

	Frequency	Tissue	Return loss	Limit	Verified Date
Calibration	2450	Head	-25.16dB	Within 20%	2019.11.21
Measurement	2450	Head	-24.77dB		2020.11.18

4. When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement

	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	2450	Head	54.37	Within 5 Ω	2019.11.21
Measurement	2450	Head	56.58		2020.11.18

7. Measurement Uncertainty

DASY5 Uncertainty (According to IEEE 1528-2013) Measurement uncertainty for 30 MHz to 3 GHz								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) V _{eff}
Measurement System								
Probe Calibration	±6%	N	1	1	1	±6.0%	±6.0%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±4.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0.0%	±0.0%	
Phantom and Setup								
Phantom Uncertainty	±6.1%	R	$\sqrt{3}$	1	1	±3.5%	±3.5%	∞
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%	∞
Liquid Conductivity (meas.)	±2.5%	R	$\sqrt{3}$	0.78	0.71	±1.1%	±1.0%	∞
Liquid Permittivity (meas.)	±2.5%	R	$\sqrt{3}$	0.26	0.26	±0.3%	±0.4%	∞
Temp. unc. - Conductivity	±3.4%	R	$\sqrt{3}$	0.78	0.71	±1.5%	±1.4%	∞
Temp. unc. - Permittivity	±0.4%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%	∞
Combined Std. Uncertainty						±11.2%	±11.1%	361
Expanded STD Uncertainty						±22.3%	±22.2%	

DASY5 Uncertainty (According to IEEE 1528-2013) Measurement uncertainty for 3GHz to 6 GHz								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) V _{eff}
Measurement System								
Probe Calibration	±6.55%	N	1	1	1	±6.55%	±6.55%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%	∞
Post-processing	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0.0%	±0.0%	
Phantom and Setup								
Phantom Uncertainty	±6.6%	R	$\sqrt{3}$	1	1	±3.8%	±3.8%	∞
SAR correction	±1.9%	R	$\sqrt{3}$	1	1	±1.1%	±0.9%	∞
Liquid Conductivity (meas.)	±2.5%	R	$\sqrt{3}$	1	0.84	±1.1%	±1.0%	∞
Liquid Permittivity (meas.)	±2.5%	R	$\sqrt{3}$	0.26	0.26	±0.3%	±0.4%	∞
Temp. unc. - Conductivity	±3.4%	R	$\sqrt{3}$	0.78	0.71	±1.5%	±1.4%	∞
Temp. unc. - Permittivity	±0.4%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%	∞
Combined Std. Uncertainty						±12.3%	±12.2%	748
Expanded STD Uncertainty						±24.6%	±24.5%	

8. Conducted Power Measurement (Including tolerance allowed for production unit)

WLAN 2.4G 2TX SISO (NB)

DSSS/OFDM mode specified maximum output power at an antenna port	Frequency	Mode	BW	SISO-Main(TX1) Chain B				SISO-Aux(TX2) Chain A			
				CH	PK Power	AV Power	AV Target	CH	PK Power	AV Power	AV Target
WLAN 2.4GHz		b	20	1	22.75	19.46	19.5	1	22.71	19.42	19.5
				2	22.65	19.36	19.5	2	23.08	19.91	20
				6	22.56	19.49	19.5	6	22.93	19.98	20
				10	22.58	19.34	19.5	10	22.99	19.90	20
				11	22.47	19.38	19.5	11	22.51	19.37	19.5
				12	21.71	18.31	18.5	12	21.77	18.41	18.5
				13	18.93	14.94	15	13	19.01	14.99	15
		g	20	1	22.91	17.88	18	1	22.94	17.92	18
				6	24.04	19.38	19.5	6	24.18	19.95	20
				11	19.93	14.96	15	11	20.01	14.86	15
				12	18.21	12.92	13	12	18.56	13.33	13.5
				13	12.93	1.44	1.5	13	12.81	1.41	1.5
		n (HT)	20	1	23.13	17.91	18	1	22.68	17.46	17.5
				6	24.07	19.42	19.5	6	24.31	19.84	20
				11	20.29	14.99	15	11	20.22	14.95	15
				12	18.21	12.83	13	12	18.91	13.45	13.5
				13	12.53	1.41	1.5	13	13.03	1.35	1.5
			40	3	22.77	17.36	17.5	3	22.92	17.43	17.5
				6	22.53	16.99	17	6	22.41	16.96	17
				9	19.27	13.43	13.5	9	19.31	13.38	13.5
				10	19.56	11.93	12	10	19.44	11.91	12
				11	15.44	4.81	5	11	15.74	4.80	5
		ax (VHT)	20	1	23.11	17.89	18	1	22.35	16.88	17
				6	24.21	19.40	19.5	6	24.06	19.46	19.5
				11	20.37	14.91	15	11	20.27	14.89	15
				12	18.39	12.85	13	12	18.93	13.37	13.5
				13	13.56	1.42	1.5	13	13.19	1.34	1.5
			40	3	23.05	17.33	17.5	3	22.68	16.85	17
				6	22.61	16.84	17	6	22.47	16.82	17
				9	19.31	13.36	13.5	9	19.22	13.31	13.5
				10	19.34	11.81	12	10	19.43	11.95	12
				11	14.88	4.83	5	11	16.63	4.83	5

WLAN 2.4G 2TX SISO (PAD)

	Frequency	Mode	BW	SISO-Main(TX1) Chain B				SISO-Aux(TX2) Chain A			
				CH	PK Power	AV Power	AV Target	CH	PK Power	AV Power	AV Target
DSSS/OFDM mode specified maximum output power at an antenna port	WLAN 2.4GHz	b	20	1	17.55	13.38	13.5	1	19.90	15.93	16
				6	17.68	13.49	13.5	6	19.91	15.97	16
				11	17.65	13.34	13.5	11	19.85	15.91	16
				12	17.66	13.33	13.5	12	19.82	15.85	16
				13	17.51	13.31	13.5	13	19.01	14.99	15
		g	20	1	18.60	13.41	13.5	1	21.13	15.88	16
				6	18.58	13.36	13.5	6	21.11	15.84	16
				11	18.44	13.33	13.5	11	20.01	14.86	15
				12	18.21	12.92	13	12	18.56	13.33	13.5
				13	12.93	1.44	1.5	13	12.81	1.41	1.5
		n (HT)	20	1	18.71	13.34	13.5	1	21.31	15.92	16
				6	18.75	13.45	13.5	6	21.18	15.91	16
				11	18.78	13.41	13.5	11	20.22	14.95	15
				12	18.21	12.83	13	12	18.91	13.45	13.5
				13	12.53	1.41	1.5	13	13.03	1.35	1.5
			40	3	19.35	13.37	13.5	3	21.85	15.91	16
				6	19.11	13.38	13.5	6	21.69	15.90	16
				9	19.27	13.43	13.5	9	19.31	13.38	13.5
				10	19.56	11.93	12	10	19.44	11.91	12
				11	15.44	4.81	5	11	15.74	4.80	5
		ax (VHT)	20	1	18.65	13.31	13.5	1	21.47	15.93	16
				6	18.62	13.33	13.5	6	21.35	15.83	16
				11	18.82	13.39	13.5	11	20.27	14.89	15
				12	18.39	12.85	13	12	18.93	13.37	13.5
				13	13.62	1.39	1.5	13	13.19	1.34	1.5
			40	3	19.37	13.32	13.5	3	21.99	15.87	16
				6	19.21	13.33	13.5	6	21.76	15.90	16
				9	19.31	13.36	13.5	9	19.22	13.31	13.5
				10	19.34	11.81	12	10	19.43	11.95	12
				11	14.88	4.83	5	11	16.63	4.83	5

WLAN 5G 2TX SISO (NB)

	Frequency	Mode	BW	SISO-Main(TX1)			SISO-Aux(TX2)			Frequency	Mode	BW	SISO-Main(TX1)			SISO-Aux(TX2)			
				Chain B			Chain A						Chain B			Chain A			
				CH	AV Power	AV Target	CH	AV Power	AV Target				CH	AV Power	AV Target	CH	AV Power	AV Target	CH
OFDM mode specified maximum output power at an antenna port	U-NII-1 (5150~5250MHz)	a	20	36	17.89	18	36	17.92	18	U-NII-2A (5250~5350MHz)	a	20	52	17.85	18	52	17.82	18	
				40	17.85	18	40	17.81	18				56	17.91	18	56	17.85	18	
				44	17.84	18	44	17.93	18				60	17.94	18	60	17.77	18	
				48	17.88	18	48	17.96	18				64	17.86	18	64	17.86	18	
		n(HT)	20	36	17.92	18	36	17.95	18		n(HT)	20	52	17.88	18	52	17.95	18	
				40	17.93	18	40	17.88	18				56	17.91	18	56	17.96	18	
				44	17.87	18	44	17.89	18				60	17.95	18	60	17.91	18	
				48	17.89	18	48	17.83	18				64	17.94	18	64	17.87	18	
		40	38	17.87	18	38	17.89	18	40		54	17.98	18	54	17.99	18			
			46	17.88	18	46	17.92	18			62	16.33	16.5	62	16.40	16.5			
		ac	80	42	17.39	17.5	42	17.44	17.5		ac	80	58	16.37	16.5	58	16.35	16.5	
		ax (VHT)	20	36	17.84	18	36	17.95	18		ax (VHT)	20	52	17.90	18	52	17.96	18	
				40	17.93	18	40	17.88	18				56	17.83	18	56	17.89	18	
				44	17.88	18	44	17.84	18				60	17.91	18	60	17.82	18	
				48	17.87	18	48	17.87	18				64	17.93	18	64	17.95	18	
			40	38	17.94	18	38	17.89	18			40	54	17.91	18	54	17.91	18	
	46			17.93	18	46	17.90	18	62	16.39			16.5	62	16.34	16.5			
	80		42	17.45	17.5	42	17.41	17.5	80	58		16.42	16.5	58	16.44	16.5			
										160		50	14.24	14.25	50	13.89	14		
	U-NII-2C (5470~5650MHz)	a	20	100	17.33	17.5	100	17.95	18	5.65 GHz & U-NII-3 (5725~5850MHz)	a	20	132	17.40	17.5	132	17.88	18	
				112	17.38	17.5	112	17.90	18				149	17.37	18	149	17.90	18	
				116	17.31	17.5	116	17.84	18				165	17.83	18	165	17.94	18	
				128	17.48	17.5	128	17.87	18										
		n(HT)	20	100	17.34	17.5	100	17.92	18		n(HT)	20	132	17.45	17.5	132	17.81	18	
				112	17.40	17.5	112	17.86	18				149	17.92	18	149	17.83	18	
				116	17.41	17.5	116	17.85	18				165	17.88	18	165	17.81	18	
				128	17.42	17.5	128	17.93	18										
		40	102	17.35	17.5	102	17.92	18	40		134	17.44	17.5	134	17.89	18			
			110	17.39	17.5	110	17.94	18			151	17.82	18	151	17.96	18			
			118	17.37	17.5	118	17.91	18			159	17.84	18	159	17.84	18			
			126	17.38	17.5	126	17.95	18											
		ac	80	106	17.42	17.5	106	17.41	17.5		ac	80	144	17.43	17.5	144	17.85	18	
				122	17.35	17.5	122	17.84	18				142	17.38	17.5	142	17.93	18	
		160	114	14.82	15	114	14.89	15			80	138	17.34	17.5	138	17.83	18		
												155	17.91	18	155	17.92	18		
		ax (VHT)	20	100	17.39	17.5	100	17.92	18		ax (VHT)	20	132	17.41	17.5	132	17.94	18	
				112	17.42	17.5	112	17.88	18				149	17.93	18	149	17.93	18	
				116	17.34	17.5	116	17.83	18				165	17.95	18	165	17.88	18	
				128	17.40	17.5	128	17.89	18										
			40	102	17.38	17.5	102	17.93	18			40	134	17.36	17.5	134	17.81	18	
				110	17.33	17.5	110	17.92	18				151	17.95	18	151	17.94	18	
				118	17.31	17.5	118	17.84	18				159	17.92	18	159	17.88	18	
				126	17.41	17.5	126	17.90	18										
			80	106	17.38	17.5	106	17.37	17.5			80	144	17.31	17.5	144	17.97	18	
				122	17.35	17.5	122	17.82	18				142	17.36	17.5	142	17.96	18	
			160	114	14.91	15	114	14.86	15				80	138	17.41	17.5	138	17.85	18
														155	17.92	18	155	17.88	18

WLAN 5G 2TX SISO (PAD)

OFDM mode specified maximum output power at an antenna port	Frequency	Mode	BW	SISO-Main(TX1) Chain B			SISO-Aux(TX2) Chain A			Frequency	Mode	BW	SISO-Main(TX1) Chain B			SISO-Aux(TX2) Chain A			
				CH	AV Power	AV Target	CH	AV Power	AV Target				CH	AV Power	AV Target				
U-NII-1 (5150~5250MHz)	a	20	36	9.84	10	36	10.94	11	U-NII-2A (5250~5350MHz)	a	20	52	9.94	10	52	10.84	11		
			40	9.89	10	40	10.87	11				56	9.93	10	56	10.81	11		
			44	9.81	10	44	10.79	11				60	9.92	10	60	10.83	11		
			48	9.94	10	48	10.91	11				64	9.86	10	64	10.85	11		
	n(HT)	20	36	9.88	10	36	10.89	11		n(HT)	20	52	9.97	10	52	10.87	11		
			40	9.91	10	40	10.96	11				56	9.84	10	56	10.81	11		
			44	9.90	10	44	10.82	11				60	9.91	10	60	10.86	11		
			48	9.96	10	48	10.87	11				64	9.87	10	64	10.94	11		
	40	38	9.87	10	38	10.86	11	40		54	9.93	10	54	10.82	11				
		46	9.83	10	46	10.92	11			62	9.95	10	62	10.90	11				
	ac	80	42	9.89	10	42	10.83	11		ac	80	58	9.99	10	58	10.99	11		
			160	50	9.86	10	50	10.85				11							
	ax (VHT)	20	36	9.90	10	36	10.89	11		ax (VHT)	20	52	9.83	10	52	10.98	11		
			40	9.87	10	40	10.90	11				56	9.80	10	56	10.86	11		
			44	9.92	10	44	10.85	11				60	9.86	10	60	10.83	11		
			48	9.98	10	48	10.84	11				64	9.91	10	64	10.90	11		
		40	38	9.97	10	38	10.96	11			40	54	9.82	10	54	10.82	11		
			46	9.80	10	46	10.93	11				62	9.83	10	62	10.84	11		
		80	42	9.91	10	42	10.87	11			80	58	9.92	10	58	10.83	11		
			160	50	9.93	10	50	10.82				11							
	U-NII-2C (5470~5650MHz)	a	20	100	9.47	9.5	100	11.36		11.5	5.65 GHz & U-NII-3 (5725~5850MHz)	a	20	132	9.44	9.5	132	11.34	11.5
				112	9.37	9.5	112	11.22		11.5				149	10.30	10.5	149	11.39	11.5
				116	9.32	9.5	116	11.40		11.5				165	10.36	10.5	165	11.40	11.5
				128	9.39	9.5	128	11.35		11.5									
n(HT)		20	100	9.36	9.5	100	11.31	11.5	n(HT)	20		132	9.37	9.5	132	11.30	11.5		
			112	9.42	9.5	112	11.37	11.5				149	10.37	10.5	149	11.33	11.5		
			116	9.35	9.5	116	11.34	11.5				165	10.38	10.5	165	11.35	11.5		
			128	9.38	9.5	128	11.36	11.5											
40		102	9.46	9.5	102	11.39	11.5	40	134	9.44		9.5	134	11.38	11.5				
		110	9.40	9.5	110	11.35	11.5		151	10.34		10.5	151	11.33	11.5				
		118	9.46	9.5	118	11.36	11.5		159	10.37		10.5	159	11.41	11.5				
		126	9.43	9.5	126	11.37	11.5		20	144		9.93	10	144	11.41	11.5			
ac		80	106	9.42	9.5	106	11.42	11.5	ac	80		142	9.89	10	142	11.27	11.5		
			122	9.41	9.5	122	11.38	11.5				138	9.40	9.5	138	11.35	11.5		
			160	114	9.91	10	114	11.36				11.5	155	10.39	10.5	155	11.31	11.5	
ax (VHT)		20	100	9.45	9.5	100	11.34	11.5	ax (VHT)	20		132	9.31	9.5	132	11.33	11.5		
			112	9.42	9.5	112	11.33	11.5				149	10.38	10.5	149	11.34	11.5		
			116	9.33	9.5	116	11.38	11.5				165	10.36	10.5	165	11.37	11.5		
			128	9.44	9.5	128	11.35	11.5											
		40	102	9.41	9.5	102	11.34	11.5		40		134	9.46	9.5	134	11.31	11.5		
			110	9.45	9.5	110	11.32	11.5				151	10.29	10.5	151	11.37	11.5		
			118	9.47	9.5	118	11.36	11.5				159	10.32	10.5	159	11.35	11.5		
			126	9.48	9.5	126	11.40	11.5				20	144	9.90	10	144	11.35	11.5	
	80	106	9.46	10	106	11.30	11.5	80		142	9.95	10	142	11.37	11.5				
		122	9.41	10	122	11.35	11.5			138	9.47	10	138	11.39	11.5				
	160	114	9.85	10	114	11.34	11.5	160		155	10.32	10.5	155	11.38	11.5				

BT Only Support Aux (NB / PAD)

Bluetooth mode maximum output power	Frequency	Mode	Modulation	SISO-Main(TX1)				SISO-Aux(TX2)			
				Chain B				Chain A			
				CH	PK Power	AV Power	AV Target	CH	PK Power	AV Power	AV Target
Bluetooth mode maximum output power	BT 2.4GHz	BR	GFSK	0	N/A	N/A	N/A	0	10.17	8.99	10.00
				39	N/A	N/A	N/A	39	10.51	9.36	10.00
				78	N/A	N/A	N/A	78	10.32	9.41	10.00
		EDR	8DPSK	0	N/A	N/A	N/A	0	9.99	7.73	8.00
				39	N/A	N/A	N/A	39	10.31	7.99	8.00
				78	N/A	N/A	N/A	78	10.07	7.93	8.00
		BLE	GFSK	0	N/A	N/A	N/A	0	9.06	6.71	7.00
				19	N/A	N/A	N/A	19	9.02	6.64	7.00
				39	N/A	N/A	N/A	39	8.98	6.44	7.00

9. Test Results

9.1 SAR Test Results Summary

SAR MEASUREMENT									
Ambient Temperature (°C) : 23.3 ±2					Relative Humidity (%): 50				
Liquid Temperature (°C) : 22.1 ±2					Depth of Liquid (cm):>15				
Test Position Body	Antenna Position	Dist (mm)	Frequency		Conducted Power (dBm)		SAR 1g (W/kg)		Limit (W/kg)
			Channel	MHz	Measurement	Tune-up Limit	Measurement	Tune-up Scaled	
Test Mode: 802.11b Main - AWAN Antenna									
Bottom(NB)	Fixed	0	1	2412	19.46	19.5	1.040	1.050	1.6
Bottom(NB)	Fixed	0	6	2437	19.49	19.5	1.050	1.052	1.6
Bottom(NB)	Fixed	0	11	2462	19.38	19.5	0.969	0.996	1.6
Back(PAD)	Fixed	0	1	2412	13.38	13.5	0.864	0.888	1.6
Back(PAD)	Fixed	0	6	2437	13.49	13.5	0.997	0.999	1.6
Back(PAD)	Fixed	0	11	2462	13.34	13.5	0.850	0.882	1.6
Left-Side(PAD)	Fixed	0	6	2437	13.49	13.5	0.461	0.462	1.6
Top(PAD)	Fixed	0	6	2437	13.49	13.5	0.122	0.122	1.6
Test Mode: 802.11b Aux - AWAN Antenna									
Bottom(NB)	Fixed	0	2	2417	19.91	20	0.665	0.679	1.6
Bottom(NB)	Fixed	0	6	2437	19.98	20	0.813	0.817	1.6
Bottom(NB)	Fixed	0	10	2457	19.9	20	0.834	0.853	1.6
Back(PAD)	Fixed	0	1	2412	15.93	16	1.050	1.067	1.6
Back(PAD)	Fixed	0	6	2437	15.97	16	0.991	0.998	1.6
Back(PAD)	Fixed	0	11	2462	15.91	16	1.020	1.041	1.6
Right-Side(PAD)	Fixed	0	6	2437	15.97	16	0.475	0.478	1.6
Top(PAD)	Fixed	0	6	2437	15.97	16	0.160	0.161	1.6
Test Mode: BT-1M Aux - AWAN Antenna									
Bottom(NB)	Fixed	0	78	2480	9.41	9.5	0.120	0.137	1.6
Back(PAD)	Fixed	0	78	2480	9.41	9.5	0.216	0.247	1.6
Note : 1. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required. 2. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.									

SAR MEASUREMENT									
Ambient Temperature (°C) : 22.4 ±2					Relative Humidity (%): 52				
Liquid Temperature (°C) : 21.6 ±2					Depth of Liquid (cm):>15				
Test Position Body	Antenna Position	Dist (mm)	Frequency		Conducted Power (dBm)		SAR 1g (W/kg)		Limit (W/kg)
			Channel	MHz	Measurement	Tune-up Limit	Measurement	Tune-up Scaled	
Test Mode: 802.11n40M Main - AWAN Antenna									
Bottom(NB)	Fixed	0	38	5190	17.87	18	0.990	1.020	1.6
Bottom(NB)	Fixed	0	46	5230	17.88	18	0.989	1.017	1.6
Bottom(NB)	Fixed	0	54	5270	17.98	18	1.040	1.045	1.6
Test Mode: 802.11ac80M Main - AWAN Antenna									
Bottom(NB)	Fixed	0	106	5530	17.42	17.5	1.060	1.080	1.6
Bottom(NB)	Fixed	0	122	5610	17.35	17.5	1.040	1.077	1.6
Bottom(NB)	Fixed	0	138	5690	17.34	17.5	1.020	1.058	1.6
Bottom(NB)	Fixed	0	155	5775	17.91	18	0.990	1.011	1.6
Back(PAD)	Fixed	0	42	5210	9.89	10	1.030	1.056	1.6
Back(PAD)	Fixed	0	58	5290	9.99	10	1.020	1.022	1.6
Back(PAD)	Fixed	0	106	5530	9.42	9.5	1.010	1.029	1.6
Back(PAD)	Fixed	0	122	5610	9.41	9.5	1.070	1.092	1.6
Back(PAD)	Fixed	0	138	5690	9.40	9.5	1.070	1.095	1.6
Back(PAD)	Fixed	0	155	5775	10.39	10.5	1.120	1.149	1.6
Left-Side(PAD)	Fixed	0	58	5290	9.99	10	0.473	0.474	1.6
Left-Side(PAD)	Fixed	0	106	5530	9.42	9.5	0.479	0.488	1.6
Left-Side(PAD)	Fixed	0	155	5775	10.39	10.5	0.411	0.422	1.6
Test Mode: 802.11n40M Aux - AWAN Antenna									
Bottom(NB)	Fixed	0	54	5270	17.99	18	0.693	0.695	1.6
Test Mode: 802.11ac80M Aux - AWAN Antenna									
Bottom(NB)	Fixed	0	122	5610	17.84	18	0.814	0.845	1.6
Bottom(NB)	Fixed	0	138	5690	17.83	18	0.809	0.841	1.6
Bottom(NB)	Fixed	0	155	5775	17.92	18	0.806	0.821	1.6
Back(PAD)	Fixed	0	42	5210	10.83	11	0.969	1.008	1.6
Back(PAD)	Fixed	0	58	5290	10.99	11	0.944	0.946	1.6
Back(PAD)	Fixed	0	106	5530	11.42	11.5	1.020	1.039	1.6
Back(PAD)	Fixed	0	122	5610	11.38	11.5	1.110	1.141	1.6
Back(PAD)	Fixed	0	138	5690	11.35	11.5	1.060	1.097	1.6
Back(PAD)	Fixed	0	155	5775	11.31	11.5	0.927	0.968	1.6
Right-Side(PAD)	Fixed	0	58	5290	10.99	11	0.376	0.377	1.6
Right-Side(PAD)	Fixed	0	106	5530	11.42	11.5	0.394	0.401	1.6
Right-Side(PAD)	Fixed	0	155	5775	11.31	11.5	0.358	0.374	1.6
Note : 1. When multiple transmission modes (802.11 n) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected									
2. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.									
3. When the reported SAR of the highest measured maximum U-NII-2A for the exposure configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.									

9.2 Simultaneous Transmission

Simultaneous Transmission Configurations	
1	WLAN 2.4GHz Main + WLAN 2.4GHz Aux
2	WLAN 2.4GHz Main + BT Aux
3	WLAN 5GHz Main + BT Aux
4	WLAN 5GHz Main + WLAN 5GHz Aux
5	WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux

9.2.1 Simultaneous transmission of MIMO in 802.11 test exclusion considerations

Frequency (GHz)	Test Position (Body)	WLAN Main SAR (W/Kg)	WLAN Aux SAR W/Kg)	Simultaneous Transmission (W/Kg)	Antenna pair in mm	Peak location separation ratio
2.4	Bottom(NB)	1.052	0.853	1.905	327	0.008
2.4	Back(PAD)	0.999	1.067	2.066	327	0.009
2.4	Left/Right(PAD)	0.462	0.478	0.940	N/A	N/A
2.4	Top(PAD)	0.122	0.161	0.283	N/A	N/A
5	Bottom(NB)	1.080	0.845	1.925	327	0.008
5	Back(PAD)	1.149	1.141	2.290	327	0.011
5	Left/Right(PAD)	0.488	0.401	0.889	N/A	N/A

Note : The sum of value is less than 1.6W/Kg or the ratio is determined by $(SAR1 + SAR2)^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for SAR test exclusion.

9.2.2 simultaneous transmission of Wi-Fi and other wireless technologies

When the sum of SAR is larger than the limit, The ratio is determined by $(SAR1 + SAR2)^{1.5/R_i}$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. The estimation result as below:

For DTS Band:

Mode	WLAN Main SAR (W/Kg)	BT SAR (W/Kg)	Simultaneous Transmission (W/Kg)	Antenna pair in mm	Peak location separation ratio
Bottom(NB)	1.052	0.137	1.189	N/A	N/A
Back(PAD)	0.999	0.247	1.246	N/A	N/A

The sum of value is less than 1.6W/Kg, thus simultaneous SAR testing is not needed.

For U-NII Band:

Mode	WLAN Main SAR (W/Kg)	BT SAR (W/Kg)	Simultaneous Transmission (W/Kg)	Antenna pair in mm	Peak location separation ratio
Bottom(NB)	1.080	0.137	1.217	N/A	N/A
Back(PAD)	1.149	0.247	1.396	N/A	N/A

The sum of value is less than 1.6W/Kg, thus simultaneous SAR testing is not needed.

Mode	WLAN Main SAR (W/Kg)	WLAN Aux SAR (W/Kg)	BT SAR (W/Kg)	Simultaneous Transmission (W/Kg)	Antenna pair in mm	Peak location separation ratio
Bottom(NB)	1.080	0.845	0.137	2.062	327	0.009
Back(PAD)	1.149	1.141	0.247	2.537	327	0.012

The ratio of value is less than 0.04, thus simultaneous SAR testing is not needed.

10. SAR measurement variability

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency		SAR 1g (W/kg)						
Channel	MHz	Original	First Repeated		Second Repeated		Third Repeated	
			Value	Ratio	Value	Ratio	Value	Ratio
6	2437	1.050	1.030	1.019	N/A	N/A	N/A	N/A
155	5775	1.120	1.080	1.037	N/A	N/A	N/A	N/A

Appendix

Appendix A. SAR System Check Data

Appendix B. SAR measurement Data

Appendix C. Test Setup Photographs & EUT Photographs

Appendix D. Probe Calibration Data

Appendix E. Dipole Calibration Data

Appendix A. SAR System Check Data

Test Laboratory: DEKRA

Date/Time: 2020/11/23

System Performance Check_2450MHz-Head

DUT: Dipole 2450 MHz; Type: D2450V2

Communication System: UID 0, CW; Frequency: 2450 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 38.89$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/2450MHz_Body/Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 15.8 W/kg

Configuration/2450MHz_Body/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.38 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 24.2 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.8 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

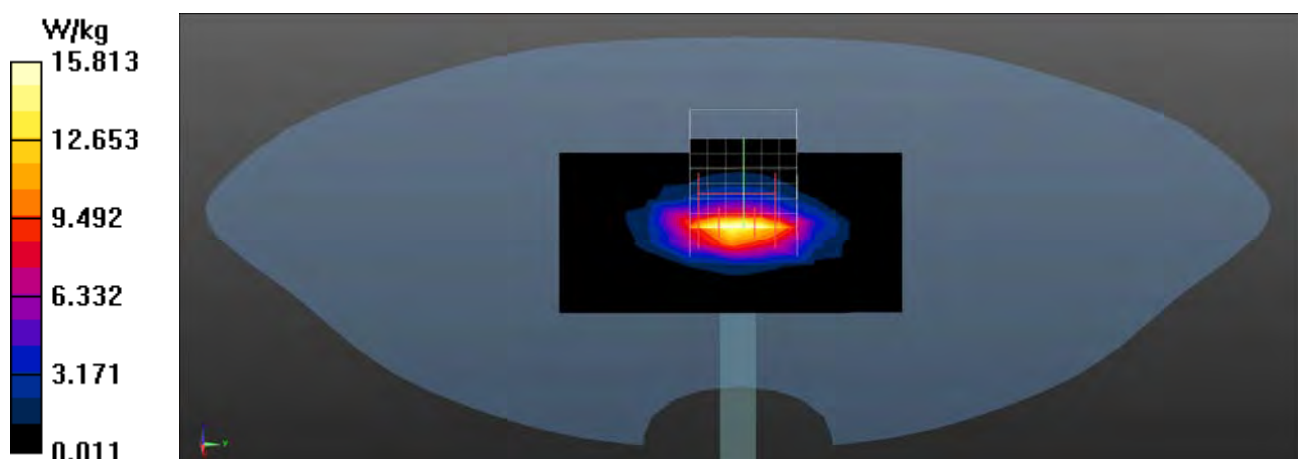

Test Laboratory: DEKRA

Date/Time: 2020/11/19

System Performance Check_5250MHz-Head**DUT: Dipole 5GHz; Type: D5GHzV2**

Communication System: UID 0, CW; Frequency: 5250 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 35.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.34, 5.34, 5.34); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/5250MHz_Body/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.4 W/kg


Configuration/5250MHz_Body/Zoom Scan (7x7x12), dist=1.4mm (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 74.48 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 26.7 W/kg

SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 21.7 W/kg

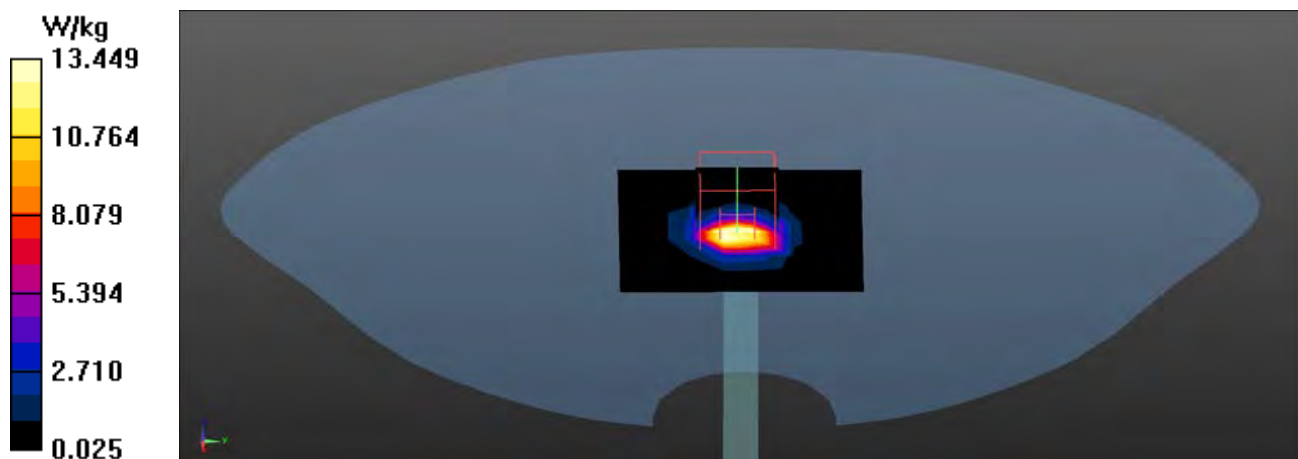

Test Laboratory: DEKRA

Date/Time: 2020/11/19

System Performance Check_5600MHz-Head**DUT: Dipole 5GHz; Type: D5GHzV2**

Communication System: UID 0, CW; Frequency: 5600 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 34.82$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.76, 4.76, 4.76); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/5600MHz_Body/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.1 W/kg


Configuration/5600MHz_Body/Zoom Scan (7x7x12), dist=1.4mm (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 70.98 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 29.9 W/kg

SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 21.2 W/kg

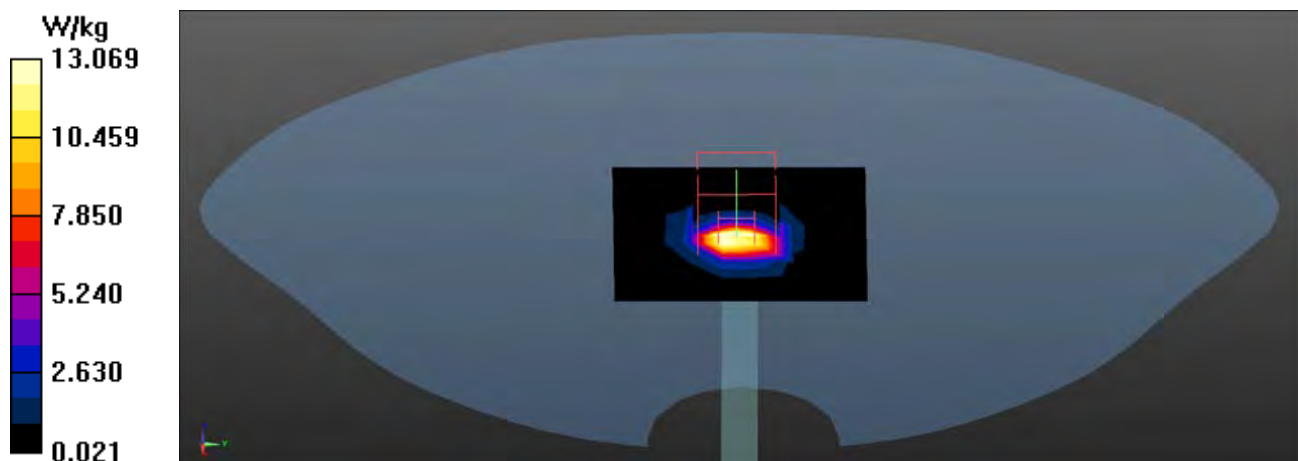

Test Laboratory: DEKRA

Date/Time: 2020/11/19

System Performance Check_5800MHz-Head**DUT: Dipole 5GHz; Type: D5GHzV2**

Communication System: UID 0, CW; Frequency: 5800 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.42$ S/m; $\epsilon_r = 34.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.79, 4.79, 4.79); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/5800MHz_Body/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 14.7 W/kg


Configuration/5800MHz_Body/Zoom Scan (7x7x12), dist=1.4mm (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 72.46 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 32.8 W/kg

SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

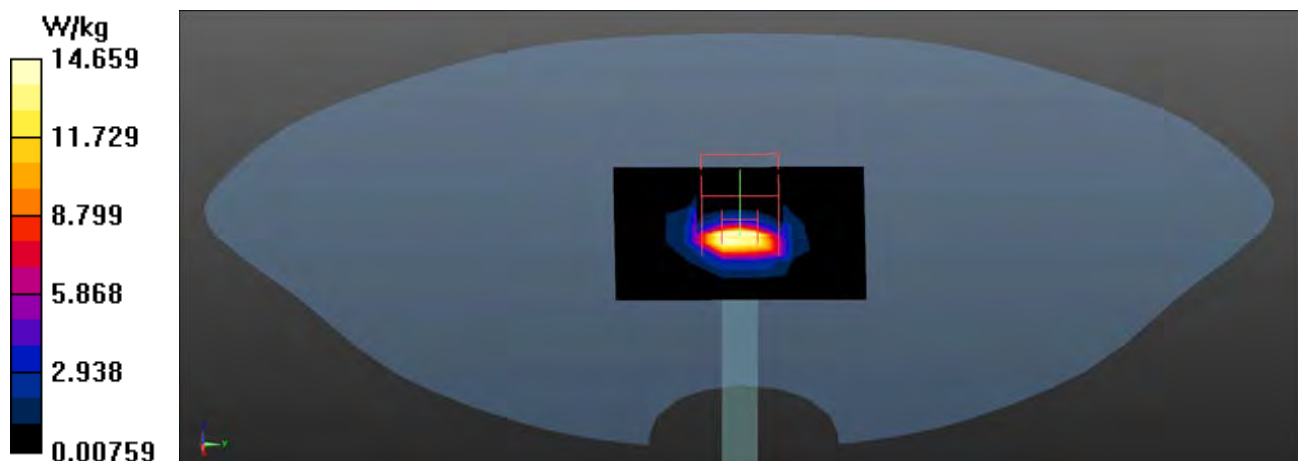

Appendix B. SAR measurement Data

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_1-Bottom(NB) Main-AWAN

DUT: Chromebook; Type: CM5500FDA

Communication System: UID 0, WLAN 2.4G; Frequency: 2412 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 39.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.43 W/kg


Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.141 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.539 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

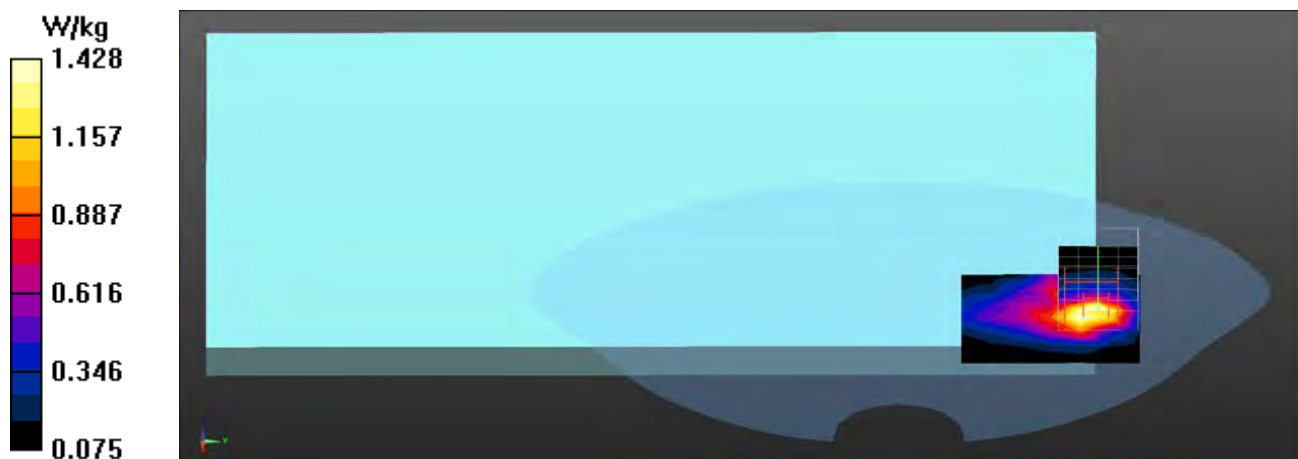

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_6-Bottom(NB) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2437 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.59 W/kg

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.300 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 2.29 W/kg
SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.544 W/kg
Maximum value of SAR (measured) = 1.78 W/kg

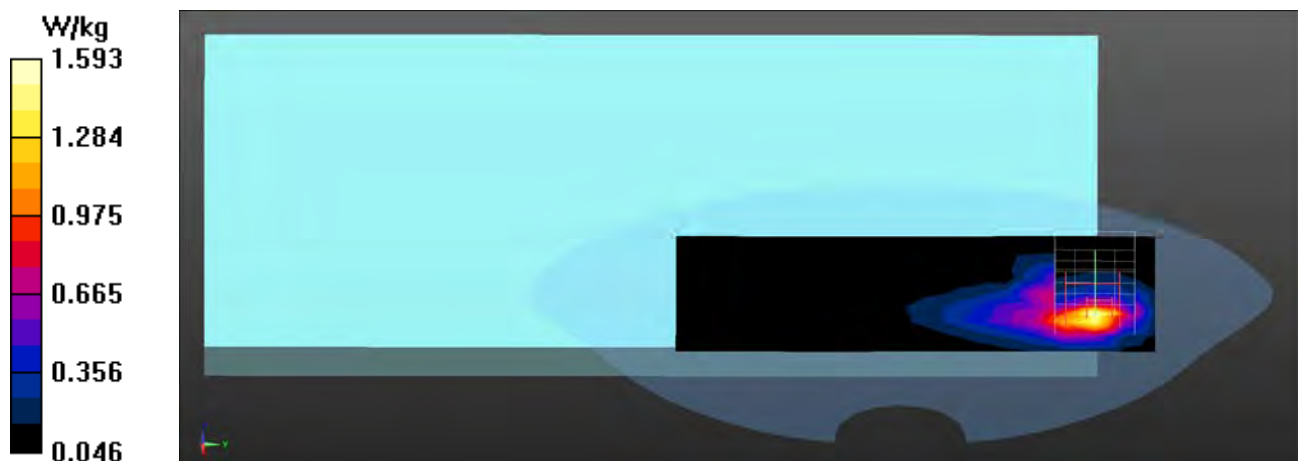

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_11-Bottom(NB) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2462 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.56 W/kg

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.911 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.502 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

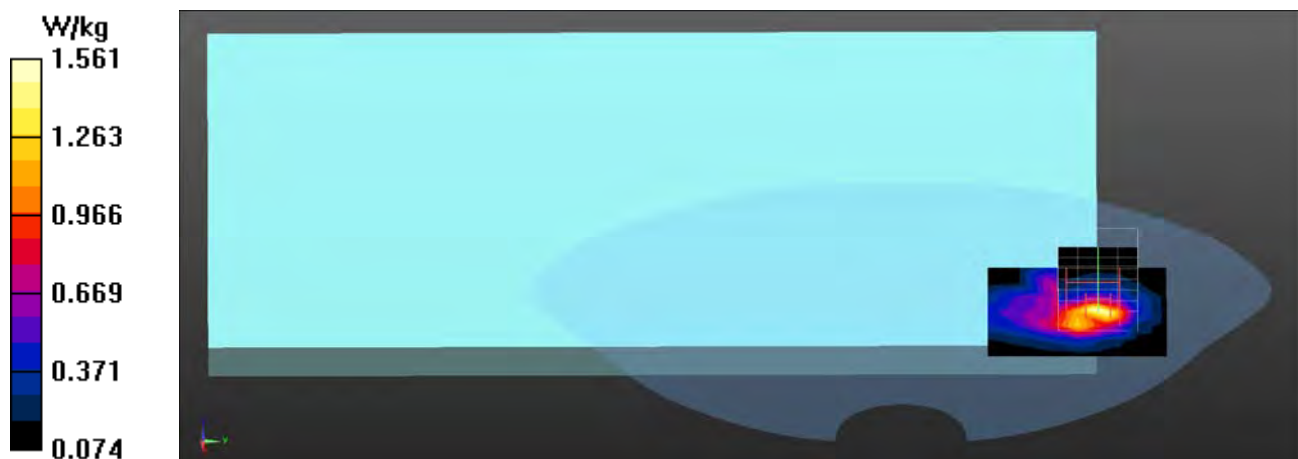

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_1-Back(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2412 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 39.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.21 W/kg

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.644 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.368 W/kg

Maximum value of SAR (measured) = 1.78 W/kg

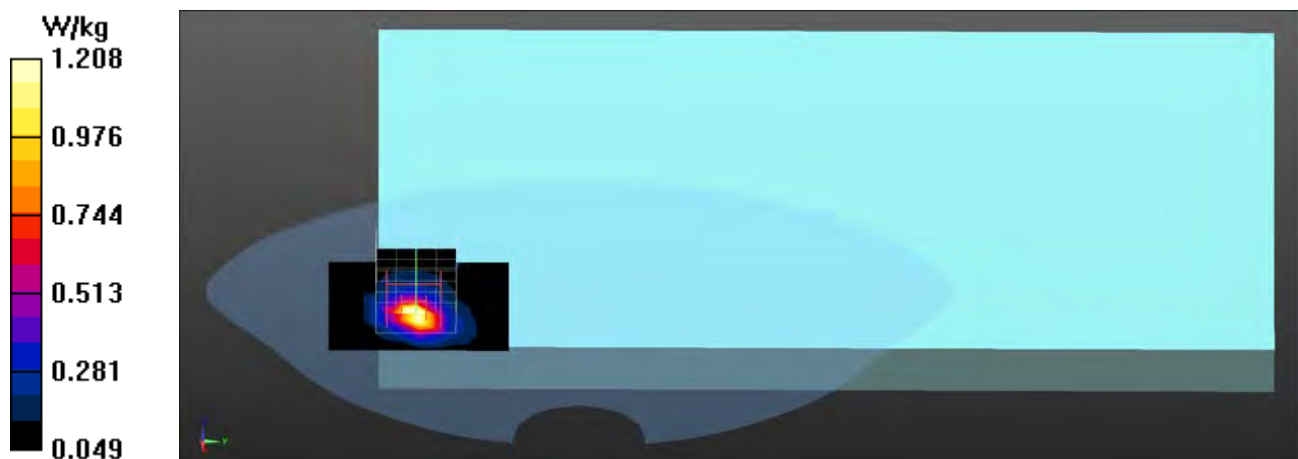

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_6-Back(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2437 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.20 W/kg**Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.526 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 0.997 W/kg; SAR(10 g) = 0.421 W/kg

Maximum value of SAR (measured) = 1.99 W/kg

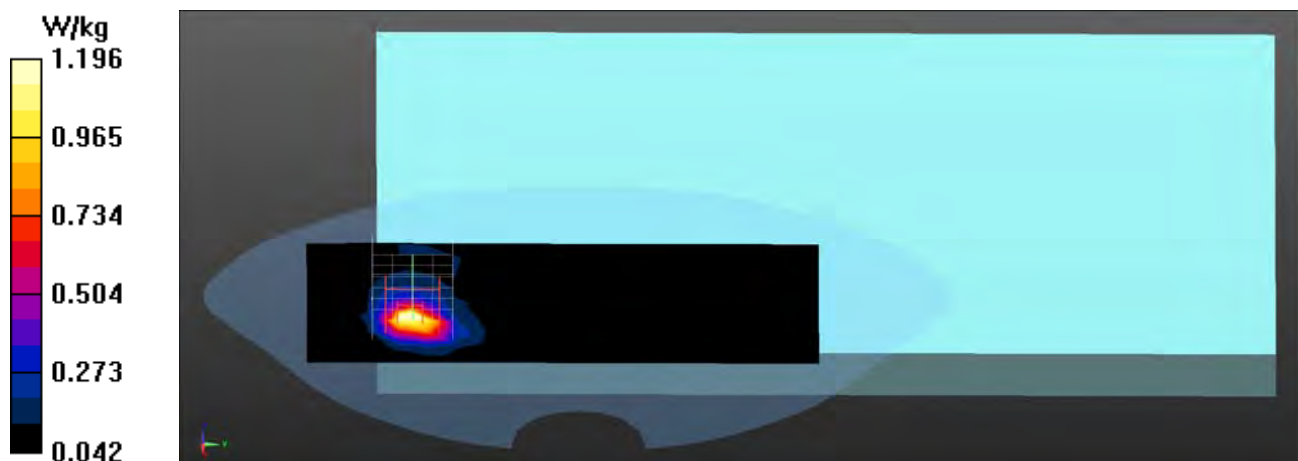

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_11-Back(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2462 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.16 W/kg

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.553 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.359 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

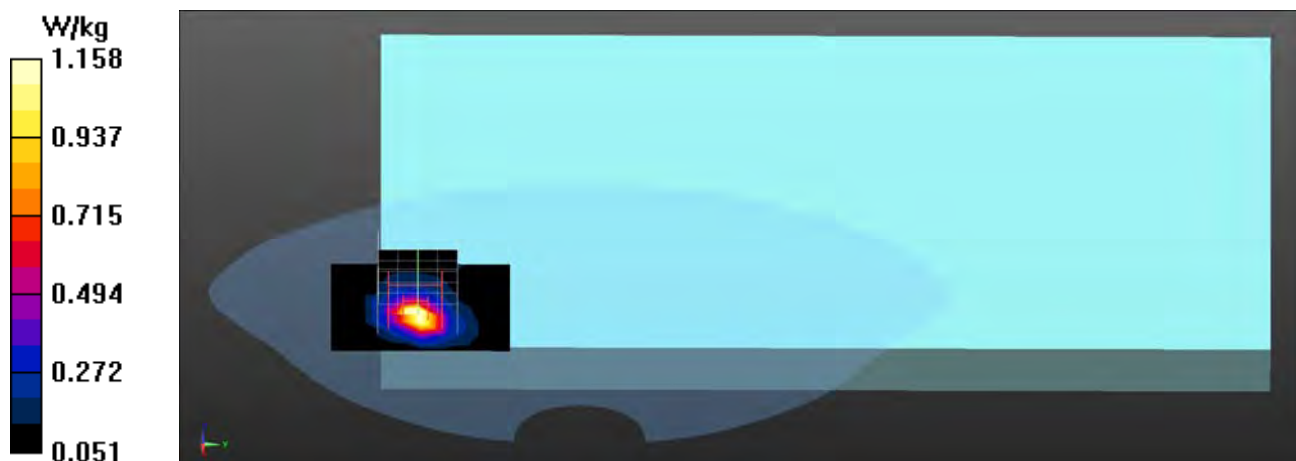

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_6-Left-Side(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2437 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.665 W/kg**Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.20 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.766 W/kg

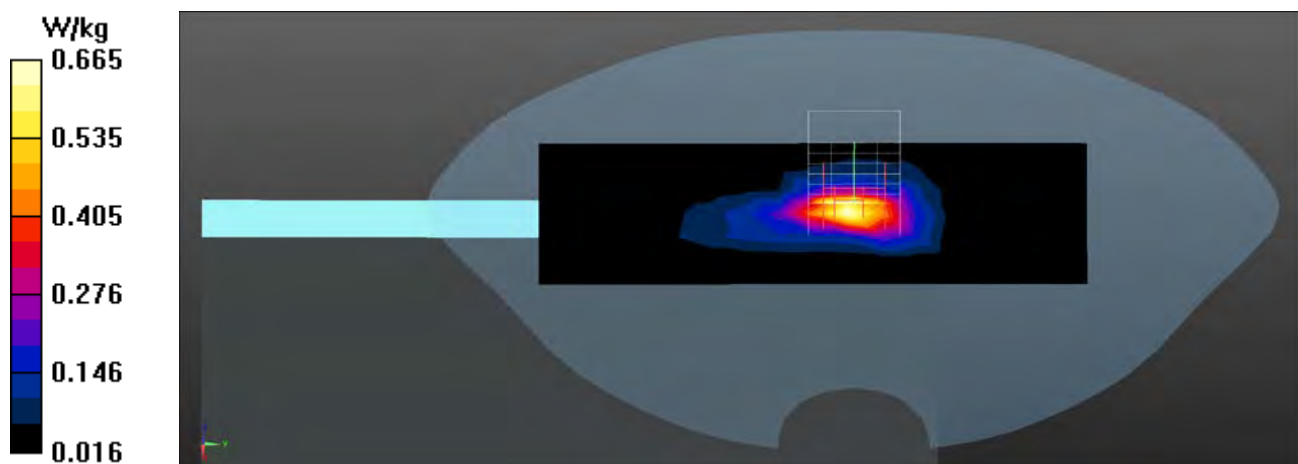

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_6-Top(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2437 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.160 W/kg**Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.016 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

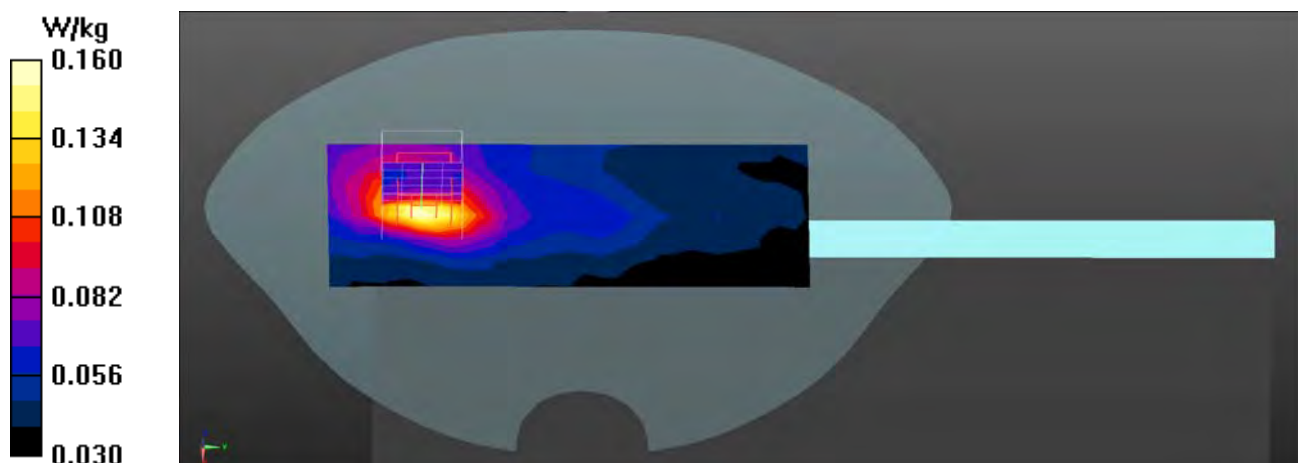

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_2-Bottom(NB) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2417 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2417$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 39.01$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.962 W/kg

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.393 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

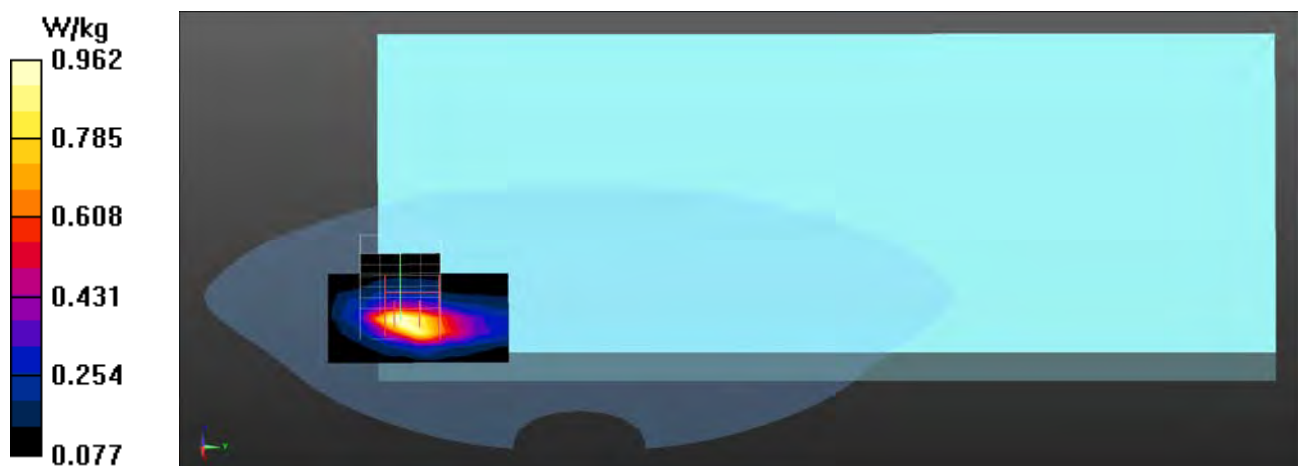

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_6-Bottom(NB) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2437 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.24 W/kg**Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.643 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.438 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

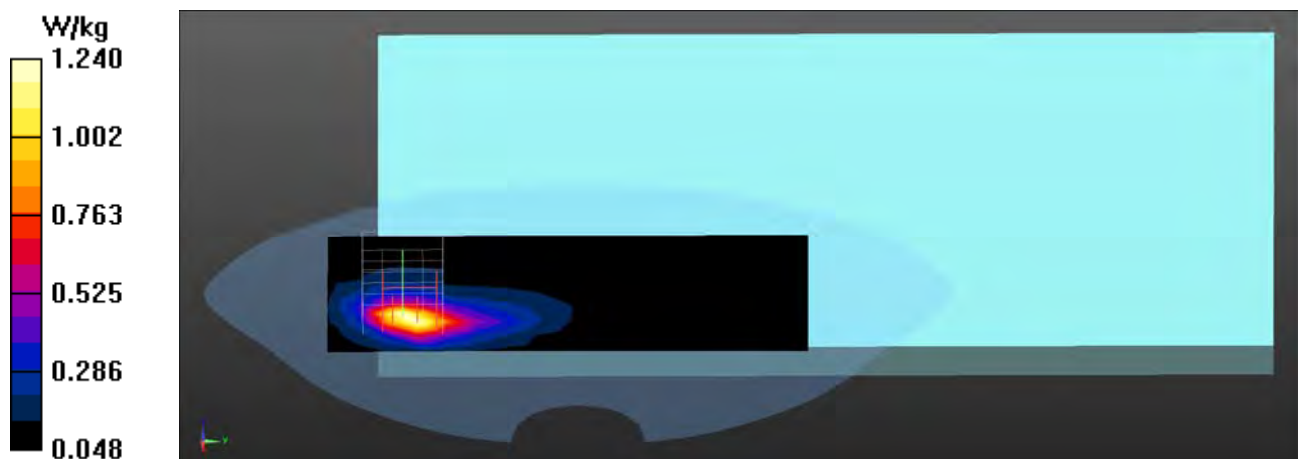

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_10-Bottom(NB) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2457 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2457$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 38.86$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.24 W/kg

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.958 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.454 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

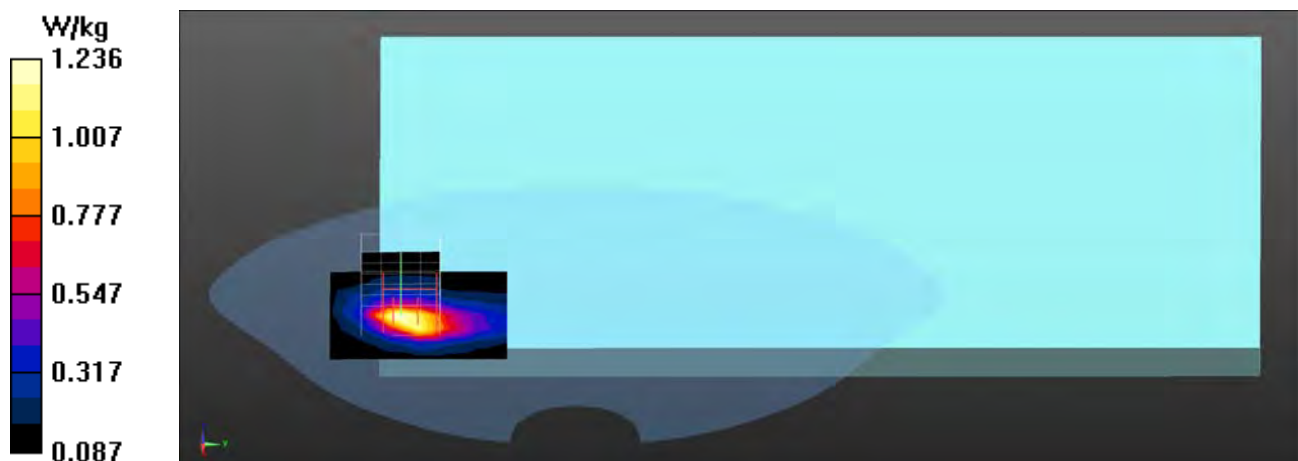

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_1-Back(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2412 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 39.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.61 W/kg

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.119 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.84 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.442 W/kg

Maximum value of SAR (measured) = 2.08 W/kg

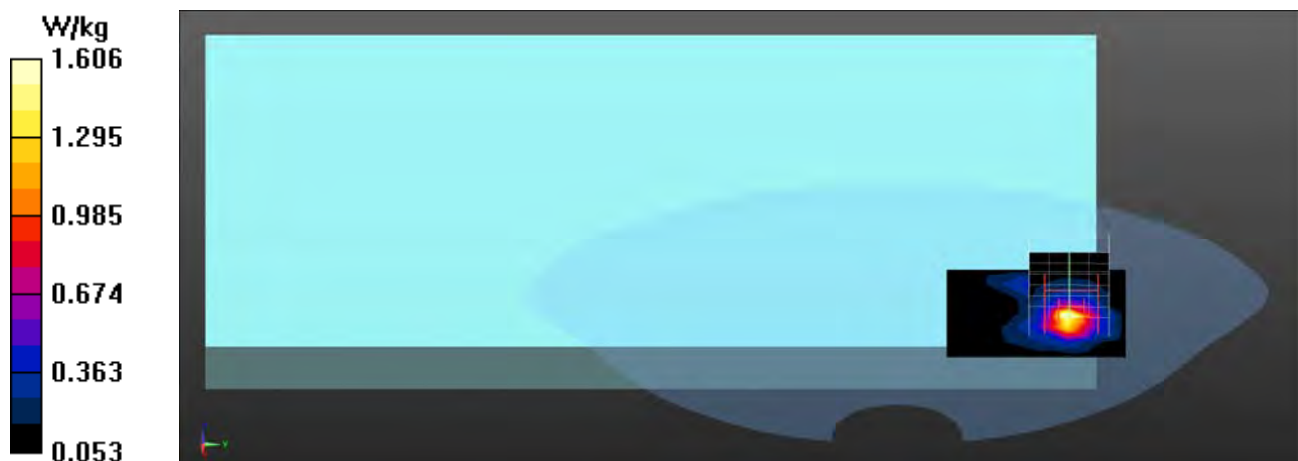

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_6-Back(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2437 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.74 W/kg**Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.974 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 0.991 W/kg; SAR(10 g) = 0.420 W/kg

Maximum value of SAR (measured) = 1.93 W/kg

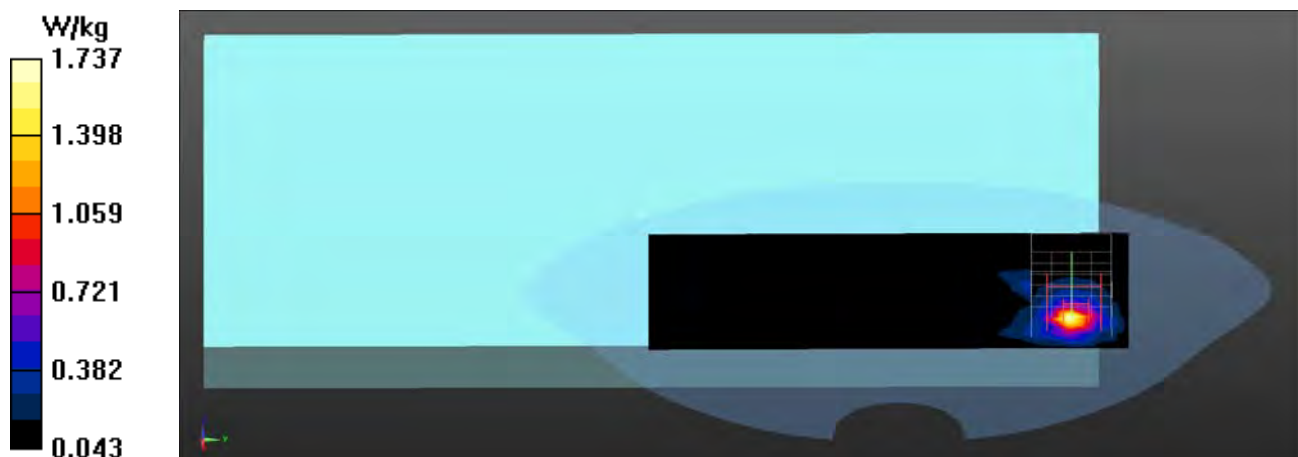

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_11-Back(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2462 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.59 W/kg

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.767 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.79 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.428 W/kg

Maximum value of SAR (measured) = 2.02 W/kg

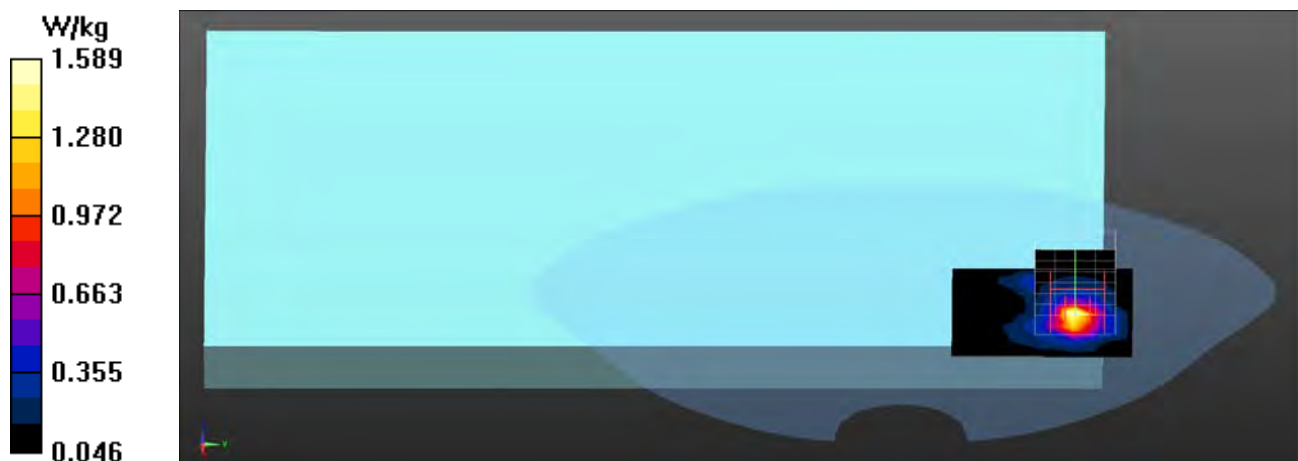

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_6-Right-Side(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2437 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.681 W/kg**Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.55 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.731 W/kg

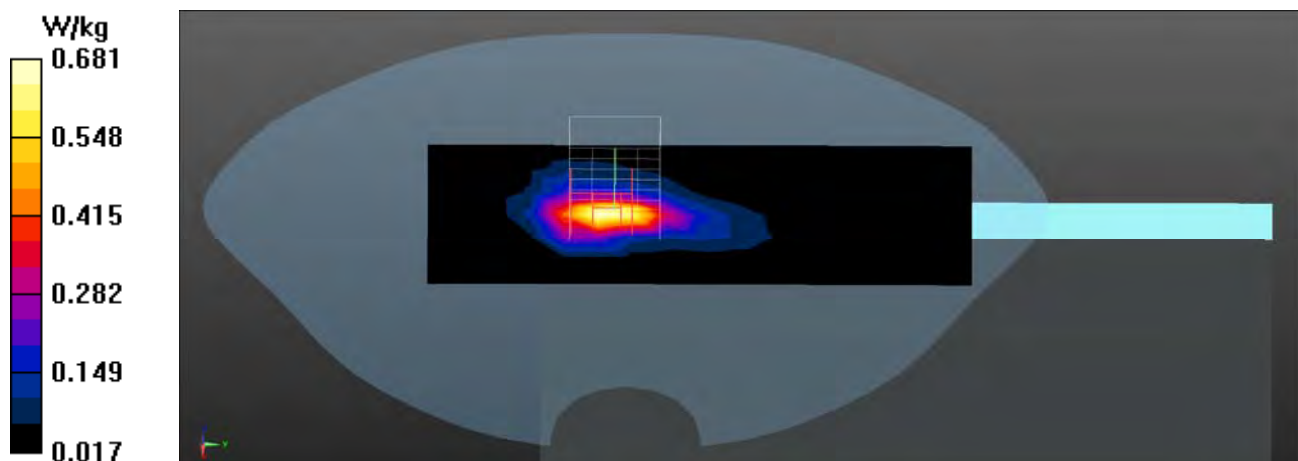

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_6-Top(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 2.4G; Frequency: 2437 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.203 W/kg**Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.421 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.240 W/kg

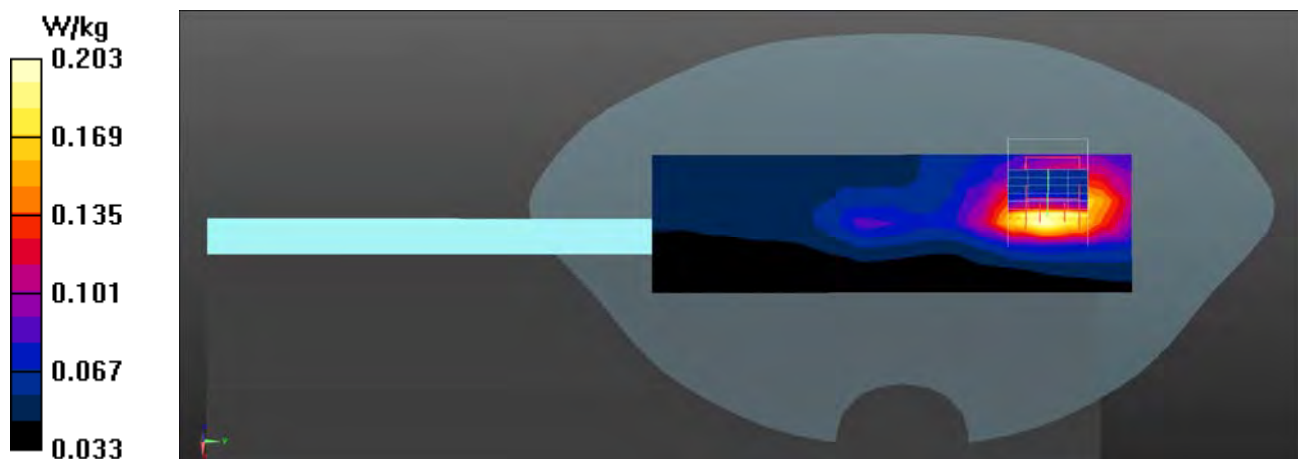

Test Laboratory: DEKRA

Date/Time: 2020/11/23

BT-1M_78-Bottom(NB) Aux-AWA**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2480 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.77$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.146 W/kg

Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.875 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.197 W/kg
SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.091 W/kg
Maximum value of SAR (measured) = 0.157 W/kg

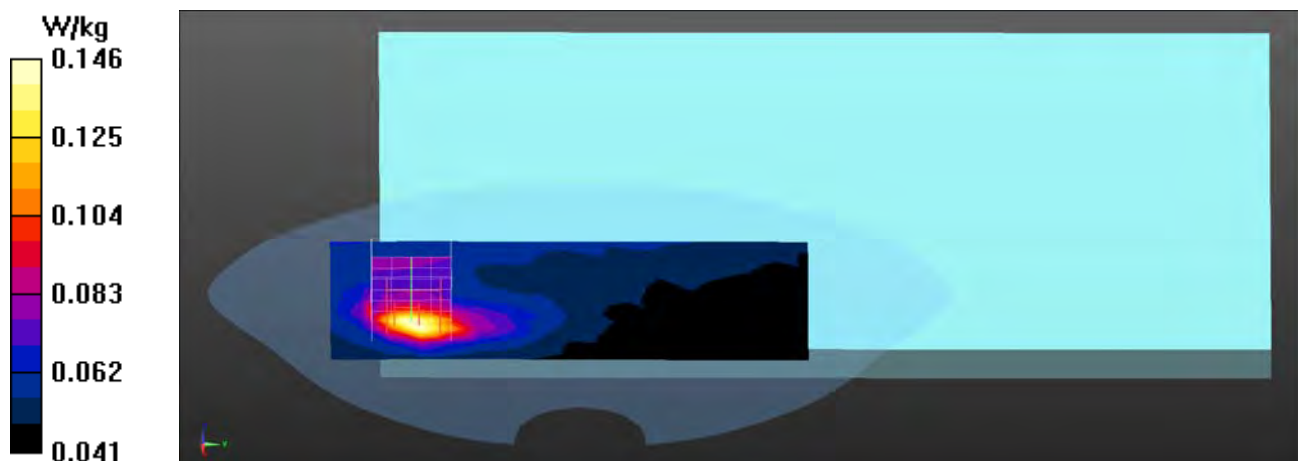

Test Laboratory: DEKRA

Date/Time: 2020/11/23

BT-1M_78-Back(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2480 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.77$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.305 W/kg


Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.693 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.516 W/kg


SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

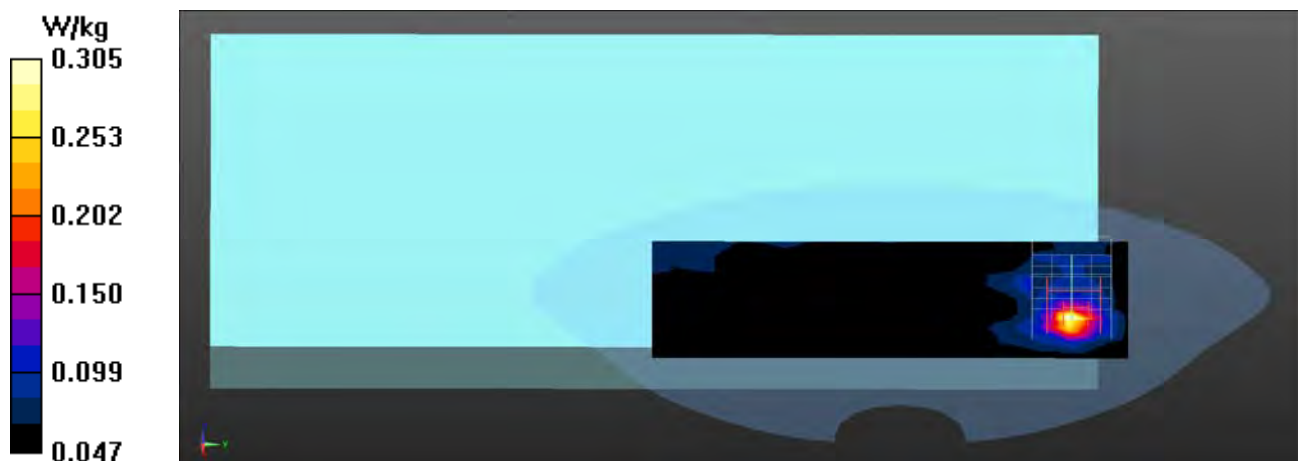

802.11b EUT Back(PAD) (AWAN Aux Antenna) Z-Axis plot

Channel: 1

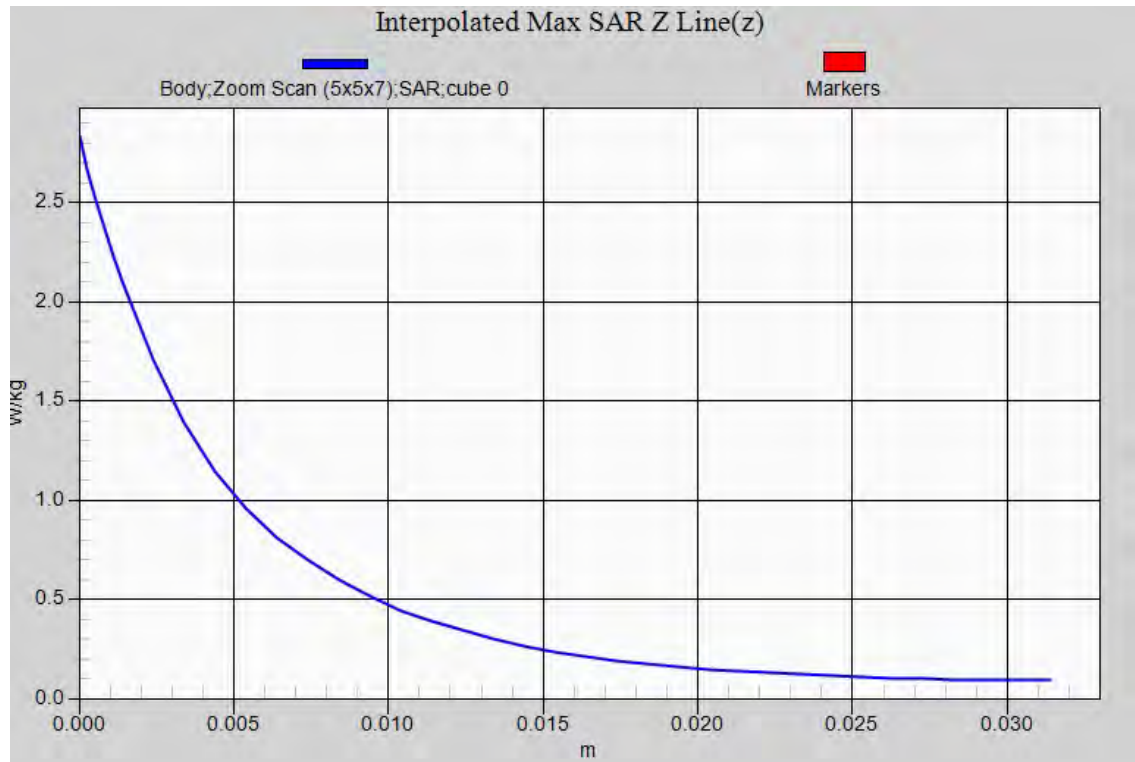

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11n40M_38-Bottom(NB) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5190 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.6$ S/m; $\epsilon_r = 35.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.34, 5.34, 5.34); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.85 W/kg

Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.687 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 3.08 W/kg

SAR(1 g) = 0.990 W/kg; SAR(10 g) = 0.524 W/kg

Maximum value of SAR (measured) = 1.91 W/kg

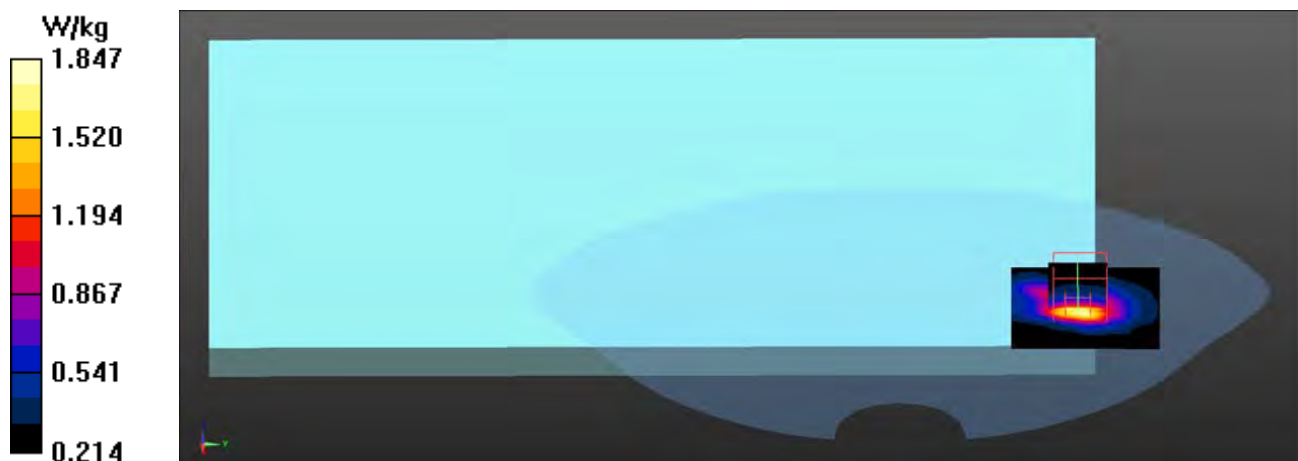

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11n40M_46-Bottom(NB) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5230 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 35.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.34, 5.34, 5.34); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.74 W/kg

Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.418 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.473 W/kg

Maximum value of SAR (measured) = 2.01 W/kg

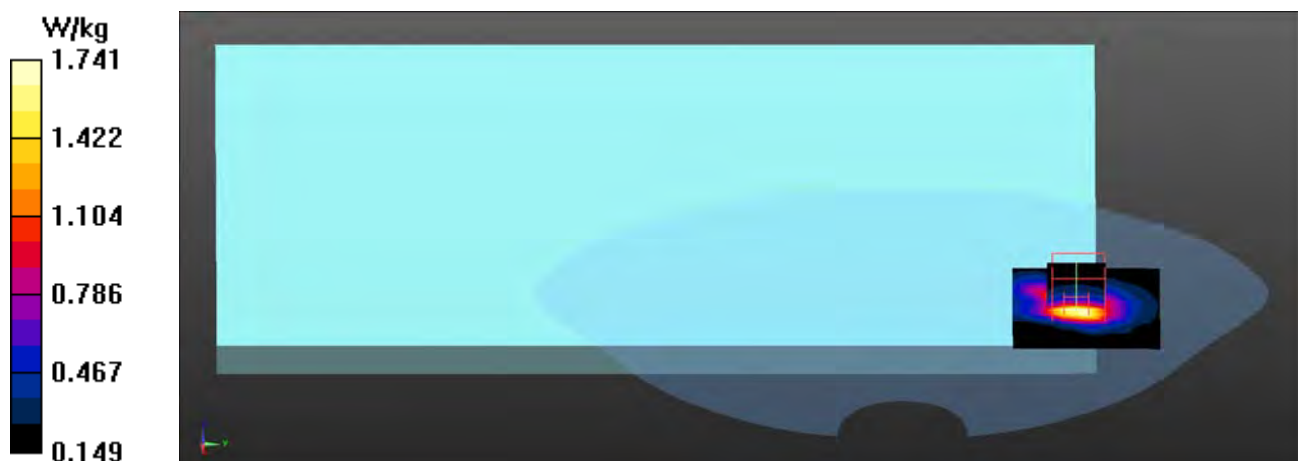

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11n40M_54-Bottom(NB) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5270 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 35.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.13, 5.13, 5.13); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (10x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.97 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.595 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.32 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.542 W/kg

Maximum value of SAR (measured) = 2.06 W/kg

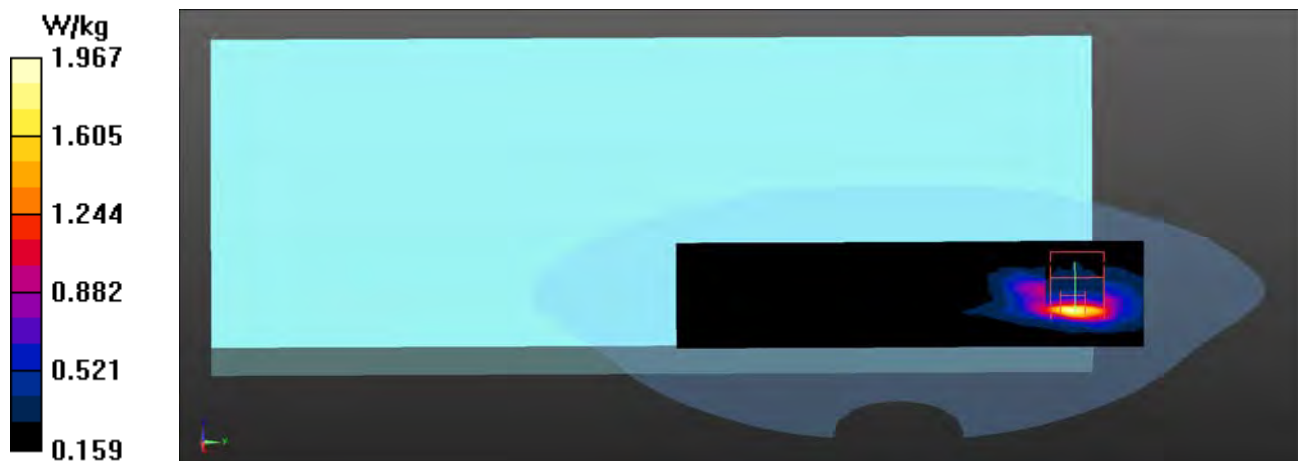

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_106-Bottom(NB) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5530 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.95, 4.95, 4.95); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.90 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.681 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.72 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.520 W/kg

Maximum value of SAR (measured) = 2.19 W/kg

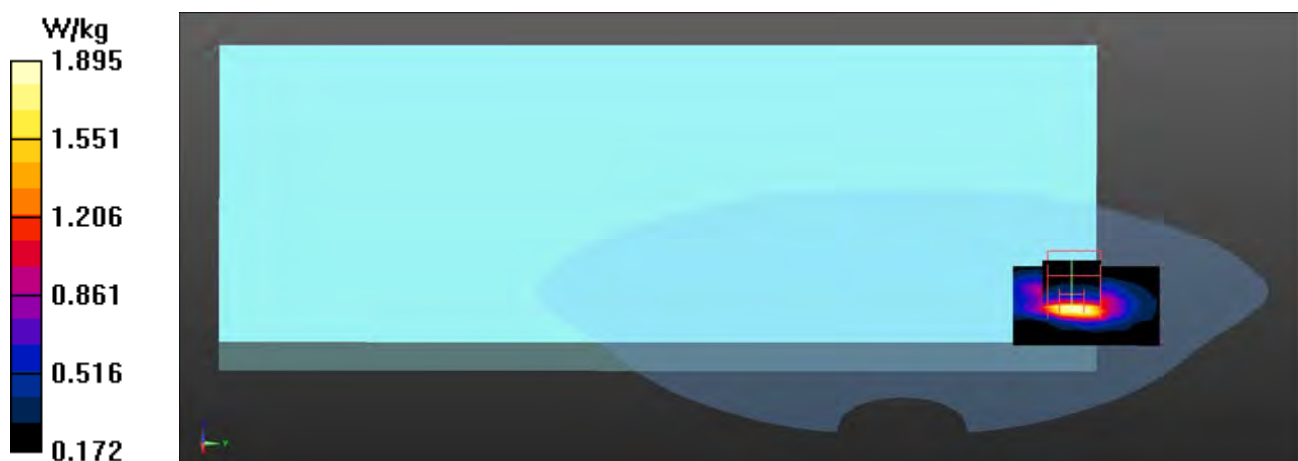

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_122-Bottom(NB) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5610 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 34.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.76, 4.76, 4.76); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.85 W/kg**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.967 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.522 W/kg

Maximum value of SAR (measured) = 2.13 W/kg

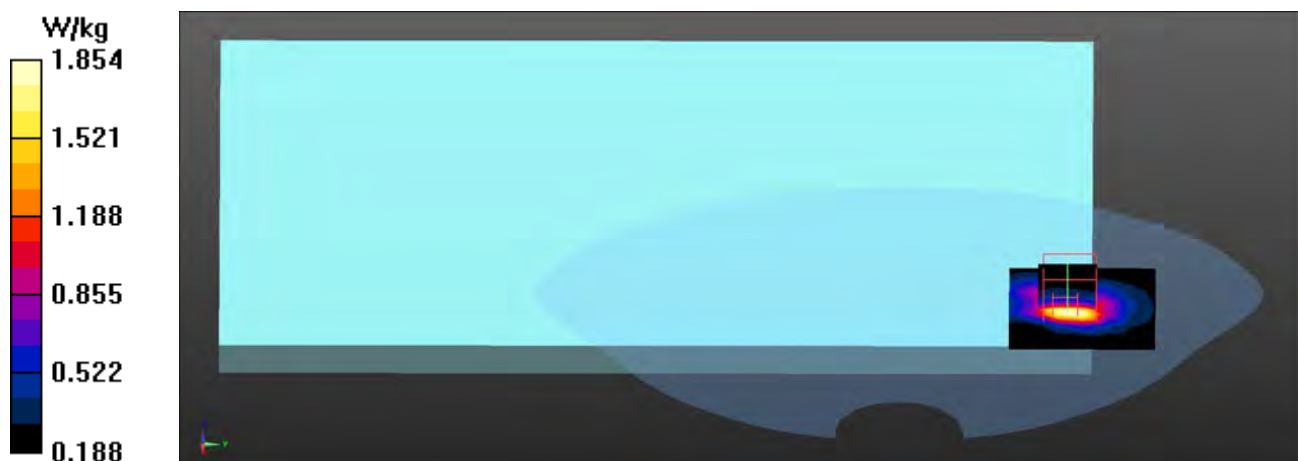

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_138-Bottom(NB) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5690 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 34.57$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.76, 4.76, 4.76); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.83 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.950 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.81 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.524 W/kg

Maximum value of SAR (measured) = 2.10 W/kg

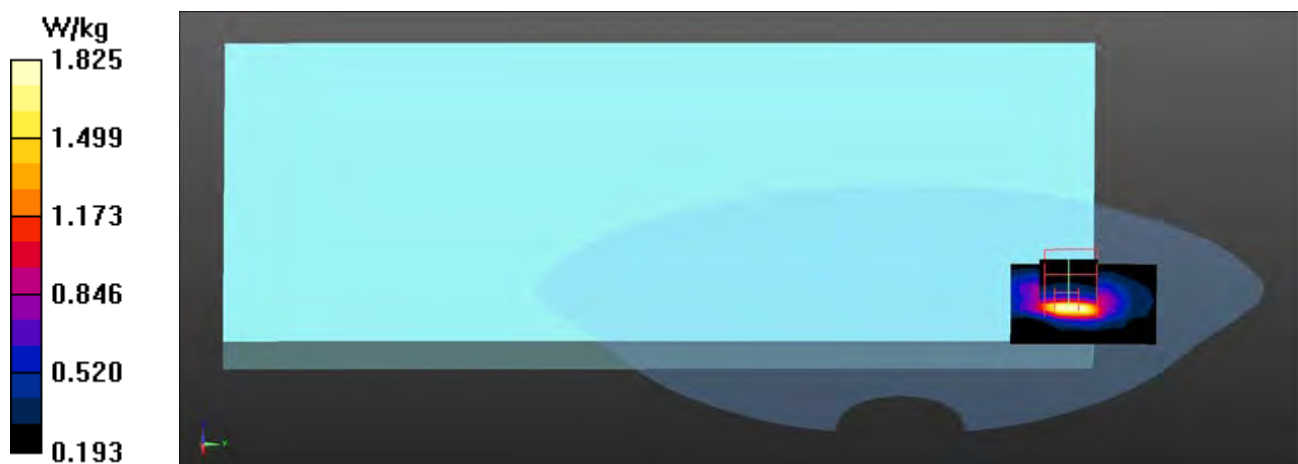

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_155-Bottom(NB) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.38$ S/m; $\epsilon_r = 34.33$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.79, 4.79, 4.79); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.82 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.705 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.79 W/kg

SAR(1 g) = 0.990 W/kg; SAR(10 g) = 0.502 W/kg

Maximum value of SAR (measured) = 2.09 W/kg

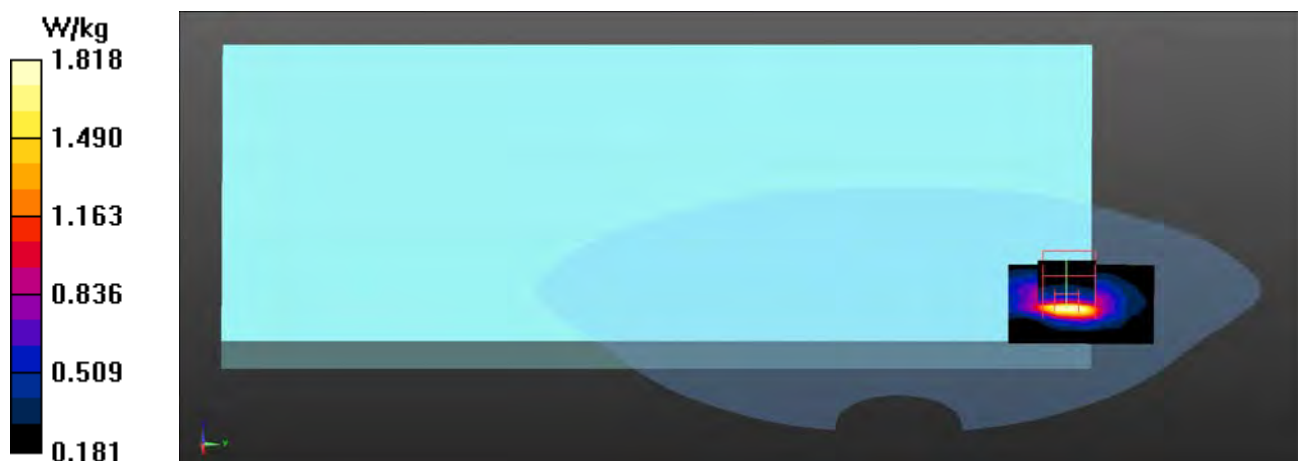

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_42-Back(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5210 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5210$ MHz; $\sigma = 4.63$ S/m; $\epsilon_r = 35.89$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.34, 5.34, 5.34); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.24 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.963 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 4.48 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.398 W/kg

Maximum value of SAR (measured) = 2.45 W/kg

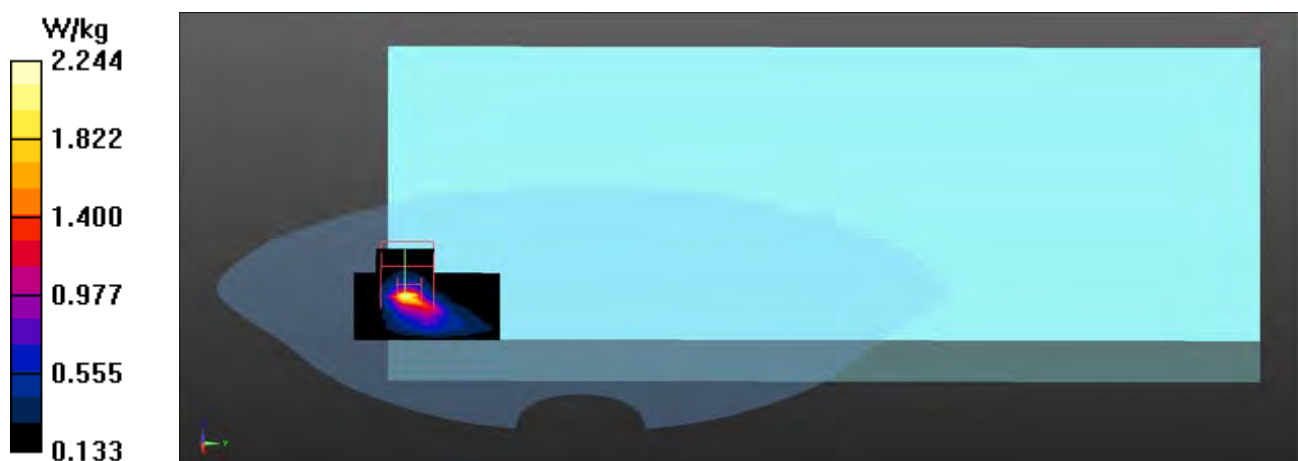

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_58-Back(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5290 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 35.67$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.13, 5.13, 5.13); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.22 W/kg**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.005 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 4.48 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.401 W/kg

Maximum value of SAR (measured) = 2.40 W/kg

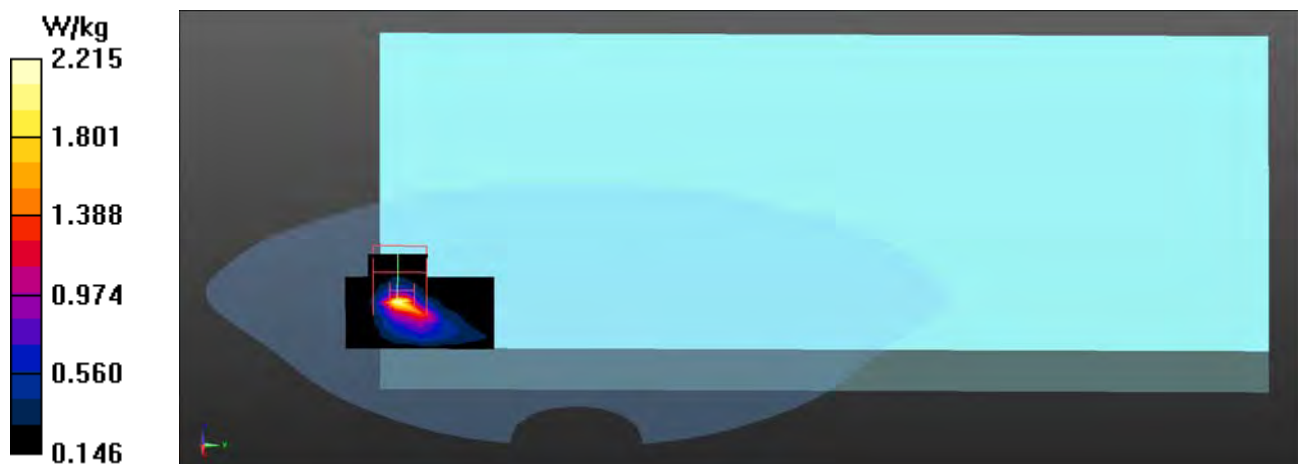

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_106-Back(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5530 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.95, 4.95, 4.95); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.15 W/kg

Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm
Reference Value = 6.087 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 5.75 W/kg
SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.430 W/kg
Maximum value of SAR (measured) = 2.46 W/kg

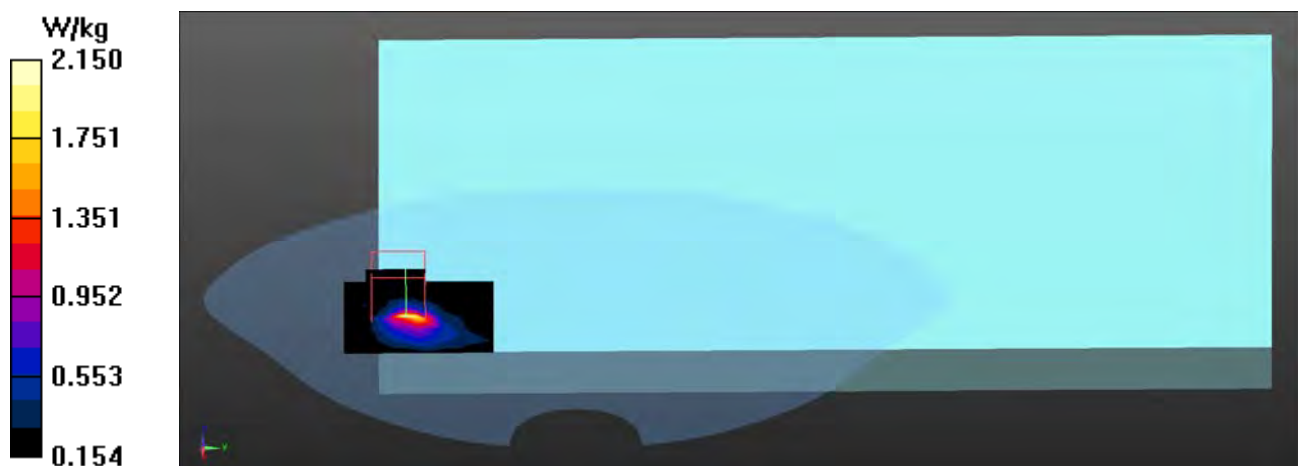

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_122-Back(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5610 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 34.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.76, 4.76, 4.76); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.22 W/kg

Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm
Reference Value = 5.979 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 6.45 W/kg
SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.439 W/kg
Maximum value of SAR (measured) = 2.67 W/kg

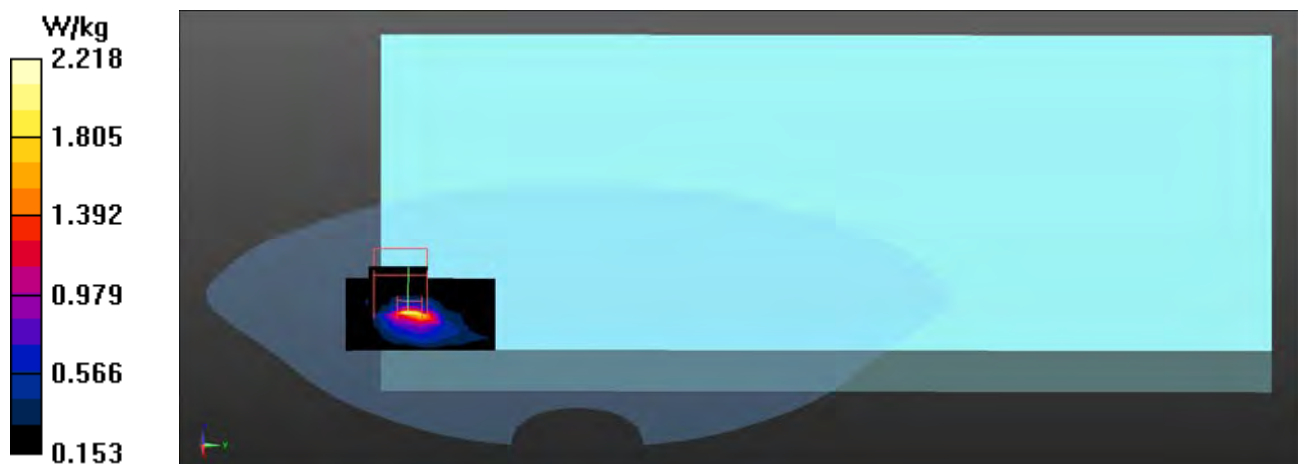

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_138-Back(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5690 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 34.57$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.76, 4.76, 4.76); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.10 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.877 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 6.63 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.433 W/kg

Maximum value of SAR (measured) = 2.68 W/kg

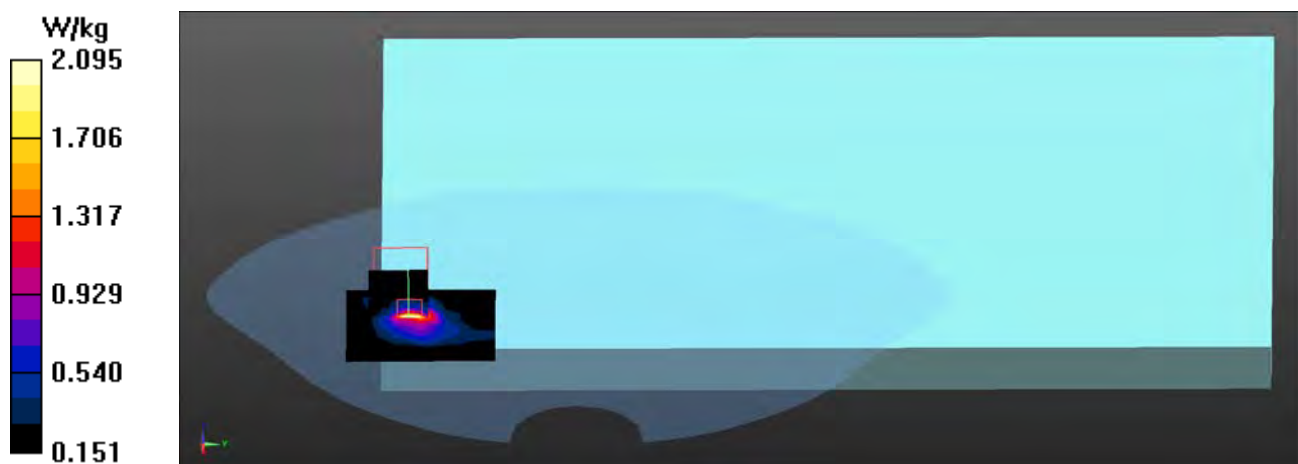

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_155-Back(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.38$ S/m; $\epsilon_r = 34.33$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.79, 4.79, 4.79); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (10x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.98 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.889 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 7.26 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.509 W/kg

Maximum value of SAR (measured) = 2.90 W/kg

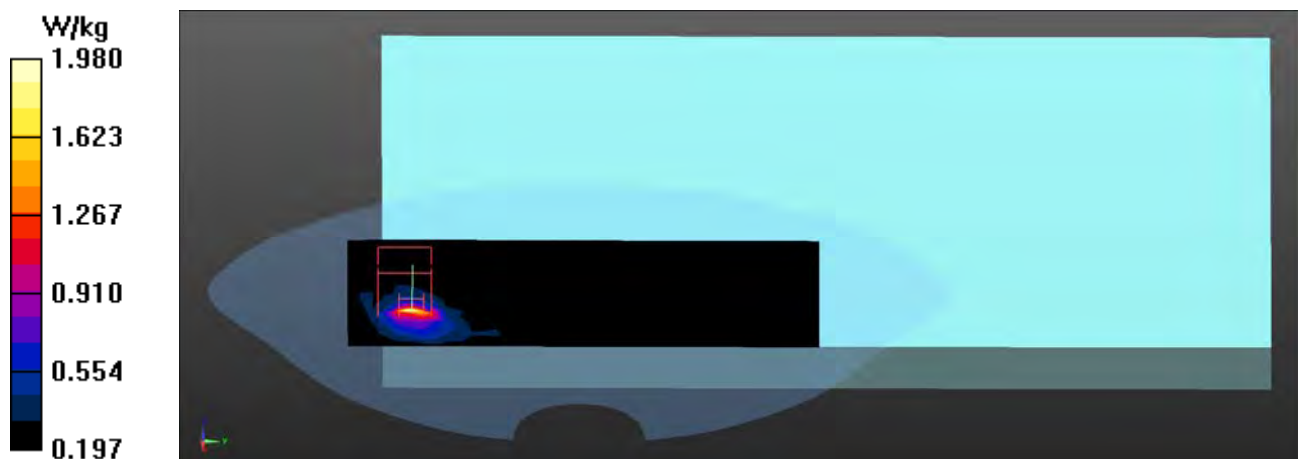

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_58-Left-Side(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5290 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 35.67$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.13, 5.13, 5.13); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.841 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.095 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.940 W/kg

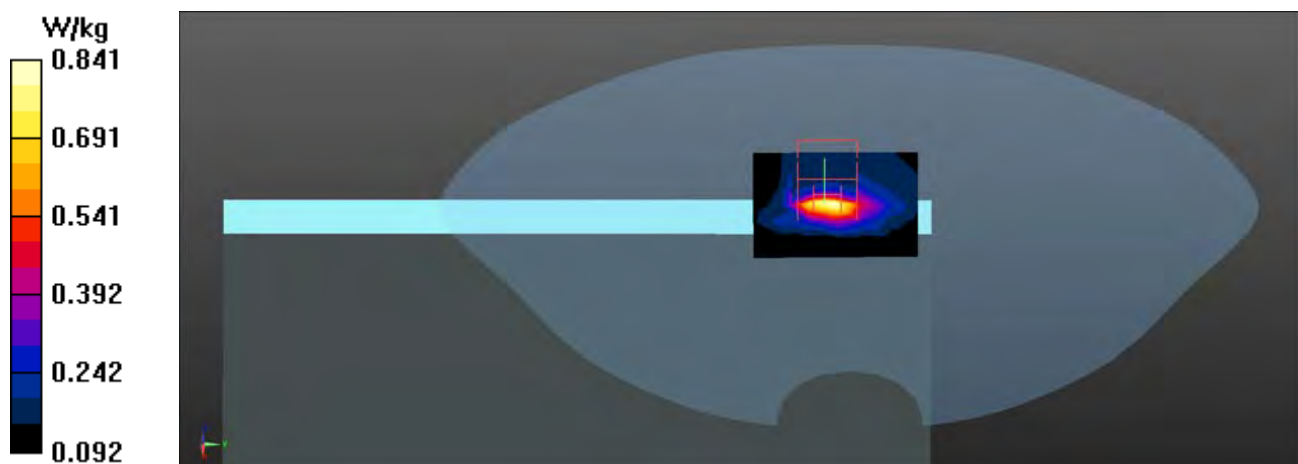

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_106-Left-Side(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5530 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.95, 4.95, 4.95); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.858 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.433 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.943 W/kg

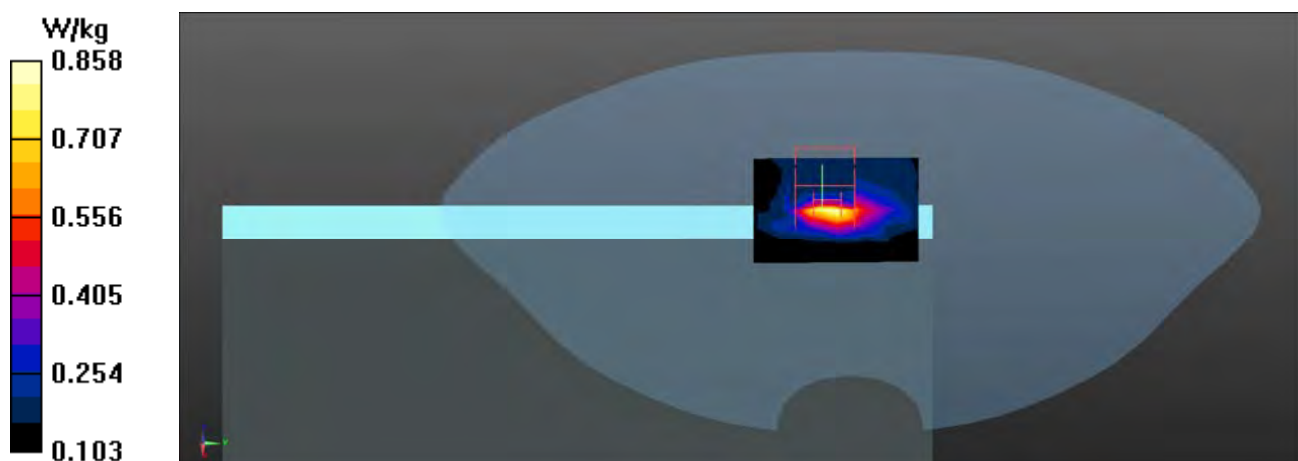

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_155-Left-Side(PAD) Main-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.38$ S/m; $\epsilon_r = 34.33$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.79, 4.79, 4.79); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.631 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.359 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.763 W/kg

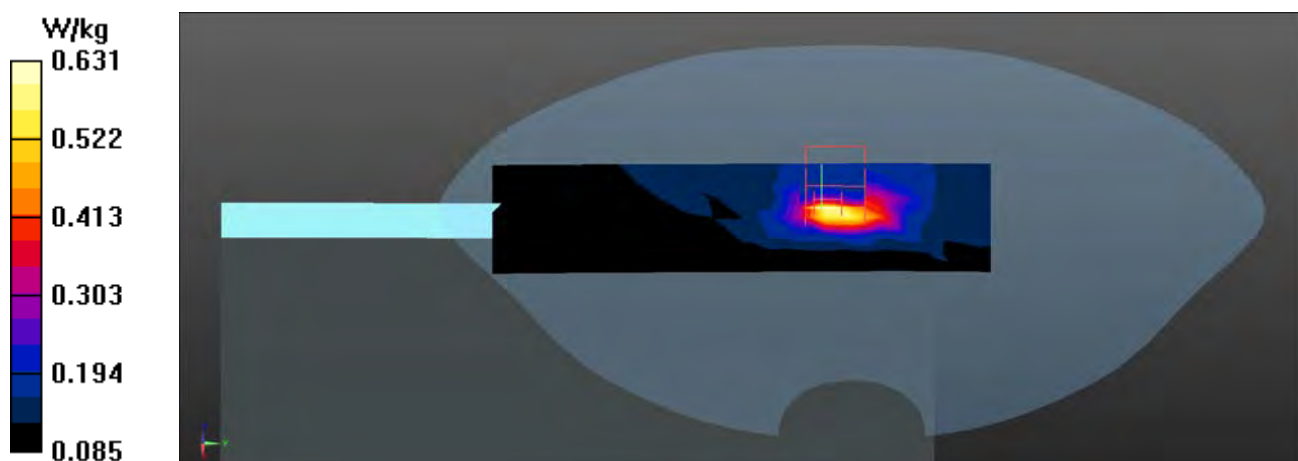

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11n40M_54-Bottom(NB) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5270 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 35.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.13, 5.13, 5.13); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (10x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.13 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.058 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.383 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

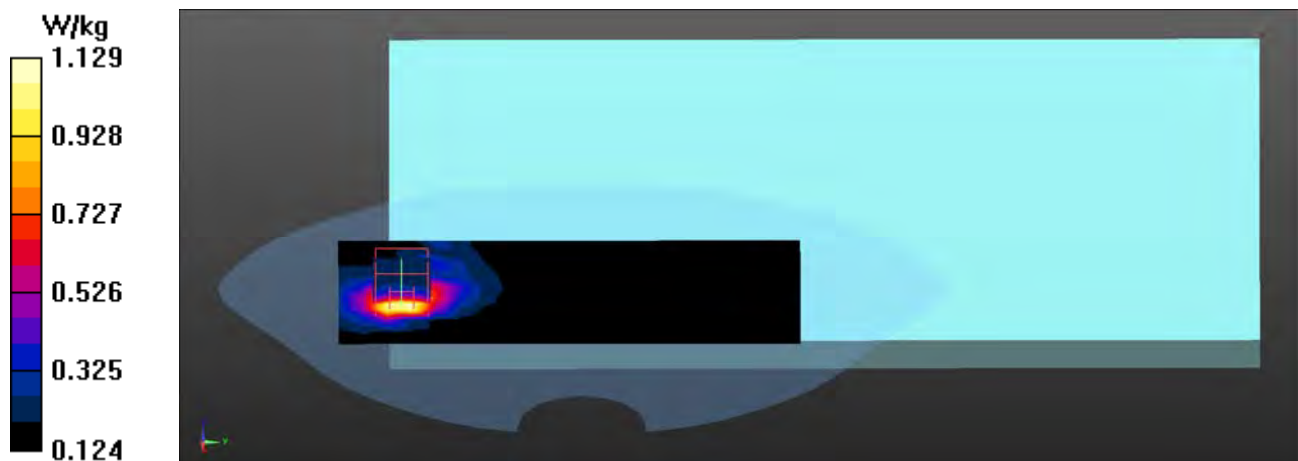

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_122-Bottom(NB) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5610 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 34.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.76, 4.76, 4.76); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.47 W/kg

Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm
Reference Value = 6.611 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 2.89 W/kg
SAR(1 g) = 0.814 W/kg; SAR(10 g) = 0.455 W/kg
Maximum value of SAR (measured) = 1.60 W/kg

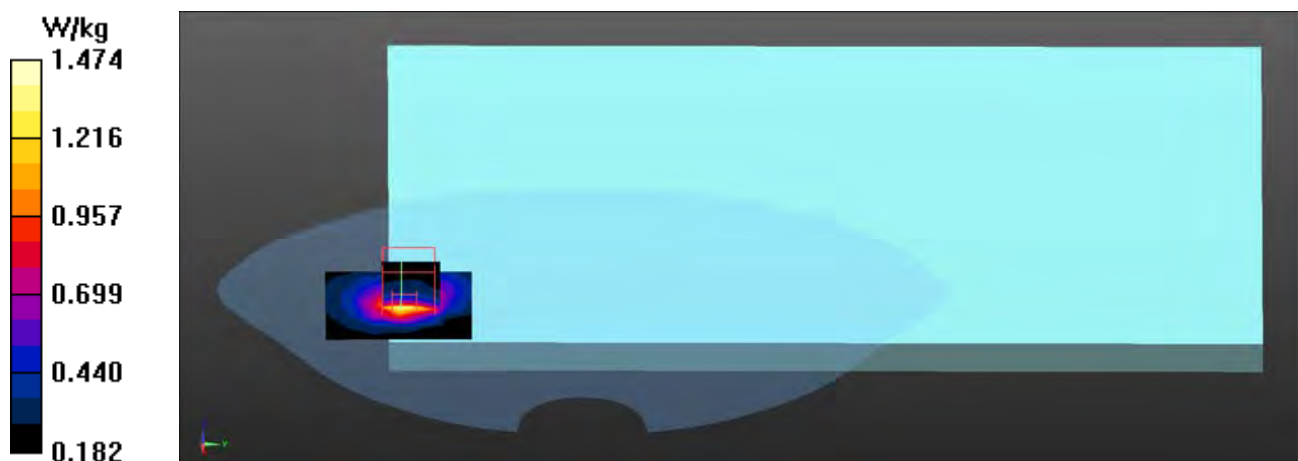

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_138-Bottom(NB) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5690 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 34.57$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.76, 4.76, 4.76); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.45 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.749 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.95 W/kg

SAR(1 g) = 0.809 W/kg; SAR(10 g) = 0.455 W/kg

Maximum value of SAR (measured) = 1.59 W/kg

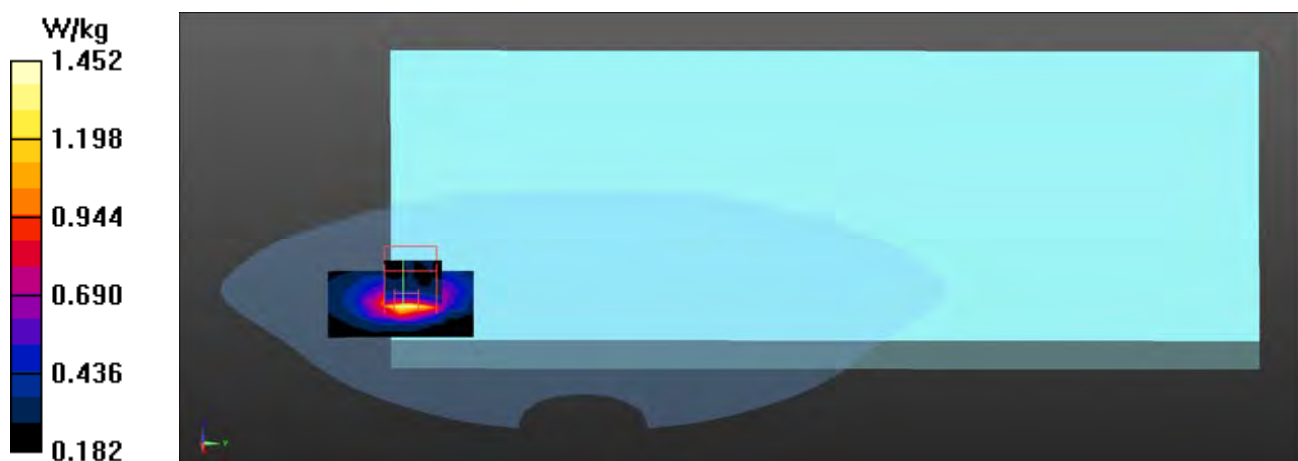

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_155-Bottom(NB) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.38$ S/m; $\epsilon_r = 34.33$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.79, 4.79, 4.79); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.48 W/kg

Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm
Reference Value = 6.699 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.09 W/kg
SAR(1 g) = 0.806 W/kg; SAR(10 g) = 0.445 W/kg
Maximum value of SAR (measured) = 1.56 W/kg

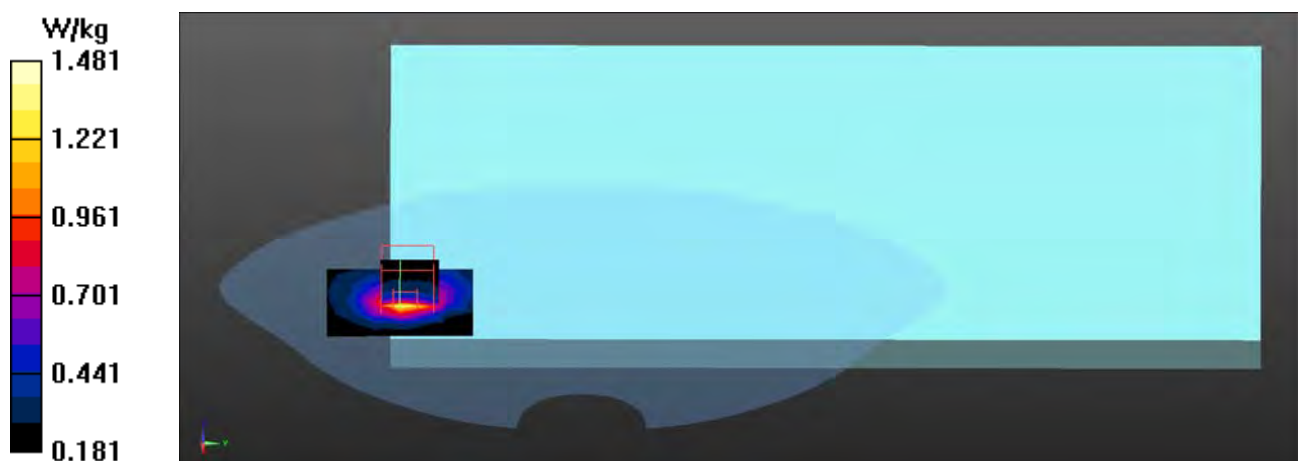

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_42-Back(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5210 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5210$ MHz; $\sigma = 4.63$ S/m; $\epsilon_r = 35.89$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.34, 5.34, 5.34); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.45 W/kg**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.163 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 4.47 W/kg

SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.407 W/kg

Maximum value of SAR (measured) = 2.28 W/kg

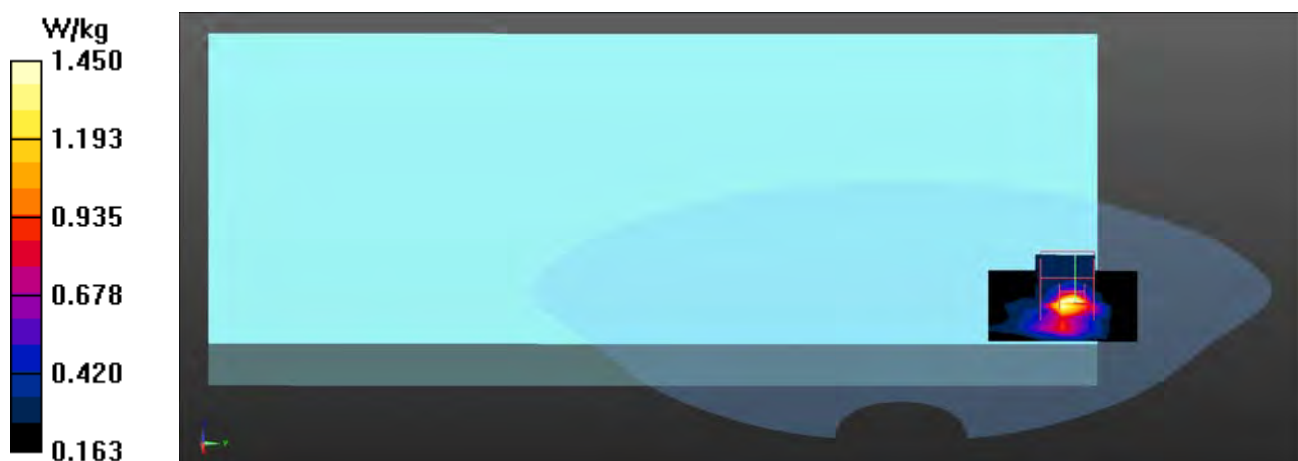

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_58-Back(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5290 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 35.67$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.13, 5.13, 5.13); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.49 W/kg

Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.238 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 4.27 W/kg

SAR(1 g) = 0.944 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 2.23 W/kg

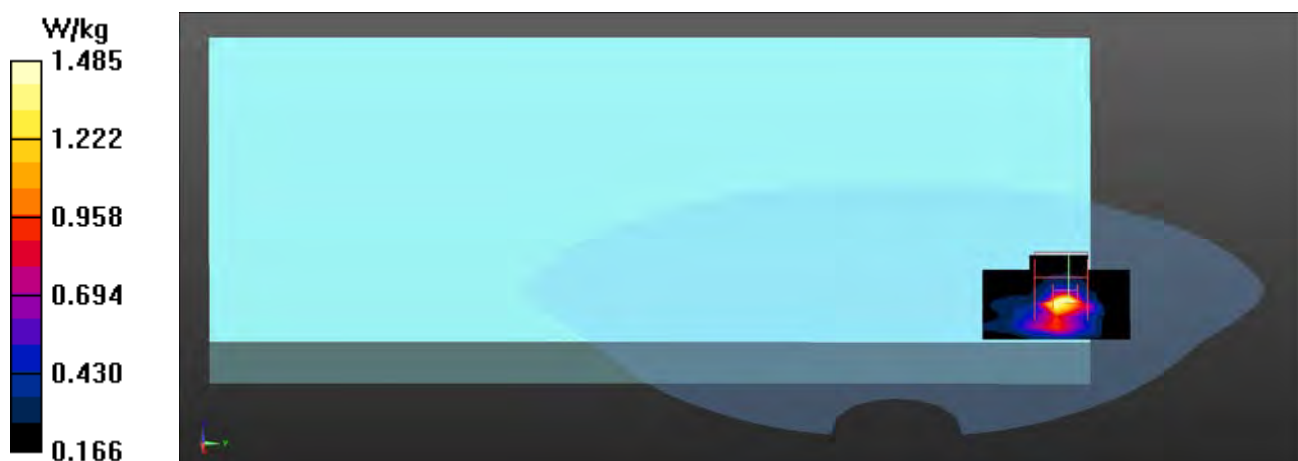

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_106-Back(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5530 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.95, 4.95, 4.95); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (10x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.52 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.234 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 5.03 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.416 W/kg

Maximum value of SAR (measured) = 2.35 W/kg

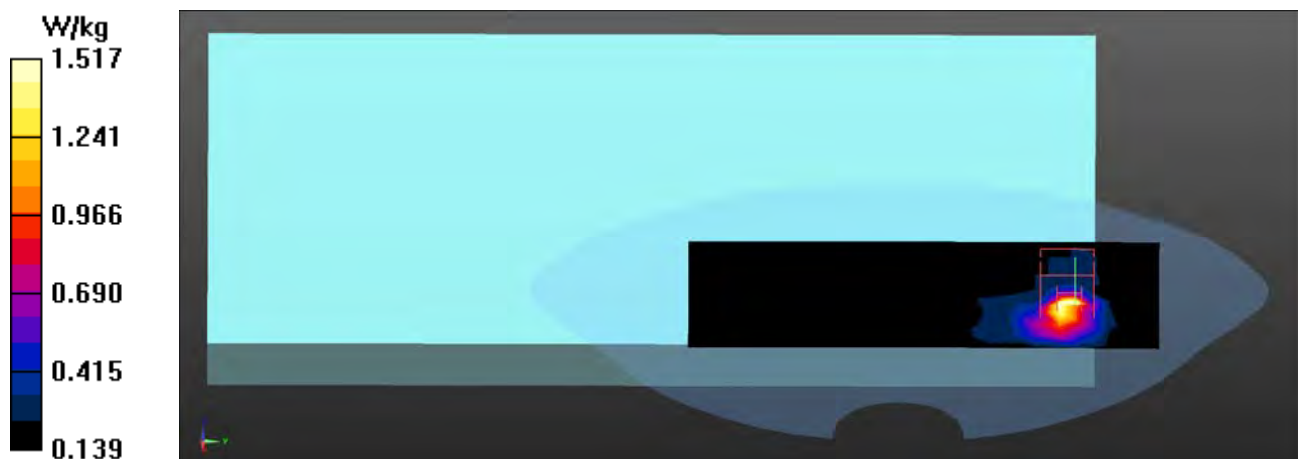

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_122-Back(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5610 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 34.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.76, 4.76, 4.76); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.74 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.420 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 5.88 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.479 W/kg

Maximum value of SAR (measured) = 2.52 W/kg

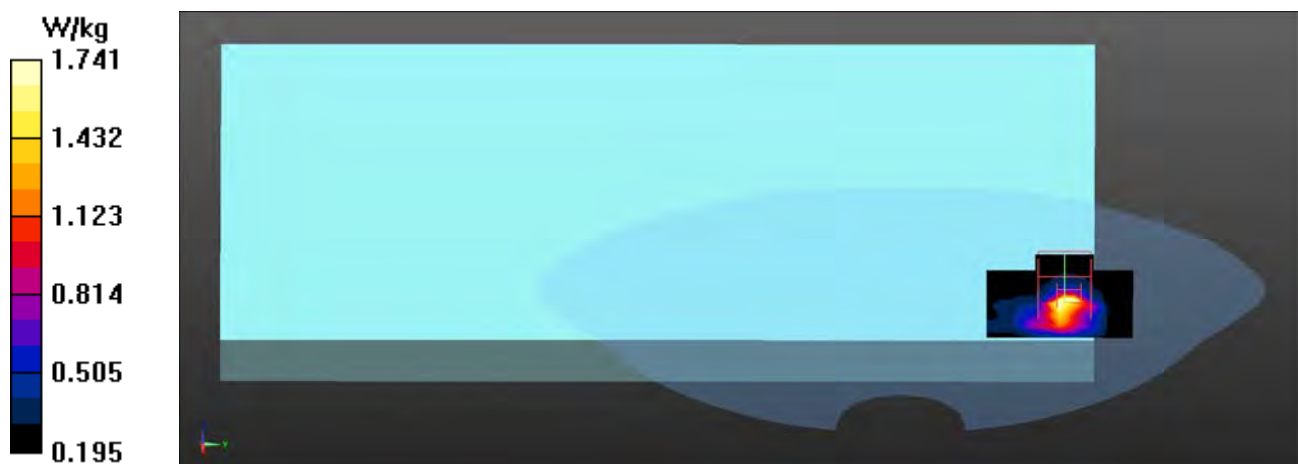

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_138-Back(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5690 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 34.57$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.76, 4.76, 4.76); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.70 W/kg

Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm
Reference Value = 6.591 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 5.72 W/kg
SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.477 W/kg
Maximum value of SAR (measured) = 2.35 W/kg

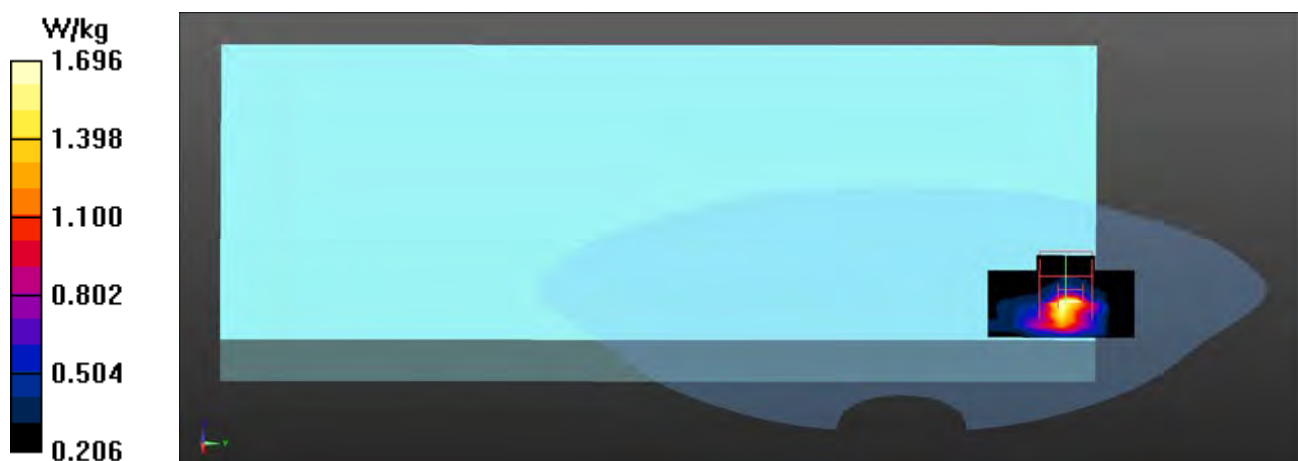

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_155-Back(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.38$ S/m; $\epsilon_r = 34.33$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.79, 4.79, 4.79); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.44 W/kg


Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.182 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 5.07 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.424 W/kg

Maximum value of SAR (measured) = 2.05 W/kg

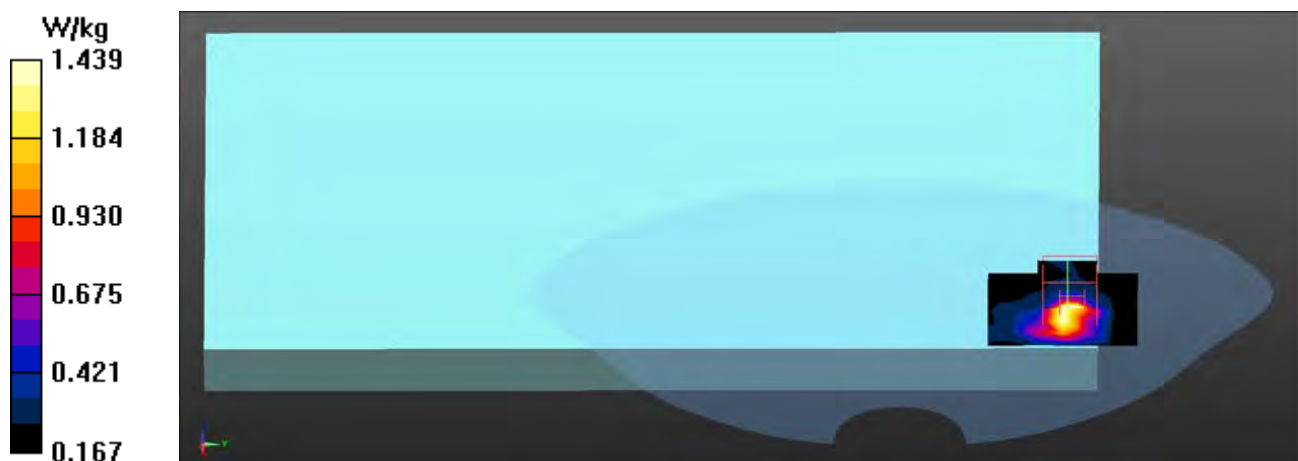

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_58-Right-Side(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5290 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 35.67$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(5.13, 5.13, 5.13); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.607 W/kg**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.662 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.659 W/kg

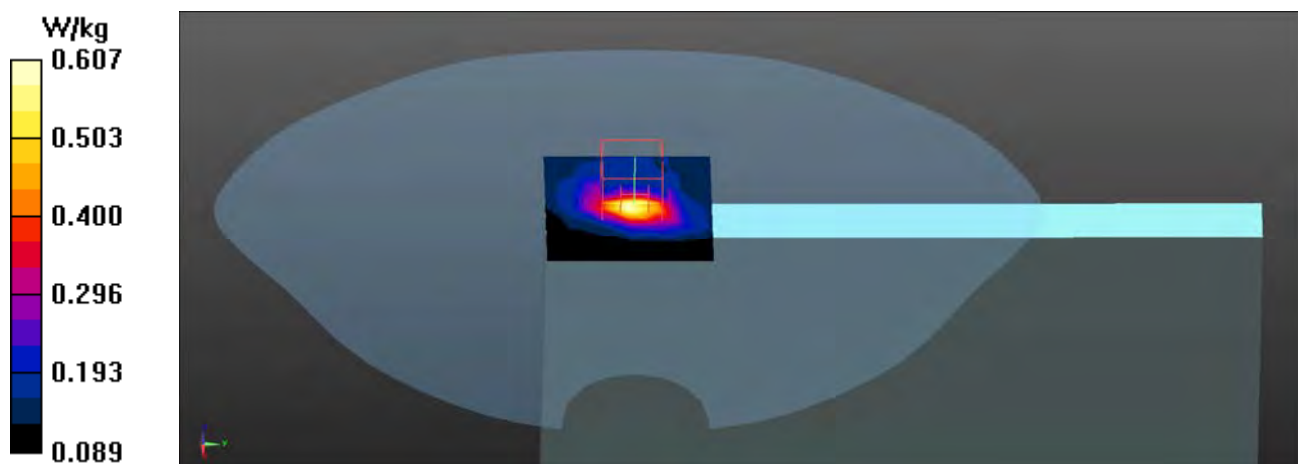

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_106-Right-Side(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5530 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.95, 4.95, 4.95); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (7x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.635 W/kg**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.905 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.695 W/kg

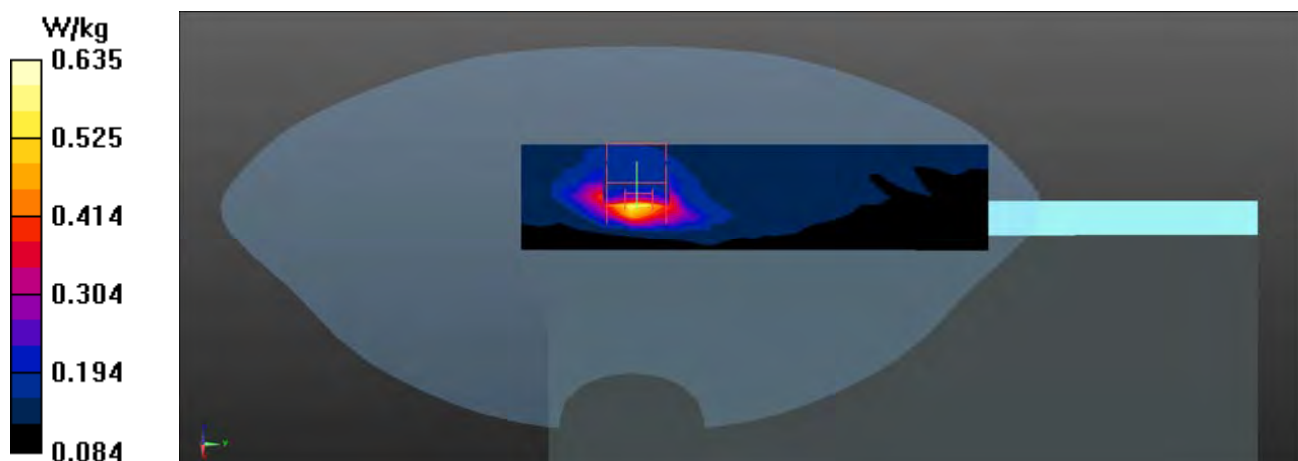

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_155-Right-Side(PAD) Aux-AWAN**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.38$ S/m; $\epsilon_r = 34.33$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.79, 4.79, 4.79); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.591 W/kg**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:
dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.964 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.34 W/kg


SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 0.592 W/kg

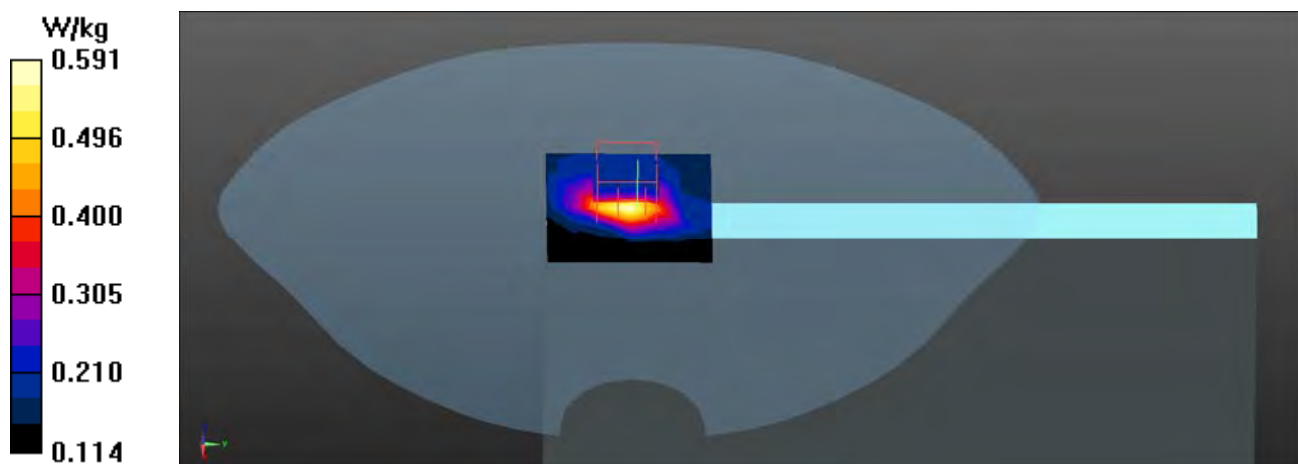

802.11ac (80M) EUT Back(PAD) (AWAN Main Antenna), Z-Axis plot

Channel: 155

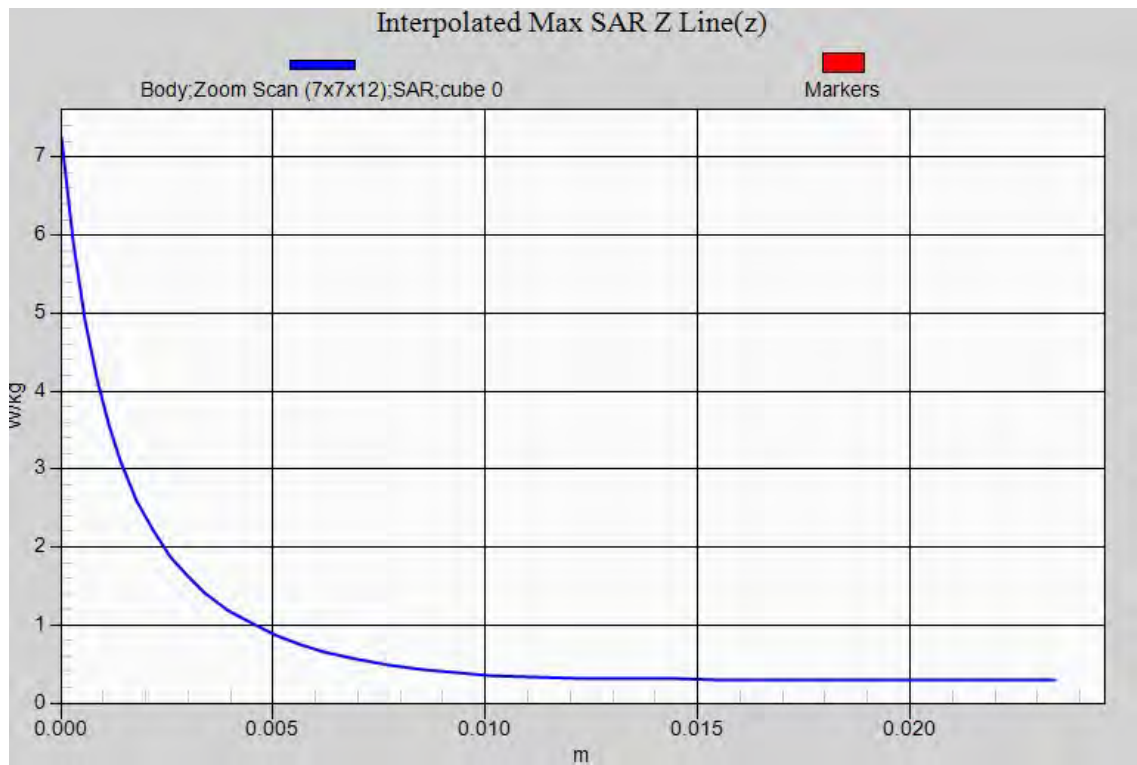

SAR measurement variability

Test Laboratory: DEKRA

Date/Time: 2020/11/23

802.11b_1-Back(PAD) Aux-AWAN-Verify

DUT: Chromebook; Type: CM5500FDA

Communication System: UID 0, WLAN 2.4G; Frequency: 2412 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 39.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 23.3, Liquid Temperature (°C) : 22.1

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(7.56, 7.56, 7.56); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.23 W/kg


Configuration/Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.993 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.441 W/kg

Maximum value of SAR (measured) = 1.93 W/kg

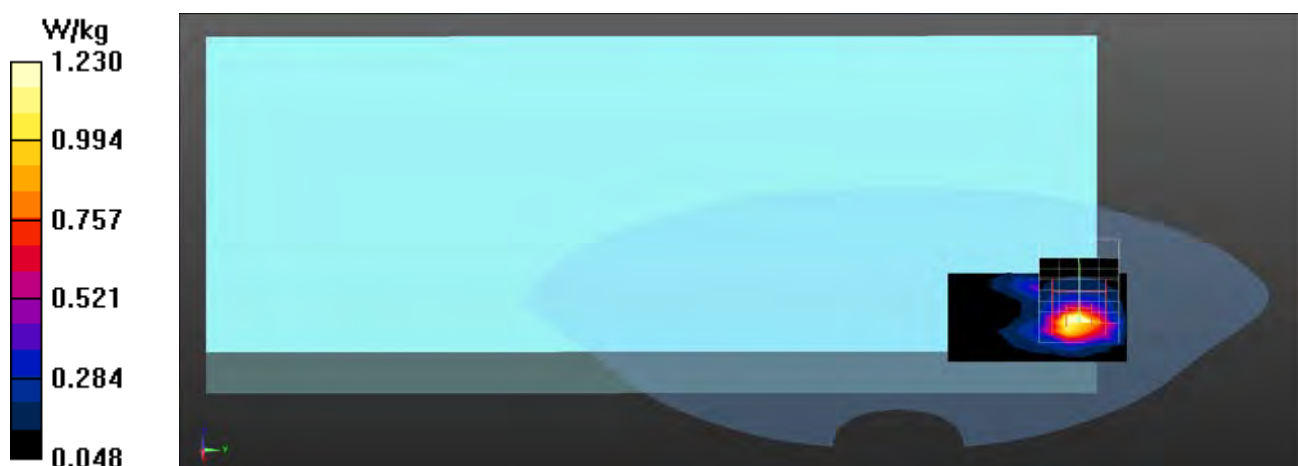

Test Laboratory: DEKRA

Date/Time: 2020/11/19

802.11ac80M_155-Back(PAD) Main-AWAN-Verify**DUT: Chromebook; Type: CM5500FDA**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz;

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.38$ S/m; $\epsilon_r = 34.33$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature (°C) : 22.4, Liquid Temperature (°C) : 21.6

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3975; ConvF(4.79, 4.79, 4.79); Calibrated: 2020/05/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2020/05/06
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.15 W/kg

Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.424 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 6.94 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.483 W/kg

Maximum value of SAR (measured) = 2.87 W/kg

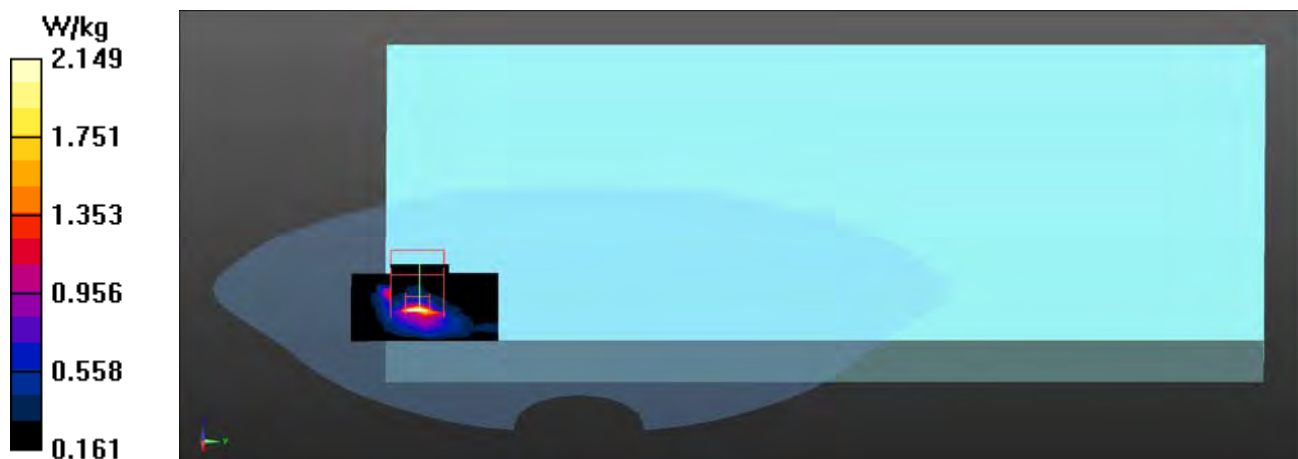



Appendix D. Probe Calibration Data

Object: EX3DV4 - SN:3975



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client

Auden

Certificate No: Z20-60149

CALIBRATION CERTIFICATE

Object

EX3DV4 - SN : 3975

Calibration Procedure(s)

FF-Z11-004-01

Calibration Procedures for Dosimetric E-field Probes

Calibration date:

May 20, 2020

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	18-Jun-19(CTTL, No.J19X05125)	Jun-20
Power sensor NRP-Z91	101547	18-Jun-19(CTTL, No.J19X05125)	Jun-20
Power sensor NRP-Z91	101548	18-Jun-19(CTTL, No.J19X05125)	Jun-20
Reference 10dBAttenuator	18N50W-10dB	10-Feb-20(CTTL, No.J20X00525)	Feb-22
Reference 20dBAttenuator	18N50W-20dB	10-Feb-20(CTTL, No.J20X00526)	Feb-22
Reference Probe EX3DV4	SN 3617	30-Jan-20(SPEAG, No.EX3-3617_Jan20/2)	Jan-21
DAE4	SN 1556	4-Feb-20(SPEAG, No.DAE4-1556_Feb20)	Feb-21

Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	18-Jun-19(CTTL, No.J19X05127)	Jun-20
Network Analyzer E5071C	MY46110673	10-Feb-20(CTTL, No.J20X00515)	Feb-21

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: May 22, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta=0$ ($f \leq 900\text{MHz}$ in TEM-cell; $f > 1800\text{MHz}$: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800\text{MHz}$) and inside waveguide using analytical field distributions based on power measurements for $f > 800\text{MHz}$. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from $\pm 50\text{MHz}$ to $\pm 100\text{MHz}$.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



DASY/EASY – Parameters of Probe: EX3DV4 – SN:3975

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc ($k=2$)
Norm($\mu\text{V}/(\text{V/m})^2$) ^A	0.41	0.46	0.51	$\pm 10.0\%$
DCP(mV) ^B	104.4	101.4	102.1	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E ($k=2$)
0	CW	X	0.0	0.0	1.0	0.00	145.8	$\pm 2.3\%$
		Y	0.0	0.0	1.0		161.0	
		Z	0.0	0.0	1.0		166.0	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 4).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



DASY/EASY – Parameters of Probe: EX3DV4 – SN:3975

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	9.90	9.90	9.90	0.40	0.75	±12.1%
835	41.5	0.90	9.56	9.56	9.56	0.14	1.41	±12.1%
900	41.5	0.97	9.52	9.52	9.52	0.14	1.39	±12.1%
1450	40.5	1.20	8.63	8.63	8.63	0.30	0.81	±12.1%
1750	40.1	1.37	8.36	8.36	8.36	0.27	0.97	±12.1%
1900	40.0	1.40	7.95	7.95	7.95	0.28	1.02	±12.1%
2000	40.0	1.40	7.93	7.93	7.93	0.24	1.09	±12.1%
2300	39.5	1.67	7.78	7.78	7.78	0.61	0.68	±12.1%
2450	39.2	1.80	7.56	7.56	7.56	0.61	0.70	±12.1%
2600	39.0	1.96	7.34	7.34	7.34	0.63	0.68	±12.1%
3300	38.2	2.71	6.84	6.84	6.84	0.42	0.94	±13.3%
3500	37.9	2.91	6.79	6.79	6.79	0.44	0.94	±13.3%
3700	37.7	3.12	6.53	6.53	6.53	0.44	0.93	±13.3%
3900	37.5	3.32	6.42	6.42	6.42	0.40	1.20	±13.3%
4100	37.2	3.53	6.40	6.40	6.40	0.40	1.20	±13.3%
4200	37.1	3.63	6.28	6.28	6.28	0.40	1.20	±13.3%
4400	36.9	3.84	6.15	6.15	6.15	0.40	1.20	±13.3%
4600	36.7	4.04	6.09	6.09	6.09	0.45	1.15	±13.3%
4800	36.4	4.25	6.04	6.04	6.04	0.45	1.25	±13.3%
4950	36.3	4.40	5.91	5.91	5.91	0.45	1.25	±13.3%
5200	36.0	4.66	5.34	5.34	5.34	0.40	1.60	±13.3%
5300	35.9	4.76	5.13	5.13	5.13	0.40	1.60	±13.3%
5500	35.6	4.96	4.95	4.95	4.95	0.40	1.55	±13.3%
5600	35.5	5.07	4.76	4.76	4.76	0.45	1.40	±13.3%
5800	35.3	5.27	4.79	4.79	4.79	0.45	1.60	±13.3%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

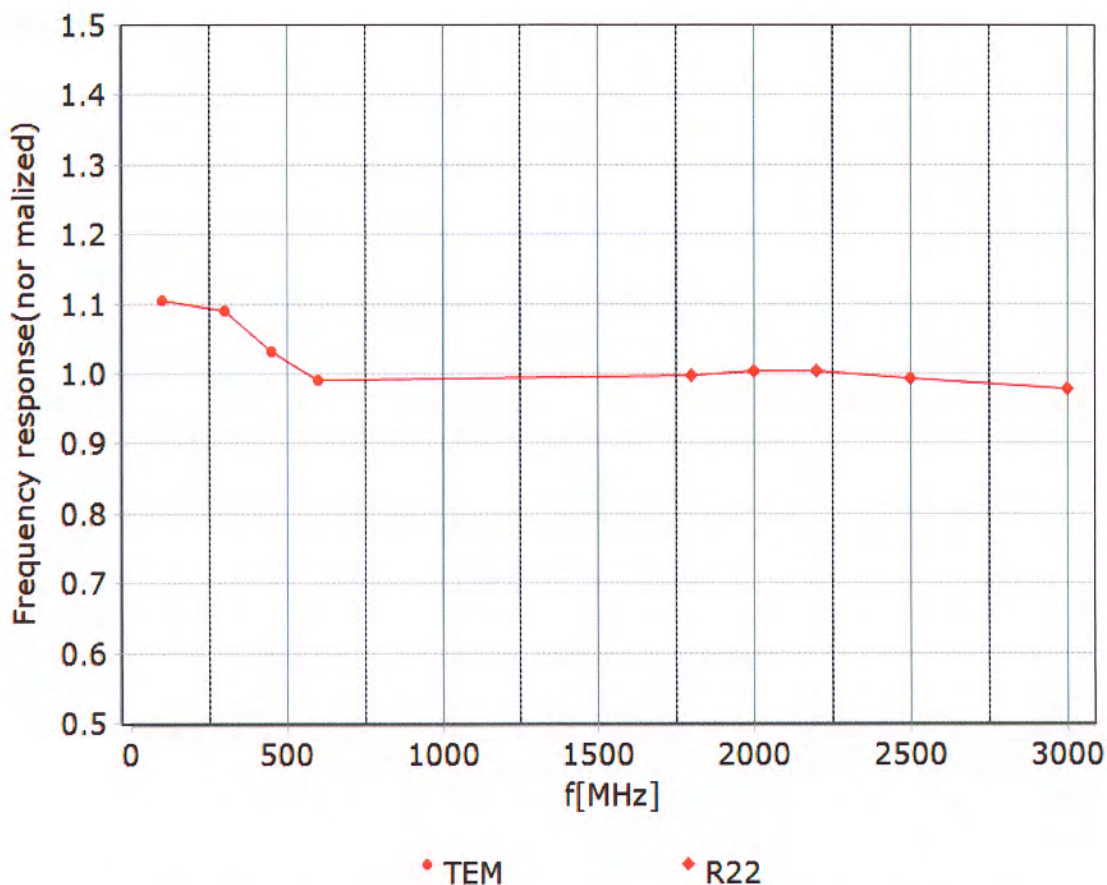

Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)




In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

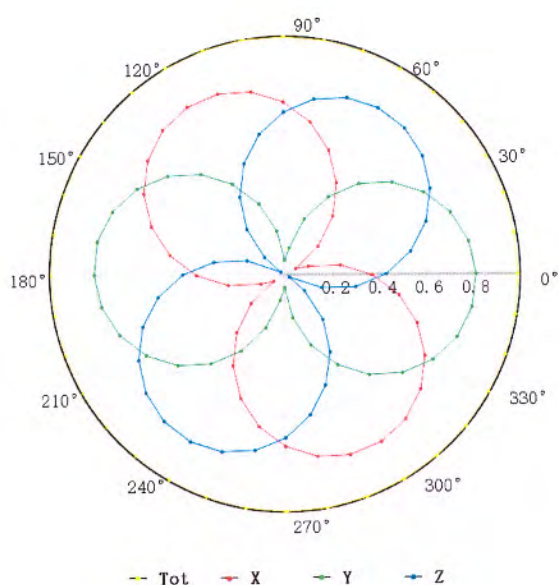

f=1800 MHz, R22

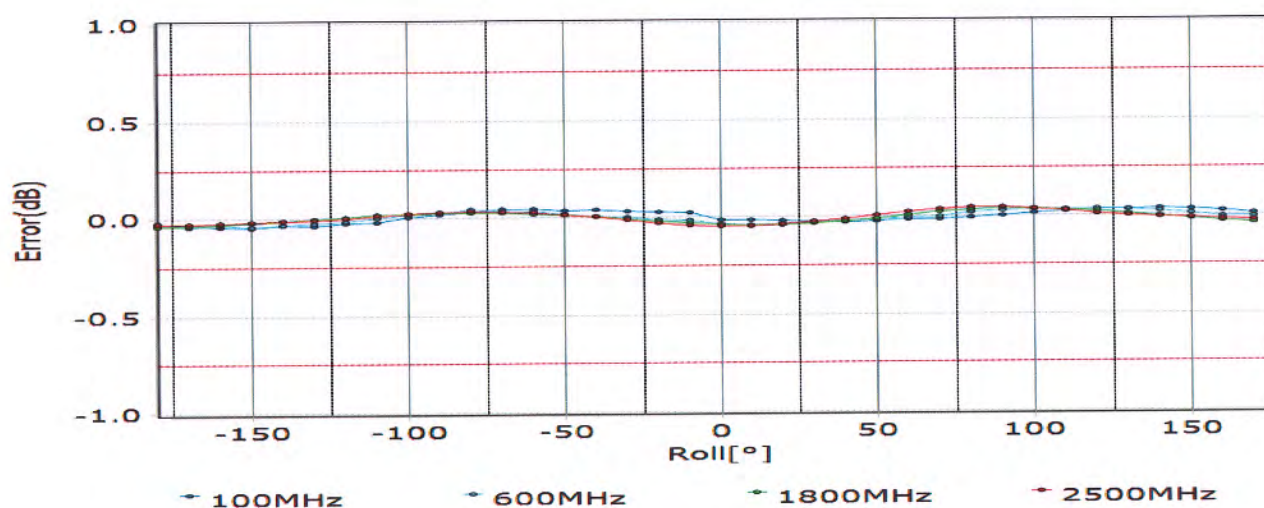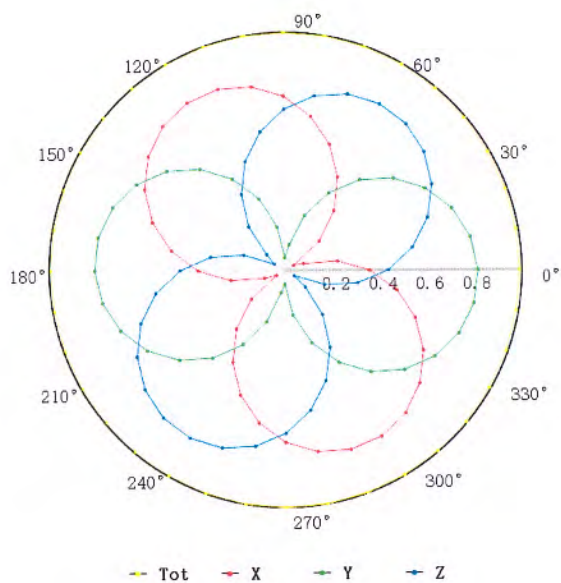



Uncertainty of Axial Isotropy Assessment: $\pm 1.2\%$ ($k=2$)



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctl@chinattl.com <http://www.chinattl.cn>

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$)

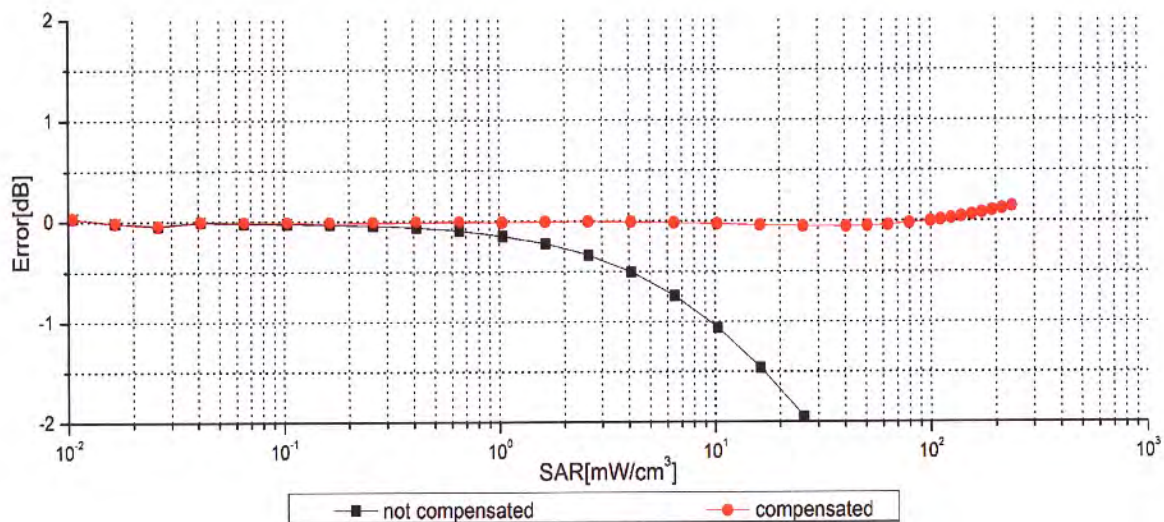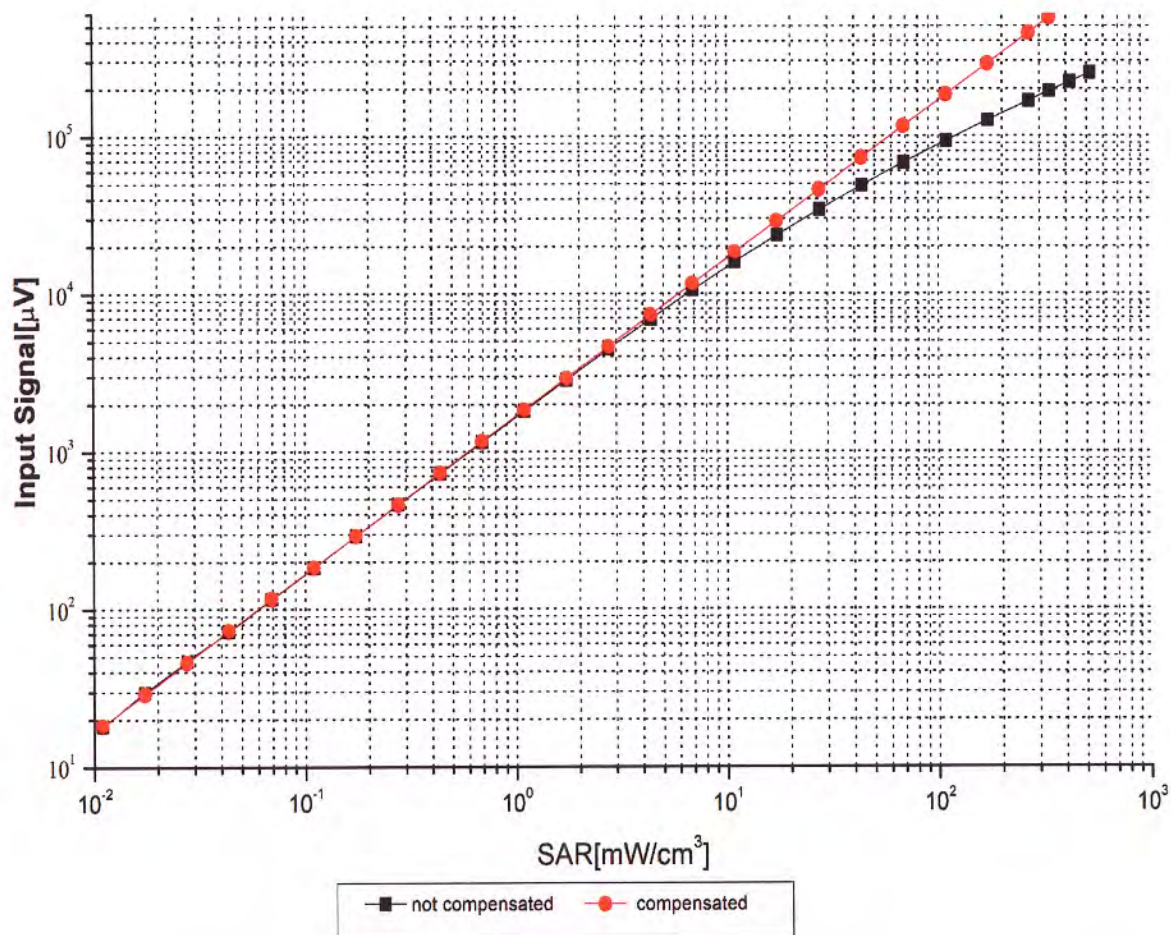

Uncertainty of Linearity Assessment: $\pm 0.9\%$ ($k=2$)




In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)


Conversion Factor Assessment

f=750 MHz,WGLS R9(H_convF)

f=1750 MHz,WGLS R22(H_convF)

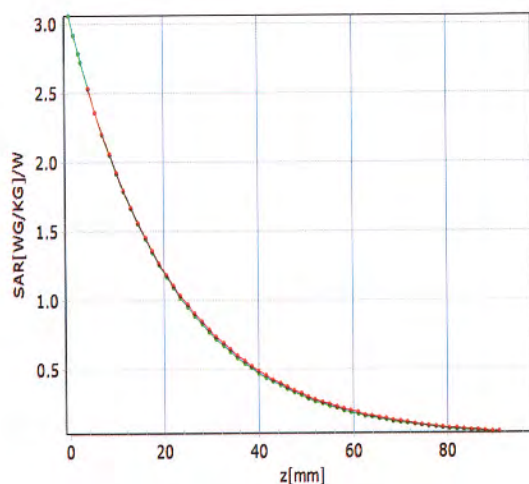


+ analytical + measured

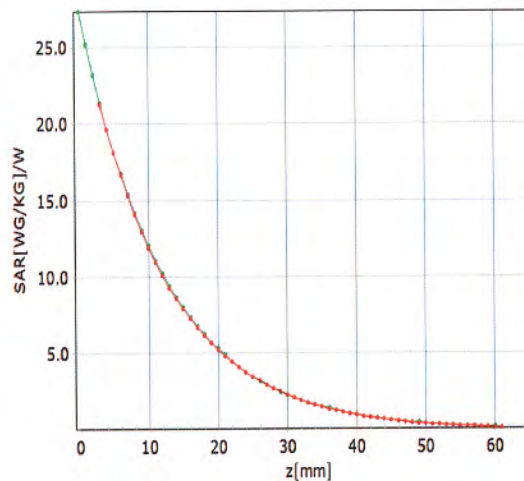

+ analytical + measured

Deviation from Isotropy in Liquid

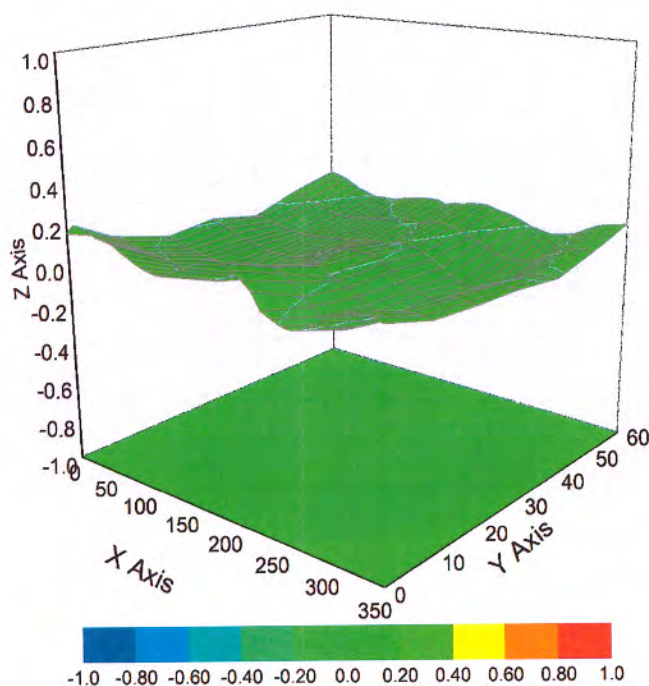

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\%$ ($k=2$)



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: ctl@chinattl.com

[Http://www.chinattl.cn](http://www.chinattl.cn)

DASY/EASY – Parameters of Probe: EX3DV4 – SN:3975

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	84.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	10mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm



Appendix E. Dipole Calibration

	Instrument	Manufacturer	Model No.	Serial No.
	Reference Dipole 450MHz	Speag	D450V3	1108
	Reference Dipole 750MHz	Speag	D750V3	1031
	Reference Dipole 835Mhz	Speag	ALS-D-835	QTK-315
	Reference Dipole 900MHz	Speag	D900V2	1d176
	Reference Dipole 1450MHz	Speag	D1450V2	1056
	Reference Dipole 1640MHz	Speag	D1640V2	329
	Reference Dipole 1750MHz	Speag	D1750V2	1113
	Reference Dipole 1800MHz	Speag	D1800V2	2d221
	Reference Dipole 1900MHz	Speag	D1900V2	5d184
	Reference Dipole 1950MHz	Speag	D1950V3	1213
	Reference Dipole 2300MHz	Speag	D2300V2	1045
X	Reference Dipole 2450MHz	Speag	D2450V2	930
	Reference Dipole 2600MHz	Aprel	ALS-D-2600	QTK-225
	Reference Dipole 3500MHz	Aprel	ALS-D-3500	QTK-228
	Reference Dipole 3700MHz	Speag	D3700V2	1056
X	Reference Dipole 5GHz	Speag	D5GHzV2	1041

Note: The test dipole antenna marked with "X" are used to measure the final test results.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **DEKRA (Auden)**

Certificate No: **D2450V2-930_Nov19**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:930**

Calibration procedure(s) **QA CAL-05.v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **November 21, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-19 (No. 217-02894)	Apr-20
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-19 (No. 217-02895)	Apr-20
Reference Probe EX3DV4	SN: 7349	29-May-19 (No. EX3-7349_May19)	May-20
DAE4	SN: 601	30-Apr-19 (No. DAE4-601_Apr19)	Apr-20
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

Calibrated by: **Claudio Leubler** Laboratory Technician

Signature

Approved by: **Katja Pokovic** Technical Manager

Issued: November 25, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.3
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.2 $\pm$ 6 %	1.84 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	53.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.6 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	50.8 $\pm$ 6 %	2.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	52.0 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.3 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.4 Ω + 3.8 j Ω
Return Loss	- 25.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.2 Ω + 5.1 j Ω
Return Loss	- 25.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.158 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 21.11.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:930

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.9, 7.9, 7.9) @ 2450 MHz; Calibrated: 29.05.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 117.5 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 26.6 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.22 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm


Ratio of SAR at M2 to SAR at M1 = 50.8%

Maximum value of SAR (measured) = 22.0 W/kg

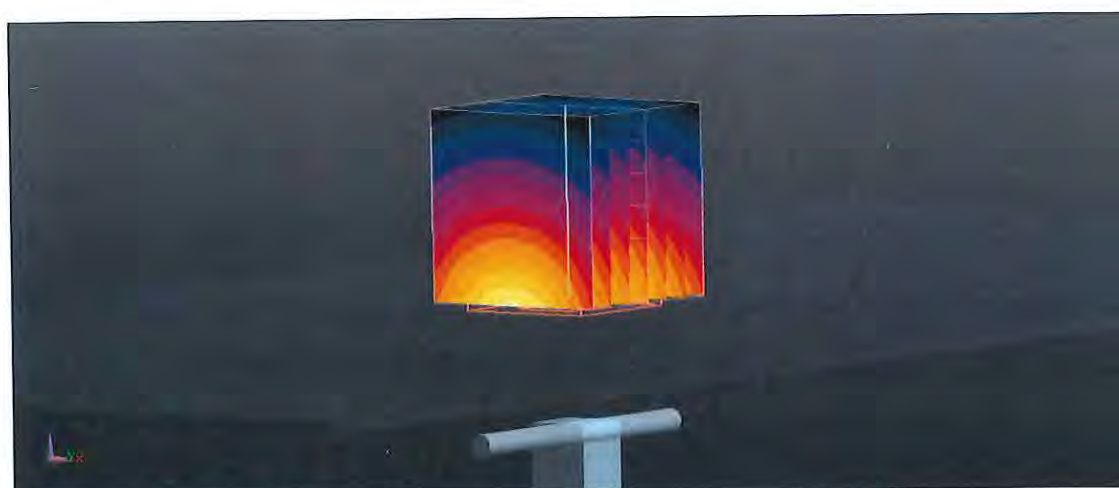

0 dB = 22.0 W/kg = 13.42 dBW/kg

Impedance Measurement Plot for Head TSL

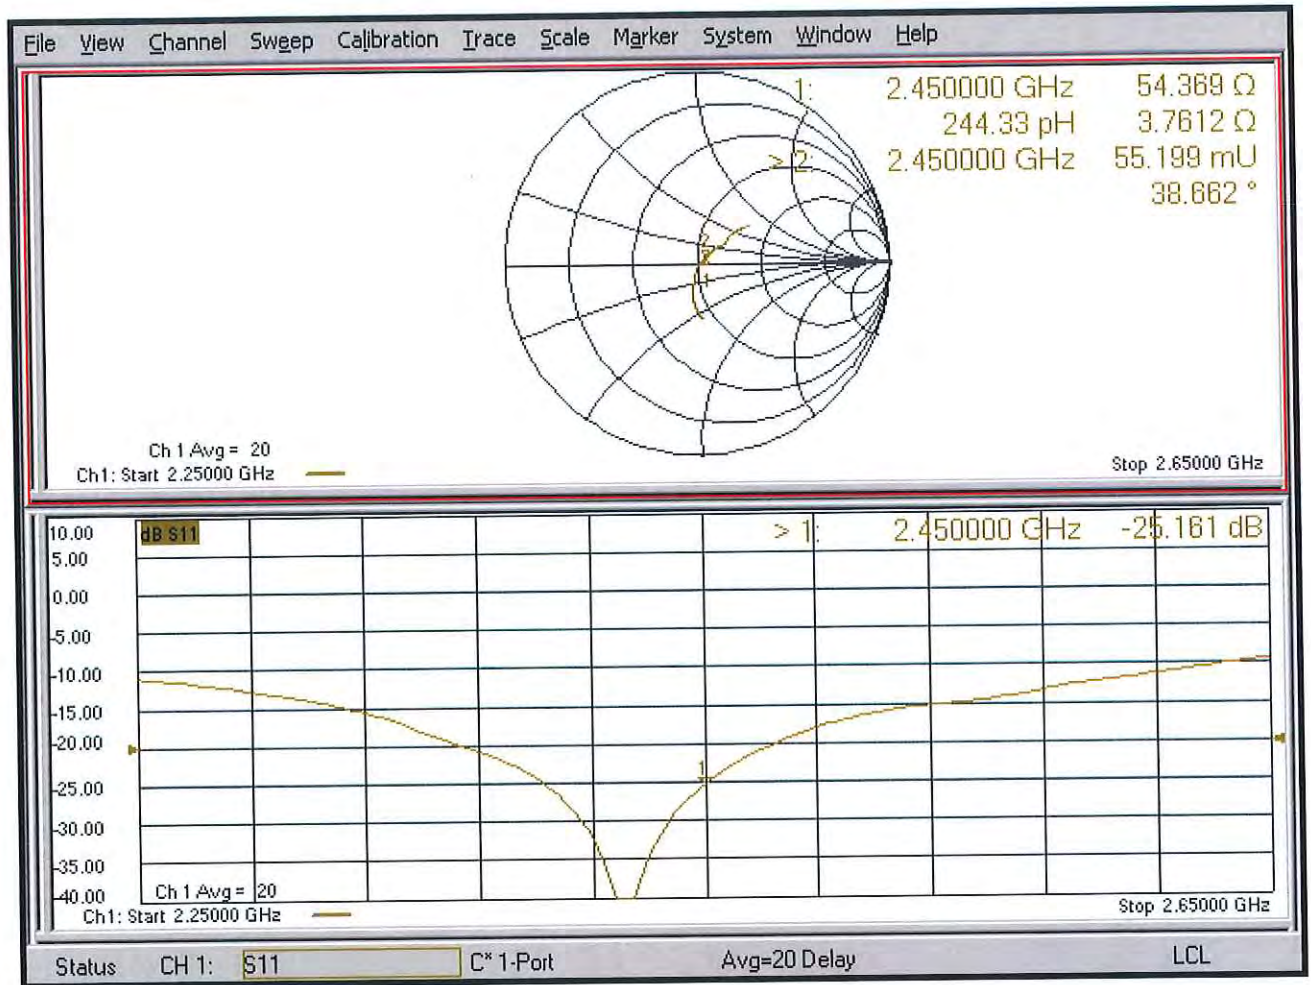

DASY5 Validation Report for Body TSL

Date: 21.11.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:930

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.94, 7.94, 7.94) @ 2450 MHz; Calibrated: 29.05.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.8 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 26.5 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.17 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm


Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 21.9 W/kg

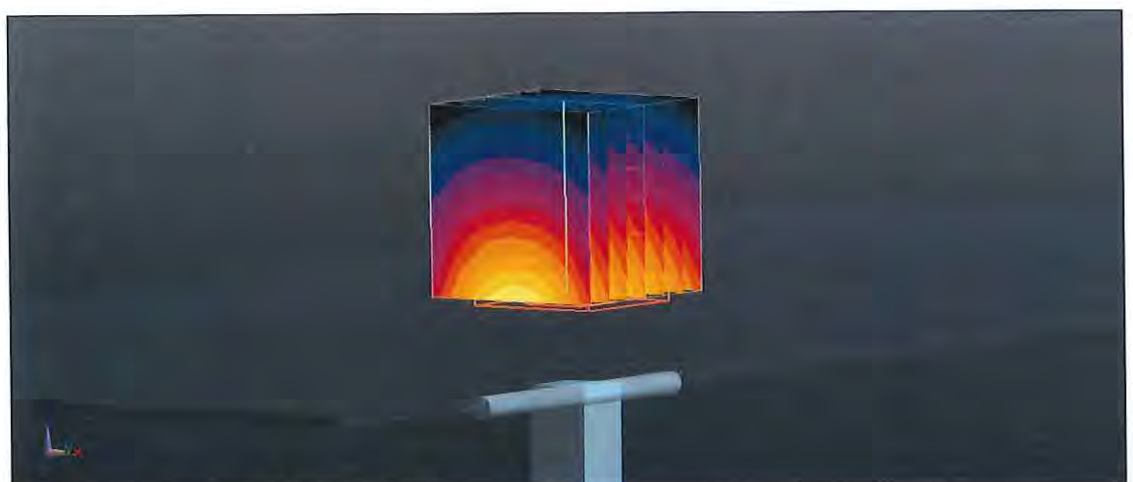

0 dB = 21.9 W/kg = 13.40 dBW/kg

Impedance Measurement Plot for Body TSL

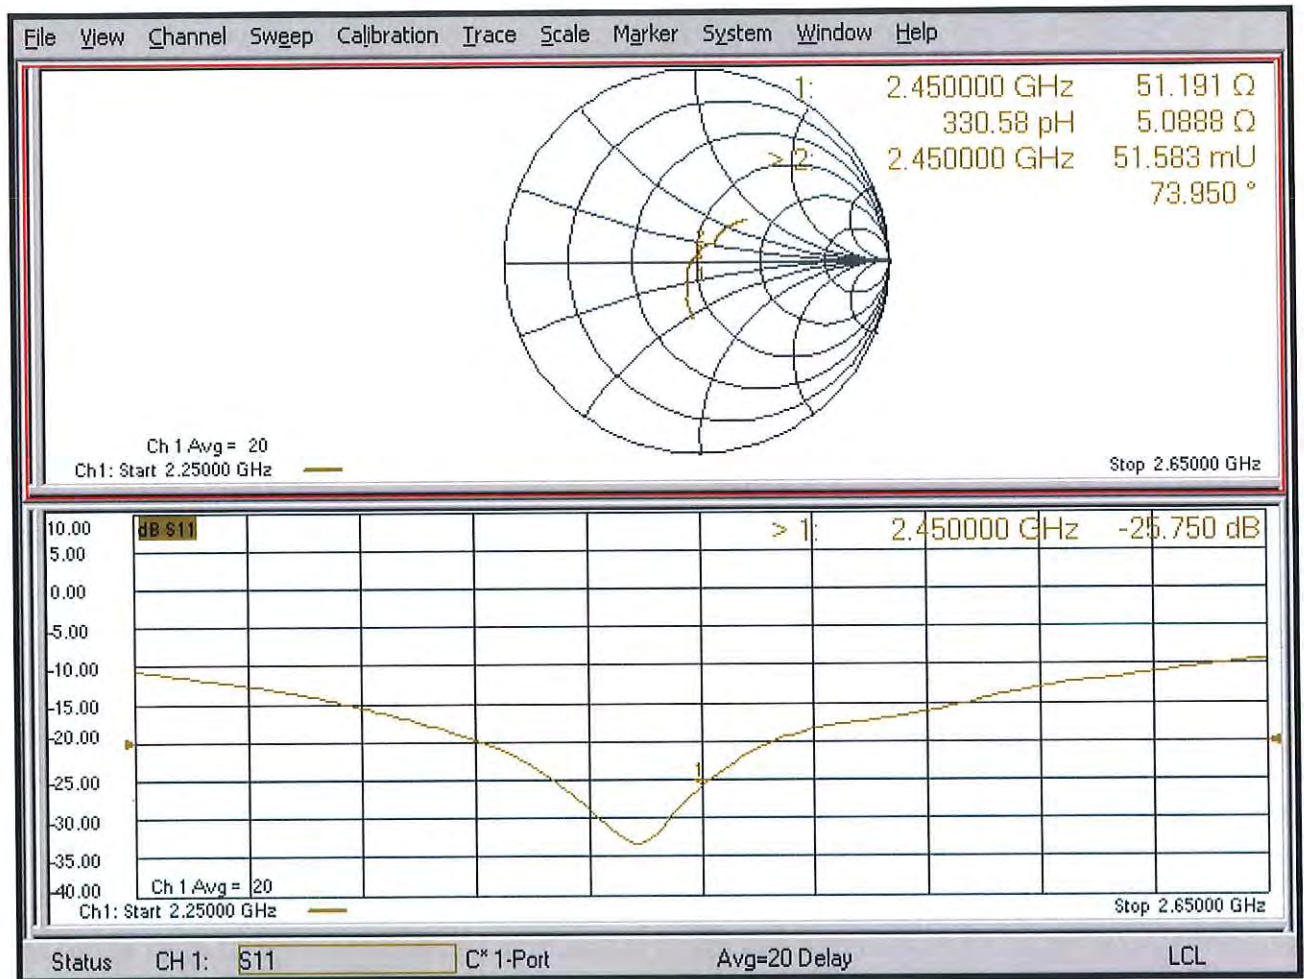



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **DEKRA (Auden)**

Certificate No: **D5GHzV2-1041_May20**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1041**

Calibration procedure(s) **QA CAL-22.v4
Calibration Procedure for SAR Validation Sources between 3-6 GHz**

Calibration date: **May 25, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: BH9394 (20k)	31-Mar-20 (No. 217-03106)	Apr-21
Type-N mismatch combination	SN: 310982 / 06327	31-Mar-20 (No. 217-03104)	Apr-21
Reference Probe EX3DV4	SN: 3503	31-Dec-19 (No. EX3-3503_Dec19)	Dec-20
DAE4	SN: 601	27-Dec-19 (No. DAE4-601_Dec19)	Dec-20

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

	Name	Function	Signature
Calibrated by:	Michael Weber	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 26, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 10.0 mm, dz = 10.0 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	35.3 $\pm$ 6 %	4.55 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.20 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.6 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.2 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	34.8 $\pm$ 6 %	4.90 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.63 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	85.9 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.43 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.2 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.5 ± 6 %	5.11 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.25 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.8 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	49.0 Ω - 4.4 j Ω
Return Loss	- 26.9 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	56.3 Ω - 1.2 j Ω
Return Loss	- 24.4 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	54.3 Ω - 2.1 j Ω
Return Loss	- 26.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.197 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 25.05.2020

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1041

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 35.3$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.9$ S/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 34.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.5, 5.5, 5.5) @ 5250 MHz, ConvF(5.1, 5.1, 5.1) @ 5600 MHz, ConvF(5.01, 5.01, 5.01) @ 5800 MHz; Calibrated: 31.12.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 79.63 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.8 W/kg

SAR(1 g) = 8.20 W/kg; SAR(10 g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.4%

Maximum value of SAR (measured) = 18.9 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 79.80 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 8.63 W/kg; SAR(10 g) = 2.43 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 66.8%

Maximum value of SAR (measured) = 20.6 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 77.63 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 8.25 W/kg; SAR(10 g) = 2.30 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.8%

Maximum value of SAR (measured) = 20.2 W/kg

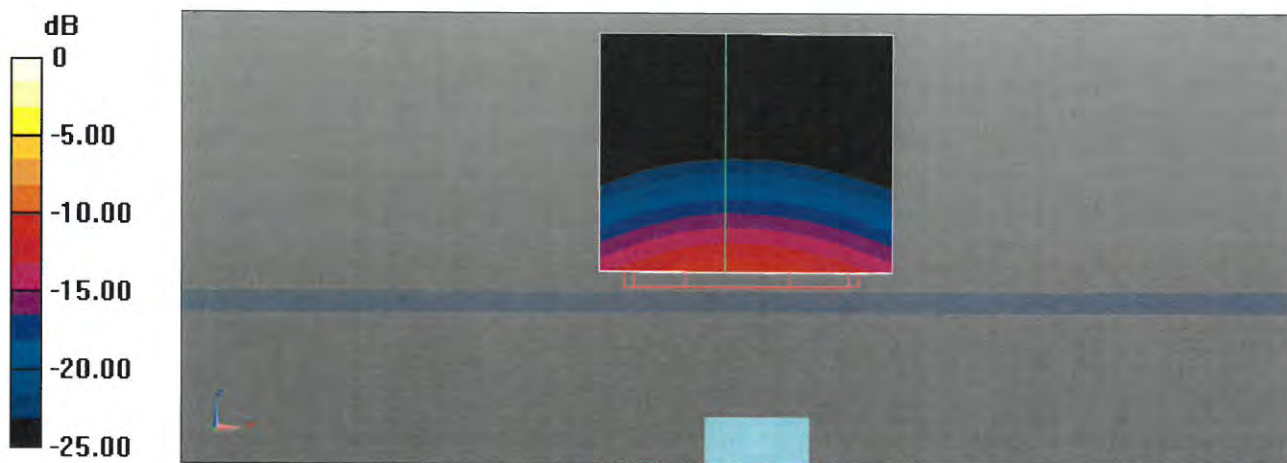

0 dB = 20.6 W/kg = 13.13 dBW/kg

Impedance Measurement Plot for Head TSL

