

# RF Exposure report



The following samples were submitted and identified on behalf of the client as:

<b>EUT Description</b>	WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card
<b>Brand Name</b>	Intel® Wi-Fi 6E AX211
<b>Model Name</b>	AX211D2W
<b>Applicant</b>	ASUSTeK COMPUTER INC. 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan
<b>Standards</b>	IEEE/ANSI C95.1-1992, IEEE 1528-2013
<b>FCC ID</b>	MSQAX211D2
<b>Date of EUT Receipt</b>	Aug. 29, 2022
<b>Date of Test(s)</b>	Sep. 13, 2022 ~ Nov. 03, 2022
<b>Date of Issue</b>	Nov. 24, 2022




In the configuration tested, the EUT complied with the standards specified above.

**Remarks:**

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

**Signed on behalf of SGS**

Clerk / Kimmy Chiou	PM / Afu Chen	Approved By / John Yeh
		

**Date: Nov. 24, 2022**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
TESA2208000323ES	00	Initial creation of document	Oct. 03, 2022	Kimmy Chiou	*
TESA2208000323ES	01	Modify comment	Oct. 19, 2022	Kimmy Chiou	*
TESA2208000323ES	02	Modify comment	Oct. 20, 2022	Kimmy Chiou	*
TESA2208000323ES	03	Modify comment	Oct. 24, 2022	Kimmy Chiou	*
TESA2208000323ES	04	Modify comment	Nov. 04, 2022	Kimmy Chiou	*
TESA2208000323ES	05	Modify gain	Nov. 24, 2022	Kimmy Chiou	

**Note:**

- The mark " \* " is the revised version of the report due to comments submitted by the certification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。  
 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Contents

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
1.1	Test Methodology .....	5
1.2	Description of EUT.....	6
1.3	Maximum value .....	7
1.4	Antenna Information .....	7
<b>2</b>	<b>MEASUREMENT SYSTEM .....</b>	<b>8</b>
2.1	Test Facility .....	8
2.2	SAR System.....	9
2.3	PD system .....	14
<b>3</b>	<b>SAR SYSTEM VERIFICATION.....</b>	<b>16</b>
3.1	Tissue Simulating Liquid.....	16
3.2	Tissue Simulant Liquid measurement.....	16
3.3	Measurement results of Tissue Simulant Liquid.....	17
3.4	The composition of the tissue simulating liquid:.....	19
3.5	System check .....	19
3.6	System check results .....	20
<b>4</b>	<b>PD SYSTEM VERIFICATION .....</b>	<b>21</b>
4.1	System check .....	21
4.2	System check result .....	22
<b>5</b>	<b>TEST CONFIGURATIONS .....</b>	<b>23</b>
5.1	Test Environment.....	23
5.2	Test Note.....	23
5.3	Test position.....	25
5.4	Power verification of device mode .....	27
5.5	Test limit .....	32
<b>6</b>	<b>Maximum OUTPUT POWER .....</b>	<b>35</b>
6.1	WLAN .....	35
6.2	WIFI 6E.....	55
6.3	Bluetooth .....	63
6.4	BLE.....	63
<b>7</b>	<b>DUTY CYCLE .....</b>	<b>64</b>
<b>8</b>	<b>SUMMARY OF RESULTS .....</b>	<b>69</b>
8.1	Decision rules .....	69
8.2	Summary of SAR Results.....	69
8.3	Summary of PD Results .....	75
8.4	Reporting statements of conformity .....	75
8.5	Conclusion .....	75
<b>9</b>	<b>SIMULTANEOUS TRANSMISSION ANALYSIS.....</b>	<b>76</b>
9.1	Simultaneous Transmission Scenarios: .....	76
9.2	Estimated SAR calculation.....	77
9.3	SPLSR evaluation and analysis.....	77
9.4	Conclusion .....	79
<b>10</b>	<b>INSTRUMENTS LIST.....</b>	<b>80</b>
<b>11</b>	<b>UNCERTAINTY BUDGET.....</b>	<b>82</b>

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

12	SAR MEASUREMENT results .....	86
13	measurement result .....	137
14	AR SYSTEM check results .....	147
15	pd system check result.....	166
16	APPENDIXES .....	167
16.1	SAR_Appendix A Photographs .....	167
16.2	SAR_Appendix B DAE & Probe Cal. Certificate .....	167
16.3	SAR_Appendix C Phantom Description & Dipole Cal. Certificate .....	167

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

## 1 GENERAL INFORMATION

### 1.1 Test Methodology

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992

IEEE 1528-2013

KDB447498D01v06

KDB865664D01v01r04

KDB865664D02v01r02

KDB616217D04v01r02

KDB248227D01v02r01

IEC/IEEE 62209-1528:2020

SPEAG DASY6 System Handbook

SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)

IEC TR 63170:2018

IEC 62479:2010

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.2 Description of EUT

EUT Description	WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card	
Brand Name	Intel® Wi-Fi 6E AX211	
Model No.	AX211D2W	
FCC ID	MSQAX211D2	
Host Information	Product Type: Notebook PC Trade Name: ASUS Model Name: GZ301V, GZ301VIC, GZ301VVC, GZ301VUC, GZ301VJC, GZ301VFC All models are electrically identical, different model names are for marketing purpose.	
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE	
Duty Cycle	WLAN802.11	Refer to page 57~60
	Bluetooth	77.2%
Supported radios (TX Frequency Range, MHz)	802.11 b/g/n/ax	2.4GHz (2400.0 – 2483.5 MHz)
	802.11a/n/ac/ax	5.2GHz (5150.0 – 5350.0 MHz)
		5.6GHz (5470.0 – 5725.0 MHz)
		5.8GHz (5725.0 – 5850.0 MHz)
802.11ax	6.2GHz (5925.0 – 6425.0 MHz)	
	6.5GHz (6425.0 – 6525.0 MHz)	
	6.7GHz (6525.0 – 6875.0 MHz)	
	7.0GHz (6875.0 – 7125.0 MHz)	
Bluetooth 5.2	2.4GHz (2400.0 – 2483.5 MHz)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 1.3 Maximum value

ASAP

Summary of Maximum SAR and Power Density Value			
Mode	Highest SAR1g Body (W/kg)	Highest APD (W/m <sup>2</sup> )	Highest PD (W/m <sup>2</sup> )
2.4G WLAN	1.11	N/A	N/A
5.2G WLAN	0.47	N/A	N/A
5.6G WLAN	0.39	N/A	N/A
5.8G WLAN	0.41	N/A	N/A
6G WLAN	1.00	5.12	4.46
Bluetooth(GFSK)	0.43	N/A	N/A

INPAQ

Summary of Maximum SAR and Power Density Value			
Mode	Highest SAR1g Body (W/kg)	Highest APD (W/m <sup>2</sup> )	Highest PD (W/m <sup>2</sup> )
2.4G WLAN	0.78	N/A	N/A
5.2G WLAN	0.47	N/A	N/A
5.6G WLAN	0.50	N/A	N/A
5.8G WLAN	0.34	N/A	N/A
6G WLAN	0.94	4.50	N/A
Bluetooth(GFSK)	0.35	N/A	N/A

### 1.4 Antenna Information

Tablet mode WLAN		Frist																	
Vendor	ASAP																		
Antenna	Main									Aux									
Part Number	LA9RF399-CS-H									LA9RF400-CS-H									
Frequency(MHz)	2400-2500	5150-5250	5250-5350	5470-5725	5725-5850	5925-6425	6425-6525	6525-6875	6875-7125	2400-2500	5150-5250	5250-5350	5470-5725	5725-5850	5925-6425	6425-6525	6525-6875	6875-7125	
Gain (dBi)	2.56	3.64	3.64	4.59	3.12	4.33	3.90	3.90	3.90	-0.33	2.24	1.48	3.55	4.5	4.35	3.90	3.90	3.90	
Note: Antenna information is provided by the applicant.																			
Tablet mode WLAN		Second																	
Vendor	Inpaq																		
Antenna	Main									Aux									
Part Number	MDA-LE-02-013									MDA-LE-01-005									
Frequency(MHz)	2400-2500	5150-5250	5250-5350	5470-5725	5725-5850	5925-6425	6425-6525	6525-6875	6875-7125	2400-2500	5150-5250	5250-5350	5470-5725	5725-5850	5925-6425	6425-6525	6525-6875	6875-7125	
Gain (dBi)	2.48	3.51	2.76	4.21	2.52	4.01	3.80	3.83	2.95	-0.74	1.55	0.64	3.55	3.66	3.61	3.72	3.38	3.87	
Note: Antenna information is provided by the applicant.																			

Note: Antenna information is provided by the applicant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 2 MEASUREMENT SYSTEM

### 2.1 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
SGS Taiwan Ltd. Central RF Lab. (TAF code 3702)	1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road, NeiHu District, Taipei City, 11493, Taiwan.	SAR 2	TW0029	TW3702
		SAR 6		
	No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan	SAR 1	TW0028	
		SAR 4		
	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan	SAR 3	TW0027	
		SAR 7		

**Note:** Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



## Block Diagram (DASY6)

The DASY system used for performing compliance tests consists of the following items:

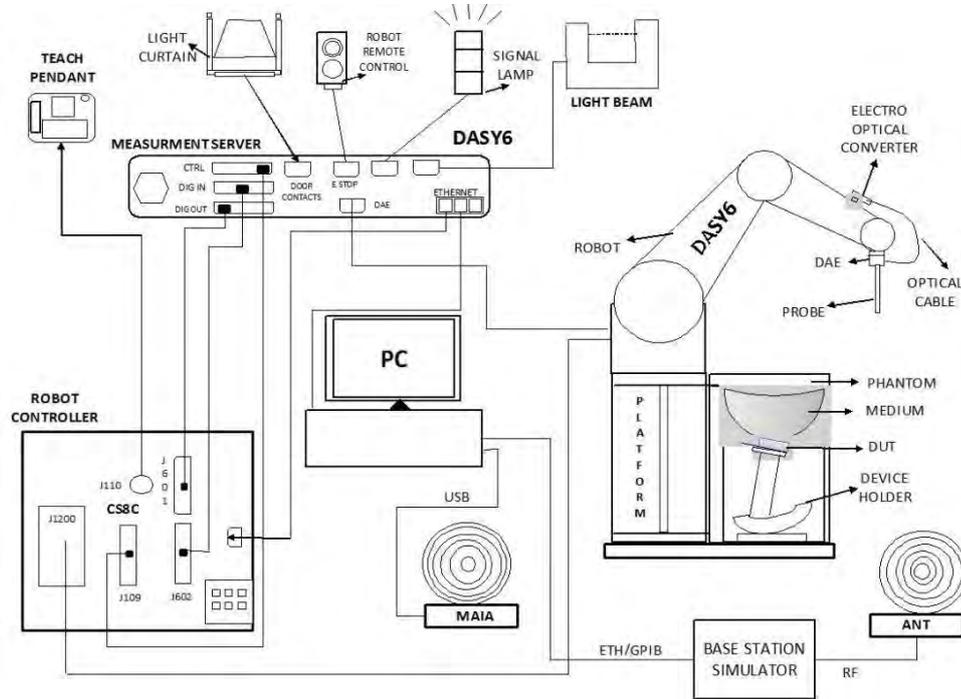

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Windows 10 and the DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5250/5600/5750/6500/7000 MHz Additional CF for other liquids and frequencies upon request	
Frequency	10 MHz to > 6 GHz	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)	
Dimensions	Tip diameter: 2.5 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

**PHANTOM (ELI)**

Model	ELI	
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 30 liters	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Height: 850 mm; Length: 1000 mm; Width: 500 mm	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## DEVICE HOLDER (ELI)

<p>Construction</p>	<p>The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.</p>	 <p style="text-align: center;">Device Holder</p>
---------------------	---	---

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 2.3 PD system


#### Block Diagram (DASY6)

Power density measurements for mmWave frequencies were performed using SPEAG DASY6 with cDASY6 5G module. The DASY6 included a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the 5G phantom cover.

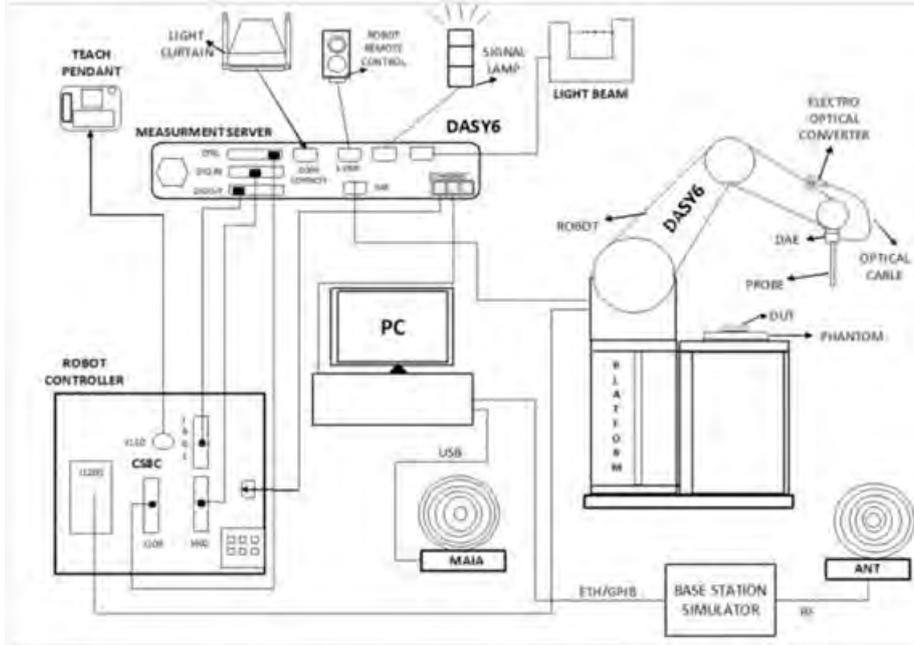

#### EUmmWVx probe

The EUmmWVx probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. The design entails two small 0.8mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9mm wide and 0.12mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields. The probe consist of two sensors with different angles (1 and 2) arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. The probe design allows measurements at distances as small as 2mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated.

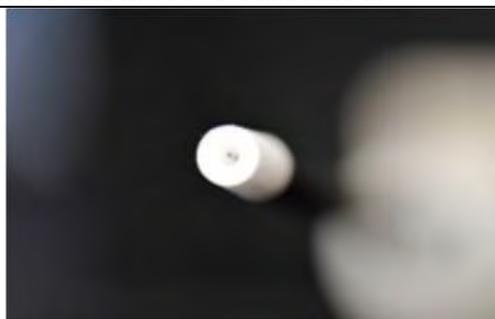

Two dipoles optimally arranged to obtain pseudo-vector information. Minimum 3 measurements/point, 120° rotated around probe axis. Sensors (0.8mm length) printed on glass substrate protected by high density foam. Low perturbation of the measured field. Requires positioner which can do accurate probe rotation.


Frequency Range

750 MHz – 110 GHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

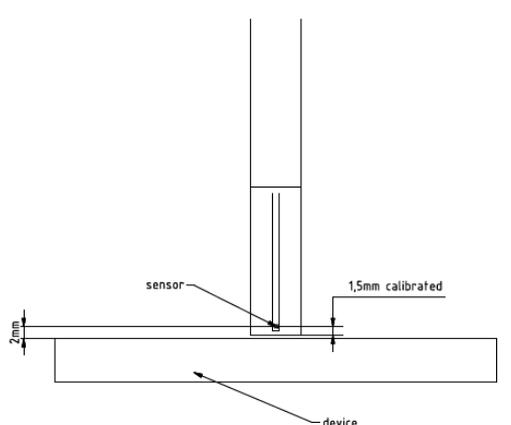Dynamic Range	< 20 V/m – 10,000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)
Position Precision	< 0.2 mm (DASY6)
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: encapsulation 8 mm (internal sensor < 1mm) Distance from probe tip to dipole centers: < 2 mm. Sensor displacement to probe's calibration point: < 0.3 mm
Applications	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space). Power density, H-field and far-field analysis using total field reconstruction (cDASY6 5G module required)
	
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

### mmWave Phantom

The mmWave Phantom approximates free-space conditions, allowing for the evaluation of the antenna side of the device and the front (screen) side or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the RF field. It consists of a 40mm thick Rohacell plate used as a test bed, which has a loss tangent ( $\tan \delta$ )  $\leq 0.05$  and a relative permittivity ( $\epsilon_r$ )  $\leq 1.2$ . High-performance RF absorbers are placed below the foam.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 3 SAR SYSTEM VERIFICATION

#### 3.1 Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with homogeneous tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm.

#### 3.2 Tissue Simulant Liquid measurement

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5)

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within  $\pm 5\%$  of the target values.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

### 3.3 Measurement results of Tissue Simulant Liquid

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, $\epsilon_r$	Target Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon_r$	Measured Conductivity, $\sigma$ (S/m)	% dev $\epsilon_r$	% dev $\sigma$
Head	Sep. 13. 2022	2402	39.282	1.757	38.862	1.778	-1.07%	1.17%
		2412	39.265	1.766	38.842	1.787	-1.08%	1.17%
		2437	39.222	1.788	38.807	1.807	-1.06%	1.04%
		2441	39.215	1.792	38.803	1.81	-1.05%	1.00%
		2450	39.200	1.800	38.792	1.817	-1.04%	0.94%
		2462	39.184	1.813	38.777	1.829	-1.04%	0.89%
		2480	39.160	1.832	38.755	1.841	-1.03%	0.49%
	Sep. 14. 2022	5210	35.990	4.670	35.842	4.54	-0.41%	-2.78%
		5250	35.950	4.710	35.79	4.585	-0.45%	-2.65%
		5260	35.940	4.720	35.762	4.597	-0.50%	-2.61%
		5270	35.930	4.730	35.73	4.609	-0.56%	-2.56%
		5280	35.920	4.740	35.701	4.621	-0.61%	-2.51%
		5300	35.900	4.760	35.651	4.645	-0.69%	-2.42%
		5310	35.890	4.770	35.646	4.656	-0.68%	-2.39%
		5320	35.880	4.780	35.64	4.667	-0.67%	-2.36%
		5530	35.605	4.997	35.286	4.942	-0.90%	-1.09%
		Sep. 15. 2022	5570	35.545	5.039	35.22	5.006	-0.91%
	5600		35.500	5.070	35.154	5.02	-0.97%	-0.99%
	5610		35.490	5.080	35.129	5.031	-1.02%	-0.96%
	5690		35.410	5.160	34.897	5.156	-1.45%	-0.08%
	5750		35.350	5.220	34.777	5.173	-1.62%	-0.90%
	Sep. 16. 2022	5755	35.345	5.225	34.771	5.178	-1.62%	-0.90%
		5775	35.325	5.245	34.747	5.197	-1.64%	-0.92%
		5795	35.305	5.265	34.695	5.215	-1.73%	-0.95%
		2402	39.282	1.757	39.615	1.792	0.85%	1.96%
	Sep. 13. 2022	2412	39.265	1.766	39.578	1.801	0.80%	1.96%
		2437	39.222	1.788	39.514	1.823	0.74%	1.93%
		2441	39.215	1.792	39.509	1.827	0.75%	1.95%
		2450	39.200	1.800	39.492	1.835	0.74%	1.94%
		2462	39.184	1.813	39.474	1.847	0.74%	1.89%
		2480	39.160	1.832	39.44	1.866	0.72%	1.86%
		Sep. 14. 2022	5210	35.990	4.670	35.639	4.555	-0.98%
	5250		35.950	4.710	35.564	4.622	-1.07%	-1.87%
	5260		35.940	4.720	35.538	4.634	-1.12%	-1.82%
	5270		35.930	4.730	35.506	4.649	-1.18%	-1.71%
	5280		35.920	4.740	35.474	4.664	-1.24%	-1.60%
	5300		35.900	4.760	35.423	4.686	-1.33%	-1.56%
	5310		35.890	4.770	35.401	4.697	-1.36%	-1.53%
	5320		35.880	4.780	35.393	4.711	-1.36%	-1.44%
	5530		35.605	4.997	35.118	4.951	-1.37%	-0.91%
	Sep. 15. 2022		5570	35.545	5.039	35.004	5.02	-1.52%
		5600	35.500	5.070	34.91	5.054	-1.66%	-0.32%
		5610	35.490	5.080	34.903	5.068	-1.65%	-0.24%
		5690	35.410	5.160	35.632	5.234	0.63%	1.43%
		5750	35.350	5.220	34.569	5.27	-2.21%	0.96%
	Sep. 16. 2022	5755	35.345	5.225	34.563	5.275	-2.21%	0.96%
		5775	35.325	5.245	34.545	5.304	-2.21%	1.12%
		5795	35.305	5.265	34.413	5.344	-2.53%	1.50%
		6025	35.070	5.510	34.52	5.462	-1.57%	-0.86%
	Sep. 17. 2022	6185	34.878	5.698	34.367	5.648	-1.47%	-0.88%
		6345	34.686	5.887	34.2	5.831	-1.40%	-0.95%
		6500	34.500	6.070	34.037	6.005	-1.34%	-1.07%
		6505	34.494	6.076	34.031	6.01	-1.34%	-1.08%
		6665	34.302	6.261	33.862	6.192	-1.28%	-1.11%
		6825	34.110	6.447	33.705	6.368	-1.19%	-1.23%
		Sep. 18. 2022	6985	33.918	6.633	33.53	6.545	-1.14%
	7000		33.900	6.650	33.525	6.56	-1.11%	-1.35%
	6025		35.070	5.510	34.608	5.441	-1.32%	-1.24%
	Sep. 19. 2022	6185	34.878	5.698	34.43	5.625	-1.28%	-1.29%
		6345	34.686	5.887	34.259	5.808	-1.23%	-1.34%
		6500	34.500	6.070	34.107	5.985	-1.14%	-1.40%
		6505	34.494	6.076	34.101	5.99	-1.14%	-1.41%
		6665	34.302	6.261	33.923	6.172	-1.10%	-1.43%
		6825	34.110	6.447	33.75	6.353	-1.06%	-1.46%
		6985	33.918	6.633	33.581	6.531	-0.99%	-1.53%
	Sep. 20. 2022	7000	33.900	6.650	33.57	6.547	-0.97%	-1.55%
	Oct. 20. 2022	2450	39.200	1.800	39.285	1.823	0.22%	1.28%
		2462	39.184	1.813	39.278	1.838	0.24%	1.39%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, $\epsilon_r$	Target Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon_r$	Measured Conductivity, $\sigma$ (S/m)	% dev $\epsilon_r$	% dev $\sigma$
Head	Nov. 02. 2022	2402	39.282	1.757	39.234	1.703	-0.12%	-3.10%
		2412	39.265	1.766	39.213	1.711	-0.13%	-3.13%
		2437	39.222	1.788	39.178	1.73	-0.11%	-3.27%
		2441	39.215	1.792	39.172	1.733	-0.11%	-3.29%
		2450	39.200	1.800	39.161	1.74	-0.10%	-3.33%
		2462	39.184	1.813	39.151	1.749	-0.08%	-3.52%
		2480	39.160	1.832	39.128	1.763	-0.08%	-3.77%
		5250	35.950	4.710	35.933	4.675	-0.05%	-0.74%
		5530	35.605	4.997	35.474	5.03	-0.37%	0.67%
		5570	35.545	5.039	35.373	5.076	-0.48%	0.74%
		5600	35.500	5.070	35.279	5.111	-0.62%	0.81%
		5610	35.490	5.080	35.272	5.125	-0.61%	0.89%
		5690	35.410	5.160	35.068	5.241	-0.97%	1.57%
		5750	35.350	5.220	34.938	5.328	-1.17%	2.07%
		5775	35.325	5.245	34.915	5.362	-1.16%	2.23%
		6025	35.070	5.510	34.858	5.453	-0.60%	-1.03%
		6185	34.878	5.698	34.64	5.637	-0.68%	-1.08%
		6345	34.686	5.887	34.479	5.82	-0.60%	-1.14%
		6500	34.500	6.070	34.347	5.997	-0.44%	-1.20%
		6505	34.494	6.076	34.341	6.002	-0.44%	-1.21%
6665	34.302	6.261	34.173	6.184	-0.38%	-1.24%		
6825	34.110	6.447	34.03	6.365	-0.23%	-1.27%		
6985	33.918	6.633	33.821	6.543	-0.29%	-1.35%		
7000	33.900	6.650	33.77	6.559	-0.38%	-1.37%		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 3.4 The composition of the tissue simulating liquid:

Simulating Liquids for 600 MHz -10 GHz, Manufactured by SPEAG:


Broad-band head tissue simulating liquids	SPEAG Product	Frequency range (MHz)	Main Ingredients
	HBBL600-1000V6	600 - 10000	Water, Oil

### 3.5 System check

The microwave circuit arrangement for system check is sketched in below. The daily system accuracy verification occurs within the flat section of the SAM phantom and ELI phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values.

The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed with SAR values normalized to 1W forward power delivered to the dipole.

During the tests, the liquid depth from the center of the flat phantom to the liquid top surface was 15 cm above in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

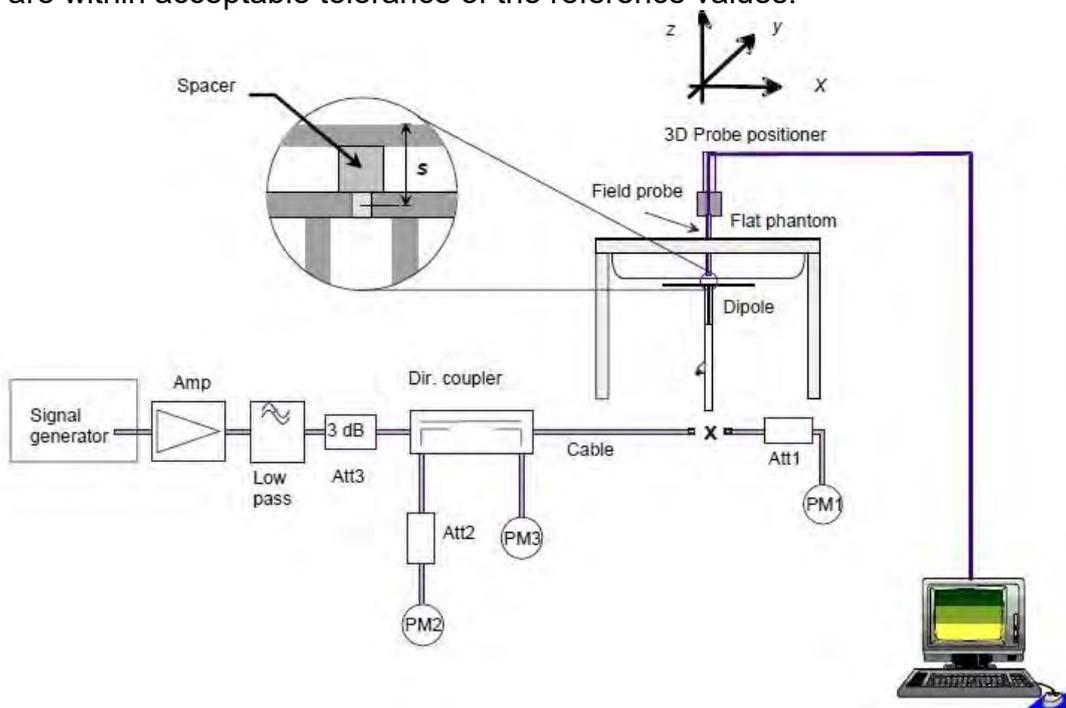

The block diagram of system check

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

3.6 System check results

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D2450V2	727	2450	52.8	13.1	52.4	-0.76	± 10%	Sep.13,2022
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D5GHzV2	1023	5250	81	7.93	79.3	-2.10	± 10%	Sep.14,2022
D5GHzV2	1023	5600	84.4	8.17	81.7	-3.20	± 10%	Sep.15,2022
D5GHzV2	1023	5750	81	8.17	81.7	0.86	± 10%	Sep.16,2022
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D6.5GHzV2	1006	6500	292	29.1	291	-0.34	± 10%	Sep.19,2022
D7GHzV2	1007	7000	278	26.6	266	-4.32	± 10%	Sep.19,2022
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D6.5GHzV2	1006	6500	292	29.6	296	1.37	± 10%	Sep.17,2022
D7GHzV2	1007	7000	278	26.5	265	-4.68	± 10%	Sep.18,2022
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D2450V2	727	2450	52.8	13.4	53.6	1.52	± 10%	Oct.20,2022
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	Pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D2450V2	727	2450	52.80	13.20	52.80	0.00	± 10%	Nov. 02, 2022
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	Pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D5GHzV2	1023	5250	81.00	7.92	79.20	-2.22	± 10%	Nov. 02, 2022
D5GHzV2	1023	5600	84.40	8.18	81.80	-3.08	± 10%	Nov. 02, 2022
D5GHzV2	1023	5750	81.00	8.04	80.40	-0.74	± 10%	Nov. 02, 2022
D6.5GHzV2	1006	6500	292.00	27.80	278.00	-4.79	± 10%	Nov. 02, 2022
D7GHzV2	1007	7000	278.00	27.20	272.00	-2.16	± 10%	Nov. 02, 2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 4 PD SYSTEM VERIFICATION

### 4.1 System check

The system was verified to be within  $\pm 0.66$  dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

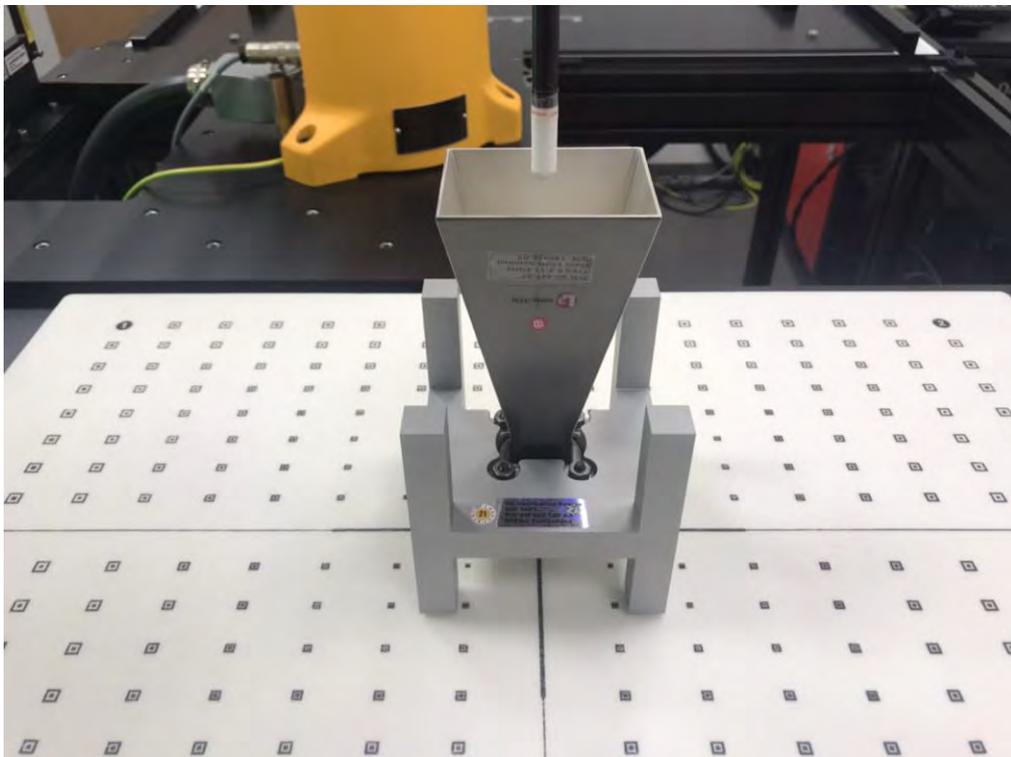

System Verification Setup Photo

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

## 4.2 System check result

The system was verified to be within  $\pm 0.66$  dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

Frequency (MHz)	PD Verification Source (MHz)	Probe S/N	DAE S/N	Distance (mm)	Prad (mW)	Measured $4\text{cm}^2$ ( $\text{W}/\text{m}^2$ )	Target $4\text{cm}^2$ ( $\text{W}/\text{m}^2$ )	Deviation (dB)	Date
10000	10000	9635	1260	10	86.1	53	51.7	0.11	Nov. 03, 2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

## 5 TEST CONFIGURATIONS

### 5.1 Test Environment

Ambient Temperature: 22±2° C

Tissue Simulating Liquid: 22±2° C

### 5.2 Test Note

- **General:** Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s).
- **General:** The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
- **General:** During the SAR testing, the DASY system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- **General:** According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.
- **General:** According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- **WLAN 2.4GHz:** 802.11b DSSS SAR Test Requirements: SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- **WLAN 2.4GHz:** 802.11g/n OFDM SAR Test Exclusion Requirements: SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

- **WLAN 5GHz:** Initial Test Configuration: An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is  $> 0.8$  W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for subsequent test configuration.
- **WLAN 5GHz:** Based on FCC guidance, general principles of KDB248227D01 can be applied to 802.11ax to determine initial test configuration with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency band.
- **WLAN 6GHz:** Per October 2020 & April 2021 TCB Workshop Interim procedures and FCC guidance, start instead with a minimum of 5 test channels across the full band, then adapt and apply conducted power and SAR test reduction procedures of KDB Pub. 248227 v02r02. WIFI 6E SAR is measured by using 6-7GHz parameters per IEC/IEEE62209- 1528:2020 and report also estimated absorbed PD (for reference purposes only, not specifically for compliance). For the highest SAR test configurations also measure incident PD (total) using mmW near-field probe and total-field/power-density reconstruction method.
- **WLAN 6GHz:** Per equipment manufacturer guidance, power density was measured at  $d=2\text{mm}$  with the grid step ( $0.0625\lambda$ ) for determining compliance at  $d=2\text{mm}$ .
- **WLAN 6GHz:** According to October 2020 TCB Workshop Interim procedures, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty  $> 30\%$ . Total expanded uncertainty of 2.67 dB (85%) was used to determine the psPD measurement scaling factor.
- **WLAN 6GHz:** Per FCC guidance, for simultaneous transmission evaluation, using SAR sum and SPLSR for simultaneous transmit exclusion analyses and evaluations.
- **General:** The device was tested based on FCC guidance.
- The bumper is not removable, and the bumper height for top edge, left/right edge and back surface is 7.38mm, 7.41mm and 4mm respectively. Please refer to Appendix A for the detail.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 5.3 Test position

#### Laptop mode SAR test position (0mm)

For laptop PC, according to KDB 616217 D04, SAR evaluation is required for the bottom surface of the keyboard. This EUT was tested in the base of EUT directly against the flat phantom. The required minimum test separation distance for incorporating transmitters and antennas into laptop computer display is determined with the display screen opened at an angle of 90° to the keyboard compartment. SAR measurement for laptop mode is not required because the antenna to user distance is larger than 20cm.

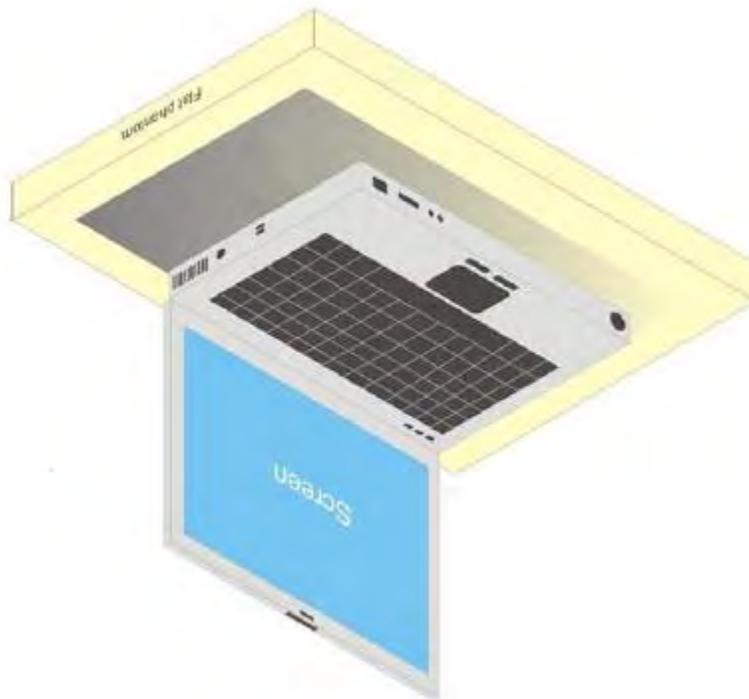


Illustration for Laptop Setup


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Tablet mode SAR test position (0mm)**

For full-size tablet, according to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user’s hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

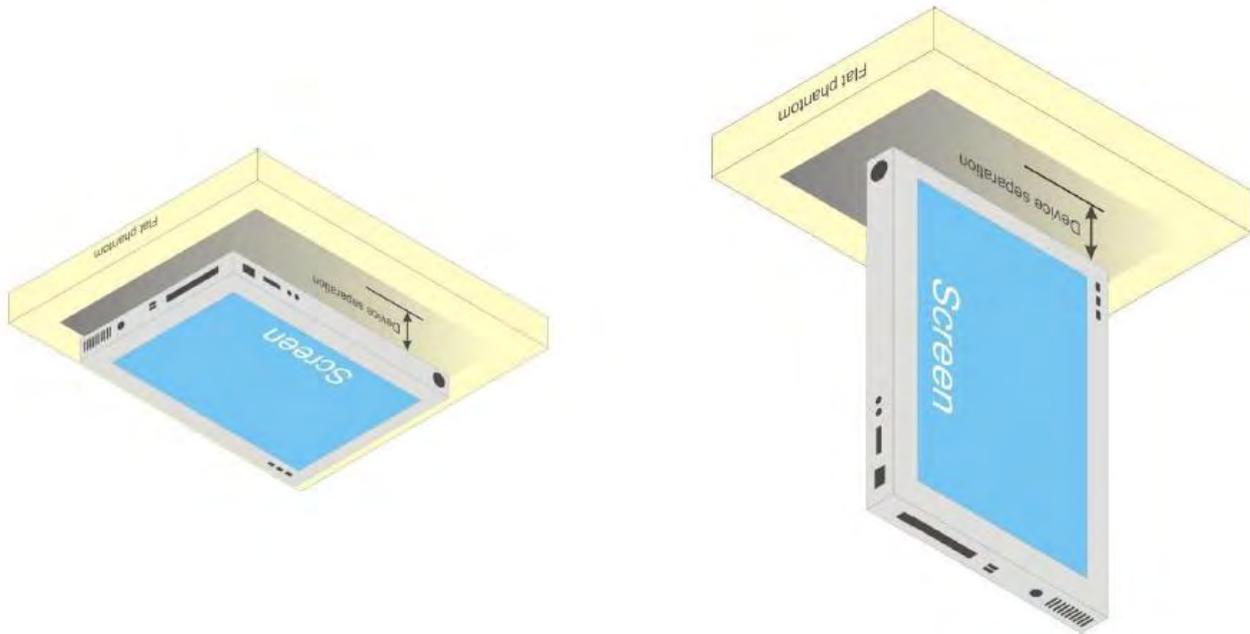

**Illustration for Tablet Setup**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company’s findings at the time of its intervention only and within the limits of Client’s instructions, if any. The Company’s sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

#### 5.4 Power verification of device mode

For the device modes verification, the measured conducted output power is monitored qualitatively to identify the triggering characteristics and recorded quantitatively.

#### Results and conclusion

The measured output power versus lid angle is tabulated in the following table based on the guidance from 2019-11 TCB workshop, and the triggering verification complies with the device mode / power level declared by the manufacturer.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Device mode verification by power measurement

Antenna	Operation mode	Lid angle	802.11b	802.11a 5.2G	802.11g 5.2G	802.11ac(80M) 5.8G	802.11ac(80M) 5.8G	U-NB-3 802.11ax(160M)	U-NB-6 802.11ax(160M)	U-NB-7 802.11ax(160M)	U-NB-8 802.11ax(160M)	
Lid close	Laptop	0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
		15°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
		20°	20.43	20.30	20.33	20.45	20.47	13.39	13.44	12.73	12.69	
		120°	20.40	20.31	20.33	20.38	20.40	13.44	13.47	12.71	12.72	
		15°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		11°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		120°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		13°	20.43	20.33	20.27	20.45	20.47	13.48	13.42	12.73	12.70	
		14°	20.39	20.33	20.28	20.39	20.43	13.48	13.40	12.69	12.73	
		16°	20.38	20.35	20.32	20.40	20.39	13.40	13.48	12.73	12.68	
Lid close	Laptop	15°	20.43	20.27	20.33	20.48	20.45	13.39	13.45	12.64	12.74	
		17°	20.43	20.30	20.27	20.39	20.42	13.47	13.41	12.74	12.64	
		18°	20.41	20.32	20.33	20.47	20.38	13.44	13.46	12.69	12.67	
		19°	20.44	20.28	20.34	20.48	20.38	13.39	13.39	12.69	12.64	
		20°	20.39	20.28	20.34	20.47	20.46	13.46	13.41	12.68	12.68	
		30°	20.38	20.36	20.32	20.48	20.45	13.46	13.43	12.68	12.71	
		40°	20.46	20.34	20.30	20.47	20.40	13.44	13.45	12.65	12.65	
		50°	20.46	20.35	20.28	20.40	20.45	13.39	13.39	12.65	12.72	
		60°	20.38	20.32	20.30	20.44	20.37	13.42	13.42	12.67	12.69	
		70°	20.39	20.28	20.34	20.41	20.39	13.48	13.48	12.70	12.72	
Lid close	Laptop	80°	20.39	20.31	20.27	20.42	20.47	13.44	13.41	12.68	12.68	
		90°	20.42	20.32	20.34	20.47	20.41	13.40	13.45	12.70	12.70	
		100°	20.45	20.29	20.28	20.38	20.45	13.41	13.47	12.69	12.68	
		110°	20.48	20.33	20.30	20.39	20.38	13.44	13.44	12.69	12.68	
		120°	20.40	20.28	20.32	20.44	20.46	13.38	13.45	12.71	12.71	
		130°	20.43	20.27	20.26	20.48	20.39	13.44	13.41	12.74	12.71	
		140°	20.42	20.29	20.33	20.41	20.40	13.42	13.41	12.72	12.65	
		150°	20.45	20.30	20.28	20.46	20.38	13.38	13.46	12.63	12.73	
		160°	20.44	20.38	20.35	20.45	20.41	13.41	13.42	12.63	12.73	
		170°	20.38	20.30	20.30	20.40	20.37	13.40	13.40	12.70	12.68	
Lid close	Laptop	180°	20.38	20.30	20.35	20.40	20.47	13.47	13.41	12.72	12.65	
		190°	20.40	20.35	20.27	20.45	20.47	13.47	13.42	12.72	12.65	
		200°	14.92	7.94	7.81	7.81	7.85	7.86	7.86	7.91	7.87	
		195°	20.45	20.29	20.34	20.39	20.38	13.48	13.42	12.70	12.66	
		185°	20.48	20.27	20.39	20.38	20.38	13.38	13.38	12.67	12.74	
		197°	20.41	20.27	20.31	20.46	20.39	13.45	13.43	12.72	12.68	
		198°	20.40	20.37	20.28	20.40	20.40	13.43	13.46	12.67	12.74	
		199°	20.38	20.30	20.32	20.45	20.44	13.44	13.44	12.67	12.66	
		200°	14.91	7.88	7.80	7.82	7.84	7.80	7.85	7.95	7.95	
		201°	14.90	7.89	7.77	7.81	7.82	7.87	7.89	7.90	7.89	
Lid close	Laptop	202°	14.93	7.93	7.79	7.89	7.89	7.89	7.77	7.86	7.82	
		203°	14.95	7.94	7.81	7.92	7.87	7.78	7.94	7.95	7.95	
		204°	14.88	7.94	7.77	7.84	7.83	7.77	7.92	7.90	7.90	
		205°	14.93	7.94	7.83	7.95	7.82	7.94	7.89	7.89	7.89	
		206°	14.92	7.88	7.74	7.95	7.85	7.74	7.90	7.94	7.94	
		207°	14.94	7.93	7.83	7.88	7.84	7.86	7.83	7.94	7.97	
		208°	14.88	7.94	7.73	7.94	7.82	7.88	7.74	7.95	7.88	
		209°	14.92	7.89	7.83	7.93	7.84	7.79	7.88	7.88	7.92	
		210°	14.96	7.85	7.83	7.96	7.92	7.95	7.76	7.90	7.93	
		211°	14.97	7.95	7.77	7.87	7.86	7.87	7.74	7.88	7.88	
Lid close	Laptop	212°	14.92	7.90	7.79	7.96	7.92	7.88	7.82	7.94	7.88	
		213°	14.97	7.85	7.83	7.93	7.85	7.91	7.76	7.87	7.95	
		214°	14.96	7.94	7.75	7.94	7.86	7.84	7.92	7.94	7.92	
		215°	14.89	7.90	7.82	7.87	7.83	7.96	7.83	7.96	7.88	
		216°	14.95	7.95	7.76	7.92	7.82	7.95	7.74	7.91	7.98	
		217°	14.93	7.94	7.81	7.94	7.82	7.94	7.81	7.89	7.92	
		218°	14.95	7.91	7.83	7.97	7.86	7.77	7.96	7.91	7.98	
		219°	14.97	7.94	7.77	7.90	7.89	7.85	7.76	7.96	7.92	
		220°	14.98	7.87	7.78	7.98	7.88	7.91	7.80	7.94	7.97	
		221°	14.93	7.88	7.77	7.86	7.85	7.85	7.78	7.88	7.94	
Lid close	Laptop	330°	14.91	7.95	7.78	7.96	7.88	7.85	7.83	7.93	7.93	
		340°	14.96	7.98	7.75	7.95	7.83	7.88	7.77	7.94	7.92	
		350°	14.97	7.90	7.81	7.97	7.90	7.80	7.91	7.91	7.97	
		360°	14.98	7.90	7.73	7.90	7.88	7.81	7.96	7.96	7.92	
		350°	14.96	7.91	7.78	7.95	7.85	7.94	7.81	7.96	7.90	
		340°	14.90	7.85	7.77	7.92	7.83	7.88	7.75	7.87	7.95	
		330°	14.96	7.87	7.82	7.96	7.85	7.87	7.75	7.92	7.93	
		320°	14.90	7.94	7.80	7.94	7.81	7.91	7.77	7.88	7.97	
		310°	14.91	7.91	7.77	7.94	7.87	7.85	7.82	7.91	7.93	
		300°	14.88	7.94	7.78	7.94	7.92	7.91	7.78	7.90	7.95	
Lid close	Laptop	290°	14.98	7.86	7.76	7.96	7.92	7.93	7.84	7.96	7.94	
		280°	14.95	7.93	7.76	7.96	7.86	7.92	7.74	7.95	7.90	
		270°	14.96	7.93	7.76	7.95	7.89	7.95	7.82	7.93	7.97	
		260°	14.92	7.87	7.83	7.95	7.85	7.93	7.82	7.90	7.94	
		250°	14.94	7.95	7.76	7.95	7.89	7.95	7.84	7.95	7.98	
		240°	14.88	7.85	7.74	7.96	7.89	7.94	7.84	7.88	7.93	
		230°	14.93	7.88	7.82	7.95	7.85	7.93	7.77	7.85	7.93	
		220°	14.92	7.89	7.77	7.87	7.87	7.88	7.76	7.95	7.90	
		210°	14.92	7.92	7.83	7.89	7.89	7.91	7.82	7.95	7.92	
		200°	14.96	7.86	7.76	7.88	7.82	7.92	7.78	7.95	7.95	
Lid close	Laptop	190°	14.97	7.87	7.82	7.96	7.84	7.88	7.83	7.96	7.90	
		180°	14.90	7.90	7.74	7.92	7.85	7.87	7.80	7.93	7.98	
		170°	14.90	7.91	7.82	7.97	7.88	7.90	7.74	7.95	7.90	
		160°	14.97	7.86	7.77	7.95	7.84	7.95	7.75	7.94	7.95	
		150°	20.38	20.28	20.30	20.44	20.46	13.39	13.48	12.72	12.71	
		155°	20.46	20.30	20.30	20.46	20.40	13.44	13.48	12.74	12.73	
		160°	14.96	7.85	7.77	7.86	7.83	7.86	7.74	7.90	7.85	
		159°	20.40	20.27	20.30	20.45	20.43	13.40	13.38	12.72	12.67	
		158°	20.41	20.27	20.35	20.42	20.42	13.47	13.43	12.72	12.71	
		157°	20.47	20.31	20.32	20.42	20.41	13.39	13.47	12.74	12.65	
Lid close	Laptop	156°	20.48	20.32	20.38	20.44	20.39	13.44	13.43	12.67	12.68	
		155°	20.44	20.28	20.36	20.44	20.43	13.44	13.40	12.64	12.70	
		154°	20.44	20.37	20.27	20.40	20.38	13.46	13.42	12.65	12.70	
		153°	20.48	20.29	20.29	20.39	20.43	13.45	13.43	12.71	12.67	
		152°	20.40	20.32	20.48	20.48	20.46	13.43	13.41	12.67	12.74	
		151°	20.40	20.33	20.27	20.43	20.45	13.43	13.48	12.70	12.69	
		150°	20.42	20.30	20.30	20.48	20.37	13.42	13.46	12.64	12.71	
		140°	20.45	20.31	20.28	20.45	20.47	13.41	13.40	12.66	12.70	
		130°	20.38	20.33	20.26	20.39	20.37	13.38	13.42	12.70	12.73	
		120°	20.48	20.31	20.29	20.45	20.39	13.41	13.44	12.70	12.73	
Lid close	Laptop	110°	20.43	20.34	20.27	20.43	20.37	13.42	13.38	12.73	12.71	
		100°	20.42	20.30	20.31	20.42	20.38	13.42	13.40	12.68	12.70	
		90°	20.43	20.30	20.29	20.38	20.45	13.44	13.42	12.67	12.67	
		80°	20.43	20.31	20.30	20.43	20.47	13.38	13.38	12.74	12.68	
		70°	20.41	20.28	20.34	20.48	20.41	13.48	13.39	12.65	12.72	
		60°	20.39	20.37	20							

Antenna	Operation mode	Lid angle	802.11b	802.11a 5.2G	802.11a 5.3G	802.11ac(80M) 5.5G	802.11ac(80M) 5.8G	U-NB-5 802.11ac(160M)	U-NB-6 802.11ac(160M)	U-NB-7 802.11ac(160M)	U-NB-8 802.11ac(160M)
Main	Book	13°	14.93	7.87	7.83	7.90	7.88	7.94	7.85	7.88	7.88
		14°	14.91	7.88	7.80	7.95	7.90	7.90	7.83	7.88	7.97
		15°	14.88	7.87	7.83	7.88	7.88	7.88	7.79	7.91	7.95
		16°	14.92	7.92	7.75	7.91	7.87	7.95	7.79	7.91	7.98
		17°	14.88	7.87	7.75	7.89	7.87	7.87	7.83	7.95	7.98
		18°	14.88	7.83	7.83	7.89	7.85	7.89	7.82	7.88	7.90
		19°	14.94	7.88	7.77	7.89	7.84	7.87	7.77	7.96	7.94
		20°	14.88	7.89	7.82	7.89	7.83	7.92	7.74	7.91	7.89
		30°	14.92	7.87	7.75	7.98	7.82	7.94	7.76	7.94	7.91
		40°	14.88	7.87	7.78	7.94	7.87	7.89	7.78	7.89	7.95
		50°	14.91	7.88	7.74	7.95	7.92	7.91	7.83	7.87	7.95
		60°	14.96	7.88	7.76	7.99	7.92	7.85	7.78	7.92	7.85
		70°	14.90	7.91	7.82	7.97	7.82	7.89	7.76	7.90	7.95
		80°	14.96	7.89	7.76	7.93	7.88	7.90	7.76	7.92	7.96
		90°	14.97	7.93	7.82	7.96	7.88	7.85	7.75	7.86	7.97
		100°	14.98	7.95	7.78	7.98	7.91	7.90	7.77	7.91	7.91
		110°	14.92	7.92	7.73	7.91	7.86	7.94	7.81	7.90	7.88
		120°	14.90	7.91	7.73	7.91	7.89	7.94	7.83	7.91	7.95
		130°	14.92	7.94	7.73	7.93	7.87	7.91	7.74	7.94	7.94
		140°	14.98	7.91	7.77	7.98	7.87	7.87	7.82	7.96	7.90
		150°	14.91	7.87	7.73	7.95	7.89	7.92	7.77	7.95	7.93
		160°	14.91	7.95	7.77	7.89	7.90	7.90	7.77	7.91	7.97
		170°	14.93	7.92	7.81	7.93	7.86	7.85	7.76	7.94	7.94
		180°	14.93	7.86	7.83	7.94	7.91	7.89	7.83	7.93	7.88
		190°	14.97	7.91	7.74	7.93	7.84	7.92	7.76	7.96	7.89
		195°	14.90	7.89	7.80	7.89	7.87	7.94	7.81	7.86	7.97
		196°	14.93	7.85	7.74	7.97	7.88	7.87	7.75	7.92	7.98
		197°	14.88	7.88	7.78	7.94	7.82	7.95	7.79	7.88	7.95
		198°	14.88	7.92	7.79	7.97	7.83	7.93	7.78	7.90	7.93
		199°	14.91	7.96	7.75	7.98	7.83	7.91	7.76	7.81	7.96
		199°	14.89	7.89	7.89	7.95	7.82	7.91	7.77	7.93	7.89
		199°	14.92	7.93	7.82	7.92	7.86	7.93	7.80	7.95	7.94
		199°	14.91	7.85	7.73	7.92	7.82	7.86	7.78	7.89	7.88
		199°	14.96	7.87	7.78	7.94	7.89	7.92	7.74	7.91	7.91
		157°	14.88	7.89	7.77	7.99	7.92	7.88	7.77	7.92	7.97
		156°	14.88	7.88	7.83	7.96	7.92	7.93	7.82	7.94	7.95
		155°	14.95	7.87	7.79	7.94	7.87	7.88	7.75	7.87	7.96
		154°	14.90	7.95	7.78	7.95	7.82	7.94	7.78	7.90	7.96
		153°	14.88	7.86	7.83	7.95	7.92	7.92	7.82	7.95	7.95
		152°	14.94	7.95	7.76	7.92	7.92	7.92	7.82	7.94	7.96
		151°	14.96	7.87	7.73	7.94	7.86	7.95	7.83	7.87	7.90
		150°	14.97	7.95	7.82	7.98	7.90	7.95	7.82	7.91	7.93
		140°	14.93	7.92	7.79	7.89	7.86	7.94	7.83	7.95	7.92
		130°	14.95	7.86	7.82	7.98	7.86	7.93	7.84	7.93	7.94
		120°	14.98	7.93	7.73	7.99	7.86	7.96	7.83	7.86	7.94
		110°	14.94	7.93	7.76	7.91	7.92	7.89	7.83	7.90	7.93
		100°	14.98	7.85	7.83	7.98	7.88	7.85	7.76	7.91	7.91
		90°	14.97	7.90	7.83	7.99	7.92	7.87	7.75	7.89	7.97
		80°	14.95	7.89	7.83	7.99	7.83	7.89	7.77	7.92	7.88
		70°	14.95	7.95	7.79	7.97	7.88	7.85	7.81	7.88	7.94
		60°	14.88	7.88	7.79	7.99	7.83	7.87	7.82	7.89	7.96
		50°	14.96	7.89	7.82	7.96	7.86	7.92	7.80	7.87	7.93
		40°	14.97	7.87	7.78	7.98	7.92	7.95	7.83	7.91	7.91
		30°	14.96	7.86	7.73	7.90	7.86	7.95	7.83	7.96	7.97
		20°	14.91	7.85	7.82	7.90	7.89	7.92	7.83	7.96	7.93
		15°	14.97	7.88	7.83	7.99	7.84	7.94	7.77	7.86	7.90
		14°	14.93	7.90	7.78	7.89	7.90	7.94	7.81	7.91	7.85
		13°	14.98	7.88	7.76	7.96	7.84	7.85	7.80	7.89	7.90

\*The screen orientation is 90° or 270° in book mode, other is laptop mode.

Man	without keyboard	14.91	7.82	7.88	7.92	7.89	7.95	7.88	7.91	7.92
-----	------------------	-------	------	------	------	------	------	------	------	------

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Antenna	Operation mode	Lid angle	802.11b	802.11a(40M) 5.2G	802.11ax(40M) 5.3G	802.11ax(40M) 5.6G	802.11ax(40M) 5.8G	U-NR-5 802.11ax(160M)	U-NR-6 802.11ax(160M)	U-NR-7 802.11ax(160M)	U-NR-8 802.11ax(160M)
Lid close	Laptop	0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		20°	20.44	20.34	20.34	20.40	20.44	13.47	13.30	12.49	12.59
		35°	20.45	20.36	20.38	20.44	20.48	13.39	13.37	12.51	12.61
		50°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		70°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		90°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		110°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		130°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		150°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Laptop	Laptop	11°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		12°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		13°	20.41	20.34	20.30	20.40	20.44	13.40	13.34	12.52	12.59
		14°	20.47	20.38	20.38	20.38	20.47	13.44	13.37	12.50	12.89
		15°	20.45	20.35	20.33	20.38	20.39	13.39	13.39	12.46	12.64
		16°	20.40	20.35	20.38	20.38	20.43	13.42	13.41	12.48	12.65
		17°	20.49	20.36	20.34	20.34	20.48	13.43	13.33	12.45	12.63
		18°	20.47	20.40	20.28	20.41	20.47	13.39	13.42	12.52	12.62
		19°	20.41	20.42	20.32	20.38	20.38	13.35	13.34	12.46	12.65
		20°	20.43	20.41	20.31	20.42	20.42	13.45	13.40	12.51	12.59
		30°	20.40	20.43	20.33	20.40	20.47	13.46	13.32	12.44	12.64
		40°	20.43	20.35	20.38	20.41	20.41	13.40	13.34	12.45	12.61
		50°	20.45	20.34	20.30	20.34	20.39	13.42	13.33	12.49	12.68
		60°	20.44	20.38	20.38	20.35	20.42	13.45	13.40	12.44	12.65
		70°	20.41	20.42	20.30	20.39	20.48	13.46	13.36	12.54	12.63
		80°	20.39	20.35	20.35	20.38	20.38	13.41	13.40	12.45	12.67
		90°	20.47	20.39	20.30	20.39	20.44	13.41	13.42	12.45	12.67
		100°	20.41	20.40	20.34	20.39	20.40	13.42	13.36	12.47	12.67
		110°	20.47	20.38	20.34	20.43	20.38	13.43	13.41	12.51	12.62
		120°	20.43	20.35	20.38	20.42	20.38	13.45	13.39	12.47	12.67
130°	20.40	20.32	20.38	20.38	20.39	13.42	13.32	12.52	12.68		
140°	20.39	20.38	20.28	20.44	20.39	13.45	13.37	12.50	12.60		
150°	20.39	20.42	20.35	20.43	20.45	13.45	13.34	12.49	12.58		
160°	20.44	20.44	20.44	20.44	20.44	13.44	13.40	12.48	12.68		
170°	20.42	20.42	20.31	20.39	20.45	13.42	13.42	12.45	12.62		
180°	20.49	20.42	20.30	20.39	20.38	13.43	13.32	12.50	12.66		
190°	20.47	20.48	20.48	20.48	20.48	13.43	13.38	12.45	12.63		
200°	16.45	8.72	8.86	8.86	8.89	8.89	8.89	8.79	8.92		
Flip	Laptop	195°	20.47	20.41	20.35	20.35	20.44	13.40	13.35	12.47	12.60
		196°	20.48	20.40	20.35	20.41	20.44	13.40	13.36	12.48	12.62
		197°	20.45	20.35	20.35	20.40	20.40	13.47	13.33	12.45	12.59
		198°	20.46	20.42	20.33	20.39	20.39	13.45	13.45	12.44	12.68
		199°	20.45	20.42	20.31	20.34	20.38	13.44	13.38	12.49	12.63
		200°	16.45	8.72	8.87	8.87	8.89	8.89	8.79	8.85	8.85
		201°	16.43	8.79	8.89	8.92	8.72	8.88	8.78	8.88	8.88
		202°	16.41	8.74	8.82	8.92	8.72	8.87	8.85	8.82	8.91
		203°	16.43	8.73	8.83	8.73	8.74	8.92	8.86	8.76	8.92
		204°	16.44	8.74	8.81	8.89	8.68	8.90	8.85	8.85	8.89
Flip	Laptop	205°	16.37	8.72	8.85	8.93	8.73	8.87	8.85	8.75	8.86
		206°	16.41	8.77	8.88	8.88	8.69	8.92	8.80	8.80	8.86
		207°	16.40	8.72	8.85	8.88	8.69	8.88	8.93	8.80	8.94
		208°	16.39	8.73	8.86	8.87	8.74	8.86	8.84	8.84	8.87
		209°	16.40	8.73	8.86	8.88	8.68	8.89	8.85	8.85	8.87
		210°	16.39	8.73	8.87	8.88	8.67	8.95	8.93	8.80	8.90
		220°	16.37	8.78	8.58	8.58	8.75	8.96	8.94	8.80	8.88
		230°	16.38	8.77	8.65	8.85	8.71	8.93	8.85	8.75	8.89
		240°	16.40	8.72	8.62	8.82	8.52	8.95	8.90	8.80	8.94
		250°	16.44	8.72	8.68	8.87	8.75	8.88	8.85	8.76	8.94
		260°	16.36	8.77	8.65	8.85	8.71	8.93	8.85	8.75	8.89
		270°	16.40	8.72	8.62	8.82	8.52	8.95	8.90	8.80	8.94
		280°	16.37	8.72	8.60	8.97	8.75	8.88	8.85	8.76	8.94
		290°	16.40	8.78	8.58	8.89	8.74	8.91	8.85	8.80	8.92
		300°	16.38	8.73	8.67	8.87	8.73	8.91	8.84	8.77	8.86
		310°	16.37	8.77	8.62	8.96	8.67	8.94	8.85	8.84	8.93
		320°	16.38	8.71	8.67	8.89	8.70	8.90	8.94	8.75	8.85
		330°	16.40	8.68	8.68	8.88	8.74	8.98	8.93	8.79	8.90
		340°	16.44	8.78	8.57	8.95	8.67	8.88	8.88	8.82	8.88
		350°	16.36	8.70	8.58	8.96	8.72	8.92	8.93	8.83	8.84
360°	16.40	8.78	8.65	8.87	8.71	8.93	8.89	8.83	8.89		
Flip	Laptop	350°	16.39	8.78	8.63	8.87	8.65	8.85	8.89	8.84	8.89
		340°	16.44	8.71	8.62	8.97	8.70	8.91	8.86	8.76	8.93
		330°	16.38	8.74	8.67	8.88	8.72	8.95	8.94	8.85	8.89
		320°	16.38	8.77	8.63	8.87	8.73	8.93	8.93	8.83	8.89
		310°	16.45	8.61	8.61	8.73	8.91	8.91	8.82	8.82	8.86
		300°	16.37	8.70	8.67	8.87	8.71	8.91	8.85	8.80	8.89
		290°	16.42	8.70	8.62	8.96	8.76	8.91	8.85	8.80	8.90
		280°	16.42	8.72	8.60	8.92	8.72	8.96	8.93	8.85	8.84
		270°	16.40	8.70	8.61	8.90	8.68	8.92	8.93	8.81	8.86
		260°	16.44	8.73	8.63	8.87	8.65	8.91	8.91	8.79	8.87
		250°	16.43	8.69	8.67	8.91	8.73	8.90	8.90	8.79	8.92
		240°	16.36	8.77	8.65	8.90	8.65	8.90	8.86	8.85	8.90
		230°	16.40	8.71	8.63	8.92	8.70	8.90	8.85	8.85	8.88
		220°	16.37	8.75	8.59	8.87	8.65	8.88	8.93	8.78	8.92
		210°	16.40	8.71	8.64	8.86	8.68	8.88	8.87	8.79	8.88
		200°	16.40	8.77	8.60	8.92	8.72	8.93	8.94	8.76	8.90
		190°	16.39	8.70	8.59	8.92	8.71	8.93	8.87	8.75	8.84
		180°	16.41	8.73	8.63	8.95	8.69	8.90	8.80	8.80	8.91
		170°	16.41	8.71	8.64	8.89	8.72	8.87	8.91	8.84	8.88
		160°	16.44	8.78	8.61	8.87	8.66	8.89	8.84	8.84	8.85
Lid close	Laptop	150°	20.47	20.32	20.37	20.38	13.46	13.41	12.44	12.62	
		155°	20.48	20.37	20.30	20.40	13.45	13.32	12.46	12.63	
		160°	16.38	8.75	8.64	8.92	8.70	8.92	8.80	8.84	
		165°	20.48	20.38	20.32	20.38	13.45	13.38	12.44	12.65	
		168°	20.47	20.37	20.38	20.39	13.48	13.37	12.53	12.60	
		170°	20.39	20.35	20.31	20.38	13.48	13.40	12.52	12.61	
		175°	20.46	20.35	20.37	20.44	13.39	13.38	12.53	12.63	
		180°	20.48	20.34	20.36	20.39	13.41	13.39	12.52	12.59	
		184°	20.48	20.37	20.38	20.40	13.40	13.38	12.46	12.59	
		185°	20.49	20.34	20.36	20.34	13.45	13.32	12.50	12.62	
Laptop	Laptop	182°	20.45	20.39	20.35	20.47	13.45	13.39	12.50	12.66	
		181°	20.46	20.36	20.36	20.41	13.44	13.36	12.51	12.68	
		180°	20.46	20.42	20.28	20.44	13.48	13.41	12.54	12.68	
		140°	20.48	20.38	20.37	20.42	13.40	13.32	12.44	12.61	
		130°	20.41	20.37	20.38	20.35	13.38	13.37	12.45	12.60	
		120°	20.43	20.37	20.35	20.44	13.47	13.37	12.52	12.58	
		110°	20.47	20.40	20.37	20.34	13.41	13.32	12.53	12.62	
		100°	20.45	20.34	20.33	20.44	13.41	13.41	12.50	12.59	
		90°	20.49	20.43	20.33	20.47	13.42	13.44	12.44	12.65	
		80°	20.42	20.38	20.33	20.38	13.48	13.32	12.52	12.61	
Lid close	Laptop	70°	20.44	20.33	20.28	20.38	13.44	13.36	12.48	12.62	
		60°									

Antenna	Operation mode	Lid angle	802.11b	802.11n(40M) 5.2G	802.11ax(40M) 5.3G	802.11ac(80M) 5.6G	802.11n(40M) 5.8G	U-NII-5 802.11ax(190M)	U-NII-6 802.11ax(190M)	U-NII-7 802.11ax(190M)	U-NII-8 802.11ax(190M)			
Aux	Book	13°	16.44	8.79	8.60	8.93	8.92	8.92	8.94	8.92	8.95			
		14°	16.40	8.73	8.64	8.92	8.73	8.87	8.90	8.80	8.84			
		15°	16.44	8.78	8.61	8.95	8.67	8.86	8.87	8.81	8.94			
		16°	16.39	8.71	8.61	8.88	8.74	8.90	8.94	8.84	8.93			
		17°	16.46	8.72	8.60	8.97	8.73	8.87	8.90	8.84	8.88			
		18°	16.45	8.74	8.57	8.92	8.67	8.87	8.91	8.84	8.86			
		19°	16.38	8.70	8.67	8.95	8.73	8.91	8.89	8.78	8.86			
		20°	16.44	8.71	8.67	8.87	8.72	8.88	8.92	8.81	8.88			
		30°	16.42	8.71	8.62	8.90	8.68	8.86	8.84	8.81	8.94			
		40°	16.37	8.76	8.61	8.87	8.69	8.89	8.93	8.85	8.90			
		50°	16.43	8.75	8.65	8.87	8.71	8.92	8.94	8.76	8.88			
		60°	16.39	8.77	8.66	8.88	8.74	8.90	8.94	8.81	8.92			
		70°	16.46	8.79	8.58	8.91	8.73	8.87	8.84	8.79	8.85			
		80°	16.45	8.77	8.61	8.93	8.70	8.88	8.90	8.85	8.85			
		90°	16.42	8.79	8.57	8.96	8.73	8.88	8.91	8.76	8.92			
		100°	16.44	8.78	8.61	8.90	8.75	8.88	8.91	8.78	8.84			
		110°	16.44	8.78	8.66	8.96	8.74	8.99	8.93	8.83	8.86			
		120°	16.37	8.75	8.67	8.93	8.69	8.88	8.88	8.82	8.91			
		130°	16.38	8.79	8.57	8.88	8.74	8.90	8.88	8.82	8.91			
		140°	16.43	8.73	8.58	8.95	8.68	8.91	8.87	8.78	8.91			
		150°	16.36	8.77	8.62	8.89	8.71	8.88	8.89	8.78	8.87			
		160°	16.44	8.74	8.65	8.91	8.69	8.92	8.87	8.79	8.90			
		170°	16.44	8.71	8.64	8.95	8.75	8.92	8.88	8.84	8.93			
		180°	16.41	8.69	8.57	8.88	8.75	8.87	8.91	8.79	8.85			
		190°	16.44	8.70	8.62	8.95	8.70	8.95	8.89	8.79	8.90			
		195°	16.44	8.77	8.57	8.94	8.68	8.91	8.89	8.77	8.86			
		196°	16.36	8.73	8.58	8.89	8.75	8.92	8.89	8.79	8.91			
		197°	16.37	8.74	8.61	8.87	8.68	8.86	8.89	8.82	8.85			
		198°	16.36	8.76	8.63	8.96	8.74	8.89	8.94	8.85	8.93			
		199°	16.41	8.73	8.61	8.94	8.70	8.98	8.89	8.76	8.86			
		Aux	Book	150°	16.38	8.78	8.63	8.87	8.72	8.86	8.84	8.85	8.92	
				155°	16.41	8.70	8.59	8.87	8.70	8.91	8.84	8.81	8.93	
				159°	16.36	8.71	8.62	8.94	8.73	8.95	8.94	8.85	8.94	
				158°	16.38	8.74	8.60	8.95	8.73	8.90	8.89	8.80	8.84	
				157°	16.42	8.76	8.66	8.90	8.71	8.96	8.93	8.84	8.93	
				156°	16.40	8.78	8.64	8.97	8.71	8.88	8.90	8.78	8.92	
				155°	16.43	8.76	8.65	8.90	8.69	8.96	8.91	8.75	8.94	
				154°	16.36	8.70	8.61	8.92	8.75	8.90	8.85	8.77	8.90	
				153°	16.45	8.70	8.62	8.94	8.70	8.90	8.89	8.76	8.90	
				152°	16.36	8.77	8.66	8.96	8.71	8.92	8.84	8.79	8.91	
				151°	16.41	8.76	8.60	8.89	8.66	8.88	8.94	8.77	8.86	
				150°	16.44	8.73	8.58	8.95	8.71	8.91	8.89	8.81	8.90	
				140°	16.44	8.79	8.61	8.95	8.67	8.88	8.85	8.75	8.85	
				130°	16.43	8.71	8.59	8.97	8.66	8.89	8.91	8.82	8.94	
				120°	16.41	8.76	8.60	8.95	8.71	8.88	8.92	8.79	8.89	
				110°	16.40	8.76	8.66	8.91	8.75	8.91	8.91	8.77	8.94	
				100°	16.42	8.72	8.67	8.96	8.66	8.89	8.93	8.78	8.86	
				90°	16.38	8.73	8.59	8.90	8.70	8.94	8.91	8.84	8.85	
				80°	16.45	8.73	8.60	8.92	8.69	8.92	8.93	8.78	8.90	
				70°	16.38	8.76	8.62	8.96	8.72	8.96	8.88	8.78	8.85	
				60°	16.40	8.70	8.58	8.88	8.73	8.89	8.86	8.78	8.86	
				50°	16.45	8.71	8.65	8.92	8.75	8.86	8.92	8.82	8.94	
				40°	16.43	8.72	8.63	8.93	8.70	8.95	8.90	8.76	8.92	
				30°	16.42	8.69	8.58	8.94	8.66	8.89	8.90	8.77	8.90	
				20°	16.37	8.69	8.66	8.89	8.70	8.91	8.87	8.78	8.84	
				Book	15°	16.37	8.70	8.64	8.97	8.71	8.88	8.89	8.76	8.94
					14°	16.46	8.77	8.58	8.93	8.72	8.93	8.91	8.80	8.85
					13°	16.41	8.76	8.62	8.87	8.65	8.90	8.92	8.77	8.85
					12°	16.44	8.78	8.66	8.91	8.75	8.91	8.91	8.77	8.94

\*The screen orientation is 90° or 270° in book mode, other is laptop mode.

Aux	without keyboard	16.44	8.72	8.61	8.82	8.74	8.87	8.92	8.76	8.87
-----	------------------	-------	------	------	------	------	------	------	------	------

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 5.5 Test limit

### [§ 2.1093\(d\)\(1\)](#)

Applications for equipment authorization of portable RF sources subject to routine environmental evaluation must contain a statement confirming compliance with the limits specified in [§ 1.1310](#) as part of their application. Technical information showing the basis for this statement must be submitted to the Commission upon request. The SAR limits specified in [§ 1.1310\(a\)](#) through [\(c\) of this chapter](#) shall be used for evaluation of portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to [§ 1.1310\(e\)\(1\)](#). A minimum separation distance applicable to the operating configurations and exposure conditions of the device shall be used for the evaluation. In general, maximum time-averaged power levels must be used for evaluation. All unlicensed personal communications service (PCS) devices and unlicensed NII devices shall be subject to the limits for general population/uncontrolled exposure. Radiofrequency radiation exposure limits.

### [§ 1.1310\(a\)](#)

Specific absorption rate (SAR) shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in § 1.1307(b) within the frequency range of 100 kHz to 6 GHz (inclusive).

### [§ 1.1310\(b\)](#)

The SAR limits for occupational/controlled exposure are 0.4 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 8 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit for occupational/controlled exposure is 20 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 6 minutes to determine compliance with occupational/controlled SAR limits.

### [§ 1.1310\(c\)](#)

The SAR limits for general population/uncontrolled exposure are 0.08 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 1.6 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit is 4 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 30 minutes to determine compliance with general population/uncontrolled SAR limits.

Note to paragraphs (a) through (c):

SAR is a measure of the rate of energy absorption due to exposure to RF electromagnetic energy. These SAR limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized SAR in [Section 4.2](#) of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

3 kHz to 300 GHz,” ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in “Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” NCRP Report No. 86, [Section 17.4.5](#), copyright 1986 by NCRP, Bethesda, Maryland 20814. Limits for whole body SAR and peak spatial-average SAR are based on recommendations made in both of these documents. The MPE limits in Table 1 are based generally on criteria published by the NCRP in “Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” NCRP Report No. 86, Sections 17.4.1, 17.4.1.1, 17.4.2 and 17.4.3, copyright 1986 by NCRP, Bethesda, Maryland 20814. In the frequency range from 100 MHz to 1500 MHz, these MPE exposure limits for field strength and power density are also generally based on criteria recommended by the ANSI in [Section 4.1](#) of “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz,” ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to [§ 1.1310\(e\)\(1\)](#).

According to ANSI/IEEE C95.1-1992, the criteria listed in the following Table shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm<sup>2</sup> per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(i) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6
<b>(ii) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

f = frequency in MHz. \* = Plane-wave equivalent power density.

Table 1 to [§ 1.1310\(e\)\(1\)](#) - Limits for Maximum Permissible Exposure (MPE)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 6 MAXIMUM OUTPUT POWER

### 6.1 WLAN

NB

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2.45GHz	802.11b	1	2412	1Mbps	20.50	20.41
		6	2437		20.50	20.48
		11	2462		20.50	20.46
	802.11g	1	2412	6Mbps	19.50	19.23
		6	2437		20.50	20.27
		11	2462		18.00	17.90
	802.11n20-HT0	1	2412	MCS0	19.50	19.26
		6	2437		20.50	20.37
		11	2462		18.00	17.75
	802.11ax20-HE0	1	2412	MCS0	19.50	19.28
		6	2437		20.50	20.28
		11	2462		18.00	17.84
	802.11n40-HT0	3	2422	MCS0	15.50	15.24
		6	2437		17.50	17.29
		9	2452		15.50	15.26
	802.11ax40-HE0	3	2422	MCS0	15.50	15.38
		6	2437		17.50	17.30
		9	2452		15.50	15.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	19.50	19.46
		40	5200		20.50	20.37
		44	5220		20.375	20.34
		48	5240		19.875	19.71
	802.11n20-HT0	36	5180	MCS0	19.50	19.30
		40	5200		20.50	20.24
		44	5220		20.00	19.72
		48	5240		19.50	19.30
	802.11ax20-HE0	36	5180	MCS0	19.50	19.25
		40	5200		20.50	20.20
		44	5220		20.25	19.94
		48	5240		19.75	19.49
	802.11n40-HT0	38	5190	MCS0	17.75	17.53
		46	5230		20.25	20.02
	802.11ax40-HE0	38	5190	MCS0	17.75	17.57
		46	5230		20.125	19.88
802.11ac80-VHT0	42	5210	MCS0	18.50	18.32	
802.11ax80-HE0	42	5210	MCS0	18.50	18.28	
802.11ac160-VHT0	50	5250	MCS0	14.50	14.26	
802.11ax160-HE0	50	5250	MCS0	14.50	14.29	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	19.875	19.66
		56	5280		20.00	19.84
		60	5300		20.375	20.17
		64	5320		20.50	20.36
	802.11n20-HT0	52	5260	MCS0	19.75	19.50
		56	5280		20.375	20.05
		60	5300		20.50	20.31
		64	5320		20.50	20.30
	802.11ax20-HE0	52	5260	MCS0	19.875	19.57
		56	5280		20.25	20.07
		60	5300		20.50	20.28
		64	5320		20.50	20.23
	802.11n40-HT0	54	5270	MCS0	19.875	19.67
		62	5310		17.50	17.22
	802.11ax40-HE0	54	5270	MCS0	19.75	19.45
		62	5310		17.50	17.16
	802.11ac80-VHT0	58	5290	MCS0	17.50	17.18
	802.11ax80-HE0	58	5290	MCS0	17.50	17.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.6GHz	802.11a	100	5500	6Mbps	20.50	20.37
		120	5600		20.50	20.24
		140	5700		20.25	20.06
		144	5720		20.50	20.25
	802.11n20-HT0	100	5500	MCS0	20.50	20.36
		120	5600		20.50	20.21
		140	5700		20.25	19.97
		144	5720		20.50	20.29
	802.11ax20-HE0	100	5500	MCS0	20.50	20.25
		120	5600		20.50	20.37
		140	5700		20.25	20.02
		144	5720		20.50	20.22
	802.11n40-HT0	102	5510	MCS0	19.75	19.62
		118	5590		20.50	20.40
		134	5670		20.50	20.30
		142	5710		20.50	20.30
	802.11ax40-HE0	102	5510	MCS0	19.75	19.48
		118	5590		20.50	20.25
		134	5670		20.50	20.27
		142	5710		20.50	20.23
	802.11ac80-VHT0	106	5530	MCS0	18.50	18.38
		122	5610		20.50	20.41
		138	5690		20.50	20.48
	802.11ax80-HE0	106	5530	MCS0	18.50	18.29
122		5610	20.50		20.37	
138		5690	20.50		20.32	
802.11ac160-VHT0	114	5570	MCS0	15.50	15.30	
802.11ax160-HE0	114	5570	MCS0	15.50	15.33	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.8GHz	802.11a	149	5745	6Mbps	20.50	20.34
		157	5785		20.50	20.21
		165	5825		20.50	20.24
	802.11n20-HT0	149	5745	MCS0	20.50	20.29
		157	5785		20.50	20.27
		165	5825		20.50	20.35
	802.11ax20-HE0	149	5745	MCS0	20.50	20.26
		157	5785		20.50	20.32
		165	5825		20.50	20.40
	802.11n40-HT0	151	5755	MCS0	20.50	20.29
		159	5795		20.50	20.25
	802.11ax40-HE0	151	5755	MCS0	20.50	20.21
		159	5795		20.50	20.34
	802.11ac80-VHT0	155	5775	MCS0	20.50	20.47
	802.11ax80-HE0	155	5775	MCS0	20.50	20.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2.45GHz	802.11b	1	2412	1Mbps	20.50	20.48
		6	2437		20.50	20.49
		11	2462		20.50	20.44
	802.11g	1	2412	6Mbps	19.25	18.96
		6	2437		20.50	20.29
		11	2462		18.25	17.97
	802.11n20-HT0	1	2412	MCS0	19.25	19.09
		6	2437		20.50	20.37
		11	2462		18.25	18.15
	802.11ax20-HE0	1	2412	MCS0	19.25	19.03
		6	2437		20.50	20.21
		11	2462		18.25	17.95
	802.11n40-HT0	3	2422	MCS0	15.75	15.54
		6	2437		17.75	17.50
		9	2452		17.00	16.73
	802.11ax40-HE0	3	2422	MCS0	15.75	15.47
		6	2437		17.75	17.59
		9	2452		17.00	16.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	19.50	19.38
		40	5200		20.50	20.35
		44	5220		20.50	20.33
		48	5240		20.50	20.40
	802.11n20-HT0	36	5180	MCS0	19.50	19.39
		40	5200		20.50	20.28
		44	5220		20.50	20.31
		48	5240		20.50	20.21
	802.11ax20-HE0	36	5180	MCS0	19.50	19.29
		40	5200		20.50	20.38
		44	5220		20.50	20.21
		48	5240		20.50	20.33
	802.11n40-HT0	38	5190	MCS0	18.75	18.72
		46	5230		20.50	20.42
	802.11ax40-HE0	38	5190	MCS0	18.75	18.57
		46	5230		20.50	20.25
802.11ac80-VHT0	42	5210	MCS0	18.25	18.12	
802.11ax80-HE0	42	5210	MCS0	18.25	18.14	
802.11ac160-VHT0	50	5250	MCS0	14.00	13.80	
802.11ax160-HE0	50	5250	MCS0	14.00	13.82	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	20.50	20.35
		56	5280		20.25	20.15
		60	5300		20.50	20.25
		64	5320		20.50	20.23
	802.11n20-HT0	52	5260	MCS0	20.50	20.33
		56	5280		20.25	20.05
		60	5300		20.50	20.23
		64	5320		20.50	20.30
	802.11ax20-HE0	52	5260	MCS0	20.50	20.38
		56	5280		20.13	19.87
		60	5300		20.50	20.27
		64	5320		20.50	20.34
	802.11n40-HT0	54	5270	MCS0	20.25	20.12
		62	5310		17.50	17.38
	802.11ax40-HE0	54	5270	MCS0	20.50	20.38
		62	5310		17.50	17.43
	802.11ac80-VHT0	58	5290	MCS0	17.50	17.32
	802.11ax80-HE0	58	5290	MCS0	17.50	17.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.6GHz	802.11a	100	5500	6Mbps	20.50	20.30
		120	5600		20.50	20.34
		140	5700		20.25	20.04
		144	5720		20.50	20.35
	802.11n20-HT0	100	5500	MCS0	20.50	20.30
		120	5600		20.50	20.28
		140	5700		20.25	20.05
		144	5720		20.50	20.26
	802.11ax20-HE0	100	5500	MCS0	20.50	20.36
		120	5600		20.50	20.23
		140	5700		20.25	20.03
		144	5720		20.50	20.28
	802.11n40-HT0	102	5510	MCS0	20.25	20.02
		118	5590		20.50	20.38
		134	5670		20.50	20.34
		142	5710		20.50	20.21
	802.11ax40-HE0	102	5510	MCS0	20.25	19.97
		118	5590		20.50	20.28
		134	5670		20.50	20.40
		142	5710		20.50	20.40
	802.11ac80-VHT0	106	5530	MCS0	18.75	18.73
		122	5610		20.50	20.38
		138	5690		20.50	20.44
	802.11ax80-HE0	106	5530	MCS0	18.75	18.58
122		5610	20.50		20.21	
138		5690	20.50		20.34	
802.11ac160-VHT0	114	5570	MCS0	15.50	15.24	
802.11ax160-HE0	114	5570	MCS0	15.50	15.34	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.8GHz	802.11a	149	5745	6Mbps	20.50	20.24
		157	5785		20.50	20.30
		165	5825		20.50	20.30
	802.11n20-HT0	149	5745	MCS0	20.50	20.31
		157	5785		20.50	20.27
		165	5825		20.50	20.22
	802.11ax20-HE0	149	5745	MCS0	20.50	20.23
		157	5785		20.50	20.40
		165	5825		20.50	20.34
	802.11n40-HT0	151	5755	MCS0	20.50	20.41
		159	5795		20.50	20.48
	802.11ax40-HE0	151	5755	MCS0	20.50	20.29
		159	5795		20.50	20.31
	802.11ac80-VHT0	155	5775	MCS0	20.25	20.01
	802.11ax80-HE0	155	5775	MCS0	20.25	19.97

TB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2.45GHz	802.11b	1	2412	1Mbps	15.00	14.95
		6	2437		15.00	14.98
		11	2462		15.00	14.96
	802.11g	1	2412	6Mbps	15.00	14.87
		6	2437		15.00	14.80
		11	2462		15.00	14.84
	802.11n20-HT0	1	2412	MCS0	15.00	14.91
		6	2437		15.00	14.82
		11	2462		15.00	14.87
	802.11ax20-HE0	1	2412	MCS0	15.00	14.86
		6	2437		15.00	14.79
		11	2462		15.00	14.82
	802.11n40-HT0	3	2422	MCS0	15.00	14.83
		6	2437		15.00	14.95
		9	2452		15.00	14.79
	802.11ax40-HE0	3	2422	MCS0	15.00	14.90
		6	2437		15.00	14.83
		9	2452		15.00	14.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	8.00	7.86
		40	5200		8.00	7.93
		44	5220		8.00	7.76
		48	5240		8.00	7.95
	802.11n20-HT0	36	5180	MCS0	8.00	7.81
		40	5200		8.00	7.95
		44	5220		8.00	7.91
		48	5240		8.00	7.88
	802.11ax20-HE0	36	5180	MCS0	8.00	7.82
		40	5200		8.00	7.93
		44	5220		8.00	7.84
		48	5240		8.00	7.78
	802.11n40-HT0	38	5190	MCS0	8.00	7.86
		46	5230		8.00	7.92
	802.11ax40-HE0	38	5190	MCS0	8.00	7.92
		46	5230		8.00	7.87
	802.11ac80-VHT0	42	5210	MCS0	8.00	7.92
	802.11ax80-HE0	42	5210	MCS0	8.00	7.86
	802.11ac160-VHT0	50	5250	MCS0	8.00	7.97
	802.11ax160-HE0	50	5250	MCS0	8.00	7.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	8.00	7.76
		56	5280		8.00	7.83
		60	5300		8.00	7.78
		64	5320		8.00	7.82
	802.11n20-HT0	52	5260	MCS0	8.00	7.88
		56	5280		8.00	7.75
		60	5300		8.00	7.89
		64	5320		8.00	7.81
	802.11ax20-HE0	52	5260	MCS0	8.00	7.83
		56	5280		8.00	7.80
		60	5300		8.00	7.73
		64	5320		8.00	7.86
	802.11n40-HT0	54	5270	MCS0	8.00	7.70
		62	5310		8.00	7.70
	802.11ax40-HE0	54	5270	MCS0	8.00	7.83
		62	5310		8.00	7.81
802.11ac80-VHT0	58	5290	MCS0	8.00	7.93	
802.11ax80-HE0	58	5290	MCS0	8.00	7.80	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.6GHz	802.11a	100	5500	6Mbps	8.00	7.94
		120	5600		8.00	7.80
		140	5700		8.00	7.76
		144	5720		8.00	7.81
	802.11n20-HT0	100	5500	MCS0	8.00	7.78
		120	5600		8.00	7.93
		140	5700		8.00	7.75
		144	5720		8.00	7.92
	802.11ax20-HE0	100	5500	MCS0	8.00	7.90
		120	5600		8.00	7.83
		140	5700		8.00	7.88
		144	5720		8.00	7.94
	802.11n40-HT0	102	5510	MCS0	8.00	7.88
		118	5590		8.00	7.91
		134	5670		8.00	7.82
		142	5710		8.00	7.81
	802.11ax40-HE0	102	5510	MCS0	8.00	7.92
		118	5590		8.00	7.80
		134	5670		8.00	7.88
		142	5710		8.00	7.78
	802.11ac80-VHT0	106	5530	MCS0	8.00	7.96
		122	5610		8.00	7.87
		138	5690		8.00	7.99
	802.11ax80-HE0	106	5530	MCS0	8.00	7.83
122		5610	8.00		7.84	
138		5690	8.00		7.81	
802.11ac160-VHT0	114	5570	MCS0	8.00	7.91	
802.11ax160-HE0	114	5570	MCS0	8.00	7.94	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.8GHz	802.11a	149	5745	6Mbps	8.00	7.89
		157	5785		8.00	7.83
		165	5825		8.00	7.83
	802.11n20-HT0	149	5745	MCS0	8.00	7.80
		157	5785		8.00	7.75
		165	5825		8.00	7.87
	802.11ax20-HE0	149	5745	MCS0	8.00	7.74
		157	5785		8.00	7.78
		165	5825		8.00	7.77
	802.11n40-HT0	151	5755	MCS0	8.00	7.84
		159	5795		8.00	7.83
	802.11ax40-HE0	151	5755	MCS0	8.00	7.87
		159	5795		8.00	7.72
	802.11ac80-VHT0	155	5775	MCS0	8.00	7.92
	802.11ax80-HE0	155	5775	MCS0	8.00	7.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2.45GHz	802.11b	1	2412	1Mbps	16.50	16.42
		6	2437		16.50	16.46
		11	2462		16.50	16.45
	802.11g	1	2412	6Mbps	16.50	16.38
		6	2437		16.50	16.32
		11	2462		16.50	16.35
	802.11n20-HT0	1	2412	MCS0	16.50	16.34
		6	2437		16.50	16.39
		11	2462		16.50	16.37
	802.11ax20-HE0	1	2412	MCS0	16.50	16.26
		6	2437		16.50	16.34
		11	2462		16.50	16.35
	802.11n40-HT0	3	2422	MCS0	16.50	16.32
		6	2437		16.50	16.42
		9	2452		16.50	16.44
	802.11ax40-HE0	3	2422	MCS0	16.50	16.33
		6	2437		16.50	16.30
		9	2452		16.50	16.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	9.00	8.75
		40	5200		9.00	8.86
		44	5220		9.00	8.81
		48	5240		9.00	8.75
	802.11n20-HT0	36	5180	MCS0	9.00	8.86
		40	5200		9.00	8.75
		44	5220		9.00	8.81
		48	5240		9.00	8.87
	802.11ax20-HE0	36	5180	MCS0	9.00	8.80
		40	5200		9.00	8.83
		44	5220		9.00	8.80
		48	5240		9.00	8.78
	802.11n40-HT0	38	5190	MCS0	9.00	8.71
		46	5230		9.00	8.73
	802.11ax40-HE0	38	5190	MCS0	9.00	8.79
		46	5230		9.00	8.73
802.11ac80-VHT0	42	5210	MCS0	9.00	8.85	
802.11ax80-HE0	42	5210	MCS0	9.00	8.76	
802.11ac160-VHT0	50	5250	MCS0	9.00	8.90	
802.11ax160-HE0	50	5250	MCS0	9.00	8.78	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	9.00	8.77
		56	5280		9.00	8.72
		60	5300		9.00	8.74
		64	5320		9.00	8.75
	802.11n20-HT0	52	5260	MCS0	9.00	8.74
		56	5280		9.00	8.79
		60	5300		9.00	8.75
		64	5320		9.00	8.80
	802.11ax20-HE0	52	5260	MCS0	9.00	8.78
		56	5280		9.00	8.66
		60	5300		9.00	8.81
		64	5320		9.00	8.83
	802.11n40-HT0	54	5270	MCS0	9.00	8.79
		62	5310		9.00	8.83
	802.11ax40-HE0	54	5270	MCS0	9.00	8.66
		62	5310		9.00	8.67
802.11ac80-VHT0	58	5290	MCS0	9.00	8.87	
802.11ax80-HE0	58	5290	MCS0	9.00	8.66	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.6GHz	802.11a	100	5500	6Mbps	9.00	8.77
		120	5600		9.00	8.92
		140	5700		9.00	8.81
		144	5720		9.00	8.94
	802.11n20-HT0	100	5500	MCS0	9.00	8.82
		120	5600		9.00	8.83
		140	5700		9.00	8.95
		144	5720		9.00	8.81
	802.11ax20-HE0	100	5500	MCS0	9.00	8.83
		120	5600		9.00	8.88
		140	5700		9.00	8.95
		144	5720		9.00	8.90
	802.11n40-HT0	102	5510	MCS0	9.00	8.79
		118	5590		9.00	8.95
		134	5670		9.00	8.79
		142	5710		9.00	8.85
	802.11ax40-HE0	102	5510	MCS0	9.00	8.88
		118	5590		9.00	8.84
		134	5670		9.00	8.86
		142	5710		9.00	8.84
	802.11ac80-VHT0	106	5530	MCS0	9.00	8.93
		122	5610		9.00	8.88
		138	5690		9.00	8.97
	802.11ax80-HE0	106	5530	MCS0	9.00	8.87
		122	5610		9.00	8.79
		138	5690		9.00	8.83
	802.11ac160-VHT0	114	5570	MCS0	9.00	8.93
	802.11ax160-HE0	114	5570	MCS0	9.00	8.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.8GHz	802.11a	149	5745	6Mbps	9.00	8.85
		157	5785		9.00	8.85
		165	5825		9.00	8.74
	802.11n20-HT0	149	5745	MCS0	9.00	8.72
		157	5785		9.00	8.80
		165	5825		9.00	8.89
	802.11ax20-HE0	149	5745	MCS0	9.00	8.77
		157	5785		9.00	8.89
		165	5825		9.00	8.88
	802.11n40-HT0	151	5755	MCS0	9.00	8.75
		159	5795		9.00	8.71
	802.11ax40-HE0	151	5755	MCS0	9.00	8.89
		159	5795		9.00	8.75
	802.11ac80-VHT0	155	5775	MCS0	9.00	8.95
802.11ax80-HE0	155	5775	MCS0	9.00	8.70	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

6.2 WIFI 6E

NB

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-5 6.2GHz	802.11ax20-HE0	1	5955	MCS0	5.00	4.88
		45	6175		5.00	4.85
		93	6415		5.00	4.83
	802.11ax40-HE0	3	5965	MCS0	8.25	8.11
		43	6165		8.25	8.04
		91	6405		8.25	8.09
	802.11ax80-HE0	7	5985	MCS0	10.75	10.66
		39	6145		10.75	10.65
		87	6385		10.75	10.50
	802.11ax160-HE0	15	6025	MCS0	13.50	13.48
		47	6185		13.50	13.44
		79	6345		13.50	13.47
WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-6 6.5GHz	802.11ax20-HE0	97	6435	MCS0	5.00	4.90
		105	6475		5.00	4.79
		113	6515		5.00	4.77
	802.11ax40-HE0	99	6445	MCS0	8.25	8.13
		107	6485		8.25	8.10
	802.11ax80-HE0	103	6465	MCS0	10.75	10.51
		119	6545		10.75	10.53
	802.11ax160-HE0	111	6505	MCS0	13.50	13.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-7 6.7GHz	802.11ax20-HE0	117	6535	MCS0	4.25	4.12
		149	6695		4.25	4.17
		181	6855		4.25	4.12
	802.11ax40-HE0	115	6525	MCS0	8.25	8.14
		147	6685		7.50	7.30
		179	6845		7.50	7.38
	802.11ax80-HE0	135	6625	MCS0	10.00	9.80
		151	6705		10.00	9.75
		167	6785		10.00	9.91
	802.11ax160-HE0	143	6665	MCS0	12.75	12.70
		175	6825		12.75	12.74

WLAN Main						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-8 7.0GHz	802.11ax20-HE0	185	6875	MCS0	4.25	4.16
		209	6995		4.25	4.11
		233	7115		-1.00	-1.20
	802.11ax40-HE0	187	6885	MCS0	7.50	7.31
		227	7085		7.50	7.40
	802.11ax80-HE0	183	6865	MCS0	10.00	9.76
		199	6945		10.00	9.87
		215	7025		10.00	9.82
	802.11ax160-HE0	207	6985	MCS0	12.75	12.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-5 6.2GHz	802.11ax20-HE0	1	5955	MCS0	5.00	4.85
		45	6175		5.00	4.83
		93	6415		5.00	4.82
	802.11ax40-HE0	3	5965	MCS0	8.25	8.19
		43	6165		8.25	8.01
		91	6405		8.25	8.12
	802.11ax80-HE0	7	5985	MCS0	10.75	10.65
		39	6145		10.75	10.53
		87	6385		10.75	10.58
	802.11ax160-HE0	15	6025	MCS0	13.50	13.48
		47	6185		13.50	13.28
		79	6345		13.50	13.33
WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-6 6.5GHz	802.11ax20-HE0	97	6435	MCS0	5.00	4.77
		105	6475		5.00	4.76
		113	6515		5.00	4.83
	802.11ax40-HE0	99	6445	MCS0	8.25	8.19
		107	6485		8.25	8.17
	802.11ax80-HE0	103	6465	MCS0	10.75	10.60
		119	6545		10.75	10.51
	802.11ax160-HE0	111	6505	MCS0	13.50	13.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-7 6.7GHz	802.11ax20-HE0	117	6535	MCS0	4.25	4.10
		149	6695		4.25	4.03
		181	6855		4.25	4.20
	802.11ax40-HE0	115	6525	MCS0	8.25	8.06
		147	6685		7.50	7.41
		179	6845		7.50	7.36
	802.11ax80-HE0	135	6625	MCS0	10.00	9.75
		151	6705		10.00	9.86
		167	6785		10.00	9.86
	802.11ax160-HE0	143	6665	MCS0	12.75	12.46
		175	6825		12.75	12.54

WLAN Aux						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-8 7.0GHz	802.11ax20-HE0	185	6875	MCS0	4.25	4.05
		209	6995		4.25	4.19
		233	7115		-1.00	-1.11
	802.11ax40-HE0	187	6885	MCS0	7.50	7.35
		227	7085		7.50	7.25
	802.11ax80-HE0	183	6865	MCS0	10.00	9.80
		199	6945		10.00	9.89
		215	7025		10.00	9.77
	802.11ax160-HE0	207	6985	MCS0	12.75	12.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

TB

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-5 6.2GHz	802.11ax20-HE0	1	5955	MCS0	5.00	4.70
		45	6175		5.00	4.83
		93	6415		5.00	4.90
	802.11ax40-HE0	3	5965	MCS0	8.00	7.76
		43	6165		8.00	7.78
		91	6405		8.00	7.73
	802.11ax80-HE0	7	5985	MCS0	8.00	7.78
		39	6145		8.00	7.90
		87	6385		8.00	7.86
	802.11ax160-HE0	15	6025	MCS0	8.00	7.95
		47	6185		8.00	7.77
		79	6345		8.00	7.81
WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-6 6.5GHz	802.11ax20-HE0	97	6435	MCS0	5.00	4.70
		105	6475		5.00	4.77
		113	6515		5.00	4.82
	802.11ax40-HE0	99	6445	MCS0	8.00	7.81
		107	6485		8.00	7.79
	802.11ax80-HE0	103	6465	MCS0	8.00	7.74
		119	6545		8.00	7.81
	802.11ax160-HE0	111	6505	MCS0	8.00	7.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Main						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-7 6.7GHz	802.11ax20-HE0	117	6535	MCS0	4.25	4.03
		149	6695		4.25	3.99
		181	6855		4.25	4.01
	802.11ax40-HE0	115	6525	MCS0	8.00	7.86
		147	6685		7.50	7.26
		179	6845		7.50	7.33
	802.11ax80-HE0	135	6625	MCS0	8.00	7.72
		151	6705		8.00	7.90
		167	6785		8.00	7.82
	802.11ax160-HE0	143	6665	MCS0	8.00	7.83
		175	6825		8.00	7.96
	WLAN Main					
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-8 7.0GHz	802.11ax20-HE0	185	6875	MCS0	4.25	4.11
		209	6995		4.25	4.02
		233	7115		-1.00	-1.21
	802.11ax40-HE0	187	6885	MCS0	7.50	7.26
		227	7085		7.50	7.29
	802.11ax80-HE0	183	6865	MCS0	8.00	7.79
		199	6945		8.00	7.86
		215	7025		8.00	7.75
	802.11ax160-HE0	207	6985	MCS0	8.00	7.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-5 6.2GHz	802.11ax20-HE0	1	5955	MCS0	5.00	4.80
		45	6175		5.00	4.89
		93	6415		5.00	4.86
	802.11ax40-HE0	3	5965	MCS0	8.25	8.00
		43	6165		8.25	8.09
		91	6405		8.25	7.96
	802.11ax80-HE0	7	5985	MCS0	9.00	8.82
		39	6145		9.00	8.80
		87	6385		9.00	8.78
	802.11ax160-HE0	15	6025	MCS0	9.00	8.96
		47	6185		9.00	8.89
		79	6345		9.00	8.92
WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-6 6.5GHz	802.11ax20-HE0	97	6435	MCS0	5.00	4.80
		105	6475		5.00	4.88
		113	6515		5.00	4.82
	802.11ax40-HE0	99	6445	MCS0	8.25	8.12
		107	6485		8.25	8.12
	802.11ax80-HE0	103	6465	MCS0	9.00	8.74
		119	6545		9.00	8.80
	802.11ax160-HE0	111	6505	MCS0	9.00	8.94

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN Aux						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-7 6.7GHz	802.11ax20-HE0	117	6535	MCS0	4.25	4.05
		149	6695		4.25	4.01
		181	6855		4.25	4.03
	802.11ax40-HE0	115	6525	MCS0	8.25	7.92
		147	6685		7.50	7.30
		179	6845		7.50	7.16
	802.11ax80-HE0	135	6625	MCS0	9.00	8.69
		151	6705		9.00	8.73
		167	6785		9.00	8.73
	802.11ax160-HE0	143	6665	MCS0	9.00	8.83
		175	6825		9.00	8.85

WLAN Aux						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
U-NII-8 7.0GHz	802.11ax20-HE0	185	6875	MCS0	4.25	4.15
		209	6995		4.25	4.00
		233	7115		-1.00	-1.25
	802.11ax40-HE0	187	6885	MCS0	7.50	7.31
		227	7085		7.50	7.34
	802.11ax80-HE0	183	6865	MCS0	9.00	8.86
		199	6945		9.00	8.82
		215	7025		9.00	8.90
	802.11ax160-HE0	207	6985	MCS0	9.00	8.94

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 6.3 Bluetooth

Mode	Channel	Frequency (MHz)	1Mbps		2Mbps		3Mbps	
			Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
BR/EDR	CH 00	2402	11.00	9.33	7.00	6.55	7.00	6.61
	CH 39	2441		9.38		6.77		6.80
	CH 78	2480		9.52		6.98		6.86

### 6.4 BLE

Mode	Channel	Frequency (MHz)	GFSK	
			Max. Rated Avg. Power + Max. Tolerance (dBm)	Average Output Power (dBm)
BLE_1M	CH 00	2402	7	6.77
	CH 19	2440		6.89
	CH 39	2480		6.97
Mode	Channel	Frequency (MHz)	GFSK	
			Max. Rated Avg. Power + Max. Tolerance (dBm)	Average Output Power (dBm)
BLE_2M	CH 00	2402	7	6.94
	CH 19	2440		6.97
	CH 39	2480		6.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 7 DUTY CYCLE

2.4G b duty

(12.21/12.3=0.993) Scaling Factor=1.007

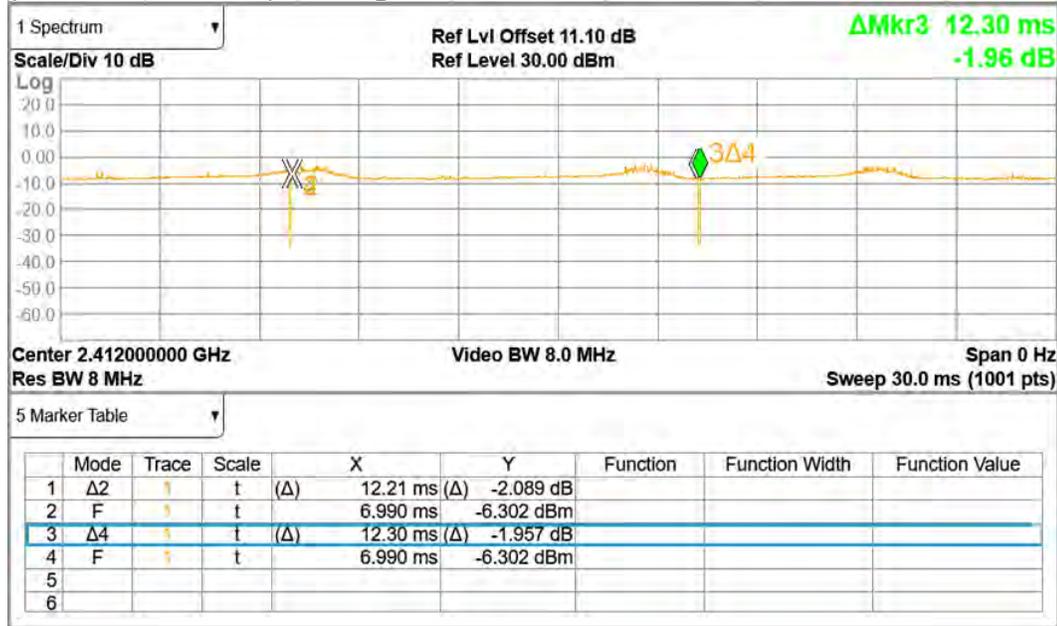


BT duty

(2.895/3.75=0.772) Scaling Factor=1.295

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

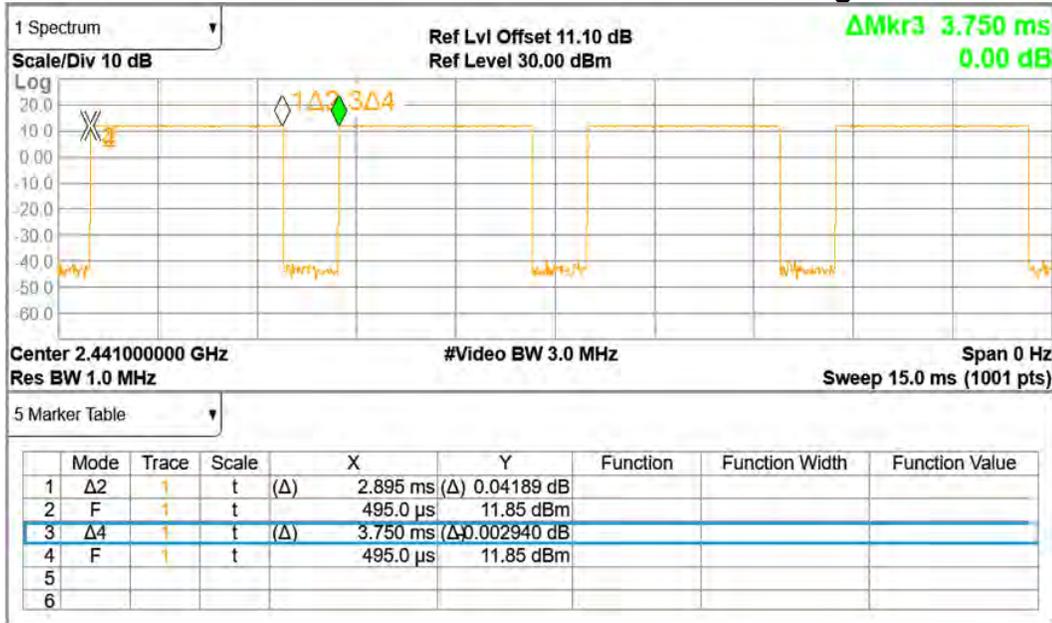


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

5G a duty  
 $(1.911/2.016=0.948)$  Scaling Factor=1.055

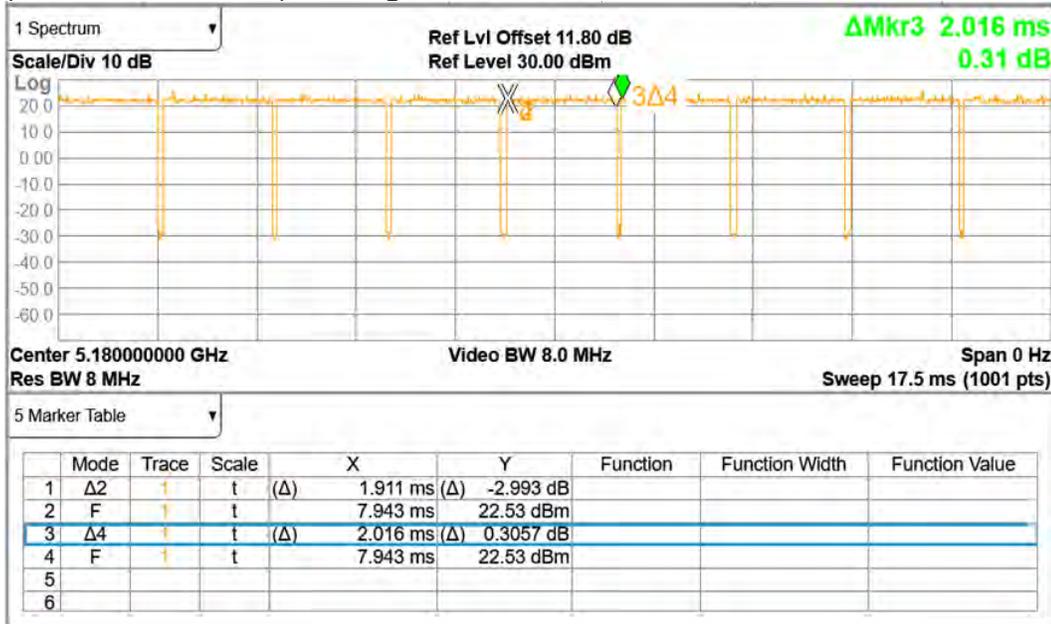

5G n(40M) duty  
 $(3.992/4.038=0.989)$  Scaling Factor=1.011

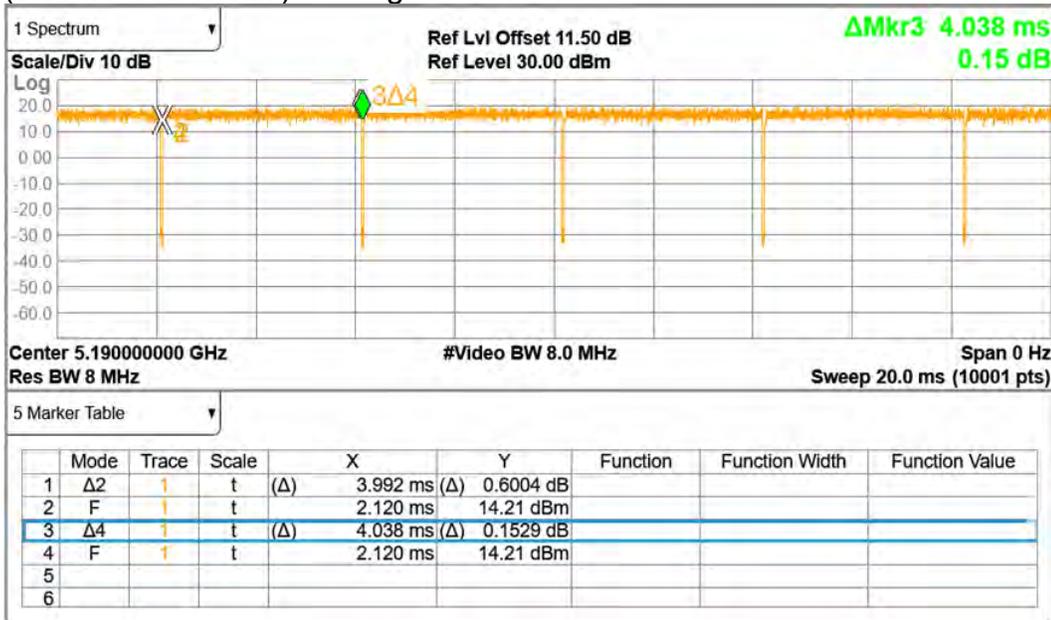


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

5G ax(40M) duty  
 $(7.925/8.05=0.984)$  Scaling Factor=1.016

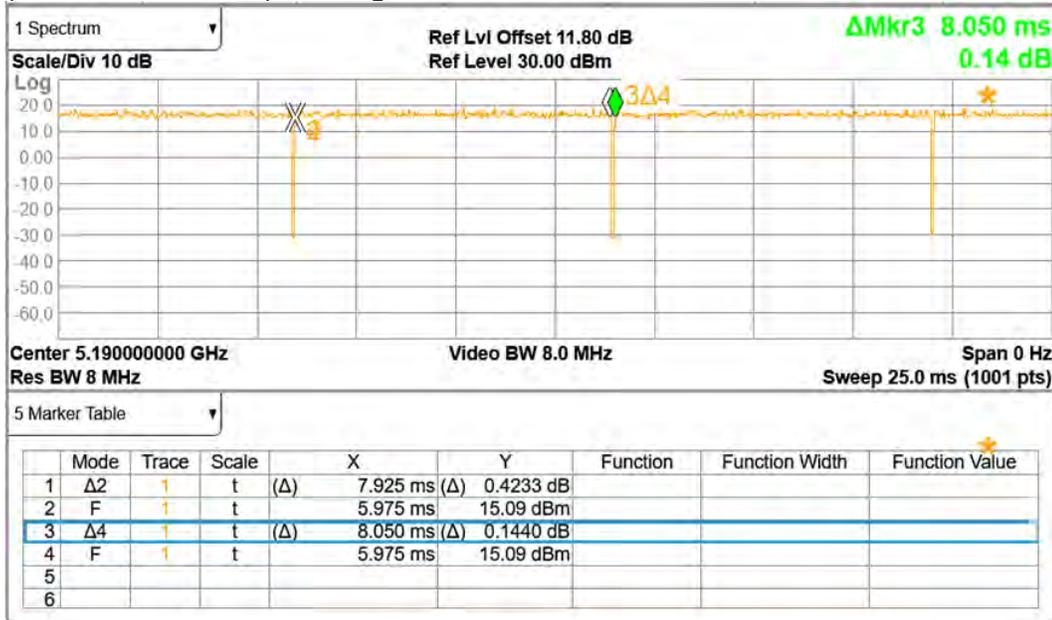

5G ac(80M) duty  
 $(3.976/4.024=0.988)$  Scaling Factor=1.012

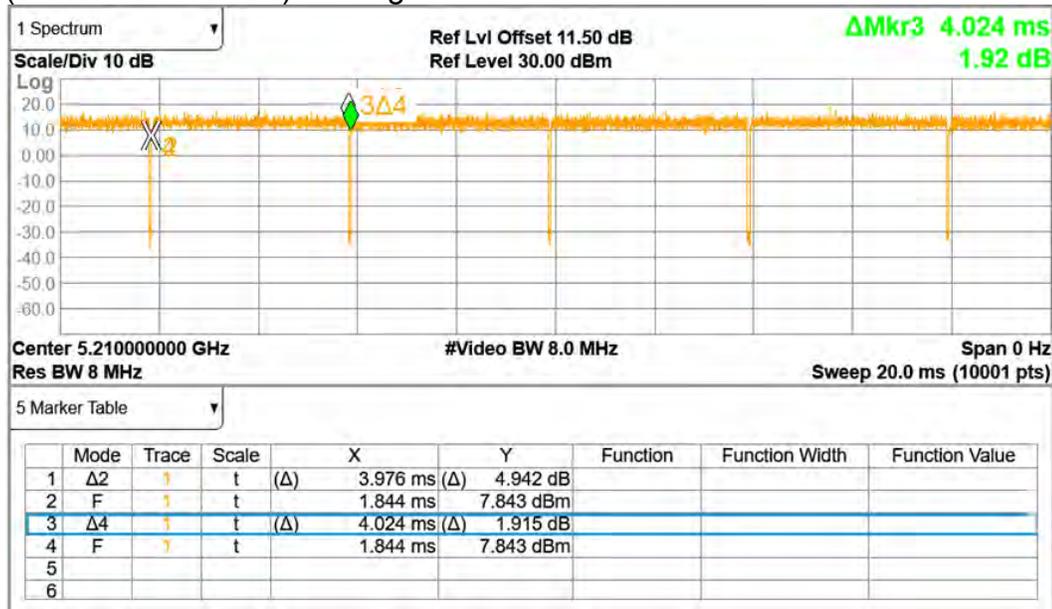


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

5G ac(160M) duty  
 $(3.964/4.012=0.988)$  Scaling Factor=1.012

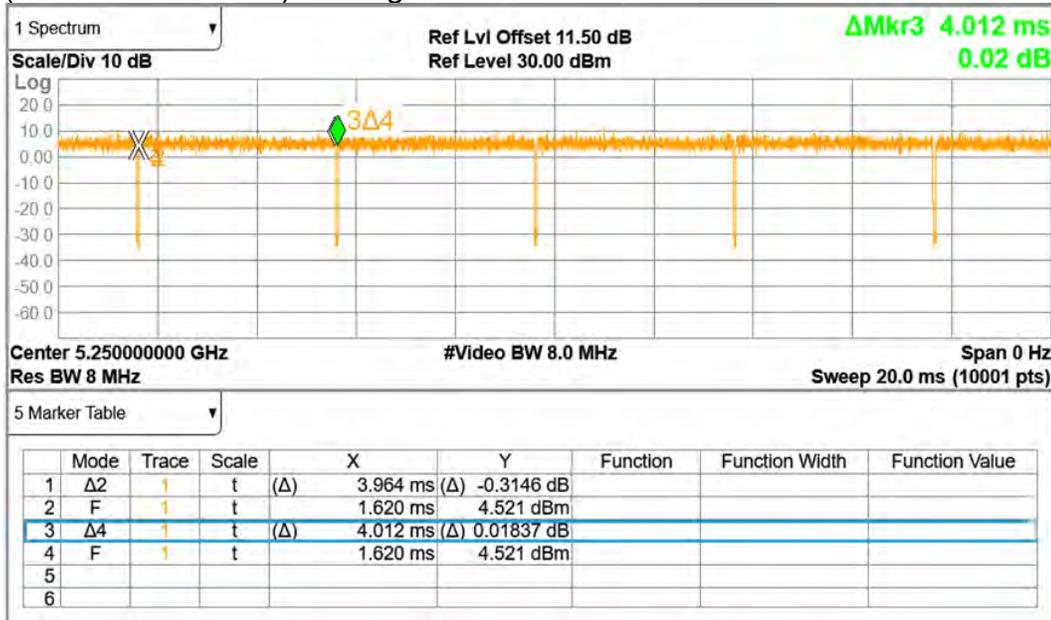

6G ax(160M) duty  
 $(3.961/4.008=0.988)$  Scaling Factor=1.012

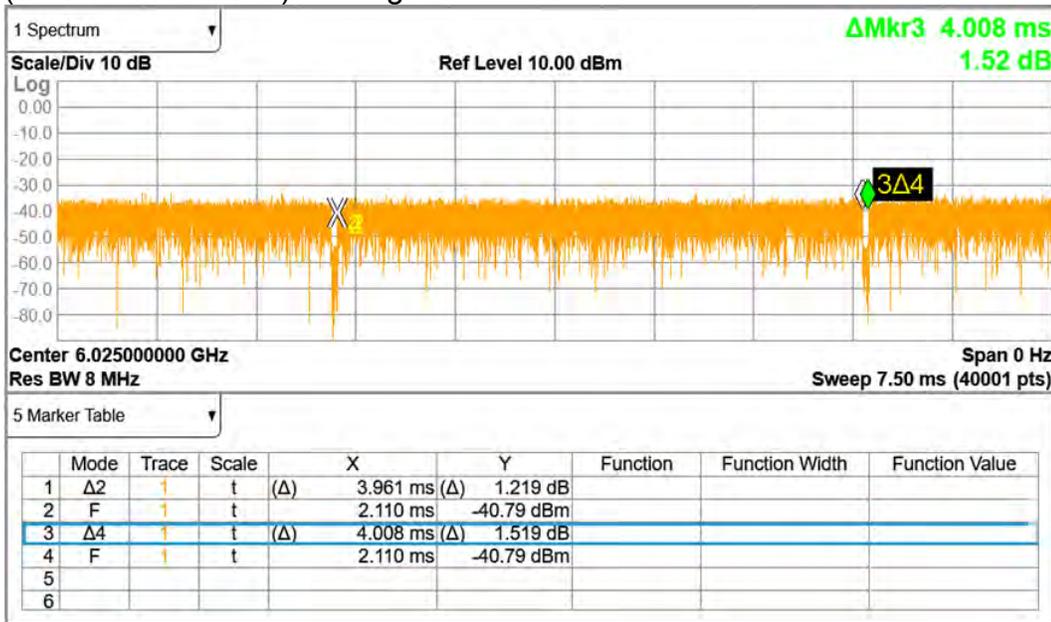

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 8 SUMMARY OF RESULTS

### 8.1 Decision rules

Reported measurement data comply with Test Methodology in section 1.1.

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 8.2 Summary of SAR Results

#### ASAP

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11b	WLAN Main	Back Surface	0	6	2437	15.00	14.98	1.01	100.46%	0.451	0.456	-
WLAN 802.11b	WLAN Main	Top Edge	0	1	2412	15.00	14.95	1.01	101.16%	0.453	0.461	-
WLAN 802.11b	WLAN Main	Top Edge	0	6	2437	15.00	14.98	1.01	100.46%	0.479	0.485	001
WLAN 802.11b	WLAN Main	Top Edge	0	11	2462	15.00	14.96	1.01	100.93%	0.462	0.470	-
WLAN 802.11b	WLAN Main	Bottom Edge	0	6	2437	15.00	14.98	1.01	100.46%	0.003	0.003	-
WLAN 802.11b	WLAN Main	Left Edge	0	6	2437	15.00	14.98	1.01	100.46%	0.069	0.070	-
WLAN 802.11b	WLAN Main	Right Edge	0	6	2437	15.00	14.98	1.01	100.46%	0.017	0.017	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
WLAN 802.11ac(160M) 5.2G	WLAN Main	Back Surface	0	50	5250	8.00	7.97	1.01	100.69%	0.110	0.112	-
WLAN 802.11ac(160M) 5.2G	WLAN Main	Top Edge	0	50	5250	8.00	7.97	1.01	100.69%	0.459	0.468	002
WLAN 802.11ac(160M) 5.2G	WLAN Main	Bottom Edge	0	50	5250	8.00	7.97	1.01	100.69%	0.006	0.006	-
WLAN 802.11ac(160M) 5.2G	WLAN Main	Left Edge	0	50	5250	8.00	7.97	1.01	100.69%	0.016	0.016	-
WLAN 802.11ac(160M) 5.2G	WLAN Main	Right Edge	0	50	5250	8.00	7.97	1.01	100.69%	0.008	0.008	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
WLAN 802.11ac(80M) 5.6G	WLAN Main	Back Surface	0	138	5690	8.00	7.99	1.01	100.23%	0.098	0.099	-
WLAN 802.11ac(80M) 5.6G	WLAN Main	Top Edge	0	138	5690	8.00	7.99	1.01	100.23%	0.315	0.320	003
WLAN 802.11ac(80M) 5.6G	WLAN Main	Bottom Edge	0	138	5690	8.00	7.99	1.01	100.23%	0.009	0.009	-
WLAN 802.11ac(80M) 5.6G	WLAN Main	Left Edge	0	138	5690	8.00	7.99	1.01	100.23%	0.020	0.020	-
WLAN 802.11ac(80M) 5.6G	WLAN Main	Right Edge	0	138	5690	8.00	7.99	1.01	100.23%	0.001	0.001	-
WLAN 802.11ac(160M) 5.6G	WLAN Main	Back Surface	0	114	5570	8.00	7.91	1.01	102.09%	0.131	0.135	-
WLAN 802.11ac(160M) 5.6G	WLAN Main	Top Edge	0	114	5570	8.00	7.91	1.01	102.09%	0.379	0.392	004
WLAN 802.11ac(160M) 5.6G	WLAN Main	Bottom Edge	0	114	5570	8.00	7.91	1.01	102.09%	0.002	0.002	-
WLAN 802.11ac(160M) 5.6G	WLAN Main	Left Edge	0	114	5570	8.00	7.91	1.01	102.09%	0.013	0.014	-
WLAN 802.11ac(160M) 5.6G	WLAN Main	Right Edge	0	114	5570	8.00	7.91	1.01	102.09%	0.009	0.010	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
WLAN 802.11ac(80M) 5.8G	WLAN Main	Back Surface	0	155	5775	8.00	7.92	1.01	101.86%	0.110	0.113	-
WLAN 802.11ac(80M) 5.8G	WLAN Main	Top Edge	0	155	5775	8.00	7.92	1.01	101.86%	0.306	0.315	005
WLAN 802.11ac(80M) 5.8G	WLAN Main	Bottom Edge	0	155	5775	8.00	7.92	1.01	101.86%	0.003	0.003	-
WLAN 802.11ac(80M) 5.8G	WLAN Main	Left Edge	0	155	5775	8.00	7.92	1.01	101.86%	0.014	0.015	-
WLAN 802.11ac(80M) 5.8G	WLAN Main	Right Edge	0	155	5775	8.00	7.92	1.01	101.86%	0.005	0.005	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11b	WLAN Aux	Back Surface	0	6	2437	16.50	16.46	1.01	100.93%	0.448	0.455	-
WLAN 802.11b	WLAN Aux	Top Edge	0	6	2437	16.50	16.46	1.01	100.93%	1.090	1.108	006
WLAN 802.11b	WLAN Aux	Top Edge	0	11	2462	16.50	16.45	1.01	101.16%	1.080	1.100	-
WLAN 802.11b	WLAN Aux	Bottom Edge	0	6	2437	16.50	16.46	1.01	100.93%	0.002	0.002	-
WLAN 802.11b	WLAN Aux	Left Edge	0	6	2437	16.50	16.46	1.01	100.93%	0.008	0.008	-
WLAN 802.11b	WLAN Aux	Right Edge	0	6	2437	16.50	16.46	1.01	100.93%	0.021	0.022	-
WLAN 802.11b	WLAN Aux	Top Edge*	0	6	2437	16.50	16.46	1.01	100.93%	1.020	1.037	-
WLAN 802.11b	WLAN Aux	Top Edge**	0	6	2437	16.50	16.46	1.01	100.93%	1.050	1.067	-
WLAN 802.11b	WLAN Aux	Top Edge***	0	6	2437	16.50	16.46	1.01	100.93%	1.010	1.026	-

\* - Spot-check for EUT with strap.

\*\* - Spot-check for EUT with Keyboard in back.

\*\*\* - repeated at the highest SAR measurement according to the KDB 865664 D01

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
Bluetooth(GFSK)	WLAN Aux	Back Surface	0	78	2480	11.00	9.52	1.30	140.60%	0.088	0.161	-
Bluetooth(GFSK)	WLAN Aux	Top Edge	0	78	2480	11.00	9.52	1.30	140.60%	0.235	0.428	007
Bluetooth(GFSK)	WLAN Aux	Bottom Edge	0	78	2480	11.00	9.52	1.30	140.60%	0.001	0.002	-
Bluetooth(GFSK)	WLAN Aux	Left Edge	0	78	2480	11.00	9.52	1.30	140.60%	0.003	0.006	-
Bluetooth(GFSK)	WLAN Aux	Right Edge	0	78	2480	11.00	9.52	1.30	140.60%	0.008	0.014	-

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11ac(160M) 5.2G	WLAN Aux	Back Surface	0	50	5250	9.00	8.90	1.01	102.33%	0.101	0.105	-
WLAN 802.11ac(160M) 5.2G	WLAN Aux	Top Edge	0	50	5250	9.00	8.90	1.01	102.33%	0.215	0.223	008
WLAN 802.11ac(160M) 5.2G	WLAN Aux	Bottom Edge	0	50	5250	9.00	8.90	1.01	102.33%	0.001	0.002	-
WLAN 802.11ac(160M) 5.2G	WLAN Aux	Left Edge	0	50	5250	9.00	8.90	1.01	102.33%	0.002	0.002	-
WLAN 802.11ac(160M) 5.2G	WLAN Aux	Right Edge	0	50	5250	9.00	8.90	1.01	102.33%	0.016	0.017	-

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11ac(80M) 5.6G	WLAN Aux	Back Surface	0	138	5690	9.00	8.97	1.01	100.69%	0.092	0.094	-
WLAN 802.11ac(80M) 5.6G	WLAN Aux	Top Edge	0	138	5690	9.00	8.97	1.01	100.69%	0.342	0.349	009
WLAN 802.11ac(80M) 5.6G	WLAN Aux	Bottom Edge	0	138	5690	9.00	8.97	1.01	100.69%	0.001	0.001	-
WLAN 802.11ac(80M) 5.6G	WLAN Aux	Left Edge	0	138	5690	9.00	8.97	1.01	100.69%	0.003	0.003	-
WLAN 802.11ac(80M) 5.6G	WLAN Aux	Right Edge	0	138	5690	9.00	8.97	1.01	100.69%	0.014	0.015	-
WLAN 802.11ac(160M) 5.6G	WLAN Aux	Back Surface	0	114	5570	9.00	8.93	1.01	101.62%	0.095	0.098	-
WLAN 802.11ac(160M) 5.6G	WLAN Aux	Top Edge	0	114	5570	9.00	8.93	1.01	101.62%	0.226	0.232	010
WLAN 802.11ac(160M) 5.6G	WLAN Aux	Bottom Edge	0	114	5570	9.00	8.93	1.01	101.62%	0.001	0.001	-
WLAN 802.11ac(160M) 5.6G	WLAN Aux	Left Edge	0	114	5570	9.00	8.93	1.01	101.62%	0.002	0.002	-
WLAN 802.11ac(160M) 5.6G	WLAN Aux	Right Edge	0	114	5570	9.00	8.93	1.01	101.62%	0.013	0.013	-

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11ac(80M) 5.8G	WLAN Aux	Back Surface	0	155	5775	9.00	8.95	1.01	101.16%	0.103	0.105	-
WLAN 802.11ac(80M) 5.8G	WLAN Aux	Top Edge	0	155	5775	9.00	8.95	1.01	101.16%	0.398	0.407	011
WLAN 802.11ac(80M) 5.8G	WLAN Aux	Bottom Edge	0	155	5775	9.00	8.95	1.01	101.16%	0.001	0.001	-
WLAN 802.11ac(80M) 5.8G	WLAN Aux	Left Edge	0	155	5775	9.00	8.95	1.01	101.16%	0.002	0.002	-
WLAN 802.11ac(80M) 5.8G	WLAN Aux	Right Edge	0	155	5775	9.00	8.95	1.01	101.16%	0.014	0.015	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WIFI 6E\_ASAP

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Estimated Measured APD W/m <sup>2</sup> (4cm <sup>2</sup> )	Estimated Reported APD W/m <sup>2</sup> (4cm <sup>2</sup> )	ID
										Measured	Reported			
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Back Surface	0	15	6025	8.00	7.95	1.01	101.16%	0.104	0.106	0.775	0.793	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Top Edge	0	15	6025	8.00	7.95	1.01	101.16%	0.376	0.385	2.03	2.078	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Top Edge	0	79	6345	8.00	7.81	1.01	104.47%	0.844	0.892	4.2	4.440	012
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Bottom Edge	0	15	6025	8.00	7.95	1.01	101.16%	0.004	0.004	0.055	0.056	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Left Edge	0	15	6025	8.00	7.95	1.01	101.16%	0.013	0.013	0.13	0.133	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Right Edge	0	15	6025	8.00	7.95	1.01	101.16%	0.001	0.001	0.027	0.028	-

\* - repeated at the highest SAR measurement according to the KDB 865664 D01

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Estimated Measured APD W/m <sup>2</sup> (4cm <sup>2</sup> )	Estimated Reported APD W/m <sup>2</sup> (4cm <sup>2</sup> )	ID
										Measured	Reported			
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Back Surface	0	111	6505	8.00	7.84	1.01	103.75%	0.177	0.186	1.26	1.323	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Top Edge	0	111	6505	8.00	7.84	1.01	103.75%	0.960	1.008	4.85	5.092	013
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Bottom Edge	0	111	6505	8.00	7.84	1.01	103.75%	0.004	0.004	0.071	0.075	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Left Edge	0	111	6505	8.00	7.84	1.01	103.75%	0.008	0.008	0.092	0.097	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Right Edge	0	111	6505	8.00	7.84	1.01	103.75%	0.002	0.002	0.041	0.043	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Top Edge*	0	111	6505	8.00	7.84	1.01	103.75%	0.942	0.989	4.77	5.008	-

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Estimated Measured APD W/m <sup>2</sup> (4cm <sup>2</sup> )	Estimated Reported APD W/m <sup>2</sup> (4cm <sup>2</sup> )	ID
										Measured	Reported			
U-NII-7 6.7GHz802.11ax(160M)	WLAN Main	Back Surface	0	175	6825	8.00	7.96	1.01	100.93%	0.189	0.193	1.35	1.379	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Main	Top Edge	0	175	6825	8.00	7.96	1.01	100.93%	0.785	0.802	4.12	4.208	014
U-NII-7 6.7GHz802.11ax(160M)	WLAN Main	Bottom Edge	0	175	6825	8.00	7.96	1.01	100.93%	0.007	0.007	0.097	0.099	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Main	Left Edge	0	175	6825	8.00	7.96	1.01	100.93%	0.025	0.026	0.213	0.218	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Main	Right Edge	0	175	6825	8.00	7.96	1.01	100.93%	0.003	0.003	0.029	0.030	-

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Estimated Measured APD W/m <sup>2</sup> (4cm <sup>2</sup> )	Estimated Reported APD W/m <sup>2</sup> (4cm <sup>2</sup> )	ID
										Measured	Reported			
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Main	Back Surface	0	207	6985	8.00	7.98	1.01	100.46%	0.158	0.160	1.09	1.103	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Main	Top Edge	0	207	6985	8.00	7.98	1.01	100.46%	0.564	0.571	2.99	3.025	015
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Main	Bottom Edge	0	207	6985	8.00	7.98	1.01	100.46%	0.009	0.009	0.126	0.127	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Main	Left Edge	0	207	6985	8.00	7.98	1.01	100.46%	0.059	0.060	0.778	0.787	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Main	Right Edge	0	207	6985	8.00	7.98	1.01	100.46%	0.004	0.004	0.064	0.065	-

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Estimated Measured APD W/m <sup>2</sup> (4cm <sup>2</sup> )	Estimated Reported APD W/m <sup>2</sup> (4cm <sup>2</sup> )	ID
										Measured	Reported			
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Back Surface	0	15	6025	9.00	8.96	1.01	100.93%	0.081	0.083	0.66	0.674	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Top Edge	0	15	6025	9.00	8.96	1.01	100.93%	0.376	0.384	2.03	2.073	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Top Edge	0	79	6345	9.00	8.92	1.01	101.86%	0.395	0.407	2.68	2.680	016
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Bottom Edge	0	15	6025	9.00	8.96	1.01	100.93%	0.007	0.007	0.116	0.118	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Left Edge	0	15	6025	9.00	8.96	1.01	100.93%	0.002	0.002	0.051	0.052	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Right Edge	0	15	6025	9.00	8.96	1.01	100.93%	0.033	0.034	0.536	0.547	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**INPAQ**

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11b	WLAN Main	Back Surface	0	6	2437	15.00	14.98	1.01	100.46%	0.444	0.449	-
WLAN 802.11b	WLAN Main	Top Edge	0	1	2412	15.00	14.95	1.01	101.16%	0.461	0.470	-
WLAN 802.11b	WLAN Main	Top Edge	0	6	2437	15.00	14.98	1.01	100.46%	0.478	0.484	020
WLAN 802.11b	WLAN Main	Top Edge	0	11	2462	15.00	14.96	1.01	100.93%	0.471	0.479	-
WLAN 802.11b	WLAN Main	Bottom Edge	0	6	2437	15.00	14.98	1.01	100.46%	0.002	0.002	-
WLAN 802.11b	WLAN Main	Left Edge	0	6	2437	15.00	14.98	1.01	100.46%	0.024	0.024	-
WLAN 802.11b	WLAN Main	Right Edge	0	6	2437	15.00	14.98	1.01	100.46%	0.004	0.004	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
WLAN 802.11ac(160M) 5.2G	WLAN Main	Back Surface	0	50	5250	8.00	7.97	1.01	100.69%	0.099	0.101	-
WLAN 802.11ac(160M) 5.2G	WLAN Main	Top Edge	0	50	5250	8.00	7.97	1.01	100.69%	0.463	0.472	021
WLAN 802.11ac(160M) 5.2G	WLAN Main	Bottom Edge	0	50	5250	8.00	7.97	1.01	100.69%	0.005	0.005	-
WLAN 802.11ac(160M) 5.2G	WLAN Main	Left Edge	0	50	5250	8.00	7.97	1.01	100.69%	0.024	0.024	-
WLAN 802.11ac(160M) 5.2G	WLAN Main	Right Edge	0	50	5250	8.00	7.97	1.01	100.69%	0.001	0.001	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
WLAN 802.11ac(80M) 5.6G	WLAN Main	Back Surface	0	138	5690	8.00	7.99	1.01	100.23%	0.074	0.075	-
WLAN 802.11ac(80M) 5.6G	WLAN Main	Top Edge	0	138	5690	8.00	7.99	1.01	100.23%	0.399	0.405	022
WLAN 802.11ac(80M) 5.6G	WLAN Main	Bottom Edge	0	138	5690	8.00	7.99	1.01	100.23%	0.002	0.002	-
WLAN 802.11ac(80M) 5.6G	WLAN Main	Left Edge	0	138	5690	8.00	7.99	1.01	100.23%	0.019	0.019	-
WLAN 802.11ac(80M) 5.6G	WLAN Main	Right Edge	0	138	5690	8.00	7.99	1.01	100.23%	0.001	0.001	-
WLAN 802.11ac(160M) 5.6G	WLAN Main	Back Surface	0	114	5570	8.00	7.91	1.01	102.09%	0.094	0.097	-
WLAN 802.11ac(160M) 5.6G	WLAN Main	Top Edge	0	114	5570	8.00	7.91	1.01	102.09%	0.487	0.503	023
WLAN 802.11ac(160M) 5.6G	WLAN Main	Bottom Edge	0	114	5570	8.00	7.91	1.01	102.09%	0.001	0.001	-
WLAN 802.11ac(160M) 5.6G	WLAN Main	Left Edge	0	114	5570	8.00	7.91	1.01	102.09%	0.002	0.002	-
WLAN 802.11ac(160M) 5.6G	WLAN Main	Right Edge	0	114	5570	8.00	7.91	1.01	102.09%	0.001	0.001	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
WLAN 802.11ac(80M) 5.8G	WLAN Main	Back Surface	0	155	5775	8.00	7.92	1.01	101.86%	0.087	0.090	-
WLAN 802.11ac(80M) 5.8G	WLAN Main	Top Edge	0	155	5775	8.00	7.92	1.01	101.86%	0.326	0.336	024
WLAN 802.11ac(80M) 5.8G	WLAN Main	Bottom Edge	0	155	5775	8.00	7.92	1.01	101.86%	0.001	0.001	-
WLAN 802.11ac(80M) 5.8G	WLAN Main	Left Edge	0	155	5775	8.00	7.92	1.01	101.86%	0.029	0.030	-
WLAN 802.11ac(80M) 5.8G	WLAN Main	Right Edge	0	155	5775	8.00	7.92	1.01	101.86%	0.003	0.003	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11b	WLAN Aux	Back Surface	0	6	2437	16.50	16.46	1.01	100.93%	0.444	0.451	-
WLAN 802.11b	WLAN Aux	Top Edge	0	1	2412	16.50	16.42	1.01	101.86%	0.752	0.771	-
WLAN 802.11b	WLAN Aux	Top Edge	0	6	2437	16.50	16.46	1.01	100.93%	0.768	0.781	025
WLAN 802.11b	WLAN Aux	Top Edge	0	11	2462	16.50	16.45	1.01	101.16%	0.745	0.759	-
WLAN 802.11b	WLAN Aux	Bottom Edge	0	6	2437	16.50	16.46	1.01	100.93%	0.003	0.003	-
WLAN 802.11b	WLAN Aux	Left Edge	0	6	2437	16.50	16.46	1.01	100.93%	0.002	0.002	-
WLAN 802.11b	WLAN Aux	Right Edge	0	6	2437	16.50	16.46	1.01	100.93%	0.031	0.032	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
Bluetooth(GFSK)	WLAN Aux	Back Surface	0	78	2480	11.00	9.52	1.30	140.60%	0.075	0.136	-
Bluetooth(GFSK)	WLAN Aux	Top Edge	0	78	2480	11.00	9.52	1.30	140.60%	0.193	0.351	026
Bluetooth(GFSK)	WLAN Aux	Bottom Edge	0	78	2480	11.00	9.52	1.30	140.60%	0.001	0.002	-
Bluetooth(GFSK)	WLAN Aux	Left Edge	0	78	2480	11.00	9.52	1.30	140.60%	0.001	0.002	-
Bluetooth(GFSK)	WLAN Aux	Right Edge	0	78	2480	11.00	9.52	1.30	140.60%	0.011	0.020	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11ac(160M) 5.2G	WLAN Aux	Back Surface	0	50	5250	9.00	8.90	1.01	102.33%	0.061	0.063	-
WLAN 802.11ac(160M) 5.2G	WLAN Aux	Top Edge	0	50	5250	9.00	8.90	1.01	102.33%	0.278	0.288	027
WLAN 802.11ac(160M) 5.2G	WLAN Aux	Bottom Edge	0	50	5250	9.00	8.90	1.01	102.33%	0.001	0.001	-
WLAN 802.11ac(160M) 5.2G	WLAN Aux	Left Edge	0	50	5250	9.00	8.90	1.01	102.33%	0.002	0.002	-
WLAN 802.11ac(160M) 5.2G	WLAN Aux	Right Edge	0	50	5250	9.00	8.90	1.01	102.33%	0.011	0.011	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11ac(80M) 5.6G	WLAN Aux	Back Surface	0	138	5690	9.00	8.97	1.01	100.69%	0.102	0.104	-
WLAN 802.11ac(80M) 5.6G	WLAN Aux	Top Edge	0	138	5690	9.00	8.97	1.01	100.69%	0.130	0.132	028
WLAN 802.11ac(80M) 5.6G	WLAN Aux	Bottom Edge	0	138	5690	9.00	8.97	1.01	100.69%	0.002	0.002	-
WLAN 802.11ac(80M) 5.6G	WLAN Aux	Left Edge	0	138	5690	9.00	8.97	1.01	100.69%	0.009	0.009	-
WLAN 802.11ac(80M) 5.6G	WLAN Aux	Right Edge	0	138	5690	9.00	8.97	1.01	100.69%	0.025	0.025	-
WLAN 802.11ac(160M) 5.6G	WLAN Aux	Back Surface	0	114	5570	9.00	8.93	1.01	101.62%	0.093	0.096	-
WLAN 802.11ac(160M) 5.6G	WLAN Aux	Top Edge	0	114	5570	9.00	8.93	1.01	101.62%	0.183	0.188	029
WLAN 802.11ac(160M) 5.6G	WLAN Aux	Bottom Edge	0	114	5570	9.00	8.93	1.01	101.62%	0.001	0.001	-
WLAN 802.11ac(160M) 5.6G	WLAN Aux	Left Edge	0	114	5570	9.00	8.93	1.01	101.62%	0.001	0.001	-
WLAN 802.11ac(160M) 5.6G	WLAN Aux	Right Edge	0	114	5570	9.00	8.93	1.01	101.62%	0.009	0.009	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11ac(80M) 5.8G	WLAN Aux	Back Surface	0	155	5775	9.00	8.95	1.01	101.16%	0.102	0.104	-
WLAN 802.11ac(80M) 5.8G	WLAN Aux	Top Edge	0	155	5775	9.00	8.95	1.01	101.16%	0.128	0.131	030
WLAN 802.11ac(80M) 5.8G	WLAN Aux	Bottom Edge	0	155	5775	9.00	8.95	1.01	101.16%	0.002	0.002	-
WLAN 802.11ac(80M) 5.8G	WLAN Aux	Left Edge	0	155	5775	9.00	8.95	1.01	101.16%	0.001	0.001	-
WLAN 802.11ac(80M) 5.8G	WLAN Aux	Right Edge	0	155	5775	9.00	8.95	1.01	101.16%	0.055	0.056	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WIFI 6E\_INPAQ

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Estimated Measured APD W/m <sup>2</sup> (4cm <sup>2</sup> )	Estimated Reported APD W/m <sup>2</sup> (4cm <sup>2</sup> )	ID
										Measured	Reported			
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Back Surface	0	15	6025	8.00	7.95	1.01	101.16%	0.128	0.131	0.936	0.958	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Top Edge	0	15	6025	8.00	7.95	1.01	101.16%	0.238	0.244	1.42	1.454	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Top Edge	0	79	6345	8.00	7.81	1.01	104.47%	0.689	0.728	3.31	3.500	031
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Bottom Edge	0	15	6025	8.00	7.95	1.01	101.16%	0.003	0.003	0.034	0.035	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Left Edge	0	15	6025	8.00	7.95	1.01	101.16%	0.009	0.009	0.086	0.088	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Main	Right Edge	0	15	6025	8.00	7.95	1.01	101.16%	0.002	0.002	0.025	0.026	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Back Surface	0	111	6505	8.00	7.84	1.01	103.75%	0.168	0.176	1.24	1.302	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Top Edge	0	111	6505	8.00	7.84	1.01	103.75%	0.891	0.936	4.29	4.504	032
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Bottom Edge	0	111	6505	8.00	7.84	1.01	103.75%	0.014	0.015	0.152	0.160	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Left Edge	0	111	6505	8.00	7.84	1.01	103.75%	0.049	0.051	0.426	0.447	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Main	Right Edge	0	111	6505	8.00	7.84	1.01	103.75%	0.005	0.005	0.057	0.060	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Main	Back Surface	0	175	6825	8.00	7.96	1.01	100.93%	0.174	0.178	1.22	1.246	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Main	Top Edge	0	175	6825	8.00	7.96	1.01	100.93%	0.733	0.749	3.69	3.769	033
U-NII-7 6.7GHz802.11ax(160M)	WLAN Main	Bottom Edge	0	175	6825	8.00	7.96	1.01	100.93%	0.006	0.006	0.068	0.069	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Main	Left Edge	0	175	6825	8.00	7.96	1.01	100.93%	0.018	0.018	0.161	0.164	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Main	Right Edge	0	175	6825	8.00	7.96	1.01	100.93%	0.003	0.003	0.033	0.034	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Main	Back Surface	0	207	6985	8.00	7.98	1.01	100.46%	0.138	0.140	0.975	0.986	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Main	Top Edge	0	207	6985	8.00	7.98	1.01	100.46%	0.472	0.477	2.41	2.438	034
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Main	Bottom Edge	0	207	6985	8.00	7.98	1.01	100.46%	0.015	0.015	0.162	0.164	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Main	Left Edge	0	207	6985	8.00	7.98	1.01	100.46%	0.033	0.033	0.258	0.261	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Main	Right Edge	0	207	6985	8.00	7.98	1.01	100.46%	0.004	0.004	0.047	0.048	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Back Surface	0	15	6025	9.00	8.96	1.01	100.93%	0.116	0.118	0.904	0.923	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Top Edge	0	15	6025	9.00	8.96	1.01	100.93%	0.245	0.250	1.6	1.634	035
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Top Edge	0	79	6345	9.00	8.92	1.01	101.86%	0.228	0.235	1.61	1.660	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Bottom Edge	0	15	6025	9.00	8.96	1.01	100.93%	0.007	0.007	0.071	0.073	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Left Edge	0	15	6025	9.00	8.96	1.01	100.93%	0.002	0.002	0.025	0.026	-
U-NII-5 6.2GHz802.11ax(160M)	WLAN Aux	Right Edge	0	15	6025	9.00	8.96	1.01	100.93%	0.013	0.013	0.1	0.102	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Aux	Back Surface	0	111	6505	9.00	8.94	1.01	101.39%	0.101	0.104	0.828	0.850	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Aux	Top Edge	0	111	6505	9.00	8.94	1.01	101.39%	0.293	0.301	2.02	2.073	036
U-NII-6 6.5GHz802.11ax(160M)	WLAN Aux	Bottom Edge	0	111	6505	9.00	8.94	1.01	101.39%	0.014	0.014	0.149	0.153	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Aux	Left Edge	0	111	6505	9.00	8.94	1.01	101.39%	0.006	0.006	0.068	0.070	-
U-NII-6 6.5GHz802.11ax(160M)	WLAN Aux	Right Edge	0	111	6505	9.00	8.94	1.01	101.39%	0.031	0.032	0.224	0.230	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Aux	Back Surface	0	175	6825	9.00	8.85	1.01	103.51%	0.104	0.109	0.822	0.861	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Aux	Top Edge	0	175	6825	9.00	8.85	1.01	103.51%	0.430	0.450	2.56	2.682	037
U-NII-7 6.7GHz802.11ax(160M)	WLAN Aux	Bottom Edge	0	175	6825	9.00	8.85	1.01	103.51%	0.007	0.007	0.074	0.078	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Aux	Left Edge	0	175	6825	9.00	8.85	1.01	103.51%	0.003	0.003	0.032	0.034	-
U-NII-7 6.7GHz802.11ax(160M)	WLAN Aux	Right Edge	0	175	6825	9.00	8.85	1.01	103.51%	0.012	0.013	0.092	0.096	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Aux	Back Surface	0	207	6985	9.00	8.94	1.01	101.39%	0.105	0.107	0.808	0.825	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Aux	Top Edge	0	207	6985	9.00	8.94	1.01	101.39%	0.560	0.572	3.06	3.124	038
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Aux	Bottom Edge	0	207	6985	9.00	8.94	1.01	101.39%	0.009	0.009	0.093	0.095	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Aux	Left Edge	0	207	6985	9.00	8.94	1.01	101.39%	0.004	0.004	0.045	0.046	-
U-NII-8 7.0GHz 802.11ax (160M)	WLAN Aux	Right Edge	0	207	6985	9.00	8.94	1.01	101.39%	0.019	0.019	0.154	0.157	-

Note:

Reported SAR = measured SAR \* Power scaling \* Duty cycle scaling  
 Reported APD = measured APD \* Power scaling \* Duty cycle scaling

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 8.3 Summary of PD Results

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Tune-up Scaling	Duty cycle scaling	Measurement uncertainty	PD result(4cm)				ID
											Measured Total psPD (W/m <sup>2</sup> )	Reported Total psPD (W/m <sup>2</sup> )	Measured Normal psPD (W/m <sup>2</sup> )	Reported Normal psPD (W/m <sup>2</sup> )	
WLAN 6E 802.11ax(160M) U-NII-5	WLAN Main	Top Edge	2	15	6025	8.00	7.95	101.16%	1.01	1.55	1.340	2.126	1.110	1.761	039
	WLAN Main	Top Edge	2	79	6345	8.00	7.81	104.47%	1.01	1.55	2.080	3.409	1.810	2.966	040
WLAN 6E 802.11ax(160M) U-NII-6	WLAN Main	Top Edge	2	111	6505	8.00	7.84	103.75%	1.01	1.55	2.310	3.759	2.020	3.287	041
WLAN 6E 802.11ax(160M) U-NII-7	WLAN Main	Top Edge	2	175	6825	8.00	7.96	100.93%	1.01	1.55	2.820	4.464	2.490	3.942	042
WLAN 6E 802.11ax(160M) U-NII-8	WLAN Main	Top Edge	2	207	6985	8.00	7.98	100.46%	1.01	1.55	2.550	4.018	2.290	3.609	043
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Tune-up Scaling	Duty cycle scaling	Measurement uncertainty	PD result(4cm)				ID
											Measured Total psPD (W/m <sup>2</sup> )	Reported Total psPD (W/m <sup>2</sup> )	Measured Normal psPD (W/m <sup>2</sup> )	Reported Normal psPD (W/m <sup>2</sup> )	
WLAN 6E 802.11ax(160M) U-NII-5	WLAN Aux	Top Edge	2	15	6025	9.00	8.96	100.93%	1.01	1.55	1.210	1.916	1.010	1.599	044
	WLAN Aux	Top Edge	2	79	6345	9.00	8.92	101.86%	1.01	1.55	2.370	3.787	1.950	3.116	045
WLAN 6E 802.11ax(160M) U-NII-6	WLAN Aux	Top Edge	2	111	6505	9.00	8.94	101.39%	1.01	1.55	1.640	2.608	1.400	2.227	046
WLAN 6E 802.11ax(160M) U-NII-7	WLAN Aux	Top Edge	2	175	6825	9.00	8.85	103.51%	1.01	1.55	2.490	4.043	2.210	3.588	047
WLAN 6E 802.11ax(160M) U-NII-8	WLAN Aux	Top Edge	2	207	6985	9.00	8.94	101.39%	1.01	1.55	2.740	4.358	2.220	3.531	048

**Note:**

Reported PD = measured PD \* Power scaling \* Duty cycle scaling \* Uncertainty scaling

### 8.4 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

### 8.5 Conclusion

The device is compliant because all the standalone results are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 9 SIMULTANEOUS TRANSMISSION ANALYSIS

### 9.1 Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
WLAN 2.4GHz Main + BT Aux	Yes
WLAN 2.4GHz Main + WLAN 2.4GHz Aux	Yes
WLAN 5GHz Main + BT Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux	Yes
WLAN 6GHz Main + BT Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux + BT Aux	Yes

Note:

1. Bluetooth and WLAN Aux share the same antenna path, and BT can transmit with WLAN Main simultaneously.
2. For 2.4/5GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission is the same with or less than that used in standalone transmission, and we used the sum of 1-g SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 9.2 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\text{Estimated SAR} = \frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

## 9.3 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by  $(\text{SAR1} + \text{SAR2})^{1.5}/R_i$ , rounded to two decimal digits, and must be  $\leq 0.04$  for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and  $R_i$  is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## Simultaneous Transmission Combination

### ASAP

Exposure Position		FCC Reported SAR							Scenario 1	Scenario 2	Scenario 3	Scenario 4	Scenario 5	Scenario 6	Scenario 7	Scenario 8
		1	2	3	4	5	6	7	1+2	1+5	3+4	3+5	3+4+5	6+7	5+6	5+6+7
		2.4GHz WLAN Main	2.4GHz WLAN Aux	5GHz WLAN Main	5GHz WLAN Aux	Bluetooth Aux	6GHz WLAN Main	6GHz WLAN Aux	Summed							
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Back Surface	0	0.456	0.506	0.136	0.105	0.161	0.193	0.104	0.962	0.617	0.241	0.297	0.402	0.297	0.354	0.458
Top Edge	0	0.485	1.108	0.468	0.407	0.428	1.008	0.932	1.593	0.913	0.875	0.896	1.303	1.940	1.436	2.368
Bottom Edge	0	0.003	0.002	0.009	0.002	0.002	0.009	0.009	0.005	0.005	0.011	0.011	0.013	0.018	0.011	0.020
Left Edge	0	0.070	0.008	0.020	0.003	0.006	0.060	0.002	0.078	0.076	0.023	0.026	0.029	0.062	0.066	0.068
Right Edge	0	0.017	0.022	0.010	0.017	0.014	0.004	0.034	0.039	0.031	0.027	0.024	0.041	0.038	0.018	0.052

### INPAQ

Exposure Position		FCC Reported SAR							Scenario 1	Scenario 2	Scenario 3	Scenario 4	Scenario 5	Scenario 6	Scenario 7	Scenario 8
		1	2	3	4	5	6	7	1+2	1+5	3+4	3+5	3+4+5	6+7	5+6	5+6+7
		2.4GHz WLAN Main	2.4GHz WLAN Aux	5GHz WLAN Main	5GHz WLAN Aux	Bluetooth Aux	6GHz WLAN Main	6GHz WLAN Aux	Summed							
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Back Surface	0	0.449	0.492	0.101	0.104	0.136	0.178	0.118	0.941	0.585	0.205	0.237	0.341	0.296	0.314	0.432
Top Edge	0	0.484	0.781	0.503	0.288	0.351	0.936	0.572	1.265	0.835	0.791	0.854	1.142	1.508	1.287	1.869
Bottom Edge	0	0.002	0.003	0.005	0.002	0.002	0.015	0.014	0.005	0.004	0.007	0.007	0.009	0.029	0.017	0.031
Left Edge	0	0.024	0.002	0.030	0.009	0.002	0.051	0.006	0.026	0.026	0.039	0.032	0.041	0.057	0.053	0.059
Right Edge	0	0.004	0.032	0.003	0.056	0.020	0.005	0.032	0.036	0.024	0.059	0.023	0.079	0.037	0.025	0.057


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 9.4 Conclusion

The simultaneous transmission is compliant because both SAR sum and/or SPLSR are less than their corresponding criteria.

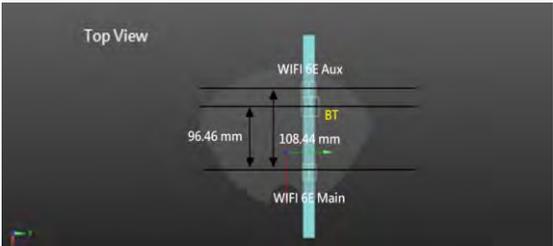ASAP Scenario 1:									
Position	Conditions	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Test
			x	y	z				
Top Edge	WLAN 6GHz Main	1.008	5.68	4.18	0.03	-	-	-	-
	WLAN 6GHz + BT Aux	1.360	-3.96	3.84	0.00	2.368	96.46	0.038	SPLSR ≤ 0.04, Not required
									

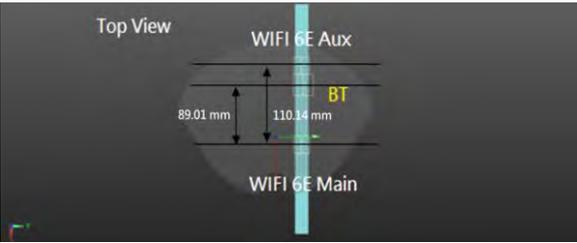INPAQ Scenario 1:									
Position	Conditions	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Test
			x	y	z				
Top Edge	WLAN 6GHz Main	0.936	4.08	4.00	0.02	-	-	-	-
	WLAN 6GHz + BT Aux	0.868	-4.82	4.16	0.00	1.804	89.01	0.027	SPLSR ≤ 0.04, Not required
									

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 10 INSTRUMENTS LIST

Equipment List					
Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
SPEAG	Data acquisition Electronics	DAE4	856	Apr/21/2022	Apr/20/2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	3770	May/02/2022	May/01/2023
SPEAG	System Validation Dipole	D2450V2	727	Apr/25/2022	Apr/24/2023
SPEAG	System Validation Dipole	D5GHzV2	1023	Jan/27/2022	Jan/26/2023
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb/28/2022	Feb/27/2023
R&S	MXG Analog Signal Generator	SMB100A03	182012	Jun/13/2022	Jun/12/2023
Agilent	Dual-directional coupler	772D	MY52180142	Nov/02/2021	Nov/01/2022
Agilent	Dual-directional coupler	778D	MY52180302	Oct/29/2021	Oct/28/2022
EMCI	Amplifier	EMC 2830P	980156	Calibration not required	Calibration not required
R&S	Power Meter	NRX	102034	Dec/28/2021	Dec/27/2022
R&S	Power Sensor	NRP18S	101974	Oct/12/2021	Oct/11/2022
R&S	Power Sensor	NRP18S	109066	Oct/12/2021	Oct/11/2022
R&S	Power Sensor	NRP18S	101973	Jan/22/2022	Jan/21/2023
R&S	Power Sensor	NRP18S	101358	Jan/22/2022	Jan/21/2023
SPEAG	Software	DASY 52 V52.10.4.152 7	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
TECEP	Digital thermometer	DTM-303A	TP190085	Jan/14/2022	Jan/13/2023

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Equipment List					
Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
SPEAG	Data acquisition Electronics	DAE4	558	Nov/23/2021	Nov/22/2022
SPEAG	Data acquisition Electronics	DAE4	1260	Sep/22/2022	Sep/21/2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	7466	Jan/26/2022	Jan/25/2023
SPEAG	E-field Probe for Near Field Application	EUmmWV4	9635	Jun/14/2022	Jun/13/2023
SPEAG	System Validation Dipole	D2450V2	727	Apr/25/2022	Apr/24/2023
SPEAG	System Validation Dipole	D5GHzV2	1023	Jan/27/2022	Jan/26/2023
SPEAG	System Validation Dipole	D6.5GHzV2	1006	Aug/23/2022	Aug/22/2023
SPEAG	System Validation Dipole	D7GHzV2	1007	Aug/24/2022	Aug/23/2023
SPEAG	5G Verification Source 10GHz	5G-Veri10	1021	Jan/24/2022	Jan/23/2023
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb/28/2022	Feb/27/2023
R&S	MXG Analog Signal Generator	SMB100A03	182012	Jun/13/2022	Jun/12/2023
EMCI	Amplifier	EMC 074225P	980155	Calibration not required	Calibration not required
EMCI	Amplifier	EMC 2830P	980156	Calibration not required	Calibration not required
Agilent	Dual-directional coupler	772D	MY52180142	Nov/02/2021	Nov/01/2022
Agilent	Dual-directional coupler	778D	MY52180302	Oct/29/2021	Oct/28/2022
R&S	Power Meter	NRX	102034	Dec/28/2021	Dec/27/2022
R&S	Power Sensor	NRP18S	101974	Oct/12/2021	Oct/11/2022
R&S	Power Sensor	NRP18S	109066	Oct/12/2021	Oct/11/2022
R&S	Power Sensor	NRP18S	101973	Jan/22/2022	Jan/21/2023
R&S	Power Sensor	NRP18S	101358	Jan/22/2022	Jan/21/2023
SPEAG	Software	DASY 6 V16.0.2.136	N/A	Calibration not required	Calibration not required
SPEAG	Software	DASY 52 V52.10.4.15 27	N/A	Calibration not required	Calibration not required
SPEAG	Software	DASY 6 mmWave V2.4.2.62	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	mmWave Phantom	N/A	Calibration not required	Calibration not required
TECPEL	Digital thermometer	DTM-303A	TP130074	May/13/2022	May/12/2023

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 11 UNCERTAINTY BUDGET

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	c	D	e		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
<b>Measurement system</b>									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	∞
<i>Isotropy , Axial</i>	3.50%	R	√ 3	1.732	1	1	2.02%	2.02%	∞
<i>Isotropy, Hemispherical</i>	9.60%	R	√ 3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√ 3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√ 3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√ 3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√ 3	1.732	1	1	1.50%	1.50%	∞
<b>Measurement drift (class A evaluation)</b>									
RF ambient condition - noise	3.00%	R	√ 3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√ 3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√ 3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√ 3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	∞
<b>Test Sample related</b>									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√ 3	1.732	1	1	2.89%	2.89%	∞
<b>Phantom and Setup</b>									
Phantom Uncertainty	4.00%	R	√ 3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	2.53%	N	1	1	0.64	0.43	1.62%	1.09%	M
Liquid Conductivity (mea.)	2.78%	N	1	1	0.6	0.49	1.67%	1.36%	M
Combined standard uncertainty		RSS					11.94%	11.84%	
Expant uncertainty (95% confidence interval), K=2							23.89%	23.67%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	c	D	e		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
<b>Measurement system</b>									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
<i>Isotropy, Axial</i>	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
<i>Isotropy, Hemispherical</i>	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
<b>Measurement drift (class A evaluation)</b>									
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
<b>Test Sample related</b>									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
<b>Phantom and Setup</b>									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.08%	N	1	1	0.64	0.43	0.69%	0.46%	M
Liquid Conductivity (mea.)	3.77%	N	1	1	0.6	0.49	2.26%	1.85%	M
Combined standard uncertainty		RSS					11.66%	11.57%	
Expant uncertainty (95% confidence interval), K=2							23.32%	23.13%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**DASY6 Uncertainty Budget**  
**According to IEC/IEEE 62209-1528**  
**(Frequency band: 6GHz - 10GHz range)**

a	b	c	d		e	e	f=b * e / d	f=b * e / d
Source of Uncertainty	Uncertainty Value (±%)	Probability Distribution	Div.	Div. Value	(ci) 1g	(ci) 10g	Std. uncertainty (1g) (±%)	Std. uncertainty (10g) (±%)
<b>Measurement system errors</b>								
Probe calibration	18.6	N	2	2	1	1	9.3	9.3
Probe Calibration Drift	1.7	R	√3	1.732	1	1	1.0	1.0
Probe Linearity	4.7	R	√3	1.732	1	1	2.7	2.7
Broadband Signal	2.8	R	√3	1.732	1	1	1.6	1.6
Probe Isotropy	7.6	R	√3	1.732	1	1	4.4	4.4
Data Acquisition	0.3	N	1	1	1	1	0.3	0.3
RF Ambient	1.8	N	1	1	1	1	1.8	1.8
Probe positioning	0.2	N	1	1	0.67	0.67	0.1	0.1
Data Processing	3.5	N	1	1	1	1	3.5	3.5
<b>Phantom and device errors</b>								
Conductivity (meas.)DAK	2.5	N	1	1	0.78	0.71	2.0	1.8
Conductivity (temp.)BB	2.4	R	√3	1.732	0.78	0.71	1.1	1.0
Phantom Permittivity	14.0	R	√3	1.732	0.5	0.5	4.0	4.0
Distance DUT - TSL	2.0	N	1	1	2	2	4.0	4.0
Device Positioning (±0.5mm)	1.0	N	1	1	1	1	1.0	1.0
Device Holder	3.6	N	1	1	1	1	3.6	3.6
DUT Modulationm	2.4	R	√3	1.732	1	1	1.4	1.4
Time-average SAR	0.0	R	√3	1.732	1	1	0.0	0.0
DUT drift	2.5	N	1	1	1	1	2.5	2.5
Val Antenna Unc.	0.0	N	1	1	1	1	0.0	0.0
Unc. Input Power	0.0	N	1	1	1	1	0.0	0.0
<b>Correction to the SAR results</b>								
Deviation to Target	1.90	N	1	1	1	0.84	1.9	1.6
SAR scaling		R	√3	1.732	1	1	0.0	0.0
Combined Std. uncertainty							14.0	13.9
Expanded Std. uncertainty (95% confidence interval), K=2							28.0	27.8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**cDASY6 Module mmWave Uncertainty Budget for PD  
Evaluation Distances to the Antennas  $\geq \lambda / 5$   
In Compliance with IEC/IEEE 63195**

a	b	c	d	e	f=b * e / d	g	
Source of Uncertainty	Uncertainty Value (+/-dB)	Probability Distribution	Div.	Div. Value	ci	Std. uncertainty (+/-dB)	(vi) Veff
<b>Uncertainty terms dependent on the measurement system</b>							
Probe calibration	0.49	N	1	1	1	0.49	∞
Probe correction	0.00	R	√3	1.732	1	0.00	∞
Frequency response (BW ≤ 1GHz)	0.20	R	√3	1.732	1	0.12	∞
Sensor cross coupling	0.00	R	√3	1.732	1	0.00	∞
Isotropy	0.50	R	√3	1.732	1	0.29	∞
Linearity	0.20	R	√3	1.732	1	0.12	∞
Probe scattering	0.00	R	√3	1.732	1	0.00	∞
Probe positioning offset	0.30	R	√3	1.732	1	0.17	∞
Probe positioning repeatability	0.04	R	√3	1.732	1	0.02	∞
Sensor mechanical offset	0.00	R	√3	1.732	1	0.00	∞
Probe spatial resolution	0.00	R	√3	1.732	1	0.00	∞
Field impedance dependence	0.00	R	√3	1.732	1	0.00	∞
Amplitude and phase drift	0.00	R	√3	1.732	1	0.00	∞
Amplitude and phase noise	0.04	R	√3	1.732	1	0.02	∞
Measurement area truncation	0.00	R	√3	1.732	1	0.00	∞
Data acquisition	0.03	N	1	1	1	0.03	∞
Sampling	0.00	R	√3	1	1	0.00	∞
Field reconstruction	2.00	R	√3	1.732	1	1.15	∞
Forward transformation	0.00	R	√3	1.732	1	0.00	∞
Power density scaling	-	R	√3	1.732	1	-	∞
Spatial averaging	0.10	R	√3	1.732	1	0.06	∞
System detection limit	0.04	R	√3	1.732	1	0.02	∞
<b>Uncertainty terms dependent on the DUT and environmental factors</b>							
Probe coupling with DUT	0.00	R	√3	1.732	1	0.00	∞
Modulation response	0.40	R	√3	1.732	1	0.23	∞
Integration time	0.00	R	√3	1.732	1	0.00	∞
Response time	0.00	R	√3	1.732	1	0.00	∞
Device holder influence	0.10	R	√3	1.732	1	0.06	∞
DUT alignment	0.00	R	√3	1.732	1	0.00	∞
RF ambient conditions	0.04	R	√3	1.732	1	0.02	∞
Ambient reflections	0.04	R	√3	1.732	1	0.02	∞
Immunity / secondary reception	0.00	R	√3	1.732	1	0.00	∞
Drift of the DUT	-	R	√3	1.732	1	-	∞
Combined Std. uncertainty						1.33	
Expanded Std. uncertainty (95% confidence interval), K=2						2.67	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 12 SAR MEASUREMENT RESULTS

Date: 2022/11/2

ID: 001

Report No. :TESA2208000323ES

WLAN 802.11b\_Body\_Top Edge\_CH 6\_0mm\_Main

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty cycle= 1:1.007

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.73$  S/m;  $\epsilon_r = 39.178$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2437 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (101x51x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.798 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.225 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.194 W/kg**

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 0.803 W/kg

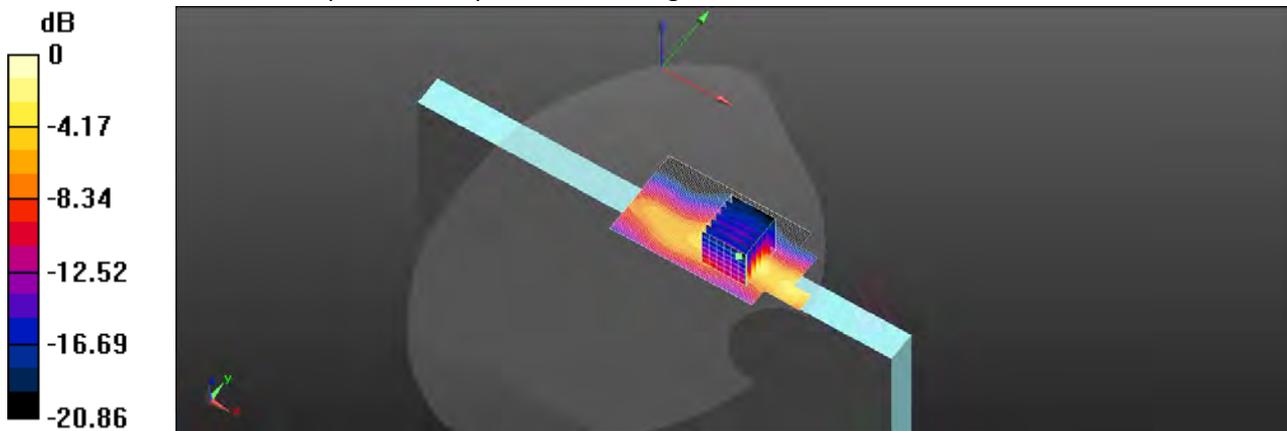

0 dB = 0.803 W/kg = -0.95 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 002

Report No. :TESA2208000323ES

**WLAN 802.11ac(160M) 5.2G\_Body\_Top Edge\_CH 50\_0mm\_Main**

Communication System: WLAN 5G; Frequency: 5250 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.675 \text{ S/m}$ ;  $\epsilon_r = 35.933$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.44, 5.44, 5.44) @ 5250 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.683 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.562 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.68 W/kg

**SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.122 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 0.957 W/kg

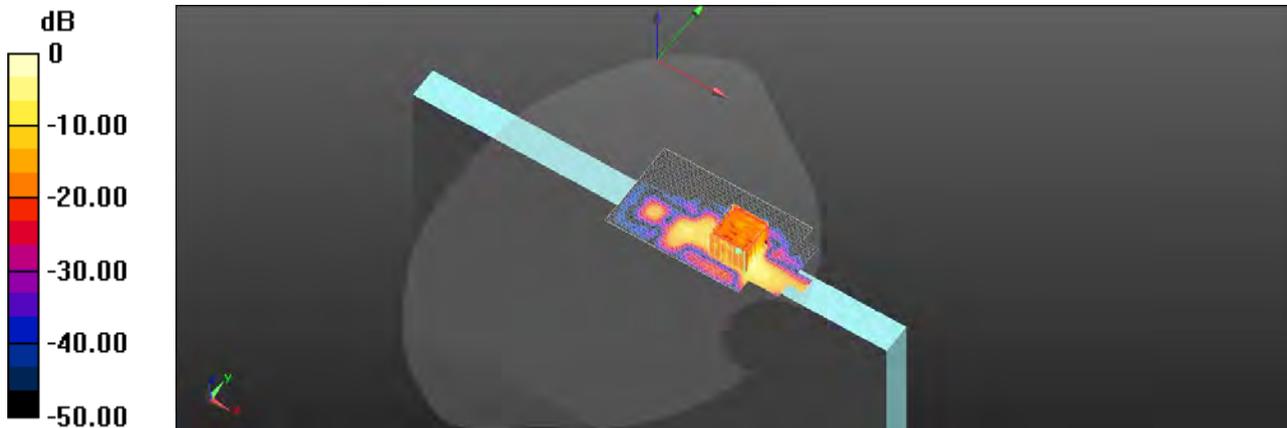

0 dB = 0.957 W/kg = -0.19 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 003

Report No. :TESA2208000323ES

**WLAN 802.11ac(80M) 5.6G\_Body\_Top Edge\_CH 138\_0mm\_Main**

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5690$  MHz;  $\sigma = 5.241$  S/m;  $\epsilon_r = 35.068$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5690 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.44 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.763 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.72 W/kg

**SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.078 W/kg**

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.695 W/kg

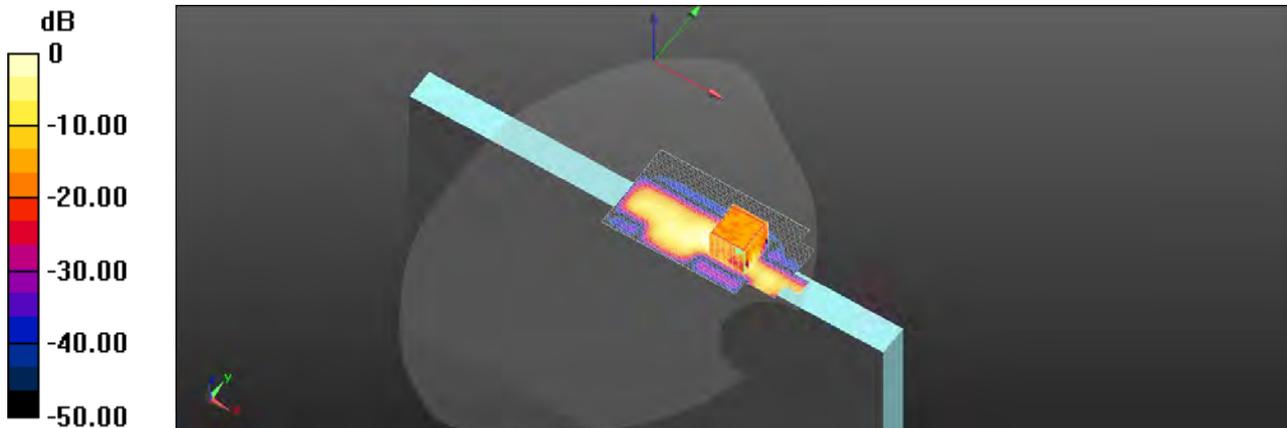

0 dB = 0.695 W/kg = -1.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 004

Report No. :TESA2208000323ES

WLAN 802.11ac(160M) 5.6G\_Body\_Top Edge\_CH 114\_0mm\_Main

Communication System: WLAN 5G; Frequency: 5570 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5570$  MHz;  $\sigma = 5.076$  S/m;  $\epsilon_r = 35.373$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.05, 5.05, 5.05) @ 5570 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.488 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 2.30 W/kg

**SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.093 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 0.837 W/kg

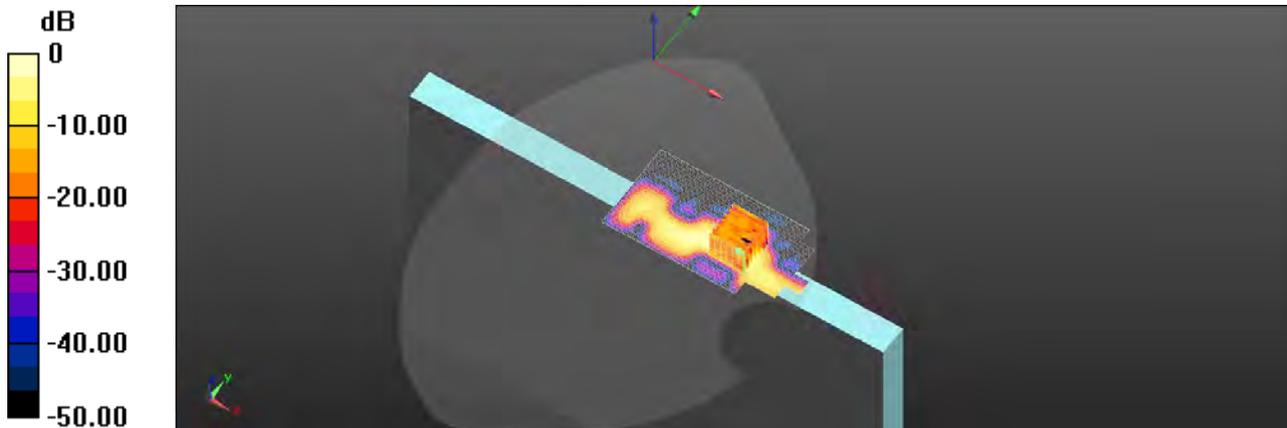

0 dB = 0.837 W/kg = -0.77 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 005

Report No. :TESA2208000323ES

**WLAN 802.11ac(80M) 5.8G\_Body\_Top Edge\_CH 155\_0mm\_Main**

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5775 \text{ MHz}$ ;  $\sigma = 5.362 \text{ S/m}$ ;  $\epsilon_r = 34.915$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5775 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.27 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.708 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.17 W/kg

**SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.072 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 0.702 W/kg

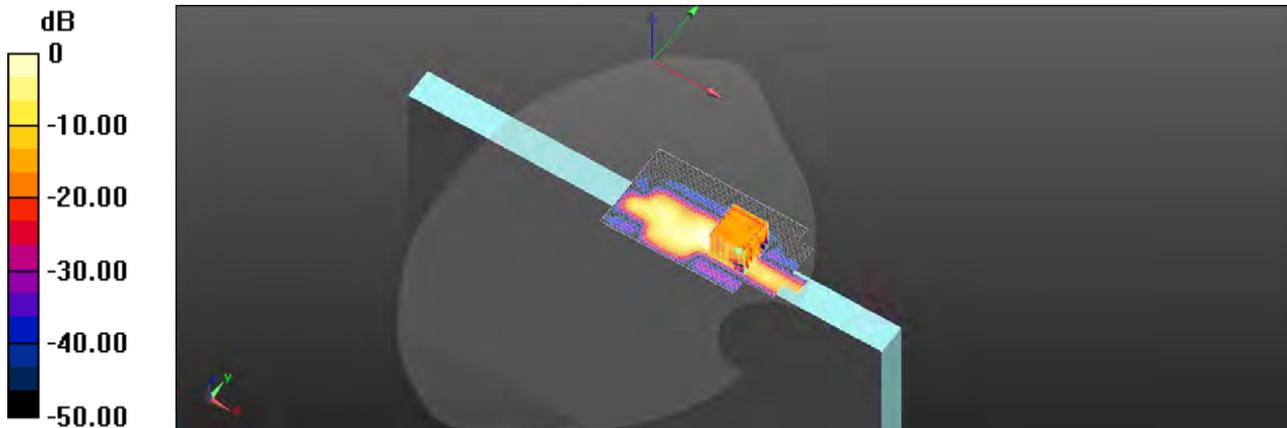

0 dB = 0.702 W/kg = -1.54 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 006

Report No. :TESA2208000323ES

WLAN 802.11b\_Body\_Top Edge\_CH 6\_0mm\_Aux

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty cycle= 1:1.007

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.73 \text{ S/m}$ ;  $\epsilon_r = 39.178$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2437 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (101x51x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.83 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.463 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 2.47 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.442 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 1.79 W/kg

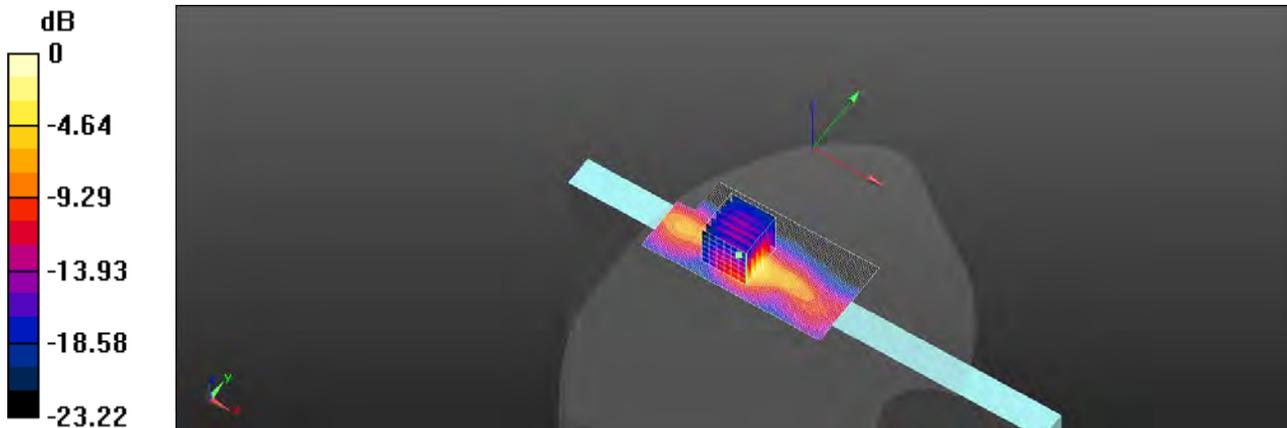

0 dB = 1.79 W/kg = 2.53 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 007

Report No. :TESA2208000323ES

Bluetooth(GFSK)\_Body\_Top Edge\_CH 78\_0mm\_Aux

Communication System: Bluetooth; Frequency: 2480 MHz; Duty cycle= 1:1.295

Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.763$  S/m;  $\epsilon_r = 39.128$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2480 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (101x51x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.419 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.132 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.557 W/kg

**SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.093 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

Maximum value of SAR (measured) = 0.387 W/kg

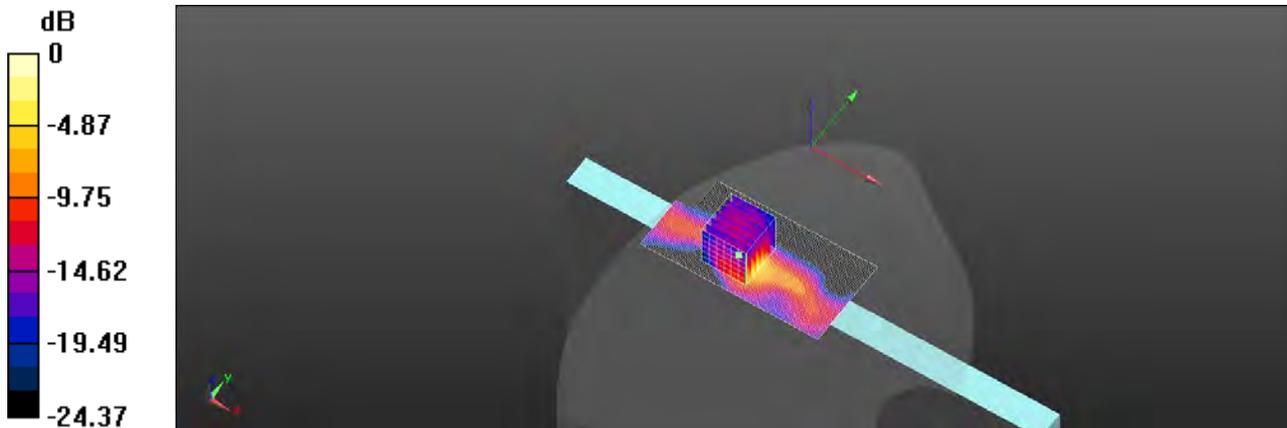

0 dB = 0.387 W/kg = -4.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 008

Report No. :TESA2208000323ES

WLAN 802.11ac(160M) 5.2G\_Body\_Top Edge\_CH 50\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5250 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.675 \text{ S/m}$ ;  $\epsilon_r = 35.933$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.44, 5.44, 5.44) @ 5250 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.446 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.875 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.771 W/kg

**SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.073 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 0.412 W/kg

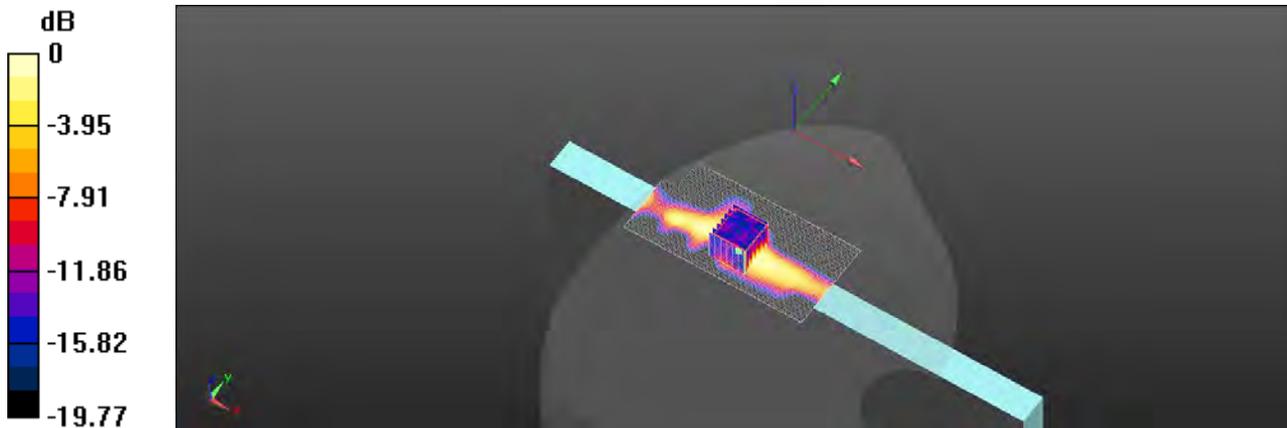

0 dB = 0.412 W/kg = -3.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 009

Report No. :TESA2208000323ES

WLAN 802.11ac(80M) 5.6G\_Body\_Top Edge\_CH 138\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5690$  MHz;  $\sigma = 5.241$  S/m;  $\epsilon_r = 35.068$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5690 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.721 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.142 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.109 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.661 W/kg

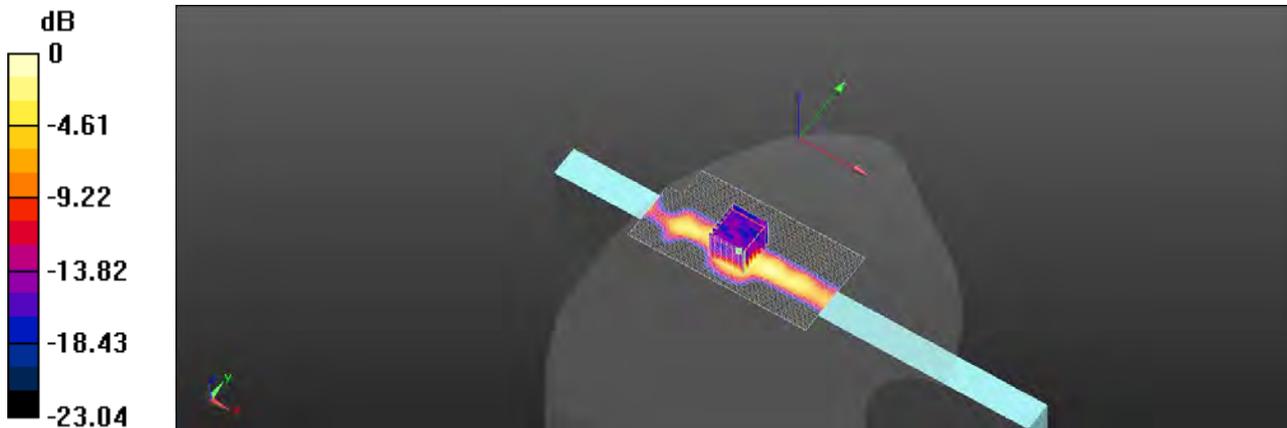

0 dB = 0.661 W/kg = -1.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 010

Report No. :TESA2208000323ES

WLAN 802.11ac(160M) 5.6G\_Body\_Top Edge\_CH 114\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5570 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5570$  MHz;  $\sigma = 5.076$  S/m;  $\epsilon_r = 35.373$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.05, 5.05, 5.05) @ 5570 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.444 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.416 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.886 W/kg

**SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.076 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 0.451 W/kg

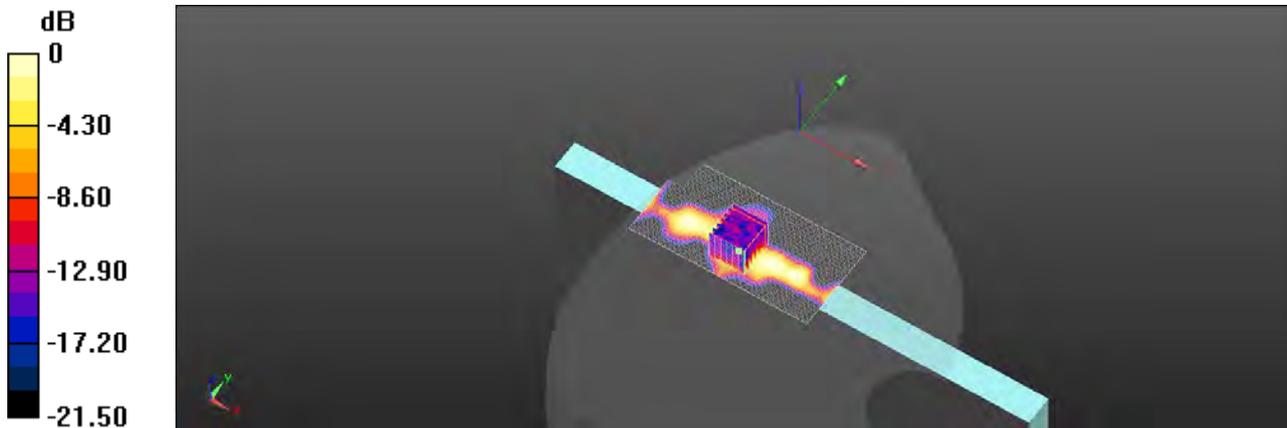

0 dB = 0.451 W/kg = -3.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 011

Report No. :TESA2208000323ES

WLAN 802.11ac(80M) 5.8G\_Body\_Top Edge\_CH 155\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.362$  S/m;  $\epsilon_r = 34.915$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5775 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.07 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.134 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.49 W/kg

**SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.124 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 0.739 W/kg

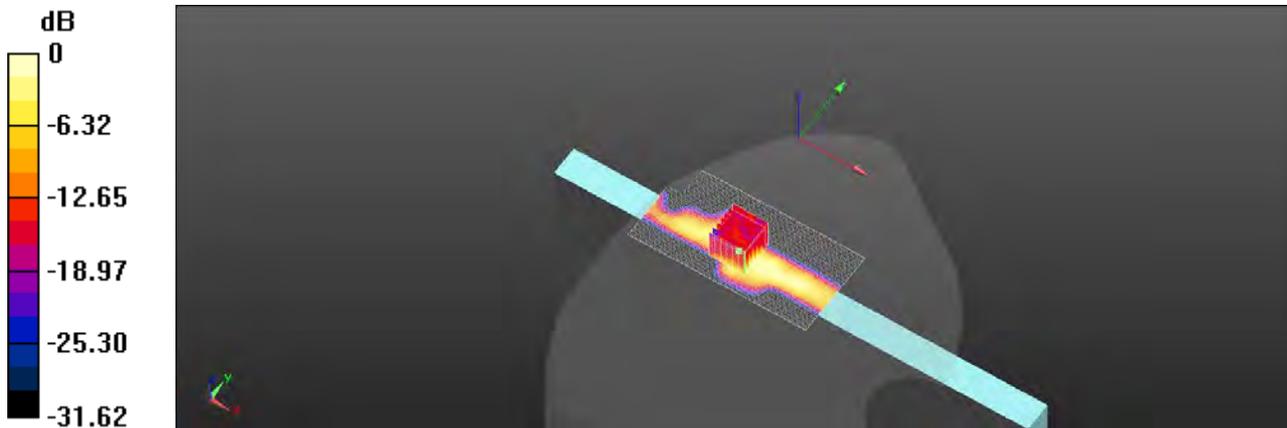

0 dB = 0.739 W/kg = -1.31 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 012

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-5,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 79 (6345.0 MHz), Main  
Ambient temperature: 21.7°C; Liquid temperature: 21.5°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	5.82	34.479

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.599	0.844
psSAR8g [W/kg]	0.185	0.210
psSAR10g [W/kg]	0.157	0.174
psPDab (4.0cm2, sq) [W/m2]		4.20
Power Drift [dB]	0.09	0.04
M2/M1 [%]		56.7
Dist 3dB Peak [mm]		4.1

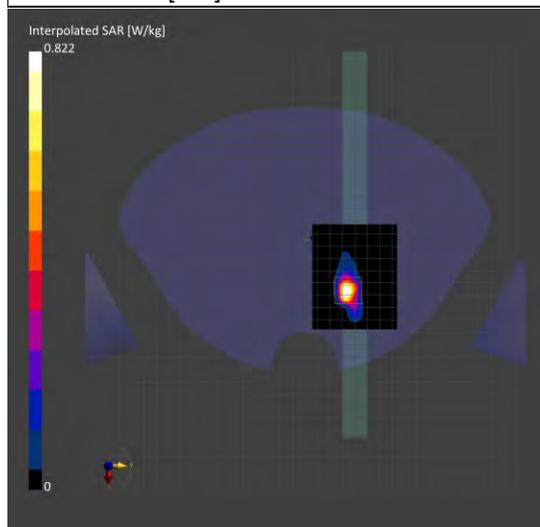

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 013

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-6,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz), Main  
Ambient temperature: 21.7°C; Liquid temperature: 21.5°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	6.002	34.341

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.682	0.960
psSAR8g [W/kg]	0.217	0.242
psSAR10g [W/kg]	0.184	0.202
psPDab (4.0cm2, sq) [W/m2]		4.85
Power Drift [dB]	-0.15	-0.08
M2/M1 [%]		61.2
Dist 3dB Peak [mm]		4.1

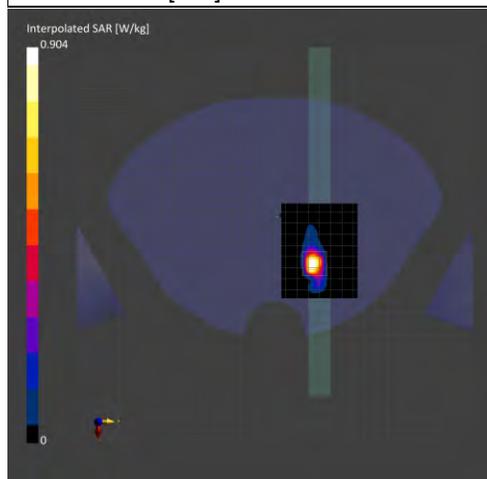

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 014

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-7,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 175 (6825.0 MHz), Main  
Ambient temperature: 21.7°C; Liquid temperature: 21.5°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	6.365	34.03

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.580	0.785
psSAR8g [W/kg]	0.189	0.206
psSAR10g [W/kg]	0.162	0.173
psPDab (4.0cm2, sq) [W/m2]		4.12
Power Drift [dB]	0.08	-0.12
M2/M1 [%]		55.8
Dist 3dB Peak [mm]		4.3

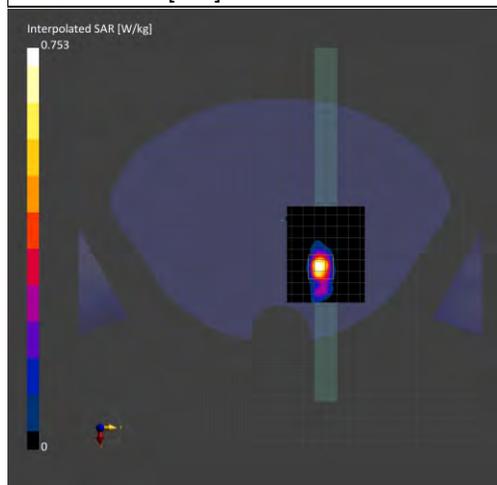

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 015

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-8,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz), Main  
Ambient temperature: 21.8°C; Liquid temperature: 21.6°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.85	6.543	33.821

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.427	0.564
psSAR8g [W/kg]	0.142	0.150
psSAR10g [W/kg]	0.122	0.126
psPDab (4.0cm2, sq) [W/m2]		2.99
Power Drift [dB]	-0.15	-0.18
M2/M1 [%]		59.1
Dist 3dB Peak [mm]		4.1

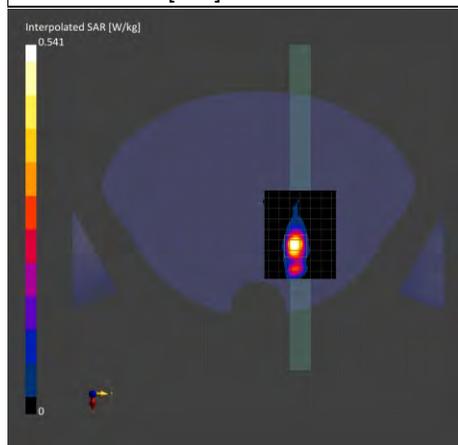

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 016

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-5,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 79 (6345.0 MHz), Aux  
Ambient temperature: 21.7°C; Liquid temperature: 21.5°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	5.82	34.479

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.359	0.395
psSAR8g [W/kg]	0.133	0.134
psSAR10g [W/kg]	0.116	0.117
psPDab (4.0cm2, sq) [W/m2]		2.68
Power Drift [dB]	-0.02	-0.01
M2/M1 [%]		58.2
Dist 3dB Peak [mm]		5.4

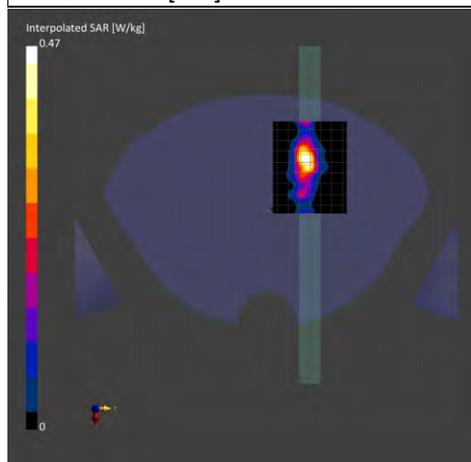

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 017

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-6,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz), Aux  
Ambient temperature: 21.7°C; Liquid temperature: 21.5°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	6.002	34.341

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.513	0.600
psSAR8g [W/kg]	0.175	0.175
psSAR10g [W/kg]	0.152	0.150
psPDab (4.0cm2, sq) [W/m2]		3.51
Power Drift [dB]	-0.01	-0.07
M2/M1 [%]		58.3
Dist 3dB Peak [mm]		5.2

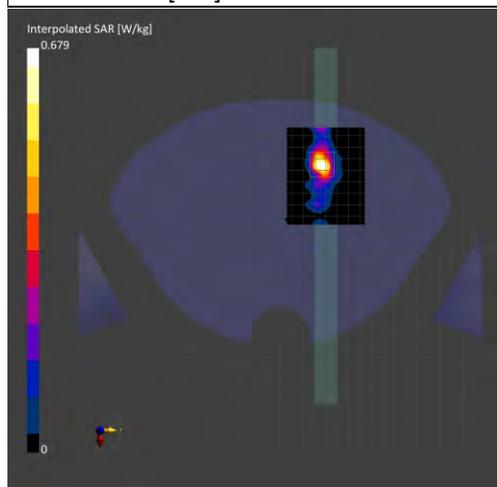

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 018

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-7,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 175 (6825.0 MHz), Aux  
Ambient temperature: 21.7°C; Liquid temperature: 21.5°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	6.365	34.03

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.752	0.890
psSAR8g [W/kg]	0.245	0.245
psSAR10g [W/kg]	0.210	0.207
psPDab (4.0cm2, sq) [W/m2]		4.89
Power Drift [dB]	0.04	-0.08
M2/M1 [%]		55.2
Dist 3dB Peak [mm]		4.8

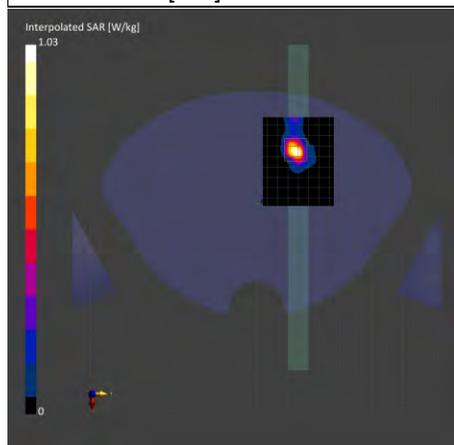

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 019

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-8,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz), Aux  
Ambient temperature: 21.8°C; Liquid temperature: 21.6°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.85	6.543	33.821

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.683	0.800
psSAR8g [W/kg]	0.206	0.216
psSAR10g [W/kg]	0.177	0.182
psPDab (4.0cm2, sq) [W/m2]		4.32
Power Drift [dB]	0.12	-0.05
M2/M1 [%]		54.0
Dist 3dB Peak [mm]		4.8

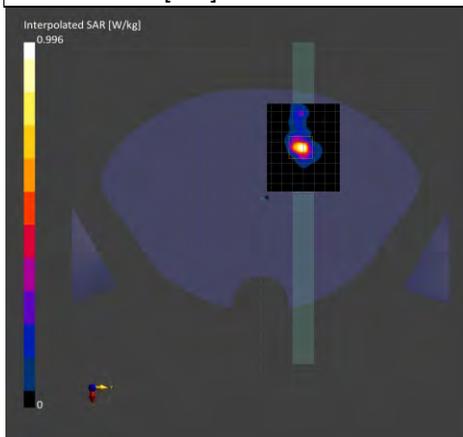

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 020

Report No. :TESA2208000323ES

WLAN 802.11b\_Body\_Top Edge\_CH 6\_0mm\_Main

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty cycle= 1:1.007

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.73$  S/m;  $\epsilon_r = 39.178$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2437 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (101x51x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.786 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.995 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.197 W/kg**

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.787 W/kg

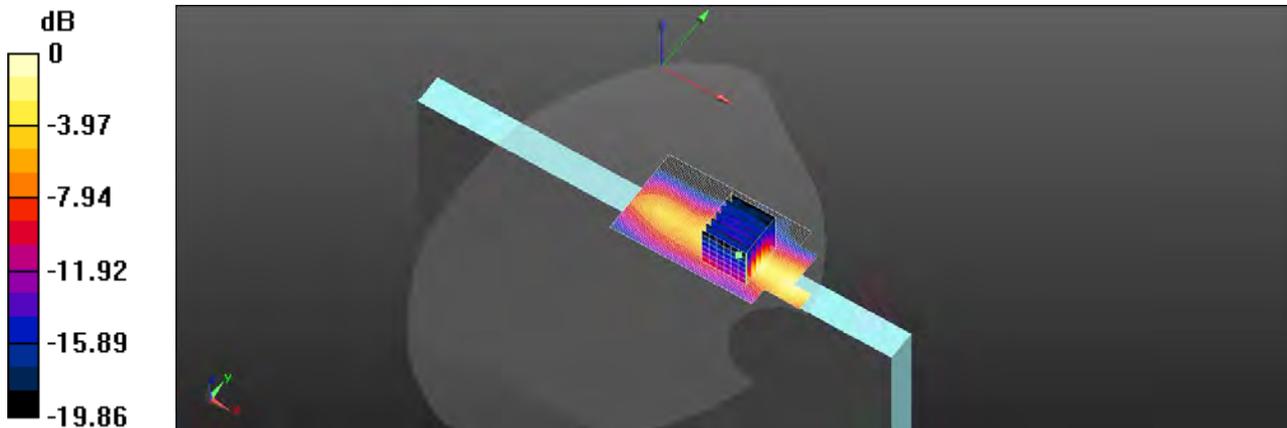

0 dB = 0.787 W/kg = -1.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 021

Report No. :TESA2208000323ES

WLAN 802.11ac(160M) 5.2G\_Body\_Top Edge\_CH 50\_0mm\_Main

Communication System: WLAN 5G; Frequency: 5250 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.675 \text{ S/m}$ ;  $\epsilon_r = 35.933$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.44, 5.44, 5.44) @ 5250 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.03 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.355 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.117 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 0.975 W/kg

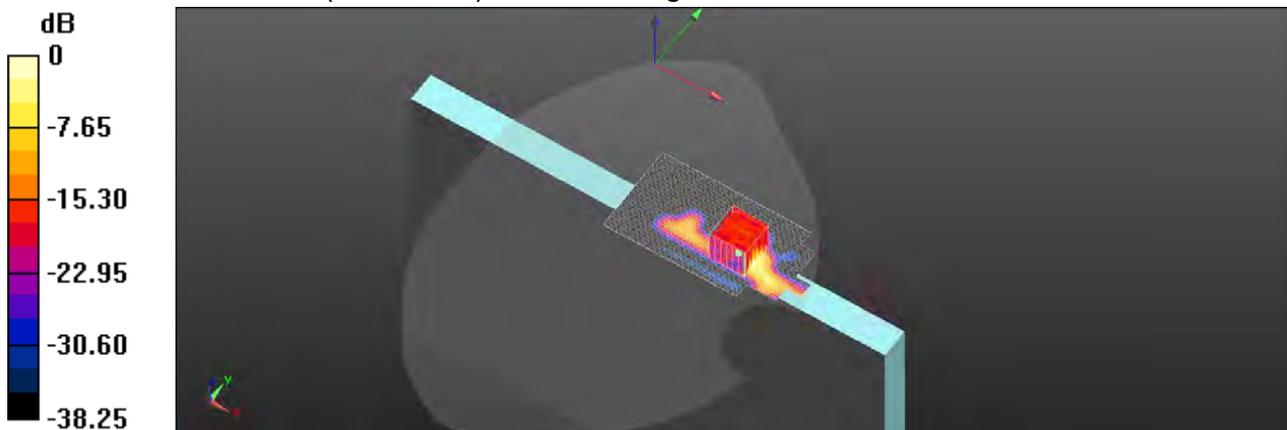

0 dB = 0.975 W/kg = -0.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 022

Report No. :TESA2208000323ES

**WLAN 802.11ac(80M) 5.6G\_Body\_Top Edge\_CH 138\_0mm\_Main**

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5690$  MHz;  $\sigma = 5.241$  S/m;  $\epsilon_r = 35.068$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5690 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.71 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.508 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 3.84 W/kg

**SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.098 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.876 W/kg

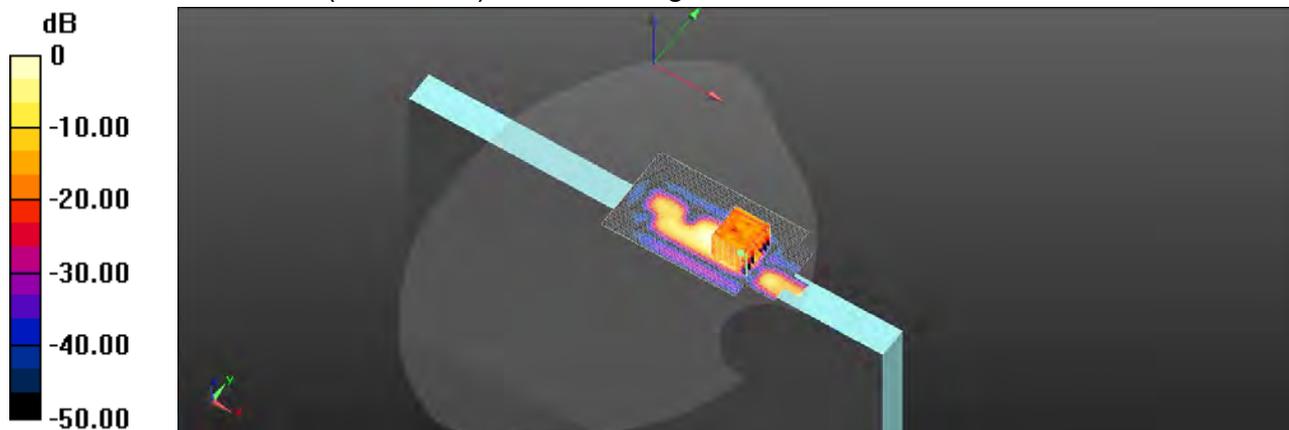

0 dB = 0.876 W/kg = -0.57 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 023

Report No. :TESA2208000323ES

WLAN 802.11ac(160M) 5.6G\_Body\_Top Edge\_CH 114\_0mm\_Main

Communication System: WLAN 5G; Frequency: 5570 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5570 \text{ MHz}$ ;  $\sigma = 5.076 \text{ S/m}$ ;  $\epsilon_r = 35.373$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.05, 5.05, 5.05) @ 5570 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.34 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.702 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.99 W/kg

**SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.116 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.8%

Maximum value of SAR (measured) = 1.07 W/kg

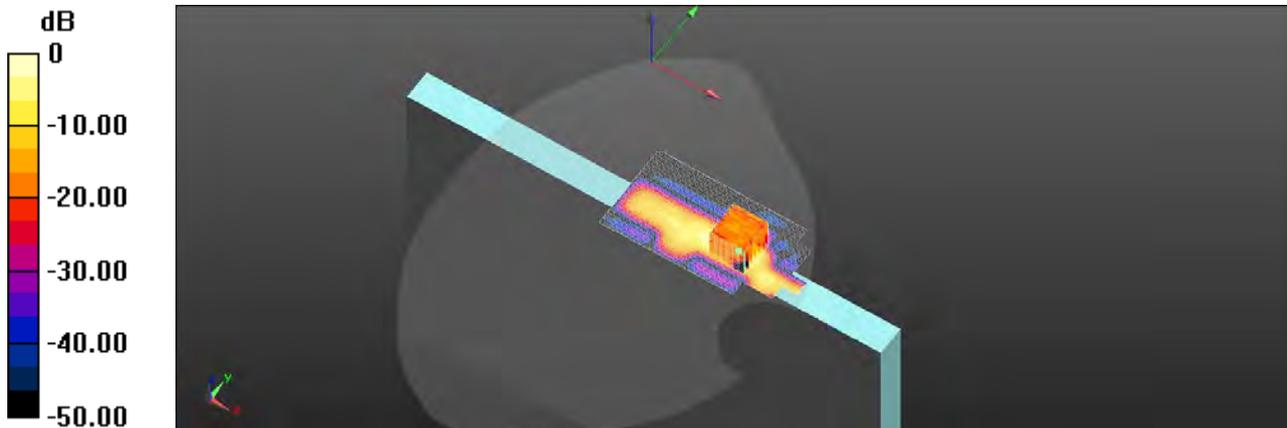

0 dB = 1.07 W/kg = 0.29 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 024

Report No. :TESA2208000323ES

**WLAN 802.11ac(80M) 5.8G\_Body\_Top Edge\_CH 155\_0mm\_Main**

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.362$  S/m;  $\epsilon_r = 34.915$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5775 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.26 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.318 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.080 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.744 W/kg

**Zoom Scan (7x7x12)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.318 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.082 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.1 mm


Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.601 W/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

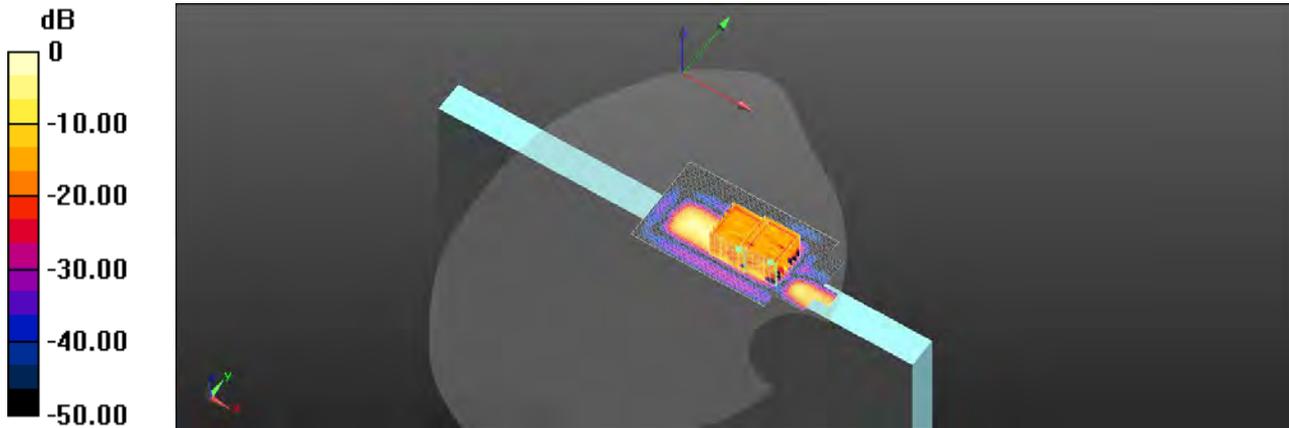

0 dB = 0.601 W/kg = -2.21 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 025

Report No. :TESA2208000323ES

WLAN 802.11b\_Body\_Top Edge\_CH 6\_0mm\_Aux

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty cycle= 1:1.007

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.73 \text{ S/m}$ ;  $\epsilon_r = 39.178$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2437 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (101x51x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.993 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.323 W/kg**

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 1.26 W/kg

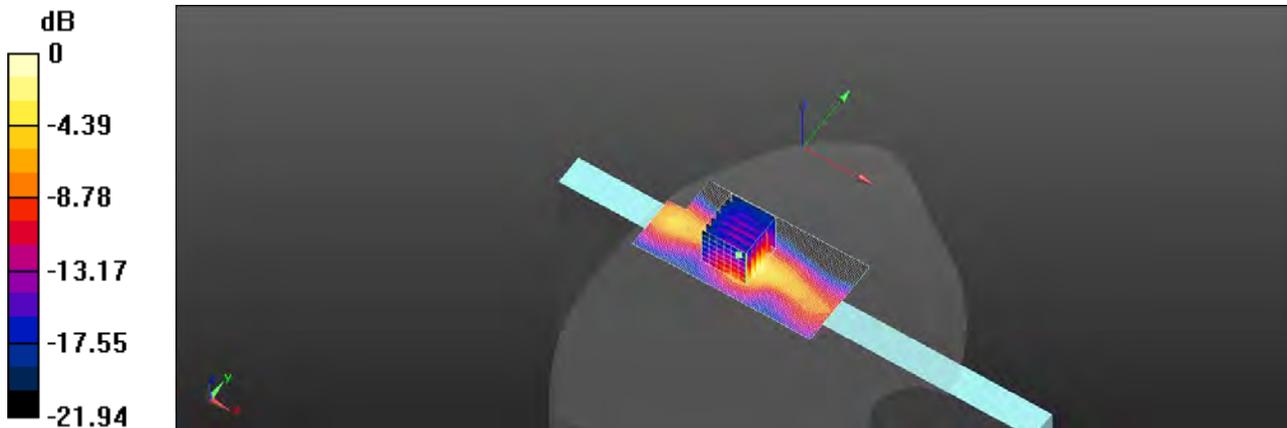

0 dB = 1.26 W/kg = 1.00 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 026

Report No. :TESA2208000323ES

Bluetooth(GFSK)\_Body\_Top Edge\_CH 78\_0mm\_Aux

Communication System: Bluetooth; Frequency: 2480 MHz; Duty cycle= 1:1.295

Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.763$  S/m;  $\epsilon_r = 39.128$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2480 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (101x51x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.332 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.181 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.445 W/kg

**SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.080 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.313 W/kg

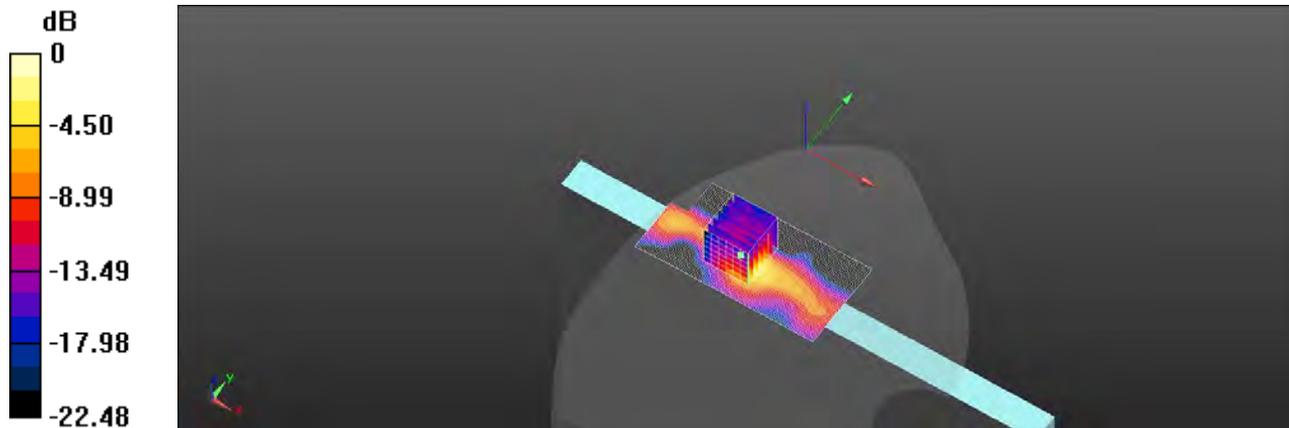

0 dB = 0.313 W/kg = -5.05 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 027

Report No. :TESA2208000323ES

WLAN 802.11ac(160M) 5.2G\_Body\_Top Edge\_CH 50\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5250 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.675 \text{ S/m}$ ;  $\epsilon_r = 35.933$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.44, 5.44, 5.44) @ 5250 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.289 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.982 W/kg

**SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.096 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.525 W/kg

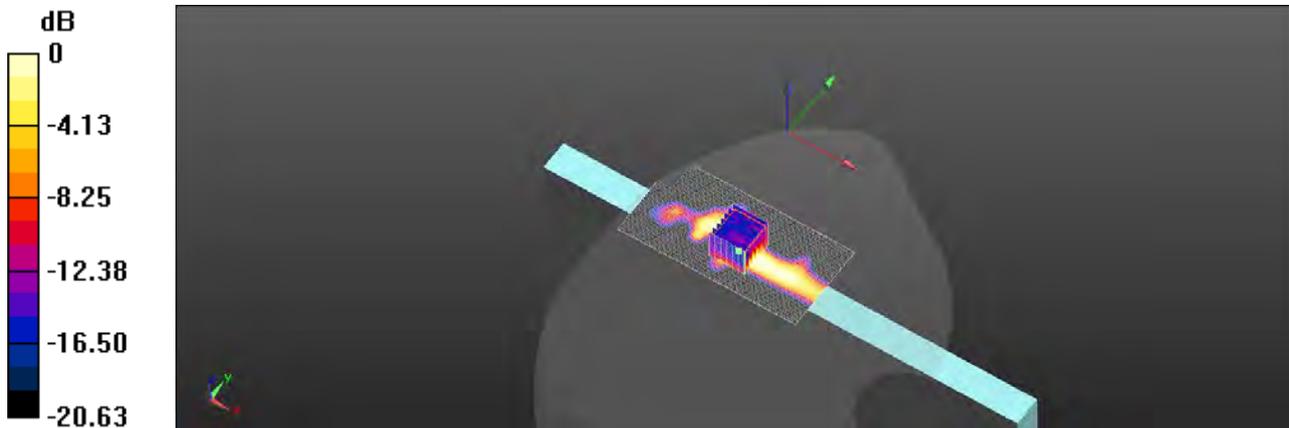

0 dB = 0.525 W/kg = -2.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 028

Report No. :TESA2208000323ES

WLAN 802.11ac(80M) 5.6G\_Body\_Top Edge\_CH 138\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5690$  MHz;  $\sigma = 5.241$  S/m;  $\epsilon_r = 35.068$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5690 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.301 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.107 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.564 W/kg

**SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.041 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 0.302 W/kg

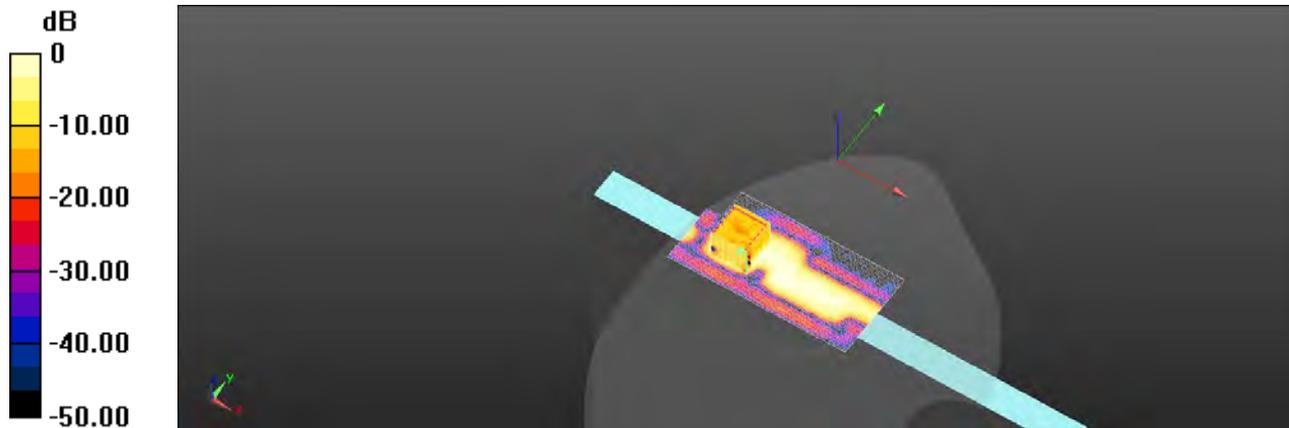

0 dB = 0.302 W/kg = -5.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 029

Report No. :TESA2208000323ES

**WLAN 802.11ac(160M) 5.6G\_Body\_Top Edge\_CH 114\_0mm\_Aux**

Communication System: WLAN 5G; Frequency: 5570 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5570$  MHz;  $\sigma = 5.076$  S/m;  $\epsilon_r = 35.373$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.05, 5.05, 5.05) @ 5570 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.695 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.419 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.730 W/kg

**SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.067 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.349 W/kg

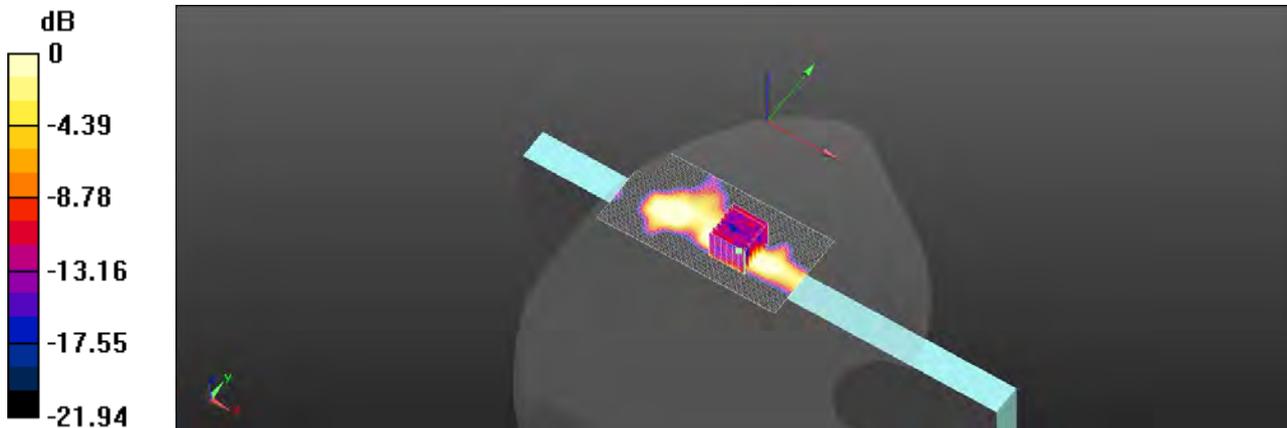

0 dB = 0.349 W/kg = -4.57 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 030

Report No. :TESA2208000323ES

WLAN 802.11ac(80M) 5.8G\_Body\_Top Edge\_CH 155\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5775 \text{ MHz}$ ;  $\sigma = 5.362 \text{ S/m}$ ;  $\epsilon_r = 34.915$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5775 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.754 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.424 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.595 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.037 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.274 W/kg

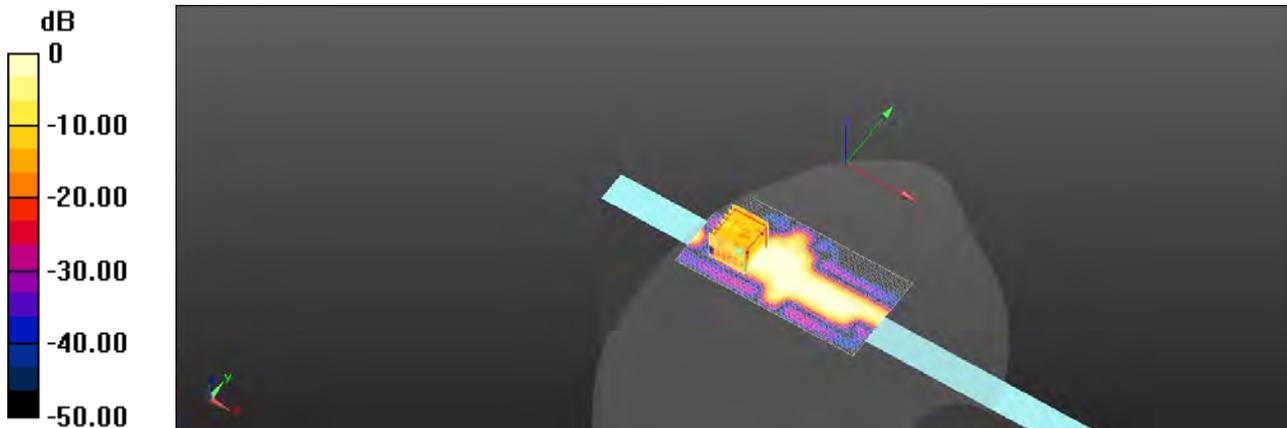

0 dB = 0.274 W/kg = -5.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 020

Report No. :TESA2208000323ES

WLAN 802.11b\_Body\_Top Edge\_CH 6\_0mm\_Main

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty cycle= 1:1.007

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.73$  S/m;  $\epsilon_r = 39.178$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2437 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (101x51x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.786 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.995 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.197 W/kg**

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.787 W/kg

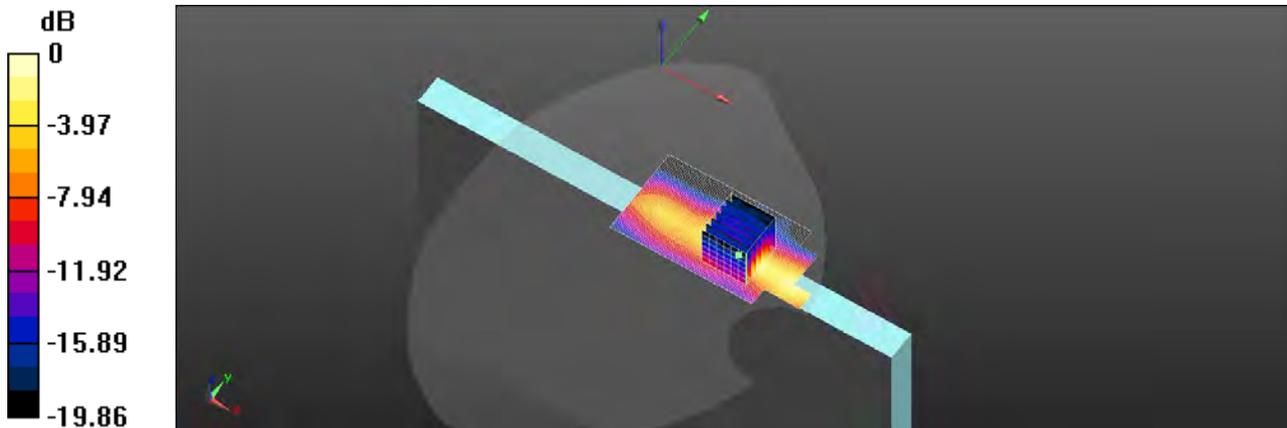

0 dB = 0.787 W/kg = -1.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 021

Report No. :TESA2208000323ES

**WLAN 802.11ac(160M) 5.2G\_Body\_Top Edge\_CH 50\_0mm\_Main**

Communication System: WLAN 5G; Frequency: 5250 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.675 \text{ S/m}$ ;  $\epsilon_r = 35.933$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.44, 5.44, 5.44) @ 5250 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.03 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.355 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.117 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 0.975 W/kg

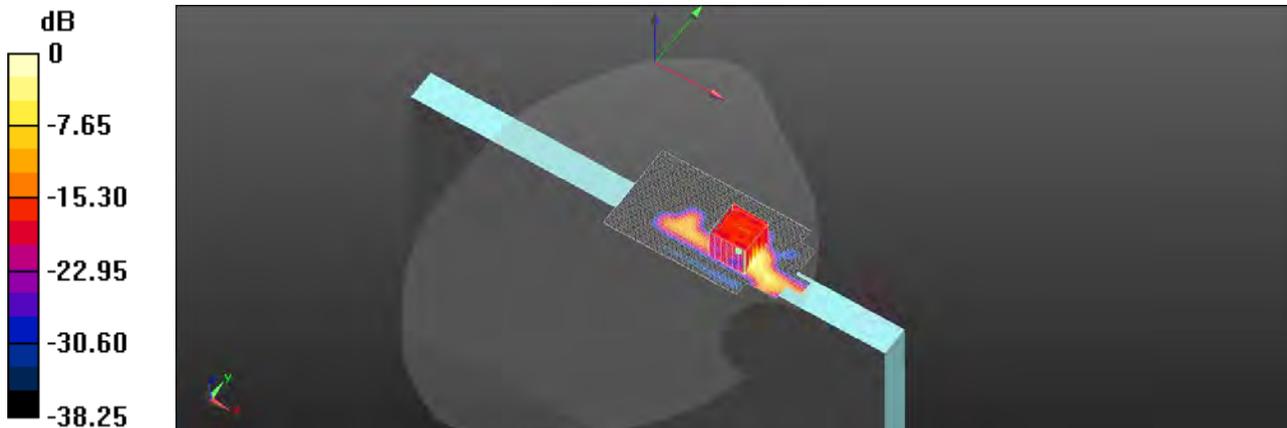

0 dB = 0.975 W/kg = -0.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 022

Report No. :TESA2208000323ES

**WLAN 802.11ac(80M) 5.6G\_Body\_Top Edge\_CH 138\_0mm\_Main**

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5690$  MHz;  $\sigma = 5.241$  S/m;  $\epsilon_r = 35.068$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5690 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.71 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.508 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 3.84 W/kg

**SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.098 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.876 W/kg

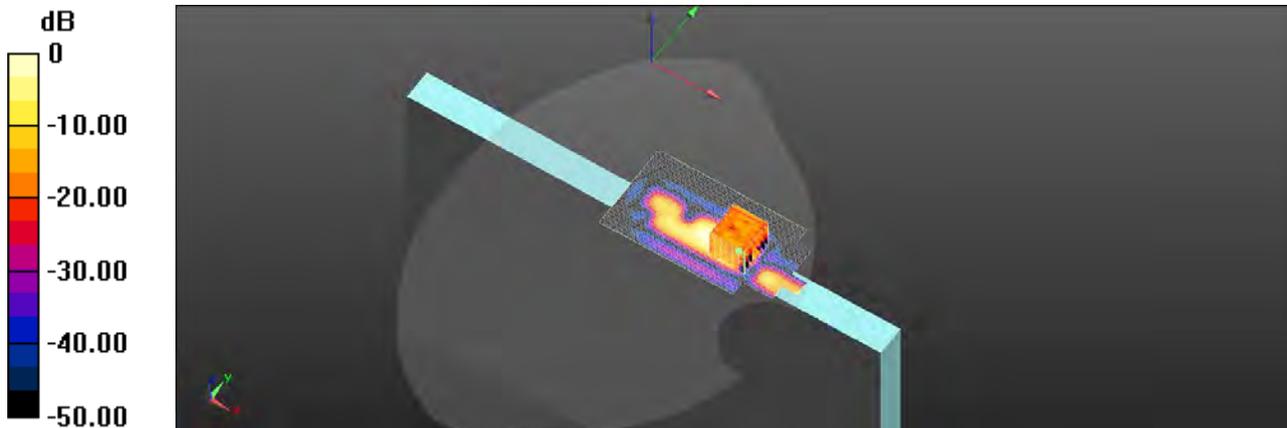

0 dB = 0.876 W/kg = -0.57 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 023

Report No. :TESA2208000323ES

WLAN 802.11ac(160M) 5.6G\_Body\_Top Edge\_CH 114\_0mm\_Main

Communication System: WLAN 5G; Frequency: 5570 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5570$  MHz;  $\sigma = 5.076$  S/m;  $\epsilon_r = 35.373$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.05, 5.05, 5.05) @ 5570 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.34 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.702 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.99 W/kg

**SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.116 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.8%

Maximum value of SAR (measured) = 1.07 W/kg

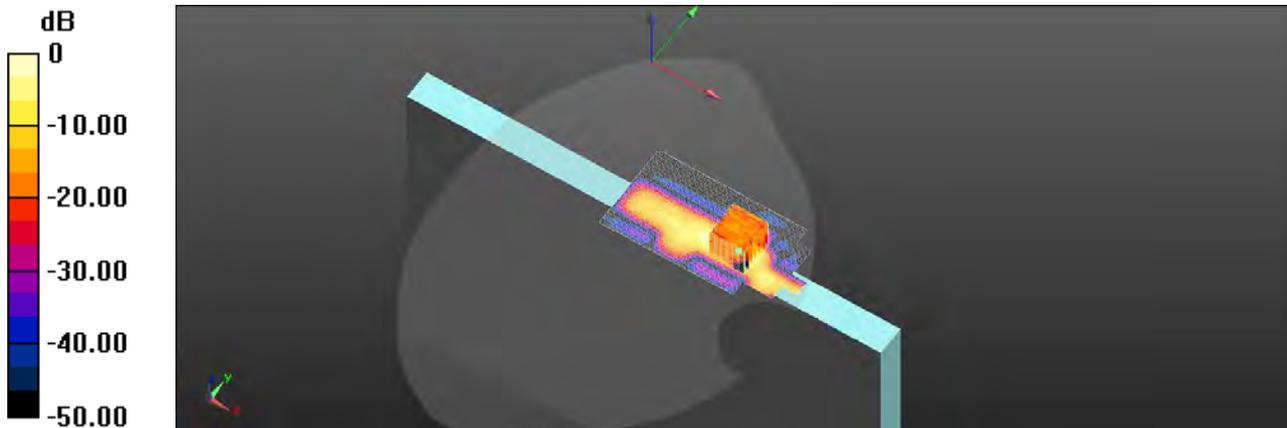

0 dB = 1.07 W/kg = 0.29 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 024

Report No. :TESA2208000323ES

**WLAN 802.11ac(80M) 5.8G\_Body\_Top Edge\_CH 155\_0mm\_Main**

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.362$  S/m;  $\epsilon_r = 34.915$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5775 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.26 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.318 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.080 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.744 W/kg

**Zoom Scan (7x7x12)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.318 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.082 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.1 mm


Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.601 W/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

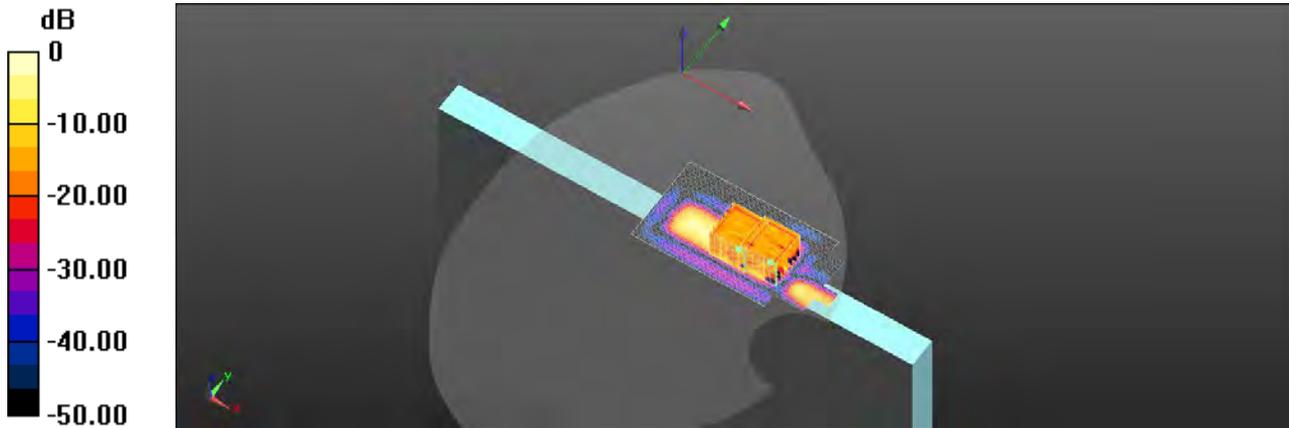

0 dB = 0.601 W/kg = -2.21 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 025

Report No. :TESA2208000323ES

WLAN 802.11b\_Body\_Top Edge\_CH 6\_0mm\_Aux

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty cycle= 1:1.007

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.73 \text{ S/m}$ ;  $\epsilon_r = 39.178$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2437 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (101x51x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.993 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.323 W/kg**

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 1.26 W/kg

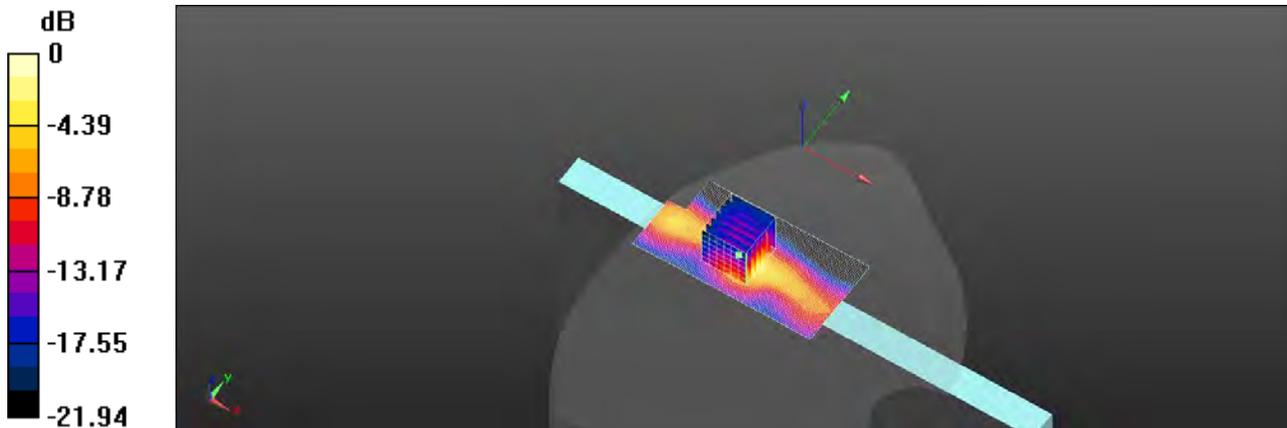

0 dB = 1.26 W/kg = 1.00 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 026

Report No. :TESA2208000323ES

Bluetooth(GFSK)\_Body\_Top Edge\_CH 78\_0mm\_Aux

Communication System: Bluetooth; Frequency: 2480 MHz; Duty cycle= 1:1.295

Medium parameters used:  $f = 2480 \text{ MHz}$ ;  $\sigma = 1.763 \text{ S/m}$ ;  $\epsilon_r = 39.128$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2480 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (101x51x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.332 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.181 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.445 W/kg

**SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.080 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.313 W/kg

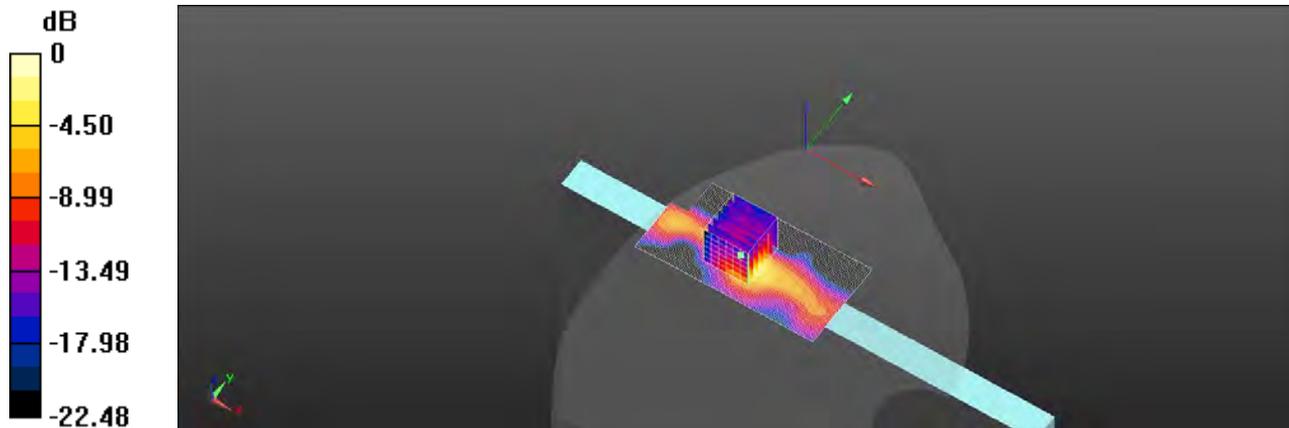

0 dB = 0.313 W/kg = -5.05 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 027

Report No. :TESA2208000323ES

WLAN 802.11ac(160M) 5.2G\_Body\_Top Edge\_CH 50\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5250 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.675 \text{ S/m}$ ;  $\epsilon_r = 35.933$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.44, 5.44, 5.44) @ 5250 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.289 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.982 W/kg

**SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.096 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.525 W/kg

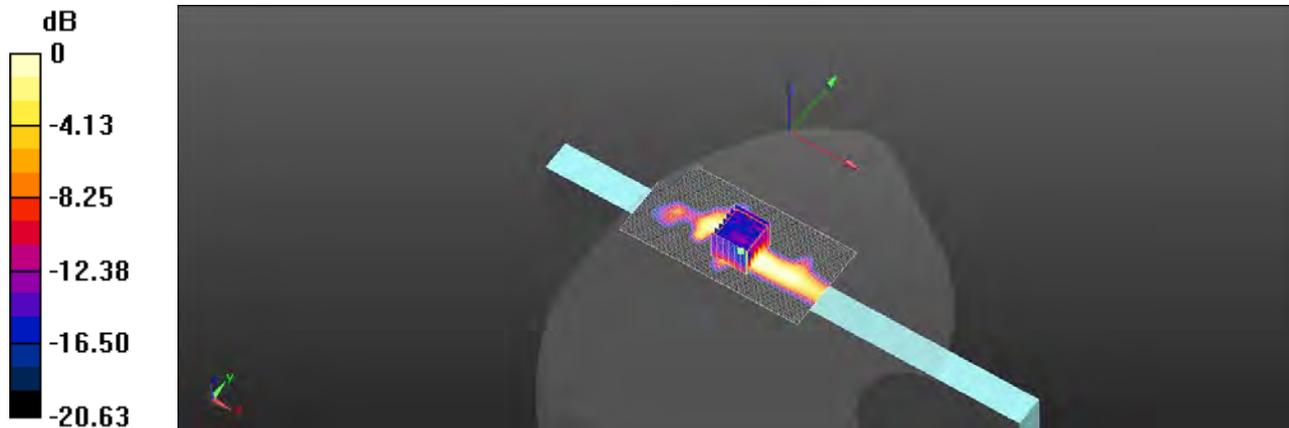

0 dB = 0.525 W/kg = -2.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 028

Report No. :TESA2208000323ES

WLAN 802.11ac(80M) 5.6G\_Body\_Top Edge\_CH 138\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5690$  MHz;  $\sigma = 5.241$  S/m;  $\epsilon_r = 35.068$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5690 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.301 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.107 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.564 W/kg

**SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.041 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 0.302 W/kg

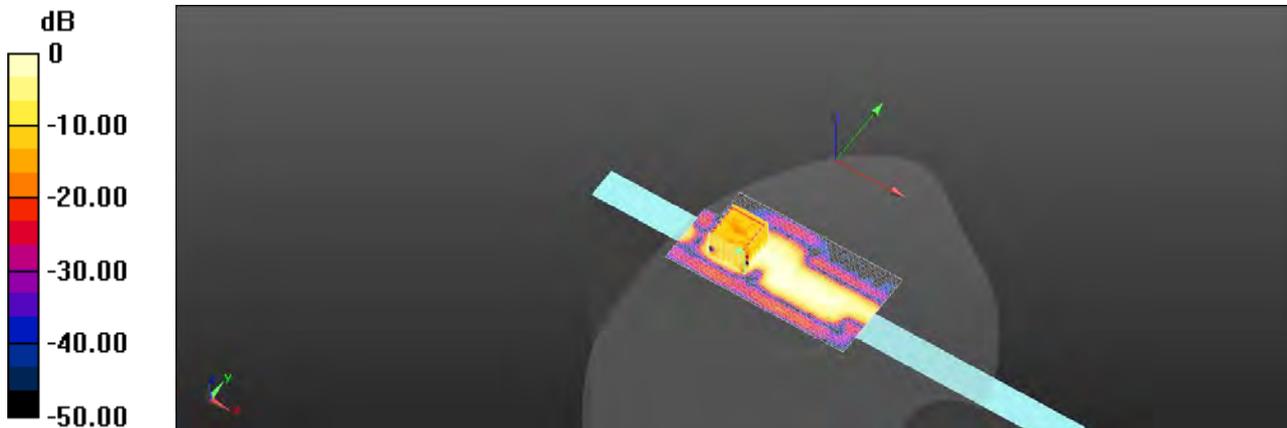

0 dB = 0.302 W/kg = -5.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 029

Report No. :TESA2208000323ES

WLAN 802.11ac(160M) 5.6G\_Body\_Top Edge\_CH 114\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5570 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5570$  MHz;  $\sigma = 5.076$  S/m;  $\epsilon_r = 35.373$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.05, 5.05, 5.05) @ 5570 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.695 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.419 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.730 W/kg

**SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.067 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.349 W/kg

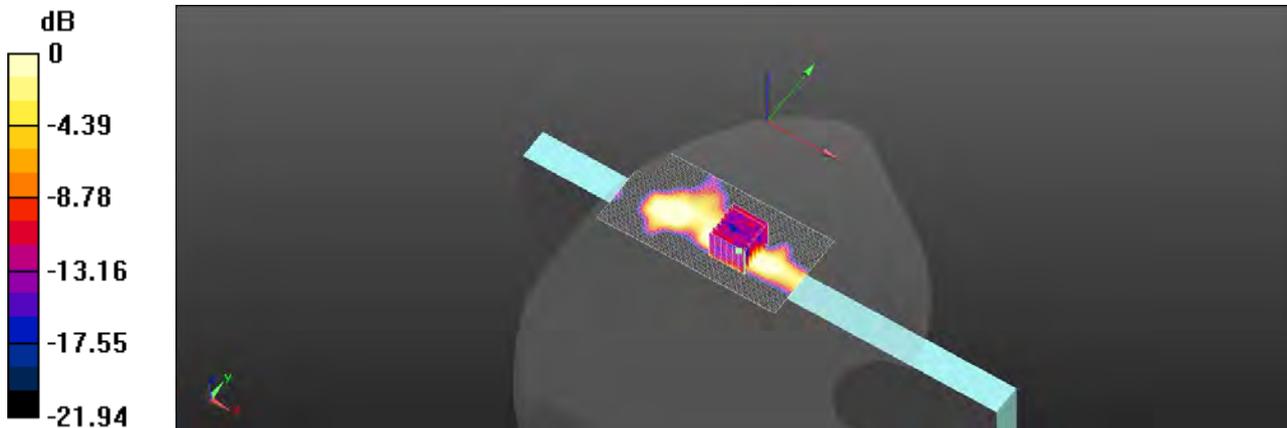

0 dB = 0.349 W/kg = -4.57 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 030

Report No. :TESA2208000323ES

WLAN 802.11ac(80M) 5.8G\_Body\_Top Edge\_CH 155\_0mm\_Aux

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty cycle= 1:1.012

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.362$  S/m;  $\epsilon_r = 34.915$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5775 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (121x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.754 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.424 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.595 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.037 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.274 W/kg

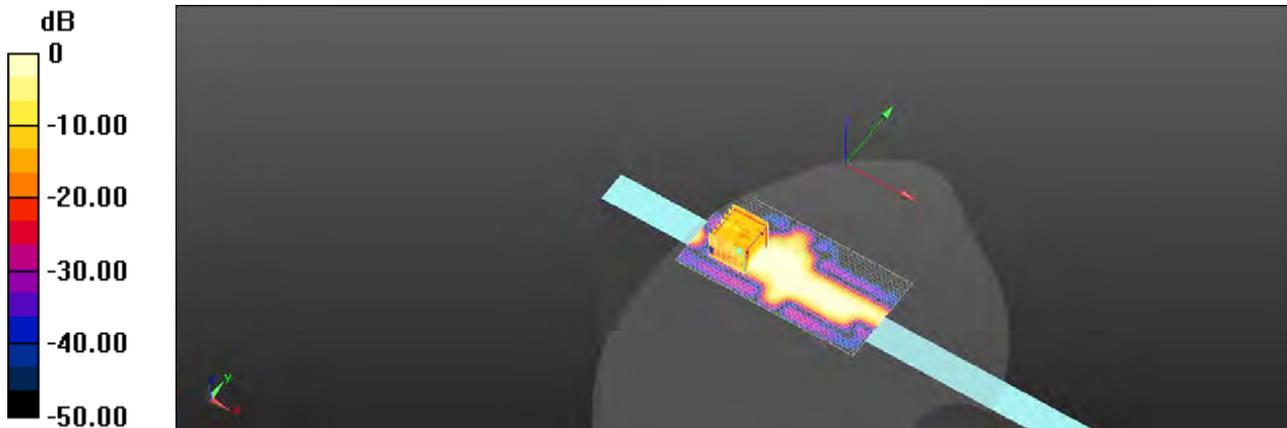

0 dB = 0.274 W/kg = -5.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 031

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-5,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 79 (6345.0 MHz), Main  
Ambient temperature: 21.7°C; Liquid temperature: 21.5°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	5.82	34.479

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.1 x 3.1 x 1.2
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.587	0.689
psSAR8g [W/kg]	0.155	0.165
psSAR10g [W/kg]	0.131	0.137
psPDab (4.0cm <sup>2</sup> , sq) [W/m <sup>2</sup> ]		3.31
Power Drift [dB]	-0.12	-0.12
M2/M1 [%]		61.4
Dist 3dB Peak [mm]		3.9

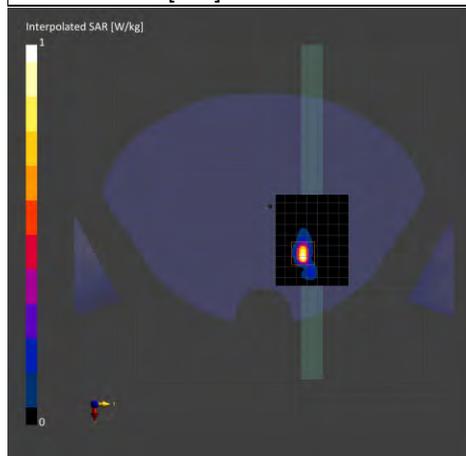

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 032

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-6,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz), Main

Ambient temperature: 21.7°C; Liquid temperature: 21.5°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	6.002	34.341

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.1 x 3.1 x 1.2
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.889	0.891
psSAR8g [W/kg]	0.219	0.215
psSAR10g [W/kg]	0.183	0.178
psPDab (4.0cm2, sq) [W/m2]		4.29
Power Drift [dB]	0.06	-0.09
M2/M1 [%]		61.0
Dist 3dB Peak [mm]		3.9

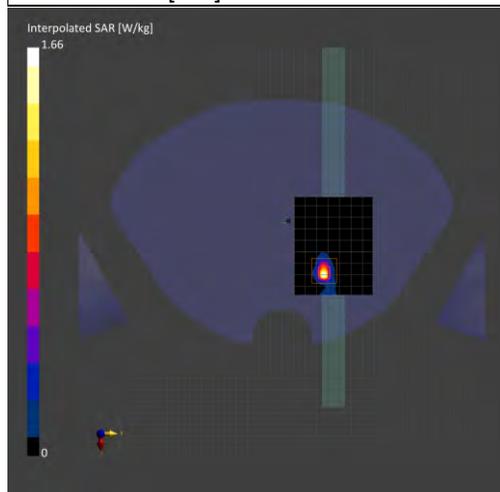

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 033

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-7,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 175 (6825.0 MHz), Main

Ambient temperature: 21.8°C; Liquid temperature: 21.6°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	6.365	34.03

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.663	0.733
psSAR8g [W/kg]	0.183	0.185
psSAR10g [W/kg]	0.155	0.154
psPDab (4.0cm <sup>2</sup> , sq) [W/m <sup>2</sup> ]		3.69
Power Drift [dB]	0.01	0.05
M2/M1 [%]		52.0
Dist 3dB Peak [mm]		4.1

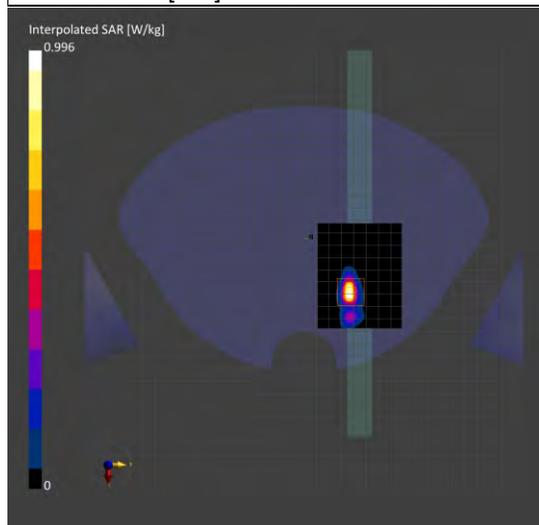

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 034

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-8,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz), Main

Ambient temperature: 21.8°C; Liquid temperature: 21.6°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.85	6.543	33.821

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2036	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.517	0.472
psSAR8g [W/kg]	0.137	0.121
psSAR10g [W/kg]	0.115	0.101
psPDab (4.0cm2, sq) [W/m2]		2.41
Power Drift [dB]	-0.05	-0.09
M2/M1 [%]		55.8
Dist 3dB Peak [mm]		4.3

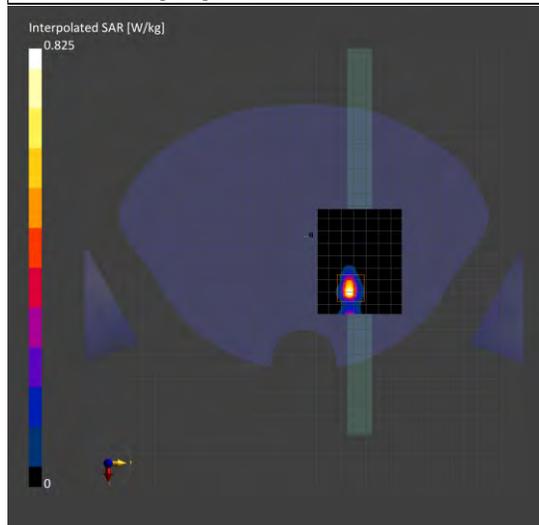

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 035

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-5,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 15 (6025.0 MHz), Aux  
Ambient temperature: 21.7°C; Liquid temperature: 21.5°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	5.453	34.858

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.224	0.245
psSAR8g [W/kg]	0.076	0.080
psSAR10g [W/kg]	0.066	0.069
psPDab (4.0cm <sup>2</sup> , sq) [W/m <sup>2</sup> ]		1.60
Power Drift [dB]	-0.07	0.19
M2/M1 [%]		59.4
Dist 3dB Peak [mm]		6.7

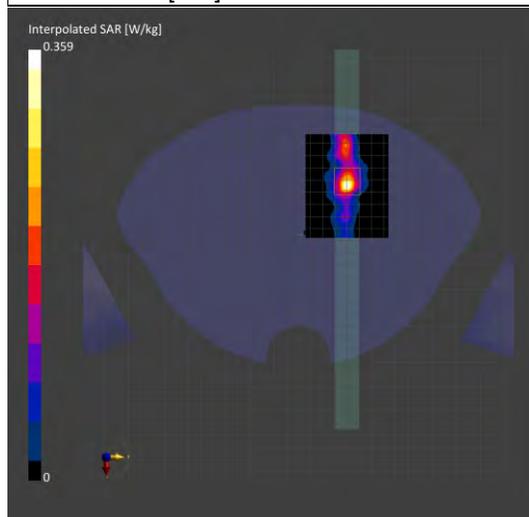

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 036

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-6,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz), Aux  
Ambient temperature: 21.7°C; Liquid temperature: 21.5°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	6.002	34.341

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.302	0.293
psSAR8g [W/kg]	0.103	0.101
psSAR10g [W/kg]	0.089	0.087
psPDab (4.0cm2, sq) [W/m2]		2.02
Power Drift [dB]	0.17	0.08
M2/M1 [%]		59.1
Dist 3dB Peak [mm]		5.6

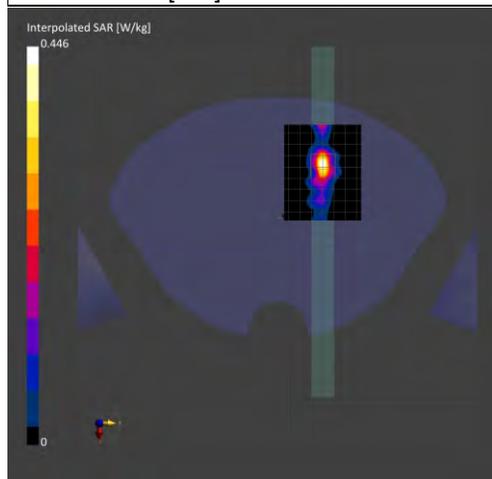

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 037

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-7,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 175 (6825.0 MHz), Aux

Ambient temperature: 21.8°C; Liquid temperature: 21.6°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.65	6.365	34.03

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.430	0.430
psSAR8g [W/kg]	0.134	0.128
psSAR10g [W/kg]	0.115	0.109
psPDab (4.0cm2, sq) [W/m2]		2.56
Power Drift [dB]	0.09	-0.14
M2/M1 [%]		56.1
Dist 3dB Peak [mm]		5.4

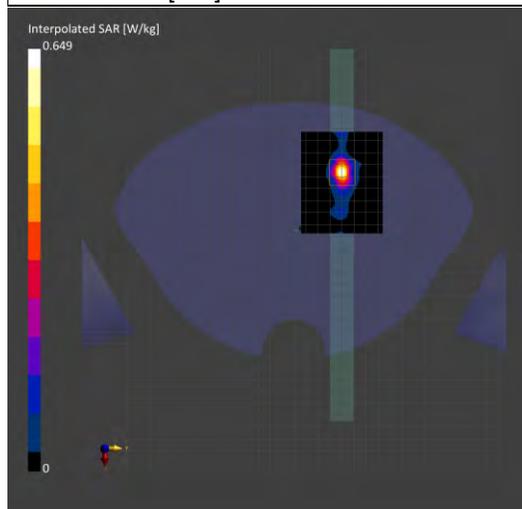

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 038

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-8,  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz), Aux

Ambient temperature: 21.8°C; Liquid temperature: 21.6°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Top Edge, 0.00	5.85	6.543	33.821

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	0.559	0.560
psSAR8g [W/kg]	0.165	0.153
psSAR10g [W/kg]	0.140	0.129
psPDab (4.0cm2, sq) [W/m2]		3.06
Power Drift [dB]	0.14	0.12
M2/M1 [%]		53.8
Dist 3dB Peak [mm]		5.2

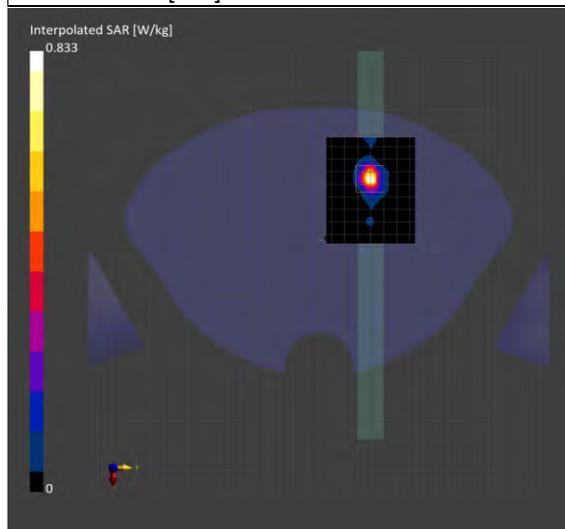

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 13 MEASUREMENT RESULT

ID: 039

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-5, Main  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 15 (6025.0 MHz)

#### Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Top Edge, 2.00	1.0

#### Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

#### Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

#### Measurement Results

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	1.11
psPDtot+ [W/m <sup>2</sup> ]	1.34
psPDmod+ [W/m <sup>2</sup> ]	1.55
E <sub>max</sub> [V/m]	34.8
Power Drift [dB]	0.05

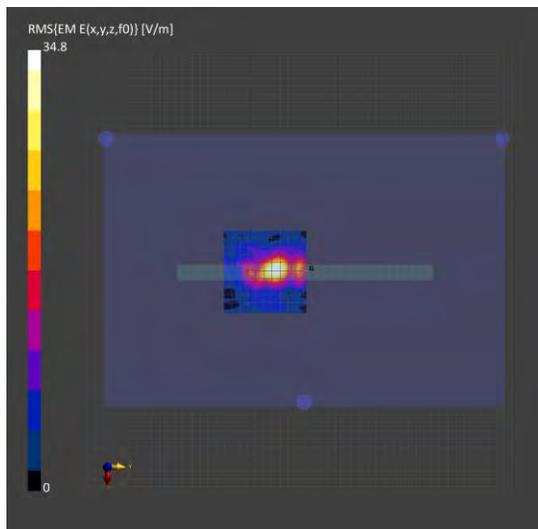

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 040

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-5, Main  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 79 (6345.0 MHz)

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Top Edge, 2.00	1.0

**Hardware Setup**


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

**Scans Setup**

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

**Measurement Results**

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	1.81
psPDtot+ [W/m <sup>2</sup> ]	2.08
psPDmod+ [W/m <sup>2</sup> ]	2.50
E <sub>max</sub> [V/m]	40.8
Power Drift [dB]	0.11

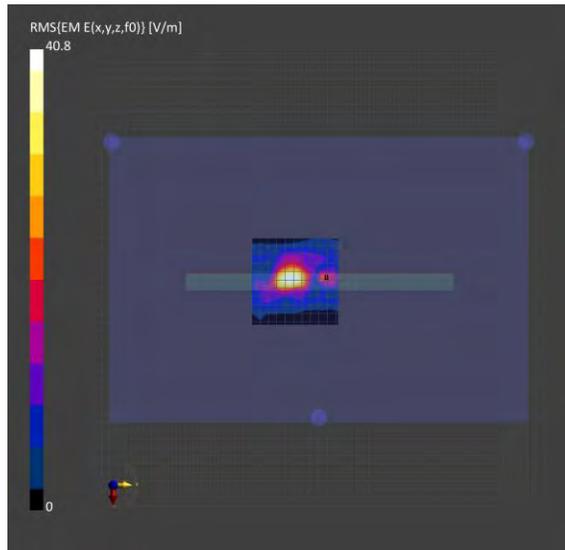

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 041

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-6, Main

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz)

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Top Edge, 2.00	1.0

**Hardware Setup**


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

**Scans Setup**

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

**Measurement Results**

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	2.02
psPDtot+ [W/m <sup>2</sup> ]	2.31
psPDmod+ [W/m <sup>2</sup> ]	2.76
E <sub>max</sub> [V/m]	42.2
Power Drift [dB]	0.14

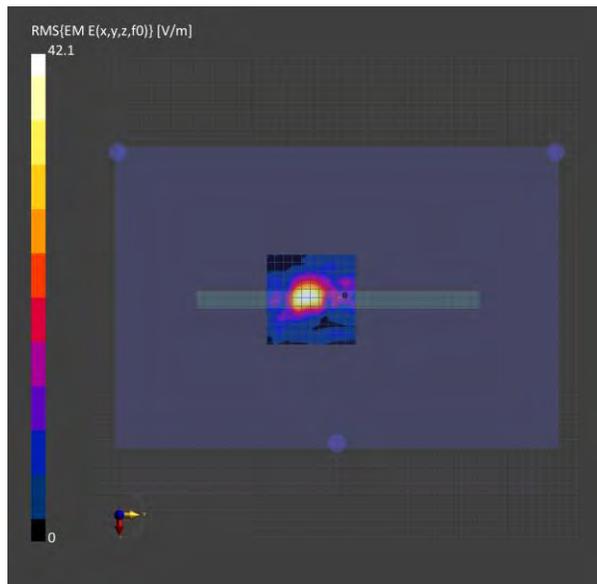

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 042

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-7, Main  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 175 (6825.0 MHz)

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Top Edge, 2.00	1.0

**Hardware Setup**


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

**Scans Setup**

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

**Measurement Results**

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	2.49
psPDtot+ [W/m <sup>2</sup> ]	2.82
psPDmod+ [W/m <sup>2</sup> ]	3.19
E <sub>max</sub> [V/m]	46.3
Power Drift [dB]	-0.04

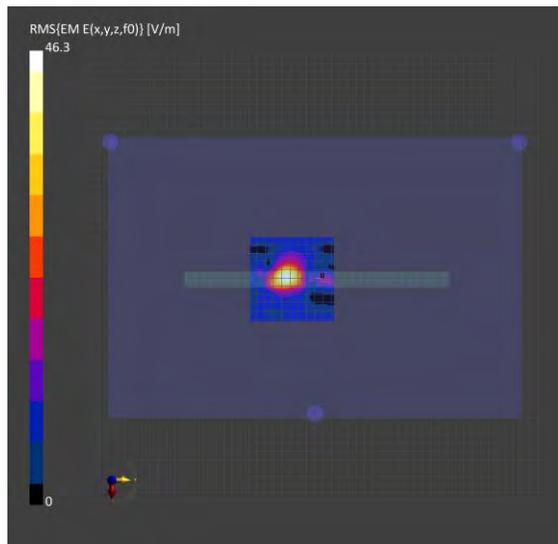

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 043

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-8, Main  
IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz)

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Top Edge, 2.00	1.0

**Hardware Setup**


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

**Scans Setup**

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

**Measurement Results**

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	2.29
psPDtot+ [W/m <sup>2</sup> ]	2.55
psPDmod+ [W/m <sup>2</sup> ]	2.80
E <sub>max</sub> [V/m]	43.7
Power Drift [dB]	-0.13

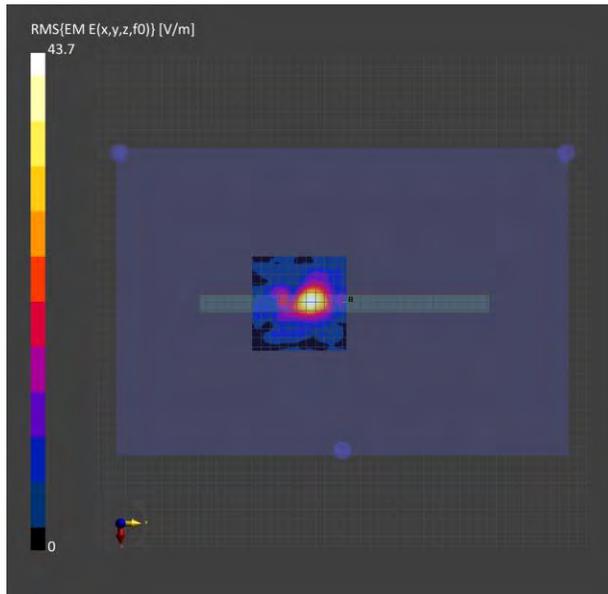

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 044

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-5, Aux

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 15 (6025.0 MHz)

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Top Edge, 2.00	1.0

**Hardware Setup**


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

**Scans Setup**

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

**Measurement Results**

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	1.01
psPDtot+ [W/m <sup>2</sup> ]	1.21
psPDmod+ [W/m <sup>2</sup> ]	1.46
E <sub>max</sub> [V/m]	30.9
Power Drift [dB]	-0.05

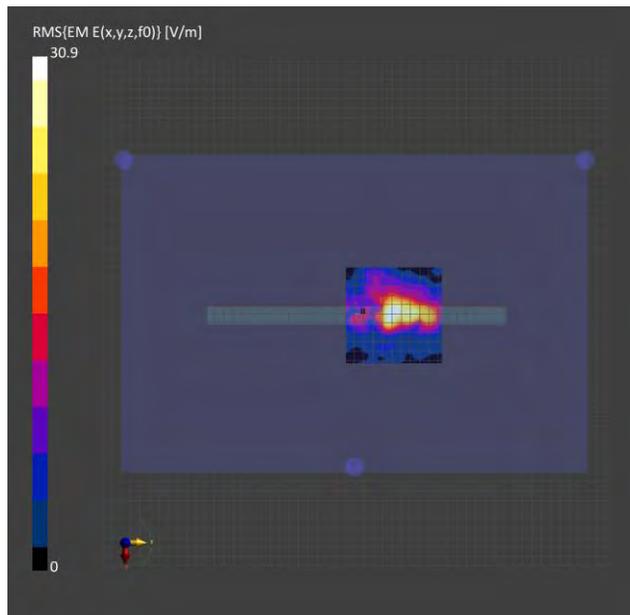

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 045

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-5, Aux

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 79 (6345.0 MHz)

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Top Edge, 2.00	1.0

**Hardware Setup**


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

**Scans Setup**

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

**Measurement Results**

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	1.95
psPDtot+ [W/m <sup>2</sup> ]	2.37
psPDmod+ [W/m <sup>2</sup> ]	2.63
E <sub>max</sub> [V/m]	35.9
Power Drift [dB]	0.05

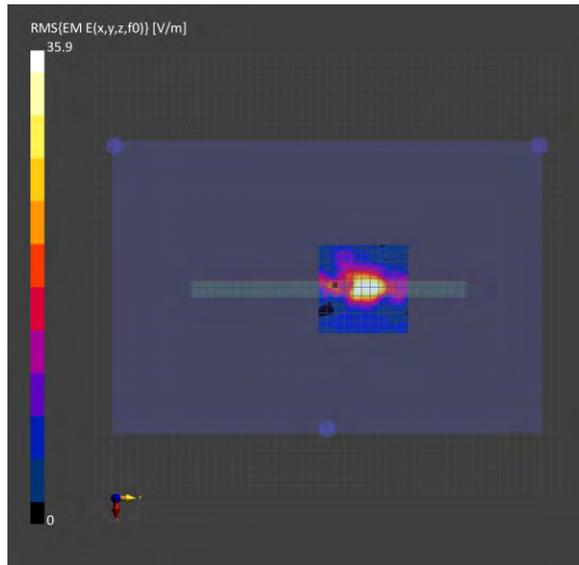

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 046

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-6, Aux

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz)

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Top Edge, 2.00	1.0

**Hardware Setup**


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

**Scans Setup**

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

**Measurement Results**

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	1.40
psPDtot+ [W/m <sup>2</sup> ]	1.64
psPDmod+ [W/m <sup>2</sup> ]	2.05
E <sub>max</sub> [V/m]	40.2
Power Drift [dB]	0.04

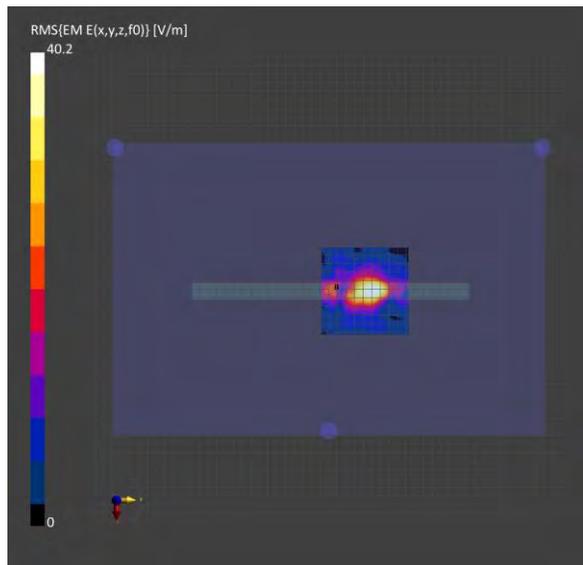

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 047

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-7, Aux

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 175 (6825.0 MHz)

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Top Edge, 2.00	1.0

**Hardware Setup**


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

**Scans Setup**

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

**Measurement Results**

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	2.21
psPDtot+ [W/m <sup>2</sup> ]	2.49
psPDmod+ [W/m <sup>2</sup> ]	2.74
E <sub>max</sub> [V/m]	45.3
Power Drift [dB]	0.09

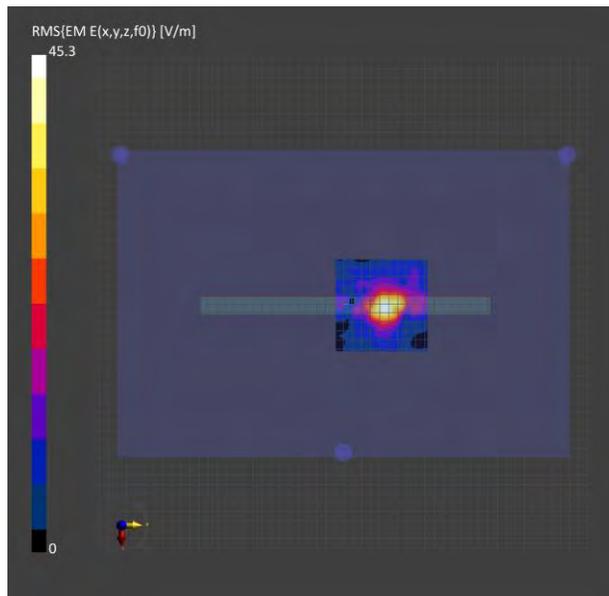

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ID: 048

Report No. :TESA2208000323ES

Measurement Report for GZ301V, Body, Top Edge, U-NII-8, Aux

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz)

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Top Edge, 2.00	1.0

**Hardware Setup**


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

**Scans Setup**

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

**Measurement Results**

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	2.22
psPDtot+ [W/m <sup>2</sup> ]	2.74
psPDmod+ [W/m <sup>2</sup> ]	2.94
E <sub>max</sub> [V/m]	41.3
Power Drift [dB]	0.12

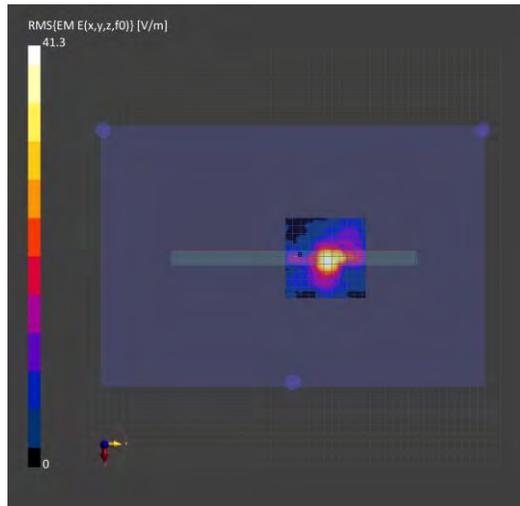

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 14 AR SYSTEM CHECK RESULTS

Report No. :TESA2208000323ES

Measurement Report for Device, FRONT, Validation band,  
CW, Channel 6500 (6500.0 MHz), SN:1006

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	5.65	5.985	34.107

### Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn558, 2021-11-23

### Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	36.0 x 51.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2022-09-19	2022-09-19
psSAR1g [W/kg]	24.5	29.1
psSAR8g [W/kg]	6.06	6.69
psSAR10g [W/kg]	5.03	5.51
psPDab (4.0cm <sup>2</sup> , sq) [W/m <sup>2</sup> ]		134
Power Drift [dB]	0.04	0.00
M2/M1 [%]		51.0
Dist 3dB Peak [mm]		4.8

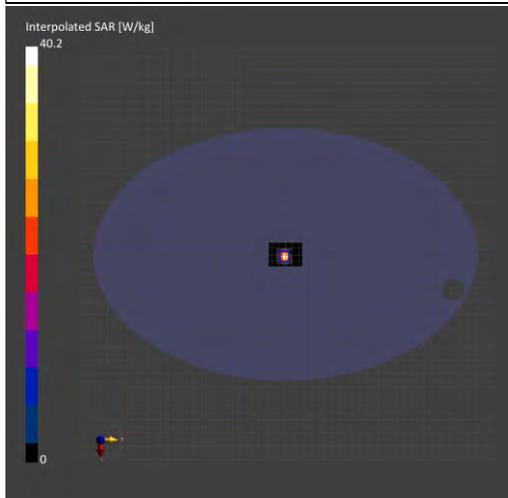

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No. :TESA2208000323ES  
Measurement Report for Device, FRONT, Validation band,  
CW, Channel 7000 (7000.0 MHz), SN:1007  
Ambient temperature: 22.5°C; Liquid temperature: 22.3°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	5.85	6.547	33.57

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn558, 2021-11-23

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	36.0 x 45.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 7.5	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-09-19	2022-09-19
psSAR1g [W/kg]	23.6	26.6
psSAR8g [W/kg]	5.68	5.97
psSAR10g [W/kg]	4.71	4.90
psPDab (4.0cm2, sq) [W/m2]		119
Power Drift [dB]	-0.02	-0.02
M2/M1 [%]		50.8
Dist 3dB Peak [mm]		4.7

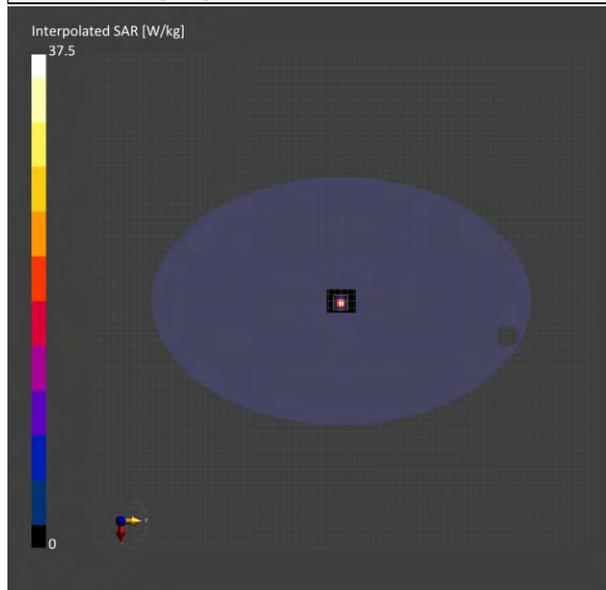

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No. :TESA2208000323ES  
Measurement Report for Device, FRONT, Validation band,  
CW, Channel 6500 (6500.0 MHz), SN:1006  
Ambient temperature: 22.2°C; Liquid temperature: 22.0°C  
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	5.65	6.005	34.037

#### Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn558, 2021-11-23

#### Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	36.0 x 51.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

#### Measurement Results

	Area Scan	Zoom Scan
Date	2022-09-17	2022-09-17
psSAR1g [W/kg]	24.8	29.6
psSAR8g [W/kg]	6.13	6.81
psSAR10g [W/kg]	5.09	5.60
psPDab (4.0cm2, sq) [W/m2]		136
Power Drift [dB]	0.03	0.05
M2/M1 [%]		49.7
Dist 3dB Peak [mm]		4.8

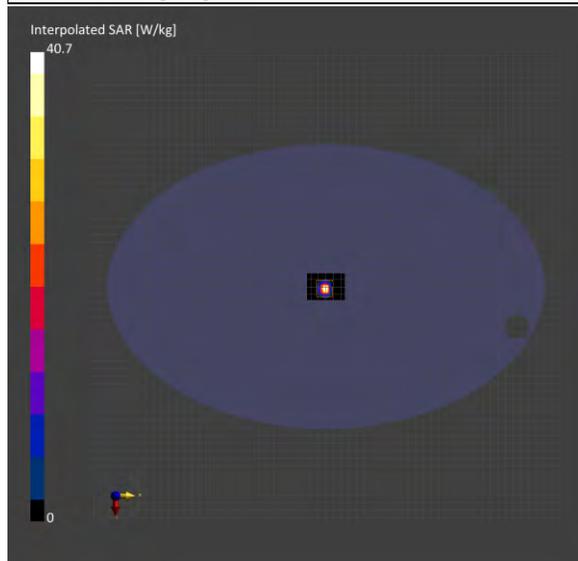

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No. :TESA2208000323ES  
Measurement Report for Device, FRONT, Validation band,  
CW, Channel 7000 (7000.0 MHz), SN:1007

Ambient temperature: 22.4°C; Liquid temperature: 22.2°C

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	5.85	6.56	33.525

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn558, 2021-11-23

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	36.0 x 45.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 7.5	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-09-18	2022-09-18
psSAR1g [W/kg]	23.5	26.5
psSAR8g [W/kg]	5.66	5.93
psSAR10g [W/kg]	4.70	4.87
psPDab (4.0cm2, sq) [W/m2]		119
Power Drift [dB]	-0.02	-0.01
M2/M1 [%]		50.9
Dist 3dB Peak [mm]		4.7

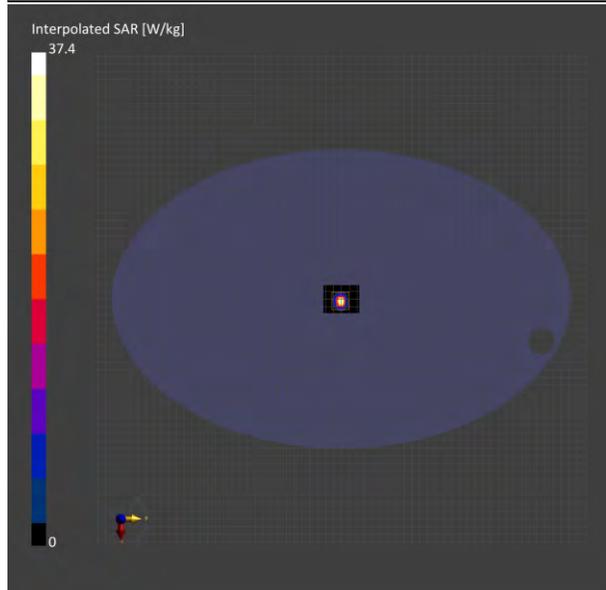

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Report No. :TESA2208000323ES**

**Dipole 2450 MHz\_SN:727**

Communication System: CW; Frequency: 2450 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.835 \text{ S/m}$ ;  $\epsilon_r = 39.492$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.5°C; Liquid temperature: 21.9°C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3770; ConvF(8.2, 8.2, 8.2) @ 2450 MHz; Calibrated: 2022/5/2
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2022/4/21
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (51x61x1):** Interpolated grid:  $dx=12 \text{ mm}$ ,  $dy=12 \text{ mm}$

Maximum value of SAR (interpolated) = 21.4 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 104.7 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 28.1 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.18 W/kg**

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 20.4 W/kg

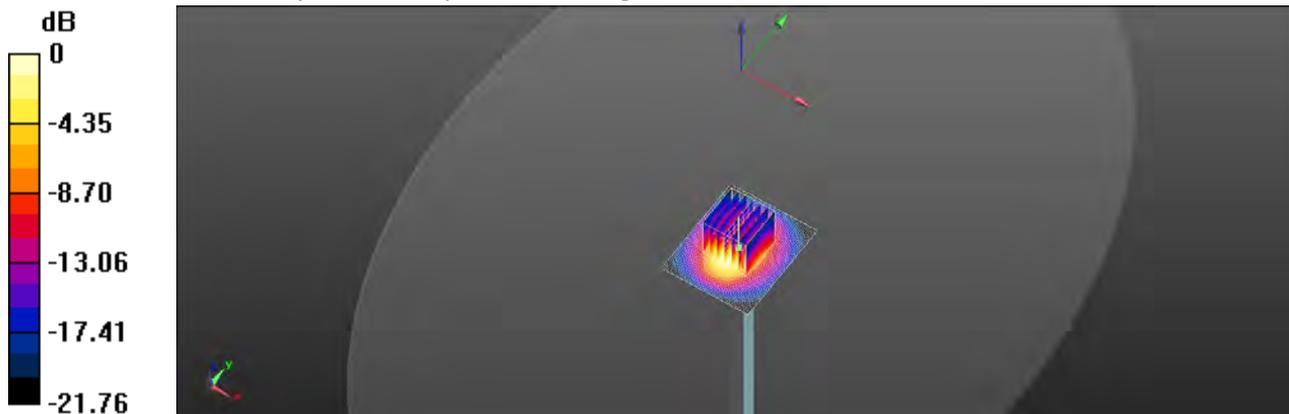

0 dB = 20.4 W/kg = 13.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Report No. :TESA2208000323ES**

**Dipole 5250 MHz\_SN:1023**

Communication System: CW; Frequency: 5250 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.622 \text{ S/m}$ ;  $\epsilon_r = 35.564$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 21.4°C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3770; ConvF(5.6, 5.6, 5.6) @ 5250 MHz; Calibrated: 2022/5/2
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2022/4/21
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (61x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.3 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 66.27 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 30.5 W/kg

**SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.23 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 15.9 W/kg

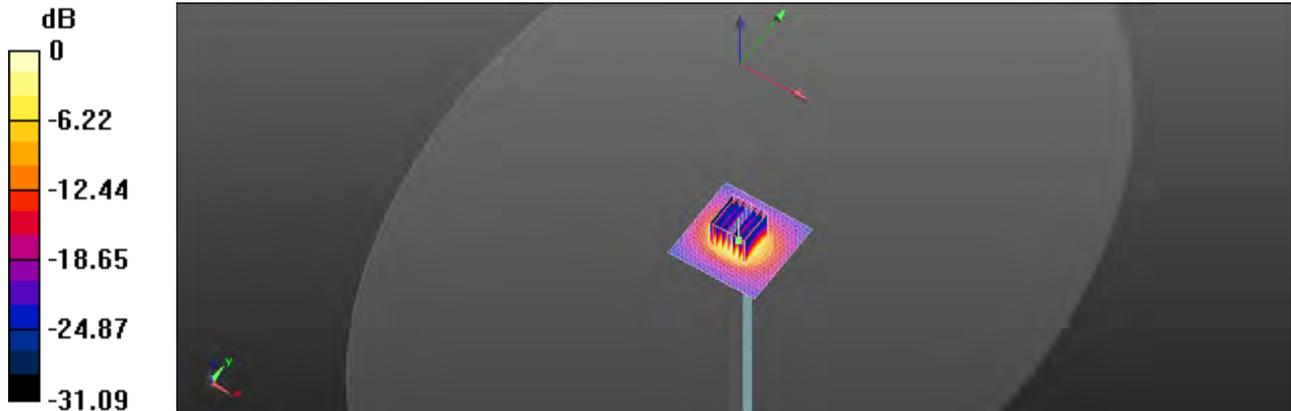

0 dB = 15.9 W/kg = 12.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Report No. : TESA2208000323ES**

**Dipole 5600 MHz\_SN:1023**

Communication System: CW; Frequency: 5600 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 5600 \text{ MHz}$ ;  $\sigma = 5.054 \text{ S/m}$ ;  $\epsilon_r = 34.91$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature:  $21.7^\circ\text{C}$ ; Liquid temperature:  $22.0^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3770; ConvF(5, 5, 5) @ 5600 MHz; Calibrated: 2022/5/2
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2022/4/21
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (61x61x1):** Interpolated grid:  $dx=10 \text{ mm}$ ,  $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) =  $19.2 \text{ W/kg}$

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $62.36 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$


Peak SAR (extrapolated) =  $33.8 \text{ W/kg}$

**SAR(1 g) =  $8.17 \text{ W/kg}$ ; SAR(10 g) =  $2.34 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $7.5 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $54\%$

Maximum value of SAR (measured) =  $17.3 \text{ W/kg}$

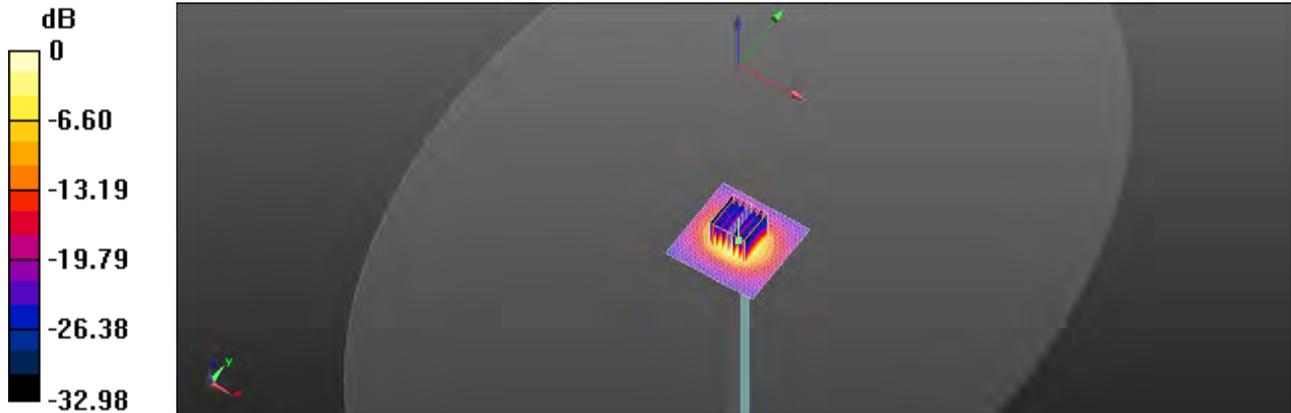

0 dB =  $17.3 \text{ W/kg}$  =  $12.38 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Report No. :TESA2208000323ES**

**Dipole 5750 MHz\_SN:1023**

Communication System: CW; Frequency: 5750 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 5750 \text{ MHz}$ ;  $\sigma = 5.27 \text{ S/m}$ ;  $\epsilon_r = 34.569$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3770; ConvF(5.05, 5.05, 5.05) @ 5750 MHz; Calibrated: 2022/5/2
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2022/4/21
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (61x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.2 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.95 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 31.9 W/kg

**SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.19 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 16.1 W/kg

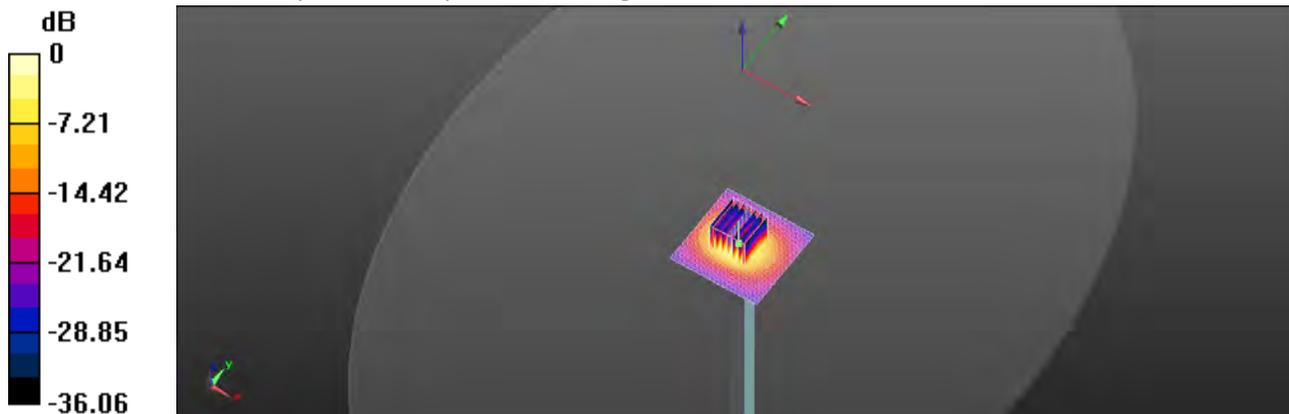

0 dB = 16.1 W/kg = 12.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Report No. :TESA2208000323ES**

**Dipole 2450 MHz\_SN:727**

Communication System: CW; Frequency: 2450 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.817$  S/m;  $\epsilon_r = 38.792$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.3°C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2450 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2021/11/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (51x61x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 21.5 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.9 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 27.6 W/kg

**SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.04 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 20.4 W/kg

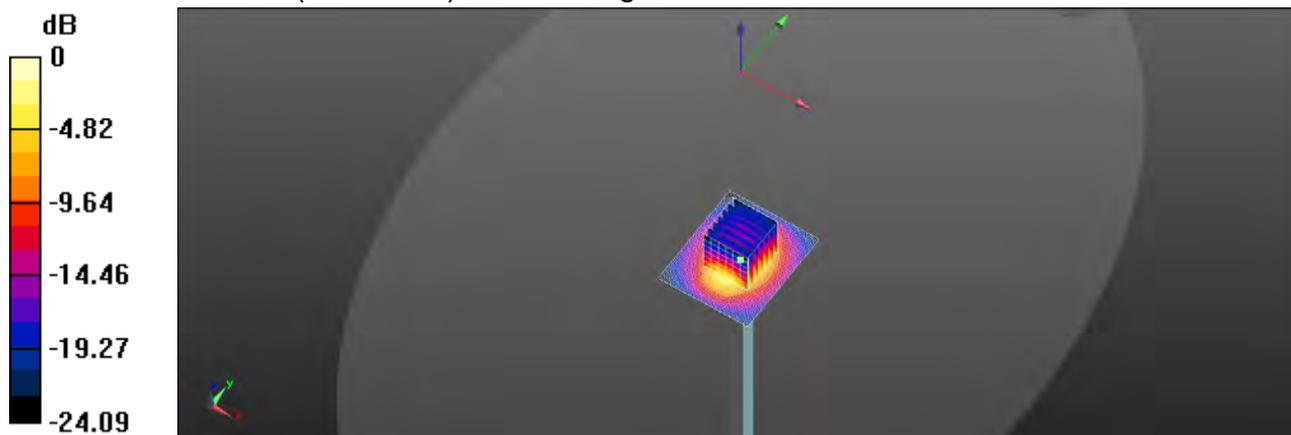

0 dB = 21.5 W/kg = 13.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Report No. :TESA2208000323ES**

**Dipole 5250 MHz\_SN:1023**

Communication System: CW; Frequency: 5250 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.585 \text{ S/m}$ ;  $\epsilon_r = 35.79$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.1°C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7466; ConvF(5.44, 5.44, 5.44) @ 5250 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2021/11/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (61x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.1 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 61.57 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 32.3 W/kg

**SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.25 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 16.5 W/kg

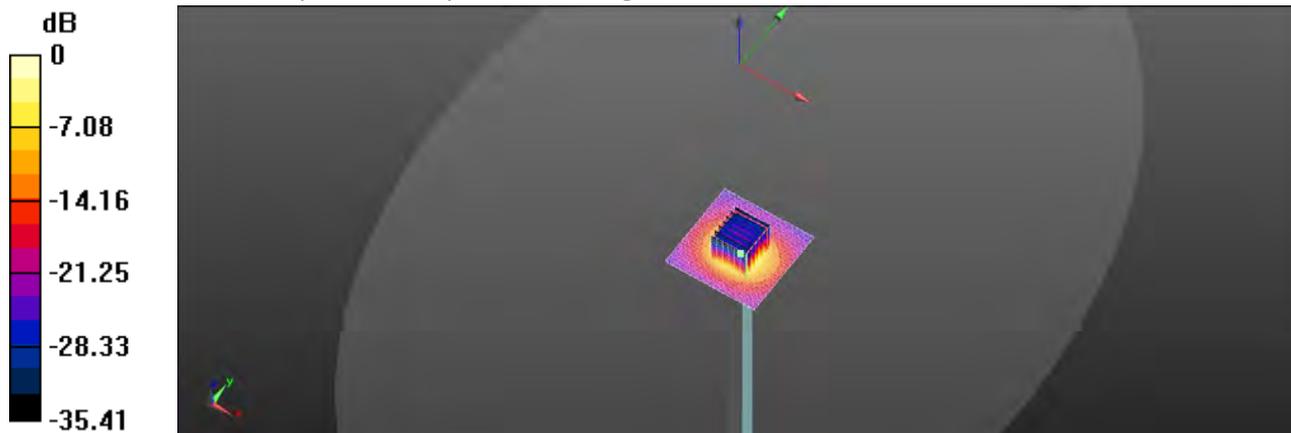

0 dB = 16.5 W/kg = 12.17 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Report No. :TESA2208000323ES**

**Dipole 5600 MHz\_SN:1023**

Communication System: CW; Frequency: 5600 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 5600 \text{ MHz}$ ;  $\sigma = 5.02 \text{ S/m}$ ;  $\epsilon_r = 35.154$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7466; ConvF(5.05, 5.05, 5.05) @ 5600 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2021/11/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (61x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.2 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.16 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 36.4 W/kg

**SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.27 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 17.6 W/kg

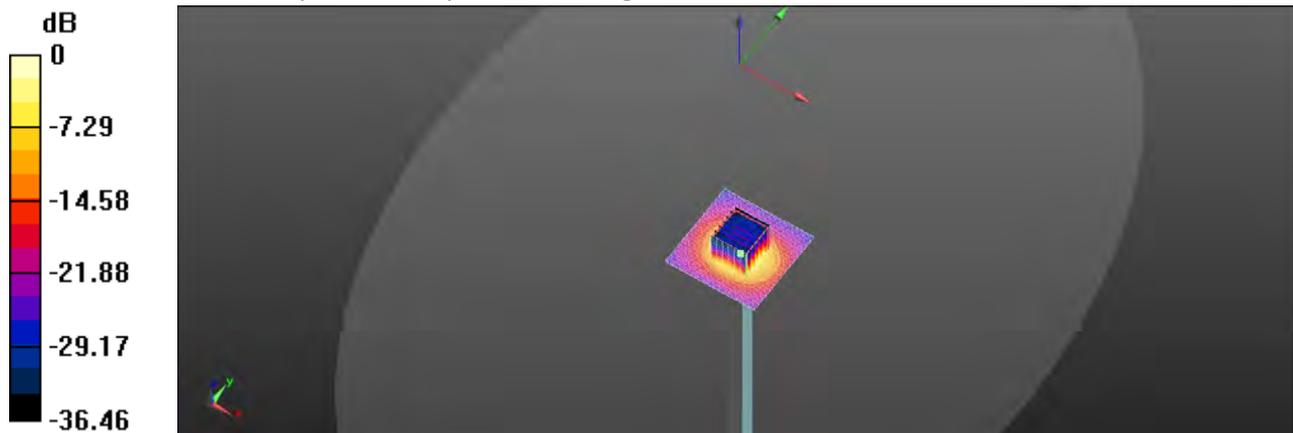

0 dB = 17.6 W/kg = 12.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/9/16

Report No. : TESA2208000323ES

Dipole 5750 MHz\_SN:1023

Communication System: CW; Frequency: 5750 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 5750 \text{ MHz}$ ;  $\sigma = 5.173 \text{ S/m}$ ;  $\epsilon_r = 34.777$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature:  $22.0^\circ\text{C}$ ; Liquid temperature:  $21.7^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5750 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2021/11/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (61x61x1):** Interpolated grid:  $dx=10 \text{ mm}$ ,  $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) =  $16.6 \text{ W/kg}$

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $58.15 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$


Peak SAR (extrapolated) =  $36.5 \text{ W/kg}$

**SAR(1 g) =  $8.17 \text{ W/kg}$ ; SAR(10 g) =  $2.33 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $7.2 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $56.2\%$

Maximum value of SAR (measured) =  $17.3 \text{ W/kg}$

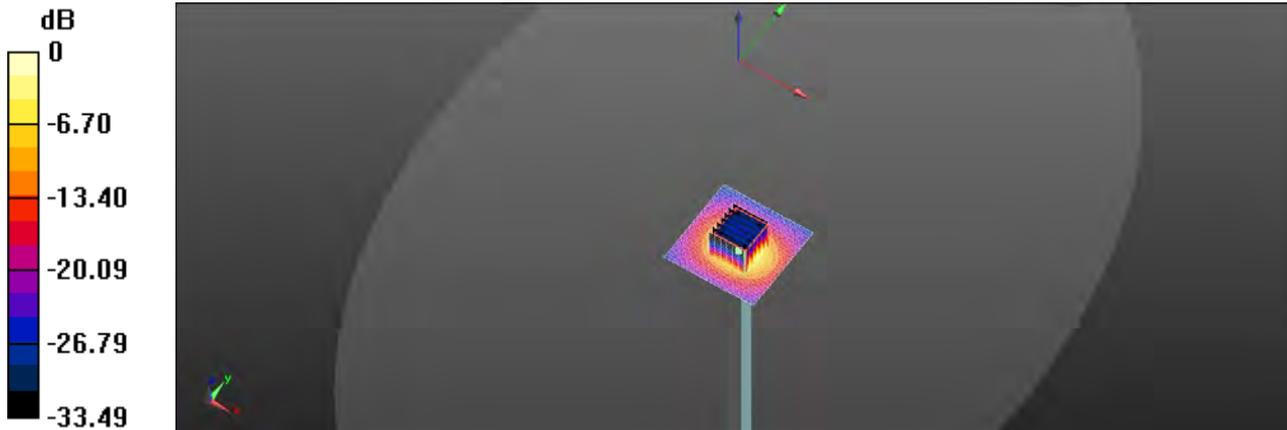

0 dB =  $17.3 \text{ W/kg}$  =  $12.38 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/10/20

Report No. :TESA2208000323ES

Dipole 2450 MHz\_SN:727

Communication System: CW; Frequency: 2450 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.823$  S/m;  $\epsilon_r = 39.285$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 – SN3770; ConvF(8.2, 8.2, 8.2) @ 2450 MHz; Calibrated: 2022/5/2
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2022/4/21
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (51x61x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 22.1 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.9 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 28.2 W/kg

**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.13 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 21.0 W/kg

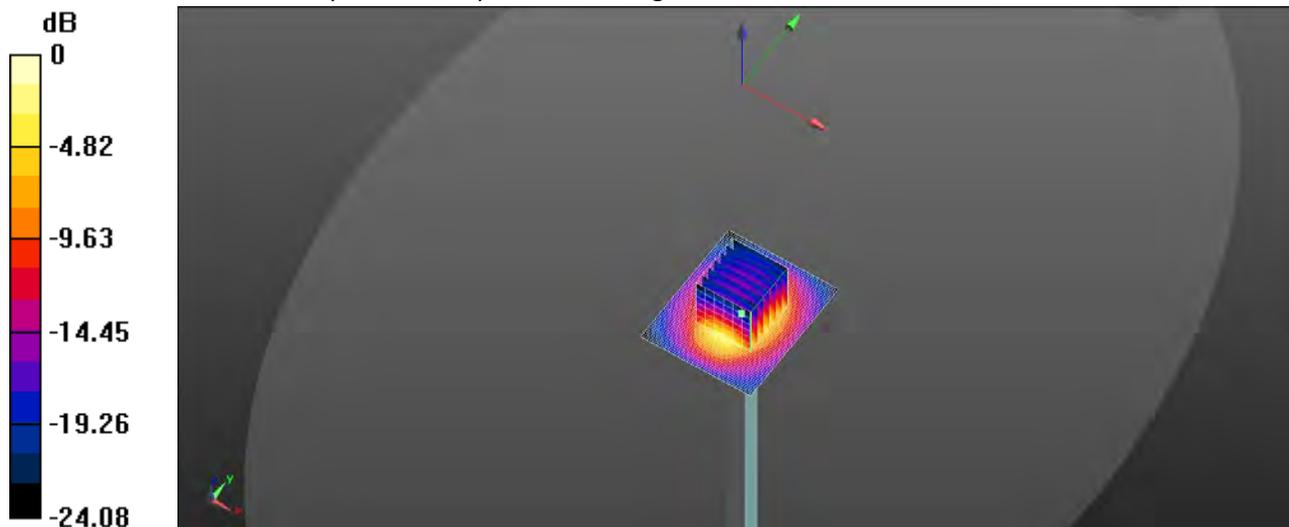

0 dB = 22.1 W/kg = 13.44 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Report No. :TESA2208000323ES**  
**Measurement Report for Device, FRONT, Validation band,**  
**CW, Channel 6500 (6500.0 MHz), SN:1006**  
**Ambient temperature: 21.7°C; Liquid temperature: 21.5°C**  
**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	5.65	5.997	34.347

**Hardware Setup**


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	36.0 x 51.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	24.9	27.8
psSAR8g [W/kg]	5.91	6.49
psSAR10g [W/kg]	4.90	5.33
psPDab (4.0cm2, sq) [W/m2]		130
Power Drift [dB]	0.01	0.06
M2/M1 [%]		54.7
Dist 3dB Peak [mm]		4.9

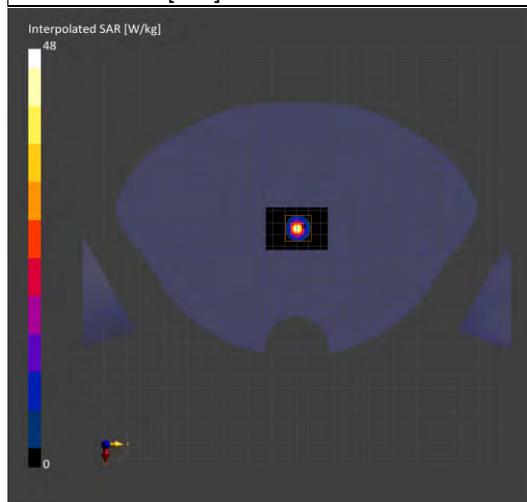

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No. :TESA2208000323ES  
Measurement Report for Device, FRONT, Validation band,  
CW, Channel 7000 (7000.0 MHz), SN:1007  
Ambient temperature: 21.8°C; Liquid temperature: 21.6°C  
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	5.85	6.559	33.77

### Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
SAM	EX3DV4 - SN7466, 2022-01-26	DAE4 Sn1260, 2022-09-22

### Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	36.0 x 45.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 7.5	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-02	2022-11-02
psSAR1g [W/kg]	25.2	27.2
psSAR8g [W/kg]	5.74	6.01
psSAR10g [W/kg]	4.74	4.93
psPDab (4.0cm <sup>2</sup> , sq) [W/m <sup>2</sup> ]		120
Power Drift [dB]	-0.04	0.03
M2/M1 [%]		54.0
Dist 3dB Peak [mm]		4.8

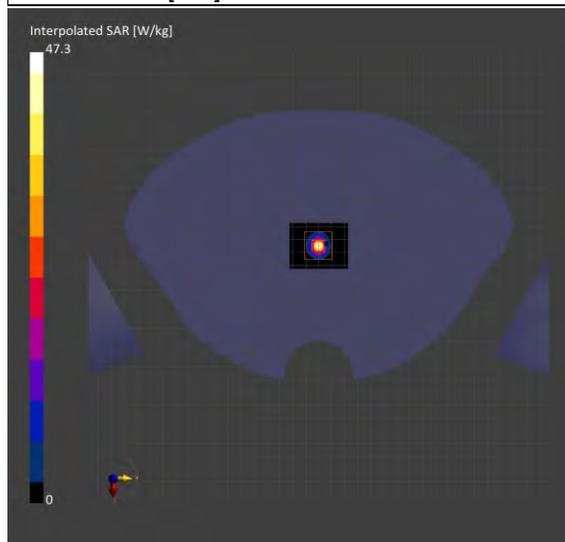

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/11/2

Report No. :TESA2208000323ES

Dipole 2450 MHz\_SN:727

Communication System: CW; Frequency: 2450 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.74$  S/m;  $\epsilon_r = 39.161$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(8.1, 8.1, 8.1) @ 2450 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (51x51x1):** Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 21.9 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.8 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 27.3 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.19 W/kg**

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 20.3 W/kg

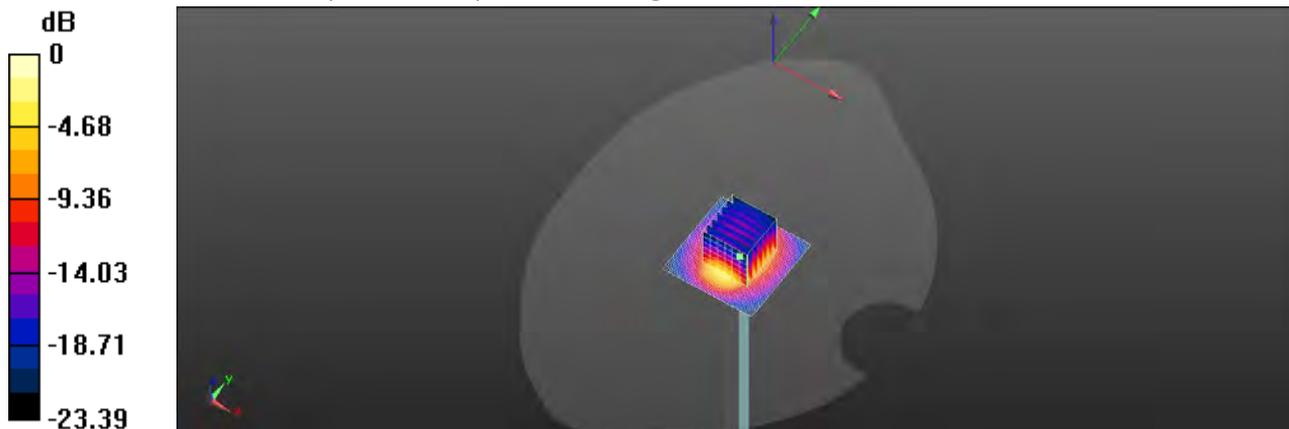

0 dB = 21.9 W/kg = 13.40 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/11/2

Report No. :TESA2208000323ES

Dipole 5250 MHz\_SN:1023

Communication System: CW; Frequency: 5250 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.675$  S/m;  $\epsilon_r = 35.933$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(5.44, 5.44, 5.44) @ 5250 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (61x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.6 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 60.64 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 30.3 W/kg

**SAR(1 g) = 7.92 W/kg; SAR(10 g) = 2.3 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 16.3 W/kg

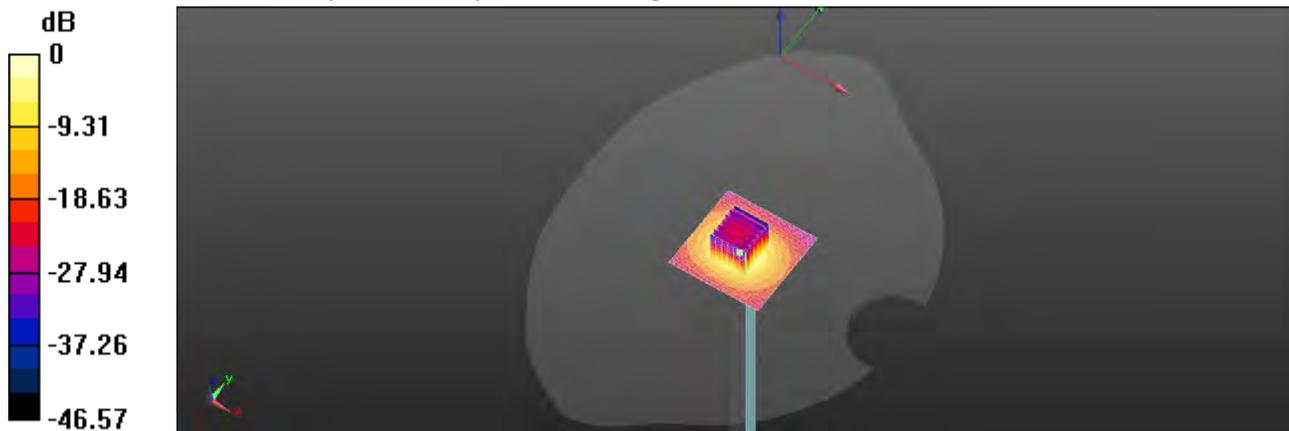

0 dB = 16.3 W/kg = 12.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/11/2

Report No. :TESA2208000323ES

Dipole 5600 MHz\_SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.111$  S/m;  $\epsilon_r = 35.279$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5600 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (61x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.0 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.17 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 36.8 W/kg

**SAR(1 g) = 8.18 W/kg; SAR(10 g) = 2.32 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 17.2 W/kg

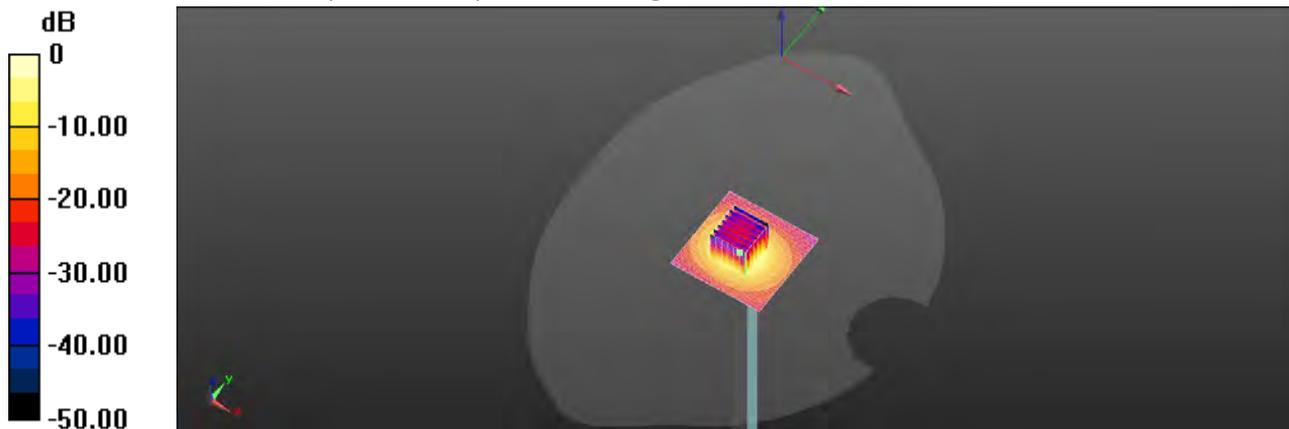

0 dB = 17.2 W/kg = 12.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/11/2

Report No. :TESA2208000323ES

Dipole 5750 MHz\_SN:1023

Communication System: CW; Frequency: 5750 MHz; Duty cycle= 1:1

Medium parameters used:  $f = 5750 \text{ MHz}$ ;  $\sigma = 5.328 \text{ S/m}$ ;  $\epsilon_r = 34.938$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98) @ 5750 MHz; Calibrated: 2022/1/26
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2022/9/22
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (61x61x1):** Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.2 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 54.34 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 39.4 W/kg

**SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.21 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 17.6 W/kg

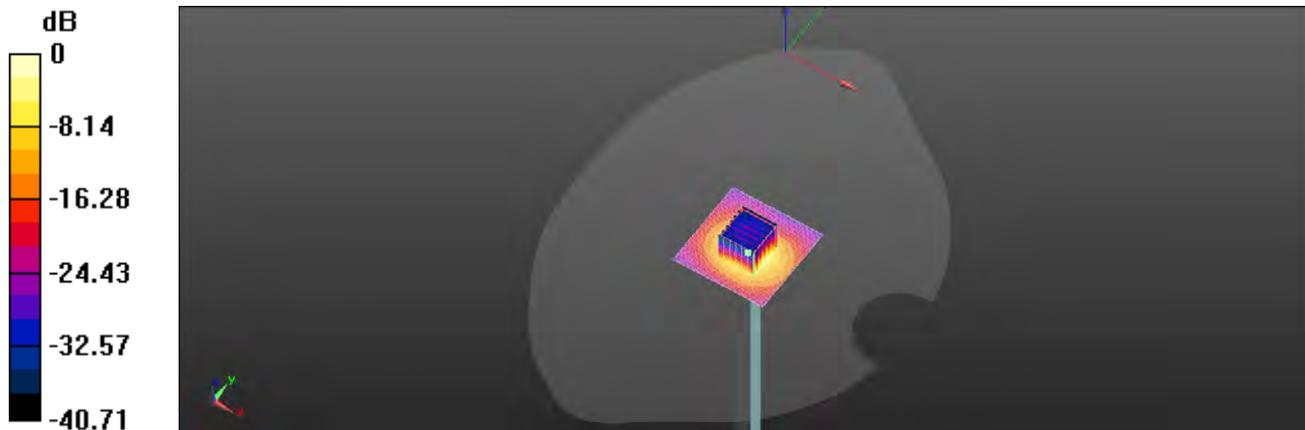

0 dB = 17.6 W/kg = 12.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

## 15 PD SYSTEM CHECK RESULT

Report No. :TESA2208000323ES

Measurement Report for 5G Verification Source 10GHz, FRONT, Validation band, CW, Channel 10000 (10000.0 MHz), SN:1021

### Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	FRONT, 10.00	1.0

### Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9635_F1-55GHz, 2022-06-14	DAE4 Sn1260, 2022-09-22

### Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

### Measurement Results

Scan Type	5G Scan
Date	2022-11-03
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	52.9
psPDtot+ [W/m <sup>2</sup> ]	53.0
psPDmod+ [W/m <sup>2</sup> ]	53.2
E <sub>max</sub> [V/m]	160
Power Drift [dB]	0.06

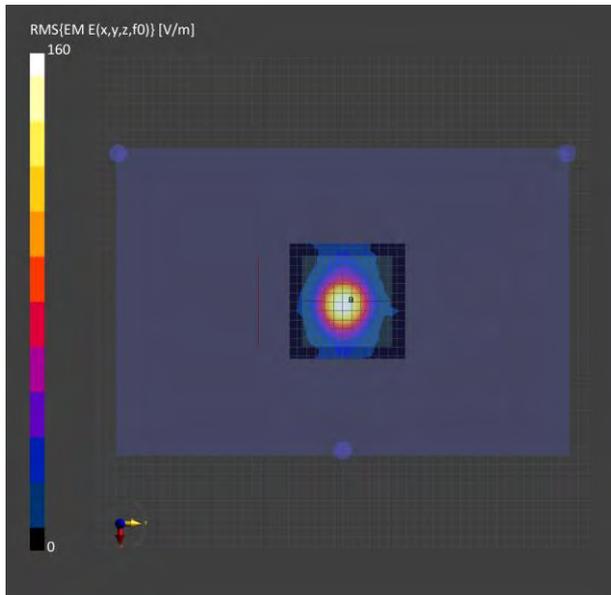

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Refer to separated files for the following appendixes.**

- 16.1 SAR\_Appendix A Photographs**
- 16.2 SAR\_Appendix B DAE & Probe Cal. Certificate**
- 16.3 SAR\_Appendix C Phantom Description & Dipole Cal. Certificate**

**- End of report -**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.