


Embedded Multi-Band Antenna for MDA-LE-02-013

1. Explanation of part number :

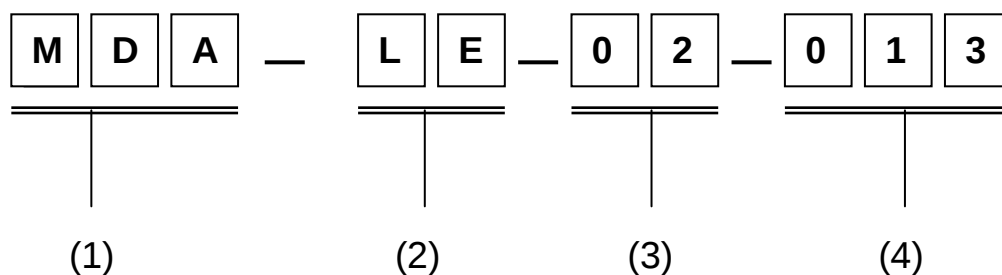

(1) Product type/Material : Wireless Antenna/Holder + LDS

(2) Frequency/Band code : 2400~2500 & 5150~7125MHz

(3) Coaxial Cable Type : Black Coaxial Cable

(4) Suffix : 013

2. Electrical Specification :

Ant. Part Number (main & aux parts)	Type	Connector Type	Cable length	Laptop/ Host Model
Main: INPAQ P/N: MDA-LE-02-013 ASUS P/N: 14008-05330200	PIFA	I-PEX MHF4-L	40	GZ301V

Antenna Type	PIFA Antenna For WIFI 802.11a/b/g/n/ac/ax	
Connector Type	I-PEX MHF4-L Connector	
Cable Type	OD 1.13 Normal RF Cable	
Impedance	50Ω	
Polarization	Linear	
Radiation Pattern	Omni-directional	
Frequency Range	WLAN 802.11a/b/g/n/ac/ax	2.4~2.5GHz & 5.15~7.125 GHz
VSWR	WLAN 802.11a/b/g/n/ac/ax	≤ 3.5
Operation Temperature	-10°C~+55°C	
Storage Temperature	-30°C~+75°C	
Return Loss	≤ -6 dB	
Max Power	1W	

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:高楨棋

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Multi-Band Antenna for
MDA-LE-02-013


DOCUMENT
NO.

ENS000172590

SPEC REV.
P1

3. RF Connector :

3-1 Cable Dimension :

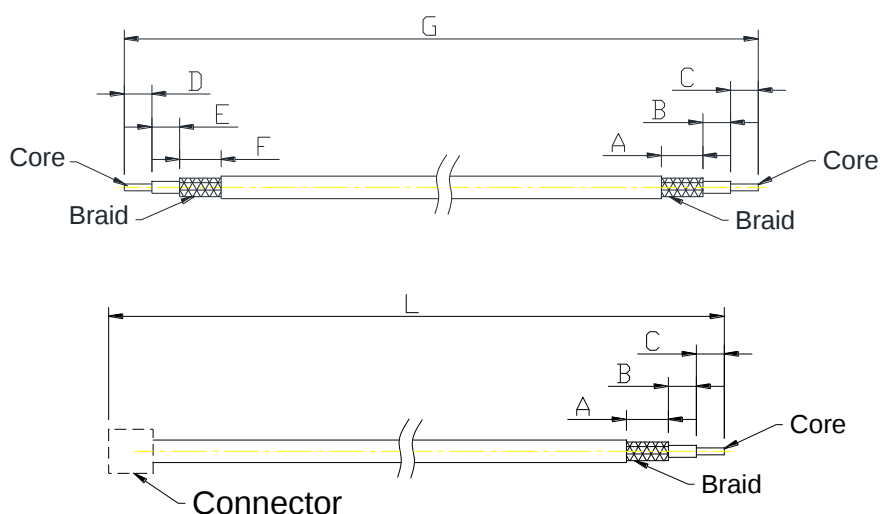

Connector : I-PEX MHF-4L ; Cable : RF Cable ϕ 1.13 Normal(Black)

L : 57.0 ± 2.0

D : 1.20 ± 0.15

A : 4.5 ± 0.5 (沾錫)

E : 0.72 ± 0.15

B : 2.5 ± 0.5

F : 1.00 ± 0.15

C : 1.0 ± 0.5 (沾錫)

G : 56.0 ± 2.0


unit : mm

3-1.1 Electric SPEC :

短路/斷路測試：(使用三用電表量測)

- 芯線與 Braid wires 間不可短路。
- Connector 之 Ground 與線路另一端之 Braid wires 間不可斷路。
- Connector 之芯線與線路另一端之芯線間不可斷路。

3-1.2 Connector Appearance : I-PEX MHF-4L (此為示意圖)

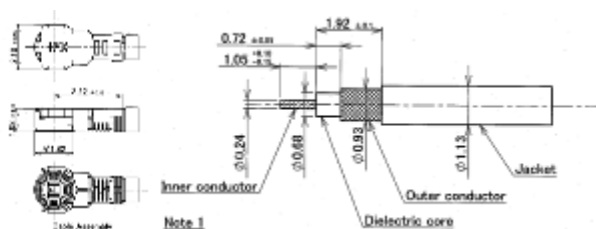

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±

X.X=±

X.XX=±

ANGLES=±

HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:高楨棋

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Multi-Band Antenna for
MDA-LE-02-013

DOCUMENT
NO.

ENS000172590

SPEC REV.
P1

4. Electrical Specification :

Those specifications were specially defined for GZ301V model, and all characteristics were measured under the model's handset testing jig.

4-1. Frequency Band :

Frequency Band	MHz	MHz
Wi-Fi 6e	2400~2500	5150~7125

4-2. Impedance :


50 ohm nominal

4-3. Matching circuit :

None

4-4. Return loss/VSWR :

Frequency(MHz)	2425	2495	5120	5855	7150
Main S11(dB)	-13.96	-8.91	-20.13	-4.31	-9.89

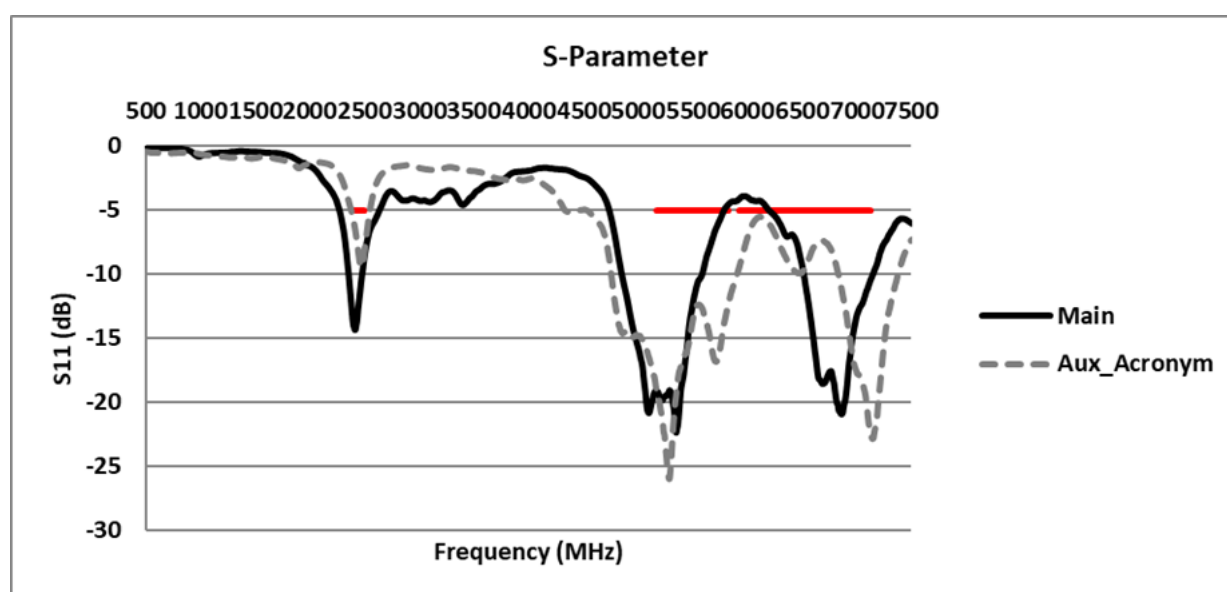

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:高楨棋

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Multi-Band Antenna for
MDA-LE-02-013

DOCUMENT
NO.

ENS000172590


SPEC REV.
P1

4-5 Gain and Radiation Pattern

4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

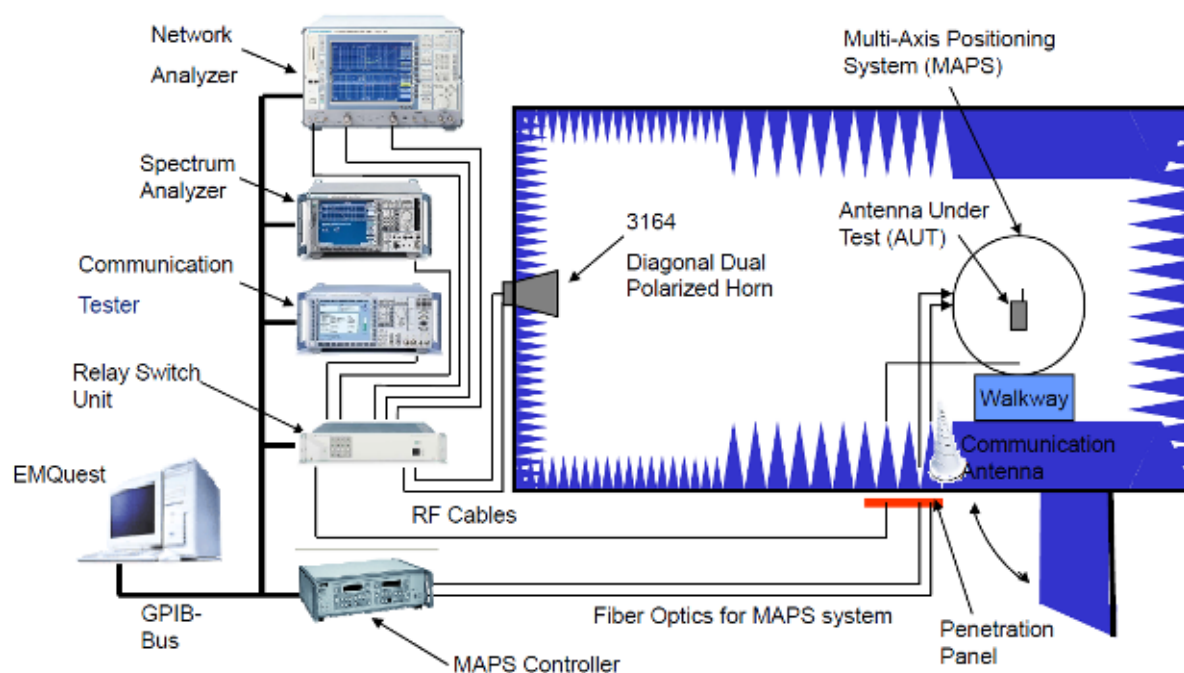

1. An anechoic chamber (10mx3mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 50cmx50cmx50cm at the center of rotator
3. The distance between DUT and standard antenna is 9.14m
4. Two measurement antennas is 3164-06 (300MHz - 6GHz) and 3164-05 (2 - 18GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:高楨棋

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Multi-Band Antenna for
MDA-LE-02-013

DOCUMENT
NO.

ENS000172590

SPEC REV.
P1

4-5.3 Gain data and radiation pattern

Antenna gain is marked (dBi) and is based on **STANDARD HORN** antenna. The data shows Average-Gain.

	Main
Frequency (MHz)	Peak gain w/ cable loss (dBi)
2400-2483.5	2.48
5150-5250	3.51
5250-5350	2.76
5470-5725	4.21
5725-5850	2.52
5850-5895	2.52
5925-6425	4.01
6425-6525	3.80
6525-6875	3.83
6875-7125	2.95

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:高楨棋

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Multi-Band Antenna for
MDA-LE-02-013


DOCUMENT
NO.

ENS000172590

SPEC REV.
P1

5. 外箱貼附 Cable 的 UL 標籤：

The appearance of cable UL label is according to drawing Figure 7-1-1

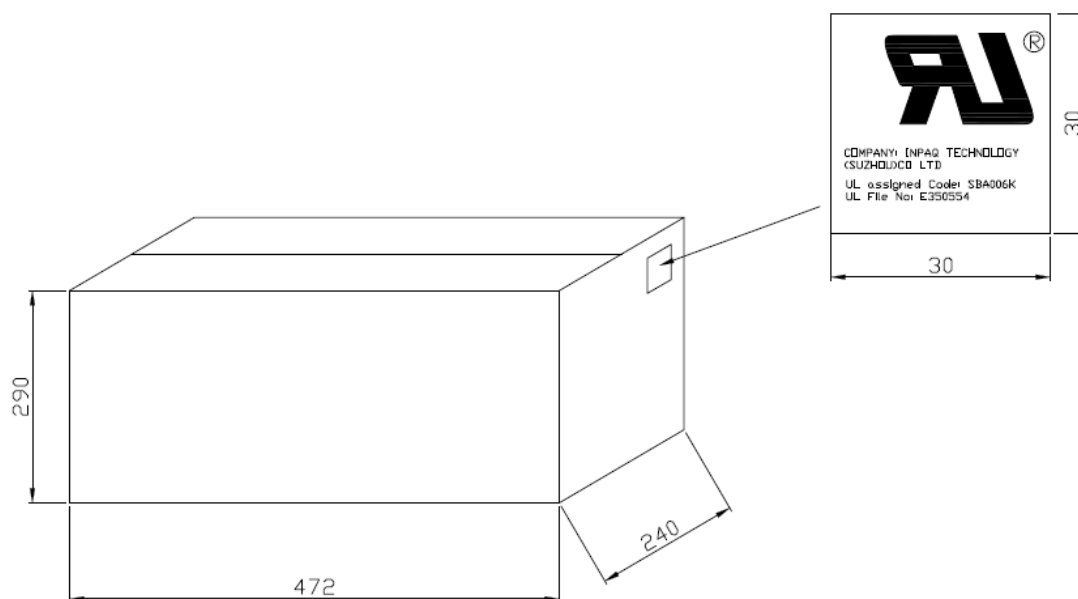

帶線材的產品出貨時皆需貼附此標籤

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:高楨棋

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Multi-Band Antenna for
 MDA-LE-02-013

DOCUMENT
 NO.

ENS000172590

SPEC REV.
 P1