

THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3654702	A01	As Shown

NOTE:

(1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.

(2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.

(3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).

(4) MATERIAL:

A: 1.面材 (Code):Lexan 8010 polycarbonate film
2.表面處理 (Code):霧油
3.膠性：平膠+網格膠
or equivalent material.(the material spec as same as Q-Form spec)

B.ADHESIVE: 3M-SP7533

C.THICKNESS: 0.125mm

D. RAW MATERIAL COLOR: Transparent


(5) INK COLOR: Black, Pantone Cool Gray 7U

(6) THERMAL TRANSFER RIBBON:N/A


(7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011

(8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.

(9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

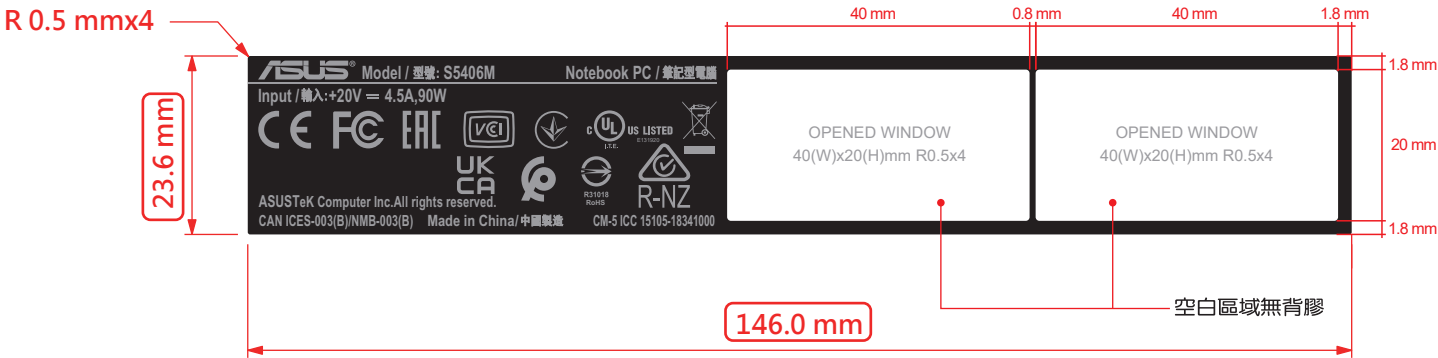

出標樣式/佈膠示意圖

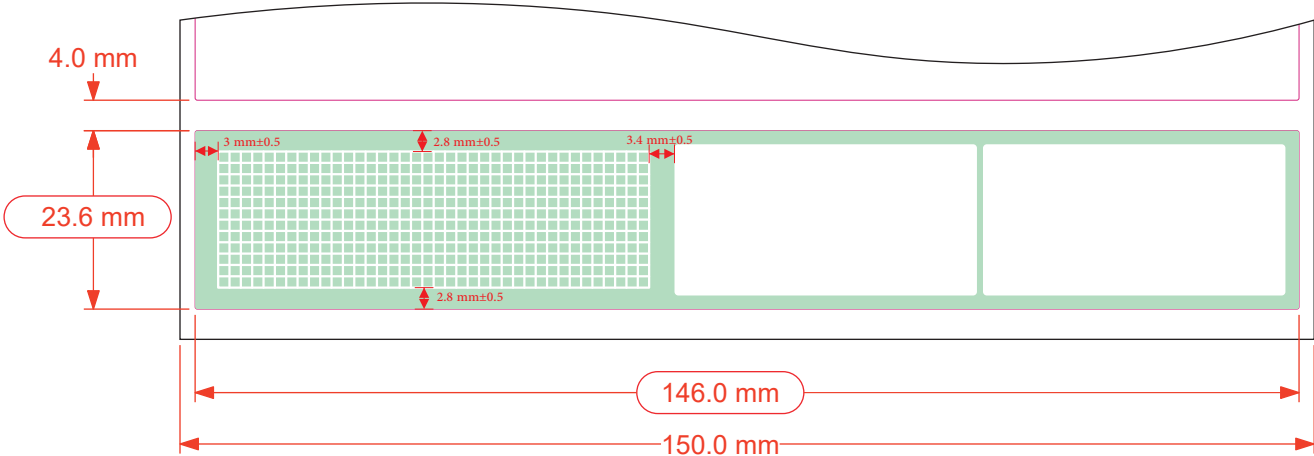

Output direction

測試規範

	Paste Location	Glue Type	Paste method	Peel off method	Test Criteria	Remark
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在 5*5cm 或以下面積範圍內，不超過兩個 <5mm 直徑	濕測結束需靜置12hr
V	Cover	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在 5*5cm 或以下面積範圍內，不超過兩個 <5mm 直徑	濕測結束需靜置12hr
		R 膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M) 3. 氣泡在 5*5cm 或以下面積範圍內，不超過兩個 <5mm 直徑	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

	公差
材料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm

REVISION HISTORY		DOC DATE
DESIGNER	CHANGE NO.	REV dd/mm/yyyy
	INITIAL	A

卷芯要有以下資訊



IEC PN 6060BXXXXXX
ASUS PN XXXXX-XXXXXXXX

離型紙後請印刷以下資訊

IEC PN 圖紙版本 廠商代碼
6060BXXXXXX-V0-XXXX
Barcode內容 同下方顯示文字
ASUS PN Vendor code(數字)
151XX-XXXXXXXX-XXXX

★注意：ASUS PN和Vendor code只能用“英文-” 分開

MODEL				S5406M				Inventec CORPORATION				CONFIDENTIAL							
DESIGNER				Fair Wu				D:28				TITLE				S5406M RATING LABEL (WO/3C+JP) V1.0 90W(S5406MA)			
								M:11											
								Y:23											
MANAGER				Jane Lee				D:28				DOCUMENT NUMBER							
								M:11											
								Y:23											
 THIRD AHGLE PROJECTION				DO NOT SCALE DRAWING				SIZE		CODE		NUMBER				REV		VER	
								B		PS		6060-B36547-02-AI				A		0	
								SCALE: 1:1		UNIT:mm		SHEET:10F1							
LINEAR		X		X.X		X.XX		FILE NAME											
mm								S5406M-l-rating_WO3C_15105-18341000_6060B3654702											
INCH																			


THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3654703	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1.面材 (Code):Lexan 8010 polycarbonate film
2.表面處理 (Code):霧油
3.膠性：平膠+網格膠
or equivalent material.(the material spec as same as Q-Form spec)
- B.ADHESIVE: 3M-SP7533
- C.THICKNESS: 0.125mm
- D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)



出標樣式/佈膠示意圖

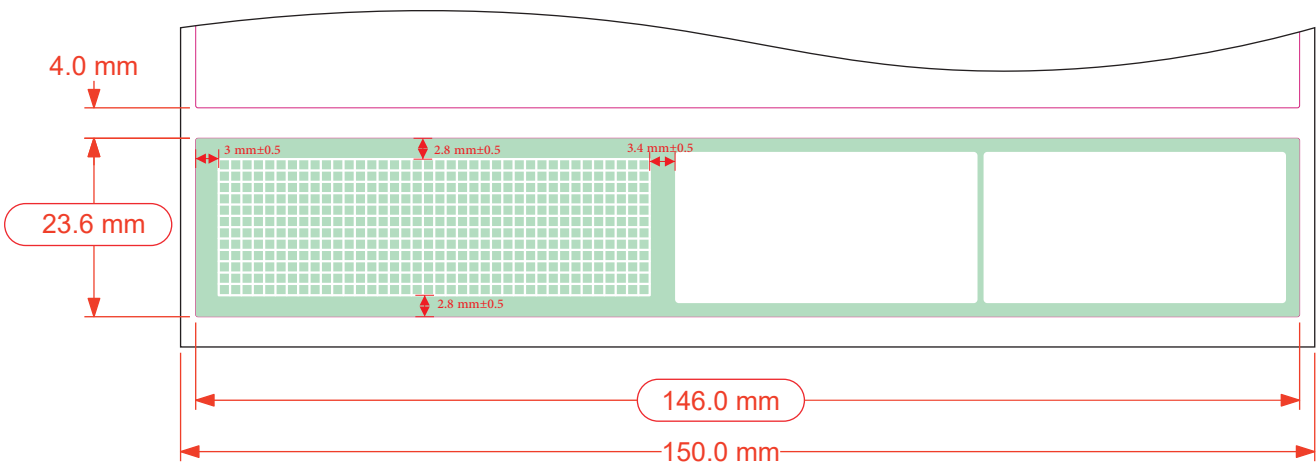

Output direction

測試規範


	Paste Location	Glue Type	Paste method	Peel off method	Test Criteria	Remark
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在 5*5cm 或以下面積範圍內，不超過兩個 <5mm 直徑	濕測結束需靜置12hr
V	Cover	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在 5*5cm 或以下面積範圍內，不超過兩個 <5mm 直徑	濕測結束需靜置12hr
		R 膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M)	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

	公差
材料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm

REVISION HISTORY		DOC DATE
DESIGNER	CHANGE NO.	REV dd/mm/yyyy
	INITIAL	A

卷芯要有以下資訊




IEC PN 6060BXXXXXX
ASUS PN XXXXX-XXXXXXXX

離型紙後請印刷以下資訊

IEC PN 圖紙版本 廠商代碼
6060BXXXXXX-V0-XXXX
Barcode內容 同下方顯示文字
ASUS PN Vendor code(數字)
151XX-XXXXXXXX-XXXX

★注意：ASUS PN和Vendor code只能用“英文-” 分開

MODEL K5406M				InventecCORPORATION CONFIDENTIAL				
DESIGNER Fair Wu		D:28 M:11 Y:23		TITLE K5406M RATING LABEL (WO/3C+JP) V1.0 90W(S5406MA)				
MANAGER Jane Lee		D:28 M:11 Y:23		DOCUMENT NUMBER				
 THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SIZE	CODE	NUMBER	REV	VER
				B	PS	6060-B36547-03-AI	A	0
SCALE: 1:1		UNIT:mm		SHEET:10F1				
FILE NAME				K5406M-l-rating_WO3C_15105-18342000_6060B3654703				
LINEAR	X	X.X	X.XX					
mm								
INCH								


THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION.

LEGEND		
PART NO	REV	VARIATION
6060B3654704	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1.面材 (Code):Lexan 8010 polycarbonate film
2.表面處理 (Code):霧油
3.膠性：平膠+網格膠
or equivalent material.(the material spec as same as Q-Form spec)
- B.ADHESIVE: 3M-SP7533
- C.THICKNESS: 0.125mm
- D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)



出標樣式/佈膠示意圖

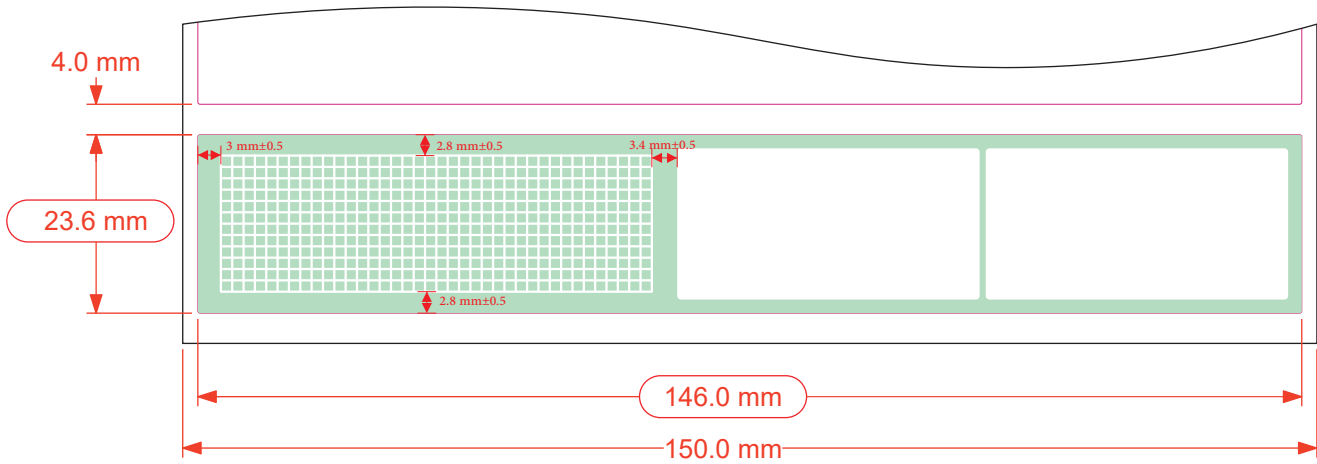

測試規範


	Paste Location	Glue Type	Paste method	Peel off method	Test Criteria	Remark
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在 5*5cm 或以下面積範圍內，不超過兩個 <5mm 直徑	濕測結束需靜置12hr
V	Cover	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在 5*5cm 或以下面積範圍內，不超過兩個 <5mm 直徑	濕測結束需靜置12hr
		R 膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M)	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

	公差
材料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm

REVISION HISTORY		DOC DATE
DESIGNER	CHANGE NO.	REV dd/mm/yyyy
	INITIAL	A

卷芯要有以下資訊




IEC PN 6060BXXXXXX
ASUS PN XXXXX-XXXXXXXX

離型紙後請印刷以下資訊

IEC PN 圖紙版本 廠商代碼
6060BXXXXXXXX-IV0-XXXX
Barcode內容 同下方顯示文字
ASUS PN Vendor code(數字)
151XX-XXXXXXXX-XXXX

★注意：ASUS PN和Vendor code只能用“英文-” 分開

MODEL V5406M				InventecCORPORATION CONFIDENTIAL				
DESIGNER Fair Wu		D:28 M:11 Y:23		TITLE V5406M RATING LABEL (WO/3C+JP) V1.0 90W(S5406MA)				
MANAGER Jane Lee		D:28 M:11 Y:23		DOCUMENT NUMBER				
 THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SIZE	CODE	NUMBER	REV	VER
				B	PS	6060-B36547-04-AI	A	0
SCALE: 1:1		UNIT:mm		SHEET:10F1				
FILE NAME				V5406M-l-rating_WO3C_15105-18343000_6060B3654704				
LINEAR	X	X.X	X.XX					
mm								
INCH								


THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION.

LEGEND


PART NO	REV	VARIATION
6060B3654705	A01	As Shown

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
(2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
(3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC
(IF NOT SPECIFIED).
(4) MATERIAL:
A: 1. 面材 (Code): Lexan 8010 polycarbonate film
2. 表面處理 (Code): 霧油
3. 膠性: 平膠+網格膠
or equivalent material. (the material spec as same as Q-Form spec)
B. ADHESIVE: 3M-SP7533
C. THICKNESS: 0.125mm
D. RAW MATERIAL COLOR: Transparent
(5) INK COLOR: Black, Pantone Cool Gray 7U
(6) THERMAL TRANSFER RIBBON: N/A
(7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code : CM-100-011
(8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
(9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR"
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL. (內文有製造年份時需定義年份轉換規則)

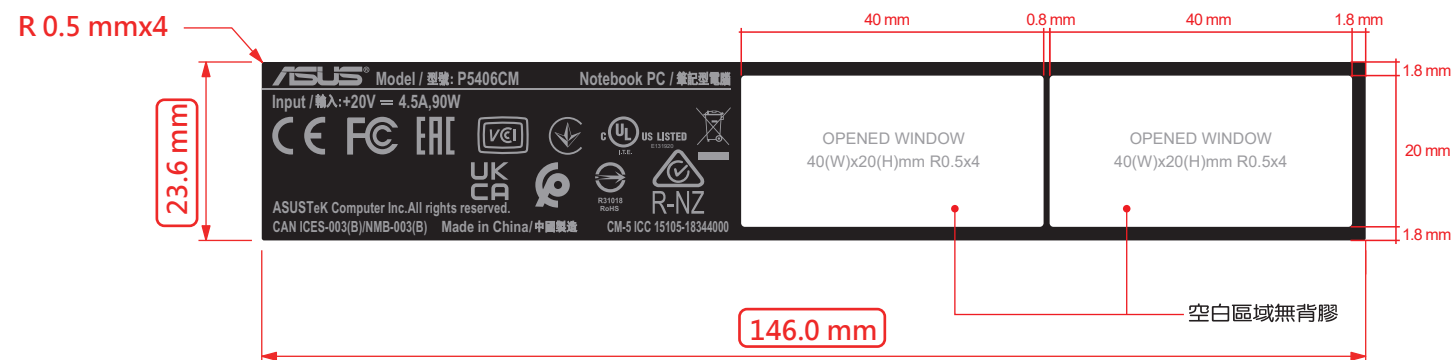

出標樣式/佈膠示意圖

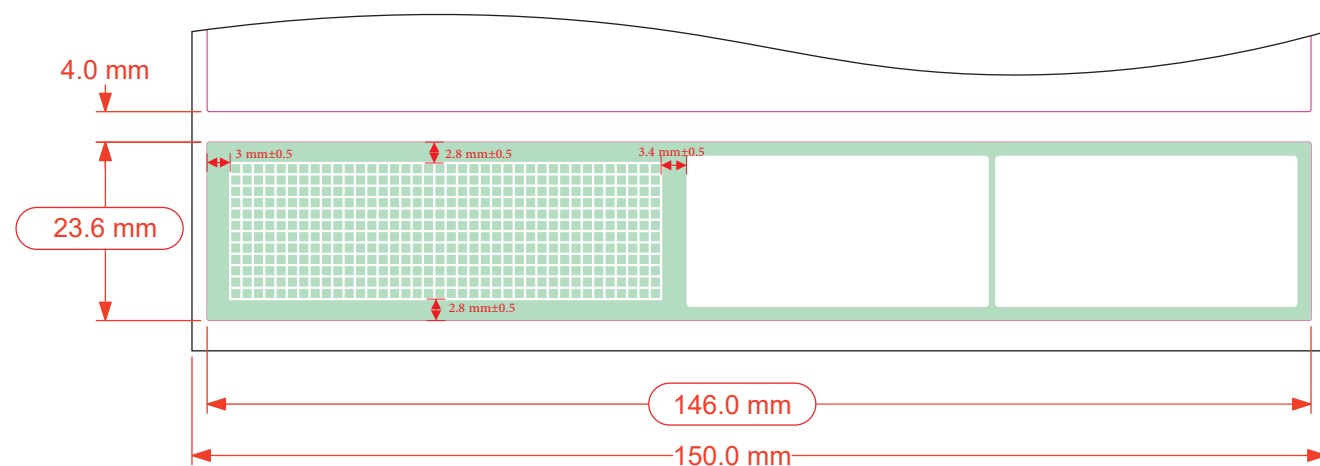

Output direction

測試規範


	Paste Location	Glue Type	Paste method	Peel off method	Test Criteria	Remark
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜起 3. 氣泡在 5*5cm 或以下 面積範圍內， 不超過兩個 <5mm 直徑	環測結束需靜置12hr
V		一般膠	食指推平	No	1. 不脫落 2. 不龜起 3. 氣泡在 5*5cm 或以下 面積範圍內， 不超過兩個 <5mm 直徑	環測結束需靜置12hr
	Cover					
		R 膠	食指推平	任一角以90℃ (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕敲可用3M 膠水清除) 3. 氣泡在 5*5cm 或以下 面積範圍內， 不超過兩個 <5mm 直徑	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible.
	300cycles				2. The substrate or Undercoating is not visible

	公差
材 料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm

REVISION HISTORY			
DESIGNER	CHANGE NO.	DOC REV	DATE dd/mm/yyyy
-	INITIAL	A	

卷芯要有以下資訊



IEC PN ← 6060BXXXXXX
ASUS PN ← XXXXX-XXXXXXXX

離型紙後請印刷以下資訊

IEC PN 圖紙版本 廠商代碼

6060BXXXXXXXXX-V0-XXXX

Barcode

151XX-XXXXXXXXX-XXXX

ASUS PN Vendor code(數字)


Barcode內容
同下方顯示文字

★注意：ASUS PN和Vendor code只能用“ 英文-” 分開

MODEL				P5406CM				InventecCORPORATION CONFIDENTIAL			
DESIGNER Fair Wu			D:28	TITLE P5406CM RATING LABEL (WO/3C+JP) V1.0 90W(S5406MA)							
			M:11								
			Y:23								
MANAGER Jane Lee			D:28	DOCUMENT NUMBER							
			M:11								
			Y:23								
 THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SIZE	CODE	NUMBER				REV	VER
				B	PS	6060-B36547-05-AI				A	0
SCALE: 1:1		UNIT:mm		SHEET:1OF1							
FILE NAME								P5406CM-l-rating_WO3C_15105-18344000_6060B3654705			

THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2024 INVENTEC CORPORATION .	LEGEND		
	PART NO	REV	VARIATION
	6060B3668503	A01	As show

NOTE:
(1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
(2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
(3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
(4) MATERIAL:
A: 1.面材 (Code) : 25#白色PET (BW0128)
2.表面處理 (Code): 霧P (PPATM(T)(30)(N))
3.膠性 : 平膠
B. ADHESIVE: NA
C. THICKNESS: 0.084mm (面材+膠材)
D. RAW MATERIAL COLOR: WHITE
(5) INK COLOR: 黑底白字
(6) THERMAL TRANSFER RIBBON:NA
(7) MATERIAL AND RIBBON NEED UL CERTIFICATION: NA
(8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
(9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL. 內文有製造年份時需定義年份轉換規則

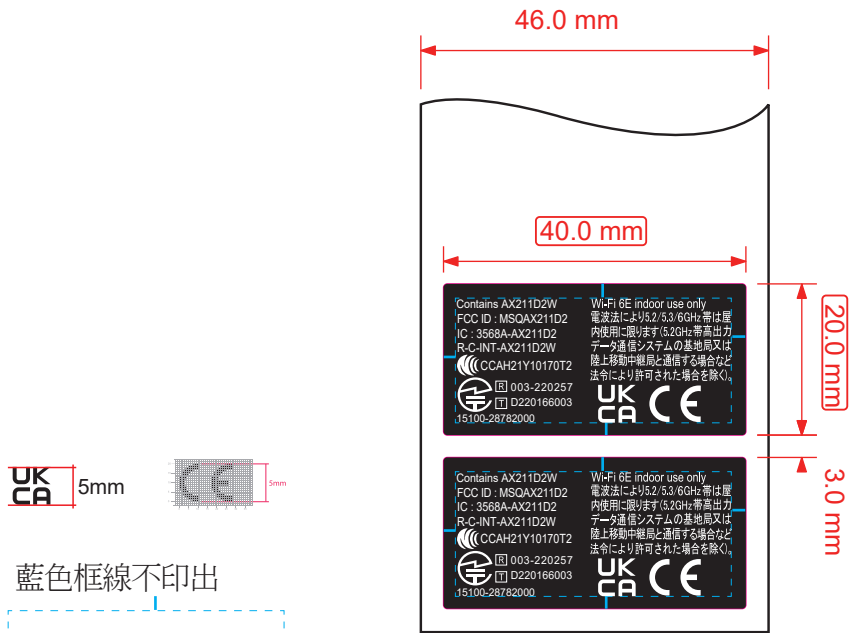

印刷色 : 黑底+白字

藍色框線不印出




Output direction

	公差
材料	Dimension
Label長寬	±0.2mm
Label面材+膠材	±0.02mm

IEC
MERD
正式圖面

REVISION HISTORY	DOC	DATE
	CHANGE NO.	REV
	INITIAL	A
	DESIGNER	FAIR WU

卷芯要有以下資訊




IEC PN ← 6060BXXXXXX
ASUS PN ← XXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊

IEC PN 圖紙版本 廠商代碼
6060BXXXXXXXXX-V0-XXXX
Barcode內容 同下方顯示文字
151XX-XXXXXXXXXX-XXXX
ASUS PN Vendor code(數字)

★注意 : ASUS PN和Vendor code只能“-” 分開

MODEL				S5406MA				Inventec CORPORATION CONFIDENTIAL						
DESIGNER			Fair Wu		D:27 M:12 Y:23		TITLE				RF LB_INTEL AX211.D2WG.NV 999M5T BLK// WIFI6E V1.0 COMBO 5G 40*20MM MSQ			
MANAGER			Jane Lee		D:27 M:12 Y:23		DOCUMENT NUMBER							
		THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SIZE	CODE	NUMBER				REV	VER	
						B	PS	6060-B36685-03-AI				A	0	
						SCALE: 1:1		UNIT:mm		SHEET:1OF1				
						FILE NAME								s5406ma-l-RF_15100-28782000_6060B3668503
LINEAR		X	X.X	X.XX										
mm														
INCH														