

## SAR, APD and IPD Evaluation Report for FCC

**Applicant Name** : ASUSTeK COMPUTER INC.  
**Applicant Address** : 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan  
**Product Name** : Intel® BE201D2W  
**Brand Name** : Intel  
**Model Number** : BE201D2W  
**FCC ID** : MSQBE201D2

**Report Number** : USSC248379001  
**Compliant Standards** : FCC 47 CFR §2.1093  
**Sample Received Date** : Aug. 26, 2024  
**Date of Testing** : Sep. 09, 2024 ~ Sep. 11, 2024  
**Report Issued Date** : Oct. 08, 2024

The above equipment has been tested by **Eurofins E&E Wireless Taiwan Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Device Under Test (DUT) configurations represented herein are true and accurate accounts of the measurements of the sample's characteristics under the conditions specified in this report.

**Note:**

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

**Approved By :**

Roy Wu / SAR Technical Director



## Table of Contents

|                                                                |    |
|----------------------------------------------------------------|----|
| Revision History .....                                         | 3  |
| 1. Compliance Statement .....                                  | 4  |
| 2. Test Regulations.....                                       | 5  |
| 2.1. Reference Standard and Guidance.....                      | 5  |
| 2.2. RF Exposure Limits.....                                   | 6  |
| 3. Information of Testing Laboratory .....                     | 7  |
| 4. DUT (Device Under Test) Information .....                   | 8  |
| 4.1. Device Overview .....                                     | 8  |
| 5. Measurement System Description .....                        | 10 |
| 5.1. SAR Definition.....                                       | 10 |
| 5.2. SAR Measurement Setup .....                               | 10 |
| 5.3. SAR Test Procedures.....                                  | 14 |
| 5.4. Incident Power Density Definition.....                    | 18 |
| 5.5. Incident Power Density Measurement Setup .....            | 18 |
| 5.6. Incident Power Density Measurement Procedure .....        | 21 |
| 6. System Verification .....                                   | 24 |
| 6.1. SAR Tissue Simulating Liquid Verification.....            | 24 |
| 6.2. SAR Test System Verification.....                         | 25 |
| 6.3. IPD Test System Verification .....                        | 27 |
| 7. Test Configurations.....                                    | 28 |
| 7.1. Description of Test Position .....                        | 28 |
| 7.2. Standalone SAR Test Exclusion Considerations .....        | 29 |
| 7.3. FCC General Test Procedures .....                         | 31 |
| 8. RF Output Power Specification and Measurement.....          | 34 |
| 8.1. Nominal and Maximum Output Power Specifications.....      | 34 |
| 8.2. Measured Conducted Power Results for WLAN .....           | 41 |
| 8.3. Measured Conducted Power Results for Bluetooth.....       | 48 |
| 9. Evaluation for Standalone Transmission Scenario .....       | 49 |
| 9.1. Test Notes .....                                          | 49 |
| 9.2. Measured and Reported SAR Results for Body.....           | 52 |
| 9.3. Measured and Reported SAR Results for Extremity .....     | 53 |
| 9.4. Measured and Reported SAR Results for Power Density ..... | 54 |
| 9.5. SAR Measurement Variability.....                          | 55 |
| 10. Evaluation for Simultaneous Transmission Scenario .....    | 56 |
| 10.1. Simultaneous Transmission Capabilities .....             | 56 |
| 10.2. SAR Summation Analysis .....                             | 57 |
| 10.3. Simultaneous Transmission SAR Measurement .....          | 58 |
| 11. Test Equipment.....                                        | 59 |
| 12. Measurement Uncertainty.....                               | 60 |

**Appendix A - DUT Antenna Illustration and Test Setup Photographs**

**Appendix B - System Check Plots**

**Appendix C - Highest Test Plots**

**Appendix D - Calibration Certificate for Probe**

**Appendix E - Calibration Certificate for Dipole**

Revision History

| Rev. | Issued Date   | Description   | Revised by  |
|------|---------------|---------------|-------------|
| 00   | Oct. 08, 2024 | Initial Issue | Rowan Hsieh |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |

## 1. Compliance Statement

This device (FCC ID: **MSQBE201D2**) has been tested by **Eurofins E&E Wireless Taiwan Co., Ltd.** in accordance with the measurement procedures specified in FCC KDB procedures, and the results shown in below are capable of demonstrating compliance for localized specific absorption rate (SAR) for general population / uncontrolled environment exposure limits specified in *FCC 47 CFR §1.1310*.

| Highest Reported SAR            |              |                                                        |                                                              |
|---------------------------------|--------------|--------------------------------------------------------|--------------------------------------------------------------|
| Equipment Class                 | Mode         | Exposure Condition                                     |                                                              |
|                                 |              | Body<br>(Separation: 0 mm)<br>SAR <sub>1g</sub> (W/kg) | Extremity<br>(Separation: 0 mm)<br>SAR <sub>10g</sub> (W/kg) |
| DTS                             | WLAN 2.4 GHz | 0.56                                                   | 0.48                                                         |
| NII                             | WLAN 5 GHz   | 0.57                                                   | 0.27                                                         |
| 6CD                             | WLAN 6 GHz   | 0.33                                                   | 0.28                                                         |
| DSS / DTS                       | Bluetooth    | 0.33                                                   | 0.28                                                         |
| Simultaneous SAR per KDB 690783 |              | 1.26                                                   | 0.76                                                         |
| SAR Limits                      |              | 1.60                                                   | 4.00                                                         |

| Highest Reported Total PD |            |                                                                             |                                                                                  |
|---------------------------|------------|-----------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| Equipment Class           | Mode       | Exposure Condition                                                          |                                                                                  |
|                           |            | Body<br>Averaging Area [4 cm <sup>2</sup> ] Total PD<br>(W/m <sup>2</sup> ) | Extremity<br>Averaging Area [4 cm <sup>2</sup> ] Total PD<br>(W/m <sup>2</sup> ) |
| 6CD                       | WLAN 6 GHz | 5.44                                                                        | 9.24                                                                             |
| Total PD Limits           |            | 10.0                                                                        | 10.0                                                                             |

### Note.

1. This notebook collocates with an external keyboard. (FCC ID: MSQUX8406M)
2. This product is a dual-screen laptop, so the test plan will include the 90-degree laptop mode test and verify it with an external keyboard. For detailed instructions, please refer to the user manual.

## 2. Test Regulations

### 2.1. Reference Standard and Guidance

The Specific Absorption Rate (SAR) testing documented in this report were performed in accordance with following FCC published KDB guidance and standard :

***KDB Publication 248227 D01 – IEEE 802.11 Wi-Fi SAR v02r02***

***KDB Publication 447498 D01 – General RF Exposure Guidance v06***

***KDB Publication 447498 D04 – Interim General RF Exposure Guidance v01***

***KDB Publication 616217 D04 – SAR for Laptop and Tablets v01r02***

***KDB Publication 648474 D04 – Handset SAR v01r03***

***KDB Publication 865664 D01 – SAR measurement 100 MHz to 6 GHz v01r04***

***KDB Publication 865664 D02 – RF Exposure Reporting v01r02***

***IEEE Std 1528-2013***

In addition to the above, the following guideline was used :

***TCB Workshop Oct 2016 – Guidelines for Bluetooth Duty Factor***

***TCB Workshop Oct 2016 – Guidelines for DUT Holder Perturbations***

***TCB Workshop May 2017 – Guidelines for Broadband Liquid Above 3 GHz***

***TCB Workshop Oct 2018 – Guidelines for Near-Field Power Density***

***TCB Workshop Apr 2019 – Guidelines for Tissue Simulating Liquids (TSL)***

***TCB Workshop Apr 2019 – Guidelines for IEEE 802.11ax SAR Testing***

***TCB Workshop Oct 2020 – Guidelines for U-NII 6-7 GHz SAR Testing***

***TCB Workshop Oct 2022 – Guidelines for f-above-6 GHz Portable Devices***

## 2.2. RF Exposure Limits

**Population / Uncontrolled Environments:** Defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Occupational / Controlled Environments:** Defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e., as a result of employment or occupation). In general, occupational / controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

### *The Radiofrequency Radiation Exposure Limits Specified in FCC 47 CFR §1.1310*

| Exposure Scenario         | Frequency Range    | Local Head/Body SAR (1g-SAR, W/kg) | Local Extremity SAR (10g-SAR, W/kg) | Local Power Density (4 cm <sup>2</sup> , mW/cm <sup>2</sup> ) |
|---------------------------|--------------------|------------------------------------|-------------------------------------|---------------------------------------------------------------|
| Population / Uncontrolled | 100 kHz to 6 GHz   | 1.6                                | 4.0                                 |                                                               |
|                           | 1.5 GHz to 100 GHz |                                    |                                     | 1.0                                                           |
| Occupational / Controlled | 100 kHz to 6 GHz   | 8.0                                | 20.0                                |                                                               |
|                           | 1.5 GHz to 100 GHz |                                    |                                     | 5.0                                                           |

### 3. Information of Testing Laboratory

#### Test Facilities

Company Name: Eurofins E&E Wireless Taiwan Co., Ltd.  
Address No.: 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan  
Website: <https://www.atl.com.tw>  
Telephone: +886-3-271-0188  
Fax: +886-3-271-0190  
E-mail: [infoEETW@eurofins.com](mailto:infoEETW@eurofins.com)

#### Test Site Location

- ☐ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan  
☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan

#### Laboratory Accreditation

| Location                                                              | TAF                        | FCC                        | ISED                                 |
|-----------------------------------------------------------------------|----------------------------|----------------------------|--------------------------------------|
| No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan | Accreditation No.:<br>1330 | Designation No.:<br>TW0010 | Company No.: 7381A<br>CAB ID: TW1330 |
| No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan             | Accreditation No.:<br>1330 | Designation No.:<br>TW0034 | Company No.: 28922<br>CAB ID: TW1330 |

## 4. DUT (Device Under Test) Information

### 4.1. Device Overview

|                                        |                                                                                                                                                                                   |                                                                         |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>Product Name</b>                    | Intel® BE201D2W                                                                                                                                                                   |                                                                         |
| <b>Brand Name</b>                      | Intel                                                                                                                                                                             |                                                                         |
| <b>Model Name</b>                      | BE201D2W                                                                                                                                                                          |                                                                         |
| <b>FCC ID</b>                          | MSQBE201D2                                                                                                                                                                        |                                                                         |
| <b>Host Information</b>                | Product Name: Notebook PC<br>Trade Name: ASUS<br>Model Name: UX8406C, RX8406C, BX8406C<br>All models are electrically identical, different model names are for marketing purpose. |                                                                         |
| <b>Supported Wireless Technologies</b> | <b>Tx Frequency (MHz)</b>                                                                                                                                                         | <b>Operating Mode</b>                                                   |
|                                        | <b>WLAN</b><br>2.4G : 2412 ~ 2472<br>5G : 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5720,<br>5745 ~ 5825, 5845 ~ 5885<br>6G : 5955 ~ 6415, 6435 ~ 6515, 6535 ~ 6855,<br>6875 ~ 7115        | 2.4G : 802.11b/g/n/ax/be<br>5G : 802.11a/n/ac/ax/be<br>6G : 802.11ax/be |
|                                        | <b>Bluetooth</b><br>2402 ~ 2480                                                                                                                                                   | BR, EDR, LE                                                             |

#### Note:

The above DUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

### Antenna list:

| Antenna Source                                                                         | ANT             | Manufacturer      | Part No.(Vendor) | Type         | Frequency (MHz) | Max. Gain (dBi) |      |
|----------------------------------------------------------------------------------------|-----------------|-------------------|------------------|--------------|-----------------|-----------------|------|
|                                                                                        |                 |                   |                  |              |                 | NB              | PAD  |
| 1                                                                                      | Chain A (Ant 0) | Pulse Electronics | 14008-05930200   | PIFA Antenna | 2402 - 2480     | 2.72            | 1.3  |
|                                                                                        |                 |                   |                  |              | 5150 - 5250     | 3               | 3.26 |
|                                                                                        |                 |                   |                  |              | 5250 - 5350     | 2.42            | 3.51 |
|                                                                                        |                 |                   |                  |              | 5470 - 5725     | 3.74            | 4.12 |
|                                                                                        |                 |                   |                  |              | 5725 - 5850     | 3.97            | 3.6  |
|                                                                                        |                 |                   |                  |              | 5850 - 5895     | 3.9             | 3.55 |
|                                                                                        |                 |                   |                  |              | 5925 - 6425     | 4.36            | 3.64 |
|                                                                                        |                 |                   |                  |              | 6425 - 6525     | 2.32            | 3.42 |
|                                                                                        |                 |                   |                  |              | 6525 - 6875     | 3.06            | 3    |
|                                                                                        |                 |                   |                  |              | 6875 - 7125     | 4.76            | 3.95 |
|                                                                                        | Chain B (Ant 1) | Pulse Electronics | 14008-05930000   | PIFA Antenna | 2402 - 2480     | 2.52            | 2.63 |
|                                                                                        |                 |                   |                  |              | 5150 - 5250     | 3.38            | 3.55 |
|                                                                                        |                 |                   |                  |              | 5250 - 5350     | 2.91            | 3.65 |
|                                                                                        |                 |                   |                  |              | 5470 - 5725     | 3.27            | 2.11 |
|                                                                                        |                 |                   |                  |              | 5725 - 5850     | 2.11            | 1.91 |
|                                                                                        |                 |                   |                  |              | 5850 - 5895     | 1.77            | 2.99 |
|                                                                                        |                 |                   |                  |              | 5925 - 6425     | 1.09            | 2.7  |
|                                                                                        |                 |                   |                  |              | 6425 - 6525     | 2.61            | 2.4  |
|                                                                                        |                 |                   |                  |              | 6525 - 6875     | 3.32            | 2.41 |
|                                                                                        |                 |                   |                  |              | 6875 - 7125     | 0.01            | 1.6  |
| Note :                                                                                 |                 |                   |                  |              |                 |                 |      |
| 1. The Chain A is connected to AUX port / Chain B is connected to Main port of module. |                 |                   |                  |              |                 |                 |      |

## 5. Measurement System Description

### 5.1. SAR Definition

The Specific Absorption Rate (SAR) is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population / uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational / controlled exposure limits are higher than the limits for general population / uncontrolled. The SAR is defined as the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho$ ) as shown in the following equation:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

The SAR is expressed in units of watts per kilogram (W/kg) or equivalently milliwatts per gram (mW/g), and it is related to the E-field at a point by the following equation:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

$\sigma$  = conductivity of the tissue (S/m)


$\rho$  = mass density of the tissue (kg/m<sup>3</sup>)

$E$  = RMS electrical field strength (V/m)

### 5.2. SAR Measurement Setup

The SAR measurements are performed using Dosimetric Assessment System (DASY) made by Schmid & Partner Engineering AG, which is a robot-based high precision electromagnetic (EM) near-field scanning platform. The DASY system measures the precise locations of the near-field radiators of highly non-isotropic fields. A sophisticated measurement system with a variety of probes (SAR, E-field, H-field etc.) combined with a high-precision 6-axis robot positioner allows for completely automated measurement scans and evaluations with both field and position information, e.g., volume averages, peak search, and extrapolations.

**SPEAG DASY8 SAR Measurement System Setup**

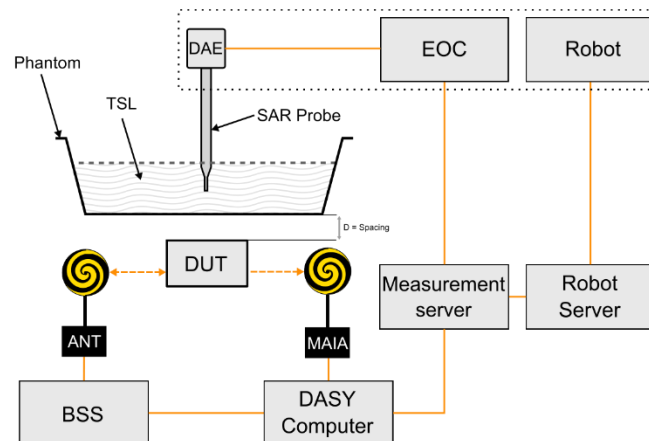

The DASY8 system for SAR measurements consists of:

- 6-axis robotic arm (Stäubli TX2-90XL) for positioning the probe.
- Mounting Platform for keeping the phantoms at a fixed location relative to the robot.
- Measurement Server for handling all time-critical tasks, such as measurement data acquisition and supervision of safety features.
- EOC (Electrical to Optical Converter) for converting the optical signal from the DAE to electrical before being transmitted to the measurement server.
- LB (Light-Beam unit) for probe alignment (measurement of the exact probe length and eccentricity).
- SAR probe (EX3D, ES3D probes) for measuring the E-field distribution in the phantom. The SAR distribution and the psSAR (peak spatial averaged SAR) are derived from the E-field measurement.
- SAR phantom that represents a physical model with an equivalent human anatomy. A Specific Anthropomorphic Mannequin (SAM) head is usually used for handheld devices, and a Flat phantom is used for body-worn devices. Specific phantoms are available if the Device Under Test (DUT) is intended for operation on different parts of the body other than the head or torso (e.g., the wrist).
- TSL (Tissue Simulating Liquid) representing the dielectric properties of used tissue.
- DAE (Data Acquisition Electronics) for reading the probe voltages and transmitting it to the DASY8 control PC.
- Device Holder for positioning the DUT beneath the phantom.
- MAIA (Modulation and Interference Analyzer) for confirming the accuracy of the probe linearization parameters.
- ANT (wide-band Antenna) for broadcasting the downlink signals emitted by base station simulators to the DUT.
- Control PC for running the DASY8 software to define/execute the measurements.
- System validation kits for system check / validation purposes.


### 5.2.1 E-Field Probes


|                      |                                                                                                                                                          |                                                                                       |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>         | EX3DV4                                                                                                                                                   |  |
| <b>Construction</b>  | Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |                                                                                       |
| <b>Frequency</b>     | 4 MHz to 10 GHz<br>Linearity: $\pm 0.2$ dB                                                                                                               |                                                                                       |
| <b>Directivity</b>   | $\pm 0.1$ dB in TSL (rotation around probe axis)<br>$\pm 0.3$ dB in TSL (rotation normal to probe axis)                                                  |                                                                                       |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)                                                                   |                                                                                       |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                     |                                                                                       |

### 5.2.2 Data Acquisition Electronics (DAE)

|                             |                                                                                                                                                                                                                                                     |                                                                                       |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>                | DAE3, DAE4                                                                                                                                                                                                                                          |  |
| <b>Construction</b>         | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. |                                                                                       |
| <b>Measurement Range</b>    | -100 to +300 mV (16-bit resolution and two range settings: 4mV, 400mV)                                                                                                                                                                              |                                                                                       |
| <b>Input Offset Voltage</b> | $< 5$ $\mu$ V (with auto zero)                                                                                                                                                                                                                      |                                                                                       |
| <b>Input Bias Current</b>   | $< 50$ fA                                                                                                                                                                                                                                           |                                                                                       |
| <b>Dimensions</b>           | 60 x 60 x 68 mm                                                                                                                                                                                                                                     |                                                                                       |

### 5.2.3 Phantoms

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                         |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>           | SAM-Twin Phantom                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |   |
| <b>Construction</b>    | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE Std 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. |                                                                                                                                                                         |
| <b>Material</b>        | Vinylester, fiberglass reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                         |
| <b>Shell Thickness</b> | 2 ± 0.2 mm (6 ± 0.2 mm at ear point)                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                         |
| <b>Dimensions</b>      | Length: 1000 mm<br>Width: 500 mm<br>Height: adjustable feet                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                         |
| <b>Filling Volume</b>  | approx. 25 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                         |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                          |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>           | ELI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |   |
| <b>Construction</b>    | The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. |                                                                                                                                                                          |
| <b>Material</b>        | Vinylester, fiberglass reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                          |
| <b>Shell Thickness</b> | 2.0 ± 0.2 mm (bottom plate)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                          |
| <b>Dimensions</b>      | Major axis: 600 mm<br>Minor axis: 400 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                          |
| <b>Filling Volume</b>  | approx. 30 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                          |

### 5.2.4 Device Holder

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                       |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>        | MD4HHTV5 - Mounting Device for Hand-Held Transmitters                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| <b>Construction</b> | In combination with the Twin SAM or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). |                                                                                       |
| <b>Material</b>     | Polyoxymethylene (POM)                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                       |

|                     |                                                                                                                                                                          |                                                                                       |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>        | MD4WTV5 - Mounting Device Adaptor for Ultra-Wide Transmitters                                                                                                            |  |
| <b>Construction</b> | An upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm. |                                                                                       |
| <b>Material</b>     | Polyoxymethylene (POM)                                                                                                                                                   |                                                                                       |

|                     |                                                                                                                                          |                                                                                       |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>        | MDA4SPV6 - Mounting Device Adaptor for Smart Phones                                                                                      |  |
| <b>Construction</b> | The solid low-density MDA4SPV6 adaptor assuring no impact on the DUT radiation performance and is conform with any DUT design and shape. |                                                                                       |
| <b>Material</b>     | ROHACELL                                                                                                                                 |                                                                                       |

|                     |                                                                                                                                                                                                                                              |                                                                                     |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>        | MD4LAPV5 - Mounting Device for Laptops and other Body-Worn Transmitters                                                                                                                                                                      |  |
| <b>Construction</b> | In combination with the Twin SAM or ELI phantoms, the Mounting Device (Body-Worn) enables testing of transmitter devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at a flat phantom section. |                                                                                     |
| <b>Material</b>     | Polyoxymethylene (POM), PET-G, Foam                                                                                                                                                                                                          |                                                                                     |

### 5.2.5 Power Source

|                              |                                                           |                                                                                     |
|------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>                 | Powersource1                                              |  |
| <b>Signal Type</b>           | Continuous Wave                                           |                                                                                     |
| <b>Operating Frequencies</b> | 600 MHz to 5850 MHz                                       |                                                                                     |
| <b>Output Power</b>          | -5.0 dBm to +17.0 dBm                                     |                                                                                     |
| <b>Power Supply</b>          | 5V DC, via USB jack                                       |                                                                                     |
| <b>Power Consumption</b>     | <3 W                                                      |                                                                                     |
| <b>Applications</b>          | System performance check and validation with a CW signal. |                                                                                     |

### 5.2.6 System Validation Dipoles

|                         |                                                                                                                                                                      |                                                                                      |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>            | D-Serial                                                                                                                                                             |  |
| <b>Construction</b>     | Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions. |                                                                                      |
| <b>Frequency</b>        | 750 MHz to 5800 MHz                                                                                                                                                  |                                                                                      |
| <b>Return Loss</b>      | > 20 dB                                                                                                                                                              |                                                                                      |
| <b>Power Capability</b> | > 100 W (f < 1GHz), > 40 W (f > 1GHz)                                                                                                                                |                                                                                      |

### 5.2.7 Tissue Simulating Liquids

The dielectric properties of the tissue simulating liquids are referred to KDB 865664 D01, IEEE Std 1528 and IEC/IEEE 62209-1528. For SAR measurement of the field distribution inside the phantom, the phantom has been filled with head tissue-equivalent medium. To minimize reflections within the phantom, the depth of the homogeneous medium is greater than or equal to 15 cm. For head SAR testing, the liquid height was measured from the phantom ear reference point (ERP) to the top surface of the tissue simulating liquid. For body and extremity SAR testing, the liquid height was measured from the center of the flat phantom to the top surface of the tissue simulating liquid.

The following table gives the recipes for tissue simulating liquids.

| Tissue Type | Water   | Tween 20 | Oxidized Mineral Oil | Diethyleneglycol Monohexylether | Triton X-100 | NaCl   |
|-------------|---------|----------|----------------------|---------------------------------|--------------|--------|
| 835         | 50.36 % | 48.39 %  |                      |                                 |              | 1.25 % |
| 900         | 50.31 % | 48.34 %  |                      |                                 |              | 1.35 % |
| 1800        | 56.00 % |          | 44.00 %              |                                 |              |        |
| 2450        | 56.00 % |          | 44.00 %              |                                 |              |        |
| 4000        | 56.00 % |          | 44.00 %              |                                 |              |        |
| 5000        | 56.00 % |          | 44.00 %              |                                 |              |        |
| 5200        | 65.53 % |          |                      | 17.24 %                         | 17.24 %      |        |
| 5800        | 65.53 % |          |                      | 17.24 %                         | 17.24 %      |        |
| 6000        | 56.00 % |          | 44.00 %              |                                 |              |        |
| 8000        | 67.80 % | 31.10 %  |                      |                                 |              |        |
| 10000       | 66.00 % | 33.00 %  |                      |                                 |              |        |

Before SAR measurement, the dielectric properties of the tissue simulating liquid were verified using a dielectric assessment kit and a network analyzer. Since the range of  $\pm 10\%$  of the required target values is used to measure relative permittivity and conductivity, the SAR correction procedure is applied to correct measured SAR for the deviations in permittivity and conductivity. Only positive correction has been used to scale up the measured SAR, and SAR result would not be corrected if the correction  $\Delta\text{SAR}$  has a negative sign. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of  $10\%$  are listed in below.

| Frequency (MHz) | Target Permittivity | $\pm 10\%$ Range of Permittivity | Target Conductivity | $\pm 10\%$ Range of Conductivity |
|-----------------|---------------------|----------------------------------|---------------------|----------------------------------|
| 750             | 41.9                | 37.7 ~ 46.1                      | 0.89                | 0.80 ~ 0.98                      |
| 835             | 41.5                | 37.4 ~ 45.7                      | 0.90                | 0.81 ~ 0.99                      |
| 900             | 41.5                | 37.4 ~ 45.7                      | 0.97                | 0.87 ~ 1.07                      |
| 1450            | 40.5                | 36.5 ~ 44.6                      | 1.20                | 1.08 ~ 1.32                      |
| 1800            | 40.0                | 36.0 ~ 44.0                      | 1.40                | 1.26 ~ 1.54                      |
| 1900            | 40.0                | 36.0 ~ 44.0                      | 1.40                | 1.26 ~ 1.54                      |
| 1950            | 40.0                | 36.0 ~ 44.0                      | 1.40                | 1.26 ~ 1.54                      |
| 2000            | 40.0                | 36.0 ~ 44.0                      | 1.40                | 1.26 ~ 1.54                      |
| 2100            | 39.8                | 35.8 ~ 43.8                      | 1.49                | 1.34 ~ 1.64                      |
| 2450            | 39.2                | 35.3 ~ 43.1                      | 1.80                | 1.62 ~ 1.98                      |
| 2600            | 39.0                | 35.1 ~ 42.9                      | 1.96                | 1.76 ~ 2.16                      |
| 3000            | 38.5                | 34.7 ~ 42.4                      | 2.40                | 2.16 ~ 2.64                      |
| 3500            | 37.9                | 34.1 ~ 41.7                      | 2.91                | 2.62 ~ 3.20                      |
| 4000            | 37.4                | 33.7 ~ 41.1                      | 3.43                | 3.09 ~ 3.77                      |
| 4500            | 36.8                | 33.1 ~ 40.5                      | 3.94                | 3.55 ~ 4.33                      |
| 5000            | 36.2                | 32.6 ~ 39.8                      | 4.45                | 4.01 ~ 4.90                      |
| 5200            | 36.0                | 32.4 ~ 39.6                      | 4.66                | 4.19 ~ 5.13                      |
| 5400            | 35.8                | 32.2 ~ 39.4                      | 4.86                | 4.37 ~ 5.35                      |
| 5600            | 35.5                | 32.0 ~ 39.1                      | 5.07                | 4.56 ~ 5.58                      |
| 5800            | 35.3                | 31.8 ~ 38.8                      | 5.27                | 4.74 ~ 5.80                      |
| 6000            | 35.1                | 31.6 ~ 38.6                      | 5.48                | 4.93 ~ 6.03                      |
| 6500            | 34.5                | 31.1 ~ 38.0                      | 6.07                | 5.46 ~ 6.68                      |
| 7000            | 33.9                | 30.5 ~ 37.3                      | 6.65                | 5.99 ~ 7.32                      |
| 7500            | 33.3                | 30.0 ~ 36.6                      | 7.24                | 6.52 ~ 7.96                      |
| 8000            | 32.7                | 29.4 ~ 36.0                      | 7.84                | 7.06 ~ 8.62                      |
| 8500            | 32.1                | 28.9 ~ 35.3                      | 8.46                | 7.61 ~ 9.31                      |
| 9000            | 31.6                | 28.4 ~ 34.8                      | 9.08                | 8.17 ~ 9.99                      |
| 9500            | 31.0                | 27.9 ~ 34.1                      | 9.71                | 8.74 ~ 10.68                     |
| 10000           | 30.4                | 27.4 ~ 33.4                      | 10.40               | 9.36 ~ 11.44                     |

### 5.3. SAR Test Procedures

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- [1] Power Reference measurement
- [2] Area Scan
- [3] Zoom Scan
- [4] Power Drift measurement

#### 5.3.1 Power Reference Measurement

The Power Reference measurement and Power Drift measurement are for monitoring the power drift of the DUT in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### 5.3.2 Area Scan Measurement

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEC/IEEE 62209-1528. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Following table provides the measurement parameters required for the area scan.

| Parameter                                                                                 | $f \leq 3 \text{ GHz}$                                                                   | $f > 3 \text{ GHz}$                                                                                                                        |
|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum distance from closest measurement point to phantom surface                        | $5 \pm 1 \text{ mm}$                                                                     | $\frac{1}{2}\delta \ln(2) \pm 0.5 \text{ mm}$                                                                                              |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | $30^\circ \pm 1^\circ$                                                                   | $20^\circ \pm 1^\circ$                                                                                                                     |
| Maximum area scan spatial resolution : $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$   | $\leq 2 \text{ GHz} : \leq 15 \text{ mm}$<br>$2 \sim 3 \text{ GHz} : \leq 12 \text{ mm}$ | $3 \sim 4 \text{ GHz} : \leq 12 \text{ mm}$<br>$4 \sim 6 \text{ GHz} : \leq 10 \text{ mm}$<br>$6 \sim 7 \text{ GHz} : \leq 7.5 \text{ mm}$ |

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks. Additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1.0 W/kg for 1.6 W/kg 1g SAR limit; or 1.26 W/kg for 2.0 W/kg 10g SAR limit).

### 5.3.3 Zoom Scan Measurement

The Zoom Scan are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

The Zoom Scan (three-dimensional SAR distribution) is performed at the local maxima locations identified in previous area scan procedure. The zoom scan volume must be larger than the required minimum dimensions. When graded grids are used, which only applies in the direction normal to the phantom surface, the initial grid separation closest to the phantom surface and subsequent graded grid increment ratios must satisfy the required protocols. The 1 g SAR averaging volume must be fully contained within the zoom scan measurement volume boundaries; otherwise, the measurement must be repeated by shifting or expanding the zoom scan volume. The similar requirements also apply to 10 g SAR measurements. Following table provides the measurement parameters required for the zoom scan.

| Parameter                                                                                 |                                            | $f \leq 3 \text{ GHz}$                                                                 | $f > 3 \text{ GHz}$                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------|--------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}$ , $\Delta y_{\text{Zoom}}$ |                                            | $\leq 2 \text{ GHz} : \leq 8 \text{ mm}$<br>$2 \sim 3 \text{ GHz} : \leq 5 \text{ mm}$ | $3 \sim 4 \text{ GHz} : \leq 5.0 \text{ mm}$<br>$4 \sim 6 \text{ GHz} : \leq 4.0 \text{ mm}$<br>$6 \sim 7 \text{ GHz} : \leq 3.4 \text{ mm}$                                                 |
| Maximum zoom scan spatial resolution, normal to phantom surface                           | uniform grid : $\Delta z_{\text{Zoom}}(n)$ | $\leq 5 \text{ mm}$                                                                    | $3 \sim 4 \text{ GHz} : \leq 4.0 \text{ mm}$<br>$4 \sim 5 \text{ GHz} : \leq 3.0 \text{ mm}$<br>$5 \sim 7 \text{ GHz} : \leq 2.0 \text{ mm}$                                                 |
|                                                                                           | graded grids : $\Delta z_{\text{Zoom}}(1)$ | $\leq 4 \text{ mm}$                                                                    | $3 \sim 4 \text{ GHz} : \leq 3.0 \text{ mm}$<br>$4 \sim 5 \text{ GHz} : \leq 2.5 \text{ mm}$<br>$5 \sim 6 \text{ GHz} : \leq 2.0 \text{ mm}$<br>$6 \sim 7 \text{ GHz} : \leq 1.7 \text{ mm}$ |
|                                                                                           | $\Delta z_{\text{Zoom}}(n>1)$              | $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$                                |                                                                                                                                                                                              |
| Minimum zoom scan volume (x, y, z)                                                        |                                            | $\geq 30 \text{ mm}$                                                                   | $3 \sim 4 \text{ GHz} : \geq 28 \text{ mm}$<br>$4 \sim 5 \text{ GHz} : \geq 25 \text{ mm}$<br>$5 \sim 7 \text{ GHz} : \geq 22 \text{ mm}$                                                    |

Per IEC 62209-2 AMD1, the successively higher resolution zoom scan is required if the zoom scan measured as defined above complies with both of the following criteria, or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed:

- [1] The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions ( $\Delta x$ ,  $\Delta y$ ). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance  $z_{M1}$ .
- [2] The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum SAR value shall be at least 30 %.

If one or both of the above criteria are not met, the zoom scan measurement shall be repeated using a finer resolution. New horizontal and vertical grid steps shall be determined from the measured SAR distribution so that the above criteria are met. Compliance with the above two criteria shall be demonstrated for the new measured zoom scan.

#### 5.3.4 Power Drift Measurement

The Power Drift measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift measurement gives the field difference in dB from the reading conducted within the last Power Reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Power Reference measurement. If the power drift more than 5 %, the SAR measurement will be retested.

#### 5.3.5 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1 g and 10 g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- [1] Extraction of the measured data (grid and values) from the Zoom Scan
- [2] Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- [3] Generation of a high-resolution mesh within the measured volume
- [4] Interpolation of all measured values from the measurement grid to the high-resolution grid
- [5] Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- [6] Calculation of the averaged SAR within masses of 1 g and 10 g

### 5.3.6 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1 % for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

### 5.3.7 Volume Scan Measurement

The volume scan is used for assessing overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing. When all volume scans were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 5.3.8 Absorbed Power Density Conversion

The Absorbed Power Density (APD) will be derived from the measured SAR values. According to SPEAG application note and DASY8 manual, the APD is evaluated numerically using the FDTD method of Sim4Life software and averaged over square surface areas of 1 cm<sup>2</sup> and 4 cm<sup>2</sup> in the lowermost voxel layer of a flat phantom at a frequency of 6.5 GHz. The phantom consists of a dielectric shell of 2 mm thickness and a relative permittivity 3.7.

#### 5.4. Incident Power Density Definition

The incident power density for an electromagnetic field represents the rate of energy transfer per unit area. The local power density (i.e., Poynting vector) at a given spatial point is deduced from electromagnetic fields by the following formula:

$$S = \frac{1}{2} \text{Re}\{E \times H^*\} \cdot \vec{n}$$

Where: E is the complex electric field peak phasor and H is the complex conjugate magnetic field peak phasor.

The spatial-average power density distribution on the evaluation surface is determined per the IEC TR 63170. The spatial area, A is specified by the applicable exposure limit or regulatory requirements. The circular shape was used.


$$S = \frac{1}{2A} \Re \left( \int E \times H^* \cdot \hat{n} dA \right)$$

#### 5.5. Incident Power Density Measurement Setup

The DASY8 system combines a sophisticated measurement system with a variety of probes (SAR, E- field, H-field, temperature, etc.) and a high-precision 6-axis robot positioner. The combination allows for completely automated measurement scans and evaluations with both field and position information, e.g., volume averages, peak search, and extrapolations. The main purpose is to perform near-field measurements of radiators of highly non-isotropic fields for which the exact measurement location is critical.

The special application area described in the system handbook is IPD measurement in the 6 GHz– 110 GHz frequency range.

##### SPEAG DASY8 Power Density Measurement System Setup

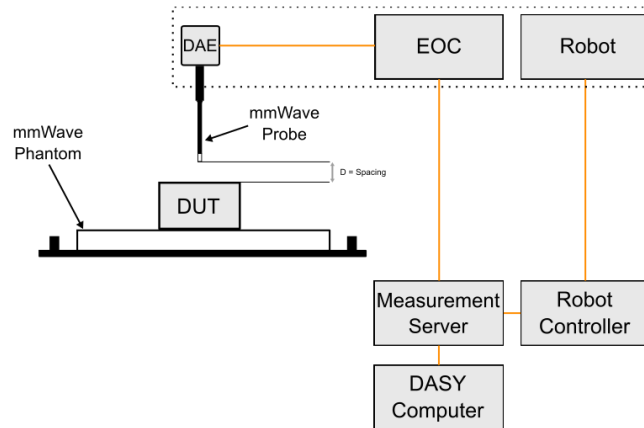

The DASY8 system for Incident Power Density measurements consists of:

- 6-axis robotic arm (Stäubli TX2-90XL) for positioning the probe.
- Mounting Platform for maintaining the phantoms at a fixed location relative to the robot.
- Measurement Server that handles all time-critical tasks, such as measurement data acquisition and supervision of safety features.
- Electrical to Optical Converter (EOC) for converting the optical signal from the DAE to electrical before being transmitted to the measurement server.
- Light Beam unit for probe alignment (measurement of the exact probe length and eccentricity).

- A millimeter Wave (mm-Wave) probe (EUmmWVx) for measuring the E-field magnitude. The polarization ellipses and the power density are then derived.
- A mm-Wave phantom used as the test bed.
- DAE that reads the probe voltages and transmits it to the DASY8 control PC.
- A mm-Wave Device Holder for positioning the DUT on top of the phantom.
- Control PC that runs the DASY8 software for defining / executing the measurements.
- System verification sources for system performance checks.

### 5.5.1 mm-Wave E-Field Probe

|                               |                                                                                                                                                                                                                     |                                                                                     |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>                  | EUmmWVx                                                                                                                                                                                                             |  |
| <b>Frequency</b>              | 750 MHz to 110 GHz                                                                                                                                                                                                  |                                                                                     |
| <b>Dynamic Range</b>          | < 20 V/m ~ 10000 V/m with PRE-10 (min < 20 V/m ~ 2000 V/m)                                                                                                                                                          |                                                                                     |
| <b>Linearity</b>              | < ±0.2 dB                                                                                                                                                                                                           |                                                                                     |
| <b>Hemispherical Isotropy</b> | < 0.5 dB                                                                                                                                                                                                            |                                                                                     |
| <b>Position Precision</b>     | < 0.2 mm                                                                                                                                                                                                            |                                                                                     |
| <b>Dimensions</b>             | Overall length: 320 mm (tip: 20 mm)<br>Tip diameter: encapsulation 8 mm (internal sensor < 1 mm)<br>Distance from probe tip to dipole centers: < 2 mm<br>Sensor displacement to probe's calibration point: < 0.3 mm |                                                                                     |


The EUmmWVx probe is an electric (E) universal (U) field probe with two dipole sensors for field measurements at frequencies up to 110 GHz and as close as 2 mm from any field source or transmitter. The sensors consist of two diode-loaded small dipoles that provide the rectified voltage from the coupled E-field. From the voltages at three different orientations in the field at known angles, both the magnitude of the field component and the field polarization can be calculated. Due to the small size of the sensors, the probe can be used for measurements over an extremely wide frequency range from 750 MHz to 110 GHz. The probe sensors are protected by non-removable 8 mm high-density foam.

The EUmmWVx probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. This probe concept also has the advantage that the sensor angle errors or distortions of the field by the substrate can be largely nullified by calibration. This is particularly important as, at these very high frequencies, field distortions by the substrate are dependent on the wavelength. The design entails two small 0.8 mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9 mm wide and 0.12 mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields.

The probe consists of two sensors with different angles arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. These probes are the most flexible and accurate probes currently available for measuring field amplitude.


The probe design allows measurements at distances as small as 2 mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated.

### Illustration of the Distance Sensor to the DUT Surface

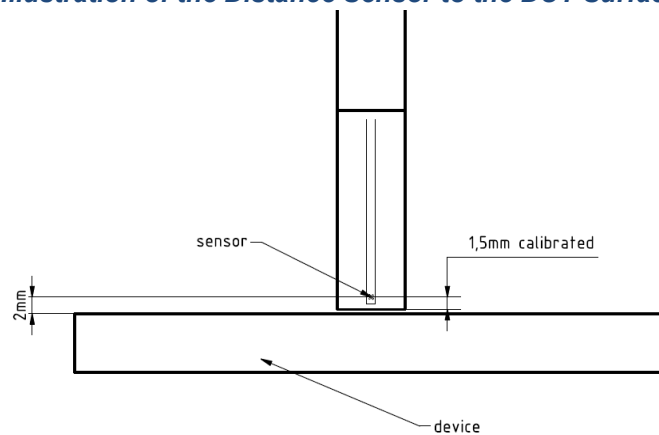

### 5.5.2 System Verification Sources

|                             |                                                                                                     |                                                                                      |
|-----------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>                | System Verification for X-band                                                                      |  |
| <b>Calibrated Frequency</b> | 10 GHz                                                                                              |                                                                                      |
| <b>E-field Polarization</b> | Linear                                                                                              |                                                                                      |
| <b>Max Input Power</b>      | 20 W                                                                                                |                                                                                      |
| <b>Connector</b>            | SMA                                                                                                 |                                                                                      |
| <b>Operation</b>            | requires a stable source with known forward power to perform system performance check or validation |                                                                                      |
| <b>Weight</b>               | 700 g                                                                                               |                                                                                      |

|                             |                                                 |                                                                                       |
|-----------------------------|-------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>                | System Verification for Ka-band, V-band, W-band |  |
| <b>Calibrated Frequency</b> | 30 GHz, 60 GHz                                  |                                                                                       |
| <b>Frequency Accuracy</b>   | ±100 MHz                                        |                                                                                       |
| <b>Harmonics</b>            | -20 dBc                                         |                                                                                       |
| <b>Total Radiated Power</b> | 14 dBm for 30 GHz, 20 dBm for 60 GHz            |                                                                                       |
| <b>Power Stability</b>      | 0.05 dB for 30 GHz, 0.1 dB for 60 GHz           |                                                                                       |
| <b>Dimensions</b>           | 100 x 100 x 100 mm                              |                                                                                       |


## 5.6. Incident Power Density Measurement Procedure

Within a short distance from the transmitting source, power density is determined based on both electric and magnetic fields. Generally, the magnitude and phase of two components of either the E-field or H-field are needed on a sufficiently large surface to fully characterize the total E-field and H-field distributions. Nevertheless, solutions based on direct measurement of E-field and H-field can be used to compute power density. When the measurement surface does not correspond to the evaluation surface, reconstruction algorithms are necessary to project or transform the fields from the measurement surface to the evaluation surface. The general measurement approach is summarized in following:

- [1] Measure the E-field on the measurement surface at a reference location where the field is well above the noise level. This reference level will be used at the end of this procedure to assess output power drift of the DUT during the measurement.
- [2] Scan the electric field on the measurement surface. The requirements of measurement surface dimensions and spatial resolution are dependent on the measurement system and assessment methodology applied. Measurements are therefore conducted according to the instructions provided by the measurement system manufacturer.
- [3] Measurement spatial resolution can depend on the measured field characteristic and measurement methodology used by the system. Planar scanners typically require a step size of less than  $\lambda/2$ . When measurements are acquired in regions where evanescent modes are not negligible, smaller spatial resolution may be required. Similar criteria also apply to cylindrical scanning systems where the spatial resolution in the vertical direction should be less than  $\lambda/2$ .
- [4] Since only E-field is measured on the measurement system, the H-field is calculated from the measured field using a reconstruction algorithm. As power density requires knowledge of both amplitude and phase, reconstruction algorithms can also be used to obtain field information from the measured data (e.g., the phase from the amplitude if only the amplitude is measured). The measurement involves two planes with three different probe rotations on two measurement planes separated by  $\lambda/4$ . The grid steps are optimized by the software based on the test frequency. The location of the lowest measurement plane is defined by the distance of first measurement layer from device under test entered by the user. In addition, when the measurement surface does not correspond to the evaluation surface, reconstruction algorithms are employed to project or transform the fields from the measurement surface to the evaluation surface. In substance, reconstruction algorithms are the set of algorithms, mathematical techniques and procedures that are applied to the measured field on the measurement surface to determine E- and H-field (amplitude and phase) on the evaluation surface.
- [5] To determine the spatial-average power density distribution on the evaluation surface. The spatial averaging area, A, is specified by the applicable exposure limits or regulatory requirements. If the shape of the area is not provided by the relevant regulatory requirements, a circular shape is recommended.
- [6] Measure the E-field on the measurement surface position at the reference location chosen in step [1]. The power drift of the DUT is estimated as the difference between the squared amplitude of the field values taken in steps [1] and [6]. When the drift is smaller than  $\pm 5\%$ , this term should be considered in the uncertainty budget. Drifts larger than  $5\%$  due to the design and operating characteristics of the device should be accounted for or addressed according to regulatory requirements to determine compliance.

### 5.6.1 Computation of the Electric Field Polarization Ellipse

For the numerical description of an arbitrarily oriented ellipse in three-dimensional space, five parameters are needed: the semi-major axis ( $a$ ), the semi-minor axis ( $b$ ), two angles describing the orientation of the normal vector of the ellipse ( $\Phi$ ,  $\theta$ ), and one angle describing the tilt of the semi-major axis ( $\psi$ ). For the two extreme cases, i.e., circular and linear polarizations, only three parameters ( $a$ ,  $\Phi$ , and  $\theta$ ) are sufficient for the description of the incident field.

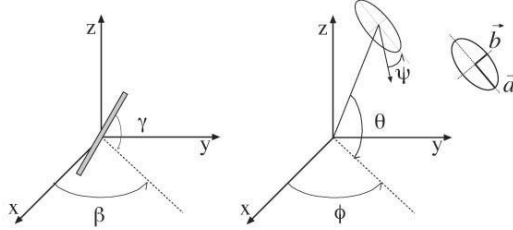

For the reconstruction of the ellipse parameters from measured data, the problem can be reformulated as a nonlinear search problem. The semi-major and semi-minor axes of an elliptical field can be expressed as functions of the three angles ( $\Phi$ ,  $\theta$ , and  $\psi$ ). The parameters can be uniquely determined to minimize the error based on least-squares for the given set of angles and the measured data. In this way, the number of free parameters is reduced from five to three, which means that at least three sensor readings are necessary to gain sufficient information for the reconstruction of the ellipse parameters. However, to suppress the noise and increase the reconstruction accuracy, it is desirable to overdetermine the system of equations. The solution to use a probe consisting of two sensors angled by  $\gamma_1$  and  $\gamma_2$  toward the probe axis and to perform measurements at three angular positions of the probe, i.e., at  $\beta_1$ ,  $\beta_2$ , and  $\beta_3$ , results in overdeterminations by a factor of two. If more information or increased accuracy is required, more rotation angles can be added.

The reconstruction of the ellipse parameters can be separated into linear and non-linear parts that are best solved by the Givens algorithm combined with a downhill simplex algorithm. To minimize the mutual coupling, sensor angles are set with a shift of  $90^\circ$  ( $\gamma_2 = \gamma_1 + 90^\circ$ ), and, for simplification, the first rotation angle of the probe ( $\beta_1$ ) can be set to  $0^\circ$ .

### 5.6.2 Total Field and Power Flux Density Reconstruction

#### **Plane-to-Plane Phase Reconstruction (PTP-PR)**

Computation of the IPD in general requires knowledge of the electric (E-) and magnetic (H-) field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations.

The Plane-to-Plane Phase Reconstruction (PTP-PR) reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUmmWVx probe. This reconstruction algorithm, together with the ability of the probe to measure extremely close to the source without perturbing the field, permits reconstruction of the E- and H-fields and the IPD on measurement planes located as near as  $\lambda/2\pi$ . At closer distances, the uncertainty might be larger.

#### **Equivalent Source Reconstruction (ESR) (Recommended)**

In order to overcome the main limitations of PTP-PR at distances  $d \leq \lambda/2\pi$  from the DUT, i.e., in the reactive near-field and beyond planar evaluation surfaces, SPEAG have joined forces in a research collaboration to develop a novel equivalent source reconstruction (ESR) algorithm, that models an unknown and inaccessible transmitter not anymore in terms of plane waves but as a set of distributed known auxiliary sources below the surface of the device enclosure. The locations, amplitudes, and phases of these sources are then determined to reconstruct the measured near-fields optimally. As a result, the transmitters inside any enclosure can be replaced with these equivalent sources in any radiation problem, including exposure assessment scenarios. ESR even enables back transformation within a limited range.

This approach has three main advantages:

- Lower reconstruction errors in the reactive near-field regions, which ease compliance testing of DUT operating in the 6 ~ 24 GHz frequency range.
- Evaluation of phones with non-planar surfaces, e.g., a flat surface with a protruding camera module.
- Possibility to perform phase reconstruction in any parts of the radiation region without any limitation to planar measurement domains. In other words, measurements can be done on a conformal surface or even on scattered points in the radiation domain and still obtain reliable data on the phase variations. This opens the way for evaluations on non-planar device surfaces (e.g., virtual- reality goggles) and enables full-wave simulations using measurement results only, i.e., without requiring models for the transmitters.

### 5.6.3 Power Flux Density Averaging

The average of the reconstructed power density is evaluated on the measurement plane. Two averaging geometries are available: a circle and a rotating square. The averaging area is defined by the user; typical values are 1 cm<sup>2</sup> and 4 cm<sup>2</sup>. The three variants of the spatial-average Power Density (sPD) defined in the IEC 63195 standard are computed by integration of the Poynting vector:

- sPDn+ : Surface normal propagating power flux density into the phantom.
- sPDtot+ : Total propagating power flux density into the phantom.
- sPDmod+ : Total power flux density into the phantom considering near-field exposure.

## 6. System Verification

### 6.1. SAR Tissue Simulating Liquid Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18 °C to 25 °C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18 °C to 25 °C and within  $\pm 2$  °C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 ~ 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.


The dielectric constant ( $\epsilon_r$ ) and conductivity ( $\sigma$ ) of typical tissue-equivalent media recipes are expected to be within  $\pm 5$  % of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for  $\epsilon_r$  and  $\sigma$  can be relaxed to  $\pm 10$  %.

| Frequency (MHz) | Ambient Temp. (°C) | Tissue Temp. (°C) | Permittivity ( $\epsilon_r$ ) | Conductivity ( $\sigma$ ) | Targeted Permittivity ( $\epsilon_r$ ) | Targeted Conductivity ( $\sigma$ ) | Deviation Permittivity ( $\epsilon_r$ ) (%) | Deviation Conductivity ( $\sigma$ ) (%) | Date          |
|-----------------|--------------------|-------------------|-------------------------------|---------------------------|----------------------------------------|------------------------------------|---------------------------------------------|-----------------------------------------|---------------|
| 2450            | 22.9               | 22.3              | 38.5                          | 1.80                      | 39.2                                   | 1.8                                | -1.79                                       | 0.00                                    | Sep. 10, 2024 |
| 5250            | 22.6               | 22.1              | 35.7                          | 4.63                      | 35.9                                   | 4.71                               | -0.56                                       | -1.70                                   | Sep. 09, 2024 |
| 5600            | 22.6               | 22.1              | 35.1                          | 5.02                      | 35.5                                   | 5.07                               | -1.13                                       | -0.99                                   | Sep. 09, 2024 |
| 5800            | 22.6               | 22.1              | 34.8                          | 5.26                      | 35.3                                   | 5.27                               | -1.42                                       | -0.19                                   | Sep. 09, 2024 |
| 6500            | 22.9               | 22.3              | 32.9                          | 5.74                      | 34.5                                   | 6.07                               | -4.64                                       | -5.44                                   | Sep. 10, 2024 |

## 6.2. SAR Test System Verification

The SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium.

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. For frequency  $\leq 6$  GHz, the SPEAG Powersource1 is used as signal source. For frequency  $> 6$  GHz, the signal generator is used as signal source. The Powersource1 is a portable and very stable RF source providing a continuous wave (CW) signal. It is designed for conducting system checks and system validation and is compatible with international standards, and has been calibrated by SPEAG's ISO 17025 accredited calibration center. When using Powersource1, the setup can be simplified. The signal purity is warranted by design. Since the Powersource1 is calibrated, no additional equipment is needed and the Powersource1 can directly be connected to the SMA connector of the dipole without a cable as all separate components (signal generator, amplifier, coupler and power meter) are built into the unit. The system verification setup is shown as below.

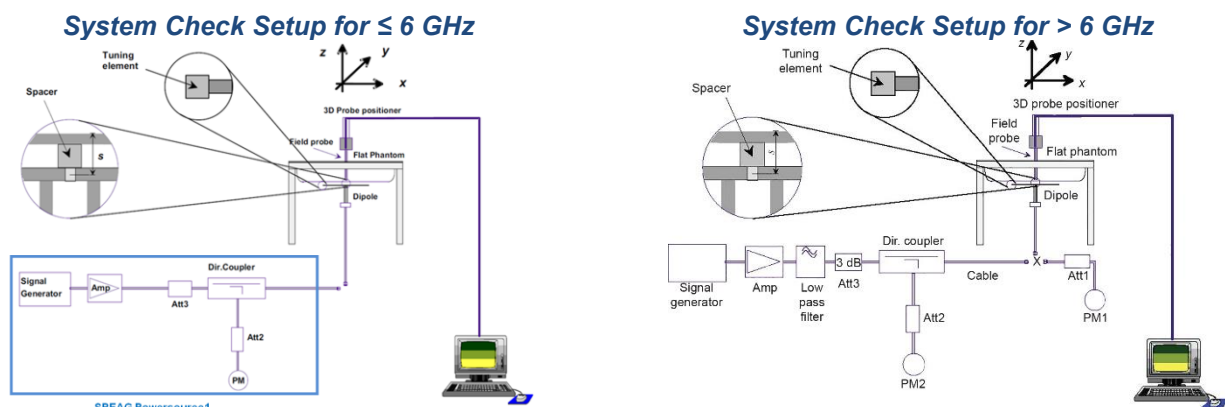

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touched the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. Before the system check testing, the Powersource1 will be adjusted for the desired forward power of 17 dBm (50 mW) or the signal generator will be adjusted for desired forward power of 20 dBm (100 mW) at the dipole connector and the RF output power would be turned on. After system check testing, the SAR result will be normalized to 1 W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

| Date          | Frequency (MHz) | Targeted 1g SAR (W/kg) | Measured 1g SAR (W/kg) | Normalized 1g SAR (W/kg) | Deviation (%) | Targeted 10g SAR (W/kg) | Measured 10g SAR (W/kg) | Normalized 10g SAR (W/kg) | Deviation (%) | Dipole S/N | Probe S/N | DAE S/N | Output Power (dBm) |
|---------------|-----------------|------------------------|------------------------|--------------------------|---------------|-------------------------|-------------------------|---------------------------|---------------|------------|-----------|---------|--------------------|
| Sep. 10, 2024 | 2450            | 53.2                   | 2.59                   | 51.68                    | -2.86         | 24.9                    | 1.23                    | 24.54                     | -1.44         | 1087       | 7650      | 1741    | 17                 |
| Sep. 09, 2024 | 5250            | 79.2                   | 3.84                   | 76.62                    | -3.26         | 22.6                    | 1.11                    | 22.15                     | -2.00         | 1358       | 7650      | 1741    | 17                 |
| Sep. 09, 2024 | 5600            | 82.1                   | 4.35                   | 86.79                    | 5.72          | 23.4                    | 1.25                    | 24.94                     | 6.58          | 1358       | 7650      | 1741    | 17                 |
| Sep. 09, 2024 | 5800            | 79.4                   | 3.68                   | 73.43                    | -7.52         | 22.5                    | 1.09                    | 21.75                     | -3.34         | 1358       | 7650      | 1741    | 17                 |

| Date          | Frequency (MHz) | Targeted 1g SAR (W/kg) | Measured 1g SAR (W/kg) | Normalized 1g SAR (W/kg) | Deviation (%) | Targeted 8g SAR (W/kg) | Measured 8g SAR (W/kg) | Normalized 8g SAR (W/kg) | Deviation (%) | Targeted 10g SAR (W/kg) | Measured 10g SAR (W/kg) | Normalized 10g SAR (W/kg) | Deviation (%) | Targeted APD 4 cm <sup>2</sup> (W/kg) | Measured APD 4 cm <sup>2</sup> (W/kg) | Normalized APD 4 cm <sup>2</sup> (W/kg) | Deviation (%) | Dipole S/N | Probe S/N | DAE S/N | Output Power (dBm) |
|---------------|-----------------|------------------------|------------------------|--------------------------|---------------|------------------------|------------------------|--------------------------|---------------|-------------------------|-------------------------|---------------------------|---------------|---------------------------------------|---------------------------------------|-----------------------------------------|---------------|------------|-----------|---------|--------------------|
| Sep. 10, 2024 | 6500            | 288                    | 26.5                   | 265.00                   | -7.99         | 65                     | 6.05                   | 60.50                    | -6.92         | 53.2                    | 4.93                    | 49.30                     | -7.33         | 1300                                  | 125                                   | 1250.00                                 | -3.85         | 1081       | 7650      | 1741    | 17                 |

### 6.3. IPD Test System Verification


The system was verified to be within  $\pm 0.66$  dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mm-Wave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The system check provides a fast and reliable method to routinely verify that the measurement system is operational with no system component failures, including probe defects, drifts or deviation from target performance requirements. A system check also verifies the repeatability of the measurement system before compliance testing.


The measurement of a verification source is started from 5G probe installed and the phantom taught. The verification source is placed on the 5G phantom. Due to the internal distance from the horn to the outer surface of the verification source, the measurement distance set in the software should be offset by -4.45 mm; e.g., for measurement of the verification source at 10 mm, the measurement distance set in the software should be 5.55 mm (10 mm - 4.45 mm).

The system check is a complete measurement using simple well-defined reference sources. Per the DASY8 specification in the user's manual and SPEAG's recommendation, the deviation threshold of  $\pm 0.66$  dB represents the expanded standard uncertainty for system performance check. The system check is successful if the measured results are within  $\pm 0.66$  dB tolerances to the target value shown in the calibration certificate of the verification source. The instrumentation and procedures used for system check should ensure the system is ready for performing compliance tests.

**System Check Setup for 10 GHz**

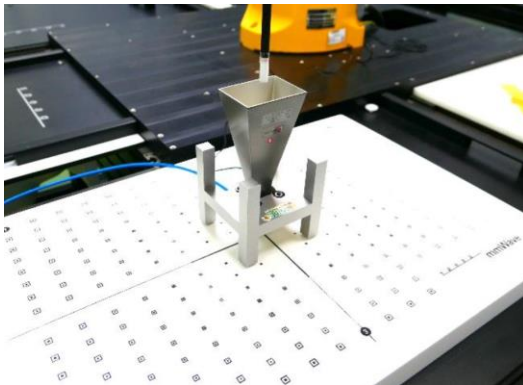

**System Check Setup for 30 / 60 GHz**

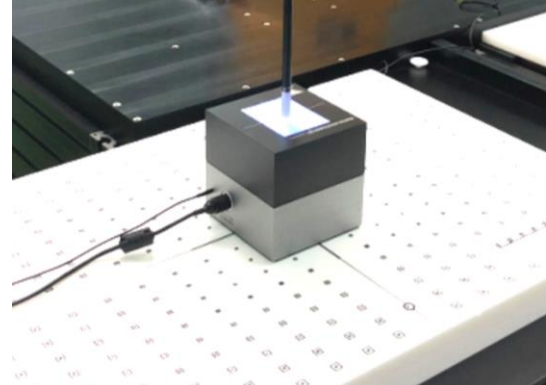

**Settings for the Measurement of Verification Sources**

| Frequency (GHz) | Grid Step             | Grid Extent X/Y (mm) | Measurement Points |
|-----------------|-----------------------|----------------------|--------------------|
| 10              | 0.125 ( $\lambda/8$ ) | 60 / 60              | 18 x 18            |
| 30              | 0.25 ( $\lambda/4$ )  | 60 / 60              | 26 x 26            |
| 60              | 0.25 ( $\lambda/4$ )  | 32.5 / 32.5          | 28 x 28            |


| Date          | Frequency (MHz) | Normal psPD (4 cm <sup>2</sup> , W/m <sup>2</sup> ) |          |                        | Total psPD (4 cm <sup>2</sup> , W/m <sup>2</sup> ) |          |                        | Note       |           |         |                    |
|---------------|-----------------|-----------------------------------------------------|----------|------------------------|----------------------------------------------------|----------|------------------------|------------|-----------|---------|--------------------|
|               |                 | Measured                                            | Targeted | Delta ( $\pm 0.66$ dB) | Measured                                           | Targeted | Delta ( $\pm 0.66$ dB) | Dipole S/N | Probe S/N | DAE S/N | Output Power (dBm) |
| Sep. 10, 2024 | 10G             | 171                                                 | 178      | -0.17                  | 172                                                | 178      | -0.15                  | 2003       | 9403      | 1742    | 20                 |
| Sep. 11, 2024 | 10G             | 169                                                 | 178      | -0.23                  | 170                                                | 178      | -0.2                   | 2003       | 9403      | 1742    | 20                 |

## 7. Test Configurations

### 7.1. Description of Test Position


#### 7.1.1 Body Exposure Conditions

Per KDB Publication 616217 D04, SAR evaluation for laptop PC is required for the bottom surface of the keyboard. This DUT was tested in the base of DUT directly against the flat phantom. The required minimum test separation distance for incorporating transmitters and antennas into laptop computer display is determined with the display screen opened at an angle of 90° to the keyboard compartment.

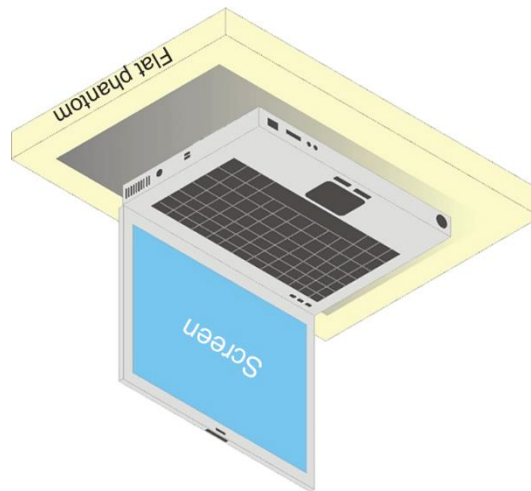

For full-size tablet, according to KDB Publication 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

#### *Illustration for Full-size Tablet Setup*

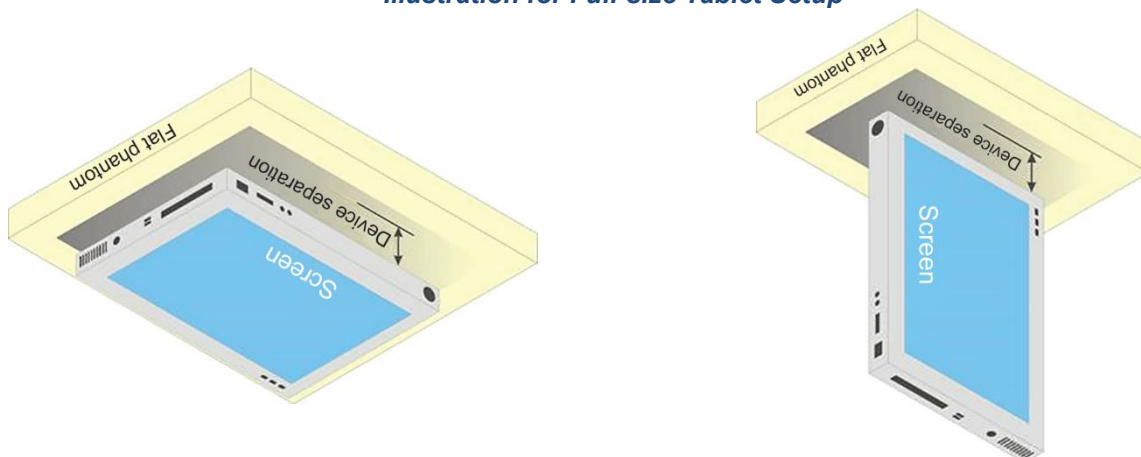

## 7.2. Standalone SAR Test Exclusion Considerations

According to KDB 447498 D04, SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time-averaged power or maximum time-averaged ERP, whichever is greater. If the ERP of a device is not easily determined, such as for a portable device with a small form factor, the applicant may use the available maximum time-averaged power exclusively if the device antenna or radiating structure does not exceed an electrical length of  $\lambda/4$ . As for devices with antennas of length greater than  $\lambda/4$  where the gain is not well defined, but always less than that of a half-wave dipole (length  $\lambda/2$ ), the available maximum time-averaged power generated by the device may be used in place of the maximum time-averaged ERP, where that value is not known. The separation distance is the smallest distance from any part of the antenna or radiating structure for all persons, during operation at the applicable ERP. In the case of mobile or portable devices, the separation distance is from the outer housing of the device where it is closest to the antenna. The SAR-based exemption formula of § 1.1307(b)(3)(i)(B), repeated here as Formula (B.2), applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold  $P_{th}$  (mW). This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive).  $P_{th}$  is given by Formula (B.2).

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B. 1})$$

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}}(d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B. 2})$$

where

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and  $f$  is in GHz,  $d$  is the separation distance (cm), and  $ERP_{20 \text{ cm}}$  is per Formula (B.1).

Finally, when 10-g extremity SAR applies, SAR test exemption may be considered by applying a factor of 2.5 to the SAR-based exemption thresholds.

### <1g SAR>

| Ant. Used         | Band                 | Body SAR test reduction |            |       |          |       |                               |           |            |          |             | SAR Test Exclusion Threshold Pth (mW) |           |            |          |             |
|-------------------|----------------------|-------------------------|------------|-------|----------|-------|-------------------------------|-----------|------------|----------|-------------|---------------------------------------|-----------|------------|----------|-------------|
|                   |                      | Frequency               | Tune-Power |       | Ant Gain | ERP   | Distance of Ant. To User (mm) |           |            |          |             |                                       |           |            |          |             |
|                   |                      | (GHz)                   | (dBm)      | (mW)  | (dBi)    | (mW)  | Bottom of laptop              | Left Side | Right Side | Top Side | Bottom Side | Bottom of laptop                      | Left Side | Right Side | Top Side | Bottom Side |
| Bluetooth Antenna | BT                   | 2.480                   | 15         | 31.62 | 2.72     | 36.06 | 7.13                          | 206.36    | 72.16      | 219.6    | 209.3       | 5                                     | 3060      | 439        | 3060     | 3060        |
| WLAN Antenna      | 2.4 GHz WLAN Ant 1   | 2.462                   | 15         | 31.62 | 2.63     | 35.32 | 7.13                          | 22.41     | 255.91     | 400      | 5           | MEASURE                               | EXEMPT    | EXEMPT     | EXEMPT   | EXEMPT      |
|                   | 2.4 GHz WLAN Ant 2   | 2.462                   | 15         | 31.62 | 2.72     | 36.06 | 7.13                          | 206.36    | 72.16      | 219.6    | 209.3       | 5                                     | 3060      | 440        | 3060     | 3060        |
|                   | 2.4 GHz WLAN Ant 1+2 | 2.462                   | 18         | 63.10 | 2.72     | 71.95 | 7.13                          | 22.41     | 72.16      | 219.6    | 5           | MEASURE                               | EXEMPT    | EXEMPT     | EXEMPT   | EXEMPT      |
|                   | 5 GHz WLAN Ant 1     | 5.825                   | 13.5       | 22.39 | 3.65     | 31.62 | 7.13                          | 22.41     | 255.91     | 400      | 5           | MEASURE                               | MEASURE   | EXEMPT     | EXEMPT   | MEASURE     |
|                   | 5 GHz WLAN Ant 2     | 5.825                   | 12.5       | 17.78 | 3.97     | 27.04 | 7.13                          | 206.36    | 72.16      | 219.6    | 209.3       | 3                                     | 3060      | 363        | 3060     | 3060        |
|                   | 5 GHz WLAN Ant 1+2   | 5.825                   | 16         | 40.00 | 3.97     | 60.53 | 7.13                          | 22.41     | 72.16      | 219.6    | 5           | MEASURE                               | EXEMPT    | EXEMPT     | EXEMPT   | EXEMPT      |

### Note:

1. The determination of exemption is based on §1.1307(b)(3)(i)(B).
2. If the output power is more than the power threshold then SAR testing is required.
3. The highest frequency and power were used in order to evaluate conservatively.
4. When an Antenna qualifies for the standalone SAR test exclusion and also transmits simultaneously with other Antennas, the standalone SAR value must be estimated in accordance with KDB 447498.
5. The string "MEASURE" represents that SAR test is required; the string "EXEMPT" represents that SAR test exclusion can be applied. The SAR tests were performed including the exemption part in practice.

### 7.3. FCC General Test Procedures

#### 7.3.1 Measured and Reported SAR

Per KDB Publication 447498 D01, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB Publication 690783 D01.

#### 7.3.2 Measurement Condition for Wi-Fi

##### **General Considerations**

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. Various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 ~ 96 % is typically achievable in most test mode configurations. A minimum transmission duty factor of 85 % is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB Publication 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

##### **2.4 GHz Band**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### **U-NII-1 and U-NII-2A Bands**

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### **U-NII-2C and U-NII-3 Bands**

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 ~ 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 ~ 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### **Initial Test Position SAR Test Reduction Procedure**

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are tested. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### **OFDM Transmission Mode SAR Test and Channel Selection**

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power is the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

### **Initial Test Configuration Procedure**

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### **Subsequent Test Configuration Procedure**

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### **MIMO SAR considerations**

Per KDB Publication 248227 D01, the simultaneous SAR provisions in KDB Publication 447498 D01 should be applied to determine simultaneous transmission SAR test exclusion for Wi-Fi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$  W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### **SAR Test Exclusion for IEEE 802.11ax**

To make the most efficient use of the additional available subcarriers (data tones), IEEE 802.11ax can utilize Orthogonal Frequency-Division Multiple Access (OFDMA) which divides the existing 802.11 channels into smaller subchannels called Resource Units (RUs). Possible RU sizes are: 26T, 52T, 106T, 242T, 484T, 996T and 996Tx2.

Per FCC Guidance, 802.11ax was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 D01 for OFDM mode selection. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values. Per FCC Guidance, maximum conducted powers were performed for each RU size to demonstrate that the output powers would not be higher than the other OFDM 802.11 modes.

When SAR testing for 802.11ax is required, the following procedures are applied to measure the SAR.

- If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power.
- Otherwise, consider the fully allocated channel for SAR testing.
- When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel.

## 8. RF Output Power Specification and Measurement

### 8.1. Nominal and Maximum Output Power Specifications

| WLAN 2.4 GHz MAX Tune-up Power |         |           |             |             |             |
|--------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                           | Channel | Frequency | ANT 1       | ANT 2       | ANT 1+2     |
|                                |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11b                        | 1       | 2412      | 15.00       | 15.00       | ---         |
|                                | 6       | 2437      | 15.00       | 15.00       | ---         |
|                                | 11      | 2462      | 15.00       | 15.00       | ---         |
|                                | 12      | 2467      | 15.00       | 15.00       | ---         |
|                                | 13      | 2472      | 15.00       | 13.75       | ---         |
| 802.11g                        | 1       | 2412      | 15.00       | 15.00       | ---         |
|                                | 6       | 2437      | 15.00       | 15.00       | ---         |
|                                | 11      | 2462      | 15.00       | 15.00       | ---         |
|                                | 12      | 2467      | 15.00       | 15.00       | ---         |
|                                | 13      | 2472      | 15.00       | 13.75       | ---         |
| 802.11n HT20                   | 1       | 2412      | 15.00       | 15.00       | 18.00       |
|                                | 6       | 2437      | 15.00       | 15.00       | 18.00       |
|                                | 11      | 2462      | 15.00       | 15.00       | 18.00       |
|                                | 12      | 2467      | 15.00       | 15.00       | 18.00       |
|                                | 13      | 2472      | 15.00       | 13.75       | 16.875      |
| 802.11n HT40                   | 3       | 2422      | 15.00       | 15.00       | 18.00       |
|                                | 6       | 2437      | 15.00       | 15.00       | 18.00       |
|                                | 9       | 2452      | 15.00       | 15.00       | 18.00       |
|                                | 10      | 2457      | 15.00       | 15.00       | 16.875      |
|                                | 11      | 2462      | 15.00       | 14.50       | 17.00       |
| 802.11ax HE20                  | 1       | 2412      | 15.00       | 15.00       | 18.000      |
|                                | 6       | 2437      | 15.00       | 15.00       | 18.00       |
|                                | 11      | 2462      | 15.00       | 15.00       | 18.00       |
|                                | 12      | 2467      | 15.00       | 15.00       | 17.875      |
|                                | 13      | 2472      | 14.75       | 14.00       | 16.125      |
| 802.11ax HE40                  | 3       | 2422      | 15.00       | 15.00       | 18.00       |
|                                | 6       | 2437      | 15.00       | 15.00       | 18.00       |
|                                | 9       | 2452      | 15.00       | 15.00       | 18.00       |
|                                | 10      | 2457      | 15.00       | 15.00       | 18.00       |
|                                | 11      | 2462      | 15.00       | 14.25       | 17.125      |
| 802.11be EHT20                 | 1       | 2412      | 15.00       | 15.00       | 18.000      |
|                                | 6       | 2437      | 15.00       | 15.00       | 18.00       |
|                                | 11      | 2462      | 15.00       | 15.00       | 18.00       |
|                                | 12      | 2467      | 15.00       | 15.00       | 17.875      |
|                                | 13      | 2472      | 14.75       | 14.00       | 16.125      |
| 802.11be EHT40                 | 3       | 2422      | 15.00       | 15.00       | 18.00       |
|                                | 6       | 2437      | 15.00       | 15.00       | 18.00       |
|                                | 9       | 2452      | 15.00       | 15.00       | 18.00       |
|                                | 10      | 2457      | 15.00       | 15.00       | 18.00       |
|                                | 11      | 2462      | 15.00       | 14.25       | 17.125      |

| WLAN 5.2 GHz MAX Tune-up Power |         |           |             |             |             |
|--------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                           | Channel | Frequency | ANT 1       | ANT 2       | ANT 1+2     |
|                                |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11a                        | 36      | 5180      | 13.50       | 12.50       | ---         |
|                                | 40      | 5200      | 13.50       | 12.50       | ---         |
|                                | 44      | 5220      | 13.50       | 12.50       | ---         |
|                                | 48      | 5240      | 13.50       | 12.50       | ---         |
| 802.11n HT20                   | 36      | 5180      | 13.50       | 12.50       | 16.00       |
|                                | 40      | 5200      | 13.50       | 12.50       | 16.00       |
|                                | 44      | 5220      | 13.50       | 12.50       | 16.00       |
|                                | 48      | 5240      | 13.50       | 12.50       | 16.00       |
| 802.11n HT40                   | 38      | 5190      | 13.50       | 12.50       | 16.00       |
|                                | 46      | 5230      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT20                 | 36      | 5180      | 13.50       | 12.50       | 16.00       |
|                                | 40      | 5200      | 13.50       | 12.50       | 16.00       |
|                                | 44      | 5220      | 13.50       | 12.50       | 16.00       |
|                                | 48      | 5240      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT40                 | 38      | 5190      | 13.50       | 12.50       | 16.00       |
|                                | 46      | 5230      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT80                 | 42      | 5210      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE20                  | 36      | 5180      | 13.50       | 12.50       | 16.00       |
|                                | 40      | 5200      | 13.50       | 12.50       | 16.00       |
|                                | 44      | 5220      | 13.50       | 12.50       | 16.00       |
|                                | 48      | 5240      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE40                  | 38      | 5190      | 13.50       | 12.50       | 16.00       |
|                                | 46      | 5230      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE80                  | 42      | 5210      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT20                 | 36      | 5180      | 13.50       | 12.50       | 16.00       |
|                                | 40      | 5200      | 13.50       | 12.50       | 16.00       |
|                                | 44      | 5220      | 13.50       | 12.50       | 16.00       |
|                                | 48      | 5240      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT40                 | 38      | 5190      | 13.50       | 12.50       | 16.00       |
|                                | 46      | 5230      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT80                 | 42      | 5210      | 13.50       | 12.50       | 16.00       |

| WLAN 5.3 GHz MAX Tune-up Power |         |           |             |             |             |
|--------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                           | Channel | Frequency | ANT 1       | ANT 2       | ANT 1+2     |
|                                |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11a                        | 52      | 5260      | 13.50       | 12.50       | ---         |
|                                | 56      | 5280      | 13.50       | 12.50       | ---         |
|                                | 60      | 5300      | 13.50       | 12.50       | ---         |
|                                | 64      | 5320      | 13.50       | 12.50       | ---         |
| 802.11n HT20                   | 52      | 5260      | 13.50       | 12.50       | 16.00       |
|                                | 56      | 5280      | 13.50       | 12.50       | 16.00       |
|                                | 60      | 5300      | 13.50       | 12.50       | 16.00       |
|                                | 64      | 5320      | 13.50       | 12.50       | 16.00       |
| 802.11n HT40                   | 54      | 5270      | 13.50       | 12.50       | 16.00       |
|                                | 62      | 5310      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT20                 | 52      | 5260      | 13.50       | 12.50       | 16.00       |
|                                | 56      | 5280      | 13.50       | 12.50       | 16.00       |
|                                | 60      | 5300      | 13.50       | 12.50       | 16.00       |
|                                | 64      | 5320      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT40                 | 54      | 5270      | 13.50       | 12.50       | 16.00       |
|                                | 62      | 5310      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT80                 | 58      | 5290      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT160                | 50      | 5250      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE20                  | 52      | 5260      | 13.50       | 12.50       | 16.00       |
|                                | 56      | 5280      | 13.50       | 12.50       | 16.00       |
|                                | 60      | 5300      | 13.50       | 12.50       | 16.00       |
|                                | 64      | 5320      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE40                  | 54      | 5270      | 13.50       | 12.50       | 16.00       |
|                                | 62      | 5310      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE80                  | 58      | 5290      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE160                 | 50      | 5250      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT20                 | 52      | 5260      | 13.50       | 12.50       | 16.00       |
|                                | 56      | 5280      | 13.50       | 12.50       | 16.00       |
|                                | 60      | 5300      | 13.50       | 12.50       | 16.00       |
|                                | 64      | 5320      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT40                 | 54      | 5270      | 13.50       | 12.50       | 16.00       |
|                                | 62      | 5310      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT80                 | 58      | 5290      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT160                | 50      | 5250      | 13.50       | 12.50       | 16.00       |

| WLAN 5.6 GHz MAX Tune-up Power |         |           |             |             |             |
|--------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                           | Channel | Frequency | ANT 1       | ANT 2       | ANT 1+2     |
|                                |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11a                        | 100     | 5500      | 13.50       | 12.50       | ---         |
|                                | 116     | 5580      | 13.50       | 12.50       | ---         |
|                                | 124     | 5620      | 13.50       | 12.50       | ---         |
|                                | 132     | 5660      | 13.50       | 12.50       | ---         |
|                                | 140     | 5700      | 13.50       | 12.50       | ---         |
|                                | 144     | 5720      | 13.50       | 12.50       | ---         |
| 802.11n HT20                   | 100     | 5500      | 13.50       | 12.50       | 16.00       |
|                                | 116     | 5580      | 13.50       | 12.50       | 16.00       |
|                                | 124     | 5620      | 13.50       | 12.50       | 16.00       |
|                                | 132     | 5660      | 13.50       | 12.50       | 16.00       |
|                                | 140     | 5700      | 13.50       | 12.50       | 16.00       |
|                                | 144     | 5720      | 13.50       | 12.50       | 16.00       |
| 802.11n HT40                   | 102     | 5510      | 13.50       | 12.50       | 16.00       |
|                                | 110     | 5550      | 13.50       | 12.50       | 16.00       |
|                                | 126     | 5630      | 13.50       | 12.50       | 16.00       |
|                                | 134     | 5670      | 13.50       | 12.50       | 16.00       |
|                                | 142     | 5710      | 13.50       | 12.50       | 16.00       |
|                                | 100     | 5500      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT20                 | 116     | 5580      | 13.50       | 12.50       | 16.00       |
|                                | 124     | 5620      | 13.50       | 12.50       | 16.00       |
|                                | 132     | 5660      | 13.50       | 12.50       | 16.00       |
|                                | 140     | 5700      | 13.50       | 12.50       | 16.00       |
|                                | 144     | 5720      | 13.50       | 12.50       | 16.00       |
|                                | 102     | 5510      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT40                 | 110     | 5550      | 13.50       | 12.50       | 16.00       |
|                                | 126     | 5630      | 13.50       | 12.50       | 16.00       |
|                                | 134     | 5670      | 13.50       | 12.50       | 16.00       |
|                                | 142     | 5710      | 13.50       | 12.50       | 16.00       |
|                                | 106     | 5530      | 13.50       | 12.50       | 16.00       |
|                                | 122     | 5610      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT80                 | 138     | 5690      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT160                | 114     | 5570      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE20                  | 100     | 5500      | 13.50       | 12.50       | 16.00       |
|                                | 116     | 5580      | 13.50       | 12.50       | 16.00       |
|                                | 124     | 5620      | 13.50       | 12.50       | 16.00       |
|                                | 132     | 5660      | 13.50       | 12.50       | 16.00       |
|                                | 140     | 5700      | 13.50       | 12.50       | 16.00       |
|                                | 144     | 5720      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE40                  | 102     | 5510      | 13.50       | 12.50       | 16.00       |
|                                | 110     | 5550      | 13.50       | 12.50       | 16.00       |
|                                | 126     | 5630      | 13.50       | 12.50       | 16.00       |
|                                | 134     | 5670      | 13.50       | 12.50       | 16.00       |
|                                | 142     | 5710      | 13.50       | 12.50       | 16.00       |
|                                | 106     | 5530      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE80                  | 122     | 5610      | 13.50       | 12.50       | 16.00       |
|                                | 138     | 5690      | 13.50       | 12.50       | 16.00       |
|                                | 114     | 5570      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE160                 | 100     | 5500      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT20                 | 116     | 5580      | 13.50       | 12.50       | 16.00       |
|                                | 124     | 5620      | 13.50       | 12.50       | 16.00       |
|                                | 132     | 5660      | 13.50       | 12.50       | 16.00       |
|                                | 140     | 5700      | 13.50       | 12.50       | 16.00       |
|                                | 144     | 5720      | 13.50       | 12.50       | 16.00       |
|                                | 102     | 5510      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT40                 | 110     | 5550      | 13.50       | 12.50       | 16.00       |
|                                | 126     | 5630      | 13.50       | 12.50       | 16.00       |
|                                | 134     | 5670      | 13.50       | 12.50       | 16.00       |
|                                | 142     | 5710      | 13.50       | 12.50       | 16.00       |
|                                | 106     | 5530      | 13.50       | 12.50       | 16.00       |
|                                | 122     | 5610      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT80                 | 138     | 5690      | 13.50       | 12.50       | 16.00       |
|                                | 114     | 5570      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT160                | 100     | 5500      | 13.50       | 12.50       | 16.00       |

| WLAN 5.8 GHz MAX Tune-up Power |         |           |             |             |             |
|--------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                           | Channel | Frequency | ANT 1       | ANT 2       | ANT 1+2     |
|                                |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11a                        | 149     | 5745      | 13.50       | 12.50       | ---         |
|                                | 157     | 5785      | 13.50       | 12.50       | ---         |
|                                | 165     | 5825      | 13.50       | 12.50       | ---         |
|                                | 169     | 5845      | 13.50       | 12.50       | ---         |
|                                | 173     | 5865      | 13.50       | 12.50       | ---         |
|                                | 177     | 5885      | 13.50       | 12.50       | ---         |
| 802.11n HT20                   | 149     | 5745      | 13.50       | 12.50       | 16.00       |
|                                | 157     | 5785      | 13.50       | 12.50       | 16.00       |
|                                | 165     | 5825      | 13.50       | 12.50       | 16.00       |
|                                | 169     | 5845      | 13.50       | 12.50       | 16.00       |
|                                | 173     | 5865      | 13.50       | 12.50       | 16.00       |
|                                | 177     | 5885      | 13.50       | 12.50       | 16.00       |
| 802.11n HT40                   | 151     | 5755      | 13.50       | 12.50       | 16.00       |
|                                | 159     | 5795      | 13.50       | 12.50       | 16.00       |
|                                | 167     | 5835      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT20                 | 175     | 5875      | 13.50       | 12.50       | 16.00       |
|                                | 149     | 5745      | 13.50       | 12.50       | 16.00       |
|                                | 157     | 5785      | 13.50       | 12.50       | 16.00       |
|                                | 165     | 5825      | 13.50       | 12.50       | 16.00       |
|                                | 169     | 5845      | 13.50       | 12.50       | 16.00       |
|                                | 173     | 5865      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT40                 | 177     | 5885      | 13.50       | 12.50       | 16.00       |
|                                | 151     | 5755      | 13.50       | 12.50       | 16.00       |
|                                | 159     | 5795      | 13.50       | 12.50       | 16.00       |
|                                | 167     | 5835      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT80                 | 175     | 5875      | 13.50       | 12.50       | 16.00       |
|                                | 155     | 5775      | 13.50       | 12.50       | 16.00       |
|                                | 171     | 5855      | 13.50       | 12.50       | 16.00       |
| 802.11ac VHT160                | 163     | 5815      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE20                  | 149     | 5745      | 13.50       | 12.50       | 16.00       |
|                                | 157     | 5785      | 13.50       | 12.50       | 16.00       |
|                                | 165     | 5825      | 13.50       | 12.50       | 16.00       |
|                                | 169     | 5845      | 13.50       | 12.50       | 16.00       |
|                                | 173     | 5865      | 13.50       | 12.50       | 16.00       |
|                                | 177     | 5885      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE40                  | 151     | 5755      | 13.50       | 12.50       | 16.00       |
|                                | 159     | 5795      | 13.50       | 12.50       | 16.00       |
|                                | 167     | 5835      | 13.50       | 12.50       | 16.00       |
|                                | 175     | 5875      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE80                  | 155     | 5775      | 13.50       | 12.50       | 16.00       |
|                                | 171     | 5855      | 13.50       | 12.50       | 16.00       |
| 802.11ax HE160                 | 163     | 5815      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT20                 | 149     | 5745      | 13.50       | 12.50       | 16.00       |
|                                | 157     | 5785      | 13.50       | 12.50       | 16.00       |
|                                | 165     | 5825      | 13.50       | 12.50       | 16.00       |
|                                | 169     | 5845      | 13.50       | 12.50       | 16.00       |
|                                | 173     | 5865      | 13.50       | 12.50       | 16.00       |
|                                | 177     | 5885      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT40                 | 151     | 5755      | 13.50       | 12.50       | 16.00       |
|                                | 159     | 5795      | 13.50       | 12.50       | 16.00       |
|                                | 167     | 5835      | 13.50       | 12.50       | 16.00       |
|                                | 175     | 5875      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT80                 | 155     | 5775      | 13.50       | 12.50       | 16.00       |
|                                | 171     | 5855      | 13.50       | 12.50       | 16.00       |
| 802.11be EHT160                | 163     | 5815      | 13.50       | 12.50       | 16.00       |

| U-NII 5 MAX Tune-up Power SP |         |           |             |             |             |
|------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                         | Channel | Frequency | ANT 1       | ANT 2       | ANT 1+2     |
|                              |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11ax HE20                | 1       | 5955      | 12.00       | 12.00       | 15.00       |
|                              | 45      | 6175      | 12.00       | 12.00       | 15.00       |
|                              | 93      | 6415      | 12.00       | 12.00       | 15.00       |
| 802.11ax HE40                | 3       | 5965      | 12.00       | 12.00       | 15.00       |
|                              | 43      | 6165      | 12.00       | 12.00       | 15.00       |
|                              | 91      | 6405      | 12.00       | 12.00       | 15.00       |
| 802.11ax HE80                | 7       | 5985      | 12.00       | 12.00       | 15.00       |
|                              | 39      | 6145      | 12.00       | 12.00       | 15.00       |
|                              | 87      | 6385      | 12.00       | 12.00       | 15.00       |
| 802.11ax HE160               | 15      | 6025      | 12.00       | 12.00       | 15.00       |
|                              | 47      | 6185      | 12.00       | 12.00       | 15.00       |
|                              | 79      | 6345      | 12.00       | 12.00       | 15.00       |
| 802.11be EHT20               | 1       | 5955      | 12.00       | 12.00       | 15.00       |
|                              | 45      | 6175      | 12.00       | 12.00       | 15.00       |
|                              | 93      | 6415      | 12.00       | 12.00       | 15.00       |
| 802.11be EHT40               | 3       | 5965      | 12.00       | 12.00       | 15.00       |
|                              | 43      | 6165      | 12.00       | 12.00       | 15.00       |
|                              | 91      | 6405      | 12.00       | 12.00       | 15.00       |
| 802.11be EHT80               | 7       | 5985      | 12.00       | 12.00       | 15.00       |
|                              | 39      | 6145      | 12.00       | 12.00       | 15.00       |
|                              | 87      | 6385      | 12.00       | 12.00       | 15.00       |
| 802.11be EHT160              | 15      | 6025      | 12.00       | 12.00       | 15.00       |
|                              | 47      | 6185      | 12.00       | 12.00       | 15.00       |
|                              | 79      | 6345      | 12.00       | 12.00       | 15.00       |
| 802.11be EHT320              | 31      | 6105      | 12.00       | 12.00       | 15.00       |
|                              | 63      | 6265      | 12.00       | 12.00       | 15.00       |

| U-NII 5 MAX Tune-up Power LPI |         |           |             |             |             |
|-------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                          | Channel | Frequency | ANT 0       | ANT 1       | ANT 0+1     |
|                               |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11ax HE20                 | 1       | 5955      | 5.5         | 5.5         | 5.5         |
|                               | 45      | 6175      | 5.5         | 5.5         | 5.5         |
|                               | 93      | 6415      | 5.5         | 5.5         | 5.5         |
| 802.11ax HE40                 | 3       | 5965      | 8.5         | 8.5         | 8.5         |
|                               | 43      | 6165      | 8.5         | 8.5         | 8.5         |
|                               | 91      | 6405      | 8.5         | 8.5         | 8.5         |
| 802.11ax HE80                 | 7       | 5985      | 11.5        | 11.5        | 11.5        |
|                               | 39      | 6145      | 11.5        | 11.5        | 11.5        |
|                               | 87      | 6385      | 11.5        | 11.5        | 11.5        |
| 802.11ax HE160                | 15      | 6025      | 12.0        | 12.0        | 14.5        |
|                               | 47      | 6185      | 12.0        | 12.0        | 14.5        |
|                               | 79      | 6345      | 12.0        | 12.0        | 14.5        |
| 802.11be EHT20                | 1       | 5955      | 5.5         | 5.5         | 5.5         |
|                               | 45      | 6175      | 5.5         | 5.5         | 5.5         |
|                               | 93      | 6415      | 5.5         | 5.5         | 5.5         |
| 802.11be EHT40                | 3       | 5965      | 8.5         | 8.5         | 8.5         |
|                               | 43      | 6165      | 8.5         | 8.5         | 8.5         |
|                               | 91      | 6405      | 8.5         | 8.5         | 8.5         |
| 802.11be EHT80                | 7       | 5985      | 11.5        | 11.5        | 11.5        |
|                               | 39      | 6145      | 11.5        | 11.5        | 11.5        |
|                               | 87      | 6385      | 11.5        | 11.5        | 11.5        |
| 802.11be EHT160               | 15      | 6025      | 12.0        | 12.0        | 14.5        |
|                               | 47      | 6185      | 12.0        | 12.0        | 14.5        |
|                               | 79      | 6345      | 12.0        | 12.0        | 14.5        |
| 802.11be EHT320               | 31      | 6105      | 12.0        | 12.0        | 15.0        |
|                               | 63      | 6265      | 12.0        | 12.0        | 15.0        |

| U-NII 6 MAX Tune-up Power LPI |         |           |             |             |             |
|-------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                          | Channel | Frequency | ANT 1       | ANT 2       | ANT 1+2     |
|                               |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11ax HE20                 | 97      | 6435      | 5.50        | 5.75        | 5.625       |
|                               | 105     | 6475      | 5.50        | 5.75        | 5.625       |
|                               | 113     | 6515      | 5.75        | 5.50        | 5.625       |
| 802.11ax HE40                 | 99      | 6445      | 8.75        | 8.75        | 8.625       |
|                               | 107     | 6485      | 8.50        | 8.75        | 8.625       |
| 802.11ax HE80                 | 103     | 6465      | 11.75       | 11.50       | 11.625      |
|                               | 119     | 6545      | 12.00       | 11.75       | 11.875      |
| 802.11ax HE160                | 111     | 6505      | 12.00       | 12.00       | 14.625      |
| 802.11be EHT20                | 97      | 6435      | 5.50        | 5.75        | 5.625       |
|                               | 105     | 6475      | 5.50        | 5.75        | 5.625       |
|                               | 113     | 6515      | 5.75        | 5.50        | 5.625       |
| 802.11be EHT40                | 99      | 6445      | 8.75        | 8.75        | 8.625       |
|                               | 107     | 6485      | 8.50        | 8.75        | 8.625       |
| 802.11be EHT80                | 103     | 6465      | 11.75       | 11.50       | 11.625      |
|                               | 119     | 6545      | 12.00       | 11.75       | 11.875      |
| 802.11be EHT160               | 111     | 6505      | 12.00       | 12.00       | 14.625      |
| 802.11be EHT320               | 95      | 6425      | 12.00       | 12.00       | 15.00       |

| U-NII 7 MAX Tune-up Power SP |         |           |             |             |             |
|------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                         | Channel | Frequency | ANT 1       | ANT 2       | ANT 1+2     |
|                              |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11ax HE20                | 117     | 6535      | 12.00       | 12.00       | 15.00       |
|                              | 149     | 6695      | 12.00       | 12.00       | 15.00       |
|                              | 181     | 6855      | 12.00       | 12.00       | 15.00       |
| 802.11ax HE40                | 115     | 6525      | 8.50        | 8.75        | 8.75        |
|                              | 147     | 6685      | 12.00       | 12.00       | 15.00       |
|                              | 179     | 6845      | 12.00       | 12.00       | 15.00       |
| 802.11ax HE80                | 135     | 6625      | 12.00       | 12.00       | 15.00       |
|                              | 151     | 6705      | 12.00       | 12.00       | 15.00       |
|                              | 167     | 6785      | 12.00       | 12.00       | 15.00       |
|                              | 183     | 6865      | 11.75       | 12.00       | 11.875      |
| 802.11ax HE160               | 143     | 6665      | 12.00       | 12.00       | 15.00       |
|                              | 175     | 6825      | 12.00       | 12.00       | 15.00       |
| 802.11be EHT20               | 117     | 6535      | 12.00       | 12.00       | 15.00       |
|                              | 149     | 6695      | 12.00       | 12.00       | 15.00       |
|                              | 181     | 6855      | 12.00       | 12.00       | 15.00       |
| 802.11be EHT40               | 115     | 6525      | 8.50        | 8.75        | 8.75        |
|                              | 147     | 6685      | 12.00       | 12.00       | 15.00       |
|                              | 179     | 6845      | 12.00       | 12.00       | 15.00       |
| 802.11be EHT80               | 135     | 6625      | 12.00       | 12.00       | 15.00       |
|                              | 151     | 6705      | 12.00       | 12.00       | 15.00       |
|                              | 167     | 6785      | 12.00       | 12.00       | 15.00       |
|                              | 183     | 6865      | 11.75       | 12.00       | 11.875      |
| 802.11be EHT160              | 143     | 6665      | 12.00       | 12.00       | 15.00       |
|                              | 175     | 6825      | 12.00       | 12.00       | 15.00       |
| 802.11be EHT320              | 127     | 6585      | 12.00       | 12.00       | 15.00       |
|                              | 159     | 6745      | 12.00       | 12.00       | 15.00       |

| U-NII 7 MAX Tune-up Power LPI |         |           |             |             |             |
|-------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                          | Channel | Frequency | ANT 0       | ANT 1       | ANT 0+1     |
|                               |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11ax HE20                 | 117     | 6535      | 5.5         | 5.5         | 5.5         |
|                               | 149     | 6695      | 5.5         | 5.5         | 5.5         |
|                               | 181     | 6855      | 5.5         | 5.5         | 5.5         |
| 802.11ax HE40                 | 115     | 6525      | 8.5         | 8.5         | 8.5         |
|                               | 147     | 6685      | 8.5         | 8.5         | 8.5         |
|                               | 179     | 6845      | 8.5         | 8.5         | 8.5         |
| 802.11ax HE80                 | 135     | 6625      | 11.5        | 11.5        | 11.5        |
|                               | 151     | 6705      | 11.5        | 11.5        | 11.5        |
|                               | 167     | 6785      | 11.5        | 11.5        | 11.5        |
|                               | 183     | 6865      | 11.5        | 11.5        | 11.5        |
| 802.11ax HE160                | 143     | 6665      | 12.0        | 12.0        | 14.5        |
|                               | 175     | 6825      | 12.0        | 12.0        | 14.5        |
| 802.11be EHT20                | 117     | 6535      | 5.5         | 5.5         | 5.5         |
|                               | 149     | 6695      | 5.5         | 5.5         | 5.5         |
|                               | 181     | 6855      | 5.5         | 5.5         | 5.5         |
| 802.11be EHT40                | 115     | 6525      | 8.5         | 8.5         | 8.5         |
|                               | 147     | 6685      | 8.5         | 8.5         | 8.5         |
|                               | 179     | 6845      | 8.5         | 8.5         | 8.5         |
| 802.11be EHT80                | 135     | 6625      | 11.5        | 11.5        | 11.5        |
|                               | 151     | 6705      | 11.5        | 11.5        | 11.5        |
|                               | 167     | 6785      | 11.5        | 11.5        | 11.5        |
|                               | 183     | 6865      | 11.5        | 11.5        | 11.5        |
| 802.11be EHT160               | 143     | 6665      | 12.0        | 12.0        | 14.5        |
|                               | 175     | 6825      | 12.0        | 12.0        | 14.5        |
| 802.11be EHT320               | 127     | 6585      | 12.0        | 12.0        | 15.0        |
|                               | 159     | 6745      | 12.0        | 12.0        | 15.0        |

| U-NII 8 MAX Tune-up Power LPI |         |           |             |             |             |
|-------------------------------|---------|-----------|-------------|-------------|-------------|
| Mode                          | Channel | Frequency | ANT 1       | ANT 2       | ANT 1+2     |
|                               |         |           | MAX Tune-up | MAX Tune-up | MAX Tune-up |
| 802.11ax HE20                 | 185     | 6875      | 5.75        | 5.75        | 8.75        |
|                               | 209     | 6995      | 5.75        | 6.00        | 8.875       |
|                               | 233     | 7115      | 0.50        | 0.50        | 1.25        |
| 802.11ax HE40                 | 187     | 6885      | 8.75        | 8.75        | 8.75        |
|                               | 211     | 7005      | 8.75        | 8.75        | 8.75        |
|                               | 227     | 7085      | 9.00        | 9.00        | 8.75        |
| 802.11ax HE80                 | 199     | 6945      | 11.75       | 12.00       | 11.875      |
|                               | 215     | 7025      | 11.75       | 11.75       | 11.75       |
| 802.11ax HE160                | 207     | 6985      | 12.00       | 12.00       | 14.875      |
| 802.11be EHT20                | 185     | 6875      | 5.75        | 5.75        | 8.75        |
|                               | 209     | 6995      | 5.75        | 6.00        | 8.875       |
|                               | 233     | 7115      | 0.50        | 0.50        | 1.25        |
| 802.11be EHT40                | 187     | 6885      | 8.75        | 8.75        | 8.75        |
|                               | 211     | 7005      | 8.75        | 8.75        | 8.75        |
|                               | 227     | 7085      | 9.00        | 9.00        | 8.75        |
| 802.11be EHT80                | 199     | 6945      | 11.75       | 12.00       | 11.875      |
|                               | 215     | 7025      | 11.75       | 11.75       | 11.75       |
| 802.11be EHT160               | 207     | 6985      | 12.00       | 12.00       | 14.875      |
| 802.11be EHT320               | 191     | 6905      | 12.00       | 12.00       | 15.00       |

| Bluetooth MAX Tune-up Power |                        |           |             |             |       |
|-----------------------------|------------------------|-----------|-------------|-------------|-------|
| Mode                        | Channel                | Frequency | ANT 1       | ANT 2       |       |
|                             |                        |           | MAX Tune-up | MAX Tune-up |       |
| BR / EDR                    | 1Mbps (GFSK)           | 0         | 2402        | ---         | 15.25 |
|                             |                        | 39        | 2441        | ---         | 15.25 |
|                             |                        | 78        | 2480        | ---         | 15.25 |
|                             | 2Mbps ( $\pi/4$ DQPSK) | 0         | 2402        | ---         | 15.00 |
|                             |                        | 39        | 2441        | ---         | 15.00 |
|                             |                        | 78        | 2480        | ---         | 15.00 |
|                             | 3Mbps (8-DPSK)         | 0         | 2402        | ---         | 14.90 |
|                             |                        | 39        | 2441        | ---         | 14.90 |
|                             |                        | 78        | 2480        | ---         | 14.90 |
| LE                          | 1Mbps (GFSK)           | 0         | 2402        | ---         | 15.25 |
|                             |                        | 19        | 2440        | ---         | 15.25 |
|                             |                        | 39        | 2480        | ---         | 15.25 |
|                             | 2Mbps ( $\pi/4$ DQPSK) | 1         | 2404        | ---         | 15.25 |
|                             |                        | 19        | 2440        | ---         | 15.25 |
|                             |                        | 38        | 2478        | ---         | 15.25 |

## 8.2. Measured Conducted Power Results for WLAN

### Test Notes:

- [1] The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power was measured for the highest maximum output power configurations in each frequency band according to the default power measurement procedures.
- [2] Per KDB Publication 248227 D01, the conducted power measurement was performed for the transmission mode configuration with the highest maximum output power specified for production units.
- [3] For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- [4] For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- [5] For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- [6] Per April 2019 TCB Workshop guidance, general principles of KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax, and 802.11ax is considered as the highest order modulation mode. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power is higher than RU (OFDMA).

| WLAN 2.4 GHz   |         |                 |                     |               |                     |               |                           |                           |                             |               |
|----------------|---------|-----------------|---------------------|---------------|---------------------|---------------|---------------------------|---------------------------|-----------------------------|---------------|
| Mode           | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               | ANT 1+2                   |                           |                             |               |
|                |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit | Average power (dBm) ANT 0 | Average power (dBm) ANT 1 | Average power (dBm) ANT 1+2 | Tune-Up Limit |
| 802.11b        | 1       | 2412            | 14.95               | 15.00         | 14.87               | 15.00         | ---                       | ---                       | ---                         | ---           |
|                | 6       | 2437            | 14.96               | 15.00         | 14.94               | 15.00         | ---                       | ---                       | ---                         | ---           |
|                | 11      | 2462            | 14.94               | 15.00         | 14.89               | 15.00         | ---                       | ---                       | ---                         | ---           |
|                | 12      | 2467            | 14.85               | 15.00         | 14.92               | 15.00         | ---                       | ---                       | ---                         | ---           |
|                | 13      | 2472            | 14.83               | 15.00         | 13.74               | 13.75         | ---                       | ---                       | ---                         | ---           |
| 802.11g        | 1       | 2412            | 14.93               | 15.00         | 14.90               | 15.00         | ---                       | ---                       | ---                         | ---           |
|                | 6       | 2437            | 14.91               | 15.00         | 14.86               | 15.00         | ---                       | ---                       | ---                         | ---           |
|                | 11      | 2462            | 14.89               | 15.00         | 14.87               | 15.00         | ---                       | ---                       | ---                         | ---           |
|                | 12      | 2467            | 14.78               | 15.00         | 14.83               | 15.00         | ---                       | ---                       | ---                         | ---           |
|                | 13      | 2472            | 14.79               | 15.00         | 13.68               | 13.75         | ---                       | ---                       | ---                         | ---           |
| 802.11n HT20   | 1       | 2412            | 14.94               | 15.00         | 14.91               | 15.00         | 14.85                     | 14.80                     | 17.84                       | 18.00         |
|                | 6       | 2437            | 14.87               | 15.00         | 14.93               | 15.00         | 14.90                     | 14.82                     | 17.87                       | 18.00         |
|                | 11      | 2462            | 14.84               | 15.00         | 14.83               | 15.00         | 14.93                     | 14.89                     | 17.92                       | 18.00         |
|                | 12      | 2467            | 14.82               | 15.00         | 14.72               | 15.00         | 14.85                     | 14.73                     | 17.80                       | 18.00         |
|                | 13      | 2472            | 14.75               | 15.00         | 13.66               | 13.75         | 13.75                     | 13.78                     | 16.78                       | 16.875        |
| 802.11n HT40   | 3       | 2422            | 14.88               | 15.00         | 14.83               | 15.00         | 14.85                     | 14.86                     | 17.87                       | 18.00         |
|                | 6       | 2437            | 14.87               | 15.00         | 14.84               | 15.00         | 14.94                     | 14.87                     | 17.92                       | 18.00         |
|                | 9       | 2452            | 14.80               | 15.00         | 14.84               | 15.00         | 14.91                     | 14.89                     | 17.91                       | 18.00         |
|                | 10      | 2457            | 14.72               | 15.00         | 14.78               | 15.00         | 13.87                     | 13.79                     | 16.84                       | 16.875        |
|                | 11      | 2462            | 14.72               | 15.00         | 14.41               | 14.50         | 13.95                     | 13.88                     | 16.93                       | 17.00         |
| 802.11ax HE20  | 1       | 2412            | 14.94               | 15.00         | 14.91               | 15.00         | 14.95                     | 14.84                     | 17.91                       | 18.00         |
|                | 6       | 2437            | 14.86               | 15.00         | 14.92               | 15.00         | 14.89                     | 14.79                     | 17.85                       | 18.00         |
|                | 11      | 2462            | 14.86               | 15.00         | 14.91               | 15.00         | 14.91                     | 14.84                     | 17.89                       | 18.00         |
|                | 12      | 2467            | 14.77               | 15.00         | 14.80               | 15.00         | 14.79                     | 14.71                     | 17.76                       | 17.875        |
|                | 13      | 2472            | 14.61               | 14.75         | 13.90               | 14.00         | 13.11                     | 13.09                     | 16.11                       | 16.13         |
| 802.11ax HE40  | 3       | 2422            | 14.90               | 15.00         | 14.83               | 15.00         | 14.76                     | 14.67                     | 17.73                       | 18.00         |
|                | 6       | 2437            | 14.91               | 15.00         | 14.86               | 15.00         | 14.76                     | 14.68                     | 17.73                       | 18.00         |
|                | 9       | 2452            | 14.81               | 15.00         | 14.82               | 15.00         | 14.83                     | 14.80                     | 17.83                       | 18.00         |
|                | 10      | 2457            | 14.79               | 15.00         | 14.73               | 15.00         | 14.93                     | 14.79                     | 17.87                       | 18.00         |
|                | 11      | 2462            | 14.70               | 15.00         | 13.11               | 14.25         | 13.87                     | 13.82                     | 16.86                       | 17.13         |
| 802.11be EHT20 | 1       | 2412            | 14.90               | 15.00         | 14.83               | 15.00         | 14.81                     | 14.73                     | 17.78                       | 18.00         |
|                | 6       | 2437            | 14.79               | 15.00         | 14.86               | 15.00         | 14.72                     | 14.60                     | 17.67                       | 18.00         |
|                | 11      | 2462            | 14.86               | 15.00         | 14.90               | 15.00         | 14.84                     | 14.85                     | 17.86                       | 18.00         |
|                | 12      | 2467            | 14.78               | 15.00         | 14.75               | 15.00         | 14.80                     | 14.76                     | 17.79                       | 17.875        |
|                | 13      | 2472            | 14.69               | 14.75         | 13.88               | 14.00         | 13.08                     | 13.02                     | 16.06                       | 16.13         |
| 802.11be EHT40 | 3       | 2422            | 14.86               | 15.00         | 14.90               | 15.00         | 14.78                     | 14.82                     | 17.81                       | 18.00         |
|                | 6       | 2437            | 14.87               | 15.00         | 14.87               | 15.00         | 14.78                     | 14.66                     | 17.73                       | 18.00         |
|                | 9       | 2452            | 14.82               | 15.00         | 14.81               | 15.00         | 14.87                     | 14.80                     | 17.85                       | 18.00         |
|                | 10      | 2457            | 14.79               | 15.00         | 14.76               | 15.00         | 14.91                     | 14.94                     | 17.94                       | 18.00         |
|                | 11      | 2462            | 14.74               | 15.00         | 14.18               | 14.25         | 13.93                     | 13.99                     | 16.97                       | 17.13         |

| WLAN 5.2 GHz   |         |                 |                     |               |                     |               |                           |                           |                             |               |
|----------------|---------|-----------------|---------------------|---------------|---------------------|---------------|---------------------------|---------------------------|-----------------------------|---------------|
| Mode           | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               | ANT 1+2                   |                           |                             |               |
|                |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit | Average power (dBm) ANT 0 | Average power (dBm) ANT 1 | Average power (dBm) ANT 1+2 | Tune-Up Limit |
| 802.11a        | 36      | 5180            | 13.35               | 13.50         | 12.44               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                | 40      | 5200            | 13.47               | 13.50         | 12.41               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                | 44      | 5220            | 13.40               | 13.50         | 12.41               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                | 48      | 5240            | 13.42               | 13.50         | 12.32               | 12.50         | ---                       | ---                       | ---                         | ---           |
| 802.11n HT20   | 36      | 5180            | 13.45               | 13.50         | 12.36               | 12.50         | 12.85                     | 12.84                     | 15.86                       | 16.00         |
|                | 40      | 5200            | 13.40               | 13.50         | 12.34               | 12.50         | 12.79                     | 12.76                     | 15.79                       | 16.00         |
|                | 44      | 5220            | 13.44               | 13.50         | 12.44               | 12.50         | 12.86                     | 12.81                     | 15.85                       | 16.00         |
|                | 48      | 5240            | 13.33               | 13.50         | 12.35               | 12.50         | 12.86                     | 12.78                     | 15.83                       | 16.00         |
| 802.11n HT40   | 38      | 5190            | 13.26               | 13.50         | 12.33               | 12.50         | 12.70                     | 12.66                     | 15.69                       | 16.00         |
|                | 46      | 5230            | 13.37               | 13.50         | 12.35               | 12.50         | 12.78                     | 12.86                     | 15.83                       | 16.00         |
| 802.11ac VHT20 | 36      | 5180            | 13.40               | 13.50         | 12.31               | 12.50         | 12.78                     | 12.77                     | 15.79                       | 16.00         |
|                | 40      | 5200            | 13.34               | 13.50         | 12.32               | 12.50         | 12.79                     | 12.80                     | 15.81                       | 16.00         |
|                | 44      | 5220            | 13.32               | 13.50         | 12.26               | 12.50         | 12.74                     | 12.82                     | 15.79                       | 16.00         |
|                | 48      | 5240            | 13.44               | 13.50         | 12.45               | 12.50         | 12.80                     | 12.85                     | 15.84                       | 16.00         |
| 802.11ac VHT40 | 38      | 5190            | 13.32               | 13.50         | 12.33               | 12.50         | 12.84                     | 12.75                     | 15.81                       | 16.00         |
|                | 46      | 5230            | 13.35               | 13.50         | 12.35               | 12.50         | 12.82                     | 12.80                     | 15.82                       | 16.00         |
| 802.11ac VHT80 | 42      | 5210            | 13.39               | 13.50         | 12.38               | 12.50         | 12.79                     | 12.65                     | 15.73                       | 16.00         |
| 802.11ax HE20  | 36      | 5180            | 13.41               | 13.50         | 12.41               | 12.50         | 12.83                     | 12.83                     | 15.84                       | 16.00         |
|                | 40      | 5200            | 13.45               | 13.50         | 12.45               | 12.50         | 12.81                     | 12.77                     | 15.80                       | 16.00         |
|                | 44      | 5220            | 13.41               | 13.50         | 12.44               | 12.50         | 12.79                     | 12.77                     | 15.79                       | 16.00         |
|                | 48      | 5240            | 13.40               | 13.50         | 12.34               | 12.50         | 12.86                     | 12.85                     | 15.87                       | 16.00         |
| 802.11ax HE40  | 38      | 5190            | 13.37               | 13.50         | 12.28               | 12.50         | 12.79                     | 12.68                     | 15.75                       | 16.00         |
|                | 46      | 5230            | 13.41               | 13.50         | 12.37               | 12.50         | 12.70                     | 12.77                     | 15.75                       | 16.00         |
| 802.11ax HE80  | 42      | 5210            | 13.37               | 13.50         | 12.41               | 12.50         | 12.75                     | 12.82                     | 15.80                       | 16.00         |
| 802.11be EHT20 | 36      | 5180            | 13.31               | 13.50         | 12.35               | 12.50         | 12.75                     | 12.68                     | 15.73                       | 16.00         |
|                | 40      | 5200            | 13.37               | 13.50         | 12.39               | 12.50         | 12.78                     | 12.75                     | 15.78                       | 16.00         |
|                | 44      | 5220            | 13.31               | 13.50         | 12.29               | 12.50         | 12.75                     | 12.82                     | 15.80                       | 16.00         |
|                | 48      | 5240            | 13.35               | 13.50         | 12.30               | 12.50         | 12.82                     | 12.72                     | 15.78                       | 16.00         |
| 802.11be EHT40 | 38      | 5190            | 13.35               | 13.50         | 12.22               | 12.50         | 12.72                     | 12.78                     | 15.76                       | 16.00         |
|                | 46      | 5230            | 13.43               | 13.50         | 12.39               | 12.50         | 12.80                     | 12.74                     | 15.78                       | 16.00         |
| 802.11be EHT80 | 42      | 5210            | 13.43               | 13.50         | 12.37               | 12.50         | 12.65                     | 12.69                     | 15.68                       | 16.00         |

| WLAN 5.3 GHz    |         |                 |                     |               |                     |               |                           |                           |                             |               |
|-----------------|---------|-----------------|---------------------|---------------|---------------------|---------------|---------------------------|---------------------------|-----------------------------|---------------|
| Mode            | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               | ANT 1+2                   |                           |                             |               |
|                 |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit | Average power (dBm) ANT 0 | Average power (dBm) ANT 1 | Average power (dBm) ANT 1+2 | Tune-Up Limit |
| 802.11a         | 52      | 5260            | 13.39               | 13.50         | 12.45               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 56      | 5280            | 13.47               | 13.50         | 12.41               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 60      | 5300            | 13.43               | 13.50         | 12.40               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 64      | 5320            | 13.40               | 13.50         | 12.36               | 12.50         | ---                       | ---                       | ---                         | ---           |
| 802.11n HT20    | 52      | 5260            | 13.43               | 13.50         | 12.36               | 12.50         | 12.89                     | 12.85                     | 15.88                       | 16.00         |
|                 | 56      | 5280            | 13.39               | 13.50         | 12.38               | 12.50         | 12.82                     | 12.76                     | 15.80                       | 16.00         |
|                 | 60      | 5300            | 13.44               | 13.50         | 12.44               | 12.50         | 12.85                     | 12.83                     | 15.85                       | 16.00         |
|                 | 64      | 5320            | 13.34               | 13.50         | 12.34               | 12.50         | 12.90                     | 12.78                     | 15.85                       | 16.00         |
| 802.11n HT40    | 54      | 5270            | 13.29               | 13.50         | 12.33               | 12.50         | 12.71                     | 12.68                     | 15.71                       | 16.00         |
|                 | 62      | 5310            | 13.36               | 13.50         | 12.36               | 12.50         | 12.79                     | 12.87                     | 15.84                       | 16.00         |
| 802.11ac VHT20  | 52      | 5260            | 13.38               | 13.50         | 12.31               | 12.50         | 12.81                     | 12.76                     | 15.80                       | 16.00         |
|                 | 56      | 5280            | 13.34               | 13.50         | 12.36               | 12.50         | 12.81                     | 12.80                     | 15.82                       | 16.00         |
|                 | 60      | 5300            | 13.33               | 13.50         | 12.28               | 12.50         | 12.78                     | 12.81                     | 15.81                       | 16.00         |
|                 | 64      | 5320            | 13.48               | 13.50         | 12.47               | 12.50         | 12.81                     | 12.85                     | 15.84                       | 16.00         |
| 802.11ac VHT40  | 54      | 5270            | 13.35               | 13.50         | 12.36               | 12.50         | 12.83                     | 12.77                     | 15.81                       | 16.00         |
|                 | 62      | 5310            | 13.39               | 13.50         | 12.38               | 12.50         | 12.81                     | 12.82                     | 15.83                       | 16.00         |
| 802.11ac VHT80  | 58      | 5290            | 13.40               | 13.50         | 12.37               | 12.50         | 12.80                     | 12.68                     | 15.75                       | 16.00         |
| 802.11ac VHT160 | 50      | 5250            | 13.49               | 13.50         | 12.48               | 12.50         | 12.94                     | 12.92                     | 15.94                       | 16.00         |
| 802.11ax HE20   | 52      | 5260            | 13.40               | 13.50         | 12.40               | 12.50         | 12.87                     | 12.87                     | 15.88                       | 16.00         |
|                 | 56      | 5280            | 13.43               | 13.50         | 12.44               | 12.50         | 12.85                     | 12.80                     | 15.84                       | 16.00         |
|                 | 60      | 5300            | 13.43               | 13.50         | 12.43               | 12.50         | 12.83                     | 12.80                     | 15.83                       | 16.00         |
|                 | 64      | 5320            | 13.43               | 13.50         | 12.34               | 12.50         | 12.86                     | 12.88                     | 15.88                       | 16.00         |
| 802.11ax HE40   | 54      | 5270            | 13.39               | 13.50         | 12.31               | 12.50         | 12.78                     | 12.68                     | 15.74                       | 16.00         |
|                 | 62      | 5310            | 13.39               | 13.50         | 12.39               | 12.50         | 12.71                     | 12.77                     | 15.75                       | 16.00         |
| 802.11ax HE80   | 58      | 5290            | 13.37               | 13.50         | 12.43               | 12.50         | 12.77                     | 12.82                     | 15.81                       | 16.00         |
| 802.11ax HE160  | 50      | 5250            | 13.33               | 13.50         | 12.33               | 12.50         | 12.77                     | 12.72                     | 15.76                       | 16.00         |
| 802.11be EHT20  | 52      | 5260            | 13.38               | 13.50         | 12.38               | 12.50         | 12.80                     | 12.77                     | 15.80                       | 16.00         |
|                 | 56      | 5280            | 13.29               | 13.50         | 12.29               | 12.50         | 12.79                     | 12.85                     | 15.83                       | 16.00         |
|                 | 60      | 5300            | 13.35               | 13.50         | 12.33               | 12.50         | 12.81                     | 12.72                     | 15.78                       | 16.00         |
|                 | 64      | 5320            | 13.34               | 13.50         | 12.24               | 12.50         | 12.73                     | 12.80                     | 15.78                       | 16.00         |
| 802.11be EHT40  | 54      | 5270            | 13.44               | 13.50         | 12.43               | 12.50         | 12.84                     | 12.78                     | 15.82                       | 16.00         |
|                 | 62      | 5310            | 13.41               | 13.50         | 12.36               | 12.50         | 12.69                     | 12.69                     | 15.70                       | 16.00         |
| 802.11be EHT80  | 58      | 5290            | 13.29               | 13.50         | 12.39               | 12.50         | 12.70                     | 12.73                     | 15.73                       | 16.00         |
| 802.11be EHT160 | 50      | 5250            | 13.43               | 13.50         | 12.41               | 12.50         | 12.82                     | 12.71                     | 15.78                       | 16.00         |

| WLAN 5.6 GHz    |         |                 |                     |               |                     |               |                           |                           |                             |               |
|-----------------|---------|-----------------|---------------------|---------------|---------------------|---------------|---------------------------|---------------------------|-----------------------------|---------------|
| Mode            | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               | ANT 1+2                   |                           |                             |               |
|                 |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit | Average power (dBm) ANT 0 | Average power (dBm) ANT 1 | Average power (dBm) ANT 1+2 | Tune-Up Limit |
| 802.11a         | 100     | 5500            | 13.29               | 13.50         | 12.45               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 116     | 5580            | 13.45               | 13.50         | 12.31               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 124     | 5620            | 13.43               | 13.50         | 12.37               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 132     | 5660            | 13.38               | 13.50         | 12.39               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 140     | 5700            | 13.41               | 13.50         | 12.45               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 144     | 5720            | 13.33               | 13.50         | 12.41               | 12.50         | ---                       | ---                       | ---                         | ---           |
| 802.11n HT20    | 100     | 5500            | 13.31               | 13.50         | 12.35               | 12.50         | 12.90                     | 12.92                     | 15.92                       | 16.00         |
|                 | 116     | 5580            | 13.42               | 13.50         | 12.28               | 12.50         | 12.78                     | 12.75                     | 15.78                       | 16.00         |
|                 | 124     | 5620            | 13.34               | 13.50         | 12.44               | 12.50         | 12.83                     | 12.79                     | 15.82                       | 16.00         |
|                 | 132     | 5660            | 13.32               | 13.50         | 12.41               | 12.50         | 12.85                     | 12.87                     | 15.87                       | 16.00         |
|                 | 140     | 5700            | 13.42               | 13.50         | 12.37               | 12.50         | 12.90                     | 12.88                     | 15.90                       | 16.00         |
|                 | 144     | 5720            | 13.43               | 13.50         | 12.41               | 12.50         | 12.82                     | 12.76                     | 15.80                       | 16.00         |
| 802.11n HT40    | 102     | 5510            | 13.35               | 13.50         | 12.45               | 12.50         | 12.87                     | 12.86                     | 15.88                       | 16.00         |
|                 | 110     | 5550            | 13.39               | 13.50         | 12.31               | 12.50         | 12.86                     | 12.87                     | 15.88                       | 16.00         |
|                 | 126     | 5630            | 13.34               | 13.50         | 12.31               | 12.50         | 12.76                     | 12.73                     | 15.76                       | 16.00         |
|                 | 134     | 5670            | 13.43               | 13.50         | 12.29               | 12.50         | 12.81                     | 12.80                     | 15.82                       | 16.00         |
|                 | 142     | 5710            | 13.28               | 13.50         | 12.28               | 12.50         | 12.87                     | 12.82                     | 15.86                       | 16.00         |
|                 | 144     | 5720            | 13.43               | 13.50         | 12.28               | 12.50         | 12.79                     | 12.75                     | 15.78                       | 16.00         |
| 802.11ac VHT20  | 100     | 5500            | 13.24               | 13.50         | 12.36               | 12.50         | 12.80                     | 12.72                     | 15.77                       | 16.00         |
|                 | 116     | 5580            | 13.31               | 13.50         | 12.43               | 12.50         | 12.72                     | 12.82                     | 15.78                       | 16.00         |
|                 | 124     | 5620            | 13.32               | 13.50         | 12.28               | 12.50         | 12.77                     | 12.85                     | 15.82                       | 16.00         |
|                 | 132     | 5660            | 13.28               | 13.50         | 12.26               | 12.50         | 12.73                     | 12.79                     | 15.77                       | 16.00         |
|                 | 140     | 5700            | 13.28               | 13.50         | 12.31               | 12.50         | 12.82                     | 12.77                     | 15.81                       | 16.00         |
|                 | 144     | 5720            | 13.43               | 13.50         | 12.28               | 12.50         | 12.79                     | 12.75                     | 15.78                       | 16.00         |
| 802.11ac VHT40  | 102     | 5510            | 13.26               | 13.50         | 12.34               | 12.50         | 12.70                     | 12.67                     | 15.70                       | 16.00         |
|                 | 110     | 5550            | 13.38               | 13.50         | 12.26               | 12.50         | 12.65                     | 12.71                     | 15.69                       | 16.00         |
|                 | 126     | 5630            | 13.32               | 13.50         | 12.39               | 12.50         | 12.80                     | 12.77                     | 15.80                       | 16.00         |
|                 | 134     | 5670            | 13.34               | 13.50         | 12.32               | 12.50         | 12.71                     | 12.72                     | 15.73                       | 16.00         |
|                 | 142     | 5710            | 13.36               | 13.50         | 12.28               | 12.50         | 12.71                     | 12.74                     | 15.74                       | 16.00         |
|                 | 144     | 5720            | 13.43               | 13.50         | 12.28               | 12.50         | 12.79                     | 12.75                     | 15.78                       | 16.00         |
| 802.11ac VHT80  | 106     | 5530            | 13.45               | 13.50         | 12.49               | 12.50         | 12.96                     | 12.97                     | 15.98                       | 16.00         |
|                 | 122     | 5610            | 13.40               | 13.50         | 12.41               | 12.50         | 12.92                     | 12.95                     | 15.95                       | 16.00         |
|                 | 138     | 5690            | 13.44               | 13.50         | 12.38               | 12.50         | 12.91                     | 12.93                     | 15.93                       | 16.00         |
| 802.11ac VHT160 | 114     | 5570            | 13.40               | 13.50         | 12.43               | 12.50         | 12.86                     | 12.92                     | 15.90                       | 16.00         |
| 802.11ax HE20   | 100     | 5500            | 13.30               | 13.50         | 12.45               | 12.50         | 12.93                     | 12.87                     | 15.91                       | 16.00         |
|                 | 116     | 5580            | 13.45               | 13.50         | 12.36               | 12.50         | 12.87                     | 12.79                     | 15.84                       | 16.00         |
|                 | 124     | 5620            | 13.43               | 13.50         | 12.37               | 12.50         | 12.82                     | 12.87                     | 15.86                       | 16.00         |
|                 | 132     | 5660            | 13.34               | 13.50         | 12.34               | 12.50         | 12.85                     | 12.80                     | 15.84                       | 16.00         |
|                 | 140     | 5700            | 13.38               | 13.50         | 12.45               | 12.50         | 12.74                     | 12.68                     | 15.72                       | 16.00         |
|                 | 144     | 5720            | 13.38               | 13.50         | 12.31               | 12.50         | 12.79                     | 12.82                     | 15.82                       | 16.00         |
| 802.11ax HE40   | 102     | 5510            | 13.34               | 13.50         | 12.35               | 12.50         | 12.81                     | 12.76                     | 15.80                       | 16.00         |
|                 | 110     | 5550            | 13.32               | 13.50         | 12.49               | 12.50         | 12.78                     | 12.73                     | 15.77                       | 16.00         |
|                 | 126     | 5630            | 13.38               | 13.50         | 12.35               | 12.50         | 12.74                     | 12.81                     | 15.79                       | 16.00         |
|                 | 134     | 5670            | 13.39               | 13.50         | 12.41               | 12.50         | 12.87                     | 12.88                     | 15.89                       | 16.00         |
|                 | 142     | 5710            | 13.31               | 13.50         | 12.45               | 12.50         | 12.78                     | 12.76                     | 15.78                       | 16.00         |
|                 | 144     | 5720            | 13.43               | 13.50         | 12.31               | 12.50         | 12.79                     | 12.82                     | 15.82                       | 16.00         |
| 802.11ax HE80   | 106     | 5530            | 13.31               | 13.50         | 12.39               | 12.50         | 12.73                     | 12.76                     | 15.76                       | 16.00         |
|                 | 122     | 5610            | 13.46               | 13.50         | 12.29               | 12.50         | 12.94                     | 12.83                     | 15.90                       | 16.00         |
|                 | 138     | 5690            | 13.38               | 13.50         | 12.42               | 12.50         | 12.83                     | 12.81                     | 15.83                       | 16.00         |
| 802.11ax HE160  | 114     | 5570            | 13.38               | 13.50         | 12.40               | 12.50         | 12.88                     | 12.86                     | 15.88                       | 16.00         |
| 802.11be EHT20  | 100     | 5500            | 13.43               | 13.50         | 12.41               | 12.50         | 12.88                     | 12.80                     | 15.85                       | 16.00         |
|                 | 116     | 5580            | 13.35               | 13.50         | 12.33               | 12.50         | 12.72                     | 12.74                     | 15.74                       | 16.00         |
|                 | 124     | 5620            | 13.39               | 13.50         | 12.31               | 12.50         | 12.72                     | 12.78                     | 15.76                       | 16.00         |
|                 | 132     | 5660            | 13.30               | 13.50         | 12.31               | 12.50         | 12.80                     | 12.78                     | 15.80                       | 16.00         |
|                 | 140     | 5700            | 13.28               | 13.50         | 12.33               | 12.50         | 12.79                     | 12.78                     | 15.80                       | 16.00         |
|                 | 144     | 5720            | 13.35               | 13.50         | 12.41               | 12.50         | 12.74                     | 12.85                     | 15.81                       | 16.00         |
| 802.11be EHT40  | 102     | 5510            | 13.30               | 13.50         | 12.31               | 12.50         | 12.77                     | 12.83                     | 15.81                       | 16.00         |
|                 | 110     | 5550            | 13.28               | 13.50         | 12.30               | 12.50         | 12.80                     | 12.74                     | 15.78                       | 16.00         |
|                 | 126     | 5630            | 13.27               | 13.50         | 12.36               | 12.50         | 12.73                     | 12.72                     | 15.74                       | 16.00         |
|                 | 134     | 5670            | 13.46               | 13.50         | 12.21               | 12.50         | 12.77                     | 12.74                     | 15.77                       | 16.00         |
|                 | 142     | 5710            | 13.33               | 13.50         | 12.36               | 12.50         | 12.67                     | 12.68                     | 15.69                       | 16.00         |
|                 | 144     | 5720            | 13.45               | 13.50         | 12.24               | 12.50         | 12.70                     | 12.69                     | 15.71                       | 16.00         |
| 802.11be EHT80  | 106     | 5530            | 13.45               | 13.50         | 12.45               | 12.50         | 12.78                     | 12.73                     | 15.77                       | 16.00         |
|                 | 122     | 5610            | 13.33               | 13.50         | 12.45               | 12.50         | 12.78                     | 12.73                     | 15.77                       | 16.00         |
|                 | 138     | 5690            | 13.35               | 13.50         | 12.33               | 12.50         | 12.79                     | 12.73                     | 15.77                       | 16.00         |
| 802.11be EHT160 | 114     | 5570            | 13.31               | 13.50         | 12.37               | 12.50         | 12.75                     | 12.72                     | 15.75                       | 16.00         |

| WLAN 5.8 GHz    |         |                 |                     |               |                     |               |                           |                           |                             |               |
|-----------------|---------|-----------------|---------------------|---------------|---------------------|---------------|---------------------------|---------------------------|-----------------------------|---------------|
| Mode            | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               | ANT 1+2                   |                           |                             |               |
|                 |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit | Average power (dBm) ANT 0 | Average power (dBm) ANT 1 | Average power (dBm) ANT 1+2 | Tune-Up Limit |
| 802.11a         | 149     | 5745            | 13.39               | 13.50         | 12.44               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 157     | 5785            | 13.39               | 13.50         | 12.32               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 165     | 5825            | 13.42               | 13.50         | 12.30               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 169     | 5845            | 13.35               | 13.50         | 12.36               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 173     | 5865            | 13.40               | 13.50         | 12.40               | 12.50         | ---                       | ---                       | ---                         | ---           |
|                 | 177     | 5885            | 13.36               | 13.50         | 12.41               | 12.50         | ---                       | ---                       | ---                         | ---           |
| 802.11n HT20    | 149     | 5745            | 13.39               | 13.50         | 12.33               | 12.50         | 12.85                     | 12.84                     | 15.86                       | 16.00         |
|                 | 157     | 5785            | 13.30               | 13.50         | 12.27               | 12.50         | 12.78                     | 12.78                     | 15.79                       | 16.00         |
|                 | 165     | 5825            | 13.29               | 13.50         | 12.28               | 12.50         | 12.88                     | 12.78                     | 15.84                       | 16.00         |
|                 | 169     | 5845            | 13.33               | 13.50         | 12.38               | 12.50         | 12.87                     | 12.89                     | 15.89                       | 16.00         |
|                 | 173     | 5865            | 13.45               | 13.50         | 12.34               | 12.50         | 12.92                     | 12.86                     | 15.90                       | 16.00         |
|                 | 177     | 5885            | 13.35               | 13.50         | 12.39               | 12.50         | 12.82                     | 12.74                     | 15.79                       | 16.00         |
| 802.11n HT40    | 151     | 5755            | 13.33               | 13.50         | 12.36               | 12.50         | 12.86                     | 12.78                     | 15.83                       | 16.00         |
|                 | 159     | 5795            | 13.42               | 13.50         | 12.34               | 12.50         | 12.83                     | 12.82                     | 15.84                       | 16.00         |
|                 | 167     | 5835            | 13.34               | 13.50         | 12.35               | 12.50         | 12.74                     | 12.70                     | 15.73                       | 16.00         |
|                 | 175     | 5875            | 13.40               | 13.50         | 12.35               | 12.50         | 12.79                     | 12.79                     | 15.80                       | 16.00         |
| 802.11ac VHT20  | 149     | 5745            | 13.26               | 13.50         | 12.32               | 12.50         | 12.86                     | 12.82                     | 15.85                       | 16.00         |
|                 | 157     | 5785            | 13.25               | 13.50         | 12.35               | 12.50         | 12.86                     | 12.79                     | 15.84                       | 16.00         |
|                 | 165     | 5825            | 13.27               | 13.50         | 12.33               | 12.50         | 12.79                     | 12.82                     | 15.82                       | 16.00         |
|                 | 169     | 5845            | 13.36               | 13.50         | 12.30               | 12.50         | 12.83                     | 12.86                     | 15.86                       | 16.00         |
|                 | 173     | 5865            | 13.34               | 13.50         | 12.30               | 12.50         | 12.79                     | 12.75                     | 15.78                       | 16.00         |
|                 | 177     | 5885            | 13.28               | 13.50         | 12.44               | 12.50         | 12.80                     | 12.82                     | 15.82                       | 16.00         |
| 802.11ac VHT40  | 151     | 5755            | 13.38               | 13.50         | 12.30               | 12.50         | 12.83                     | 12.75                     | 15.80                       | 16.00         |
|                 | 159     | 5795            | 13.32               | 13.50         | 12.24               | 12.50         | 12.68                     | 12.71                     | 15.71                       | 16.00         |
|                 | 167     | 5835            | 13.38               | 13.50         | 12.31               | 12.50         | 12.65                     | 12.77                     | 15.72                       | 16.00         |
|                 | 175     | 5875            | 13.36               | 13.50         | 12.31               | 12.50         | 12.75                     | 12.76                     | 15.77                       | 16.00         |
| 802.11ac VHT80  | 155     | 5775            | 13.42               | 13.50         | 12.36               | 12.50         | 12.74                     | 12.67                     | 15.72                       | 16.00         |
| 802.11ac VHT160 | 171     | 5855            | 13.30               | 13.50         | 12.19               | 12.50         | 12.77                     | 12.69                     | 15.74                       | 16.00         |
| 802.11ax HE20   | 163     | 5815            | 13.46               | 13.50         | 12.48               | 12.50         | 12.98                     | 12.94                     | 15.97                       | 16.00         |
|                 | 149     | 5745            | 13.39               | 13.50         | 12.33               | 12.50         | 12.87                     | 12.86                     | 15.88                       | 16.00         |
|                 | 157     | 5785            | 13.44               | 13.50         | 12.33               | 12.50         | 12.78                     | 12.78                     | 15.79                       | 16.00         |
|                 | 165     | 5825            | 13.41               | 13.50         | 12.34               | 12.50         | 12.82                     | 12.83                     | 15.84                       | 16.00         |
|                 | 169     | 5845            | 13.32               | 13.50         | 12.35               | 12.50         | 12.87                     | 12.86                     | 15.88                       | 16.00         |
|                 | 173     | 5865            | 13.34               | 13.50         | 12.38               | 12.50         | 12.90                     | 12.91                     | 15.92                       | 16.00         |
| 802.11ax HE40   | 177     | 5885            | 13.39               | 13.50         | 12.47               | 12.50         | 12.86                     | 12.74                     | 15.81                       | 16.00         |
|                 | 151     | 5755            | 13.32               | 13.50         | 12.42               | 12.50         | 12.86                     | 12.80                     | 15.84                       | 16.00         |
|                 | 159     | 5795            | 13.42               | 13.50         | 12.34               | 12.50         | 12.91                     | 12.89                     | 15.91                       | 16.00         |
|                 | 167     | 5835            | 13.40               | 13.50         | 12.35               | 12.50         | 12.91                     | 12.83                     | 15.88                       | 16.00         |
| 802.11ax HE80   | 175     | 5875            | 13.37               | 13.50         | 12.34               | 12.50         | 12.82                     | 12.82                     | 15.83                       | 16.00         |
|                 | 155     | 5775            | 13.36               | 13.50         | 12.44               | 12.50         | 12.80                     | 12.80                     | 15.81                       | 16.00         |
| 802.11ax HE160  | 171     | 5855            | 13.32               | 13.50         | 12.41               | 12.50         | 12.84                     | 12.86                     | 15.86                       | 16.00         |
|                 | 163     | 5815            | 13.36               | 13.50         | 12.36               | 12.50         | 12.79                     | 12.67                     | 15.74                       | 16.00         |
| 802.11be EHT20  | 149     | 5745            | 13.29               | 13.50         | 12.28               | 12.50         | 12.78                     | 12.84                     | 15.82                       | 16.00         |
|                 | 157     | 5785            | 13.23               | 13.50         | 12.33               | 12.50         | 12.85                     | 12.80                     | 15.84                       | 16.00         |
|                 | 165     | 5825            | 13.33               | 13.50         | 12.37               | 12.50         | 12.80                     | 12.72                     | 15.77                       | 16.00         |
|                 | 169     | 5845            | 13.33               | 13.50         | 12.37               | 12.50         | 12.79                     | 12.83                     | 15.82                       | 16.00         |
|                 | 173     | 5865            | 13.24               | 13.50         | 12.31               | 12.50         | 12.87                     | 12.81                     | 15.85                       | 16.00         |
|                 | 177     | 5885            | 13.30               | 13.50         | 12.25               | 12.50         | 12.79                     | 12.72                     | 15.77                       | 16.00         |
| 802.11be EHT40  | 151     | 5755            | 13.41               | 13.50         | 12.27               | 12.50         | 12.81                     | 12.78                     | 15.81                       | 16.00         |
|                 | 159     | 5795            | 13.34               | 13.50         | 12.24               | 12.50         | 12.75                     | 12.77                     | 15.77                       | 16.00         |
|                 | 167     | 5835            | 13.43               | 13.50         | 12.32               | 12.50         | 12.61                     | 12.62                     | 15.63                       | 16.00         |
|                 | 175     | 5875            | 13.30               | 13.50         | 12.21               | 12.50         | 12.67                     | 12.74                     | 15.72                       | 16.00         |
| 802.11be EHT80  | 155     | 5775            | 13.36               | 13.50         | 12.45               | 12.50         | 12.76                     | 12.78                     | 15.78                       | 16.00         |
| 802.11be EHT160 | 171     | 5855            | 13.38               | 13.50         | 12.34               | 12.50         | 12.72                     | 12.64                     | 15.69                       | 16.00         |
|                 | 163     | 5815            | 13.37               | 13.50         | 12.35               | 12.50         | 12.71                     | 12.79                     | 15.76                       | 16.00         |

| U-NII 5 SP      |         |                 |                     |               |                     |               |                           |                           |                             |               |
|-----------------|---------|-----------------|---------------------|---------------|---------------------|---------------|---------------------------|---------------------------|-----------------------------|---------------|
| Mode            | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               | ANT 1+2                   |                           |                             |               |
|                 |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit | Average power (dBm) ANT 1 | Average power (dBm) ANT 2 | Average power (dBm) ANT 1+2 | Tune-Up Limit |
| 802.11ax HE20   | 1       | 5955            | 11.92               | 12.00         | 11.85               | 12.00         | 11.87                     | 11.99                     | 14.94                       | 15.00         |
|                 | 45      | 6175            | 11.79               | 12.00         | 11.73               | 12.00         | 11.79                     | 11.76                     | 14.79                       | 15.00         |
|                 | 93      | 6415            | 11.86               | 12.00         | 11.85               | 12.00         | 11.88                     | 11.91                     | 14.91                       | 15.00         |
| 802.11ax HE40   | 3       | 5965            | 11.82               | 12.00         | 11.79               | 12.00         | 11.85                     | 11.86                     | 14.87                       | 15.00         |
|                 | 43      | 6165            | 11.86               | 12.00         | 11.76               | 12.00         | 11.81                     | 11.89                     | 14.86                       | 15.00         |
|                 | 91      | 6405            | 11.76               | 12.00         | 11.73               | 12.00         | 11.77                     | 11.74                     | 14.77                       | 15.00         |
| 802.11ax HE80   | 7       | 5985            | 11.72               | 12.00         | 11.73               | 12.00         | 11.77                     | 11.78                     | 14.79                       | 15.00         |
|                 | 39      | 6145            | 11.85               | 12.00         | 11.80               | 12.00         | 11.81                     | 11.76                     | 14.80                       | 15.00         |
|                 | 87      | 6385            | 11.68               | 12.00         | 11.72               | 12.00         | 11.88                     | 11.89                     | 14.90                       | 15.00         |
| 802.11ax HE160  | 15      | 6025            | 11.84               | 12.00         | 11.82               | 12.00         | 11.79                     | 11.87                     | 14.84                       | 15.00         |
|                 | 47      | 6185            | 11.89               | 12.00         | 11.86               | 12.00         | 11.78                     | 11.86                     | 14.83                       | 15.00         |
|                 | 79      | 6345            | 11.86               | 12.00         | 11.77               | 12.00         | 11.90                     | 11.91                     | 14.92                       | 15.00         |
| 802.11be EHT20  | 1       | 5955            | 11.71               | 12.00         | 11.78               | 12.00         | 11.88                     | 11.87                     | 14.89                       | 15.00         |
|                 | 45      | 6175            | 11.77               | 12.00         | 11.72               | 12.00         | 11.80                     | 11.83                     | 14.83                       | 15.00         |
|                 | 93      | 6415            | 11.88               | 12.00         | 11.92               | 12.00         | 11.91                     | 11.96                     | 14.95                       | 15.00         |
| 802.11be EHT40  | 3       | 5965            | 11.78               | 12.00         | 11.79               | 12.00         | 11.80                     | 11.89                     | 14.86                       | 15.00         |
|                 | 43      | 6165            | 11.77               | 12.00         | 11.78               | 12.00         | 11.76                     | 11.86                     | 14.82                       | 15.00         |
|                 | 91      | 6405            | 11.79               | 12.00         | 11.82               | 12.00         | 11.78                     | 11.83                     | 14.82                       | 15.00         |
| 802.11be EHT80  | 7       | 5985            | 11.74               | 12.00         | 11.75               | 12.00         | 11.79                     | 11.77                     | 14.79                       | 15.00         |
|                 | 39      | 6145            | 11.83               | 12.00         | 11.85               | 12.00         | 11.81                     | 11.82                     | 14.83                       | 15.00         |
|                 | 87      | 6385            | 11.73               | 12.00         | 11.72               | 12.00         | 11.89                     | 11.92                     | 14.92                       | 15.00         |
| 802.11be EHT160 | 15      | 6025            | 11.82               | 12.00         | 11.83               | 12.00         | 11.75                     | 11.77                     | 14.77                       | 15.00         |
|                 | 47      | 6185            | 11.78               | 12.00         | 11.73               | 12.00         | 11.68                     | 11.76                     | 14.73                       | 15.00         |
|                 | 79      | 6345            | 11.87               | 12.00         | 11.94               | 12.00         | 11.81                     | 11.78                     | 14.81                       | 15.00         |
| 802.11be EHT320 | 31      | 6105            | 11.98               | 12.00         | 11.95               | 12.00         | 11.97                     | 11.88                     | 14.94                       | 15.00         |
|                 | 63      | 6265            | 11.97               | 12.00         | 11.91               | 12.00         | 11.92                     | 11.86                     | 14.90                       | 15.00         |

| U-NII 6 LPI     |         |                 |                     |               |                     |               |                           |                           |                             |               |
|-----------------|---------|-----------------|---------------------|---------------|---------------------|---------------|---------------------------|---------------------------|-----------------------------|---------------|
| Mode            | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               | ANT 1+2                   |                           |                             |               |
|                 |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit | Average power (dBm) ANT 1 | Average power (dBm) ANT 2 | Average power (dBm) ANT 1+2 | Tune-Up Limit |
| 802.11ax HE20   | 97      | 6435            | 5.33                | 5.50          | 5.65                | 5.75          | 2.49                      | 2.51                      | 5.51                        | 5.625         |
|                 | 105     | 6475            | 5.32                | 5.50          | 5.64                | 5.75          | 2.39                      | 2.39                      | 5.40                        | 5.625         |
|                 | 113     | 6515            | 5.54                | 5.75          | 5.30                | 5.50          | 2.42                      | 2.45                      | 5.45                        | 5.625         |
| 802.11ax HE40   | 99      | 6445            | 8.59                | 8.75          | 8.64                | 8.75          | 5.44                      | 5.42                      | 8.44                        | 8.625         |
|                 | 107     | 6485            | 8.30                | 8.50          | 8.63                | 8.75          | 5.49                      | 5.40                      | 8.46                        | 8.625         |
| 802.11ax HE80   | 103     | 6465            | 11.62               | 11.75         | 11.29               | 11.50         | 8.49                      | 8.46                      | 11.49                       | 11.625        |
|                 | 119     | 6545            | 11.84               | 12.00         | 11.55               | 11.75         | 8.72                      | 8.65                      | 11.70                       | 11.875        |
| 802.11ax HE160  | 111     | 6505            | 11.82               | 12.00         | 11.89               | 12.00         | 11.52                     | 11.40                     | 14.47                       | 14.625        |
| 802.11be EHT20  | 97      | 6435            | 5.40                | 5.50          | 5.60                | 5.75          | 2.51                      | 2.45                      | 5.49                        | 5.625         |
|                 | 105     | 6475            | 5.33                | 5.50          | 5.65                | 5.75          | 2.47                      | 2.39                      | 5.44                        | 5.625         |
|                 | 113     | 6515            | 5.61                | 5.75          | 5.40                | 5.50          | 2.44                      | 2.43                      | 5.45                        | 5.625         |
| 802.11be EHT40  | 99      | 6445            | 8.55                | 8.75          | 8.56                | 8.75          | 5.45                      | 5.49                      | 8.48                        | 8.625         |
|                 | 107     | 6485            | 8.34                | 8.50          | 8.57                | 8.75          | 5.46                      | 5.51                      | 8.50                        | 8.625         |
| 802.11be EHT80  | 103     | 6465            | 11.61               | 11.75         | 11.40               | 11.50         | 8.46                      | 8.51                      | 11.50                       | 11.625        |
|                 | 119     | 6545            | 11.76               | 12.00         | 11.60               | 11.75         | 8.77                      | 8.67                      | 11.73                       | 11.875        |
| 802.11be EHT160 | 111     | 6505            | 11.72               | 12.00         | 11.85               | 12.00         | 11.42                     | 11.46                     | 14.45                       | 14.625        |
| 802.11be EHT320 | 95      | 6425            | 11.98               | 12.00         | 11.87               | 12.00         | 11.97                     | 11.93                     | 14.96                       | 15.00         |

| U-NII 7 SP      |         |                 |                     |               |                     |               |                           |                           |                             |               |
|-----------------|---------|-----------------|---------------------|---------------|---------------------|---------------|---------------------------|---------------------------|-----------------------------|---------------|
| Mode            | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               | ANT 1+2                   |                           |                             |               |
|                 |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit | Average power (dBm) ANT 1 | Average power (dBm) ANT 2 | Average power (dBm) ANT 1+2 | Tune-Up Limit |
| 802.11ax HE20   | 117     | 6535            | 11.90               | 12.00         | 11.97               | 12.00         | 11.88                     | 11.94                     | 14.92                       | 15.00         |
|                 | 149     | 6695            | 11.76               | 12.00         | 11.76               | 12.00         | 11.79                     | 11.82                     | 14.82                       | 15.00         |
|                 | 181     | 6855            | 11.94               | 12.00         | 11.95               | 12.00         | 11.82                     | 11.99                     | 14.92                       | 15.00         |
| 802.11ax HE40   | 115     | 6525            | 8.30                | 8.50          | 8.64                | 8.75          | 5.52                      | 5.62                      | 8.58                        | 8.75          |
|                 | 147     | 6685            | 11.86               | 12.00         | 11.90               | 12.00         | 11.73                     | 11.84                     | 14.80                       | 15.00         |
|                 | 179     | 6845            | 11.90               | 12.00         | 11.88               | 12.00         | 11.75                     | 11.85                     | 14.81                       | 15.00         |
| 802.11ax HE80   | 135     | 6625            | 11.79               | 12.00         | 11.85               | 12.00         | 11.87                     | 11.92                     | 14.91                       | 15.00         |
|                 | 151     | 6705            | 11.79               | 12.00         | 11.98               | 12.00         | 11.76                     | 11.75                     | 14.77                       | 15.00         |
|                 | 167     | 6785            | 11.72               | 12.00         | 11.81               | 12.00         | 11.76                     | 11.75                     | 14.77                       | 15.00         |
|                 | 183     | 6865            | 11.60               | 11.75         | 11.80               | 12.00         | 8.77                      | 8.65                      | 11.72                       | 11.875        |
| 802.11ax HE160  | 143     | 6665            | 11.76               | 12.00         | 11.92               | 12.00         | 11.89                     | 11.91                     | 14.91                       | 15.00         |
|                 | 175     | 6825            | 11.88               | 12.00         | 11.88               | 12.00         | 11.78                     | 11.87                     | 14.84                       | 15.00         |
| 802.11be EHT20  | 117     | 6535            | 11.74               | 12.00         | 11.85               | 12.00         | 11.69                     | 11.80                     | 14.76                       | 15.00         |
|                 | 149     | 6695            | 11.83               | 12.00         | 11.82               | 12.00         | 11.94                     | 11.86                     | 14.91                       | 15.00         |
|                 | 181     | 6855            | 11.86               | 12.00         | 11.77               | 12.00         | 11.90                     | 11.89                     | 14.91                       | 15.00         |
| 802.11be EHT40  | 115     | 6525            | 8.31                | 8.50          | 8.63                | 8.75          | 5.58                      | 5.64                      | 8.62                        | 8.75          |
|                 | 147     | 6685            | 11.86               | 12.00         | 11.92               | 12.00         | 11.77                     | 11.84                     | 14.82                       | 15.00         |
|                 | 179     | 6845            | 11.69               | 12.00         | 11.83               | 12.00         | 11.74                     | 11.88                     | 14.82                       | 15.00         |
| 802.11be EHT80  | 135     | 6625            | 11.76               | 12.00         | 11.92               | 12.00         | 11.89                     | 11.88                     | 14.90                       | 15.00         |
|                 | 151     | 6705            | 11.86               | 12.00         | 11.75               | 12.00         | 11.71                     | 11.75                     | 14.74                       | 15.00         |
|                 | 167     | 6785            | 11.87               | 12.00         | 11.86               | 12.00         | 11.73                     | 11.78                     | 14.77                       | 15.00         |
|                 | 183     | 6865            | 11.65               | 11.75         | 11.79               | 12.00         | 8.69                      | 8.73                      | 11.72                       | 11.875        |
| 802.11be EHT160 | 143     | 6665            | 11.85               | 12.00         | 11.86               | 12.00         | 11.86                     | 11.70                     | 14.79                       | 15.00         |
|                 | 175     | 6825            | 11.88               | 12.00         | 11.82               | 12.00         | 11.90                     | 11.72                     | 14.82                       | 15.00         |
| 802.11be EHT320 | 127     | 6585            | 11.93               | 12.00         | 11.93               | 12.00         | 11.94                     | 11.96                     | 14.96                       | 15.00         |
|                 | 159     | 6745            | 11.91               | 12.00         | 11.89               | 12.00         | 11.96                     | 11.94                     | 14.96                       | 15.00         |

| U-NII 8 LPI     |         |                 |                     |               |                     |               |                           |                           |                             |               |
|-----------------|---------|-----------------|---------------------|---------------|---------------------|---------------|---------------------------|---------------------------|-----------------------------|---------------|
| Mode            | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               | ANT 1+2                   |                           |                             |               |
|                 |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit | Average power (dBm) ANT 1 | Average power (dBm) ANT 2 | Average power (dBm) ANT 1+2 | Tune-Up Limit |
| 802.11ax HE20   | 185     | 6875            | 5.60                | 5.75          | 5.63                | 5.75          | 5.54                      | 5.65                      | 8.61                        | 8.75          |
|                 | 209     | 6995            | 5.62                | 5.75          | 5.80                | 6.00          | 5.71                      | 5.69                      | 8.71                        | 8.875         |
|                 | 233     | 7115            | 0.38                | 0.50          | 0.38                | 0.50          | -1.97                     | -1.85                     | 1.10                        | 1.25          |
| 802.11ax HE40   | 187     | 6885            | 8.61                | 8.75          | 8.59                | 8.75          | 5.60                      | 5.65                      | 8.64                        | 8.75          |
|                 | 211     | 7005            | 8.54                | 8.75          | 8.62                | 8.75          | 5.60                      | 5.53                      | 8.58                        | 8.75          |
|                 | 227     | 7085            | 8.88                | 9.00          | 8.85                | 9.00          | 5.60                      | 5.53                      | 8.58                        | 8.75          |
| 802.11ax HE80   | 199     | 6945            | 11.61               | 11.75         | 11.91               | 12.00         | 8.73                      | 8.64                      | 11.70                       | 11.875        |
|                 | 215     | 7025            | 11.61               | 11.75         | 11.58               | 11.75         | 8.53                      | 8.60                      | 11.58                       | 11.75         |
| 802.11ax HE160  | 207     | 6985            | 11.86               | 12.00         | 11.83               | 12.00         | 11.75                     | 11.67                     | 14.72                       | 14.875        |
|                 | 185     | 6875            | 5.61                | 5.75          | 5.61                | 5.75          | 5.55                      | 5.65                      | 8.61                        | 8.75          |
| 802.11be EHT20  | 209     | 6995            | 5.54                | 5.75          | 5.88                | 6.00          | 5.68                      | 5.71                      | 8.71                        | 8.875         |
|                 | 233     | 7115            | 0.37                | 0.50          | 0.38                | 0.50          | -1.85                     | -1.90                     | 1.14                        | 1.25          |
| 802.11be EHT40  | 187     | 6885            | 8.59                | 8.75          | 8.64                | 8.75          | 5.51                      | 5.56                      | 8.55                        | 8.75          |
|                 | 211     | 7005            | 8.59                | 8.75          | 8.60                | 8.75          | 5.54                      | 5.57                      | 8.57                        | 8.75          |
|                 | 227     | 7085            | 8.81                | 9.00          | 8.85                | 9.00          | 5.58                      | 5.52                      | 8.56                        | 8.75          |
| 802.11be EHT80  | 199     | 6945            | 11.60               | 11.75         | 11.85               | 12.00         | 8.65                      | 8.76                      | 11.72                       | 11.875        |
|                 | 215     | 7025            | 11.65               | 11.75         | 11.63               | 11.75         | 8.53                      | 8.54                      | 11.55                       | 11.75         |
| 802.11be EHT160 | 207     | 6985            | 11.84               | 12.00         | 11.91               | 12.00         | 11.71                     | 11.74                     | 14.74                       | 14.875        |
| 802.11be EHT320 | 191     | 6905            | 11.99               | 12.00         | 11.96               | 12.00         | 11.97                     | 11.95                     | 14.97                       | 15.00         |

### 8.3. Measured Conducted Power Results for Bluetooth

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

The Bluetooth call box has been used during SAR measurement and the DUT was set to DH5 mode at the maximum output power. Its duty factor was calculated as below and the measured SAR for Bluetooth would be scaled to the 100% transmission duty factor to determine compliance.

| BT 2.0 / 3.0                  |         |                 |                     |               |                     |               |
|-------------------------------|---------|-----------------|---------------------|---------------|---------------------|---------------|
| Mode                          | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               |
|                               |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit |
| BR / EDR<br>1Mbps (GFSK)      | 0       | 2402            | ---                 | ---           | 14.36               | 15.25         |
|                               | 39      | 2441            | ---                 | ---           | 14.44               | 15.25         |
|                               | 78      | 2480            | ---                 | ---           | 14.63               | 15.25         |
| BR / EDR<br>2Mbps (π/4 DQPSK) | 0       | 2402            | ---                 | ---           | 14.27               | 15.00         |
|                               | 39      | 2441            | ---                 | ---           | 14.37               | 15.00         |
|                               | 78      | 2480            | ---                 | ---           | 14.53               | 15.00         |
| BR / EDR<br>3Mbps (8-DPSK)    | 0       | 2402            | ---                 | ---           | 14.33               | 14.90         |
|                               | 39      | 2441            | ---                 | ---           | 14.42               | 14.90         |
|                               | 78      | 2480            | ---                 | ---           | 14.59               | 14.90         |


| BT 4.0 / 5.0            |         |                 |                     |               |                     |               |
|-------------------------|---------|-----------------|---------------------|---------------|---------------------|---------------|
| Mode                    | Channel | Frequency (MHz) | ANT 1               |               | ANT 2               |               |
|                         |         |                 | Average power (dBm) | Tune-Up Limit | Average power (dBm) | Tune-Up Limit |
| LE<br>1Mbps (GFSK)      | 0       | 2402            | ---                 | ---           | 14.31               | 15.25         |
|                         | 19      | 2440            | ---                 | ---           | 14.39               | 15.25         |
|                         | 39      | 2480            | ---                 | ---           | 14.59               | 15.25         |
| LE<br>2Mbps (π/4 DQPSK) | 1       | 2404            | ---                 | ---           | 14.31               | 15.25         |
|                         | 19      | 2440            | ---                 | ---           | 14.42               | 15.25         |
|                         | 38      | 2478            | ---                 | ---           | 14.54               | 15.25         |

The duty factor of Bluetooth signal has been calculated as following.

| Mode | Antenna | Pulse Width (ms) | Total Period (ms) | Duty Cycle (%) | Crest Factor (1/Duty Cycle) |
|------|---------|------------------|-------------------|----------------|-----------------------------|
| GFSK | ANT-1   | 2.88             | 3.75              | 76.80%         | 1.3                         |

Duty Factor = Pulse Width / Total Period

#### Time-domain Plot for Bluetooth Antenna-1 Transmission

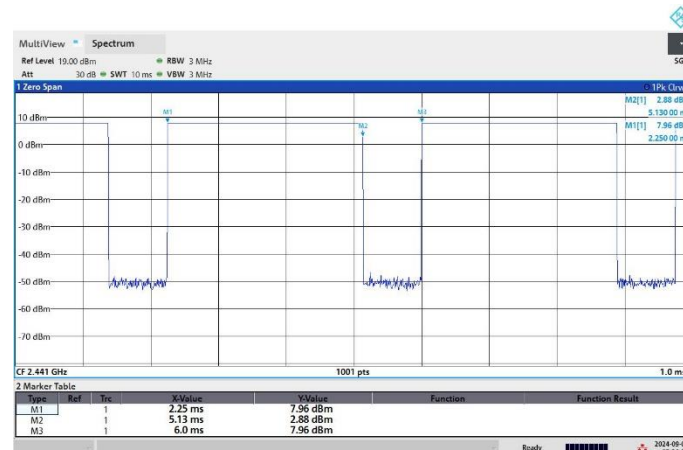

## 9. Evaluation for Standalone Transmission Scenario

### 9.1. Test Notes

#### General Notes:

- [1] Per KDB 447498 D01, SAR results were scaled to the maximum allowed power to demonstrate compliance. When SAR is not measured at the maximum power level allowed for production units, the measured SAR will be scaled to the maximum tune-up tolerance limit to determine compliance.
- [2] The SAR has been measured with highest transmission duty factor supported by the test mode tools for WLAN and/or Bluetooth. When the transmission duty factor could not achieve 100%, the reported SAR will be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up power.
- [3] The reported SAR was calculated as below:
  - Tune-up Scaling Factor = Maximum Tune-up Limit Power (mW) / Measured Conducted Power (mW)
  - Duty Factor Scaling Factor = 100% / Transmission Duty Cycle (%)
  - WWAN Reported SAR = Measured SAR x Tune-up Scaling Factor
  - WLAN / Bluetooth Reported SAR = Measured SAR x Tune-up Scaling Factor x Duty Cycle Scaling Factor
- [4] Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:
  - 1g SAR  $\leq$  0.8 W/kg or 10g SAR  $\leq$  2.0 W/kg, when the transmission band is  $\leq$  100 MHz
  - 1g SAR  $\leq$  0.6 W/kg or 10g SAR  $\leq$  1.5 W/kg, when the transmission band is between 100 MHz and 200 MHz
  - 1g SAR  $\leq$  0.4 W/kg or 10g SAR  $\leq$  1.0 W/kg, when the transmission band is  $\geq$  200 MHz
- [5] Per KDB Publication 648474 D04, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was  $\leq$  1.2 W/kg, no additional body-worn SAR evaluation with a headset was required.
- [6] Per KDB 865664 D01, variability SAR tests were performed when the measured SAR results for a frequency band were  $\geq$  0.8 W/kg.
- [7] During SAR testing for the wireless router conditions per KDB Publication 941225 D06, the actual portable Hotspot operation (with actual simultaneous transmission of a transmitter with Wi-Fi) was not activated.
- [8] Per KDB Publication 648474 D04, this device is considered as "Phablet" since its overall diagonal dimension is  $>$  16 cm. Therefore, Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR  $>$  1.2 W/kg.
- [9] Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the 1g thresholds for the equivalent test cases.

#### WLAN Notes:

- [1] Per KDB Publication 248227 D01, for held-to-ear, hotspot, and phablet (mini-tablet) operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported 1g SAR for the initial test position is  $\leq$  0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq$  0.8 W/kg or all test positions are measured.
- [2] For 2.4 GHz Wi-Fi single transmission chain operations, the highest measured maximum output power channel of 802.11b for DSSS was selected for SAR measurement. SAR for OFDM modes (802.11g/n/ax) was not required due to the highest reported SAR for DSSS adjusted by the ratio of OFDM to DSSS specified maximum output power is  $\leq$  1.2 W/kg.
- [3] For 5 GHz Wi-Fi operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported 1g SAR for initial test configuration adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power is 1.2 W/kg.

- [4] SAR testing for U-NII-1 is not required due to the highest reported SAR for U-NII-2A is  $\leq 1.2$  W/kg.
- [5] When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg for 1g evaluations or all test channels were measured.
- [6] SAR for MIMO mode was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously.
- [7] For scaling factor determination of the reported SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain.
- [8] The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100 % transmission duty factor to determine compliance.
- [9] When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

#### Wi-Fi 6E PD Notes:

- [1] The Wi-Fi 6E PD was performed according 2020 TCB workshop RF Exposure 5G RFX Policies Interim Procedures.
- [2] First, evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020 and using highest SAR test configurations evaluate incident PD using the mmW near-field probe and total-field / power-density reconstruction method (2 mm closest meas. plane).
- [3] Per Interim Procedures, the power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty  $> 30$  %. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor.
- [4] The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- [5] The Wi-Fi 6E RF Exposure results are used for simultaneous transmission analysis with the other transmitters and total exposure ratio, the analysis can be found in this report and PD report.
- [6] The absorbed power density (APD) using a 4 cm<sup>2</sup> averaging area is reported based on SAR measurements.
- [7] Power density was calculated by repeated E-field measurements on two measurement planes separated by  $\lambda/4$ .
- [8] The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
- [9] The measurement procedure consists of measuring the *PD<sub>inc</sub>* at two different distances: 2 mm (compliance distance) and  $\lambda/5$ . The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density *iPD<sub>n</sub>* fulfill the criterion described below. Since iPD ratio between the two distances is  $\geq -1$  dB, the grid step (0.0625) was sufficient for determining compliance at  $d = 2$  mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$

- [10] iPD testing was performed on 5 selected channels spread across all of the 6E spectrum. Channels were determined based on the highest maximum output power and transmission mode combination. No channels that could transmit below 6 GHz were selected for testing so as to use the ESR Test Methodology only.
- [11] The test position for iPD was determined using the worst-case V/m on each required test position needed for consideration.

**Bluetooth Notes**

- [1] Bluetooth SAR was measured with the device connected to a callbox with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop guidance, the reported SAR was scaled to the 78% transmission duty factor for Bluetooth and 86% transmission duty factor for Bluetooth LE to determine compliance.
- [2] Head and Hotspot Bluetooth SAR were evaluated for BT BDR tethering applications.
- [3] The highest frame average power configurations for both Bluetooth and Bluetooth LE were evaluated for SAR. The worst-case configuration was used for the remaining test positions as the most conservative scenario.
- [4] SAR measurement is not required for the 8PSK, BLE, and HDR. When the secondary mode is  $\leq 0.25$  dB higher than the primary mode.

## 9.2. Measured and Reported SAR Results for Body

| Index. | Band      | Modulation      | Test Position    | Spacing (mm) | Channel | Antenna | External Keyboard | Power Drift | Meas. Conducted Power (dBm) | Tune-up (dBm) | Tune-up Scaling Factor | Duty Cycle (%) | Duty Cycle Scaling Factor | SAR 1 g (W/kg) | Reported SAR 1 g (W/kg) |
|--------|-----------|-----------------|------------------|--------------|---------|---------|-------------------|-------------|-----------------------------|---------------|------------------------|----------------|---------------------------|----------------|-------------------------|
| 1      | WLAN2.4G  | 802.11b         | Bottom of laptop | 0            | 6       | Ant 1   | w/o               | 0.04        | 14.96                       | 15            | 1.009                  | 99.41          | 1.006                     | 0.282          | 0.29                    |
|        | WLAN2.4G  | 802.11b         | Left Side        | 0            | 6       | Ant 1   | w/o               | 0.05        | 14.96                       | 15            | 1.009                  | 99.41          | 1.006                     | 0.077          | 0.08                    |
|        | WLAN2.4G  | 802.11b         | Bottom Side      | 0            | 6       | Ant 1   | w/o               | -0.05       | 14.96                       | 15            | 1.009                  | 99.41          | 1.006                     | 0.55           | 0.56                    |
|        | WLAN2.4G  | 802.11b         | Bottom of laptop | 0            | 6       | Ant 2   | w/o               | -0.14       | 14.94                       | 15            | 1.014                  | 99.41          | 1.006                     | 0.265          | 0.27                    |
|        | WLAN2.4G  | 802.11n HT40    | Bottom of laptop | 0            | 6       | Ant 1+2 | w/o               | -0.12       | 17.92                       | 18            | 1.019                  | 99.35          | 1.007                     | 0.283          | 0.29                    |
|        | WLAN2.4G  | 802.11n HT40    | Left Side        | 0            | 6       | Ant 1+2 | w/o               | 0.01        | 17.92                       | 18            | 1.019                  | 99.35          | 1.007                     | 0.045          | 0.05                    |
|        | WLAN2.4G  | 802.11n HT40    | Bottom Side      | 0            | 6       | Ant 1+2 | w/o               | 0.01        | 17.92                       | 18            | 1.019                  | 99.35          | 1.007                     | 0.475          | 0.49                    |
|        | WLAN2.4G  | 802.11b         | Bottom Side      | 0            | 1       | Ant 1   | w/o               | 0.15        | 14.95                       | 15            | 1.012                  | 99.41          | 1.006                     | 0.358          | 0.36                    |
|        | WLAN2.4G  | 802.11b         | Bottom Side      | 0            | 11      | Ant 1   | w/o               | -0.09       | 14.94                       | 15            | 1.014                  | 99.41          | 1.006                     | 0.361          | 0.37                    |
|        | WLAN2.4G  | 802.11b         | Bottom Side      | 0            | 12      | Ant 1   | w/o               | -0.04       | 14.85                       | 15            | 1.035                  | 99.41          | 1.006                     | 0.355          | 0.37                    |
|        | WLAN2.4G  | 802.11b         | Bottom Side      | 0            | 13      | Ant 1   | w/o               | -0.04       | 14.83                       | 15            | 1.040                  | 99.41          | 1.006                     | 0.346          | 0.36                    |
|        | WLAN2.4G  | 802.11b         | Bottom Side      | 0            | 6       | Ant 1   | w/                | -0.14       | 14.96                       | 15            | 1.009                  | 99.41          | 1.006                     | 0.409          | 0.42                    |
| 2      | WLAN5.3G  | 802.11ac VHT160 | Bottom of laptop | 0            | 50      | Ant 1   | w/o               | -0.14       | 13.49                       | 13.5          | 1.002                  | 99.01          | 1.010                     | 0.39           | 0.39                    |
|        | WLAN5.3G  | 802.11ac VHT160 | Left Side        | 0            | 50      | Ant 1   | w/o               | 0.11        | 13.49                       | 13.5          | 1.002                  | 99.01          | 1.010                     | 0.043          | 0.04                    |
|        | WLAN5.3G  | 802.11ac VHT160 | Bottom Side      | 0            | 50      | Ant 1   | w/o               | 0.19        | 13.49                       | 13.5          | 1.002                  | 99.01          | 1.010                     | 0.435          | 0.44                    |
|        | WLAN5.3G  | 802.11ac VHT160 | Bottom of laptop | 0            | 50      | Ant 2   | w/o               | -0.01       | 12.48                       | 12.5          | 1.005                  | 99.01          | 1.010                     | 0.401          | 0.41                    |
|        | WLAN5.3G  | 802.11ac VHT160 | Bottom of laptop | 0            | 50      | Ant 1+2 | w/o               | 0.15        | 15.94                       | 16            | 1.014                  | 98.23          | 1.018                     | 0.459          | 0.47                    |
|        | WLAN5.3G  | 802.11ac VHT160 | Left Side        | 0            | 50      | Ant 1+2 | w/o               | 0.04        | 15.94                       | 16            | 1.014                  | 98.23          | 1.018                     | 0.034          | 0.04                    |
|        | WLAN5.3G  | 802.11ac VHT160 | Bottom Side      | 0            | 50      | Ant 1+2 | w/o               | 0.01        | 15.94                       | 16            | 1.014                  | 98.23          | 1.018                     | 0.482          | 0.50                    |
|        | WLAN5.3G  | 802.11ac VHT160 | Bottom Side      | 0            | 50      | Ant 1+2 | w/                | -0.18       | 15.94                       | 16            | 1.014                  | 98.23          | 1.018                     | 0.376          | 0.39                    |
|        | WLAN5.6G  | 802.11ac VHT160 | Bottom of laptop | 0            | 114     | Ant 1   | w/o               | 0.15        | 13.4                        | 13.5          | 1.023                  | 99.01          | 1.010                     | 0.342          | 0.35                    |
|        | WLAN5.6G  | 802.11ac VHT160 | Left Side        | 0            | 114     | Ant 1   | w/o               | -0.07       | 13.4                        | 13.5          | 1.023                  | 99.01          | 1.010                     | 0.061          | 0.06                    |
|        | WLAN5.6G  | 802.11ac VHT160 | Bottom Side      | 0            | 114     | Ant 1   | w/o               | 0.15        | 13.4                        | 13.5          | 1.023                  | 99.01          | 1.010                     | 0.295          | 0.30                    |
|        | WLAN5.6G  | 802.11ac VHT160 | Bottom of laptop | 0            | 114     | Ant 2   | w/o               | -0.15       | 12.43                       | 12.5          | 1.016                  | 99.01          | 1.010                     | 0.306          | 0.31                    |
| 3      | WLAN5.6G  | 802.11ac VHT160 | Bottom of laptop | 0            | 114     | Ant 1+2 | w/o               | 0.05        | 15.9                        | 16            | 1.023                  | 98.23          | 1.018                     | 0.295          | 0.31                    |
|        | WLAN5.6G  | 802.11ac VHT160 | Left Side        | 0            | 114     | Ant 1+2 | w/o               | -0.18       | 15.9                        | 16            | 1.023                  | 98.23          | 1.018                     | 0.038          | 0.04                    |
|        | WLAN5.6G  | 802.11ac VHT160 | Bottom Side      | 0            | 114     | Ant 1+2 | w/o               | 0.06        | 15.9                        | 16            | 1.023                  | 98.23          | 1.018                     | 0.363          | 0.38                    |
|        | WLAN5.6G  | 802.11ac VHT160 | Bottom Side      | 0            | 114     | Ant 1+2 | w/                | -0.08       | 15.9                        | 16            | 1.023                  | 98.23          | 1.018                     | 0.258          | 0.27                    |
|        | WLAN5.8G  | 802.11ac VHT160 | Bottom of laptop | 0            | 163     | Ant 1   | w/o               | -0.09       | 13.46                       | 13.5          | 1.009                  | 99.01          | 1.010                     | 0.434          | 0.44                    |
|        | WLAN5.8G  | 802.11ac VHT160 | Left Side        | 0            | 163     | Ant 1   | w/o               | -0.19       | 13.46                       | 13.5          | 1.009                  | 99.01          | 1.010                     | 0.046          | 0.05                    |
|        | WLAN5.8G  | 802.11ac VHT160 | Bottom Side      | 0            | 163     | Ant 1   | w/o               | 0.02        | 13.46                       | 13.5          | 1.009                  | 99.01          | 1.010                     | 0.42           | 0.43                    |
|        | WLAN5.8G  | 802.11ac VHT160 | Bottom of laptop | 0            | 163     | Ant 2   | w/o               | 0.17        | 12.48                       | 12.5          | 1.005                  | 99.01          | 1.010                     | 0.563          | 0.57                    |
|        | WLAN5.8G  | 802.11ac VHT160 | Bottom of laptop | 0            | 163     | Ant 1+2 | w/o               | -0.17       | 15.97                       | 16            | 1.007                  | 98.23          | 1.018                     | 0.553          | 0.57                    |
|        | WLAN5.8G  | 802.11ac VHT160 | Left Side        | 0            | 163     | Ant 1+2 | w/o               | -0.09       | 15.97                       | 16            | 1.007                  | 98.23          | 1.018                     | 0.062          | 0.06                    |
|        | WLAN5.8G  | 802.11ac VHT160 | Bottom Side      | 0            | 163     | Ant 1+2 | w/o               | -0.17       | 15.97                       | 16            | 1.007                  | 98.23          | 1.018                     | 0.321          | 0.33                    |
|        | WLAN5.8G  | 802.11ac VHT160 | Bottom of laptop | 0            | 163     | Ant 2   | w/                | 0.05        | 12.48                       | 12.5          | 1.005                  | 99.01          | 1.010                     | 0.494          | 0.50                    |
| 5      | Bluetooth | GFSK            | Bottom of laptop | 0            | 78      | Ant 2   | w/o               | -0.03       | 14.63                       | 15.25         | 1.153                  | 76.80          | 1.302                     | 0.196          | 0.29                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 0       | Ant 2   | w/o               | 0.01        | 14.36                       | 15.25         | 1.227                  | 76.80          | 1.302                     | 0.165          | 0.26                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 39      | Ant 2   | w/o               | 0.03        | 14.62                       | 15.25         | 1.156                  | 76.80          | 1.302                     | 0.217          | 0.33                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 39      | Ant 2   | w/                | 0.02        | 14.62                       | 15.25         | 1.156                  | 76.80          | 1.302                     | 0.203          | 0.31                    |
| 6      | Bluetooth | GFSK            | Bottom of laptop | 0            | 78      | Ant 2   | w/o               | -0.03       | 14.63                       | 15.25         | 1.153                  | 76.80          | 1.302                     | 0.196          | 0.29                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 0       | Ant 2   | w/o               | 0.01        | 14.36                       | 15.25         | 1.227                  | 76.80          | 1.302                     | 0.165          | 0.26                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 39      | Ant 2   | w/o               | 0.03        | 14.62                       | 15.25         | 1.156                  | 76.80          | 1.302                     | 0.217          | 0.33                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 39      | Ant 2   | w/                | 0.02        | 14.62                       | 15.25         | 1.156                  | 76.80          | 1.302                     | 0.203          | 0.31                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 78      | Ant 2   | w/o               | -0.03       | 14.63                       | 15.25         | 1.153                  | 76.80          | 1.302                     | 0.196          | 0.29                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 0       | Ant 2   | w/o               | 0.01        | 14.36                       | 15.25         | 1.227                  | 76.80          | 1.302                     | 0.165          | 0.26                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 39      | Ant 2   | w/o               | 0.03        | 14.62                       | 15.25         | 1.156                  | 76.80          | 1.302                     | 0.217          | 0.33                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 39      | Ant 2   | w/                | 0.02        | 14.62                       | 15.25         | 1.156                  | 76.80          | 1.302                     | 0.203          | 0.31                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 78      | Ant 2   | w/o               | -0.03       | 14.63                       | 15.25         | 1.153                  | 76.80          | 1.302                     | 0.196          | 0.29                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 0       | Ant 2   | w/o               | 0.01        | 14.36                       | 15.25         | 1.227                  | 76.80          | 1.302                     | 0.165          | 0.26                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 39      | Ant 2   | w/o               | 0.03        | 14.62                       | 15.25         | 1.156                  | 76.80          | 1.302                     | 0.217          | 0.33                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 39      | Ant 2   | w/                | 0.02        | 14.62                       | 15.25         | 1.156                  | 76.80          | 1.302                     | 0.203          | 0.31                    |
|        | Bluetooth | GFSK            | Bottom of laptop | 0            | 78      | Ant 2   | w/o               | -0.03       | 14.63                       | 15.25         | 1.153                  | 76.80          | 1.302                     | 0.196          | 0.29                    |

| Index.  | Band            | Modulation       | Test Position    | Spacing (mm) | Channel | Antenna | External Keyboard | Power Drift | Meas. Conducted Power (dBm) | Tune-up (dBm) | Tune-up Scaling Factor | Duty Cycle (%) | Duty Cycle Scaling Factor | SAR 1 g (W/kg) | Reported SAR 1 g (W/kg) | APD W/m² (4cm²) | Reported APD W/m² (4cm²) |
|---------|-----------------|------------------|------------------|--------------|---------|---------|-------------------|-------------|-----------------------------|---------------|------------------------|----------------|---------------------------|----------------|-------------------------|-----------------|--------------------------|
| 7       | U-NII 8         | 802.11be EHT320  | Bottom of laptop | 0            | 191     | Ant 1   | w/o               | -0.03       | 11.99                       | 12            | 1.002                  | 99.04          | 1.010                     | 0.192          | 0.19                    | 1.39            | 1.41                     |
|         | U-NII 8         | 802.11be EHT320  | Left Side        | 0            | 191     | Ant 1   | w/o               | -0.16       | 11.99                       | 12            | 1.002                  | 99.04          | 1.010                     | 0.03           | 0.03                    | 0.222           | 0.22                     |
|         | U-NII 8         | 802.11be EHT320  | Right Side       | 0            | 191     | Ant 1   | w/o               | 0           | 11.99                       | 12            | 1.002                  | 99.04          | 1.010                     | 0.001          | 0.00                    | 0               | 0.00                     |
|         | U-NII 8         | 802.11be EHT320  | Top Side         | 0            | 191     | Ant 1   | w/o               | 0           | 11.99                       | 12            | 1.002                  | 99.04          | 1.010                     | 0.001          | 0.00                    | 0               | 0.00                     |
|         | U-NII 8         | 802.11be EHT320  | Bottom Side      | 0            | 191     | Ant 1   | w/o               | -0.1        | 11.99                       | 12            | 1.002                  | 99.04          | 1.010                     | 0.241          | 0.24                    | 1.86            | 1.88                     |
|         | U-NII 8         | 802.11be EHT320  | Bottom of laptop | 0            | 191     | Ant 2   | w/o               | 0.07        | 11.96                       | 12            | 1.009                  | 99.04          | 1.010                     | 0.261          | 0.27                    | 2.07            | 2.11                     |
|         | U-NII 8         | 802.11be EHT320  | Left Side        | 0            | 191     | Ant 2   | w/o               | 0           | 11.96                       | 12            | 1.009                  | 99.04          | 1.010                     | 0.001          | 0.00                    | 0               | 0.00                     |
|         | U-NII 8         | 802.11be EHT320  | Right Side       | 0            | 191     | Ant 2   | w/o               | 0           | 11.96                       | 12            | 1.009                  | 99.04          | 1.010                     | 0.001          | 0.00                    | 0               | 0.00                     |
|         | U-NII 8         | 802.11be EHT320  | Top Side         | 0            | 191     | Ant 2   | w/o               | 0           | 11.96                       | 12            | 1.009                  | 99.04          | 1.010                     | 0.001          | 0.00                    | 0               | 0.00                     |
|         | U-NII 8         | 802.11be EHT320  | Bottom Side      | 0            | 191     | Ant 2   | w/o               | 0           | 11.96                       | 12            | 1.009                  | 99.04          | 1.010                     | 0.001          | 0.00                    | 0               | 0.00                     |
|         | U-NII 8         | 802.11be EHT320  | Bottom of laptop | 0            | 191     | Ant 1+2 | w/o               | 0.03        | 14.97                       | 15            | 1.007                  | 98.78          | 1.012                     | 0.27           | 0.28                    | 2.08            | 2.12                     |
|         | U-NII 8         | 802.11be EHT320  | Left Side        | 0            | 191     | Ant 1+2 | w/o               | -0.08       | 14.97                       | 15            | 1.007                  | 98.78          | 1.012                     | 0.059          | 0.06                    | 0.481           | 0.49                     |
| U-NII 8 | 802.11be EHT320 | Right Side       | 0                | 191          | Ant 1+2 | w/o     | 0                 | 14.97       | 15                          | 1.007         | 98.78                  | 1.012          | 0.001                     | 0.00           | 0                       | 0.00            |                          |
| U-NII 8 | 802.11be EHT320 | Top Side         | 0                | 191          | Ant 1+2 | w/o     | 0                 | 14.97       | 15                          | 1.007         | 98.78                  | 1.012          | 0.001                     | 0.00           | 0                       | 0.00            |                          |
| U-NII 8 | 802.11be EHT320 | Bottom Side      | 0                | 191          | Ant 1+2 | w/o     | 0.17              | 14.97       | 15                          | 1.007         | 98.78                  | 1.012          | 0.248                     | 0.25           | 1.69                    | 1.72            |                          |
| U-NII 5 | 802.11be EHT320 | Bottom of laptop | 0                | 31           | Ant 1+2 | w/o     | -0.04             | 14.94       | 15                          | 1.014         | 98.78                  | 1.012          | 0.241                     | 0.25           | 1.78                    | 1.83            |                          |
| U-NII 5 | 802.11be EHT320 | Bottom of laptop | 0                | 63           | Ant 1+2 | w/o     | -0.06             | 14.9        | 15                          | 1.023         | 98.78                  | 1.012          | 0.281                     | 0.29           | 2.05                    | 2.12            |                          |
| U-NII 6 | 802.11be EHT320 | Bottom of laptop | 0                | 95           | Ant 1+2 | w/o     | -0.35             | 14.96       | 15                          | 1.019         | 98.78                  | 1.012          | 0.32                      | 0.33           | 2.46                    | 2.54            |                          |
| U-NII 7 | 802.11be EHT320 | Bottom of laptop | 0                | 127          | Ant 1+2 | w/o     | -0.15             | 14.96       | 15                          | 1.009         | 98.78                  | 1.012          | 0.312                     | 0.32           | 1.96                    | 2.00            |                          |
| U-NII 7 | 802.11be EHT320 | Bottom of laptop | 0                | 159          | Ant 1+2 | w/o     | 0.16              | 14.96       | 15                          | 1.009         | 98.78                  | 1.012          | 0.307                     | 0.31           | 2.01                    | 2.05            |                          |
| U-NII 6 | 802.11be EHT320 | Bottom of laptop | 0                | 95           | Ant 1+2 | w/      | 0.05              | 14.96       | 15                          | 1.019         | 98.78                  | 1.012          | 0.305                     | 0.31           | 1.93                    | 1.99            |                          |

### 9.3. Measured and Reported SAR Results for Extremity

| Index. | Band      | Modulation      | Test Position        | Spacing (mm) | Channel | Antenna | External Keyboard | Power Drift | Meas. Conducted Power (dBm) | Tune-up (dBm) | Tune-up Scaling Factor | Duty Cycle (%) | Duty Cycle Scaling Factor | SAR 10 g (W/kg) | Reported SAR 10 g (W/kg) |
|--------|-----------|-----------------|----------------------|--------------|---------|---------|-------------------|-------------|-----------------------------|---------------|------------------------|----------------|---------------------------|-----------------|--------------------------|
| 8      | WLAN2.4G  | 802.11b         | Top Side of keyboard | 0            | 6       | Ant 1   | w/o               | -0.01       | 14.96                       | 15            | 1.009                  | 99.41          | 1.006                     | 0.471           | 0.48                     |
|        | WLAN2.4G  | 802.11b         | Top Side of keyboard | 0            | 6       | Ant 2   | w/o               | 0.11        | 14.94                       | 15            | 1.014                  | 99.41          | 1.006                     | 0.075           | 0.08                     |
|        | WLAN2.4G  | 802.11n HT40    | Top Side of keyboard | 0            | 6       | Ant 1+2 | w/o               | 0.08        | 17.92                       | 18            | 1.019                  | 99.35          | 1.007                     | 0.43            | 0.44                     |
|        | WLAN2.4G  | 802.11b         | Top Side of keyboard | 0            | 1       | Ant 1   | w/o               | 0.07        | 14.95                       | 15            | 1.012                  | 99.41          | 1.006                     | 0.375           | 0.38                     |
|        | WLAN2.4G  | 802.11b         | Top Side of keyboard | 0            | 11      | Ant 1   | w/o               | 0.09        | 14.94                       | 15            | 1.014                  | 99.41          | 1.006                     | 0.383           | 0.39                     |
|        | WLAN2.4G  | 802.11b         | Top Side of keyboard | 0            | 12      | Ant 1   | w/o               | -0.1        | 14.85                       | 15            | 1.035                  | 99.41          | 1.006                     | 0.412           | 0.43                     |
|        | WLAN2.4G  | 802.11b         | Top Side of keyboard | 0            | 13      | Ant 1   | w/o               | 0.09        | 14.83                       | 15            | 1.040                  | 99.41          | 1.006                     | 0.415           | 0.43                     |
|        | WLAN2.4G  | 802.11b         | Top Side of keyboard | 0            | 6       | Ant 1   | w/                | 0.04        | 14.96                       | 15            | 1.009                  | 99.41          | 1.006                     | 0.161           | 0.16                     |
|        | WLAN5.3G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 50      | Ant 1   | w/o               | 0.02        | 13.49                       | 13.5          | 1.002                  | 99.01          | 1.010                     | 0.205           | 0.21                     |
|        | WLAN5.3G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 50      | Ant 2   | w/o               | -0.07       | 12.48                       | 12.5          | 1.005                  | 99.01          | 1.010                     | 0.196           | 0.20                     |
| 9      | WLAN5.3G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 50      | Ant 1+2 | w/o               | 0.03        | 15.94                       | 16            | 1.014                  | 98.23          | 1.018                     | 0.22            | 0.23                     |
|        | WLAN5.3G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 50      | Ant 1+2 | w/                | -0.01       | 15.94                       | 16            | 1.014                  | 98.23          | 1.018                     | 0.095           | 0.10                     |
| 10     | WLAN5.6G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 114     | Ant 1   | w/o               | 0.02        | 13.4                        | 13.5          | 1.023                  | 99.01          | 1.010                     | 0.153           | 0.16                     |
|        | WLAN5.6G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 114     | Ant 2   | w/o               | -0.11       | 12.43                       | 12.5          | 1.016                  | 99.01          | 1.010                     | 0.15            | 0.15                     |
|        | WLAN5.6G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 114     | Ant 1+2 | w/o               | 0.19        | 15.9                        | 16            | 1.023                  | 98.23          | 1.018                     | 0.148           | 0.15                     |
|        | WLAN5.6G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 114     | Ant 1   | w/                | 0.02        | 13.4                        | 13.5          | 1.023                  | 99.01          | 1.010                     | 0.066           | 0.07                     |
|        | WLAN5.8G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 163     | Ant 1   | w/o               | -0.05       | 13.46                       | 13.5          | 1.009                  | 99.01          | 1.010                     | 0.138           | 0.14                     |
| 12     | WLAN5.8G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 163     | Ant 2   | w/o               | 0.1         | 12.48                       | 12.5          | 1.005                  | 99.01          | 1.010                     | 0.266           | 0.27                     |
|        | WLAN5.8G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 163     | Ant 1+2 | w/o               | -0.19       | 15.97                       | 16            | 1.007                  | 98.23          | 1.018                     | 0.249           | 0.26                     |
|        | WLAN5.8G  | 802.11ac VHT160 | Top Side of keyboard | 0            | 163     | Ant 2   | w/                | 0.19        | 12.48                       | 12.5          | 1.005                  | 99.01          | 1.010                     | 0.134           | 0.14                     |
|        | Bluetooth | GFSK            | Top Side of keyboard | 0            | 78      | Ant 2   | w/o               | 0.16        | 14.63                       | 15.25         | 1.153                  | 76.80          | 1.302                     | 0.171           | 0.26                     |
|        | Bluetooth | GFSK            | Top Side of keyboard | 0            | 0       | Ant 2   | w/o               | -0.02       | 14.36                       | 15.25         | 1.227                  | 76.80          | 1.302                     | 0.134           | 0.21                     |
| 13     | Bluetooth | GFSK            | Top Side of keyboard | 0            | 39      | Ant 2   | w/o               | -0.02       | 14.62                       | 15.25         | 1.156                  | 76.80          | 1.302                     | 0.189           | 0.28                     |
|        | Bluetooth | GFSK            | Top Side of keyboard | 0            | 39      | Ant 2   | w/                | 0.09        | 14.62                       | 15.25         | 1.156                  | 76.80          | 1.302                     | 0.14            | 0.21                     |

| Index. | Band    | Modulation      | Test Position        | Spacing (mm) | Channel | Antenna | External Keyboard | Power Drift | Meas. Conducted Power (dBm) | Tune-up (dBm) | Tune-up Scaling Factor | Duty Cycle (%) | Duty Cycle Scaling Factor | SAR 10 g (W/kg) | Reported SAR 10 g (W/kg) | APD W/m <sup>2</sup> (4cm <sup>2</sup> ) | Reported APD W/m <sup>2</sup> (4cm <sup>2</sup> ) |
|--------|---------|-----------------|----------------------|--------------|---------|---------|-------------------|-------------|-----------------------------|---------------|------------------------|----------------|---------------------------|-----------------|--------------------------|------------------------------------------|---------------------------------------------------|
|        | U-NII 8 | 802.11be EHT320 | Top Side of keyboard | 0            | 191     | Ant 1   | w/o               | -0.08       | 11.99                       | 12            | 1.002                  | 99.04          | 1.010                     | 0.074           | 0.07                     | 1.7                                      | 1.72                                              |
|        | U-NII 8 | 802.11be EHT320 | Top Side of keyboard | 0            | 191     | Ant 2   | w/o               | 0.05        | 11.96                       | 12            | 1.009                  | 99.04          | 1.010                     | 0.155           | 0.16                     | 3.55                                     | 3.62                                              |
|        | U-NII 8 | 802.11be EHT320 | Top Side of keyboard | 0            | 191     | Ant 1+2 | w/o               | 0.12        | 14.97                       | 15            | 1.007                  | 98.78          | 1.012                     | 0.161           | 0.16                     | 3.71                                     | 3.78                                              |
|        | U-NII 5 | 802.11be EHT320 | Top Side of keyboard | 0            | 31      | Ant 1+2 | w/o               | 0.18        | 14.94                       | 15            | 1.014                  | 98.78          | 1.012                     | 0.07            | 0.07                     | 1.59                                     | 1.63                                              |
|        | U-NII 5 | 802.11be EHT320 | Top Side of keyboard | 0            | 63      | Ant 1+2 | w/o               | -0.04       | 14.9                        | 15            | 1.023                  | 98.78          | 1.012                     | 0.086           | 0.09                     | 1.97                                     | 2.04                                              |
| 14     | U-NII 6 | 802.11be EHT320 | Top Side of keyboard | 0            | 95      | Ant 1+2 | w/o               | -0.06       | 14.96                       | 15            | 1.009                  | 98.78          | 1.012                     | 0.279           | 0.28                     | 6.55                                     | 6.69                                              |
|        | U-NII 7 | 802.11be EHT320 | Top Side of keyboard | 0            | 127     | Ant 1+2 | w/o               | -0.13       | 14.96                       | 15            | 1.009                  | 98.78          | 1.012                     | 0.193           | 0.20                     | 4.42                                     | 4.51                                              |
|        | U-NII 7 | 802.11be EHT320 | Top Side of keyboard | 0            | 159     | Ant 1+2 | w/o               | -0.05       | 14.96                       | 15            | 1.009                  | 98.78          | 1.012                     | 0.203           | 0.21                     | 4.52                                     | 4.62                                              |
|        | U-NII 6 | 802.11be EHT320 | Top Side of keyboard | 0            | 95      | Ant 1+2 | w/                | -0.17       | 14.96                       | 15            | 1.009                  | 98.78          | 1.012                     | 0.062           | 0.06                     | 0.914                                    | 0.93                                              |

**Note.** The test results of these laptop test position front, left and right edge are covered by tablet mode of bottom, left and right side.

#### 9.4. Measured and Reported SAR Results for Power Density

<Body>

| Index. | Band    | Modulation      | Test Position    | Spacing (mm) | Channel | Antenna | External Keyboard | Meas. Conducted Power (dBm) | Tune-up (dBm) | Duty Cycle (%) | sPDn 4 cm <sup>2</sup> (W/m <sup>2</sup> ) | Scaling sPDn 4 cm <sup>2</sup> (W/m <sup>2</sup> ) | sPDtot 4 cm <sup>2</sup> (W/m <sup>2</sup> ) | Scaling sPDtot 4 cm <sup>2</sup> (W/m <sup>2</sup> ) |
|--------|---------|-----------------|------------------|--------------|---------|---------|-------------------|-----------------------------|---------------|----------------|--------------------------------------------|----------------------------------------------------|----------------------------------------------|------------------------------------------------------|
|        | U-NII 8 | 802.11be EHT320 | Bottom of laptop | 2            | 191     | Ant 1   | w/o               | 11.99                       | 12            | 99.04          | 1.65                                       | 1.67                                               | 3.19                                         | 3.23                                                 |
|        | U-NII 8 | 802.11be EHT320 | Left Side        | 2            | 191     | Ant 1   | w/o               | 11.99                       | 12            | 99.04          | 0.258                                      | 0.26                                               | 0.499                                        | 0.51                                                 |
|        | U-NII 8 | 802.11be EHT320 | Right Side       | 2            | 191     | Ant 1   | w/o               | 11.99                       | 12            | 99.04          | 0                                          | 0.00                                               | 0                                            | 0.00                                                 |
|        | U-NII 8 | 802.11be EHT320 | Top Side         | 2            | 191     | Ant 1   | w/o               | 11.99                       | 12            | 99.04          | 0                                          | 0.00                                               | 0                                            | 0.00                                                 |
|        | U-NII 8 | 802.11be EHT320 | Bottom Side      | 2            | 191     | Ant 1   | w/o               | 11.99                       | 12            | 99.04          | 2.07                                       | 2.10                                               | 4.01                                         | 4.06                                                 |
|        | U-NII 8 | 802.11be EHT320 | Bottom of laptop | 2            | 191     | Ant 2   | w/o               | 11.96                       | 12            | 99.04          | 2.25                                       | 2.29                                               | 4.34                                         | 4.42                                                 |
|        | U-NII 8 | 802.11be EHT320 | Left Side        | 2            | 191     | Ant 2   | w/o               | 11.96                       | 12            | 99.04          | 0                                          | 0.00                                               | 0                                            | 0.00                                                 |
|        | U-NII 8 | 802.11be EHT320 | Right Side       | 2            | 191     | Ant 2   | w/o               | 11.96                       | 12            | 99.04          | 0                                          | 0.00                                               | 0                                            | 0.00                                                 |
|        | U-NII 8 | 802.11be EHT320 | Top Side         | 2            | 191     | Ant 2   | w/o               | 11.96                       | 12            | 99.04          | 0                                          | 0.00                                               | 0                                            | 0.00                                                 |
|        | U-NII 8 | 802.11be EHT320 | Bottom Side      | 2            | 191     | Ant 2   | w/o               | 11.96                       | 12            | 99.04          | 0                                          | 0.00                                               | 0                                            | 0.00                                                 |
|        | U-NII 8 | 802.11be EHT320 | Bottom of laptop | 2            | 191     | Ant 1+2 | w/o               | 14.97                       | 15            | 98.78          | 2.22                                       | 2.26                                               | 4.35                                         | 4.43                                                 |
|        | U-NII 8 | 802.11be EHT320 | Left Side        | 2            | 191     | Ant 1+2 | w/o               | 14.97                       | 15            | 98.78          | 0.508                                      | 0.52                                               | 0.982                                        | 1.00                                                 |
|        | U-NII 8 | 802.11be EHT320 | Right Side       | 2            | 191     | Ant 1+2 | w/o               | 14.97                       | 15            | 98.78          | 0                                          | 0.00                                               | 0                                            | 0.00                                                 |
|        | U-NII 8 | 802.11be EHT320 | Top Side         | 2            | 191     | Ant 1+2 | w/o               | 14.97                       | 15            | 98.78          | 0                                          | 0.00                                               | 0                                            | 0.00                                                 |
|        | U-NII 8 | 802.11be EHT320 | Bottom Side      | 2            | 191     | Ant 1+2 | w/o               | 14.97                       | 15            | 98.78          | 2.13                                       | 2.17                                               | 4.13                                         | 4.21                                                 |
|        | U-NII 5 | 802.11be EHT320 | Bottom of laptop | 2            | 31      | Ant 1+2 | w/o               | 14.94                       | 15            | 98.78          | 2.07                                       | 2.12                                               | 4.01                                         | 4.11                                                 |
|        | U-NII 5 | 802.11be EHT320 | Bottom of laptop | 2            | 63      | Ant 1+2 | w/o               | 14.9                        | 15            | 98.78          | 2.42                                       | 2.51                                               | 4.68                                         | 4.85                                                 |
| 15     | U-NII 6 | 802.11be EHT320 | Bottom of laptop | 2            | 95      | Ant 1+2 | w/o               | 14.96                       | 15            | 98.78          | 2.76                                       | 2.82                                               | 5.33                                         | 5.44                                                 |
|        | U-NII 7 | 802.11be EHT320 | Bottom of laptop | 2            | 127     | Ant 1+2 | w/o               | 14.96                       | 15            | 98.78          | 2.69                                       | 2.75                                               | 5.19                                         | 5.30                                                 |
|        | U-NII 7 | 802.11be EHT320 | Bottom of laptop | 2            | 159     | Ant 1+2 | w/o               | 14.96                       | 15            | 98.78          | 2.64                                       | 2.70                                               | 5.11                                         | 5.22                                                 |
|        | U-NII 6 | 802.11be EHT320 | Bottom of laptop | 2            | 95      | Ant 1+2 | w/                | 14.96                       | 15            | 98.78          | 2.63                                       | 2.69                                               | 5.08                                         | 5.19                                                 |

<Extremity>

| Index. | Band    | Modulation      | Test Position        | Spacing (mm) | Channel | Antenna | External Keyboard | Meas. Conducted Power (dBm) | Tune-up (dBm) | Duty Cycle (%) | sPDn 4 cm <sup>2</sup> (W/m <sup>2</sup> ) | Scaling sPDn 4 cm <sup>2</sup> (W/m <sup>2</sup> ) | sPDtot 4 cm <sup>2</sup> (W/m <sup>2</sup> ) | Scaling sPDtot 4 cm <sup>2</sup> (W/m <sup>2</sup> ) |
|--------|---------|-----------------|----------------------|--------------|---------|---------|-------------------|-----------------------------|---------------|----------------|--------------------------------------------|----------------------------------------------------|----------------------------------------------|------------------------------------------------------|
|        | U-NII 8 | 802.11be EHT320 | Top Side of keyboard | 2            | 191     | Ant 1   | w/o               | 11.99                       | 12            | 99.04          | 1.32                                       | 1.34                                               | 2.4                                          | 2.43                                                 |
|        | U-NII 8 | 802.11be EHT320 | Top Side of keyboard | 2            | 191     | Ant 2   | w/o               | 11.96                       | 12            | 99.04          | 2.76                                       | 2.81                                               | 5.02                                         | 5.12                                                 |
|        | U-NII 8 | 802.11be EHT320 | Top Side of keyboard | 2            | 191     | Ant 1+2 | w/o               | 14.97                       | 15            | 98.78          | 2.87                                       | 2.92                                               | 5.22                                         | 5.32                                                 |
|        | U-NII 5 | 802.11be EHT320 | Top Side of keyboard | 2            | 31      | Ant 1+2 | w/o               | 14.94                       | 15            | 98.78          | 1.24                                       | 1.27                                               | 2.27                                         | 2.33                                                 |
|        | U-NII 5 | 802.11be EHT320 | Top Side of keyboard | 2            | 63      | Ant 1+2 | w/o               | 14.9                        | 15            | 98.78          | 1.53                                       | 1.58                                               | 2.78                                         | 2.88                                                 |
| 16     | U-NII 6 | 802.11be EHT320 | Top Side of keyboard | 2            | 95      | Ant 1+2 | w/o               | 14.96                       | 15            | 98.78          | 4.98                                       | 5.09                                               | 9.05                                         | 9.24                                                 |
|        | U-NII 7 | 802.11be EHT320 | Top Side of keyboard | 2            | 127     | Ant 1+2 | w/o               | 14.96                       | 15            | 98.78          | 3.44                                       | 3.51                                               | 6.26                                         | 6.39                                                 |
|        | U-NII 7 | 802.11be EHT320 | Top Side of keyboard | 2            | 159     | Ant 1+2 | w/o               | 14.96                       | 15            | 98.78          | 3.62                                       | 3.70                                               | 6.58                                         | 6.72                                                 |
|        | U-NII 6 | 802.11be EHT320 | Top Side of keyboard | 2            | 95      | Ant 1+2 | w/                | 14.96                       | 15            | 98.78          | 1.1                                        | 1.12                                               | 2.01                                         | 2.05                                                 |

### 9.5. SAR Measurement Variability

Per KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. These additional measurements were repeated after the completion of all measurements requiring the same head tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- [1] The repeated measurement is not required, when the highest measured SAR is  $< 0.80$  W/kg.
- [2] The measurement was repeated once, when the highest measured SAR is  $\geq 0.80$  W/kg.
- [3] A second repeated measurement was performed, if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$ , or when the original or repeated measurement was  $\geq 1.45$  W/kg.
- [4] A third repeated measurement was performed, if the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg.
- [5] When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Since all the measured SAR are less than 0.8 W/kg, the repeated measurement is not required.

## 10. Evaluation for Simultaneous Transmission Scenario

### 10.1. Simultaneous Transmission Capabilities

The simultaneous transmission possibilities for this device are listed as below.

| Simultaneous Tx Combination | Capable Transmit Configuration             |
|-----------------------------|--------------------------------------------|
| 1                           | WLAN2.4G SISO Ant 1 + Bluetooth SISO Ant 2 |
| 2                           | WLAN5G SISO Ant 1 + Bluetooth SISO Ant 2   |
| 3                           | WLAN5G MIMO Ant 1+2 + Bluetooth SISO Ant 2 |
| 4                           | WLAN6G MIMO Ant 1+2 + Bluetooth SISO Ant 2 |

**Note :**

[1] The WLAN 2.4G and WLAN 5G cannot transmit simultaneously.

## 10.2. SAR Summation Analysis

### SAR Summation Analysis

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (1.6 W/kg for SAR1g and 4.0 W/kg for SAR10g), the simultaneous transmission SAR is not required. When the sum of SAR is greater than the SAR limit, SAR test exclusion is determined by the SPLSR.

#### <Body>

| Exposure Position | 1              | 2              | 3                | 4            | 5            | 6              | 7            | 8            | 9              | 10              | 1 + 10                    | 4 + 10                    | 6 + 10                    | 9 + 10                    |
|-------------------|----------------|----------------|------------------|--------------|--------------|----------------|--------------|--------------|----------------|-----------------|---------------------------|---------------------------|---------------------------|---------------------------|
|                   | WLAN2.4G Ant 1 | WLAN2.4G Ant 2 | WLAN2.4G Ant 1+2 | WLAN5G Ant 1 | WLAN5G Ant 2 | WLAN5G Ant 1+2 | WLAN6G Ant 1 | WLAN6G Ant 2 | WLAN6G Ant 1+2 | Bluetooth Ant 2 | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) | ΣSAR <sub>1g</sub> (W/kg) |
|                   | SAR1g (W/kg)   | SAR1g (W/kg)   | SAR1g (W/kg)     | SAR1g (W/kg) | SAR1g (W/kg) | SAR1g (W/kg)   | SAR1g (W/kg) | SAR1g (W/kg) | SAR1g (W/kg)   | SAR1g (W/kg)    |                           |                           |                           |                           |
| Bottom of Laptop  | 0.29           | 0.27           | 0.29             | 0.44         | 0.57         | 0.57           | 0.19         | 0.27         | 0.33           | 0.33            | 0.62                      | 0.77                      | 0.90                      | 0.66                      |
| Left Side         | 0.30           | 0.00           | 0.05             | 0.40         | 0.00         | 0.06           | 0.03         | 0.00         | 0.06           | 0.00            | 0.30                      | 0.40                      | 0.06                      | 0.06                      |
| Right Side        | 0.00           | 0.03           | 0.07             | 0.00         | 0.03         | 0.07           | 0.00         | 0.00         | 0.00           | 0.03            | 0.03                      | 0.03                      | 0.10                      | 0.03                      |
| Top Side          | 0.00           | 0.00           | 0.01             | 0.00         | 0.00         | 0.01           | 0.00         | 0.00         | 0.00           | 0.00            | 0.00                      | 0.00                      | 0.01                      | 0.00                      |
| Bottom Side       | 0.56           | 0.00           | 0.49             | 0.44         | 0.00         | 0.50           | 0.24         | 0.00         | 0.25           | 0.00            | 0.56                      | 0.44                      | 0.50                      | 0.25                      |

#### <Extremity>

| Exposure Position    | 1              | 6              | 9              | 10              | 1 + 10                     | 6 + 10                     | 9 + 10                     |
|----------------------|----------------|----------------|----------------|-----------------|----------------------------|----------------------------|----------------------------|
|                      | WLAN2.4G Ant 1 | WLAN5G Ant 1+2 | WLAN6G Ant 1+2 | Bluetooth Ant 2 | ΣSAR <sub>10g</sub> (W/kg) | ΣSAR <sub>10g</sub> (W/kg) | ΣSAR <sub>10g</sub> (W/kg) |
|                      | SAR10g (W/kg)  | SAR10g (W/kg)  | SAR10g (W/kg)  | SAR10g (W/kg)   |                            |                            |                            |
| Top Side of keyboard | 0.48           | 0.26           | 0.28           | 0.28            | 0.76                       | 0.54                       | 0.56                       |

According to KDB447498 D01, the highest reported 1-g SAR is ≤ 0.4 W/kg, modules and peripheral transmitters may be approved to operate in qualified host and portable device exposure conditions with no restriction for most host platform configurations.

The external keyboard of max standalone 1-g SAR is 0.36 W/kg, that is under 0.4 W/kg. Therefore, there are no restrictions on this product, so the maximum simultaneous transmission SAR is Max Notebook PC SAR + Max external keyboard SAR = 0.9 W/kg + 0.36 W/kg = 1.26 W/kg.

**Note.** The External Keyboard SAR value is referred to FCC Report No. USSC23N009002.

### 10.3. Simultaneous Transmission SAR Measurement

When simultaneous transmission SAR measurement is required in different frequency bands not covered by a single probe calibration point then separate tests for each frequency band are performed. The tests are performed using enlarged zoom scans which are processed, by means of superposition, using the DASY volume scan post-processing procedures to determine the SAR for the aggregate SAR distribution.

The spatial resolution used for all enlarged zoom scans is the same as used for the most stringent zoom scans, i.e., the scan parameters required for the highest frequency assessed are used for all enlarged zoom scans. The scans cover the complete area of the device to ensure all transmitting antennas and radiating structures are assessed.

DASY provides the ability to perform Multi-band Evaluations according to the latest standards using the Volume Scan job as well as appropriate routines for the post-processing. In order to extract and process measurements within different frequency bands, the SEMCAD X Post-processor performs the combination and subsequent superposition of these measurement data via DASY = Combined Multi-Band Averaged SAR. Combined Multi-Band Averaged SAR allows - in addition to the data extraction - an evaluation of the 1 g, 10 g and/or arbitrary averaged mass SAR.

Power Scaling Factor is used to allow the volume scans to be scaled by a value other than "1", this is important when the results need to be scaled to different maximum power levels. The Power Scaling Factor is applied to each individual point of the scan. When power scaling is used in multi-band combinations the scaling factor is applied to each individual point of the first scan, the second factor is then applied to each individual point of the second scan and so on. The scans are then combined.

## 11. Test Equipment

| Manufacturer | Name of Equipment              | Type/Model     | Serial Number | Calibration   |            |
|--------------|--------------------------------|----------------|---------------|---------------|------------|
|              |                                |                |               | Cal. Date     | Cal.Period |
| SPEAG        | 2450 MHz System Validation Kit | D2450V2        | 1087          | Jun. 14, 2024 | 1 year     |
| SPEAG        | 5 GHz System Validation Kit    | D5GHzV2        | 1358          | Jun. 12, 2024 | 1 year     |
| SPEAG        | 6.5 GHz System Validation Kit  | D6.5GHzV2      | 1081          | Jun. 11, 2024 | 1 year     |
| SPEAG        | 5G Verification Source         | 10 GHz         | 2003          | Feb. 12, 2024 | 1 year     |
| SPEAG        | Dosimetric E-Field Probe       | EUmmWV3        | 9403          | Dec. 05, 2023 | 1 year     |
| SPEAG        | Dosimetric E-Field Probe       | EX3DV4         | 7650          | Jun. 04, 2024 | 1 year     |
| SPEAG        | Data Acquisition Electronics   | DAE4           | 1741          | Jul. 16, 2024 | 1 year     |
| SPEAG        | Data Acquisition Electronics   | DAE4           | 1742          | Aug. 15, 2024 | 1 year     |
| R&S          | Spectrum Analyzer              | FSV3013        | 101679        | Jun. 27, 2024 | 1 year     |
| Anritsu      | Radio Communication Analyzer   | MT8870A        | 6272488631    | Jan. 10, 2024 | 1 year     |
| SPEAG        | Dielectric Probe Kit           | DAKS-3.5       | 1101          | May. 23, 2024 | 1 year     |
| SPEAG        | Dielectric Probe Kit           | DAKS_VNA R140B | 22420002      | Dec. 05, 2023 | 1 year     |
| SPEAG        | POWERSOURCE1                   | SE UMS 160 CA  | 4283          | Aug. 15, 2024 | 1 year     |
| HILA         | Digital Thermometer            | TM-906A        | 1500033       | Oct. 25, 2023 | 1 year     |
| R&S          | Power Sensor                   | NRP8S          | 111512        | Nov. 30, 2023 | 1 year     |
| Testo        | Thermometer                    | 608-H1         | 83288312      | Jun. 01, 2024 | 1 year     |
| Testo        | Thermometer                    | 608-H1         | 83837955      | Dec. 08, 2023 | 1 year     |

**Note:** CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, attenuator, coupler, or filter were connected to a calibrated source to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

**Test Engineer : Joanna Chen, Jordan Chen**

## 12. Measurement Uncertainty

Per KDB Publication 865664 D01, SAR measurement uncertainty analysis is required when the highest measured 1g SAR is  $\geq 1.5$  W/kg and the highest measured 10g SAR is  $\geq 3.75$  W/kg. The expanded SAR measurement uncertainty must be  $\leq 30$  %, for a confidence interval of  $k = 2$ . Since the highest measured SAR was  $< 1.5$  W/kg for 1g and  $< 3.75$  W/kg for 10g for all frequency bands, the measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

\*\*\*\*\* End of Report \*\*\*\*\*