

Test Report

FCC TAS COMPLIANCE

Product Name : Notebook PC
Brand Name : ASUS
Model No. : UX3405C
FCC ID : MSQBE201D2

Applicant : ASUSTeK Computer, Inc
Address : 1F, No. 15, Lide Rd, Beitou, Taipei, 112 Taiwan

Date of Receipt : 2024/08/28
Date of Test : 2024/11/13
Report No. : 2480842R-SANAV07S-2
Report Version : V1.0

Documented By : Jinn Chen
(Supervisor / Jinn Chen)

Tested By : Luke Cheng
(Senior Engineer / Luke Cheng)

Approved By : San Lin
(Assistant Manager / San Lin)

TABLE OF CONTENTS

Description	Page
1. Test Setup	4
2. Test Equipment List	5
3. Test Results	6
3.1. SAR Power in Bios Table as per SAR assessment	6
3.2. TAS Validation for 2.4 GHz Band on Channel 6	6
3.3. TAS Val idation for 5 GHz Band on Channel 120	8
4. Conclusion	10

Revision History


Report No.	Version	Description	Issued Date
2480842R-SANAV07S-2	V1.0	Initial issue of report	2024/11/13

1. Test Setup

The conducted power measurement test setup is described in the following and illustrated in Figure A.1.

- The DUT which BE201 WiFi module is installed inside Notebook PC from ASUS model UX3405C.
- A control PC is used to configure the Call Box as an access point to manage the uplink and downlink data traffic.
- Uplink signal power is measured with the Spectrum Analyzer and record by the PC with a maximum time resolution of 0.3333 msec.
- Uplink signal from the module is fed through a 3 dB Power Splitter, which delivers an equal amount of signal to the Spectrum Analyzer and the Call Box. The Splitter has high isolation between the Spectrum Analyzer and the Call Box.

Figure.1 – Validation using conducted power measurement test setup.

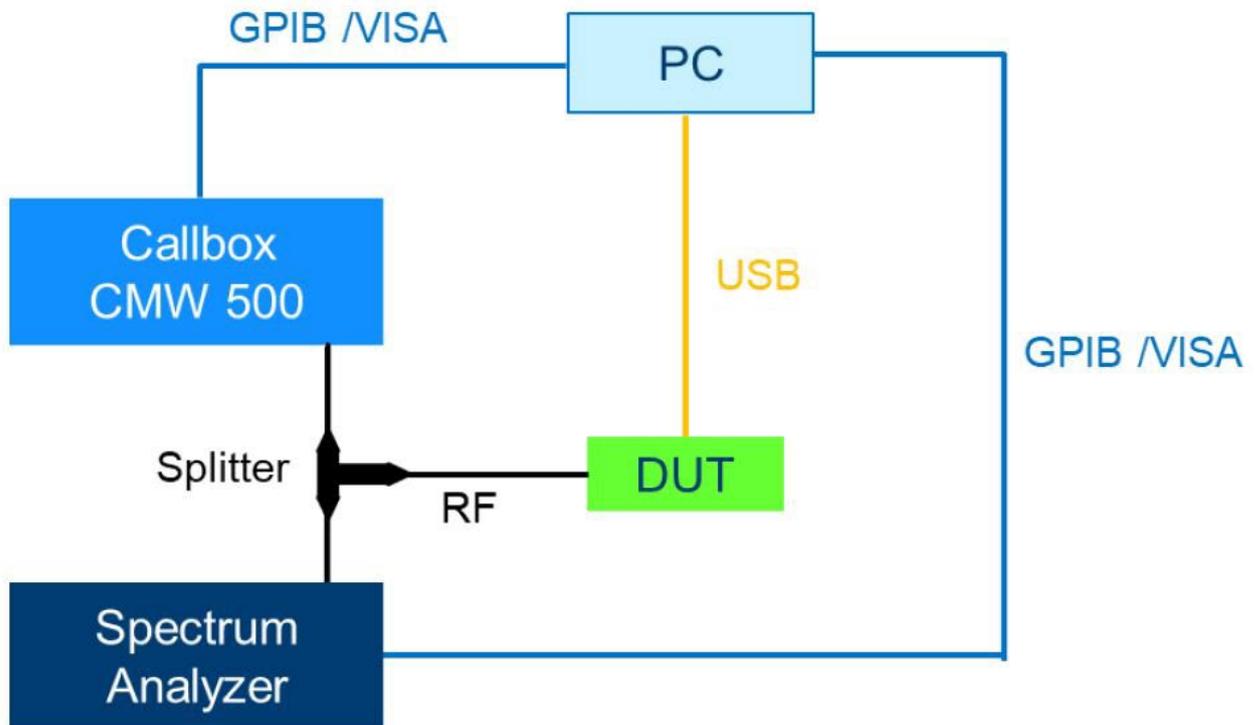

2. Test Equipment List

Instrument	Manufacturer	Model No.	Serial No.	Last Calibration	Next Calibration
Communication Tester	R&S	CMW500	157304	N/A	N/A
Spectrum Analyzer	R&S	FSV30	103464	2024/6/21	2025/6/20

3. Test Results

3.1. SAR Power in Bios Table as per SAR assessment

Chain A		Chain B	
IEEE 802.11g CH6	IEEE 802.11a CH120	IEEE 802.11g CH6	IEEE 802.11a CH120
12	9.5	12	9.5

3.2. TAS Validation for 2.4 GHz Band on Channel 6


Table 1 – Test Cases for 2.4 GHz Channel 6

Test Case #	Channel	Chain	Channel Bandwidth	Measurement Averaging Period	Measurement Time Resolution	Max Power Tune Up [dBm]	SAR Power in Bios Table [dBm]
1	6	A	20 MHz	100 sec	0.3333 msec	21.0	12
2		B	20 MHz	100 sec	0.3333 msec	21.0	12

Results of test cases in Table 1 are shown in the following plots.


Case #1: 2.4 GHz- Ch 6 – Chain A – BW 20 MHz – Rate 12 Mbps – Averaging Period 100 sec – Tmax 720 sec

Max Power Tune Up [dBm]	SAR Power in Bios Table [dBm]
21.0	12

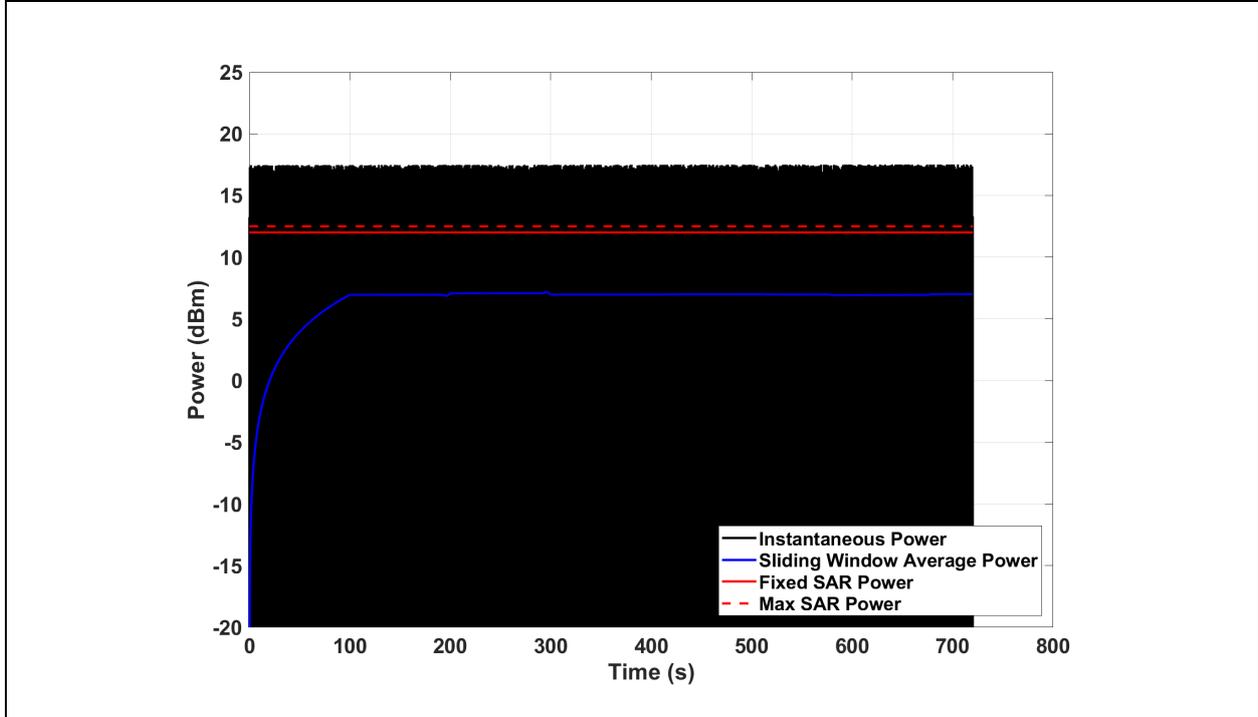

Case #2: 2.4 GHz- Ch 6 – Chain B – BW 20 MHz – Rate 12 Mbps – Average Period 100 sec – Tmax 720 sec

Max Power Tune Up [dBm]	SAR Power in Bios Table [dBm]
21.0	12

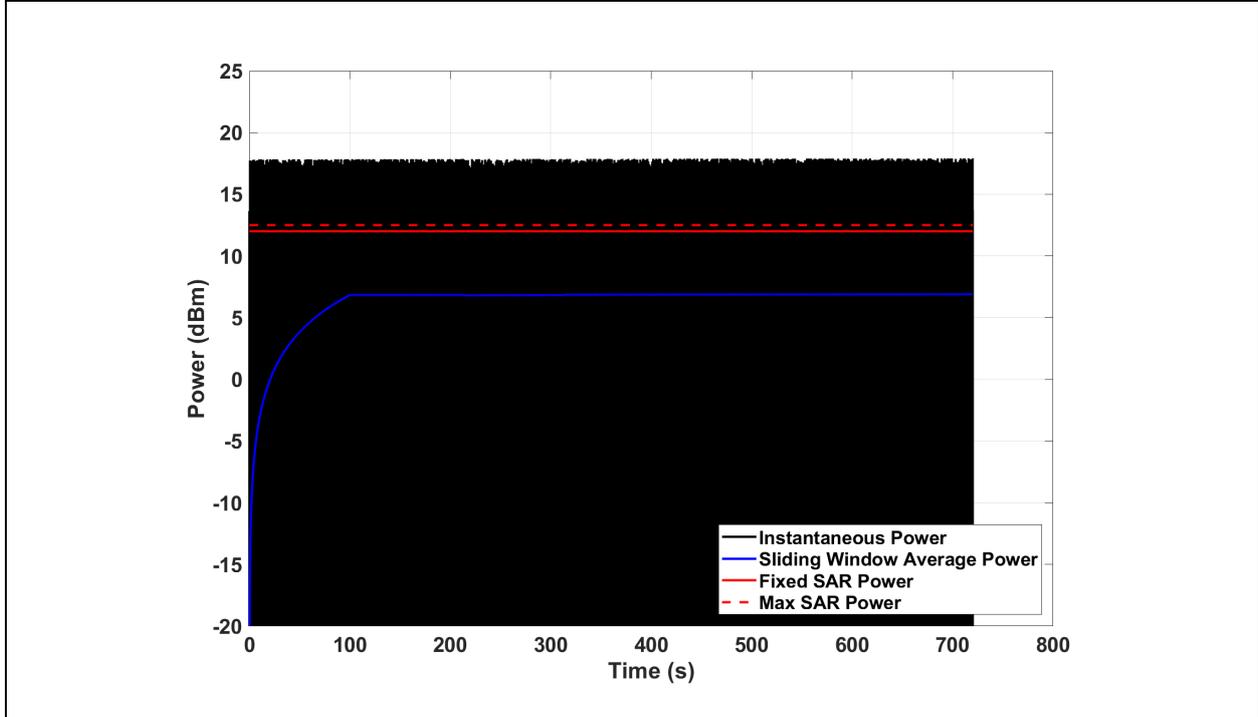

3.3. TAS Val idation for 5 GHz Band on Channel 120


Table 2 – Test Cases for 5 GHz Channel 120

<i>Test Case #</i>	<i>Channel</i>	<i>Chain</i>	<i>Channel Bandwidth</i>	<i>Measurement Averaging Period</i>	<i>Measurement Time Resolution</i>	<i>Max Power Tune Up [dBm]</i>	<i>SAR Power in Bios Table [dBm]</i>
1	120	A	20 MHz	60 sec	0.3333 msec	21.0	9.5
2		B	20 MHz	60 sec	0.3333 msec	21.0	9.5

Results of test cases in Table 2 are shown in the following plots.


Case #1: 5 GHz- Ch 120 – Chain A – BW 20 MHz – Rate 12 Mbps – Averaging Period 60 sec – Tmax 720 sec

Max Power Tune Up [dBm]	SAR Power in Bios Table [dBm]
21.0	9.5

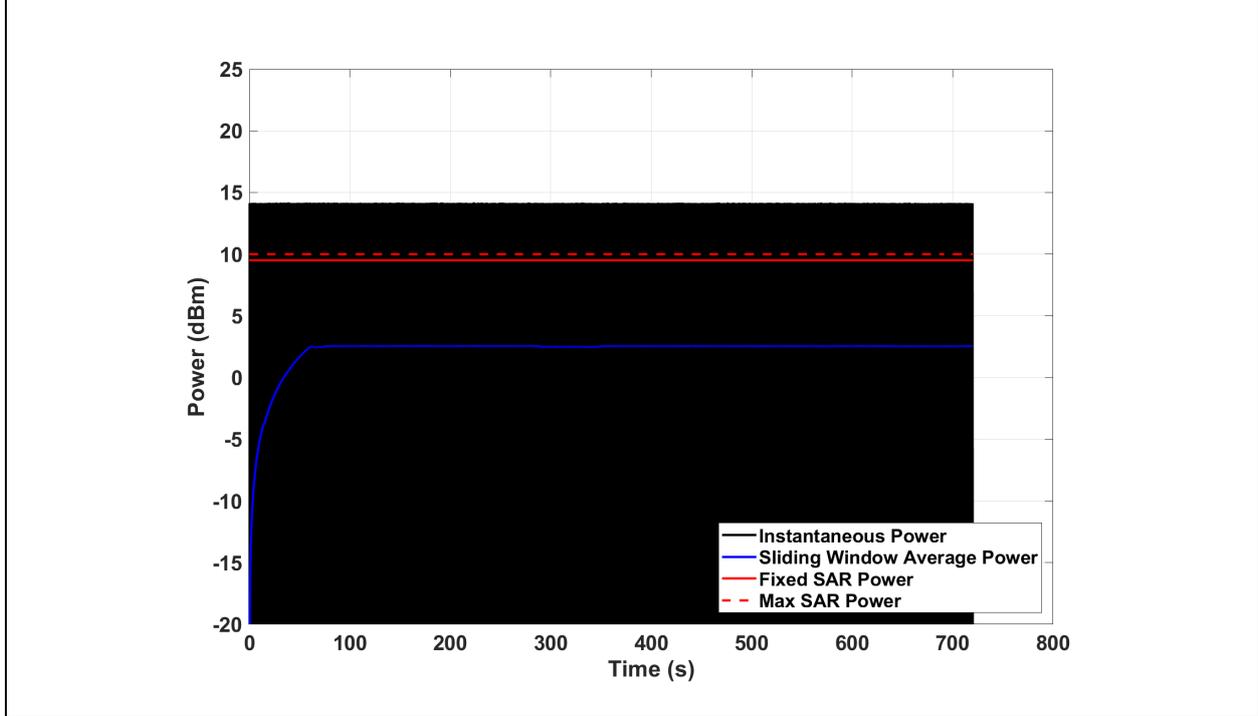

Case #2: 5 GHz- Ch 120 – Chain B – BW 20 MHz – Rate 12 Mbps – Average Period 60 sec – Tmax 720 sec

Max Power Tune Up [dBm]	SAR Power in Bios Table [dBm]
21.0	9.5

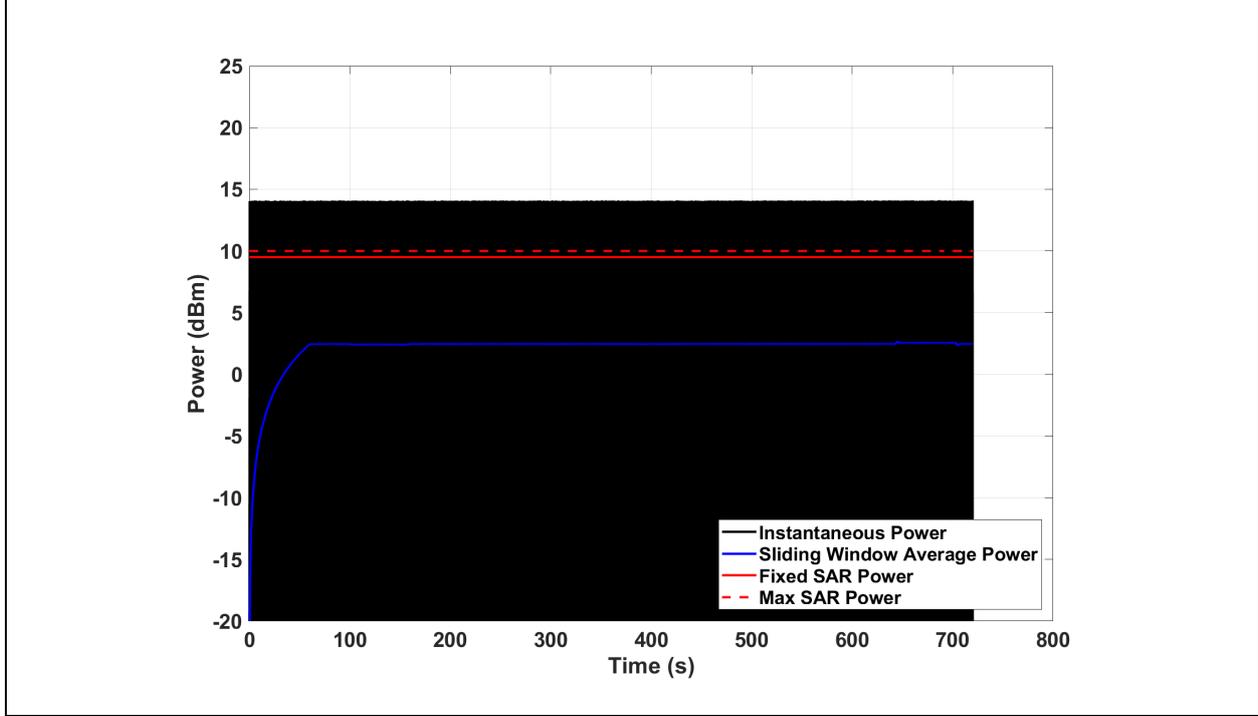

4. Conclusion

The TAS Intel Algorithm functionality of BE201 WiFi Module Integrated inside ASUS UX3405C is tested. All test cases are compliant with SAR limit.