

## Partial FCC Test Report (Part 96)

**Report No.:** RFBFLF-WTW-P21123600A-4

**Test Model:** B2402CB/B2402CBA/P2452CB/PX460CB/BW460CB/B2402FB/  
B2402FBA/P2452FB/PX460FB/BW460FB (refer to item 3.1 for more  
details)

**Received Date:** Dec. 20, 2021

**Test Date:** Jun. 28 ~ Jun. 29, 2022

**Issued Date:** Jul. 06, 2022

**Applicant:** ASUSTeK COMPUTER INC.

**Address:** 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

### FCC Registration /

**Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT.....	6
3.2 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Description of Support Units.....	11
3.3.1 Configuration of System under Test.....	11
3.4 General Description of Applied Standards.....	12
<b>4 Test Types and Results</b> .....	<b>13</b>
4.1 Radiated Emission Measurement.....	13
4.1.1 Limits of Radiated Emission Measurement.....	13
4.1.2 Test Instruments.....	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard.....	14
4.1.5 Test Set Up.....	15
4.1.6 Test Results.....	16
<b>5 Pictures of Test Arrangements</b> .....	<b>19</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>20</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBFLF-WTW-P21123600A-4	Original release.	Jul. 06, 2022

## 1 Certificate of Conformity

**Product:** Notebook PC/ExpertBook

**Brand:** ASUS

**Test Model:** B2402CB/B2402CBA/P2452CB/PX460CB/BW460CB/B2402FB/  
B2402FBA/P2452FB/PX460FB/BW460FB (refer to item 3.1 for more details)


**Sample Status:** Engineering sample

**Applicant:** ASUSTeK COMPUTER INC.

**Test Date:** Jun. 28 ~ Jun. 29, 2022

**Standards:** 47 CFR FCC Part 96

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Jul. 06, 2022  
Polly Chien / Specialist

**Approved by :**  , **Date:** Jul. 06, 2022  
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 96			
FCC Clause	Test Item	Result	Remarks
2.1046 96.41(b)	Maximum Peak Output Power	N/A	Refer to Note
2.1047 96.41(a)	Modulation Characteristics	N/A	Refer to Note
2.1046 96.41(b)	Maximum Power Spectral Density	N/A	Refer to Note
96.41(g)	Peak to Average Ration	N/A	Refer to Note
2.1049	Emission Bandwidth	N/A	Refer to Note
2.1055	Frequency Stability	N/A	Refer to Note
2.1051 96.41(e)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 96.41(e)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -0.16 dB at 7380.00 MHz.

### Note:

1. This report is a partial report, only test items of Radiated Spurious Emissions tests was performed for this report. Other testing data please refer to Sporton report no.: FG051802F\_R01 for module (Brand: Fibocom, Model: FM350-GL).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Notebook PC/ExpertBook		
Brand	ASUS		
Test Model	B2402CB/B2402CBA/P2452CB/PX460CB/BW460CB/B2402FB/B2402FBA/ P2452FB/PX460FB/BW460FB		
Model Difference	Refer to Note as below		
Status of EUT	Engineering sample		
Power Supply Rating	11.4 Vdc (Battery) 5Vdc/9Vdc/15Vdc/20Vdc (Adapter)		
Modulation Type	QPSK, 16QAM, 64QAM, 256QAM		
Operating Frequency	LTE Band 48	Channel Bandwidth 5MHz	TX: 3552.5 ~ 3697.5 MHz RX: 3552.5 ~ 3697.5 MHz
		Channel Bandwidth 10MHz	TX: 3555 ~ 3695 MHz RX: 3555 ~ 3695 MHz
		Channel Bandwidth 15MHz	TX: 3557.5 ~ 3692.5 MHz RX: 3557.5 ~ 3692.5 MHz
		Channel Bandwidth 20MHz	TX: 3560 ~ 3690 MHz RX: 3560 ~ 3690 MHz
		Antenna Type	Refer to Note
Accessory Device	NA		
Data Cable Supplied	NA		
Tx / Rx Function	1Tx / 4Rx		

Note:

- All models are listed as below.

Brand	Model	Difference
ASUS	B2402CB	For marketing purpose
	B2402CBA	
	P2452CB	
	PX460CB	
	BW460CB	
	B2402FB	
	B2402FBA	
	P2452FB	
	PX460FB	
	BW460FB	

2. The EUT contains the following accessories.

Accessories information		
Main Board	Brand	ASUS
	Model	B2402FBA MB
LCD Panel 1	Brand	INNOLUX
	Model	N140BGA-EA4
	spec	14" HD TN
LCD Panel 2	Brand	AUO
	Model	B140XTN07.2
	spec	14" HD TN
LCD Panel 3	Brand	INNOLUX
	Model	N140HGA-EA1
	spec	14" FHD TN
LCD Panel 4	Brand	BOE
	Model	NT140FHM-N44
	spec	14" FHD TN
LCD Panel 5	Brand	INNOLUX
	Model	N140HCA-EAC
	spec	14" FHD value IPS
LCD Panel 6	Brand	AUO
	Model	B140HAN04.0
	spec	14" FHD value IPS
LCD Panel 7	Brand	INNOLUX
	Model	N140HCE-EN2
	spec	14"FHD IPS, 400nits
Camera 1	Brand	AZWAVE
	Model	AM-9BF56EB-D
	spec	CAMERA HD RGB/IR ARRAY MIC CR
Camera 2	Brand	SUPREME
	Model	AHDFN050
	spec	CAMERA HD FIX 3.3V ARRAYMIC CL
Camera 3	Brand	AZWAVE
	Model	AM-6SF56A2-J
	spec	CAMERA HD FIX 3.3V ARRAYMIC CL
Camera 4	Brand	SUPREME
	Model	AHDFN171
	spec	CAMERA HD FIX 3.3V ARRAYMIC CL
CPU 1	Brand	Intel/BGA1744
	Model	I7-1260P 12C
	spec	2.1G
CPU 2	Brand	Intel/BGA1744
	Model	I5-1240P 12C
	spec	1.7G
CPU 3	Brand	Intel/BGA1744
	Model	I3-1215U 6C
	spec	1.2GHz
V-Pro CPU 1	Brand	Intel/BGA1744
	Model	I5-1250P
	spec	1.7GHz
V-Pro CPU 2	Brand	Intel/BGA1744
	Model	I7-1270P
	spec	2.2GHz
M.2 SSD 1	Brand	WD
	Model	SDBPNPZ-256G-1002
	spec	256GB M2 2280 NVME
M.2 SSD 2	Brand	KST
	Model	OM8PDP3256B-AB1
	spec	256GB M2 2280 NVME
M.2 SSD 3	Brand	INT
	Model	SSDPEKNU512GZ
	spec	512GB M2 2280 NVME

Accessories information		
M.2 SSD 4	Brand	MICRON
	Model	MTFDHBA512QFD
	spec	512G M2 2280 NVME
M.2 SSD 5	Brand	INT
	Model	SSDPEKNU010TZ
	spec	1TB M2 2280 NVME
M.2 SSD 6	Brand	MICRON
	Model	MTFDHBA1T0QFD
	spec	1TB M2 2280 NVME
M.2 SSD 7	Brand	SAMSUNG
	Model	MZVL2512HCJQ
	spec	512GB M2 2280 NVME
M.2 SSD 8	Brand	MICRON
	Model	MTFDKBA512TFH
	spec	512GB M2 2280 NVME
M.2 SSD 9	Brand	SAMSUNG
	Model	MZVL21T0HCLR
	spec	1TB M2 2280 NVME
M.2 SSD 10	Brand	MICRON
	Model	MTFDKBA1T0TFH
	spec	1TB M2 2280 NVME
M.2 SSD 11	Brand	SAMSUNG
	Model	MZVL22T0HBLB
	spec	2TB M2 2280 NVME
M.2 SSD 12	Brand	MICRON
	Model	MTFDKBA2T0TFH
	spec	2TB M2 2280 NVME
HDD 1	Brand	TOSHIBA
	Model	MQ04ABF100
	spec	1 TB-5400rpm
HDD 2	Brand	SEAGATE
	Model	ST1000LM035
	spec	1 TB-5400rpm
HDD 3	Brand	SEAGATE
	Model	ST1000LM049
	spec	1 TB-7200rpm
HDD 4	Brand	SEAGATE
	Model	ST2000LM007
	spec	2 TB-5400rpm
BT/WLAN Module	Brand	INTEL
	Model	AX201D2W
Battery 1	Brand	ASUS
	Model	B31N1909
	Power Rating	CPT/GLP606080R/3S1P/11.4V/48WH
	Manufacturer	CPT
SO-DIMM	SPEC	DDR4, 3200 MHz (4G/8G/16G/32G)
AC Adapter 1	Brand	ASUS
	Model	AD10380
	AC Input	100 - 240 Vac; 50 - 60 Hz; 1.5 A
	DC Output	5Vdc; 3A / 9Vdc; 3A / 15Vdc; 3A / 20Vdc; 3.25A
	DC Output Cable	1.5m / 0 core shielding
	Manufacturer	PI
AC Adapter 2	Brand	ASUS
	Model	A19-065N3A
	AC Input	100 - 240 Vac; 50 - 60 Hz; 1.5 A
	DC Output	5Vdc; 3A / 9Vdc; 3A / 15Vdc; 3A / 20Vdc; 3.25A
	DC Output Cable	1.5m / 0 core shielding
	Manufacturer	CHICONY
AC power cable	Signal Line	0.8 meter / no shielding / 0 core

Accessories information		
AC Adapter 3	Brand	ASUS
	Model	ADP-65TW A
	AC Input	100 - 240 Vac; 50 - 60 Hz; 1.5 A
	DC Output	5Vdc; 3A / 9Vdc; 3A / 15Vdc; 3A / 20Vdc; 3.25A
	Manufacturer	DELTA
Type C to Type C USB Cable 1	Brand	MECIMEX
	Model	USB2.0 TYPE C TO C CABLE
	Signal Line	1.5 meter
Stylus Pen	Brand	Shenzhen qianfenyi intelligent technology co., LTD.
	Model	Active Stylus SA201H
	Manufacturer	MAXEYE

\*\*After pretesting, Adapter 1 was the worst case and chosen for final test.

3. The antenna information is listed as below.

Ant. Type	Brand	Model
PIFA	PULSE	Ant. 0: TZ21101 (1415-090R0A9) Ant. 1: TZ21104 (1415-08YX0A9) Ant. 2: TZ21108 (1415-08YW0A9) Ant. 3: TZ21109 (1415-090U0A9)

Band		WCDMA			LTE																	
		II	IV	V	2	4	5	7	12	13	14	17	25	26	30	38	41	48	66	71		
Peak Gain (dBi)	NB	Ant. 0	3.1	2.9	-1.32	3.1	2.9	-1.32	1.7	3.29	1.59	1.07	3.24	3.1	-0.49	1.79	2.42	2.68	1.85	2.9	3.36	
		Ant. 1	1.92	1.9	-0.59	1.92	1.9	-0.59	2.72	-	-0.21	-0.86	-	1.92	-0.54	3.36	3.13	3.22	5.38	1.9	-	
		Ant. 2	3.07	-	-	3.07	-	-	4.24	-	-	-	-	-	3.07	-	3.64	3.59	4.93	5.52	-	-
		Ant. 3	2.27	2.58	-	2.27	2.58	-	2.31	-	-	-	-	2.27	-	2.62	1.93	2.31	2.26	2.58	-	-
	TB	Ant. 0	0	0.18	-2.59	0	0.18	-2.59	0.73	-3.98	-2.38	-2.1	-3.98	0	-2.05	0.98	0.98	2.18	5.83	0.18	-4.53	
		Ant. 1	1.35	0.65	-1.55	1.35	0.65	-1.55	3.92	-	-1.93	-1.62	-	1.35	-1.55	0.93	3.92	3.96	4.23	2.33	-	
		Ant. 2	0.62	-	-	0.62	-	-	2.36	-	-	-	-	0.62	-	1.82	2.25	2.86	5.5	-	-	
		Ant. 3	0.93	-1.39	-	0.93	-1.39	-	0.18	-	-	-	-	0.93	-	1.95	-0.64	0.28	2.35	-0.27	-	

Band		5GNR											
		2	5	7	25	30	38	41	66	71	77	78	
Peak Gain (dBi)	NB	Ant. 0	3.1	-1.32	1.7	3.1	1.79	2.42	2.68	2.9	3.36	1.3	1.3
		Ant. 1	1.92	-0.59	2.72	1.92	3.36	3.13	3.22	1.9	-	4.11	4.11
		Ant. 2	3.07	-	4.24	3.07	3.64	3.59	4.93	-	-	5.51	5.51
		Ant. 3	2.27	-	2.31	2.27	2.62	1.93	2.31	2.58	-	2.74	2.74
	TB	Ant. 0	0	-2.59	0.73	0	0.98	0.98	2.18	0.18	-4.53	5.83	5.83
		Ant. 1	1.35	-1.55	3.92	1.35	0.93	3.92	3.96	2.33	-	4.66	4.66
		Ant. 2	0.62	-	2.36	0.62	1.82	2.25	2.86	-	-	4.4	4.4
		Ant. 3	0.93	-	0.18	0.93	1.95	-0.64	0.28	-0.27	-	3.38	3.38

- The above Antenna information refers to the manufacturer's antenna specifications, the laboratory shall not be held responsible.
- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
- The EUT contains certified WWAN module with FCC ID: MSQFM350GL.

### 3.2 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X-plane. Following channel(s) was (were) selected for the final test as listed below:

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Radiated Emission	55340 to 56640	56640	20MHz	QPSK	1 RB / 0 RB Offset

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
Radiated Emission	22 deg. C, 69 % RH	120 Vac, 60 Hz	Greg Lin

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Monitor	DELL	U2410	CN-0J257M-72872-0 A6-02NL	FCC DoC Approved	-
B	Flash	SanDisk	SDDDC3-032G	NA	NA	Type-C
C	Flash	SanDisk	SDDDC3-032G	NA	NA	Type-C
D	Earphone	APPLE	MB770FEB	NA	NA	-
E	Load	NA	NA	NA	NA	-
F	Radio Communication Test Station	Anritsu	MT8821C	6261806803	NA	-

Note:


- All power cords of the above support units are non-shielded (1.8m).
- Item F acted as communication a partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN cable	1	1.5	N	0	RJ45, Cat.5e
2.	Audio cable	1	1.2	N	0	-
3.	HDMI cable	1	2.0	Y	0	Provided by Lab. (Brand: Amber, Model: HDMI-AA120)
4.	DC cable	1	1.55	N	0	Provided by client

#### 3.3.1 Configuration of System under Test

##### <Radiated Emission Test>

LTE

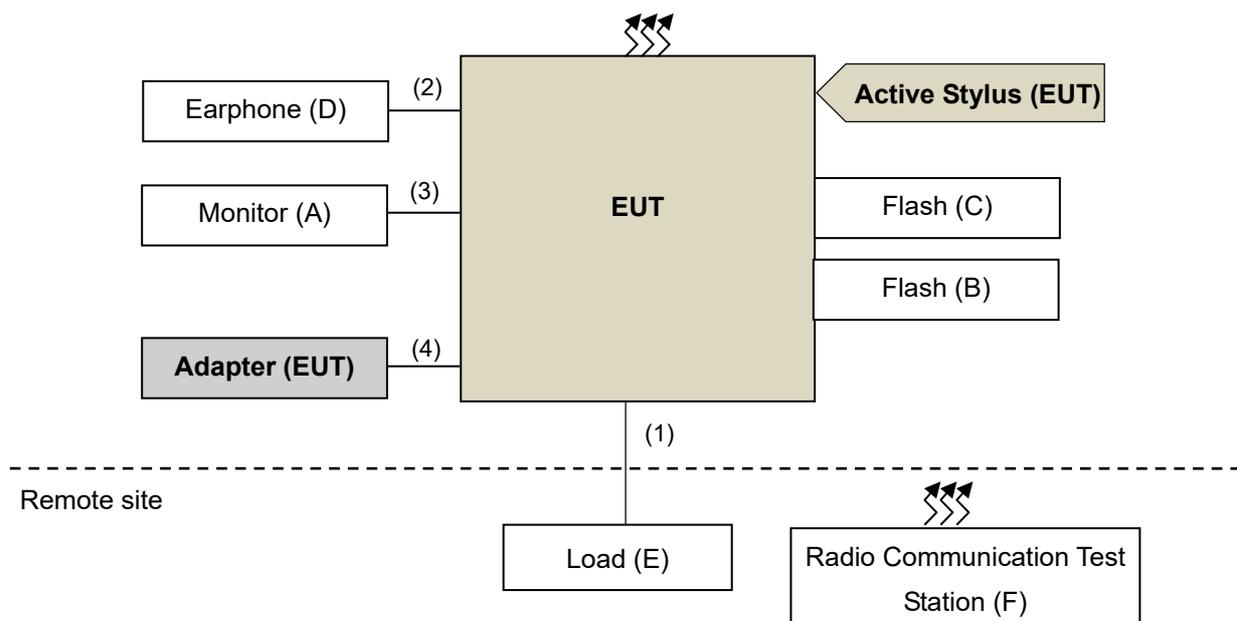

### **3.4 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 96**

**KDB 971168 D01 Power Meas License Digital Systems v02r02**

**KDB 940660 D01 Part 96 CBRS Eqpt v02**

**ANSI/TIA/EIA-603-D-2010**

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission Measurement

#### 4.1.1 Limits of Radiated Emission Measurement

The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 27, 2022	Apr. 26, 2023
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 15, 2021	Sep. 14, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Oct. 28, 2021	Oct. 27, 2022
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Oct. 26, 2021	Oct. 25, 2022
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	May 14, 2022	May 13, 2023
Preamplifier Agilent (Above 1GHz)	8449B	3008A01962	Oct. 05, 2021	Oct. 04, 2022
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM80 00	CABLE-CH9-02 (248780+171006)	Jan. 15, 2022	Jan. 14, 2023
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(2507 95/4)	Jan. 15, 2022	Jan. 14, 2023
RF signal cable Woken	8D-FB	Cable-CH9-01	May 14, 2022	May 13, 2023
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower &Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Standard Temperature And Humidity Chamber GIANT FORCE	GTH-120-40-CP-A R	MAA1306-019	Sep. 10, 2021	Sep. 09, 2022
Radio Communication Test Station Anritsu	MT8000A	6262135011	Nov. 18, 2021	Nov. 17, 2022
Radio Communication Test Station Anritsu	MT8821C	6261806803	Feb. 16, 2022	Feb. 15, 2023

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.

#### 4.1.3 Test Procedures

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7  
 $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.  
 $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.

**Note:**


1. The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:  
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

##### <Frequency Range below 1GHz>

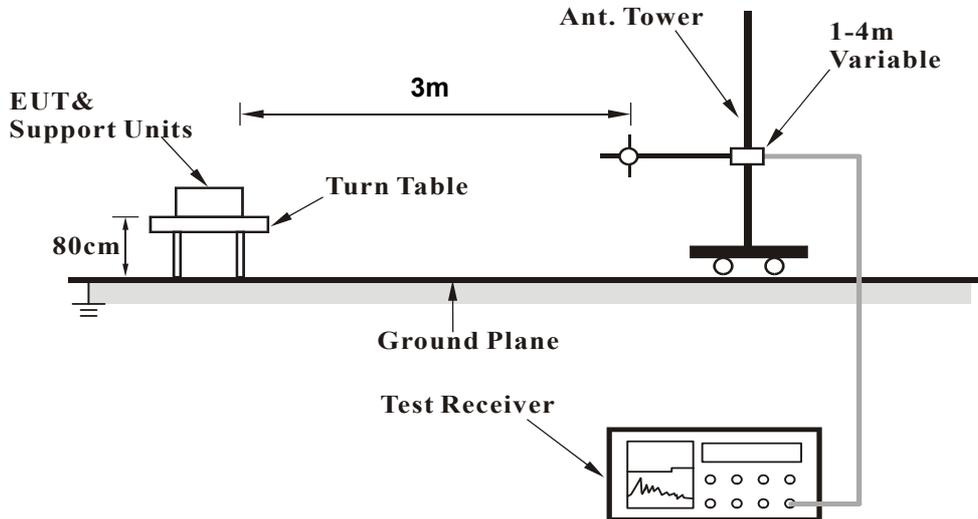

##### <Frequency Range above 1GHz>

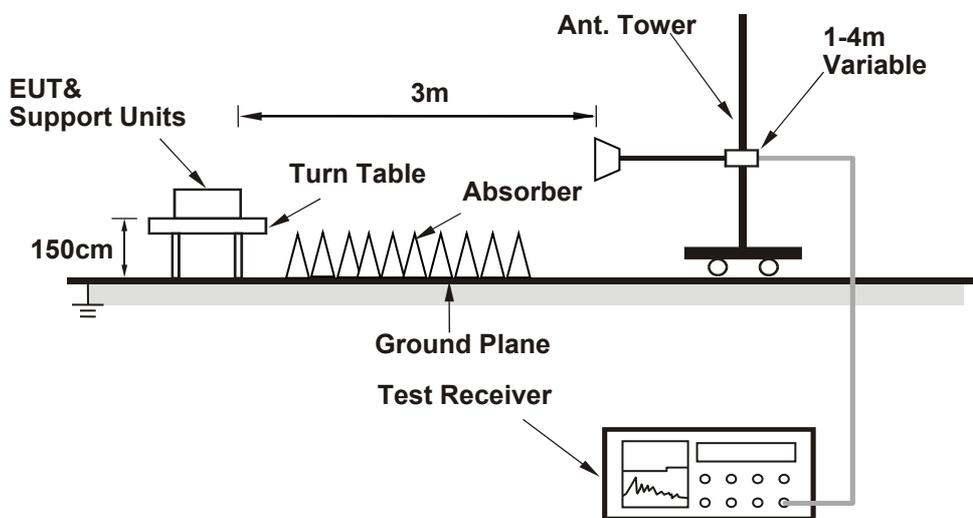

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 Test Results

Below 1GHz


LTE Band 48, Channel Bandwidth: 20MHz

Mode	TX channel 56640 (3690.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.22	-49.37	-40.00	-9.37	1.00 H	6	54.68	-104.05
2	117.30	-46.60	-40.00	-6.60	1.25 H	324	60.00	-106.60
3	225.94	-50.16	-40.00	-10.16	1.50 H	174	56.60	-106.76
4	371.44	-50.96	-40.00	-10.96	1.25 H	162	50.64	-101.60
5	621.70	-52.37	-40.00	-12.37	1.00 H	51	44.11	-96.48
6	871.96	-46.95	-40.00	-6.95	1.25 H	209	44.31	-91.26

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$ .
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$ .
4. The other EIRP levels were very low against the limit.

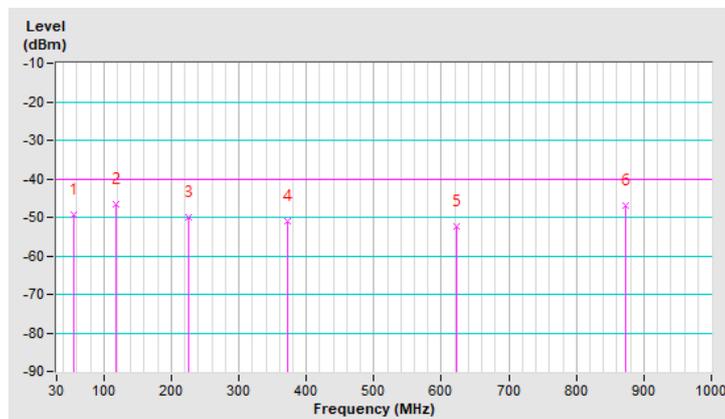


Mode	TX channel 56640 (3690.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.10	-53.54	-40.00	-13.54	1.00 V	16	50.68	-104.22
2	117.30	-57.28	-40.00	-17.28	1.00 V	241	49.32	-106.60
3	185.20	-59.45	-40.00	-19.45	1.00 V	78	46.68	-106.13
4	324.88	-55.11	-40.00	-15.11	1.25 V	214	47.08	-102.19
5	612.00	-55.34	-40.00	-15.34	1.50 V	339	41.40	-96.74
6	908.82	-47.75	-40.00	-7.75	1.25 V	304	42.81	-90.56

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$ .
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$ .
4. The other EIRP levels were very low against the limit.

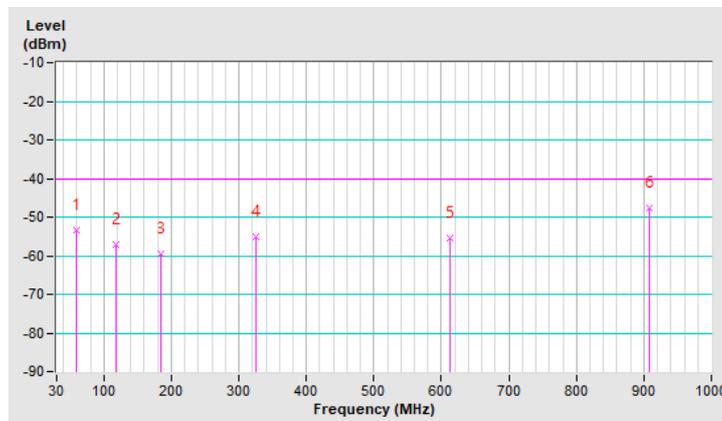

Above 1GHz

LTE Band 48, Channel Bandwidth 20MHz

Mode	TX channel 56640 (3690.00MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	22deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	7380.00	-40.16	-40.00	-0.16	3.28 H	102	36.76	-76.92
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	7380.00	-40.79	-40.00	-0.79	2.82 V	47	36.13	-76.92

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m).$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value.$
4. The other EIRP levels were very low against the limit.

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---