

# FCC RF Test Report

APPLICANT : ASUSTeK COMPUTER INC.  
EQUIPMENT : ASUS Tablet  
BRAND NAME : ASUS  
MODEL NAME : K00E  
FCC ID : MSQK00E  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Jul. 11, 2013 and completely tested on Sep. 03, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



# TABLE OF CONTENTS

REVISION HISTORY ..... 3

SUMMARY OF TEST RESULT ..... 4

1 GENERAL DESCRIPTION ..... 5

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Site ..... 7

    1.7 Applied Standards ..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8

    2.1 Descriptions of Test Mode ..... 8

    2.2 Test Mode ..... 9

    2.3 Connection Diagram of Test System ..... 10

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 11

    2.6 Measurement Results Explanation Example ..... 11

3 TEST RESULT ..... 12

    3.1 Number of Channel Measurement ..... 12

    3.2 Hopping Channel Separation Measurement ..... 14

    3.3 Dwell Time Measurement ..... 21

    3.4 20dB and 99% Bandwidth Measurement ..... 24

    3.5 Peak Output Power Measurement ..... 37

    3.6 Conducted Band Edges Measurement ..... 39

    3.7 Conducted Spurious Emission Measurement ..... 46

    3.8 Radiated Band Edges and Spurious Emission Measurement ..... 56

    3.9 AC Conducted Emission Measurement ..... 69

    3.10 Antenna Requirements ..... 73

4 LIST OF MEASURING EQUIPMENT ..... 74

5 UNCERTAINTY OF EVALUATION ..... 75

APPENDIX A. SETUP PHOTOGRAPHS





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	RSS-210 A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	RSS-210 A8.1(b)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	RSS-210 A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	RSS-210 A8.1(a)	20dB Bandwidth	NA	Pass	-
3.4	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	≤ 1 W for 1Mbps ≤ 125 mW for 2, 3Mbps	Pass	-
3.6	15.247(d)	RSS-210 A8.5	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	RSS-210 A8.5	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 10.26 dB at 35.400 MHz
3.9	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 10.92 dB at 0.479 MHz
3.10	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

ASUSTeK COMPUTER INC.

4F., No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN

## 1.2 Manufacturer

WISTRON INFOCOMM (KUNSHAN) CO., LTD.

168# First Avenue, Kunshan Integrated Free Trade Zone, Kunshan, Jiangsu, China

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	ASUS Tablet
Brand Name	ASUS
Model Name	K00E
FCC ID	MSQK00E
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA WLAN 11a/b/g/n HT20/HT40 Bluetooth v3.0
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	79
<b>Carrier Frequency of Each Channel</b>	2402+n*1 MHz; n=0~78
<b>Maximum Output Power to Antenna</b>	Bluetooth BR(1Mbps) : 11.10 dBm (0.0129 W) Bluetooth EDR (2Mbps) : 9.66 dBm (0.0092 W) Bluetooth EDR (3Mbps) : 10.06 dBm (0.0101 W)
<b>99% Occupied Bandwidth</b>	Bluetooth BR(1Mbps) : 0.928MHz Bluetooth EDR (2Mbps) : 1.212MHz Bluetooth EDR (3Mbps) : 1.216MHz
<b>Antenna Type</b>	PIFA Antenna type with gain -0.02 dBi
<b>Type of Modulation</b>	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.			
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH02-HY	CO01-HY	03CH07-HY	722060/4086B-1

**Note:** The test site complies with ANSI C63.4 2003 requirement.

### 1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	11.10 dBm	9.52 dBm	10.06 dBm
Ch39	2441MHz	10.88 dBm	9.66 dBm	9.97 dBm
Ch78	2480MHz	10.86 dBm	9.16 dBm	9.46 dBm

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
  2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
  - b. AC power line Conducted Emission was tested under maximum output power.


## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
<b>Conducted Test Cases</b>	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
<b>Radiated Test Cases</b>	<b>Bluetooth BR 1Mbps GFSK</b> Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
<b>AC Conducted Emission</b>	Mode 1 : WCDMA Band II Link + Bluetooth Link + WLAN Link + Earphone + H-pattern + MP3 + USB Cable (Charging from Adapter 2)		
<b>Remark:</b> 1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission . 2. For Radiated Test Cases, The tests were performance with Adapter 1, USB Cable, Earphone.			

## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

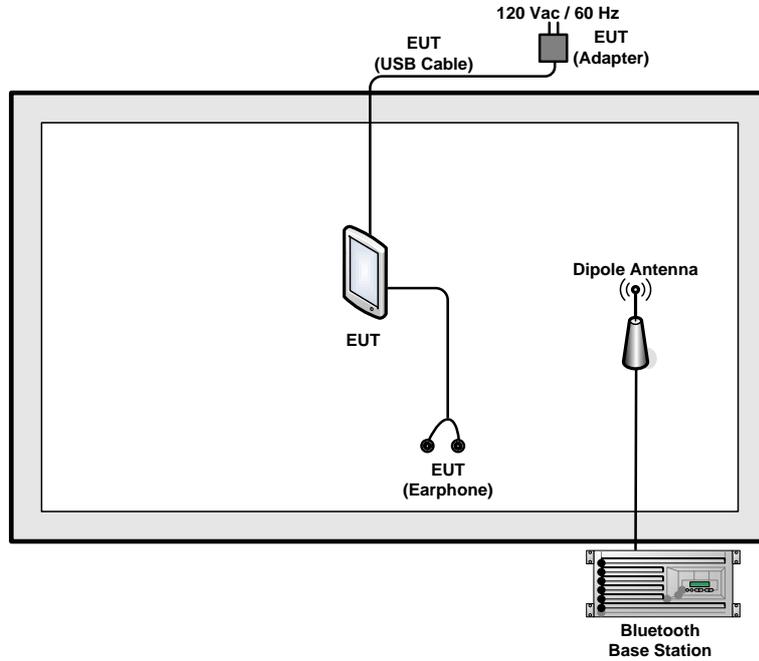

<AC Conducted Emission Mode>

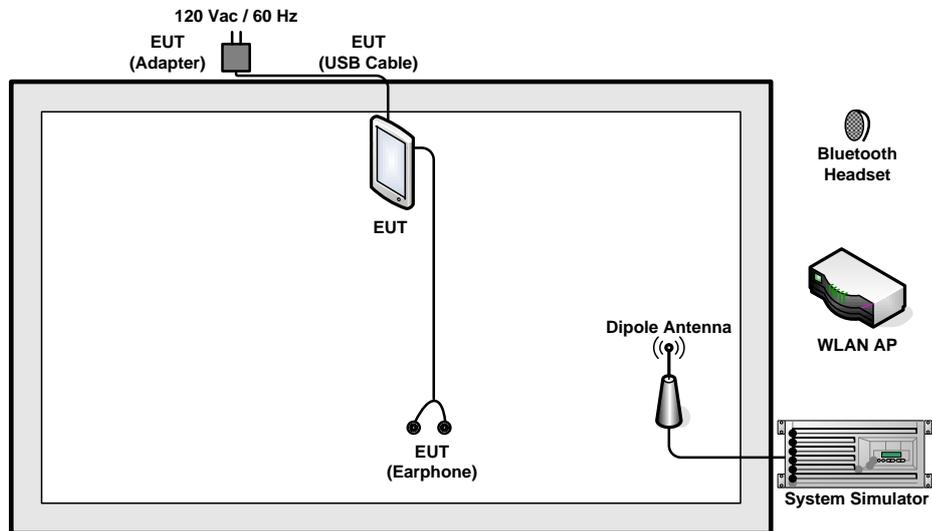

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DNS-G120	N/A	N/A	Unshielded, 1.8 m
4.	Bluetooth Headset	SONY	Z354	N/A	N/A	N/A
5.	MicroSD Card	Transcend	8GB	FCC DoC	N/A	N/A

## 2.5 EUT Operation Test Setup

For Bluetooth function, the RF utility, "wifi\_BT Test" was installed in EUT which was programmed in order to make the EUT get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

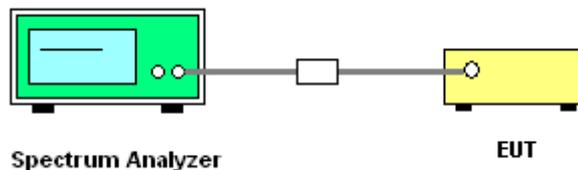


##### 3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%


Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

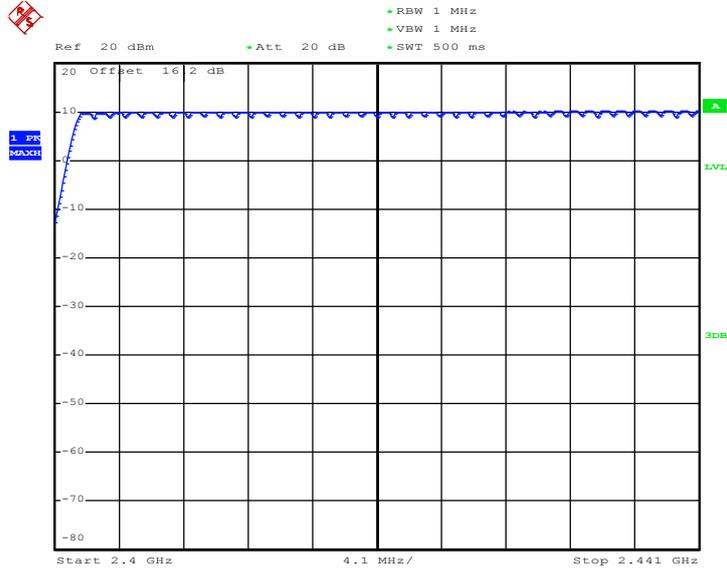

Date: 19.AUG.2013 19:34:37

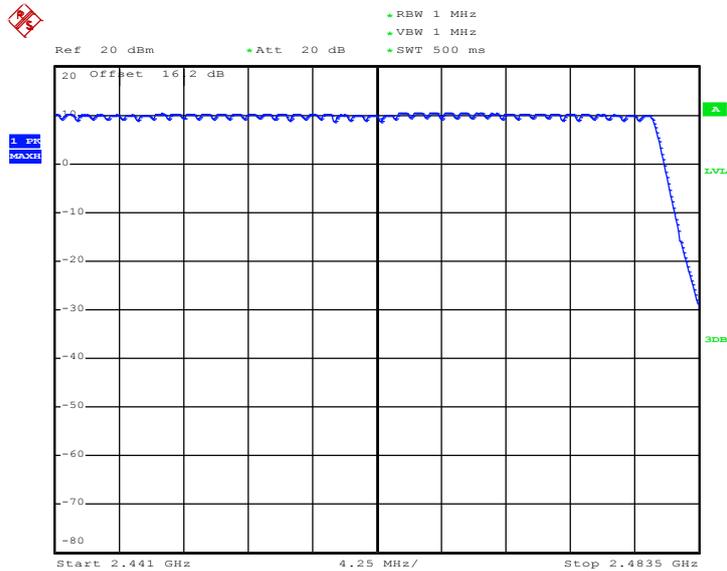

Date: 19.AUG.2013 19:38:45

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels; RBW  $\geq$  1% of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

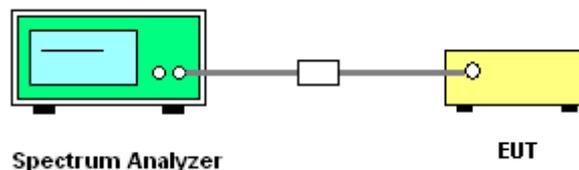




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6240	Pass
39	2441	1.002	0.6053	Pass
78	2480	1.008	0.6053	Pass


Channel Separation Plot on Channel 00 - 01

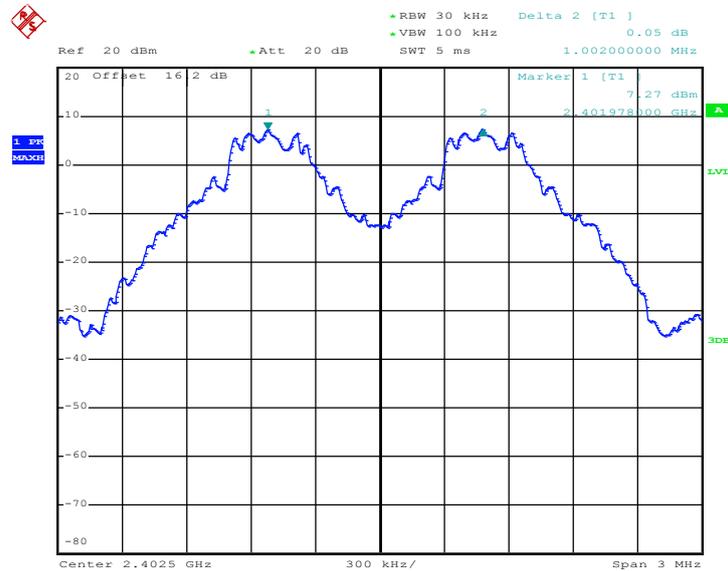

Date: 19.AUG.2013 17:26:27




Channel Separation Plot on Channel 39 - 40

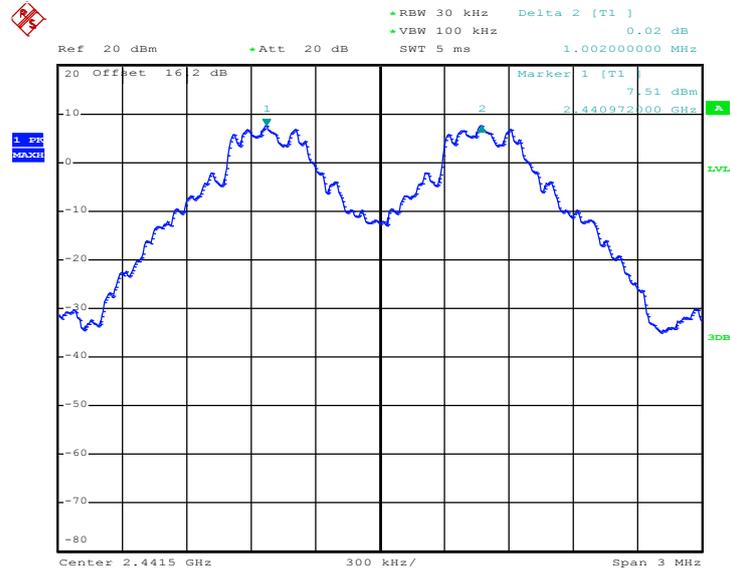

Date: 19.AUG.2013 17:28:12

Channel Separation Plot on Channel 77 - 78

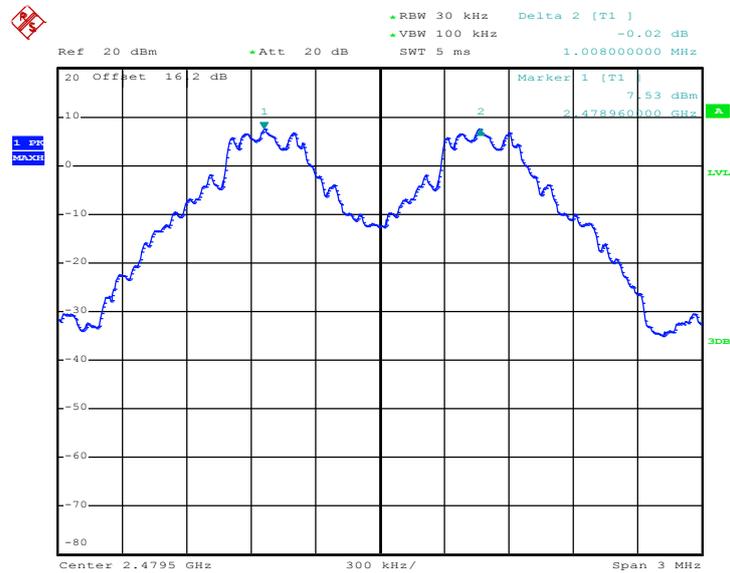


Date: 19.AUG.2013 17:32:57



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.9080	Pass
39	2441	1.002	0.9080	Pass
78	2480	1.008	0.9040	Pass


Channel Separation Plot on Channel 00 - 01

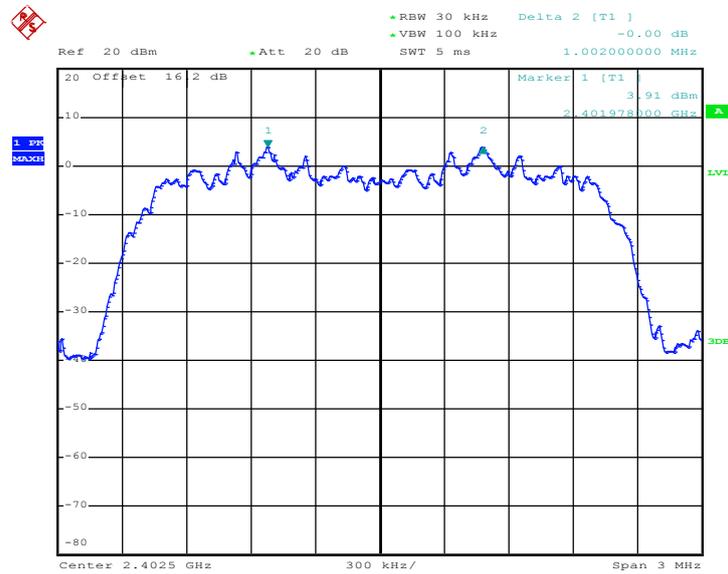

Date: 19.AUG.2013 17:39:22




Channel Separation Plot on Channel 39 - 40

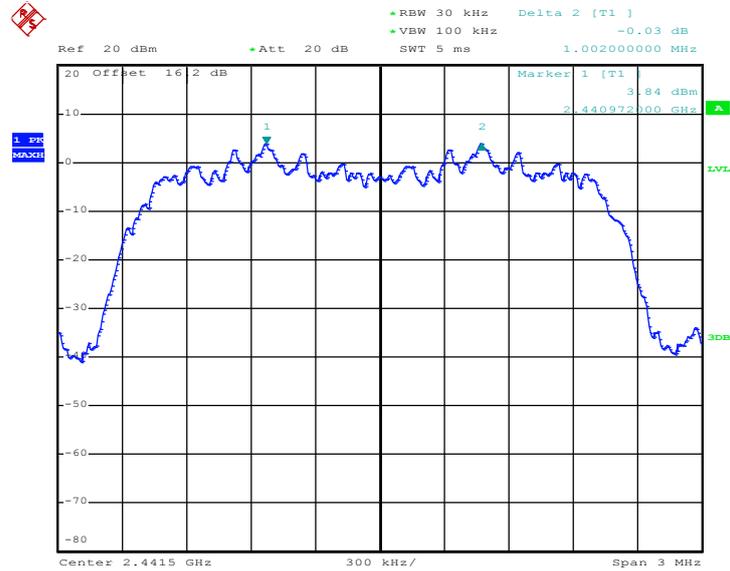

Date: 19.AUG.2013 17:38:30

Channel Separation Plot on Channel 77 - 78

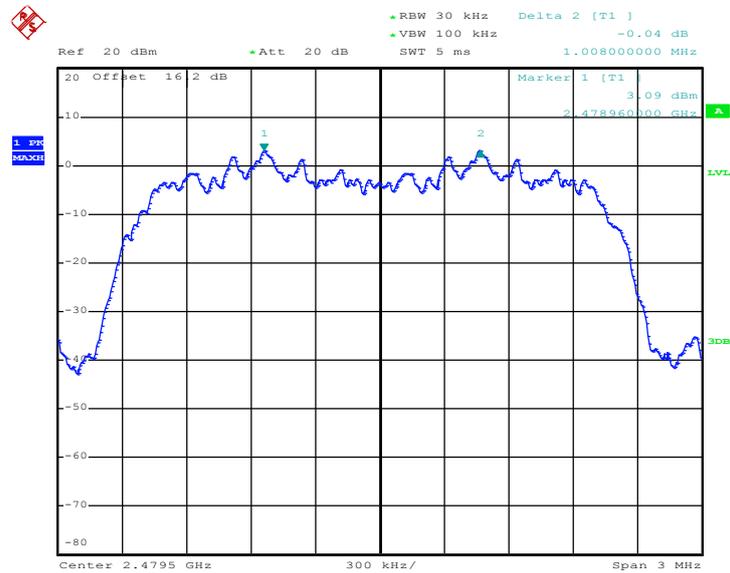


Date: 19.AUG.2013 17:35:42



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8960	Pass
39	2441	1.008	0.9000	Pass
78	2480	1.002	0.8960	Pass


Channel Separation Plot on Channel 00 - 01

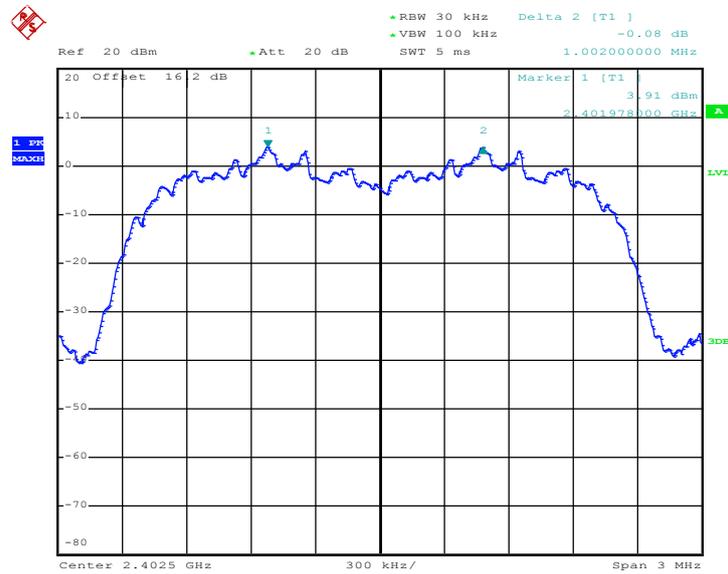

Date: 19.AUG.2013 17:42:37




Channel Separation Plot on Channel 39 - 40

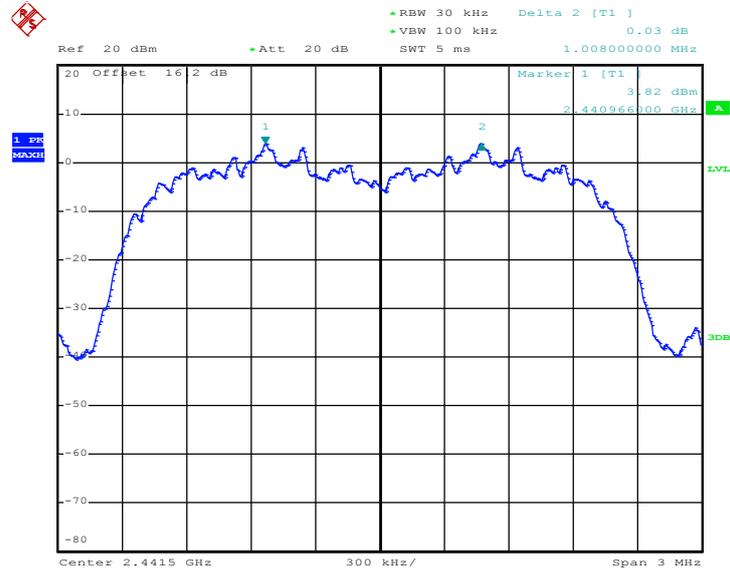

Date: 19.AUG.2013 17:45:08

Channel Separation Plot on Channel 77 - 78

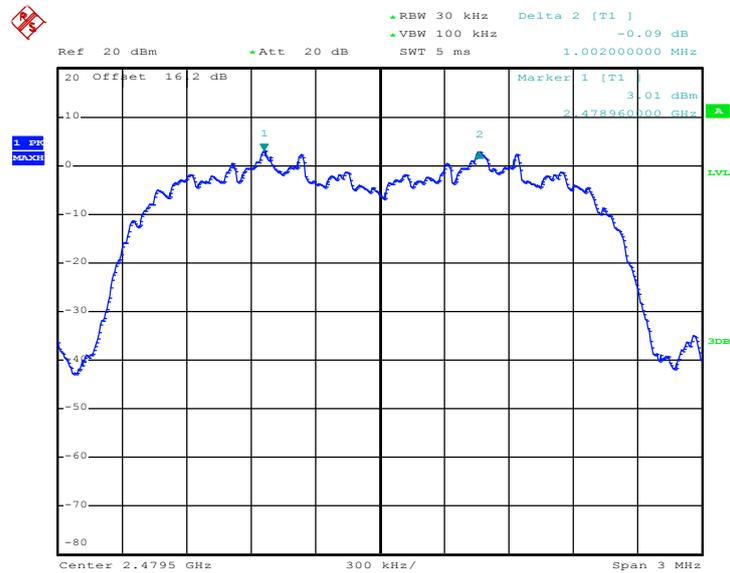

Date: 19.AUG.2013 17:46:28

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

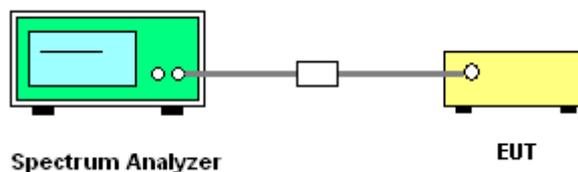

**3.3.5 Test Result of Dwell Time**

<b>Test Mode :</b>	DH5	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Rover Lee	<b>Relative Humidity :</b>	50~53%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

**Remark:**

- In normal mode, hopping rate is 1600hops/s with 6 slots in 79 hopping channels.  
 With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
 Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800hops/s with 6 slots in 20 hopping channels.  
 With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
 Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

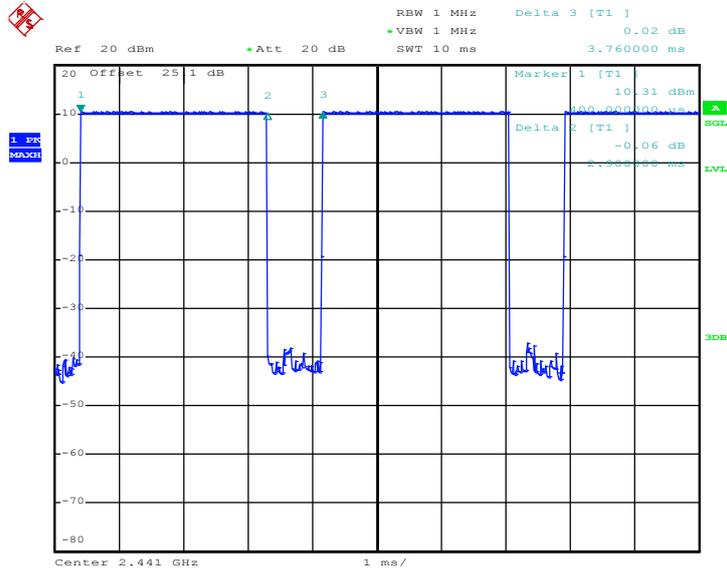

Date: 2.AUG.2013 16:01:20

### 3.4 20dB and 99% Bandwidth Measurement

#### 3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
For 99% Bandwidth measurement, the RBW=30kHz, and VBW = 100kHz. Sweep = auto ;  
Detector function = sample. Trace = max hold.
6. Measure and record the results in the test report.

#### 3.4.4 Test Setup

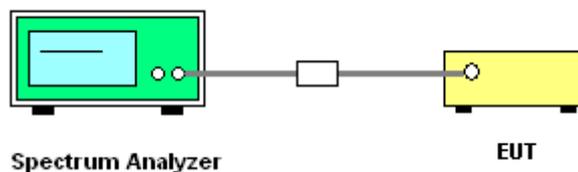




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.936
39	2441	0.908
78	2480	0.908


20 dB Bandwidth Plot on Channel 00

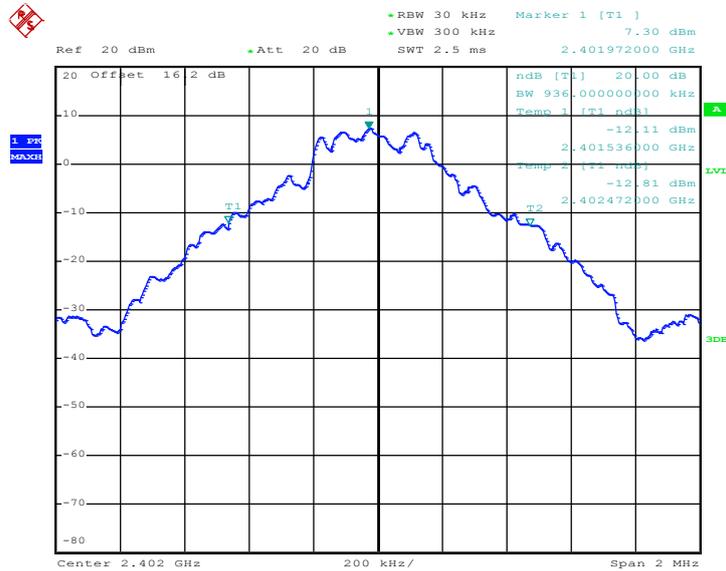

Date: 19.AUG.2013 18:02:26




20 dB Bandwidth Plot on Channel 39

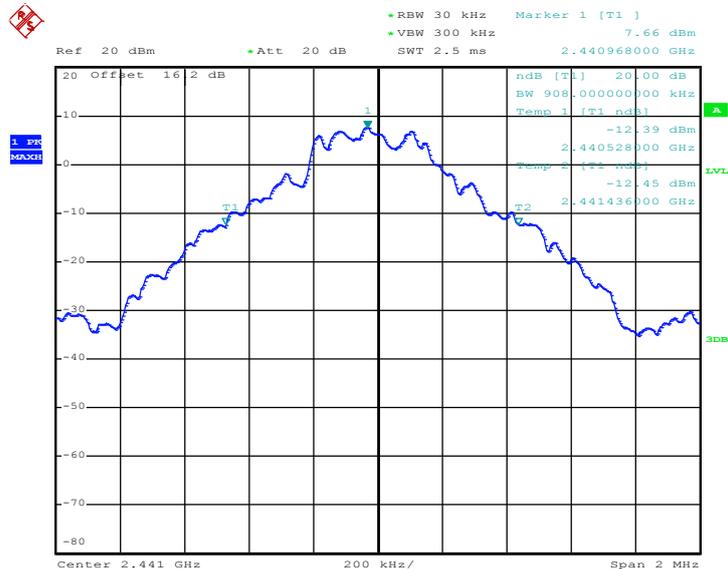

Date: 19.AUG.2013 18:02:49

20 dB Bandwidth Plot on Channel 78

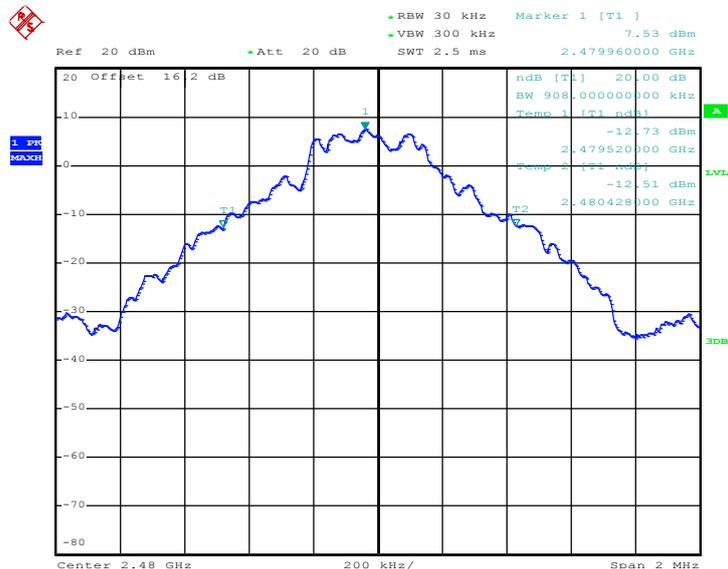


Date: 19.AUG.2013 18:03:10



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.362
39	2441	1.362
78	2480	1.356


20 dB Bandwidth Plot on Channel 00

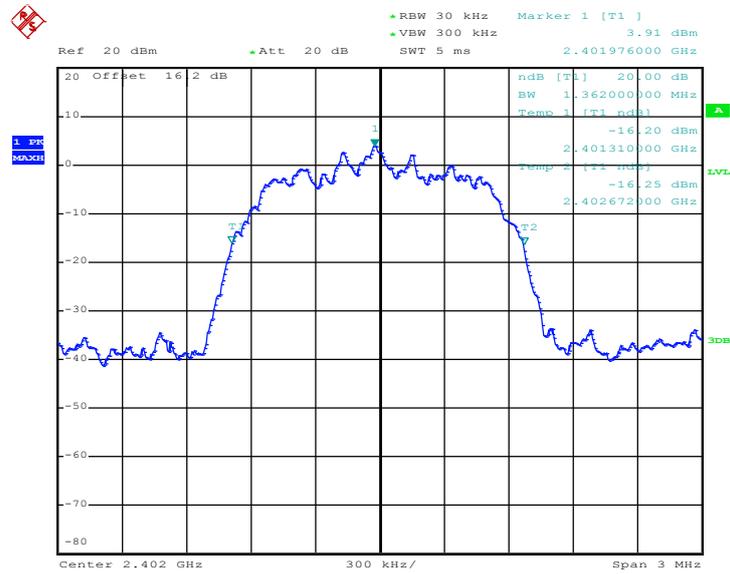

Date: 19.AUG.2013 18:03:38




### 20 dB Bandwidth Plot on Channel 39

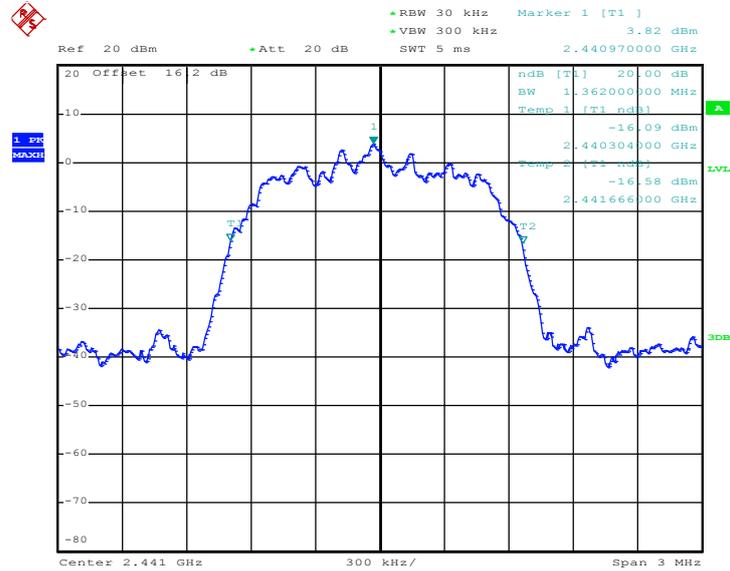

Date: 19.AUG.2013 18:04:28

### 20 dB Bandwidth Plot on Channel 78

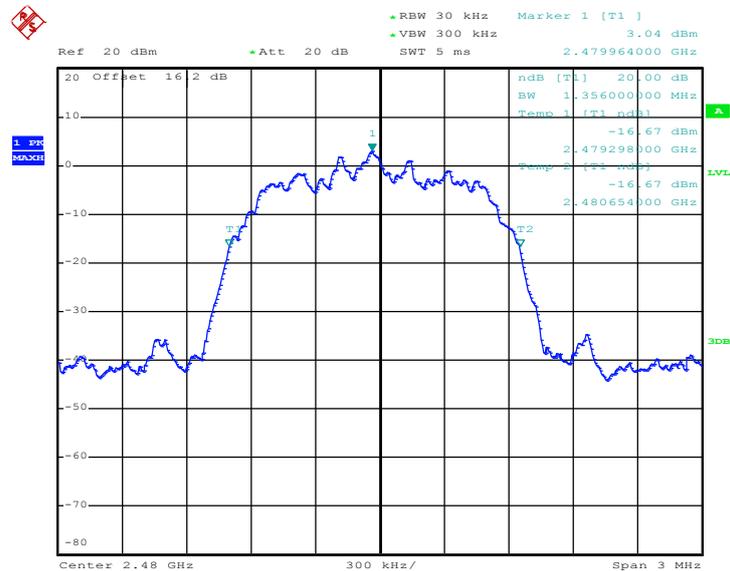


Date: 19.AUG.2013 18:05:10



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.344
39	2441	1.350
78	2480	1.344


20 dB Bandwidth Plot on Channel 00

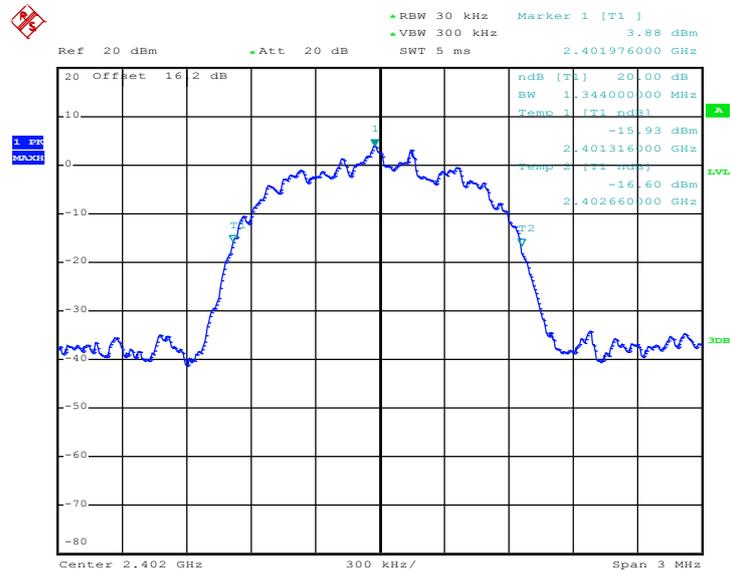

Date: 19.AUG.2013 18:05:43




### 20 dB Bandwidth Plot on Channel 39

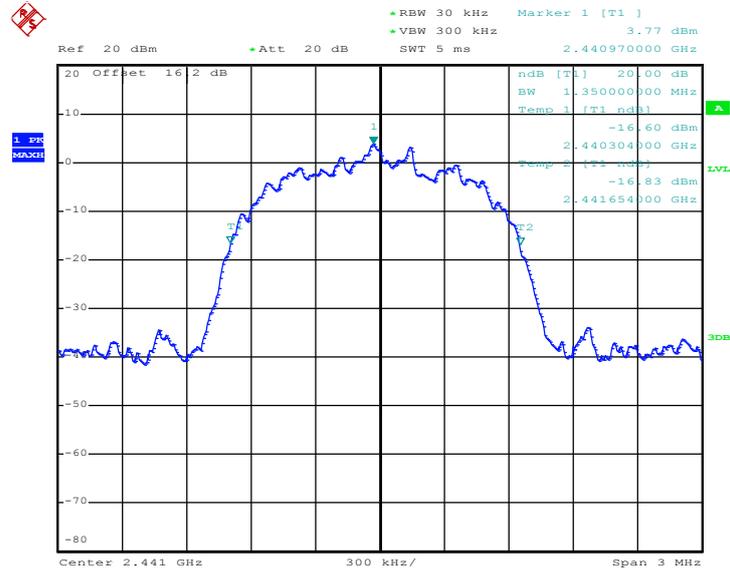

Date: 19.AUG.2013 18:06:14

### 20 dB Bandwidth Plot on Channel 78

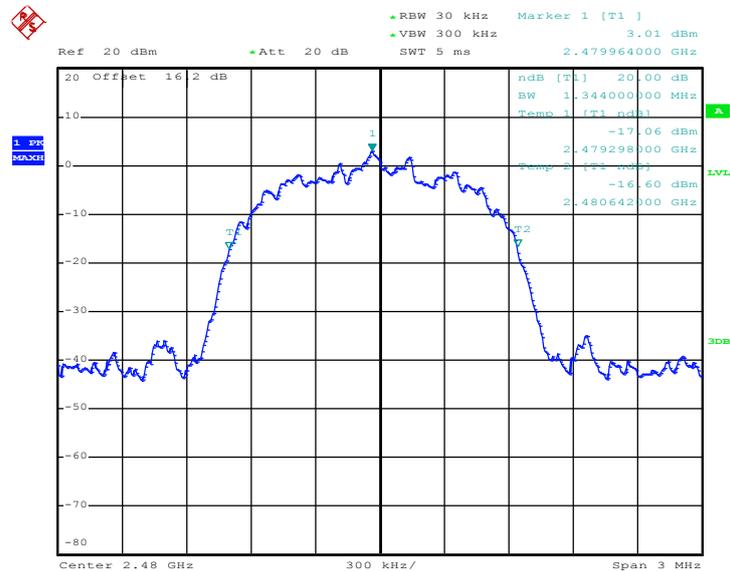


Date: 19.AUG.2013 18:06:31

3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.924
39	2441	0.928
78	2480	0.928


99% Occupied Bandwidth Plot on Channel 00

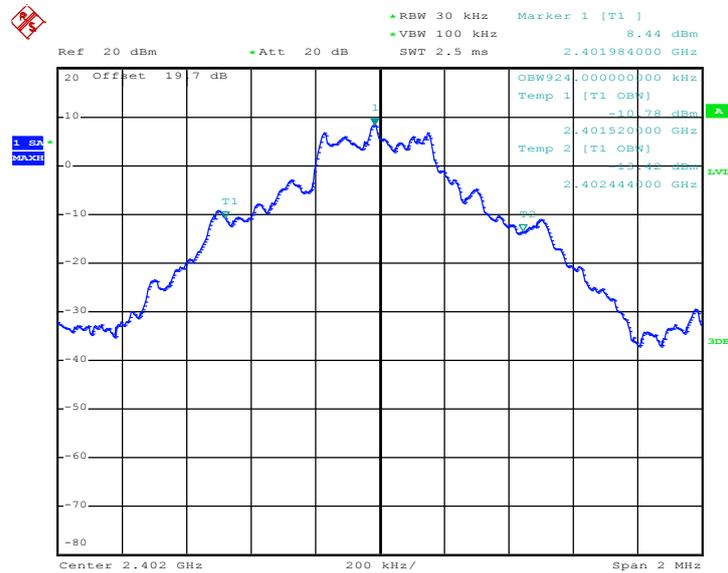

Date: 3.SEP.2013 14:18:22




99% Occupied Bandwidth Plot on Channel 39

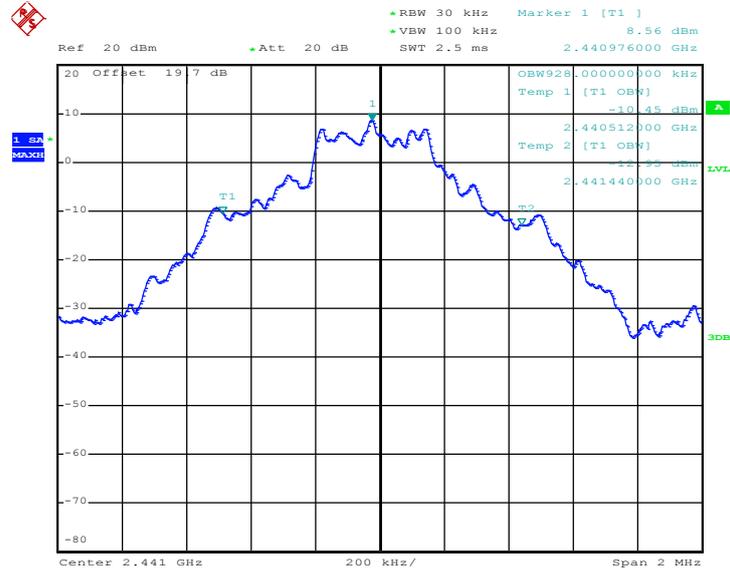

Date: 3.SEP.2013 14:17:50

99% Occupied Bandwidth Plot on Channel 78

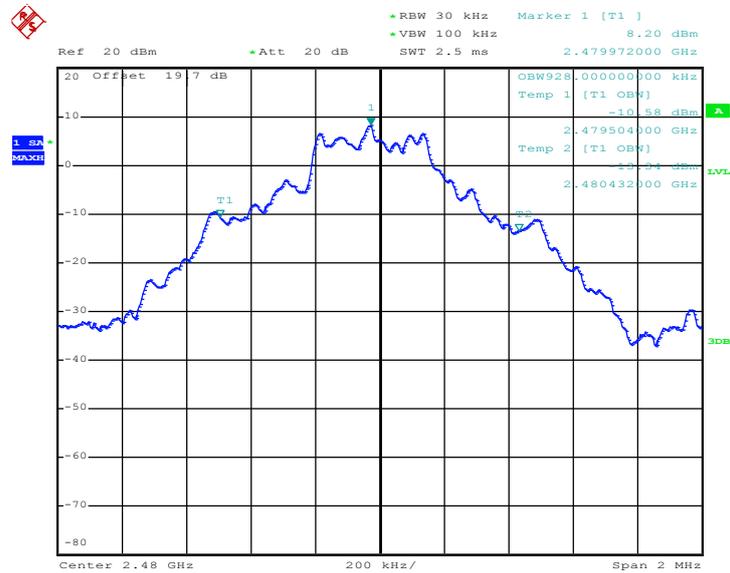


Date: 3.SEP.2013 14:16:53



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.204
39	2441	1.208
78	2480	1.212


99% Occupied Bandwidth Plot on Channel 00

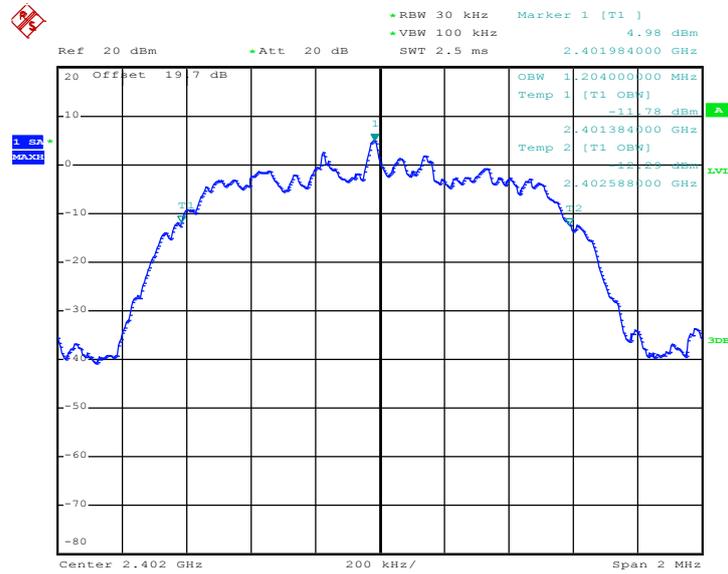

Date: 3.SEP.2013 14:20:28




99% Occupied Bandwidth Plot on Channel 39

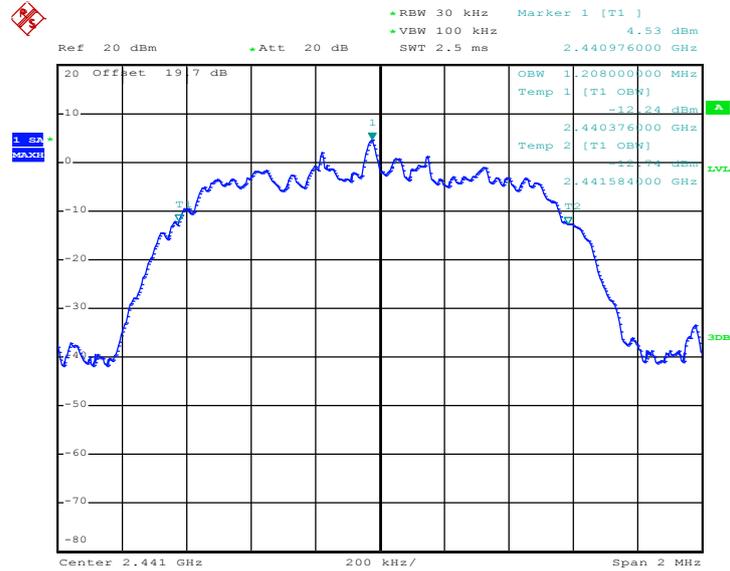

Date: 3.SEP.2013 14:20:59

99% Occupied Bandwidth Plot on Channel 78

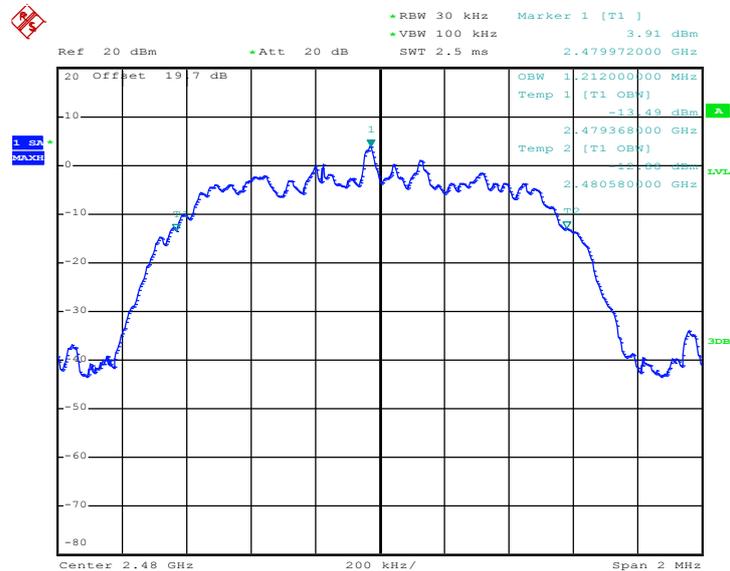


Date: 3.SEP.2013 14:21:40



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.212
39	2441	1.212
78	2480	1.216


99% Occupied Bandwidth Plot on Channel 00

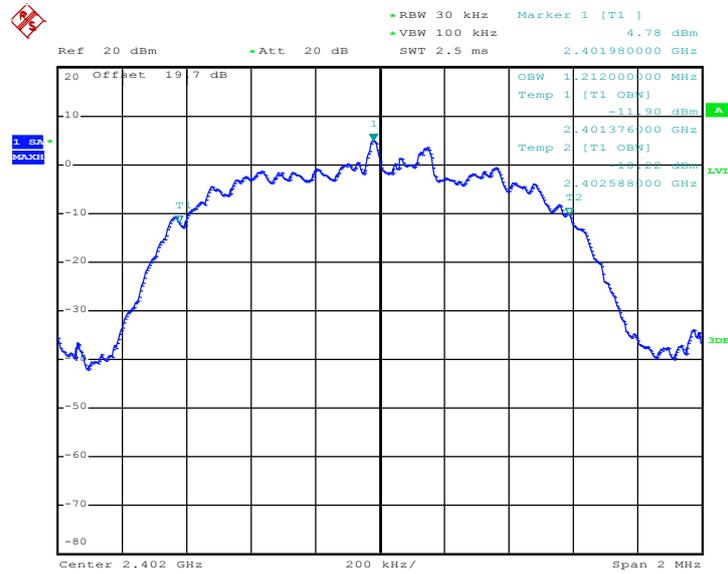

Date: 3.SEP.2013 14:24:06




99% Occupied Bandwidth Plot on Channel 39

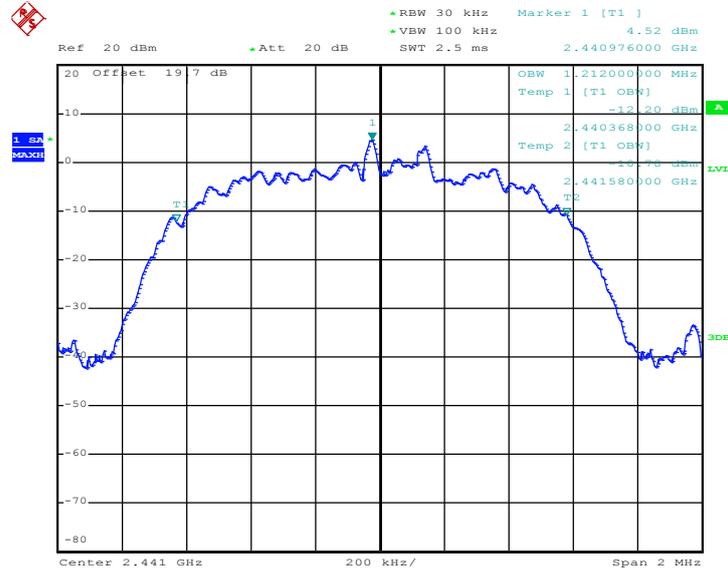

Date: 3.SEP.2013 14:22:47

99% Occupied Bandwidth Plot on Channel 78

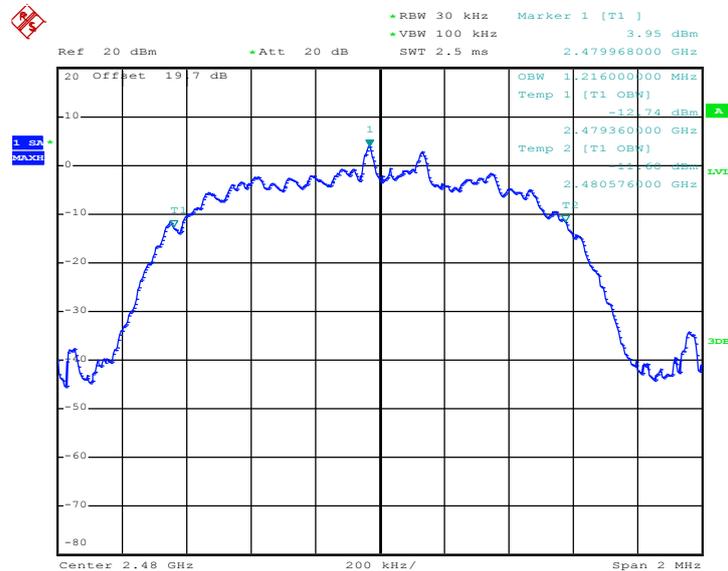

Date: 3.SEP.2013 14:22:14

## 3.5 Peak Output Power Measurement

### 3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

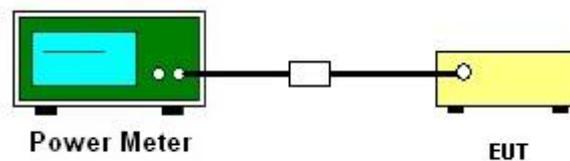

**3.5.5 Test Result of Peak Output Power**

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Rover Lee	<b>Relative Humidity :</b>	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	11.10	20.97	Pass
39	2441	10.88	20.97	Pass
78	2480	10.86	20.97	Pass

**Note:** For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

<b>Test Mode :</b>	2Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Rover Lee	<b>Relative Humidity :</b>	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	9.52	20.97	Pass
39	2441	9.66	20.97	Pass
78	2480	9.16	20.97	Pass

<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Rover Lee	<b>Relative Humidity :</b>	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	10.06	20.97	Pass
39	2441	9.97	20.97	Pass
78	2480	9.46	20.97	Pass

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300kHz ( $\geq 1\%$  span=30MHz ), VBW = 300kHz ( $\geq$  RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

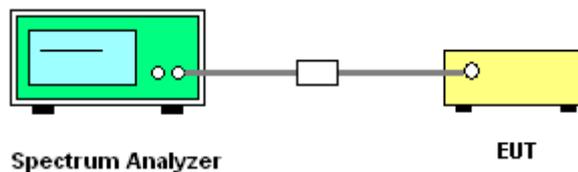




### 3.6.6 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

Low Band Edge Plot on Channel 00

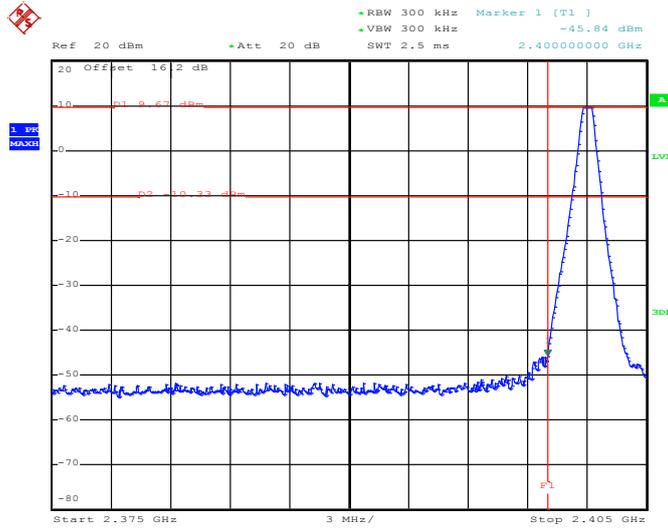

Date: 19.AUG.2013 19:17:41

High Band Edge Plot on Channel 78

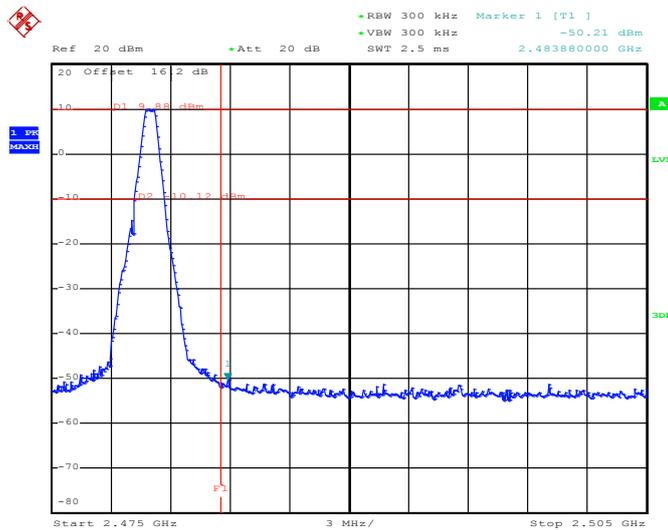


Date: 19.AUG.2013 19:18:46




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

Low Band Edge Plot on Channel 00

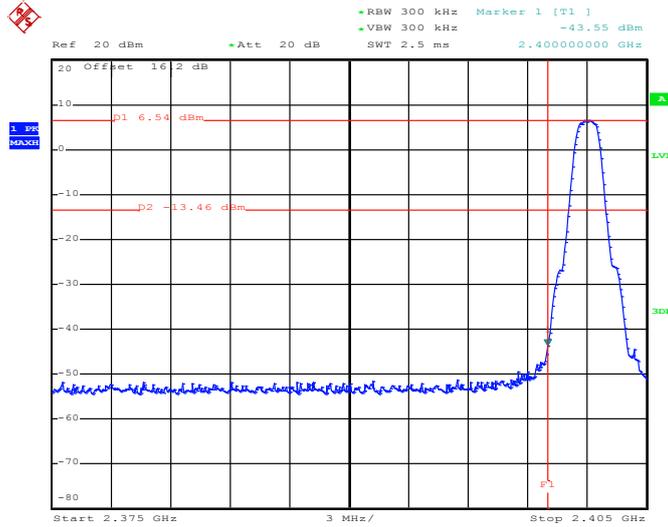

Date: 19.AUG.2013 19:15:19

High Band Edge Plot on Channel 78

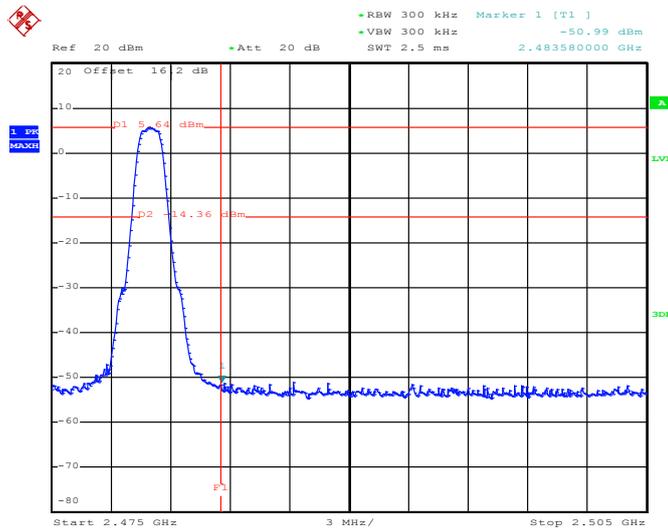


Date: 19.AUG.2013 18:25:35




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

Low Band Edge Plot on Channel 00

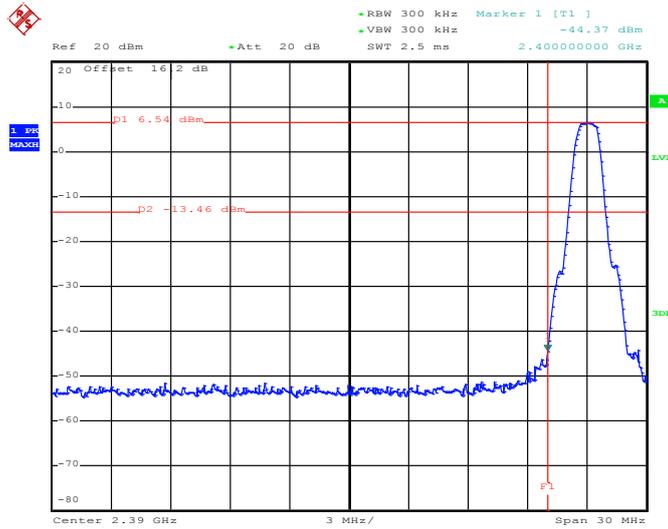

Date: 19.AUG.2013 19:14:34

High Band Edge Plot on Channel 78

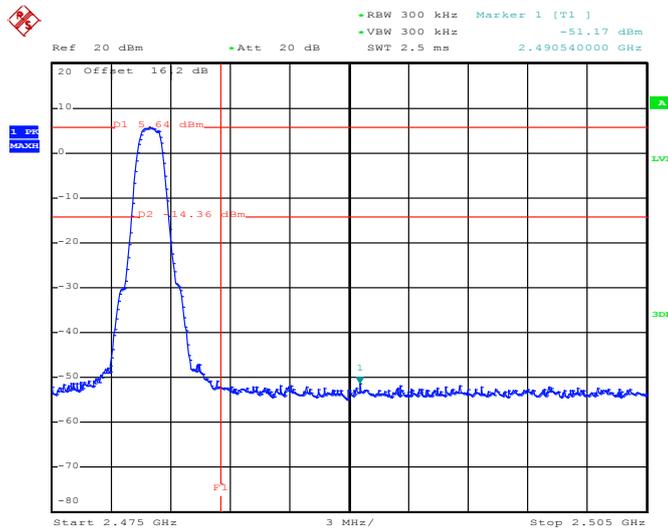


Date: 19.AUG.2013 18:23:33



### 3.6.7 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

1Mbps Hopping Mode Low Band Edge Plot

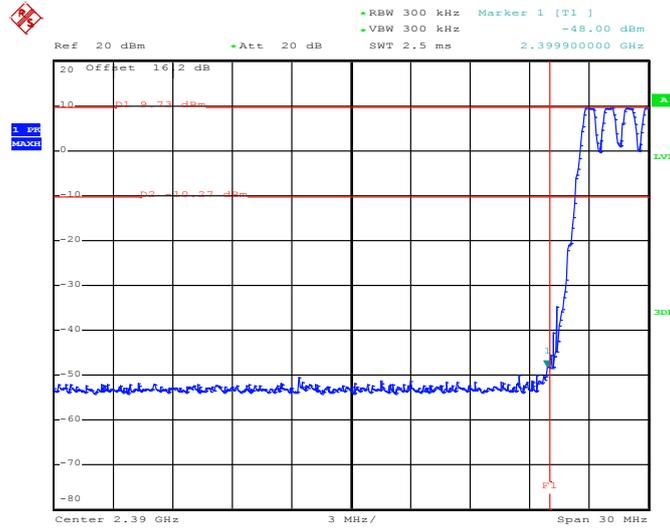

Date: 19.AUG.2013 18:14:42

1Mbps Hopping Mode High Band Edge Plot

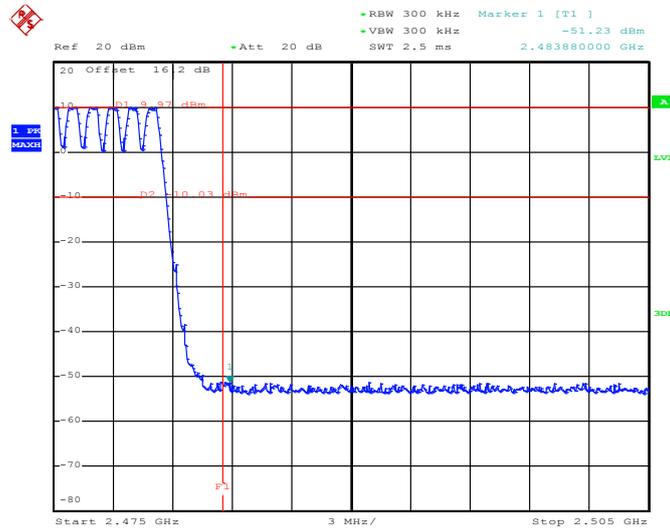


Date: 19.AUG.2013 18:16:01




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

2Mbps Hopping Mode Low Band Edge Plot

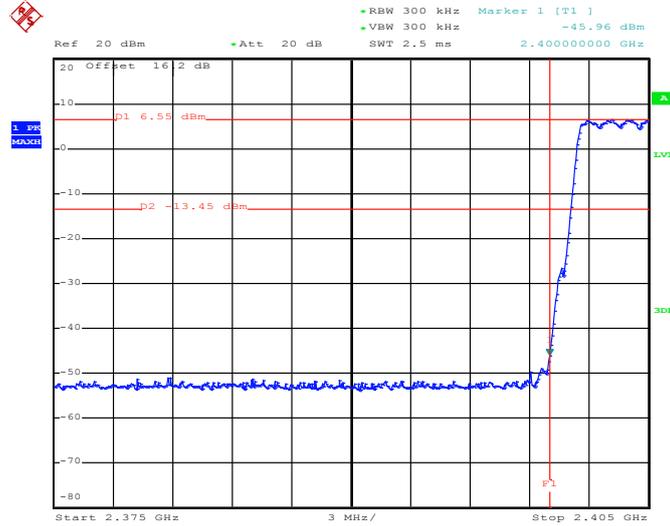

Date: 19.AUG.2013 18:19:04

2Mbps Hopping Mode High Band Edge Plot

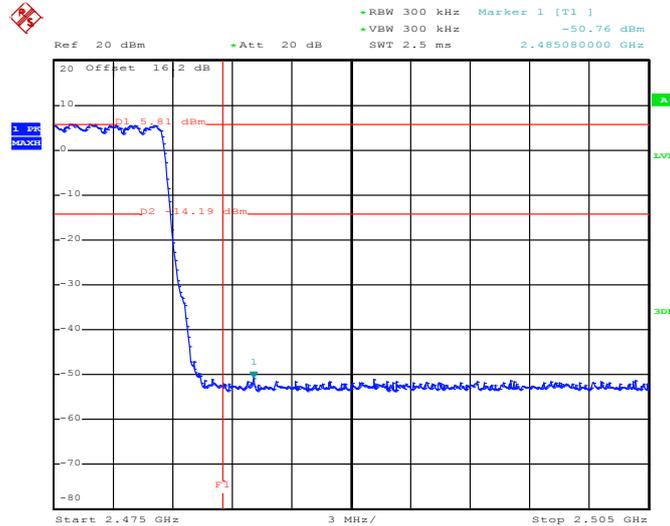


Date: 19.AUG.2013 18:17:49




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Rover Lee	Relative Humidity :	50~53%

3Mbps Hopping Mode Low Band Edge Plot

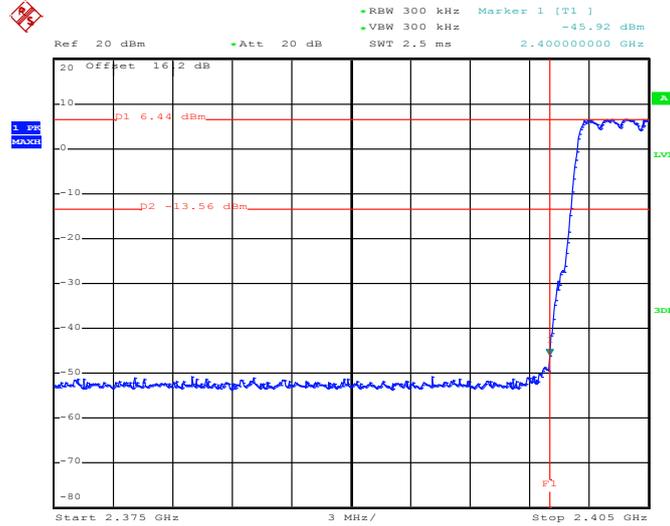

Date: 19.AUG.2013 18:21:10

3Mbps Hopping Mode High Band Edge Plot

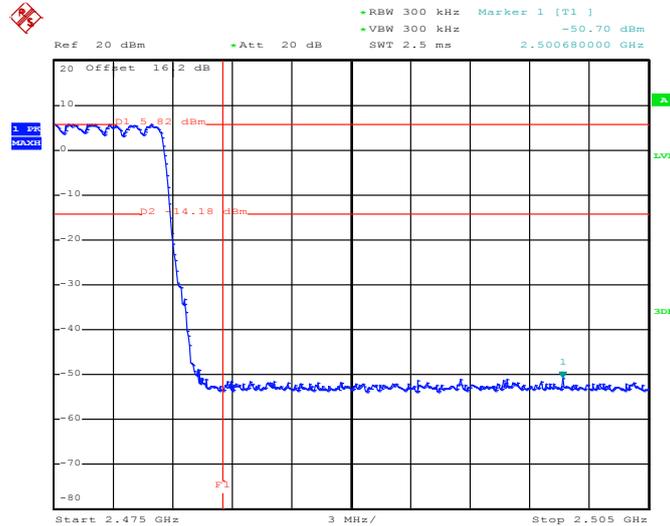

Date: 19.AUG.2013 18:22:48

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.7.4 Test Setup

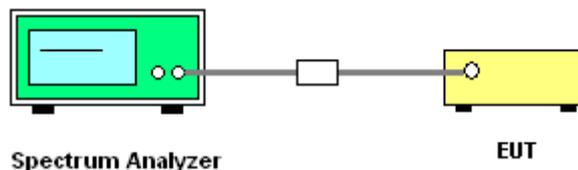

### 3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

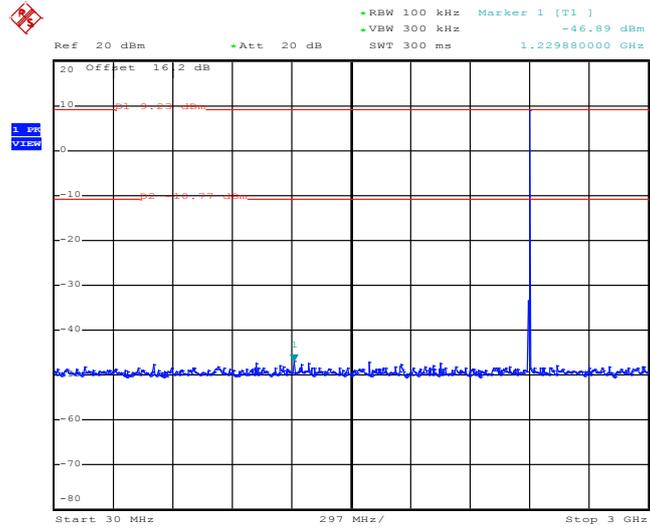

Date: 19.AUG.2013 18:55:49

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

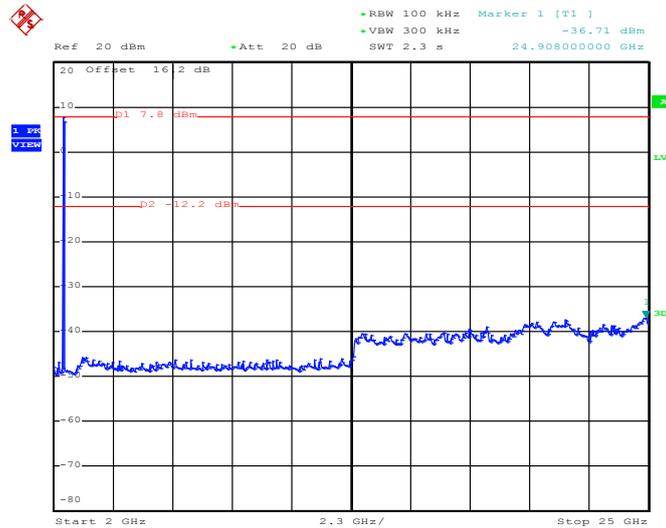


Date: 26.AUG.2013 14:08:04




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

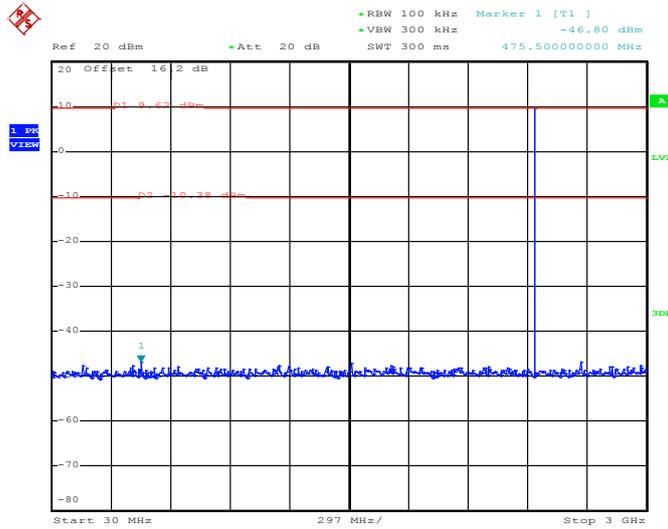

Date: 19.AUG.2013 18:57:22

1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

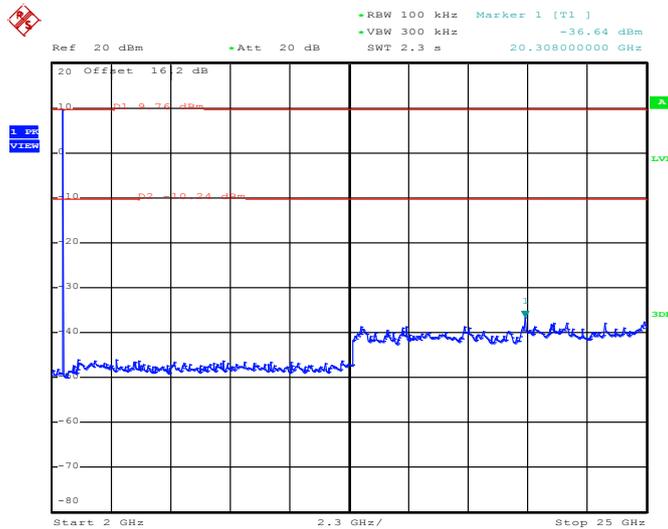


Date: 19.AUG.2013 18:57:44




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

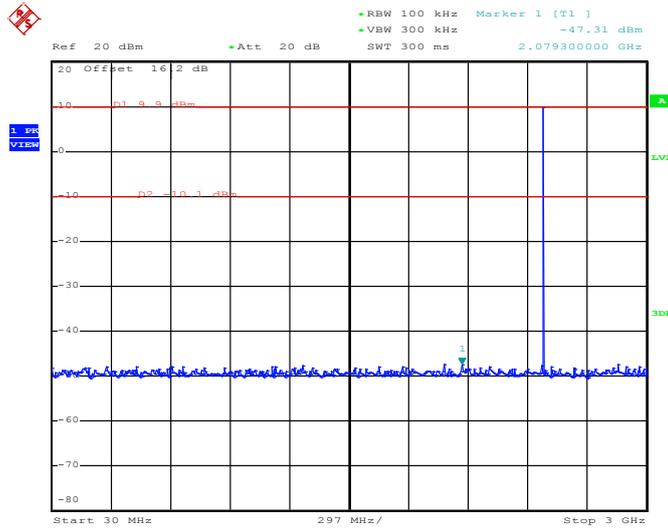

Date: 19.AUG.2013 18:58:26

1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

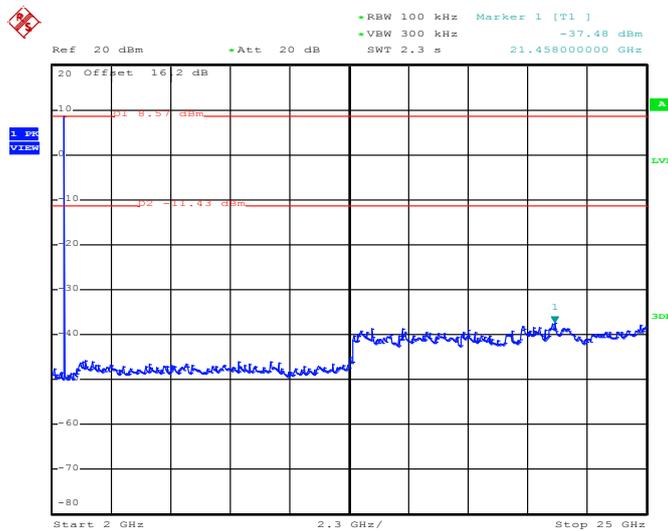


Date: 19.AUG.2013 18:58:47




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

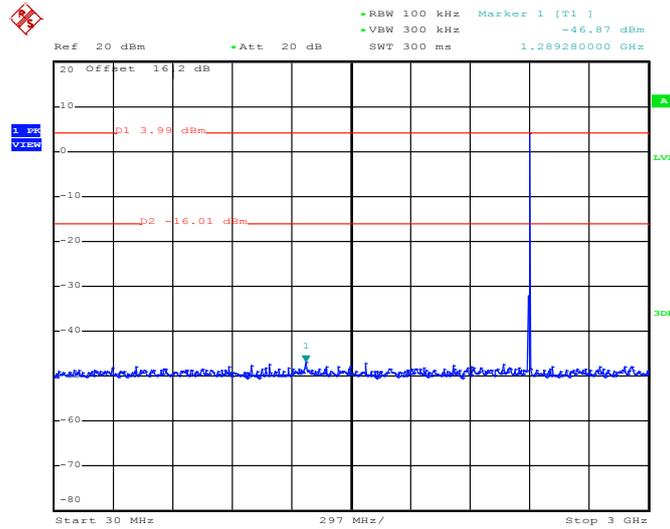

Date: 19.AUG.2013 19:01:18

2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

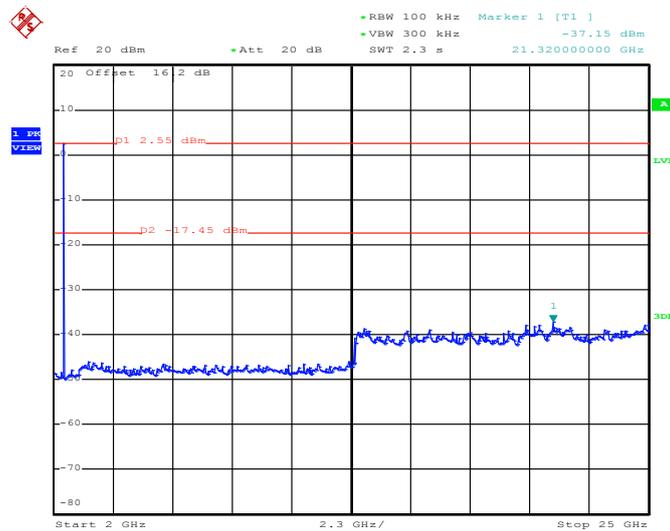


Date: 19.AUG.2013 19:01:40




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

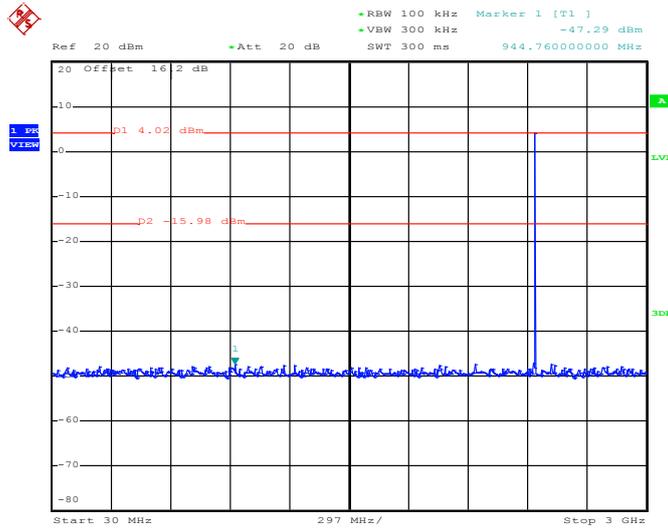

Date: 19.AUG.2013 19:00:29

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

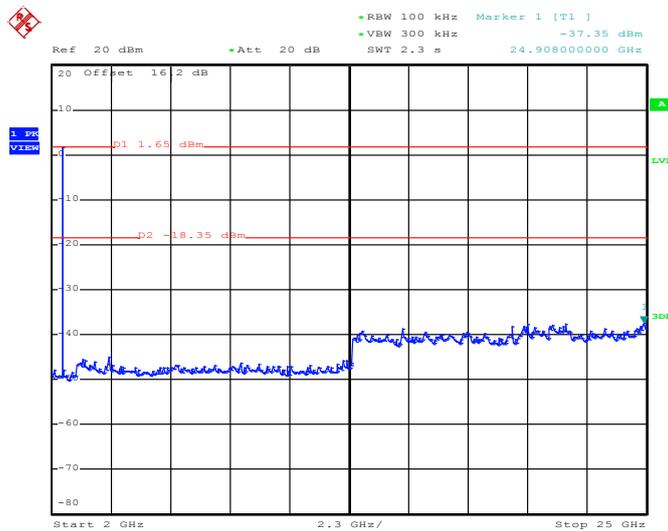


Date: 19.AUG.2013 19:00:50




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

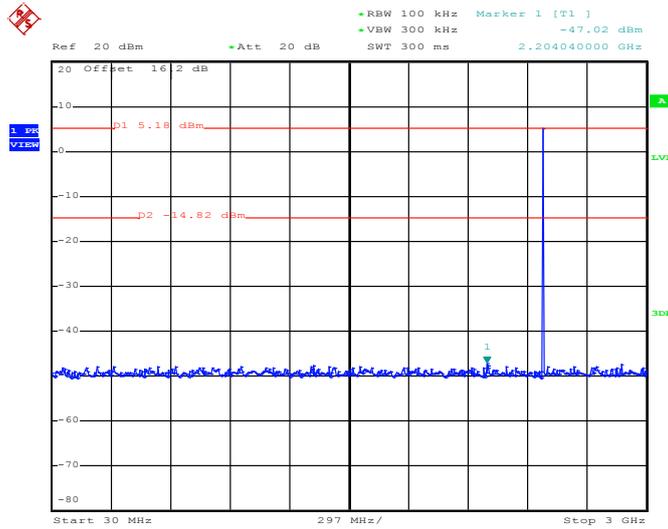

Date: 19.AUG.2013 18:59:38

2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

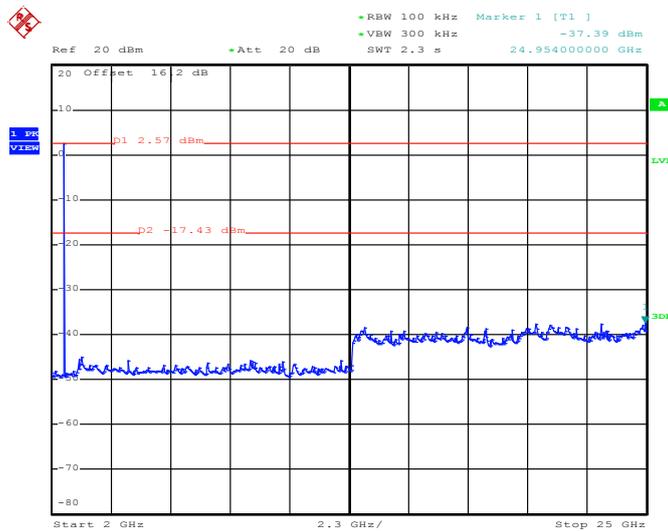


Date: 19.AUG.2013 18:59:59




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

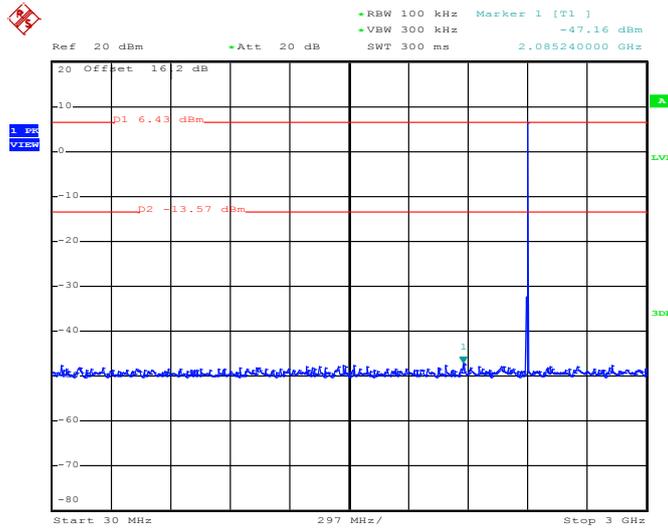

Date: 19.AUG.2013 19:02:08

3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

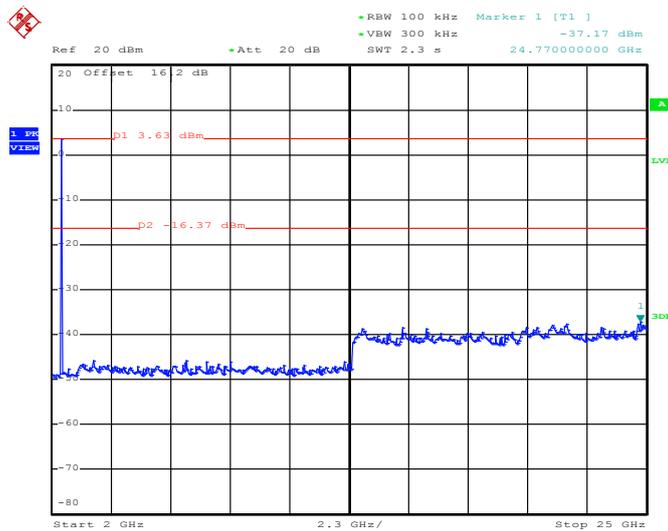


Date: 19.AUG.2013 19:02:30




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

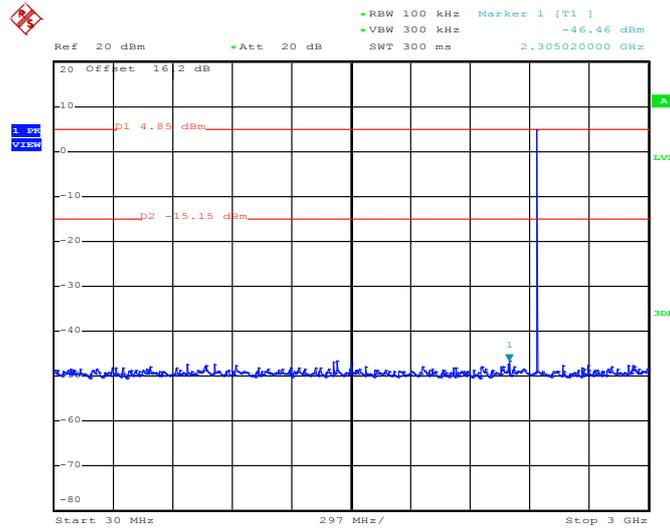

Date: 19.AUG.2013 19:03:01

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

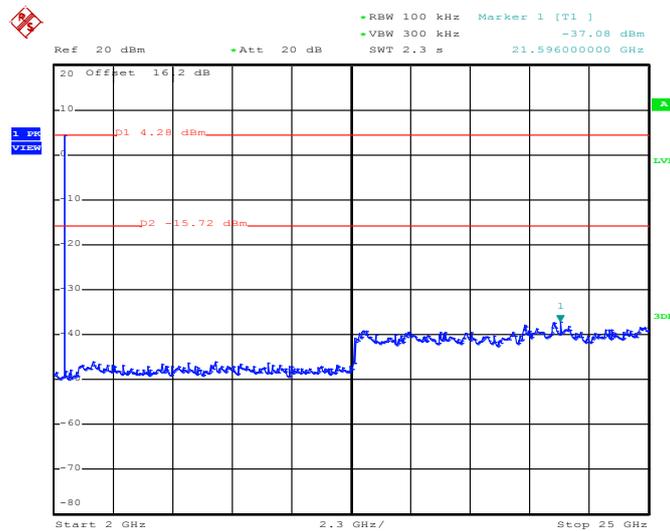


Date: 19.AUG.2013 19:03:23




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Rover Lee

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

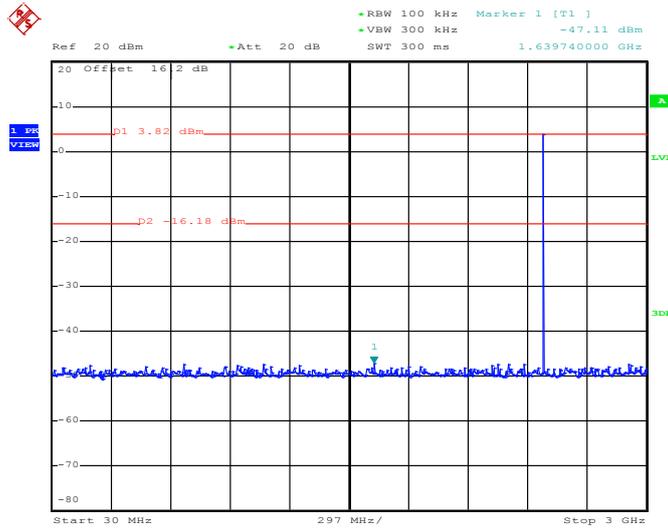

Date: 19.AUG.2013 19:06:52

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

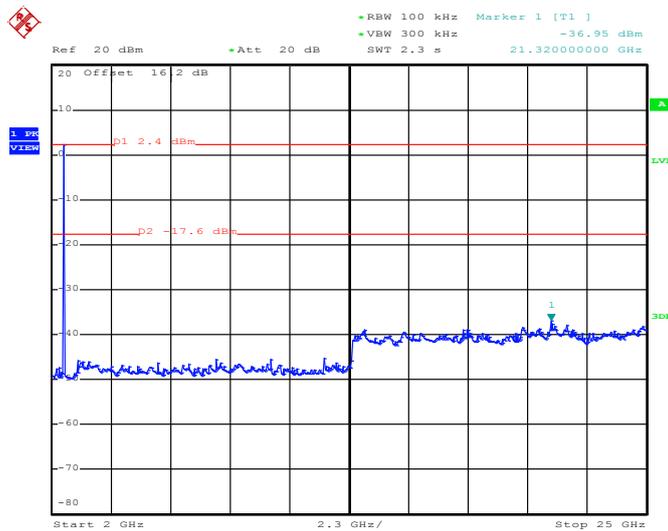

Date: 19.AUG.2013 19:07:13

### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.




3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.73dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ .

### 3.8.4 Test Setup


For radiated emissions below 30MHz

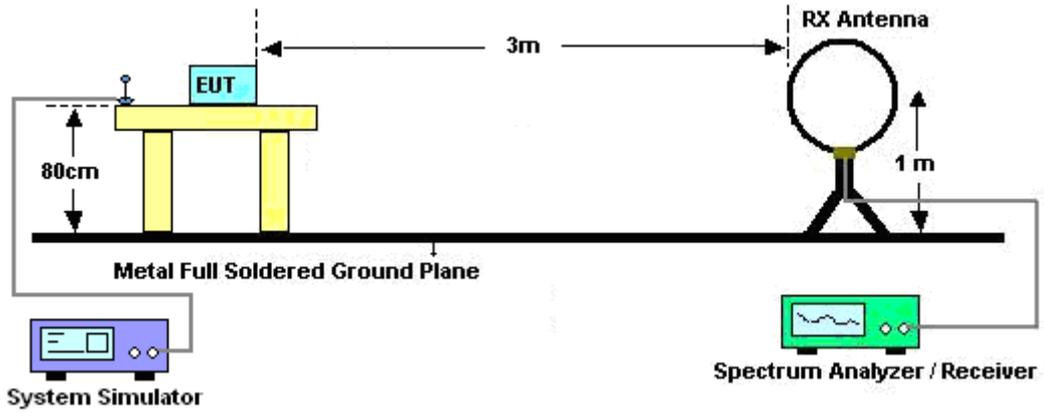

For radiated emissions from 30MHz to 1GHz

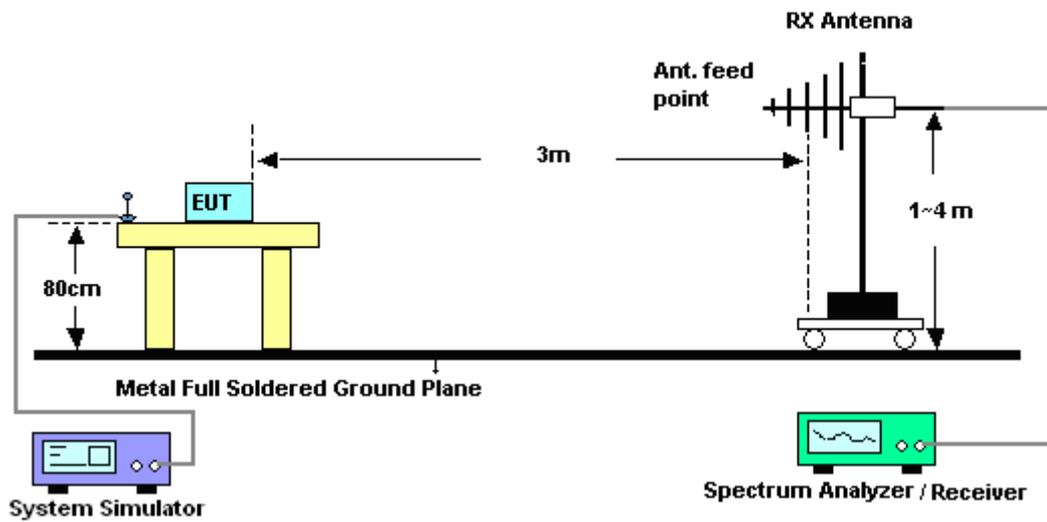

For radiated emissions above 1GHz

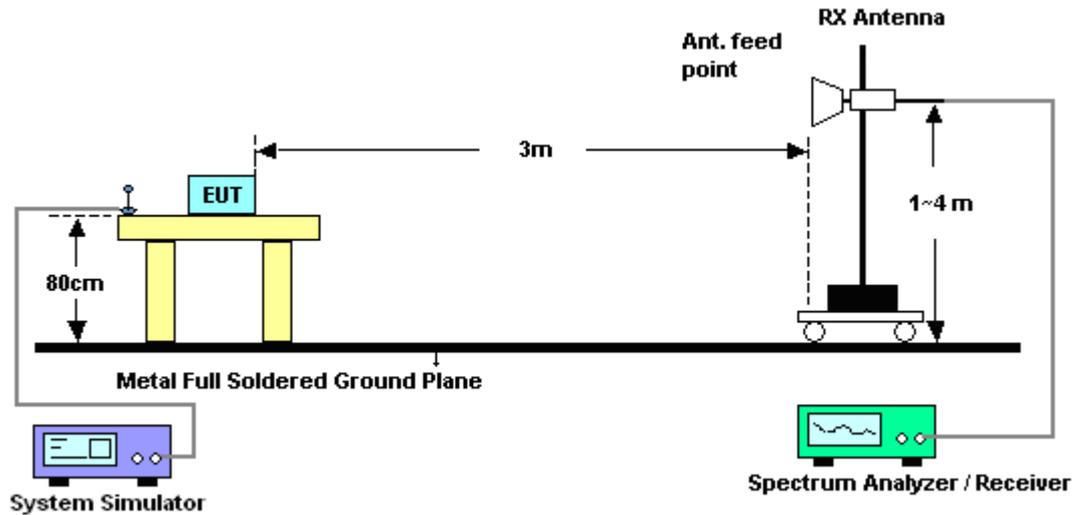


### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


### 3.8.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

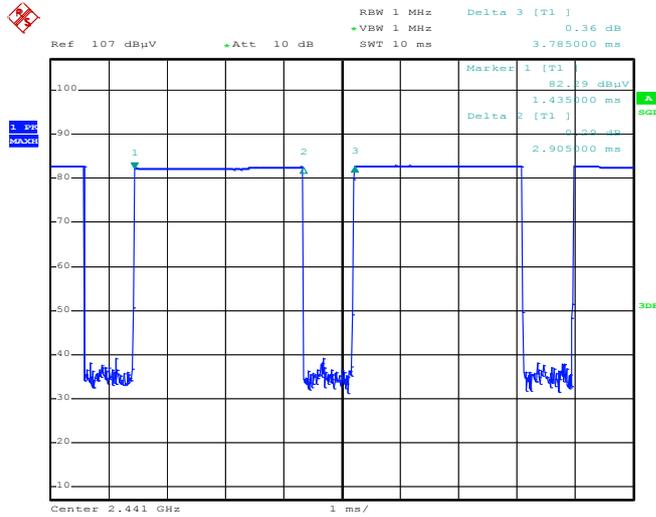

Date: 15.AUG.2013 21:22:14

DH5 on time (Count Pulses) Plot on Channel 39

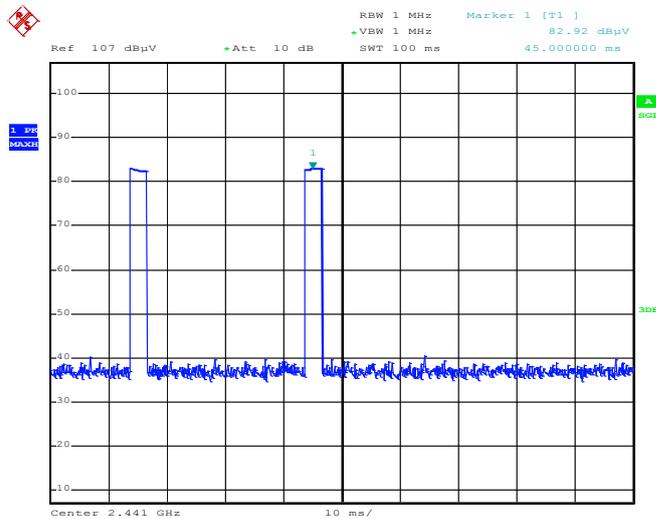

Date: 15.AUG.2013 21:24:25

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds = 2 \* 2.9 / 100 = 5.80 %
2. Worst case Duty cycle correction factor = 20\*log(Duty cycle) = -24.73 dB
3. DH5 has the highest duty cycle worst case and is reported.



**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.9 \text{ ms} \times 20 \text{ channels} = 58.0 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2$  hops

Thus, the maximum possible ON time:

$$2.9 \text{ ms} \times 2 = 5.80 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.80 \text{ ms}/100\text{ms}) = -24.73 \text{ dB}$$



3.8.7 Test Result of Radiated Spurious at Band Edges

Test Mode :	1Mbps	Temperature :	21~24°C
Test Channel :	00	Relative Humidity :	51~53%
		Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2369.13	45.27	-28.73	74	40.38	32.28	6.88	34.27	118	39	Peak
2369.13	20.54	-33.46	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2354.28	45.88	-28.12	74	41.03	32.26	6.84	34.25	128	287	Peak
2354.28	21.15	-32.85	54	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	21~24°C
Test Channel :	78	Relative Humidity :	51~53%
		Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	61.14	-12.86	74	56.13	32.38	7.06	34.43	120	328	Peak
2483.5	36.41	-17.59	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	62.11	-11.89	74	57.1	32.38	7.06	34.43	101	279	Peak
2483.5	37.38	-16.62	54	-	-	-	-	-	-	Average



**3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	21~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	51~53%
<b>Test Engineer :</b>	Eric Shih	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. 3201 MHz and 7206 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 104.26 dBμV/m - 20dB = 84.26dBμV/m.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	104.26	-	-	99.35	32.3	6.91	34.3	118	39	Peak
2402	79.53	-	-	-	-	-	-	-	-	Average
3201	46.4	-37.86	84.26	65.27	32.76	6.89	58.52	100	0	Peak
4803	46.39	-27.61	74	62.62	33.98	8.75	58.96	100	0	Peak
4803	21.66	-32.34	54	-	-	-	-	-	-	Average
7206	42.85	-41.41	84.26	54.11	35.56	10.81	57.63	100	0	Peak

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	21~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	51~53%
<b>Test Engineer :</b>	Eric Shih	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. 3201 MHz and 7206 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	101.44	-	-	96.53	32.3	6.91	34.3	128	287	Peak
2402	76.71	-	-	-	-	-	-	-	-	Average
3201	41.96	-39.48	81.44	60.83	32.76	6.89	58.52	100	0	Peak
4804	44.11	-29.89	74	60.34	33.98	8.75	58.96	100	0	Peak
4804	19.38	-34.62	54	-	-	-	-	-	-	Average
7206	41.87	-39.57	81.44	53.13	35.56	10.81	57.63	100	0	Peak

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	21~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	51~53%
<b>Test Engineer :</b>	Eric Shih	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2442 MHz is fundamental signal which can be ignored. 2. 3255 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2442	100.23	-	-	95.28	32.35	6.99	34.39	100	319	Peak
2442	75.5	-	-	-	-	-	-	-	-	Average
3255	45.42	-34.81	80.23	64.3	32.75	6.96	58.59	100	0	Peak
4882	48.13	-25.87	74	64.16	33.95	8.85	58.83	100	0	Peak
4882	23.4	-30.6	54	-	-	-	-	-	-	Average
7323	41.31	-32.69	74	52.61	35.53	10.91	57.74	100	0	Peak
7323	16.58	-37.42	54	-	-	-	-	-	-	Average

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	21~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	51~53%
<b>Test Engineer :</b>	Eric Shih	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2442 MHz is fundamental signal which can be ignored. 2. 3255 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2442	101.22	-	-	96.27	32.35	6.99	34.39	175	86	Peak
2442	76.49	-	-	-	-	-	-	-	-	Average
3255	42.03	-39.19	81.22	60.91	32.75	6.96	58.59	100	0	Peak
4881	48.6	-25.4	74	64.63	33.95	8.85	58.83	100	0	Peak
4881	23.87	-30.13	54	-	-	-	-	-	-	Average
7323	41.4	-32.6	74	52.7	35.53	10.91	57.74	100	0	Peak
7323	16.67	-37.33	54	-	-	-	-	-	-	Average

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	21~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	51~53%
<b>Test Engineer :</b>	Eric Shih	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. 3306 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
42.96	26.91	-13.09	40	45.77	11.7	0.64	31.2	-	-	Peak
163.92	29.77	-13.73	43.5	49.58	10.13	1.22	31.16	-	-	Peak
188.49	30.71	-12.79	43.5	51.54	8.98	1.27	31.08	100	28	Peak
316.8	22.7	-23.3	46	38.13	13.77	1.8	31	-	-	Peak
633.9	29.67	-16.33	46	37.34	20.07	2.79	30.53	-	-	Peak
845.3	28.19	-17.81	46	32.76	22.56	3.26	30.39	-	-	Peak
2480	100.48	-	-	95.47	32.38	7.06	34.43	120	328	Peak
2480	75.75	-	-	-	-	-	-	-	-	Average
3306	45.72	-34.76	80.48	64.6	32.74	7.03	58.65	100	0	Peak
4960	46.81	-27.19	74	62.64	33.91	8.92	58.66	100	0	Peak
4960	22.08	-31.92	54	-	-	-	-	-	-	Average
7440	41.49	-32.51	74	52.79	35.51	11.04	57.85	100	0	Peak
7440	16.76	-37.24	54	-	-	-	-	-	-	Average

**Note:** Other harmonics are lower than background noise.



<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	21~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	51~53%
<b>Test Engineer :</b>	Eric Shih	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. 3306 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
35.4	29.74	-10.26	40	44.61	15.82	0.59	31.28	100	174	Peak
76.71	24.46	-15.54	40	47.61	7.19	0.86	31.2	-	-	Peak
161.49	29.8	-13.7	43.5	49.45	10.31	1.22	31.18	-	-	Peak
528.2	26.15	-19.85	46	35.77	18.58	2.51	30.71	-	-	Peak
580.7	27.89	-18.11	46	36.46	19.47	2.64	30.68	-	-	Peak
633.9	33.8	-12.2	46	41.47	20.07	2.79	30.53	-	-	Peak
2480	102.49	-	-	97.48	32.38	7.06	34.43	101	279	Peak
2480	77.76	-	-	-	-	-	-	-	-	Average
3306	41.58	-40.91	82.49	60.46	32.74	7.03	58.65	100	0	Peak
4962	47.54	-26.46	74	63.37	33.91	8.92	58.66	100	0	Peak
4962	22.81	-31.19	54	-	-	-	-	-	-	Average
7440	41.64	-32.36	74	52.94	35.51	11.04	57.85	100	0	Peak
7440	16.91	-37.09	54	-	-	-	-	-	-	Average

**Note:** Other harmonics are lower than background noise.

### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.9.4 Test Setup

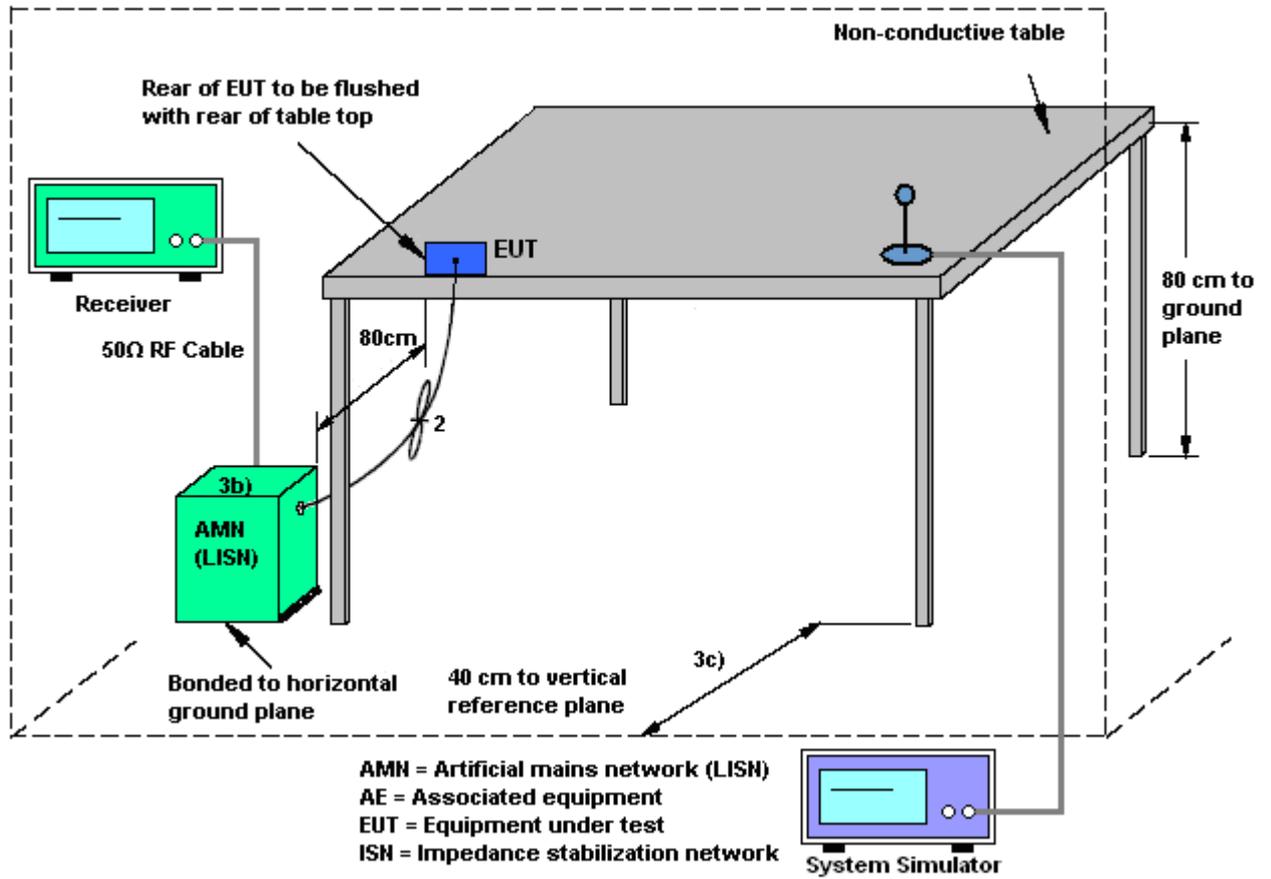



3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	David Du	Relative Humidity :	59~60%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band II Link + Bluetooth Link + WLAN Link + Earphone + H-pattern + MP3 + USB Cable (Charging from Adapter 2)		

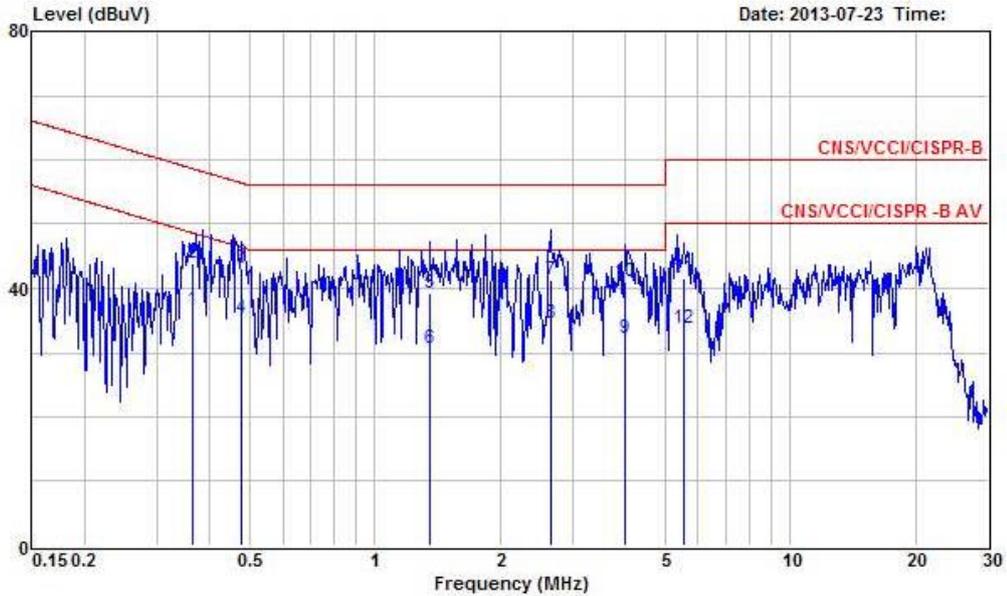


Site : CO01-HY  
 Condition : CNS/VCCI/CISPR-B LISN 2001/004-121228 LINE  
 Power : 120V/60Hz

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.363	36.56	-12.10	48.66	36.05	0.15	0.36	Average
2	0.363	44.02	-14.64	58.66	43.51	0.15	0.36	QP
3	0.479	43.00	-13.36	56.36	42.51	0.15	0.34	QP
4	0.479	35.44	-10.92	46.36	34.95	0.15	0.34	Average
5	1.360	39.25	-16.75	56.00	38.97	0.18	0.10	QP
6	1.360	30.71	-15.29	46.00	30.43	0.18	0.10	Average
7	2.650	41.42	-14.58	56.00	41.11	0.21	0.10	QP
8	2.650	34.66	-11.34	46.00	34.35	0.21	0.10	Average
9	3.990	32.17	-13.83	46.00	31.84	0.23	0.10	Average
10	3.990	40.95	-15.05	56.00	40.62	0.23	0.10	QP
11	5.560	41.50	-18.50	60.00	41.14	0.26	0.10	QP
12	5.560	33.85	-16.15	50.00	33.49	0.26	0.10	Average



Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	David Du	Relative Humidity :	59~60%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band II Link + Bluetooth Link + WLAN Link + Earphone + H-pattern + MP3 + USB Cable (Charging from Adapter 2)		

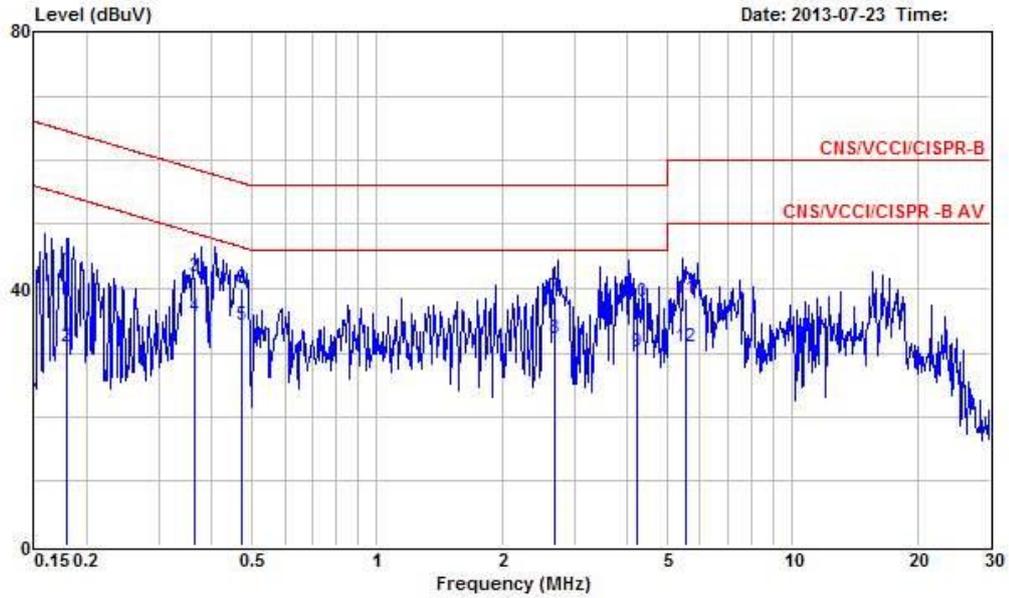

Site : CO01-HY  
 Condition : CNS/VCCI/CISPR-B LISN 2001/004-121228 NEUTRAL  
 Power : 120V/60Hz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.179	42.85	-21.68	64.53	42.65	0.10	0.10	QP
2	0.179	30.97	-23.56	54.53	30.77	0.10	0.10	Average
3	0.365	41.85	-16.76	58.61	41.37	0.12	0.36	QP
4	0.365	35.64	-12.97	48.61	35.16	0.12	0.36	Average
5	0.474	34.30	-12.14	46.44	33.84	0.12	0.34	Average
6	0.474	39.97	-16.47	56.44	39.51	0.12	0.34	QP
7	2.680	38.70	-17.30	56.00	38.41	0.19	0.10	QP
8	2.680	32.21	-13.79	46.00	31.92	0.19	0.10	Average
9	4.235	30.07	-15.93	46.00	29.75	0.22	0.10	Average
10	4.235	37.82	-18.18	56.00	37.50	0.22	0.10	QP
11	5.565	38.54	-21.46	60.00	38.19	0.25	0.10	QP
12	5.565	31.00	-19.00	50.00	30.65	0.25	0.10	Average



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

Embedded in Antenna.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Aug. 02, 2013~ Sep. 03, 2013	Jun. 06, 2014	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Feb. 05, 2013	Aug. 02, 2013~ Sep. 03, 2013	Feb. 04, 2014	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Feb. 05, 2013	Aug. 02, 2013~ Sep. 03, 2013	Feb. 04, 2014	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Aug. 15, 2013	Sep. 02, 2013	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz~30GHz	Nov. 30, 2012	Aug. 15, 2013	Nov. 29, 2013	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/00 01	9 kHz~30 MHz	Jul. 03, 2012	Aug. 15, 2013	Jul. 03, 2014	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz~1GHz	Oct. 06, 2012	Aug. 15, 2013	Oct. 05, 2013	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2012	Aug. 15, 2013	Aug. 21, 2013	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	18GHz~40GHz	Sep. 28, 2012	Aug. 15, 2013	Sep. 27, 2013	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	30MHz~1GHz	Feb. 26, 2013	Aug. 15, 2013	Feb. 25, 2014	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1GHz~26.5GHz	Dec. 01, 2012	Aug. 15, 2013	Nov. 30, 2013	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10 P	159088	DC~18G High Gain	Feb. 27, 2013	Aug. 15, 2013	Feb. 26, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Aug. 15, 2013	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Aug. 15, 2013	N/A	Radiation (03CH07-HY)
EMC Receiver	R&S	ESCS 30	100132	9kHz ~ 2.75GHz	Nov. 14, 2012	Jul. 23, 2013	Nov. 13, 2013	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz ~ 30MHz	Dec. 28, 2012	Jul. 23, 2013	Dec. 27, 2013	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz ~ 30MHz	Jan. 08, 2013	Jul. 23, 2013	Jan. 07, 2014	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Jul. 23, 2013	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0~60Hz	N/A	Jul. 23, 2013	N/A	Conduction (CO01-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	076118320 10001	9kHz ~ 30MHz	Mar. 01, 2013	Jul. 23, 2013	Feb. 28, 2014	Conduction (CO01-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.72
---	------