

## Appendix C - Highest Measurement Plots

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/24

**02\_WCDMA Band II\_RMC12.2Kbps\_Ch9538\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**


Communication System: UID 0, WCDMA Band II (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 40.332$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(8.08, 8.08, 8.08) @ 1907.6 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 1.67 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 32.81 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 2.04 W/kg  
**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.560 W/kg**  
Smallest distance from peaks to all points 3 dB below = 11.6 mm  
Ratio of SAR at M2 to SAR at M1 = 48.4%  
Maximum value of SAR (measured) = 1.60 W/kg

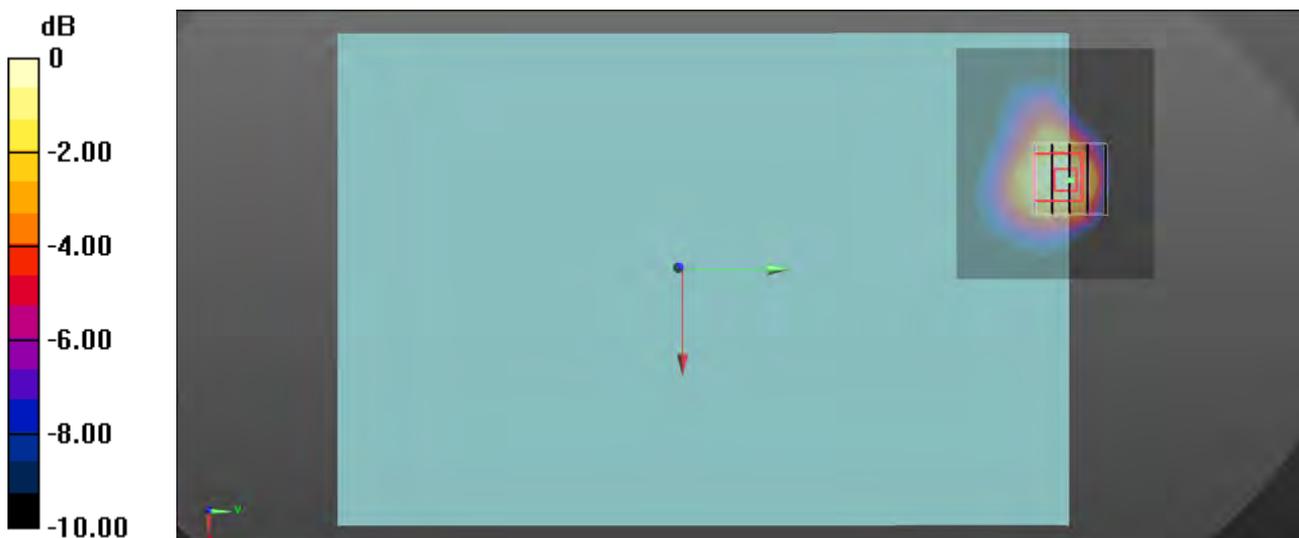

0 dB = 1.60 W/kg = 2.04 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/23

**14\_WCDMA Band IV\_RMC12.2Kbps\_Ch1312\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**


Communication System: UID 0, WCDMA Band IV (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.351$  S/m;  $\epsilon_r = 39.443$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(8.42, 8.42, 8.42) @ 1712.4 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.60 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 30.85 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 2.00 W/kg  
**SAR(1 g) = 0.995 W/kg; SAR(10 g) = 0.522 W/kg**  
Smallest distance from peaks to all points 3 dB below = 11.2 mm  
Ratio of SAR at M2 to SAR at M1 = 49.3%  
Maximum value of SAR (measured) = 1.63 W/kg

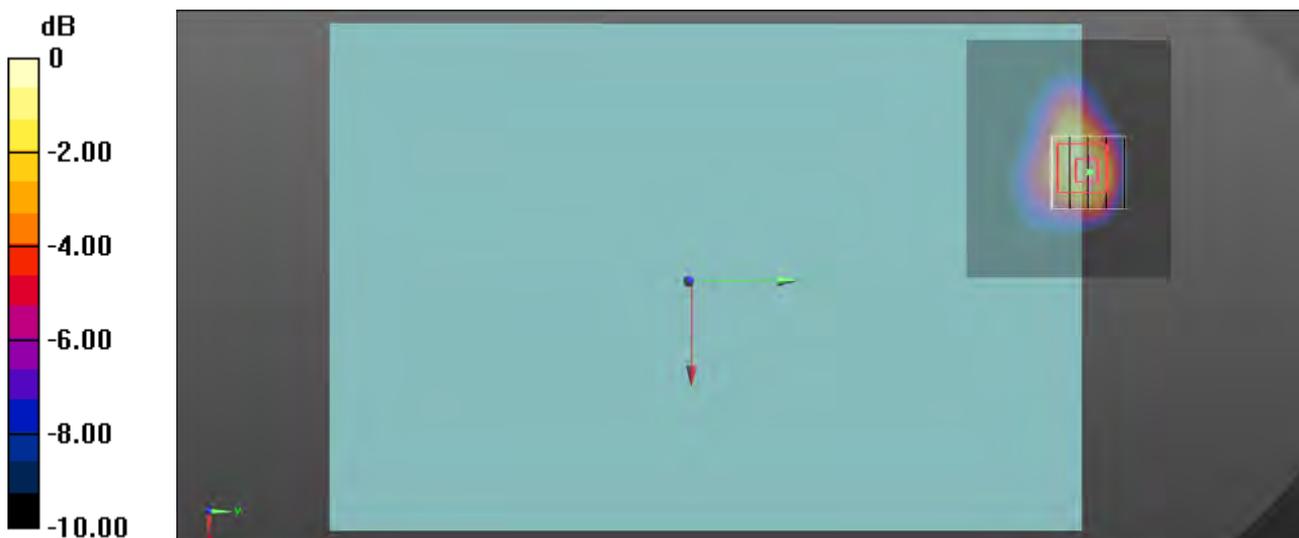

0 dB = 1.63 W/kg = 2.12 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/22

**26\_WCDMA Band V\_RMC12.2Kbps\_Ch4182\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**


Communication System: UID 0, WCDMA Band V (0); Frequency: 836.4 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.921$  S/m;  $\epsilon_r = 41.576$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(9.67, 9.67, 9.67) @ 836.4 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASYS2, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.45 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 35.53 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.81 W/kg  
**SAR(1 g) = 0.956 W/kg; SAR(10 g) = 0.539 W/kg**  
Smallest distance from peaks to all points 3 dB below = 12.2 mm  
Ratio of SAR at M2 to SAR at M1 = 52.1%  
Maximum value of SAR (measured) = 1.46 W/kg

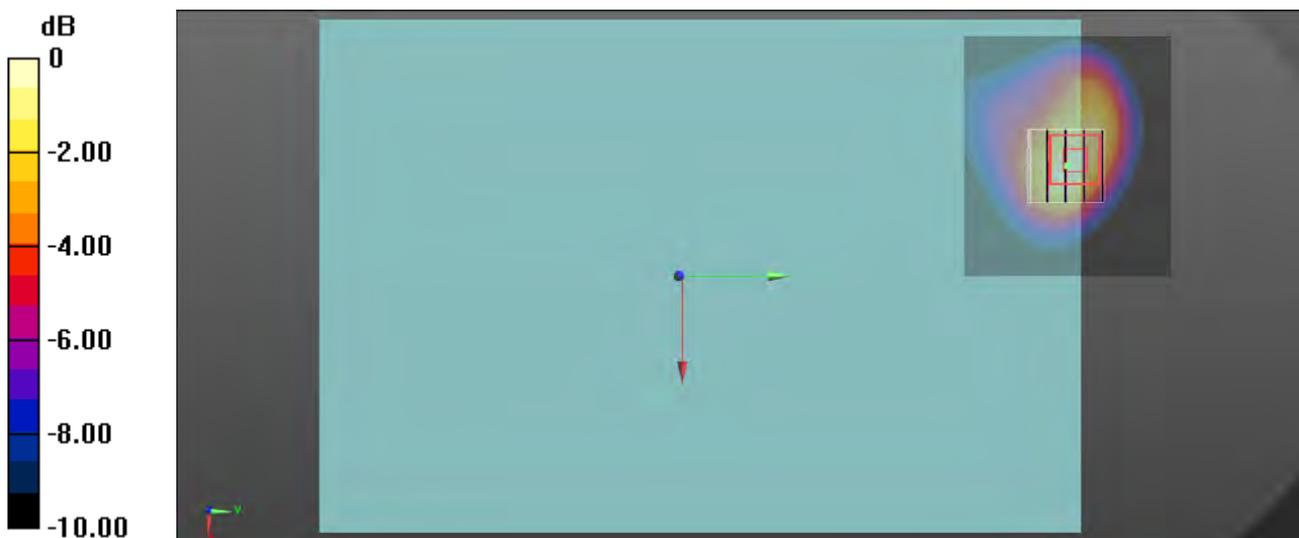

0 dB = 1.46 W/kg = 1.64 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/24

**36\_LTE Band 2\_QPSK\_Ch19100\_20M\_1 RB\_0 offset\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**


Communication System: UID 0, Generic LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.373$  S/m;  $\epsilon_r = 40.371$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(8.08, 8.08, 8.08) @ 1900 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.30 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 34.10 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 2.15 W/kg  
**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.608 W/kg**  
Smallest distance from peaks to all points 3 dB below = 8.4 mm  
Ratio of SAR at M2 to SAR at M1 = 47.4%  
Maximum value of SAR (measured) = 1.58 W/kg

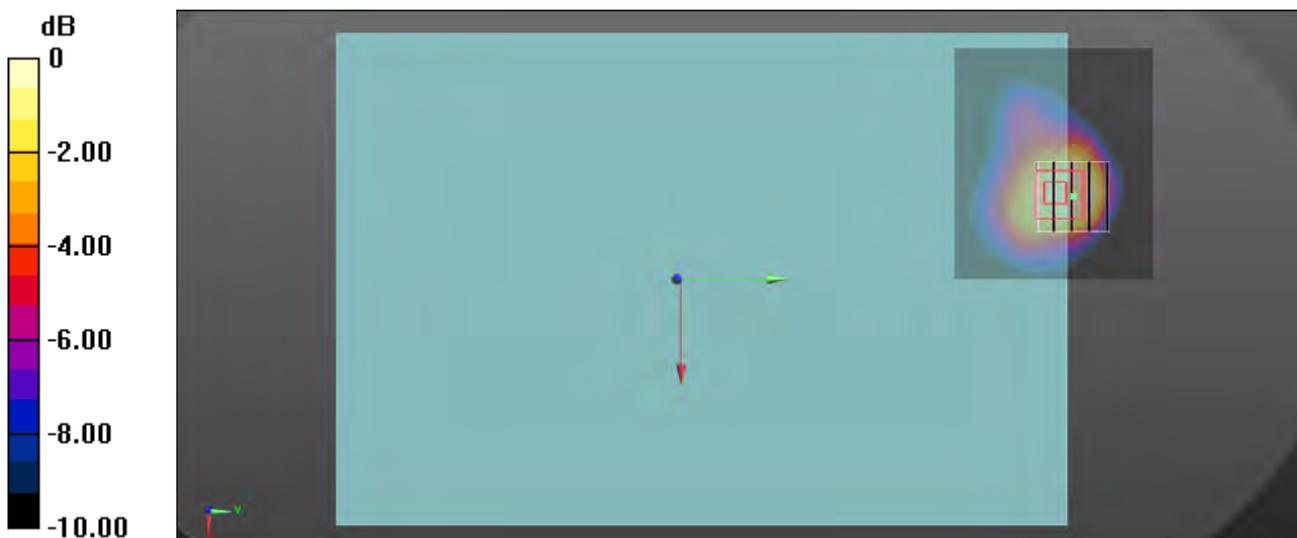

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/22

**59\_LTE Band 5\_QPSK\_Ch20525\_10M\_1 RB\_0 offset\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**


Communication System: UID 0, Generic LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.921$  S/m;  $\epsilon_r = 41.575$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(9.67, 9.67, 9.67) @ 836.5 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.26 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 37.17 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.61 W/kg  
**SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.479 W/kg**  
Smallest distance from peaks to all points 3 dB below = 12.2 mm  
Ratio of SAR at M2 to SAR at M1 = 53.6%  
Maximum value of SAR (measured) = 1.27 W/kg

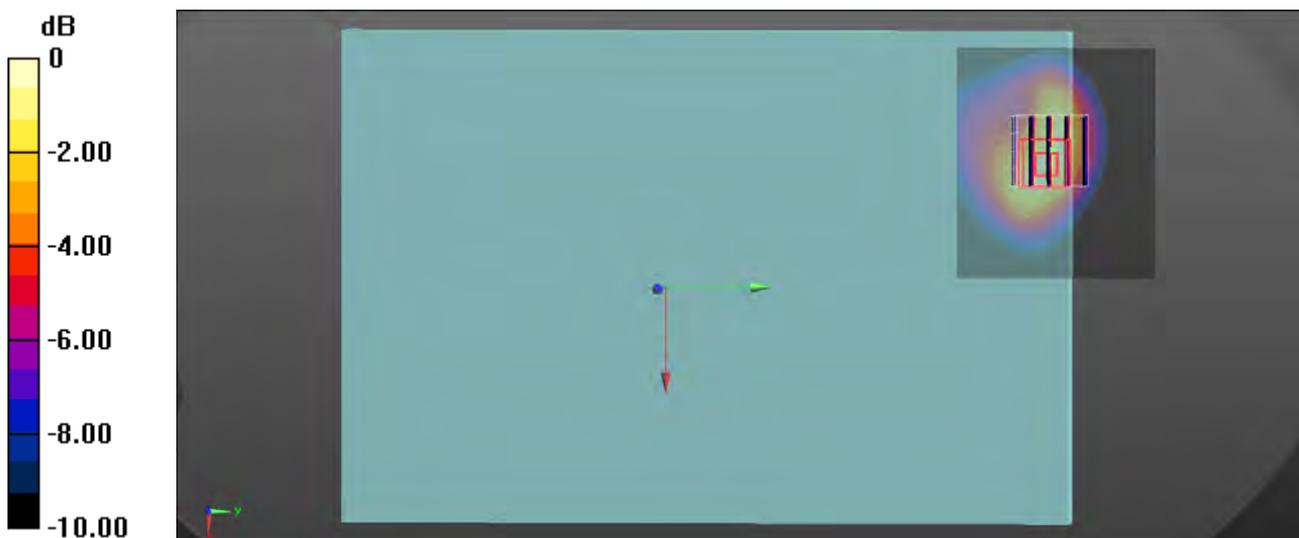

0 dB = 1.27 W/kg = 1.04 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/26

**77\_LTE Band 7\_QPSK\_Ch21350\_20M\_1 RB\_0 offset\_Bottom Face\_0 mm**

**DUT: B3402FBA**

Communication System: UID 0, Generic LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.914$  S/m;  $\epsilon_r = 39.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.15, 7.15, 7.15) @ 2560 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (81x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.62 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 31.67 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 2.34 W/kg  
**SAR(1 g) = 0.947 W/kg; SAR(10 g) = 0.391 W/kg**  
Smallest distance from peaks to all points 3 dB below = 8.1 mm  
Ratio of SAR at M2 to SAR at M1 = 42.7%  
Maximum value of SAR (measured) = 1.77 W/kg



0 dB = 1.77 W/kg = 2.48 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/21

**80\_LTE Band 12\_QPSK\_Ch23095\_10M\_1 RB\_0 offset\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**


Communication System: UID 0, Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.865$  S/m;  $\epsilon_r = 43.069$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(9.93, 9.93, 9.93) @ 707.5 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.22 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 38.05 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 1.72 W/kg  
**SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.492 W/kg**  
Smallest distance from peaks to all points 3 dB below = 12.2 mm  
Ratio of SAR at M2 to SAR at M1 = 50.2%  
Maximum value of SAR (measured) = 1.39 W/kg

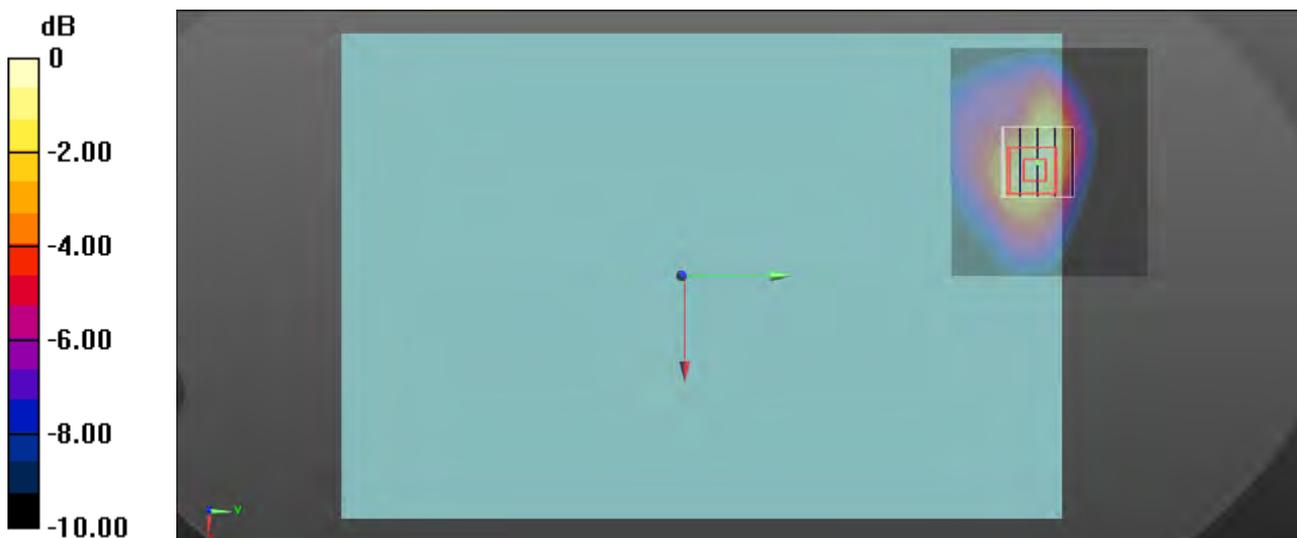

0 dB = 1.39 W/kg = 1.43 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/21

**100\_LTE Band 13\_QPSK\_Ch23230\_10M\_1 RB\_0 offset\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**


Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.917 \text{ S/m}$ ;  $\epsilon_r = 42.026$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(9.93, 9.93, 9.93) @ 782 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASYS2, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 1.39 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 32.75 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 1.87 W/kg  
**SAR(1 g) = 0.978 W/kg; SAR(10 g) = 0.567 W/kg**  
Smallest distance from peaks to all points 3 dB below = 12.5 mm  
Ratio of SAR at M2 to SAR at M1 = 51.5%  
Maximum value of SAR (measured) = 1.53 W/kg

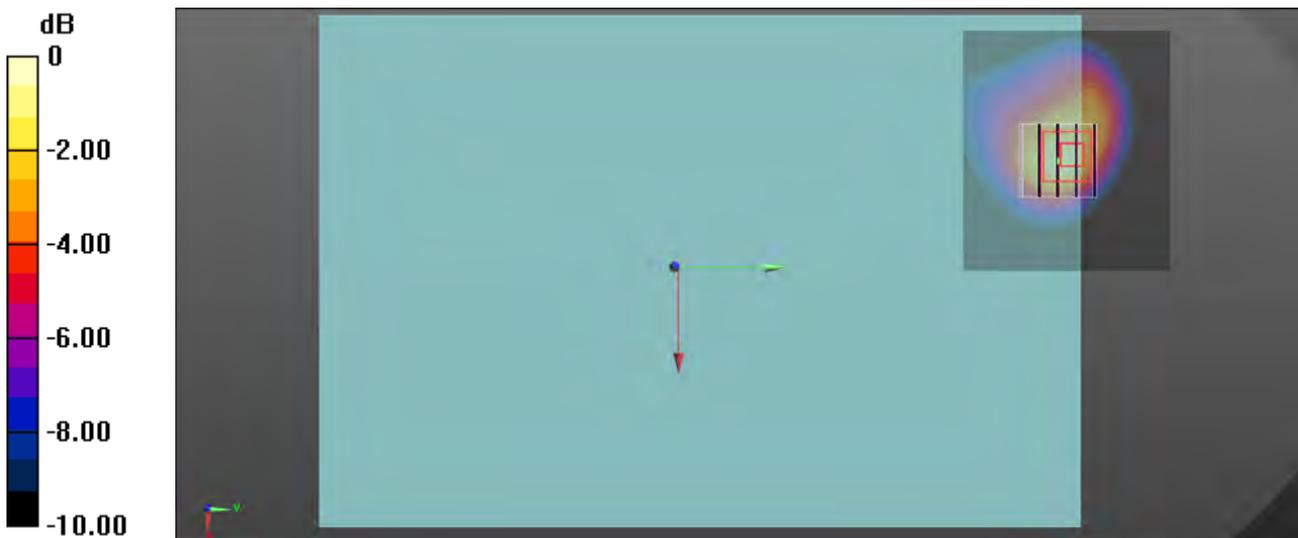

0 dB = 1.53 W/kg = 1.85 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/21

**116\_LTE Band 17\_QPSK\_Ch23790\_10M\_1 RB\_0 offset\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**

Communication System: UID 0, Generic LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.868$  S/m;  $\epsilon_r = 43.033$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(9.93, 9.93, 9.93) @ 710 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASYS2, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.33 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 40.01 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 1.91 W/kg  
**SAR(1 g) = 0.965 W/kg; SAR(10 g) = 0.545 W/kg**  
Smallest distance from peaks to all points 3 dB below = 12.9 mm  
Ratio of SAR at M2 to SAR at M1 = 50.2%  
Maximum value of SAR (measured) = 1.55 W/kg



0 dB = 1.55 W/kg = 1.90 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/22

**119\_LTE Band 26\_QPSK\_Ch26965\_15M\_1 RB\_37 offset\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**


Communication System: UID 0, Generic LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 841.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(9.67, 9.67, 9.67) @ 841.5 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.33 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 38.02 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 1.72 W/kg  
**SAR(1 g) = 0.909 W/kg; SAR(10 g) = 0.512 W/kg**  
Smallest distance from peaks to all points 3 dB below = 12.2 mm  
Ratio of SAR at M2 to SAR at M1 = 53.5%  
Maximum value of SAR (measured) = 1.35 W/kg

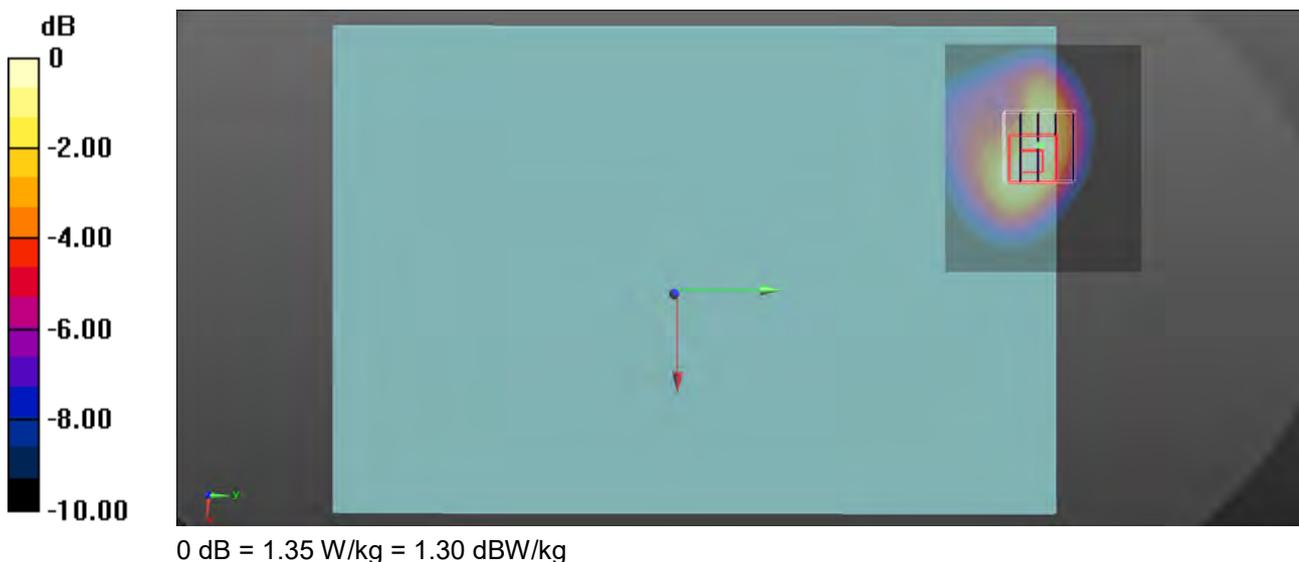

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/25

**157\_LTE Band 30\_QPSK\_Ch27710\_10M\_1 RB\_0 offset\_Bottom Face\_0 mm**

**DUT: B3402FBA**

Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.648$  S/m;  $\epsilon_r = 40.155$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.61, 7.61, 7.61) @ 2310 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASYS2, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.49 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 33.57 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 2.31 W/kg  
**SAR(1 g) = 0.988 W/kg; SAR(10 g) = 0.431 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.8 mm  
Ratio of SAR at M2 to SAR at M1 = 44.8%  
Maximum value of SAR (measured) = 1.74 W/kg



0 dB = 1.74 W/kg = 2.41 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/26

**184\_LTE Band 41\_QPSK\_Ch41055\_20M\_1 RB\_0 offset\_Bottom Face\_0 mm**

**DUT: B3402FBA**


Communication System: UID 0, Generic LTE (0); Frequency: 2636.5 MHz; Duty Cycle: 1:1.59  
Medium parameters used (interpolated):  $f = 2636.5$  MHz;  $\sigma = 2.01$  S/m;  $\epsilon_r = 39.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.15, 7.15, 7.15) @ 2636.5 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASYS2, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (81x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.70 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 32.95 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 2.47 W/kg  
**SAR(1 g) = 0.992 W/kg; SAR(10 g) = 0.388 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.6 mm  
Ratio of SAR at M2 to SAR at M1 = 42%  
Maximum value of SAR (measured) = 1.87 W/kg

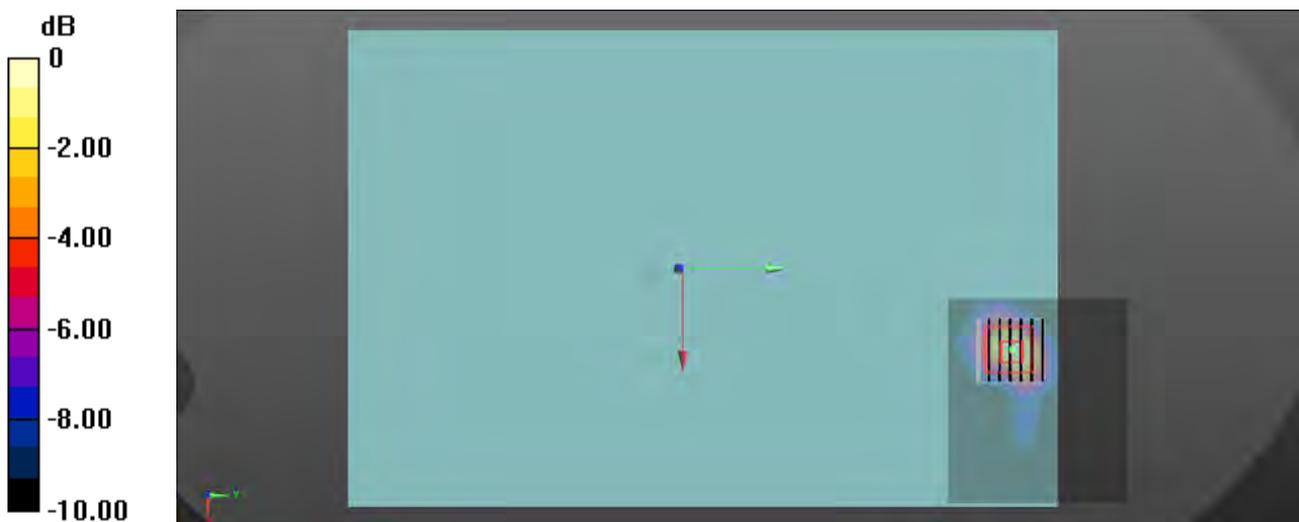

0 dB = 1.87 W/kg = 2.72 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/26

**164\_LTE Band 38\_QPSK\_Ch38000\_20M\_1 RB\_0 offset\_Bottom Face\_0 mm**

**DUT: B3402FBA**

Communication System: UID 0, Generic LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59  
Medium parameters used (interpolated):  $f = 2595$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 39.159$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.15, 7.15, 7.15) @ 2595 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (81x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.47 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 29.01 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 2.27 W/kg  
**SAR(1 g) = 0.919 W/kg; SAR(10 g) = 0.368 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.6 mm  
Ratio of SAR at M2 to SAR at M1 = 42.2%  
Maximum value of SAR (measured) = 1.74 W/kg



0 dB = 1.74 W/kg = 2.41 dBW/kg

Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/23

**202\_LTE Band 66\_QPSK\_Ch132072\_20M\_1 RB\_99 offset\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**

Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.355$  S/m;  $\epsilon_r = 39.424$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(8.42, 8.42, 8.42) @ 1720 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASYS2, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.82 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 30.73 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 1.99 W/kg  
**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.529 W/kg**  
Smallest distance from peaks to all points 3 dB below = 8.2 mm  
Ratio of SAR at M2 to SAR at M1 = 51.5%  
Maximum value of SAR (measured) = 1.53 W/kg



Test Laboratory: A Test Lab Techno Corp.  
Date: 2022/5/23

**37\_LTE Band 4\_QPSK\_Ch20175\_20M\_1 RB\_0 offset\_Bottom of laptop\_0 mm**

**DUT: B3402FBA**


Communication System: UID 0, Generic LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 39.398$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(8.42, 8.42, 8.42) @ 1732.5 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.30 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 27.99 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 1.75 W/kg  
**SAR(1 g) = 0.868 W/kg; SAR(10 g) = 0.460 W/kg**  
Smallest distance from peaks to all points 3 dB below = 11.2 mm  
Ratio of SAR at M2 to SAR at M1 = 49.5%  
Maximum value of SAR (measured) = 1.41 W/kg

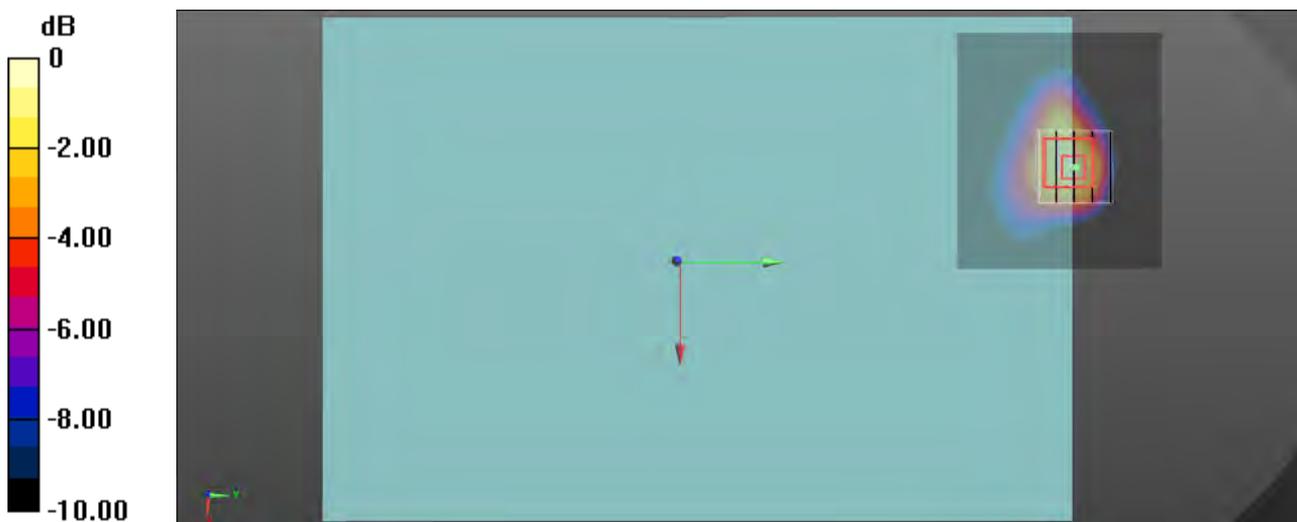

0 dB = 1.41 W/kg = 1.49 dBW/kg