


Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	10400	>500	Pass


**Figure Channel 6:**

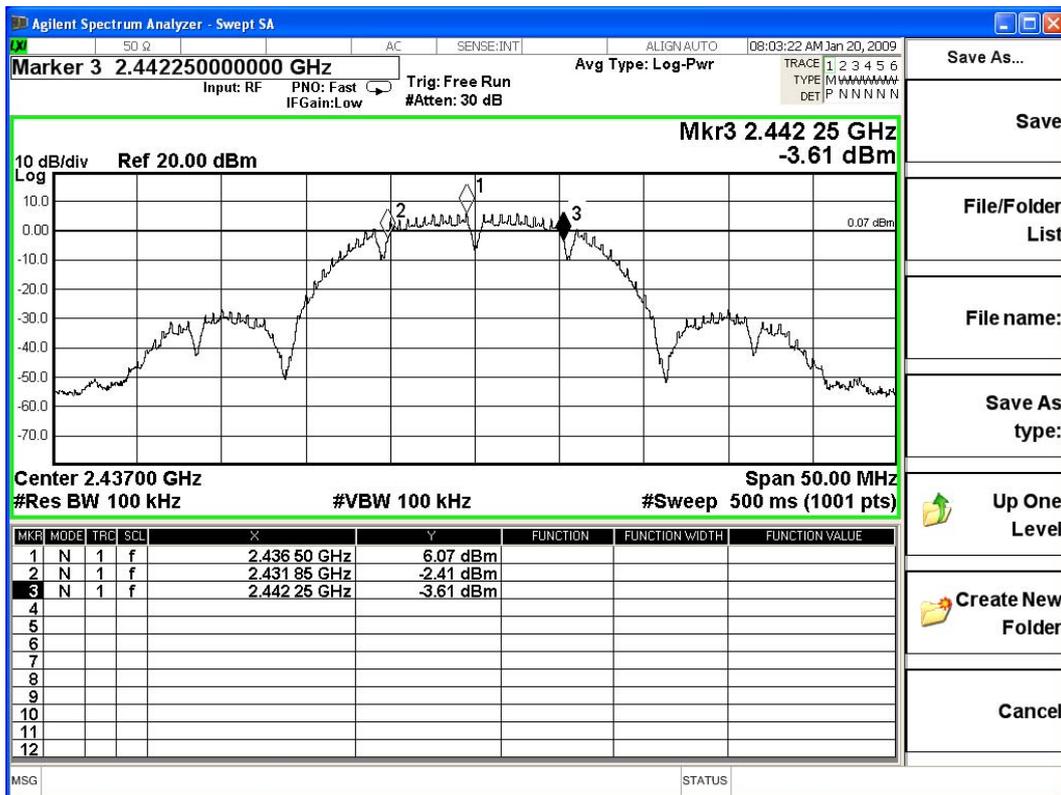

Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	10350	>500	Pass


**Figure Channel 11:**

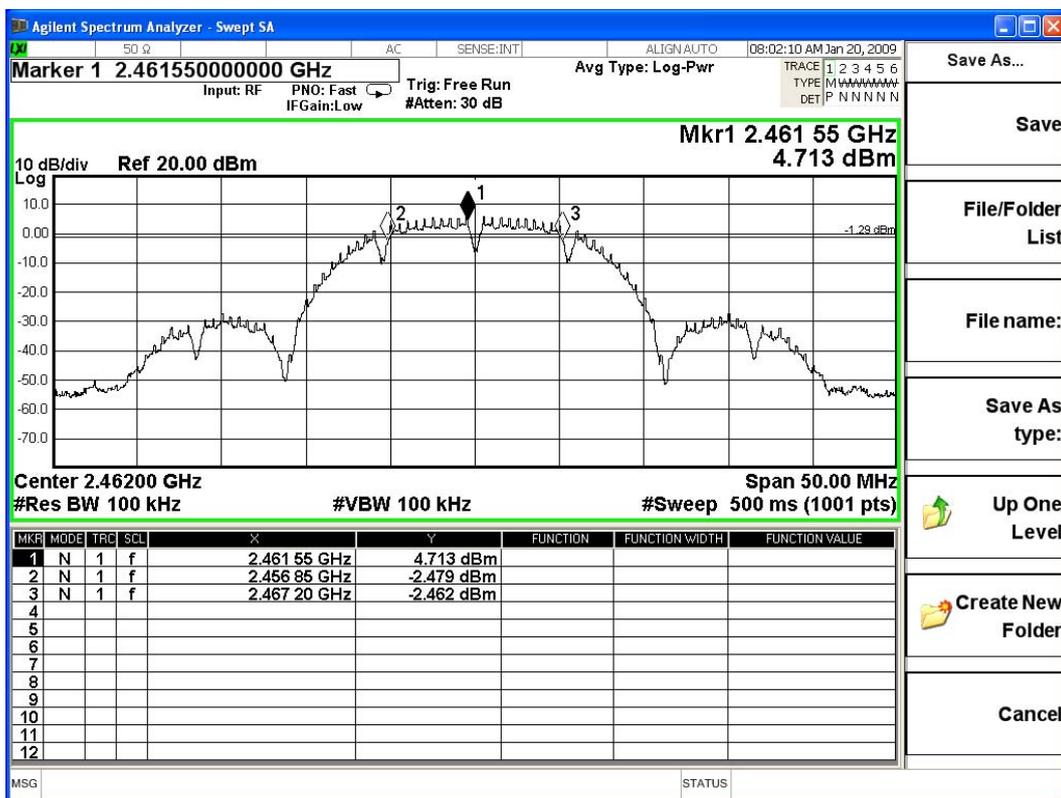

Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmitter (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	16600	>500	Pass


Figure Channel 1:

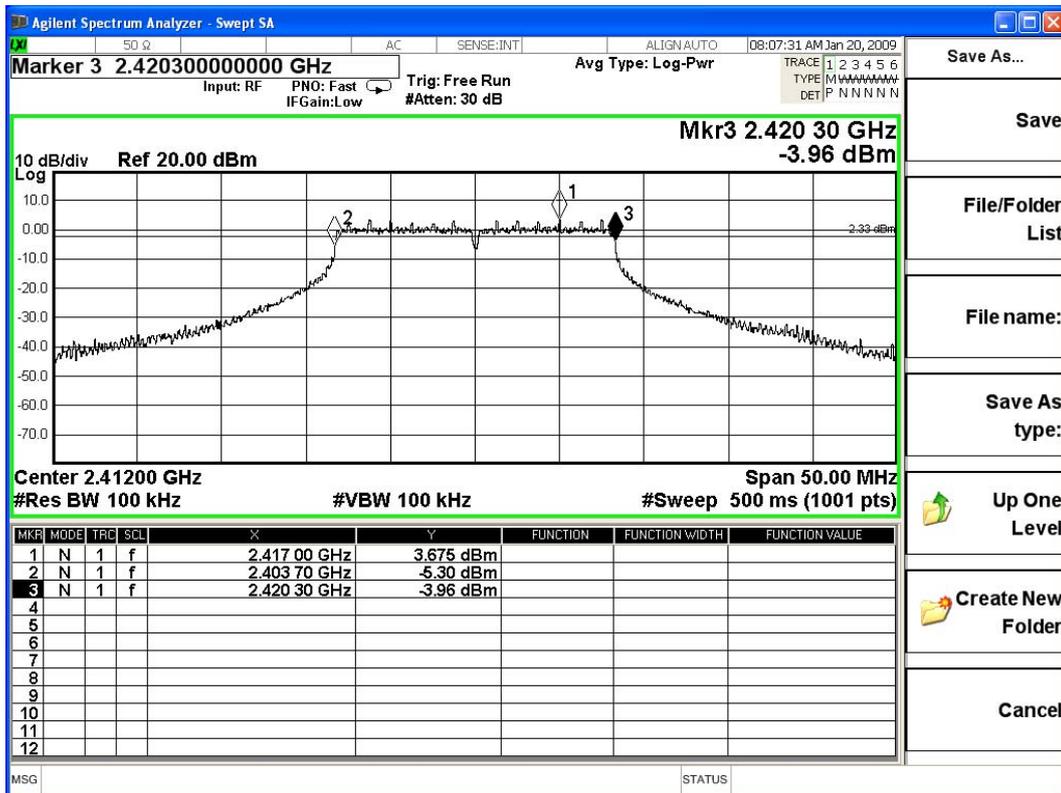

Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmitter (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	16650	>500	Pass


Figure Channel 6:

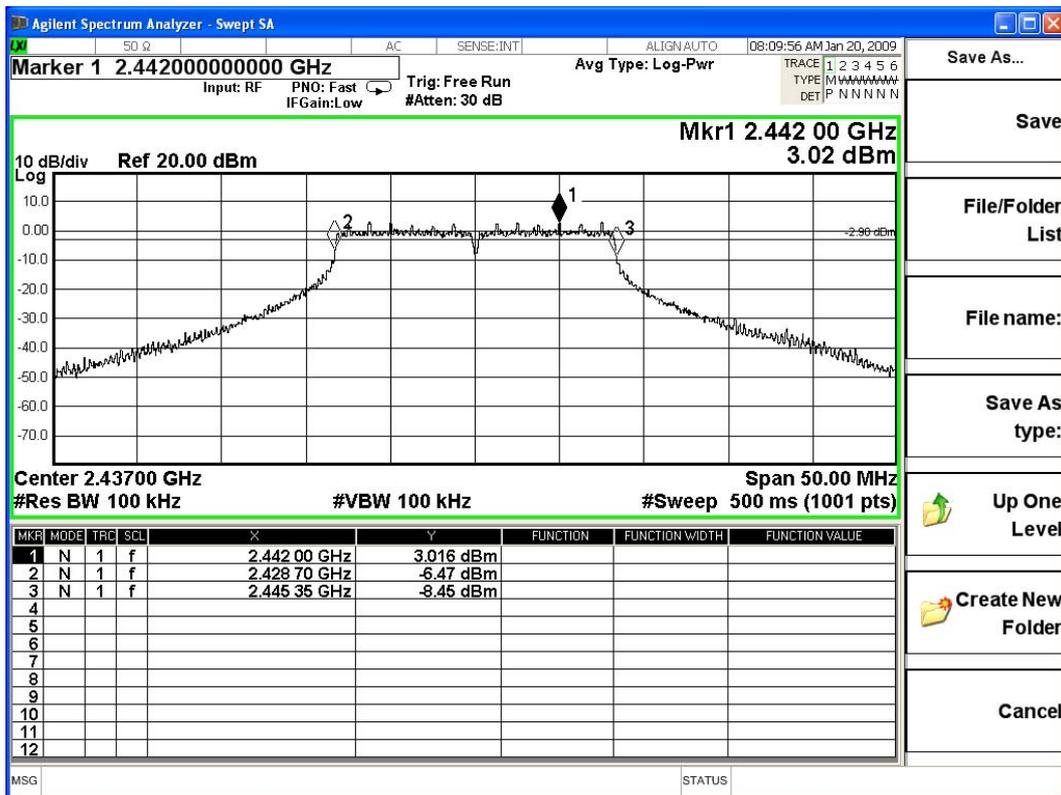

Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmitter (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	16650	>500	Pass


**Figure Channel 11:**

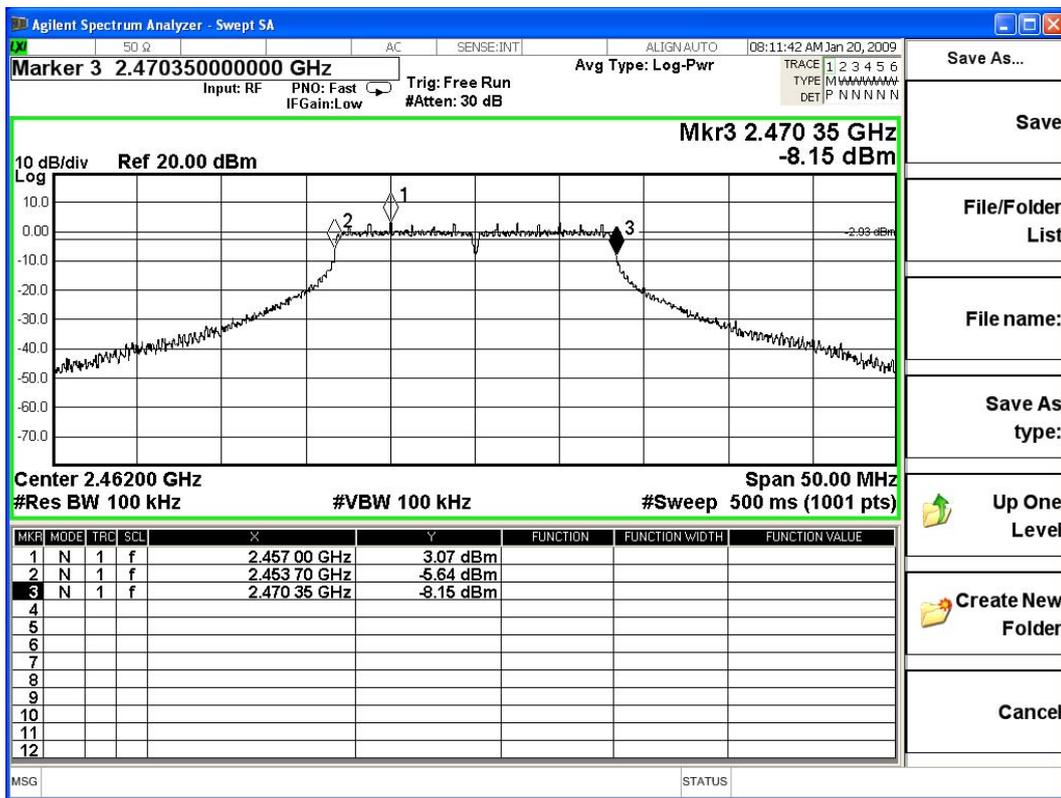

Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmitter (802.11n MCS7 6.5Mbps 20M-BW) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	17850	>500	Pass


**Figure Channel 1:**

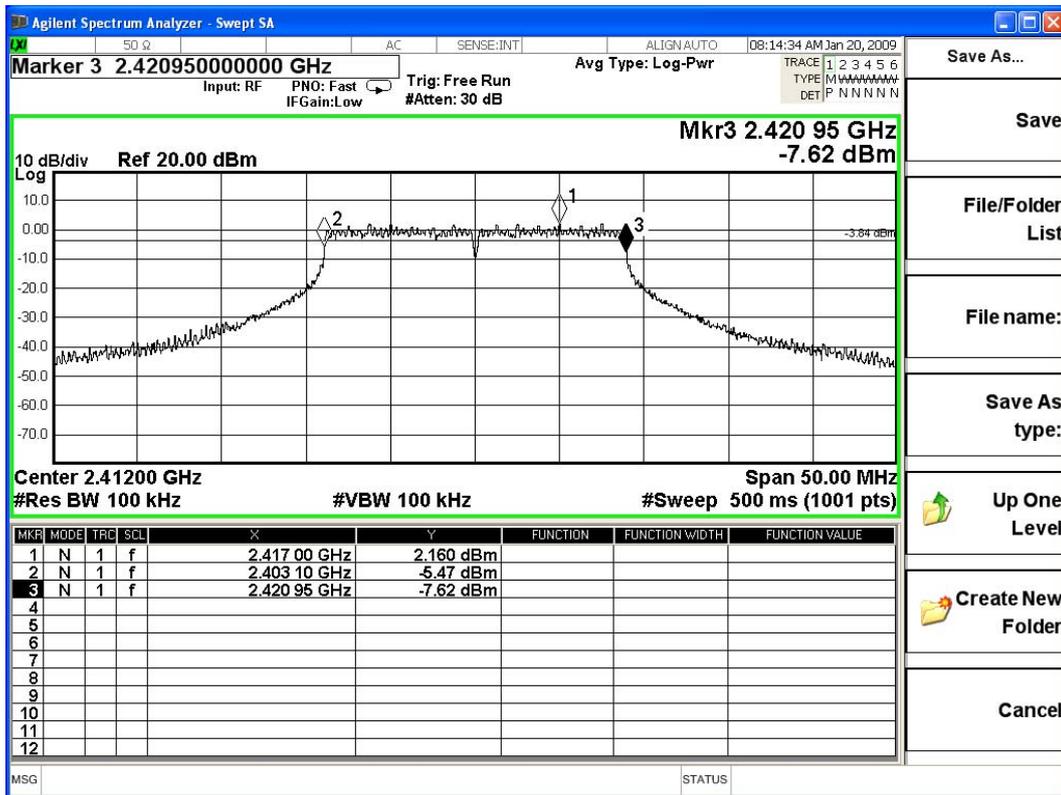

Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmitter (802.11n MCS7 6.5Mbps 20M-BW) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	17850	>500	Pass


Figure Channel 6:

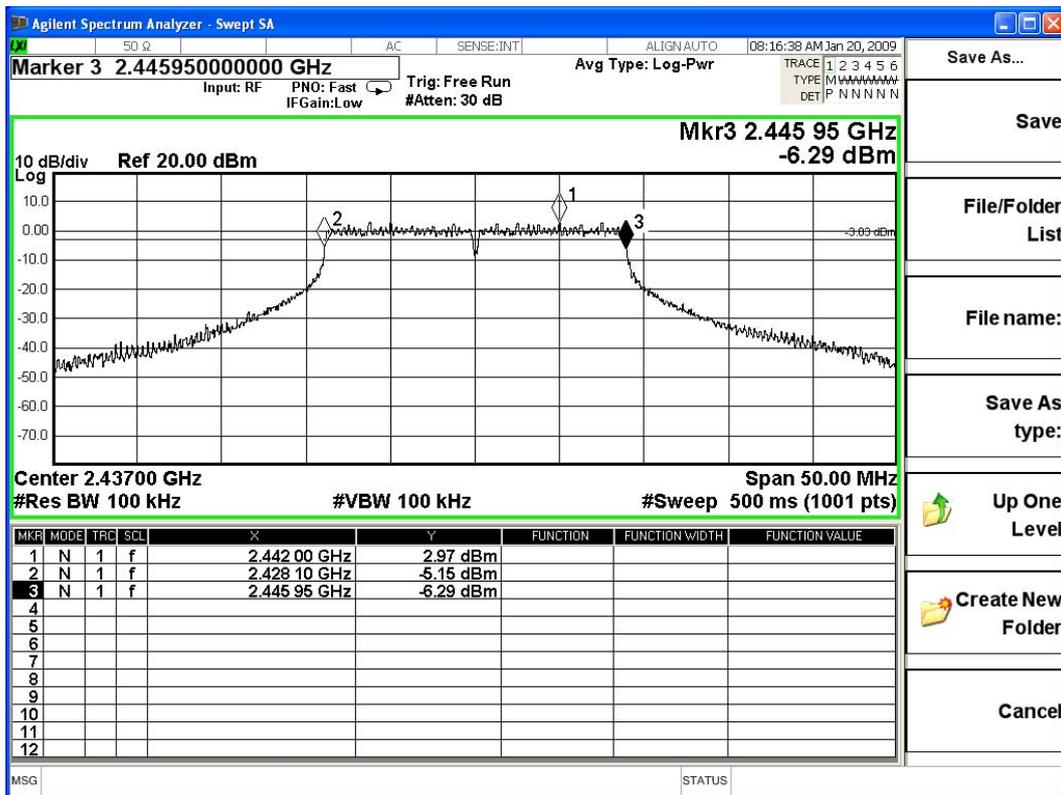

Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmitter (802.11n MCS7 6.5Mbps 20M-BW) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	17850	>500	Pass


**Figure Channel 11:**

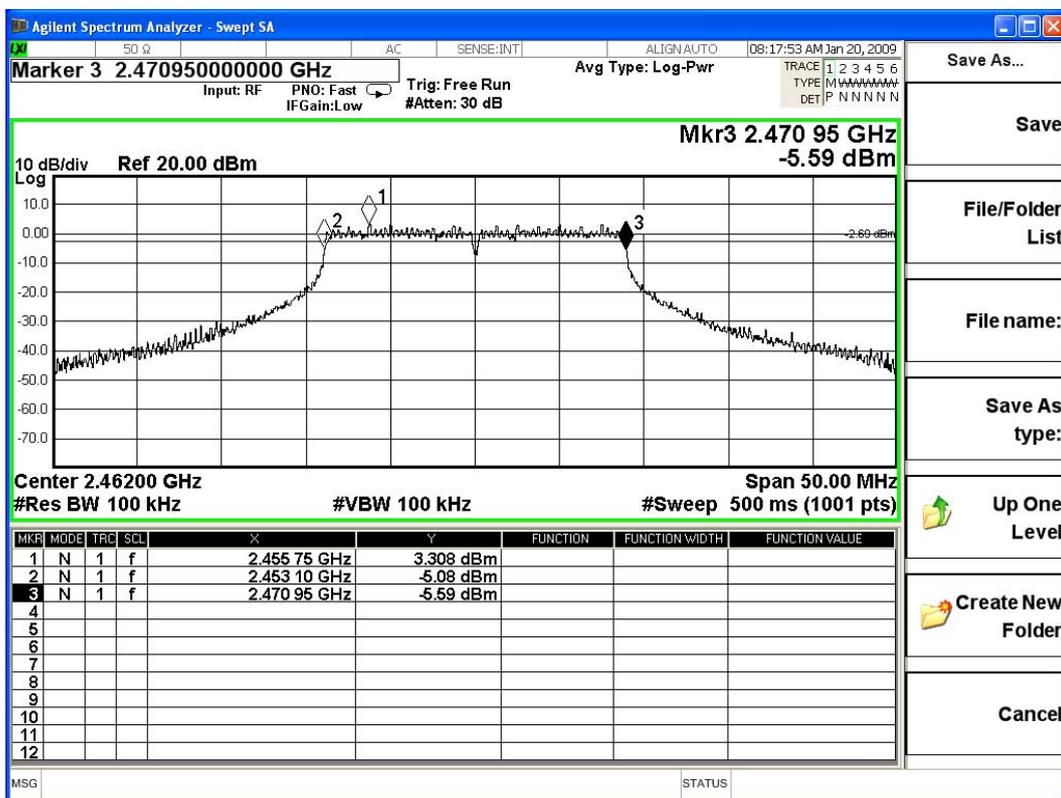

Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmitter (802.11n MCS7 13.5Mbps 40M-BW) (2422MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2422.00	36700	>500	Pass


Figure Channel 1:

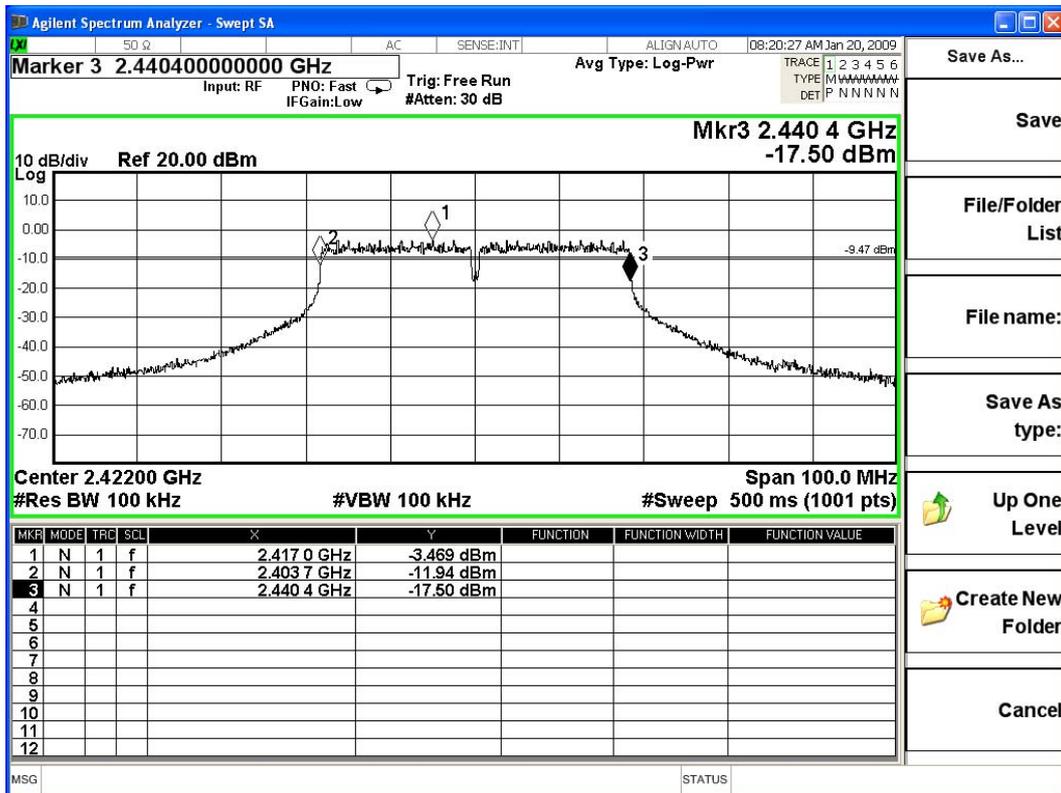

Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmitter (802.11n MCS7 13.5Mbps 40M-BW) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
4	2437.00	36700	>500	Pass


**Figure Channel 4:**

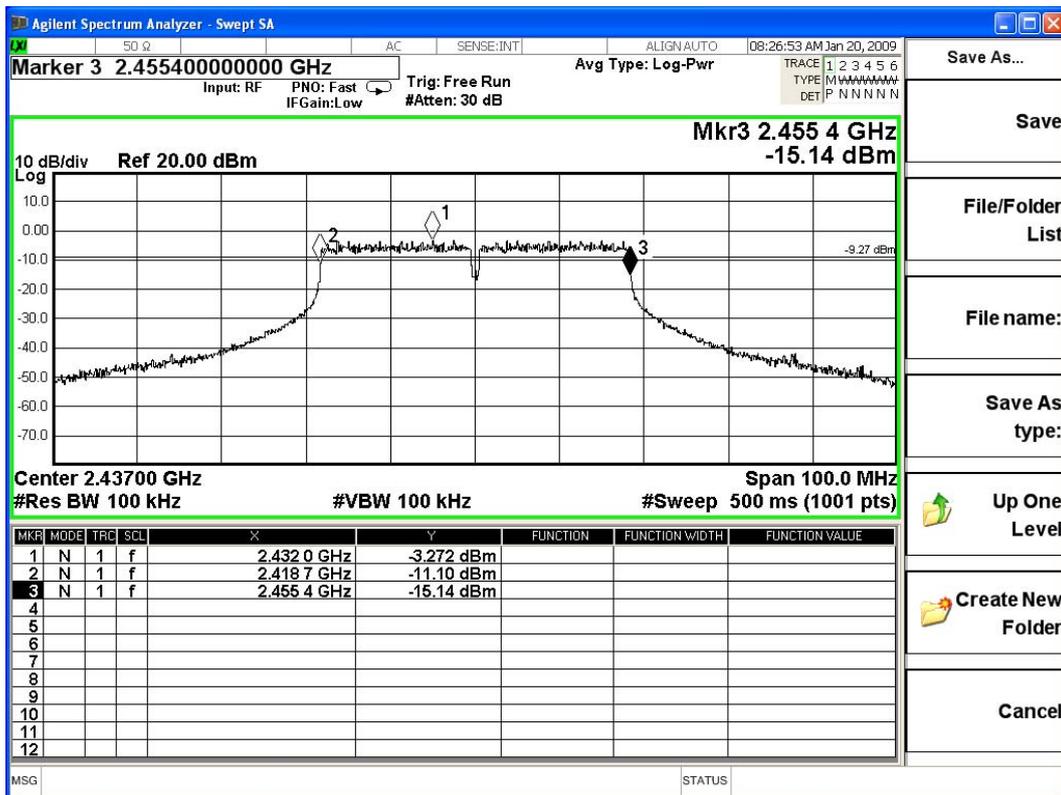

Product : Notebook P.C.  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmitter (802.11n MCS7 13.5Mbps 40M-BW) (2452MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
7	2452.00	36700	>500	Pass

**Figure Channel 7:**

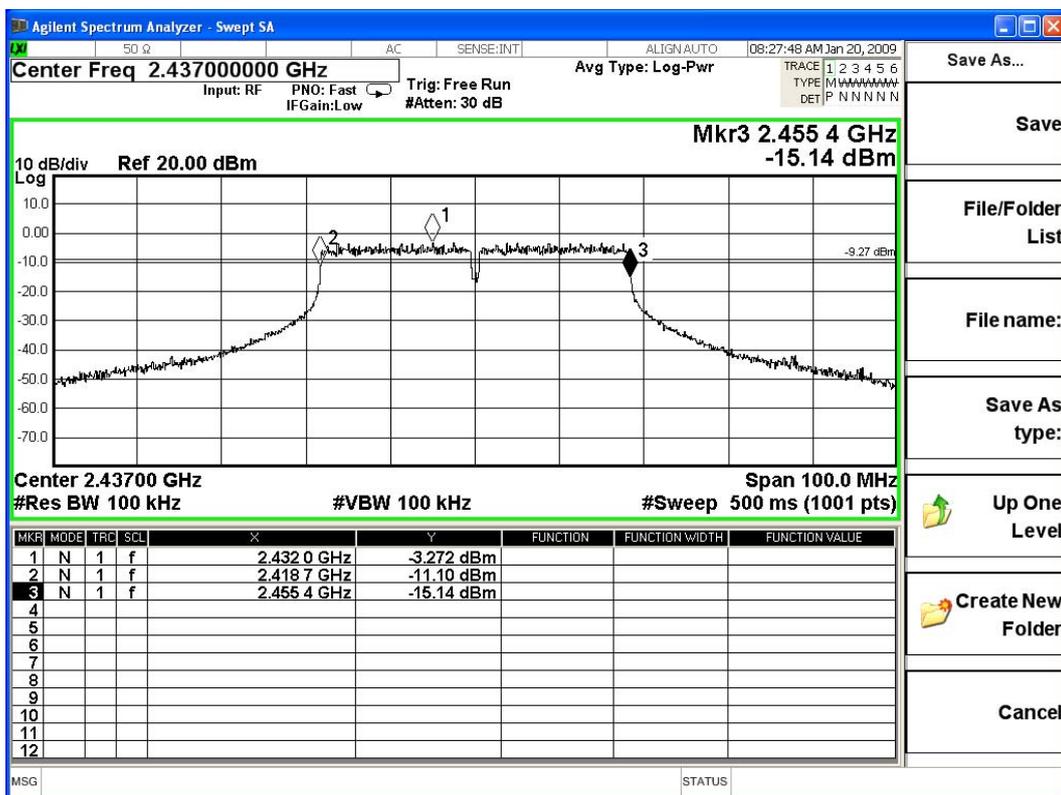

## 8. Power Density


### 8.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Nov, 2008
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr, 2008

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments marked by “X” are used to measure the final test results.

### 8.2. Test Setup

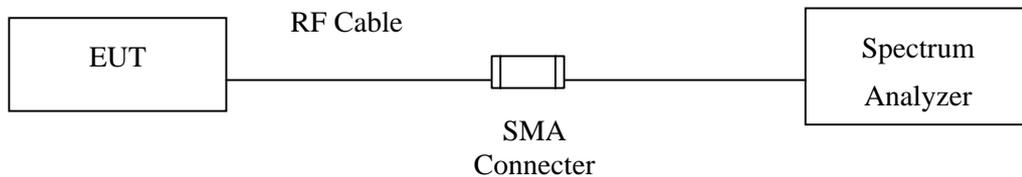

### 8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

### 8.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2003; tested according to DTS test procedure of Mar. 2005 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 3 kHz, VBW=10KHz, Sweep time=(SPAN/3KHz), detector=Peak detector

### 8.5. Uncertainty


± 1.27 dB

### 8.6. Test Result of Power Density

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412.00	-7.886	< 8dBm	Pass


Figure Channel 1:

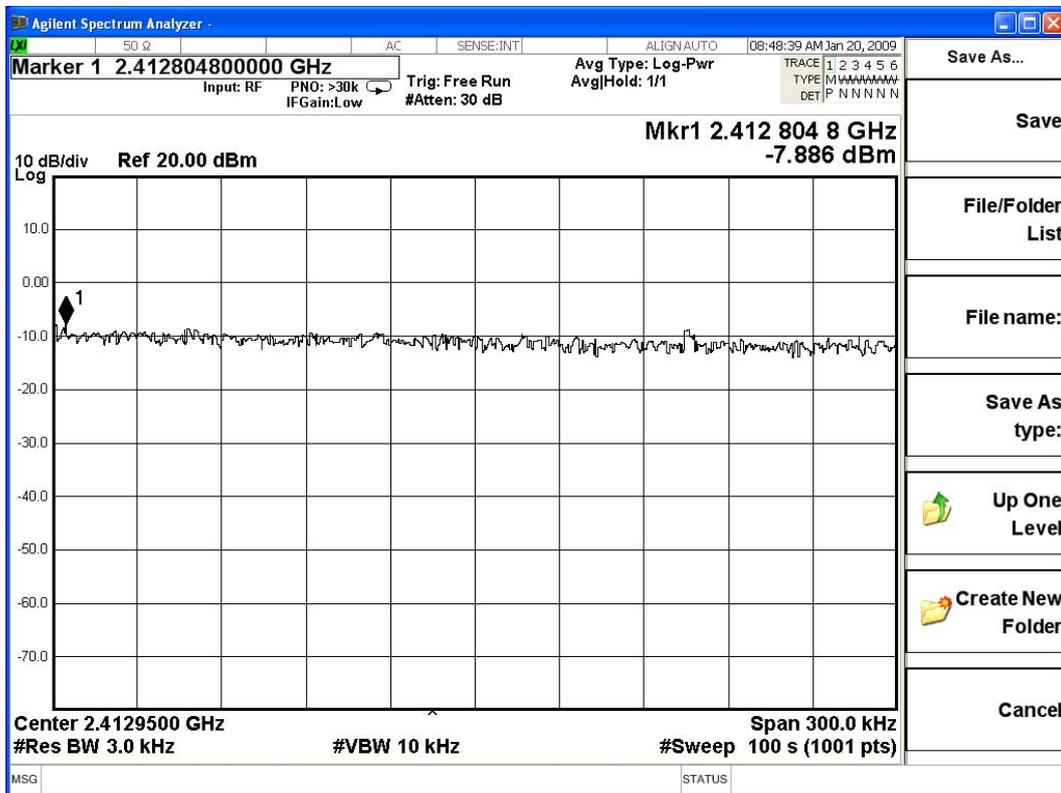

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 1: Transmitter (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437.000	-8.773	< 8dBm	Pass


**Figure Channel 6:**

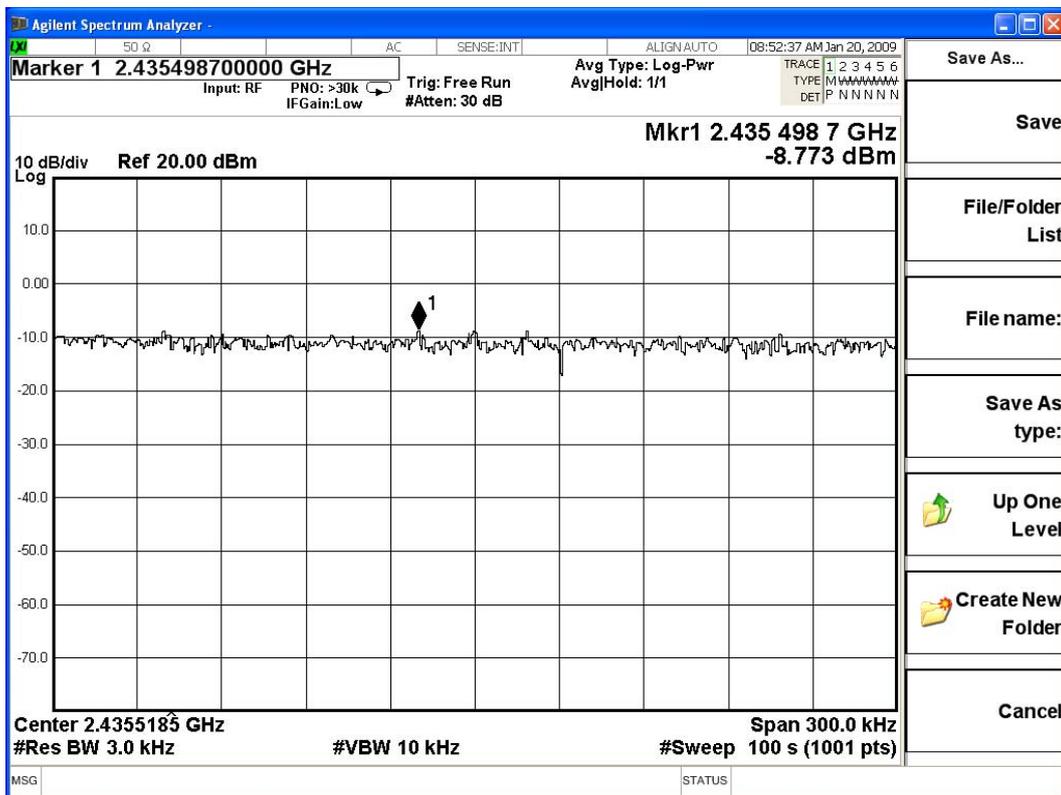

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462.00	-7.663	< 8dBm	Pass


**Figure Channel 11:**

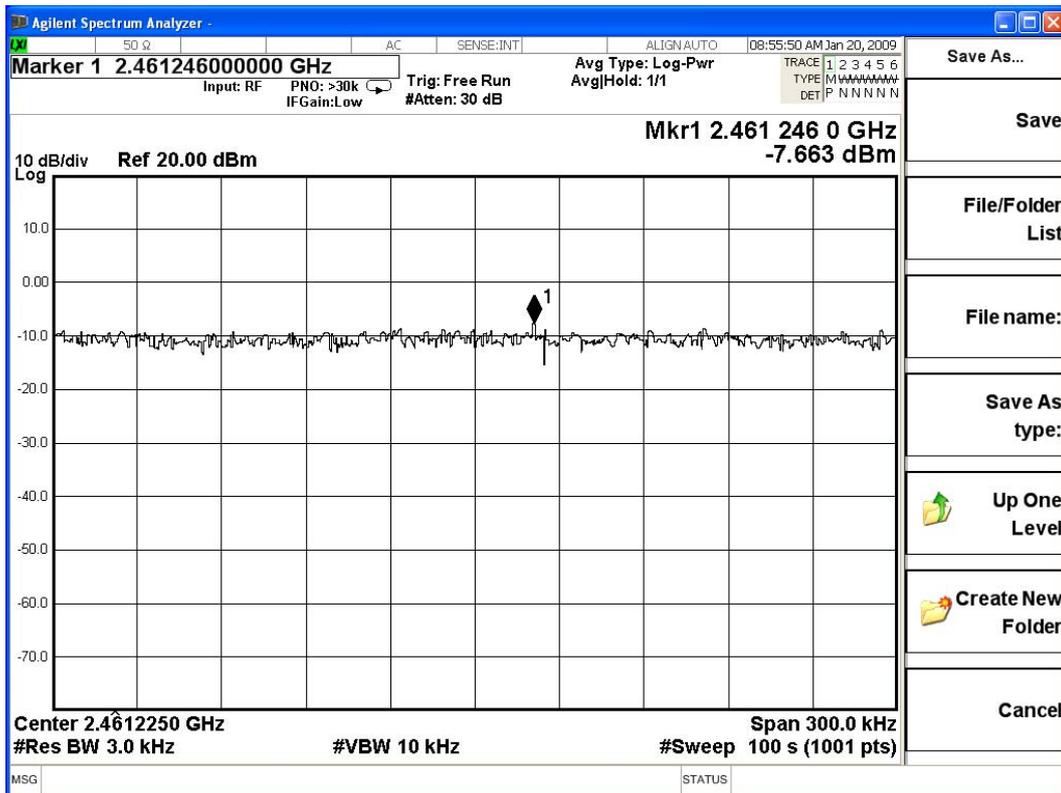

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmitter (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412.00	-10.924	< 8dBm	Pass


**Figure Channel 1:**

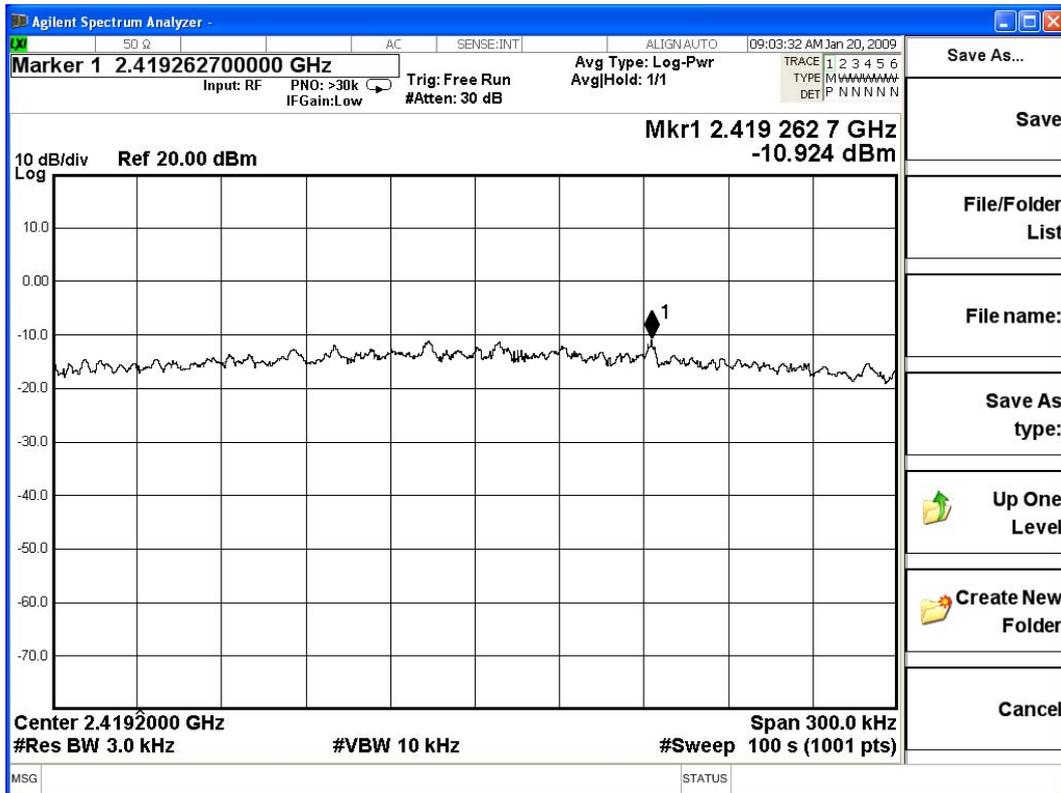

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 2: Transmitter (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437.000	-10.228	< 8dBm	Pass


**Figure Channel 6:**

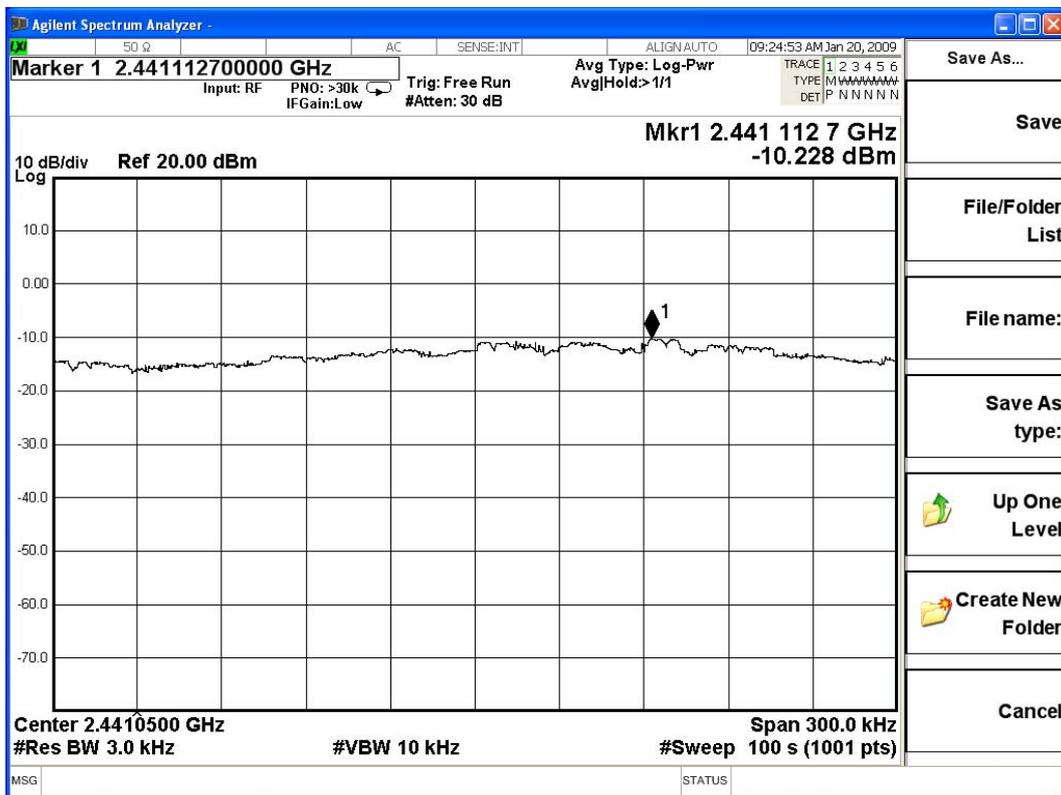

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmitter (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462.00	-10.231	< 8dBm	Pass


**Figure Channel 11:**

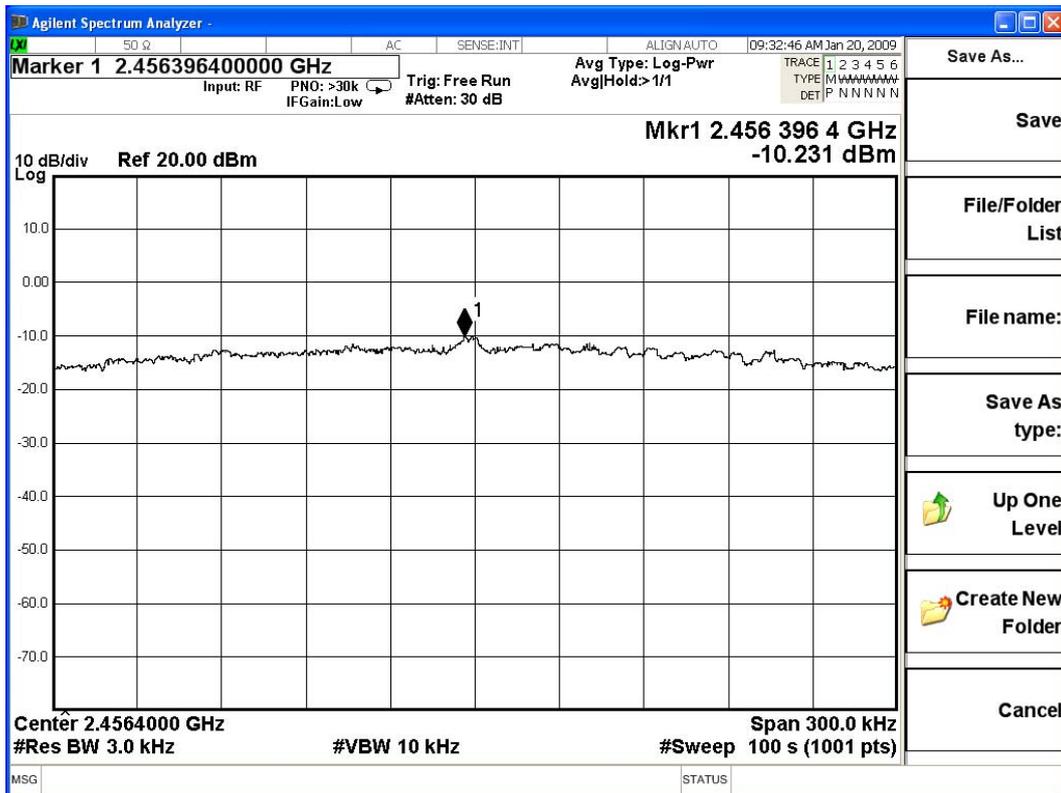

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmitter (802.11n MCS7 6.5Mbps 20M-BW) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412.00	-11.005	< 8dBm	Pass


**Figure Channel 1:**

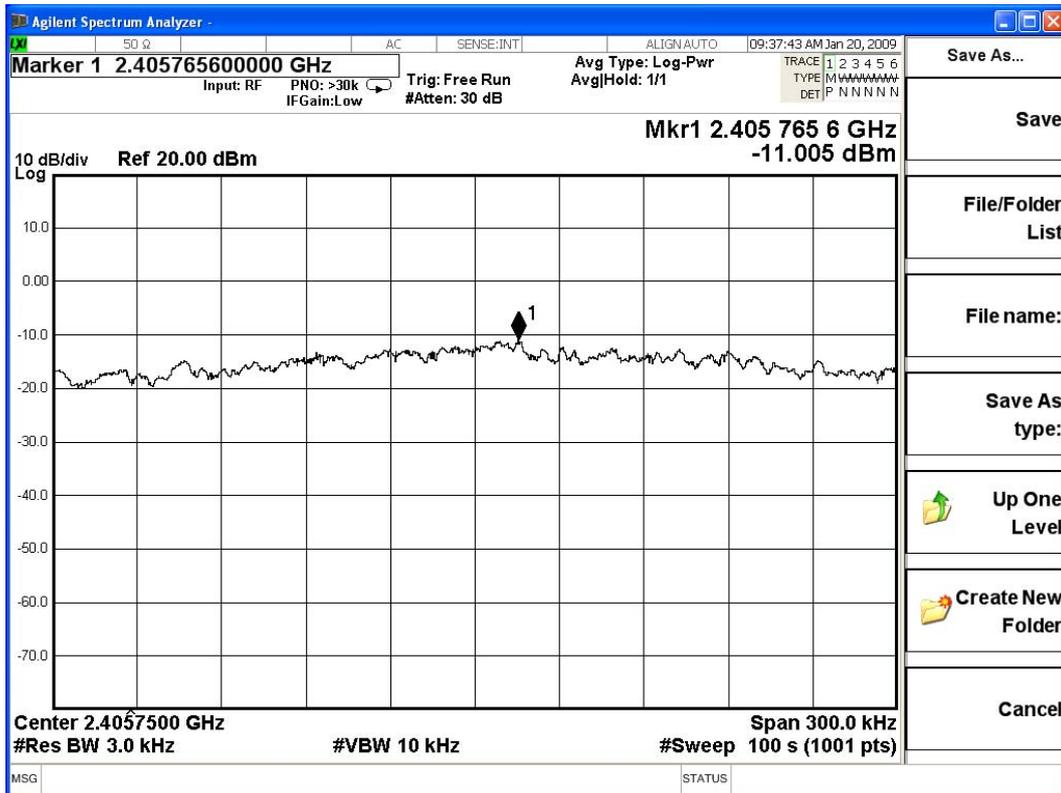

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 3: Transmitter (802.11n MCS7 6.5Mbps 20M-BW) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437.000	-10.432	< 8dBm	Pass


**Figure Channel 6:**

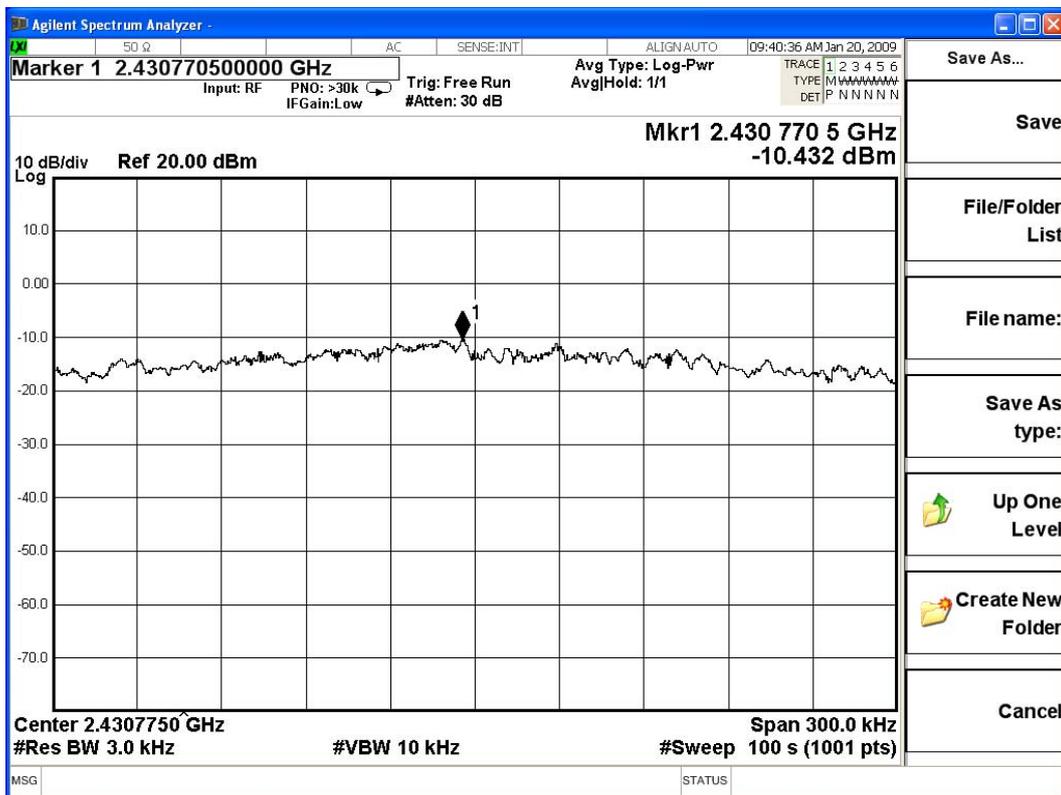

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmitter (802.11n MCS7 6.5Mbps 20M-BW) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462.00	-10.465	< 8dBm	Pass


**Figure Channel 11:**

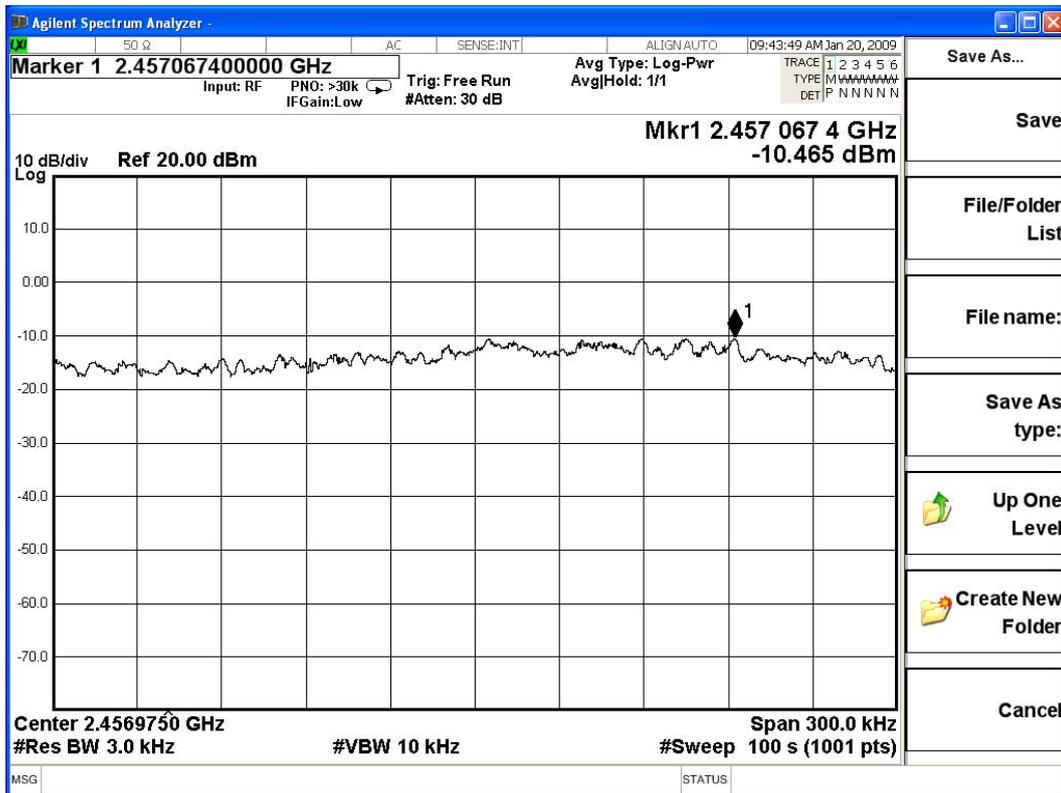

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmitter (802.11n MCS7 13.5Mbps 40M-BW) (2422MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2422.00	-25.774	< 8dBm	Pass


**Figure Channel 1:**

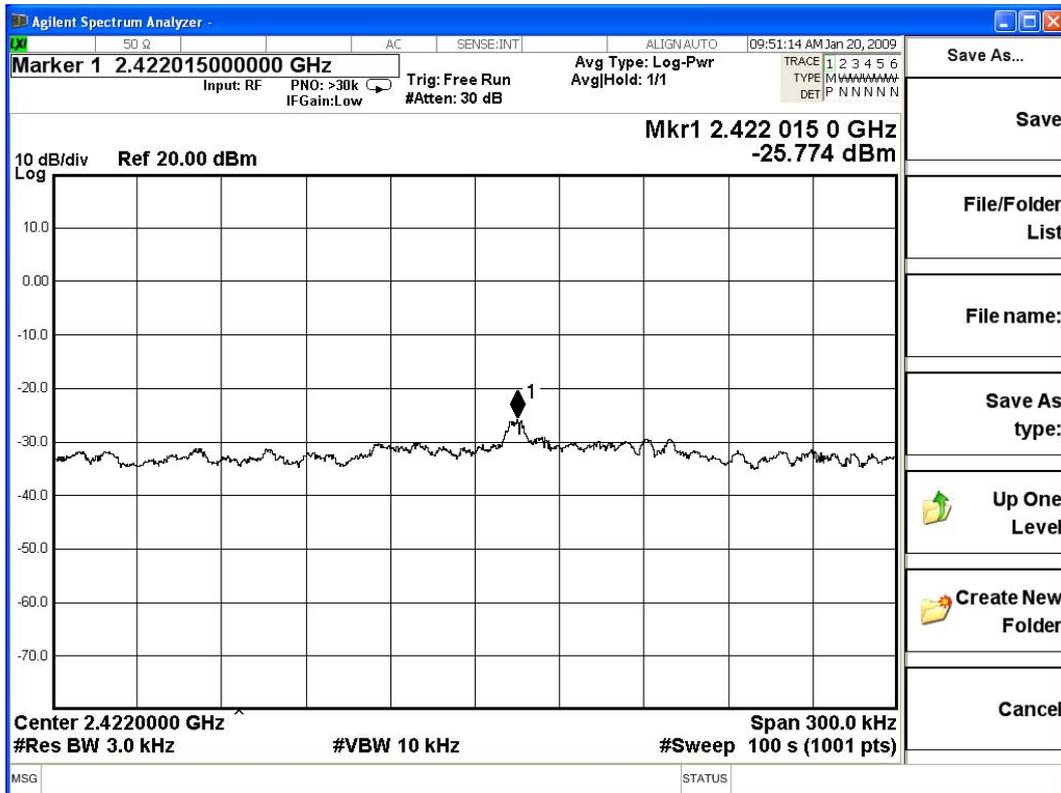

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 4: Transmitter (802.11n MCS7 13.5Mbps 40M-BW) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
4	2437.000	-15.005	< 8dBm	Pass


**Figure Channel 4:**

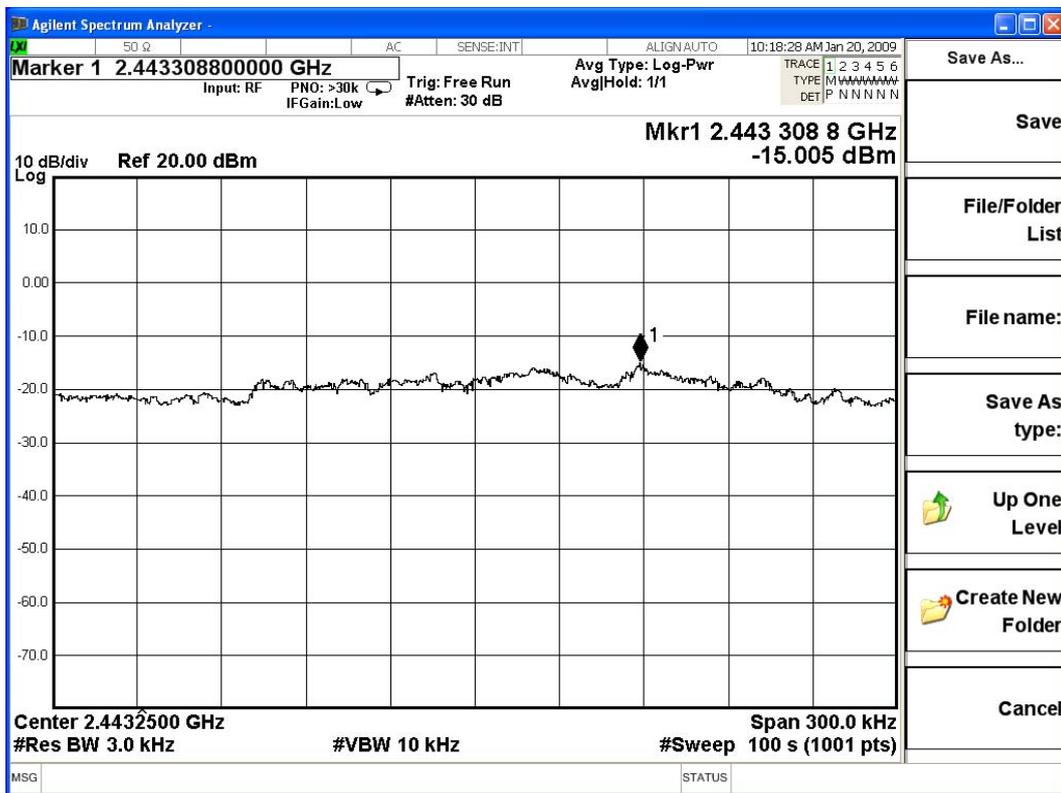

Product : Notebook P.C.  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmitter (802.11n MCS7 13.5Mbps 40M-BW) (2452MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
7	2452.00	-12.529	< 8dBm	Pass

**Figure Channel 7:**

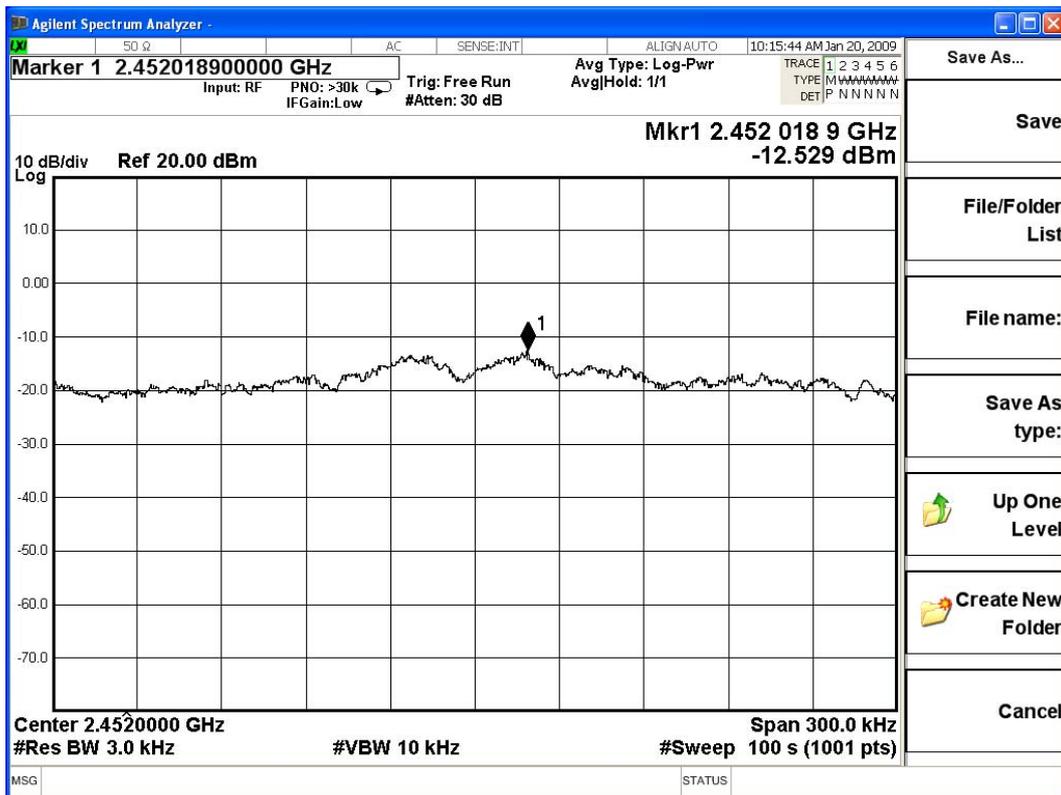

## 9. EMI Reduction Method During Compliance Testing

No modification was made during testing.