

FCC Test Report

(PART 22)

Report No.: RF160511C21

FCC ID: MSQP00I

Test Model: P00I

Received Date: May 11, 2016

Test Date: May 23, 2016 ~ May 26, 2016

Issued Date: Jun. 16, 2016

Applicant: ASUSTek COMPUTER INC.

Address: 4F, No. 150, LI-TE Rd., PEITOU, TAIPEI 112, TAIWAN

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan
Hsien 333, Taiwan, R.O.C.

Test Location (2): No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan,
R.O.C



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site and Instruments	6
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Output Power Measurement	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures	13
4.1.3 Test Setup	14
4.1.4 Test Results	15
4.2 Frequency Stability Measurement	18
4.2.1 Limits of Frequency Stability Measurement	18
4.2.2 Test Procedure	18
4.2.3 Test Setup	18
4.2.4 Test Results	19
4.3 Occupied Bandwidth Measurement	20
4.3.1 Test Procedure	20
4.3.2 Test Setup	20
4.3.3 Test Result	21
4.4 Band Edge Measurement	23
4.4.1 Limits of Band Edge Measurement	23
4.4.2 Test Setup	23
4.4.3 Test Procedures	23
4.4.4 Test Results	24
4.5 Peak to Average Ratio	28
4.5.1 Limits of Peak to Average Ratio Measurement	28
4.5.2 Test Setup	28
4.5.3 Test Procedures	28
4.5.4 Test Results	29
4.6 Conducted Spurious Emissions	31
4.6.1 Limits of Conducted Spurious Emissions Measurement	31
4.6.2 Test Setup	31
4.6.3 Test Procedure	31
4.6.4 Test Results	32
4.7 Radiated Emission Measurement	33
4.7.1 Limits of Radiated Emission Measurement	33
4.7.2 Test Procedure	33
4.7.3 Deviation from Test Standard	33
4.7.4 Test Setup	33
4.7.5 Test Results	34
5 Pictures of Test Arrangements	36
Appendix – Information on the Testing Laboratories	37

Release Control Record

Issue No.	Description	Date Issued
RF160511C21	Original Release	Jun. 16, 2016



1 Certificate of Conformity

Product: ASUS Tablet

Brand: ASUS

Test Model: P00I

Sample Status: Identical Prototype


Applicant: ASUSTek COMPUTER INC.

Test Date: May 23, 2016 ~ May 26, 2016

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Jun. 16, 2016
Ivonne Wu / Supervisor

Approved by :  , **Date:** Jun. 16, 2016
Stanley Wu / Assistant Manager

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
---	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
22.917	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -31.14 dB at 201.18 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Jan. 21, 2016	Jan. 20, 2017
Spectrum Analyzer Agilent	N9010A	MY52220314	Sep. 03, 2015	Sep. 02, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2015	Dec. 16, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Jan. 07, 2016	Jan. 06, 2017
HORN Antenna ETS-Lindgren	3117	00143293	Jan. 04, 2016	Jan. 03, 2017
Double Ridge Guide Horn Antenna EMCO	3115	5619	Jan. 04, 2016	Jan. 03, 2017
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Jan. 07, 2016	Jan. 06, 2017
Agilent Communications Tester-Wireless	8960 Series 10	MY53201073	Jul. 03, 2015	Jul. 02, 2017
Preamplifier Agilent	310N	187226	Jun. 29, 2015	Jun. 28, 2016
Preamplifier Agilent	83017A	MY39501357	Jun. 29, 2015	Jun. 28, 2016
Power Meter Anritsu	ML2495A	1232002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor Anritsu	MA2411B	1207325	Sep. 21, 2015	Sep. 20, 2016
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(R FC-SMS-100-SM S-120+RFC-SMS -100-SMS-400)	Jun. 27, 2015	Jun. 26, 2016
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(R FC-SMS-100-SM S-24)	Jun. 27, 2015	Jun. 26, 2016
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester-Wireless Agilent	8960 Series 10	MY53201073	Jul. 03, 2015	Jul. 02, 2017
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 10, 2015	Aug. 09, 2017

- Note:
1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HsinTien Chamber 1.
 3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.
 4. The FCC Site Registration No. is 149147.
 5. The IC Site Registration No. is IC7450I-1.

3 General Information

3.1 General Description of EUT

Product	ASUS Tablet	
Brand	ASUS	
Test Model	P00I	
Status of EUT	Identical Prototype	
Power Supply Rating	5 Vdc (from host equipment or adapter) 9 Vdc (from adapter) 3.85 Vdc (Li-ion battery)	
Modulation Type	LTE	QPSK, 16QAM
Frequency Range	LTE 5 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 5 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 5 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 5 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
Max. ERP Power	LTE 5 (Channel Bandwidth: 1.4 MHz)	89.17 mW
	LTE 5 (Channel Bandwidth: 3 MHz)	89.29 mW
	LTE 5 (Channel Bandwidth: 5 MHz)	89.58 mW
	LTE 5 (Channel Bandwidth: 10 MHz)	90.78 mW
Emission Designator	LTE 5 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE 5 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE 5 (Channel Bandwidth: 5 MHz)	4M49G7D
	LTE 5 (Channel Bandwidth: 10 MHz)	8M97G7D
Antenna Type	Fixed Internal Antenna	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. The EUT contains following accessory devices.


Product	Brand	Model	Description
Adapter 1	ASUS	AD2068320	I/P: 100-240Vac, 50/60Hz, 0.5A O/P: 5Vdc, 2A or 9Vdc, 2A
Adapter 2	ASUS	AS0202	I/P: 100-240Vac, 50/60Hz, 0.5A O/P: 5Vdc, 2A or 9Vdc, 2A
Battery	ASUS	C12P1602	3.85Vdc, 30Wh
USB Cable	ASAP	LA05US018-1N	0.9m shielded cable w/o core
LCD Panel	TIANMA	TM097QDSP01-00	LCD TFT 9.7' QXGA GL SLIM LED
Front Camera	CHICONY	CBFE55720003870LH	5 M
Real Camera	CHICONY	CJAG81120003871LH	8 M
CPU	Qualcomm	MSM-8956-0-747PNSP- MT-01-0-AA	987 Pin
LPDDR3 1	HYNIX	H9CKNNNDATMUPR-NUH	LPDDR3-3GB
LPDDR3 2	SAMSUNG	K3QF6F60AM-FGCF000	LPDDR3-3GB
eMMC1	HYNIX	H26M64208EMR	eMMC5.1-32GB
eMMC2	SAMSUNG	KLMBG2JENB-B041	eMMC5.1-32GB
BT/WLAN Module	Qualcomm	WCN-3680B-0-79BWLNSP -TR-05-1	--
WWAN Module	Qualcomm	WTR-2965-0-59FOWNSP -TR-06-0-VV	--

* LPDDR3 1 & eMMC1 was chosen for test.


2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

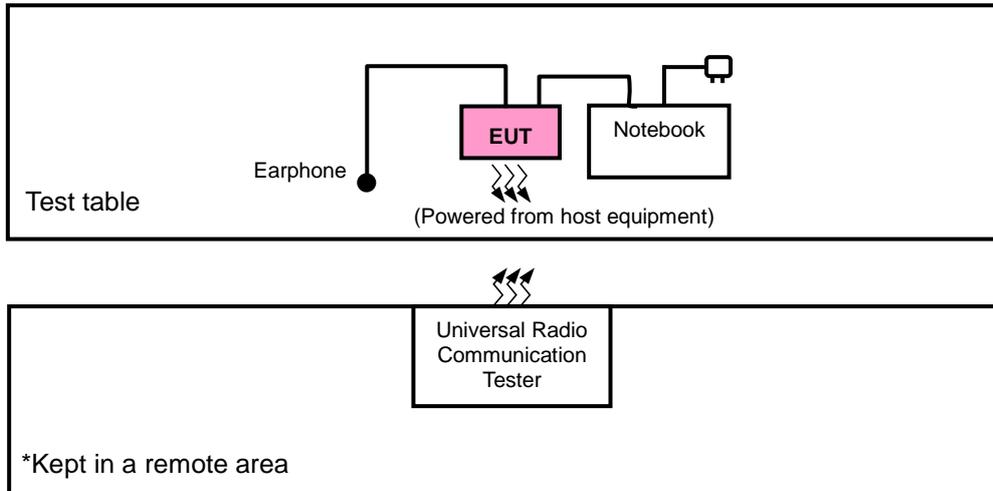

<E.R.P. Test>

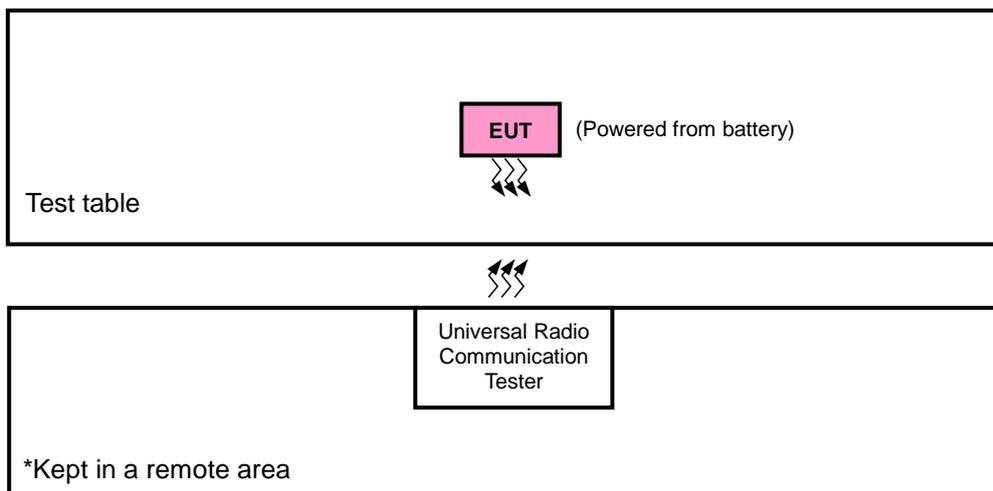

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	DELL	Inspiron 14R	6LRKKW1	N/A
2.	Earphone	N/A	N/A	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A
2.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
LTE Band 5	Y-plane	Z-axis

LTE Band 5

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
-	Frequency Stability	20407 to 20643	20525	1.4 MHz	QPSK	1 RB / 2 RB Offset
		20415 to 20635	20525	3 MHz	QPSK	1 RB / 7 RB Offset
		20425 to 20625	20525	5 MHz	QPSK	1 RB / 12 RB Offset
		20450 to 20600	20525	10 MHz	QPSK	1 RB / 24 RB Offset
-	Occupied Bandwidth	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Band Edge	20407 to 20643	20407	1.4MHz	QPSK	1 RB / 0 RB Offset
			20643	1.4MHz	QPSK	6 RB / 0 RB Offset
		20415 to 20635	20415	3 MHz	QPSK	1 RB / 5 RB Offset
			20635	3 MHz	QPSK	6 RB / 0 RB Offset
		20425 to 20625	20415	3 MHz	QPSK	1 RB / 0 RB Offset
			20635	3 MHz	QPSK	15 RB / 0 RB Offset
		20425 to 20625	20425	5 MHz	QPSK	1 RB / 14 RB Offset
			20625	5 MHz	QPSK	15 RB / 0 RB Offset
		20450 to 20600	20425	5 MHz	QPSK	1 RB / 0 RB Offset
			20625	5 MHz	QPSK	25 RB / 0 RB Offset
		20450 to 20600	20450	10 MHz	QPSK	1 RB / 24 RB Offset
			20600	10 MHz	QPSK	25 RB / 0 RB Offset
20450 to 20600	20450	10 MHz	QPSK	1 RB / 0 RB Offset		
	20600	10 MHz	QPSK	50 RB / 0 RB Offset		
20450 to 20600	20450	10 MHz	QPSK	1 RB / 49 RB Offset		
	20600	10 MHz	QPSK	50 RB / 0 RB Offset		

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Peak to Average Ratio	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
-	Conducted Emission	20407 to 20643	20525	1.4 MHz	QPSK	1 RB / 2 RB Offset
		20415 to 20635	20525	3 MHz	QPSK	1 RB / 7 RB Offset
		20425 to 20625	20525	5 MHz	QPSK	1 RB / 12 RB Offset
		20450 to 20600	20525	10 MHz	QPSK	1 RB / 24 RB Offset
-	Radiated Emission	20450 to 20600	20525	10 MHz	QPSK	1 RB / 24 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	3.85 Vdc	Karl Lee
Frequency Stability	25 deg. C, 65 % RH	3.85 Vdc	Carlos Chen
Occupied Bandwidth	25 deg. C, 65 % RH	3.85 Vdc	Carlos Chen
Band Edge	25 deg. C, 65 % RH	3.85 Vdc	Carlos Chen
Peak to Average Ratio	25 deg. C, 65 % RH	3.85 Vdc	Carlos Chen
Condcudeted Emission	25 deg. C, 65 % RH	3.85 Vdc	Carlos Chen
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Karl Lee

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/EIA-603-D 2010

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi}$.

Conducted Power Measurement:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

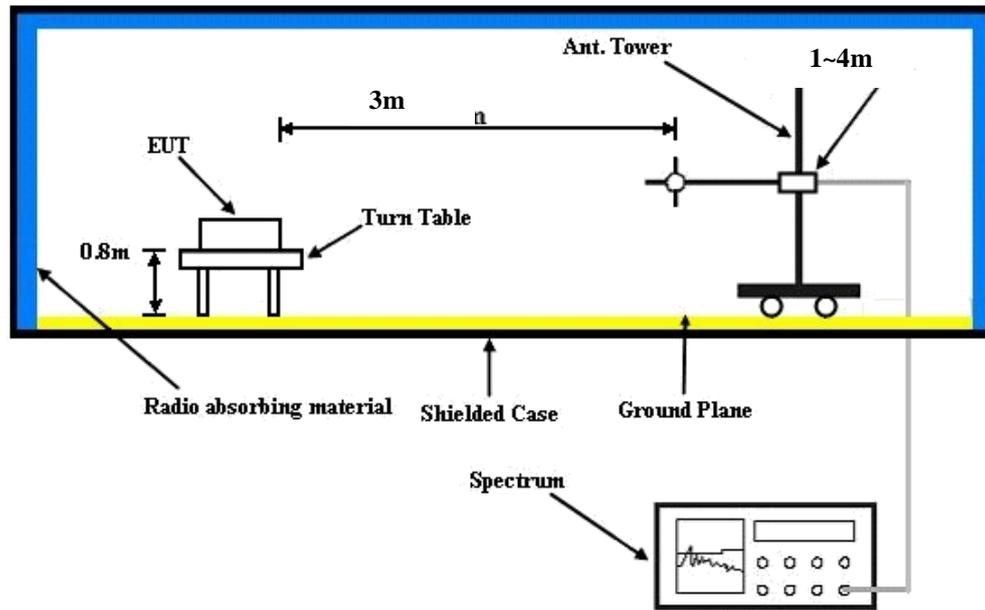

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:

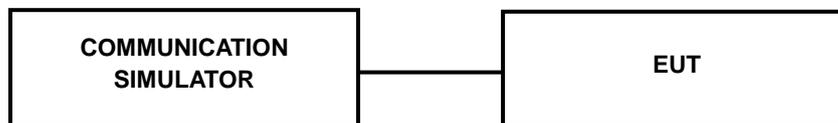

4.1.4 Test Results

Conducted Output Power (dBm)

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20407	Mid Ch 20525	High Ch 20643		Low Ch 20407	Mid Ch 20525	High Ch 20643	
			824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz	
5 / 1.4M	1	0	23.41	23.43	23.54	0	22.63	22.65	22.76	1
	1	2	23.43	23.39	23.33	0	22.65	22.61	22.55	1
	1	5	23.34	22.53	23.50	0	22.56	22.75	22.72	1
	3	0	22.63	22.93	23.07	0	21.85	22.15	22.29	1
	3	1	22.78	23.04	22.93	0	22.00	22.26	22.15	1
	3	3	22.97	22.72	22.92	0	22.19	21.94	22.14	1
	6	0	22.46	22.62	22.53	1	21.68	21.84	21.75	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20415	Mid Ch 20525	High Ch 20635		Low Ch 20415	Mid Ch 20525	High Ch 20635	
			825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz	
5 / 3M	1	0	22.74	23.04	23.18	0	21.89	22.19	22.33	1
	1	7	22.89	23.15	23.04	0	22.04	22.30	22.19	1
	1	14	23.08	22.83	23.03	0	22.23	21.98	22.18	1
	8	0	22.52	22.54	22.65	1	21.67	21.69	21.80	2
	8	3	22.54	22.50	22.44	1	21.69	21.65	21.59	2
	8	7	22.45	22.65	22.61	1	21.60	21.80	21.76	2
	15	0	22.57	22.73	22.64	1	21.72	21.88	21.79	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20425	Mid Ch 20525	High Ch 20625		Low Ch 20425	Mid Ch 20525	High Ch 20625	
			826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz	
5 / 5M	1	0	22.87	23.17	23.31	0	21.92	22.22	22.36	1
	1	12	23.02	23.28	23.17	0	22.07	22.33	22.22	1
	1	24	23.21	22.96	23.16	0	22.26	22.01	22.21	1
	12	0	22.65	22.67	22.78	1	21.70	21.72	21.83	2
	12	6	22.67	22.63	22.57	1	21.72	21.68	21.62	2
	12	13	22.58	22.78	22.74	1	21.63	21.83	21.79	2
	25	0	22.70	22.86	22.77	1	21.75	21.91	21.82	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20450	Mid Ch 20525	High Ch 20600		Low Ch 20450	Mid Ch 20525	High Ch 20600	
			829.0 MHz	836.5 MHz	844.0 MHz		829.0 MHz	836.5 MHz	844.0 MHz	
5 / 10M	1	0	23.04	23.34	23.48	0	21.96	22.26	22.40	1
	1	24	23.19	23.45	23.34	0	22.11	22.37	22.26	1
	1	49	23.38	23.13	23.33	0	22.30	22.05	22.25	1
	25	0	22.82	22.84	22.95	1	21.74	21.76	21.87	2
	25	12	22.84	22.80	22.74	1	21.76	21.72	21.66	2
	25	25	22.75	22.95	22.91	1	21.67	21.87	21.83	2
	50	0	22.87	23.03	22.94	1	21.79	21.95	21.86	2

ERP Power (dBm)

LTE Band 5							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	20407	824.7	-10.01	31.208	19.05	80.32	H
	20525	836.5	-9.87	31.3	19.28	84.72	
	20643	848.3	-9.57	31.222	19.50	89.17	
	20407	824.7	-15.36	31.504	13.99	25.08	V
	20525	836.5	-15.47	31.117	13.50	22.37	
	20643	848.3	-16.01	31.922	13.76	23.78	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	20407	824.7	-11.04	31.208	18.02	63.36	H
	20525	836.5	-10.88	31.3	18.27	67.14	
	20643	848.3	-10.76	31.222	18.31	67.80	
	20407	824.7	-16.82	31.504	12.53	17.92	V
	20525	836.5	-16.66	31.117	12.31	17.01	
	20643	848.3	-16.93	31.922	12.84	19.24	

LTE Band 5							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	20415	825.5	-9.55	31.208	19.51	89.29	H
	20525	836.5	-9.69	31.3	19.46	88.31	
	20635	847.5	-9.81	31.222	19.26	84.37	
	20415	825.5	-15.77	31.504	13.58	22.82	V
	20525	836.5	-15.91	31.117	13.06	20.22	
	20635	847.5	-15.90	31.922	13.87	24.39	
Channel Bandwidth: 3 MHz / 16QAM							
Y	20415	825.5	-10.71	31.208	18.35	68.36	H
	20525	836.5	-10.64	31.3	18.51	70.96	
	20635	847.5	-10.91	31.222	18.16	65.49	
	20415	825.5	-16.36	31.504	12.99	19.93	V
	20525	836.5	-16.59	31.117	12.38	17.29	
	20635	847.5	-16.79	31.922	12.98	19.87	

LTE Band 5							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	20425	826.5	-9.84	31.208	19.22	83.52	H
	20525	836.5	-9.73	31.3	19.42	87.50	
	20625	846.5	-9.55	31.222	19.52	89.58	
	20425	826.5	-15.61	31.504	13.74	23.68	V
	20525	836.5	-15.74	31.117	13.23	21.02	
	20625	846.5	-15.82	31.922	13.95	24.84	
Channel Bandwidth: 5 MHz / 16QAM							
Y	20425	826.5	-10.25	31.208	18.81	76.00	H
	20525	836.5	-10.48	31.3	18.67	73.62	
	20625	846.5	-10.36	31.222	18.71	74.34	
	20425	826.5	-16.38	31.504	12.97	19.83	V
	20525	836.5	-16.91	31.117	12.06	16.06	
	20625	846.5	-16.79	31.922	12.98	19.87	

LTE Band 5							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	20450	829.0	-9.91	31.208	19.15	82.19	H
	20525	836.5	-9.57	31.3	19.58	90.78	
	20600	844.0	-10.03	31.222	19.04	80.20	
	20450	829.0	-15.74	31.504	13.61	22.98	V
	20525	836.5	-15.85	31.117	13.12	20.50	
	20600	844.0	-15.88	31.922	13.89	24.50	
Channel Bandwidth: 10 MHz / 16QAM							
Y	20450	829.0	-10.55	31.208	18.51	70.93	H
	20525	836.5	-10.72	31.3	18.43	69.66	
	20600	844.0	-10.92	31.222	18.15	65.34	
	20450	829.0	-16.38	31.504	12.97	19.83	V
	20525	836.5	-16.52	31.117	12.45	17.57	
	20600	844.0	-16.79	31.922	12.98	19.87	

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.2.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

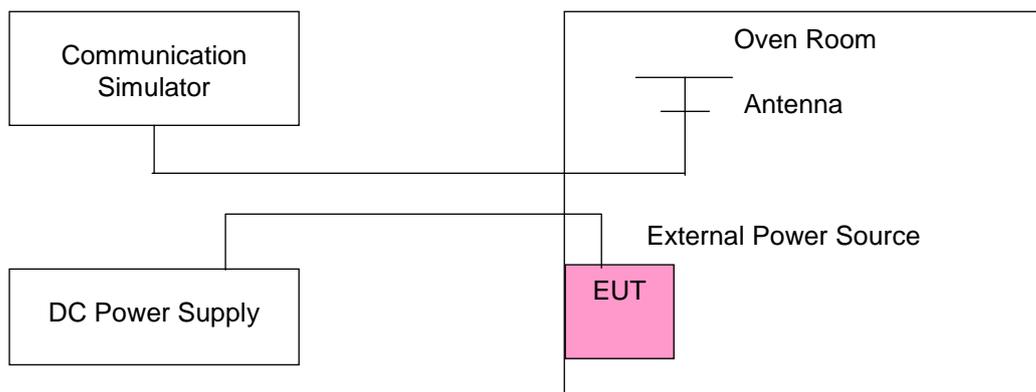

4.2.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (ppm)				Limit (ppm)
	LTE Band 5				
	5 MHz	10 MHz	15 MHz	20 MHz	
3.85	0.002	0.002	0.002	0.004	2.5
3.6	0.001	0.002	0.004	0.003	2.5
4.35	0.003	0.003	0.003	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.35 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	Frequency Error (ppm)				Limit (ppm)
	LTE Band 5				
	5 MHz	10 MHz	15 MHz	20 MHz	
-30	0.002	0.004	0.004	0.004	2.5
-20	0.003	0.002	0.002	0.005	2.5
-10	0.004	0.001	0.002	0.003	2.5
0	0.004	0.002	0.005	0.003	2.5
10	-0.003	-0.001	-0.005	-0.004	2.5
20	-0.001	-0.002	-0.003	-0.003	2.5
30	-0.003	-0.003	-0.004	-0.002	2.5
40	-0.004	-0.003	-0.005	-0.002	2.5
50	-0.003	-0.005	-0.002	-0.005	2.5

4.3 Occupied Bandwidth Measurement

4.3.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 Test Setup

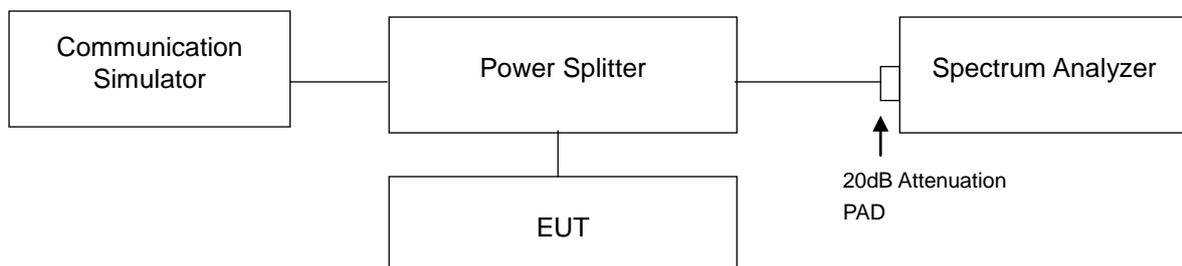

4.3.3 Test Result





LTE Band 5							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	1.0926	1.0905	20415	825.5	2.6966	2.6956
20525	836.5	1.0912	1.0892	20525	836.5	2.6941	2.6932
20643	848.3	1.0942	1.0894	20635	847.5	2.6971	2.6947

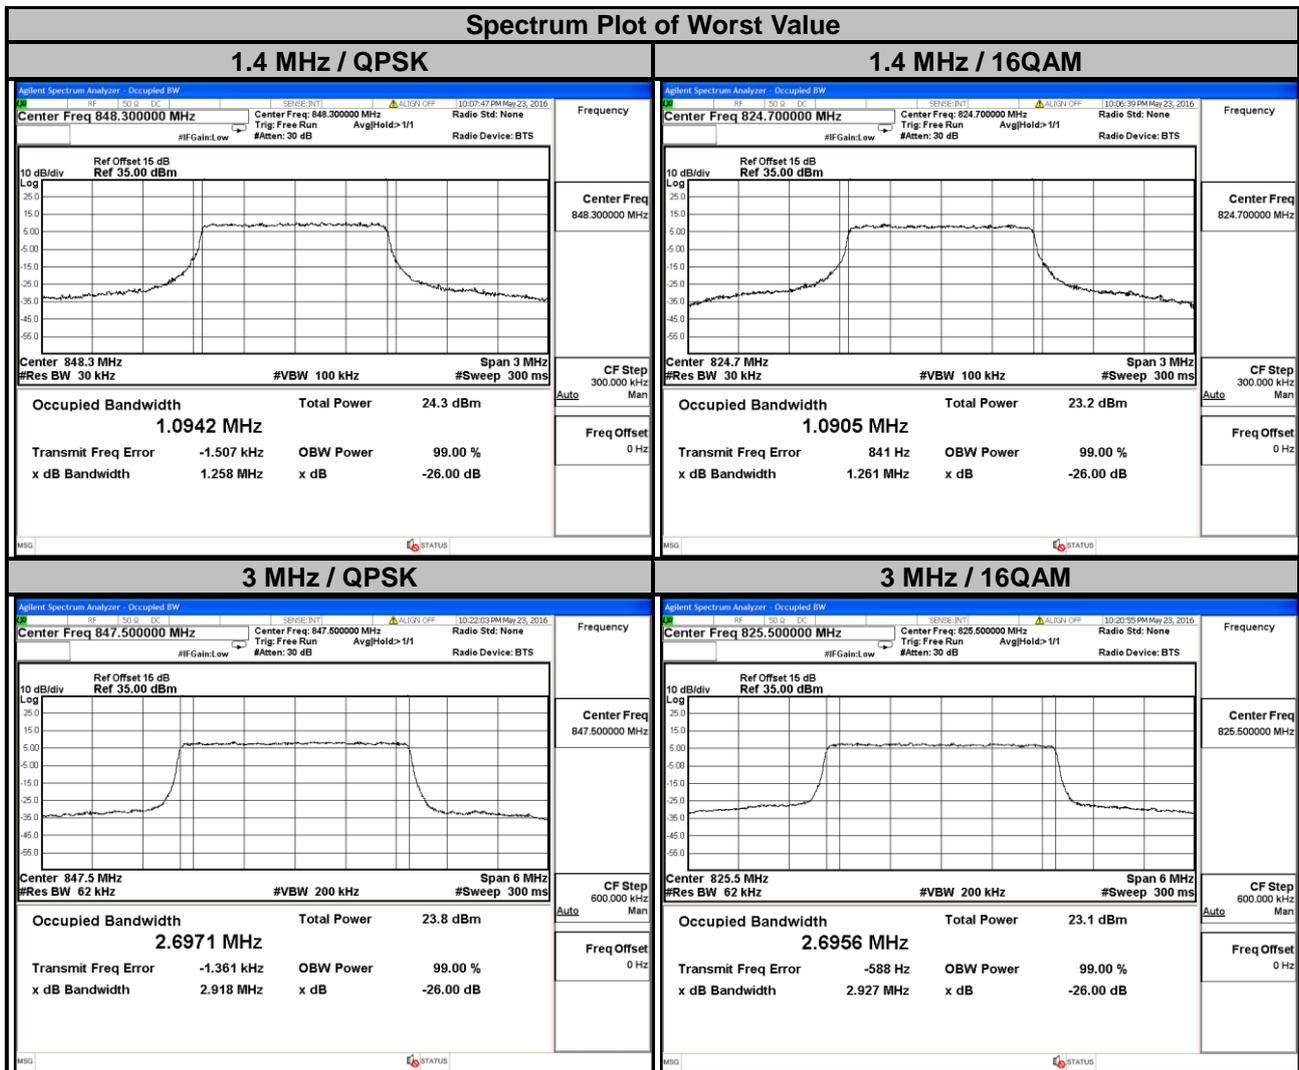

LTE Band 5

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	4.4894	4.4848	20450	829.0	8.9675	8.9718
20525	836.5	4.4849	4.4799	20525	836.5	8.9416	8.9413
20625	846.5	4.4904	4.4866	20600	844.0	8.9727	8.9661

Spectrum Plot of Worst Value

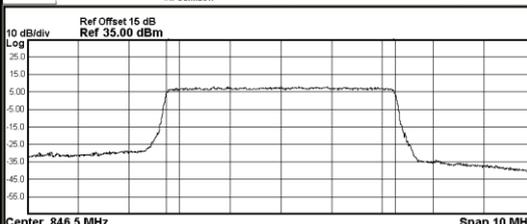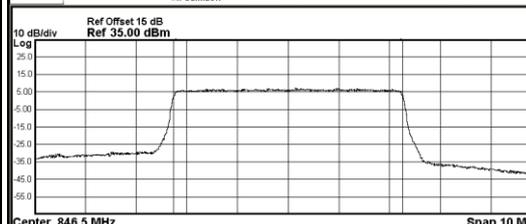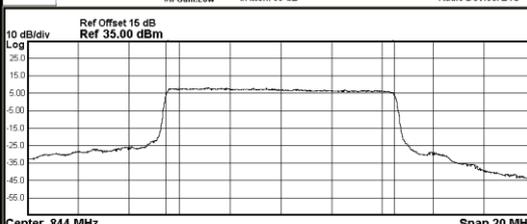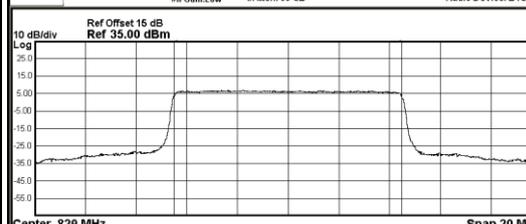
5 MHz / QPSK		5 MHz / 16QAM	
 <p>Center Freq 846.5 MHz</p> <p>Occupied Bandwidth: 4.4904 MHz</p> <p>Total Power: 23.2 dBm</p> <p>Transmit Freq Error: -1.236 kHz</p> <p>x dB Bandwidth: 4.823 MHz</p>	 <p>Center Freq 846.5 MHz</p> <p>Occupied Bandwidth: 4.4866 MHz</p> <p>Total Power: 22.2 dBm</p> <p>Transmit Freq Error: 1.727 kHz</p> <p>x dB Bandwidth: 4.801 MHz</p>		
 <p>Center Freq 844 MHz</p> <p>Occupied Bandwidth: 8.9727 MHz</p> <p>Total Power: 23.1 dBm</p> <p>Transmit Freq Error: -14.710 kHz</p> <p>x dB Bandwidth: 9.525 MHz</p>	 <p>Center Freq 829 MHz</p> <p>Occupied Bandwidth: 8.9718 MHz</p> <p>Total Power: 22.4 dBm</p> <p>Transmit Freq Error: -6.375 kHz</p> <p>x dB Bandwidth: 9.535 MHz</p>		

4.4 Band Edge Measurement

4.4.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.4.2 Test Setup

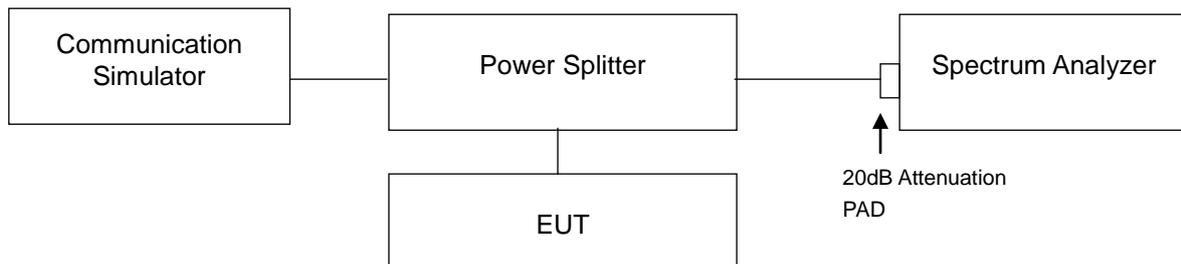


4.4.3 Test Procedures

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 13 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 5 MHz/10 MHz).
- Record the max trace plot into the test report.


4.4.4 Test Results

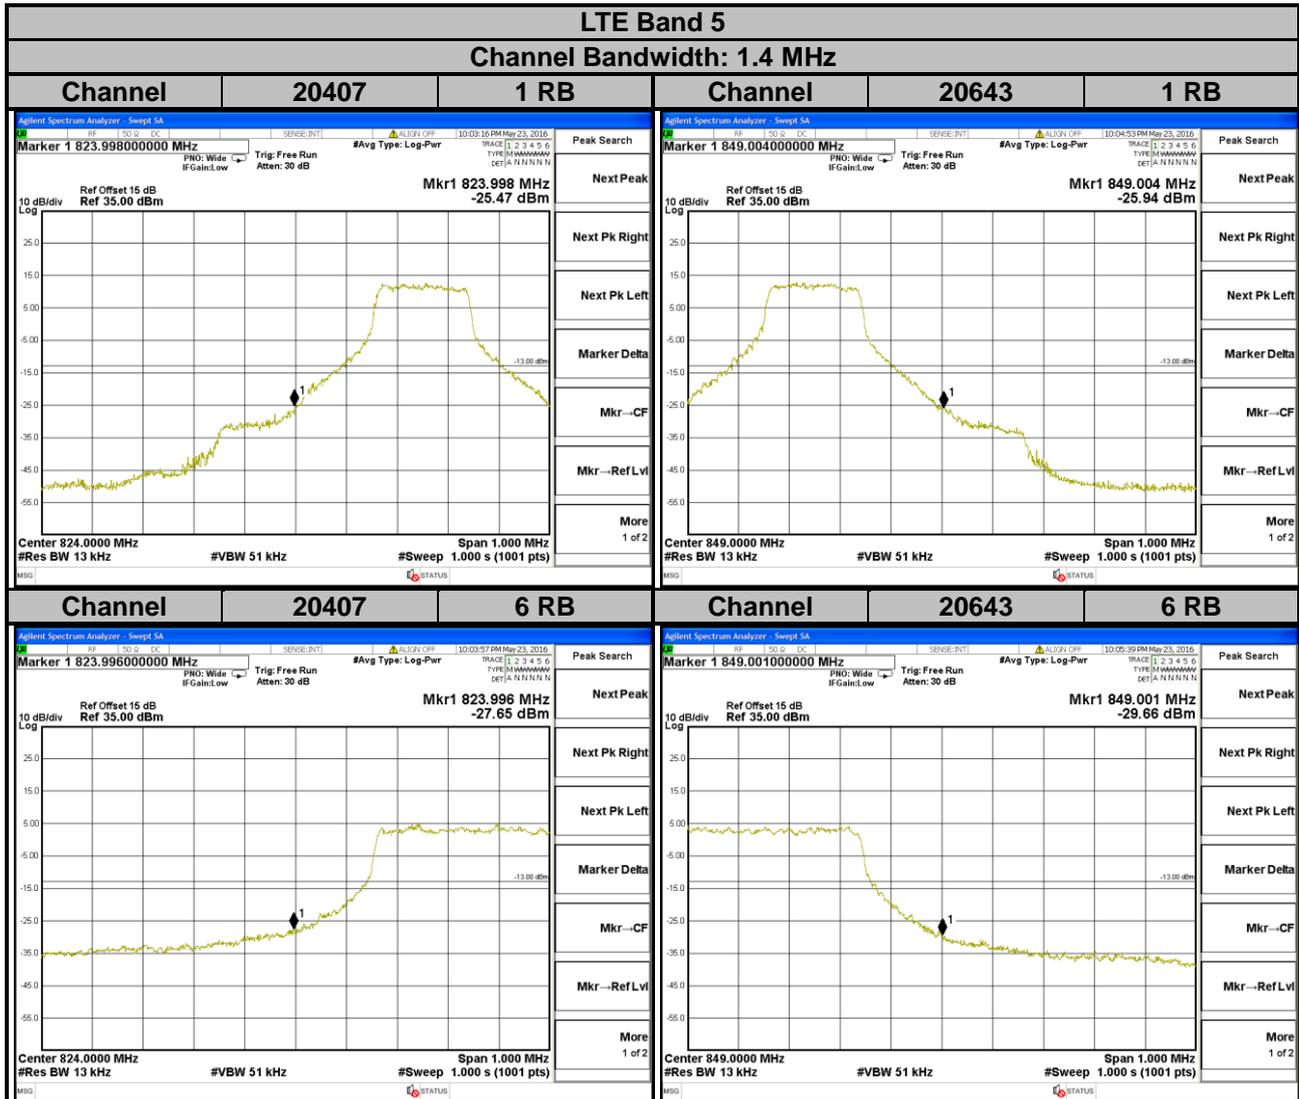



LTE Band 5
Channel Bandwidth: 3 MHz

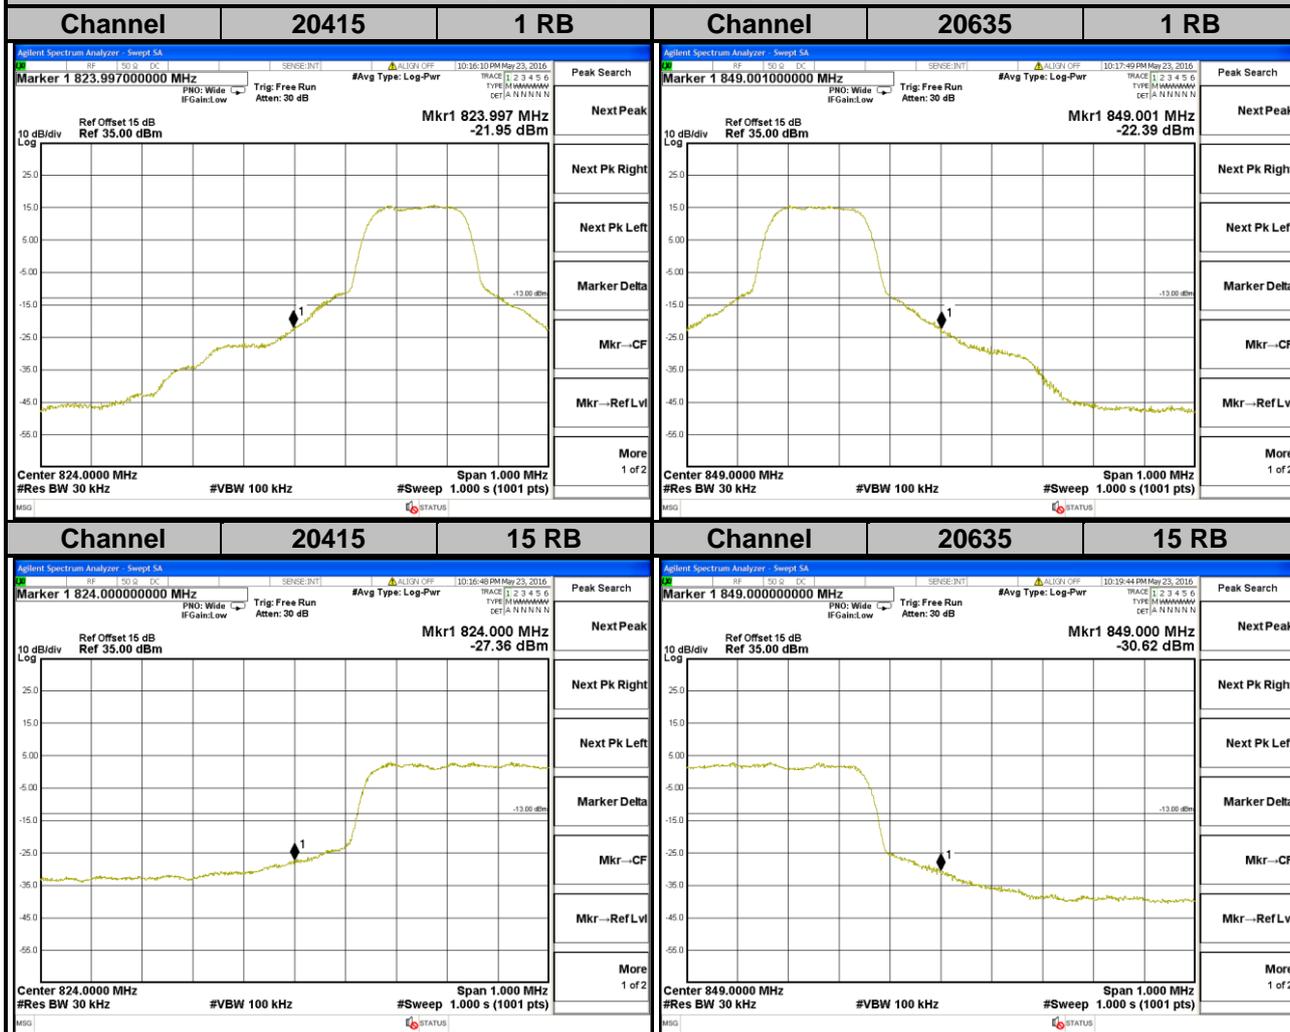

LTE Band 5
Channel Bandwidth: 5 MHz

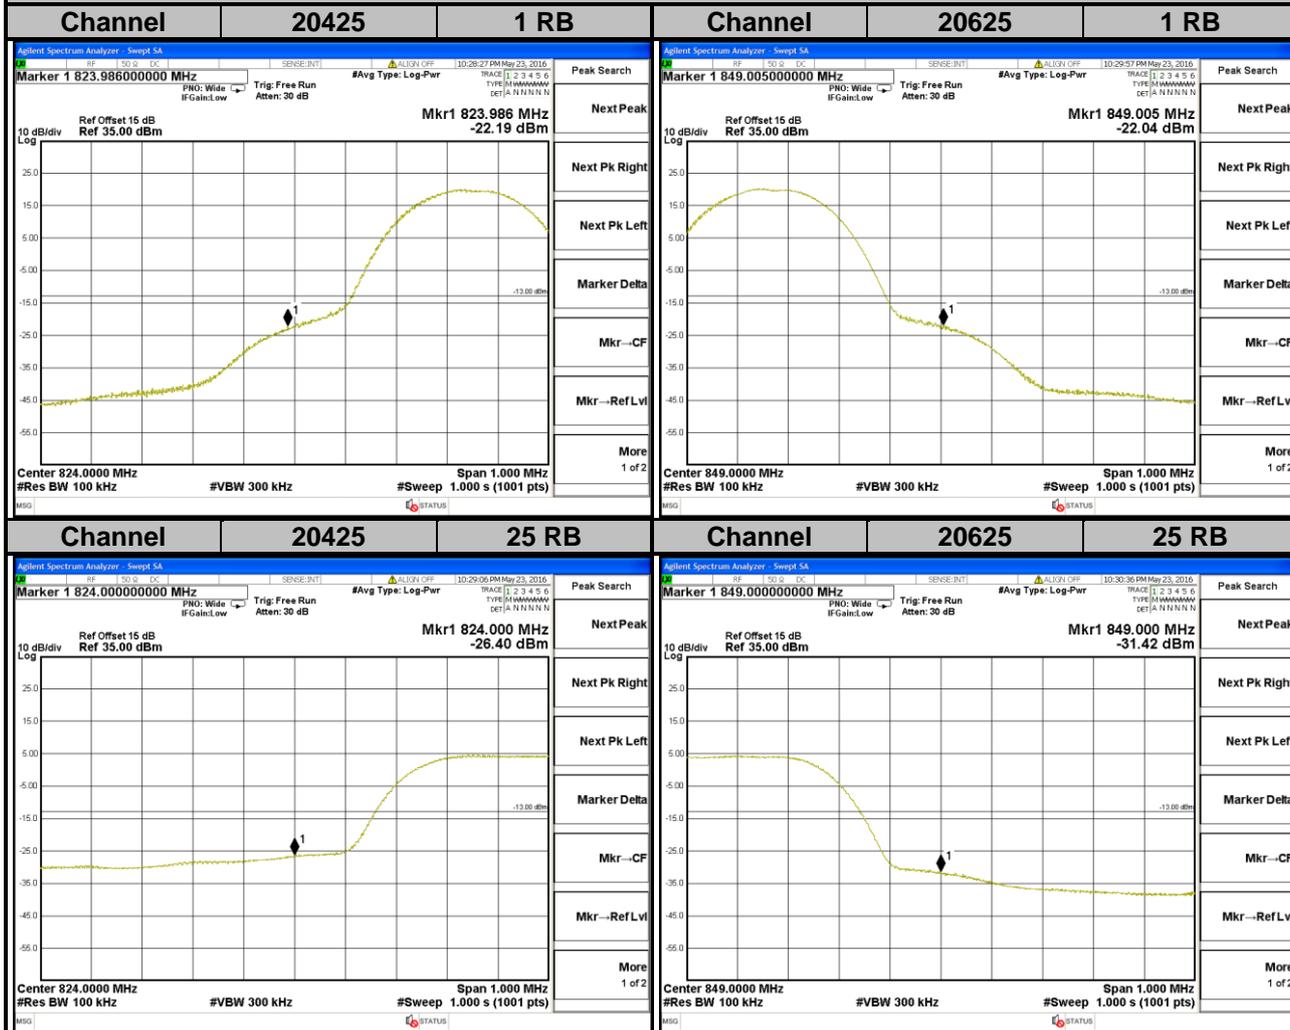

LTE Band 5
Channel Bandwidth: 10 MHz

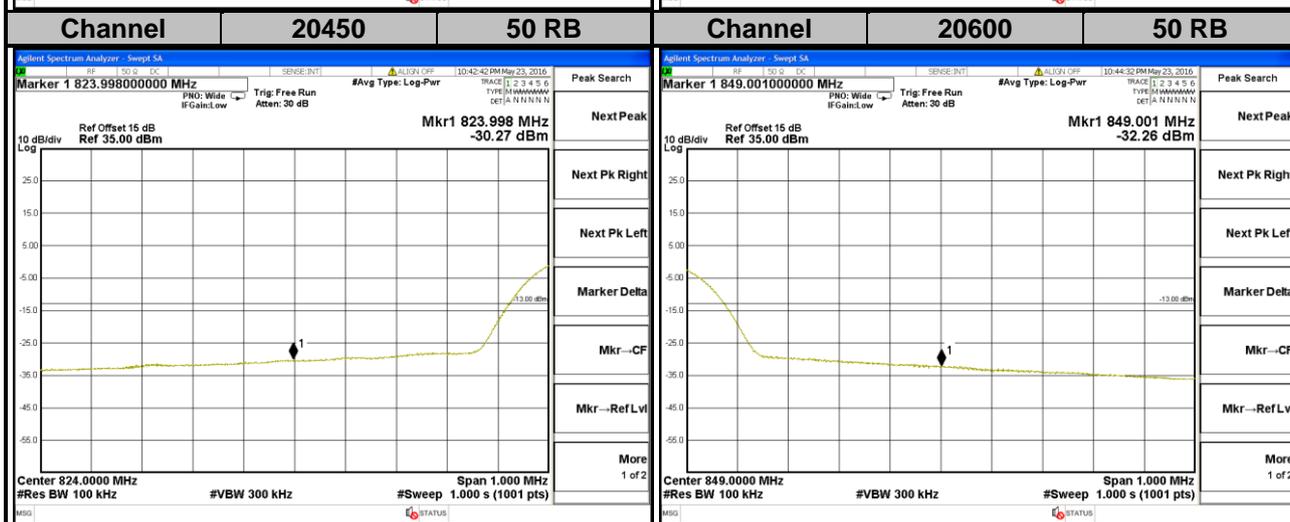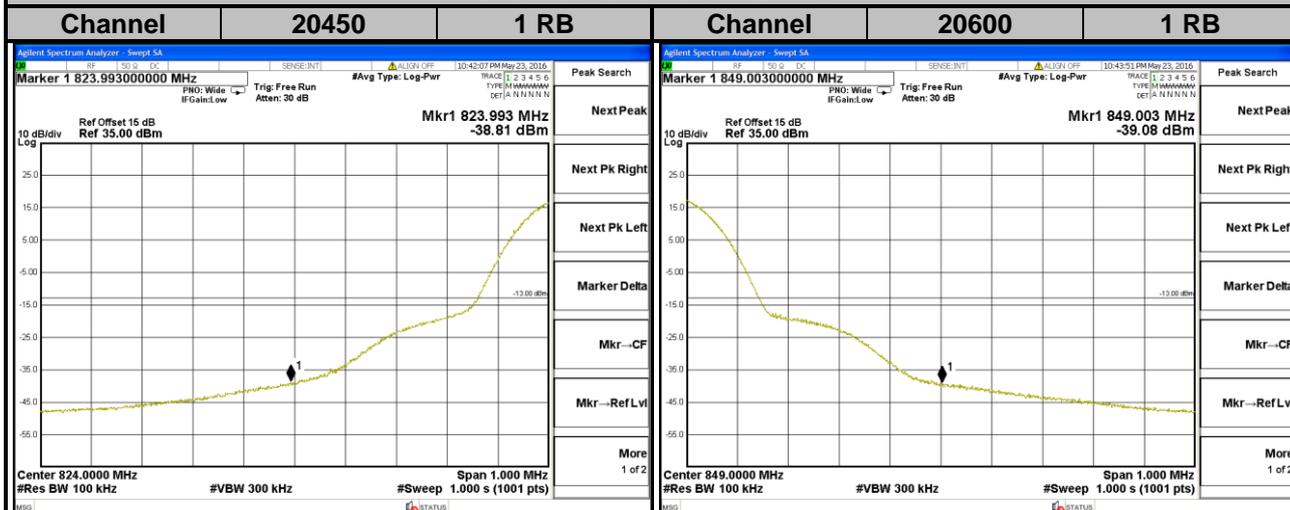


4.5 Peak to Average Ratio

4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.5.2 Test Setup

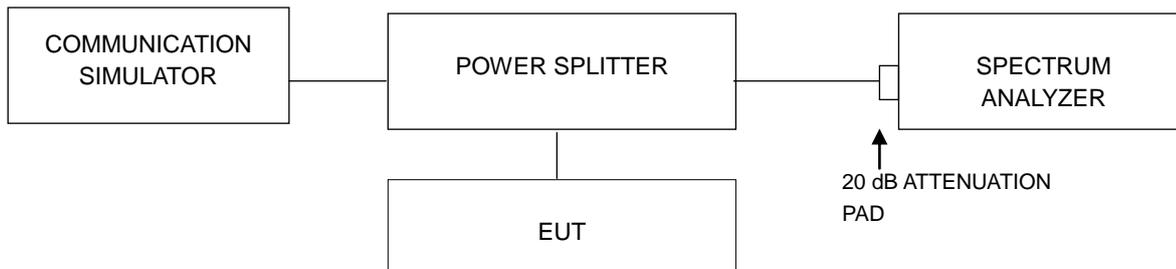


4.5.3 Test Procedures

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.5.4 Test Results


LTE Band 5							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	3.89	4.75	20415	825.5	3.85	4.66
20525	836.5	4.22	5.02	20525	836.5	4.24	5.10
20643	848.3	4.26	5.17	20635	847.5	4.58	5.39

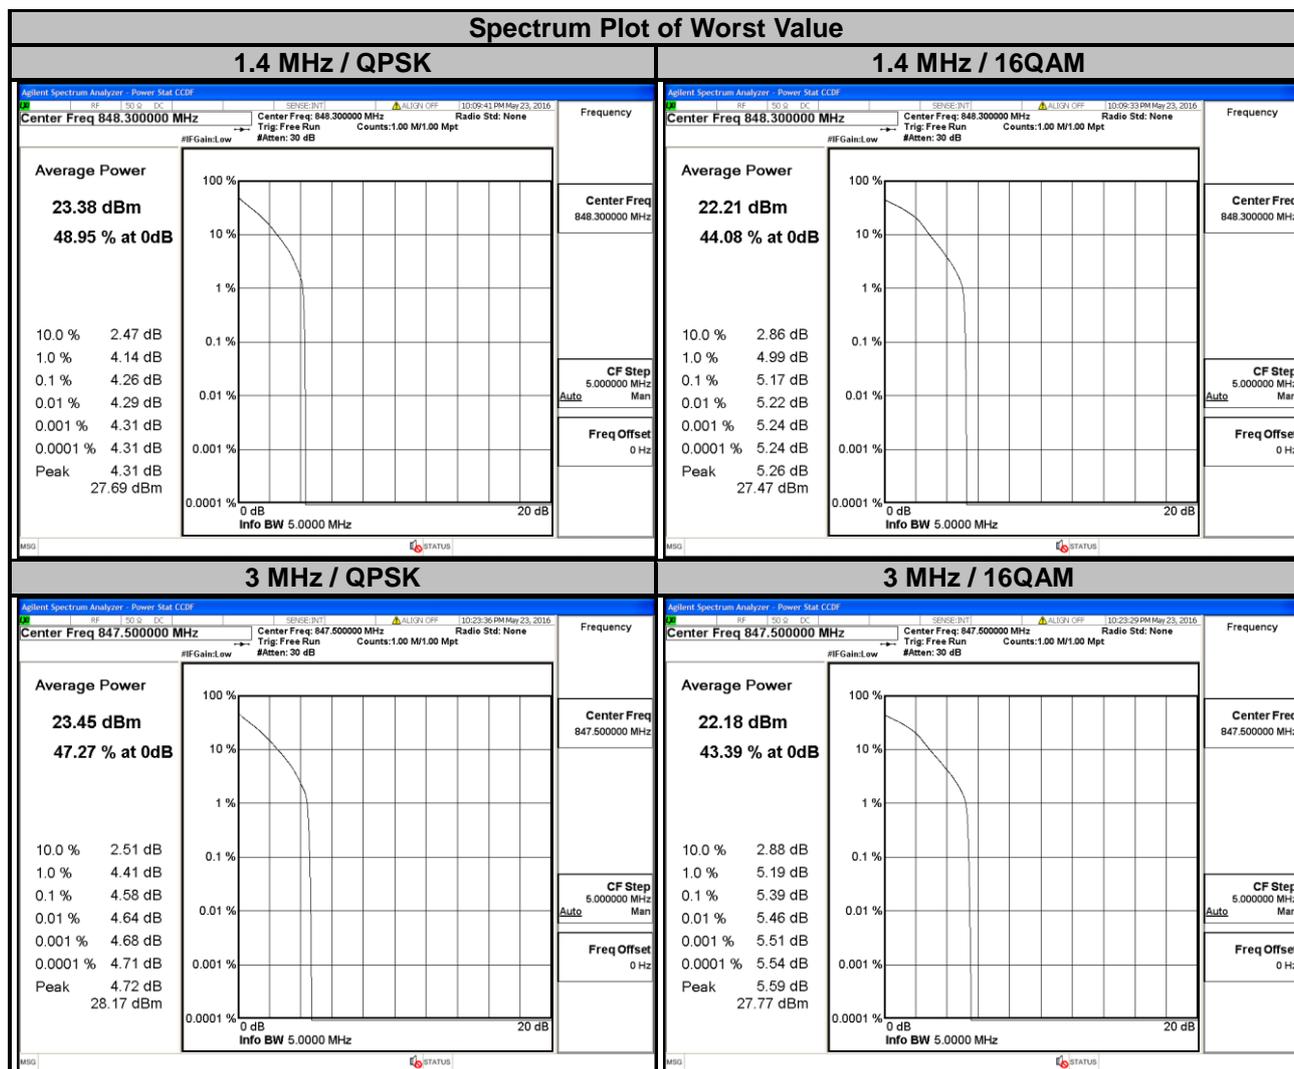

LTE Band 5

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	3.86	4.68	20450	829.0	4.08	4.65
20525	836.5	4.29	5.12	20525	836.5	4.47	5.13
20625	846.5	4.49	5.29	20600	844.0	3.85	4.73

Spectrum Plot of Worst Value

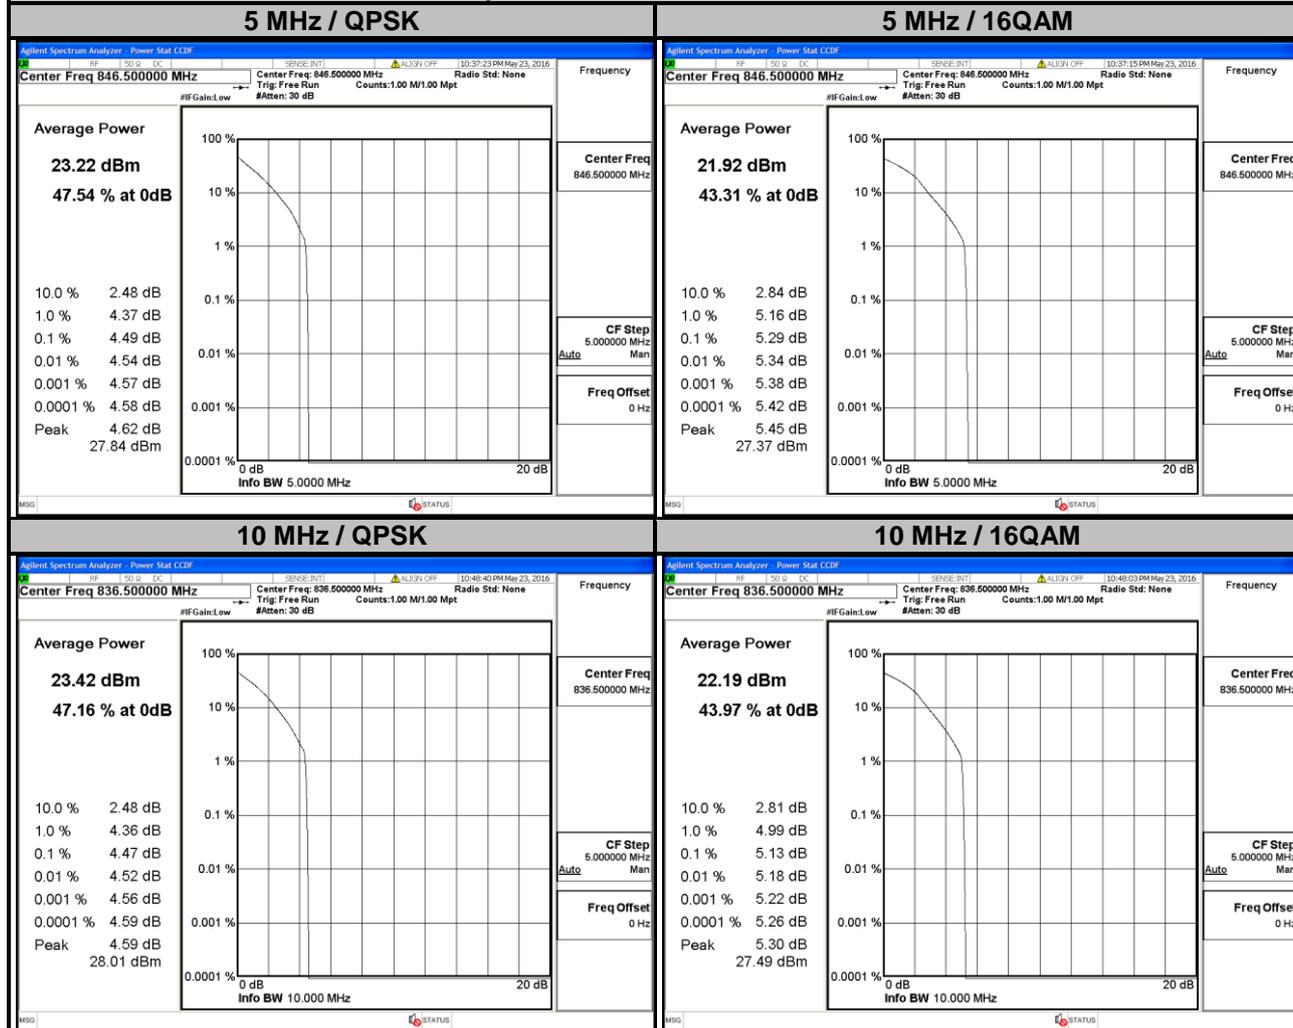


4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.6.2 Test Setup

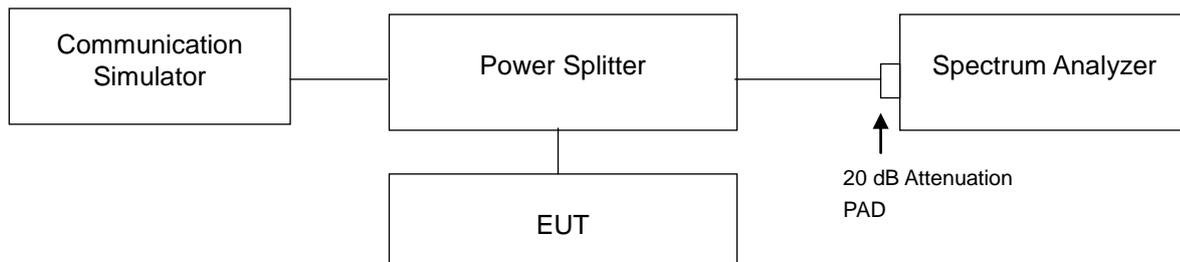

4.6.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 9 GHz. 20 dB attenuation pad is connected with spectrum. RBW=1 MHz and VBW=3 MHz is used for conducted emission measurement.

4.6.4 Test Results

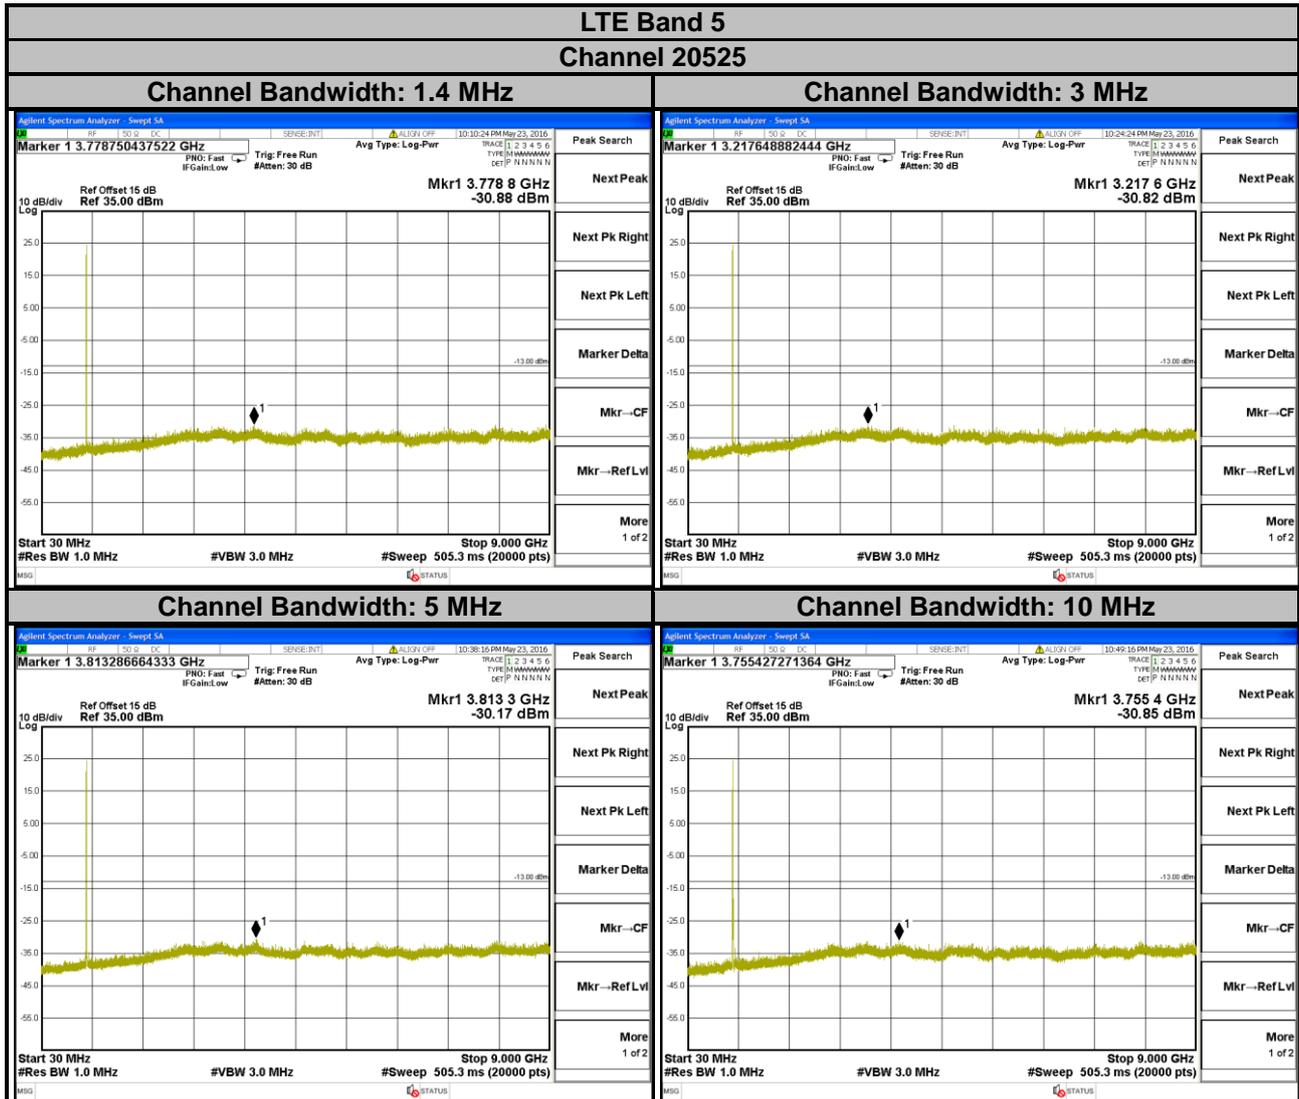

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.7.2 Test Procedure


- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.7.3 Deviation from Test Standard

No deviation.

4.7.4 Test Setup

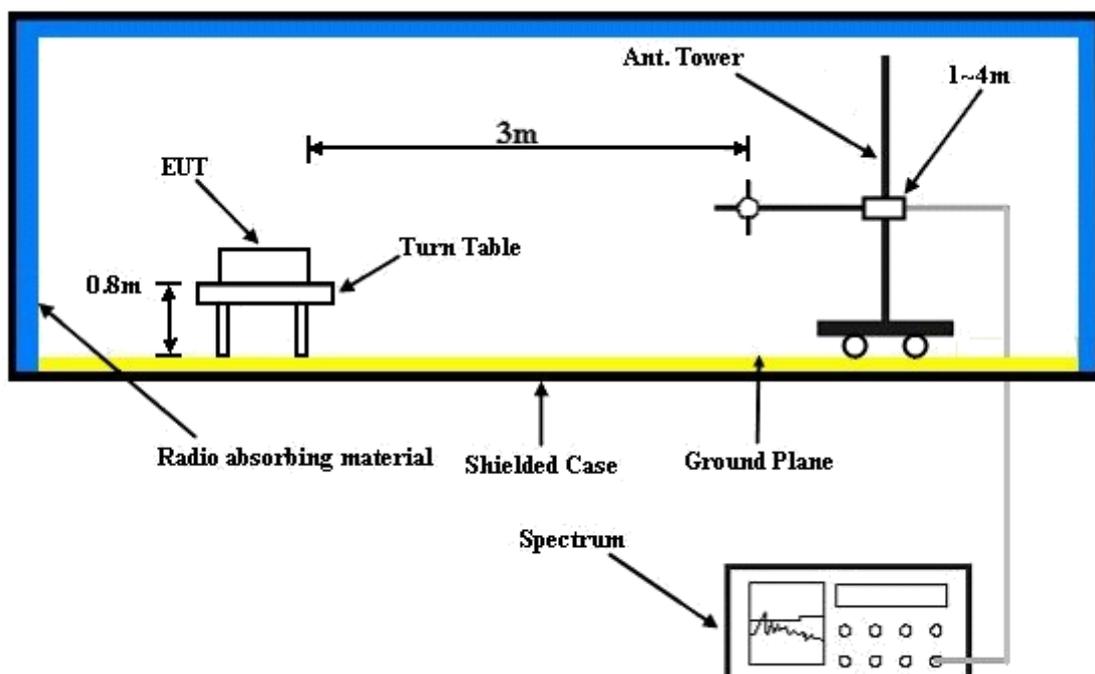

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results

LTE Band 5

Channel Bandwidth: 10 MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2016-05-26

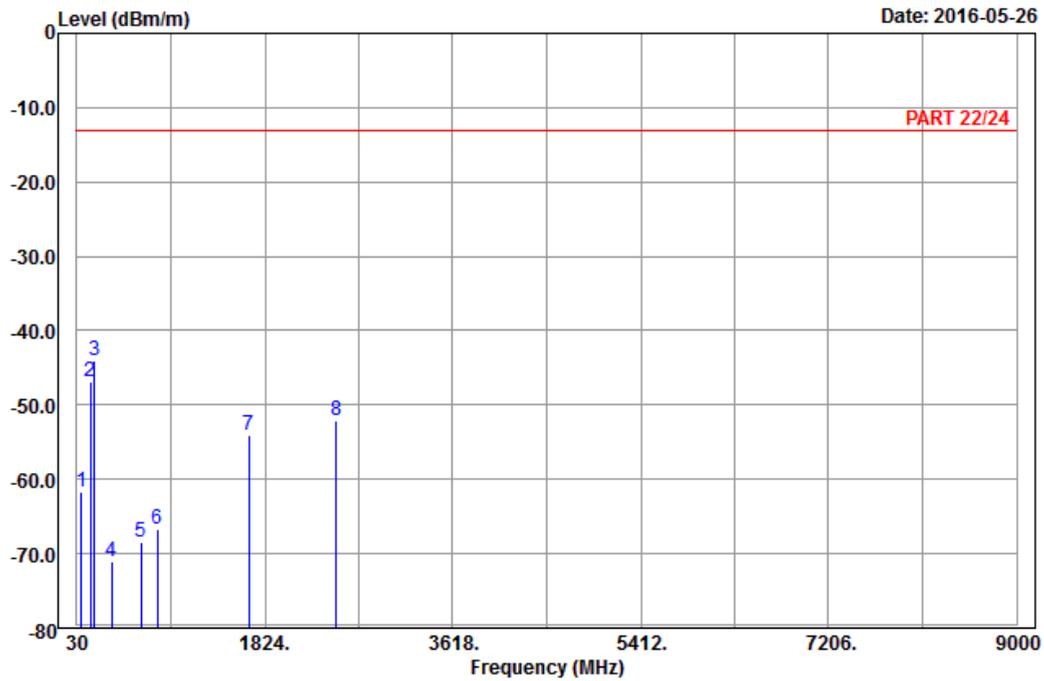

Site : 966 chamber 1
 Condition: PART 22/24 3m Horizontal
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	72.66	-61.67	-49.24	-13.00	-48.67	-12.43	Peak
2	158.52	-46.83	-39.11	-13.00	-33.83	-7.72	Peak
3 pp	201.18	-44.14	-37.97	-13.00	-31.14	-6.17	Peak
4	365.10	-71.03	-66.43	-13.00	-58.03	-4.60	Peak
5	643.70	-68.39	-68.32	-13.00	-55.39	-0.07	Peak
6	799.10	-66.75	-68.70	-13.00	-53.75	1.95	Peak
7	1673.00	-54.10	-62.01	-13.00	-41.10	7.91	Peak
8	2509.50	-52.01	-63.29	-13.00	-39.01	11.28	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2016-05-26

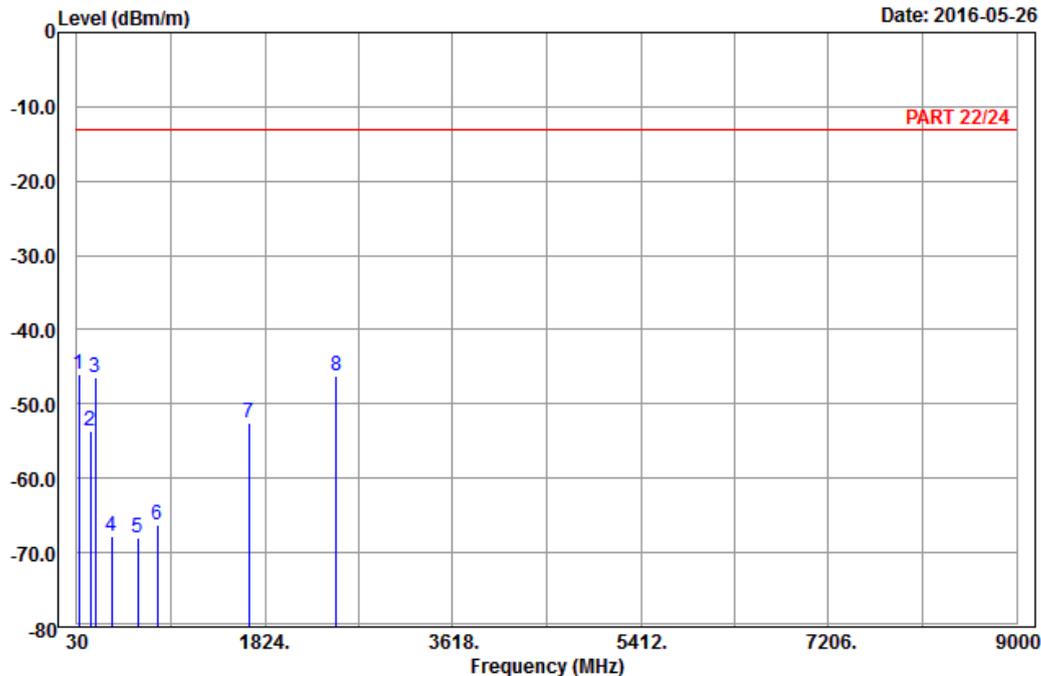

Site : 966 chamber 1
 Condition: PART 22/24 3m Vertical
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	pp	47.82	-46.03	-32.92	-13.00	-33.03	-13.11 Peak
2		156.90	-53.52	-45.77	-13.00	-40.52	-7.75 Peak
3		204.69	-46.45	-40.33	-13.00	-33.45	-6.12 Peak
4		364.40	-67.84	-63.24	-13.00	-54.84	-4.60 Peak
5		612.20	-67.99	-68.28	-13.00	-54.99	0.29 Peak
6		799.10	-66.26	-68.21	-13.00	-53.26	1.95 Peak
7		1673.00	-52.51	-60.42	-13.00	-39.51	7.91 Peak
8		2509.50	-46.12	-57.40	-13.00	-33.12	11.28 Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---