



FCC TEST REPORT (15.247)

REPORT NO.: RF150630C22
MODEL NO.: P01MA
FCC ID: MSQP01MA
RECEIVED: Jun. 29, 2015
TESTED: Jun. 29, 2015 ~ Jul. 09,2015
ISSUED: Jul. 20, 2015

APPLICANT: ASUSTek COMPUTER INC.

ADDRESS: 4F, No. 150, LI-TE Rd., PEITOU, TAIPEI 112,
TAIWAN

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB ADDRESS: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New
Taipei City, Taiwan (R.O.C)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan
Dist., Taoyuan City 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

- RELEASE CONTROL RECORD4
- 1. CERTIFICATION.....5
- 2. SUMMARY OF TEST RESULTS6
 - 2.1 MEASUREMENT UNCERTAINTY.....6
- 3. GENERAL INFORMATION7
 - 3.1 GENERAL DESCRIPTION OF EUT7
 - 3.2 DESCRIPTION OF TEST MODES9
 - 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL 10
 - 3.3 DESCRIPTION OF SUPPORT UNITS 12
 - 3.3.1 CONFIGURATION OF SYSTEM UNDER TEST 12
 - 3.4 DUTY CYCLE TEST SIGNAL 13
 - 3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS 14
- 4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND) 15
 - 4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT 15
 - 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT 15
 - 4.1.2 TEST INSTRUMENTS 16
 - 4.1.3 TEST PROCEDURES 17
 - 4.1.4 DEVIATION FROM TEST STANDARD 17
 - 4.1.5 TEST SETUP 18
 - 4.1.6 EUT OPERATING CONDITIONS 18
 - 4.1.7 TEST RESULTS..... 19
 - 4.2 CONDUCTED EMISSION MEASUREMENT 32
 - 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 32
 - 4.2.2 TEST INSTRUMENTS 32
 - 4.2.3 TEST PROCEDURES 33
 - 4.2.4 DEVIATION FROM TEST STANDARD 33
 - 4.2.5 TEST SETUP 34
 - 4.2.6 EUT OPERATING CONDITIONS 34
 - 4.2.7 TEST RESULTS..... 35
 - 4.3 6dB BANDWIDTH MEASUREMENT 39
 - 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT 39
 - 4.3.2 TEST SETUP 39
 - 4.3.3 TEST INSTRUMENTS 39
 - 4.3.4 TEST PROCEDURE 39
 - 4.3.5 DEVIATION FROM TEST STANDARD 39
 - 4.3.6 EUT OPERATING CONDITIONS 39
 - 4.3.7 TEST RESULTS..... 40
 - 4.4 CONDUCTED OUTPUT POWER 42
 - 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT 42
 - 4.4.2 TEST SETUP 42
 - 4.4.3 TEST INSTRUMENTS 42
 - 4.4.4 TEST PROCEDURES 42
 - 4.4.5 DEVIATION FROM TEST STANDARD 42
 - 4.4.6 EUT OPERATING CONDITIONS 42
 - 4.4.7 TEST RESULTS..... 43
 - 4.5 POWER SPECTRAL DENSITY MEASUREMENT 44
 - 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT 44
 - 4.5.2 TEST SETUP 44
 - 4.5.3 TEST INSTRUMENTS 44
 - 4.5.4 TEST PROCEDURE 44
 - 4.5.5 DEVIATION FROM TEST STANDARD 44
 - 4.5.6 EUT OPERATING CONDITION..... 44



A D T

4.5.7	TEST RESULTS.....	45
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	47
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	47
4.6.2	TEST SETUP	47
4.6.3	TEST INSTRUMENTS	47
4.6.4	TEST PROCEDURE	47
4.6.5	DEVIATION FROM TEST STANDARD	47
4.6.6	EUT OPERATING CONDITION.....	47
4.6.7	TEST RESULTS.....	48
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	54
6.	INFORMATION ON THE TESTING LABORATORIES	55
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	56



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF150630C22	Original release	Jul. 20, 2015

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.80dB at 0.76328MHz.
15.205 & 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -6.08dB at 2486MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	ASUS Tablet
MODEL NO.	P01MA
POWER SUPPLY	5.2Vdc (adapter) 5.0Vdc (host equipment) 3.8Vdc (Li-ion battery)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7
OPERATING FREQUENCY	2412 ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (20MHz)
OUTPUT POWER	205.12mW for 2412 ~ 2462MHz
ANTENNA TYPE	PIFA antenna with 2.93dBi gain
ANTENNA CONNECTOR	NA
DATA CABLE	Refer to Note as below
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Refer to Note as below



NOTE:

1. The EUT contains following accessory devices.

ITEM	BRAND	MODEL	SPECIFICATION
Adapter 1	ASUS	PA-1070-07	I/P: 100-240Vac, 50/60Hz, 0.25A O/P: 5.2Vdc, 1.35A
Adapter 2	ASUS	AD2005320	I/P: 100-240Vac, 50/60Hz, 0.25A O/P: 5.2Vdc, 1.35A
Battery	ASUS	C11P1426	3.8Vdc, 15.2Wh
USB Cable 1	ASUS	CUDB01B-AJ001-DF	0.9m
USB Cable 2	ASUS	L67U2016-CS-R	0.9m
CPU 1	INTEL	Moorefield Z3560 935218	1.83GHz, 64bit 1064pin
CPU 2	INTEL	Moorefield Z3580 935210	2.3GHz, 64bit 1064pin
DDR 1	SAMSUNG	K3QF2F20EM-FGCE	2G LPDDR3 1600 256M*32*2 CS
DDR 2	ELPIDA	EDFA164A2PF-GD-F	2G LPDDR3 1600 128*32*4 FBGA-256
DDR 3	HYNIX	H9CKNNNBKTMRPR-N UH	2GB LPDDR3 256M*32*2 1.8V FBGA-256
DDR 4	HYNIX	H9CKNNNCPTMRPR-N UH	4GB LPDDR3 256M*32*4 1.8V FBGA-256
EMMC 1	HYNIX	H26M78103CCR	64 GB
EMMC 2	SAMSUNG	KLMBG4WEBD-B031	32 GB
EMMC 3	Kingston	32G-S100-WB	32 GB
EMMC 4	Kingston	16G-S100-A08	16 GB
EMMC 5	SAMSUNG	KL MAG2GEND-B031	16 GB
LCD Panel	Tianma	TL079QDXP01-00	7.85"
Camera 1	Chicony	CBAE82320003872LH	--
Camera 2	Chicony	CBFE55720003870LH	--
WLAN / BT Module	BROADCOM	BCM4339	
GPS Module	BROADCOM	BCM47531	
Main Board	ASUS	Z580CA_MB_JP	
Touch pen	ASUS AC Touch pen	PAD-22 Z STYLUS	
ZEN CLUTCH	ASUS	NA	

2. The EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11n (20MHz)	1TX

3. There're 2 configurations for the EUT listed as below.

Sample A: Tablet + CPU 2 + DDR 4 + EMMC 1 + Camera 1 & 2

Sample B: Tablet + CPU 1 + DDR 2 + EMMC 3 + Camera 1 & 2 + ZEN CLUTCH

4. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

WLAN 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Sample A
B	√	√	√	-	Sample B

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
B			11			
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11g	1 to 11	11	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11g	1 to 11	11	OFDM	BPSK	6.0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Anson Lin
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Anson Lin
PLC	25deg. C, 65%RH	120Vac, 60Hz	Toby Tian
APCM	25deg. C, 65%RH	3.8Vdc	Luke Chen

3.3 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Earphone	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

NOTE: 1. All power cords of the above support units are non shielded (1.8m).

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

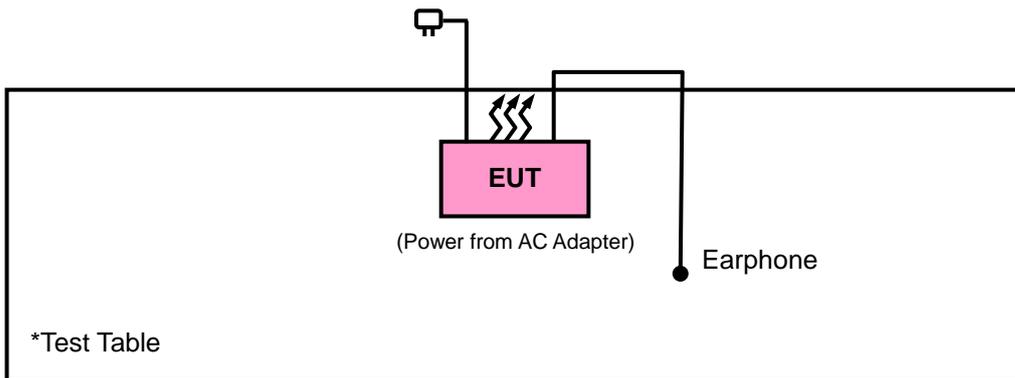



A D T


3.4 DUTY CYCLE TEST SIGNAL

2.4 GHz:

802.11b: Duty cycle of test signal is 100%, duty factor is not required.

802.11g: Duty cycle = $1.38/1.70 = 0.812$, Duty factor = $10 \cdot \log(1/0.812) = 0.91$

802.11n (20MHz): Duty cycle = $1.30/1.605 = 0.810$, Duty factor = $10 \cdot \log(1/0.810) = 0.92$

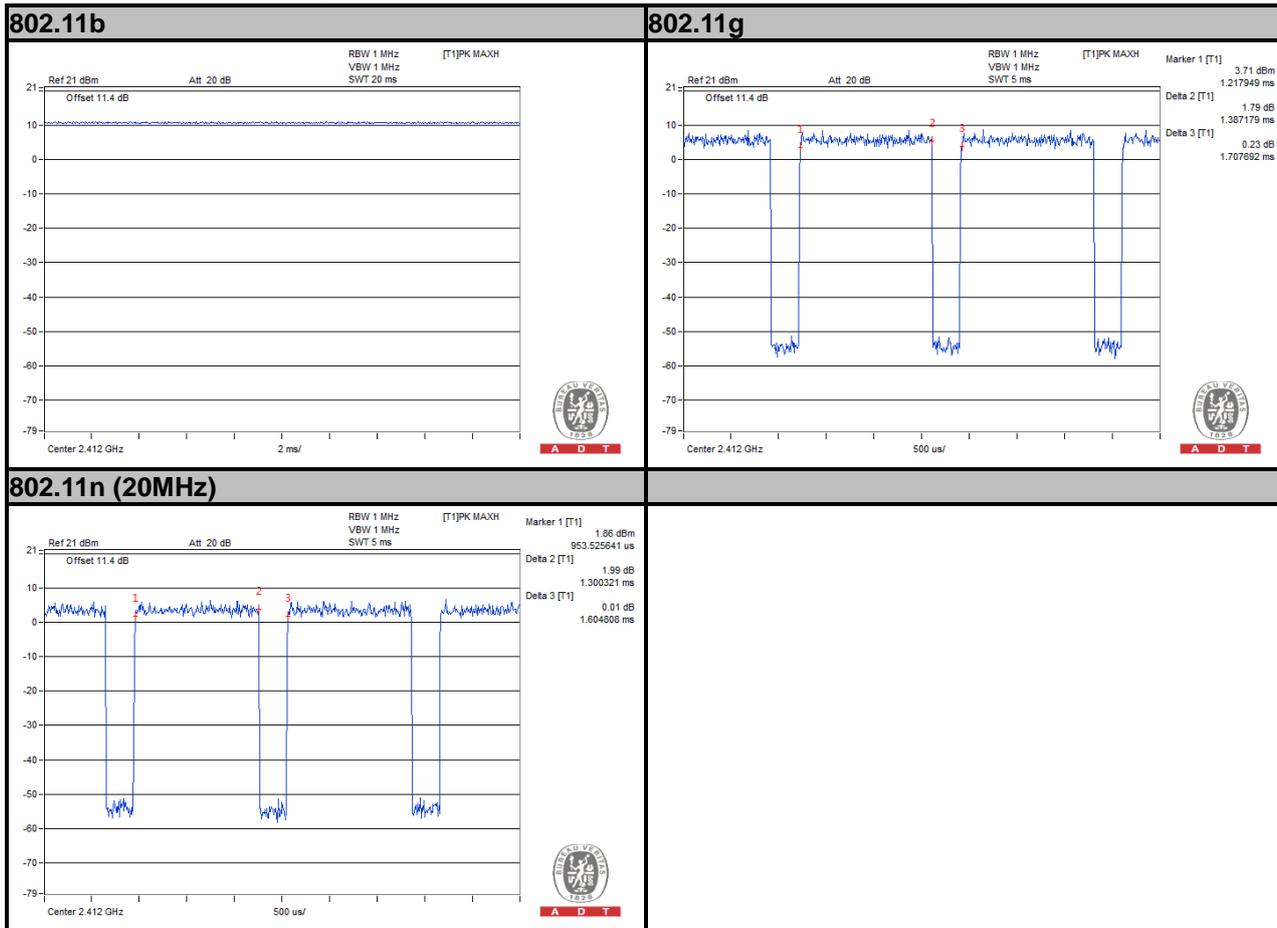



3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r02

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver Agilent	N9038A	MY51210203	Jan.21, 2015	Jan.21, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 10, 2014	Dec. 09, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Feb. 04, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Feb. 09, 2015	Feb. 09, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Feb. 04, 2015	Feb. 04, 2016
Loop Antenna	EM-6879	269	Aug.13, 2014	Aug.12, 2015
Preamplifier EMCI	EMC 012645	980115	Dec. 12, 2014	Dec. 11, 2015
Preamplifier EMCI	EMC 184045	980116	Jan. 09, 2015	Jan. 08, 2016
Preamplifier EMCI	EMC 330H	980112	Dec. 27, 2014	Dec. 26, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 18, 2014	Oct. 17, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 18, 2014	Oct. 17, 2015
RF signal cable Worken	RG-213	NA	Nov. 07, 2014	Nov. 06, 2015
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Bluetooth Tester	CBT	100980	Apr. 27, 2015	Apr. 26, 2016
Power Meter	ML2495A	1232002	Sep. 17, 2014	Sep. 16, 2015
Power Sensor	MA2411B	1207325	Sep. 17, 2014	Sep. 16, 2015

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. The test was performed in HwaYa Chamber 10.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 5. The FCC Site Registration No. is 690701.
 6. The IC Site Registration No. is IC 7450F-10.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

<Frequency Range 30MHz ~ 1GHz>

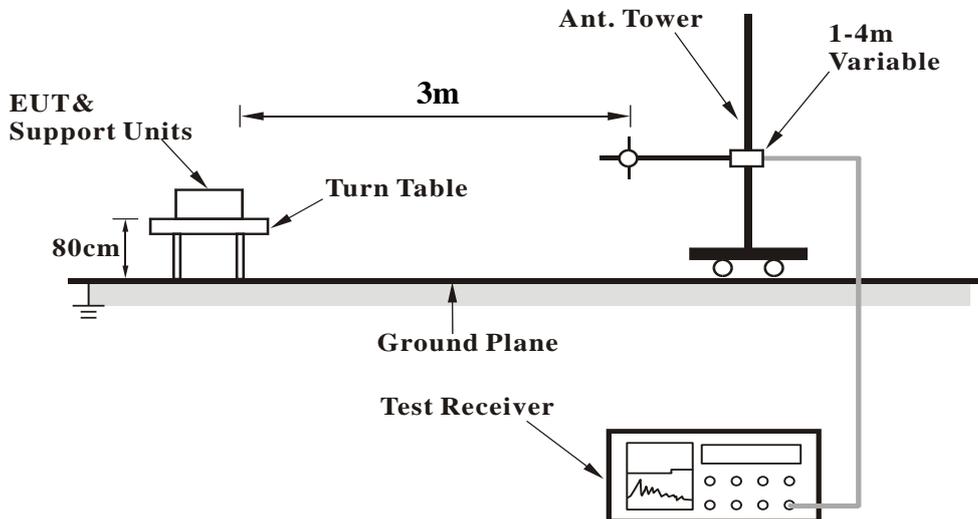

<Frequency Range above 1GHz>

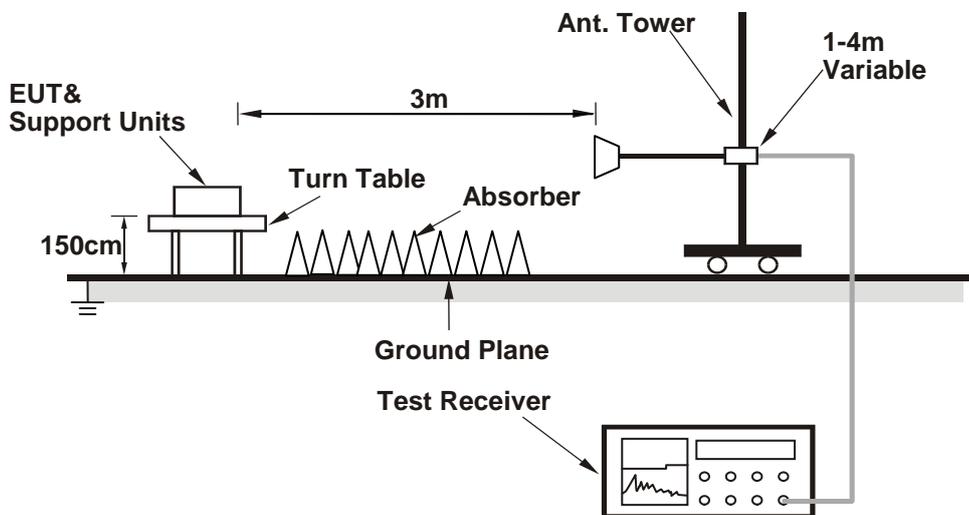

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.



A D T

4.1.7 TEST RESULTS

ABOVE 1GHz WORST-CASE DATA

Mode A

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2388	42.43	48.94	54	-11.57	26.91	4.08	37.5	178	146	Average
2388	57.6	64.11	74	-16.4	26.91	4.08	37.5	178	146	Peak
2412	103.85	110.32			26.96	4.09	37.52	178	146	Average
2412	107.64	114.11			26.96	4.09	37.52	178	146	Peak
2500	38.71	44.6	54	-15.29	27.2	4.16	37.25	178	146	Average
2500	57.01	62.9	74	-16.99	27.2	4.16	37.25	178	146	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2344	39.59	46.27	54	-14.41	26.77	4.04	37.49	198	98	Average
2344	56.25	62.93	74	-17.75	26.77	4.04	37.49	198	98	Peak
2412	100.21	106.68			26.96	4.09	37.52	198	98	Average
2412	104.06	110.53			26.96	4.09	37.52	198	98	Peak
2490	38.08	44.04	54	-15.92	27.2	4.16	37.32	198	98	Average
2490	57.56	63.52	74	-16.44	27.2	4.16	37.32	198	98	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2412MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	35.66	42.19	54	-18.34	26.91	4.08	37.52	158	145	Average
2390	56.88	63.41	74	-17.12	26.91	4.08	37.52	158	145	Peak
2437	103.97	110.25			27.06	4.12	37.46	158	145	Average
2437	107.66	113.94			27.06	4.12	37.46	158	145	Peak
2496	40.35	46.24	54	-13.65	27.2	4.16	37.25	158	145	Average
2496	57.61	63.5	74	-16.39	27.2	4.16	37.25	158	145	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2352	34.88	41.51	54	-19.12	26.81	4.05	37.49	193	96	Average
2352	56.44	63.07	74	-17.56	26.81	4.05	37.49	193	96	Peak
2437	100.56	106.84			27.06	4.12	37.46	193	96	Average
2437	104.29	110.57			27.06	4.12	37.46	193	96	Peak
2484	37.99	44.01	54	-16.01	27.15	4.15	37.32	193	96	Average
2484	57.45	63.47	74	-16.55	27.15	4.15	37.32	193	96	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2437MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2364	34.83	41.44	54	-19.17	26.81	4.07	37.49	111	140	Average
2364	56.61	63.22	74	-17.39	26.81	4.07	37.49	111	140	Peak
2462	103.94	110.1			27.1	4.13	37.39	111	140	Average
2462	107.7	113.86			27.1	4.13	37.39	111	140	Peak
2486	46.55	52.57	54	-7.45	27.15	4.15	37.32	111	140	Average
2486	59.78	65.8	74	-14.22	27.15	4.15	37.32	111	140	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2346	34.18	40.85	54	-19.82	26.77	4.05	37.49	160	96	Average
2346	56.63	63.3	74	-17.37	26.77	4.05	37.49	160	96	Peak
2462	100.39	106.55			27.1	4.13	37.39	160	96	Average
2462	104.23	110.39			27.1	4.13	37.39	160	96	Peak
2484	42.89	48.91	54	-11.11	27.15	4.15	37.32	160	96	Average
2484	57.35	63.37	74	-16.65	27.15	4.15	37.32	160	96	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2462MHz: Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.28	47.81	54	-12.72	26.91	4.08	37.52	253	100	Average
2390	60.11	66.64	74	-13.89	26.91	4.08	37.52	253	100	Peak
2412	93.78	100.25			26.96	4.09	37.52	253	100	Average
2412	103.76	110.23			26.96	4.09	37.52	253	100	Peak
2490	38.09	44.05	54	-15.91	27.2	4.16	37.32	253	100	Average
2490	57.75	63.71	74	-16.25	27.2	4.16	37.32	253	100	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.28	47.81	54	-12.72	26.91	4.08	37.52	253	100	Average
2390	60.11	66.64	74	-13.89	26.91	4.08	37.52	253	100	Peak
2412	93.78	100.25			26.96	4.09	37.52	253	100	Average
2412	103.76	110.23			26.96	4.09	37.52	253	100	Peak
2490	38.09	44.05	54	-15.91	27.2	4.16	37.32	253	100	Average
2490	57.75	63.71	74	-16.25	27.2	4.16	37.32	253	100	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2412MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2308	37.24	44.01	54	-16.76	26.67	4.01	37.45	100	140	Average
2308	56.34	63.11	74	-17.66	26.67	4.01	37.45	100	140	Peak
2437	96.51	102.79			27.06	4.12	37.46	100	140	Average
2437	106.6	112.88			27.06	4.12	37.46	100	140	Peak
2484	42.41	48.43	54	-11.59	27.15	4.15	37.32	100	140	Average
2484	58.98	65	74	-15.02	27.15	4.15	37.32	100	140	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2330	36.13	42.84	54	-17.87	26.72	4.04	37.47	229	89	Average
2330	57.16	63.87	74	-16.84	26.72	4.04	37.47	229	89	Peak
2437	93.95	100.23			27.06	4.12	37.46	229	89	Average
2437	104.28	110.56			27.06	4.12	37.46	229	89	Peak
2488	40.67	46.63	54	-13.33	27.2	4.16	37.32	229	89	Average
2488	58.79	64.75	74	-15.21	27.2	4.16	37.32	229	89	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2437MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2378	34.31	40.88	54	-19.69	26.86	4.07	37.5	173	135	Average
2378	56.96	63.53	74	-17.04	26.86	4.07	37.5	173	135	Peak
2462	97.06	103.22			27.1	4.13	37.39	173	135	Average
2462	106.96	113.12			27.1	4.13	37.39	173	135	Peak
2486	42.22	48.24	54	-11.78	27.15	4.15	37.32	173	135	Average
2486	67.92	73.94	74	-6.08	27.15	4.15	37.32	173	135	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2348	34.3	40.97	54	-19.7	26.77	4.05	37.49	205	97	Average
2348	57	63.67	74	-17	26.77	4.05	37.49	205	97	Peak
2462	93.94	100.1			27.1	4.13	37.39	205	97	Average
2462	104.01	110.17			27.1	4.13	37.39	205	97	Peak
2486	40.19	46.21	54	-13.81	27.15	4.15	37.32	205	97	Average
2486	64.78	70.8	74	-9.22	27.15	4.15	37.32	205	97	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2462MHz: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2384	41.54	48.1	54	-12.46	26.86	4.08	37.5	236	92	Average
2384	59.11	65.67	74	-14.89	26.86	4.08	37.5	236	92	Peak
2412	93.25	99.72			26.96	4.09	37.52	236	92	Average
2412	103.94	110.41			26.96	4.09	37.52	236	92	Peak
2490	36.79	42.75	54	-17.21	27.2	4.16	37.32	236	92	Average
2490	58.82	64.78	74	-15.18	27.2	4.16	37.32	236	92	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2384	41.54	48.1	54	-12.46	26.86	4.08	37.5	236	92	Average
2384	59.11	65.67	74	-14.89	26.86	4.08	37.5	236	92	Peak
2412	93.25	99.72			26.96	4.09	37.52	236	92	Average
2412	103.94	110.41			26.96	4.09	37.52	236	92	Peak
2490	36.79	42.75	54	-17.21	27.2	4.16	37.32	236	92	Average
2490	58.82	64.78	74	-15.18	27.2	4.16	37.32	236	92	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2412MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2370	35.88	42.45	54	-18.12	26.86	4.07	37.5	142	136	Average
2370	56.55	63.12	74	-17.45	26.86	4.07	37.5	142	136	Peak
2437	97.2	103.48			27.06	4.12	37.46	142	136	Average
2437	106.88	113.16			27.06	4.12	37.46	142	136	Peak
2484	41.65	47.67	54	-12.35	27.15	4.15	37.32	142	136	Average
2484	57.85	63.87	74	-16.15	27.15	4.15	37.32	142	136	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2382	35.17	41.73	54	-18.83	26.86	4.08	37.5	251	92	Average
2382	57.54	64.1	74	-16.46	26.86	4.08	37.5	251	92	Peak
2437	92.89	99.17			27.06	4.12	37.46	251	92	Average
2437	103.06	109.34			27.06	4.12	37.46	251	92	Peak
2486	38.64	44.66	54	-15.36	27.15	4.15	37.32	251	92	Average
2486	57.02	63.04	74	-16.98	27.15	4.15	37.32	251	92	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2437MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2384	34.63	41.19	54	-19.37	26.86	4.08	37.5	171	140	Average
2384	56.91	63.47	74	-17.09	26.86	4.08	37.5	171	140	Peak
2462	96.7	102.86			27.1	4.13	37.39	171	140	Average
2462	106.81	112.97			27.1	4.13	37.39	171	140	Peak
2490	42.62	48.58	54	-11.38	27.2	4.16	37.32	171	140	Average
2490	60.22	66.18	74	-13.78	27.2	4.16	37.32	171	140	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2386	34.41	40.92	54	-19.59	26.91	4.08	37.5	210	87	Average
2386	56.48	62.99	74	-17.52	26.91	4.08	37.5	210	87	Peak
2462	94.01	100.17			27.1	4.13	37.39	210	87	Average
2462	104.14	110.3			27.1	4.13	37.39	210	87	Peak
2488	40.15	46.11	54	-13.85	27.2	4.16	37.32	210	87	Average
2488	59.26	65.22	74	-14.74	27.2	4.16	37.32	210	87	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2462MHz: Fundamental frequency.




A D T

Mode B


802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 GHz ~ 25 GHz
INPUT POWER	110Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

HORIZONTAL

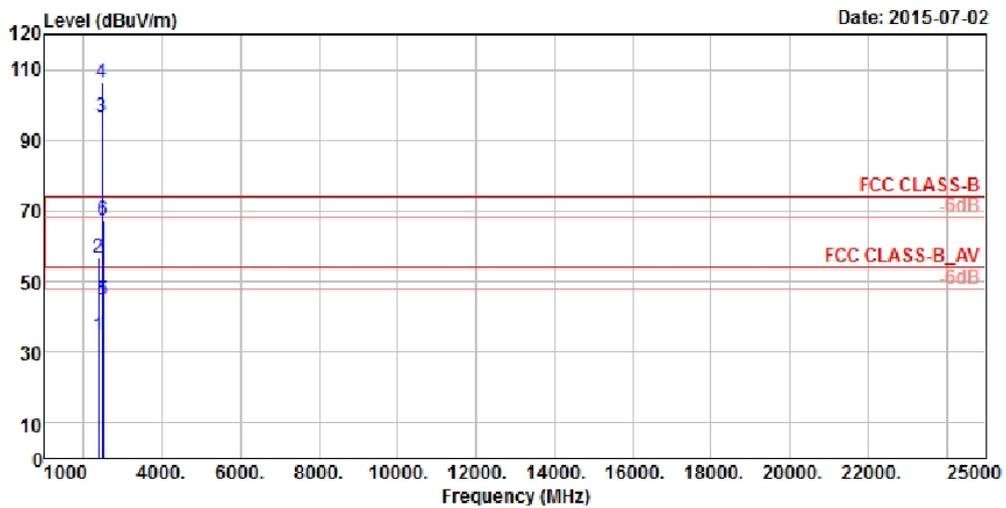

VERTICAL

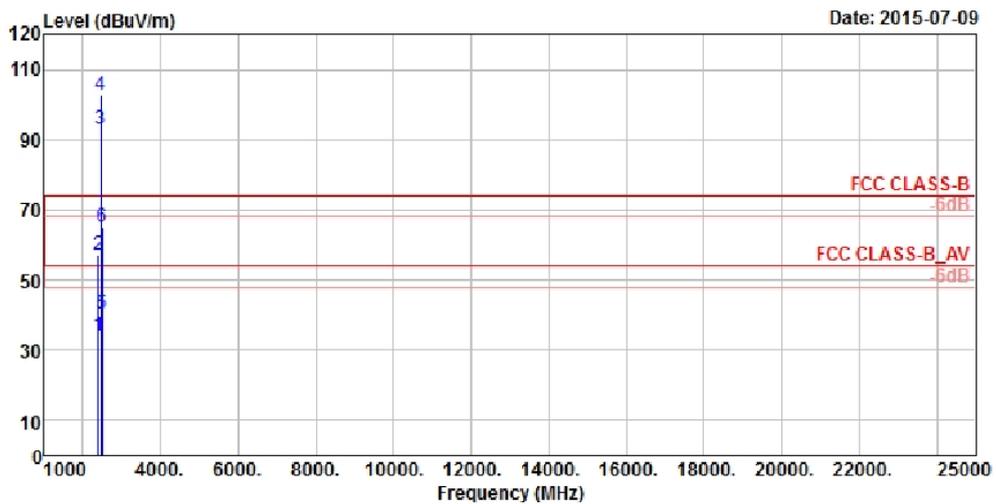



A D T

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2374	34.57	41.14	54	-19.43	26.86	4.07	37.5	139	138	Average
2374	56.6	63.17	74	-17.4	26.86	4.07	37.5	139	138	Peak
2462	96.56	102.72			27.1	4.13	37.39	139	138	Average
2462	106.45	112.61			27.1	4.13	37.39	139	138	Peak
2488	44.5	50.46	54	-9.5	27.2	4.16	37.32	139	138	Average
2488	67.42	73.38	74	-6.58	27.2	4.16	37.32	139	138	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2384	34.21	40.77	54	-19.79	26.86	4.08	37.5	184	96	Average
2384	57.1	63.66	74	-16.9	26.86	4.08	37.5	184	96	Peak
2462	92.86	99.02			27.1	4.13	37.39	184	96	Average
2462	102.94	109.1			27.1	4.13	37.39	184	96	Peak
2488	40.16	46.12	54	-13.84	27.2	4.16	37.32	184	96	Average
2488	64.92	70.88	74	-9.08	27.2	4.16	37.32	184	96	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
2. 2462MHz: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA:

Mode A

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
103.44	25.45	46.86	43.5	-18.05	9.43	1.07	31.91	124	28	Peak
182.55	27.48	47.47	43.5	-16.02	10.6	1.22	31.81	134	43	Peak
204.69	26.34	47.16	43.5	-17.16	9.56	1.31	31.69	118	184	Peak
305.6	21.53	38.7	46	-24.47	13.08	1.65	31.9	108	315	Peak
408.5	20.33	34.92	46	-25.67	15.5	1.93	32.02	114	205	Peak
584.2	23.38	34.05	46	-22.62	19.23	2.23	32.13	101	174	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
31.89	30.92	49.14	40	-9.08	12.3	0.59	31.11	120	148	Peak
41.34	31.32	48.16	40	-8.68	13.56	0.65	31.05	133	121	Peak
55.65	28.65	46.78	40	-11.35	12.45	0.75	31.33	138	45	Peak
384.7	18.53	33.68	46	-27.47	14.98	1.87	32	113	304	Peak
491.1	21.27	33.81	46	-24.73	17.14	2.08	31.76	116	146	Peak
635.3	24.8	34.55	46	-21.2	20.03	2.33	32.11	118	175	Peak

REMARKS: Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value



A D T

Mode B

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Anson Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
112.62	20.04	40.52	43.5	-23.46	10.27	1.11	31.86	128	32	Peak
165	22.09	40.53	43.5	-21.41	12.25	1.12	31.81	120	43	Peak
187.95	24.32	44.58	43.5	-19.18	10.19	1.25	31.7	132	68	Peak
617.1	22.15	32.19	46	-23.85	19.81	2.29	32.14	110	299	Peak
743.1	23.74	31.22	46	-22.26	21.42	2.53	31.43	104	142	Peak
823.6	25.02	31.48	46	-20.98	22.53	2.65	31.64	126	99	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
33.51	25.48	43.33	40	-14.52	12.63	0.6	31.08	119	94	Peak
56.73	28.29	46.62	40	-11.71	12.25	0.77	31.35	124	200	Peak
71.31	24.39	45.01	40	-15.61	10.29	0.85	31.76	113	344	Peak
566.7	20.92	31.95	46	-25.08	18.84	2.2	32.07	127	116	Peak
665.4	22	31.08	46	-24	20.4	2.39	31.87	127	181	Peak
766.2	24.17	31.22	46	-21.83	21.75	2.56	31.36	133	18	Peak

REMARKS: Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Apr. 27, 2015	Apr. 26, 2016
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 26, 2014	Dec. 25, 2015
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 30, 2014	Dec. 29, 2015
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 10, 2014	Jul. 09, 2015
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.



A D T

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

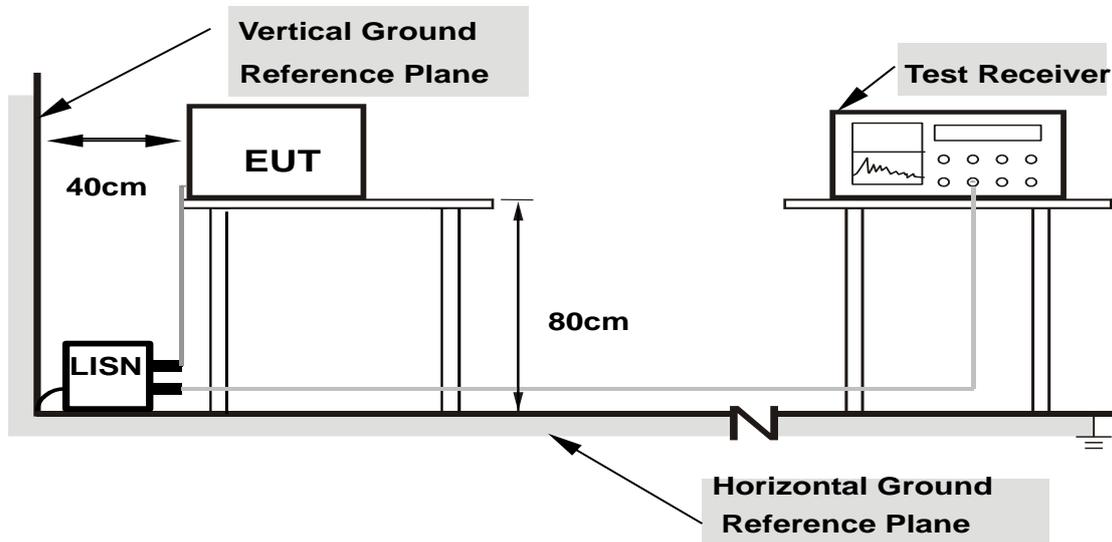

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as section 4.1.6.

4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA :


Mode A

PHASE	Line 1	6dB BANDWIDTH	9kHz
--------------	--------	----------------------	------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.16	44.31	29.19	44.47	29.35	66.00	56.00	-21.53	-26.65
2	0.19297	0.17	39.77	26.71	39.94	26.88	63.91	53.91	-23.97	-27.03
3	0.43906	0.18	34.24	24.88	34.42	25.06	57.08	47.08	-22.66	-22.02
4	0.66563	0.20	43.84	36.07	44.04	36.27	56.00	46.00	-11.96	-9.73
5	0.76328	0.21	46.62	38.99	46.83	39.20	56.00	46.00	-9.17	-6.80
6	13.33203	0.50	41.74	32.87	42.24	33.37	60.00	50.00	-17.76	-16.63

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

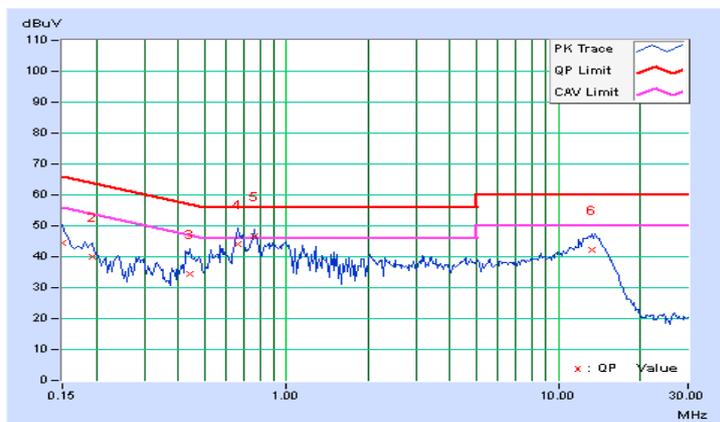




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
--------------	--------	----------------------	------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.17	42.15	26.13	42.32	26.30	66.00	56.00	-23.68	-29.70
2	0.19297	0.18	38.60	23.45	38.78	23.63	63.91	53.91	-25.13	-30.28
3	0.57188	0.21	35.55	28.29	35.76	28.50	56.00	46.00	-20.24	-17.50
4	0.66953	0.22	41.85	34.22	42.07	34.44	56.00	46.00	-13.93	-11.56
5	0.76328	0.22	41.43	33.80	41.65	34.02	56.00	46.00	-14.35	-11.98
6	13.40625	0.61	41.56	32.25	42.17	32.86	60.00	50.00	-17.83	-17.14

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

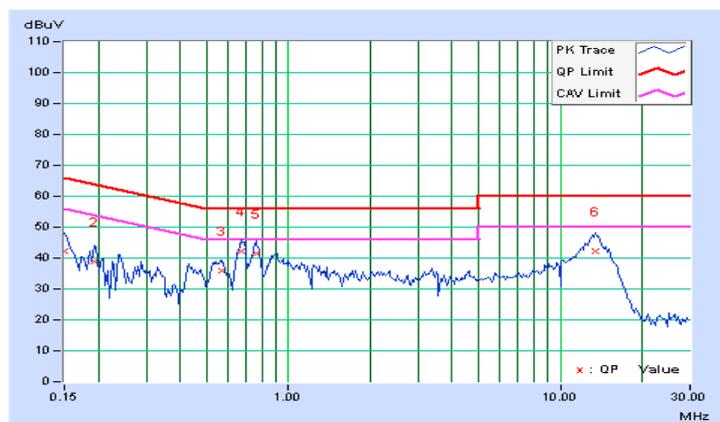



A D T


Mode B

PHASE	Line 1	6dB BANDWIDTH	9kHz
--------------	--------	----------------------	------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.16	43.30	27.39	43.46	27.55	66.00	56.00	-22.54	-28.45
2	0.43125	0.18	37.99	30.07	38.17	30.25	57.23	47.23	-19.06	-16.98
3	0.66953	0.20	43.83	36.26	44.03	36.46	56.00	46.00	-11.97	-9.54
4	0.77109	0.21	41.47	34.52	41.68	34.73	56.00	46.00	-14.32	-11.27
5	0.98984	0.23	37.13	28.05	37.36	28.28	56.00	46.00	-18.64	-17.72
6	12.59375	0.49	40.24	31.89	40.73	32.38	60.00	50.00	-19.27	-17.62

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

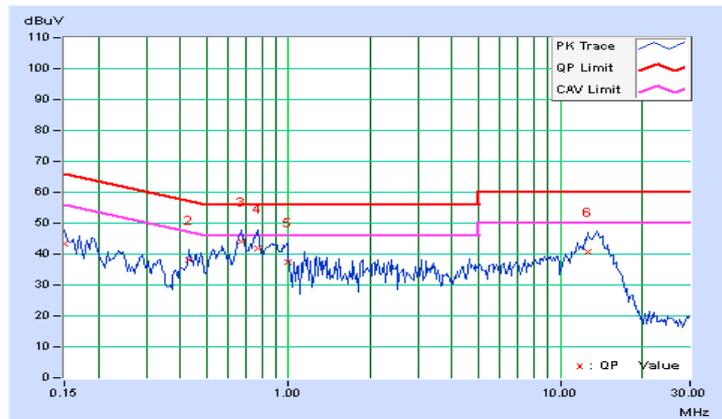




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
--------------	--------	----------------------	------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.17	42.74	26.51	42.91	26.68	66.00	56.00	-23.09	-29.32
2	0.18906	0.18	39.72	24.86	39.90	25.04	64.08	54.08	-24.18	-29.04
3	0.66953	0.22	39.42	32.16	39.64	32.38	56.00	46.00	-16.36	-13.62
4	0.75156	0.22	38.61	30.40	38.83	30.62	56.00	46.00	-17.17	-15.38
5	0.88438	0.23	34.37	26.39	34.60	26.62	56.00	46.00	-21.40	-19.38
6	13.28906	0.61	39.08	29.64	39.69	30.25	60.00	50.00	-20.31	-19.75

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

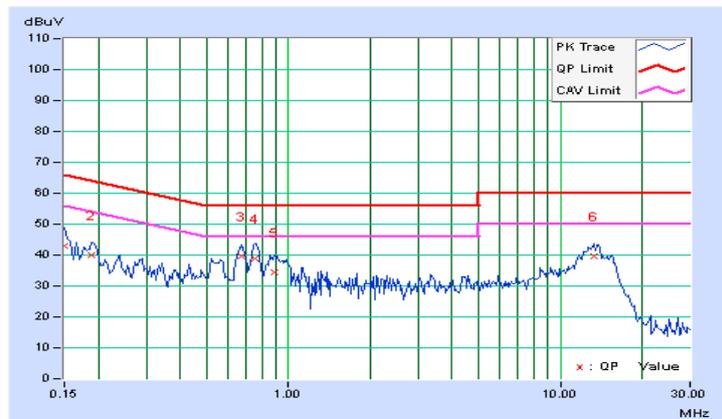


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP

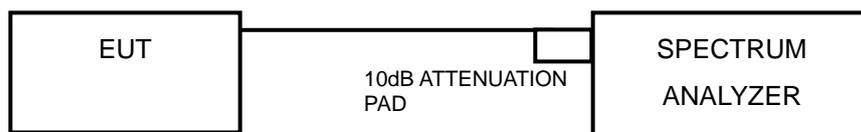

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	8.09	0.5	PASS
6	2437	8.80	0.5	PASS
11	2462	8.10	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.41	0.5	PASS
6	2437	16.41	0.5	PASS
11	2462	16.40	0.5	PASS

802.11n (20MHz)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.64	0.5	PASS
6	2437	17.64	0.5	PASS
11	2462	17.63	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b

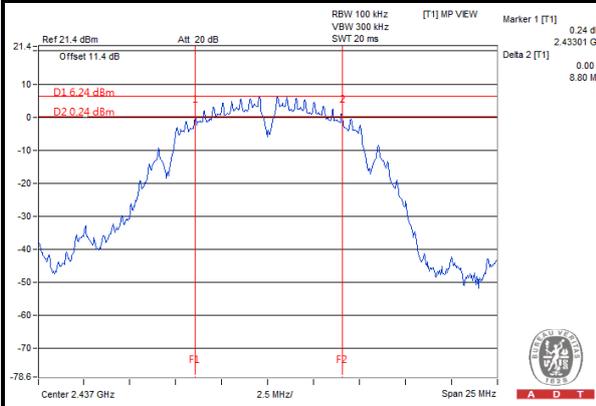

802.11g

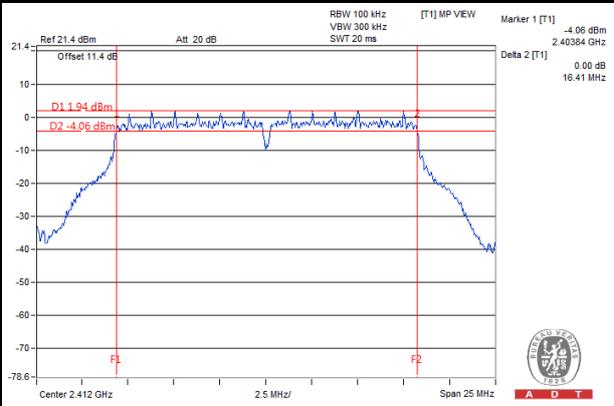

802.11n (20MHz)

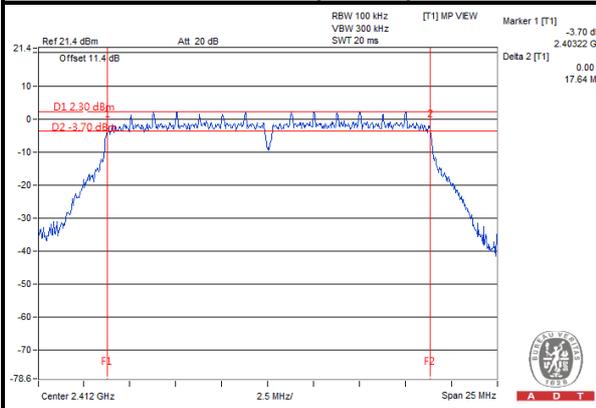


4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 TEST SETUP

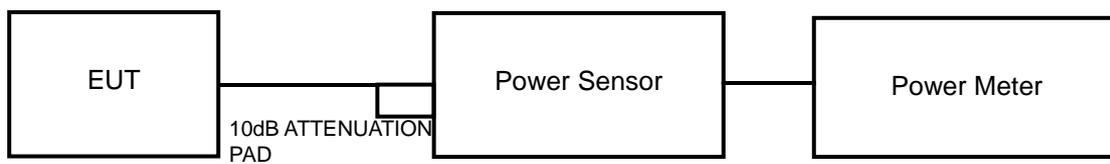

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as section 4.3.6.



A D T

4.4.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS / FAIL
1	2412	52.12	17.17	30	PASS
6	2437	54.45	17.36	30	PASS
11	2462	53.95	17.32	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS / FAIL
1	2412	199.99	23.01	30	PASS
6	2437	205.12	23.12	30	PASS
11	2462	202.30	23.06	30	PASS

802.11n (20MHz)


CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS / FAIL
1	2412	199.07	22.99	30	PASS
6	2437	203.24	23.08	30	PASS
11	2462	202.30	23.06	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP

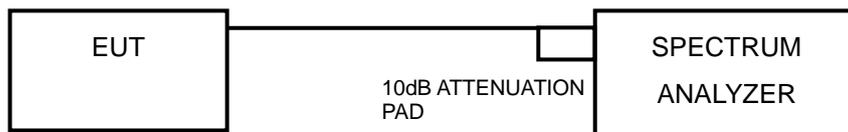

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as section 4.3.6.



A D T

4.5.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PSD (dBm/3kHz)	LIMIT (dBm/3kHz)	PASS / FAIL
1	2412	-8.12	8	PASS
6	2437	-8.46	8	PASS
11	2462	-9.10	8	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PSD (dBm/3kHz)	LIMIT (dBm/3kHz)	PASS / FAIL
1	2412	-14.47	8	PASS
6	2437	-14.18	8	PASS
11	2462	-14.05	8	PASS

802.11n (20MHz)


CHANNEL	FREQUENCY (MHz)	PSD (dBm/3kHz)	LIMIT (dBm/3kHz)	PASS / FAIL
1	2412	-13.67	8	PASS
6	2437	-14.10	8	PASS
11	2462	-13.81	8	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b

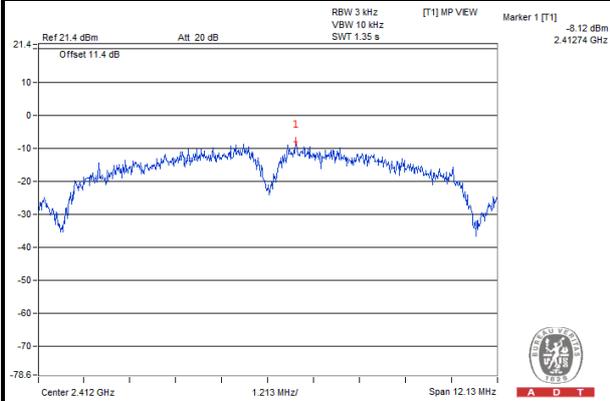

802.11g

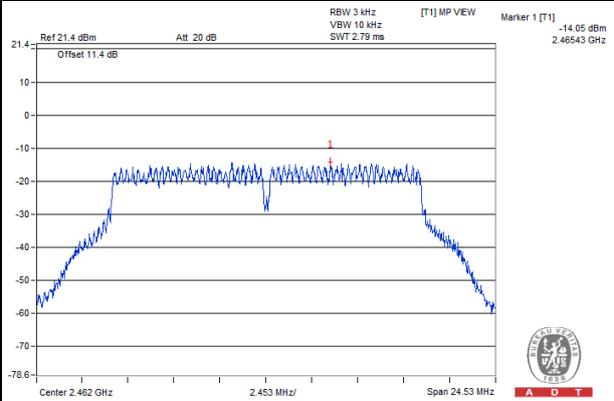

802.11n (20MHz)

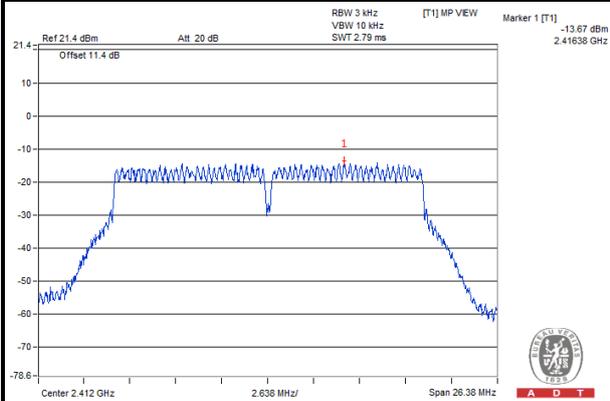


4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

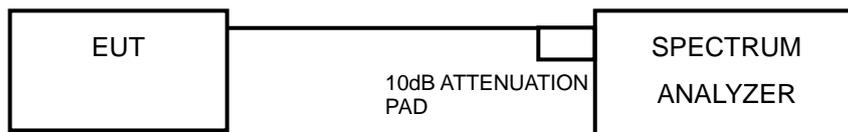

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.


4.6.6 EUT OPERATING CONDITION

Same as section 4.3.6.

4.6.7 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b

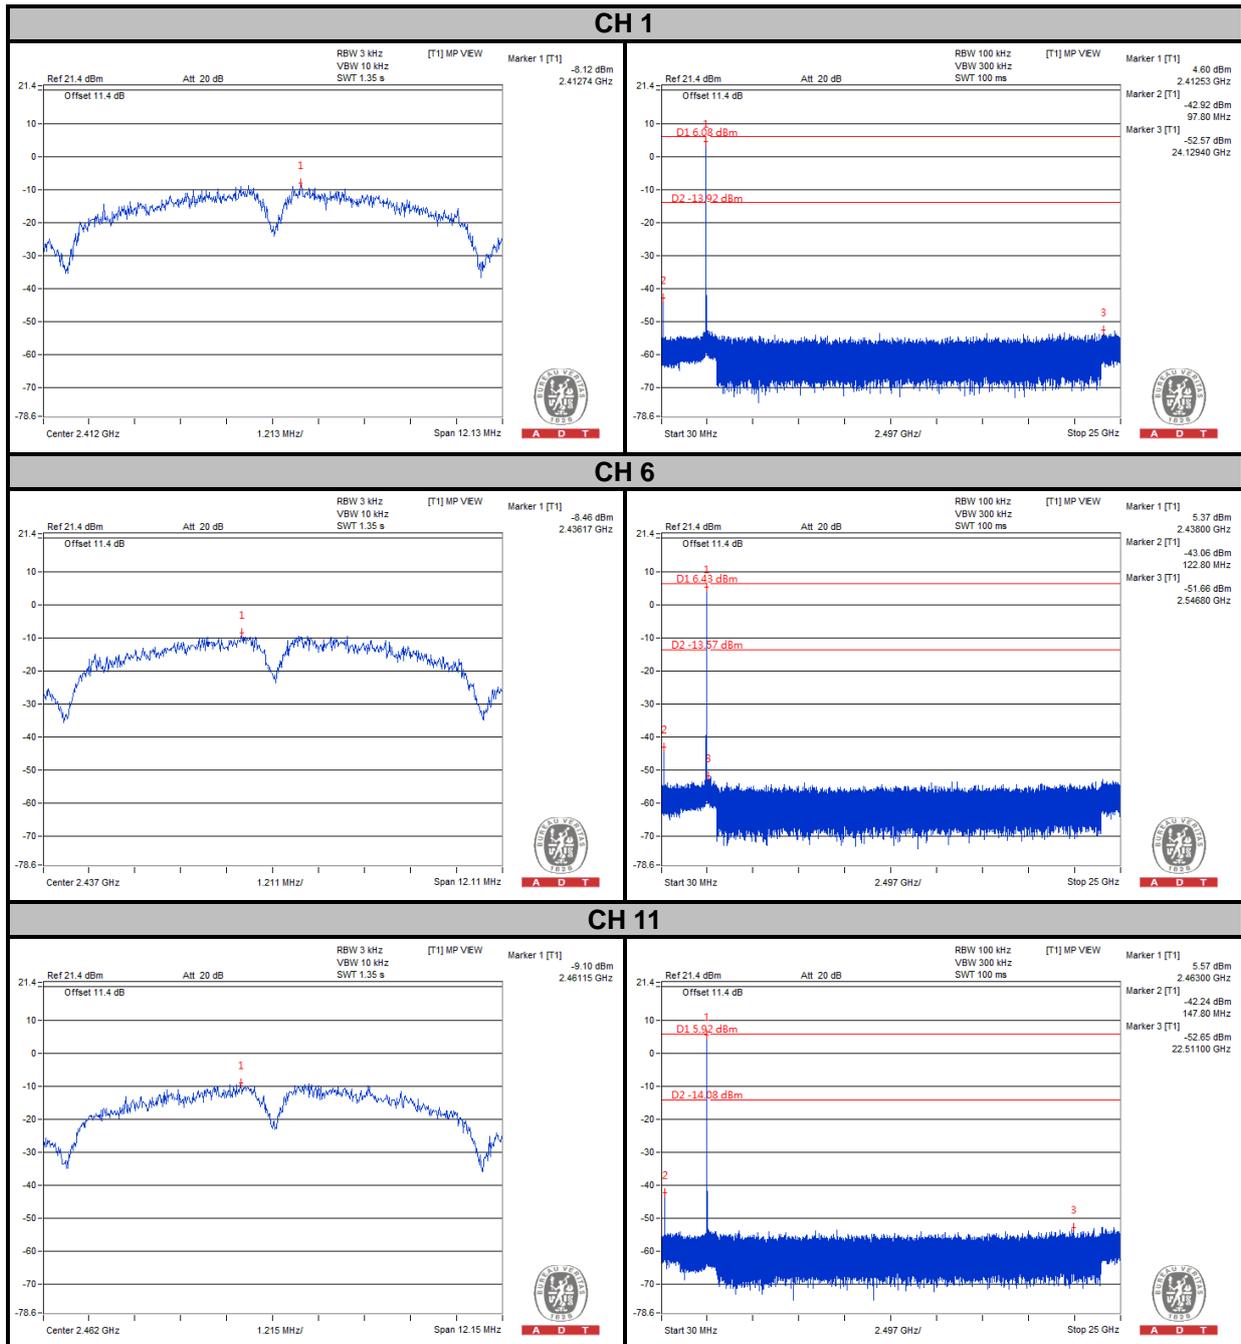




A D T

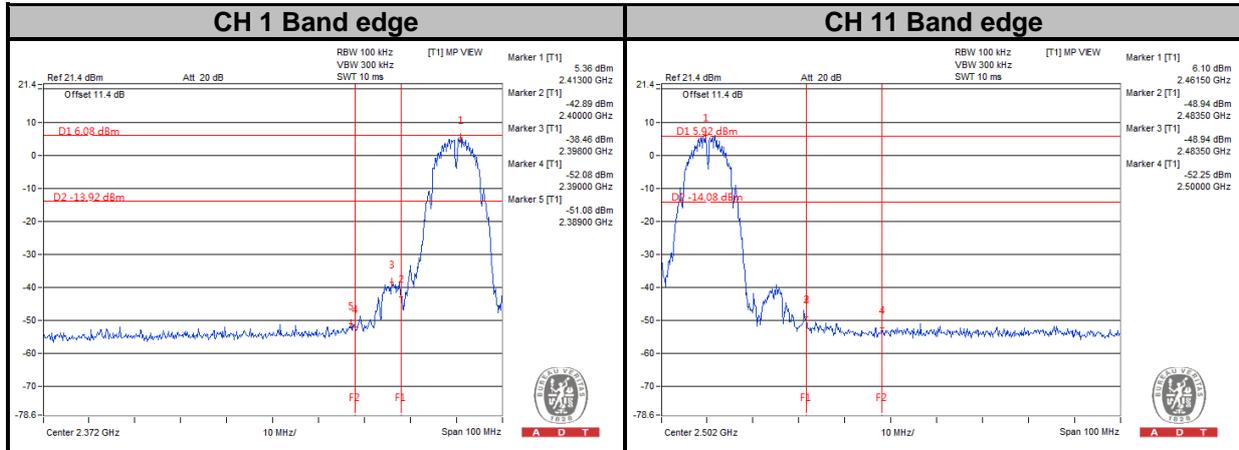




A D T

802.11g

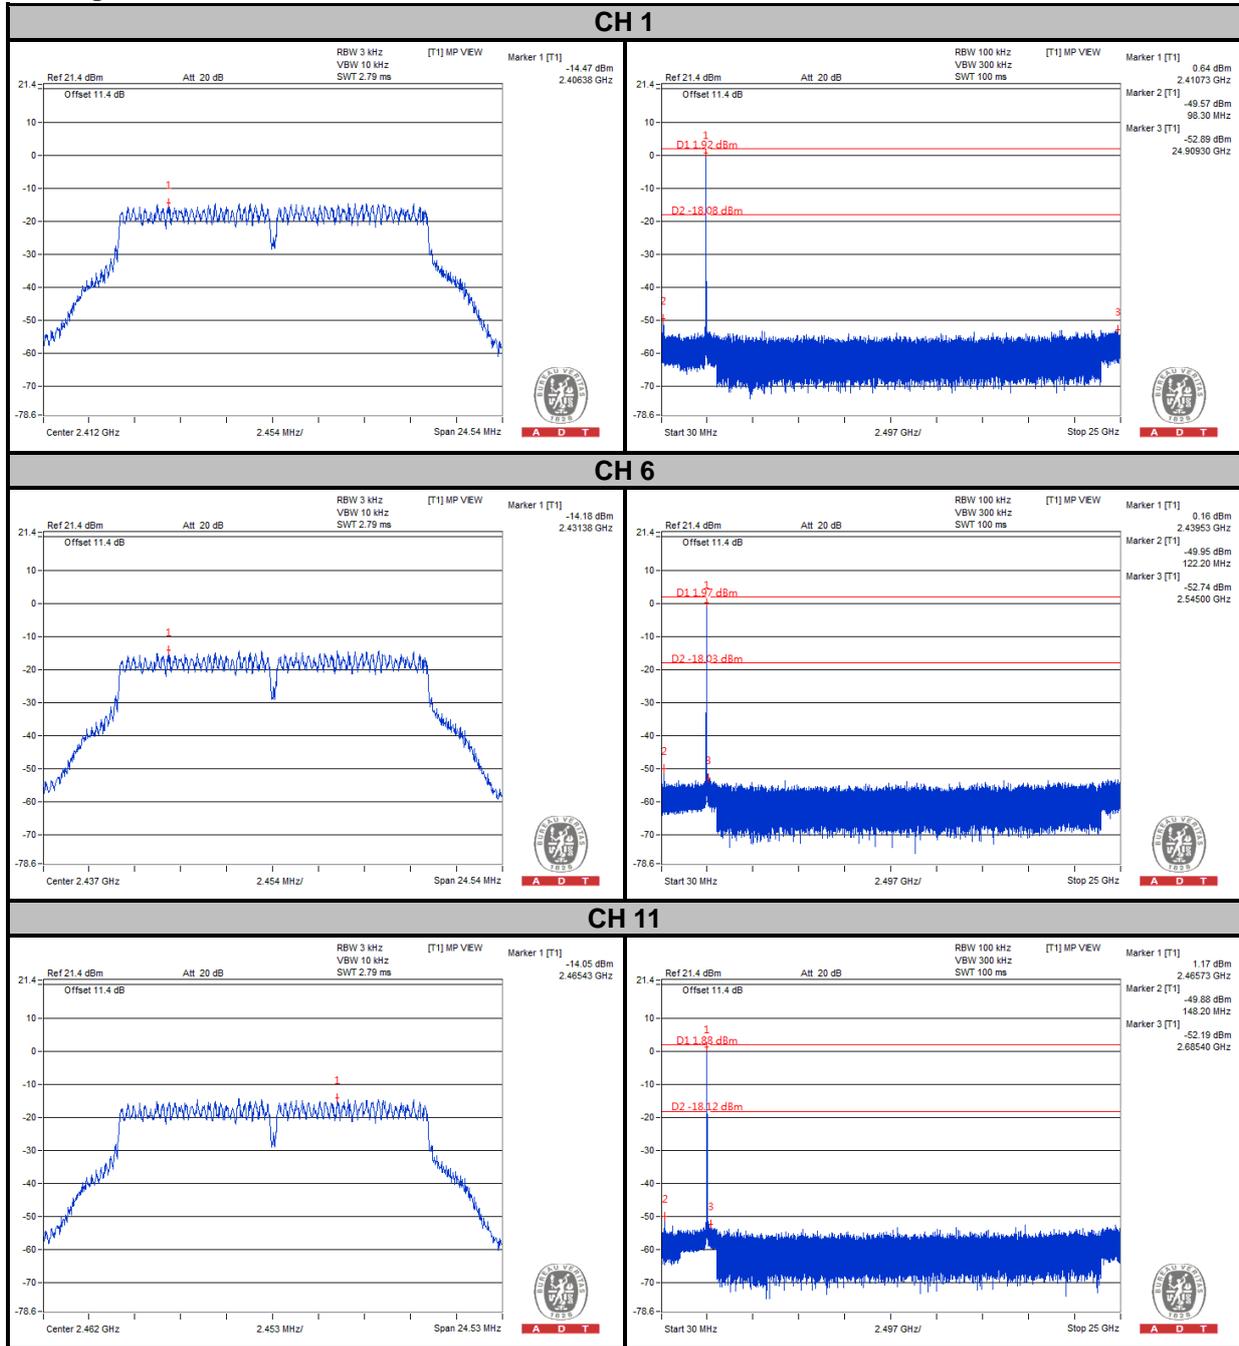



A D T


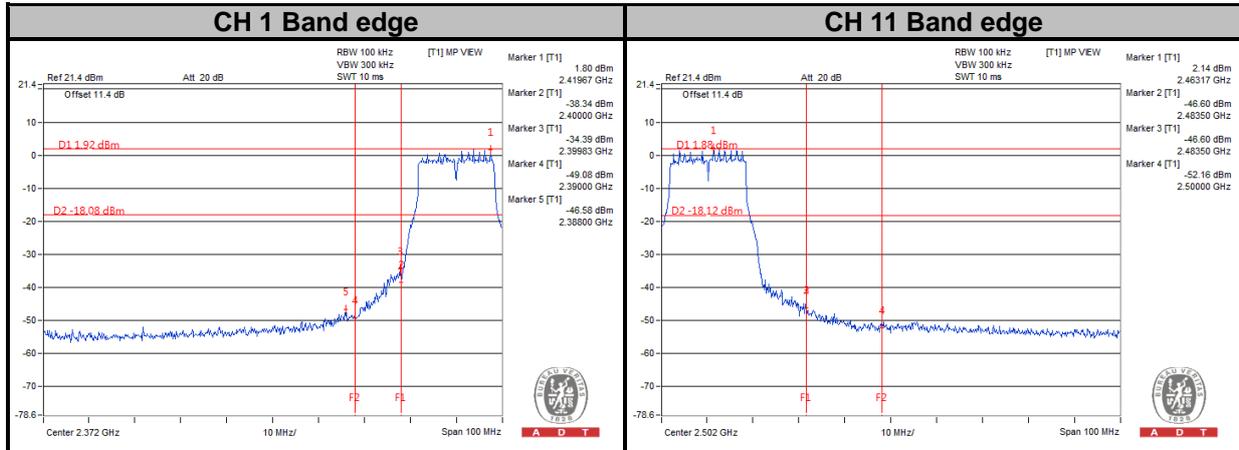






A D T

802.11n (20MHz)



CH 1

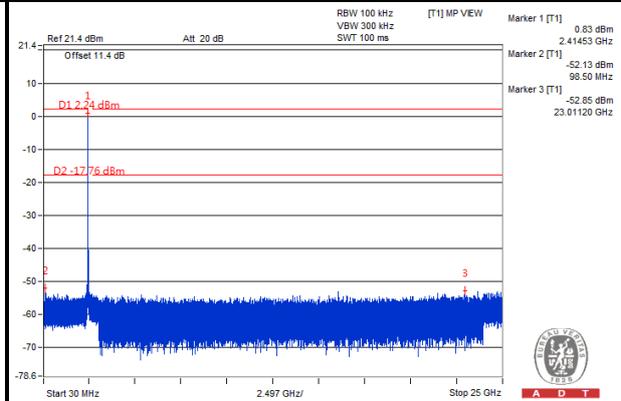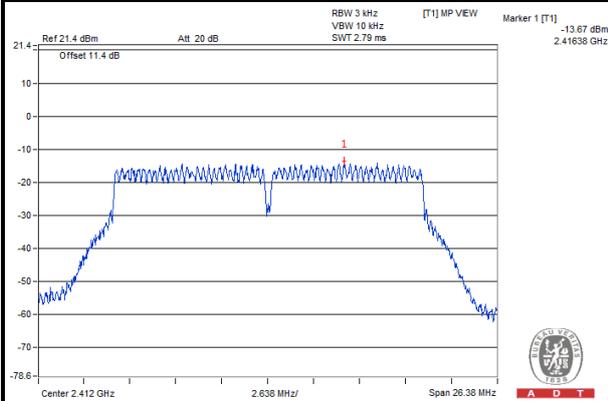

CH 6

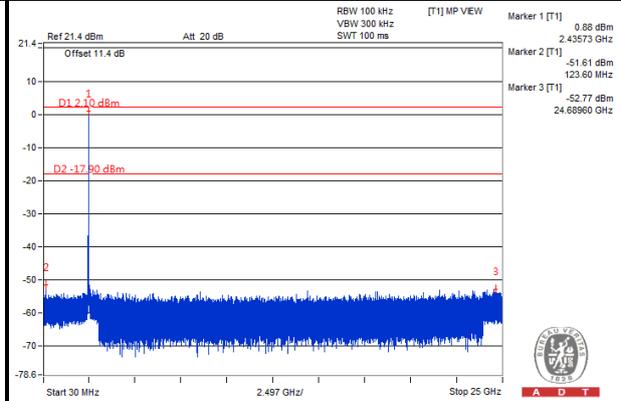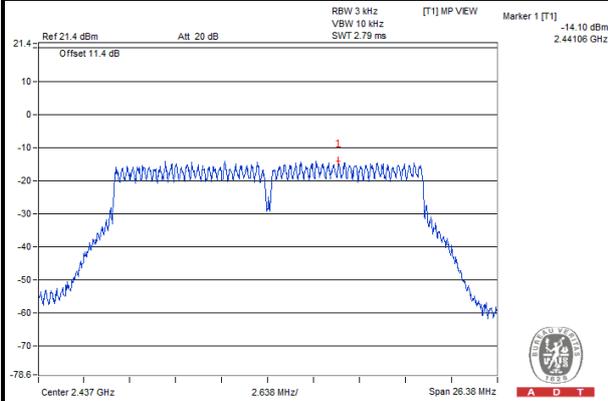


CH 11

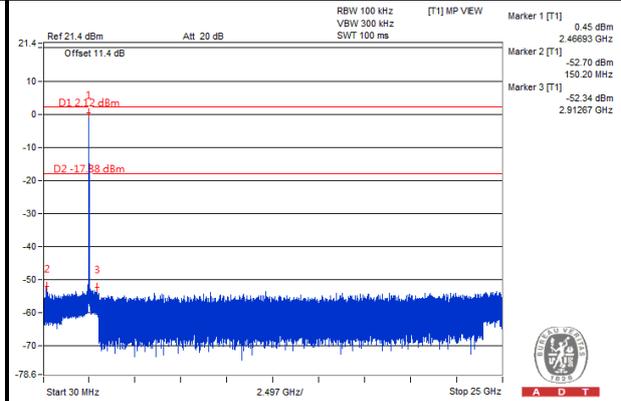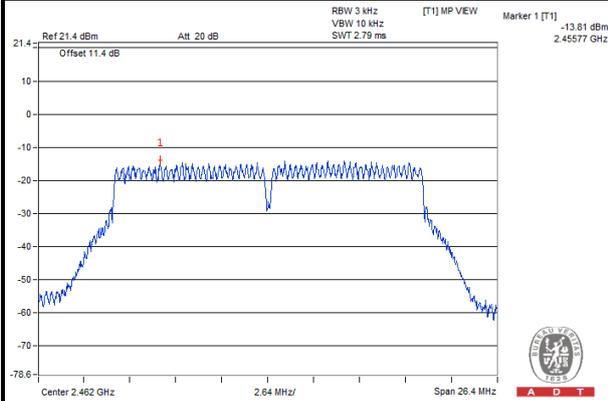



A D T

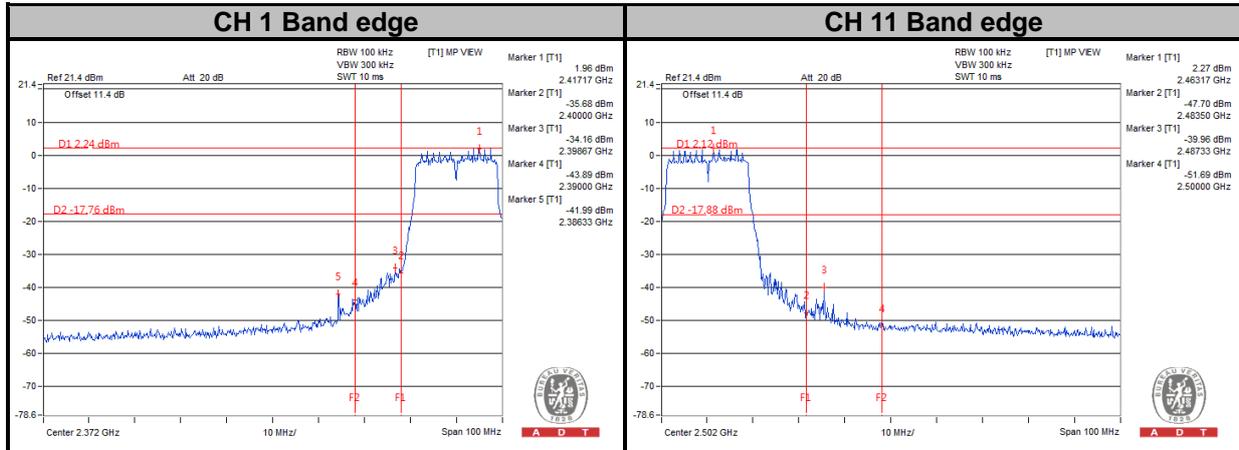



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---