



FCC TEST REPORT

for

Wireless-N Router

MODEL:RT-N10U

Brand: ASUS

Test Report Number:

SZ110524B01-RP

Issued Date: June 18, 2011

Issued for

ASUSTeK COMPUTER INC.

15, Li-Te Rd., Peitou, Taipei 112, Taiwan

Issued by:

Compliance Certification Services Inc.

Linkuo Lab.

No. 81-1, Lane 210, Bade 2nd Rd., Lujhu Township,
Taoyuan County 33841, Taiwan(R.O.C.)

TEL: 886-3-324-0332

FAX: 886-3-324-5235

E-Mail: service@ccsrf.com



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	SZ110524B01-RP	Initial Issue	ALL	Ethan Huang



TABLE OF CONTENTS

1 TEST CERTIFICATION..... 4

2 TEST RESULT SUMMARY..... 5

3 EUT DESCRIPTION 6

4 TEST METHODOLOGY 7

 4.1. DESCRIPTION OF TEST MODES 7

5 SETUP OF EQUIPMENT UNDER TEST..... 8

 5.1. DESCRIPTION OF SUPPORT UNITS..... 8

 5.2. CONFIGURATION OF SYSTEM UNDER TEST 8

6 FACILITIES AND ACCREDITATIONS 9

 6.1. FACILITIES 9

 6.2. ACCREDITATIONS 9

 6.3. MEASUREMENT UNCERTAINTY..... 9

7 FCC PART 15.247 REQUIREMENTS..... 10

 7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT 10

 7.2. SPURIOUS EMISSIONS MEASUREMENT..... 15

 7.3. 6dB BANDWIDTH MEASUREMENT 45

 7.4. PEAK OUTPUT POWER 53

 7.5. BAND EDGES MEASUREMENT:..... 61

 7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT..... 83



1 TEST CERTIFICATION

Product	Wireless-N Router
Model	RT-N10U
Brand	ASUS
Tested	May24~June 6, 2011
Applicant	ASUSTeK COMPUTER INC. 15, Li-Te Rd., Peitou, Taipei 112, Taiwan
Manufacturer	Shenzhen Gongjin Electronics Co., Ltd No 2&3 Buildings, Mingwei Factory Area, Songgang Road West, Songgang SUB-District, Shenzhen, Guangdong, China

APPLICABLE STANDARDS			
Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	<ul style="list-style-type: none"> ● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Ethan Huang
Section Manager
Compliance Certification Service Inc.

Reviewed by:

Aven Zhou
Supervisor of Report Dept.
Compliance Certification Service Inc.



2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	<ul style="list-style-type: none">● Spurious Emissions● Conducted Measurement● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

- Note:
1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
 2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

Product	Wireless-N Router
Trade Name	ASUS
Model Number	RT-N10U
Model Discrepancy	N/A
Serial Number	SZ110524B01-RP
Received Date	May 24, 2011
Power Supply	DC12V supplied by the adapter
Adapter Manufacturer / Model No.	1)Adapter 1: ShenZhen RuiDe Electronics Industrial Co.,Ltd RD1201000-C55-2MG I/P: 100-240Vac, 50/60Hz, 0.6A max O/P: 12Vdc, 1.0A DC Output Cable: Unshielded,1.50m 2)Adapter 2: ShenZhen Gongjin Electronics Co., Ltd S12A02-120A100-P4 I/P: 100-240Vac, 50/60Hz, 0.5A max O/P: 12Vdc, 1.0A, DC Output Cable: Unshielded,1.50m
Frequency Range	IEEE 802.11b/g: 2412 ~ 2462 MHz IEEE 802.11n HT20 : 2412 ~ 2462 MHz IEEE 802.11n HT40 : 2422MHz~ 2452MHz
Transmit Power	IEEE 802.11b mode: 18.99dBm IEEE 802.11g mode: 17.14dBm IEEE 802.11n HT20 MHz mode: 17.63dBm IEEE 802.11n HT40 MHz mode: 16.30dBm
Modulation Technique	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Transmit Data Rate	802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/11 /6Mbps IEEE 802.11n HT20: 135.0Mbps with fall back rates of 121.5/ 108.0/81.0 /65.0/58.5/54.0/52.0/40.5/39.0/27.0/26.0/19.5/13.5/13.0/6.5 Mbps IEEE 802.11n HT40: 135.0Mbps with fall back rates of 121.5/ 108.0/81.0 /65.0/58.5/54.0/52.0/40.5/39.0/27.0/26.0/19.5/13.5 Mbps
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 7 Channels
Antenna Specification	SMA Antenna with 5.0dBi gain (Max)

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: MSQRN10U filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Normal Link	☒
Radiated Emission	Mode 1: Normal Link	☒

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	Notebook	2672	992F2VG	N/A	IBM	Unshielded 23.0m(reticle)	Shielded 1.80m
2	Notebook	Studio 1435	531544868 6549	N/A	DELL	Unshielded 23.0m(reticle)	Shielded 1.80m

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **No. 81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, Taiwan (R.O.C.)**

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
USA	A2LA

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	+/- 3.18dB
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB
	200MHz ~1000MHz	+/- 3.62dB
	Above 1000MHz	+/- 5.04dB
Band Edges	+/-0.182 dB	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/21/2011	03/21/2012
Attenuator	SCHAFFNER	CFL9206	1711	07/14/2010	07/14/2011
LISN	SCHAFFNER	NNB42	2001/001	05/26/2011	05/26/2012
LISN	EMCO	3825/2	8901-1459	03/21/2011	03/21/2012
Current Probe	STODDART AIRCRAFT	91550-1	345-73	03/21/2011	03/21/2012
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/30/2011	03/30/2012

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.




7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



7.1.4. TEST SETUP

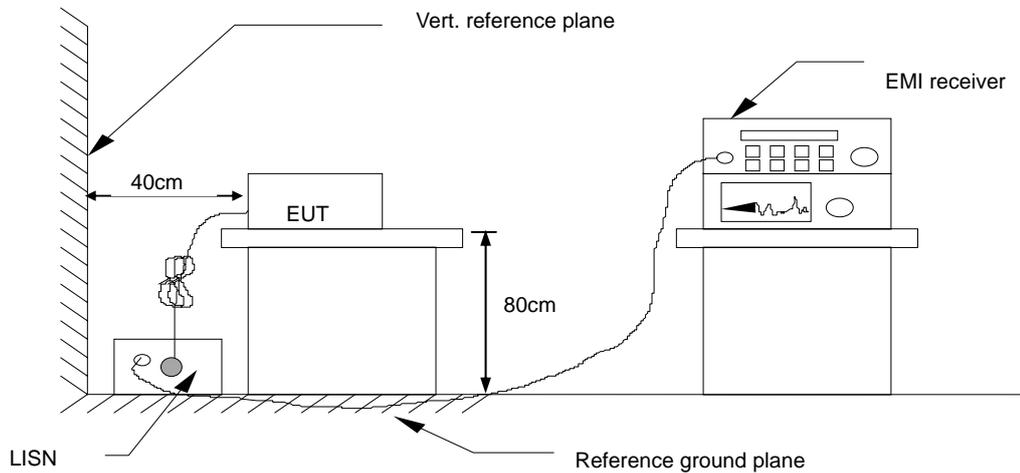

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.5. Data Sample:

Freq. (MHz)	Q.P. Level (dBuV)	AVG Level (dBuV)	Cor. Factor (dB)	Q.P. Result (dBuV)	AVG Result (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)	Line (L1/L2)
xx.xx	37.86	32.92	11.52	49.38	44.44	60.41	50.41	-11.03	-5.97	L1

- Freq. = Emission frequency in MHz
- Level = Uncorrected Analyzer/Receiver reading
- Factor = Insertion loss of LISN + Cable Loss
- Result = Level+ Factor
- Limit = Limit stated in standard
- Margin = Reading in reference to limit
- P = Peak Reading
- Q.P = Quasi-peak Reading
- AVG = Average Reading
- L1 = Hot side
- L2 = Neutral side

Calculation Formula

Margin (dB) = Result (dBuV) – Limit (dBuV)



7.1.6. TEST RESULTS

Model No.	RT-N10U	Test Mode	Normal Link (Adapter 1: RuiDe/RD1201000-C55-2MG)
Environmental Conditions	26deg.C,60% RH	RBW,VBW	9 kHz
Tested by	Sunday Hu		

Frequency Range Investigated (150 kHz to 30 MHz)										
Freq. (MHz)	Q.P. Level (dBuV)	AVG Level (dBuV)	Cor. Factor (dB)	Q.P. Result (dBuV)	AVG Result (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)	Line (L1/L2)
0.150	34.47	24.35	11.52	45.99	35.87	65.99	55.99	-20.00	-20.12	L1
0.170	32.19	21.02	11.52	43.71	32.54	64.96	54.96	-21.25	-22.42	L1
0.454	31.69	24.44	11.51	43.20	35.95	56.80	46.80	-13.60	-10.85	L1
5.526	31.13	18.73	11.70	42.83	30.43	60.00	50.00	-17.17	-19.57	L1
6.046	30.51	17.05	11.73	42.24	28.78	60.00	50.00	-17.76	-21.22	L1
6.950	28.33	13.22	11.79	40.12	25.01	60.00	50.00	-19.88	-24.99	L1
0.153	34.13	18.46	11.52	45.65	29.98	65.78	55.78	-20.13	-25.80	L2
0.174	32.68	19.71	11.52	44.20	31.23	64.76	54.76	-20.56	-23.53	L2
0.374	27.64	18.99	11.51	39.15	30.50	58.41	48.41	-19.26	-17.91	L2
0.454	33.95	24.71	11.51	45.46	36.22	56.80	46.80	-11.34	-10.58	L2
5.058	30.85	19.97	11.67	42.52	31.64	60.00	50.00	-17.48	-18.36	L2
5.650	31.90	19.61	11.71	43.61	31.32	60.00	50.00	-16.39	-18.68	L2

NOTE: 1. The measuring frequencies range between 0.15 MHz and 30 MHz.

2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.

3. “---” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.

4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of test Receiver between 0.15MHz and 30MHz was 9kHz.

5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).



Model No.	RT-N10U	Test Mode	Normal Link (Adapter 2: Gongjin/S12A02-120A100-P4)
Environmental Conditions	26deg.C,60% RH	RBW,VBW	9 kHz
Tested by	Sunday Hu		

Frequency Range Investigated (150 kHz to 30 MHz)										
Freq. (MHz)	Q.P. Level (dBuV)	AVG Level (dBuV)	Cor. Factor (dB)	Q.P. Result (dBuV)	AVG Result (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)	Line (L1/L2)
0.155	40.14	21.86	11.52	51.66	33.38	65.69	55.69	-14.03	-22.31	L1
0.181	42.15	23.25	11.52	53.67	34.77	64.39	54.39	-10.72	-19.62	L1
0.289	40.94	28.99	11.53	52.47	40.52	60.30	50.30	-7.83	-9.78	L1
3.734	28.05	12.74	11.62	39.67	24.36	56.00	46.00	-16.33	-21.64	L1
5.258	32.07	18.98	11.69	43.76	30.67	60.00	50.00	-16.24	-19.33	L1
7.494	28.80	13.78	11.82	40.62	25.60	60.00	50.00	-19.38	-24.40	L1
0.154	43.61	15.81	11.52	55.13	27.33	65.73	55.73	-10.60	-28.40	L2
0.181	40.63	23.87	11.52	52.15	35.39	64.39	54.39	-12.24	-19.00	L2
0.302	42.18	29.15	11.53	53.71	40.68	60.19	50.19	-6.48	-9.51	L2
2.022	28.19	18.87	11.56	39.75	30.43	56.00	46.00	-16.25	-15.57	L2
4.398	30.32	17.98	11.65	41.97	29.63	56.00	46.00	-14.03	-16.37	L2
5.073	32.49	19.63	11.67	44.16	31.30	60.00	50.00	-15.84	-18.70	L2

- NOTE:**
1. The measuring frequencies range between 0.15 MHz and 30 MHz.
 2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
 3. “--” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
 4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of test Receiver between 0.15MHz and 30MHz was 9kHz.
 5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012

7.2.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.



7.2.4. TEST RESULTS


Test Plot

(IEEE 802.11b mode)

CH Low (30MHz ~2.9GHz)

Agilent 13:17:12 Jun 5, 2011


R T

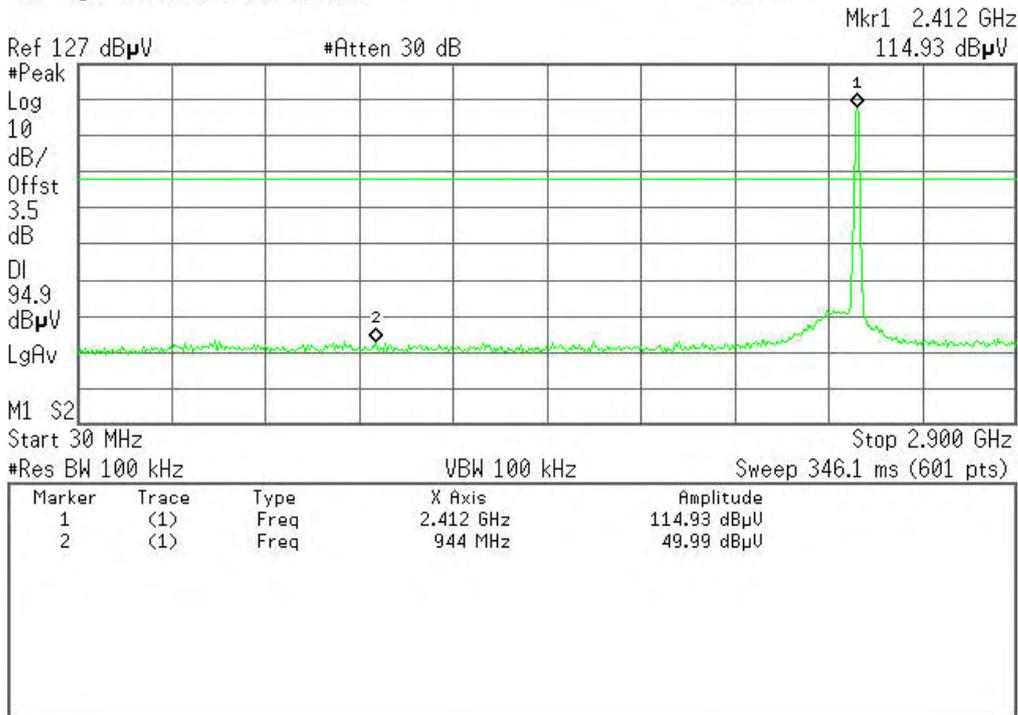

CH Low (2.9GHz ~26.5GHz)

Agilent 13:17:58 Jun 5, 2011

R T

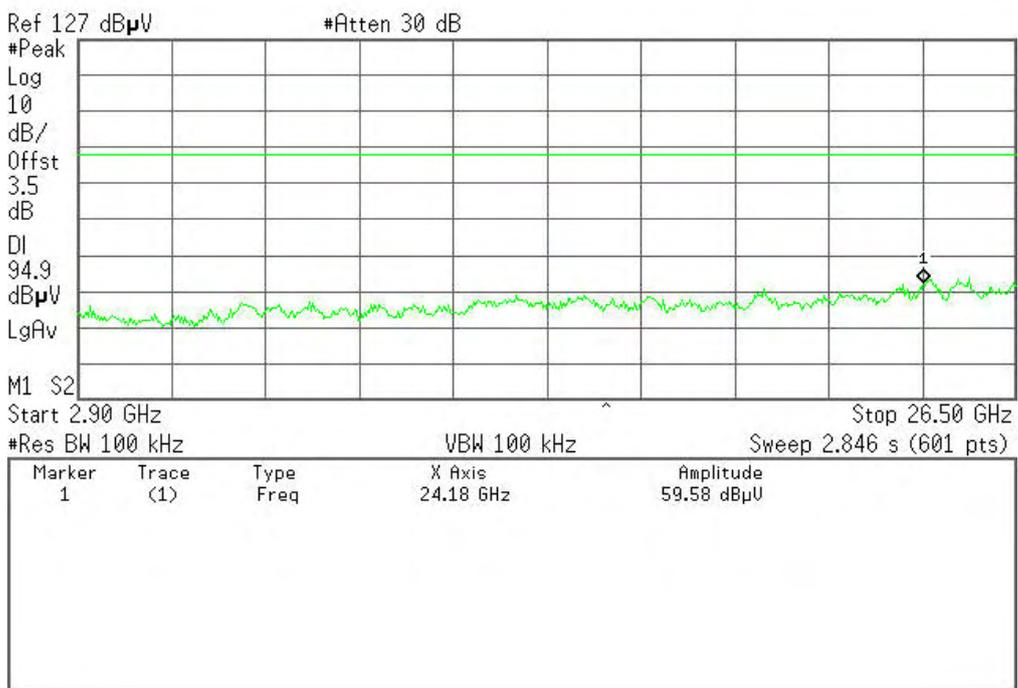




CH Mid (30MHz ~2.9GHz)

Agilent 13:22:37 Jun 5, 2011


R T

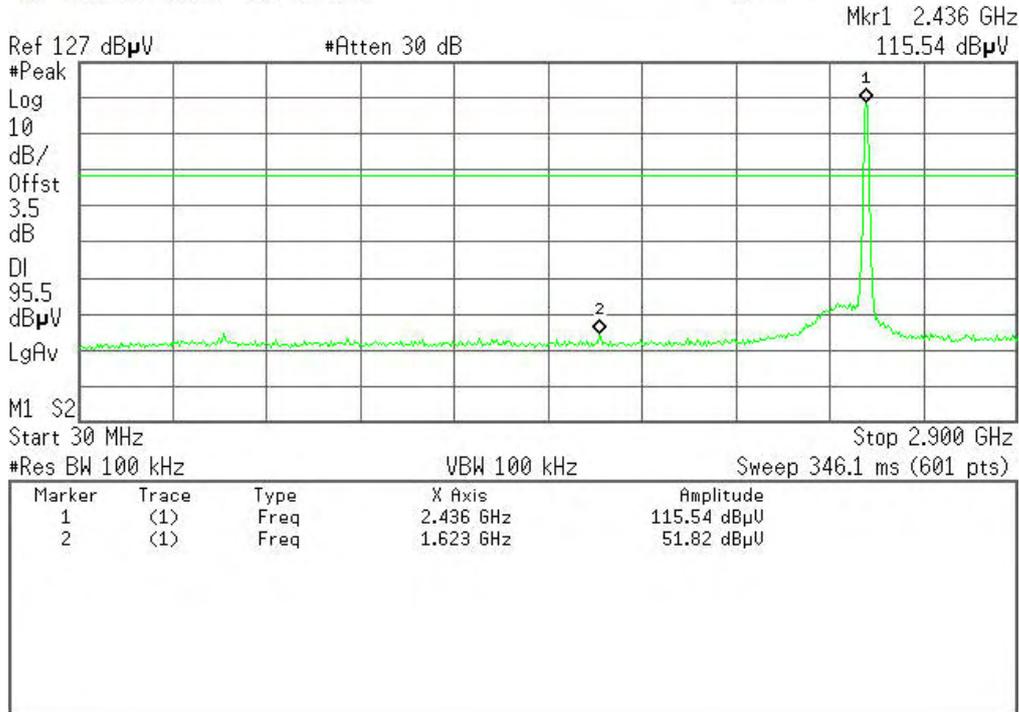

CH Mid (2.9GHz ~26.5GHz)

Agilent 13:23:22 Jun 5, 2011

R T

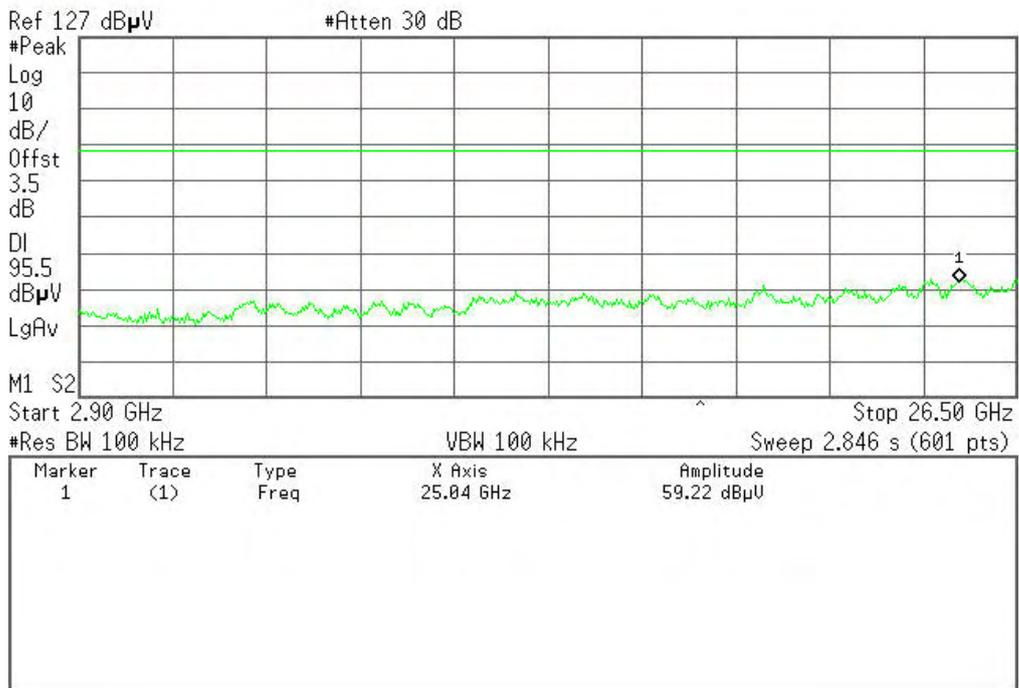




CH High (30MHz ~2.9GHz)

Agilent 13:14:22 Jun 5, 2011


R T

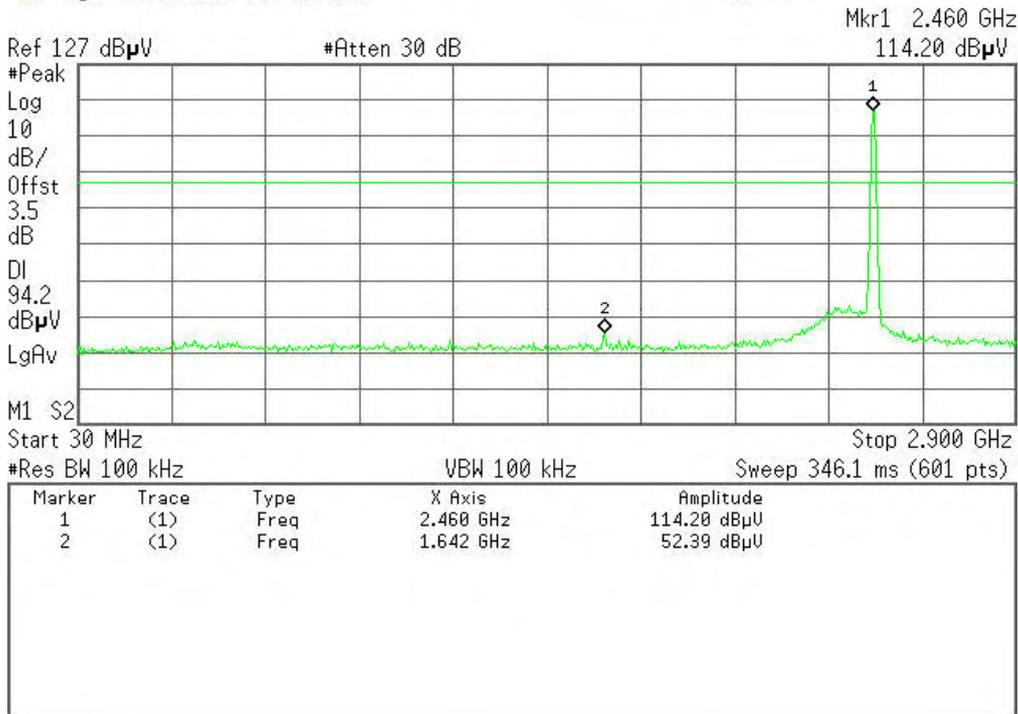

CH High(2.9GHz ~26.5GHz)

Agilent 13:15:26 Jun 5, 2011

R T

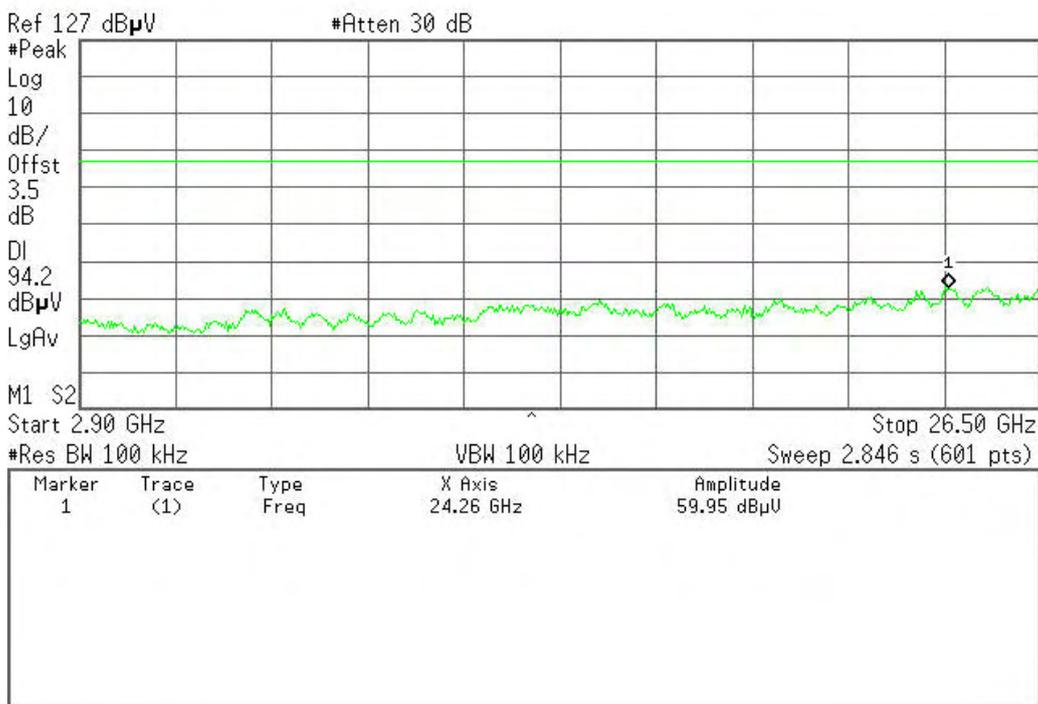




(IEEE 802.11g mode)
CH Low (30MHz ~2.9GHz)

Agilent 13:24:39 Jun 5, 2011


R T

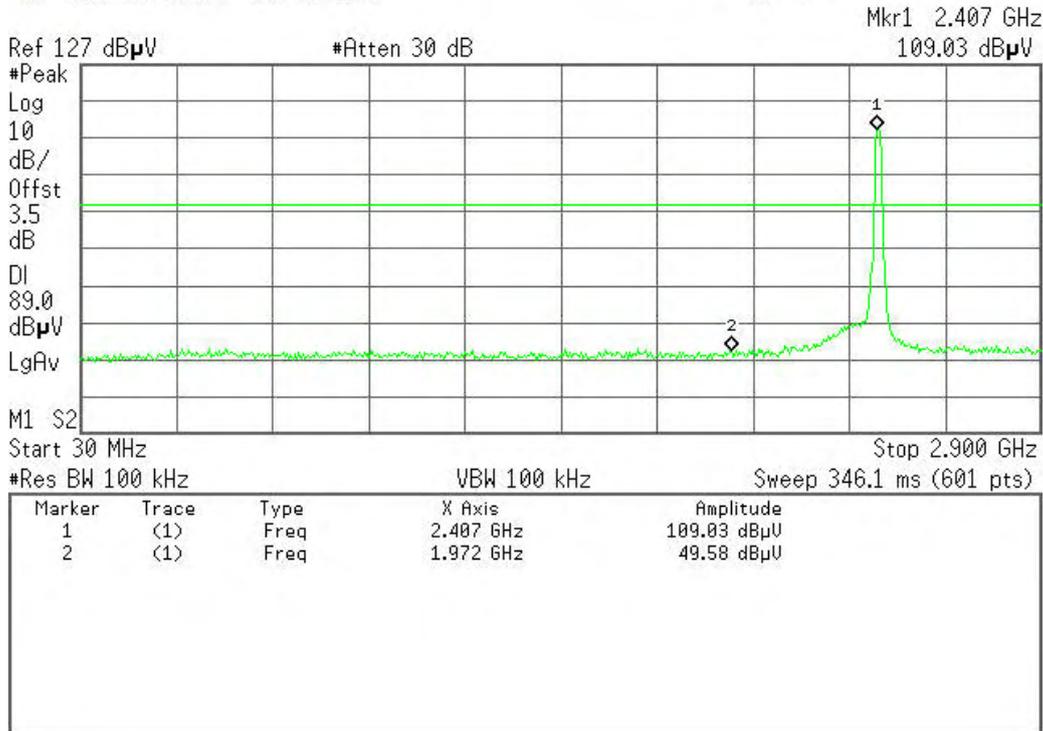

CH Low (2.9GHz ~26.5GHz)

Agilent 13:25:15 Jun 5, 2011

R T

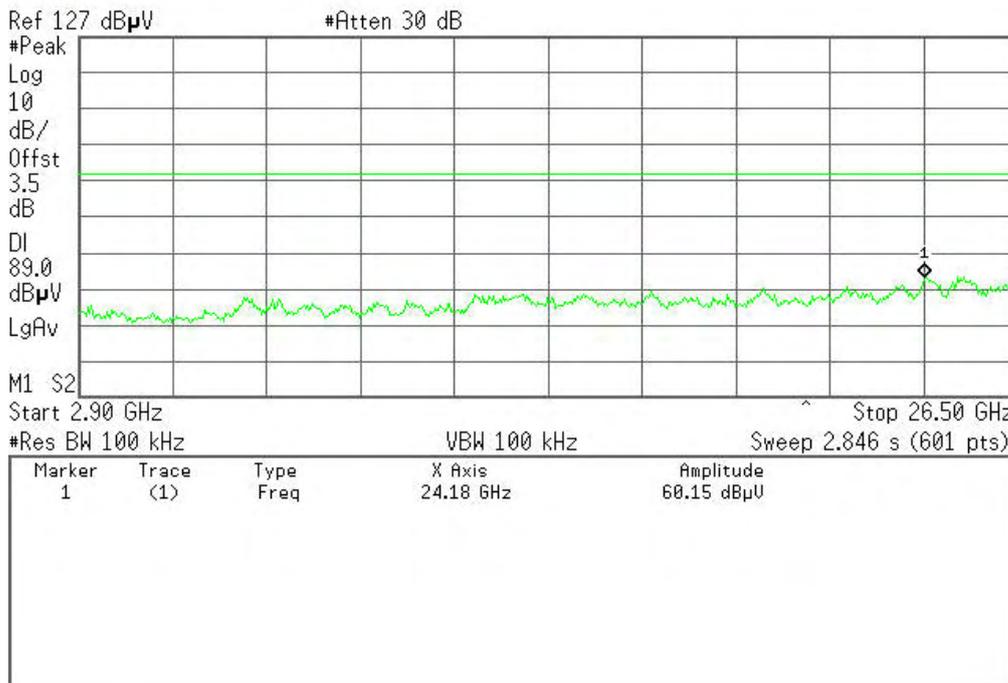




CH Mid (30MHz ~2.9GHz)

Agilent 13:30:52 Jun 5, 2011


R T

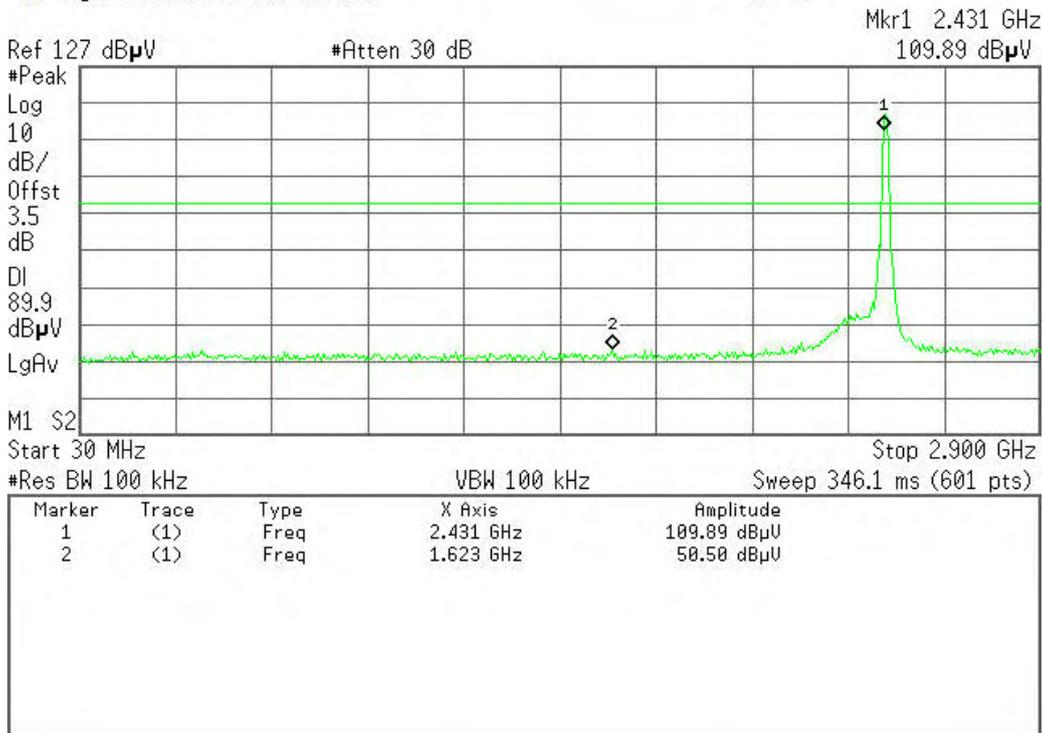

CH Mid (2.9GHz ~26.5GHz)

Agilent 13:31:24 Jun 5, 2011

R T

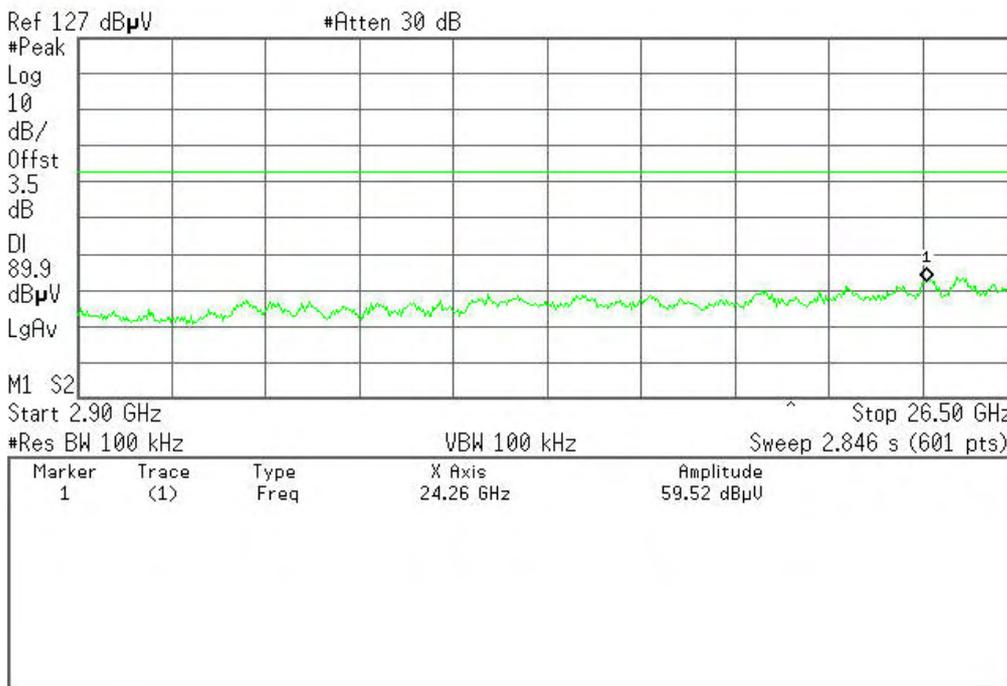




CH High (30MHz ~2.9GHz)

Agilent 13:32:37 Jun 5, 2011


R T

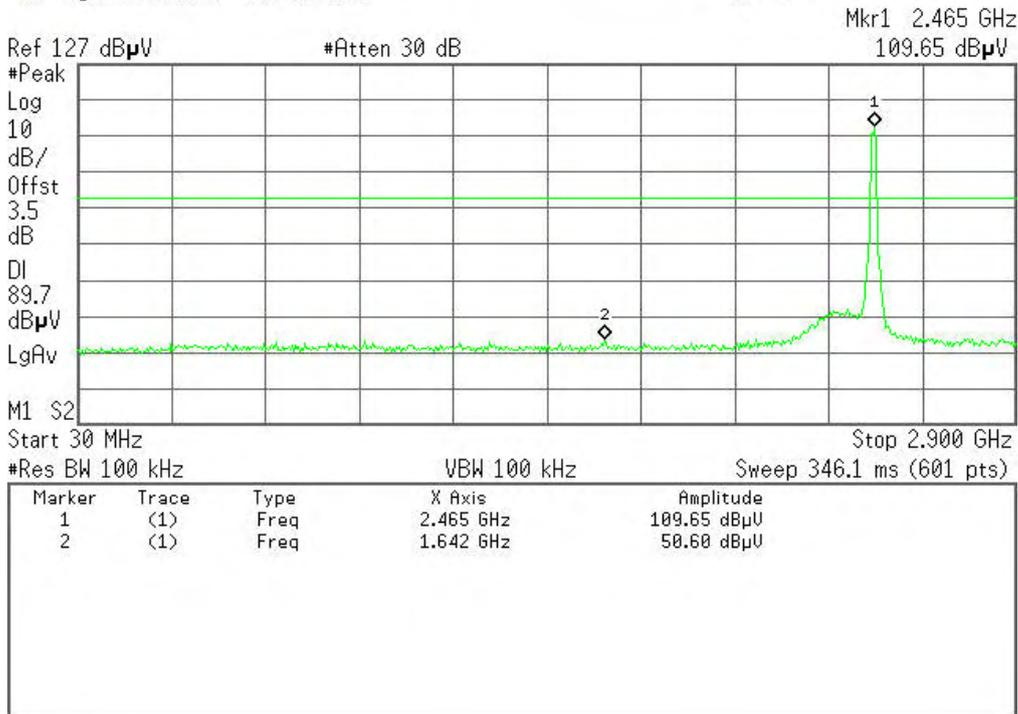

CH High(2.9GHz ~26.5GHz)

Agilent 13:33:10 Jun 5, 2011

R T

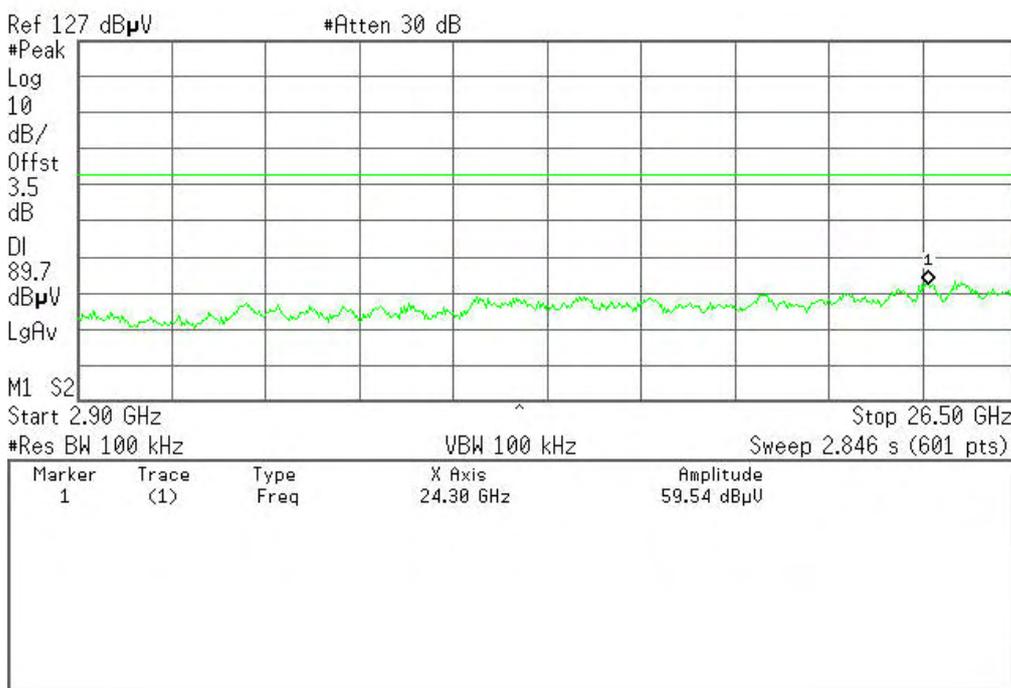




Test Plot
(IEEE 802.11n HT20 MHz mode)

CH Low (30MHz ~2.9GHz)

Agilent 13:45:01 Jun 5, 2011


R T

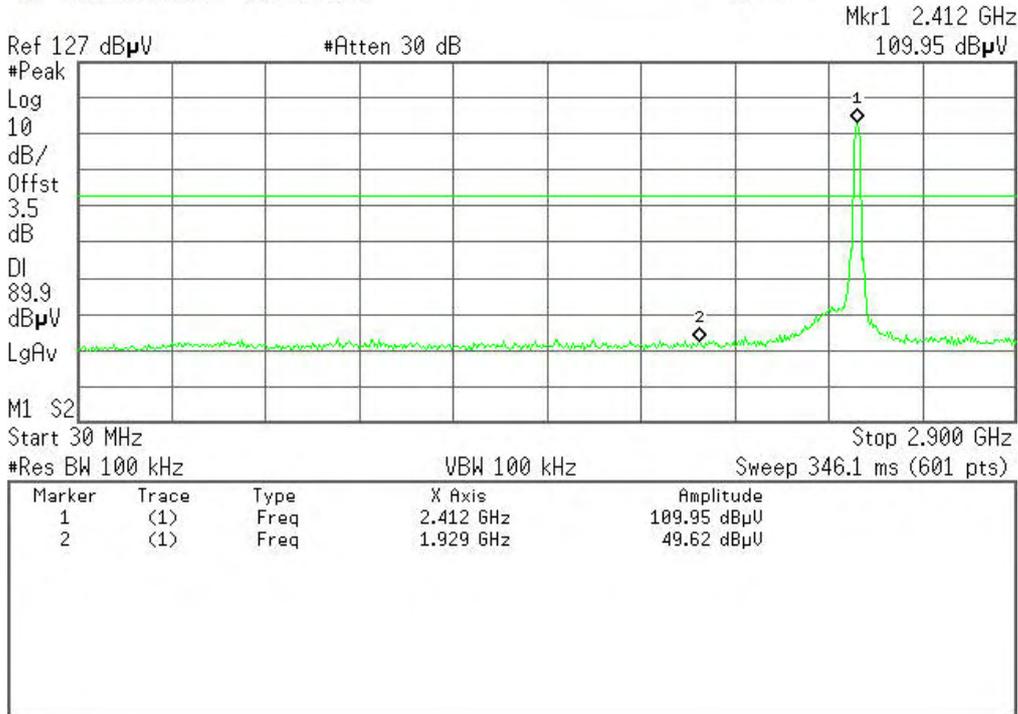

CH Low (2.9GHz ~26.5GHz)

Agilent 13:45:55 Jun 5, 2011

R T

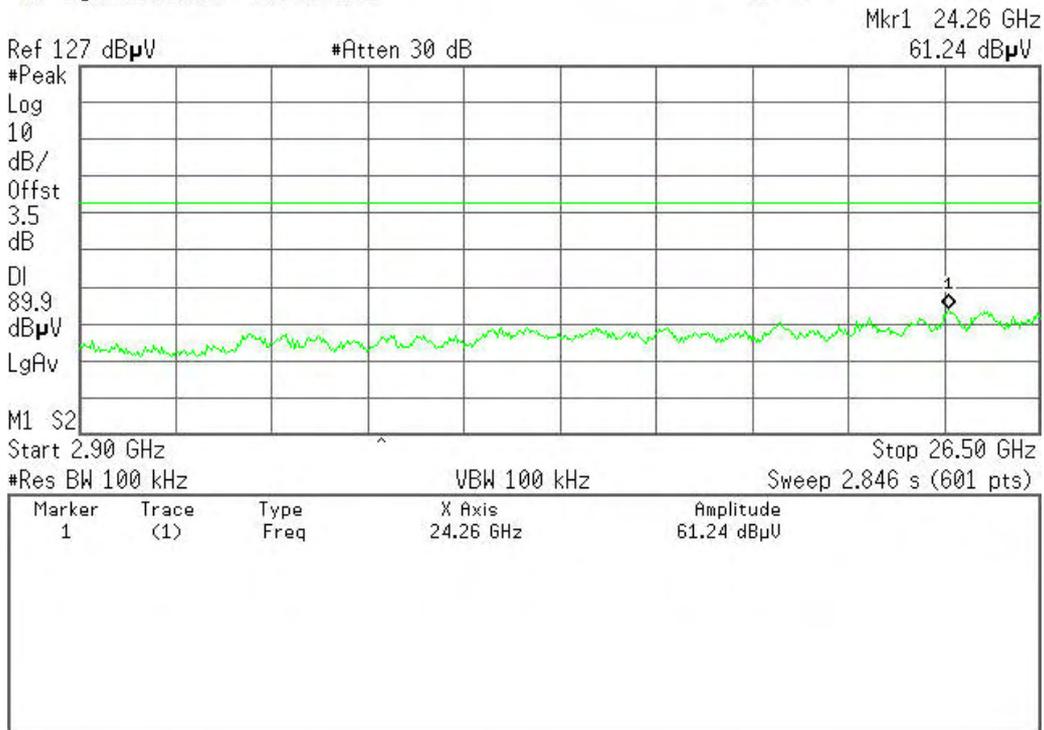




CH Mid (30MHz ~2.9GHz)

Agilent 13:41:26 Jun 5, 2011


R T

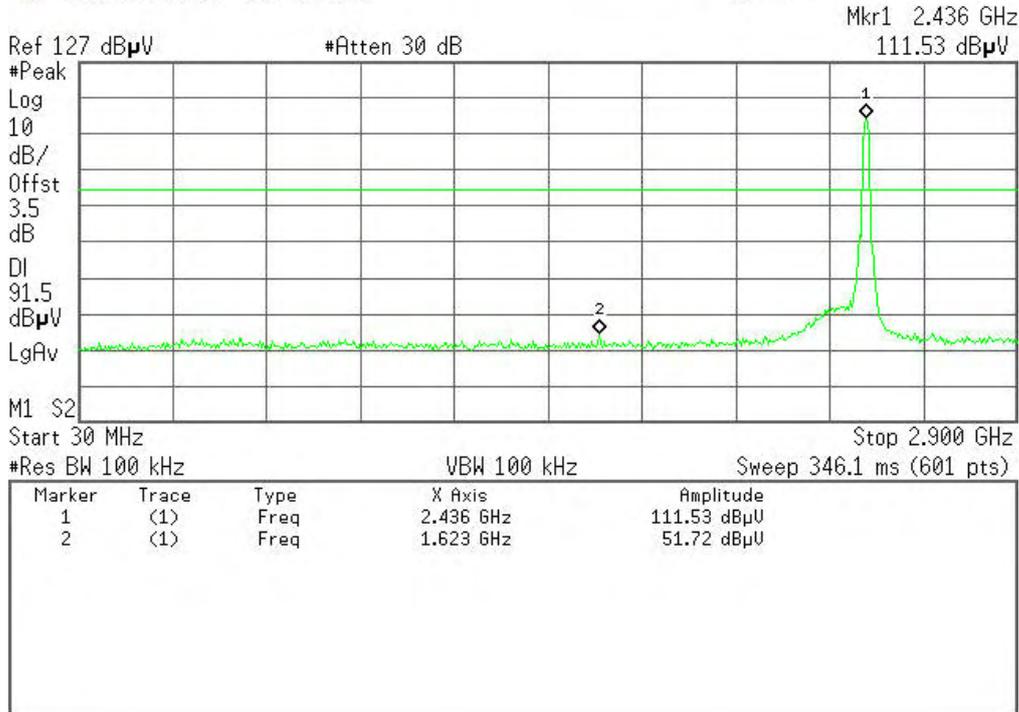

CH Mid (2.9GHz ~26.5GHz)

Agilent 13:42:00 Jun 5, 2011

R T

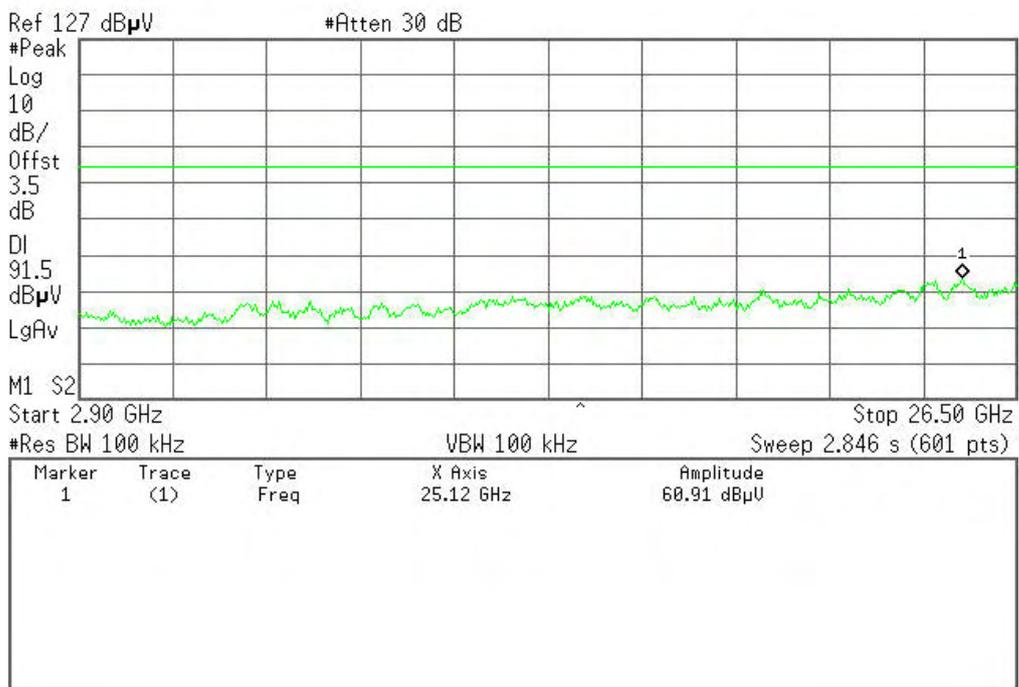




CH High (30MHz ~2.9GHz)

Agilent 13:37:09 Jun 5, 2011


R T

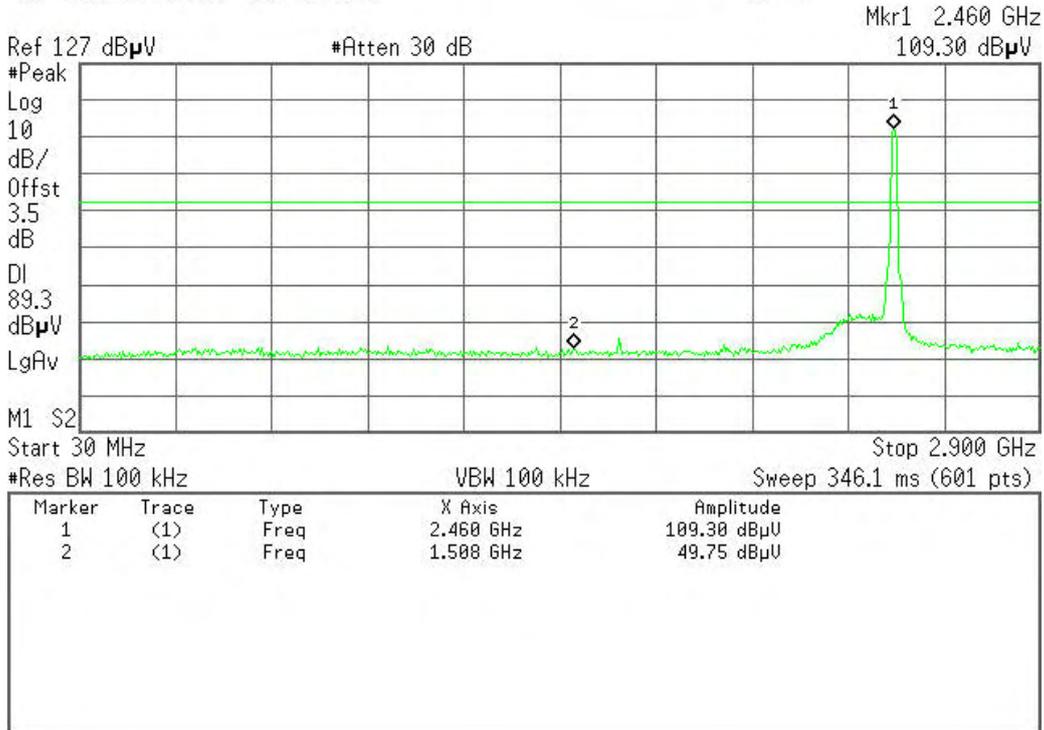

CH High(2.9GHz ~26.5GHz)

Agilent 13:37:57 Jun 5, 2011


R T

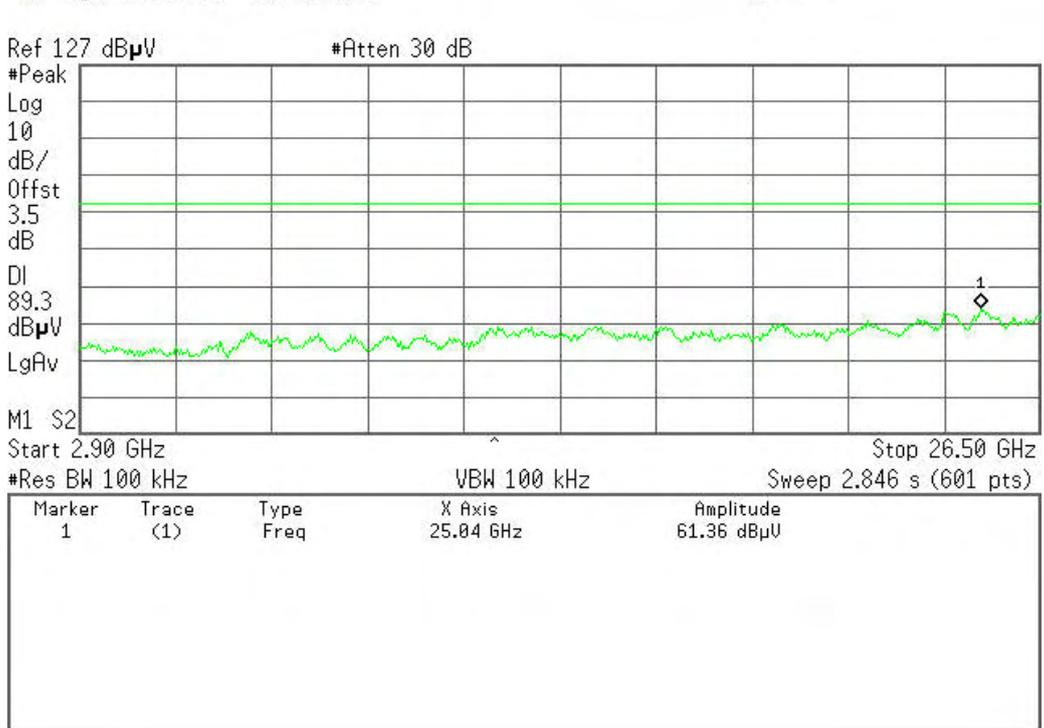




(IEEE 802.11n HT40 MHz mode)

CH Low (30MHz ~2.9GHz)

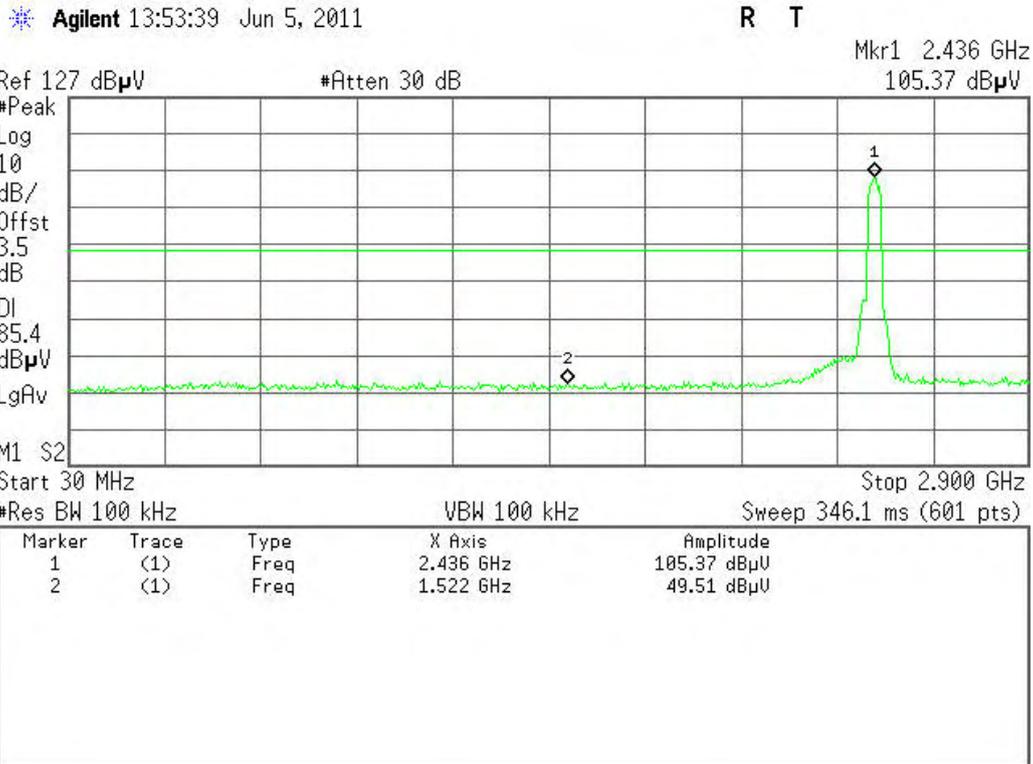

CH Low (2.9GHz ~26.5GHz)

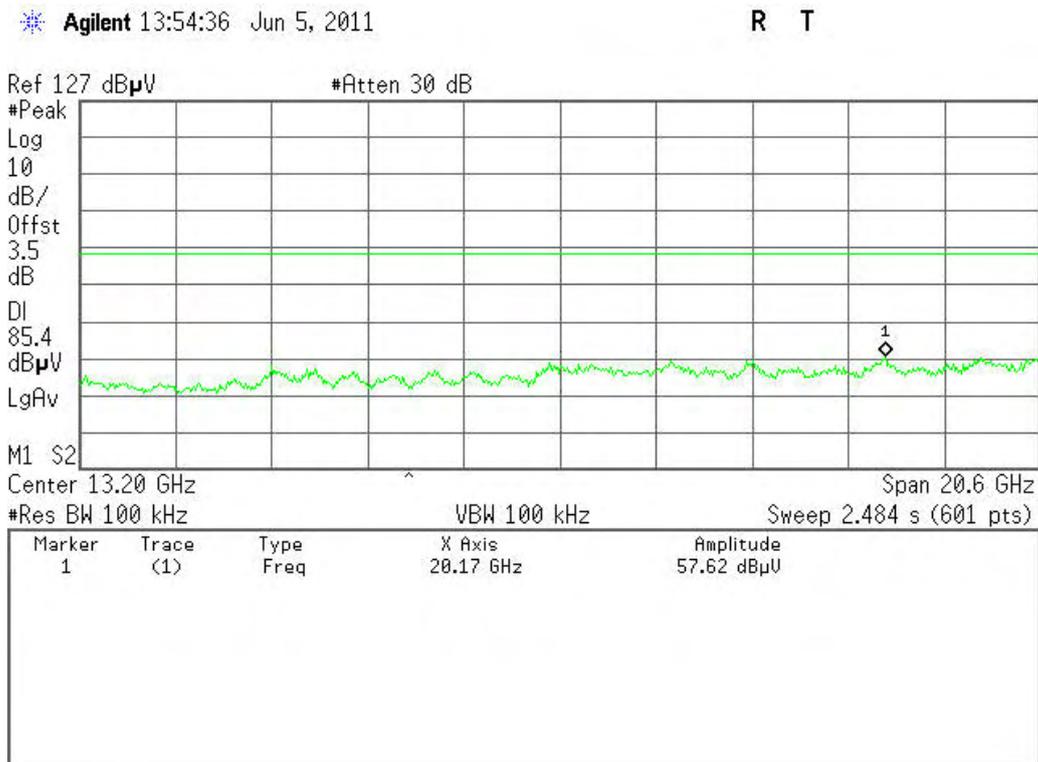




CH Mid (30MHz ~2.9GHz)

Agilent 13:50:50 Jun 5, 2011


R T

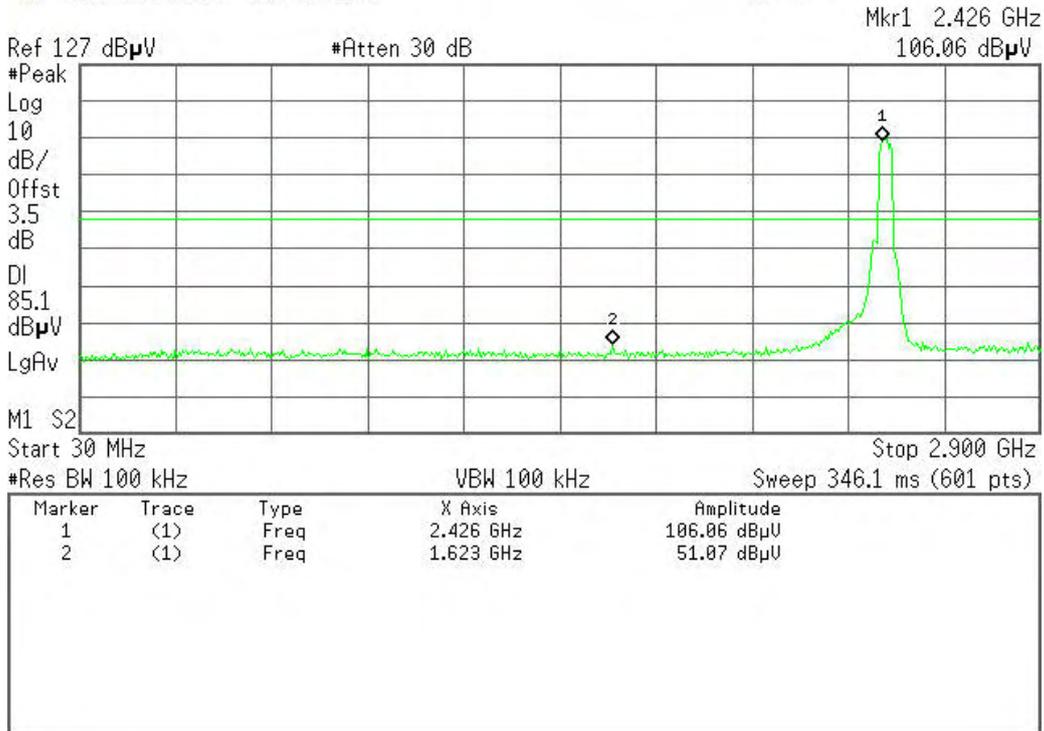

CH Mid (2.9GHz ~26.5GHz)

Agilent 13:51:32 Jun 5, 2011

R T

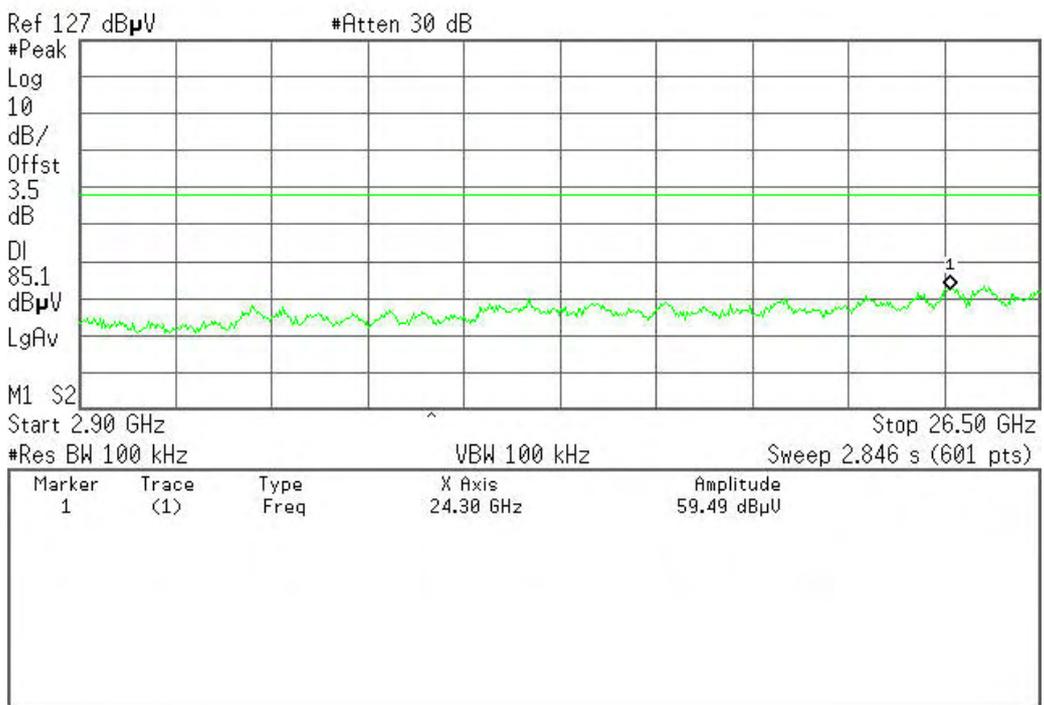




CH High (30MHz ~2.9GHz)

Agilent 13:56:16 Jun 5, 2011


R T

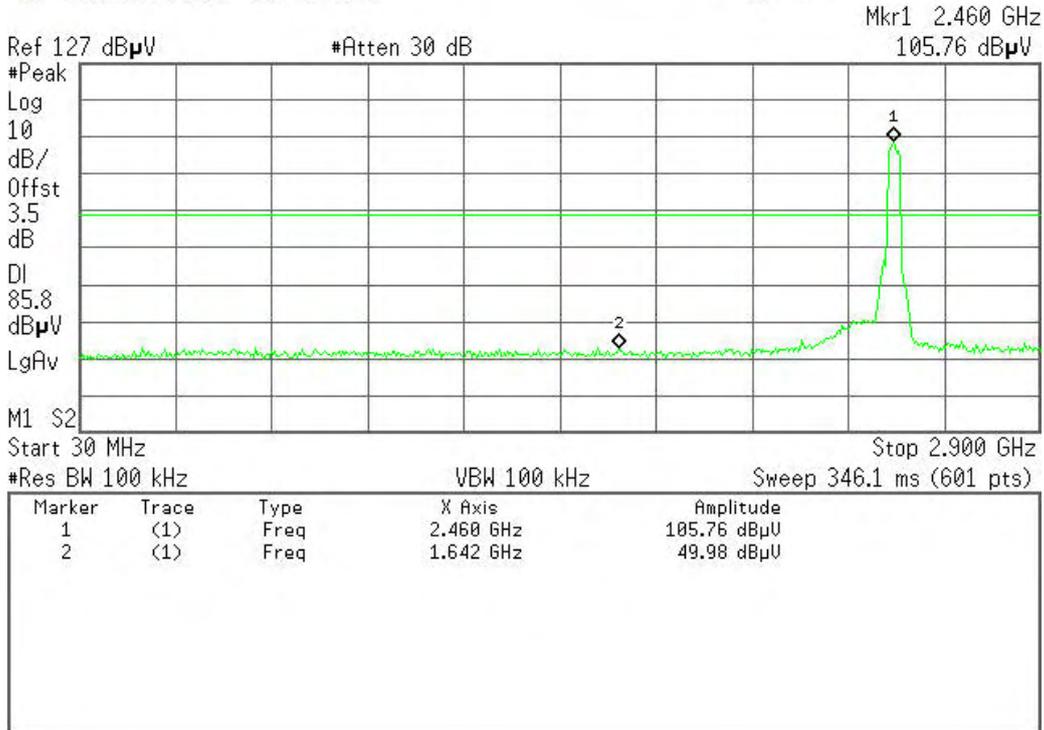

CH High(2.9GHz ~26.5GHz)

Agilent 13:58:21 Jun 5, 2011

R T

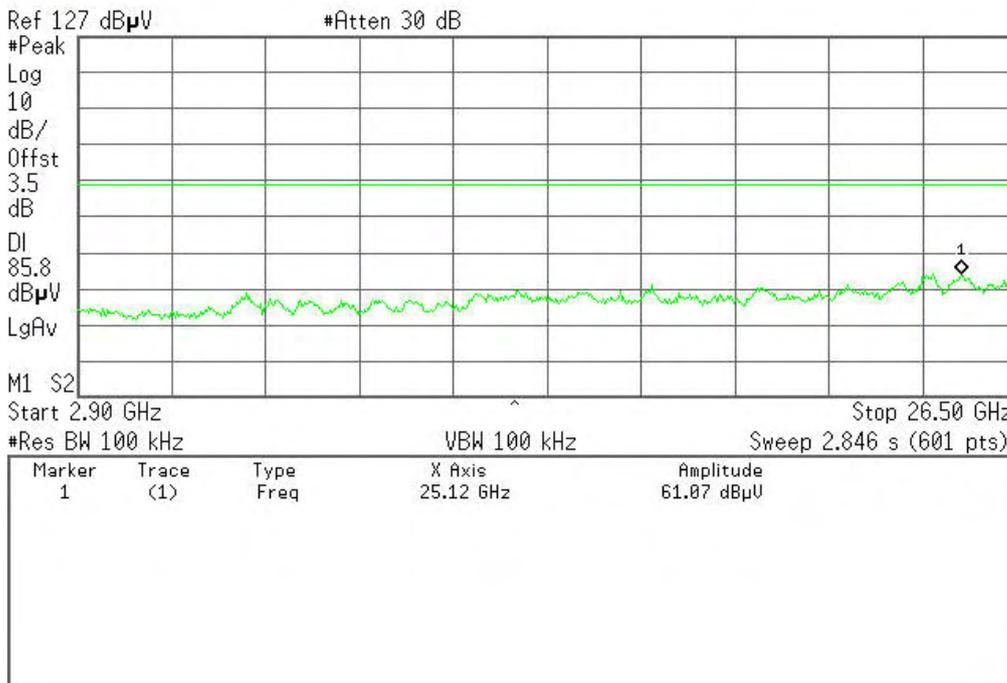



7.2.4.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).



7.2.4.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012	
Amplifier	MITEQ	AM-1604-3000	1411843	03/21/2011	03/21/2012	
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R	
Controller	CT	N/A	N/A	N.C.R	N.C.R	
High Noise Amplifier	Agilent	8449B	3008A01838	06/18/2011	06/18/2012	
Site NSA	C&C	N/A	N/A	N.C.R	N.C.R	
Bilog Antenna	SCHAFFNER	CBL6143	5082	06/18/2011	06/18/2012	
Horn Antenna	SCHWARZBECK	BBHA9120D	D286	03/19/2011	03/19/2012	
Signal Generator	Anritsu	MG3694A	#050125	03/21/2011	03/21/2012	
Horn Antenna	TRC	HA0301	N/A	03/19/2011	03/19/2012	
Loop Antenna	A.R.A	PLA-1030/B	1029	03/19/2011	03/19/2012	
Power Sensor	Anritsu	MA2491A	030619	06/18/2011	06/18/2012	
Power Meter	Anritsu	ML2487A	6K00001491	06/18/2011	06/18/2012	
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/30/2011	03/30/2012	

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The FCC Site Registration number is 101879.
 3. N.C.R = No Calibration Required.


7.2.4.3. TEST PROCEDURE (please refer to measurement standard)

- The EUT is placed on a turntable, which is 0.8m above ground plane.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Set the spectrum analyzer in the following setting as:
 Below 1GHz:
 RBW=100kHz / VBW=300kHz / Sweep=AUTO
 Above 1GHz:
 (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- Repeat above procedures until the measurements for all frequencies are complete.




7.2.4.4. TEST SETUP

Below 30MHz

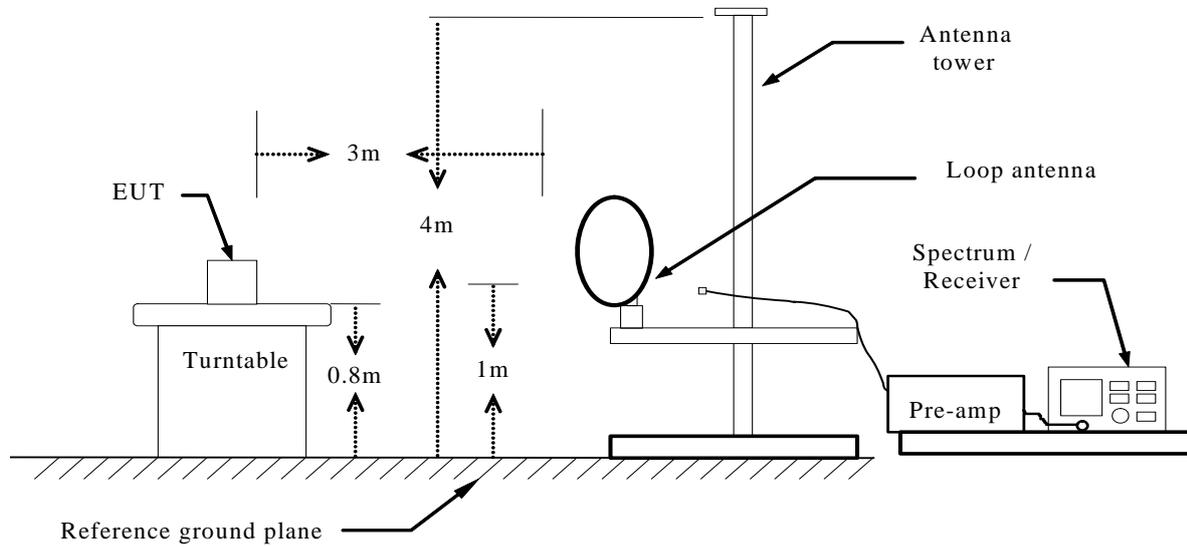


Below 1 GHz

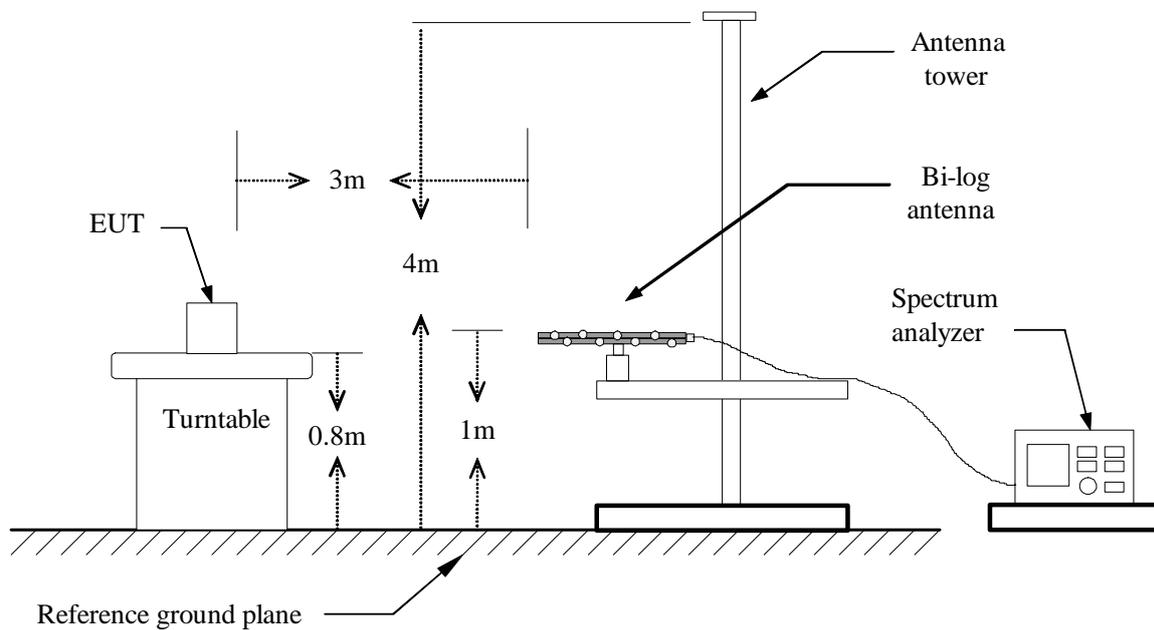



Above 1 GHz

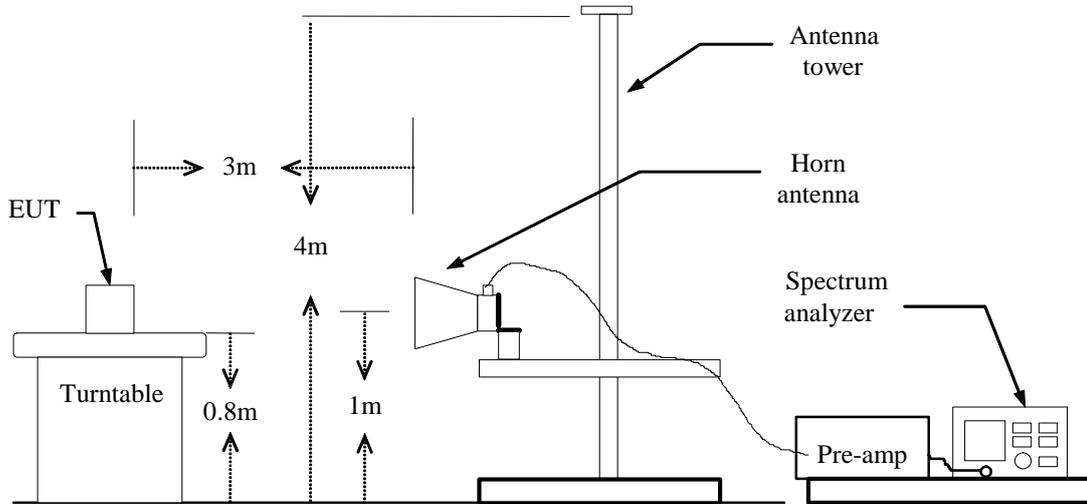

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.2.4.5. Data Sample:

Below 1 GHz

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Remark) (dBuV)	Correction Factor (dB/m)	Result (Remark) (dBuV/m)	Limit (Peak) (dBuV/m)	Margin (dB)	Remark
xxx	V	12.12	10.21	22.33	40.00	-17.67	Peak

Above 1 GHz

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
xxx	V	65.45	63.00	-11.12	54.33	51.88	74.00	54.00	-2.12	AVG

- Frequency (MHz) = Emission frequency in MHz
- Ant.Pol. (H/V) = Antenna polarization
- Reading (dBuV) = Uncorrected Analyzer / Receiver reading
- Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
- Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
- Limit (dBuV/m) = Limit stated in standard
- Margin (dB) = Remark Result (dBuV/m) – Limit (dBuV/m)
- Peak = Peak Reading
- QP = Quasi-peak Reading
- AVG = Average Reading



7.2.4.6. TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link

Test Date: June 5, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
374.350	V	Peak	48.48	-16.42	32.06	46.00	-13.94
500.450	V	Peak	53.49	-13.92	39.57	46.00	-6.43
600.683	V	Peak	50.43	-12.36	38.07	46.00	-7.93
624.933	V	Peak	52.74	-12.15	40.59	46.00	-5.41
749.416	V	Peak	49.29	-10.90	38.39	46.00	-7.61
875.516	V	Peak	48.21	-9.46	38.75	46.00	-7.25
500.450	H	Peak	54.85	-13.92	40.93	46.00	-5.07
600.683	H	Peak	47.76	-12.36	35.40	46.00	-10.60
624.933	H	Peak	54.98	-12.15	42.83	46.00	-3.17
749.416	H	Peak	48.22	-10.90	37.32	46.00	-8.68
875.516	H	Peak	50.98	-9.46	41.52	46.00	-4.48
899.766	H	Peak	42.41	-9.10	33.31	46.00	-12.69

**Remark: No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

- Measuring frequencies from 9kHz to the 1GHz.
- Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
- Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
- | | |
|--------------------|--|
| Freq(MHz). | = Emission frequency in MHz |
| Reading (dBuV/m) | = Receiver reading |
| Corr. Factor (dB) | = Antenna factor + Cable loss – Amplifier gain |
| Actual FS (dBuV/m) | = Reading (dBuV) + Corr. Factor (dB/m) |
| Limit (dBuV/m) | = Limit stated in standard |
| Safe Margin(dB) | = Measured (dBuV/m) – Limits (dBuV/m) |
| Ant. H/V | = Current carrying line of reading |
| Detector | = Mark Peak Reading or Quasi-peak Reading |



Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low
Temperature: 24°C
Humidity: 52% RH

Test Date: June 5, 2011
Tested by: Sunday Hu
Polarity: Ver. / Hor.

Table with 11 columns: Freq. (MHz), Ant. Pol H/V, Peak Reading (dBuV), AV Reading (dBuV), Ant. / CL CF (dB), Actual Fs (Peak, AV), Peak Limit (dBuV/m), AV Limit (dBuV/m), Margin (dB), Remark. Rows include frequencies like 1501.666, 3216.666, 3893.333, 6110.000, 2108.333, 4301.666, 5503.333, 6401.666.

REMARKS:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid
Temperature: 24°C
Humidity: 52% RH

Test Date: June 5, 2011
Tested by: Sunday Hu
Polarity: Ver. / Hor.

Table with 11 columns: Freq. (MHz), Ant. Pol H/V, Peak Reading (dBuV), AV Reading (dBuV), Ant. / CL CF (dB), Actual Fs (Peak and AV), Peak Limit (dBuV/m), AV Limit (dBuV/m), Margin (dB), Remark. Rows include frequencies like 1630.000, 3251.666, 6366.666, 7766.67, 1350.000, 3636.666, 3835.000, 6250.000, and N/A.

REMARKS:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: June 5, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1501.666	V	49.47	---	-10.31	39.16	---	74.00	54.00	-14.84	Peak
3286.666	V	48.18	---	-5.31	42.87	---	74.00	54.00	-11.13	Peak
3625.000	V	45.70	---	-3.81	41.89	---	74.00	54.00	-12.11	Peak
6938.333	V	45.87	---	4.37	50.24	---	74.00	54.00	-3.76	Peak
N/A										
1466.666	H	48.14	---	-10.29	37.85	---	74.00	54.00	-16.15	Peak
4301.666	H	46.27	---	-2.59	43.68	---	74.00	54.00	-10.32	Peak
5013.333	H	45.05	---	0.03	45.08	---	74.00	54.00	-8.92	Peak
6401.666	H	44.79	---	3.68	48.47	---	74.00	54.00	-5.53	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low
Temperature: 24°C
Humidity: 52% RH

Test Date: June 5, 2011
Tested by: Sunday Hu
Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1501.666	V	50.16	---	-10.31	39.85	---	74.00	54.00	-14.15	Peak
3216.666	V	49.77	---	-5.45	44.32	---	74.00	54.00	-9.68	Peak
4826.666	V	45.71	---	-0.56	45.15	---	74.00	54.00	-8.85	Peak
6110.000	V	43.72	---	3.42	47.14	---	74.00	54.00	-6.86	Peak
N/A										
1501.666	H	50.35	---	-10.31	40.04	---	74.00	54.00	-13.96	Peak
3228.333	H	47.52	---	-5.43	42.09	---	74.00	54.00	-11.91	Peak
3753.333	H	46.36	---	-3.86	42.50	---	74.00	54.00	-11.50	Peak
4826.666	H	46.34	---	-0.56	45.78	---	74.00	54.00	-8.22	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: June 5, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1501.666	V	51.16	---	-10.31	40.85	---	74.00	54.00	-13.15	Peak
3251.666	V	48.38	---	-5.38	43.00	---	74.00	54.00	-11.00	Peak
4220.000	V	46.60	---	-2.86	43.74	---	74.00	54.00	-10.26	Peak
4873.333	V	42.92	---	-0.42	42.50	---	74.00	54.00	-11.50	Peak
N/A										
1501.666	H	49.69	---	-10.31	39.38	---	74.00	54.00	-14.62	Peak
4103.333	H	45.74	---	-3.24	42.50	---	74.00	54.00	-11.50	Peak
4873.333	H	45.80	---	-0.42	45.38	---	74.00	54.00	-8.62	Peak
7311.666	H	36.37	---	5.25	41.62	---	74.00	54.00	-12.38	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: June 5, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1641.666	V	49.76	---	-10.27	39.49	---	74.00	54.00	-14.51	Peak
3286.666	V	48.26	---	-5.31	42.95	---	74.00	54.00	-11.05	Peak
3765.000	V	46.37	---	-3.87	42.50	---	74.00	54.00	-11.50	Peak
6250.000	V	44.10	---	3.79	47.89	---	74.00	54.00	-6.11	Peak
N/A										
1501.666	H	51.69	---	-10.31	41.38	---	74.00	54.00	-12.62	Peak
4383.333	H	45.86	---	-2.32	43.54	---	74.00	54.00	-10.46	Peak
5001.666	H	45.19	---	0.00	45.19	---	74.00	54.00	-8.81	Peak
5760.000	H	44.30	---	2.37	46.67	---	74.00	54.00	-7.33	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT20 MHz / CH Low **Test Date:** June 5, 2011
Temperature: 24°C **Tested by:** Sunday Hu
Humidity: 52% RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1501.666	V	50.22	---	-10.31	39.91	---	74.00	54.00	-14.09	Peak
3216.666	V	49.47	---	-5.45	44.02	---	74.00	54.00	-9.98	Peak
3870.000	V	46.15	---	-3.77	42.38	---	74.00	54.00	-11.62	Peak
4815.000	V	46.63	---	-0.60	46.03	---	74.00	54.00	-7.97	Peak
N/A										
1501.666	H	48.62	---	-10.31	38.31	---	74.00	54.00	-15.69	Peak
3380.000	H	46.38	---	-5.11	41.27	---	74.00	54.00	-12.73	Peak
4185.000	H	46.10	---	-2.98	43.12	---	74.00	54.00	-10.88	Peak
5165.000	H	45.74	---	0.48	46.22	---	74.00	54.00	-7.78	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT20 MHz / CH Mid **Test Date:** June 5, 2011
Temperature: 24°C **Tested by:** Sunday Hu
Humidity: 52% RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBUV)	AV Reading (dBUV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBUV/m)	AV Limit (dBUV/m)	Margin (dB)	Remark
					Peak (dBUV/m)	AV (dBUV/m)				
1501.666	V	50.00	---	-10.31	39.69	---	74.00	54.00	-14.31	Peak
3251.666	V	51.70	---	-5.38	46.32	---	74.00	54.00	-7.68	Peak
3881.666	V	46.25	---	-3.75	42.50	---	74.00	54.00	-11.50	Peak
6145.00	V	44.45	---	3.58	48.03	---	74.00	54.00	-5.97	Peak
1501.666	H	49.04	---	-10.31	38.73	---	74.00	54.00	-15.27	Peak
3718.333	H	46.14	---	-3.85	42.29	---	74.00	54.00	-11.71	Peak
4873.333	H	44.98	---	-0.42	44.56	---	74.00	54.00	-9.44	Peak
5596.666	H	45.01	---	1.49	46.50	---	74.00	54.00	-7.50	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBUV/m) – Average limit (dBUV/m).



Operation Mode: TX / IEEE 802.11n HT20 MHz / CH High **Test Date:** June 5, 2011
Temperature: 24°C **Tested by:** Sunday Hu
Humidity: 52% RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1501.666	V	50.45	---	-10.31	40.14	---	74.00	54.00	-13.86	Peak
3286.666	V	49.09	---	-5.31	43.78	---	74.00	54.00	-10.22	Peak
4406.666	V	45.46	---	-2.24	43.22	---	74.00	54.00	-10.78	Peak
6145.000	V	45.20	---	3.58	48.78	---	74.00	54.00	-5.22	Peak
N/A										
1501.666	H	51.90	---	-10.31	41.59	---	74.00	54.00	-12.41	Peak
3648.333	H	45.29	---	-3.82	41.47	---	74.00	54.00	-12.53	Peak
5048.333	H	44.91	---	0.13	45.04	---	74.00	54.00	-8.96	Peak
6250.000	H	44.80	---	3.79	48.59	---	74.00	54.00	-5.41	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT40 MHz / CH Low **Test Date:** June 5, 2011
Temperature: 24°C **Tested by:** Sunday Hu
Humidity: 52% RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1501.666	V	52.34	---	-10.31	42.03	---	74.00	54.00	-11.97	Peak
3228.333	V	50.15	---	-5.43	44.72	---	74.00	54.00	-9.28	Peak
4278.333	V	45.71	---	-2.67	43.04	---	74.00	54.00	-10.96	Peak
4908.333	V	45.85	---	-0.30	45.55	---	74.00	54.00	-8.45	Peak
N/A										
1501.666	H	50.33	---	-10.31	40.02	---	74.00	54.00	-13.98	Peak
3228.333	H	46.79	---	-5.43	41.36	---	74.00	54.00	-12.64	Peak
4021.666	H	46.40	---	-3.50	42.90	---	74.00	54.00	-11.10	Peak
5235.000	H	45.12	---	0.66	45.78	---	74.00	54.00	-8.22	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT40 MHz / CH Mid **Test Date:** June 5, 2011
Temperature: 24°C **Tested by:** Sunday Hu
Humidity: 52% RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBUV)	AV Reading (dBUV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBUV/m)	AV Limit (dBUV/m)	Margin (dB)	Remark
					Peak (dBUV/m)	AV (dBUV/m)				
1501.666	V	51.21	---	-10.31	40.90	---	74.00	54.00	-13.10	Peak
3251.666	V	49.68	---	-5.38	44.30	---	74.00	54.00	-9.70	Peak
3998.333	V	46.45	---	-3.57	42.88	---	74.00	54.00	-11.12	Peak
4873.333	V	47.36	---	-0.42	46.94	---	74.00	54.00	-7.06	Peak
N/A										
1501.666	H	49.16	---	-10.31	38.85	---	74.00	54.00	-15.15	Peak
3345.000	H	46.61	---	-5.19	41.42	---	74.00	54.00	-12.58	Peak
5398.333	H	45.33	---	1.01	46.34	---	74.00	54.00	-7.66	Peak
6553.333	H	45.29	---	4.07	49.36	---	74.00	54.00	-4.64	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBUV/m) – Average limit (dBUV/m).



Operation Mode: TX / IEEE 802.11n HT40 MHz / CH High **Test Date:** June 5, 2011
Temperature: 24°C **Tested by:** Sunday Hu
Humidity: 52% RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1501.666	V	49.25	---	-10.31	38.94	---	74.00	54.00	-15.06	Peak
3263.333	V	49.69	---	-5.36	44.33	---	74.00	54.00	-9.67	Peak
4768.333	V	45.44	---	-0.83	44.61	---	74.00	54.00	-9.39	Peak
4885.000	V	45.78	---	-0.38	45.40	---	74.00	54.00	-8.60	Peak
N/A										
1338.333	H	49.41	---	-10.64	38.77	---	74.00	54.00	-15.23	Peak
3228.333	H	48.00	---	-5.43	42.57	---	74.00	54.00	-11.43	Peak
3800.000	H	46.77	---	-3.88	42.89	---	74.00	54.00	-11.11	Peak
4908.333	H	51.23	---	-0.30	50.93	---	74.00	54.00	-3.07	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


7.3.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012

7.3.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span = 25MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

7.3.4. TEST SETUP





7.3.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	8086	>500	PASS
Mid	2437	8134		PASS
High	2462	8132		PASS

Test Data

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	15117	>500	PASS
Mid	2437	15112		PASS
High	2462	15130		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	15072	>500	PASS
Mid	2437	15102		PASS
High	2462	15118		PASS

Test Data

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	35191	>500	PASS
Mid	2437	35162		PASS
High	2452	35198		PASS




Test Plot

(IEEE 802.11b mode)

6dB Bandwidth (CH Low)

Agilent 13:11:36 Jun 5, 2011

R T

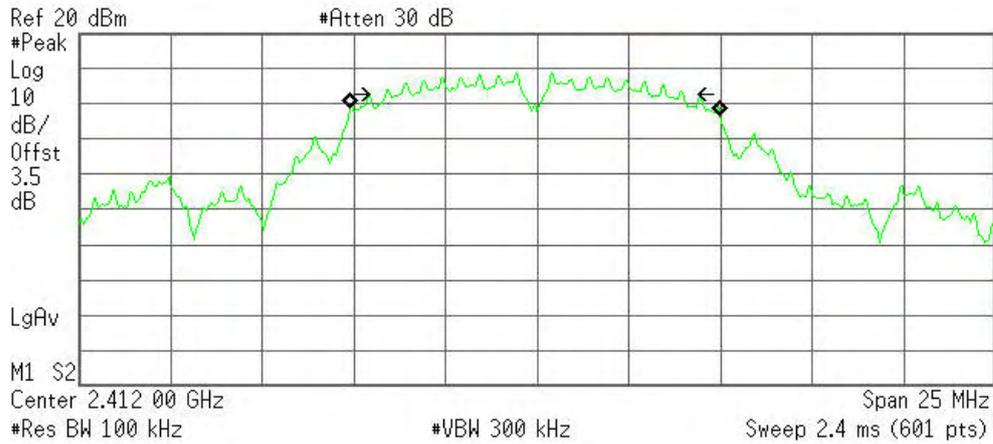

Occupied Bandwidth
10.1272 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -63.824 kHz
x dB Bandwidth 8.086 MHz

6dB Bandwidth (CH Mid)

Agilent 13:11:02 Jun 5, 2011

R T

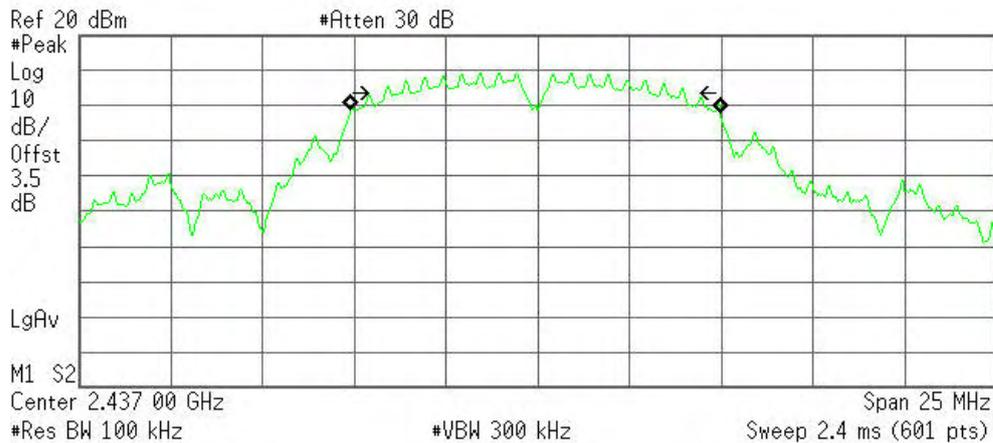

Occupied Bandwidth
10.1057 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -61.879 kHz
x dB Bandwidth 8.134 MHz



6dB Bandwidth (CH High)

Agilent 13:12:21 Jun 5, 2011

R T

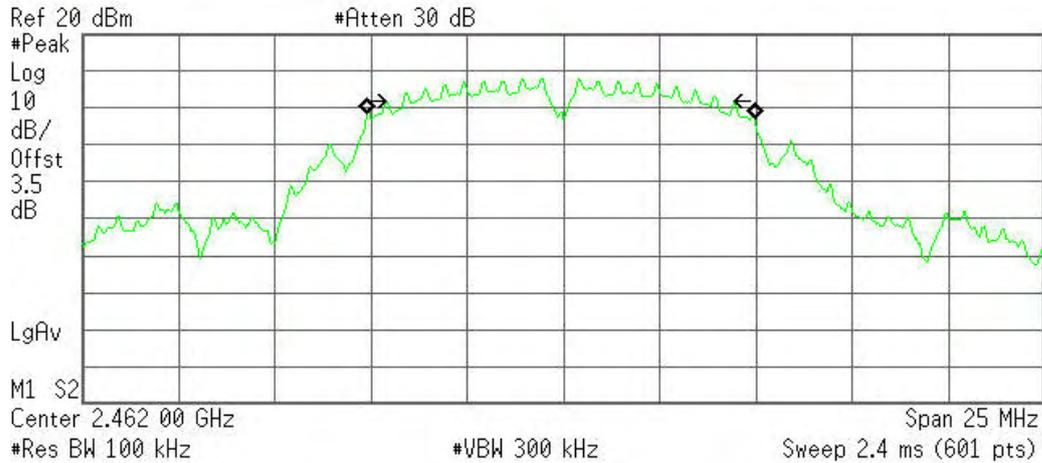

Occupied Bandwidth
10.1046 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -72.600 kHz
x dB Bandwidth 8.132 MHz

(IEEE 802.11g mode)

6dB Bandwidth (CH Low)

Agilent 11:54:13 Jun 5, 2011

R T

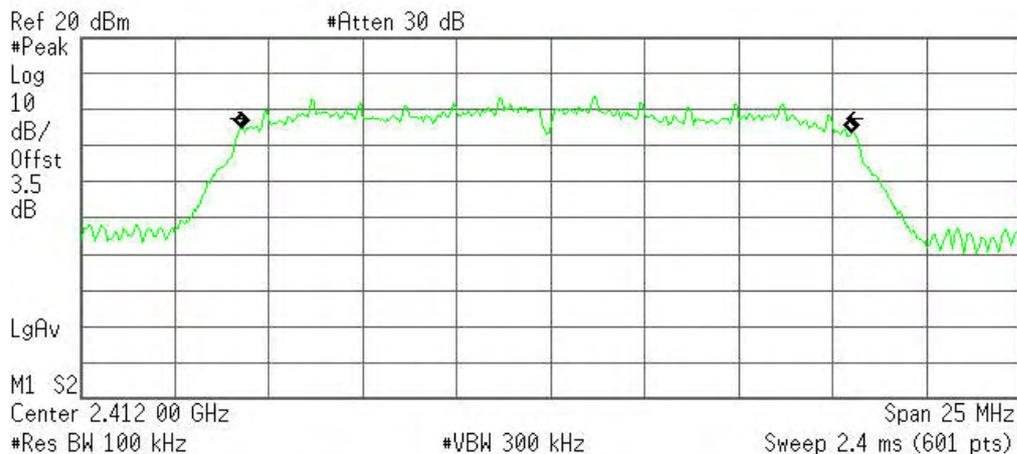

Occupied Bandwidth
16.2111 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -115.402 kHz
x dB Bandwidth 15.117 MHz



6dB Bandwidth (CH Mid)

Agilent 11:56:58 Jun 5, 2011

R T



Occupied Bandwidth
16.2383 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -114.164 kHz
x dB Bandwidth 15.112 MHz

6dB Bandwidth (CH High)

Agilent 11:52:37 Jun 5, 2011

R T



Occupied Bandwidth
16.2348 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -111.287 kHz
x dB Bandwidth 15.130 MHz




(IEEE 802.11n HT20 MHz mode)

6dB Bandwidth (CH Low)

Agilent 11:48:08 Jun 5, 2011

R T

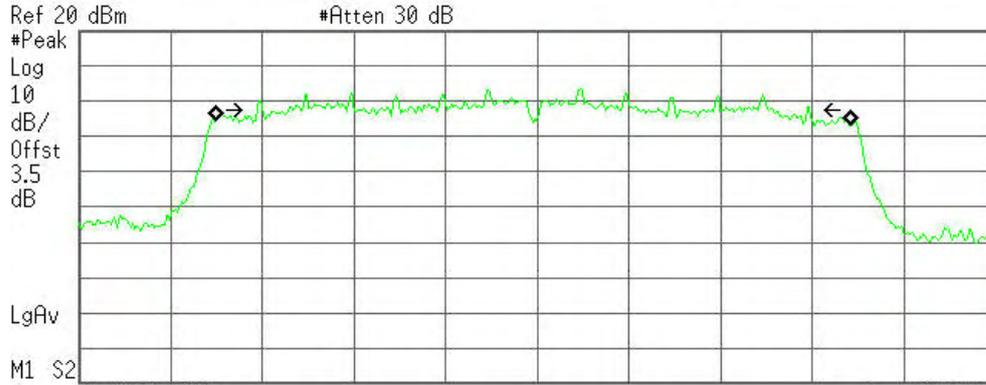

Occupied Bandwidth
17.3152 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -111.083 kHz
x dB Bandwidth 15.072 MHz

6dB Bandwidth (CH Mid)

Agilent 11:47:28 Jun 5, 2011

R T



Occupied Bandwidth
17.3262 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -117.383 kHz
x dB Bandwidth 15.102 MHz



6dB Bandwidth (CH High)

Agilent 11:49:09 Jun 5, 2011

R T

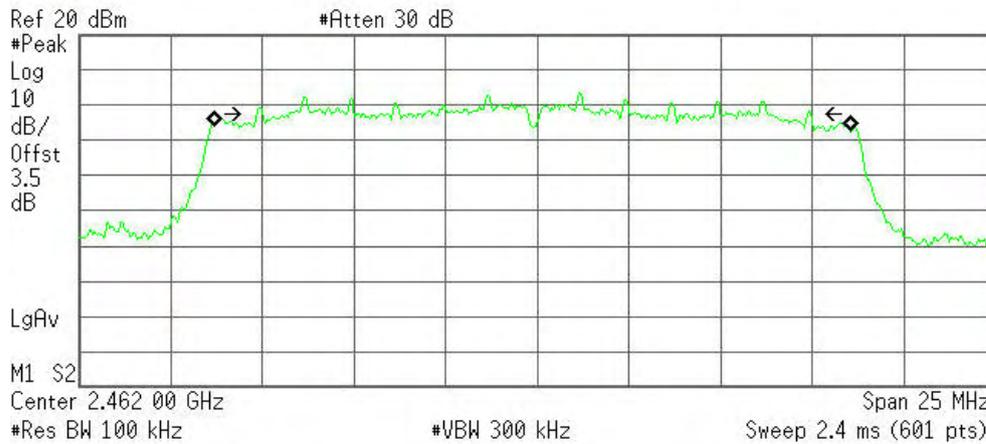

Occupied Bandwidth
17.3142 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -118.233 kHz
x dB Bandwidth 15.118 MHz

(IEEE 802.11n HT40 MHz mode)

6dB Bandwidth (CH Low)

Agilent 11:45:14 Jun 5, 2011

R T

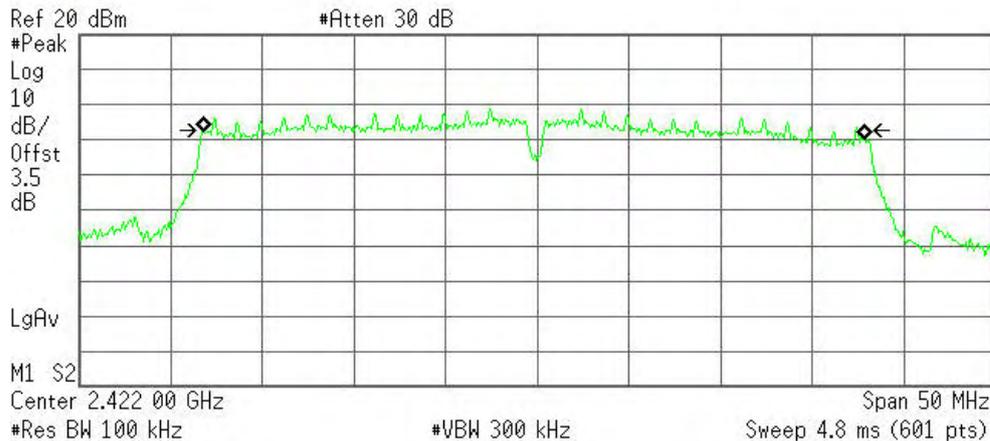

Occupied Bandwidth
35.9454 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -171.505 kHz
x dB Bandwidth 35.191 MHz



6dB Bandwidth (CH Mid)

Agilent 11:44:20 Jun 5, 2011

R T

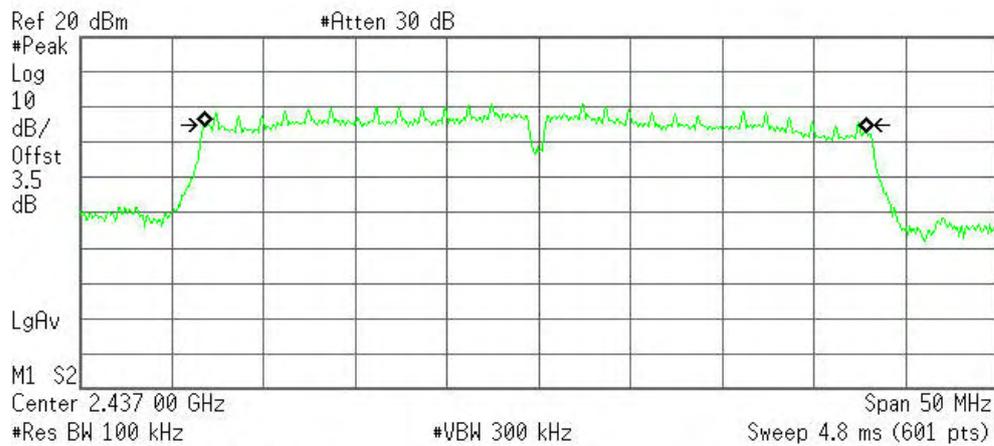

Occupied Bandwidth
35.9610 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -181.425 kHz
x dB Bandwidth 35.162 MHz

6dB Bandwidth (CH High)

Agilent 11:42:49 Jun 5, 2011

R T

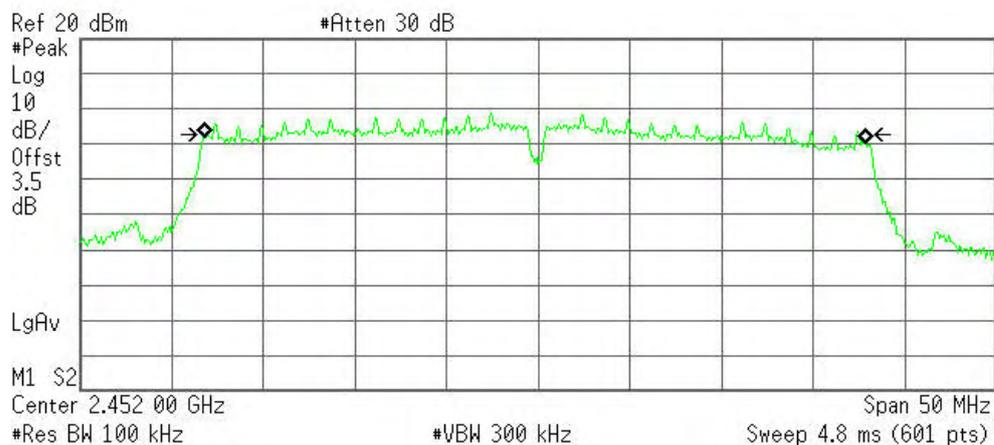

Occupied Bandwidth
35.9470 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -176.343 kHz
x dB Bandwidth 35.198 MHz



7.4. PEAK OUTPUT POWER

7.4.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.4.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012

7.4.3. TEST PROCEDURES (please refer to measurement standard)

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz.
3. Set VBW \geq 3 MHz.
4. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) $<$ 0.5 RBW. Otherwise use peak detector mode.
5. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run".
6. Trace average 100 traces in power averaging mode.
7. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.



7.4.4. TEST SETUP



7.4.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	18.18	0.06577	1	PASS
Mid	2437	18.99	0.07925		PASS
High	2462	17.59	0.05741		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.26	0.04227	1	PASS
Mid	2437	17.14	0.05176		PASS
High	2462	15.69	0.03707		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.30	0.04266	1	PASS
Mid	2437	17.63	0.05794		PASS
High	2462	15.70	0.03715		PASS

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	13.75	0.02371	1	PASS
Mid	2437	16.30	0.04266		PASS
High	2452	13.67	0.02328		PASS




Test Plot

(IEEE 802.11b mode)

Peak power (CH Low)

Agilent 11:16:43 Jun 5, 2011

R T

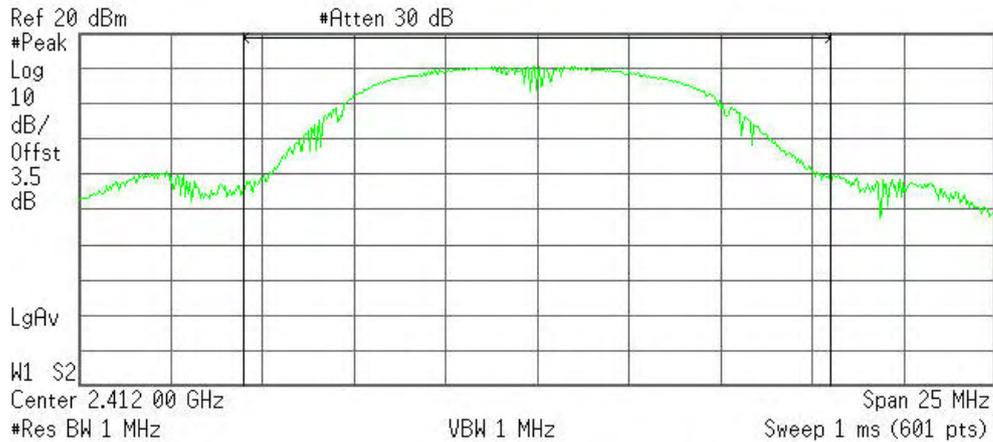

Channel Power

18.18 dBm /16.0000 MHz


Power Spectral Density

-53.87 dBm/Hz

Peak power (CH Mid)

Agilent 11:22:11 Jun 5, 2011

R T

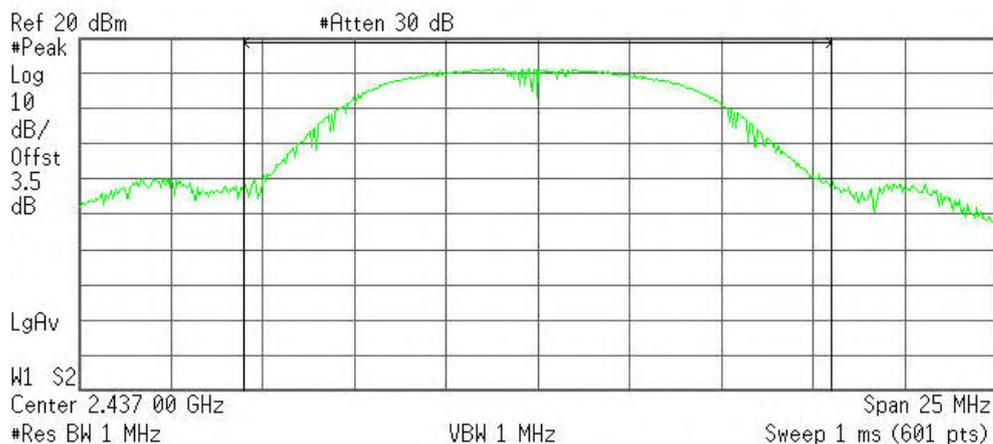

Channel Power

18.99 dBm /16.0000 MHz

Power Spectral Density


-53.05 dBm/Hz



Peak power (CH High)

Agilent 11:19:45 Jun 5, 2011

R T

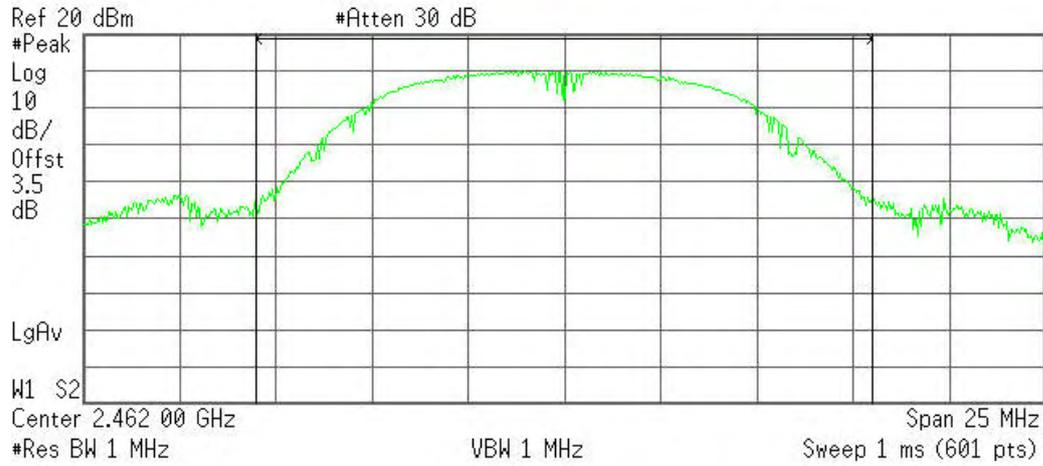

Channel Power

17.59 dBm /16.0000 MHz

Power Spectral Density


-54.45 dBm/Hz

(IEEE 802.11g mode)

Peak power (CH Low)

Agilent 11:27:47 Jun 5, 2011

R T

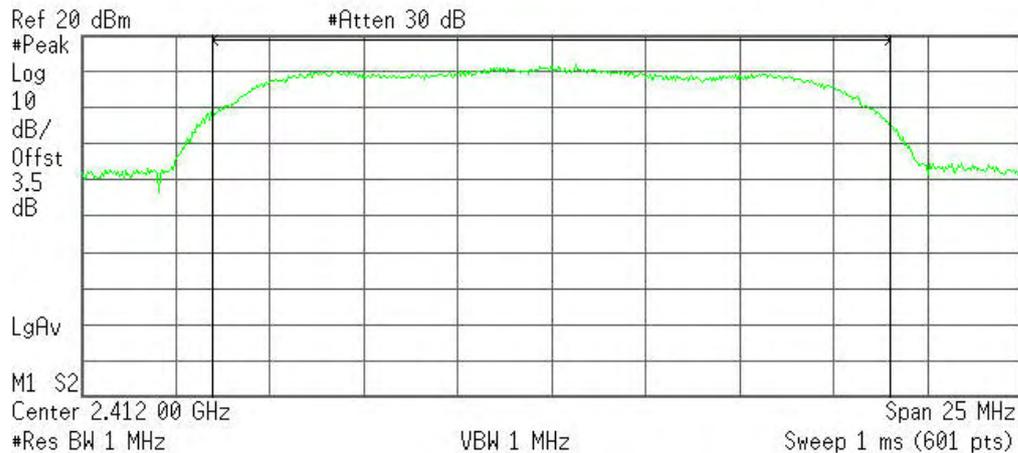

Channel Power

16.26 dBm /18.0000 MHz

Power Spectral Density


-56.29 dBm/Hz



Peak power (CH Mid)

* Agilent 11:24:52 Jun 5, 2011

R T

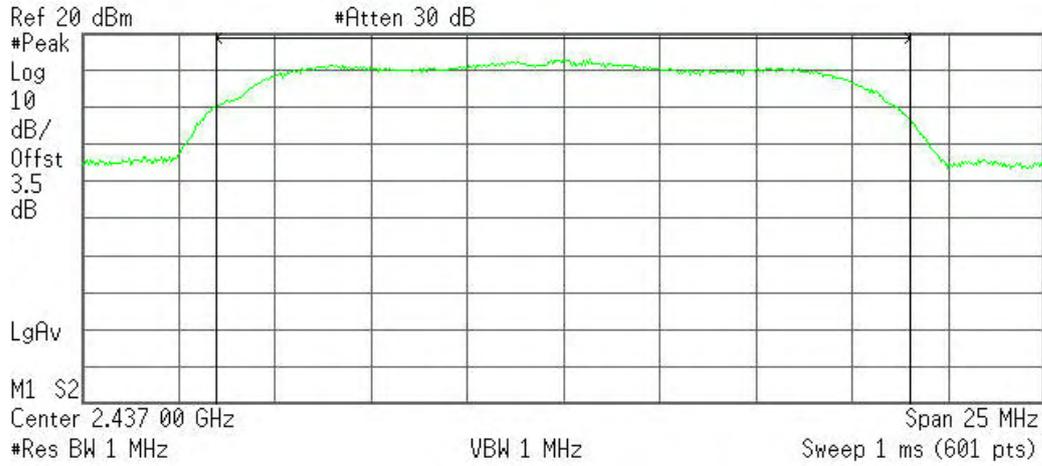

Channel Power

17.14 dBm /18.0000 MHz


Power Spectral Density

-55.41 dBm/Hz

Peak power (CH High)

* Agilent 11:29:42 Jun 5, 2011

R T

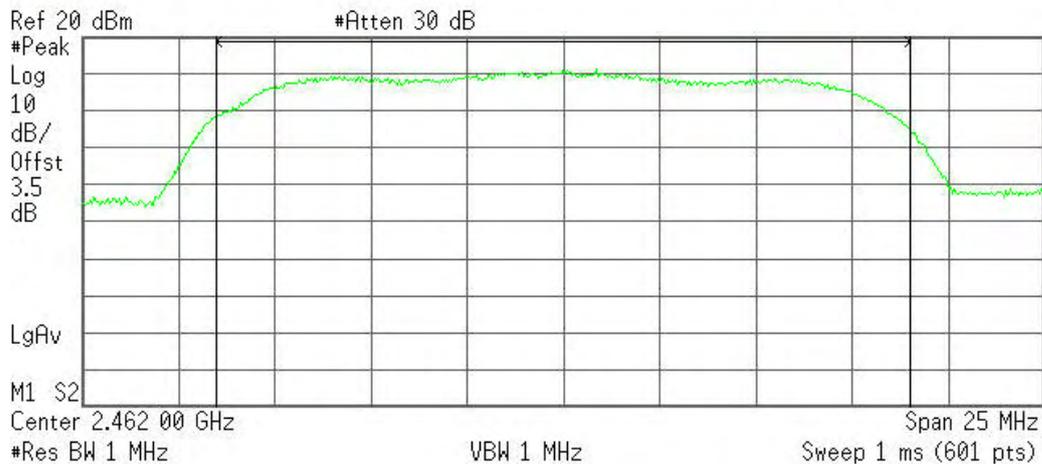

Channel Power

15.69 dBm /18.0000 MHz

Power Spectral Density

-56.86 dBm/Hz




(IEEE 802.11n HT20 MHz mode)

Peak power (CH Low)

Agilent 11:33:03 Jun 5, 2011

R T

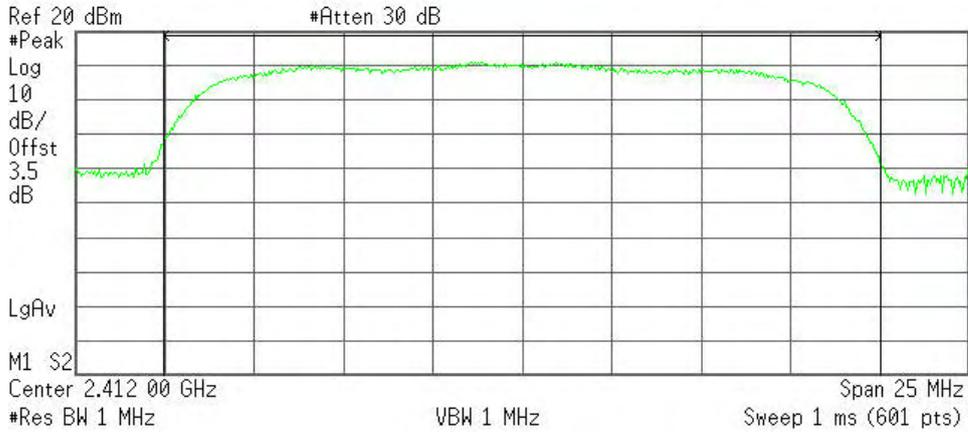

Channel Power

16.30 dBm /20.0000 MHz


Power Spectral Density

-56.71 dBm/Hz

Peak power (CH Mid)

Agilent 11:34:07 Jun 5, 2011

R T

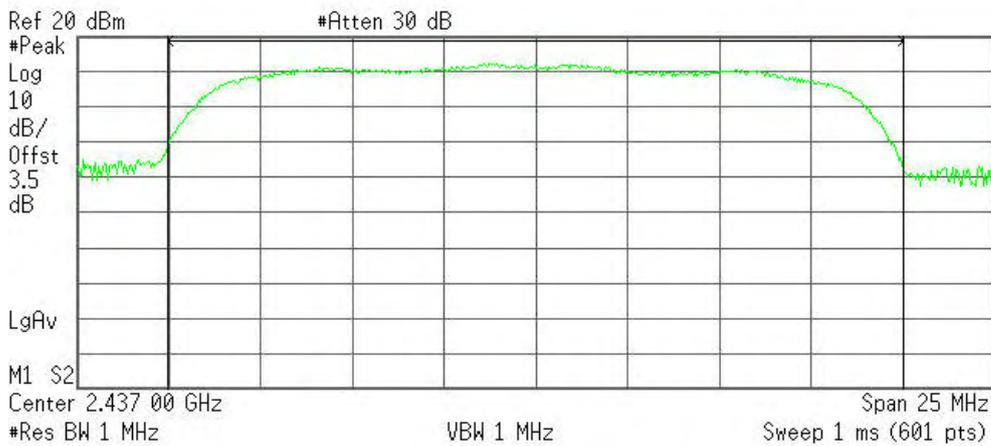

Channel Power

17.63 dBm /20.0000 MHz

Power Spectral Density


-55.38 dBm/Hz



Peak power (CH High)

* Agilent 11:31:41 Jun 5, 2011

R T

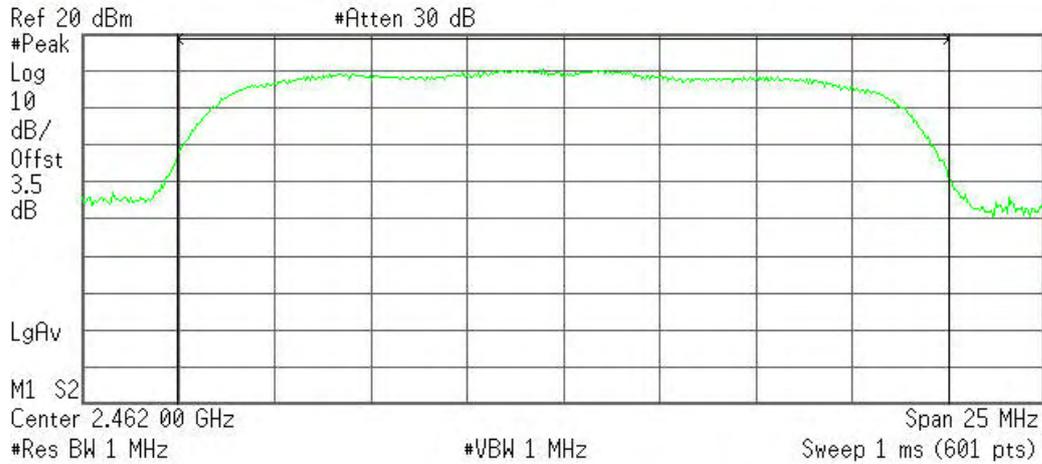

Channel Power

15.70 dBm /20.0000 MHz

Power Spectral Density


-57.31 dBm/Hz

(IEEE 802.11n HT40 MHz mode)

Peak power (CH Low)

* Agilent 11:39:49 Jun 5, 2011

R T

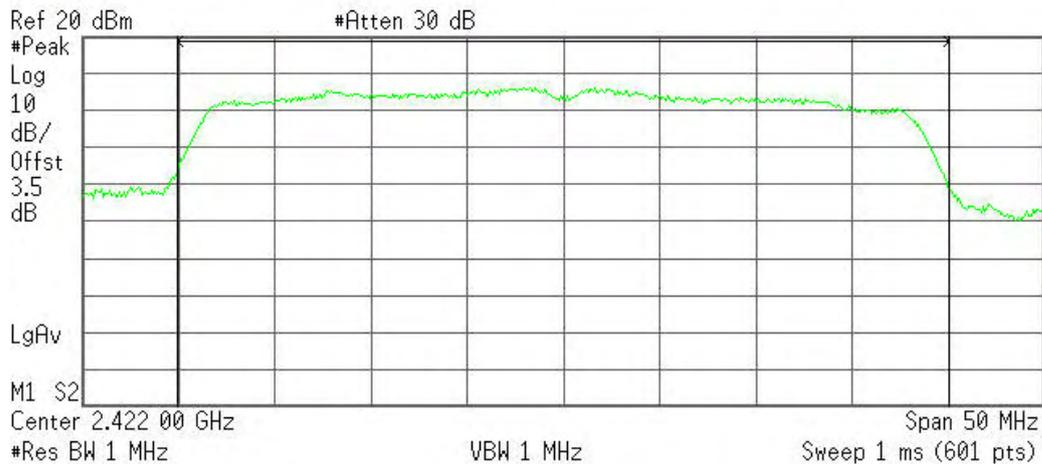

Channel Power

13.75 dBm /40.0000 MHz

Power Spectral Density


-62.27 dBm/Hz



Peak power (CH Mid)

* Agilent 11:37:10 Jun 5, 2011

R T

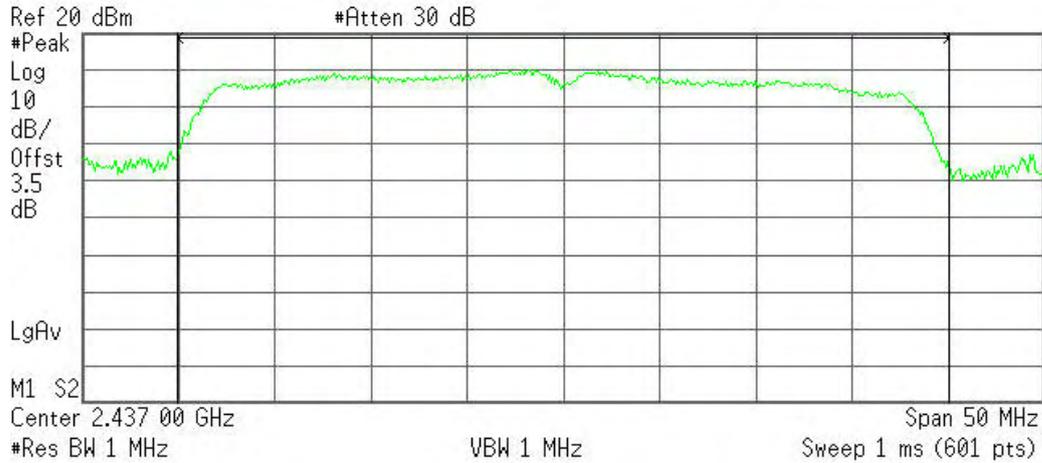

Channel Power

16.30 dBm /40.0000 MHz


Power Spectral Density

-59.72 dBm/Hz

Peak power (CH High)

* Agilent 11:41:03 Jun 5, 2011

R T

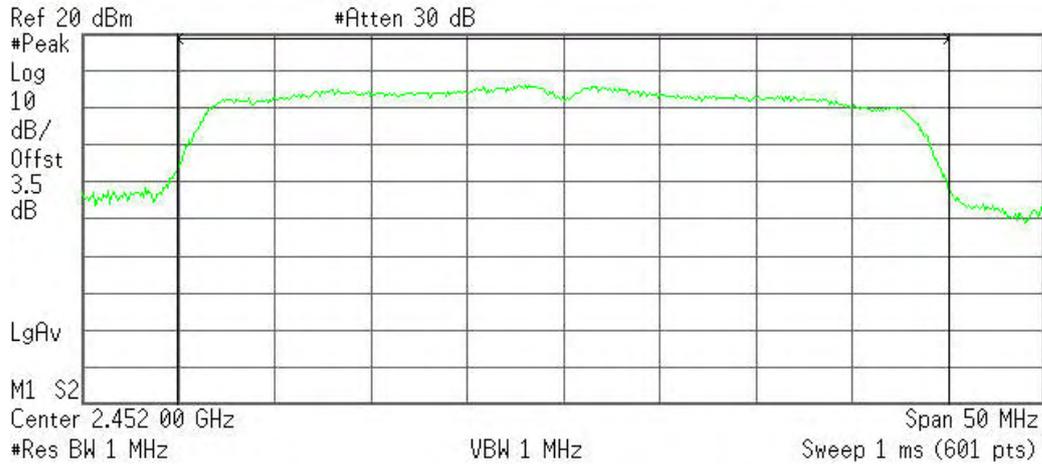

Channel Power

13.67 dBm /40.0000 MHz

Power Spectral Density

-62.35 dBm/Hz



7.5. BAND EDGES MEASUREMENT

7.5.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.5.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012	
Amplifier	MITEQ	AM-1604-3000	1411843	03/21/2011	03/21/2012	
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R	
Controller	CT	N/A	N/A	N.C.R	N.C.R	
High Noise Amplifier	Agilent	8449B	3008A01838	06/18/2011	06/18/2012	
Site NSA	C&C	N/A	N/A	N.C.R	N.C.R	
Bilog Antenna	SCHAFFNER	CBL6143	5082	06/18/2011	06/18/2012	
Horn Antenna	SCHWARZBECK	BBHA9120D	D286	03/19/2011	03/19/2012	
Signal Generator	Anritsu	MG3694A	#050125	03/21/2011	03/21/2012	
Horn Antenna	TRC	HA0301	N/A	03/19/2011	03/19/2012	
Loop Antenna	A.R.A	PLA-1030/B	1029	03/19/2011	03/19/2012	
Power Sensor	Anritsu	MA2491A	030619	06/18/2011	06/18/2012	
Power Meter	Anritsu	ML2487A	6K00001491	06/18/2011	06/18/2012	
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/30/2011	03/30/2012	

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.


3. N.C.R = No Calibration Required.



7.5.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are

7.5.4. TEST SETUP

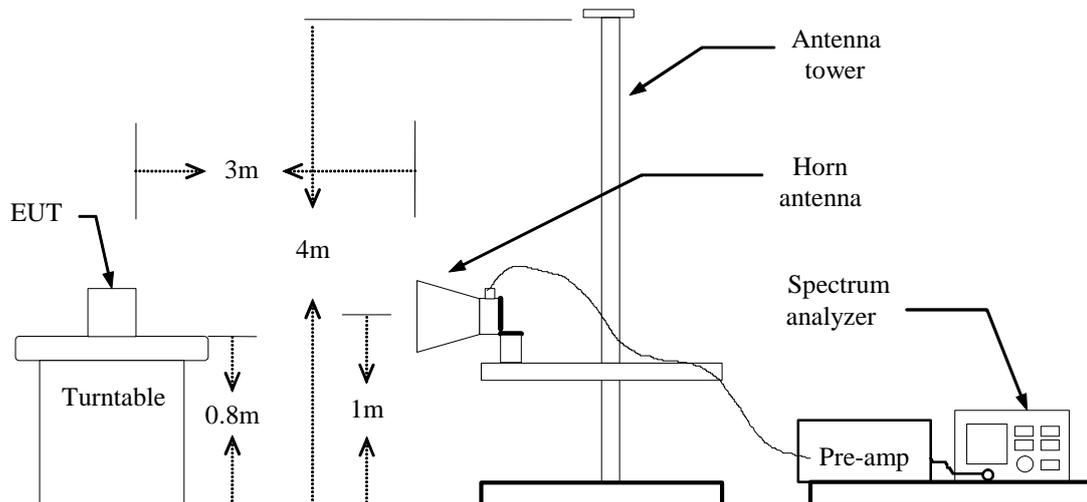



7.5.5. TEST RESULTS

IEEE 802.11b mode / CH Low

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.00	V	54.86	43.15	-9.75	45.11	33.40	74	54	-28.89	-20.60
N/A										
2390.00	H	45.69	35.10	-9.75	35.94	25.35	74	54	-38.06	-28.65
N/A										

IEEE 802.11b mode / CH High

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	56.95	48.26	-9.78	47.17	38.48	74	54	-26.83	-15.52
N/A										
2483.50	H	45.44	35.10	-9.78	35.66	25.32	74	54	-38.34	-28.68
N/A										



IEEE 802.11g mode / CH Low

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.00	V	67.14	47.05	-9.75	57.39	37.30	74	54	-16.61	-16.70
N/A										
2390.00	H	55.84	42.68	-9.75	46.09	32.93	74	54	-27.91	-21.07
N/A										

IEEE 802.11g mode / CH High

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	64.49	46.07	-9.78	54.71	36.29	74	54	-19.29	-17.71
N/A										
2483.50	H	52.51	37.36	-9.78	42.73	27.58	74	54	-31.27	-26.42
N/A										



IEEE 802.11n HT20 MHz mode / CH Low

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.00	V	74.15	50.53	-9.75	61.50	39.39	74	54	-12.50	-14.61
N/A										
2390.00	H	57.14	40.80	-9.75	64.04	41.95	74	54	-9.96	-12.05
N/A										

IEEE 802.11n HT20 MHz mode / CH High

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	67.97	48.86	-9.78	64.92	42.01	74	54	-9.08	-11.99
N/A										
2483.50	H	54.56	37.92	-9.78	60.76	49.32	74	54	-13.24	-4.68
N/A										



IEEE 802.11n HT40 MHz mode / CH Low

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.00	V	69.91	53.54	-9.75	61.48	44.29	74	54	-12.52	-9.71
N/A										
2390.00	H	59.09	41.87	-9.75	64.23	47.39	74	54	-9.77	-6.61
N/A										

IEEE 802.11n HT40 MHz mode / CH High

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	67.71	50.50	-9.78	64.49	47.19	74	54	-9.51	-6.81
N/A										
2483.50	H	55.54	38.88	-9.78	69.18	52.01	74	54	-4.82	-1.99
N/A										



Test Plot (IEEE 802.11b mode)

Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical


Agilent 17:27:18 May 29, 2011

R T

Mkr1 2.411 0 GHz
105.66 dBμV

Ref 127 dBμV

#Atten 30 dB

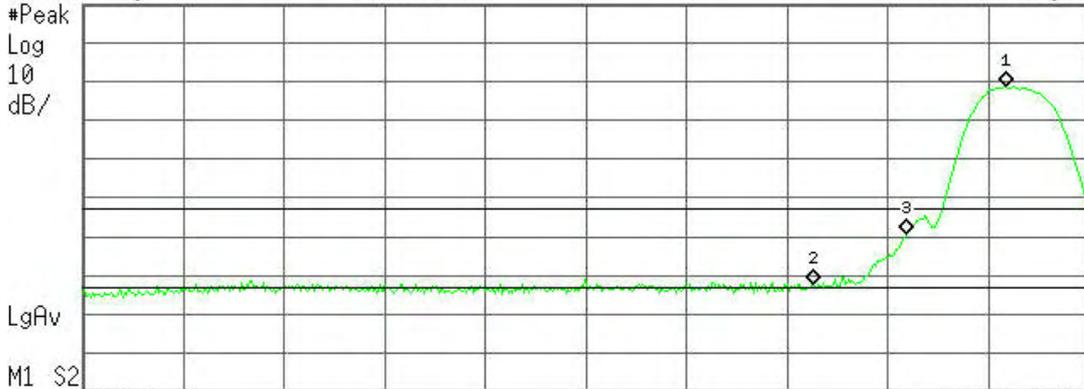

Start 2.310 0 GHz Stop 2.420 0 GHz
#Res BW 1 MHz #VBW 1 MHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.411 0 GHz	105.66 dBμV
2	(1)	Freq	2.390 0 GHz	54.86 dBμV
3	(1)	Freq	2.400 0 GHz	67.87 dBμV

Detector mode: Average

Polarity: Vertical


Agilent 17:29:54 May 29, 2011

R T

Mkr1 2.411 2 GHz
102.75 dBμV

Ref 127 dBμV

#Atten 30 dB

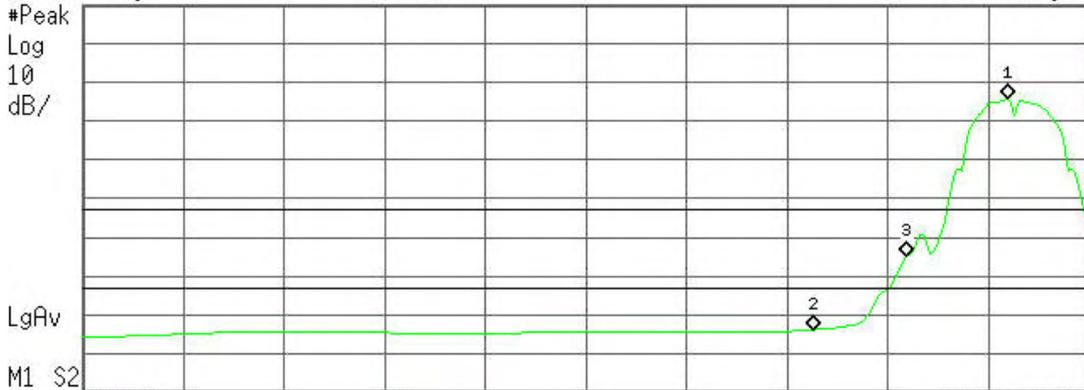

Start 2.310 0 GHz Stop 2.420 0 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.411 2 GHz	102.75 dBμV
2	(1)	Freq	2.390 0 GHz	43.15 dBμV
3	(1)	Freq	2.400 0 GHz	62.14 dBμV



Detector mode: Peak

Polarity: Horizontal


Agilent 17:33:58 May 29, 2011

R T

Mkr1 2.411 8 GHz
85.03 dBµV

Ref 127 dBµV

#Atten 30 dB

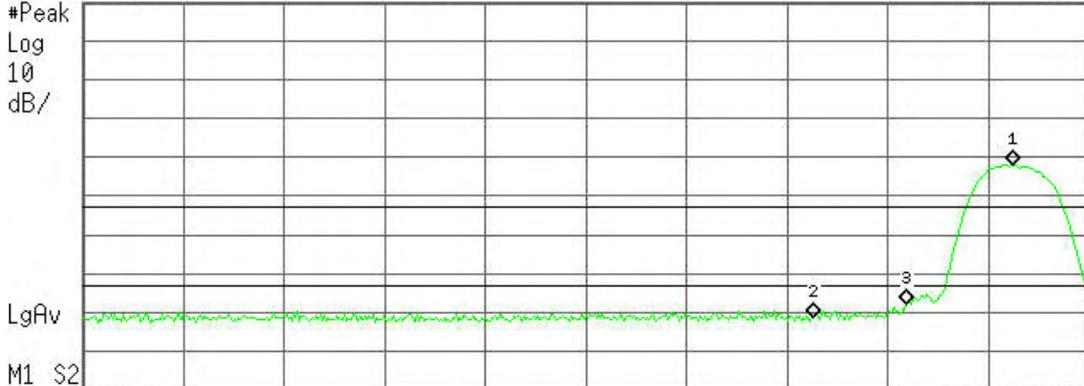

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

VBW 1 MHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.411 8 GHz	85.03 dBµV
2	(1)	Freq	2.390 0 GHz	45.69 dBµV
3	(1)	Freq	2.400 0 GHz	48.89 dBµV

Detector mode: Average

Polarity: Horizontal

Agilent 17:34:28 May 29, 2011

R T

Mkr1 2.411 2 GHz
82.10 dBµV

Ref 127 dBµV

#Atten 30 dB



Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.411 2 GHz	82.10 dBµV
2	(1)	Freq	2.390 0 GHz	35.10 dBµV
3	(1)	Freq	2.400 0 GHz	39.08 dBµV



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 15:01:28 Jun 4, 2011

R T

Mkr1 2.460 83 GHz
104.32 dBμV

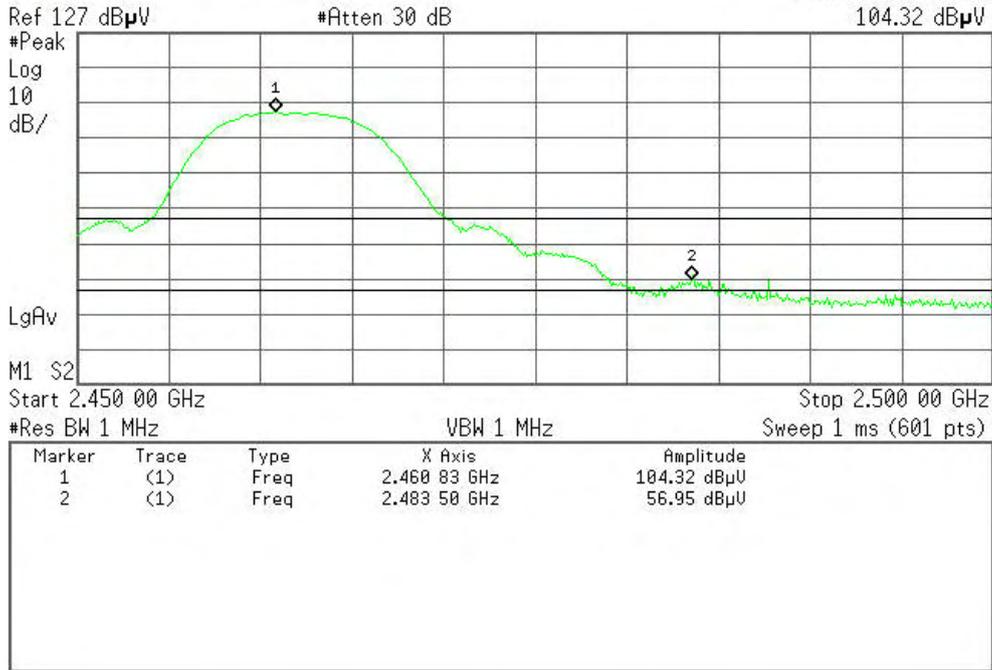


Detector mode: Average

Polarity: Vertical

Agilent 15:01:03 Jun 4, 2011

R T

Mkr1 2.461 17 GHz
100.65 dBμV

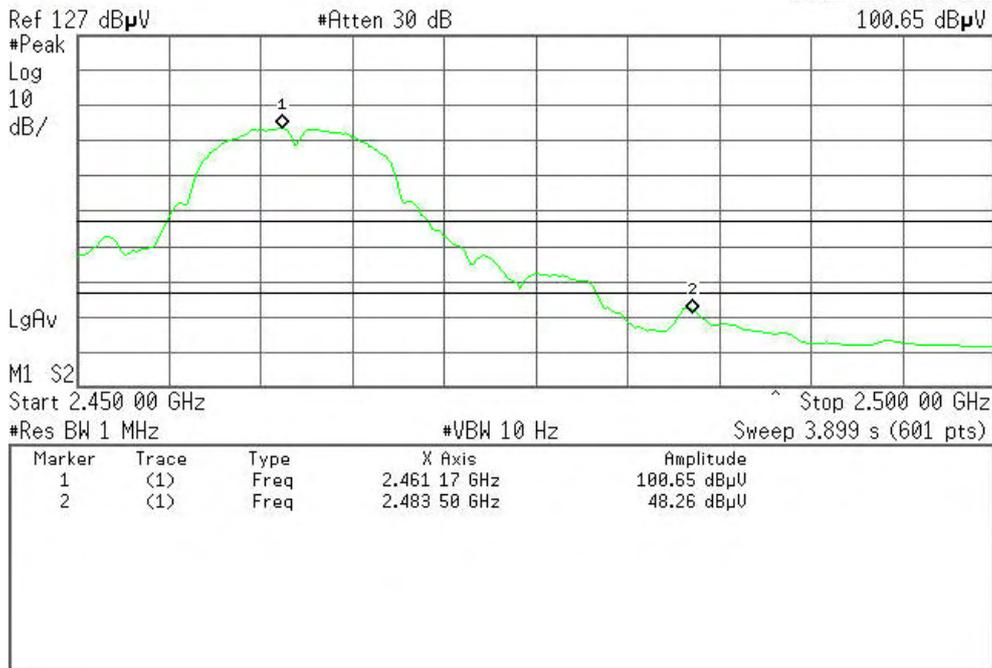




Detector mode: Peak

Polarity: Horizontal

Agilent 15:03:16 Jun 4, 2011

R T

Mkr1 2.460 92 GHz
91.67 dBμV

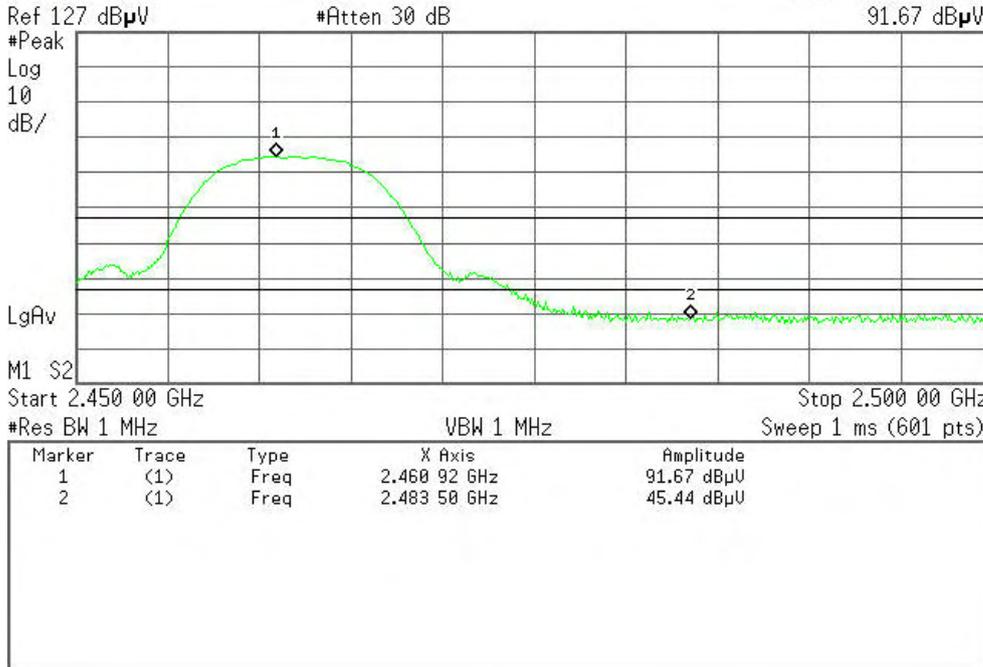


Detector mode: Average

Polarity: Horizontal

Agilent 15:03:46 Jun 4, 2011

R T

Mkr1 2.461 08 GHz
88.65 dBμV

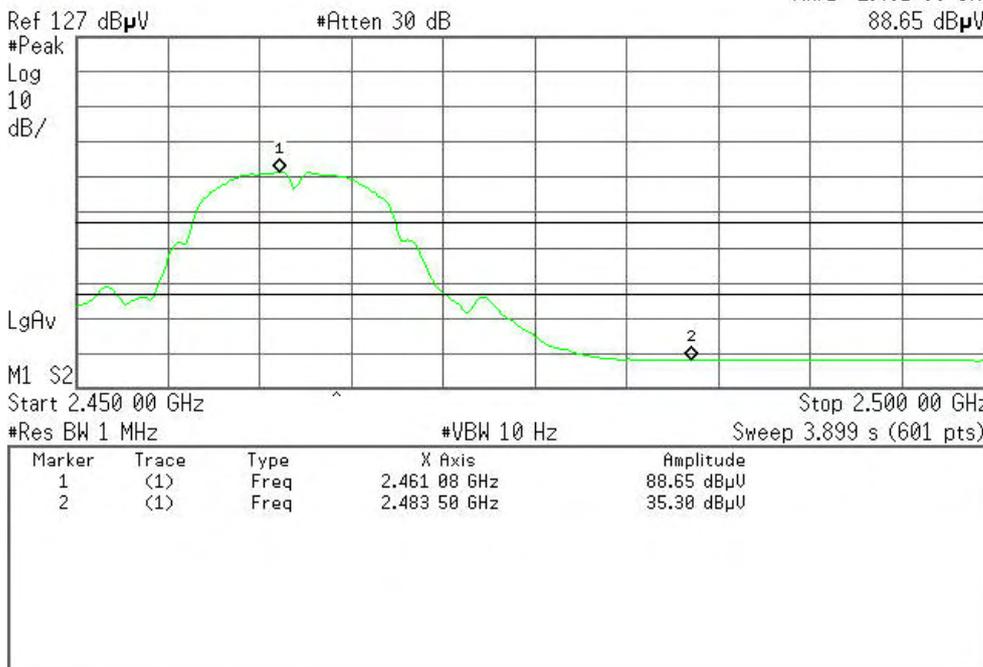



(IEEE 802.11g mode)

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 15:26:17 Jun 4, 2011

R T

Mkr1 2.413 0 GHz
103.82 dB μ V

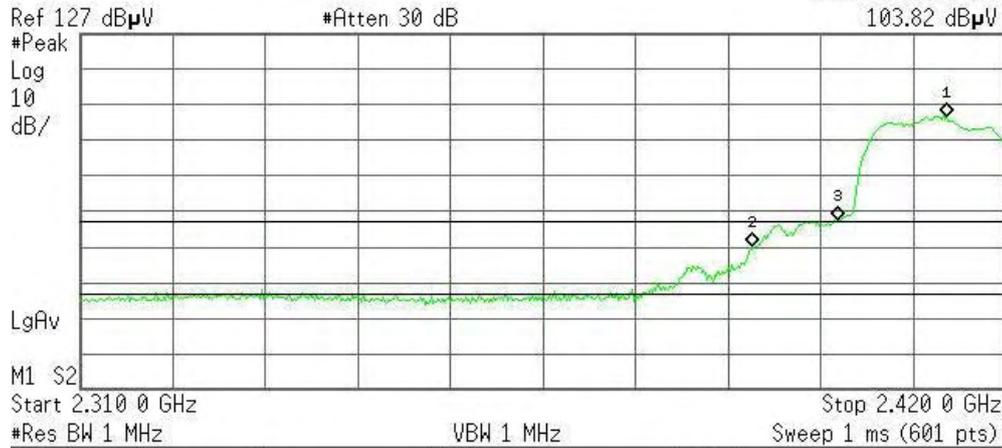

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.413 0 GHz	103.82 dB μ V
2	(1)	Freq	2.390 0 GHz	67.14 dB μ V
3	(1)	Freq	2.400 0 GHz	74.43 dB μ V


Detector mode: Average

Polarity: Vertical

Agilent 15:26:48 Jun 4, 2011

R T

Mkr1 2.411 0 GHz
90.60 dB μ V

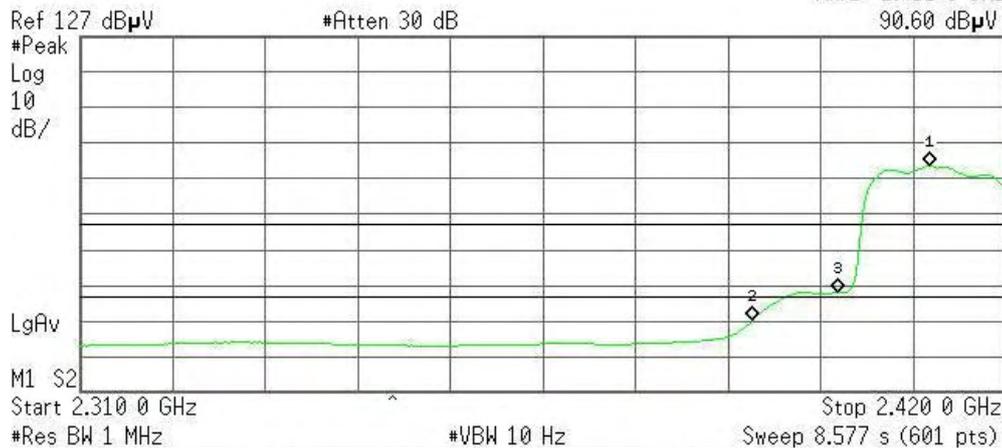

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.411 0 GHz	90.60 dB μ V
2	(1)	Freq	2.390 0 GHz	47.05 dB μ V
3	(1)	Freq	2.400 0 GHz	55.19 dB μ V




Detector mode: Peak

Polarity: Horizontal

Agilent 15:22:18 Jun 4, 2011

R T

Mkr1 2.411 8 GHz
92.04 dBμV

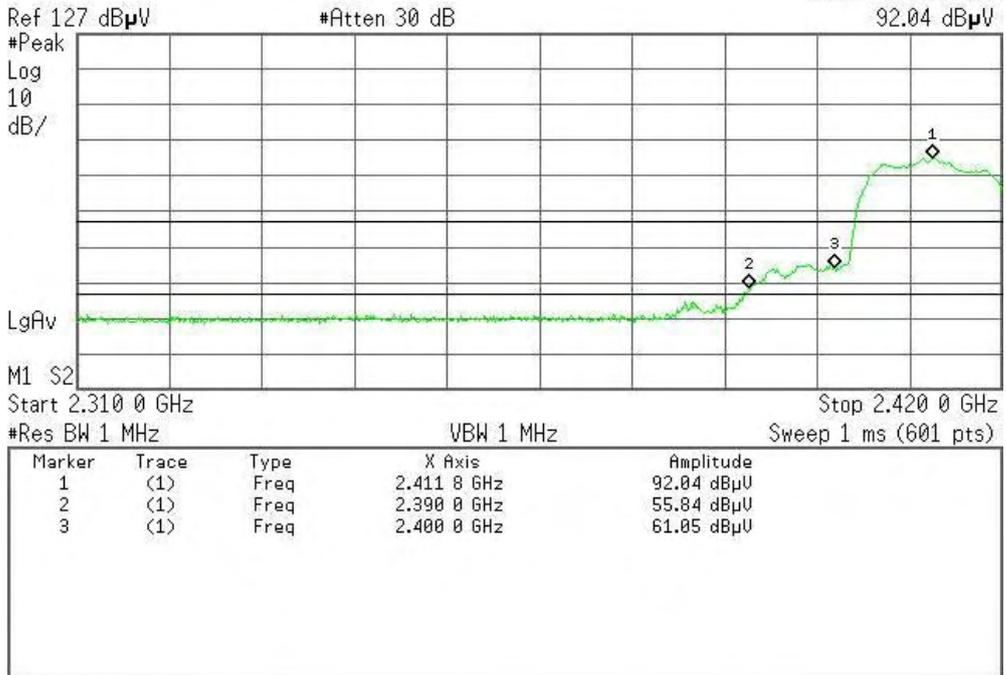


Detector mode: Average

Polarity: Horizontal

Agilent 15:22:52 Jun 4, 2011

R T

Mkr1 2.411 0 GHz
79.46 dBμV

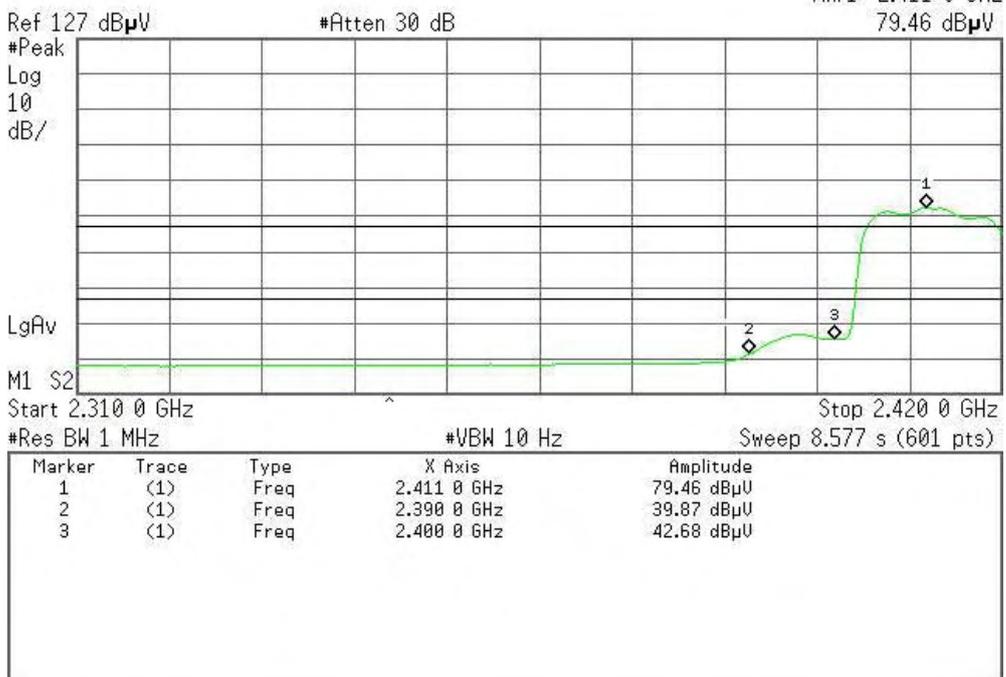



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 14:55:15 Jun 4, 2011

R T

Mkr1 2.461 75 GHz
104.43 dBμV

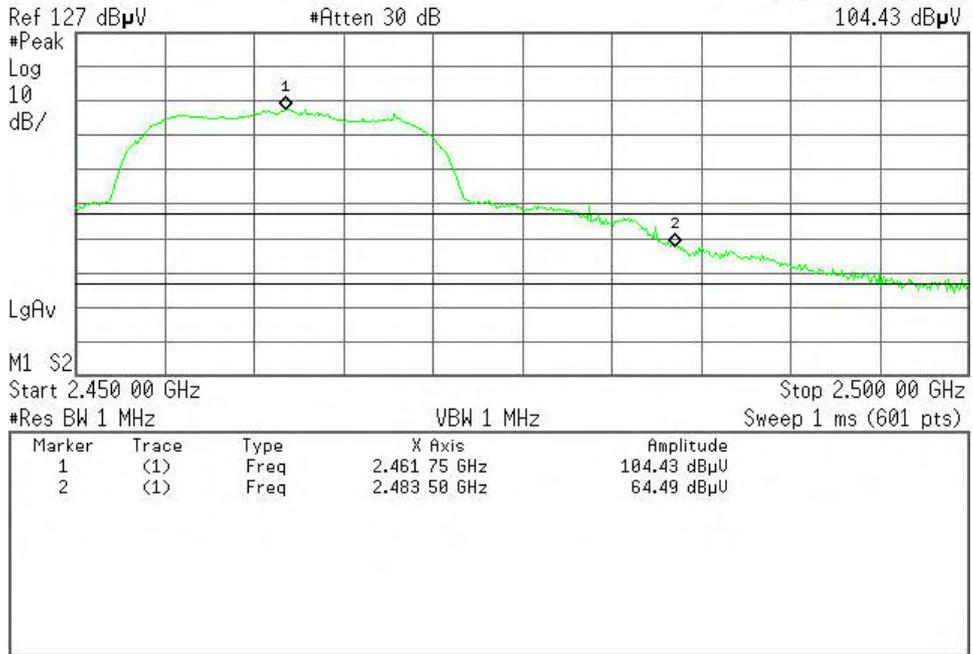


Detector mode: Average

Polarity: Vertical

Agilent 14:55:51 Jun 4, 2011

R T

Mkr1 2.461 25 GHz
90.98 dBμV

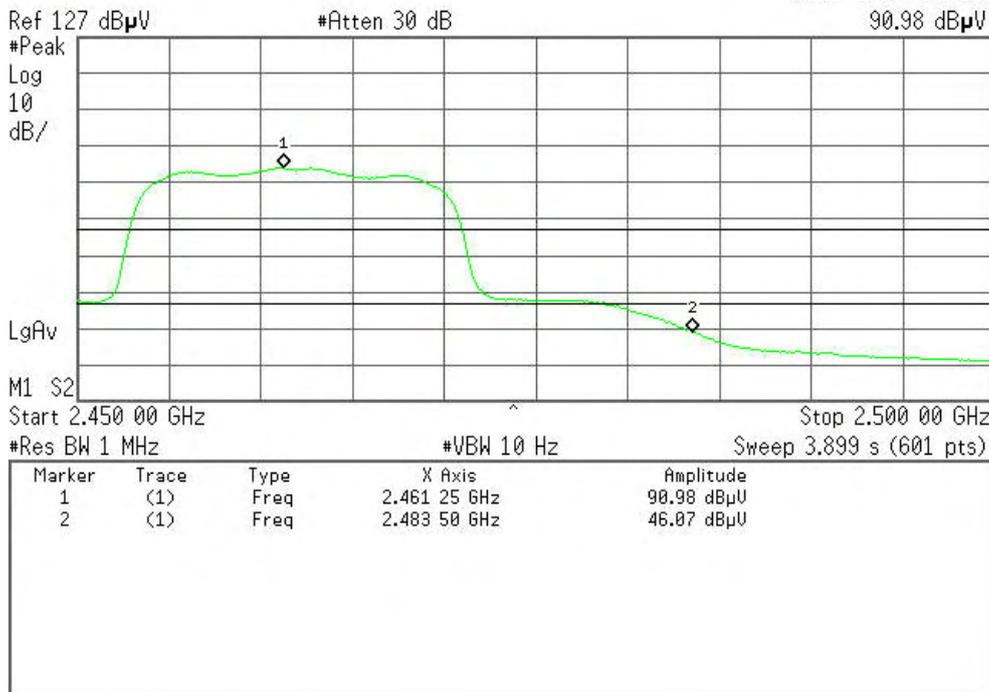




Detector mode: Peak

Polarity: Horizontal

Agilent 14:52:27 Jun 4, 2011

R T

Mkr1 2.462 75 GHz
93.32 dB μ V

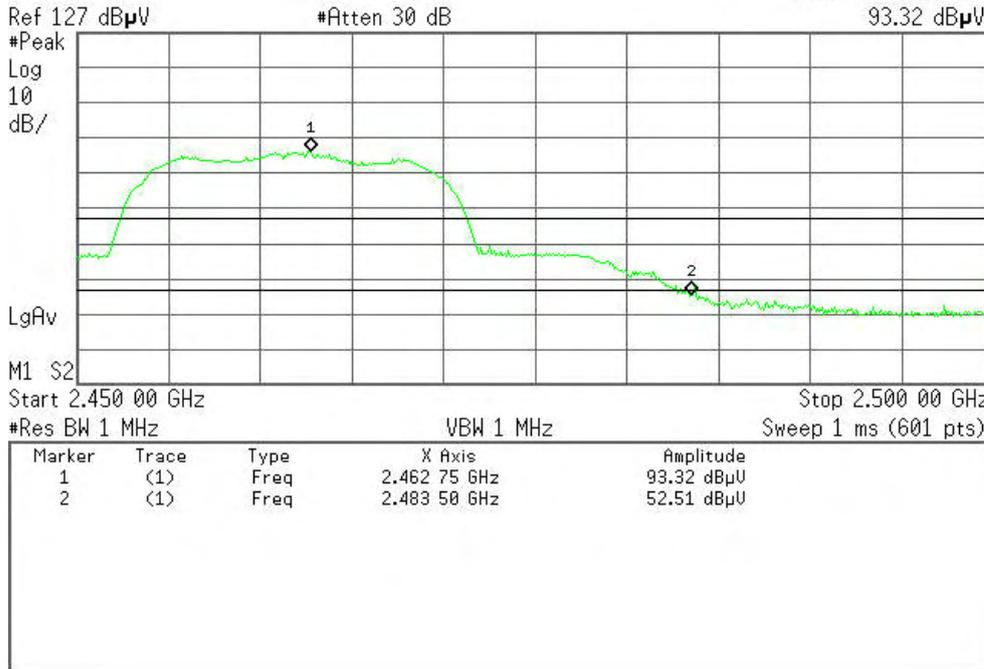


Detector mode: Average

Polarity: Horizontal

Agilent 14:52:55 Jun 4, 2011

R T

Mkr1 2.461 00 GHz
80.23 dB μ V

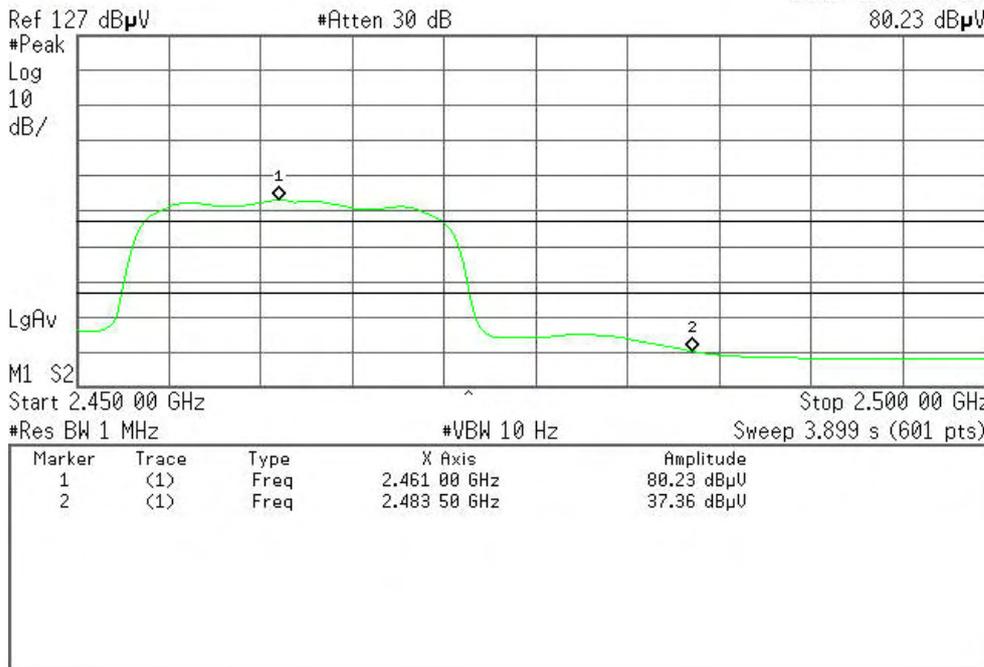



(IEEE 802.11n HT20 MHz mode)


Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 15:53:29 Jun 2, 2011

R T

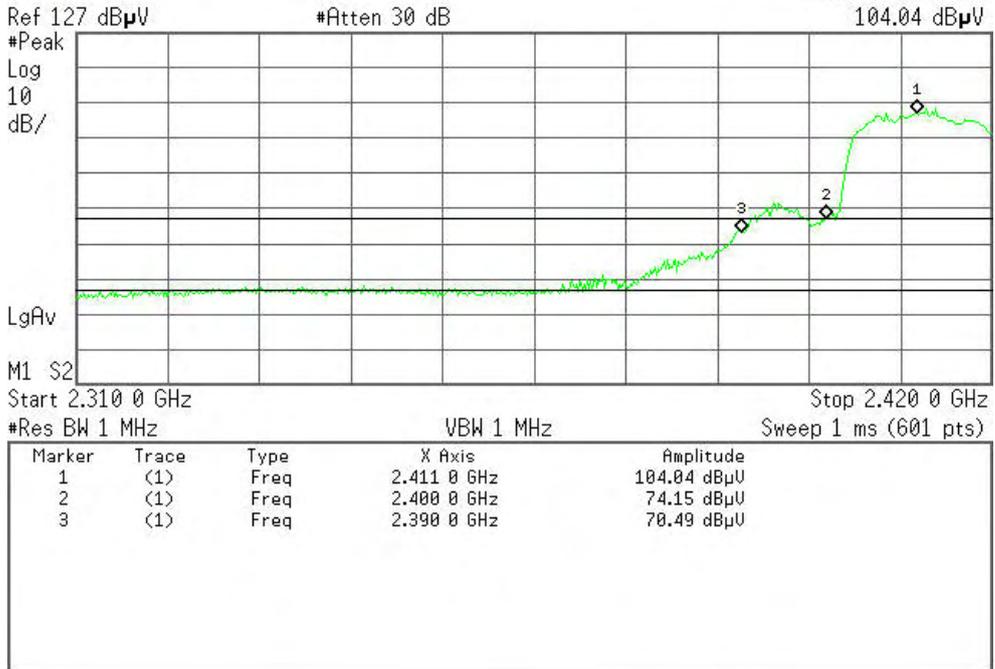


Detector mode: Average

Polarity: Vertical

Agilent 15:52:43 Jun 2, 2011

R T

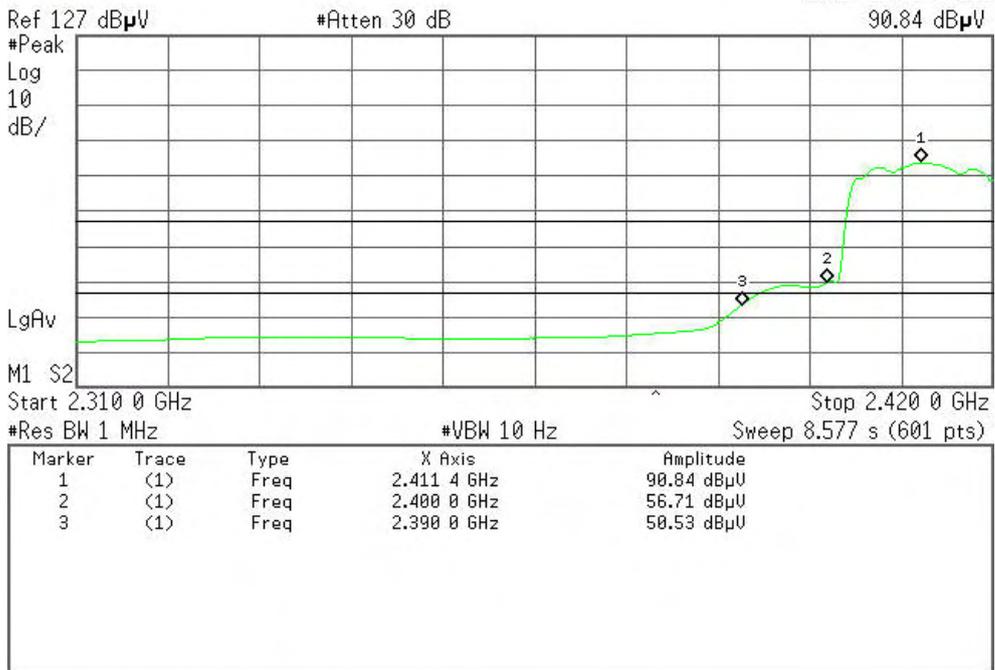




Detector mode: Peak

Polarity: Horizontal

Agilent 15:18:13 Jun 4, 2011

R T

Mkr1 2.411 8 GHz
91.26 dBμV

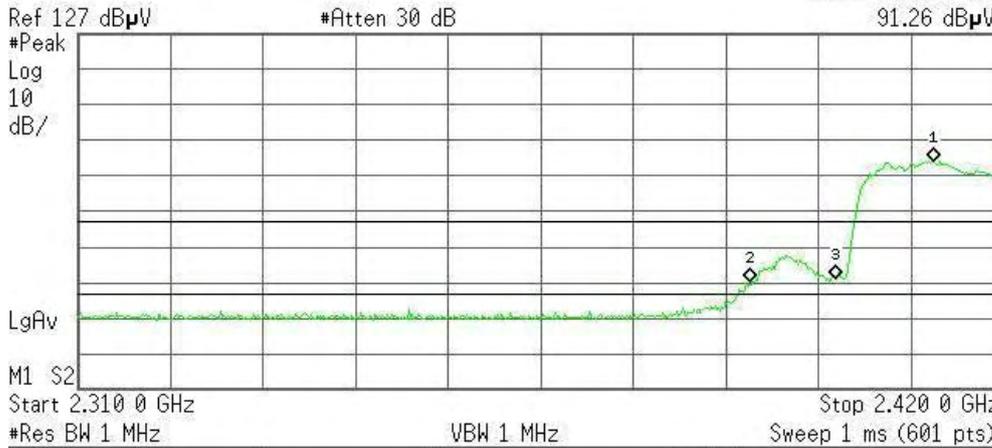

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.411 8 GHz	91.26 dBμV
2	(1)	Freq	2.390 0 GHz	57.14 dBμV
3	(1)	Freq	2.400 0 GHz	58.14 dBμV


Detector mode: Average

Polarity: Horizontal

Agilent 15:18:52 Jun 4, 2011

R T

Mkr1 2.411 4 GHz
78.47 dBμV

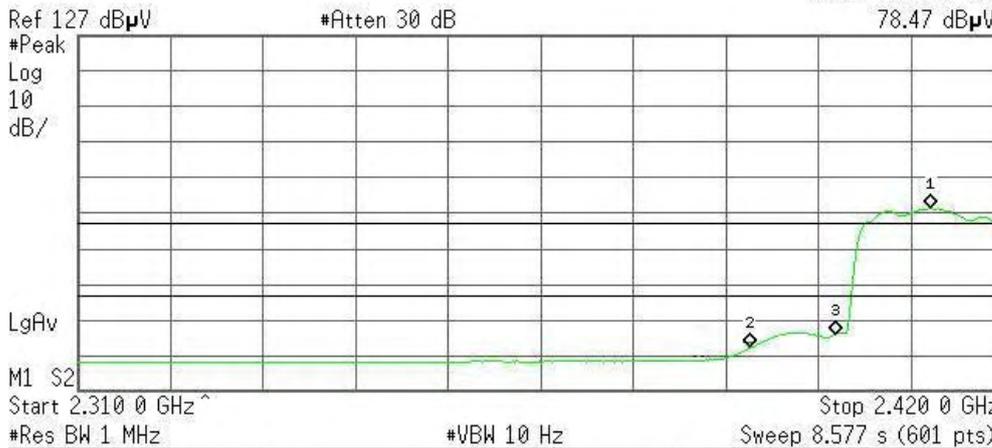

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.411 4 GHz	78.47 dBμV
2	(1)	Freq	2.390 0 GHz	40.80 dBμV
3	(1)	Freq	2.400 0 GHz	43.10 dBμV



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 14:46:36 Jun 4, 2011

R T

Mkr1 2.462 00 GHz
105.12 dB μ V

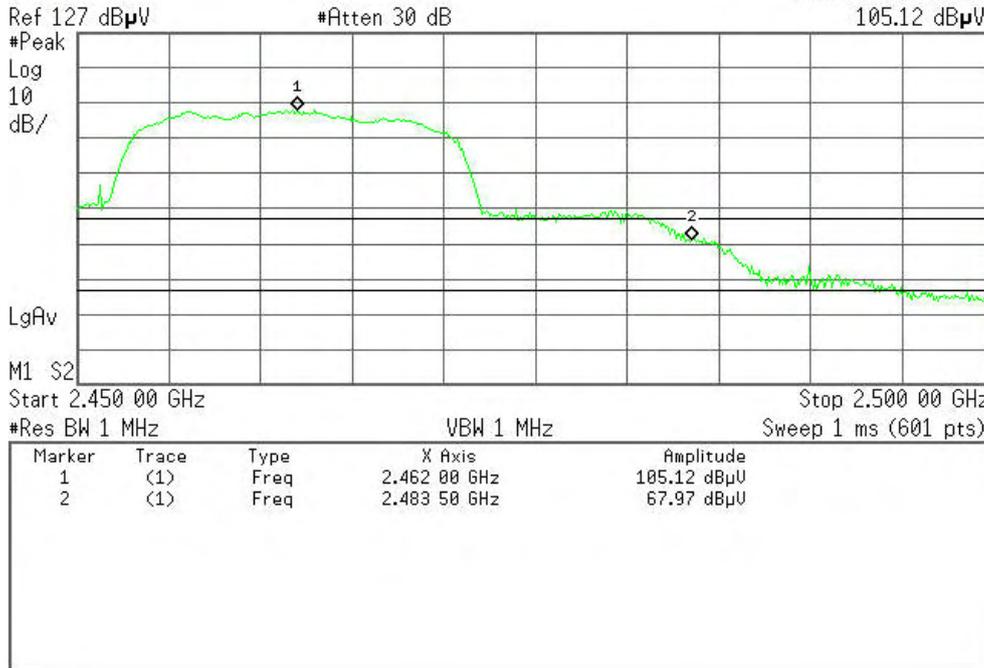


Detector mode: Average

Polarity: Vertical

Agilent 14:47:04 Jun 4, 2011

R T

Mkr1 2.461 42 GHz
91.24 dB μ V

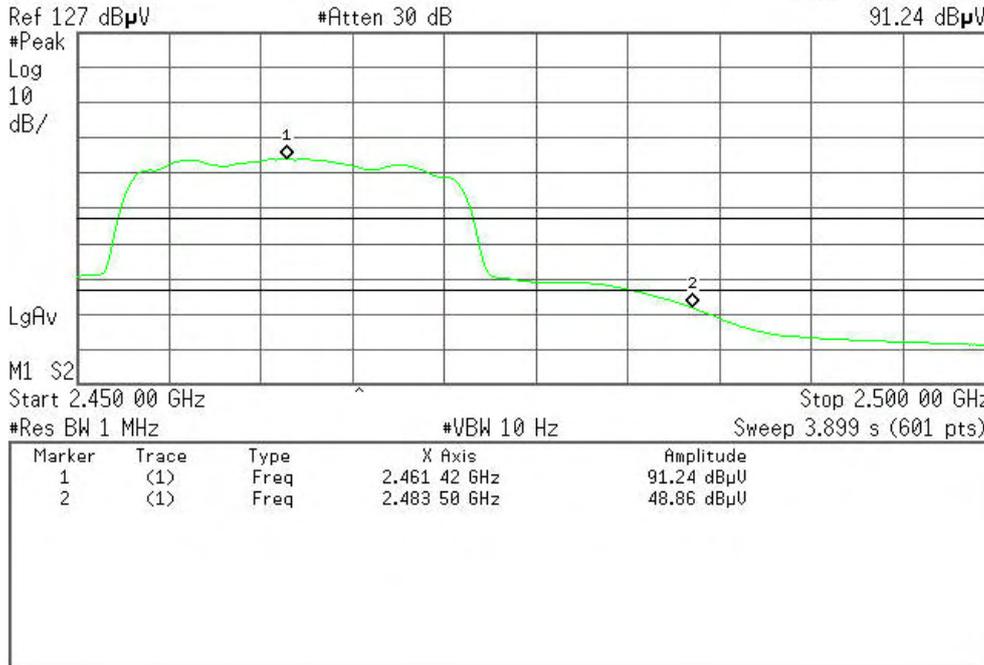




Detector mode: Peak

Polarity: Horizontal

Agilent 14:49:11 Jun 4, 2011

R T

Mkr1 2.462 42 GHz
92.55 dBμV

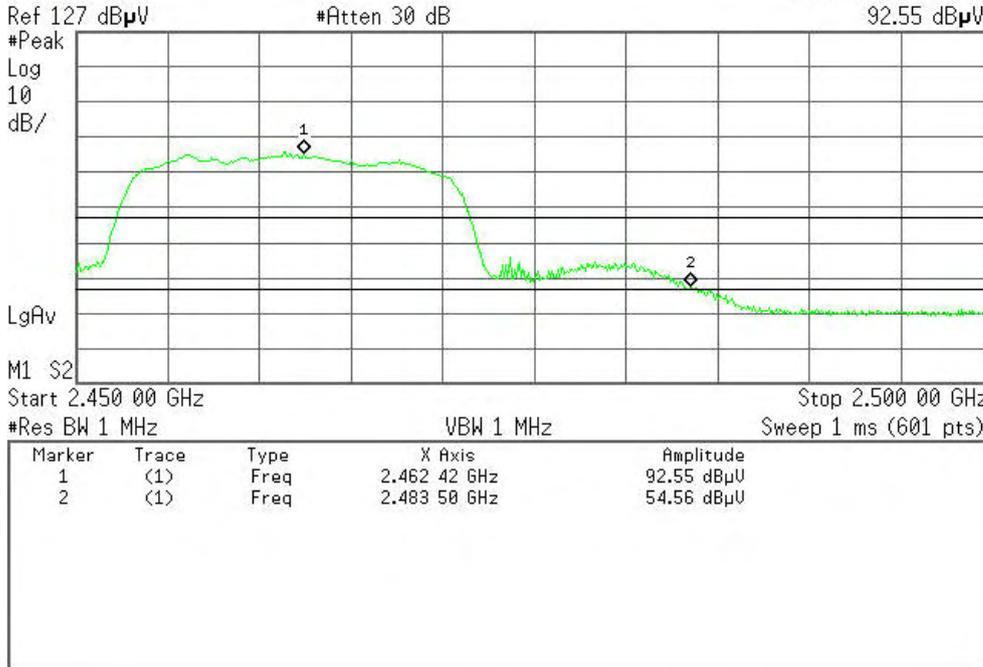


Detector mode: Average

Polarity: Horizontal

Agilent 14:49:40 Jun 4, 2011

R T

Mkr1 2.461 42 GHz
79.07 dBμV

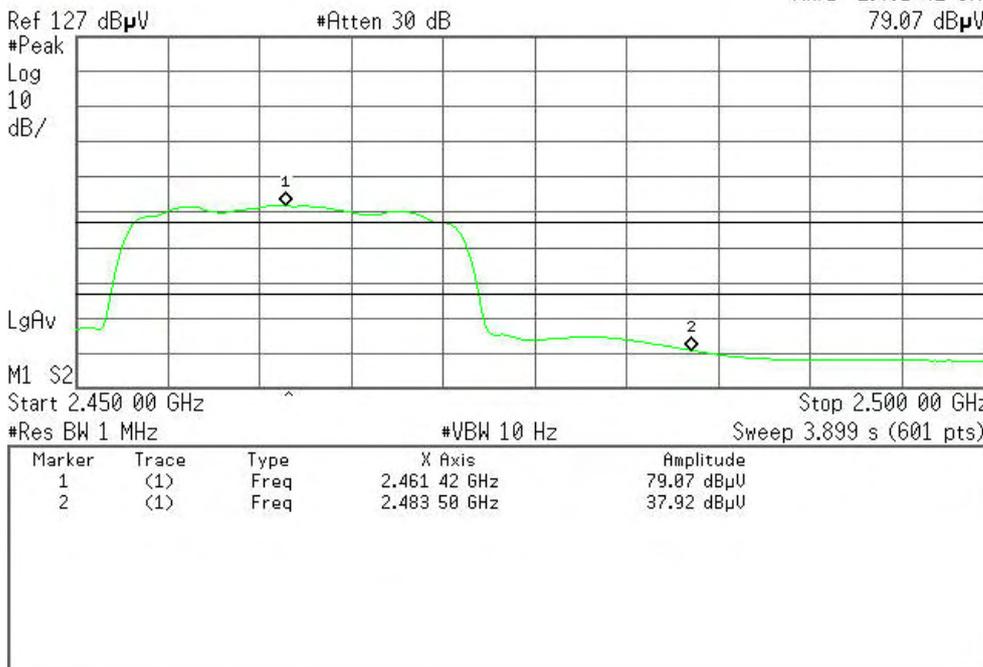



(IEEE 802.11n HT40 MHz mode)


Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 15:47:09 Jun 2, 2011

R T

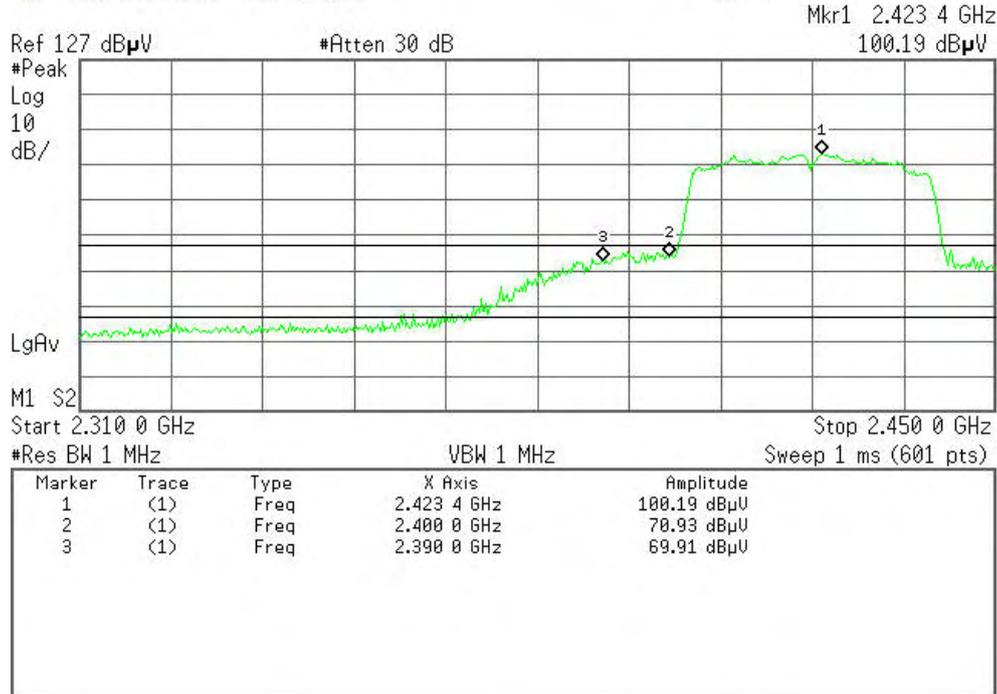


Detector mode: Average

Polarity: Vertical

Agilent 15:46:45 Jun 2, 2011

R T

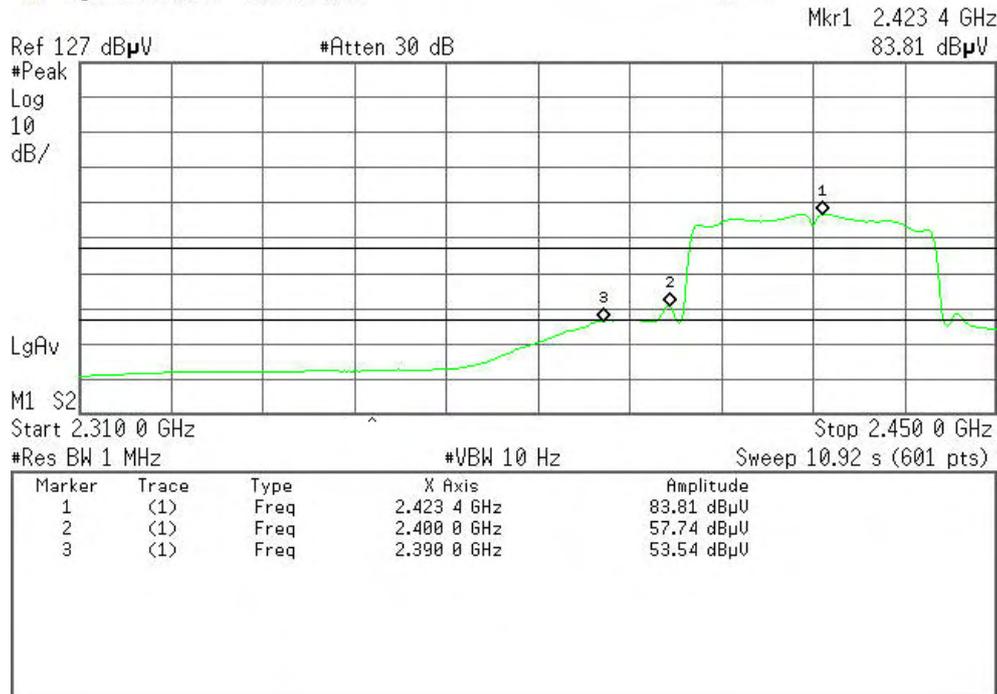




Detector mode: Peak

Polarity: Horizontal

Agilent 14:17:49 Jun 4, 2011

R T

Mkr1 2.420 1 GHz
88.38 dBµV

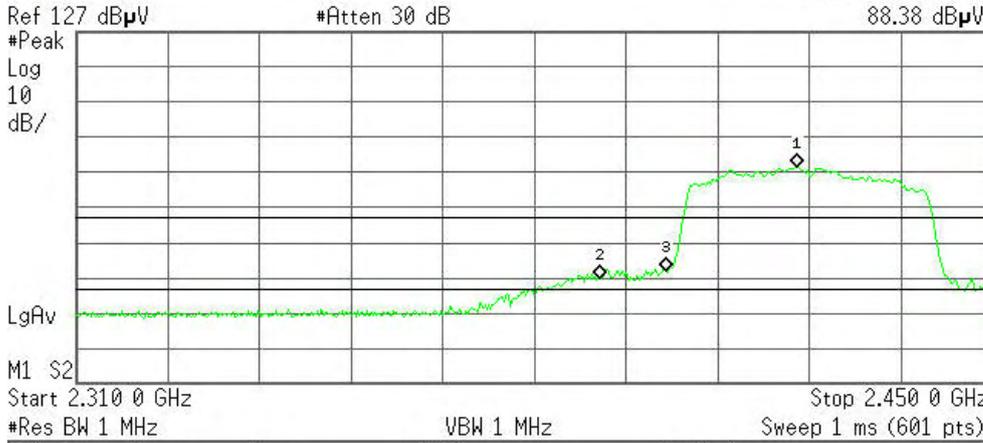

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.420 1 GHz	88.38 dBµV
2	(1)	Freq	2.390 0 GHz	56.69 dBµV
3	(1)	Freq	2.400 0 GHz	59.09 dBµV


Detector mode: Average

Polarity: Horizontal

Agilent 14:17:09 Jun 4, 2011

R T

Mkr1 2.420 4 GHz
73.44 dBµV

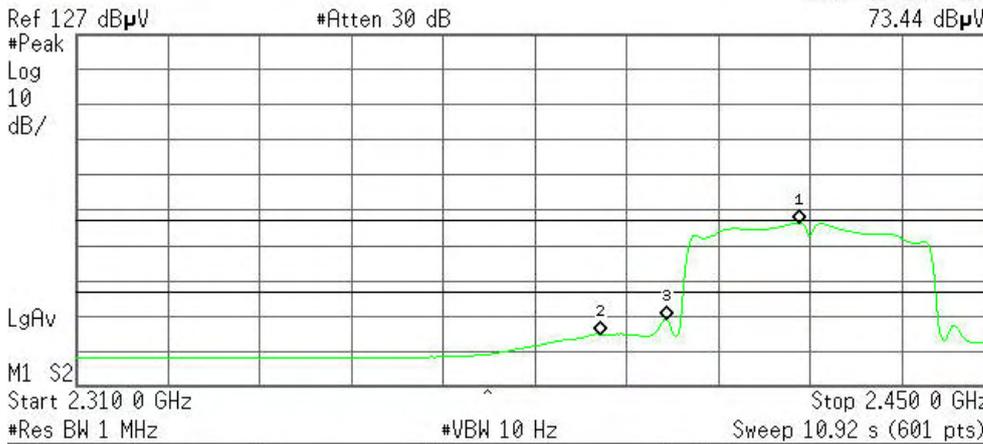

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.420 4 GHz	73.44 dBµV
2	(1)	Freq	2.390 0 GHz	41.87 dBµV
3	(1)	Freq	2.400 0 GHz	45.91 dBµV



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 14:35:04 Jun 4, 2011

R T

Mkr1 2.453 92 GHz
100.61 dBμV

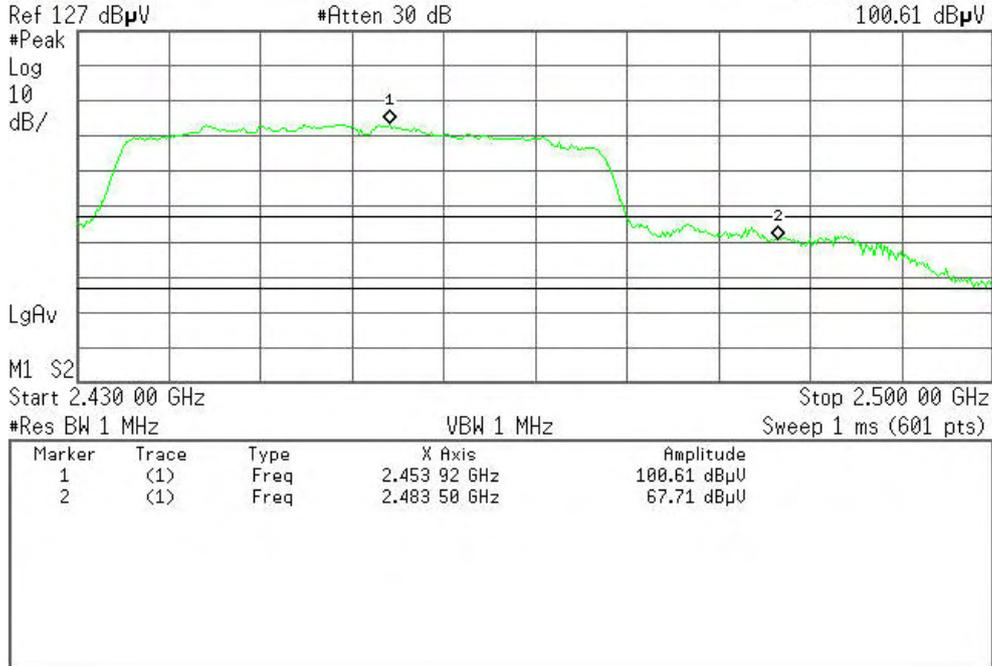


Detector mode: Average

Polarity: Vertical

Agilent 14:35:38 Jun 4, 2011

R T

Mkr1 2.450 30 GHz
83.87 dBμV

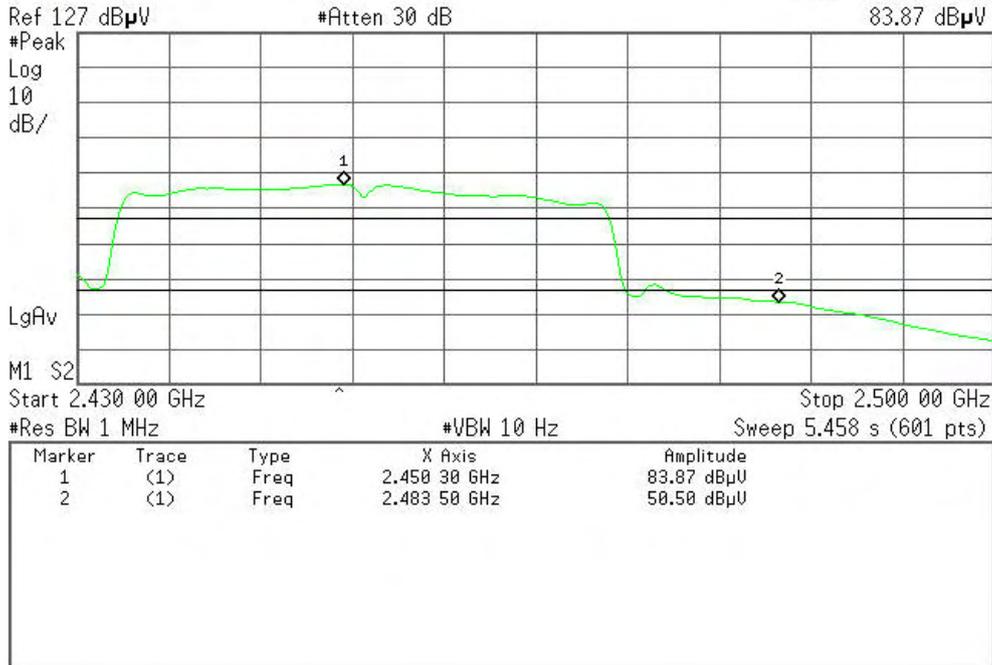




Detector mode: Peak

Polarity: Horizontal

Agilent 14:25:40 Jun 4, 2011

R T

Mkr1 2.454 27 GHz
89.18 dBμV

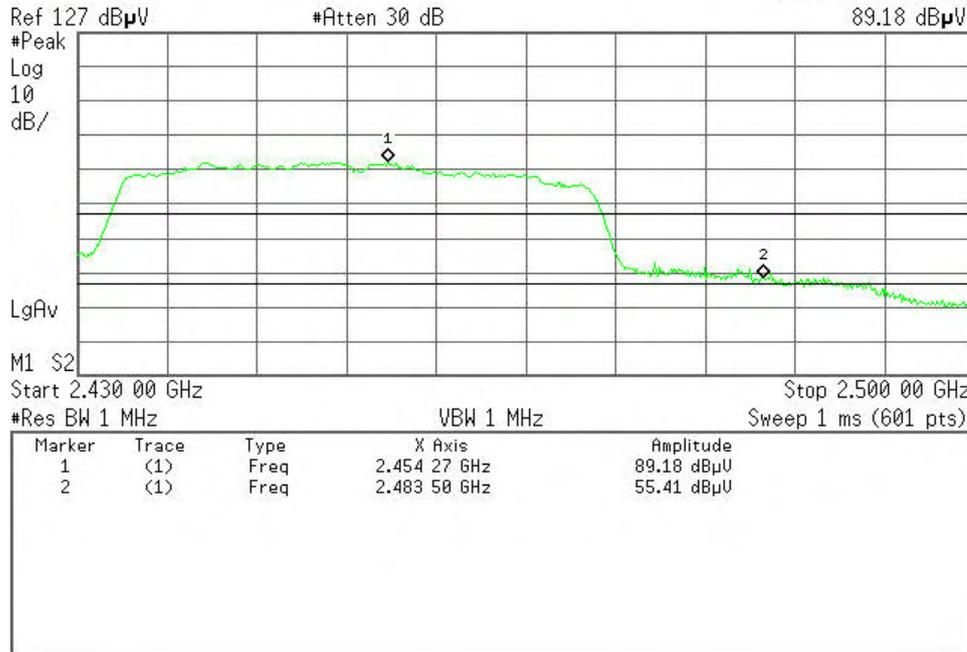


Detector mode: Average

Polarity: Horizontal

Agilent 14:26:19 Jun 4, 2011

R T

Mkr1 2.450 30 GHz
73.87 dBμV

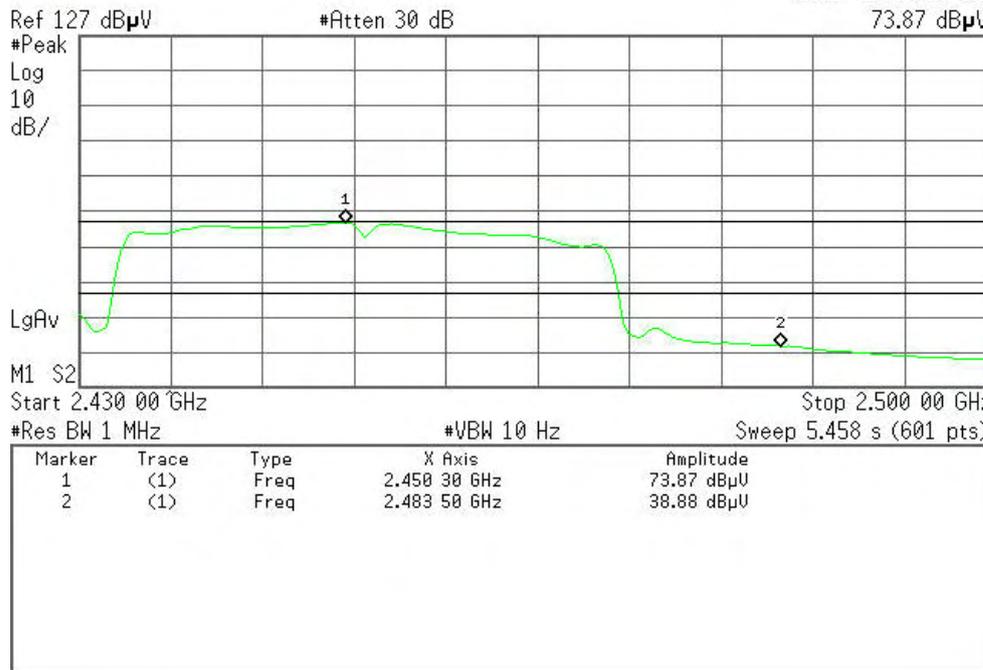



7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.6.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.


7.6.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/21/2011	03/21/2012

7.6.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 500kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.6.4. TEST SETUP





7.6.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-0.21	8.00	PASS
Mid	2437	0.58		PASS
High	2462	1.61		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-11.02	8.00	PASS
Mid	2437	-9.78		PASS
High	2462	-12.52		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-12.28	8.00	PASS
Mid	2437	-10.31		PASS
High	2462	-12.78		PASS


Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2422	-17.14	8.00	PASS
Mid	2437	-15.42		PASS
High	2452	-16.53		PASS




Test Plot (IEEE 802.11b mode)

PPSD (CH Low)

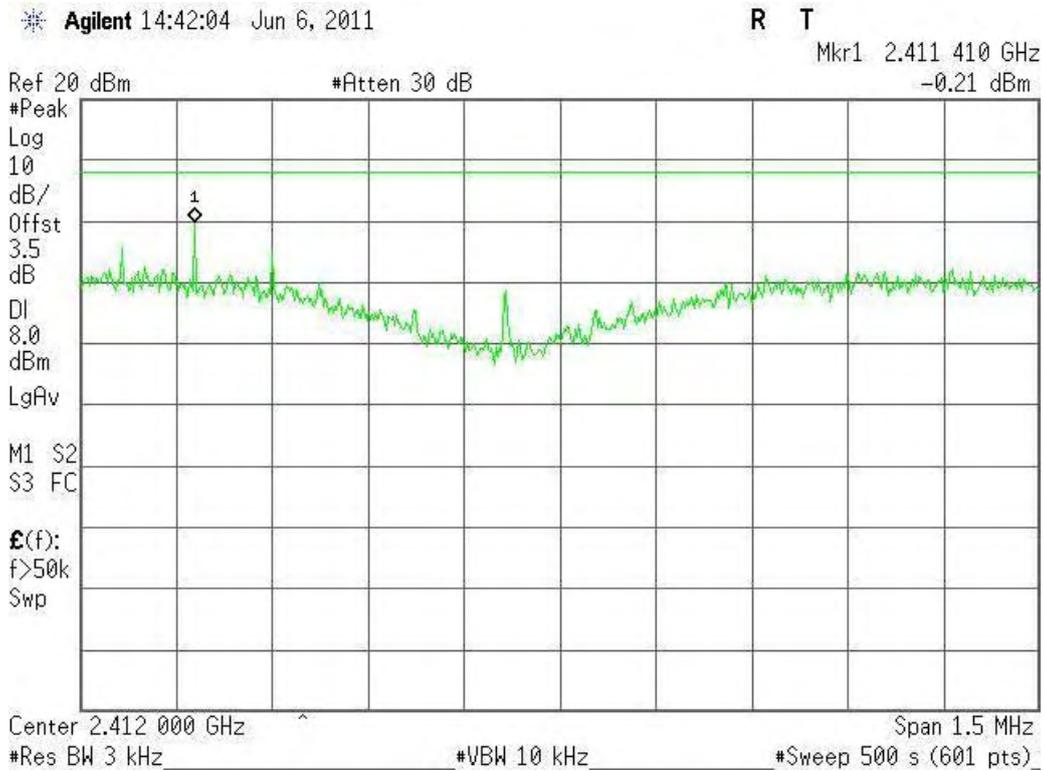


PPSD (CH Mid)

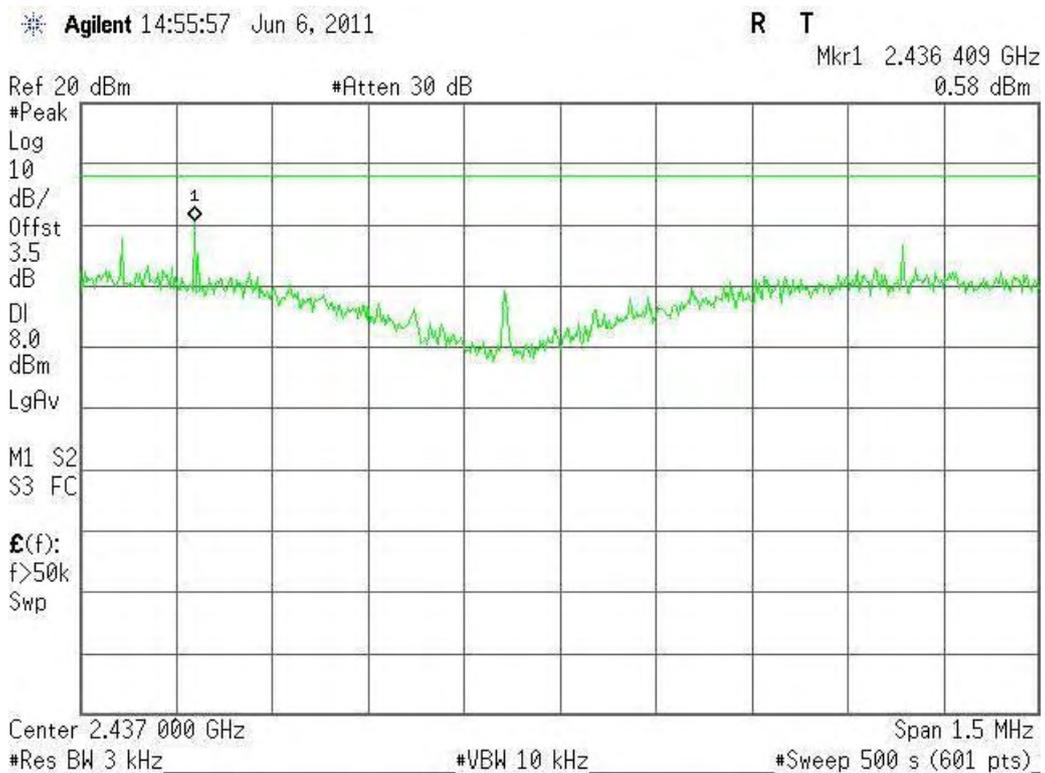




PPSD (CH High)

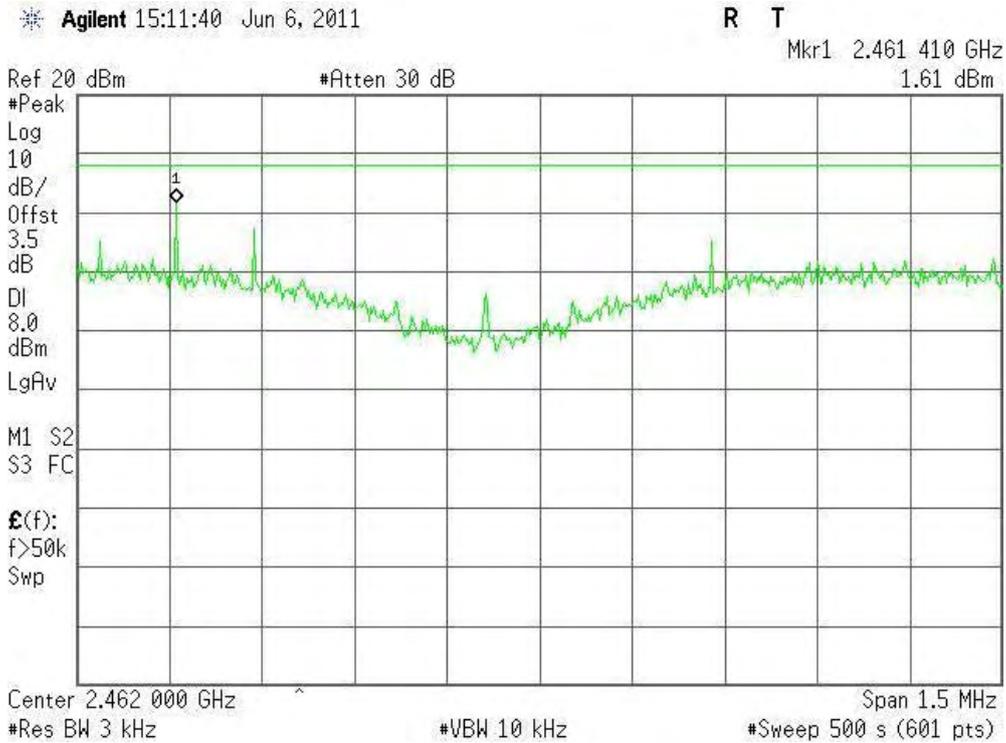


(IEEE 802.11g mode)

PPSD (CH Low)

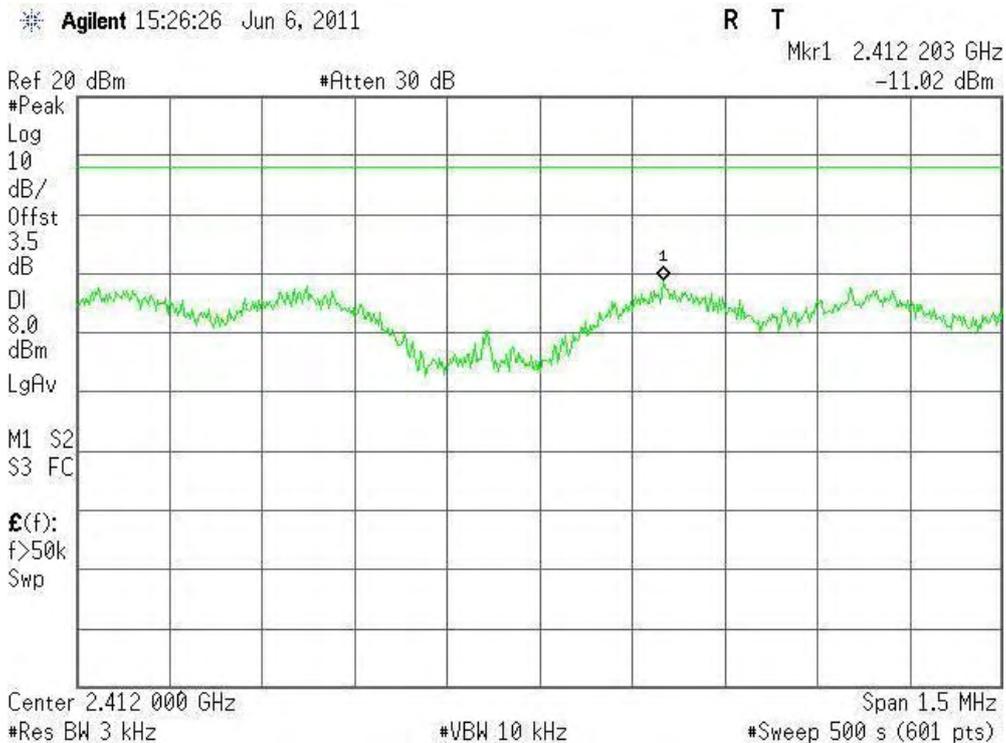




PPSD (CH Mid)

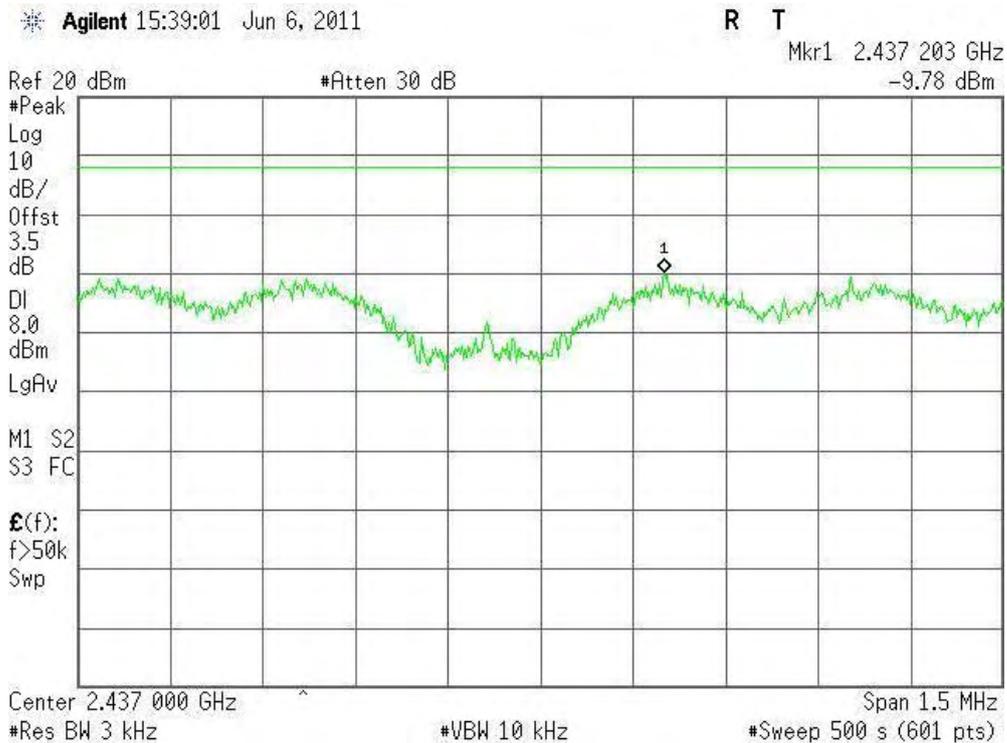

PPSD (CH High)

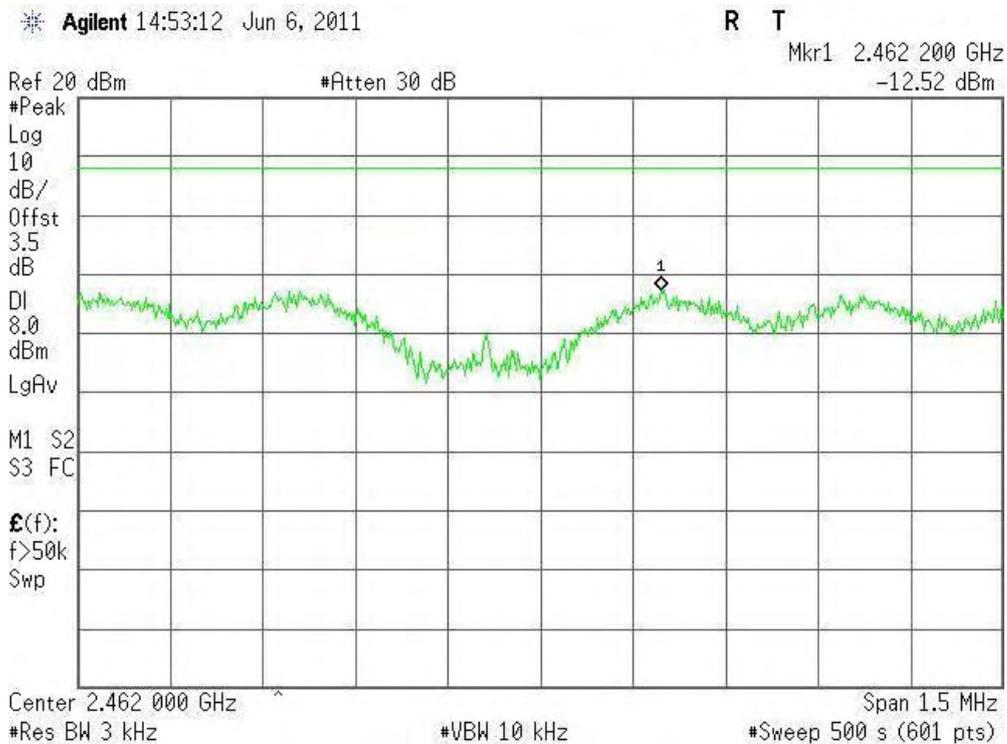




(IEEE 802.11n HT20 MHz mode)

PPSD (CH Low)

Agilent 13:35:48 Jun 6, 2011

R T

Mkr1 2.411 598 GHz
-12.28 dBm

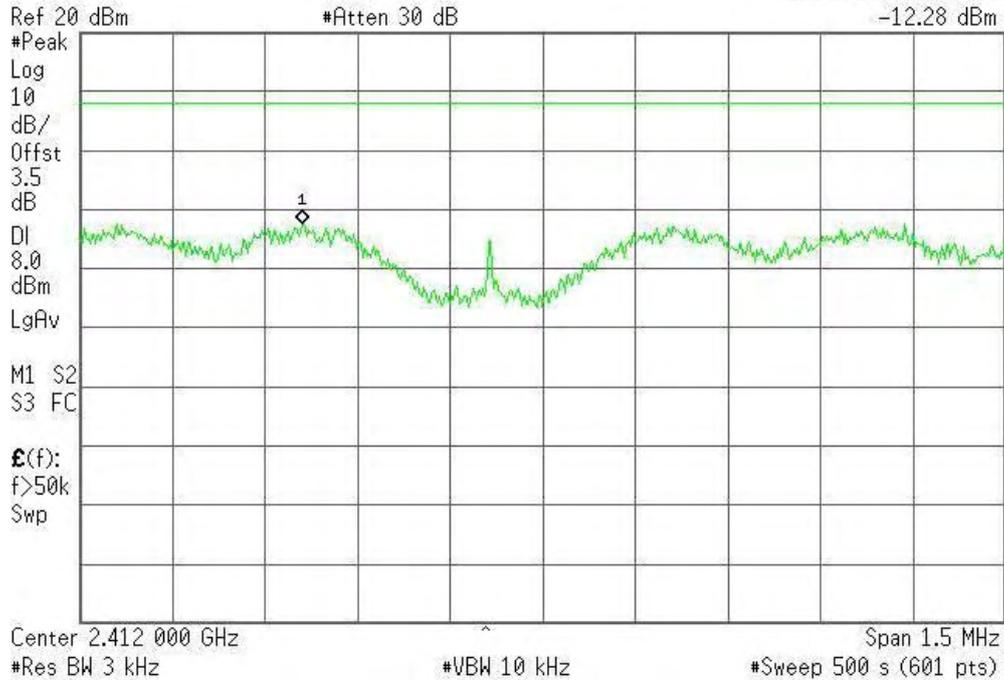


PPSD (CH Mid)

Agilent 13:22:15 Jun 6, 2011

R T

Mkr1 2.436 603 GHz
-10.31 dBm

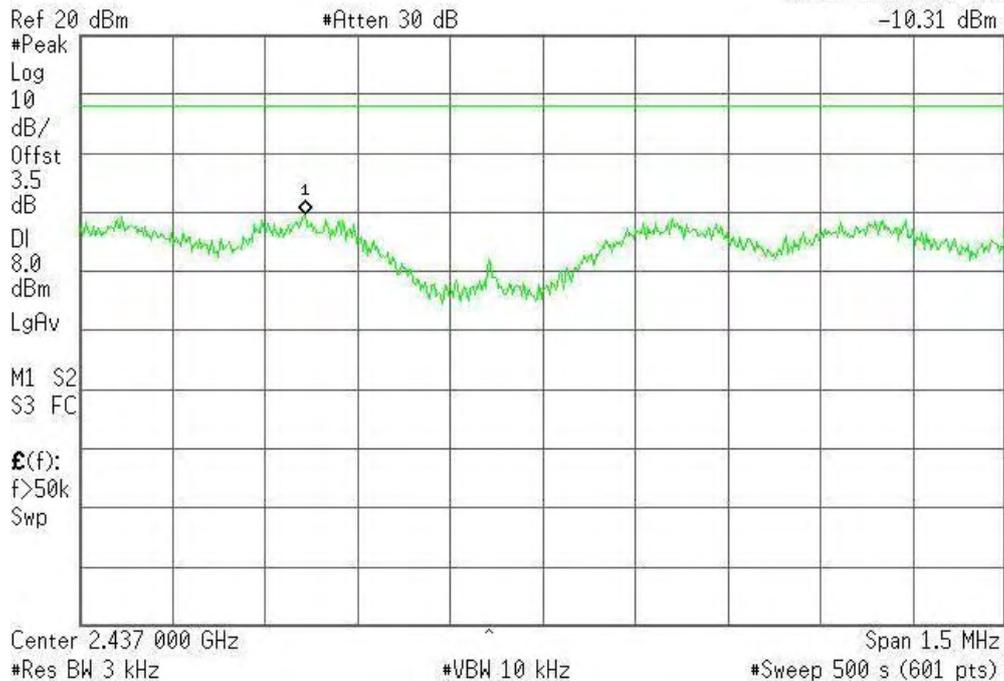




PPSD (CH High)

Agilent 13:48:31 Jun 6, 2011

R T

Mkr1 2.461 599 GHz
-12.70 dBm

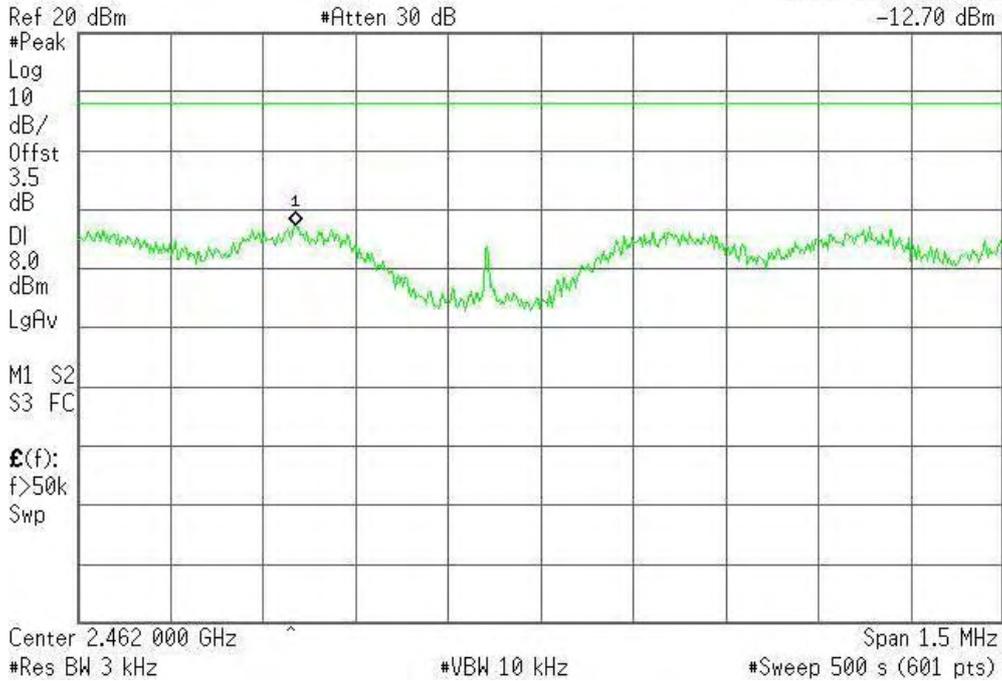


(IEEE 802.11n HT40 MHz mode)

PPSD (CH Low)

Agilent 14:01:48 Jun 6, 2011


R T

Mkr1 2.421 284 GHz
-17.14 dBm

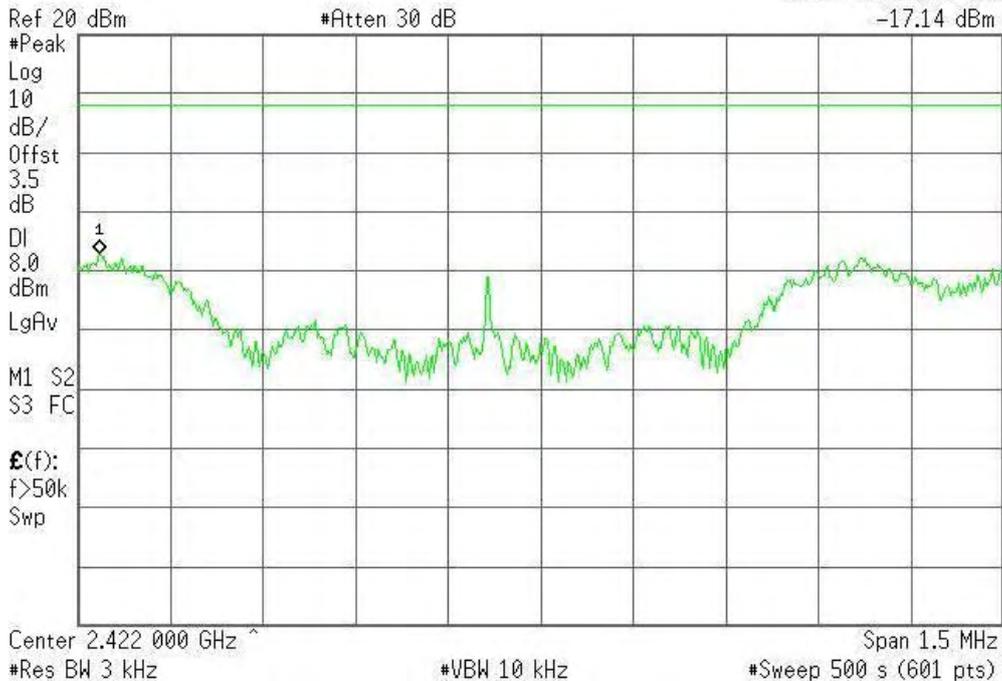



PPSD (CH Mid)

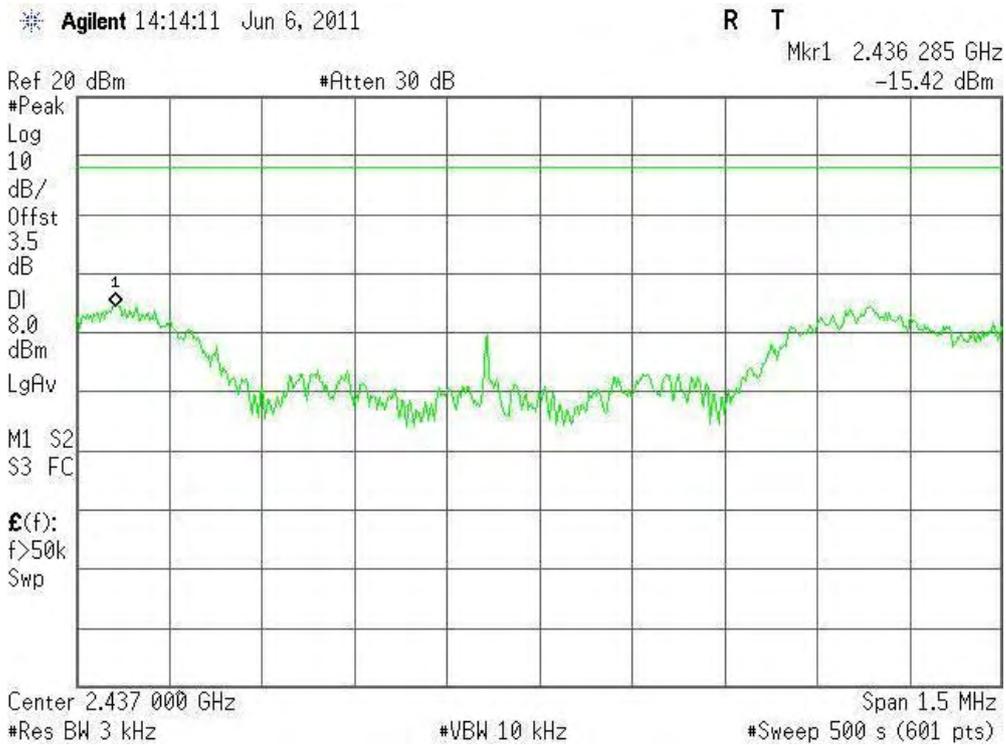

PPSD (CH High)

