

8. Power Density


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2012

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

8.2. Test Setup

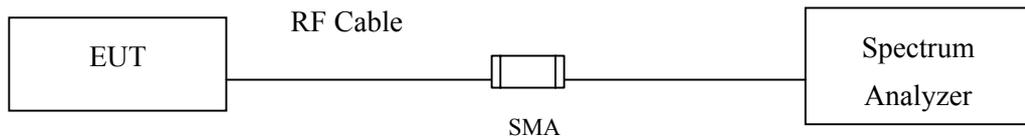

8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2003; tested according to DTS test procedure of ANSI C63.4: 2010 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 100 kHz, VBW \geq 300KHz, SPAN to 5-30 % greater than the EBW,

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$.

8.5. Uncertainty


$\pm 1.27\text{ dB}$

8.6. Test Result of Power Density

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 802.11b 1Mbps (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412.00	-15.020	< 8dBm	Pass


Figure Channel 1:

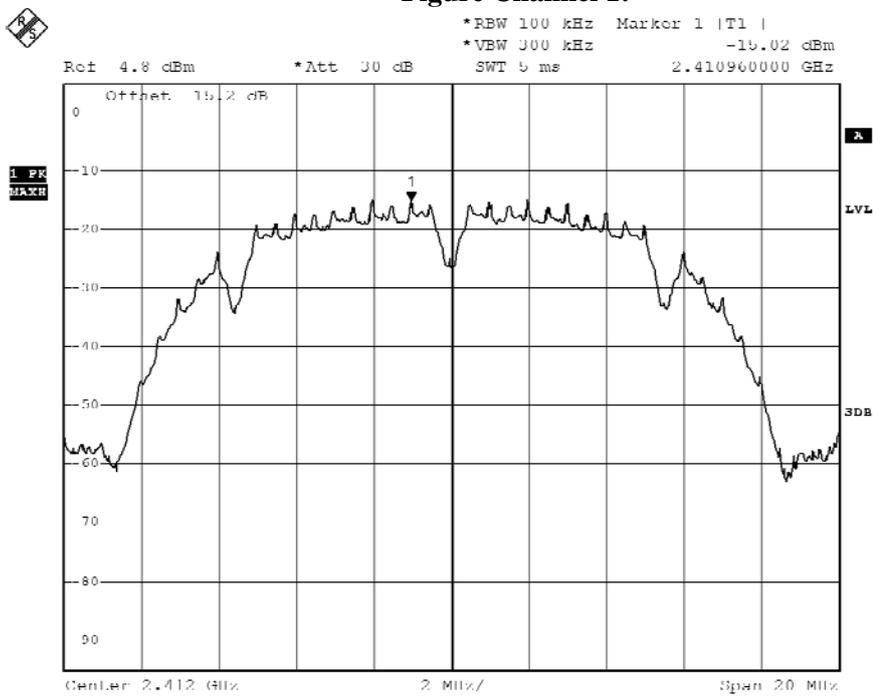

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit - 802.11b 1Mbps (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437.000	-14.320	< 8dBm	Pass


Figure Channel 6:

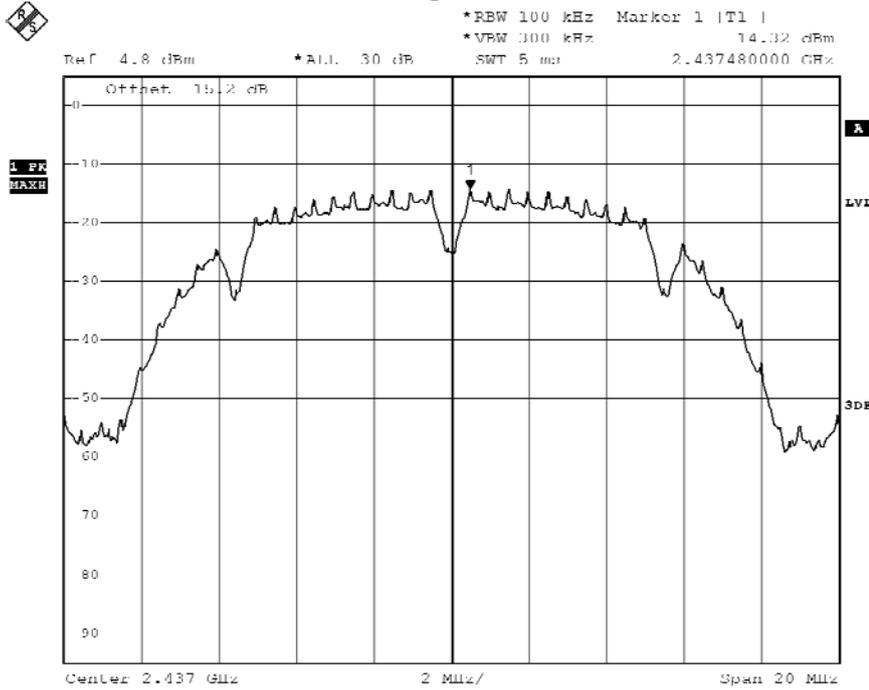

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 802.11b 1Mbps (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462.00	-13.680	< 8dBm	Pass


Figure Channel 11:

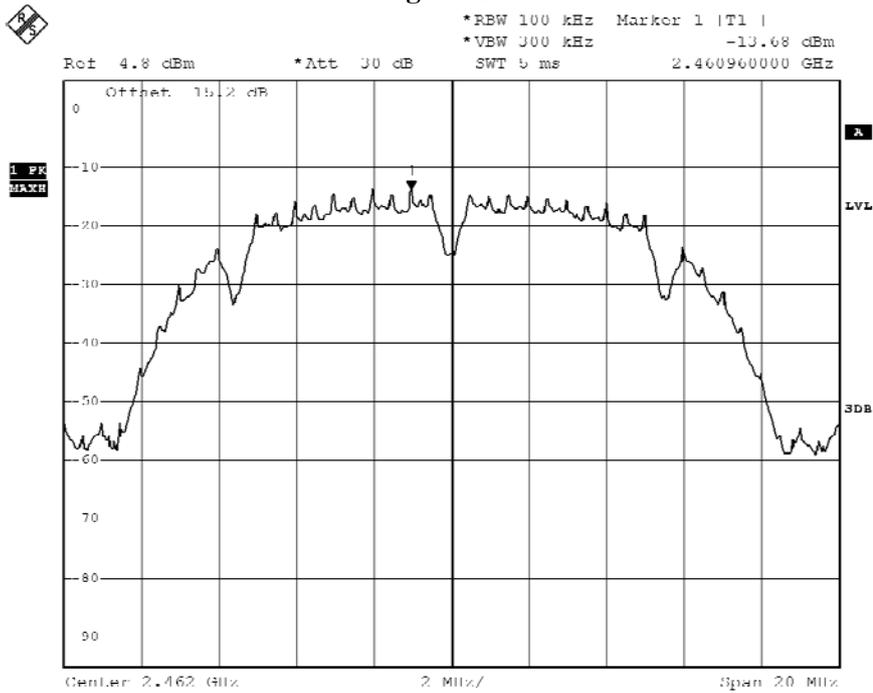

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 802.11g 6Mbps (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412.00	-15.480	< 8dBm	Pass


Figure Channel 1:

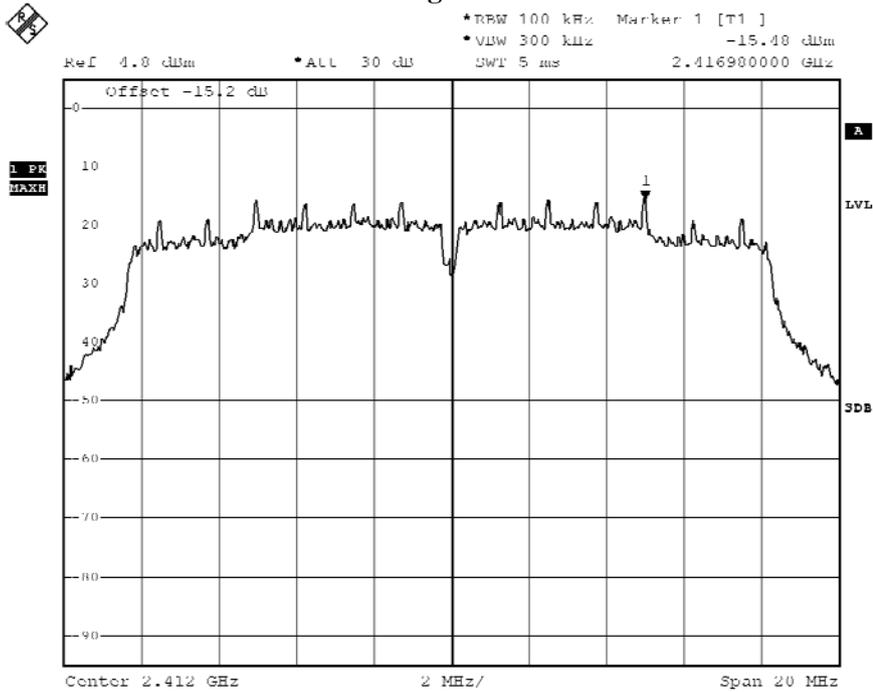

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 2: Transmit - 802.11g 6Mbps (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437.000	-12.450	< 8dBm	Pass


Figure Channel 6:

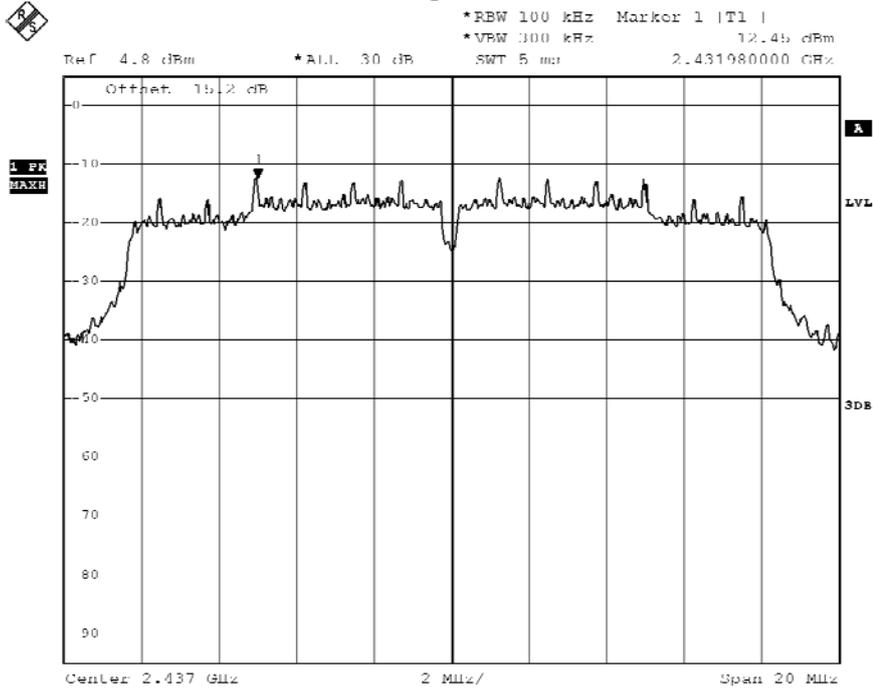

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 802.11g 6Mbps (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462.00	-15.870	< 8dBm	Pass


Figure Channel 11:

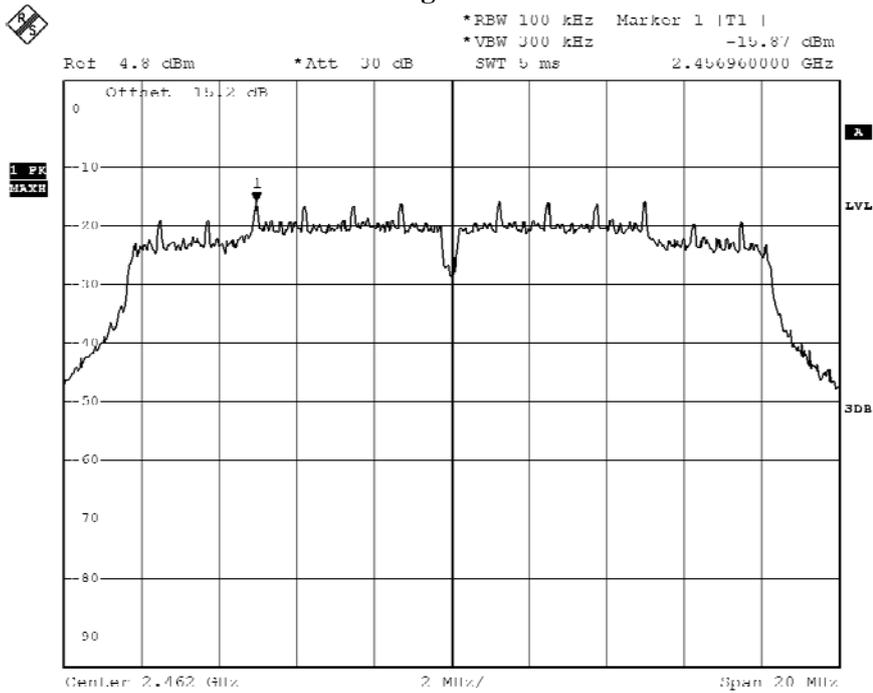

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5745MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
149	5745.000	-17.710	< 8dBm	Pass


Figure Channel 149:

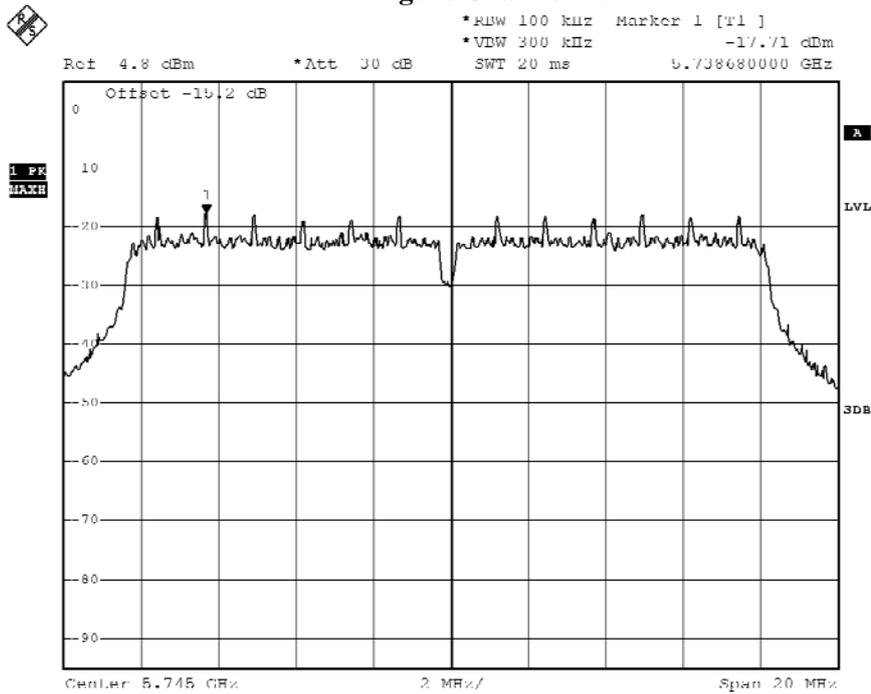

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5785MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
157	5785.000	-18.160	< 8dBm	Pass


Figure Channel 157:

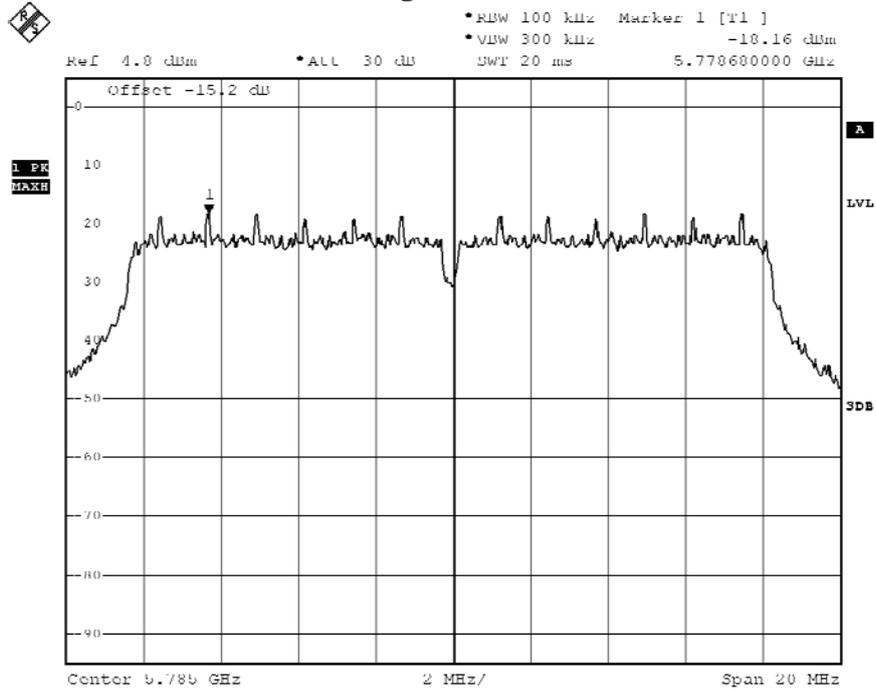

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - 802.11a 6Mbps (5825MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
165	5825.000	-17.860	< 8dBm	Pass

Figure Channel 165:

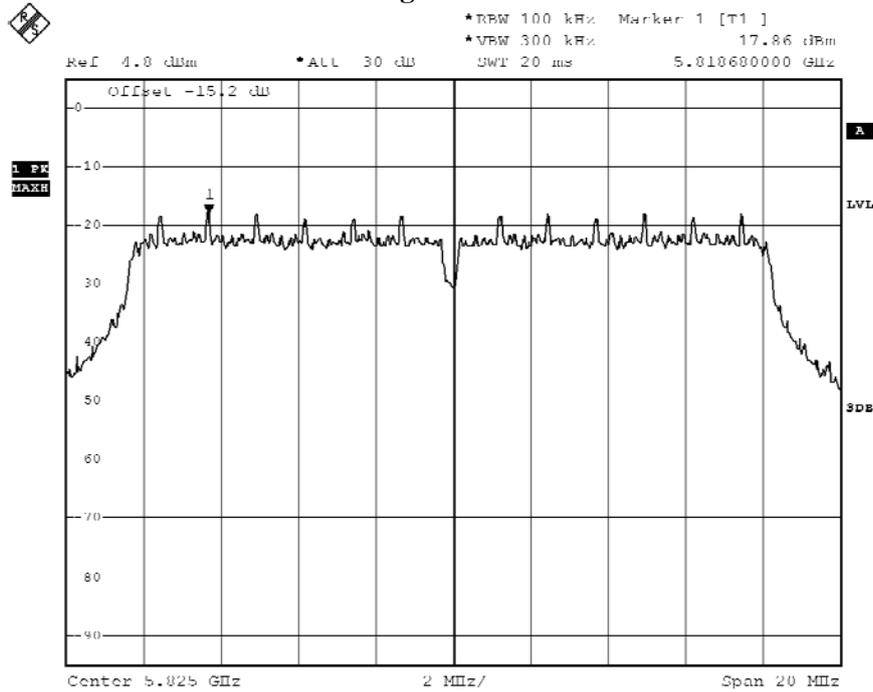

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2412MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
1	2412.00	-15.120	-14.590	-11.837	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 1: (Chain A)


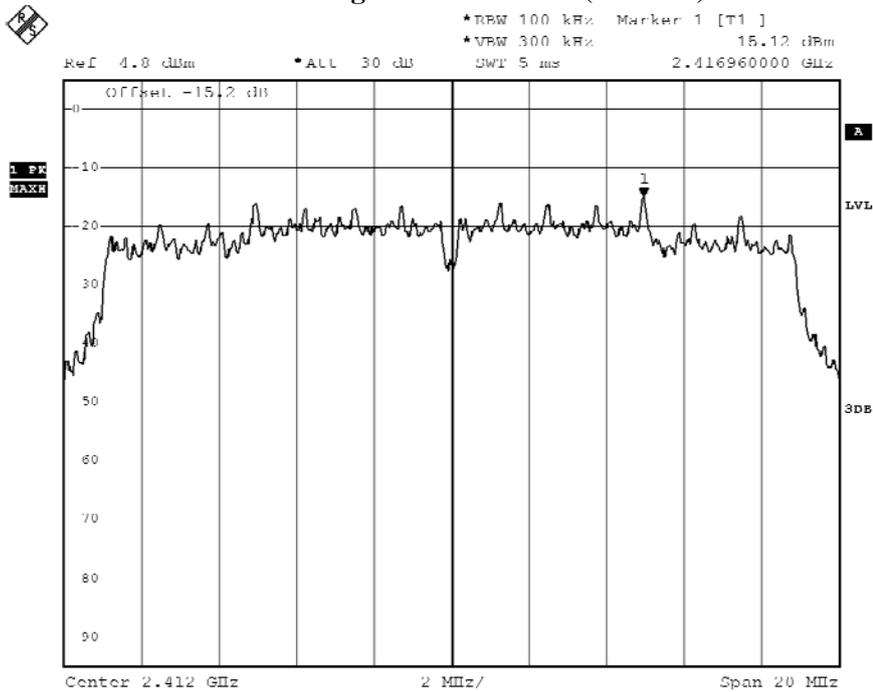


Figure Channel 1: (Chain B)

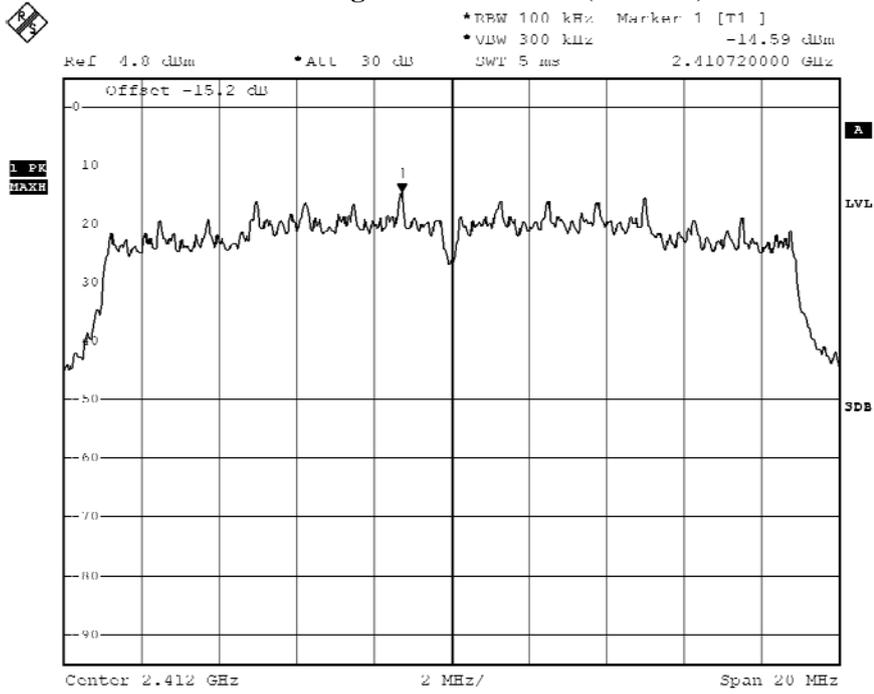

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
6	2437.00	-14.140	-13.710	-10.909	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 6: (Chain A)


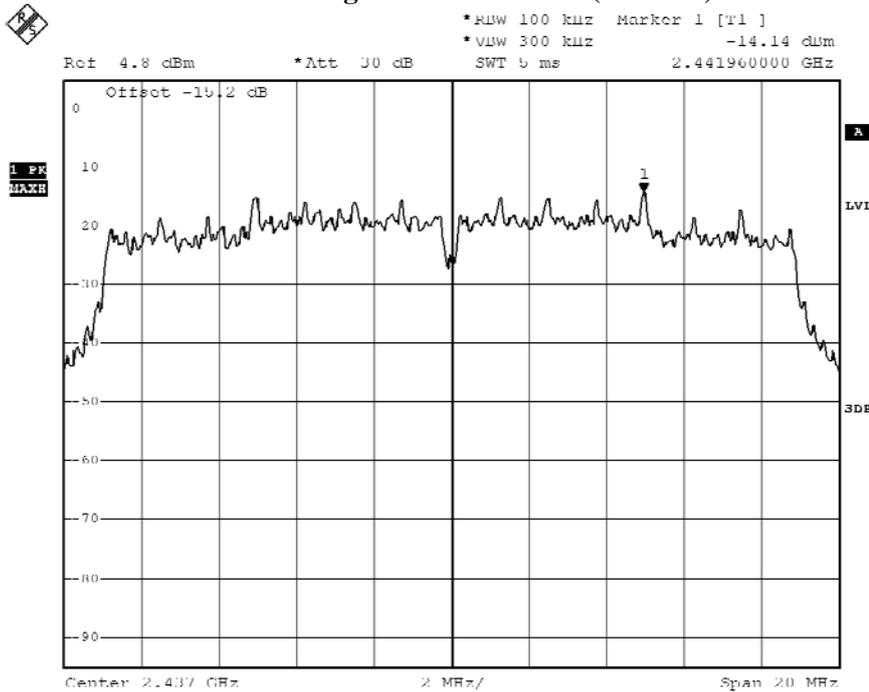


Figure Channel 6: (Chain B)

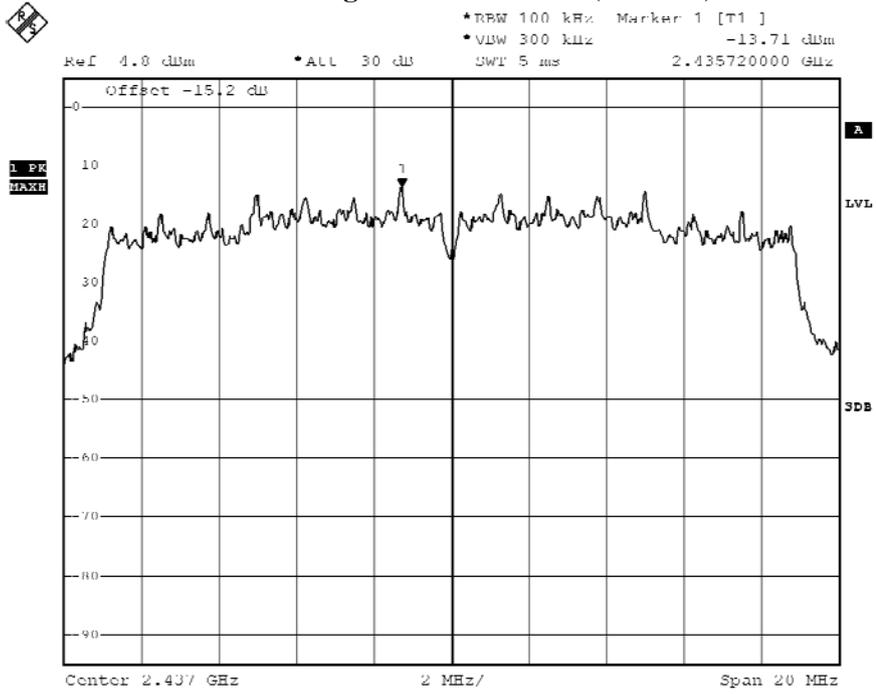

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2462MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
11	2462.00	-16.420	-14.920	-12.595	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 11: (Chain A)


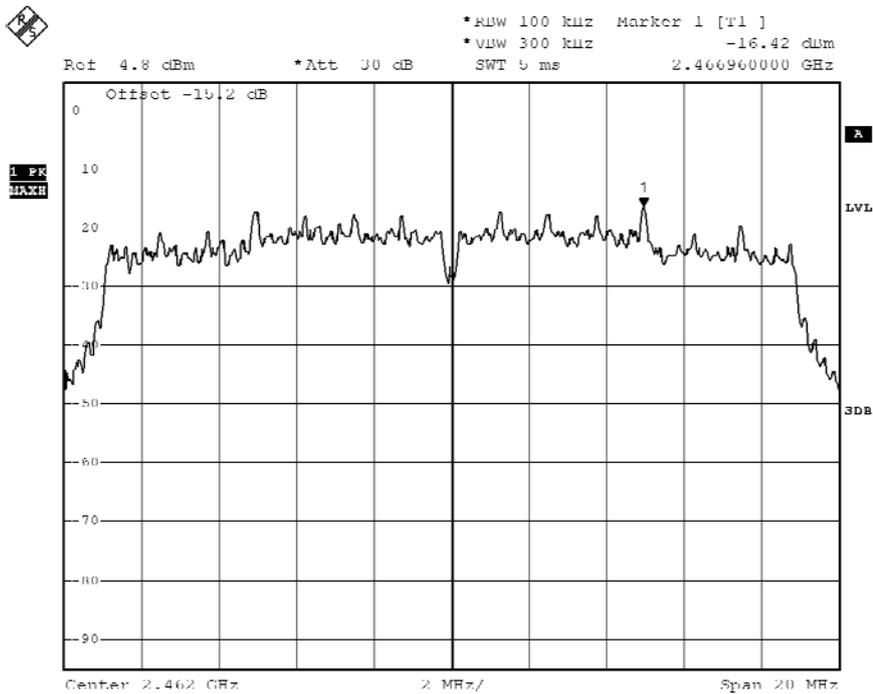


Figure Channel 11: (Chain B)

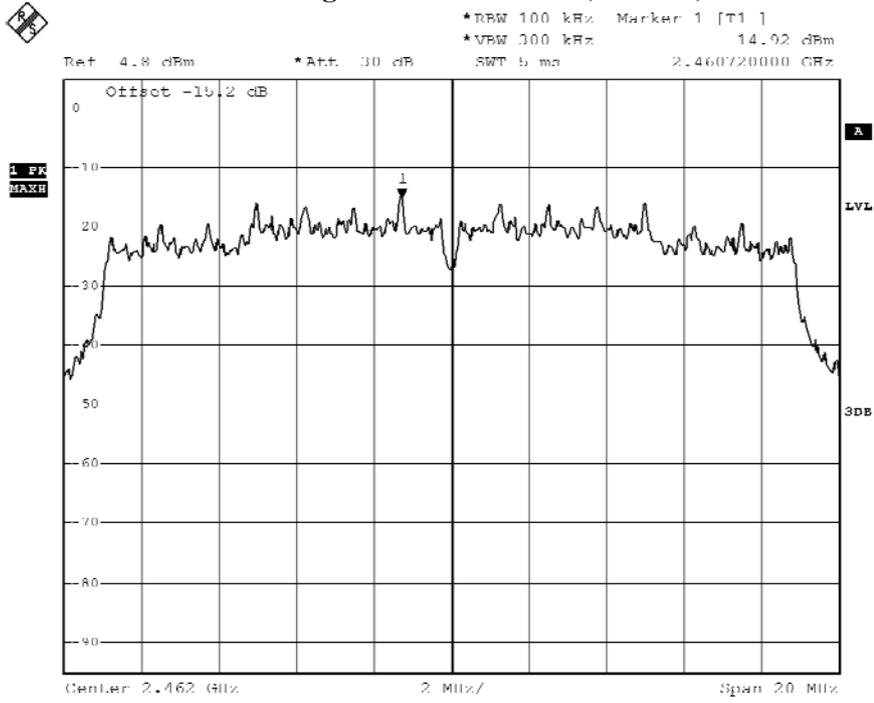

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2422MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
3	2422.00	-23.850	-24.140	-20.982	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 3: (Chain A)


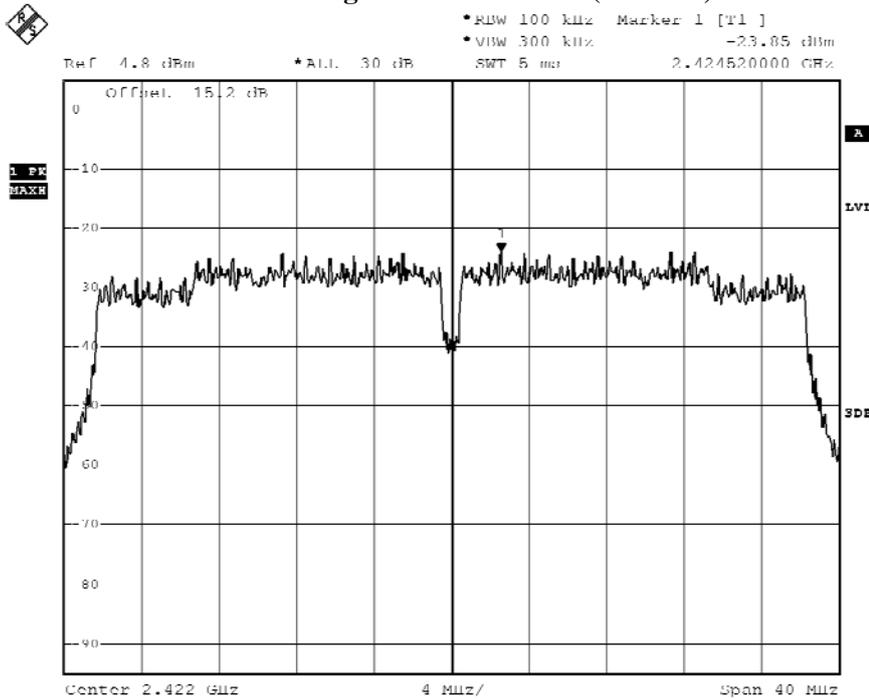


Figure Channel 3: (Chain B)

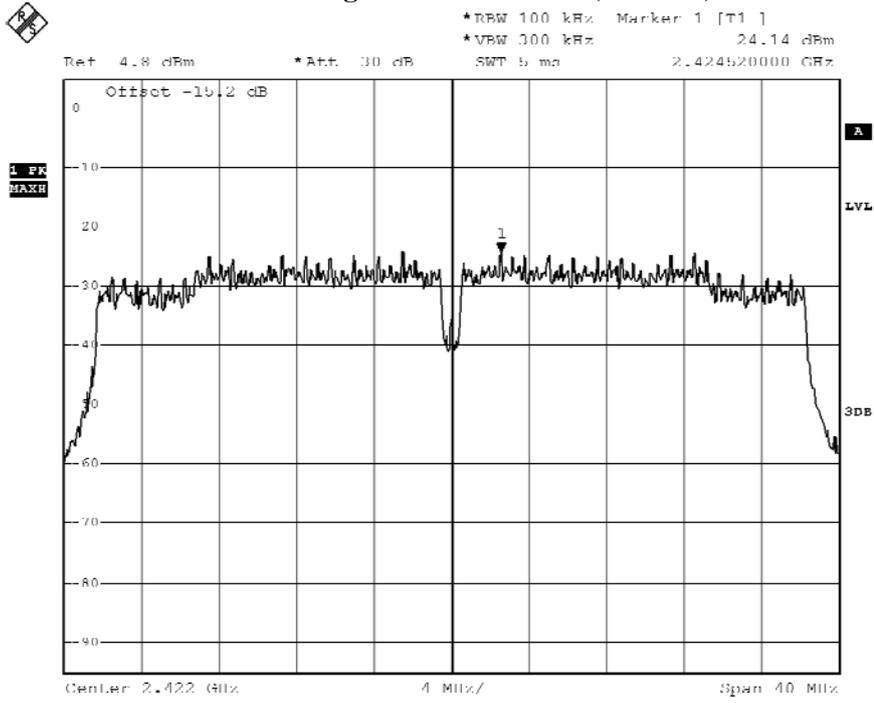

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
6	2437.00	-19.820	-19.420	-16.605	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 6: (Chain A)


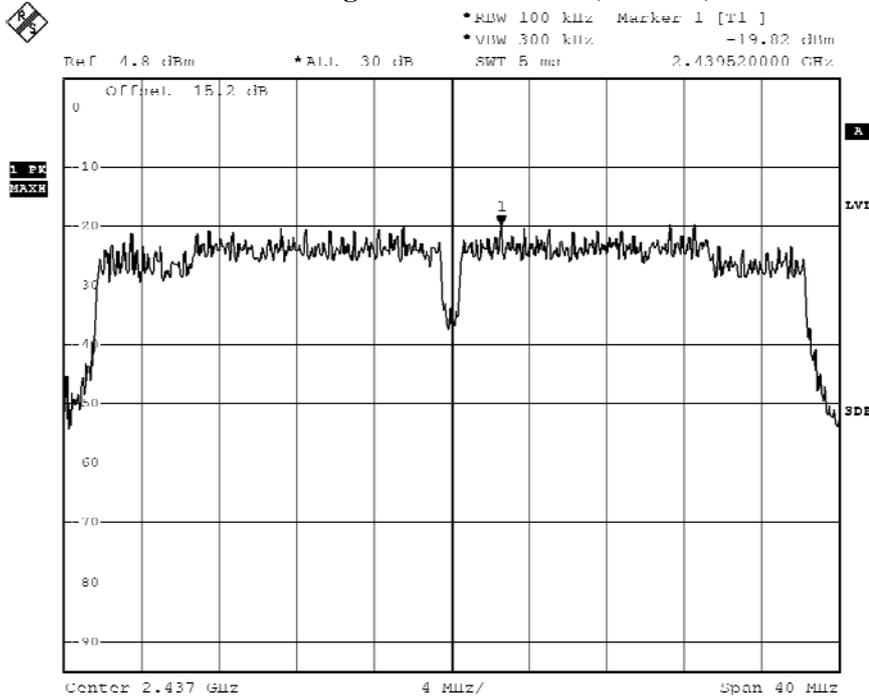


Figure Channel 6: (Chain B)

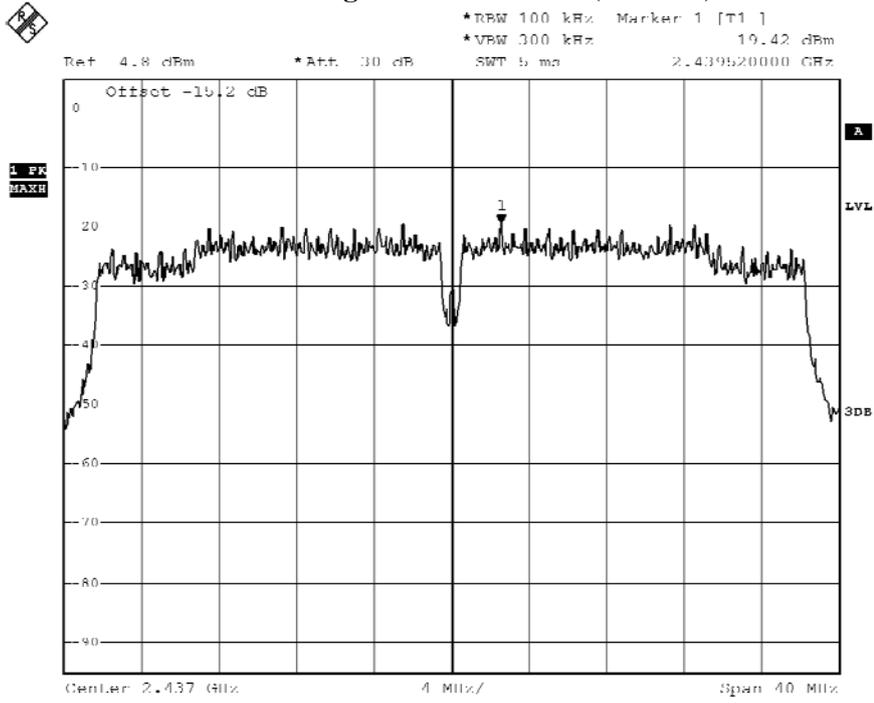

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2452MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
9	2452.00	-23.460	-23.880	-20.655	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 9: (Chain A)


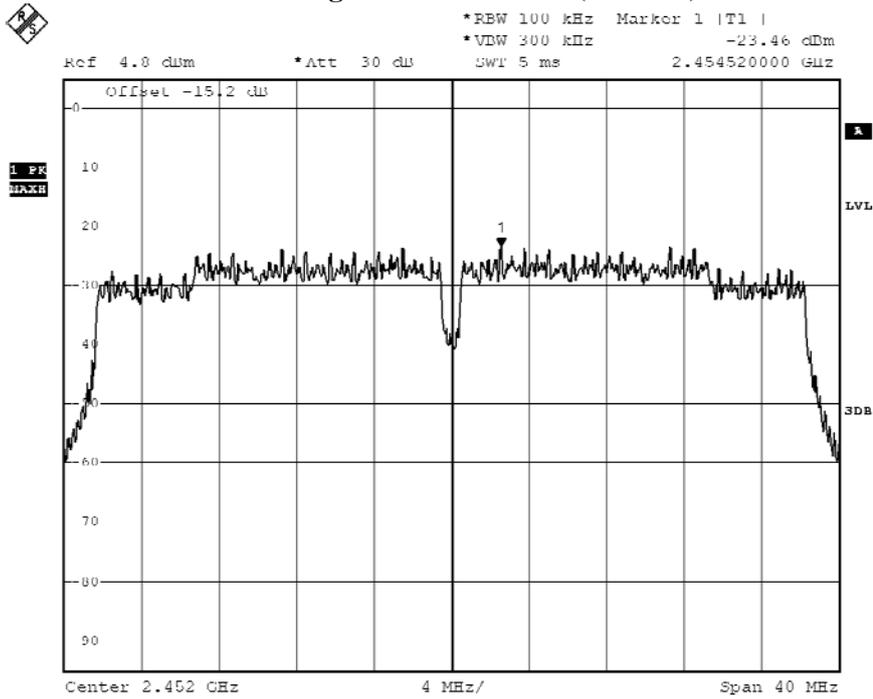


Figure Channel 9: (Chain B)

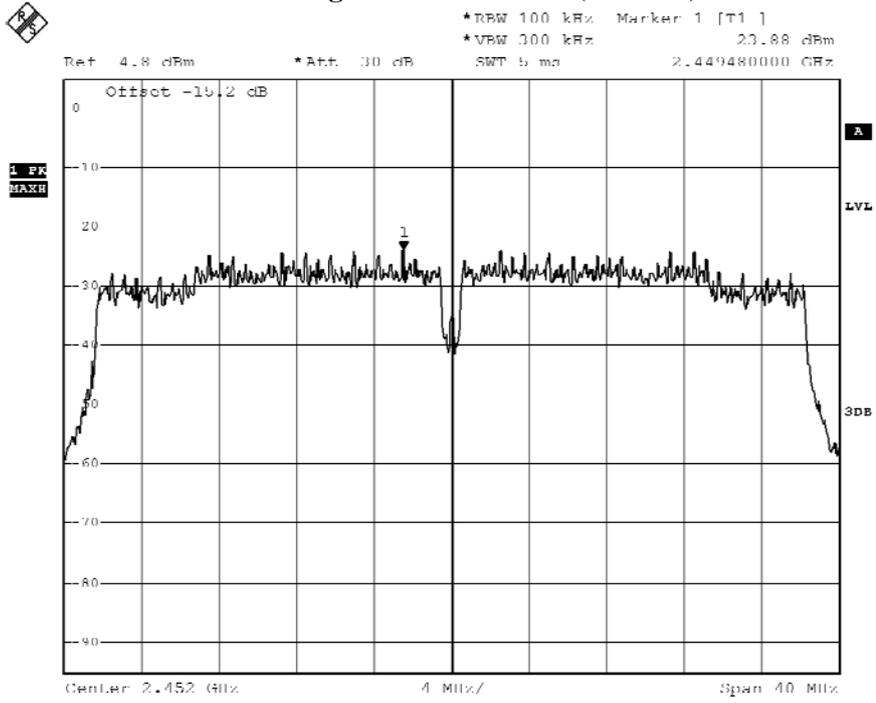

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5745MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
149	5745.00	-19.550	-19.390	-16.459	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 149: (Chain A)


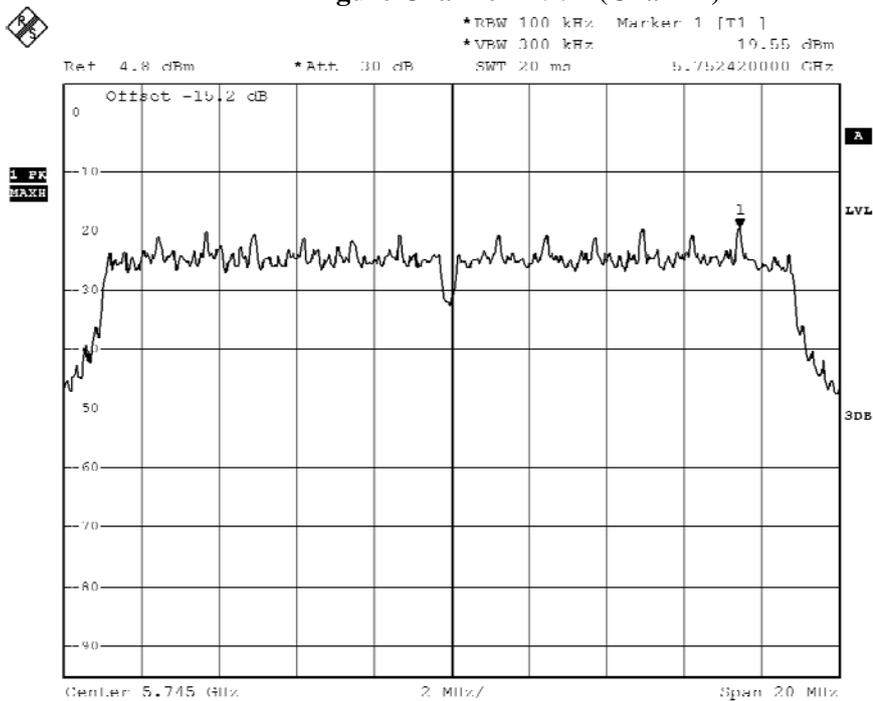


Figure Channel 149: (Chain B)

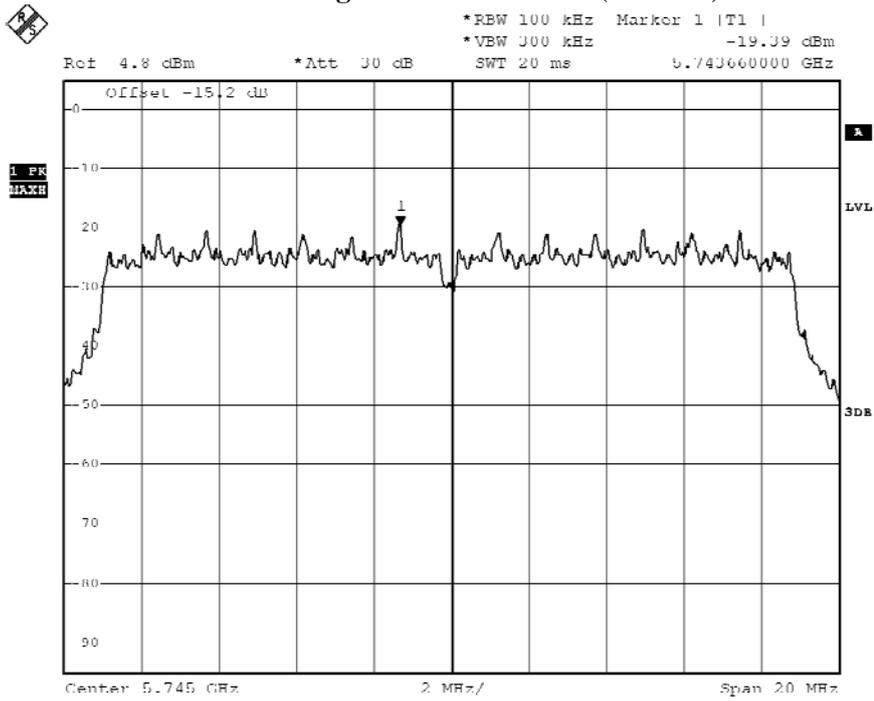

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5785MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
157	5785.00	-19.860	-19.310	-16.566	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 157: (Chain A)


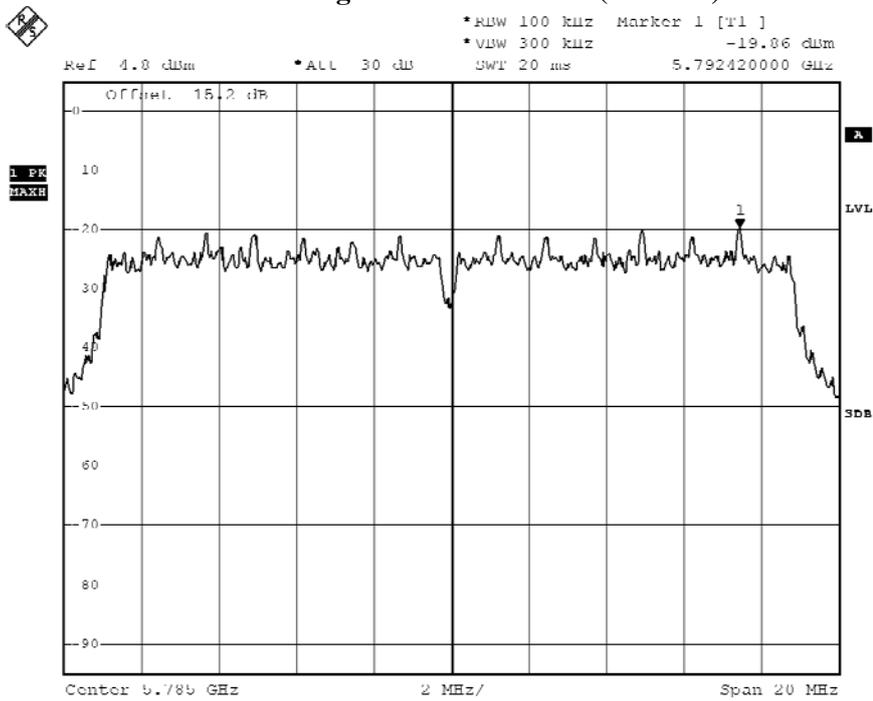


Figure Channel 157: (Chain B)

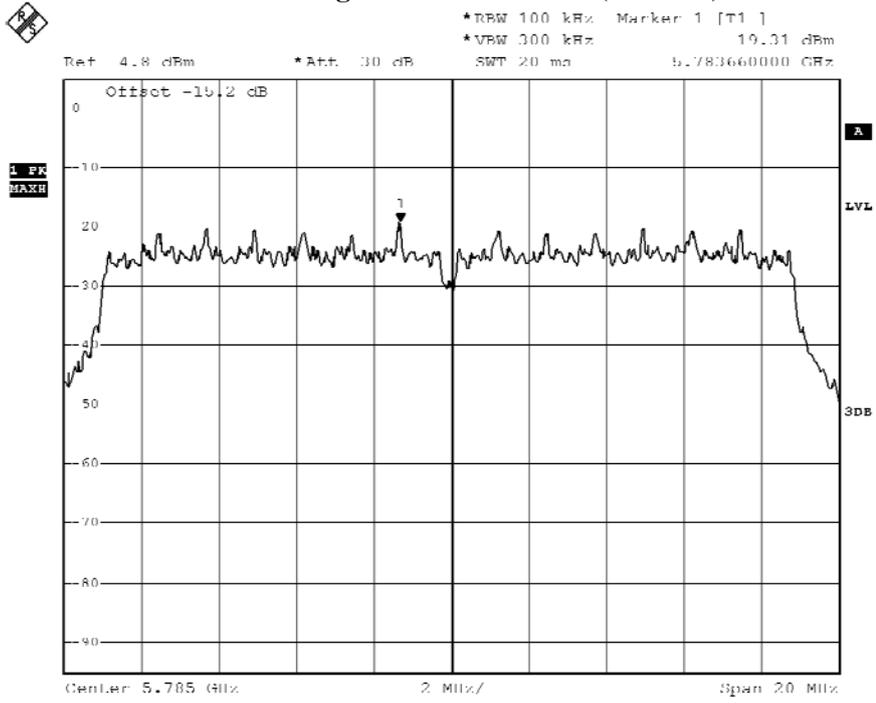

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit - 802.11n-20BW_14.4Mbps(5G Band) (5825MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
165	5825.00	-19.560	-19.470	-16.504	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 165: (Chain A)


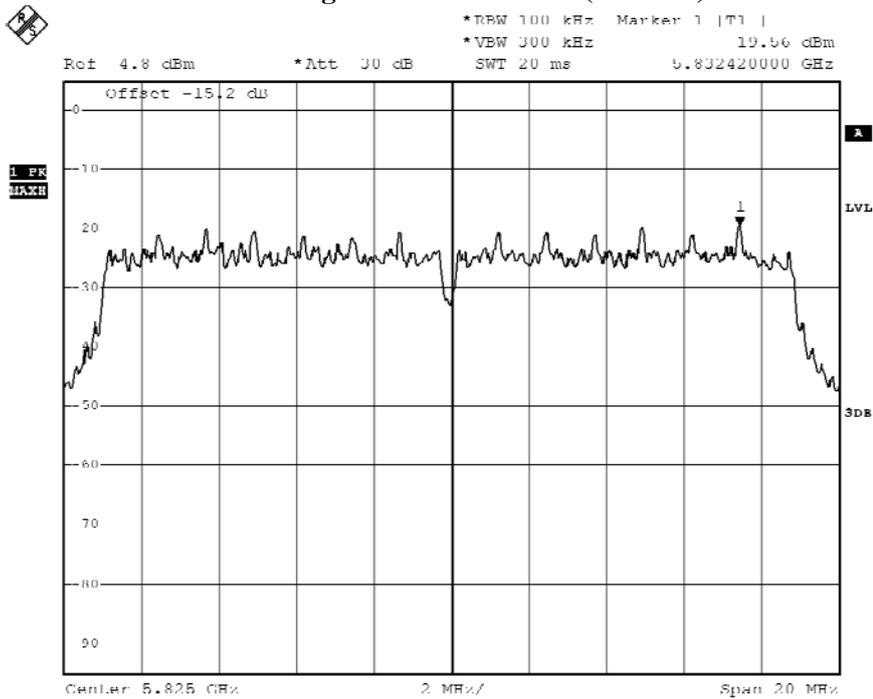


Figure Channel 165: (Chain B)

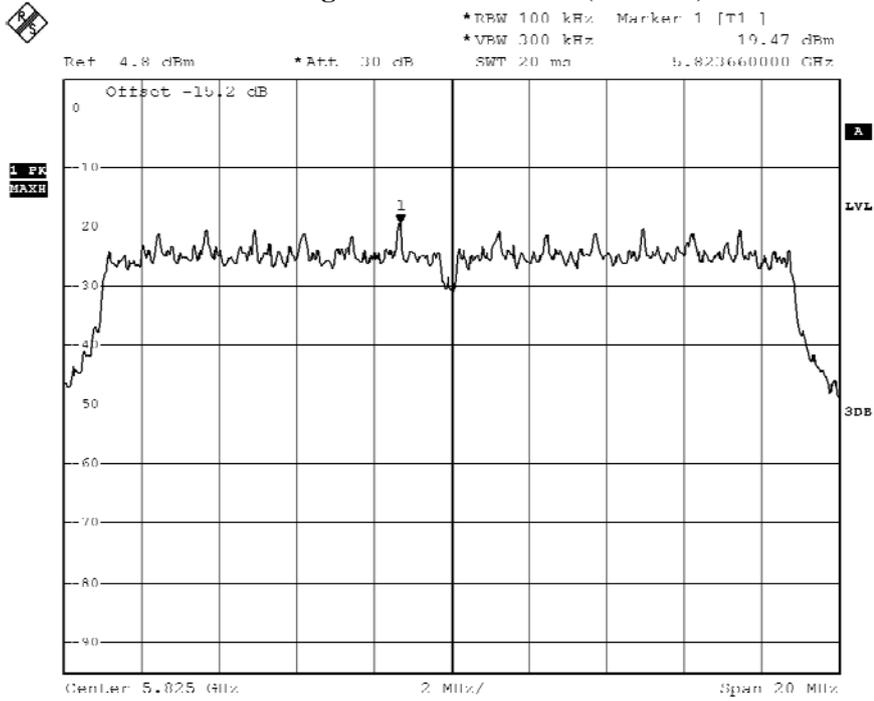

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5755MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
151	5755.00	-22.850	-22.290	-19.551	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 151: (Chain A)


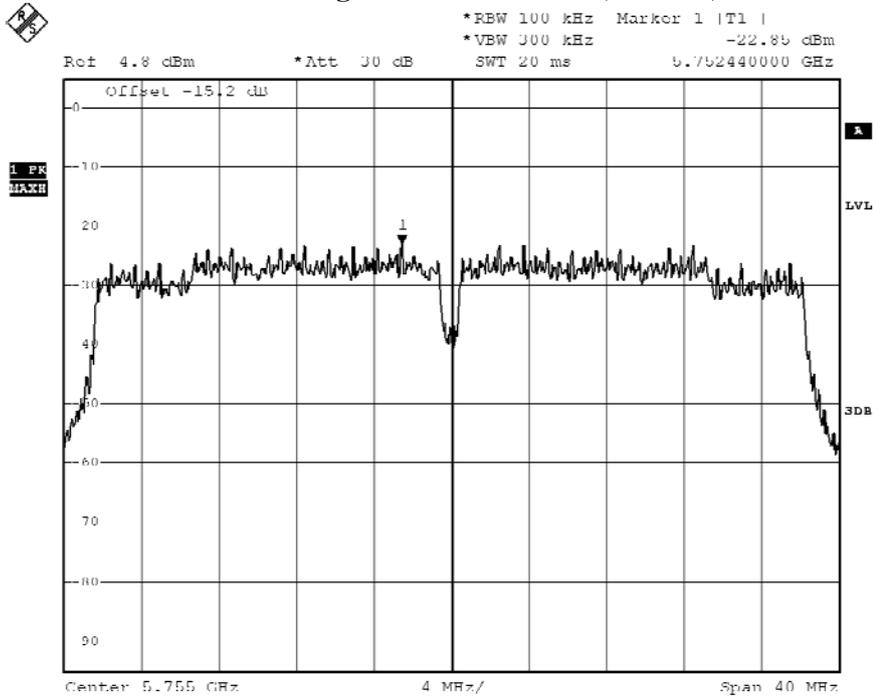


Figure Channel 151: (Chain B)

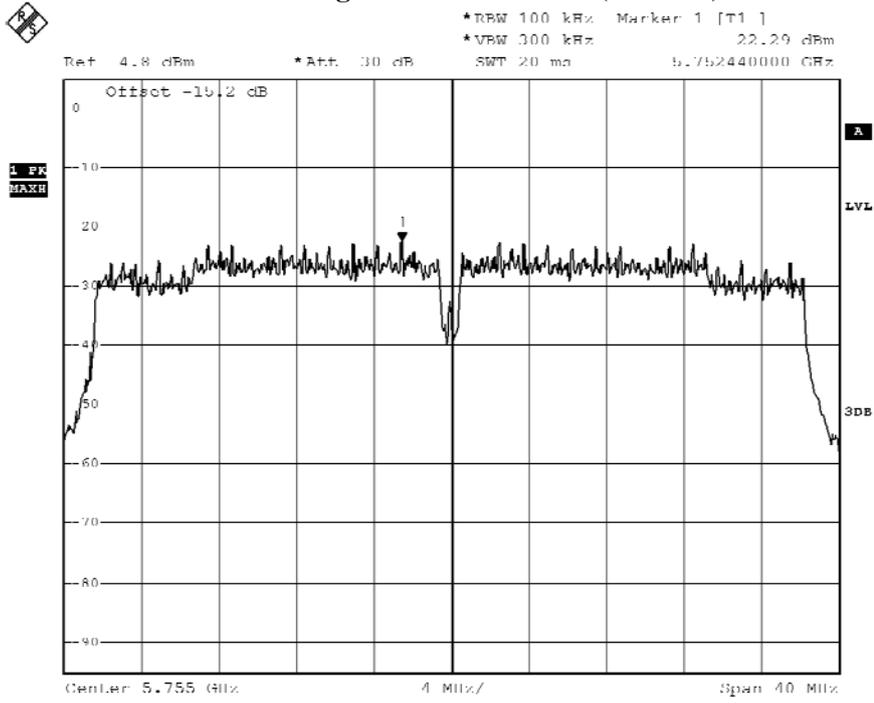

Product : Notebook PC
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 7: Transmit - 802.11n-40BW_30Mbps(5G Band) (5795MHz)

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
159	5795.00	-22.510	-22.670	-19.579	< 8dBm	Pass

Note: Power Density Value (dBm) = 10*LOG (Chain A (mW)+ Chain B (mW))

Figure Channel 159: (Chain A)


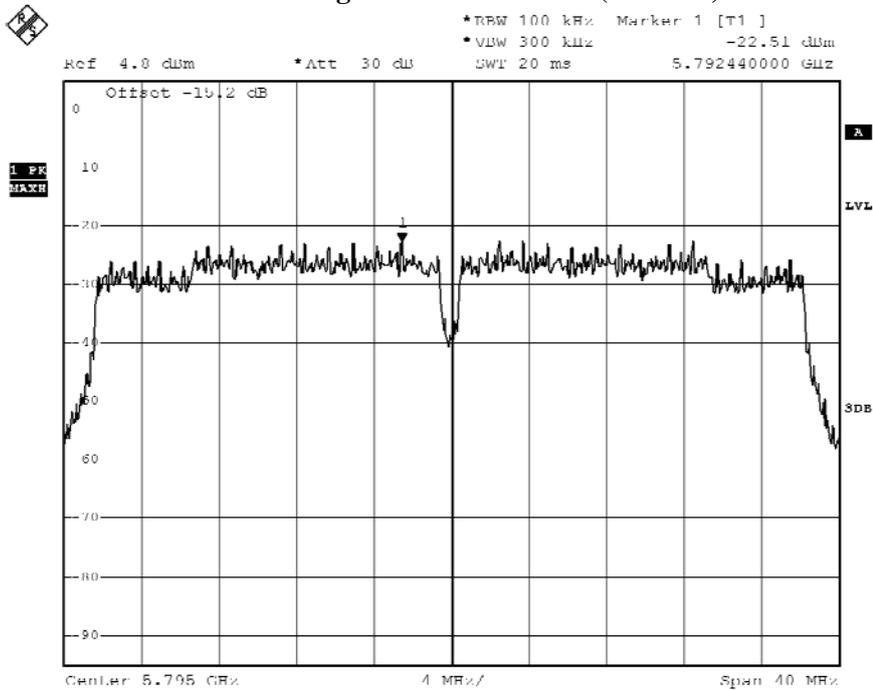


Figure Channel 159: (Chain B)

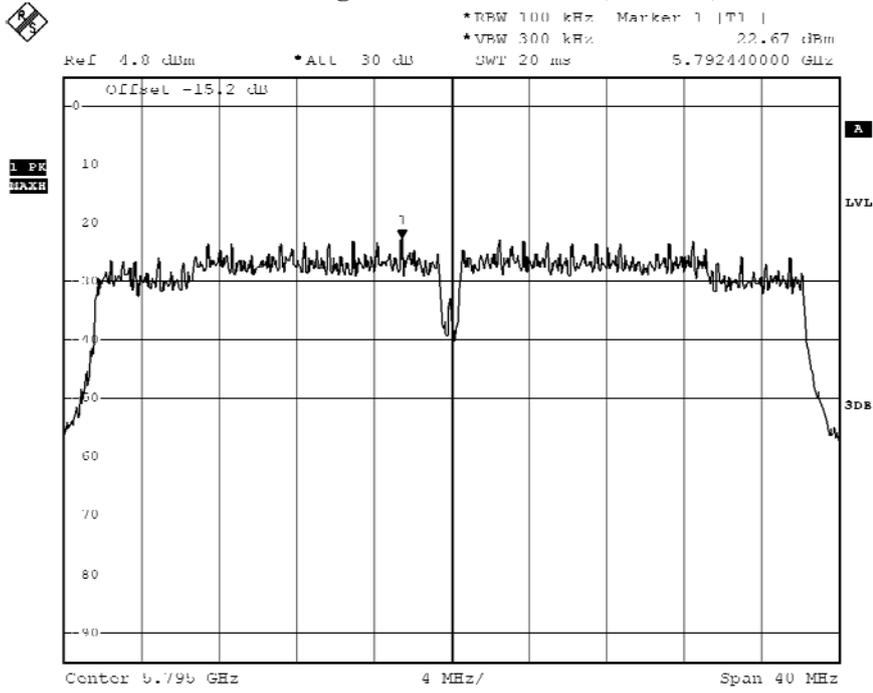

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.