

Class II Permissive Change of *Unlimited Wireless Access Point*

Applicant : ASUSTek Computer Inc.
EUT : Unlimited Wireless Access Point
Model No. : WL-330; MAP-11B
FCC ID : MSQWL330
Report No. : A5415403

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440
No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

Applicant : ASUSTek Computer Inc.
Applicant address : 4F, No. 150, Li-Te Rd., Peitou, Taipei, Taiwan
Product Name : Unlimited Wireless Access Point
Model Name : WL-330; MAP-11B
FCC ID : MSQWL330
Report No. : A5415403

Prepared by: 
Jack Tsai

Approved by: 
Frank Tsai

Conditions of issue :

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**

★ NVLAP LAB CODE: 200174-0

Federal Communications Commission Declaration of Conformity (DoC)

for the Following Equipment:

Product name : Unlimited Wireless Access Point
Model name : WL-330; MAP-11B
Trade name : ASUS ; TERAYON

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : A5415403

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,
including interference that may cause undesired operation

<i>Manufacturer</i>	<i>USA local representative</i>
Company name: ASUSTeK Computer Inc.	To be determined
Computer address: 4/F, 150, Li-Te Rd., Peitou, Taipei, Taiwan	
ZIP / Postal code: 112	
Contact person: Lawrence Yu	
Title: Manager	
Internet e-mail address: lawrence_yu@asus.com.tw	
Tel / Fax: 886-2-28943447 / 886-2-28950113	

Tables of Contents

I. GENERAL	6
1.1 Introduction	6
1.2 Description of EUT	6
1.3 Test method	6
1.4 Description of Support Equipment	7
1.5 Configuration of System Under Test	9
1.6 Verify the Frequency and Channel	12
1.7 Test Procedure	13
1.8 Location of the Test Site	13
1.9 General Test Condition	13
 II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators	 14
 III. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	 15
3.1 Test Condition & Setup	15
3.2 List of Test Instruments	15
3.3 Test Result of Conducted Emissions	16
Powered by Adapter#1	16
Powered by Adapter#2	20
Powered by USB interface	24
 IV. Section 15.247(c) : Spurious Emissions (Radiated)	 28
4.1 Test Condition & Setup	28
4.2 List of Test Instruments	29
4.3 Test Result of Spurious Radiated Emissions	30
Powered by Adapter#1	30
Powered by Adapter#2	35
Powered by USB interface	39

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

Product Name	:	Unlimited Wireless Access Point
Model Name	:	WL-330; MAP-11B
Granted FCC ID	:	MSQWL330
Frequency Range	:	2.412 GHz ~ 2.462GHz
Support Channel	:	11 Channels
Modulation Skill	:	DBPSK, DQPSK, CCK
Power Type	:	(1) Powered by the adaptor#1, Model: FA040-1000 I/P: 100-240VAC, 50-60Hz; O/P: 4VDC, 1000mA 190cm length, non-shielded, no ferrite core (2) Powered by the adaptor#2, Model: DSA-0051-03 FCH 40100F I/P: 100-240VAC, 50/60Hz, 0.2A; O/P: 4VDC, 1.0A 188cm length, non-shielded, incorporates a ferrite core (3) Powered by the USB interface USB cable: 30cm length, shielded, incorporates a ferrite core
Data Cable	:	RJ45 cable x 1: 30m, non-shielded, no ferrite core

1.3 Test method

- Using the computer and software provided by the manufacturer to control EUT. The software is operated under the Windows to control the EUT, the test is performed under the specific conditions.
- Set different channel (CH1/CH6CH11) being tested, and making EUT to as follow mode:
 - Radiated for Intentional test:
 - making EUT to the mode of continuous transmission
 - Conducted and Radiated for Unintentional test:
 - making EUT to the linking (Rx/Tx) mode with far support equipments

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : HP Pavilion

Model No. : P8574A

Serial No. : TW21920435

FCC ID : Doc Approved

檢磁 : 3902H097

Power type : 100 ~ 127VAC / 4A, 200 ~ 240VAC/2A, 50 ~ 60Hz, 5A, Switching

Power cord : Non-shielded, 2.33 m length, Plastic hood, No ferrite core

Monitor : HP 15' Color Monitor

Model No. : D2827A

Serial No. : KR91161719

FCC ID : C5F7NFCMC1518X

檢磁 : 3872B039

Power type : 110 ~ 240 VAC / 50 ~ 60 Hz, Switching

Power cord : Shielded, 1.83m long, No ferrite core

Data cable : Shielded, 1.46m long, with two ferrite cores

Keyboard : HP

Model No. : 5187-0343

Serial No. : BE21700404

FCC ID : Doc Approved

檢磁 : 3892C981

Data cable : Shielded, 1.73m length, Plastic hood, No ferrite core

Mouse : HP

Model No. : M-S34

Serial No. : LZB90714106

FCC ID : DZL211029

檢磁 : 4862A011

Power cord : Non-shielded, 1.88m long, No ferrite core

USB Gamepad : Rockfire

Model No. : QF-337uv
Serial No. : 10600545, KR91379759
FCC ID : None (CE approval)
檢磁 : 3862A574
Power type : By computer
Data Cable : Shielded, 1.81m length, Plastic, with ferrite core

Fax/Modem : Aceex

Model No. : DM-1414
Serial No. : 9010582
FCC ID : IFAXDM1414
Power type : 110 VAC / 50 ~ 60 Hz, Switching
Power Cord : Non-shielded, 1.90m length, Plastic hoods, and no ferrite bead
Data Cable : RS-232→Shielded, 1.30m length, Metal hoods , No bead
RJ-11Cx2→Non-shielded, 7' length, Plastic hoods, No bead

Printer : HP

Model No. : C6464A
Serial No. : TH16LEB5PK
FCC ID : N/A, DoC Approved
檢磁 : 3892H381
Power type : Switching adaptor
Power cord : Non-shielded, 173cm length, No ferrite core
(between adaptor and AC source)
Non-shielded, 180cm length, with ferrite core
(between printer and adaptor)
Data cable : Shielded, 1.70m length, No ferrite core

Notebook : **ASUSTek Computer**
Model No. : AB00F
Serial No. : 24NP016361
FCC ID : DoC Approved
BSMI : 41016012
Power type : 100 ~ 240VAC, 1A 50/60 Hz, Switching


Adaptor of PC : **LITE-ON Electronics, Inc.**
Model No. : PA-1530-01
Serial No. : 00151184
FCC ID : Doc Approved
檢磁 : 3882B259
Power cable : Non-shielded, 1.72m length, Plastic hood, No ferrite core
(Between power adaptor and AC power source)
Power cable : Shielded, 1.48m length, Plastic hood, with ferrite core
(Between power adaptor and notebook)

WLAN Card : **Gemtek Technology Co., Ltd.**
Model No. : C911003
FCC ID : MXF-C911003

HUB : **D-Link**
Model No. : DGS-1008T
FCC ID : N/A, DoC Approved
Power type : I/P: 100 ~ 240vac, 50 ~ 60 Hz, 0.7A
Power cord : Non-shielded, no ferrite core, 1.90m long

1.5 Configuration of System Under Test

1.5.1 Conducted and Radiated for unintentional (Powered by adapter)

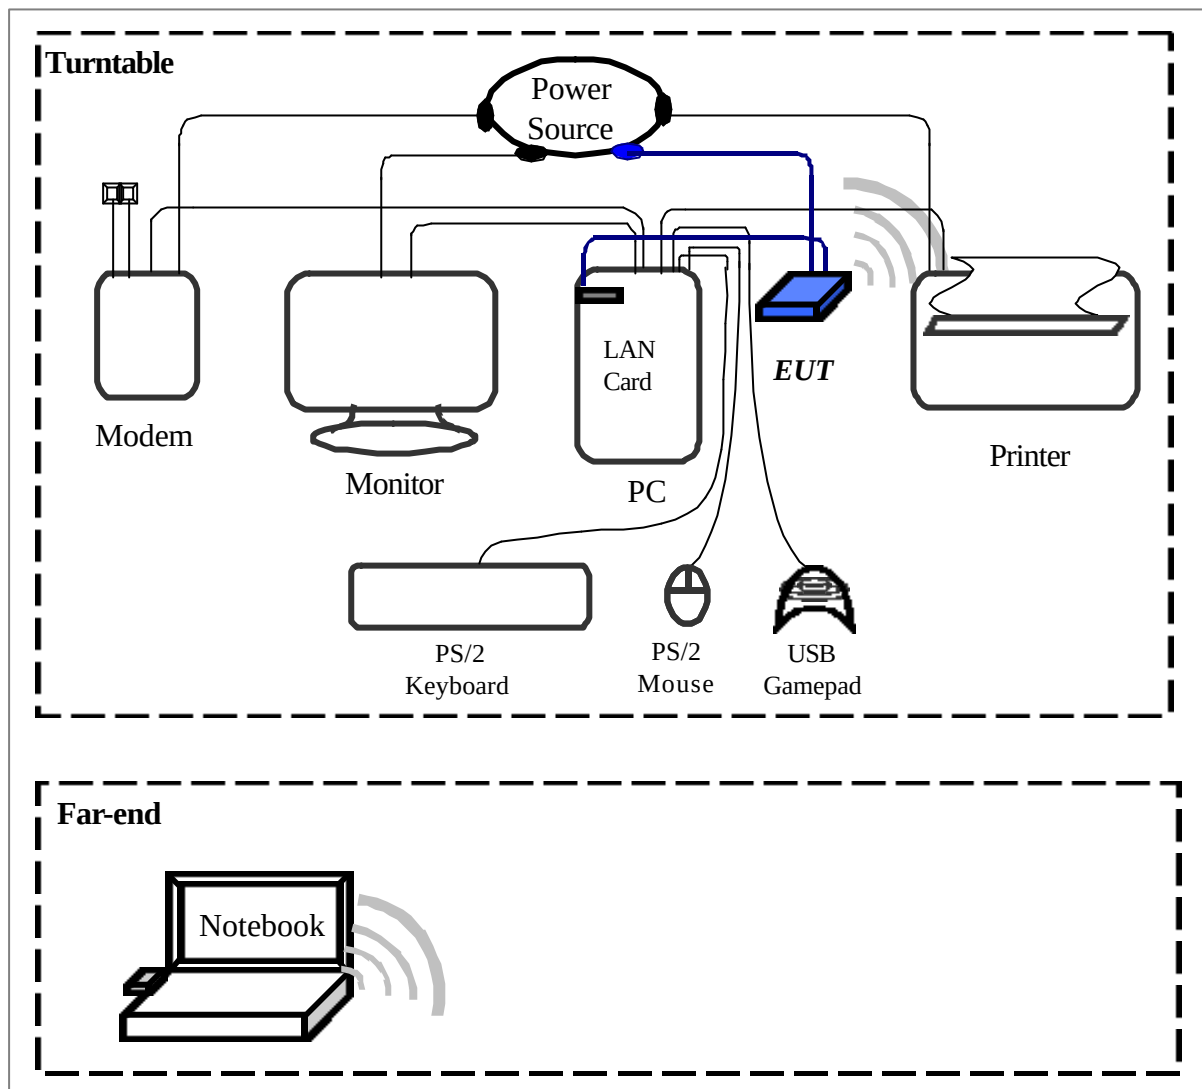


Connections of Equipment

PC:

- *Parallel Port --- a printer
- *VGA Port --- a monitor
- *Serial Port --- an external modem
- *PS/2 Ports --- a PS/2 keyboard and a PS/2 mouse
- *USB Port --- a USB gamepad
- *LAN Interface --- EUT

1.5.2 Conducted and Radiated for unintentional (Powered by USB)

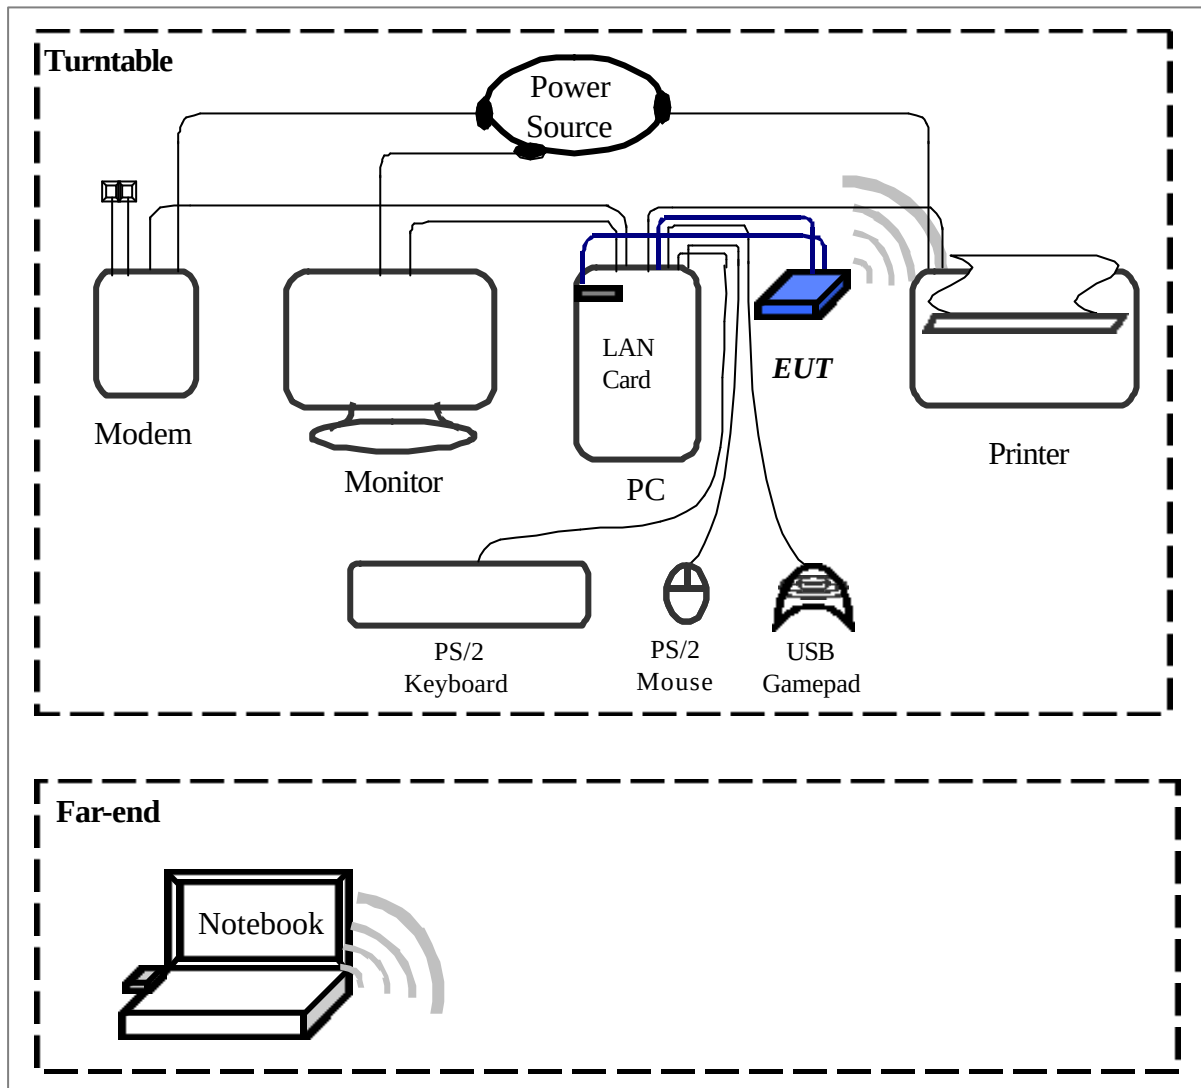


Connections of Equipment

PC:

- *Parallel Port --- a printer
- *VGA Port --- a monitor
- *Serial Port --- an external modem
- *PS/2 Ports --- a PS/2 keyboard and a PS/2 mouse
- *USB Port --- a USB gamepad
- *USB Port --- **EUT**
- *LAN Interface --- **EUT**

1.5.3 Radiated of intentional

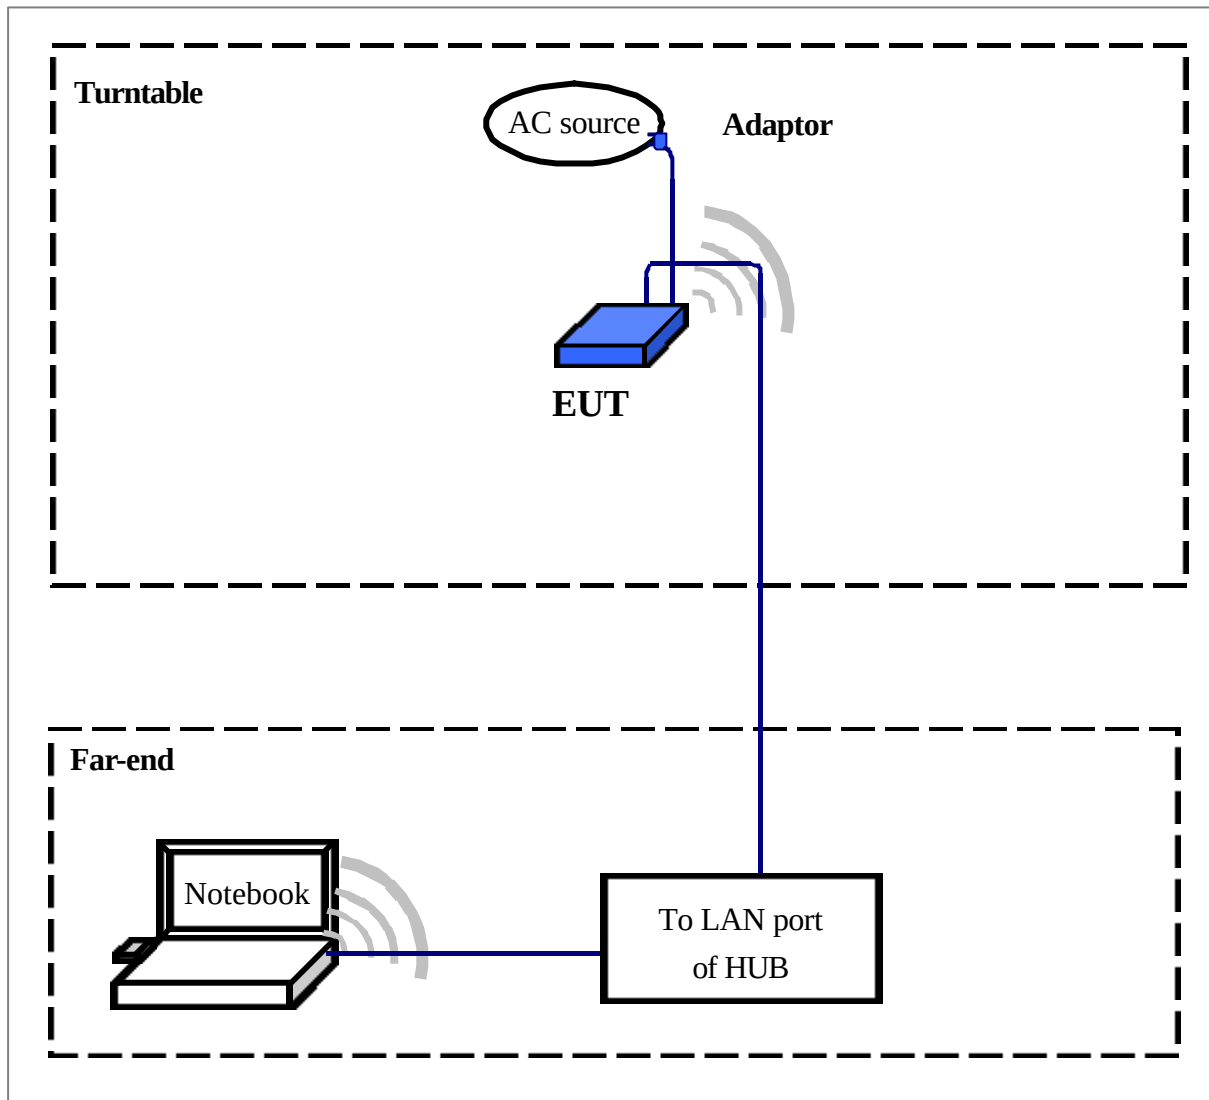

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by notebook computer.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a LAN/USB interfaces and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Sect.15.107 (Conducted limits) and Sect.15.109 (Radiated emission limits) is same as Sect.15.207 and 15.247(C).

III. Section 15.207: Power Line Conducted Emissions for AC Powered Units

3.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4.

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the lowest (CH01), one in the middle (CH06) and the other in highest (CH11).

3.2 List of Test Instruments

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Calibration Date</u>	
				<u>Last time</u>	<u>Next time</u>
EMI Receiver	8546A	HP	3520A00242	07/28/03	07/28/04
RF Filter Section	85460A	HP	3448A00217	07/28/03	07/28/04
LISN (EUT)	LISN-01	TRC	9912-03,04	07/21/03	07/21/04
LISN (Support E.) (< 30MHz)	LISN-01	TRC	9912-05	06/21/03	06/21/04

The level of confidence of 95%, the uncertainty of measurement of conducted emission is +2.53 / -2.43 dB.

3.3 Test Result of Power Line Conducted Emissions

EUT station transmit only

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Data: October 8, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 1 Test mode: Powered by Adapter#1, Channel 1

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	595.050	46.52	45.87	25.80	56.00	46.00	-10.13
	761.870	47.42	44.98	24.13	56.00	46.00	-11.02
	923.270	48.14	45.68	22.06	56.00	46.00	-10.32
	1191.280	48.14	45.93	28.00	56.00	46.00	-10.07
	1528.090	47.60	44.96	25.72	56.00	46.00	-11.04
	1699.370	47.51	44.88	24.89	56.00	46.00	-11.12
	1967.410	45.69	43.39	22.23	56.00	46.00	-12.61
Line 2	141.690	59.53	54.00	16.89	56.00	46.00	-11.77
	401.270	47.65	46.16	32.51	56.00	46.00	-12.75
	516.960	48.68	44.37	27.60	56.00	46.00	-11.63
	976.530	48.63	45.64	29.05	56.00	46.00	-10.36
	1031.530	49.17	45.43	27.15	56.00	46.00	-10.57
	1318.360	50.06	45.54	27.38	56.00	46.00	-10.46
	1601.750	49.45	45.57	27.42	56.00	46.00	-10.43

NOTE:

- (1)Margin = Peak Amplitude – Limit, The reading amplitudes are all under limit.
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit

Test Data: October 8, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 2 Test mode: Powered by Adapter#1, Channel 6

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	495.220	47.13	44.84	28.82	56.29	46.29	-11.45
	600.750	47.74	45.94	26.47	56.00	46.00	-10.06
	706.000	48.40	45.66	27.00	56.00	46.00	-10.34
	938.620	48.54	42.87	22.51	56.00	46.00	-13.13
	1193.620	48.96	45.82	28.60	56.00	46.00	-10.18
	1623.250	48.19	44.97	24.50	56.00	46.00	-11.03
	1879.580	46.74	43.31	26.20	56.00	46.00	-12.69
Line 2	137.780	60.70	54.49	19.05	65.83	55.83	-11.34
	453.100	47.79	43.61	27.27	57.37	47.37	-13.76
	744.360	49.24	46.42	30.22	56.00	46.00	-9.58
	915.570	49.29	46.77	30.72	56.00	46.00	-9.23
	1088.300	49.19	46.49	29.68	56.00	46.00	-9.51
	1481.910	49.19	44.23	23.25	56.00	46.00	-11.77
	1820.130	48.84	39.23	20.80	56.00	46.00	-16.77

Test Data: October 8, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 3 Test mode: Powered by Adapter#1, Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	494.070	48.30	40.80	27.76	56.17	46.17	-15.37
	596.250	47.98	45.93	25.90	56.00	46.00	-10.07
	703.270	48.70	45.67	26.90	56.00	46.00	-10.33
	910.070	48.89	45.50	30.18	56.00	46.00	-10.50
	1200.730	49.38	45.90	28.91	56.00	46.00	-10.10
	1538.830	48.66	45.13	30.28	56.00	46.00	-10.87
	1702.360	47.49	45.19	25.59	56.00	46.00	-10.81
Line 2	140.690	59.14	53.78	18.06	65.86	55.86	-12.08
	574.150	46.28	45.83	27.59	56.00	46.00	-10.17
	744.990	46.90	46.44	25.81	56.00	46.00	-9.56
	851.400	48.33	45.03	24.07	56.00	46.00	-10.97
	1086.100	48.47	45.75	29.81	56.00	46.00	-10.25
	1211.290	48.84	47.79	29.46	56.00	46.00	-8.21
	1529.140	49.85	45.51	24.19	56.00	46.00	-10.49

Test Data: October 8, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 4 Test mode: Powered by Adapter#1, Standby

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	394.000	44.84	---	---	59.03	49.03	-4.19
	602.480	47.72	45.82	26.49	56.00	46.00	-10.18
	921.330	47.74	45.76	27.10	56.00	46.00	-10.24
	1199.260	48.00	45.84	28.88	56.00	46.00	-10.16
	1531.610	47.79	45.17	26.11	56.00	46.00	-10.83
	1732.700	46.97	44.21	23.62	56.00	46.00	-11.79
	2715.000	42.37	---	---	56.00	46.00	-3.63
Line 2	169.000	50.08	---	---	65.46	55.46	-5.38
	229.000	45.45	---	---	63.74	53.74	-8.29
	405.000	41.52	---	---	58.71	48.71	-7.19
	523.000	41.29	---	---	56.00	46.00	-4.71
	817.000	40.85	---	---	56.00	46.00	-5.15
	1166.000	40.53	---	---	56.00	46.00	-5.47
	1696.000	39.44	---	---	56.00	46.00	-6.56

Test Data: December 3, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 5 Test mode: Powered by Adapter#2, Channel 1

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	162.450	53.38	54.46	34.61	65.77	55.77	-11.32
	450.330	46.87	43.34	26.92	58.26	48.26	-14.92
	620.130	45.97	42.14	24.92	56.00	46.00	-13.86
	773.890	45.34	40.15	18.87	56.00	46.00	-15.85
	919.620	45.73	38.85	15.76	56.00	46.00	-17.15
	1180.700	45.13	42.53	25.28	56.00	46.00	-13.47
	1579.330	44.63	43.21	24.98	56.00	46.00	-12.79
Line 2	160.000	57.75	54.97	32.33	65.69	55.69	-10.72
	210.000	51.14	---	---	64.29	54.29	-3.15
	447.000	44.00	---	---	57.51	47.51	-3.51
	604.000	42.58	---	---	56.00	46.00	-3.42
	1016.120	44.22	43.93	25.87	56.00	46.00	-12.07
	1331.500	43.53	40.63	16.35	56.00	46.00	-15.37
	1735.870	44.29	40.70	22.22	56.00	46.00	-15.30

Test Data: December 3, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 6 Test mode: Powered by Adapter#2, Channel 6

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	160.190	53.03	58.70	33.22	65.69	55.69	-6.99
	429.000	46.48	40.52	15.67	58.00	48.00	-17.48
	617.970	48.46	42.23	25.98	56.00	46.00	-13.77
	766.330	45.77	40.60	18.43	56.00	46.00	-15.40
	932.030	46.16	41.24	18.07	56.00	46.00	-14.76
	1063.860	46.66	38.13	22.76	56.00	46.00	-17.87
	1328.010	44.61	41.28	16.22	56.00	46.00	-14.72
Line 2	161.530	58.47	59.04	34.84	65.77	55.77	-6.73
	213.470	51.68	50.21	24.09	64.29	54.29	-14.08
	267.000	48.86	---	---	62.66	52.66	-3.80
	447.000	44.10	---	---	57.51	47.51	-4.71
	1016.220	44.59	44.18	26.20	56.00	46.00	-11.82
	1317.300	43.83	41.04	18.13	56.00	46.00	-14.96
	1740.020	43.14	42.22	25.49	56.00	46.00	-13.78

Test Data: December 3, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 7 Test mode: Powered by Adapter#2, Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	161.090	61.63	61.12	37.50	65.86	55.86	-4.19
	214.870	55.86	53.41	27.81	64.40	54.40	-10.99
	267.930	51.35	49.71	10.18	62.46	52.46	-12.75
	775.250	44.42	40.82	23.46	56.00	46.00	-15.18
	1014.630	46.55	44.17	27.46	56.00	46.00	-11.83
	1162.370	46.94	41.09	23.33	56.00	46.00	-14.91
	2127.410	44.33	38.81	21.41	56.00	46.00	-17.19
Line 2	161.530	60.32	60.26	36.73	65.60	55.60	-5.34
	215.060	56.27	52.17	25.99	64.29	54.29	-12.12
	268.180	51.98	52.69	21.44	62.89	52.89	-10.20
	774.000	42.65	---	---	56.00	46.00	-3.35
	1017.270	43.53	44.66	28.28	56.00	46.00	-11.34
	1160.890	44.42	41.77	23.85	56.00	46.00	-14.23
	1549.060	45.06	41.86	27.90	56.00	46.00	-14.14

Test Data: December 3, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 8 Test mode: Powered by Adapter#2, Standby

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	159.740	56.87	51.00	29.88	65.60	55.60	-14.60
	433.950	47.29	43.08	21.14	58.49	48.49	-15.41
	577.670	44.22	38.48	19.24	56.00	46.00	-17.52
	672.110	46.80	41.84	24.90	56.00	46.00	-14.16
	920.250	45.84	41.04	20.24	56.00	46.00	-14.96
	1279.510	46.02	44.37	22.32	56.00	46.00	-11.63
	3741.000	42.88	---	---	56.00	46.00	-3.12
Line 2	161.920	58.22	54.55	35.30	65.40	55.40	-10.85
	193.000	51.77	---	---	64.77	54.77	-3.00
	252.000	49.70	---	---	63.09	53.09	-3.39
	434.370	45.63	42.80	20.04	58.26	48.26	-15.46
	1015.540	44.99	43.18	25.01	56.00	46.00	-12.82
	1278.260	45.30	44.08	21.05	56.00	46.00	-11.92
	1646.670	43.76	41.30	19.38	56.00	46.00	-14.70

Test Data: December 3, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 9 Test mode: Powered by USB interface, Channel 1

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	182.000	50.33	---	---	65.09	55.09	-4.76
	366.000	35.86	---	---	59.83	49.83	-13.97
	456.000	32.29	---	---	57.26	47.26	-14.97
	2372.000	32.46	---	---	56.00	46.00	-13.54
	2741.000	32.75	---	---	56.00	46.00	-13.25
	7500.000	35.95	---	---	60.00	50.00	-14.05
	15860.000	36.78	---	---	60.00	50.00	-13.22
Line 2	182.000	50.96	---	---	65.09	55.09	-4.13
	363.000	36.62	---	---	59.91	49.91	-13.29
	456.000	34.69	---	---	57.26	47.26	-12.57
	2820.000	33.81	---	---	56.00	46.00	-12.19
	3858.000	32.98	---	---	56.00	46.00	-13.02
	8300.000	35.45	---	---	60.00	50.00	-14.55
	13710.000	37.53	---	---	60.00	50.00	-12.47

Test Data: December 3, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 10 Test mode: Powered by USB interface, Channel 6

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	182.000	49.79	---	---	65.09	55.09	-5.30
	363.000	36.75	---	---	59.91	49.91	-13.16
	1372.000	31.30	---	---	56.00	46.00	-14.70
	2286.000	33.28	---	---	56.00	46.00	-12.72
	3004.000	34.56	---	---	56.00	46.00	-11.44
	8470.000	40.19	---	---	60.00	50.00	-9.81
	15790.000	36.82	---	---	60.00	50.00	-13.18
Line 2	182.000	50.86	---	---	65.09	55.09	-4.23
	363.000	38.28	---	---	59.91	49.91	-11.63
	1269.000	33.23	---	---	56.00	46.00	-12.77
	2372.000	33.43	---	---	56.00	46.00	-12.57
	3477.000	33.80	---	---	56.00	46.00	-12.20
	4367.000	35.06	---	---	56.00	46.00	-10.94
	8430.000	39.70	---	---	60.00	50.00	-10.30

Test Data: December 3, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 11 Test mode: Powered by USB interface, Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	183.000	49.37	---	---	65.06	55.06	-5.69
	1359.000	33.52	---	---	56.00	46.00	-12.48
	2094.000	33.50	---	---	56.00	46.00	-12.50
	2558.000	35.23	---	---	56.00	46.00	-10.77
	3285.000	34.44	---	---	56.00	46.00	-11.56
	8470.000	37.98	---	---	60.00	50.00	-12.02
	16230.000	36.61	---	---	60.00	50.00	-13.39
Line 2	183.000	50.72	---	---	65.06	55.06	-4.34
	363.000	37.63	---	---	59.91	49.91	-12.28
	1282.000	33.45	---	---	56.00	46.00	-12.55
	2094.000	35.74	---	---	56.00	46.00	-10.26
	3381.000	33.78	---	---	56.00	46.00	-12.22
	8470.000	39.32	---	---	60.00	50.00	-10.68
	13100.000	39.20	---	---	60.00	50.00	-10.80

Test Data: December 3, 2003

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 12 Test mode: Powered by USB interface, Standby

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBmV)	QP (dBmV)	Average (dBmV)	QP-limit (dBmV)	AVG-limit (dBmV)	Margin (dB)
Line 1	183.000	49.67	---	---	65.06	55.06	-5.39
	1359.000	33.78	---	---	56.00	46.00	-12.22
	1645.000	32.98	---	---	56.00	46.00	-13.02
	2458.000	33.41	---	---	56.00	46.00	-12.59
	3858.000	33.85	---	---	56.00	46.00	-12.15
	8340.000	41.58	---	---	60.00	50.00	-8.42
	15710.000	36.04	---	---	60.00	50.00	-13.96
Line 2	183.000	50.95	---	---	65.06	55.06	-4.11
	363.000	37.14	---	---	59.91	49.91	-12.77
	456.000	34.73	---	---	57.26	47.26	-12.53
	2179.000	35.44	---	---	56.00	46.00	-10.56
	3858.000	32.41	---	---	56.00	46.00	-13.59
	8560.000	40.73	---	---	60.00	50.00	-9.27
	15790.000	37.72	---	---	60.00	50.00	-12.28

IV. Section 15.247 (C): Spurious Emissions (Radiated)

4.1 Test Condition & Setup

We'd performed the test by the *radiated emission skill*: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, M.E. whole range Bi-log antenna (Model No.: VULB9160) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/CMT Horn Antenna (Model 3115 / RA42-K-F-4B-C) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the lowest (CH01), one in the middle (CH06) and the other in highest (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBμV/m) is determined by algebraically adding the measured reading in dBμV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

4.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	HP	3520A00242	07/28/03	07/28/04
RF Filter Section	85460A	HP	3448A00217	07/28/03	07/28/04
Bi-log Antenna	CBL 6141A	CHASE	4206	05/27/03	05/27/04
Spectrum Analyzer	8564E	HP	3720A00840	07/23/03	07/23/04
Microwave Preamplifier	84125C	HP	US36433002	07/30/03	07/30/04
Horn Antenna	3115	EMCO	9104-3668	12/24/02	12/24/03
Horn Antenna	RA42-K-F-4B-C	CMT	961505-003	02/01/03	02/01/04
Anechoic Chamber (cable calibrated together)				05/20/03	05/20/04

The level of confidence of 95% , the uncertainty of measurement of radiated emission is +3.05 / -3.84dB.

4.3 Test Result of Spurious Radiated Emissions

EUT's transmit only

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Data: October 8, 2003

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

Test mode: Powered by Adapter#1 for 30MHz to 1GHz, Standby mode [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBmV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
133.06	36.92	1.00	182	-1.74	35.18	43.50	-8.32
167.01	34.14	1.00	286	-2.55	31.59	43.50	-11.91
176.71	34.26	1.00	283	-2.62	31.64	43.50	-11.86
391.32	33.95	1.00	325	0.13	34.08	46.00	-11.92
564.71	25.68	1.00	68	7.41	33.09	46.00	-12.91
924.83	23.49	1.00	175	18.10	41.59	46.00	-4.41

Test mode: Powered by Adapter#1 for 30MHz to 1GHz, Standby mode [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBmV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
152.46	36.28	1.00	38	-2.22	34.06	43.50	-9.44
176.71	35.68	1.00	340	-2.62	33.06	43.50	-10.44
261.59	38.50	1.00	94	-2.89	35.61	46.00	-10.39
327.06	37.79	1.00	136	-1.82	35.97	46.00	-10.03
433.76	35.69	1.00	319	2.01	37.70	46.00	-8.30
660.50	28.98	1.00	187	10.57	39.55	46.00	-6.45

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain)

Test mode: Powered by Adapter#1 for 30MHz to 1GHz, TX mode [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
133.06	37.03	1.00	203	-1.74	35.29	43.50	-8.21
167.01	35.52	1.00	309	-2.55	32.97	43.50	-10.53
396.17	34.09	1.14	304	0.30	34.39	46.00	-11.61
567.14	23.27	1.00	140	7.50	30.77	46.00	-15.23
660.50	22.75	1.00	33	10.57	33.32	46.00	-12.68
924.83	23.12	3.83	132	18.10	41.22	46.00	-4.78

Test mode: Powered by Adapter#1 for 30MHz to 1GHz, TX mode [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
133.06	39.84	1.00	279	-1.74	38.10	43.50	-5.40
151.25	36.10	1.00	345	-2.19	33.91	43.50	-9.59
176.71	35.33	1.00	25	-2.62	32.71	43.50	-10.79
397.39	30.67	1.00	277	0.35	31.02	46.00	-14.98
660.50	26.39	1.00	143	10.57	36.96	46.00	-9.04
827.83	22.67	1.00	265	14.66	37.33	46.00	-8.67

Test mode: Powered by Adapter#1 for 1GHz to 25GHz, CH1 [Horizontal]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
2037.50	1.00	227	1.96	50.63	---	74.00	53.96	-3.33
4825.14	1.00	145	3.76	38.87	---	74.00	53.96	-15.09
7234.44	1.00	25	10.07	43.96	---	74.00	53.96	-10.00
9646.39	1.00	298	11.45	44.06	---	74.00	53.96	-9.90
12171.81	1.00	66	9.69	46.46	---	74.00	53.96	-7.50

Test mode: Powered by Adapter#1 for 1GHz to 25GHz, CH1 [Vertical]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
2037.50	1.00	279	1.96	43.96	---	74.00	53.96	-10.00
4825.14	1.00	337	3.76	38.87	---	74.00	53.96	-15.09
7233.75	1.00	28	10.07	44.68	---	74.00	53.96	-9.28
9646.39	1.00	169	11.45	44.56	---	74.00	53.96	-9.40
12171.81	1.00	307	9.69	48.96	---	74.00	53.96	-5.00

Note:

1. Margin = Corrected – Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: Powered by Adapter#1 for 1GHz to 25GHz, CH6 [Horizontal]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
2062.50	1.00	25	2.05	49.71	---	74.00	53.96	-4.25
2376.04	1.00	176	3.09	43.92	---	74.00	53.96	-10.04
4873.47	1.00	289	3.95	39.39	---	74.00	53.96	-14.57
7310.28	1.00	207	10.30	43.74	---	74.00	53.96	-10.22
9747.08	1.00	335	11.89	43.66	---	74.00	53.96	-10.30

Test mode: Powered by Adapter#1 for 1GHz to 25GHz, CH6 [Vertical]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
2062.50	1.00	15	2.05	45.05	---	74.00	53.96	-8.91
4873.47	1.00	17	3.95	39.39	---	74.00	53.96	-14.57
7310.28	1.00	109	10.30	43.75	---	74.00	53.96	-10.21
9747.08	1.00	225	11.89	43.68	---	74.00	53.96	-10.28

Test mode: Powered by Adapter#1 for 1GHz to 25GHz, CH11 [Horizontal]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
2087.50	1.00	59	2.13	50.46	---	74.00	53.96	-3.50
2376.04	1.00	146	3.09	43.59	---	74.00	53.96	-10.37
4925.84	1.00	107	4.13	40.57	---	74.00	53.96	-13.39
7386.80	1.00	225	10.42	42.36	---	74.00	53.96	-11.60
9847.78	1.00	35	11.93	44.04	---	74.00	53.96	-9.92

Test mode: Powered by Adapter#1 for 1GHz to 25GHz, CH11 [Vertical]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
2087.50	1.00	167	2.13	45.96	---	74.00	53.96	-8.00
4925.84	1.00	224	4.13	41.24	---	74.00	53.96	-12.72
7386.80	1.00	39	10.42	42.53	---	74.00	53.96	-11.43
9847.78	1.00	148	11.93	44.87	---	74.00	53.96	-9.09

Test Data: December 3, 2003

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

Test mode: Powered by Adapter#2 for 30MHz to 1GHz, Standby mode [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
77.29	33.92	1.00	298	1.77	35.69	40.00	-4.31
84.56	37.90	1.00	171	1.22	38.12	40.00	-1.88
88.20	38.78	1.00	158	0.85	39.63	43.50	-3.87
134.27	32.59	1.00	165	-1.82	30.77	43.50	-12.73
233.70	34.53	1.00	217	-2.61	31.92	46.00	-14.08
631.40	24.04	1.00	112	9.49	33.53	46.00	-12.47

Test mode: Powered by Adapter#2 for 30MHz to 1GHz, Standby mode [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
43.34	28.24	1.00	297	5.08	33.32	40.00	-6.68
88.20	33.17	1.00	157	0.85	34.02	43.50	-9.48
135.49	35.70	1.00	326	-1.79	33.91	43.50	-9.59
152.46	37.25	1.00	270	-2.09	35.16	43.50	-8.34
721.12	23.98	1.00	43	12.40	36.38	46.00	-9.62
881.17	24.47	1.00	311	16.53	41.00	46.00	-5.00

Test mode: Powered by Adapter#2 for 30MHz to 1GHz, CH1 [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
151.25	37.38	1.00	214	-2.02	35.36	43.50	-8.14
221.57	35.11	1.00	297	-2.42	32.69	46.00	-13.31
251.89	34.67	1.00	236	-2.64	32.03	46.00	-13.97
301.60	33.26	1.00	243	-2.26	31.00	46.00	-15.00
348.89	32.15	1.00	0	-1.45	30.70	46.00	-15.30
528.34	25.94	1.00	210	5.76	31.70	46.00	-14.30

Test mode: Powered by Adapter#2 for 30MHz to 1GHz, CH1 [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
96.69	29.22	1.00	213	0.41	29.63	43.50	-13.87
153.68	37.00	1.00	238	-2.16	34.84	43.50	-8.66
443.46	28.34	1.00	58	1.92	30.26	46.00	-15.74
528.34	31.31	1.00	207	5.76	37.07	46.00	-8.93
660.50	24.96	1.00	190	10.18	35.14	46.00	-10.86
881.17	24.20	1.00	333	16.53	40.73	46.00	-5.27

Test mode: Powered by Adapter#2 for 30MHz to 1GHz, CH6 [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
151.25	36.55	1.00	203	-2.02	34.53	43.50	-8.97
205.81	34.48	1.00	189	-2.47	32.01	43.50	-11.49
221.57	35.15	1.00	296	-2.42	32.73	46.00	-13.27
251.89	36.17	1.00	233	-2.64	33.53	46.00	-12.47
337.97	32.79	1.00	356	-1.64	31.15	46.00	-14.85
397.39	31.24	1.00	300	0.63	31.87	46.00	-14.13

Test mode: Powered by Adapter#2 for 30MHz to 1GHz, CH6 [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
148.82	36.90	1.00	259	-1.92	34.98	43.50	-8.52
199.75	30.94	1.00	30	-2.23	28.71	43.50	-14.79
443.46	28.67	1.00	277	1.92	30.59	46.00	-15.41
528.34	31.10	1.00	204	5.76	36.86	46.00	-9.14
660.50	25.39	1.00	176	10.18	35.57	46.00	-10.43
881.17	24.15	1.00	19	16.53	40.68	46.00	-5.32

Test mode: Powered by Adapter#2 for 30MHz to 1GHz, CH11 [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
151.25	36.15	1.00	197	-2.02	34.13	43.50	-9.37
200.96	34.57	1.00	174	-2.26	32.31	43.50	-11.19
234.91	34.67	1.00	183	-2.62	32.05	46.00	-13.95
251.89	35.09	1.00	222	-2.64	32.45	46.00	-13.55
339.19	34.19	1.00	348	-1.62	32.57	46.00	-13.43
528.34	25.89	1.00	220	5.76	31.65	46.00	-14.35

Test mode: Powered by Adapter#2 for 30MHz to 1GHz, CH11 [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
154.89	35.81	1.00	227	-2.23	33.58	43.50	-9.92
196.11	32.01	1.00	359	-2.35	29.66	43.50	-13.84
443.46	28.20	1.00	149	1.92	30.12	46.00	-15.88
528.34	31.55	1.00	193	5.76	37.31	46.00	-8.69
660.50	25.20	1.00	178	10.18	35.38	46.00	-10.62
881.17	24.27	1.00	9	16.53	40.80	46.00	-5.20

Test mode: Powered by USB interface for 30MHz to 1GHz, Standby [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
140.34	32.45	1.00	202	-1.71	30.74	43.50	-12.76
152.46	32.15	1.00	156	-2.09	30.06	43.50	-13.44
167.01	33.60	1.00	295	-2.47	31.13	43.50	-12.37
233.70	33.78	1.00	178	-2.61	31.17	46.00	-14.83
351.31	30.66	1.00	214	-1.37	29.29	46.00	-16.71
397.39	28.71	1.00	299	0.63	29.34	46.00	-16.66

Test mode: Powered by USB interface for 30MHz to 1GHz, Standby [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
72.44	28.84	1.00	89	1.92	30.76	40.00	-9.24
151.25	36.32	1.00	237	-2.02	34.30	43.50	-9.20
167.01	37.42	1.00	356	-2.47	34.95	43.50	-8.55
233.70	37.28	1.00	302	-2.61	34.67	46.00	-11.33
528.34	29.92	1.00	209	5.76	35.68	46.00	-10.32
881.17	24.81	1.00	8	16.53	41.34	46.00	-4.66

Test mode: Powered by USB interface for 30MHz to 1GHz, CH1 [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
140.34	32.13	1.00	185	-1.71	30.42	43.50	-13.08
167.01	31.62	1.00	305	-2.47	29.15	43.50	-14.35
221.57	32.26	1.00	196	-2.42	29.84	46.00	-16.16
234.91	33.30	1.00	178	-2.62	30.68	46.00	-15.32
251.89	31.73	1.00	200	-2.64	29.09	46.00	-16.91
351.31	30.43	1.00	303	-1.37	29.06	46.00	-16.94

Test mode: Powered by USB interface for 30MHz to 1GHz, CH1 [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
96.69	29.75	1.00	235	0.41	30.16	43.50	-13.34
151.25	36.96	1.00	270	-2.02	34.94	43.50	-8.56
167.01	36.76	1.00	109	-2.47	34.29	43.50	-9.21
251.89	32.55	1.00	271	-2.64	29.91	46.00	-16.09
443.46	28.67	1.00	223	1.92	30.59	46.00	-15.41
528.34	30.40	1.00	217	5.76	36.16	46.00	-9.84

Test mode: Powered by USB interface for 30MHz to 1GHz, CH6 [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
134.27	32.58	1.00	160	-1.82	30.76	43.50	-12.74
167.01	32.60	1.00	287	-2.47	30.13	43.50	-13.37
221.57	32.47	1.00	196	-2.42	30.05	46.00	-15.95
232.49	33.71	1.00	161	-2.59	31.12	46.00	-14.88
397.39	28.38	1.00	301	0.63	29.01	46.00	-16.99
767.20	22.09	1.00	42	13.51	35.60	46.00	-10.40

Test mode: Powered by USB interface for 30MHz to 1GHz, CH6 [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
152.46	37.60	1.00	249	-2.09	35.51	43.50	-7.99
171.86	36.83	1.00	4	-2.50	34.33	43.50	-9.17
199.75	32.05	1.00	109	-2.23	29.82	43.50	-13.68
261.59	32.74	1.00	289	-2.75	29.99	46.00	-16.01
528.34	30.47	1.00	208	5.76	36.23	46.00	-9.77
881.17	25.59	1.00	5	16.53	42.12	46.00	-3.88

Test mode: Powered by USB interface for 30MHz to 1GHz, CH11 [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
151.25	31.46	1.00	192	-2.02	29.44	43.50	-14.06
167.01	33.12	1.00	298	-2.47	30.65	43.50	-12.85
222.79	32.43	1.00	185	-2.44	29.99	46.00	-16.01
233.70	33.71	1.00	150	-2.61	31.10	46.00	-14.90
251.89	33.09	1.00	193	-2.64	30.45	46.00	-15.55
528.34	23.51	1.00	273	5.76	29.27	46.00	-16.73

Test mode: Powered by USB interface for 30MHz to 1GHz, CH11 [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBmV)	Ant. H. (m)	Table (°)			Limit (dBmV/m)	Margin (dB)
67.59	28.04	1.00	77	2.16	30.20	40.00	-9.80
153.68	36.96	1.00	250	-2.16	34.80	43.50	-8.70
167.01	36.19	1.00	339	-2.47	33.72	43.50	-9.78
199.75	31.61	1.00	260	-2.23	29.38	43.50	-14.12
528.34	30.16	1.00	164	5.76	35.92	46.00	-10.08
881.17	24.25	1.00	337	16.53	40.78	46.00	-5.22