



FCC RF Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone (Mobile Phone)
BRAND NAME : ASUS
MODEL NAME : ASUS_X00QDA
ASUS_X00QSA
FCC ID : MSQX00QSA
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Nov. 15, 2017 and testing was completed on Feb. 23, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID: MSQX00QSA

Page Number : 1 of 27

Report Issued Date : Mar. 16, 2018

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.4



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement.....	17
3.5 AC Conducted Emission Measurement.....	22
3.6 Automatically Discontinue Transmission	24
3.7 Antenna Requirements.....	25
4 LIST OF MEASURING EQUIPMENT	26
5 UNCERTAINTY OF EVALUATION	27
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX E. DUTY CYCLE PLOTS	
APPENDIX F. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR7N1502F	Rev. 01	Initial issue of report	Mar. 16, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 4.08 dB at 11650.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 17.71 dB at 0.154 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

ASUSTeK COMPUTER INC.

4F, No. 150, Li-Te Rd., Peitou, Taipei 112, Taiwan

1.2 Manufacturer

ASUSTeK COMPUTER INC.

4F, No. 150, Li-Te Rd., Peitou, Taipei 112, Taiwan

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, FM Receiver, NFC, and GNSS

Product Specification subjective to this standard	
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS/Glonass/Galileo/BDS: PIFA Antenna NFC: PIFA Antenna FM: using earphone as antenna

<Sample Information>

Sample	Sample 1	Sample 2	Sample 3
CPU	636/3CA		
Merry / Supplier	4G/64G	4G/64G	6G/64G
	Samsung	Samsung	Samsung
Front CAM 8M	AZUREWAVE	Chicony	Chicony
Rear CAM 8M+12M	LITEON	Primax	Primax
Battery	COSLIGHT	COSLIGHT	COSLIGHT

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH12-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1: LTE Band 40 Idle + Bluetooth Link + WLAN (5GHz) Link + MPEG4 + SD (play MP3) + Earphone 2 + USB Cable 1 (Charging from Adaptor 1) + SIM 1 for Sample 1
Remark: For Radiated Test Cases, The tests were performance with adapter 1, earphone 1, USB cable 1, and sample 1	

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

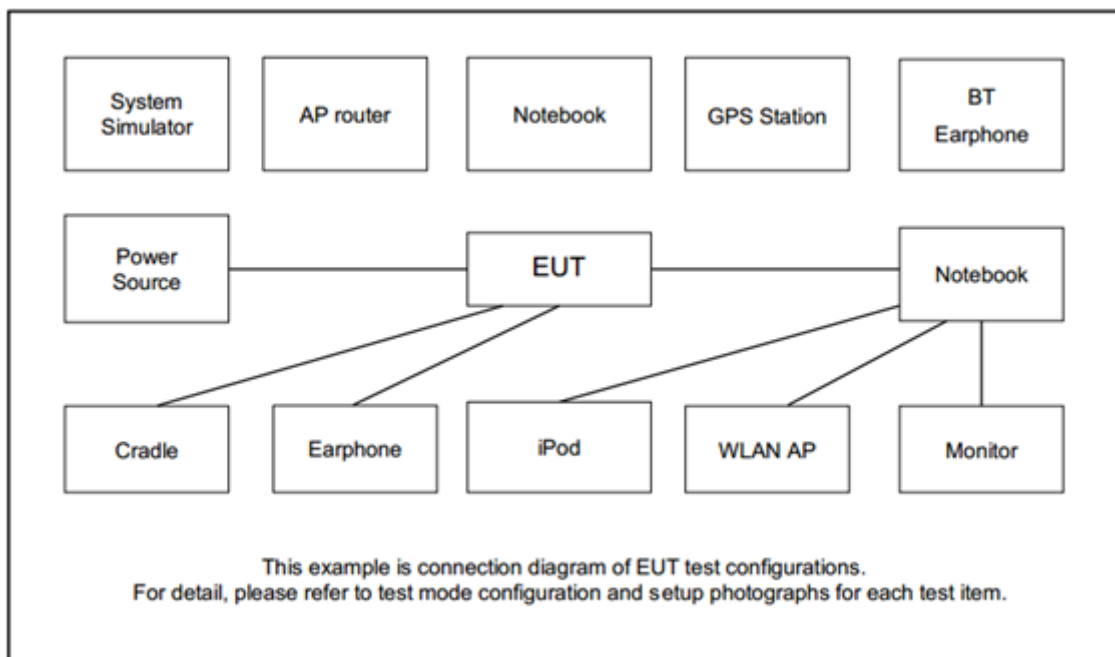

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
4.	Notebook	DELL	Latitude E3340	FCC DoC/ Contains FCC ID: PD97260NGU	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

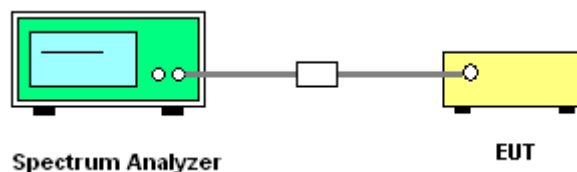

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

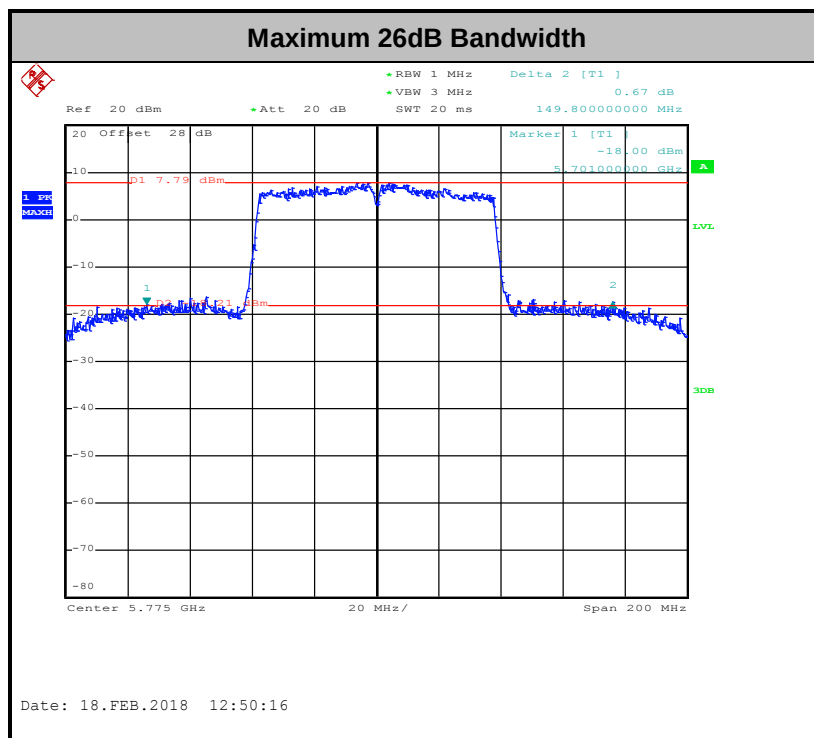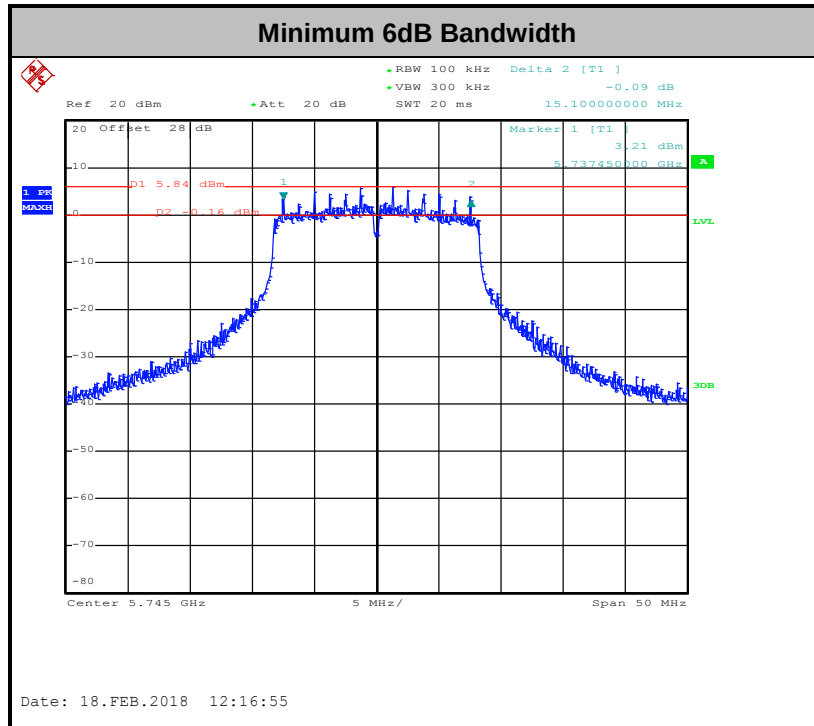

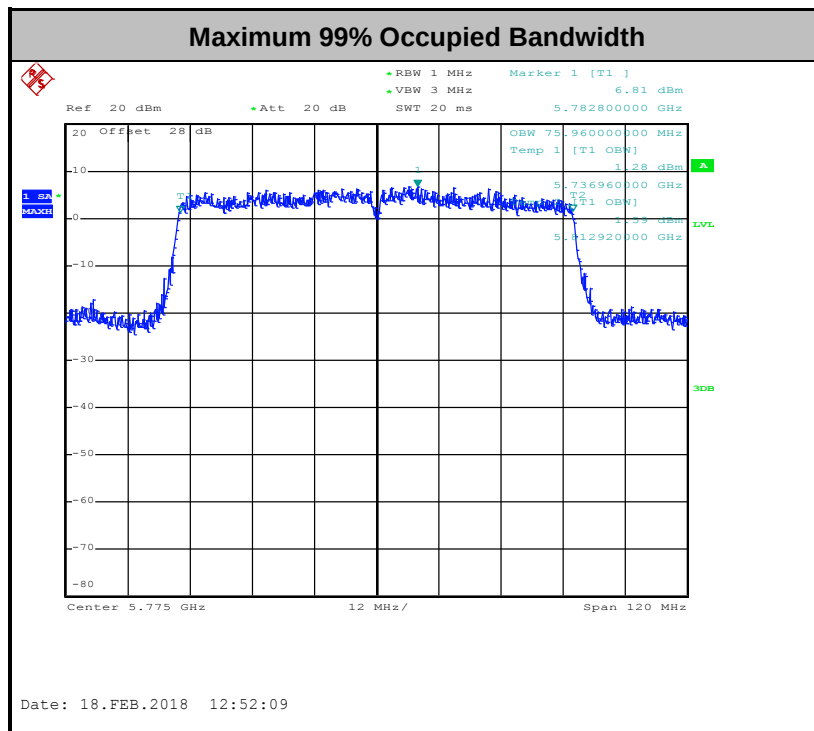

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

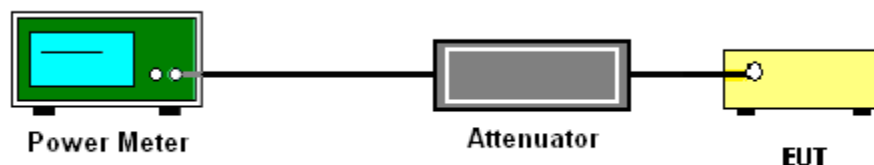

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

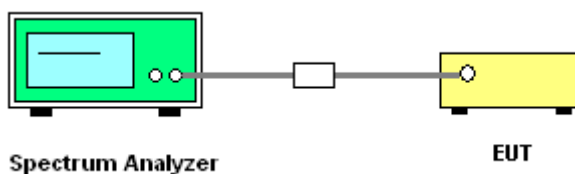

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

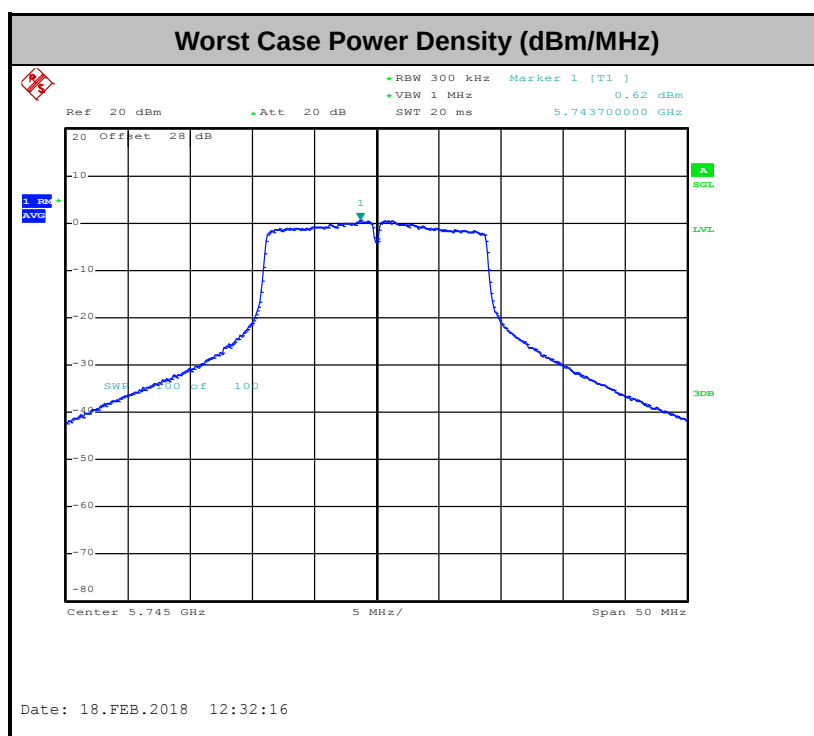



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3



(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

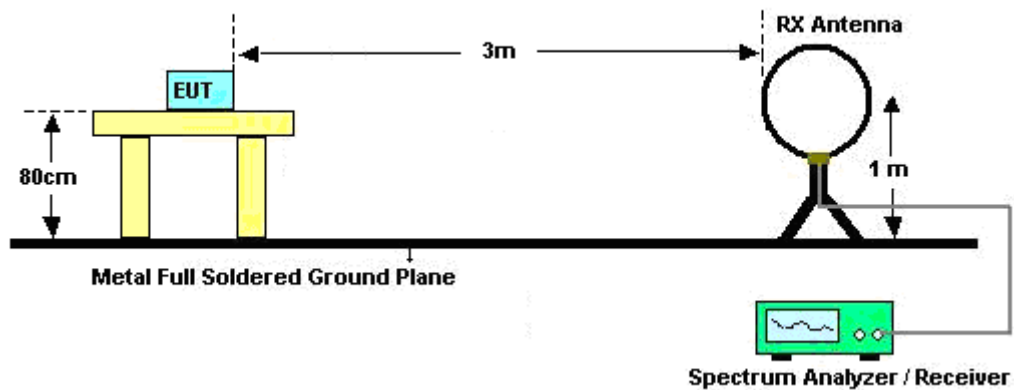

For radiated emissions from 30MHz to 1GHz

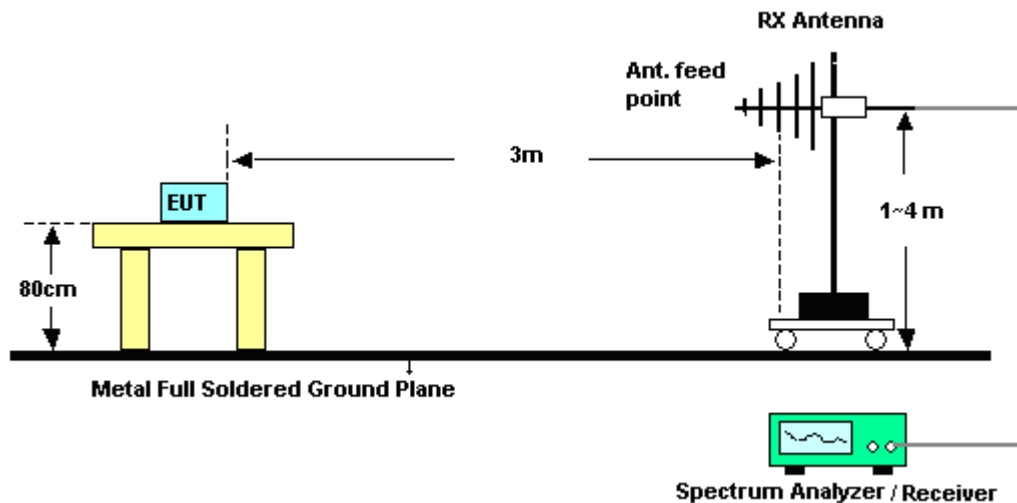

For radiated emissions above 1GHz

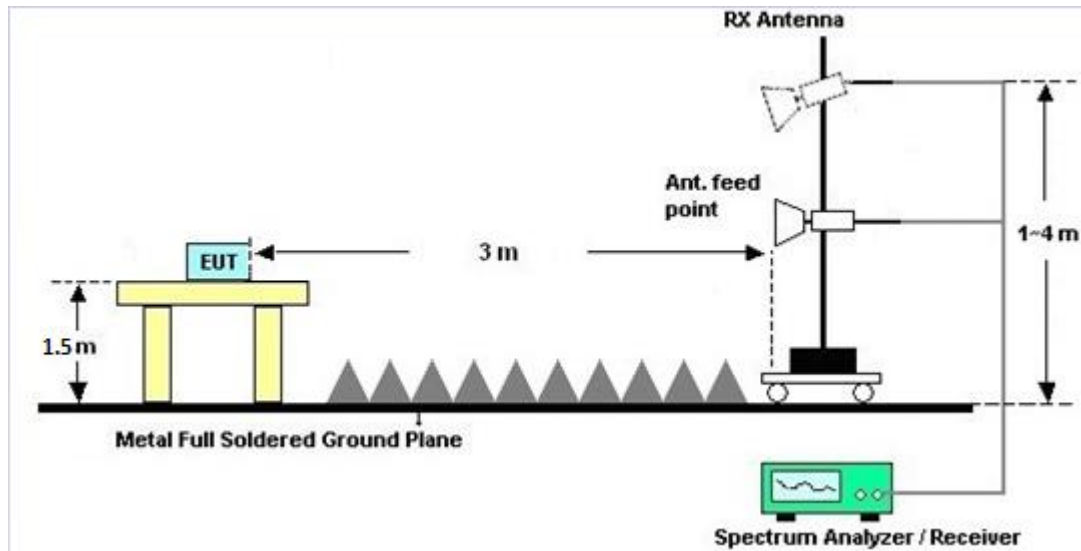

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

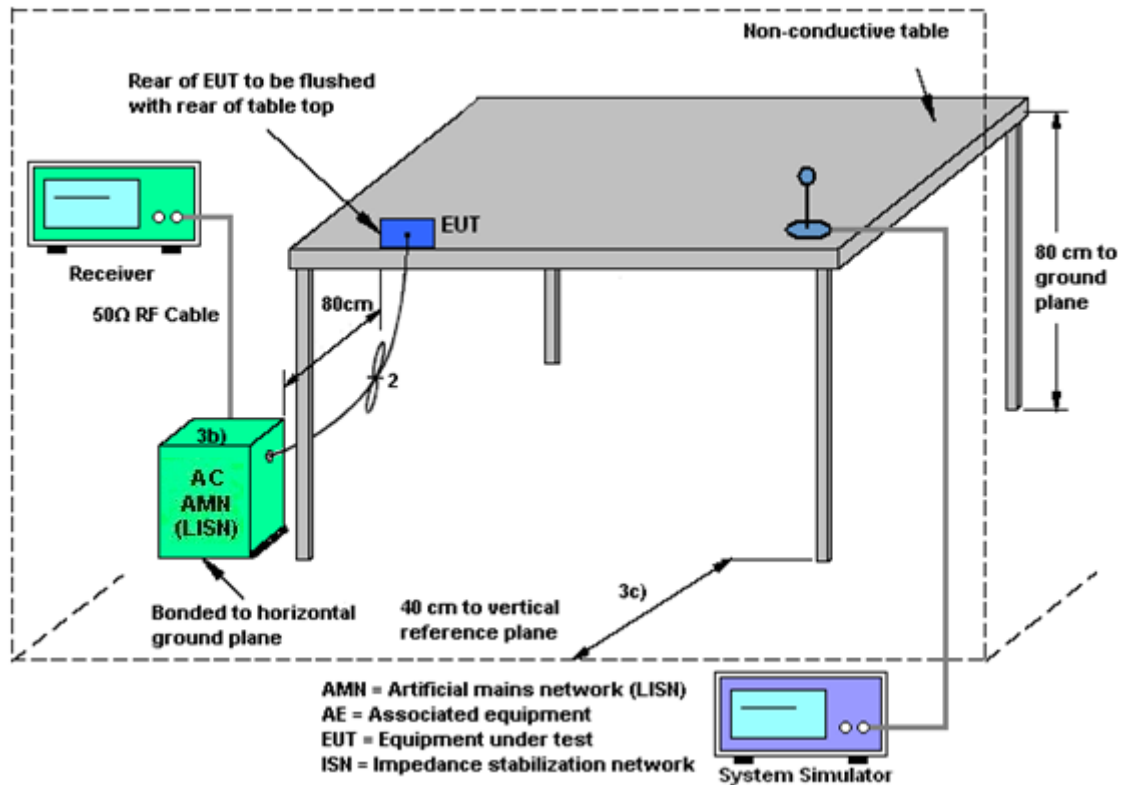

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1240001	N/A	Sep. 07, 2017	Jan. 30, 2018~ Feb. 18, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1207349	300MHz~40GHz z	Sep. 07, 2017	Jan. 30, 2018~ Feb. 18, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	Jan. 30, 2018~ Feb. 18, 2018	Jun. 19, 2018	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 23, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Feb. 23, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Feb. 23, 2018	Nov. 29, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V8.4	N/A	N/A	N/A	Feb. 23, 2018	N/A	Conduction (CO05-HY)
Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Feb. 01, 2018~ Feb. 05, 2018	Jul. 17, 2018	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N0 602	30MHz~1GHz	Oct. 14, 2017	Feb. 01, 2018~ Feb. 05, 2018	Oct. 13, 2018	Radiation (03CH12-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Feb. 01, 2018~ Feb. 05, 2018	Nov. 22, 2019	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 25, 2017	Feb. 01, 2018~ Feb. 05, 2018	Dec. 24, 2018	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 20, 2017	Feb. 01, 2018~ Feb. 05, 2018	Oct. 19, 2018	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 23, 2017	Feb. 01, 2018~ Feb. 05, 2018	Mar. 22, 2018	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Jan. 15, 2018	Feb. 01, 2018~ Feb. 05, 2018	Jan. 14, 2019	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800	2025787	1GHZ~18GHZ	Feb. 13, 2017	Feb. 01, 2018~ Feb. 05, 2018	Feb. 12, 2018	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Feb. 01, 2018~ Feb. 05, 2018	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Feb. 01, 2018~ Feb. 05, 2018	N/A	Radiation (03CH12-HY)
Attenuator	Fairview Microwave	SA18S5W-10	n/a	10db	Mar. 24, 2017	Feb. 01, 2018~ Feb. 05, 2018	Mar. 23, 2018	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917057 6	18GHz ~ 40GHz	Apr. 27, 2017	Feb. 01, 2018~ Feb. 05, 2018	Apr. 26, 2018	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 15, 2017	Feb. 01, 2018~ Feb. 05, 2018	Mar. 14, 2018	Radiation (03CH12-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
--	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
--	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
--	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Kai Liao	Temperature:	21~25	°C
Test Date:	2018/01/30 ~ 2018/02/18	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	17.60	24.35	15.10	0.5	Pass
11a	6Mbps	1	157	5785	17.45	23.90	15.30	0.5	Pass
11a	6Mbps	1	165	5825	17.55	24.00	15.40	0.5	Pass
HT20	MCS 0	1	149	5745	18.85	27.85	15.10	0.5	Pass
HT20	MCS 0	1	157	5785	18.75	27.15	15.40	0.5	Pass
HT20	MCS 0	1	165	5825	18.65	27.90	15.10	0.5	Pass
HT40	MCS 0	1	151	5755	36.80	54.99	35.64	0.5	Pass
HT40	MCS 0	1	159	5795	36.90	70.65	35.64	0.5	Pass
VHT80	MCS 0	1	155	5775	75.96	149.80	75.20	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.25	16.46	30.00	1.00		Pass
11a	6Mbps	1	157	5785	0.25	14.97	30.00	1.00		Pass
11a	6Mbps	1	165	5825	0.25	15.69	30.00	1.00		Pass
HT20	MCS 0	1	149	5745	0.26	17.83	30.00	1.00		Pass
HT20	MCS 0	1	157	5785	0.26	17.08	30.00	1.00		Pass
HT20	MCS 0	1	165	5825	0.26	17.00	30.00	1.00		Pass
HT40	MCS 0	1	151	5755	0.43	17.85	30.00	1.00		Pass
HT40	MCS 0	1	159	5795	0.43	17.68	30.00	1.00		Pass
VHT20	MCS 0	1	149	5745	0.26	16.80	30.00	1.00		Pass
VHT20	MCS 0	1	157	5785	0.26	16.73	30.00	1.00		Pass
VHT20	MCS 0	1	165	5825	0.26	16.98	30.00	1.00		Pass
VHT40	MCS 0	1	151	5755	0.48	16.92	30.00	1.00		Pass
VHT40	MCS 0	1	159	5795	0.48	16.90	30.00	1.00		Pass
VHT80	MCS 0	1	155	5775	0.50	16.83	30.00	1.00		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.25	2.22	0.96	30.00	1.00	Pass
11a	6Mbps	1	157	5785	0.25	2.22	1.05	30.00	1.00	Pass
11a	6Mbps	1	165	5825	0.25	2.22	1.12	30.00	1.00	Pass
HT20	MCS 0	1	149	5745	0.26	2.22	3.10	30.00	1.00	Pass
HT20	MCS 0	1	157	5785	0.26	2.22	2.39	30.00	1.00	Pass
HT20	MCS 0	1	165	5825	0.26	2.22	2.13	30.00	1.00	Pass
HT40	MCS 0	1	151	5755	0.43	2.22	-0.52	30.00	1.00	Pass
HT40	MCS 0	1	159	5795	0.43	2.22	0.07	30.00	1.00	Pass
VHT80	MCS 0	1	155	5775	0.50	2.22	-4.43	30.00	1.00	Pass




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Shareef Yu	Temperature :	26~27°C
		Relative Humidity :	50~52%

EUT Information

Report NO : 7N1502
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

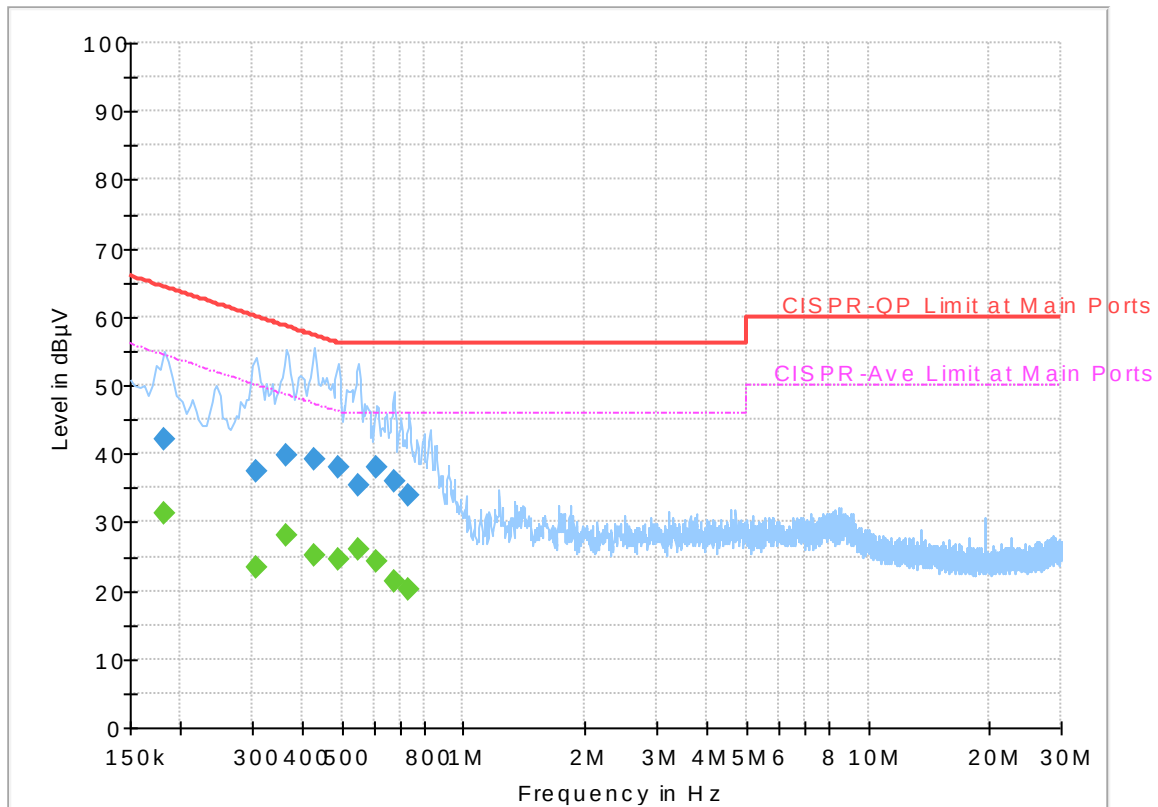


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.182000	---	31.27	54.39	23.12	L1	OFF	19.5
0.182000	42.05	---	64.39	22.34	L1	OFF	19.5
0.306000	---	23.48	50.08	26.60	L1	OFF	19.5
0.306000	37.35	---	60.08	22.73	L1	OFF	19.5
0.366000	---	27.94	48.59	20.65	L1	OFF	19.5
0.366000	39.85	---	58.59	18.74	L1	OFF	19.5
0.430000	---	25.21	47.25	22.04	L1	OFF	19.5
0.430000	39.15	---	57.25	18.10	L1	OFF	19.5
0.490000	---	24.45	46.17	21.72	L1	OFF	19.5
0.490000	38.14	---	56.17	18.03	L1	OFF	19.5
0.550000	---	26.12	46.00	19.88	L1	OFF	19.5
0.550000	35.25	---	56.00	20.75	L1	OFF	19.5
0.610000	---	24.27	46.00	21.73	L1	OFF	19.5
0.610000	37.96	---	56.00	18.04	L1	OFF	19.5
0.674000	---	21.30	46.00	24.70	L1	OFF	19.5
0.674000	35.85	---	56.00	20.15	L1	OFF	19.5
0.734000	---	20.08	46.00	25.92	L1	OFF	19.5
0.734000	33.99	---	56.00	22.01	L1	OFF	19.5

EUT Information

Report NO : 7N1502
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

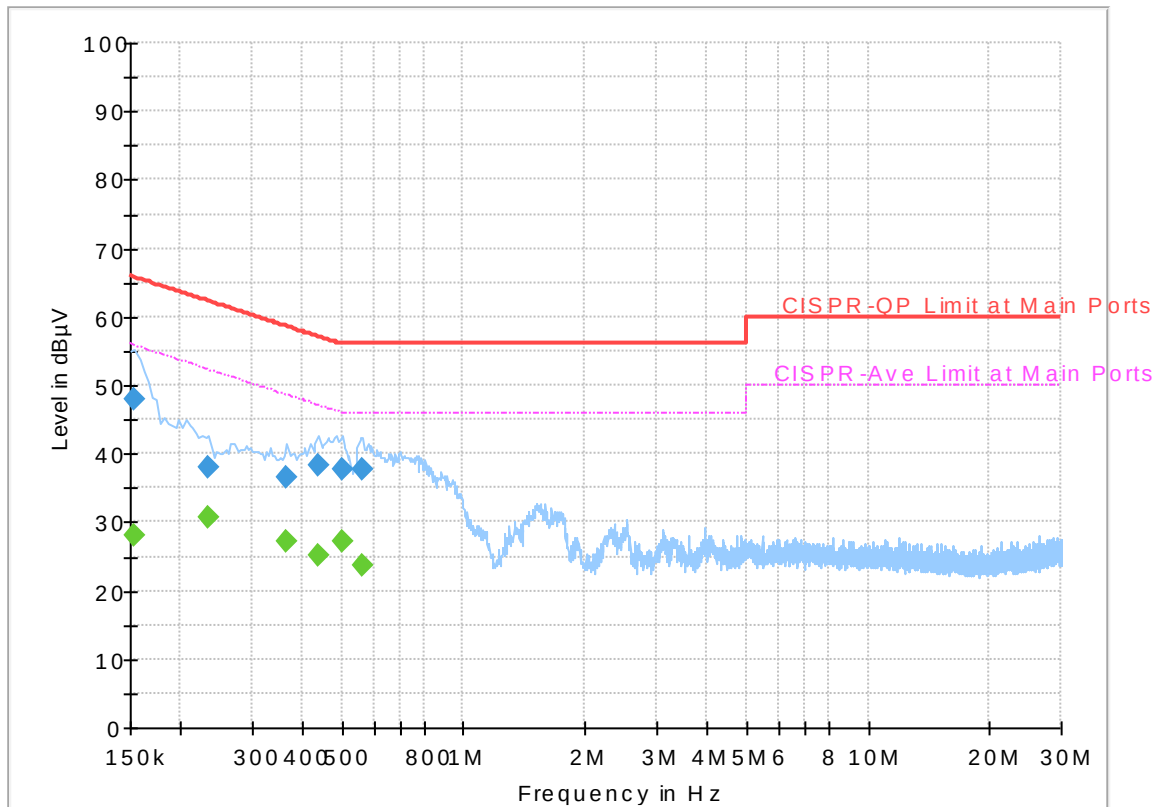

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154000	---	27.96	55.78	27.82	N	OFF	19.5
0.154000	48.07	---	65.78	17.71	N	OFF	19.5
0.234000	---	30.59	52.31	21.72	N	OFF	19.5
0.234000	38.04	---	62.31	24.27	N	OFF	19.5
0.366000	---	27.33	48.59	21.26	N	OFF	19.5
0.366000	36.54	---	58.59	22.05	N	OFF	19.5
0.438000	---	25.21	47.10	21.89	N	OFF	19.5
0.438000	38.24	---	57.10	18.86	N	OFF	19.5
0.502000	---	27.05	46.00	18.95	N	OFF	19.5
0.502000	37.82	---	56.00	18.18	N	OFF	19.5
0.562000	---	23.63	46.00	22.37	N	OFF	19.5
0.562000	37.85	---	56.00	18.15	N	OFF	19.5



Appendix C. Radiated Spurious Emission

Test Engineer :	Watt Tseng, Karl Hou, and Nick Yu	Temperature :	22~23°C
		Relative Humidity :	65~67%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5616.2	49.15	-19.05	68.2	41.85	32.17	6.34	31.21	114	243	P	H
		5698	54.85	-48.88	103.73	47.47	32.27	6.36	31.25	114	243	P	H
		5716.8	59.19	-50.72	109.91	51.8	32.29	6.36	31.26	114	243	P	H
		5724.6	62.05	-59.24	121.29	54.63	32.31	6.37	31.26	114	243	P	H
	*	5745	102.17	-	-	94.73	32.34	6.37	31.27	114	243	P	H
	*	5745	91.13	-	-	83.69	32.34	6.37	31.27	114	243	A	H
													H
													H
		5646	49.28	-18.92	68.2	41.96	32.19	6.35	31.22	101	109	P	V
		5699	58.72	-45.74	104.46	51.34	32.27	6.36	31.25	101	109	P	V
		5719.8	63.43	-47.31	110.74	56.01	32.31	6.37	31.26	101	109	P	V
		5724	66.61	-53.31	119.92	59.19	32.31	6.37	31.26	101	109	P	V
	*	5745	106.94	-	-	99.5	32.34	6.37	31.27	101	109	P	V
	*	5745	95.81	-	-	88.37	32.34	6.37	31.27	101	109	A	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5632.2	49.24	-18.96	68.2	41.94	32.17	6.35	31.22	116	241	P	H
		5663	49.33	-28.52	77.85	41.99	32.22	6.35	31.23	116	241	P	H
		5719.4	50.35	-60.28	110.63	42.93	32.31	6.37	31.26	116	241	P	H
		5721.6	50.32	-64.13	114.45	42.9	32.31	6.37	31.26	116	241	P	H
	*	5785	99.63	-	-	92.15	32.39	6.38	31.29	116	241	P	H
	*	5785	88.61	-	-	81.13	32.39	6.38	31.29	116	241	A	H
		5852.6	49.53	-66.74	116.27	41.95	32.48	6.42	31.32	116	241	P	H
		5855.2	49.13	-61.61	110.74	41.52	32.51	6.42	31.32	116	241	P	H
		5910.6	49.92	-28.9	78.82	42.23	32.58	6.46	31.35	116	241	P	H
		5929.6	49.53	-18.67	68.2	41.81	32.6	6.47	31.35	116	241	P	H
													H
													H
		5644.6	49.27	-18.93	68.2	41.95	32.19	6.35	31.22	109	109	P	V
		5654.2	50.02	-21.3	71.32	42.68	32.22	6.35	31.23	109	109	P	V
		5711.4	52.43	-55.96	108.39	45.04	32.29	6.36	31.26	109	109	P	V
		5725	56.56	-65.64	122.2	49.14	32.31	6.37	31.26	109	109	P	V
	*	5785	105.72	-	-	98.24	32.39	6.38	31.29	109	109	P	V
	*	5785	94.44	-	-	86.96	32.39	6.38	31.29	109	109	A	V
		5852.4	49.78	-66.95	116.73	42.2	32.48	6.42	31.32	109	109	P	V
		5861	50.75	-58.37	109.12	43.15	32.51	6.42	31.33	109	109	P	V
		5923.4	49.88	-19.5	69.38	42.16	32.6	6.47	31.35	109	109	P	V
		5947.4	49.03	-19.17	68.2	41.29	32.63	6.48	31.37	109	109	P	V
													V
													V



WiFi Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	99.76	-	-	92.22	32.46	6.39	31.31	122	241	P	H
	*	5825	88.66	-	-	81.12	32.46	6.39	31.31	122	241	A	H
		5851.2	55.18	-64.28	119.46	47.6	32.48	6.42	31.32	122	241	P	H
		5858.2	51.49	-58.41	109.9	43.89	32.51	6.42	31.33	122	241	P	H
		5888.2	49.74	-45.66	95.4	42.08	32.56	6.44	31.34	122	241	P	H
		5947	48.55	-19.65	68.2	40.81	32.63	6.48	31.37	122	241	P	H
													H
													H
	*	5825	105.71	-	-	98.17	32.46	6.39	31.31	107	104	P	V
	*	5825	94.7	-	-	87.16	32.46	6.39	31.31	107	104	A	V
		5850.4	60.7	-60.59	121.29	53.12	32.48	6.42	31.32	107	104	P	V
		5857.6	56.69	-53.38	110.07	49.08	32.51	6.42	31.32	107	104	P	V
		5877.6	53.04	-50.23	103.27	45.41	32.53	6.43	31.33	107	104	P	V
		5945	49.25	-18.95	68.2	41.51	32.63	6.48	31.37	107	104	P	V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	57.81	-16.19	74	72.76	40.11	10.33	65.39	137	297	P	H
		11490	44.71	-9.29	54	59.66	40.11	10.33	65.39	137	297	A	H
		17235	53.38	-14.82	68.2	63.38	41.54	12.73	64.27	100	0	P	H
													H
		11490	64.1	-9.9	74	79.05	40.11	10.33	65.39	101	201	P	V
		11490	49.74	-4.26	54	64.69	40.11	10.33	65.39	101	201	A	V
		17235	52.9	-15.3	68.2	62.9	41.54	12.73	64.27	100	0	P	V
													V
802.11a CH 157 5785MHz		11570	60.55	-13.45	74	75.62	39.93	10.37	65.37	124	300	P	H
		11570	45.66	-8.34	54	60.73	39.93	10.37	65.37	124	300	A	H
		17355	51.16	-17.04	68.2	60.49	41.96	12.82	64.11	100	0	P	H
													H
		11570	63.86	-10.14	74	78.93	39.93	10.37	65.37	102	199	P	V
		11570	49.85	-4.15	54	64.92	39.93	10.37	65.37	102	199	A	V
		17355	51.99	-16.21	68.2	61.32	41.96	12.82	64.11	100	0	P	V
													V
802.11a CH 165 5825MHz		11650	60.58	-13.42	74	75.74	39.77	10.41	65.34	134	302	P	H
		11650	46.21	-7.79	54	61.37	39.77	10.41	65.34	134	302	A	H
		17475	49.19	-19.01	68.2	57.85	42.38	12.91	63.95	100	0	P	H
													H
		11650	64.08	-9.92	74	79.24	39.77	10.41	65.34	100	340	P	V
		11650	49.83	-4.17	54	64.99	39.77	10.41	65.34	100	340	A	V
		17475	48.5	-19.7	68.2	57.16	42.38	12.91	63.95	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5640	48.81	-19.39	68.2	41.49	32.19	6.35	31.22	117	246	P	H
		5699	57.55	-46.91	104.46	50.17	32.27	6.36	31.25	117	246	P	H
		5719.6	60.12	-50.57	110.69	52.7	32.31	6.37	31.26	117	246	P	H
		5724.8	66.79	-54.95	121.74	59.37	32.31	6.37	31.26	117	246	P	H
	*	5745	103.86	-	-	96.42	32.34	6.37	31.27	117	246	P	H
	*	5745	92.52	-	-	85.08	32.34	6.37	31.27	117	246	A	H
													H
													H
	*	5745	108.41	-	-	100.97	32.34	6.37	31.27	100	110	P	V
	*	5745	97.03	-	-	89.59	32.34	6.37	31.27	100	110	A	V
		5850.2	48.47	-73.27	121.74	40.89	32.48	6.42	31.32	100	110	P	V
		5868	49.04	-58.12	107.16	41.43	32.51	6.43	31.33	100	110	P	V
		5883.8	49.43	-49.24	98.67	41.8	32.53	6.44	31.34	100	110	P	V
		5942.4	48.99	-19.21	68.2	41.25	32.63	6.48	31.37	100	110	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5642.2	48.56	-19.64	68.2	41.24	32.19	6.35	31.22	116	242	P	H
		5680.4	49.62	-41.11	90.73	42.28	32.24	6.35	31.25	116	242	P	H
		5715.4	50.06	-59.45	109.51	42.67	32.29	6.36	31.26	116	242	P	H
		5724.2	51.01	-69.37	120.38	43.59	32.31	6.37	31.26	116	242	P	H
	*	5785	101.28	-	-	93.8	32.39	6.38	31.29	116	242	P	H
	*	5785	90.25	-	-	82.77	32.39	6.38	31.29	116	242	A	H
		5854.8	49.63	-61.63	111.26	42.02	32.51	6.42	31.32	116	242	P	H
		5863.2	49.75	-58.75	108.5	42.14	32.51	6.43	31.33	116	242	P	H
		5897.8	49.67	-38.62	88.29	41.99	32.56	6.46	31.34	116	242	P	H
		5941.2	49.21	-18.99	68.2	41.47	32.63	6.48	31.37	116	242	P	H
													H
													H
		5621.8	49.91	-18.29	68.2	42.61	32.17	6.34	31.21	107	115	P	V
		5695.6	49.59	-52.37	101.96	42.21	32.27	6.36	31.25	107	115	P	V
		5719.8	53.69	-57.05	110.74	46.27	32.31	6.37	31.26	107	115	P	V
		5722.6	53.98	-62.75	116.73	46.56	32.31	6.37	31.26	107	115	P	V
	*	5785	106.84	-	-	99.36	32.39	6.38	31.29	107	115	P	V
	*	5785	95.62	-	-	88.14	32.39	6.38	31.29	107	115	A	V
		5851	51.44	-68.48	119.92	43.86	32.48	6.42	31.32	107	115	P	V
		5856.8	49.83	-60.47	110.3	42.22	32.51	6.42	31.32	107	115	P	V
		5913.8	50.04	-26.42	76.46	42.35	32.58	6.46	31.35	107	115	P	V
		5925.4	49.33	-18.87	68.2	41.61	32.6	6.47	31.35	107	115	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	100.8	-	-	93.26	32.46	6.39	31.31	125	237	P	H
	*	5825	89.57	-	-	82.03	32.46	6.39	31.31	125	237	A	H
		5852	57.47	-60.17	117.64	49.89	32.48	6.42	31.32	125	237	P	H
		5857.8	55.99	-54.02	110.01	48.39	32.51	6.42	31.33	125	237	P	H
		5879.2	50.19	-51.89	102.08	42.56	32.53	6.43	31.33	125	237	P	H
		5938.4	49.56	-18.64	68.2	41.85	32.6	6.48	31.37	125	237	P	H
													H
													H
	*	5825	106.83	-	-	99.29	32.46	6.39	31.31	109	107	P	V
	*	5825	95.59	-	-	88.05	32.46	6.39	31.31	109	107	A	V
		5850.8	62.19	-58.19	120.38	54.61	32.48	6.42	31.32	109	107	P	V
		5856.2	60.27	-50.19	110.46	52.66	32.51	6.42	31.32	109	107	P	V
		5876.6	53.31	-50.7	104.01	45.68	32.53	6.43	31.33	109	107	P	V
		5940	50.09	-18.11	68.2	42.35	32.63	6.48	31.37	109	107	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	58.27	-15.73	74	73.22	40.11	10.33	65.39	138	300	P	H
		11490	44.75	-9.25	54	59.7	40.11	10.33	65.39	138	300	A	H
		17235	53.35	-14.85	68.2	63.35	41.54	12.73	64.27	100	0	P	H
													H
		11490	63.7	-10.3	74	78.65	40.11	10.33	65.39	100	202	P	V
		11490	49.41	-4.59	54	64.36	40.11	10.33	65.39	100	202	A	V
		17235	52.23	-15.97	68.2	62.23	41.54	12.73	64.27	100	0	P	V
													V
802.11n HT20 CH 157 5785MHz		11570	60.96	-13.04	74	76.03	39.93	10.37	65.37	124	301	P	H
		11570	46.37	-7.63	54	61.44	39.93	10.37	65.37	124	301	A	H
		17355	50.79	-17.41	68.2	60.12	41.96	12.82	64.11	100	0	P	H
													H
		11570	64.44	-9.56	74	79.51	39.93	10.37	65.37	100	201	P	V
		11570	49.9	-4.1	54	64.97	39.93	10.37	65.37	100	201	A	V
		17355	50.05	-18.15	68.2	59.38	41.96	12.82	64.11	100	0	P	V
													V
802.11n HT20 CH 165 5825MHz		11650	61.37	-12.63	74	76.53	39.77	10.41	65.34	126	304	P	H
		11650	46.78	-7.22	54	61.94	39.77	10.41	65.34	126	304	A	H
		17475	50.15	-18.05	68.2	58.81	42.38	12.91	63.95	100	0	P	H
													H
		11650	64.1	-9.9	74	79.26	39.77	10.41	65.34	100	197	P	V
		11650	49.92	-4.08	54	65.08	39.77	10.41	65.34	100	197	A	V
		17475	49.49	-18.71	68.2	58.15	42.38	12.91	63.95	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5646.8	50.55	-17.65	68.2	43.23	32.19	6.35	31.22	112	216	P	H
		5699.2	59.67	-44.94	104.61	52.29	32.27	6.36	31.25	112	216	P	H
		5719.2	71.1	-39.48	110.58	63.68	32.31	6.37	31.26	112	216	P	H
		5721.8	72.74	-42.16	114.9	65.32	32.31	6.37	31.26	112	216	P	H
	*	5755	100.72	-	-	93.26	32.36	6.37	31.27	112	216	P	H
	*	5755	89.63	-	-	82.17	32.36	6.37	31.27	112	216	A	H
		5852.6	49.55	-66.72	116.27	41.97	32.48	6.42	31.32	112	216	P	H
		5857.6	49.58	-60.49	110.07	41.97	32.51	6.42	31.32	112	216	P	H
		5901.6	49.38	-36.1	85.48	41.7	32.56	6.46	31.34	112	216	P	H
		5927.4	49.09	-19.11	68.2	41.37	32.6	6.47	31.35	112	216	P	H
													H
													H
		5648.6	51.49	-16.71	68.2	44.17	32.19	6.35	31.22	100	101	P	V
		5696	64.2	-38.05	102.25	56.82	32.27	6.36	31.25	100	101	P	V
		5717	76.42	-33.54	109.96	69.03	32.29	6.36	31.26	100	101	P	V
		5723.2	76.97	-41.13	118.1	69.55	32.31	6.37	31.26	100	101	P	V
	*	5755	106.11	-	-	98.65	32.36	6.37	31.27	100	101	P	V
	*	5755	94.87	-	-	87.41	32.36	6.37	31.27	100	101	A	V
		5850.2	53.34	-68.4	121.74	45.76	32.48	6.42	31.32	100	101	P	V
		5856.4	51.87	-58.54	110.41	44.26	32.51	6.42	31.32	100	101	P	V
		5882.8	51.12	-48.29	99.41	43.48	32.53	6.44	31.33	100	101	P	V
		5933.8	49.25	-18.95	68.2	41.52	32.6	6.48	31.35	100	101	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5603.8	49.05	-19.15	68.2	41.78	32.14	6.34	31.21	108	217	P	H
		5697.2	51.51	-51.63	103.14	44.13	32.27	6.36	31.25	108	217	P	H
		5715.2	54.87	-54.59	109.46	47.48	32.29	6.36	31.26	108	217	P	H
		5723.4	56.36	-62.19	118.55	48.94	32.31	6.37	31.26	108	217	P	H
	*	5795	100.1	-	-	92.6	32.41	6.38	31.29	108	217	P	H
	*	5795	88.95	-	-	81.45	32.41	6.38	31.29	108	217	A	H
		5851.2	55.31	-64.15	119.46	47.73	32.48	6.42	31.32	108	217	P	H
		5855.6	53.62	-57.01	110.63	46.01	32.51	6.42	31.32	108	217	P	H
		5875.6	52.11	-52.64	104.75	44.48	32.53	6.43	31.33	108	217	P	H
		5940.2	49.65	-18.55	68.2	41.91	32.63	6.48	31.37	108	217	P	H
													H
													H
		5648.8	49.08	-19.12	68.2	41.76	32.19	6.35	31.22	100	117	P	V
		5698	54.06	-49.67	103.73	46.68	32.27	6.36	31.25	100	117	P	V
		5719	58.96	-51.56	110.52	51.54	32.31	6.37	31.26	100	117	P	V
		5723.4	60.55	-58	118.55	53.13	32.31	6.37	31.26	100	117	P	V
	*	5795	105.77	-	-	98.27	32.41	6.38	31.29	100	117	P	V
	*	5795	94.48	-	-	86.98	32.41	6.38	31.29	100	117	A	V
		5851.4	60.72	-58.29	119.01	53.14	32.48	6.42	31.32	100	117	P	V
		5855.2	59.82	-50.92	110.74	52.21	32.51	6.42	31.32	100	117	P	V
		5875.6	55.13	-49.62	104.75	47.5	32.53	6.43	31.33	100	117	P	V
		5927.4	49.93	-18.27	68.2	42.21	32.6	6.47	31.35	100	117	P	V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5638.8	55.34	-12.86	68.2	48.02	32.19	6.35	31.22	100	217	P	H
		5699.6	69.94	-34.97	104.91	62.56	32.27	6.36	31.25	100	217	P	H
		5703.8	69.41	-36.86	106.27	62.01	32.29	6.36	31.25	100	217	P	H
		5720.2	70.28	-40.98	111.26	62.86	32.31	6.37	31.26	100	217	P	H
	*	5775	96.1	-	-	88.61	32.39	6.38	31.28	100	217	P	H
	*	5775	85.28	-	-	77.79	32.39	6.38	31.28	100	217	A	H
		5850.6	65.9	-54.93	120.83	58.32	32.48	6.42	31.32	100	217	P	H
		5855.2	65.73	-45.01	110.74	58.12	32.51	6.42	31.32	100	217	P	H
		5876.8	57.88	-45.98	103.86	50.25	32.53	6.43	31.33	100	217	P	H
		5940.6	49.42	-18.78	68.2	41.68	32.63	6.48	31.37	100	217	P	H
													H
													H
		5647.6	56.94	-11.26	68.2	49.62	32.19	6.35	31.22	100	116	P	V
		5697.2	74.23	-28.91	103.14	66.85	32.27	6.36	31.25	100	116	P	V
		5718.4	74.62	-35.73	110.35	67.2	32.31	6.37	31.26	100	116	P	V
		5720.4	75.46	-36.25	111.71	68.04	32.31	6.37	31.26	100	116	P	V
	*	5775	101.79	-	-	94.3	32.39	6.38	31.28	100	116	P	V
	*	5775	90.59	-	-	83.1	32.39	6.38	31.28	100	116	A	V
		5851.2	71.01	-48.45	119.46	63.43	32.48	6.42	31.32	100	116	P	V
		5857.8	70.94	-39.07	110.01	63.34	32.51	6.42	31.33	100	116	P	V
		5876.2	66.58	-37.73	104.31	58.95	32.53	6.43	31.33	100	116	P	V
		5926.4	51.64	-16.56	68.2	43.92	32.6	6.47	31.35	100	116	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

5GHz WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11n HT20 LF		114.78	21.67	-21.83	43.5	34.09	17.03	0.93	30.38	-	-	P	H
		209.01	26.8	-16.7	43.5	40.72	15.01	1.33	30.26	-	-	P	H
		264.36	22.13	-23.87	46	31.35	19.51	1.46	30.19	-	-	P	H
		573.7	27.41	-18.59	46	29.33	25.75	2.02	29.69	-	-	P	H
		747.3	30.11	-15.89	46	29.37	27.87	2.31	29.44	100	0	P	H
		965	34.5	-19.5	54	29.89	30.9	2.74	29.03	-	-	P	H
													H
													H
													H
													H
													H
													H
		39.99	29.31	-10.69	40	39.76	19.28	0.59	30.32	-	-	P	V
		74.82	24.56	-15.44	40	41.53	12.73	0.73	30.43	-	-	P	V
		209.55	21.41	-22.09	43.5	35.33	15.01	1.33	30.26	-	-	P	V
		573.7	28.19	-17.81	46	30.11	25.75	2.02	29.69	-	-	P	V
		732.6	41.52	-4.48	46	41.22	27.49	2.28	29.47	100	0	P	V
		952.4	34.03	-11.97	46	29.69	30.67	2.73	29.06	-	-	P	V
													V
													V
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots



Test Engineer :	Watt Tseng, Karl Hou, and Nick Yu	Temperature :	22~23°C
		Relative Humidity :	65~67%

Note symbol

-L	Low channel location
-R	High channel location

Band 4 - 5725~5850MHz




WIFI 802.11a (Band Edge @ 3m)

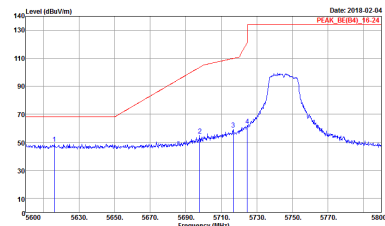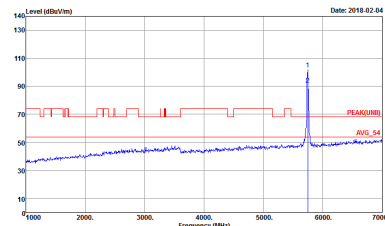WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-1HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 31	 Site : 03CH12-1HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 31






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	Site : 03CH12-HY Condition : (PEAK_RE(B4)) 16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Mode : 7N1502 Date: 2018.02.04 PEAK_RE(00)_16-24	Site : 03CH12-HY Condition : (PEAK_UND1) 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Mode : 7N1502 Date: 2018.02.04 PEAK_UND1 AVG_54

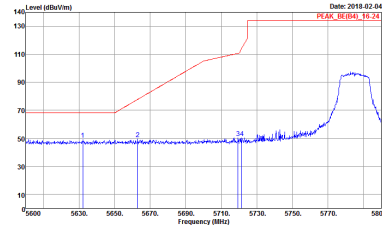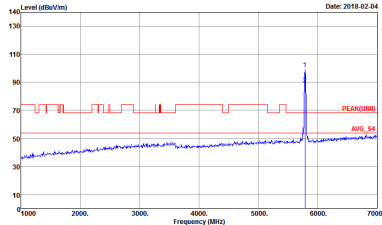
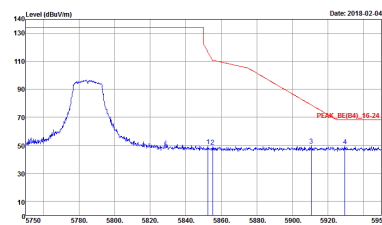


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 32	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 32
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 32	Left blank

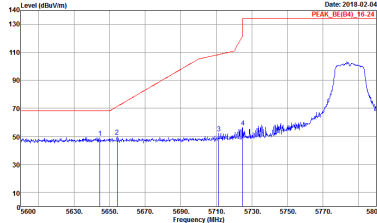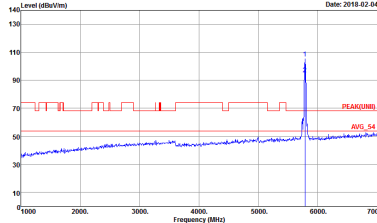
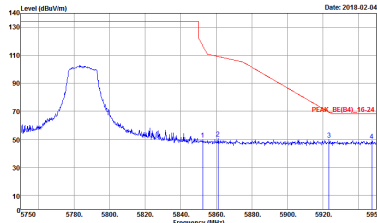


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 7N1502 Mode : 32	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 7N1502 Mode : 32
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 7N1502 Mode : 32	Left blank

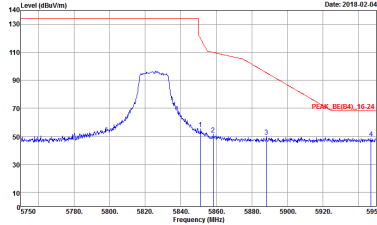
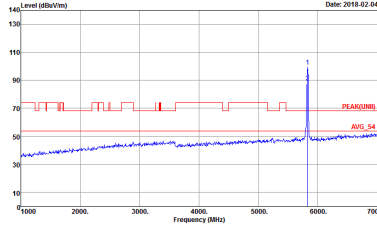


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-1HY Condition : PEAK_16(164)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Detector : Peak Project : 7N1502 Mode : 33	 Site : 03CH12-1HY Condition : PEAK(165) 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Detector : Peak Project : 7N1502 Mode : 33

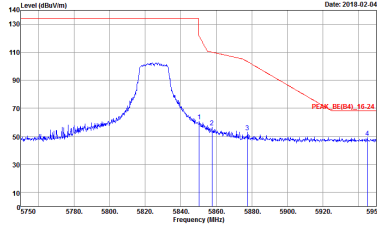
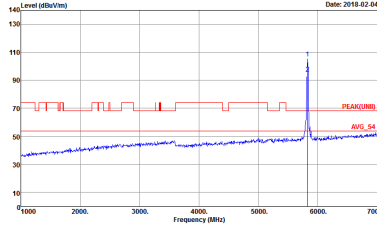


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : (PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Mode : 7N1502 33	 Site : 03CH12-HY Condition : (PEAK_UND1) 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Mode : 7N1502 33




Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

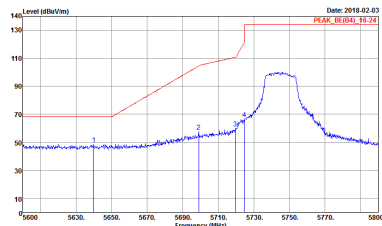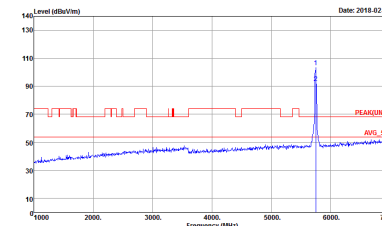WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 34	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 34


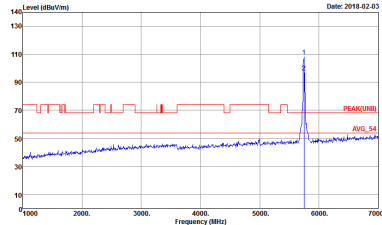
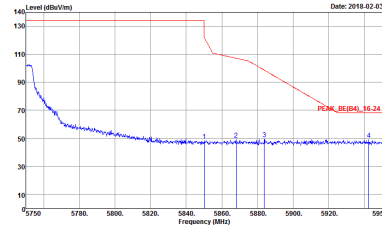


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : (PEAKLINE1) 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Detector : Peak Project : 7N1502 Mode : 34	 Site : 03CH12-HY Condition : (PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Detector : Peak Project : 7N1502 Mode : 34

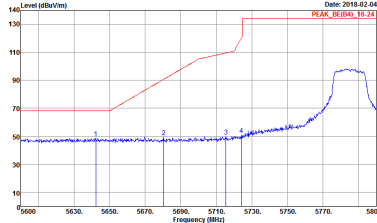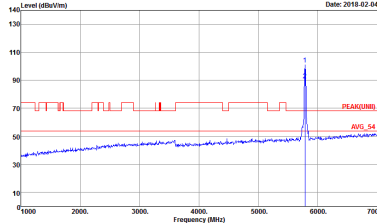
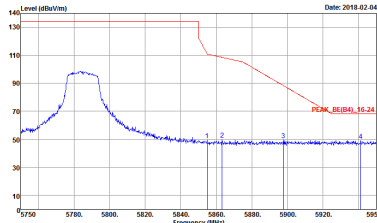


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 35	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 35
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 35	Left blank

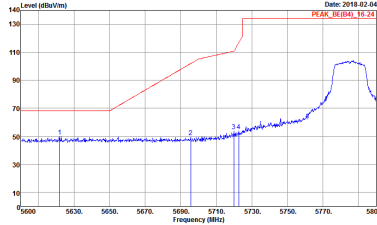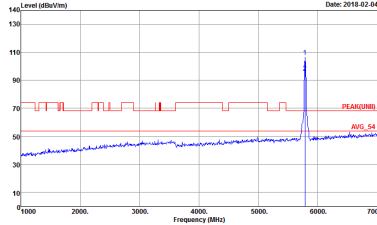
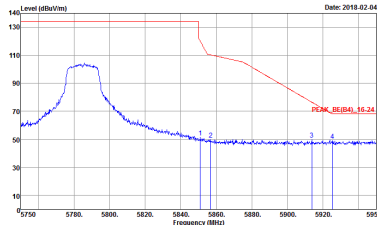


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 35	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 35
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 35	Left blank

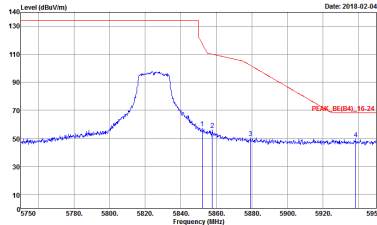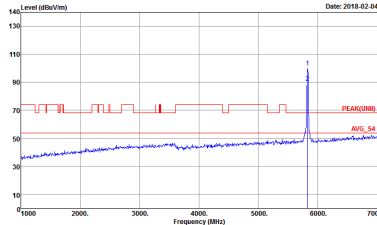




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 36	 Site : 03CH12-HY Condition : PEAK_UND1 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 36

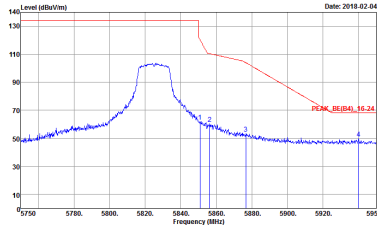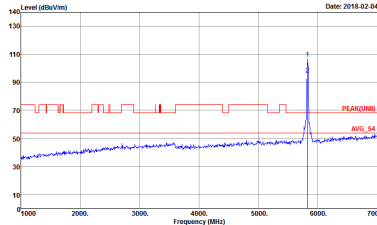




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : (PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Detector : Peak Project : 7N1502 Mode : 36	 Site : 03CH12-HY Condition : (PEAK_UND1) 3m HORN_9120D_1328 VERTICAL RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Detector : Peak Project : 7N1502 Mode : 36






Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

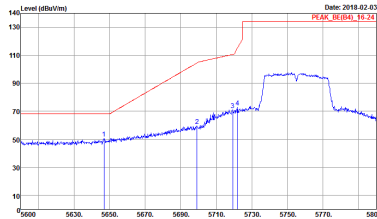
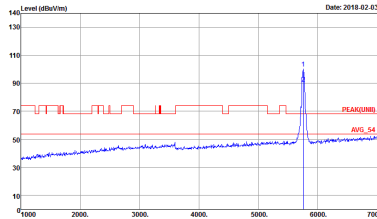
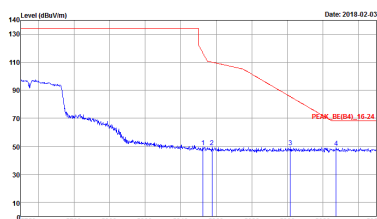
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 37	 Site : 03CH12-HY Condition : PEAK(UN1) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 37
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 37	Left blank

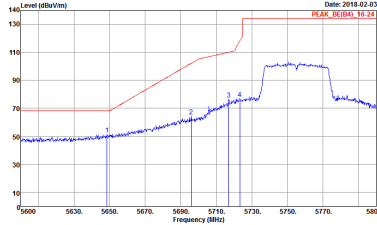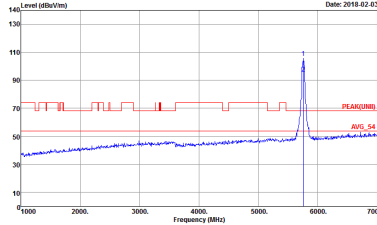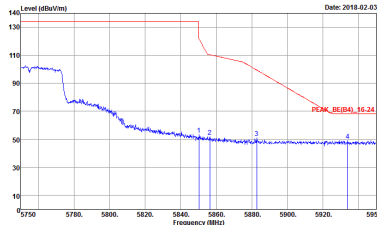

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 7N1502 Mode : 37	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 7N1502 Mode : 37
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 7N1502 Mode : 37	Left blank

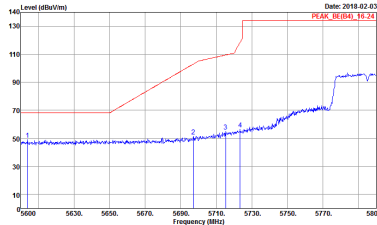
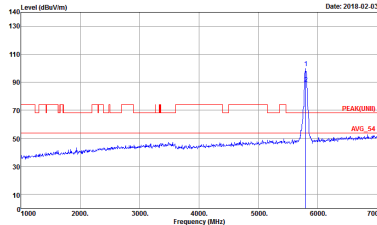
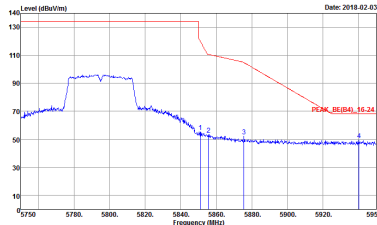


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 38	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 38
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1502 Mode : 38	Left blank

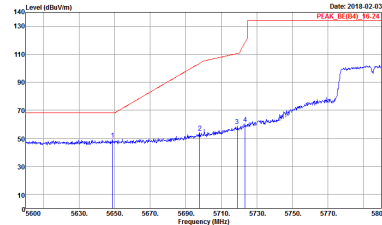
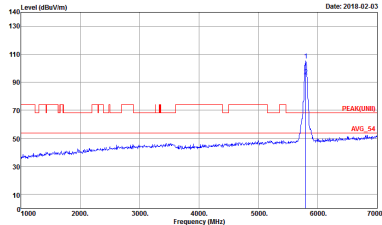
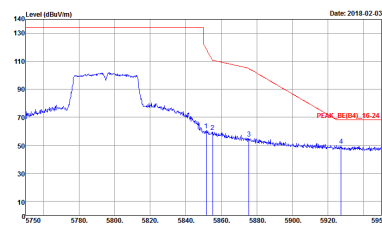
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(04)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : 7N1502 Mode : 38	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : 7N1502 Mode : 38
Peak	 Site : 03CH12-HY Condition : PEAK_BE(04)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : 7N1502 Mode : 38	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

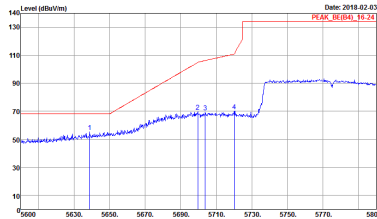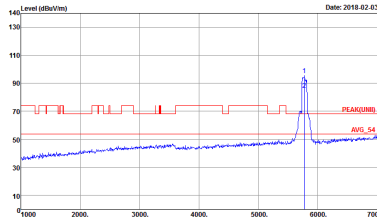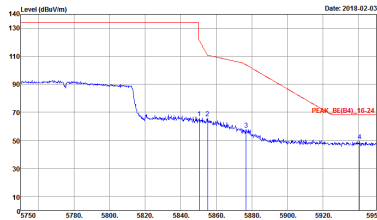WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 39	 Site : 03CH12-HY Condition : PEAK(UN1) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 39
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 39	Left blank

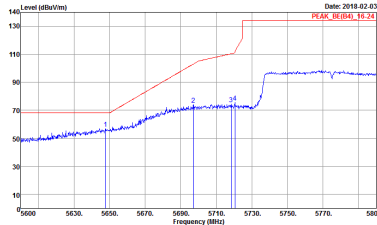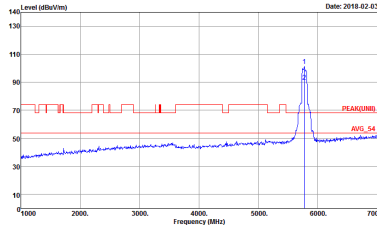
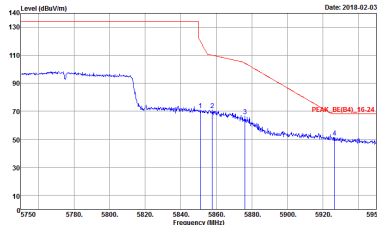


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(04)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 7N1502 Mode : 39	 Site : 03CH12-HY Condition : PEAK(00B) 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 7N1502 Mode : 39
Peak	 Site : 03CH12-HY Condition : PEAK_BE(04)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 7N1502 Mode : 39	Left blank





Band 4 - 5725~5850MHz



WIFI 802.11a (Harmonic @ 3m)

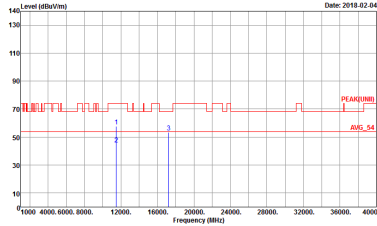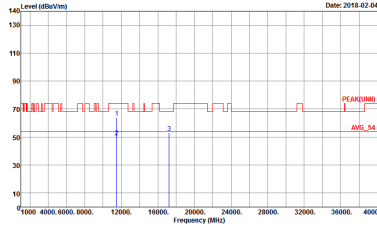WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 31 Setting : 18	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 7N1502 Mode : 31 Setting : 18

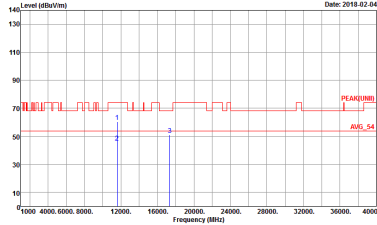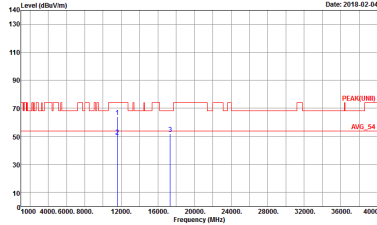



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 32 Setting : 16.5	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 7N1502 Mode : 32 Setting : 16.5

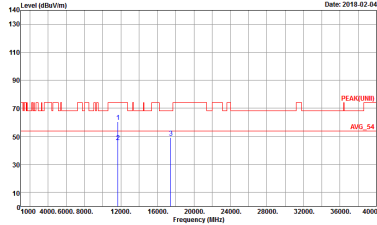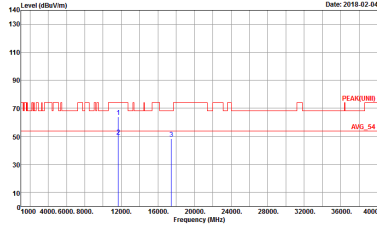



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 33 Setting : 17	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 7N1502 Mode : 33 Setting : 17





Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

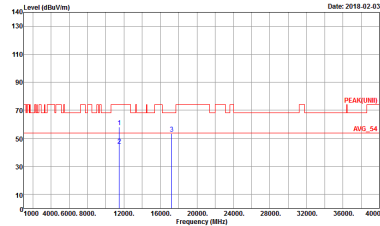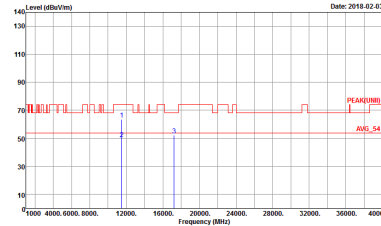WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 34	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 7N1502 Mode : 34

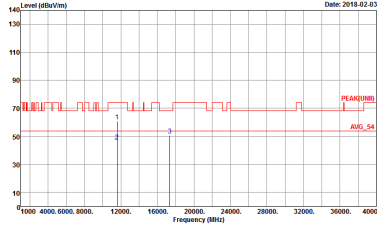
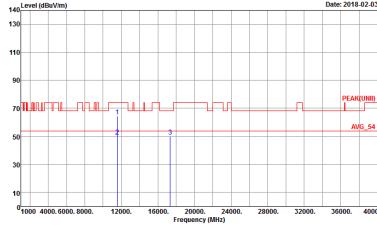


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 35 Setting : 19	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 7N1502 Mode : 35 Setting : 19

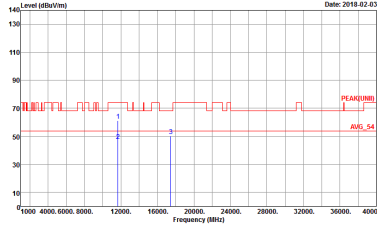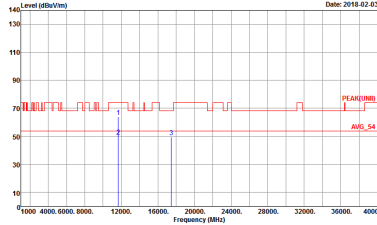


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 36 Setting : 18.5	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 7N1502 Mode : 36 Setting : 18.5

Emission below 1GHz
5GHz WIFI 802.11n HT20 (LF)

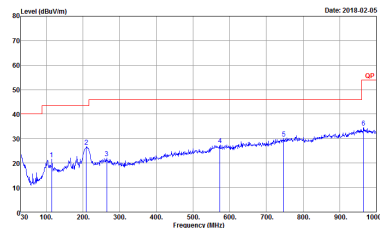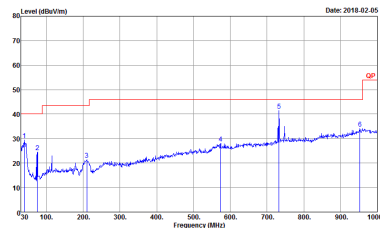
WIFI	5GHz 5725~5850MHz	
ANT	802.11n HT20 LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH12-HY Condition : QP 3m BTL06_6111D_37059 HORIZONTAL Detector : Peak Project : 7N1502 Mode : 40	 Site : 03CH12-HY Condition : QP 3m BTL06_6111D_37059 VERTICAL Detector : Peak Project : 7N1502 Mode : 40




Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor (dB)
802.11a	94.50	2060.00	0.49	1kHz	0.25
5GHz 802.11n HT20	94.12	1920.00	0.52	1kHz	0.26
5GHz 802.11n HT40	90.48	950.00	1.05	3kHz	0.43
5GHz 802.11ac VHT20	94.12	1920.00	0.52	1kHz	0.26
5GHz 802.11ac VHT40	89.62	950.00	1.05	3kHz	0.48
5GHz 802.11ac VHT80	89.16	740.00	1.35	3kHz	0.50

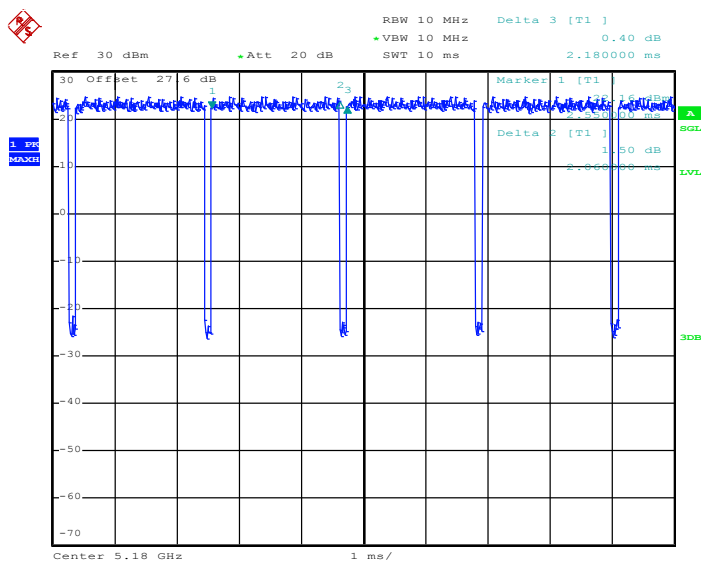

Date: 30.JAN.2018 00:39:54

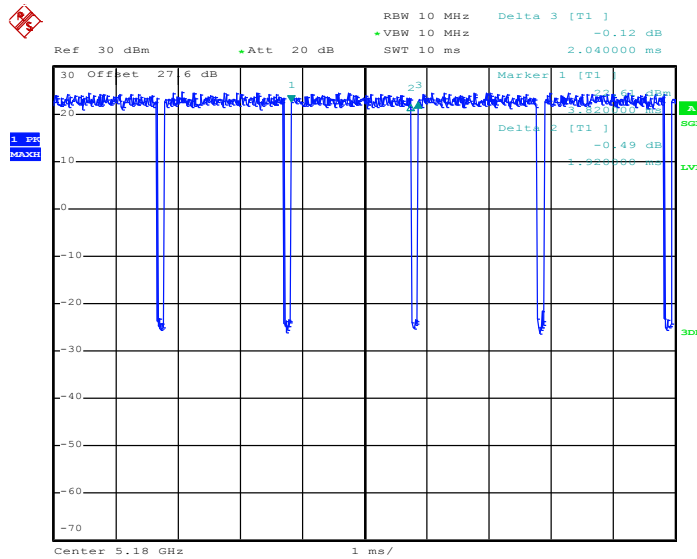
802.11n HT20


Date: 30.JAN.2018 00:41:00

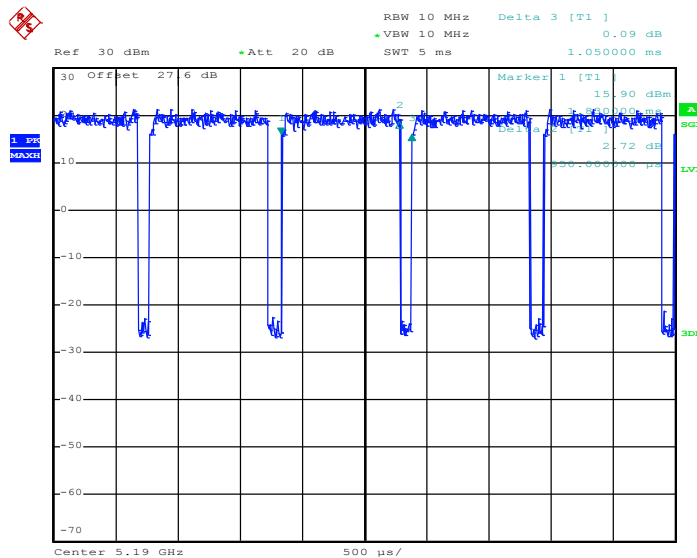802.11n HT40


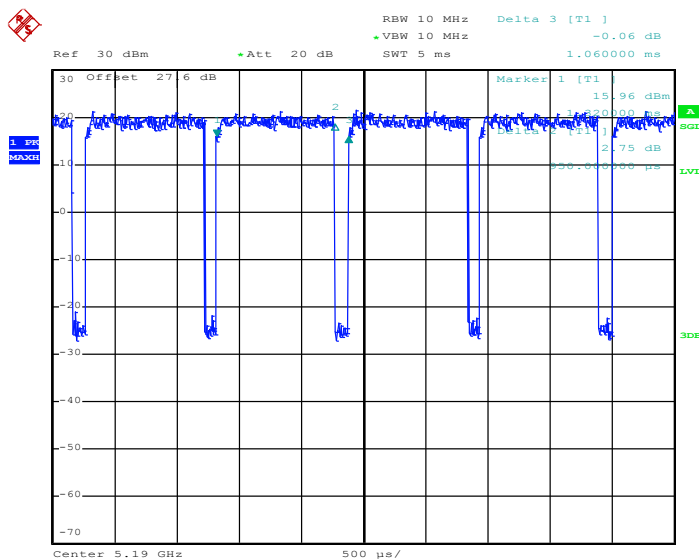
Date: 30.JAN.2018 00:45:58

802.11ac VHT20

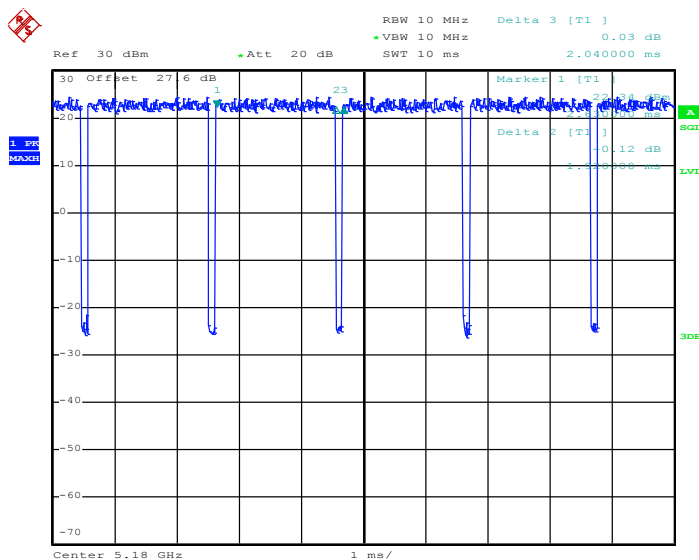

Date: 30.JAN.2018 00:42:04


802.11ac VHT40



Date: 30.JAN.2018 00:44:43



802.11ac VHT80

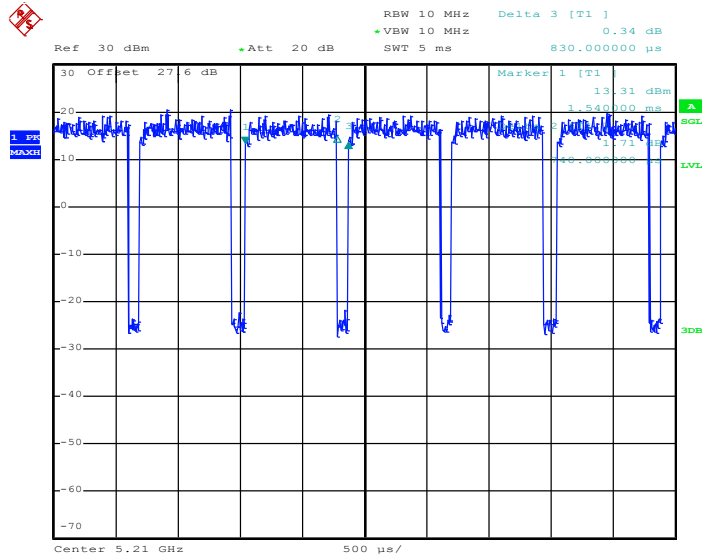

Date: 30.JAN.2018 00:51:22