

FCC SAR Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone(Mobile Phone)
BRAND NAME : ASUS
MODEL NAME : ASUS_X017DA
FCC ID : MSQX017DA
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager



Sporton International (Kunshan) Inc.

No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	7
5. RF Exposure Limits	9
5.1 Uncontrolled Environment	9
5.2 Controlled Environment	9
6. Specific Absorption Rate (SAR)	10
6.1 Introduction	10
6.2 SAR Definition	10
7. System Description and Setup	11
7.1 E-Field Probe	12
7.2 Data Acquisition Electronics (DAE)	12
7.3 Phantom	13
7.4 Device Holder	14
8. Measurement Procedures	15
8.1 Spatial Peak SAR Evaluation	15
8.2 Power Reference Measurement	16
8.3 Area Scan	16
8.4 Zoom Scan	17
8.5 Volume Scan Procedures	17
8.6 Power Drift Monitoring	17
9. Test Equipment List	18
10. System Verification	19
10.1 Tissue Simulating Liquids	19
10.2 Tissue Verification	20
10.3 System Performance Check Results	21
11. RF Exposure Positions	22
11.1 Ear and handset reference point	22
11.2 Definition of the cheek position	23
11.3 Definition of the tilt position	24
11.4 Body Worn Accessory	25
11.5 Product Specific 10g SAR Exposure	26
11.6 Wireless Router	26
12. Conducted RF Output Power (Unit: dBm)	27
13. Bluetooth Exclusions Applied	53
14. Antenna Location	54
15. SAR Test Results	55
15.1 Head SAR	57
15.2 Hotspot SAR	60
15.3 Body Worn Accessory SAR	64
15.4 Product specific 10g SAR	67
15.5 Repeated SAR Measurement	68
16. Simultaneous Transmission Analysis	69
16.1 Head Exposure Conditions	70
16.2 Hotspot Exposure Conditions	71
16.3 Body-Worn Accessory Exposure Conditions	73
17. Uncertainty Assessment	74
18. References	75
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA7N0402	Rev. 01	Initial issue of report	Mar. 22, 2018

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for ASUSTeK COMPUTER INC., ASUS Phone(Mobile Phone), ASUS_X017DA, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 10mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.19	0.33	0.33	1.45
		GSM1900	<0.10	0.67	0.50	
	WCDMA	Band V	0.21	0.26	0.26	
		Band II	0.15	0.90	0.61	
		Band IV	0.14	0.88	0.57	
	LTE	Band 5	0.20	0.21	0.21	
		Band 12/Band 17	0.17	0.25	0.25	
		Band 4	0.19	0.77	0.56	
		Band 2	0.11	1.06	0.63	
		Band 7	0.52	0.91	0.91	
DTS	WLAN	2.4GHz WLAN	0.71	0.14	0.13	1.23
NII		5GHz WLAN	0.74	0.32	0.54	1.45
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			
NII	WLAN	5GHz WLAN	1.06			
Date of Testing:			2018/2/24~2018/2/29			
Remark: This device supports LTE B17 and B12. Since the supported frequency span for LTE B17 falls completely within the supported frequency span for LTE B12, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore SAR was only assessed for LTE B12.						

Remark: This device supports LTE B17 and B12. Since the supported frequency span for LTE B17 falls completely within the supports frequency span for LTE B12, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B12.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Testing Laboratory	
Test Site	Sporton International (Kunshan) Inc.
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958

Applicant	
Company Name	ASUSTeK COMPUTER INC.
Address	4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN

Manufacturer	
Company Name	Wingtech Mobile Communications Co, Ltd.
Address	Floor 1st-3rd, Yinfeng Building, No.5097 Luosha Road, Luohu District, Shenzhen

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	ASUS Phone(Mobile Phone)
Brand Name	ASUS
Model Name	ASUS_X017DA
FCC ID	MSQX017DA
IMEI Code	SIM1: 353746090026262 SIM2: 353746090026270
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth v3.0+EDR, Bluetooth v4.0 LE, Bluetooth v4.1 LE, Bluetooth v4.2 LE NFC:ASK
HW Version	89199_1_XX
SW Version	NMF26X.WW_Phone-14.0400.1702.001-20171109
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Production Unit
Remark: 1. WLAN operation in 5600 MHz ~ 5650 MHz is notched 2. This device supports VoIP in GPRS, EGPRS, WCDMA, LTE (e.g. for 3rd-party VoIP) and LTE supports VoLTE function. 3. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12. 4. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. 5. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). 6. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests. 7. There are two samples, the two samples have different suppliers for eMCP/LCD/camera/Battery, except for the supplier of these components, all the other features are the same, so we assessed sample 1 to perform full test, sample 2 to verify the worst case for SAR test items.	

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID		MSQX017DA																																																																								
Equipment Name		ASUS Phone(Mobile Phone)																																																																								
Operating Frequency Range of each LTE transmission band		LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz																																																																								
Channel Bandwidth		LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz																																																																								
Uplink Modulations Used		QPSK, 16QAM and 64QAM																																																																								
LTE Voice / Data requirements		Data only																																																																								
LTE Release Version		R10, Cat 13																																																																								
CA Support		Yes, Downlink Only																																																																								
LTE MPR permanently built-in by design		<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>			Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																										
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR		In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																								
Spectrum plots for RB configuration		A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																								
LTE Carrier Aggregation Combinations		Intra-Band possible combinations as below page and the detail power verification please referred to section 12.																																																																								
LTE Carrier Aggregation Additional Information		This device does not support full CA features on 3GPP Release 10. It supports a maximum of 2 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																								

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 17												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq. (MHz)				
L	23755		706.5			23780		709				
M	23790		710			23790		710				
H	23825		713.5			23800		711				

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

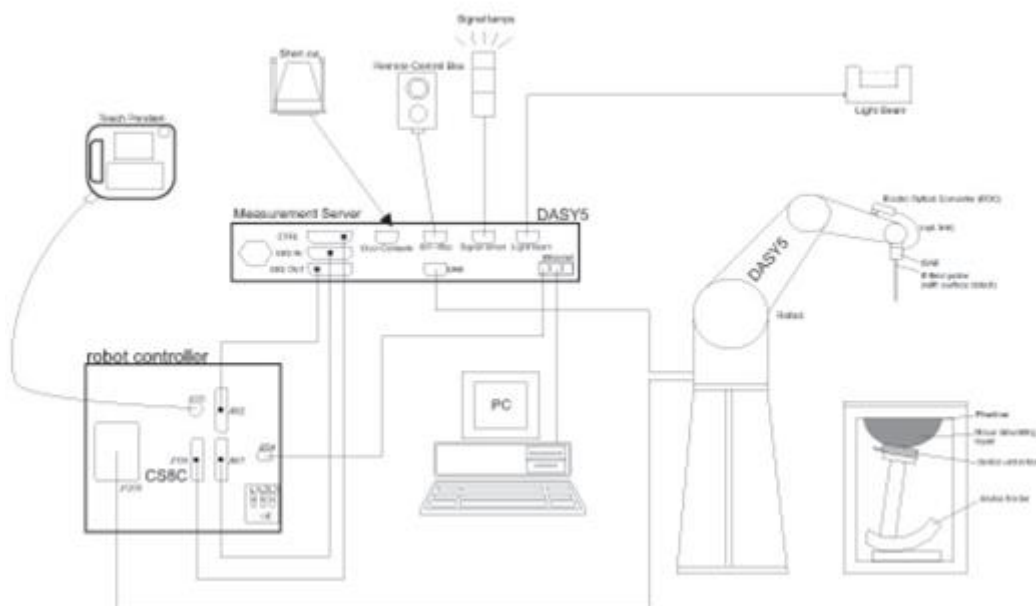

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1065	2017/12/4	2018/12/3
SPEAG	835MHz System Validation Kit	D835V2	4d091	2017/12/5	2018/12/4
SPEAG	835MHz System Validation Kit	D835V2	4d162	2017/12/5	2018/12/4
SPEAG	1750MHz System Validation Kit	D1750V2	1069	2017/12/5	2018/12/4
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	2017/12/6	2018/12/5
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	2017/12/6	2018/12/5
SPEAG	2450MHz System Validation Kit	D2450V2	840	2017/12/7	2018/12/6
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2017/12/7	2018/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2017/12/21	2018/12/20
SPEAG	5000MHz System Validation Kit	D5GHzV2	1167	2017/7/26	2018/7/25
SPEAG	Data Acquisition Electronics	DAE4	1210	2017/5/25	2018/5/24
SPEAG	Data Acquisition Electronics	DAE4	1303	2017/12/19	2018/12/18
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2017/5/26	2018/5/25
SPEAG	Dosimetric E-Field Probe	EX3DV4	3958	2018/1/11	2019/1/10
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1542	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1839	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1164	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1795	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201300654	2017/8/7	2018/8/6
Anritsu	Radio communication analyzer	MT8821C	6201692204	2017/3/29	2018/3/28
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2017/4/18	2018/4/17
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2017/4/18	2018/4/17
SPEAG	DAK Kit	DAK3.5	1146	2017/7/18	2018/7/17
R&S	Signal Generator	SML03	103818	2017/8/17	2018/8/16
Anritsu	Power Meter	ML2495A	1419002	2017/5/15	2018/5/14
Anritsu	Power Sensor	MA2411B	1339124	2017/5/15	2018/5/14
Anritsu	Power Meter	ML2495A	1218006	2017/10/6	2018/10/5
Anritsu	Power Sensor	MA2411B	1207363	2017/10/6	2018/10/5
R&S	CBT BLUETOOTH TESTER	CBT	100783	2017/8/8	2018/8/7
EXA	Spectrum Analyzer	N9010A	MY55150244	2017/4/18	2018/4/17
WISEWIND	Hygrometer	WISEWIND 0905	0905	2017/4/20	2018/4/19
JM	DIGITAC THERMOMETER	JM222	AA1207166	2017/4/19	2018/4/18
ARRA	Power Divider	A3200-2	N/A	Note	
Agilent	Dual Directional Coupler	778D	50422	Note	
PASTERNAK	Dual Directional Coupler	PE2214-10	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
AR	Amplifier	5S1G4	333096	Note	
mini-circuits	Amplifier	ZVE-3W-83+	162601250	Note	

Note:

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

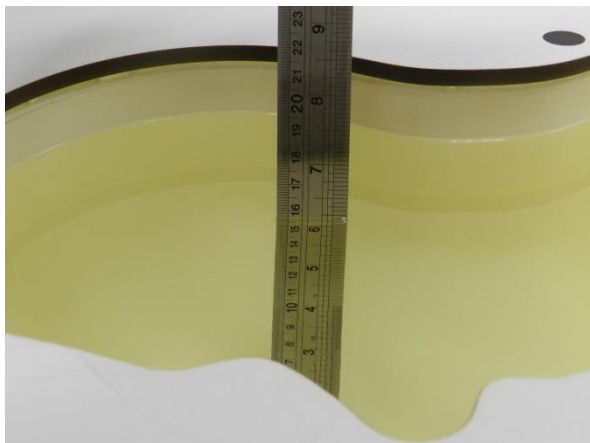


Fig 10.1Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.8	0.910	42.443	0.89	41.90	2.25	1.30	±5	2018/2/28
835	Head	22.5	0.919	43.011	0.90	41.50	2.11	3.64	±5	2018/2/28
835	Head	22.5	0.929	41.793	0.90	41.50	3.22	0.71	±5	2018/2/25
1750	Head	22.8	1.369	40.209	1.37	40.10	-0.07	0.27	±5	2018/2/28
1900	Head	22.7	1.431	39.102	1.40	40.00	2.21	-2.25	±5	2018/2/28
1900	Head	22.4	1.417	40.994	1.40	40.00	1.21	2.49	±5	2018/2/25
2450	Head	22.7	1.838	38.505	1.80	39.20	2.11	-1.77	±5	2018/2/29
2600	Head	22.7	2.051	38.046	1.96	39.00	4.64	-2.45	±5	2018/2/29
5250	Head	22.7	4.641	37.210	4.71	35.90	-1.46	3.65	±5	2018/2/29
5600	Head	22.7	4.995	35.745	5.07	35.50	-1.48	0.69	±5	2018/2/29
5750	Head	22.7	5.380	35.936	5.22	35.40	3.07	1.51	±5	2018/2/26
750	Body	22.7	0.968	55.693	0.96	55.50	0.83	0.35	±5	2018/2/25
835	Body	22.7	0.986	54.083	0.97	55.20	1.65	-2.02	±5	2018/2/25
835	Body	22.5	0.977	54.442	0.97	55.20	0.72	-1.37	±5	2018/2/24
1750	Body	22.8	1.499	53.528	1.49	53.40	0.60	0.24	±5	2018/2/25
1900	Body	22.6	1.512	53.190	1.52	53.30	-0.53	-0.21	±5	2018/2/25
1900	Body	22.6	1.545	53.535	1.52	53.30	1.64	0.44	±5	2018/2/24
2450	Body	22.7	2.026	52.750	1.95	52.70	3.90	0.09	±5	2018/2/26
2600	Body	22.7	2.242	52.136	2.16	52.50	3.80	-0.69	±5	2018/2/26
5250	Body	22.8	5.508	47.958	5.36	48.90	2.76	-1.93	±5	2018/2/26
5600	Body	22.8	5.954	47.367	5.77	48.50	3.19	-2.34	±5	2018/2/26
5750	Body	22.8	6.043	49.962	5.94	48.30	1.73	3.44	±5	2018/2/26

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2018/2/28	750	Head	250	1065	3857	1210	2.21	8.33	8.84	6.12
2018/2/28	835	Head	250	4d091	3857	1210	2.23	9.48	8.92	-5.91
2018/2/25	835	Head	250	4d162	3958	1303	2.43	9.56	9.72	1.67
2018/2/28	1750	Head	250	1069	3857	1210	9.01	37.00	36.04	-2.59
2018/2/28	1900	Head	250	5d118	3857	1210	10.80	39.70	43.20	8.82
2018/2/25	1900	Head	250	5d182	3958	1303	9.61	40.10	38.44	-4.14
2018/2/29	2450	Head	250	840	3857	1210	14.20	52.60	56.80	7.98
2018/2/29	2600	Head	250	1061	3857	1210	15.20	58.20	60.80	4.47
2018/2/29	5250	Head	100	1113	3857	1210	7.87	79.30	78.70	-0.76
2018/2/29	5600	Head	100	1113	3857	1210	7.85	82.60	78.50	-4.96
2018/2/26	5750	Head	100	1167	3958	1303	8.02	80.60	80.20	-0.50
2018/2/25	750	Body	250	1065	3857	1210	2.30	8.72	9.20	5.50
2018/2/25	835	Body	250	4d091	3857	1210	2.51	9.72	10.04	3.29
2018/2/24	835	Body	250	4d162	3958	1303	2.46	9.56	9.84	2.93
2018/2/25	1750	Body	250	1069	3857	1210	9.49	38.00	37.96	-0.11
2018/2/25	1900	Body	250	5d118	3857	1210	9.51	40.40	38.04	-5.84
2018/2/24	1900	Body	250	5d182	3958	1303	9.62	40.40	38.48	-4.75
2018/2/26	2450	Body	250	840	3857	1210	13.00	51.90	52.00	0.19
2018/2/26	2600	Body	250	1061	3857	1210	12.70	56.40	50.80	-9.93
2018/2/26	5250	Body	100	1113	3857	1210	7.35	71.70	73.50	2.51
2018/2/26	5600	Body	100	1113	3857	1210	7.55	79.20	75.50	-4.67
2018/2/26	5750	Body	100	1167	3958	1303	7.35	77.50	73.50	-5.16

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2018/2/26	5250	Body	100	1113	3857	1210	2.13	19.90	21.3	7.04
2018/2/26	5600	Body	100	1113	3857	1210	2.09	22.20	20.9	-5.86

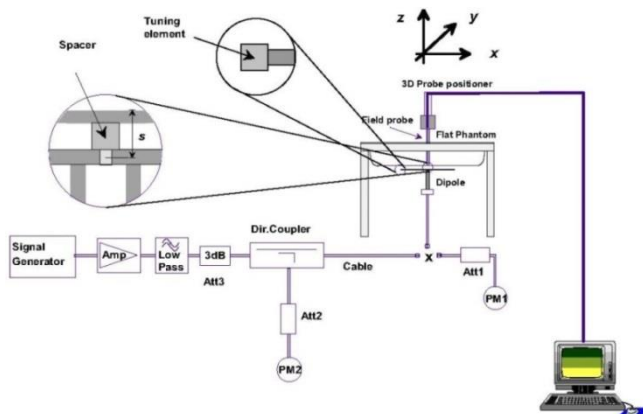


Fig 10.3.1 System Performance Check Setup



Fig 10.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

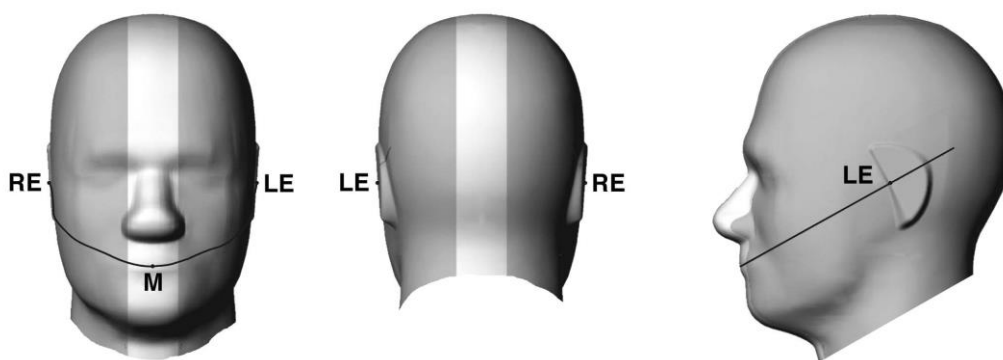


Fig 9.1.1 Front, back, and side views of SAM twin phantom

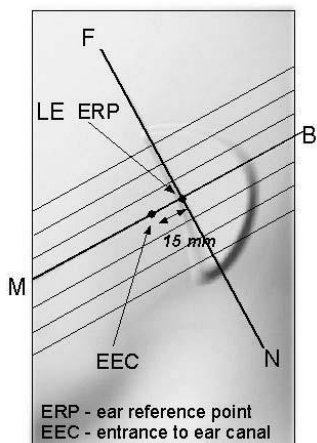


Fig 9.1.2 Close-up side view of phantom showing the ear region.

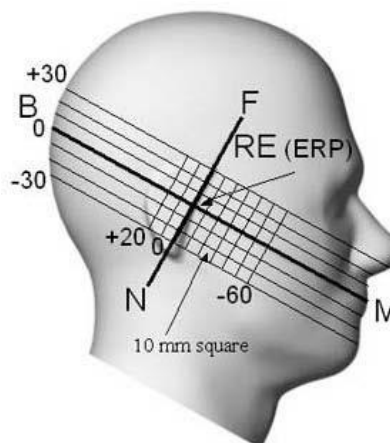


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

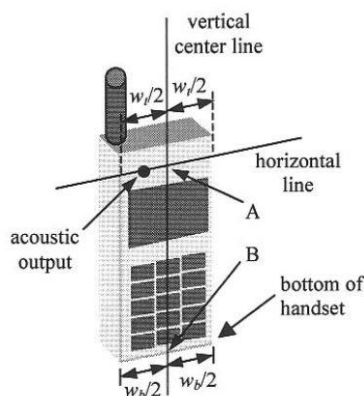


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

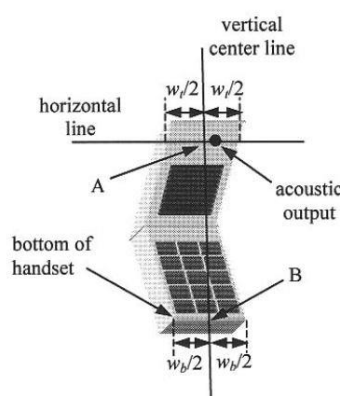


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

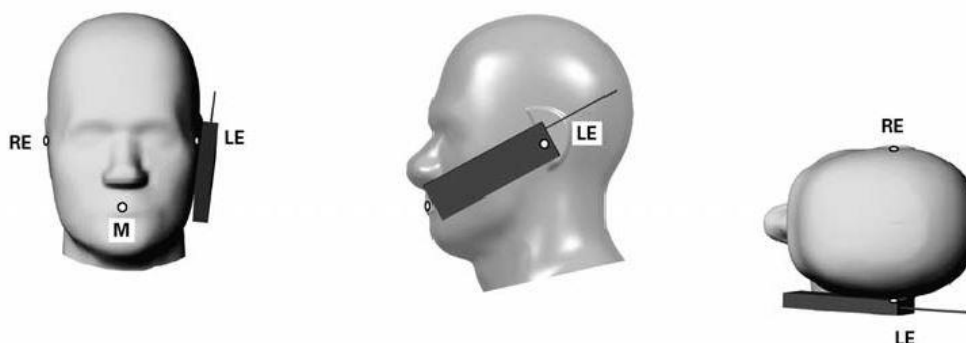


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15° .
3. Rotate the handset around the horizontal line by 15° .
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

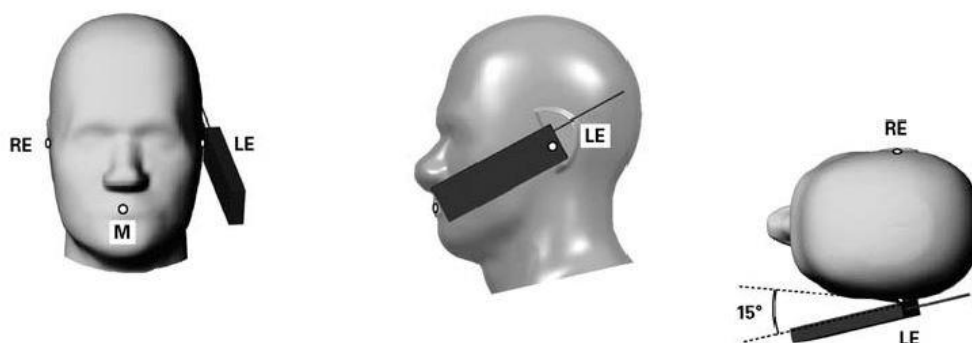


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters) only the accessory that dictates the closest spacing to the body is tested.

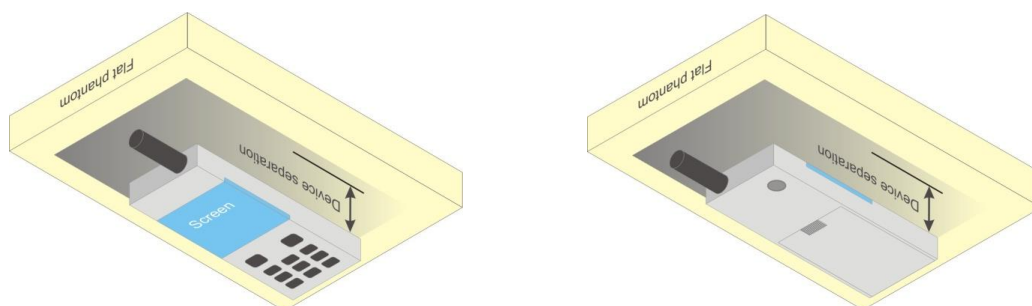


Fig 9.4 Body Worn Position



11.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

11.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850 and GPRS (4Tx slots) for GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot		33.45	33.72	33.42	34.00	24.45	24.72	24.42	25.00
GPRS 1 Tx slot		33.44	33.70	33.40	34.00	24.44	24.70	24.40	25.00
GPRS 2 Tx slots		30.20	30.50	30.10	31.00	24.20	24.50	24.10	25.00
GPRS 3 Tx slots		28.15	28.20	28.05	28.50	23.89	23.94	23.79	24.24
GPRS 4 Tx slots		26.77	26.88	26.70	27.00	23.77	23.88	23.70	24.00
EDGE 1 Tx slot		27.14	27.17	27.12	27.50	18.14	18.17	18.12	18.50
EDGE 2 Tx slots		24.09	24.16	23.91	24.50	18.09	18.16	17.91	18.50
EDGE 3 Tx slots		22.08	22.17	22.04	22.50	17.82	17.91	17.78	18.24
EDGE 4 Tx slots		21.67	21.75	21.55	22.00	18.67	18.75	18.55	19.00
GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		30.43	30.63	30.37	31.00	21.43	21.63	21.37	22.00
GPRS 1 Tx slot		30.41	30.61	30.36	31.00	21.41	21.61	21.36	22.00
GPRS 2 Tx slots		27.60	27.58	27.45	28.00	21.60	21.58	21.45	22.00
GPRS 3 Tx slots		25.55	25.57	25.39	26.00	21.29	21.31	21.13	21.74
GPRS 4 Tx slots		24.60	24.61	24.42	25.00	21.60	21.61	21.42	22.00
EDGE 1 Tx slot		26.05	26.06	25.96	26.50	17.05	17.06	16.96	17.50
EDGE 2 Tx slots		23.02	23.14	22.88	23.50	17.02	17.14	16.88	17.50
EDGE 3 Tx slots		20.96	20.91	20.76	21.00	16.70	16.65	16.50	16.74
EDGE 4 Tx slots		20.45	20.42	20.20	20.50	17.45	17.42	17.20	17.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E- TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH, HS-DPCCH, E-DPCCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPCCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPCCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

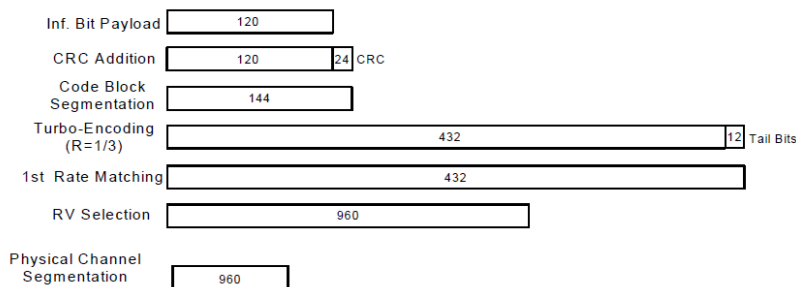


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

<WCDMA Conducted Power>**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band		WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.29	23.27	23.13	23.50
3GPP Rel 99	RMC 12.2Kbps	23.31	23.30	23.15	23.50
3GPP Rel 6	HSDPA Subtest-1	22.75	22.81	22.80	23.00
3GPP Rel 6	HSDPA Subtest-2	22.69	21.86	22.79	23.00
3GPP Rel 6	HSDPA Subtest-3	22.18	22.33	22.34	22.50
3GPP Rel 6	HSDPA Subtest-4	22.26	21.51	22.33	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.31	22.36	22.37	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.30	22.34	22.35	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.81	21.85	21.90	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.79	21.83	21.85	22.50
3GPP Rel 6	HSUPA Subtest-1	22.77	22.64	22.56	23.00
3GPP Rel 6	HSUPA Subtest-2	20.74	20.83	20.81	21.00
3GPP Rel 6	HSUPA Subtest-3	21.59	21.63	21.60	22.00
3GPP Rel 6	HSUPA Subtest-4	20.75	20.73	20.68	21.00
3GPP Rel 6	HSUPA Subtest-5	22.70	22.80	22.60	23.00

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	21.60	21.58	21.50	22.00	21.90	22.12	22.14	22.50
3GPP Rel 99	RMC 12.2Kbps	21.62	21.59	21.51	22.00	21.91	22.14	22.15	22.50
3GPP Rel 6	HSDPA Subtest-1	20.55	20.63	20.59	21.00	20.95	21.10	21.16	21.50
3GPP Rel 6	HSDPA Subtest-2	20.59	20.62	20.66	21.00	20.70	21.15	21.15	21.50
3GPP Rel 6	HSDPA Subtest-3	20.08	20.13	20.16	20.50	20.49	20.63	20.64	21.00
3GPP Rel 6	HSDPA Subtest-4	20.11	20.12	20.19	20.50	20.47	20.65	20.62	21.00
3GPP Rel 8	DC-HSDPA Subtest-1	20.49	20.54	20.56	21.00	20.82	20.91	20.95	21.50
3GPP Rel 8	DC-HSDPA Subtest-2	20.45	20.51	20.53	21.00	20.76	20.85	20.87	21.50
3GPP Rel 8	DC-HSDPA Subtest-3	20.07	20.10	20.12	20.50	20.38	20.43	20.46	21.00
3GPP Rel 8	DC-HSDPA Subtest-4	20.04	20.07	20.08	20.50	20.36	20.39	20.45	21.00
3GPP Rel 6	HSUPA Subtest-1	20.59	20.46	20.42	21.00	20.61	20.72	20.74	21.00
3GPP Rel 6	HSUPA Subtest-2	18.57	18.52	18.55	19.00	18.69	18.88	18.89	19.00
3GPP Rel 6	HSUPA Subtest-3	19.60	19.56	19.61	20.00	19.65	19.73	19.77	20.00
3GPP Rel 6	HSUPA Subtest-4	18.58	18.61	18.51	19.00	18.61	18.65	18.66	19.00
3GPP Rel 6	HSUPA Subtest-5	20.50	20.40	20.60	21.00	20.60	20.64	20.66	21.00

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64QAM and 16QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



64QAM



16QAM



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.22	22.14	22.06	22.5	0
20	QPSK	1	49	22.07	22.05	21.98		
20	QPSK	1	99	22.06	22.00	21.89		
20	QPSK	50	0	21.26	21.14	21.11	21.5	1
20	QPSK	50	24	21.25	21.10	21.06		
20	QPSK	50	50	21.16	21.07	21.03		
20	QPSK	100	0	21.18	21.17	21.10	22	0.5
20	16QAM	1	0	21.38	21.34	21.23		
20	16QAM	1	49	21.29	21.38	21.49		
20	16QAM	1	99	21.16	21.24	21.47	20.5	2
20	16QAM	50	0	20.19	20.26	20.20		
20	16QAM	50	24	20.23	20.23	20.36		
20	16QAM	50	50	20.13	20.06	20.19	20.5	2
20	16QAM	100	0	20.15	20.16	20.23		
20	64QAM	1	0	20.43	20.45	20.42	20.5	2
20	64QAM	1	49	20.41	20.47	20.49		
20	64QAM	1	99	20.47	20.48	20.49		
20	64QAM	50	0	19.21	19.29	19.32	19.5	3
20	64QAM	50	24	19.32	19.37	19.43		
20	64QAM	50	50	19.27	19.29	19.38		
20	64QAM	100	0	19.27	19.28	19.40		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5	Tune-up limit (dBm)	MPR (dB)
15	QPSK	1	0	22.20	22.09	22.05	22.5	0
15	QPSK	1	37	22.03	22.09	22.17		
15	QPSK	1	74	21.96	22.10	22.03		
15	QPSK	36	0	21.28	21.19	21.22	21.5	1
15	QPSK	36	20	21.19	21.12	21.30		
15	QPSK	36	39	21.16	21.16	21.10		
15	QPSK	75	0	21.22	21.20	21.22	22	0.5
15	16QAM	1	0	21.33	21.24	21.12		
15	16QAM	1	37	21.19	21.21	21.11		
15	16QAM	1	74	21.26	21.06	21.17	20.5	2
15	16QAM	36	0	20.21	20.14	20.19		
15	16QAM	36	20	20.19	20.18	20.26		
15	16QAM	36	39	20.18	20.13	20.18	20.5	2
15	16QAM	75	0	20.17	20.14	20.25		
15	64QAM	1	0	20.45	20.43	20.48		
15	64QAM	1	37	20.44	20.41	20.46	19.5	3
15	64QAM	1	74	20.45	20.47	20.49		
15	64QAM	36	0	19.33	19.30	19.37		
15	64QAM	36	20	19.31	19.29	19.36		
15	64QAM	36	39	19.25	19.23	19.28		
15	64QAM	75	0	19.34	19.31	19.37		



FCC SAR Test Report

Report No. : FA7N0402

Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.20	22.10	22.06	22.5	0
10	QPSK	1	25	22.18	22.08	22.15		
10	QPSK	1	49	22.19	22.18	22.09		
10	QPSK	25	0	21.24	21.19	21.21	21.5	1
10	QPSK	25	12	21.24	21.21	21.19		
10	QPSK	25	25	21.17	21.17	21.16		
10	QPSK	50	0	21.24	21.15	21.16		
10	16QAM	1	0	21.24	21.66	21.38	22	0.5
10	16QAM	1	25	21.22	21.59	21.67		
10	16QAM	1	49	21.27	21.55	21.71		
10	16QAM	25	0	20.16	20.22	20.32	20.5	2
10	16QAM	25	12	20.26	20.11	20.10		
10	16QAM	25	25	20.27	20.11	20.07		
10	16QAM	50	0	20.17	20.10	20.13		
10	64QAM	1	0	20.15	20.18	20.20	20.5	2
10	64QAM	1	25	20.13	20.20	20.19		
10	64QAM	1	49	20.15	20.14	20.14		
10	64QAM	25	0	19.03	19.07	19.10	19.5	3
10	64QAM	25	12	19.05	19.10	19.12		
10	64QAM	25	25	19.00	19.03	19.05		
10	64QAM	50	0	19.06	19.07	19.07		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.19	22.16	22.03	22.5	0
5	QPSK	1	12	22.03	22.07	22.02		
5	QPSK	1	24	21.98	21.98	22.08		
5	QPSK	12	0	21.21	21.14	21.11	21.5	1
5	QPSK	12	7	21.27	21.20	21.16		
5	QPSK	12	13	21.23	21.17	21.10		
5	QPSK	25	0	21.19	21.17	21.23		
5	16QAM	1	0	21.46	21.55	21.69	22	0.5
5	16QAM	1	12	21.67	21.74	21.50		
5	16QAM	1	24	21.55	21.62	21.61		
5	16QAM	12	0	20.20	20.21	20.28	20.5	2
5	16QAM	12	7	20.17	20.21	20.14		
5	16QAM	12	13	20.19	20.17	20.13		
5	16QAM	25	0	20.26	20.10	20.19		
5	64QAM	1	0	20.13	20.16	20.21	20.5	2
5	64QAM	1	12	20.18	20.20	20.17		
5	64QAM	1	24	20.16	20.15	20.17		
5	64QAM	12	0	19.09	19.11	19.15	19.5	3
5	64QAM	12	7	19.16	19.14	19.09		
5	64QAM	12	13	19.02	19.03	19.06		
5	64QAM	25	0	19.06	19.05	19.07		



FCC SAR Test Report

Report No. : FA7N0402

Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.14	22.13	22.04	22.5	0
3	QPSK	1	8	22.19	22.15	22.02		
3	QPSK	1	14	22.06	22.18	22.08		
3	QPSK	8	0	21.26	21.17	21.24	21.5	1
3	QPSK	8	4	21.24	21.19	21.22		
3	QPSK	8	7	21.21	21.16	21.17		
3	QPSK	15	0	21.20	21.09	21.14		
3	16QAM	1	0	21.13	21.03	21.12	22	0.5
3	16QAM	1	8	21.31	21.04	21.15		
3	16QAM	1	14	21.25	20.96	20.97		
3	16QAM	8	0	20.26	20.19	20.20	20.5	2
3	16QAM	8	4	20.23	20.26	20.31		
3	16QAM	8	7	20.31	20.29	20.27		
3	16QAM	15	0	20.27	20.17	20.15		
3	64QAM	1	0	20.23	20.22	20.19	20.5	2
3	64QAM	1	8	20.27	20.25	20.16		
3	64QAM	1	14	20.19	20.16	20.13		
3	64QAM	8	0	19.08	19.10	19.06		
3	64QAM	8	4	19.19	19.17	19.15	19.5	3
3	64QAM	8	7	19.18	19.12	19.11		
3	64QAM	15	0	19.07	19.06	19.04		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.03	22.07	21.99	22.5	0
1.4	QPSK	1	3	22.14	22.10	22.06		
1.4	QPSK	1	5	22.07	22.01	21.99		
1.4	QPSK	3	0	22.20	22.20	22.04		
1.4	QPSK	3	1	22.14	22.17	22.20		
1.4	QPSK	3	3	22.19	22.10	22.00		
1.4	QPSK	6	0	21.19	21.07	21.07	21.5	1
1.4	16QAM	1	0	21.36	21.44	21.44	22	0.5
1.4	16QAM	1	3	21.45	21.31	21.51		
1.4	16QAM	1	5	21.49	21.23	21.50		
1.4	16QAM	3	0	21.28	21.13	21.00		
1.4	16QAM	3	1	21.32	21.27	21.19		
1.4	16QAM	3	3	21.27	21.09	21.09		
1.4	16QAM	6	0	20.22	20.17	20.17	20.5	2
1.4	64QAM	1	0	20.18	20.17	20.14	20.5	2
1.4	64QAM	1	3	20.28	20.22	20.13		
1.4	64QAM	1	5	20.17	20.15	20.11		
1.4	64QAM	3	0	20.18	20.14	20.13		
1.4	64QAM	3	1	20.15	20.18	20.16		
1.4	64QAM	3	3	20.13	20.11	20.09		
1.4	64QAM	6	0	18.95	19.00	19.02	19.5	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	21.89	21.97	22.05	22.5	0
20	QPSK	1	49	21.90	22.06	22.15		
20	QPSK	1	99	21.89	22.05	22.07		
20	QPSK	50	0	20.96	21.11	21.05	21.5	1
20	QPSK	50	24	21.00	21.14	21.18		
20	QPSK	50	50	20.98	21.04	21.16		
20	QPSK	100	0	20.97	21.10	21.18	22	0.5
20	16QAM	1	0	21.47	21.23	21.27		
20	16QAM	1	49	21.46	21.33	21.37		
20	16QAM	1	99	21.50	21.33	21.50	20.5	2
20	16QAM	50	0	19.93	20.12	20.16		
20	16QAM	50	24	19.93	20.13	20.18		
20	16QAM	50	50	19.97	20.06	20.06	21.5	1
20	16QAM	100	0	19.96	20.02	20.12		
20	64QAM	1	0	21.18	21.17	21.21		
20	64QAM	1	49	21.20	21.21	21.23	20.5	2
20	64QAM	1	99	21.21	21.22	21.25		
20	64QAM	50	0	20.11	20.14	20.20		
20	64QAM	50	24	20.16	20.15	20.21	21.5	1
20	64QAM	50	50	20.15	20.12	20.18		
20	64QAM	100	0	20.12	20.16	20.15		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	21.90	22.06	22.07	22.5	0
15	QPSK	1	37	21.91	22.03	22.07		
15	QPSK	1	74	22.02	21.90	22.04		
15	QPSK	36	0	21.01	21.14	21.17	21.5	1
15	QPSK	36	20	20.98	21.12	21.21		
15	QPSK	36	39	20.98	21.07	21.11		
15	QPSK	75	0	20.92	21.06	21.20	22	0.5
15	16QAM	1	0	21.56	21.65	21.59		
15	16QAM	1	37	21.44	21.61	21.75		
15	16QAM	1	74	21.19	21.50	21.66	20.5	2
15	16QAM	36	0	20.03	20.13	20.17		
15	16QAM	36	20	20.01	20.13	20.14		
15	16QAM	36	39	19.92	20.15	20.13	21.5	1
15	16QAM	75	0	19.95	20.10	20.13		
15	64QAM	1	0	21.20	21.21	21.22		
15	64QAM	1	37	21.17	21.20	21.21	20.5	2
15	64QAM	1	74	21.13	21.18	21.20		
15	64QAM	36	0	20.16	20.17	20.20		
15	64QAM	36	20	20.15	20.15	20.18	21.5	1
15	64QAM	36	39	20.10	20.11	20.14		
15	64QAM	75	0	20.07	20.13	20.15		



FCC SAR Test Report

Report No. : FA7N0402

Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	21.96	22.08	22.11	22.5	0
10	QPSK	1	25	21.97	22.14	22.12		
10	QPSK	1	49	21.91	22.02	22.01		
10	QPSK	25	0	20.97	21.09	21.19	21.5	1
10	QPSK	25	12	21.03	21.16	21.13		
10	QPSK	25	25	20.92	21.10	21.06		
10	QPSK	50	0	20.98	21.09	21.17	22	0.5
10	16QAM	1	0	21.57	21.21	21.04		
10	16QAM	1	25	21.10	21.11	21.19		
10	16QAM	1	49	21.03	21.13	21.31	20.5	2
10	16QAM	25	0	19.97	20.12	20.09		
10	16QAM	25	12	20.03	20.09	20.15		
10	16QAM	25	25	19.94	20.06	20.10	21.5	1
10	16QAM	50	0	19.97	20.10	20.14		
10	64QAM	1	0	21.24	21.23	21.28		
10	64QAM	1	25	21.20	21.22	21.25	20.5	2
10	64QAM	1	49	21.19	21.20	21.22		
10	64QAM	25	0	20.11	20.16	20.15		
10	64QAM	25	12	20.13	20.14	20.15	21.5	1
10	64QAM	25	25	20.00	20.09	20.10		
10	64QAM	50	0	20.02	20.16	20.18		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	21.98	22.08	22.02	22.5	0
5	QPSK	1	12	21.99	22.13	22.05		
5	QPSK	1	24	21.97	22.07	22.05		
5	QPSK	12	0	20.95	21.10	21.12	21.5	1
5	QPSK	12	7	20.97	21.14	21.09		
5	QPSK	12	13	20.92	21.10	21.01		
5	QPSK	25	0	21.01	21.08	21.14	22	0.5
5	16QAM	1	0	21.02	21.09	21.52		
5	16QAM	1	12	21.08	21.73	21.28		
5	16QAM	1	24	20.88	21.19	21.05	20.5	2
5	16QAM	12	0	20.03	20.08	20.05		
5	16QAM	12	7	20.02	20.22	20.17		
5	16QAM	12	13	20.03	20.12	20.09	21.5	1
5	16QAM	25	0	20.02	20.09	19.95		
5	64QAM	1	0	21.22	21.25	21.28		
5	64QAM	1	12	21.23	21.22	21.25	20.5	2
5	64QAM	1	24	21.20	21.21	21.23		
5	64QAM	12	0	20.12	20.16	20.15		
5	64QAM	12	7	20.13	20.14	20.18	21.5	1
5	64QAM	12	13	20.10	20.09	20.11		
5	64QAM	25	0	20.13	20.12	20.16		



FCC SAR Test Report

Report No. : FA7N0402

Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.04	22.09	21.92	22.5	0
3	QPSK	1	8	21.88	22.13	21.88		
3	QPSK	1	14	22.03	22.05	22.08		
3	QPSK	8	0	21.02	21.12	21.07	21.5	1
3	QPSK	8	4	21.00	21.09	21.05		
3	QPSK	8	7	21.00	21.07	21.07		
3	QPSK	15	0	20.98	21.09	21.07		
3	16QAM	1	0	21.38	21.48	21.28	22	0.5
3	16QAM	1	8	21.49	21.30	21.25		
3	16QAM	1	14	21.41	21.35	21.23		
3	16QAM	8	0	20.08	20.16	20.05	20.5	2
3	16QAM	8	4	20.10	20.06	20.04		
3	16QAM	8	7	19.95	20.05	19.98		
3	16QAM	15	0	19.84	20.07	20.16		
3	64QAM	1	0	21.20	21.23	21.25	21.5	1
3	64QAM	1	8	21.21	21.20	21.26		
3	64QAM	1	14	21.18	21.21	21.22		
3	64QAM	8	0	20.10	20.12	20.15	20.5	2
3	64QAM	8	4	20.13	20.14	20.16		
3	64QAM	8	7	20.03	20.07	20.10		
3	64QAM	15	0	20.02	20.11	20.12		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	21.86	22.06	22.02	22.5	0
1.4	QPSK	1	3	21.81	22.09	21.87		
1.4	QPSK	1	5	21.86	21.93	21.97		
1.4	QPSK	3	0	21.85	22.05	22.03		
1.4	QPSK	3	1	22.02	22.08	22.14		
1.4	QPSK	3	3	21.85	22.04	21.94		
1.4	QPSK	6	0	20.97	20.98	20.97	21.5	1
1.4	16QAM	1	0	21.50	21.54	21.69	22	0.5
1.4	16QAM	1	3	21.55	21.67	21.59		
1.4	16QAM	1	5	21.52	21.61	21.55		
1.4	16QAM	3	0	20.91	20.96	21.12		
1.4	16QAM	3	1	21.05	20.98	21.15		
1.4	16QAM	3	3	20.89	21.07	21.13		
1.4	16QAM	6	0	19.92	20.23	20.22	20.5	2
1.4	64QAM	1	0	21.28	21.25	21.27	21.5	1
1.4	64QAM	1	3	21.22	21.21	21.25		
1.4	64QAM	1	5	21.23	21.22	21.24		
1.4	64QAM	3	0	20.16	20.18	20.20		
1.4	64QAM	3	1	20.20	20.21	20.24		
1.4	64QAM	3	3	20.10	20.11	20.15		
1.4	64QAM	6	0	20.08	20.10	20.12	20.5	2

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	23.5	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.86	22.80	22.82		
10	QPSK	1	25	22.83	22.86	22.90	22.5	1
10	QPSK	1	49	22.87	22.94	22.92		
10	QPSK	25	0	21.86	21.98	21.96		
10	QPSK	25	12	21.98	21.99	21.97	22.5	1
10	QPSK	25	25	21.96	21.93	21.93		
10	QPSK	50	0	21.81	21.94	21.93		
10	16QAM	1	0	22.06	22.03	22.01	22.5	1
10	16QAM	1	25	22.06	22.08	22.09		
10	16QAM	1	49	22.02	22.15	21.98		
10	16QAM	25	0	20.85	20.96	20.94	21.5	2
10	16QAM	25	12	20.88	20.98	20.96		
10	16QAM	25	25	20.92	20.92	20.91		
10	16QAM	50	0	20.85	20.94	20.92	21.5	2
10	64QAM	1	0	21.25	21.27	21.26		
10	64QAM	1	25	21.30	21.40	21.37		
10	64QAM	1	49	21.29	21.38	21.34	20.5	3
10	64QAM	25	0	20.19	20.30	20.25		
10	64QAM	25	12	20.26	20.31	20.29		
10	64QAM	25	25	20.24	20.25	20.24	20.5	3
10	64QAM	50	0	20.19	20.29	20.23		
Channel				20425	20525	20625	23.5	0
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.80	22.80	22.89		
5	QPSK	1	12	22.85	22.85	22.86	22.5	1
5	QPSK	1	24	22.83	22.83	22.79		
5	QPSK	12	0	21.84	21.84	21.95		
5	QPSK	12	7	21.89	21.89	22.03	22.5	1
5	QPSK	12	13	21.85	21.85	21.98		
5	QPSK	25	0	21.84	21.84	22.02		
5	16QAM	1	0	22.05	22.05	22.16	22.5	1
5	16QAM	1	12	22.04	22.04	22.06		
5	16QAM	1	24	21.99	21.99	22.10		
5	16QAM	12	0	20.85	20.85	20.98	21.5	2
5	16QAM	12	7	20.89	20.89	21.03		
5	16QAM	12	13	20.86	20.86	20.99		
5	16QAM	25	0	20.86	20.86	21.00	21.5	2
5	64QAM	1	0	21.30	21.35	21.35		
5	64QAM	1	12	21.32	21.34	21.41		
5	64QAM	1	24	21.31	21.33	21.38	20.5	3
5	64QAM	12	0	20.29	20.33	20.38		
5	64QAM	12	7	20.30	20.35	20.41		
5	64QAM	12	13	20.25	20.30	20.37	20.5	3
5	64QAM	25	0	20.24	20.25	20.29		



FCC SAR Test Report

Report No. : FA7N0402

Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.80	22.90	22.89	23.5	0
3	QPSK	1	8	22.83	22.88	22.84		
3	QPSK	1	14	22.79	22.87	22.84		
3	QPSK	8	0	21.83	21.92	22.00	22.5	1
3	QPSK	8	4	21.88	21.94	22.03		
3	QPSK	8	7	21.86	21.93	21.99		
3	QPSK	15	0	21.85	21.93	21.97		
3	16QAM	1	0	22.02	22.02	22.11	22.5	1
3	16QAM	1	8	22.00	22.06	22.13		
3	16QAM	1	14	21.98	21.98	22.04		
3	16QAM	8	0	20.91	20.97	21.03	21.5	2
3	16QAM	8	4	20.94	21.00	21.06		
3	16QAM	8	7	20.90	20.96	21.00		
3	16QAM	15	0	20.91	20.94	21.02		
3	64QAM	1	0	21.33	21.36	21.38	21.5	2
3	64QAM	1	8	21.32	21.38	21.42		
3	64QAM	1	14	21.34	21.37	21.37		
3	64QAM	8	0	20.27	20.31	20.34	20.5	3
3	64QAM	8	4	20.28	20.33	20.36		
3	64QAM	8	7	20.24	20.29	20.34		
3	64QAM	15	0	20.23	20.25	20.28		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.73	22.76	22.78	23.5	0
1.4	QPSK	1	3	22.78	22.82	22.91		
1.4	QPSK	1	5	22.74	22.74	22.82		
1.4	QPSK	3	0	22.82	22.87	22.92		
1.4	QPSK	3	1	22.83	22.92	22.91		
1.4	QPSK	3	3	22.79	22.86	22.89		
1.4	QPSK	6	0	21.78	21.85	21.90	22.5	1
1.4	16QAM	1	0	22.01	22.00	22.02	22.5	1
1.4	16QAM	1	3	22.04	22.06	22.08		
1.4	16QAM	1	5	21.94	21.96	22.06		
1.4	16QAM	3	0	21.80	21.84	21.90		
1.4	16QAM	3	1	21.80	21.87	21.90		
1.4	16QAM	3	3	21.79	21.83	21.86		
1.4	16QAM	6	0	20.83	20.88	20.96	21.5	2
1.4	64QAM	1	0	21.33	21.36	21.38	21.5	2
1.4	64QAM	1	3	21.34	21.38	21.41		
1.4	64QAM	1	5	21.34	21.36	21.47		
1.4	64QAM	3	0	21.22	21.27	21.29		
1.4	64QAM	3	1	21.30	21.32	21.35		
1.4	64QAM	3	3	21.20	21.26	21.30		
1.4	64QAM	6	0	20.09	20.15	20.24	20.5	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.56	22.65	22.60	23	0
20	QPSK	1	49	22.67	22.78	22.83		
20	QPSK	1	99	22.77	22.86	22.90		
20	QPSK	50	0	21.71	21.82	21.82	22.5	0.5
20	QPSK	50	24	21.78	21.87	21.90		
20	QPSK	50	50	21.83	21.92	21.96		
20	QPSK	100	0	21.75	21.89	21.90		
20	16QAM	1	0	21.72	22.04	21.81	22.5	0.5
20	16QAM	1	49	21.89	22.01	22.12		
20	16QAM	1	99	22.12	22.05	22.15		
20	16QAM	50	0	20.71	20.82	20.84	21	2
20	16QAM	50	24	20.81	20.92	20.92		
20	16QAM	50	50	20.82	20.95	20.97		
20	16QAM	100	0	20.76	20.88	20.85		
20	64QAM	1	0	21.11	21.13	21.21	22	1
20	64QAM	1	49	21.20	21.15	21.22		
20	64QAM	1	99	21.18	21.14	21.20		
20	64QAM	50	0	20.00	20.01	20.04	21	2
20	64QAM	50	24	20.01	20.03	20.05		
20	64QAM	50	50	20.08	20.10	20.12		
20	64QAM	100	0	20.09	20.07	20.05		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.57	22.74	22.66	23	0
15	QPSK	1	37	22.63	22.77	22.73		
15	QPSK	1	74	22.81	22.83	22.84		
15	QPSK	36	0	21.74	21.81	21.81	22.5	0.5
15	QPSK	36	20	21.82	21.90	21.87		
15	QPSK	36	39	21.86	21.92	21.88		
15	QPSK	75	0	21.78	21.88	21.84		
15	16QAM	1	0	21.77	22.11	21.94	22.5	0.5
15	16QAM	1	37	21.83	22.05	22.15		
15	16QAM	1	74	22.08	22.08	22.14		
15	16QAM	36	0	20.76	20.83	20.80	21	2
15	16QAM	36	20	20.80	20.92	20.87		
15	16QAM	36	39	20.83	20.90	20.89		
15	16QAM	75	0	20.78	20.89	20.82		
15	64QAM	1	0	21.10	21.11	21.15	22	1
15	64QAM	1	37	21.08	21.10	21.13		
15	64QAM	1	74	21.12	21.16	21.14		
15	64QAM	36	0	19.92	19.96	20.02	21	2
15	64QAM	36	20	19.98	20.03	20.00		
15	64QAM	36	39	20.00	20.09	20.10		
15	64QAM	75	0	20.01	20.05	20.08		



FCC SAR Test Report

Report No. : FA7N0402

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.60	22.68	22.76	23	0
10	QPSK	1	25	22.66	22.76	22.81		
10	QPSK	1	49	22.80	22.84	22.86		
10	QPSK	25	0	21.70	21.81	21.82	22.5	0.5
10	QPSK	25	12	21.73	21.86	21.88		
10	QPSK	25	25	21.74	21.89	21.89		
10	QPSK	50	0	21.72	21.83	21.84		
10	16QAM	1	0	21.75	22.00	22.01	22.5	0.5
10	16QAM	1	25	21.77	22.04	22.15		
10	16QAM	1	49	21.95	22.09	22.15		
10	16QAM	25	0	20.68	20.77	20.80	21	2
10	16QAM	25	12	20.72	20.85	20.89		
10	16QAM	25	25	20.74	20.85	20.87		
10	16QAM	50	0	20.70	20.84	20.87		
10	64QAM	1	0	21.01	21.05	21.07	22	1
10	64QAM	1	25	21.03	21.06	21.03		
10	64QAM	1	49	21.02	21.07	21.08		
10	64QAM	25	0	20.00	19.97	20.03	21	2
10	64QAM	25	12	20.03	20.04	20.07		
10	64QAM	25	25	20.05	20.03	20.09		
10	64QAM	50	0	19.98	20.00	20.05		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.58	22.72	22.78	23	0
5	QPSK	1	12	22.68	22.78	22.79		
5	QPSK	1	24	22.67	22.81	22.82		
5	QPSK	12	0	21.67	21.79	21.84	22.5	0.5
5	QPSK	12	7	21.74	21.87	21.88		
5	QPSK	12	13	21.73	21.87	21.87		
5	QPSK	25	0	21.73	21.80	21.88		
5	16QAM	1	0	21.75	21.99	22.08	22.5	0.5
5	16QAM	1	12	21.75	22.06	22.11		
5	16QAM	1	24	21.75	22.04	22.09		
5	16QAM	12	0	20.67	20.78	20.81	21	2
5	16QAM	12	7	20.73	20.88	20.91		
5	16QAM	12	13	20.73	20.89	20.87		
5	16QAM	25	0	20.71	20.82	20.85		
5	64QAM	1	0	21.10	21.01	21.11	22	1
5	64QAM	1	12	21.00	21.02	21.06		
5	64QAM	1	24	21.03	21.08	21.12		
5	64QAM	12	0	20.04	20.03	20.07	21	2
5	64QAM	12	7	20.08	20.05	20.09		
5	64QAM	12	13	20.03	20.06	20.07		
5	64QAM	25	0	20.00	19.99	20.02		

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.82	22.81	22.79	23	0
10	QPSK	1	25	22.80	22.83	22.84		
10	QPSK	1	49	22.83	22.87	22.85		
10	QPSK	25	0	21.89	21.86	21.80	22.5	0.5
10	QPSK	25	12	21.91	21.83	21.88		
10	QPSK	25	25	21.93	21.94	21.90		
10	QPSK	50	0	21.88	21.92	21.83	22.5	0.5
10	16QAM	1	0	22.01	21.94	21.91		
10	16QAM	1	25	22.02	21.99	22.10		
10	16QAM	1	49	22.04	22.10	22.02	21	2
10	16QAM	25	0	20.90	20.83	20.79		
10	16QAM	25	12	20.92	20.87	20.91		
10	16QAM	25	25	20.89	20.92	20.88	21	2
10	16QAM	50	0	20.89	20.83	20.91		
10	64QAM	1	0	21.40	21.41	21.38		
10	64QAM	1	25	21.45	21.48	21.41	22	1
10	64QAM	1	49	21.56	21.61	21.55		
10	64QAM	25	0	20.36	20.35	20.33		
10	64QAM	25	12	20.37	20.44	20.35	21	2
10	64QAM	25	25	20.52	20.54	20.48		
10	64QAM	50	0	20.40	20.42	20.45		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.82	22.75	22.82	23	0
5	QPSK	1	12	22.83	22.78	22.81		
5	QPSK	1	24	22.78	22.78	22.78		
5	QPSK	12	0	21.89	21.82	21.87	22.5	0.5
5	QPSK	12	7	21.95	21.84	21.88		
5	QPSK	12	13	21.89	21.82	21.85		
5	QPSK	25	0	21.89	21.83	21.87	22.5	0.5
5	16QAM	1	0	22.01	21.90	22.08		
5	16QAM	1	12	22.05	21.93	22.03		
5	16QAM	1	24	22.02	22.08	21.94	21	2
5	16QAM	12	0	20.90	20.81	20.87		
5	16QAM	12	7	20.94	20.86	20.89		
5	16QAM	12	13	20.88	20.85	20.85	21	2
5	16QAM	25	0	20.86	20.80	20.85		
5	64QAM	1	0	21.23	21.25	21.21		
5	64QAM	1	12	21.44	21.43	21.37	22	1
5	64QAM	1	24	21.40	21.44	21.39		
5	64QAM	12	0	20.39	20.43	20.40		
5	64QAM	12	7	20.43	20.46	20.45	21	2
5	64QAM	12	13	20.44	20.42	20.32		
5	64QAM	25	0	20.35	20.37	20.33		



FCC SAR Test Report

Report No. : FA7N0402

Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.78	22.77	22.82	23	0
3	QPSK	1	8	22.79	22.72	22.80		
3	QPSK	1	14	22.77	22.75	22.77		
3	QPSK	8	0	21.90	21.83	21.86	22.5	0.5
3	QPSK	8	4	21.94	21.86	21.91		
3	QPSK	8	7	21.93	21.84	21.86		
3	QPSK	15	0	21.91	21.84	21.86		
3	16QAM	1	0	22.00	21.89	22.01	22.5	0.5
3	16QAM	1	8	22.07	21.97	22.00		
3	16QAM	1	14	21.99	21.95	21.93		
3	16QAM	8	0	20.98	20.89	20.91	21	2
3	16QAM	8	4	20.98	20.91	20.92		
3	16QAM	8	7	20.97	20.88	20.90		
3	16QAM	15	0	20.93	20.87	20.87		
3	64QAM	1	0	21.22	21.27	21.23	22	1
3	64QAM	1	8	21.31	21.34	21.30		
3	64QAM	1	14	21.30	21.33	21.28		
3	64QAM	8	0	20.28	20.34	20.30	21	2
3	64QAM	8	4	20.35	20.41	20.38		
3	64QAM	8	7	20.31	20.37	20.33		
3	64QAM	15	0	20.35	20.33	20.31		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.81	22.67	22.67	23	0
1.4	QPSK	1	3	22.84	22.74	22.77		
1.4	QPSK	1	5	22.78	22.68	22.66		
1.4	QPSK	3	0	22.78	22.80	22.80		
1.4	QPSK	3	1	22.82	22.83	22.82		
1.4	QPSK	3	3	22.78	22.77	22.77		
1.4	QPSK	6	0	21.85	21.75	21.79	22.5	0.5
1.4	16QAM	1	0	22.00	21.86	21.93	22.5	0.5
1.4	16QAM	1	3	22.05	21.97	21.96		
1.4	16QAM	1	5	21.98	21.88	21.85		
1.4	16QAM	3	0	21.80	21.73	21.77		
1.4	16QAM	3	1	21.91	21.76	21.78		
1.4	16QAM	3	3	21.83	21.74	21.76		
1.4	16QAM	6	0	20.90	20.81	20.85	21	2
1.4	64QAM	1	0	20.88	20.98	20.96	22	1
1.4	64QAM	1	3	20.93	20.99	20.93		
1.4	64QAM	1	5	20.95	21.00	20.96		
1.4	64QAM	3	0	21.00	21.25	21.11		
1.4	64QAM	3	1	21.11	21.20	21.24		
1.4	64QAM	3	3	21.08	21.24	21.23		
1.4	64QAM	6	0	20.21	20.35	20.24	21	2

<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.83	22.76	22.71	23	0
10	QPSK	1	25	22.76	22.81	22.83		
10	QPSK	1	49	22.85	22.82	22.84		
10	QPSK	25	0	21.84	21.78	21.78	22.5	0.5
10	QPSK	25	12	21.83	21.89	21.86		
10	QPSK	25	25	21.91	21.90	21.87		
10	QPSK	50	0	21.91	21.89	21.87	22.5	0.5
10	16QAM	1	0	21.92	21.96	21.88		
10	16QAM	1	25	22.00	22.12	22.07		
10	16QAM	1	49	22.10	22.04	21.92	21	2
10	16QAM	25	0	20.83	20.78	20.77		
10	16QAM	25	12	20.84	20.92	20.93		
10	16QAM	25	25	20.88	20.88	20.89	22	1
10	16QAM	50	0	20.78	20.89	20.86		
10	64QAM	1	0	21.45	21.44	21.34		
10	64QAM	1	25	21.52	21.51	21.44	21	2
10	64QAM	1	49	21.42	21.40	21.32		
10	64QAM	25	0	20.40	20.41	20.40		
10	64QAM	25	12	20.40	20.43	20.35	21	2
10	64QAM	25	25	20.51	20.52	20.45		
10	64QAM	50	0	20.41	20.40	20.37		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.78	22.75	22.83	23	0
5	QPSK	1	12	22.82	22.83	22.81		
5	QPSK	1	24	22.80	22.83	22.80		
5	QPSK	12	0	21.84	21.80	21.84	22.5	0.5
5	QPSK	12	7	21.86	21.92	21.87		
5	QPSK	12	13	21.84	21.90	21.84		
5	QPSK	25	0	21.85	21.89	21.86	22.5	0.5
5	16QAM	1	0	21.91	21.96	22.06		
5	16QAM	1	12	22.00	22.12	22.01		
5	16QAM	1	24	22.00	22.07	21.93	21	2
5	16QAM	12	0	20.82	20.82	20.84		
5	16QAM	12	7	20.89	20.95	20.89		
5	16QAM	12	13	20.85	20.92	20.84	22	1
5	16QAM	25	0	20.83	20.89	20.86		
5	64QAM	1	0	21.47	21.48	21.46		
5	64QAM	1	12	21.42	21.39	21.35	21	2
5	64QAM	1	24	21.50	21.48	21.44		
5	64QAM	12	0	20.45	20.42	20.42		
5	64QAM	12	7	20.47	20.48	20.45	21	2
5	64QAM	12	13	20.48	20.50	20.41		
5	64QAM	25	0	20.41	20.40	20.35		

<LTE Carrier Aggregation>
General Note:

This device supports Carrier Aggregation on downlink for intra band, uplink CA is not supported. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.

<Intra-Band Carrier Combination>

E-UTRA CA configuration / Bandwidth combination set							
E-UTRA CA configuration	Uplink CA configurations	Component carriers in order of increasing carrier frequency				Maximum aggregated bandwidth [MHz]	Bandwidth combination set
		Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]		
CA_7A-7A	-	5	15			40	0
		10	10, 15				
		15	15, 20				
		20	20				
		5, 10, 15, 20	5, 10, 15, 20			40	1
		5, 10, 15, 20	5, 10			30	2
		10, 15, 20	10, 15, 20			40	3

LTE Carrier Aggregation Conducted Power (Downlink)
General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink carrier aggregation only. Uplink carrier aggregation is not supported. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.

Configure		PCC							SCC				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Non-Contiguous	Band 7	20M	2560	21350	QPSK	1	99	Band 7	5M	2622.5	2775	22.84	22.90

<WLAN Conducted Power>**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	15.48	16.00	99.06
		6	2437	15.50	16.00	
		11	2462	15.53	16.00	
	802.11g 6Mbps	1	2412	14.59	15.00	94.96
		6	2437	14.57	15.00	
		11	2462	14.81	15.00	
	802.11n-HT20 MCS0	1	2412	12.62	13.00	94.62
		6	2437	12.64	13.00	
		11	2462	12.39	13.00	
	802.11n-HT40 MCS0	3	2422	12.57	13.00	90.90
		6	2437	12.50	13.00	
		9	2452	12.47	13.00	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.42	15.00	94.04
		40	5200	14.31	15.00	
		44	5220	14.83	15.00	
		48	5240	14.67	15.00	
	802.11n-HT20 MCS0	36	5180	10.55	11.50	92.46
		40	5200	10.49	11.50	
		44	5220	10.81	11.50	
		48	5240	10.84	11.50	
	802.11n-HT40 MCS0	38	5190	10.61	11.50	90.10
		46	5230	10.74	11.50	
	802.11ac-VHT20 MCS0	36	5180	8.32	10.00	95.22
		40	5200	8.22	10.00	
		44	5220	8.58	10.00	
		48	5240	8.51	10.00	
	802.11ac-VHT40 MCS0	38	5190	6.66	8.00	87.68
		46	5230	6.97	8.00	
	802.11ac-VHT80 MCS0	42	5210	6.60	8.00	83.77

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	14.48	15.00	94.04
		56	5280	14.51	15.00	
		60	5300	14.33	15.00	
		64	5320	14.24	15.00	
	802.11n-HT20 MCS0	52	5260	10.67	11.50	92.46
		56	5280	10.64	11.50	
		60	5300	10.61	11.50	
		64	5320	10.44	11.50	
	802.11n-HT40 MCS0	54	5270	10.76	11.50	90.10
		62	5310	10.42	11.50	
	802.11ac-VHT20 MCS0	52	5260	8.41	10.00	95.22
		56	5280	8.44	10.00	
		60	5300	8.15	10.00	
		64	5320	8.02	10.00	
	802.11ac-VHT40 MCS0	54	5270	6.79	8.00	87.68
		62	5310	6.59	8.00	
	802.11ac-VHT80 MCS0	58	5290	6.36	8.00	83.77

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	14.49	15.00	94.04
		116	5580	14.33	15.00	
		132	5660	14.56	15.00	
		140	5700	14.40	15.00	
	802.11n-HT20 MCS0	100	5500	10.64	11.50	92.46
		116	5580	10.37	11.50	
		132	5660	10.54	11.50	
		140	5700	10.55	11.50	
	802.11n-HT40 MCS0	102	5510	10.48	11.50	90.10
		110	5550	10.23	11.50	
		134	5670	10.38	11.50	
	802.11ac-VHT20 MCS0	100	5500	8.50	10.00	95.22
		116	5580	8.13	10.00	
		132	5660	8.51	10.00	
		140	5700	8.22	10.00	
	802.11ac-VHT40 MCS0	102	5510	6.83	8.00	87.68
		110	5550	6.51	8.00	
		134	5670	6.57	8.00	
	802.11ac-VHT80 MCS0	106	5530	6.49	8.00	83.77

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	14.35	15.50	94.04
		157	5785	15.16	15.50	
		165	5825	14.93	15.50	
	802.11n-HT20 MCS0	149	5745	10.40	11.50	92.46
		157	5785	11.18	11.50	
		165	5825	11.25	11.50	
	802.11n-HT40 MCS0	151	5755	10.08	11.50	90.10
		159	5795	10.89	11.50	
	802.11ac-VHT20 MCS0	149	5745	8.21	10.00	95.22
		157	5785	8.93	10.00	
		165	5825	8.72	10.00	
	802.11ac-VHT40 MCS0	151	5755	6.06	8.00	87.68
		159	5795	6.91	8.00	
	802.11ac-VHT80 MCS0	155	5775	6.46	8.00	83.77

13. Bluetooth Exclusions Applied

Mode Band	Max Average power(dBm)	
	Bluetooth v3.0+EDR	Bluetooth v4.0/4.1/4.2 LE
2.4GHz Bluetooth	11.00	1.50

Note:

Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:


$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	Exclusion Thresholds
11.00	10	2.48	2.0

Note: Per KDB 447498 D01v06, a distance of 10 mm is applied to determine SAR test exclusion. The test exclusion threshold is 2.0 which is ≤ 3, SAR testing is not required.

14. Antenna Location

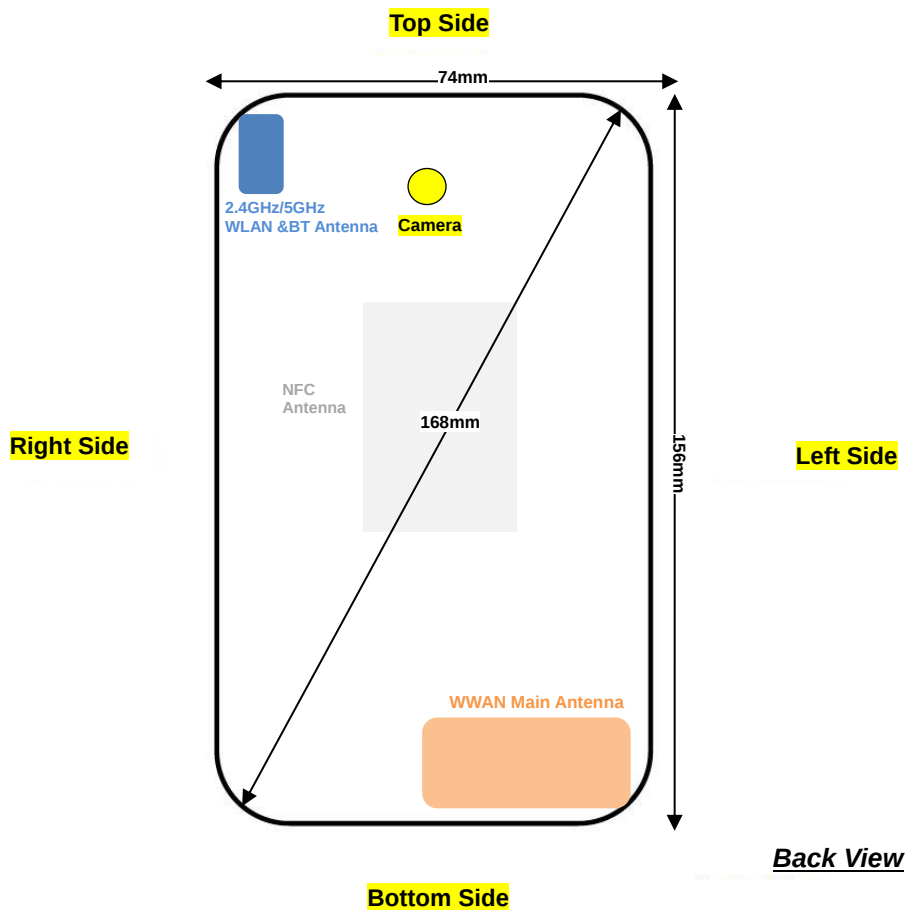

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	No	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB 648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 2Tx slots for GSM850 and GPRS 4Tx slots for GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B17 SAR test was covered by B12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS 2 Tx slots	Right Cheek	1	189	836.4	30.50	31.00	1.122	-0.06	0.167	0.187
	GSM850	GPRS 2 Tx slots	Right Cheek	2	189	836.4	30.50	31.00	1.122	0.14	0.124	0.139
	GSM850	GPRS 2 Tx slots	Right Tilted	1	189	836.4	30.50	31.00	1.122	0.01	0.119	0.134
	GSM850	GPRS 2 Tx slots	Left Cheek	1	189	836.4	30.50	31.00	1.122	0.14	0.142	0.159
	GSM850	GPRS 2 Tx slots	Left Tilted	1	189	836.4	30.50	31.00	1.122	0.04	0.118	0.132
	GSM1900	GPRS 4 Tx slots	Right Cheek	1	661	1880	24.61	25.00	1.094	0.03	0.047	0.052
	GSM1900	GPRS 4 Tx slots	Right Tilted	1	661	1880	24.61	25.00	1.094	0.02	0.030	0.032
	GSM1900	GPRS 4 Tx slots	Left Cheek	1	661	1880	24.61	25.00	1.094	0.05	0.060	0.066
	GSM1900	GPRS 4 Tx slots	Left Tilted	1	661	1880	24.61	25.00	1.094	0.04	0.062	0.068
02	GSM1900	GPRS 4 Tx slots	Left Tilted	2	661	1880	24.61	25.00	1.094	-0.03	0.080	0.088

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	1	4132	826.4	23.31	23.50	1.045	0.01	0.179	0.187
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	1	4132	826.4	23.31	23.50	1.045	0.04	0.122	0.127
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	1	4132	826.4	23.31	23.50	1.045	0.14	0.170	0.178
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	1	4132	826.4	23.31	23.50	1.045	0.12	0.127	0.133
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	1	4182	836.4	23.30	23.50	1.047	-0.12	0.197	0.206
03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	1	4233	846.6	23.15	23.50	1.084	0.07	0.192	0.208
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	2	4233	846.6	23.15	23.50	1.084	-0.04	0.161	0.175
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	1	9262	1852.4	21.62	22.00	1.091	0.14	0.069	0.075
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	1	9262	1852.4	21.62	22.00	1.091	-0.15	0.029	0.032
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	1	9262	1852.4	21.62	22.00	1.091	0.06	0.078	0.085
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	1	9262	1852.4	21.62	22.00	1.091	-0.19	0.071	0.077
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	1	9400	1880	21.59	22.00	1.099	0.05	0.088	0.097
04	WCDMA Band II	RMC 12.2Kbps	Left Cheek	1	9538	1907.6	21.51	22.00	1.119	0.03	0.130	0.146
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	2	9538	1907.6	21.51	22.00	1.119	0.01	0.126	0.141
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	1	1513	1752.6	22.15	22.50	1.084	0.02	0.047	0.051
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	1	1513	1752.6	22.15	22.50	1.084	0.12	0.034	0.036
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1	1513	1752.6	22.15	22.50	1.084	0.04	0.078	0.085
05	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	2	1513	1752.6	22.15	22.50	1.084	0.05	0.129	0.140
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	1	1513	1752.6	22.15	22.50	1.084	-0.07	0.055	0.060



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 5	10M	QPSK	1	49	Right Cheek	1	20525	836.5	22.94	23.50	1.138	0.05	0.174	0.198
	LTE Band 5	10M	QPSK	1	49	Right Cheek	2	20525	836.5	22.94	23.50	1.138	0.05	0.157	0.179
	LTE Band 5	10M	QPSK	1	49	Right Tilted	1	20525	836.5	22.94	23.50	1.138	0.03	0.096	0.109
	LTE Band 5	10M	QPSK	1	49	Left Cheek	1	20525	836.5	22.94	23.50	1.138	0.01	0.146	0.166
	LTE Band 5	10M	QPSK	1	49	Left Tilted	1	20525	836.5	22.94	23.50	1.138	-0.19	0.120	0.137
	LTE Band 5	10M	QPSK	25	12	Right Cheek	1	20525	836.5	21.99	22.50	1.125	0.01	0.143	0.161
	LTE Band 5	10M	QPSK	25	12	Right Tilted	1	20525	836.5	21.99	22.50	1.125	-0.19	0.094	0.106
	LTE Band 5	10M	QPSK	25	12	Left Cheek	1	20525	836.5	21.99	22.50	1.125	0.03	0.118	0.133
	LTE Band 5	10M	QPSK	25	12	Left Tilted	1	20525	836.5	21.99	22.50	1.125	0.05	0.104	0.117
07	LTE Band 12	10M	QPSK	1	49	Right Cheek	1	23095	707.5	22.87	23.00	1.030	0.19	0.164	0.169
	LTE Band 12	10M	QPSK	1	49	Right Cheek	2	23095	707.5	22.87	23.00	1.030	0.05	0.132	0.136
	LTE Band 12	10M	QPSK	1	49	Right Tilted	1	23095	707.5	22.87	23.00	1.030	0.01	0.095	0.098
	LTE Band 12	10M	QPSK	1	49	Left Cheek	1	23095	707.5	22.87	23.00	1.030	0.02	0.142	0.146
	LTE Band 12	10M	QPSK	1	49	Left Tilted	1	23095	707.5	22.87	23.00	1.030	0.11	0.102	0.105
	LTE Band 12	10M	QPSK	25	25	Right Cheek	1	23095	707.5	21.94	22.50	1.138	0.01	0.128	0.146
	LTE Band 12	10M	QPSK	25	25	Right Tilted	1	23095	707.5	21.94	22.50	1.138	0.01	0.074	0.085
	LTE Band 12	10M	QPSK	25	25	Left Cheek	1	23095	707.5	21.94	22.50	1.138	0.01	0.110	0.125
	LTE Band 12	10M	QPSK	25	25	Left Tilted	1	23095	707.5	21.94	22.50	1.138	0.01	0.079	0.090
	LTE Band 4	20M	QPSK	1	49	Right Cheek	1	20175	1732.5	22.06	22.50	1.107	0.09	0.109	0.121
	LTE Band 4	20M	QPSK	1	49	Right Tilted	1	20175	1732.5	22.06	22.50	1.107	0.18	0.062	0.069
08	LTE Band 4	20M	QPSK	1	49	Left Cheek	1	20175	1732.5	22.06	22.50	1.107	0.12	0.174	0.193
	LTE Band 4	20M	QPSK	1	49	Left Cheek	2	20175	1732.5	22.06	22.50	1.107	0.13	0.159	0.176
	LTE Band 4	20M	QPSK	1	49	Left Tilted	1	20175	1732.5	22.06	22.50	1.107	0.16	0.128	0.142
	LTE Band 4	20M	QPSK	50	24	Right Cheek	1	20175	1732.5	21.14	21.50	1.086	0.03	0.086	0.094
	LTE Band 4	20M	QPSK	50	24	Right Tilted	1	20175	1732.5	21.14	21.50	1.086	0.15	0.051	0.055
	LTE Band 4	20M	QPSK	50	24	Left Cheek	1	20175	1732.5	21.14	21.50	1.086	0.03	0.143	0.155
	LTE Band 4	20M	QPSK	50	24	Left Tilted	1	20175	1732.5	21.14	21.50	1.086	0.18	0.104	0.113
	LTE Band 2	20M	QPSK	1	0	Right Cheek	1	18700	1860	22.22	22.50	1.067	-0.08	0.080	0.086
	LTE Band 2	20M	QPSK	1	0	Right Tilted	1	18700	1860	22.22	22.50	1.067	0.05	0.034	0.037
	LTE Band 2	20M	QPSK	1	0	Left Cheek	1	18700	1860	22.22	22.50	1.067	-0.07	0.099	0.106
	LTE Band 2	20M	QPSK	1	0	Left Tilted	1	18700	1860	22.22	22.50	1.067	-0.19	0.081	0.086
	LTE Band 2	20M	QPSK	1	0	Left Cheek	1	18900	1880	22.14	22.50	1.086	-0.08	0.081	0.088
09	LTE Band 2	20M	QPSK	1	0	Left Cheek	1	19100	1900	22.06	22.50	1.107	0.06	0.097	0.107
	LTE Band 2	20M	QPSK	1	0	Left Cheek	2	19100	1900	22.06	22.50	1.107	0.06	0.088	0.097
	LTE Band 2	20M	QPSK	50	0	Right Cheek	1	18700	1860	21.26	21.50	1.057	-0.19	0.065	0.069
	LTE Band 2	20M	QPSK	50	0	Right Tilted	1	18700	1860	21.26	21.50	1.057	0.03	0.028	0.030
	LTE Band 2	20M	QPSK	50	0	Left Cheek	1	18700	1860	21.26	21.50	1.057	-0.07	0.083	0.088
	LTE Band 2	20M	QPSK	50	0	Left Tilted	1	18700	1860	21.26	21.50	1.057	0.06	0.067	0.070
	LTE Band 7	20M	QPSK	1	99	Right Cheek	1	21350	2560	22.90	23.00	1.023	0.01	0.225	0.230
	LTE Band 7	20M	QPSK	1	99	Right Tilted	1	21350	2560	22.90	23.00	1.023	0.08	0.175	0.179
	LTE Band 7	20M	QPSK	1	99	Left Cheek	1	21350	2560	22.90	23.00	1.023	0.14	0.423	0.433
10	LTE Band 7	20M	QPSK	1	99	Left Cheek	2	21350	2560	22.90	23.00	1.023	-0.13	0.503	0.515
	LTE Band 7	20M	QPSK	1	99	Left Tilted	1	21350	2560	22.90	23.00	1.023	0.02	0.168	0.172
	LTE Band 7	20M	QPSK	50	50	Right Cheek	1	21350	2560	21.96	22.50	1.132	0.02	0.182	0.206
	LTE Band 7	20M	QPSK	50	50	Right Tilted	1	21350	2560	21.96	22.50	1.132	0.18	0.140	0.159
	LTE Band 7	20M	QPSK	50	50	Left Cheek	1	21350	2560	21.96	22.50	1.132	0.11	0.336	0.380
	LTE Band 7	20M	QPSK	50	50	Left Tilted	1	21350	2560	21.96	22.50	1.132	0.05	0.128	0.145



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	1	11	2462	15.53	16.00	1.114	99.06	1.009		0.112		
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	1	11	2462	15.53	16.00	1.114	99.06	1.009		0.0818		
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	1	11	2462	15.53	16.00	1.114	99.06	1.009	0.09	0.837	0.506	0.569
11	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	2	11	2462	15.53	16.00	1.114	99.06	1.009	-0.02		0.632	0.711
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	1	11	2462	15.53	16.00	1.114	99.06	1.009	0.05	0.686	0.339	0.381

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	1	56	5280	14.51	15.00	1.119	94.04	1.063		0.575		
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	1	56	5280	14.51	15.00	1.119	94.04	1.063		0.431		
12	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	1	56	5280	14.51	15.00	1.119	94.04	1.063	0.02	1.540	0.621	0.739
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	2	56	5280	14.51	15.00	1.119	94.04	1.063	0.09		0.609	0.725
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	1	56	5280	14.51	15.00	1.119	94.04	1.063	0.07	0.970	0.446	0.531
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	1	132	5660	14.56	15.00	1.107	94.04	1.063		0.384		
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	1	132	5660	14.56	15.00	1.107	94.04	1.063		0.244		
13	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	1	132	5660	14.56	15.00	1.107	94.04	1.063	0.02	0.417	0.170	0.200
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	2	132	5660	14.56	15.00	1.107	94.04	1.063	0.08		0.145	0.171
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	1	132	5660	14.56	15.00	1.107	94.04	1.063		0.306		
	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	1	157	5785	15.16	15.50	1.081	94.04	1.063	-0.07		0.094	0.108
	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	1	157	5785	15.16	15.50	1.081	94.04	1.063	0.02		0.049	0.056
14	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	1	157	5785	15.16	15.50	1.081	94.04	1.063	0.09		0.271	0.312
	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	1	157	5785	15.16	15.50	1.081	94.04	1.063	-0.08		0.140	0.161
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	1	149	5745	14.35	14.50	1.035	94.04	1.063	0.02		0.211	0.232
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	1	165	5825	14.93	15.50	1.140	94.04	1.063	0.09		0.250	0.303
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	2	157	5785	15.16	15.50	1.081	94.04	1.063	-0.08		0.212	0.244

15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx slots	Front	10	1	189	836.4	30.50	31.00	1.122	0.07	0.192	0.215
	GSM850	GPRS 2 Tx slots	Back	10	1	189	836.4	30.50	31.00	1.122	0.05	0.232	0.260
15	GSM850	GPRS 2 Tx slots	Back	10	2	189	836.4	30.50	31.00	1.122	0.05	0.290	0.325
	GSM850	GPRS 2 Tx slots	Left Side	10	1	189	836.4	30.50	31.00	1.122	0.02	0.084	0.094
	GSM850	GPRS 2 Tx slots	Bottom Side	10	1	189	836.4	30.50	31.00	1.122	-0.18	0.053	0.060
	GSM1900	GPRS 4 Tx slots	Front	10	1	661	1880	24.61	25.00	1.094	0.11	0.436	0.477
	GSM1900	GPRS 4 Tx slots	Back	10	1	661	1880	24.61	25.00	1.094	-0.01	0.457	0.500
	GSM1900	GPRS 4 Tx slots	Left Side	10	1	661	1880	24.61	25.00	1.094	-0.03	0.101	0.110
	GSM1900	GPRS 4 Tx slots	Bottom Side	10	1	661	1880	24.61	25.00	1.094	0.06	0.584	0.639
16	GSM1900	GPRS 4 Tx slots	Bottom Side	10	2	661	1880	24.61	25.00	1.094	-0.03	0.614	0.672

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	1	4132	826.4	23.31	23.50	1.045	0.09	0.183	0.191
	WCDMA Band V	RMC 12.2Kbps	Back	10	1	4132	826.4	23.31	23.50	1.045	0.06	0.225	0.235
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	1	4132	826.4	23.31	23.50	1.045	-0.08	0.136	0.142
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	10	1	4132	826.4	23.31	23.50	1.045	-0.08	0.050	0.052
	WCDMA Band V	RMC 12.2Kbps	Back	10	1	4182	836.4	23.30	23.50	1.047	0.06	0.223	0.234
	WCDMA Band V	RMC 12.2Kbps	Back	10	1	4233	846.6	23.15	23.50	1.084	-0.04	0.215	0.233
17	WCDMA Band V	RMC 12.2Kbps	Back	10	2	4132	826.4	23.31	23.50	1.045	0.06	0.245	0.256
	WCDMA Band II	RMC 12.2Kbps	Front	10	1	9262	1852.4	21.62	22.00	1.091	0.09	0.539	0.588
	WCDMA Band II	RMC 12.2Kbps	Back	10	1	9262	1852.4	21.62	22.00	1.091	-0.08	0.554	0.605
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	1	9262	1852.4	21.62	22.00	1.091	0.03	0.160	0.175
18	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	1	9262	1852.4	21.62	22.00	1.091	0.06	0.821	0.896
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	2	9262	1852.4	21.62	22.00	1.091	-0.07	0.752	0.821
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	1	9400	1880	21.59	22.00	1.099	-0.01	0.757	0.832
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	1	9538	1907.6	21.51	22.00	1.119	-0.07	0.776	0.869
	WCDMA Band IV	RMC 12.2Kbps	Front	10	1	1513	1752.6	22.15	22.50	1.084	0.04	0.528	0.572
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1	1513	1752.6	22.15	22.50	1.084	-0.06	0.527	0.571
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	1	1513	1752.6	22.15	22.50	1.084	-0.02	0.175	0.19
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	1	1513	1752.6	22.15	22.50	1.084	0.01	0.756	0.819
19	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	1	1312	1712.4	21.91	22.50	1.146	-0.1	0.769	0.881
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	2	1312	1712.4	21.91	22.50	1.146	-0.18	0.724	0.829
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	1	1413	1732.6	22.14	22.50	1.086	-0.15	0.656	0.713



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
20	LTE Band 5	10M	QPSK	1	49	Front	10	1	20525	836.5	22.94	23.50	1.138	-0.15	0.148	0.168
	LTE Band 5	10M	QPSK	1	49	Back	10	1	20525	836.5	22.94	23.50	1.138	-0.01	0.182	0.207
	LTE Band 5	10M	QPSK	1	49	Left Side	10	1	20525	836.5	22.94	23.50	1.138	0.01	0.065	0.073
	LTE Band 5	10M	QPSK	1	49	Bottom Side	10	1	20525	836.5	22.94	23.50	1.138	-0.15	0.040	0.045
	LTE Band 5	10M	QPSK	1	49	Back	10	2	20525	836.5	22.94	23.50	1.138	0.06	0.177	0.201
	LTE Band 5	10M	QPSK	25	12	Front	10	1	20525	836.5	21.99	22.50	1.125	0.03	0.130	0.146
	LTE Band 5	10M	QPSK	25	12	Back	10	1	20525	836.5	21.99	22.50	1.125	-0.07	0.154	0.173
	LTE Band 5	10M	QPSK	25	12	Left Side	10	1	20525	836.5	21.99	22.50	1.125	-0.19	0.056	0.063
21	LTE Band 5	10M	QPSK	25	12	Bottom Side	10	1	20525	836.5	21.99	22.50	1.125	0.01	0.032	0.036
	LTE Band 12	10M	QPSK	1	49	Front	10	1	23095	707.5	22.87	23.00	1.030	-0.02	0.238	0.245
	LTE Band 12	10M	QPSK	1	49	Front	10	2	23095	707.5	22.87	23.00	1.030	-0.05	0.219	0.226
	LTE Band 12	10M	QPSK	1	49	Back	10	1	23095	707.5	22.87	23.00	1.030	-0.03	0.211	0.217
	LTE Band 12	10M	QPSK	1	49	Left Side	10	1	23095	707.5	22.87	23.00	1.030	0.06	0.187	0.193
	LTE Band 12	10M	QPSK	1	49	Bottom Side	10	1	23095	707.5	22.87	23.00	1.030	0.06	0.042	0.043
	LTE Band 12	10M	QPSK	25	25	Front	10	1	23095	707.5	21.94	22.50	1.138	0.03	0.204	0.232
	LTE Band 12	10M	QPSK	25	25	Back	10	1	23095	707.5	21.94	22.50	1.138	0.04	0.133	0.151
22	LTE Band 12	10M	QPSK	25	25	Left Side	10	1	23095	707.5	21.94	22.50	1.138	0.04	0.148	0.168
	LTE Band 12	10M	QPSK	25	25	Bottom Side	10	1	23095	707.5	21.94	22.50	1.138	-0.15	0.032	0.036
	LTE Band 4	20M	QPSK	1	49	Front	10	1	20175	1732.5	22.06	22.50	1.107	0.08	0.509	0.563
	LTE Band 4	20M	QPSK	1	49	Back	10	1	20175	1732.5	22.06	22.50	1.107	0.05	0.494	0.547
	LTE Band 4	20M	QPSK	1	49	Left Side	10	1	20175	1732.5	22.06	22.50	1.107	-0.09	0.165	0.183
	LTE Band 4	20M	QPSK	1	49	Bottom Side	10	1	20175	1732.5	22.06	22.50	1.107	-0.02	0.696	0.770
	LTE Band 4	20M	QPSK	1	49	Bottom Side	10	2	20175	1732.5	22.06	22.50	1.107	-0.11	0.680	0.753
	LTE Band 4	20M	QPSK	50	24	Front	10	1	20175	1732.5	21.14	21.50	1.086	0.07	0.411	0.447
23	LTE Band 4	20M	QPSK	50	24	Back	10	1	20175	1732.5	21.14	21.50	1.086	0.12	0.413	0.449
	LTE Band 4	20M	QPSK	50	24	Left Side	10	1	20175	1732.5	21.14	21.50	1.086	0.01	0.133	0.144
	LTE Band 4	20M	QPSK	50	24	Bottom Side	10	1	20175	1732.5	21.14	21.50	1.086	0.05	0.574	0.624
	LTE Band 2	20M	QPSK	1	0	Front	10	1	18700	1860	22.22	22.50	1.067	-0.15	0.520	0.555
	LTE Band 2	20M	QPSK	1	0	Back	10	1	18700	1860	22.22	22.50	1.067	-0.05	0.590	0.629
	LTE Band 2	20M	QPSK	1	0	Left Side	10	1	18700	1860	22.22	22.50	1.067	-0.19	0.282	0.301
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	1	18700	1860	22.22	22.50	1.067	-0.05	0.998	1.064
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	2	18700	1860	22.22	22.50	1.067	0.15	0.915	0.976
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	1	18900	1880	22.14	22.50	1.086	0.15	0.954	1.036
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	1	19100	1900	22.06	22.50	1.107	-0.02	0.902	0.998
	LTE Band 2	20M	QPSK	50	0	Front	10	1	18700	1860	21.26	21.50	1.057	-0.19	0.497	0.525
	LTE Band 2	20M	QPSK	50	0	Back	10	1	18700	1860	21.26	21.50	1.057	-0.01	0.475	0.502
	LTE Band 2	20M	QPSK	50	0	Left Side	10	1	18700	1860	21.26	21.50	1.057	-0.01	0.240	0.254
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	1	18700	1860	21.26	21.50	1.057	0.05	0.806	0.852
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	1	18900	1880	21.14	21.50	1.086	0.15	0.755	0.820
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	1	19100	1900	21.11	21.50	1.094	0.14	0.720	0.788
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10	1	18700	1860	21.18	21.50	1.076	-0.05	0.795	0.856



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	99	Front	10	1	21350	2560	22.90	23.00	1.023	-0.07	0.591	0.605
	LTE Band 7	20M	QPSK	1	99	Back	10	1	21350	2560	22.90	23.00	1.023	0.02	0.856	0.876
24	LTE Band 7	20M	QPSK	1	99	Back	10	2	21350	2560	22.90	23.00	1.023	0.05	0.890	0.911
	LTE Band 7	20M	QPSK	1	99	Back	10	1	20850	2510	22.77	23.00	1.054	0.06	0.664	0.700
	LTE Band 7	20M	QPSK	1	99	Back	10	1	21100	2535	22.86	23.00	1.033	0.02	0.723	0.747
	LTE Band 7	20M	QPSK	1	99	Left Side	10	1	21350	2560	22.90	23.00	1.023	-0.01	0.506	0.518
	LTE Band 7	20M	QPSK	1	99	Bottom Side	10	1	21350	2560	22.90	23.00	1.023	0.06	0.467	0.478
	LTE Band 7	20M	QPSK	50	50	Front	10	1	21350	2560	21.96	22.50	1.132	-0.02	0.487	0.551
	LTE Band 7	20M	QPSK	50	50	Back	10	1	21350	2560	21.96	22.50	1.132	0.07	0.684	0.775
	LTE Band 7	20M	QPSK	50	50	Left Side	10	1	21350	2560	21.96	22.50	1.132	-0.02	0.429	0.486
	LTE Band 7	20M	QPSK	50	50	Bottom Side	10	1	21350	2560	21.96	22.50	1.132	0.1	0.378	0.428
	LTE Band 7	20M	QPSK	100	0	Back	10	1	21350	2560	21.90	22.50	1.148	0.03	0.661	0.759



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	1	11	2462	15.53	16.00	1.114	99.06	1.009		0.119		
	WLAN2.4GHz	802.11b 1Mbps	Back	10	1	11	2462	15.53	16.00	1.114	99.06	1.009	0.18	0.129	0.111	0.125
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10	1	11	2462	15.53	16.00	1.114	99.06	1.009	0.01	0.191	0.113	0.127
25	WLAN2.4GHz	802.11b 1Mbps	Right Side	10	2	11	2462	15.53	16.00	1.114	99.06	1.009	-0.01		0.120	0.135
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10	1	11	2462	15.53	16.00	1.114	99.06	1.009		0.096		

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Front	10	1	44	5220	14.83	15.00	1.040	94.04	1.063	0.02	0.072	0.079
26	WLAN5.2GHz	802.11a 6Mbps	Back	10	1	44	5220	14.83	15.00	1.040	94.04	1.063	-0.02	0.292	0.323
	WLAN5.2GHz	802.11a 6Mbps	Back	10	2	44	5220	14.83	15.00	1.040	94.04	1.063	0.05	0.278	0.307
	WLAN5.2GHz	802.11a 6Mbps	Right Side	10	1	44	5220	14.83	15.00	1.040	94.04	1.063	0.05	0.104	0.115
	WLAN5.2GHz	802.11a 6Mbps	Top Side	10	1	44	5220	14.83	15.00	1.040	94.04	1.063	-0.09	0.056	0.062
	WLAN 5.8GHz	802.11a 6Mbps	Front	10	1	157	5785	15.16	15.50	1.081	94.04	1.063	0.05	0.030	0.035
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	1	157	5785	15.16	15.50	1.081	94.04	1.063	-0.09	0.213	0.245
	WLAN 5.8GHz	802.11a 6Mbps	Right Side	10	1	157	5785	15.16	15.50	1.081	94.04	1.063	-0.15	0.077	0.089
	WLAN 5.8GHz	802.11a 6Mbps	Top Side	10	1	157	5785	15.16	15.50	1.081	94.04	1.063	-0.02	0.060	0.069
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	1	149	5745	14.35	15.50	1.303	94.04	1.063	-0.11	0.195	0.270
27	WLAN 5.8GHz	802.11a 6Mbps	Back	10	1	165	5825	14.93	15.50	1.140	94.04	1.063	-0.02	0.238	0.288
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	2	165	5825	14.93	15.50	1.140	94.04	1.063	0.15	0.219	0.265

15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx slots	Front	10	1	189	836.4	30.50	31.00	1.122	0.07	0.192	0.215
	GSM850	GPRS 2 Tx slots	Back	10	1	189	836.4	30.50	31.00	1.122	0.05	0.232	0.260
28	GSM850	GPRS 2 Tx slots	Back	10	2	189	836.4	30.50	31.00	1.122	0.05	0.290	0.325
	GSM1900	GPRS 4 Tx slots	Front	10	1	661	1880	24.61	25.00	1.094	0.11	0.436	0.477
29	GSM1900	GPRS 4 Tx slots	Back	10	1	661	1880	24.61	25.00	1.094	-0.01	0.457	0.500

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	1	4132	826.4	23.31	23.50	1.045	0.09	0.183	0.191
	WCDMA Band V	RMC 12.2Kbps	Back	10	1	4132	826.4	23.31	23.50	1.045	0.06	0.225	0.235
	WCDMA Band V	RMC 12.2Kbps	Back	10	1	4182	836.4	23.30	23.50	1.047	0.06	0.223	0.234
	WCDMA Band V	RMC 12.2Kbps	Back	10	1	4233	846.6	23.15	23.50	1.084	-0.04	0.215	0.233
30	WCDMA Band V	RMC 12.2Kbps	Back	10	2	4132	826.4	23.31	23.50	1.045	0.06	0.245	0.256
	WCDMA Band II	RMC 12.2Kbps	Front	10	1	9262	1852.4	21.62	22.00	1.091	0.09	0.539	0.588
31	WCDMA Band II	RMC 12.2Kbps	Back	10	1	9262	1852.4	21.62	22.00	1.091	-0.08	0.554	0.605
32	WCDMA Band IV	RMC 12.2Kbps	Front	10	1	1513	1752.6	22.15	22.50	1.084	0.04	0.528	0.572
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1	1513	1752.6	22.15	22.50	1.084	-0.06	0.527	0.571



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	49	Front	10	1	20525	836.5	22.94	23.50	1.138	-0.15	0.148	0.168
33	LTE Band 5	10M	QPSK	1	49	Back	10	1	20525	836.5	22.94	23.50	1.138	-0.01	0.182	0.207
	LTE Band 5	10M	QPSK	1	49	Back	10	2	20525	836.5	22.94	23.50	1.138	0.06	0.177	0.201
	LTE Band 5	10M	QPSK	25	12	Front	10	1	20525	836.5	21.99	22.50	1.125	0.03	0.130	0.146
	LTE Band 5	10M	QPSK	25	12	Back	10	1	20525	836.5	21.99	22.50	1.125	-0.07	0.154	0.173
34	LTE Band 12	10M	QPSK	1	49	Front	10	1	23095	707.5	22.87	23.00	1.030	-0.02	0.238	0.245
	LTE Band 12	10M	QPSK	1	49	Front	10	2	23095	707.5	22.87	23.00	1.030	-0.05	0.219	0.226
	LTE Band 12	10M	QPSK	1	49	Back	10	1	23095	707.5	22.87	23.00	1.030	-0.03	0.211	0.217
	LTE Band 12	10M	QPSK	25	25	Front	10	1	23095	707.5	21.94	22.50	1.138	0.03	0.204	0.232
	LTE Band 12	10M	QPSK	25	25	Back	10	1	23095	707.5	21.94	22.50	1.138	0.04	0.133	0.151
35	LTE Band 4	20M	QPSK	1	49	Front	10	1	20175	1732.5	22.06	22.50	1.107	0.08	0.509	0.563
	LTE Band 4	20M	QPSK	1	49	Back	10	1	20175	1732.5	22.06	22.50	1.107	0.05	0.494	0.547
	LTE Band 4	20M	QPSK	50	24	Front	10	1	20175	1732.5	21.14	21.50	1.086	0.07	0.411	0.447
	LTE Band 4	20M	QPSK	50	24	Back	10	1	20175	1732.5	21.14	21.50	1.086	0.12	0.413	0.449
	LTE Band 2	20M	QPSK	1	0	Front	10	1	18700	1860	22.22	22.50	1.067	-0.15	0.520	0.555
36	LTE Band 2	20M	QPSK	1	0	Back	10	1	18700	1860	22.22	22.50	1.067	-0.05	0.590	0.629
	LTE Band 2	20M	QPSK	50	0	Front	10	1	18700	1860	21.26	21.50	1.057	-0.19	0.497	0.525
	LTE Band 2	20M	QPSK	50	0	Back	10	1	18700	1860	21.26	21.50	1.057	-0.01	0.475	0.502
	LTE Band 7	20M	QPSK	1	99	Front	10	1	21350	2560	22.90	23.00	1.023	-0.07	0.591	0.605
	LTE Band 7	20M	QPSK	1	99	Back	10	1	21350	2560	22.90	23.00	1.023	0.02	0.856	0.876
37	LTE Band 7	20M	QPSK	1	99	Back	10	2	21350	2560	22.90	23.00	1.023	0.05	0.890	0.911
	LTE Band 7	20M	QPSK	1	99	Back	10	1	20850	2510	22.77	23.00	1.054	0.06	0.664	0.700
	LTE Band 7	20M	QPSK	1	99	Back	10	1	21100	2535	22.86	23.00	1.033	0.02	0.723	0.747
	LTE Band 7	20M	QPSK	50	50	Front	10	1	21350	2560	21.96	22.50	1.132	-0.02	0.487	0.551
	LTE Band 7	20M	QPSK	50	50	Back	10	1	21350	2560	21.96	22.50	1.132	0.07	0.684	0.775
	LTE Band 7	20M	QPSK	100	0	Back	10	1	21350	2560	21.90	22.50	1.148	0.03	0.661	0.759

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	1	11	2462	15.53	16.00	1.114	99.06	1.009		0.119		
38	WLAN2.4GHz	802.11b 1Mbps	Back	10	1	11	2462	15.53	16.00	1.114	99.06	1.009	0.18	0.129	0.111	0.125

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.3GHz	802.11a 6Mbps	Front	10	1	56	5280	14.51	15.00	1.119	94.04	1.063	-0.09	0.105	0.125
	WLAN 5.3GHz	802.11a 6Mbps	Back	10	1	56	5280	14.51	15.00	1.119	94.04	1.063	-0.05	0.401	0.477
39	WLAN 5.3GHz	802.11a 6Mbps	Back	10	2	56	5280	14.51	15.00	1.119	94.04	1.063	-0.06	0.451	0.537
	WLAN 5.5GHz	802.11a 6Mbps	Front	10	1	132	5660	14.56	15.00	1.107	94.04	1.063	0.02	0.032	0.038
	WLAN 5.5GHz	802.11a 6Mbps	Back	10	1	132	5660	14.56	15.00	1.107	94.04	1.063	0.01	0.231	0.272
40	WLAN 5.5GHz	802.11a 6Mbps	Back	10	2	132	5660	14.56	15.00	1.107	94.04	1.063	0.03	0.243	0.286
	WLAN 5.8GHz	802.11a 6Mbps	Front	10	1	157	5785	15.16	15.50	1.081	94.04	1.063	0.05	0.030	0.035
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	1	157	5785	15.16	15.50	1.081	94.04	1.063	-0.09	0.213	0.245
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	1	149	5745	14.35	15.50	1.303	94.04	1.063	-0.11	0.195	0.270
41	WLAN 5.8GHz	802.11a 6Mbps	Back	10	1	165	5825	14.93	15.50	1.140	94.04	1.063	-0.02	0.238	0.288
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	2	165	5825	14.93	15.50	1.140	94.04	1.063	0.15	0.219	0.265

15.4 Product specific 10g SAR

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	0	1	56	5280	14.51	15.00	1.119	94.04	1.063	0.02	0.500	0.595
42	WLAN5.3GHz	802.11a 6Mbps	Back	0	1	56	5280	14.51	15.00	1.119	94.04	1.063	0.05	0.892	1.061
	WLAN5.3GHz	802.11a 6Mbps	Back	0	2	56	5280	14.51	15.00	1.119	94.04	1.063	0.01	0.830	0.988
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0	1	56	5280	14.51	15.00	1.119	94.04	1.063	0.12	0.400	0.476
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0	1	56	5280	14.51	15.00	1.119	94.04	1.063	0.08	0.140	0.167
	WLAN 5.5GHz	802.11a 6Mbps	Front	0	1	132	5660	14.56	15.00	1.107	94.04	1.063	0.12	0.143	0.168
	WLAN 5.5GHz	802.11a 6Mbps	Back	0	1	132	5660	14.56	15.00	1.107	94.04	1.063	-0.03	0.682	0.802
43	WLAN 5.5GHz	802.11a 6Mbps	Back	0	2	132	5660	14.56	15.00	1.107	94.04	1.063	0.04	0.795	0.935
	WLAN 5.5GHz	802.11a 6Mbps	Right Side	0	1	132	5660	14.56	15.00	1.107	94.04	1.063	0.15	0.164	0.193
	WLAN 5.5GHz	802.11a 6Mbps	Top Side	0	1	132	5660	14.56	15.00	1.107	94.04	1.063	0.01	0.048	0.056

15.5 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	1	18700	1860	22.22	22.5	1.067	-0.05	0.998	1	1.064
2nd	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	1	18700	1860	22.22	22.5	1.067	0.05	0.934	1.064	0.996
1st	LTE Band 7	20M	QPSK	1	99	Back	10	2	21350	2560	22.9	23	1.023	0.05	0.890	1	0.911
2nd	LTE Band 7	20M	QPSK	1	99	Back	10	2	21350	2560	22.9	23	1.023	0.03	0.872	1.020	0.892

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	WLAN Hotspot
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	WLAN Hotspot
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	WLAN Hotspot
5.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes		
6.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		WLAN Direct (GC only)
7.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		WLAN Direct (GC only)
8.	LTE + WLAN5.3/5.5GHz	Yes	Yes		WLAN Direct (GC only)
9.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes		
10.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	WLAN Hotspot/Direct(GC/GO)
11.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	WLAN Hotspot/Direct(GC/GO)
12.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	WLAN Hotspot/Direct(GC/GO)
13.	GSM Voice + Bluetooth		Yes		
14.	GPRS/EDGE + Bluetooth		Yes	Yes	BT Tethering
15.	WCDMA + Bluetooth		Yes	Yes	BT Tethering
16.	LTE + Bluetooth		Yes	Yes	BT Tethering

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA, LTE (e.g. for 3rd-party VoIP) and LTE supports VoLTE function.
- EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- According to the EUT character, WLAN 5GHz and Bluetooth can't transmit simultaneously.
- Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
- The reported SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR, $SPLSR \leq 0.10$ for 10g SAR simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power (dBm)	Exposure Position	
	Test separation	Hotspot & Body worn
11.00	Estimated 1g SAR (W/kg)	10 mm 0.264



16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.187	0.711	0.739	0.90	0.93
		Right Tilted	0.134	0.711	0.739	0.85	0.87
		Left Cheek	0.159	0.711	0.739	0.87	0.90
		Left Tilted	0.132	0.711	0.739	0.84	0.87
	GSM1900	Right Cheek	0.052	0.711	0.739	0.76	0.79
		Right Tilted	0.032	0.711	0.739	0.74	0.77
		Left Cheek	0.066	0.711	0.739	0.78	0.81
		Left Tilted	0.088	0.711	0.739	0.80	0.83
WCDMA	Band V	Right Cheek	0.208	0.711	0.739	0.92	0.95
		Right Tilted	0.127	0.711	0.739	0.84	0.87
		Left Cheek	0.178	0.711	0.739	0.89	0.92
		Left Tilted	0.133	0.711	0.739	0.84	0.87
	Band II	Right Cheek	0.075	0.711	0.739	0.79	0.81
		Right Tilted	0.032	0.711	0.739	0.74	0.77
		Left Cheek	0.146	0.711	0.739	0.86	0.89
		Left Tilted	0.077	0.711	0.739	0.79	0.82
	Band IV	Right Cheek	0.051	0.711	0.739	0.76	0.79
		Right Tilted	0.036	0.711	0.739	0.75	0.78
		Left Cheek	0.140	0.711	0.739	0.85	0.88
		Left Tilted	0.060	0.711	0.739	0.77	0.80
LTE	Band 5	Right Cheek	0.198	0.711	0.739	0.91	0.94
		Right Tilted	0.109	0.711	0.739	0.82	0.85
		Left Cheek	0.166	0.711	0.739	0.88	0.91
		Left Tilted	0.137	0.711	0.739	0.85	0.88
	Band 12	Right Cheek	0.169	0.711	0.739	0.88	0.91
		Right Tilted	0.098	0.711	0.739	0.81	0.84
		Left Cheek	0.146	0.711	0.739	0.86	0.89
		Left Tilted	0.105	0.711	0.739	0.82	0.84
	Band 4	Right Cheek	0.121	0.711	0.739	0.83	0.86
		Right Tilted	0.069	0.711	0.739	0.78	0.81
		Left Cheek	0.193	0.711	0.739	0.90	0.93
		Left Tilted	0.142	0.711	0.739	0.85	0.88
	Band 2	Right Cheek	0.086	0.711	0.739	0.80	0.83
		Right Tilted	0.037	0.711	0.739	0.75	0.78
		Left Cheek	0.107	0.711	0.739	0.82	0.85
		Left Tilted	0.086	0.711	0.739	0.80	0.83
	Band 7	Right Cheek	0.230	0.711	0.739	0.94	0.97
		Right Tilted	0.179	0.711	0.739	0.89	0.92
		Left Cheek	0.515	0.711	0.739	1.23	1.25
		Left Tilted	0.172	0.711	0.739	0.88	0.91

16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850	Front	0.215	0.135	0.323	0.264	0.35	0.54	0.48
		Back	0.325	0.135	0.323	0.264	0.46	0.65	0.59
		Left Side	0.094				0.09	0.09	0.09
		Right Side		0.135	0.323	0.264	0.14	0.32	0.26
		Top Side		0.135	0.323	0.264	0.14	0.32	0.26
		Bottom Side	0.060				0.06	0.06	0.06
	GSM1900	Front	0.477	0.135	0.323	0.264	0.61	0.80	0.74
		Back	0.500	0.135	0.323	0.264	0.64	0.82	0.76
		Left Side	0.110				0.11	0.11	0.11
		Right Side		0.135	0.323	0.264	0.14	0.32	0.26
		Top Side		0.135	0.323	0.264	0.14	0.32	0.26
		Bottom Side	0.672				0.67	0.67	0.67
WCDMA	Band V	Front	0.191	0.135	0.323	0.264	0.33	0.51	0.46
		Back	0.256	0.135	0.323	0.264	0.39	0.58	0.52
		Left Side	0.142				0.14	0.14	0.14
		Right Side		0.135	0.323	0.264	0.14	0.32	0.26
		Top Side		0.135	0.323	0.264	0.14	0.32	0.26
		Bottom Side	0.052				0.05	0.05	0.05
	Band II	Front	0.588	0.135	0.323	0.264	0.72	0.91	0.85
		Back	0.605	0.135	0.323	0.264	0.74	0.93	0.87
		Left Side	0.175				0.18	0.18	0.18
		Right Side		0.135	0.323	0.264	0.14	0.32	0.26
		Top Side		0.135	0.323	0.264	0.14	0.32	0.26
		Bottom Side	0.896				0.90	0.90	0.90
	Band IV	Front	0.572	0.135	0.323	0.264	0.71	0.90	0.84
		Back	0.571	0.135	0.323	0.264	0.71	0.89	0.84
		Left Side	0.190				0.19	0.19	0.19
		Right Side		0.135	0.323	0.264	0.14	0.32	0.26
		Top Side		0.135	0.323	0.264	0.14	0.32	0.26
		Bottom Side	0.881				0.88	0.88	0.88

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
LTE	Band 5	Front	0.168	0.135	0.323	0.264	0.30	0.49	0.43
		Back	0.207	0.135	0.323	0.264	0.34	0.53	0.47
		Left Side	0.073				0.07	0.07	0.07
		Right Side		0.135	0.323	0.264	0.14	0.32	0.26
		Top Side		0.135	0.323	0.264	0.14	0.32	0.26
		Bottom Side	0.045				0.05	0.05	0.05
	Band 12	Front	0.245	0.135	0.323	0.264	0.38	0.57	0.51
		Back	0.217	0.135	0.323	0.264	0.35	0.54	0.48
		Left Side	0.193				0.19	0.19	0.19
		Right Side		0.135	0.323	0.264	0.14	0.32	0.26
		Top Side		0.135	0.323	0.264	0.14	0.32	0.26
		Bottom Side	0.043				0.04	0.04	0.04
	Band 4	Front	0.563	0.135	0.323	0.264	0.70	0.89	0.83
		Back	0.547	0.135	0.323	0.264	0.68	0.87	0.81
		Left Side	0.183				0.18	0.18	0.18
		Right Side		0.135	0.323	0.264	0.14	0.32	0.26
		Top Side		0.135	0.323	0.264	0.14	0.32	0.26
		Bottom Side	0.770				0.77	0.77	0.77
	Band 2	Front	0.555	0.135	0.323	0.264	0.69	0.88	0.82
		Back	0.629	0.135	0.323	0.264	0.76	0.95	0.89
		Left Side	0.301				0.30	0.30	0.30
		Right Side		0.135	0.323	0.264	0.14	0.32	0.26
		Top Side		0.135	0.323	0.264	0.14	0.32	0.26
		Bottom Side	1.064				1.06	1.06	1.06
	Band 7	Front	0.605	0.135	0.323	0.264	0.74	0.93	0.87
		Back	0.911	0.135	0.323	0.264	1.05	1.23	1.18
		Left Side	0.518				0.52	0.52	0.52
		Right Side		0.135	0.323	0.264	0.14	0.32	0.26
		Top Side		0.135	0.323	0.264	0.14	0.32	0.26
		Bottom Side	0.478				0.48	0.48	0.48

16.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850	Front	0.215	0.125	0.537	0.264	0.34	0.75	0.48
		Back	0.325	0.125	0.537	0.264	0.45	0.86	0.59
	GSM1900	Front	0.477	0.125	0.537	0.264	0.60	1.01	0.74
		Back	0.500	0.125	0.537	0.264	0.63	1.04	0.76
WCDMA	Band V	Front	0.191	0.125	0.537	0.264	0.32	0.73	0.46
		Back	0.256	0.125	0.537	0.264	0.38	0.79	0.52
	Band II	Front	0.588	0.125	0.537	0.264	0.71	1.13	0.85
		Back	0.605	0.125	0.537	0.264	0.73	1.14	0.87
	Band IV	Front	0.572	0.125	0.537	0.264	0.70	1.11	0.84
		Back	0.571	0.125	0.537	0.264	0.70	1.11	0.84
LTE	Band 5	Front	0.168	0.125	0.537	0.264	0.29	0.71	0.43
		Back	0.207	0.125	0.537	0.264	0.33	0.74	0.47
	Band 12	Front	0.245	0.125	0.537	0.264	0.37	0.78	0.51
		Back	0.217	0.125	0.537	0.264	0.34	0.75	0.48
	Band 4	Front	0.563	0.125	0.537	0.264	0.69	1.10	0.83
		Back	0.547	0.125	0.537	0.264	0.67	1.08	0.81
	Band 2	Front	0.555	0.125	0.537	0.264	0.68	1.09	0.82
		Back	0.629	0.125	0.537	0.264	0.75	1.17	0.89
	Band 7	Front	0.605	0.125	0.537	0.264	0.73	1.14	0.87
		Back	0.911	0.125	0.537	0.264	1.04	1.45	1.18

Test Engineer: Nick Hu

17. Uncertainty Assessment

Pre KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

18. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [7] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [8] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [10] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [11] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [12] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [13] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_750MHz**DUT: D750V3 - SN:1065**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 750$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.443$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(10.01, 10.01, 10.01); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.30 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 55.12 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 2.21 W/kg; SAR(10 g) = 1.32 W/kg

Maximum value of SAR (measured) = 3.34 W/kg

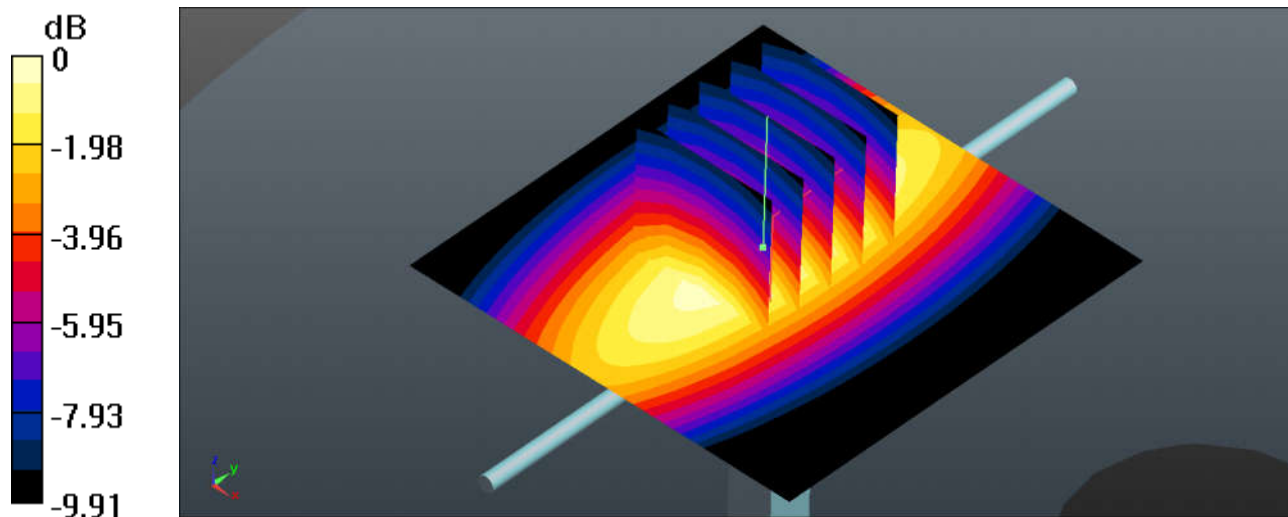

0 dB = 3.34 W/kg = 5.24 dBW/kg

System Check_Head_835MHz**DUT: D835V2 - SN:4d091**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.011$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.73, 9.73, 9.73); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.63 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.79 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 4.08 W/kg

SAR(1 g) = 2.23 W/kg; SAR(10 g) = 1.62 W/kg

Maximum value of SAR (measured) = 3.58 W/kg

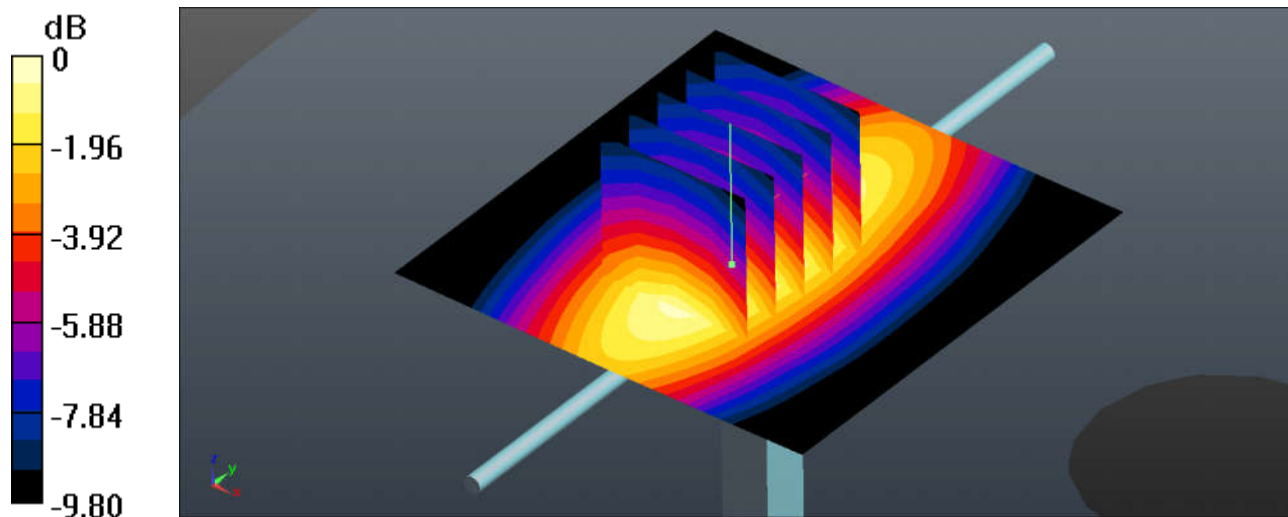

0 dB = 3.58 W/kg = 5.54 dBW/kg

System Check_Head_835MHz

DUT: D835V2-SN:4d162

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 41.793$; $\rho = 1000$

kg/m^3

Ambient Temperature : 23.3°C ; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(10.31, 10.31, 10.31); Calibrated: 2018.01.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2017.12.19
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 3.10 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.60 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.43 W/kg ; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.09 W/kg

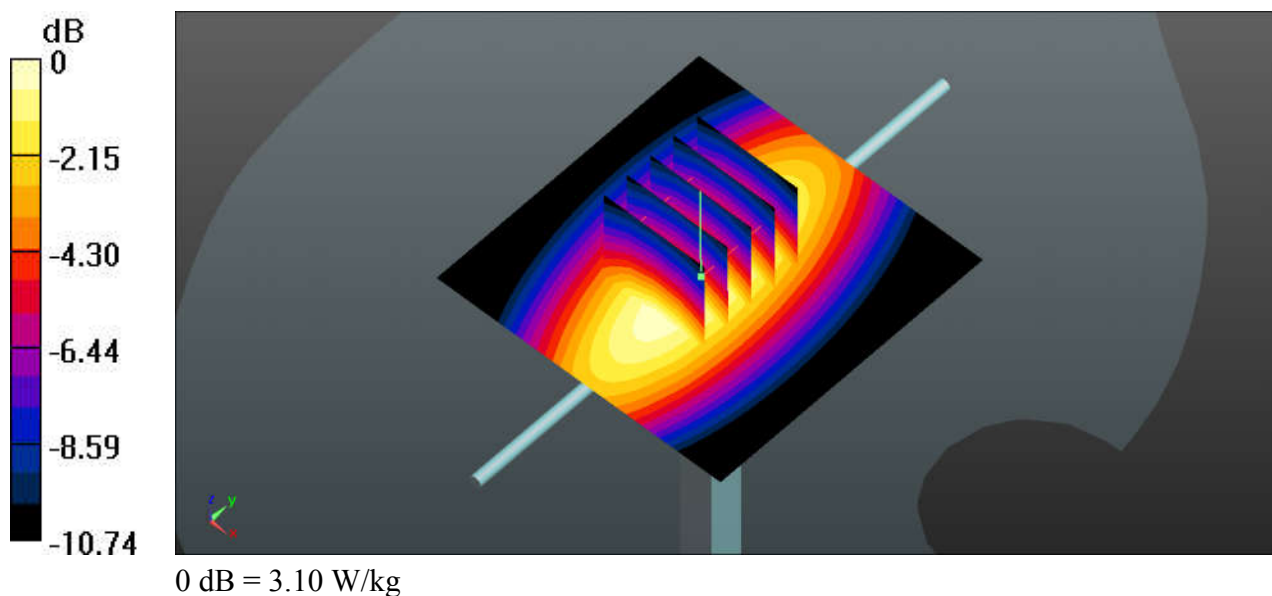

System Check_Head_1750MHz**DUT: D1750V2 - SN:1069**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.209$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.47, 8.47, 8.47); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.6 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 79.89 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 9.01 W/kg; SAR(10 g) = 4.82 W/kg

Maximum value of SAR (measured) = 12.7 W/kg

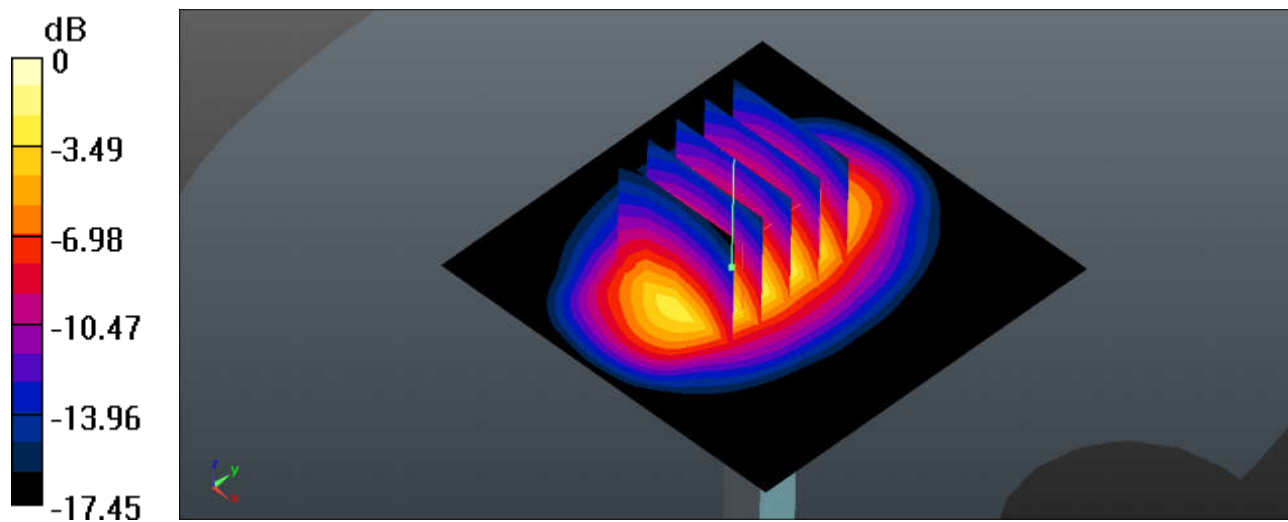

0 dB = 12.7 W/kg = 11.04 dBW/kg

System Check_Head_1900MHz**DUT: D1900V2 - SN:5d118**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 39.102$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.29, 8.29, 8.29); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.8 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.854 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 18.7 W/kg

SAR(1 g) = 10.8 W/kg; SAR(10 g) = 5.67 W/kg

Maximum value of SAR (measured) = 15.1 W/kg

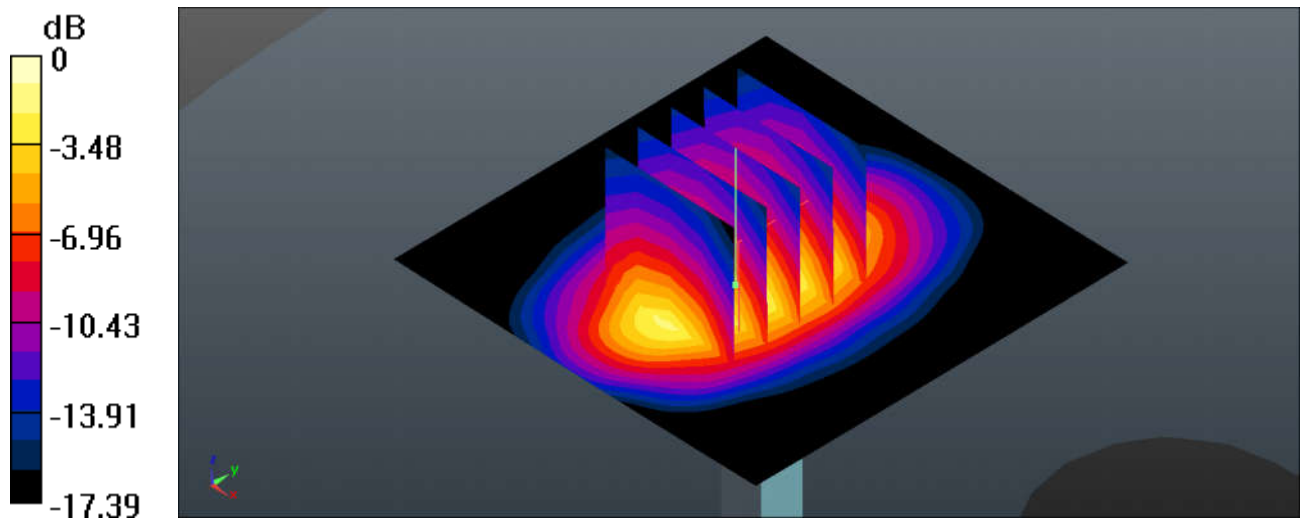

System Check_Head_1900MHz

DUT: D1900V2-SN:5d182

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.994$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(8.43, 8.43, 8.43); Calibrated: 2018.01.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2017.12.19
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.0 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 96.04 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 9.61 W/kg; SAR(10 g) = 5.02 W/kg

Maximum value of SAR (measured) = 13.6 W/kg

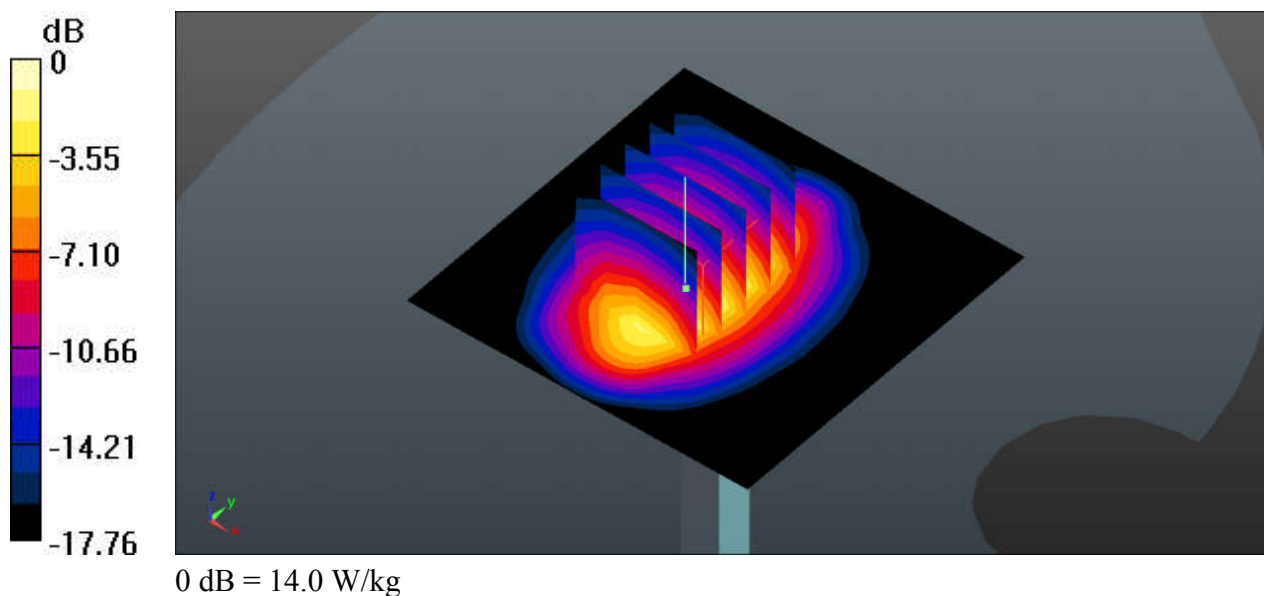

System Check_Head_2450MHz**DUT: D2450V2 - SN:840**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.838$ S/m; $\epsilon_r = 38.505$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.71, 7.71, 7.71); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 22.2 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.18 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 30.0 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.51 W/kg

Maximum value of SAR (measured) = 22.0 W/kg

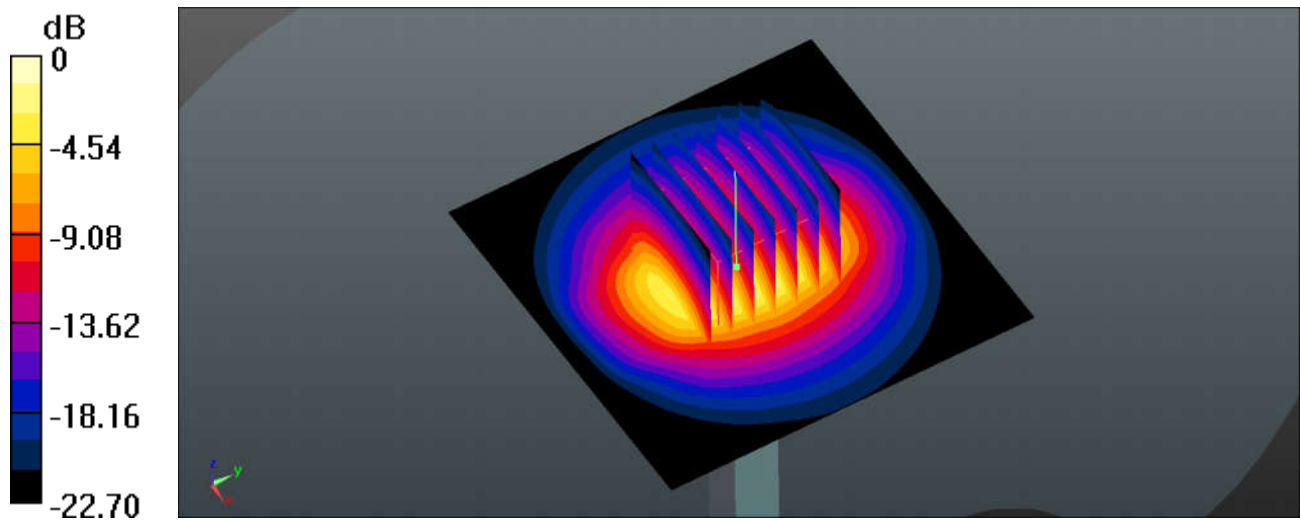

0 dB = 22.0 W/kg = 13.42 dBW/kg

System Check_Head_2600MHz**DUT: D2600V2 - SN:1061**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.051$ S/m; $\epsilon_r = 38.046$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.62, 7.62, 7.62); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 23.6 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 91.26 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 31.9 W/kg

SAR(1 g) = 15.2 W/kg; SAR(10 g) = 6.89 W/kg

Maximum value of SAR (measured) = 23.5 W/kg

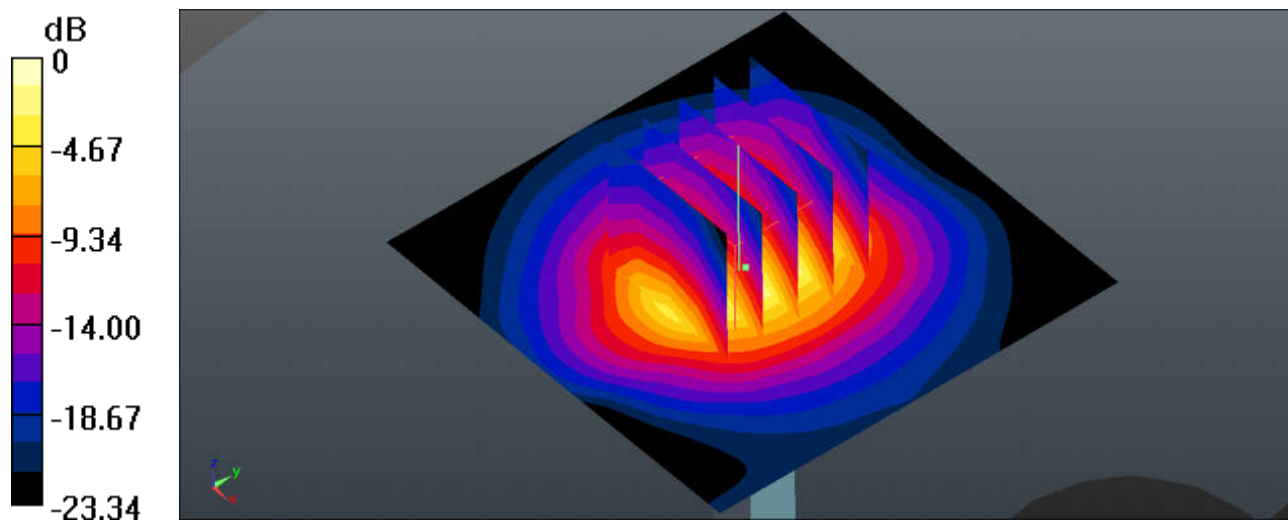

0 dB = 23.5 W/kg = 13.71 dBW/kg

System Check_Head_5250MHz**DUT: D5GHzV2-SN:1113**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.641$ S/m; $\epsilon_r = 37.21$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.39, 5.39, 5.39); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.7 W/kg


CW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.51 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 28.8 W/kg

SAR(1 g) = 7.87 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

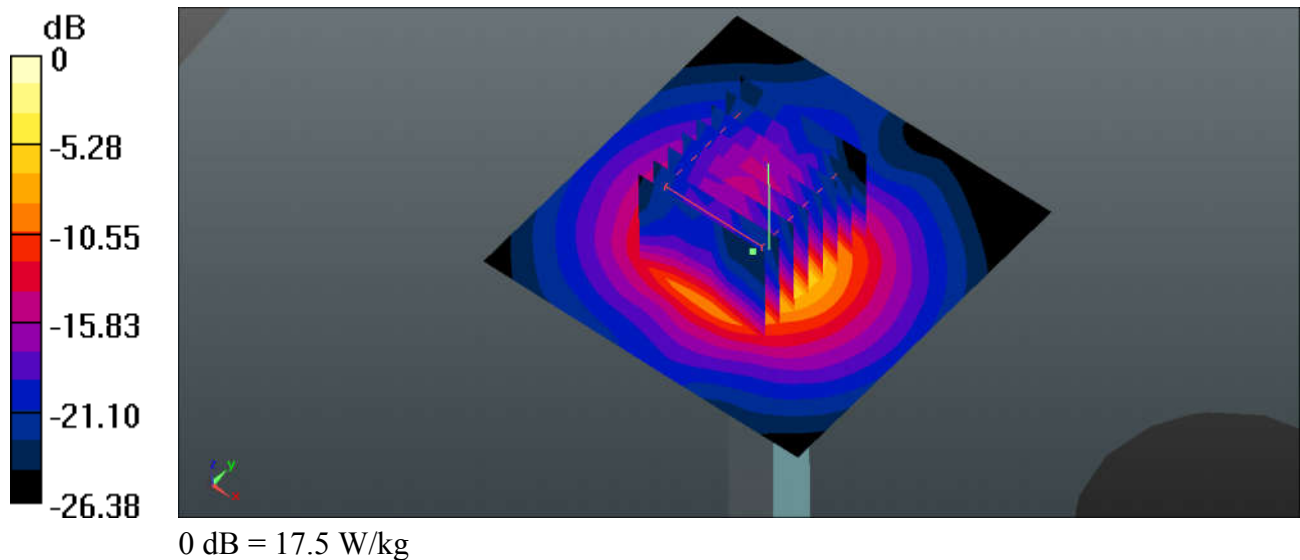

System Check_Head_5600MHz**DUT: D5GHzV2-SN:1113**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.995$ S/m; $\epsilon_r = 35.745$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.04, 5.04, 5.04); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.7 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.14 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 34.2 W/kg

SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

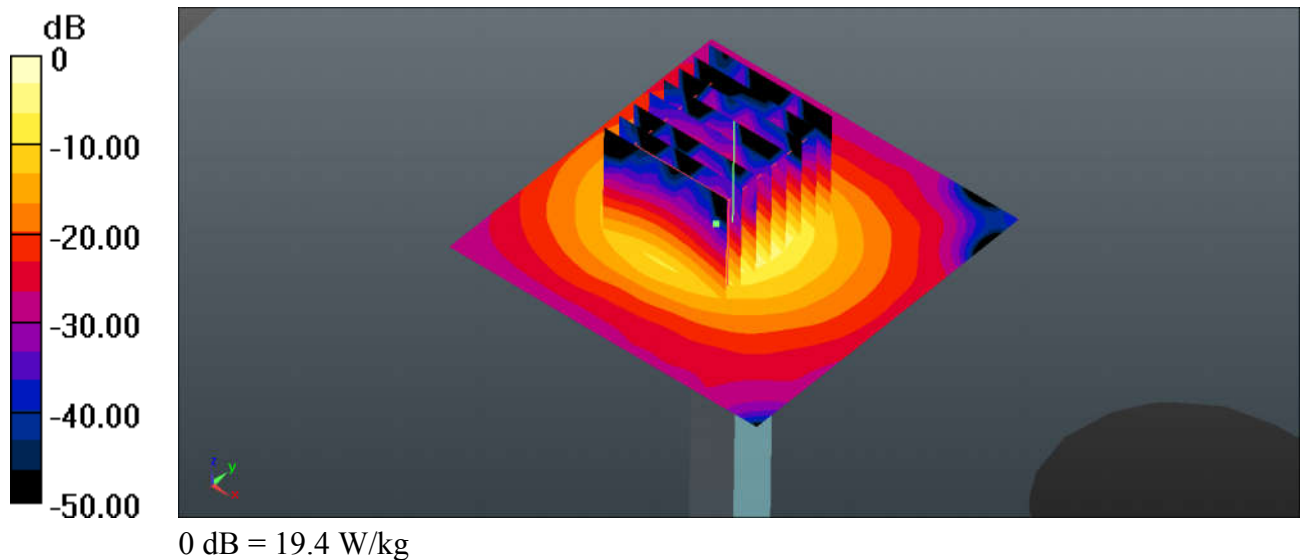

System Check_Head_5750MHz

DUT: D5GHzV2-SN:1167

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5750 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.38$ S/m; $\epsilon_r = 35.936$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(5.24, 5.24, 5.24); Calibrated: 2018.01.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2017.12.19
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 19.8 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 44.49 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 21.1 W/kg

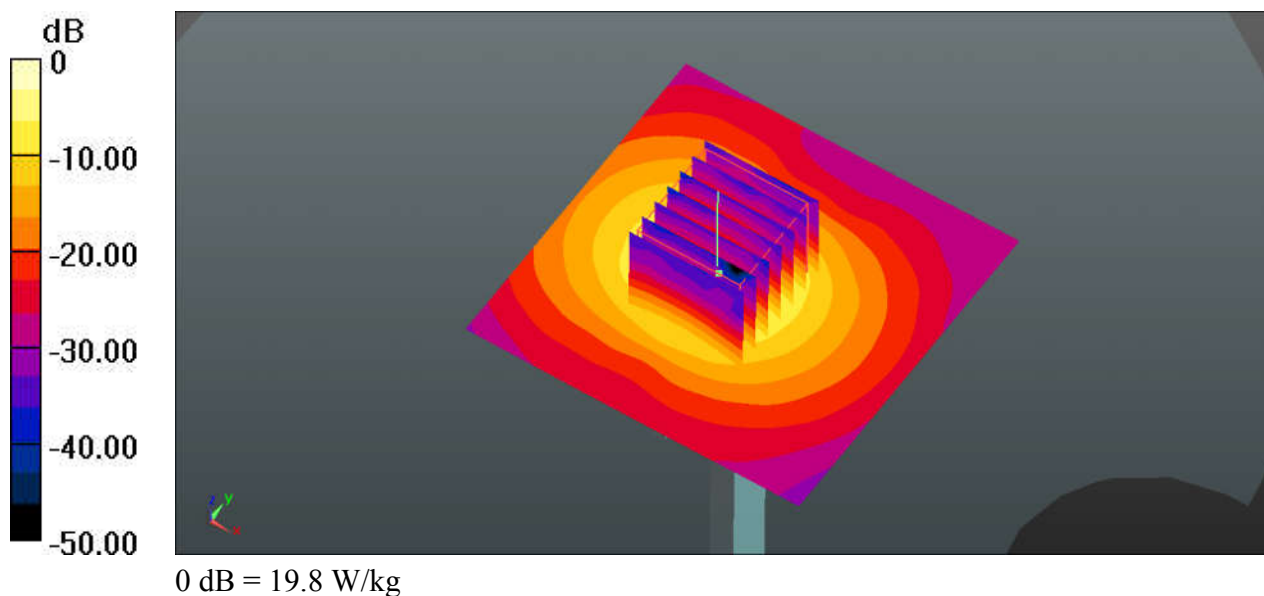

System Check_Body_750MHz**DUT: D750V3 - SN:1065**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL_750 Medium parameters used: $f = 750$ MHz; $\sigma = 0.968$ S/m; $\epsilon_r = 55.693$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.96, 9.96, 9.96); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.85 W/kg



Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.97 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.31 W/kg

SAR(1 g) = 2.3 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 2.86 W/kg

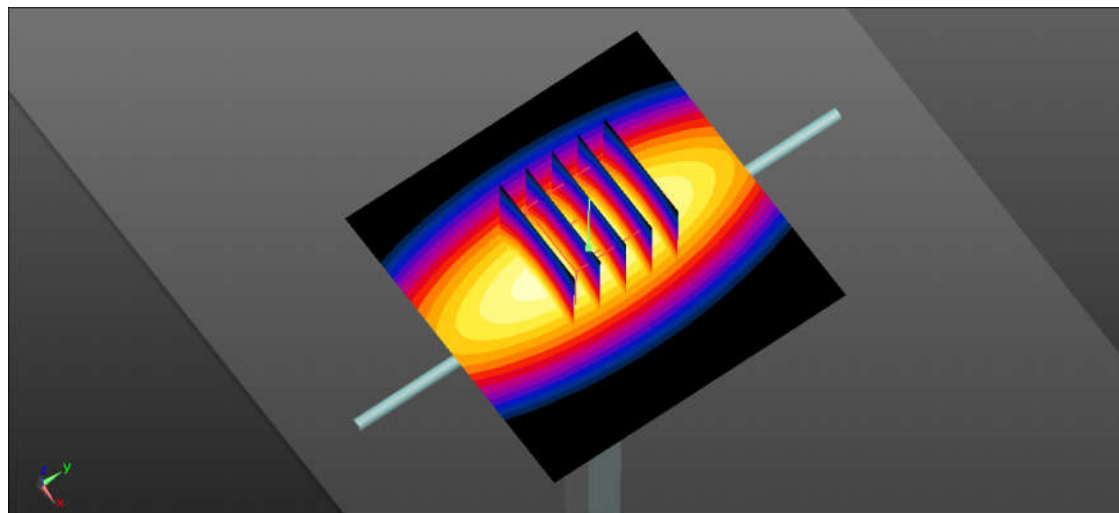

0 dB = 2.86 W/kg = 4.56 dBW/kg

System Check_Body_835MHz**DUT: D835V2 - SN:4d091**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 54.083$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.3°C ; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.72, 9.72, 9.72); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.16 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.23 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.70 W/kg

SAR(1 g) = 2.51 W/kg ; SAR(10 g) = 1.66 W/kg

Maximum value of SAR (measured) = 3.17 W/kg

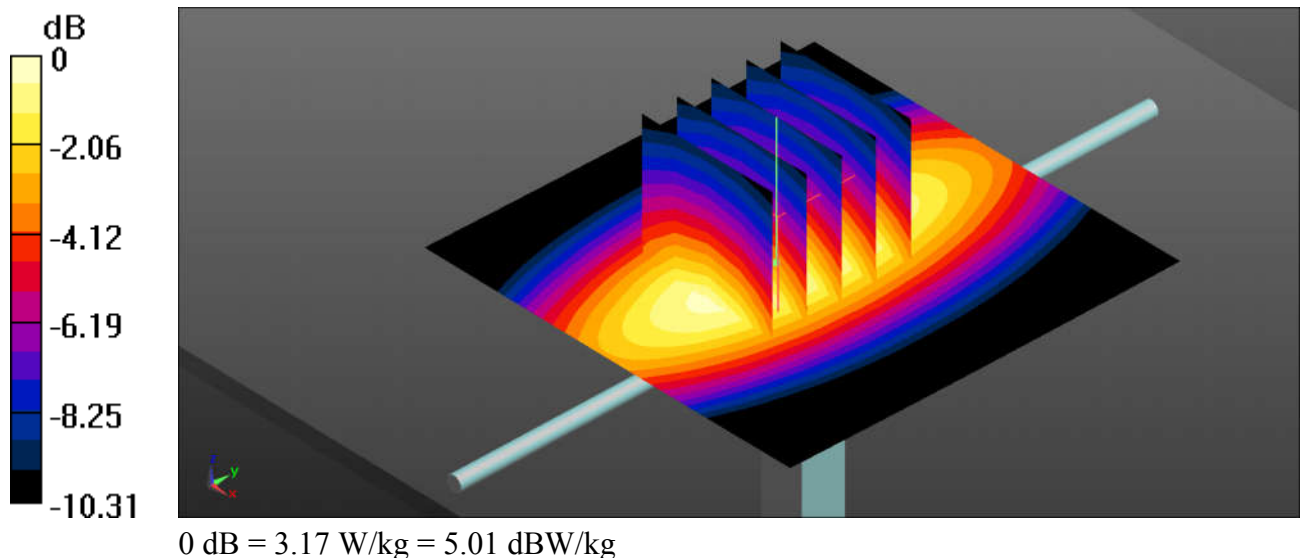

System Check_Body_835MHz

DUT: D835V2-SN:4d162

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.977 \text{ S/m}$; $\epsilon_r = 54.442$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.4°C ; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(10.19, 10.19, 10.19); Calibrated: 2018.01.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2017.12.19
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 3.11 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.24 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.46 W/kg ; SAR(10 g) = 1.62 W/kg

Maximum value of SAR (measured) = 3.12 W/kg

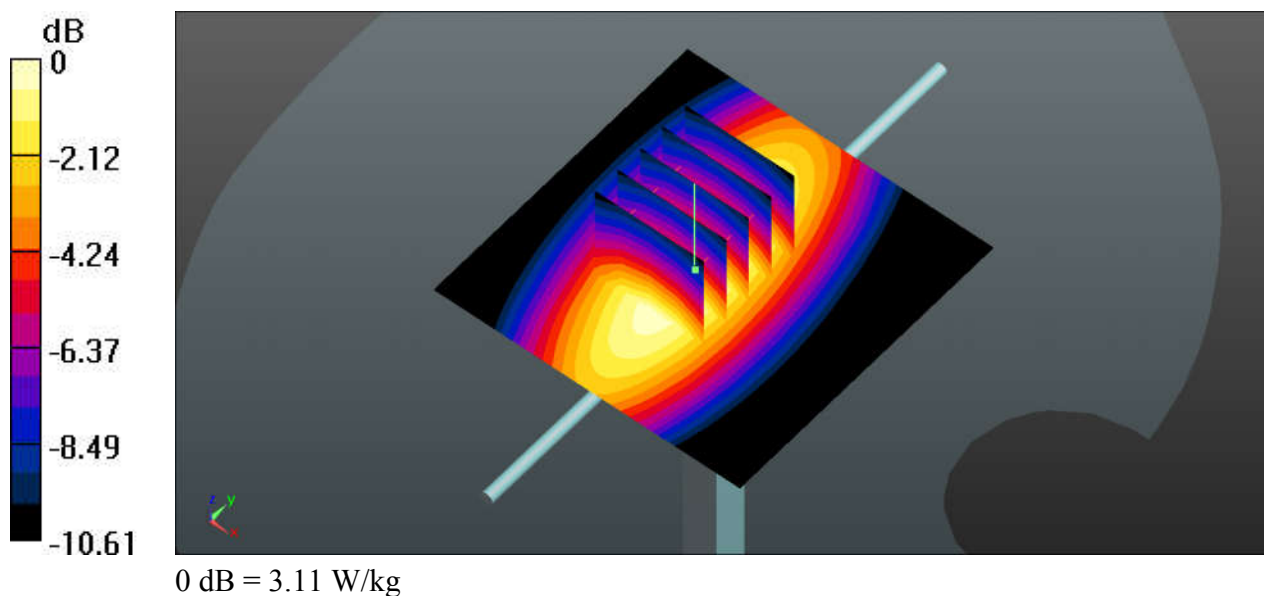

System Check_Body_1750MHz**DUT: D1750V2 - SN:1069**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 53.528$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.29, 8.29, 8.29); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.92 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.49 W/kg; SAR(10 g) = 5.08 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

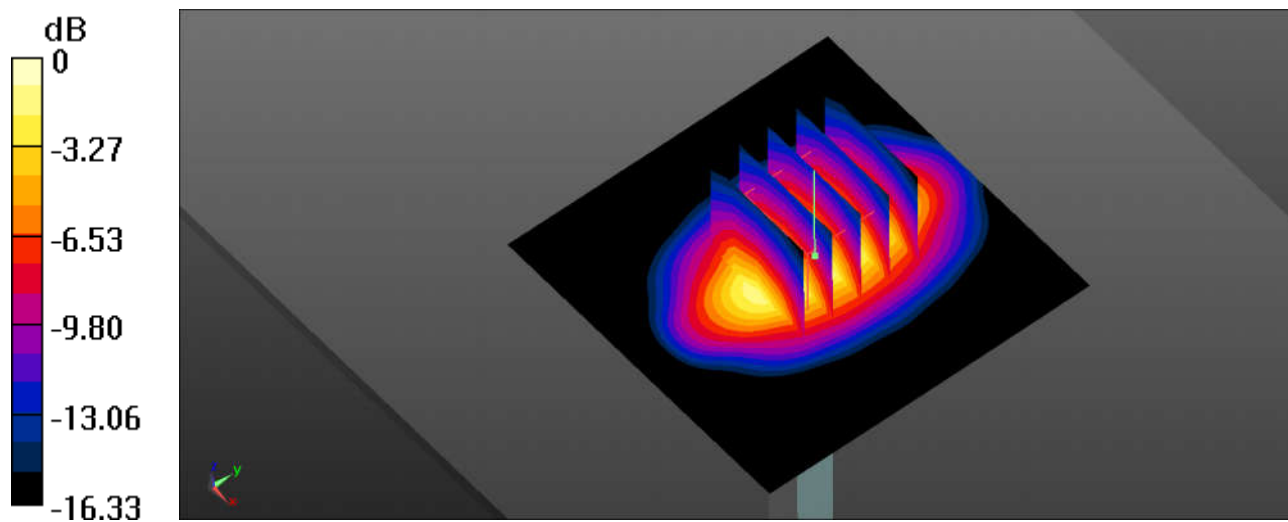

0 dB = 13.4 W/kg = 11.27 dBW/kg

System Check_Body_1900MHz**DUT: D1900V2 - SN:5d118**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.19$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.08, 8.08, 8.08); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.90 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 9.51 W/kg; SAR(10 g) = 4.95 W/kg

Maximum value of SAR (measured) = 13.6 W/kg

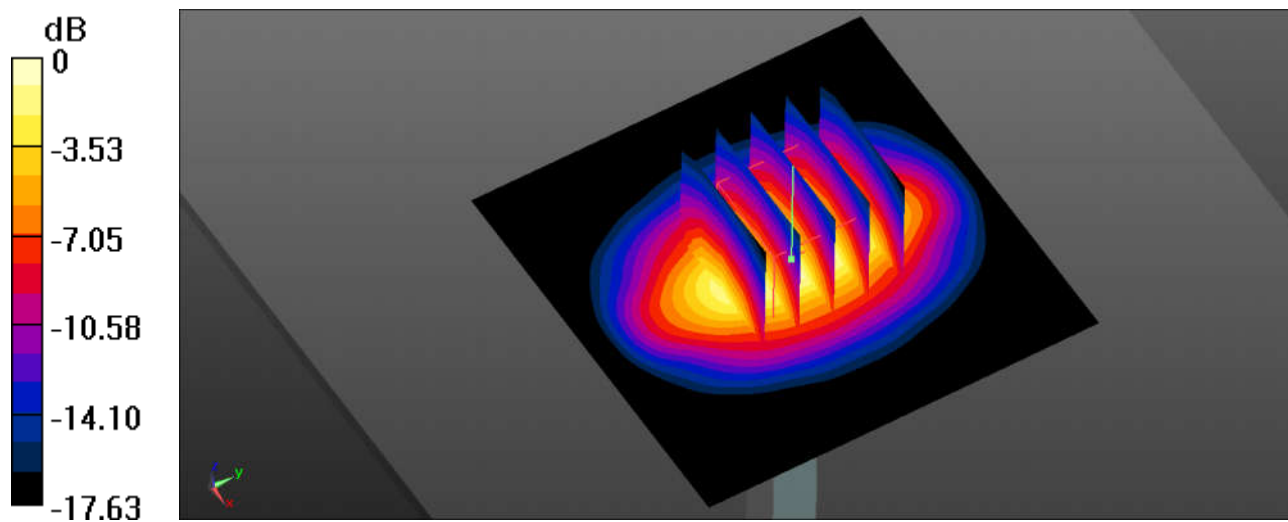

0 dB = 13.6 W/kg = 11.34 dBW/kg

System Check_Body_1900MHz

DUT: D1900V2-SN:5d182

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 53.535$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(8.27, 8.27, 8.27); Calibrated: 2018.01.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2017.12.19
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.0 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 94.89 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 9.62 W/kg; SAR(10 g) = 4.92 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

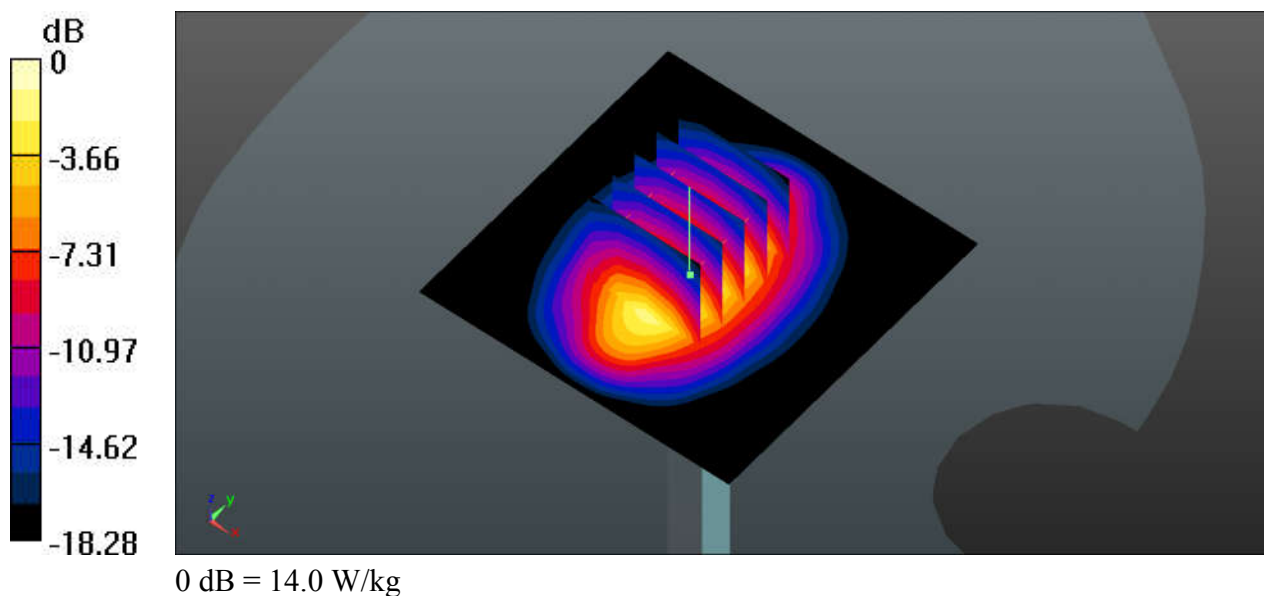

System Check_Body_2450MHz**DUT: D2450V2 - SN:840**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.026$ S/m; $\epsilon_r = 52.75$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.7, 7.7, 7.7); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.3 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 80.90 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 26.3 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.09 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

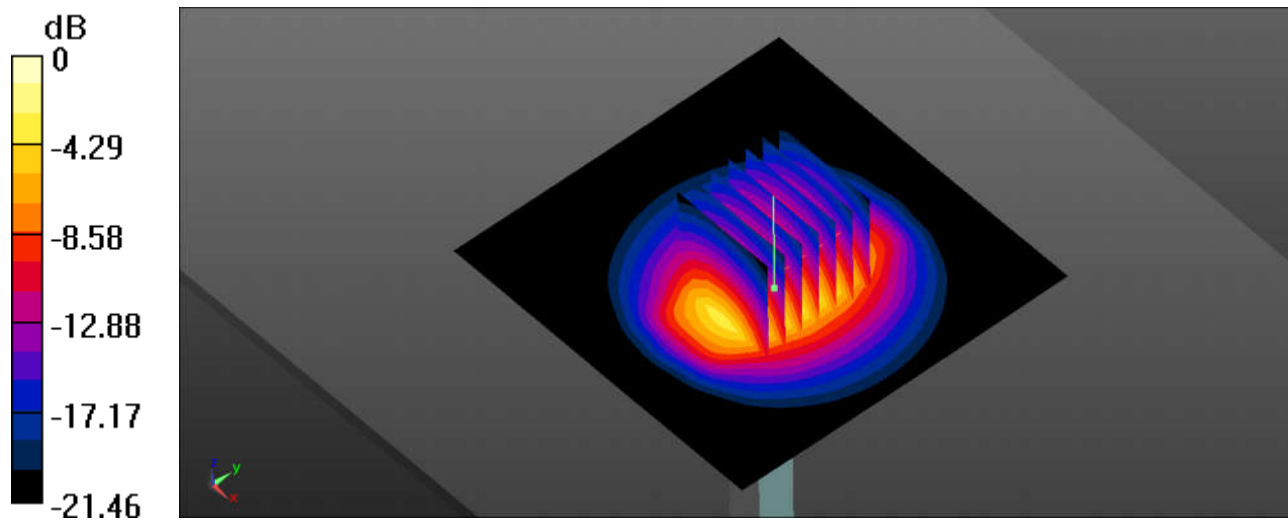

0 dB = 19.8 W/kg = 12.97 dBW/kg

System Check_Body_2600MHz**DUT: D2600V2 - SN:1061**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: MSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.242$ S/m; $\epsilon_r = 52.136$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.59, 7.59, 7.59); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 16.7 W/kg



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 78.38 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 23.1 W/kg

SAR(1 g) = 12.7 W/kg; SAR(10 g) = 6.39 W/kg

Maximum value of SAR (measured) = 18.4 W/kg

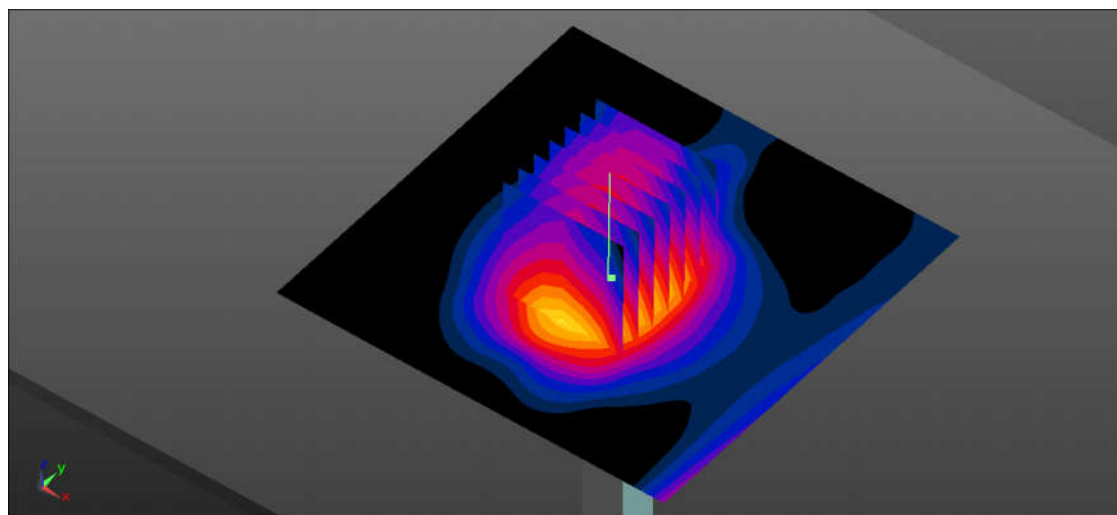

0 dB = 18.4 W/kg = 12.65 dBW/kg

System Check_Body_5250MHz**DUT: D5GHzV2-SN:1113**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: MSL_5000 Medium parameters used: $f = 5250$ MHz; $\sigma = 5.508$ S/m; $\epsilon_r = 47.958$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.72, 4.72, 4.72); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.6 W/kg


CW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 38.72 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 26.4 W/kg

SAR(1 g) = 7.35 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 16.1 W/kg

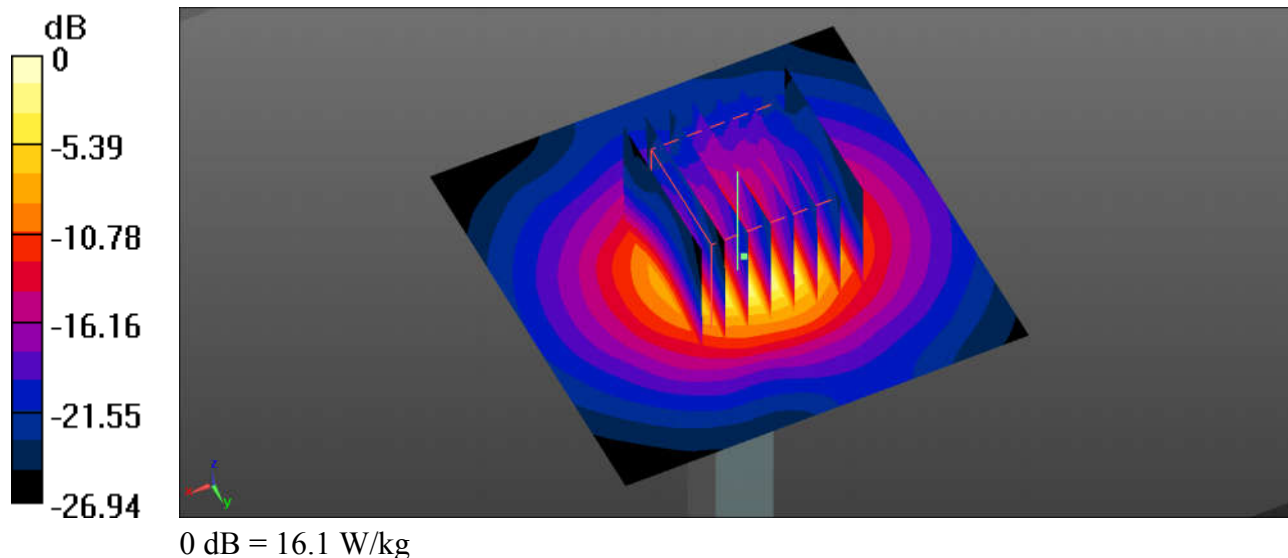

System Check_Body_5600MHz**DUT: D5GHzV2-SN:1113**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: MSL_5000 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.954$ S/m; $\epsilon_r = 47.367$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.01, 4.01, 4.01); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.7 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 36.87 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 31.9 W/kg

SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

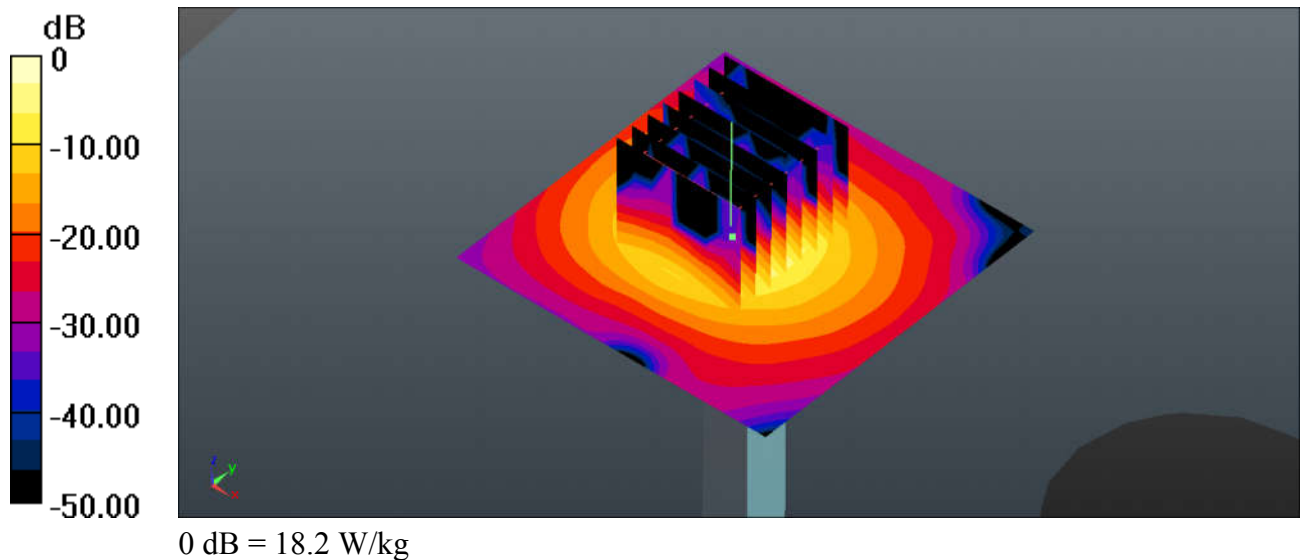

System Check_Body_5750MHz

DUT: D5GHzV2-SN:1167

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: MSL_5750_180226 Medium parameters used: $f = 5750$ MHz; $\sigma = 6.043$ S/m; $\epsilon_r = 49.962$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(4.4, 4.4, 4.4); Calibrated: 2018.01.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2017.12.19
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 19.3 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 43.48 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 34.3 W/kg

SAR(1 g) = 7.35 W/kg; SAR(10 g) = 1.99 W/kg

Maximum value of SAR (measured) = 19.0 W/kg

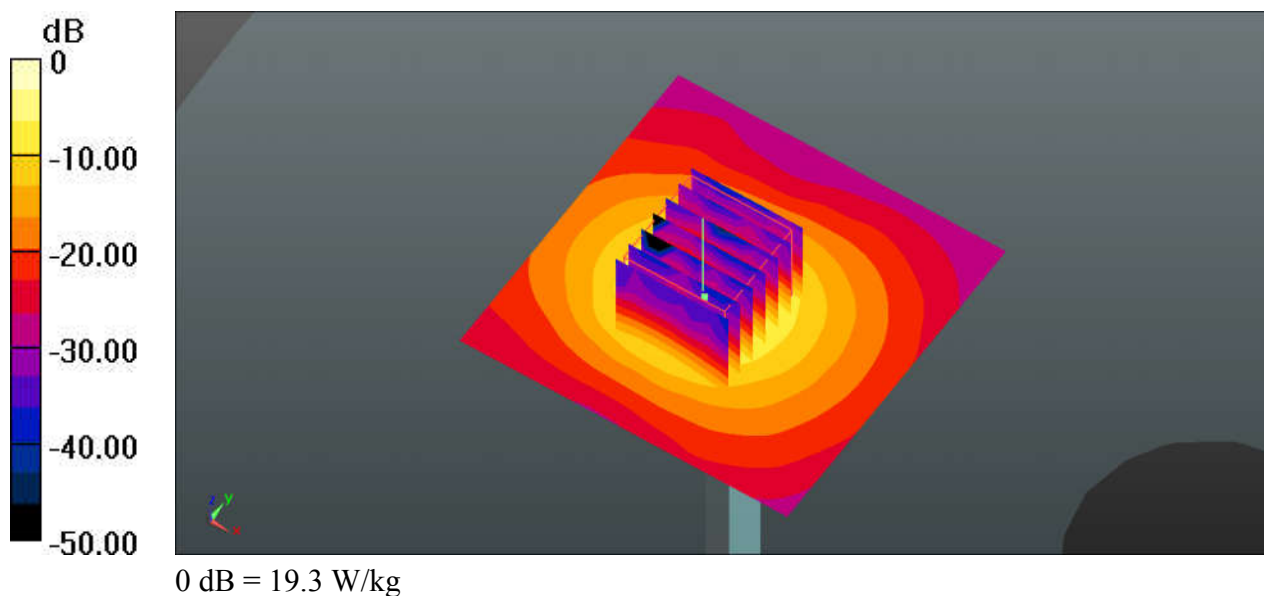



Appendix B. Plots of High SAR Measurement

The plots are shown as follows.

01_GSM850_GPRS 2 Tx slots_Right Cheek_0mm_Ch189_Sample 1

Communication System: UID 0, GPRS/EDGE (2 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:4.15
Medium: HSL_850 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 42.985$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.73, 9.73, 9.73); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch189/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.187 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.927 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

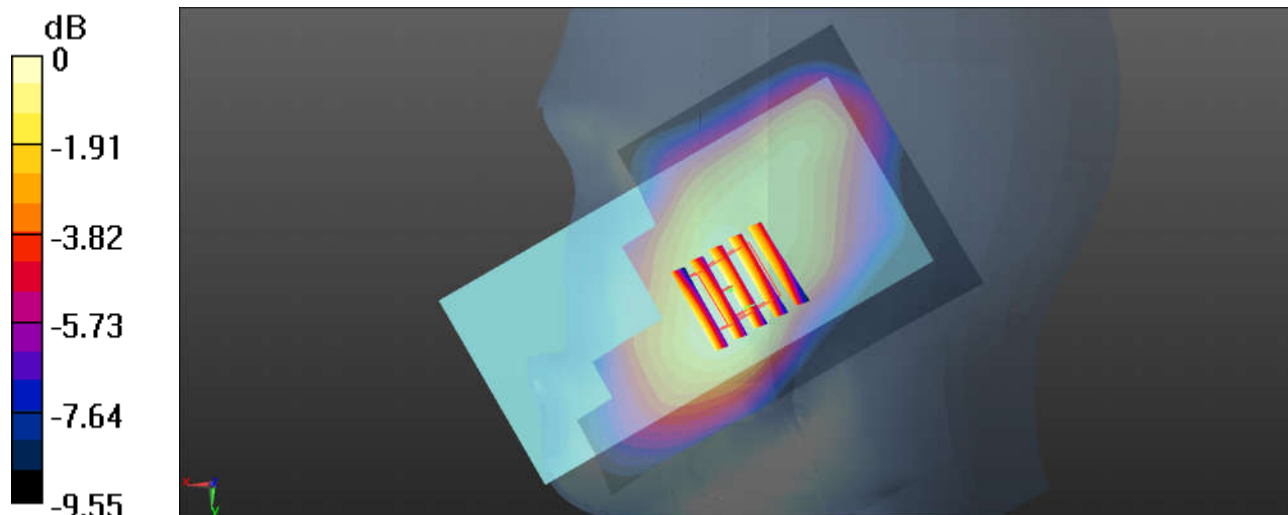

0 dB = 0.193 W/kg = -7.14 dBW/kg

02_GSM1900_GPRS 4 Tx slots_Left Tilted_0mm_Ch661_Sample 2

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.19$;

$$\rho = 1000 \text{ kg/m}^3$$

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.29, 8.29, 8.29); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch661/Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0993 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.782 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.159 W/kg

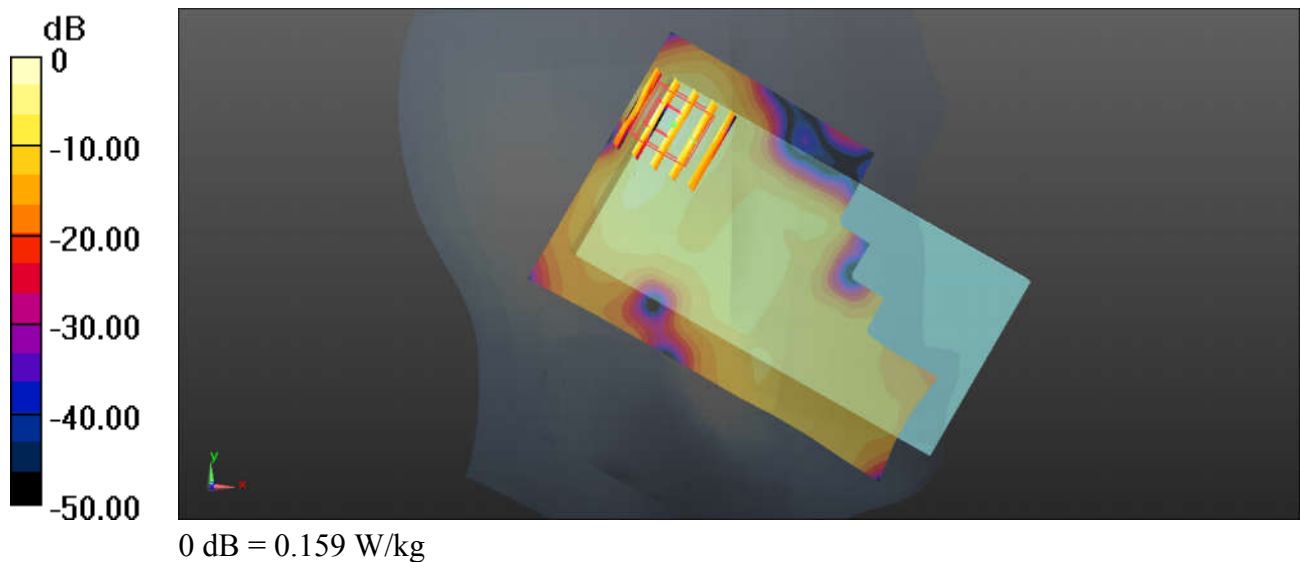

03_WCDMA Band V_RMC 12.2Kbps_Right Cheek_Ch4233_Sample 1

Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: HSL_835 Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.939$ S/m;
 $\epsilon_r = 41.657$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(10.31, 10.31, 10.31); Calibrated: 2018.01.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2017.12.19
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4233/Area Scan (71x131x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.230 W/kg


Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.8940 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.222 W/kg

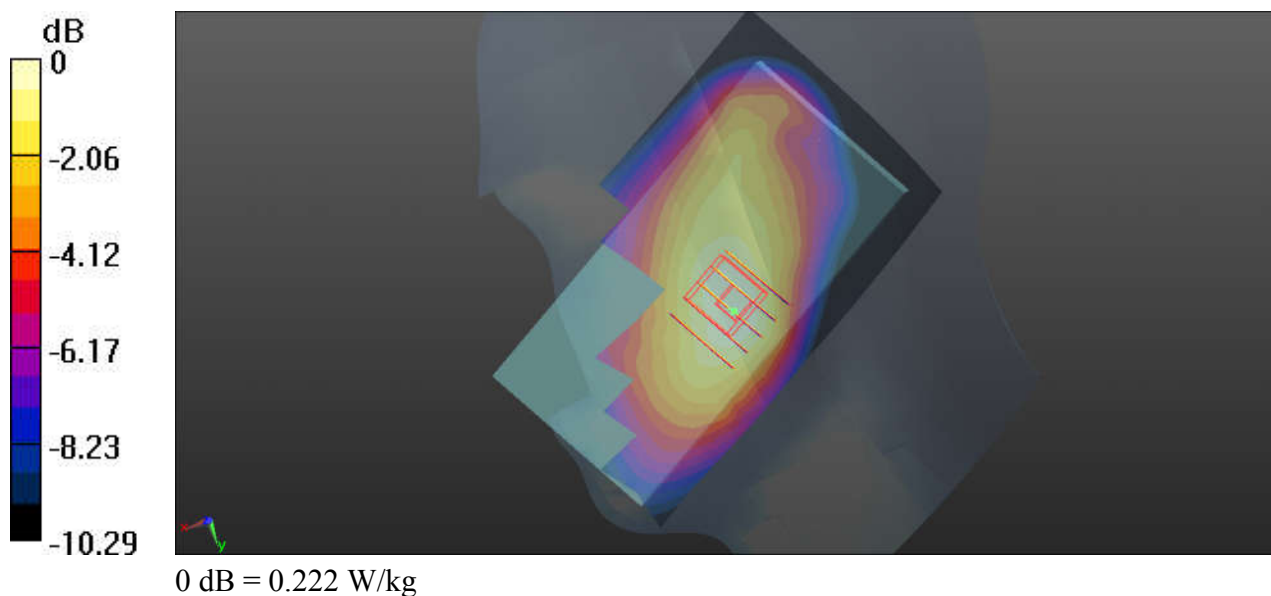

04_WCDMA Band II_RMC 12.2Kbps_Left Cheek_Ch9538_Sample 1

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: HSL_1900_180225 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.426$ S/m;
 $\epsilon_r = 40.977$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(8.43, 8.43, 8.43); Calibrated: 2018.01.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2017.12.19
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9538/Area Scan (71x131x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.179 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.9850 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

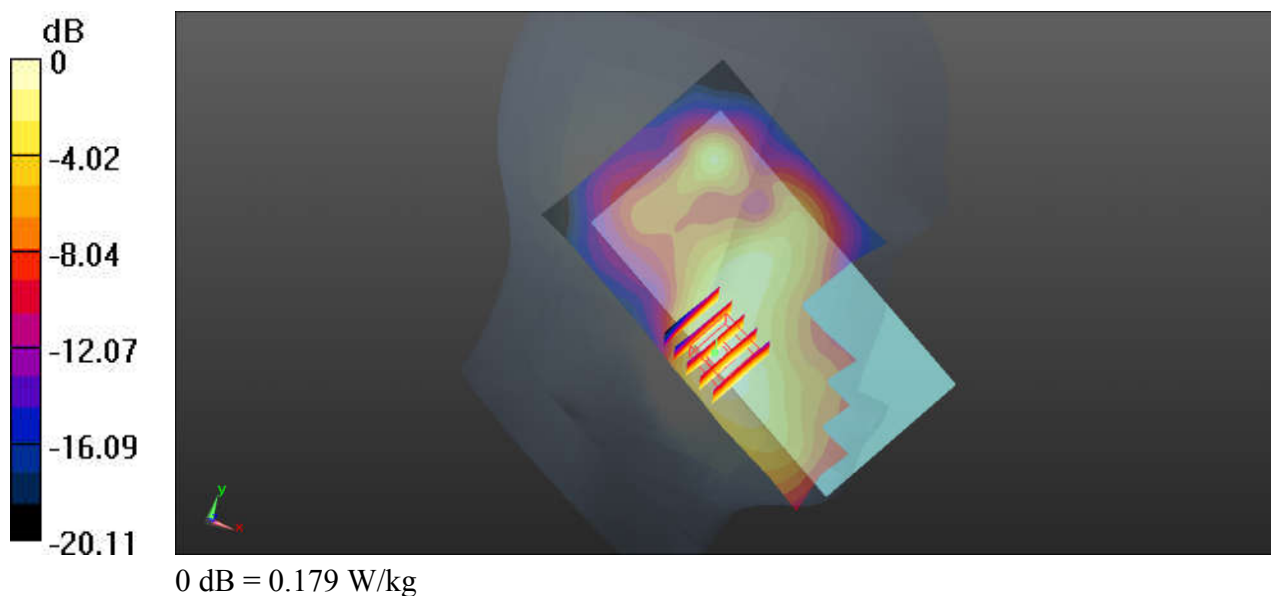

05_WCDMA Band IV_RMC 12.2Kbps_Left Cheek_0mm_Ch1513_Sample 2



Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL_1750 Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.193$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.47, 8.47, 8.47); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1513/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.173 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.777 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.191 W/kg
SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.085 W/kg
Maximum value of SAR (measured) = 0.160 W/kg

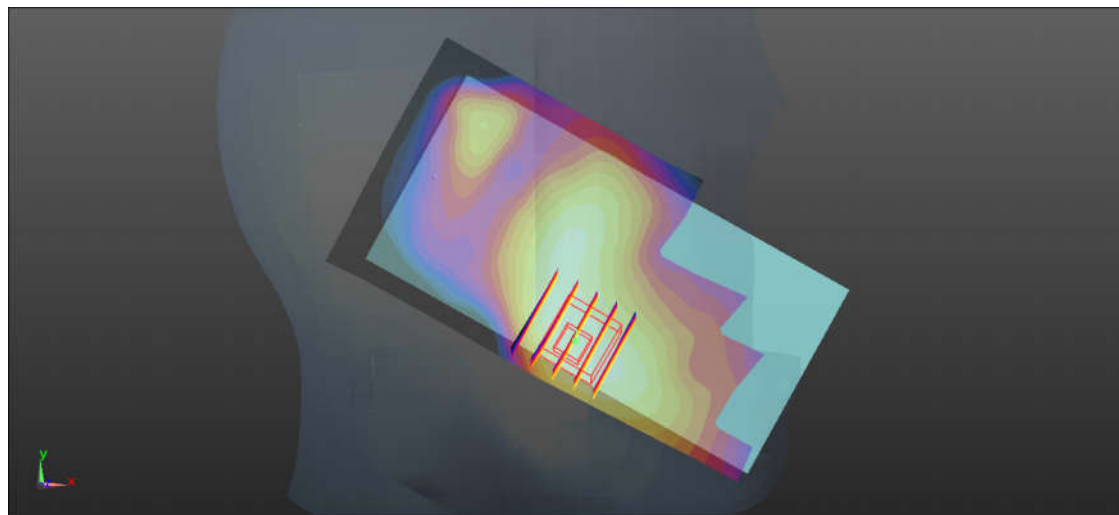

0 dB = 0.160 W/kg

06_LTE Band 5_10M_QPSK_1RB_49Offset_Right Cheek_Ch20525_Sample 1

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_180225 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 41.777$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(10.31, 10.31, 10.31); Calibrated: 2018.01.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2017.12.19
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20525/Area Scan (71x131x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.202 W/kg


Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.8550 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.199 W/kg

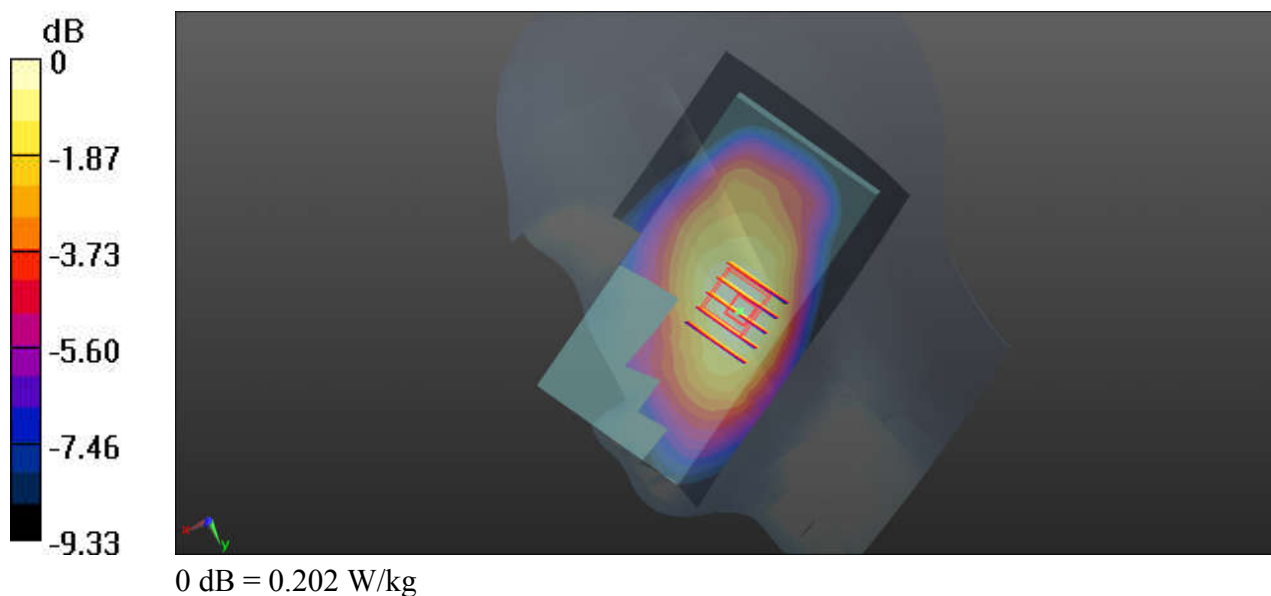

07_LTE Band 12_10M_QPSK_1RB_49Offset_Right Cheek_0mm_Ch23095_Sample 1

Communication System: UID 0, FDD_LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 43.056$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(10.01, 10.01, 10.01); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23095/Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.182 W/kg



Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.361 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

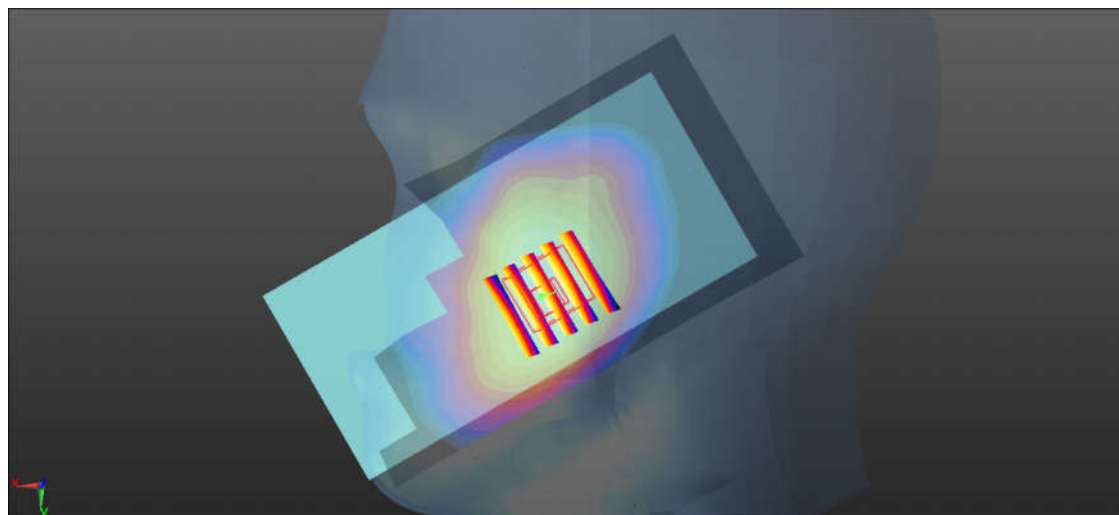

0 dB = 0.181 W/kg = -7.42 dBW/kg

08_LTE Band 4_20M_QPSK_1RB_49Offset_Left Cheek_0mm_Ch20175_Sample 1

Communication System: UID 0, FDD_LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: HSL_1750 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.294$;

$$\rho = 1000 \text{ kg/m}^3$$

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.47, 8.47, 8.47); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20175/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.219 W/kg



Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.211 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.219 W/kg

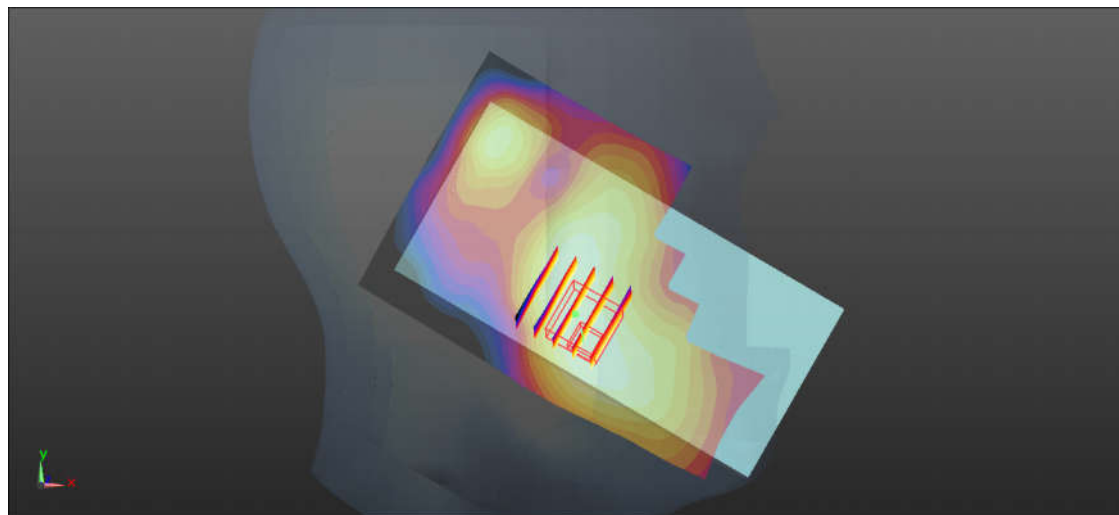

0 dB = 0.219 W/kg

09_LTE Band 2_20M_QPSK_1RB_0Offset_Left Cheek_Ch19100_Sample 1


Communication System: UID 0, LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL_1900_180225 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.994$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(8.43, 8.43, 8.43); Calibrated: 2018.01.11;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2017.12.19
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch19100/Area Scan (71x131x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.140 W/kg

Ch19100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.444 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.180 W/kg
SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.053 W/kg
Maximum value of SAR (measured) = 0.126 W/kg

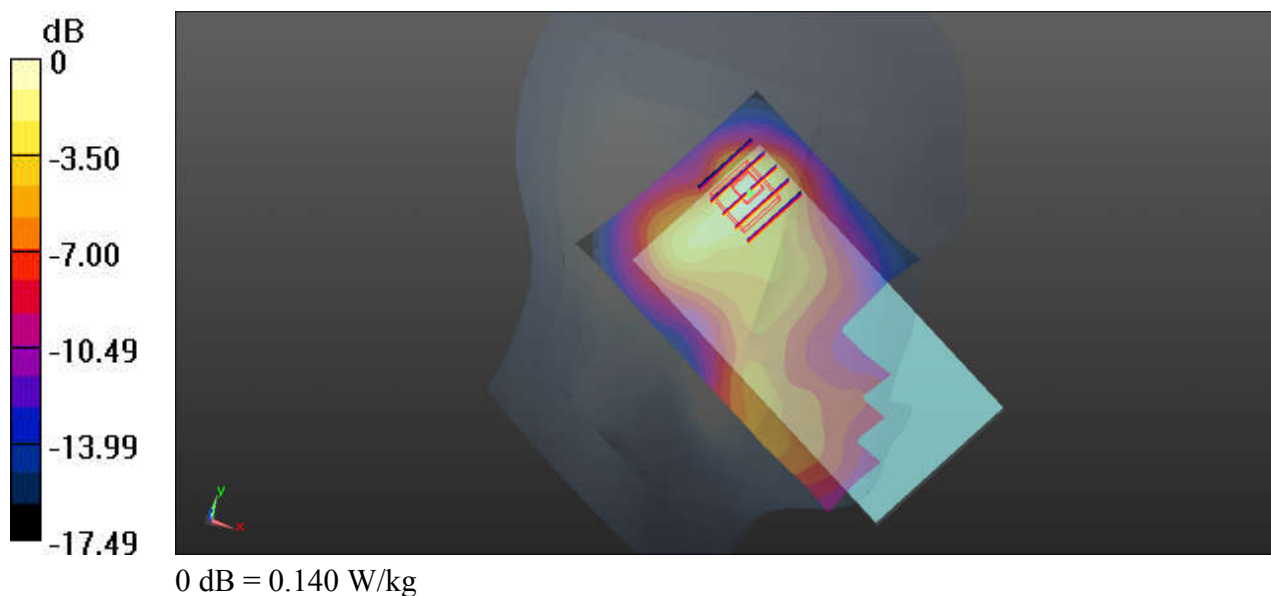

10_LTE Band 7_20M_QPSK_1RB_99Offset_Left Cheek_0mm_Ch21350_Sample 2


Communication System: UID 0, FDD_LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: HSL_2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.002$ S/m; $\epsilon_r = 38.203$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.62, 7.62, 7.62); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch21350/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.728 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.45 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.938 W/kg
SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.267 W/kg
Maximum value of SAR (measured) = 0.714 W/kg

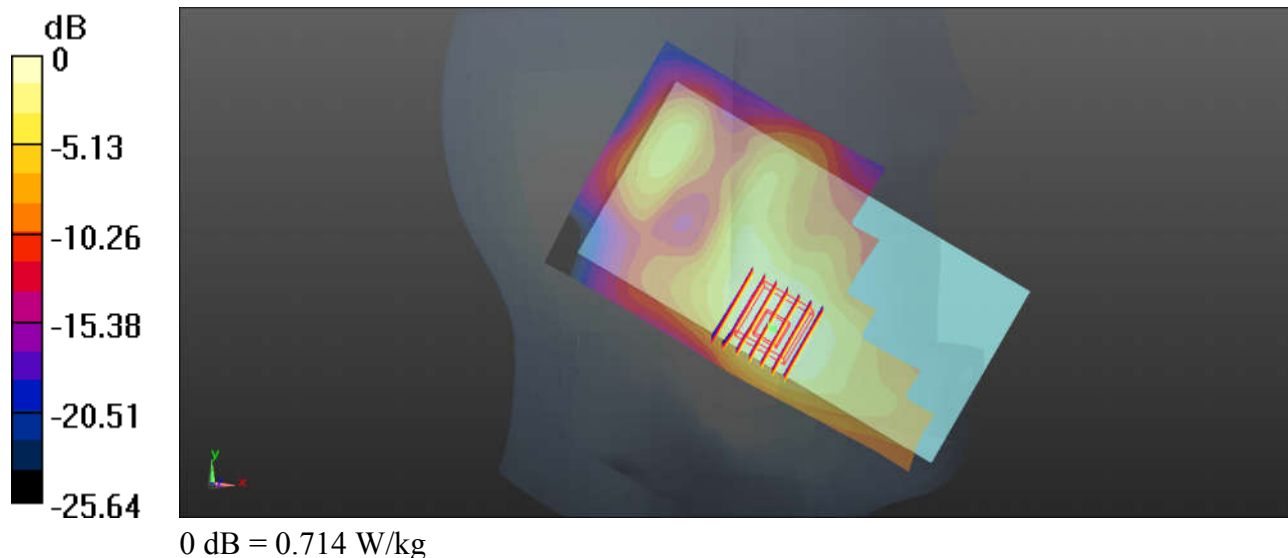

11_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11_Sample 2

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.009
Medium: HSL_2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.851$ S/m; $\epsilon_r = 38.444$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.71, 7.71, 7.71); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch11/Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.42 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.407 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

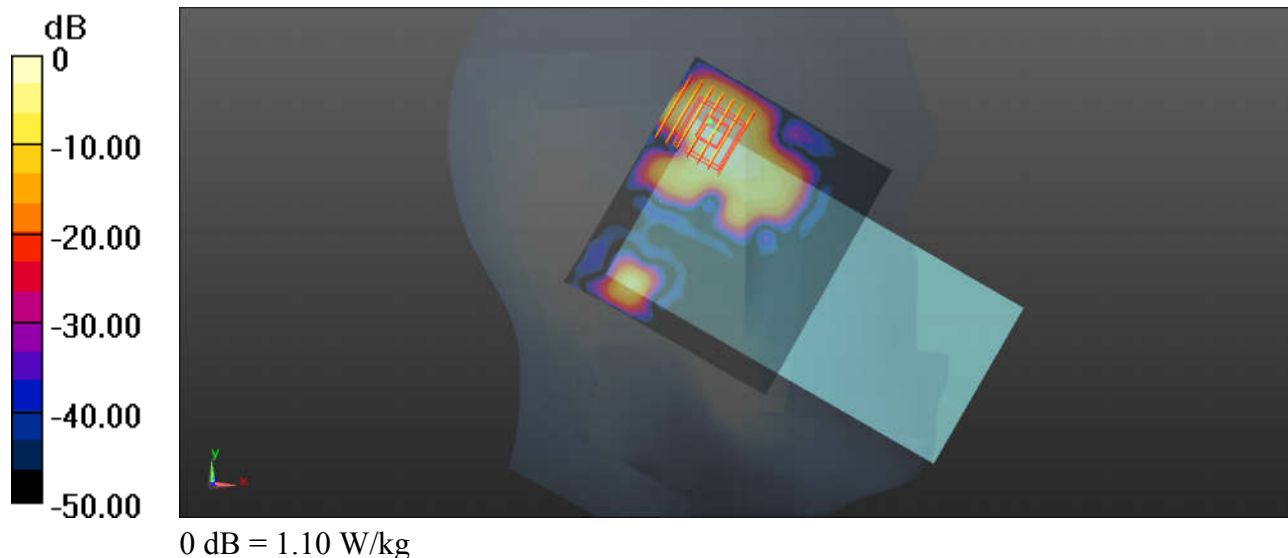

12_WLAN5.3GHz_802.11a 6Mbps_Left Cheek_0mm_Ch56_Sample 1

Communication System: UID 0, WIFI (0); Frequency: 5280 MHz; Duty Cycle: 1:1.063
Medium: HSL_5000 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.186$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.39, 5.39, 5.39); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch56/Area Scan (91x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.54 W/kg


Ch56/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.482 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

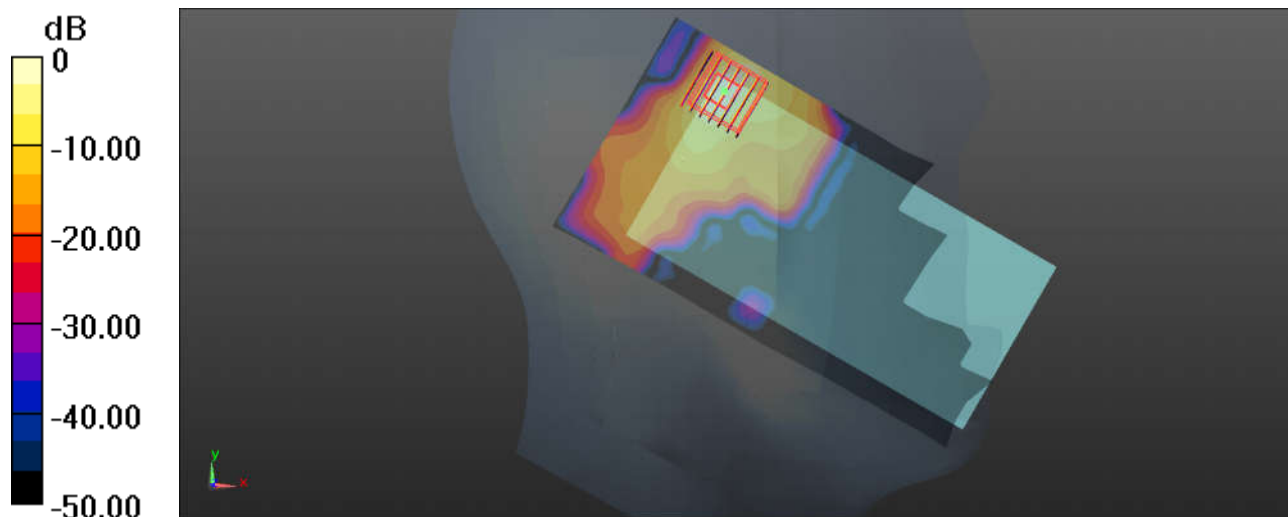

0 dB = 1.69 W/kg = 2.28 dBW/kg

13_WLAN5.5GHz_802.11a 6Mbps_Left Cheek_0mm_Ch132_Sample 1

Communication System: UID 0, WIFI (0); Frequency: 5660 MHz; Duty Cycle: 1:1.063
Medium: HSL_5000 Medium parameters used: $f = 5660$ MHz; $\sigma = 5.061$ S/m; $\epsilon_r = 35.659$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.04, 5.04, 5.04); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.417 W/kg



Ch132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.871 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.841 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.524 W/kg

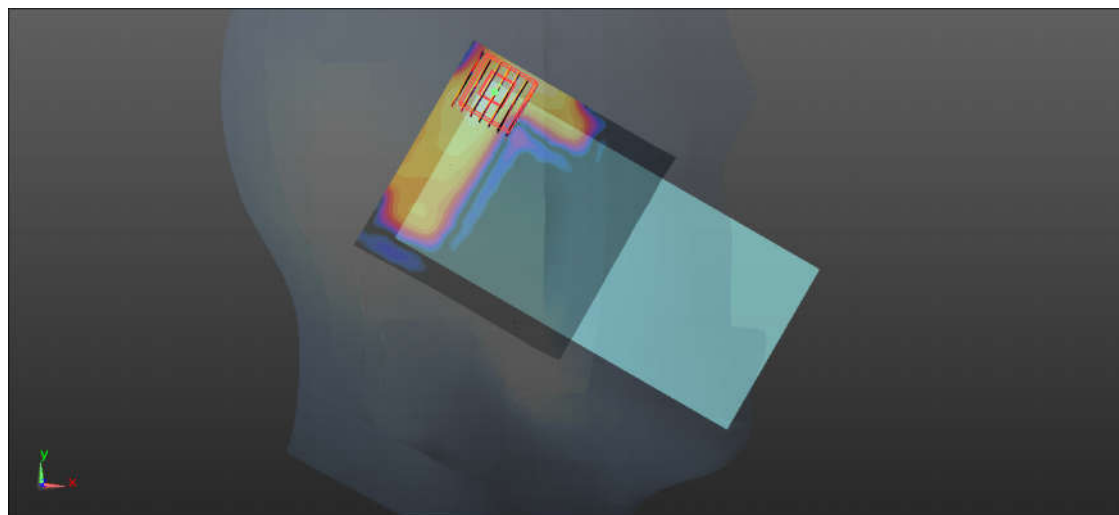

0 dB = 0.524 W/kg = -2.81 dBW/kg