

HAC_E_Dipole_835_180315**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2018/1/19;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid:

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 123.4 V/m; Power Drift = -0.07 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 109.6 V/m

Average value of Total=(109.6+107.6) / 2 = 108.6 V/m

PMF scaled E-field



Grid 1 M4 106.0 V/m	Grid 2 M4 109.6 V/m	Grid 3 M4 108.3 V/m
Grid 4 M4 62.68 V/m	Grid 5 M4 63.73 V/m	Grid 6 M4 63.05 V/m
Grid 7 M4 105.9 V/m	Grid 8 M4 107.6 V/m	Grid 9 M4 105.9 V/m

Cursor:

Total = 109.6 V/m

E Category: M4

Location: -1, -75.5, 9.7 mm

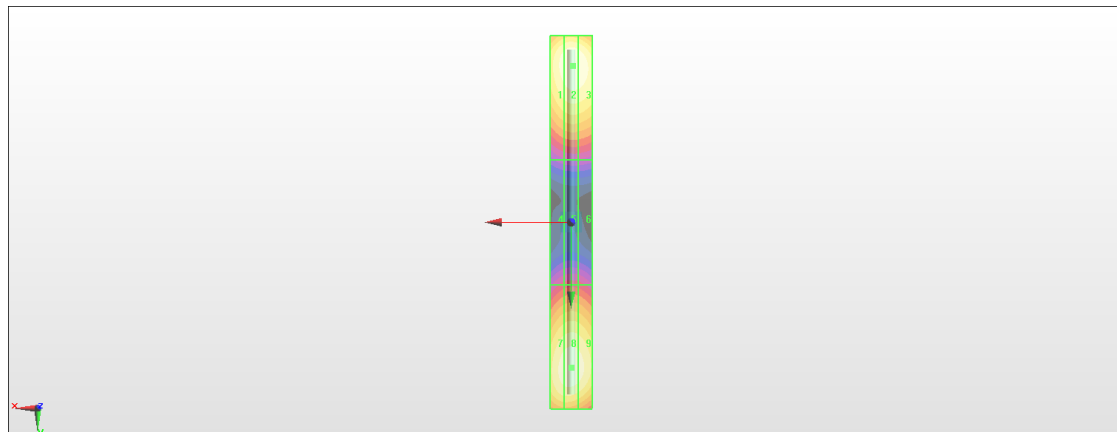

0 dB = 109.6 V/m = 40.80 dBV/m

HAC_E_Dipole_1880_180315**DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2018/1/19;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2017/5/2
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - measurement distance from the probe sensor center to CD1880 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid:

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 147.6 V/m; Power Drift = 0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 88.99 V/m

Average value of Total=(88.99+84.71) / 2 = 86.85 V/m

PMF scaled E-field



Grid 1 M3 88.31 V/m	Grid 2 M3 88.99 V/m	Grid 3 M3 86.51 V/m
Grid 4 M3 69.56 V/m	Grid 5 M3 69.75 V/m	Grid 6 M3 67.91 V/m
Grid 7 M3 83.33 V/m	Grid 8 M3 84.71 V/m	Grid 9 M3 83.69 V/m

Cursor:

Total = 88.99 V/m

E Category: M3

Location: 1, -31, 9.7 mm

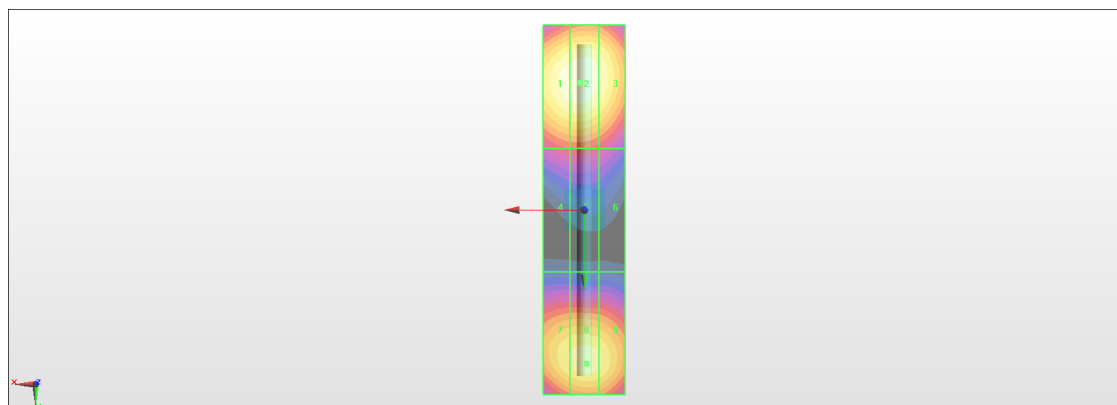

0 dB = 88.99 V/m = 38.99 dBV/m