

## HAC\_E\_Dipole\_835

### DUT: HAC-Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C

#### DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2017/1/19;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn577; Calibrated: 2016/9/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

### E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid:

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 99.31 V/m; Power Drift = -0.05 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 100.4 V/m

Average value of Total=(100.4+97.65) / 2 = 99.025 V/m

PMF scaled E-field



Grid 1 M4 <b>98.44 V/m</b>	Grid 2 M4 <b>100.4 V/m</b>	Grid 3 M4 <b>99.20 V/m</b>
Grid 4 M4 <b>61.72 V/m</b>	Grid 5 M4 <b>62.52 V/m</b>	Grid 6 M4 <b>60.77 V/m</b>
Grid 7 M4 <b>97.21 V/m</b>	Grid 8 M4 <b>97.65 V/m</b>	Grid 9 M4 <b>93.65 V/m</b>

#### Cursor:

Total = 100.4 V/m

E Category: M4

Location: -0.5, -69.5, 9.7 mm

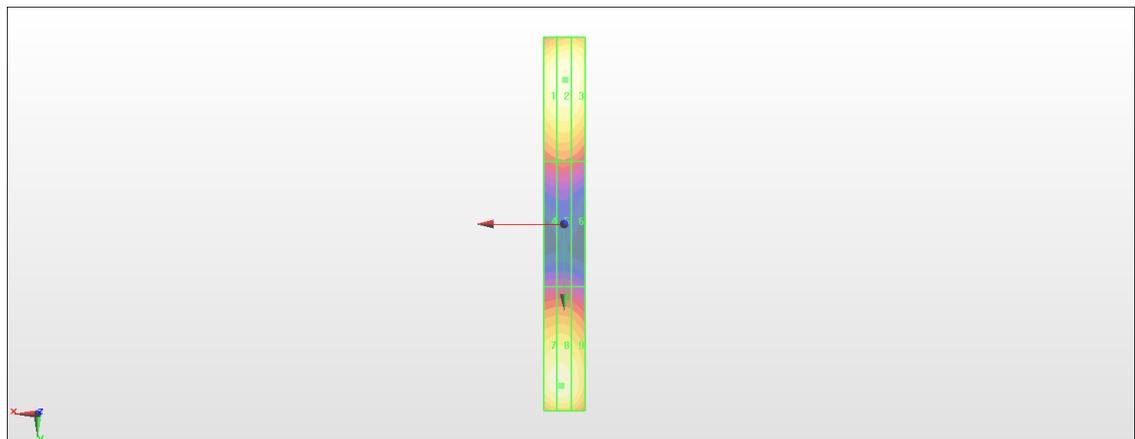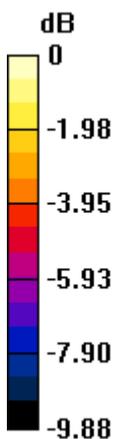

0 dB = 100.4 V/m = 40.03 dBV/m

## HAC\_E\_Dipole\_835

### DUT: HAC-Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.5 °C

#### DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2017/1/19;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2017/5/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

### E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid:

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 122.9 V/m; Power Drift = 0.04 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 114.0 V/m

Average value of Total=(114+108.9) / 2 = 111.3 V/m

PMF scaled E-field



Grid 1 M4 <b>110.5 V/m</b>	Grid 2 M4 <b>114.0 V/m</b>	Grid 3 M4 <b>112.8 V/m</b>
Grid 4 M4 <b>62.51 V/m</b>	Grid 5 M4 <b>63.93 V/m</b>	Grid 6 M4 <b>63.02 V/m</b>
Grid 7 M4 <b>107.1 V/m</b>	Grid 8 M4 <b>108.9 V/m</b>	Grid 9 M4 <b>107.2 V/m</b>

#### Cursor:

Total = 114.0 V/m

E Category: M4

Location: -1, -75.5, 9.7 mm

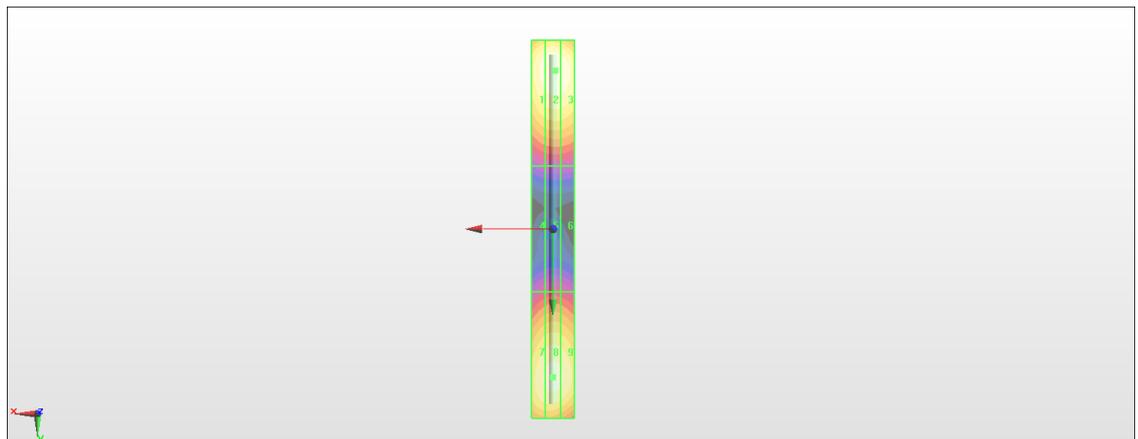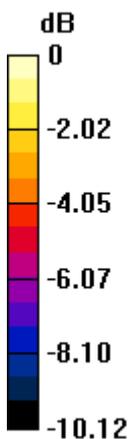

0 dB = 114.0 V/m = 41.14 dBV/m

# HAC\_E\_Dipole\_1880

## DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C

### DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2017/1/19;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn577; Calibrated: 2016/9/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

### E Scan - measurement distance from the probe sensor center to CD1880 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid:



dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 137.3 V/m; Power Drift = 0.02 dB  
 PMR not calibrated. PMF = 1.000 is applied.  
 E-field emissions = 89.72 V/m  
 Average value of Total=(89.05+89.72) / 2 = 89.385 V/m

PMF scaled E-field

Grid 1 <b>M3</b> <b>87.62 V/m</b>	Grid 2 <b>M3</b> <b>89.05 V/m</b>	Grid 3 <b>M3</b> <b>87.57 V/m</b>
Grid 4 <b>M3</b> <b>69.81 V/m</b>	Grid 5 <b>M3</b> <b>70.78 V/m</b>	Grid 6 <b>M3</b> <b>69.82 V/m</b>
Grid 7 <b>M3</b> <b>88.70 V/m</b>	Grid 8 <b>M3</b> <b>89.72 V/m</b>	Grid 9 <b>M3</b> <b>87.64 V/m</b>

#### Cursor:

Total = 89.72 V/m  
 E Category: M3  
 Location: 0.5, 31, 9.7 mm

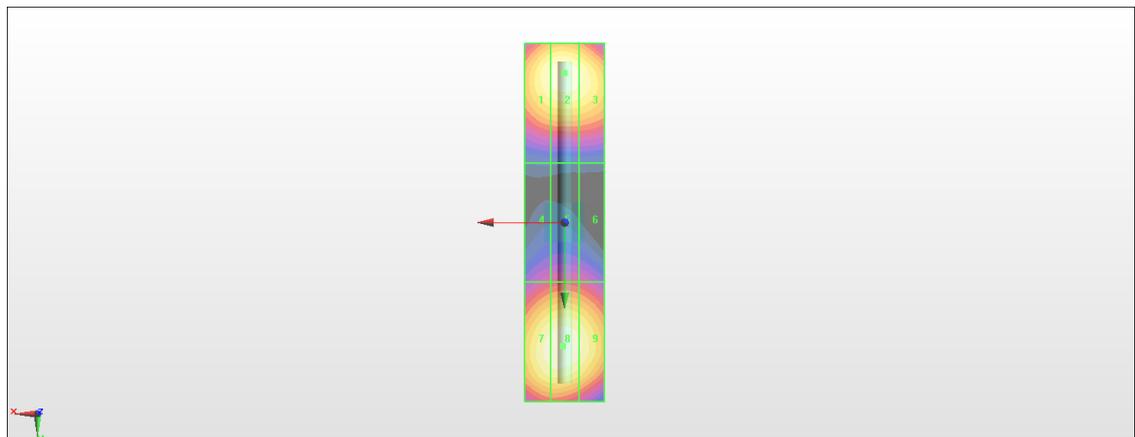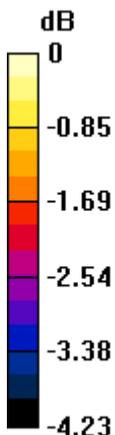

0 dB = 89.72 V/m = 39.06 dBV/m