

## Variant FCC Test Report

### (PART 27)

**Report No.:** RF170425C26A-2

**FCC ID:** MSQZ01KD

**Test Model:** ASUS\_Z01KD

**Received Date:** Aug. 24, 2017

**Test Date:** Oct. 17, 2017

**Issued Date:** Nov. 13, 2017

**Applicant:** ASUSTek COMPUTER INC.

**Address:** 4F, No. 150, LI-TE Rd., PEITOU, TAIPEI 112, TAIWAN

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
( R.O.C )

**Test Location (1):** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan  
Hsien 333, Taiwan, R.O.C.

**Test Location (2):** No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan,  
R.O.C



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agency

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty.....	7
2.2 Test Site and Instruments .....	8
<b>3 General Information .....</b>	<b>9</b>
3.1 General Description of EUT .....	9
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units .....	10
3.3 Test Mode Applicability and Tested Channel Detail .....	11
3.4 EUT Operating Conditions .....	12
3.5 General Description of Applied Standards.....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Output Power Measurement.....	13
4.1.1 Limits of Output Power Measurement .....	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	14
4.1.4 Test Results .....	15
4.2 Radiated Emission Measurement.....	17
4.2.1 Limits of Radiated Emission Measurement .....	17
4.2.2 Test Procedure .....	17
4.2.3 Deviation from Test Standard .....	17
4.2.4 Test Setup.....	18
4.2.5 Test Results .....	19
<b>5 Pictures of Test Arrangements.....</b>	<b>37</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>38</b>

### Release Control Record

Issue No.	Description	Date Issued
RF170425C26A-2	Original Release	Nov. 13, 2017

## 1 Certificate of Conformity

**Product:** ASUS Phone

**Brand:** ASUS

**Test Model:** ASUS\_Z01KD

**Sample Status:** Production Unit

**Applicant:** ASUSTek COMPUTER INC.

**Test Date:** Oct. 17, 2017

**Standards:** FCC Part 27, Subpart C, L

This report is issued as a supplementary report to BV CPS report no.: RF170426C26-2. This report shall be used by combining with its original report.

**Prepared by :** , **Date:** Nov. 13, 2017  
Ivonne Wu / Supervisor

**Approved by :** , **Date:** Nov. 13, 2017  
Dylan Chiou / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (WCDMA)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	N/A	Refer to Note
2.1049 27.53(h)	Occupied Bandwidth	N/A	Refer to Note
27.50(d)(5)	Peak to Average Ratio	N/A	Refer to Note
27.53(h)	Band Edge Measurements	N/A	Refer to Note
2.1051 27.53(h)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -37.95 dB at 3465.20 MHz.

**Note:** Only EIRP and radiated spurious emissions tests had been performed for the addendum. Refer to original report for other test data.

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	N/A	Refer to Note
2.1049 27.53(h)	Occupied Bandwidth	N/A	Refer to Note
27.50(d)(5)	Peak to Average Ratio	N/A	Refer to Note
27.53(h)	Band Edge Measurements	N/A	Refer to Note
2.1051 27.53(h)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -29.00 dB at 5235.00 MHz.

**Note:** Only EIRP and radiated spurious emissions tests had been performed for the addendum. Refer to original report for other test data.

Applied Standard: FCC Part 27 & Part 2 (LTE 12)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(C)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	N/A	Refer to Note
2.1049 27.53(g)	Occupied Bandwidth	N/A	Refer to Note
27.50(d)(5)	Peak to Average Ratio	N/A	Refer to Note
27.53(g)	Band Edge Measurements	N/A	Refer to Note
2.1051 27.53(g)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -26.29 dB at 2122.50 MHz.

**Note:** Only ERP and radiated spurious emissions tests had been performed for the addendum. Refer to original report for other test data.

Applied Standard: FCC Part 27 & Part 2 (LTE 17)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(C)(10)	Maximum Peak Output Power	N/A	Refer to Note
2.1055 27.54	Frequency Stability	N/A	Refer to Note
2.1049 27.53(g)	Occupied Bandwidth	N/A	Refer to Note
27.50(d)(5)	Peak to Average Ratio	N/A	Refer to Note
27.53(g)	Band Edge Measurements	N/A	Refer to Note
2.1051 27.53(g)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 27.53(g)	Radiated Spurious Emissions	N/A	Refer to Note

**Note:** Refer to original report for other test data.

## 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Jul. 05, 2017	Jul. 04, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 13, 2016	Dec. 12, 2017
HORN Antenna ETS-Lindgren	3117	00143293	Jun. 26, 2017	Jun. 25, 2018
Double Ridge Guide Horn Antenna EMCO	3115	5619	Dec. 15, 2016	Dec. 14, 2017
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 13, 2016	Dec. 12, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 14, 2016	Dec. 13, 2017
Fixed Attenuator Mini-Circuits	BW-N10W5+	NA	Jul. 07, 2017	Jul. 06, 2018
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 19, 2016	Oct. 18, 2017
Preamplifier Agilent	310N	187226	Jun. 23, 2017	Jun. 22, 2018
Preamplifier Agilent	83017A	MY39501357	Jun. 23, 2017	Jun. 22, 2018
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(R FC-SMS-100-SM S-120+RFC-SMS -100-SMS-400)	Jun. 26, 2017	Jun. 25, 2018
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(R FC-SMS-100-SM S-24)	Jun. 26, 2017	Jun. 25, 2018
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester-Wireless Agilent	8960 Series 10	MY53201073	Jun. 28, 2017	Jun. 27, 2019
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HsinTien Chamber 1.
3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is IC7450I-1.

### 3 General Information

#### 3.1 General Description of EUT



<b>Product</b>	ASUS Phone	
<b>Brand</b>	ASUS	
<b>Test Model</b>	ASUS_Z01KD	
<b>SKU</b>	BR/NA/SA-2CA US/BR/CO/PE/CL	
<b>Status of EUT</b>	Production Unit	
<b>Power Supply Rating</b>	5.0 Vdc or 9 Vdc (adapter) 5.0 Vdc (host equipment) 3.85 Vdc (Li-ion battery)	
<b>Modulation Type</b>	WCDMA	QPSK
	LTE	QPSK, 16QAM
<b>Frequency Range</b>	WCDMA	1712.4 ~ 1752.6 MHz
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
	LTE Band 17 (Channel Bandwidth: 5 MHz)	706.5 ~ 713.5 MHz
LTE Band 17 (Channel Bandwidth: 10 MHz)	709 ~ 711 MHz	
<b>Max. ERP Power</b>	LTE Band 12 (Channel Bandwidth: 10 MHz)	45.78mW
<b>Max. EIRP Power</b>	WCDMA	127.85mW
	LTE Band 4 (Channel Bandwidth: 20 MHz)	145.38mW
<b>Antenna Type</b>	Fixed Internal Antenna	
<b>Accessory Device</b>	Refer to Note as below	
<b>Data Cable Supplied</b>	Refer to Note as below	

Note:



1. This report is issued as a supplementary report to BV CPS report no.: RF170425C26-2. The difference compared with original report is adding 2<sup>nd</sup> source of front camera and rear camera. Therefore, only ERP/EIRP and radiated spurious emissions tests had been performed for this report.
2. The EUT's accessories list refers to Ext. Pho.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

#### <Radiated Emission Test>

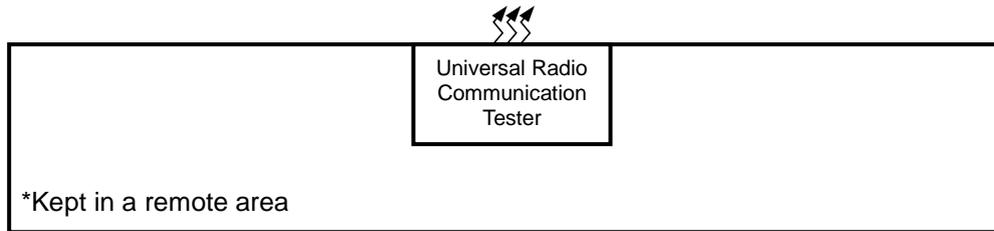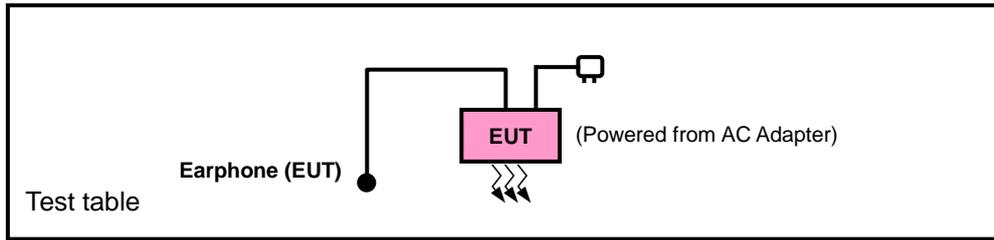

#### <E.R.P. / E.I.R.P. Test>

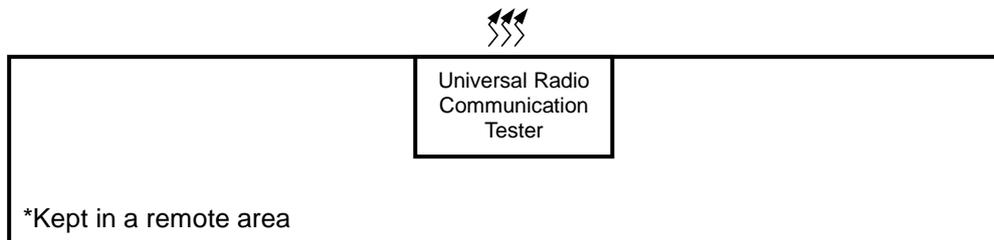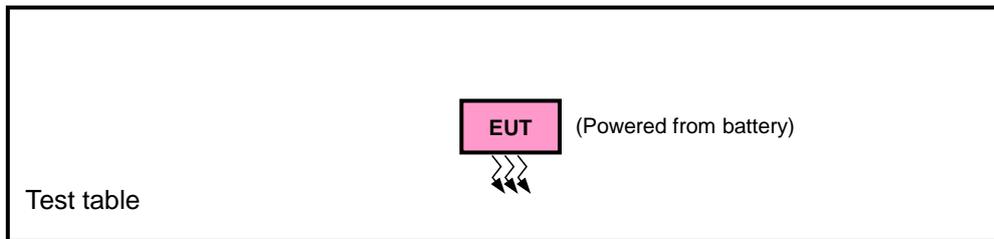

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

SIM	Band	ERP / EIRP	Radiated Emission
1	WCDMA	X-plane	Y-axis
	LTE Band 4	X-plane	Z-axis
	LTE Band 12	Y-plane	Y-axis

#### WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	1312 to 1513	1312, 1413, 1513	WCDMA
-	Radiated Emission	1312 to 1513	1312, 1413, 1513	WCDMA

#### LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset

#### LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 24 RB Offset

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	3.85 Vdc	Charles Hsiao
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Charles Hsiao & Karl Lee

### **3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**KDB 971168 D01 Power Meas License Digital Systems v02r02**

**ANSI/TIA/EIA-603-D 2010**

**Note:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 698-716 MHz band are limited to 3 watts ERP


#### 4.1.2 Test Procedures

##### **EIRP / ERP Measurement:**

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for WCDMA and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ . E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi}$ .

#### 4.1.3 Test Setup

##### EIRP / ERP Measurement:

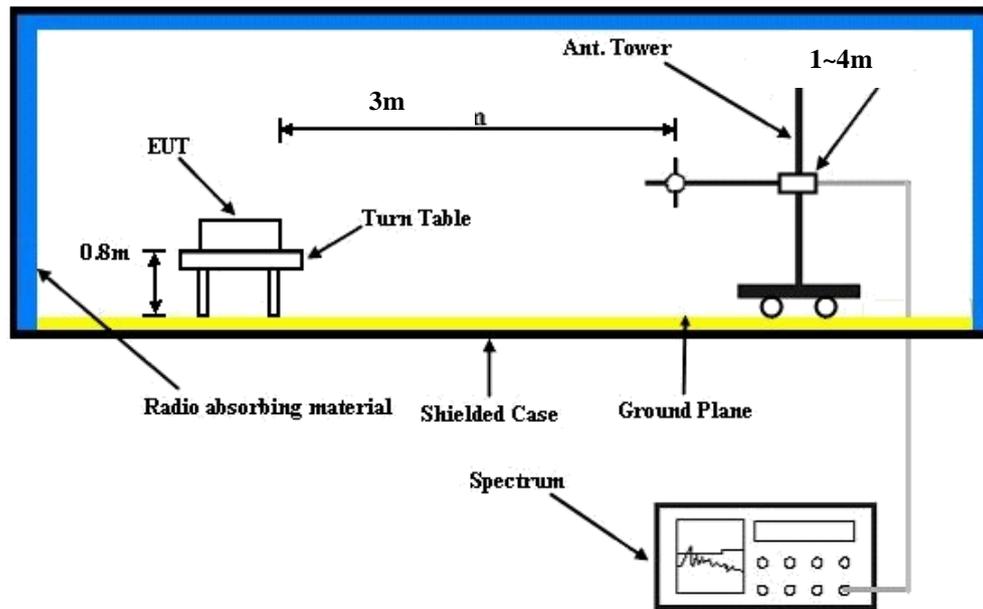

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

**ERP Power (dBm)**

LTE Band 12							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23060	704.0	-13.97	32.727	16.61	45.78	H
	23095	707.5	-14.04	32.739	16.55	45.18	
	23130	711.0	-14.02	32.728	16.56	45.27	
	23060	704.0	-19.00	32.75	11.60	14.45	V
	23095	707.5	-19.15	32.81	11.51	14.16	
	23130	711.0	-19.27	32.84	11.42	13.87	
Channel Bandwidth: 10 MHz / 16QAM							
Y	23060	704.0	-15.04	32.727	15.54	35.78	H
	23095	707.5	-15.12	32.739	15.47	35.23	
	23130	711.0	-15.09	32.728	15.49	35.38	
	23060	704.0	-20.03	32.75	10.57	11.40	V
	23095	707.5	-20.18	32.81	10.48	11.17	
	23130	711.0	-20.24	32.84	10.45	11.09	

**EIRP Power (dBm)**

WCDMA							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	1312	1712.4	-21.46	42.49	21.03	126.62	H
	1413	1732.6	-21.26	42.33	21.07	127.85	
	1513	1752.6	-21.05	42.10	21.05	127.35	
	1312	1712.4	-25.90	42.99	17.09	51.17	V
	1413	1732.6	-25.68	42.74	17.06	50.82	
	1513	1752.6	-25.11	42.21	17.10	51.29	

LTE Band 4							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20050	1720.0	-20.86	42.49	21.63	145.38	H
	20175	1732.5	-20.84	42.33	21.49	140.83	
	20300	1745.0	-20.59	42.10	21.51	141.58	
	20050	1720.0	-25.44	42.99	17.55	56.89	V
	20175	1732.5	-25.30	42.74	17.44	55.46	
	20300	1745.0	-24.64	42.21	17.57	57.15	
Channel Bandwidth: 20 MHz / 16QAM							
X	20050	1720.0	-22.04	42.49	20.45	110.79	H
	20175	1732.5	-21.79	42.33	20.54	113.16	
	20300	1745.0	-21.50	42.10	20.60	114.82	
	20050	1720.0	-26.48	42.99	16.51	44.77	V
	20175	1732.5	-26.30	42.74	16.44	44.06	
	20300	1745.0	-25.66	42.21	16.55	45.19	

## 4.2 Radiated Emission Measurement

### 4.2.1 Limits of Radiated Emission Measurement

- a. The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission is equal to -13 dBm.

### 4.2.2 Test Procedure


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15 dBi.

**Note:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

### 4.2.3 Deviation from Test Standard

No deviation.

#### 4.2.4 Test Setup

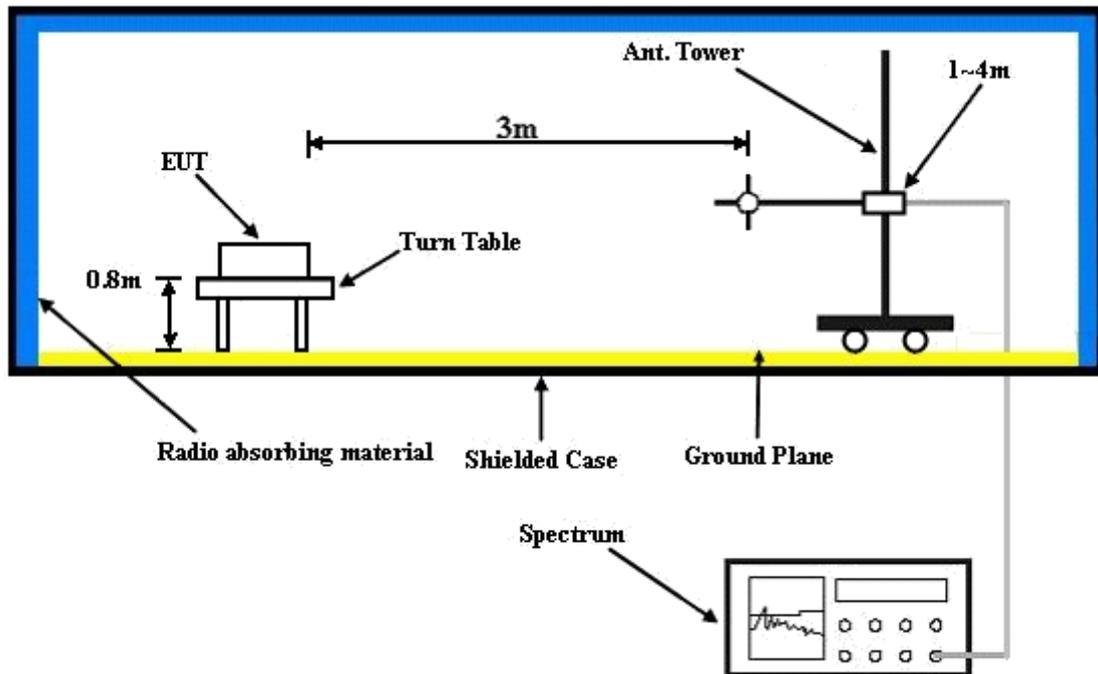

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

WCDMA:  
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-10-17

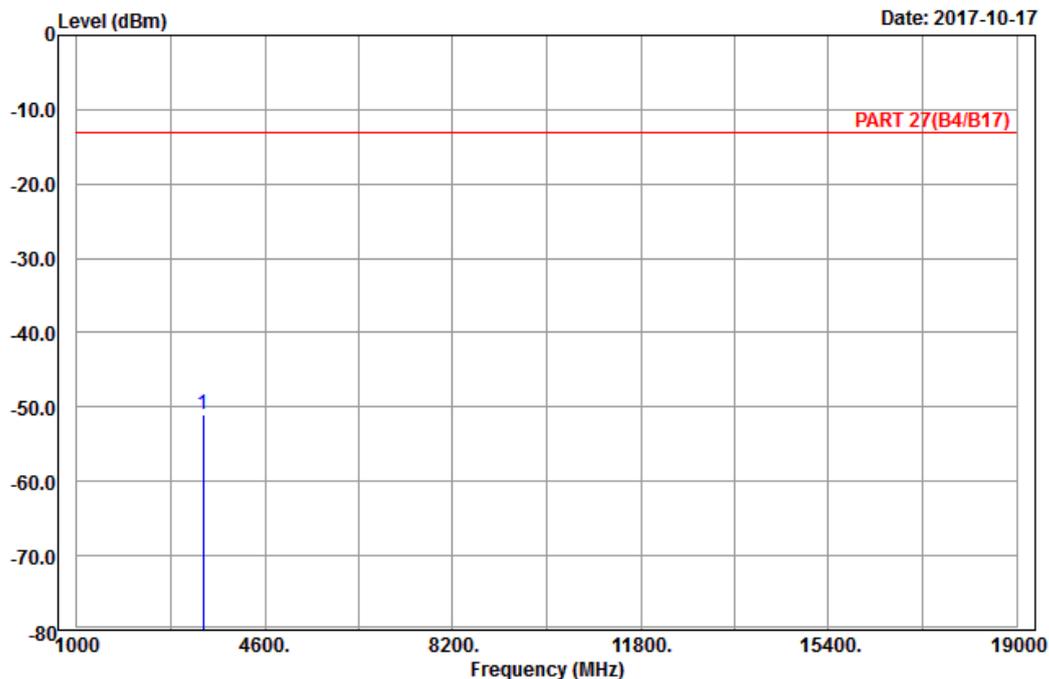

Site : 966 chamber 1  
Condition: PART 27(B4/B17) Horizontal  
Remark : Band IV\_Link\_CH1312  
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3424.80	-51.10	-65.47	-13.00	-38.10	14.37	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2017-10-17

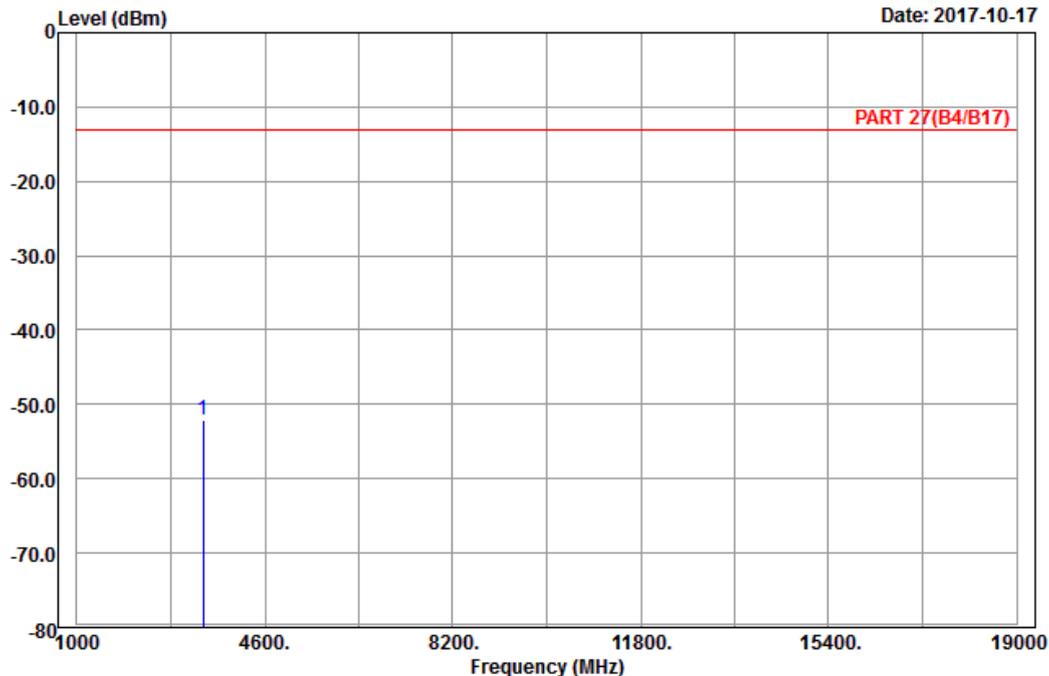

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Vertical  
 Remark : Band IV\_Link\_CH1312  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3424.80	-52.04	-66.41	-13.00	-39.04	14.37	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

Date: 2017-10-17

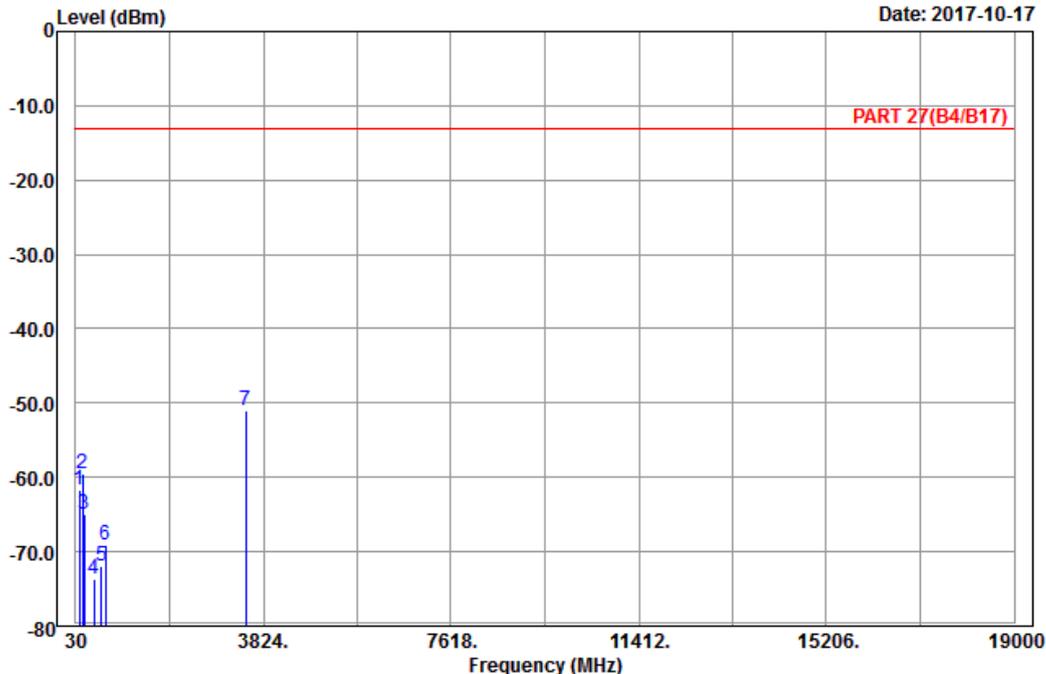

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Horizontal  
 Remark : Band IV\_Link\_CH1413  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	101.01	-61.62	-51.62	-13.00	-48.62	-10.00	Peak
2	165.27	-59.43	-52.24	-13.00	-46.43	-7.19	Peak
3	199.02	-65.06	-58.92	-13.00	-52.06	-6.14	Peak
4	408.50	-73.62	-70.69	-13.00	-60.62	-2.93	Peak
5	553.40	-71.94	-70.44	-13.00	-58.94	-1.50	Peak
6	624.80	-69.20	-69.35	-13.00	-56.20	0.15	Peak
7 pp	3465.20	-50.95	-65.29	-13.00	-37.95	14.34	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

Date: 2017-10-17

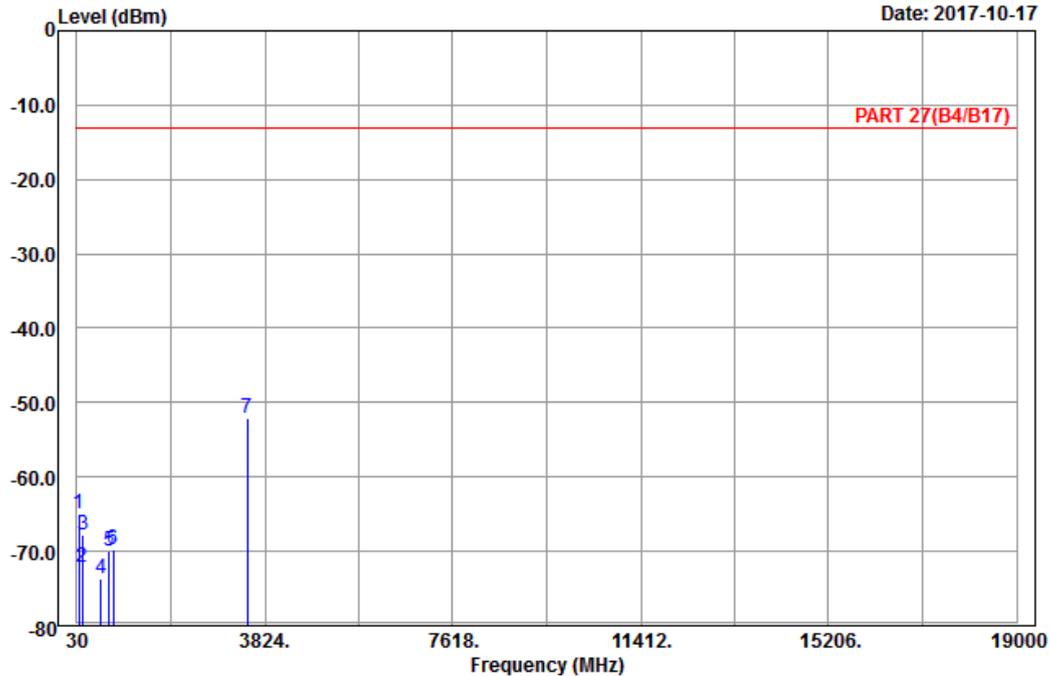

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Vertical  
 Remark : Band IV\_Link\_CH1413  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	63.75	-65.00	-51.49	-13.00	-52.00	-13.51	Peak
2	135.57	-72.26	-64.59	-13.00	-59.26	-7.67	Peak
3	152.31	-67.84	-59.95	-13.00	-54.84	-7.89	Peak
4	523.30	-73.61	-70.03	-13.00	-60.61	-3.58	Peak
5	687.80	-70.00	-69.68	-13.00	-57.00	-0.32	Peak
6	768.30	-69.70	-69.60	-13.00	-56.70	-0.10	Peak
7 pp	3465.20	-52.01	-66.35	-13.00	-39.01	14.34	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-10-17

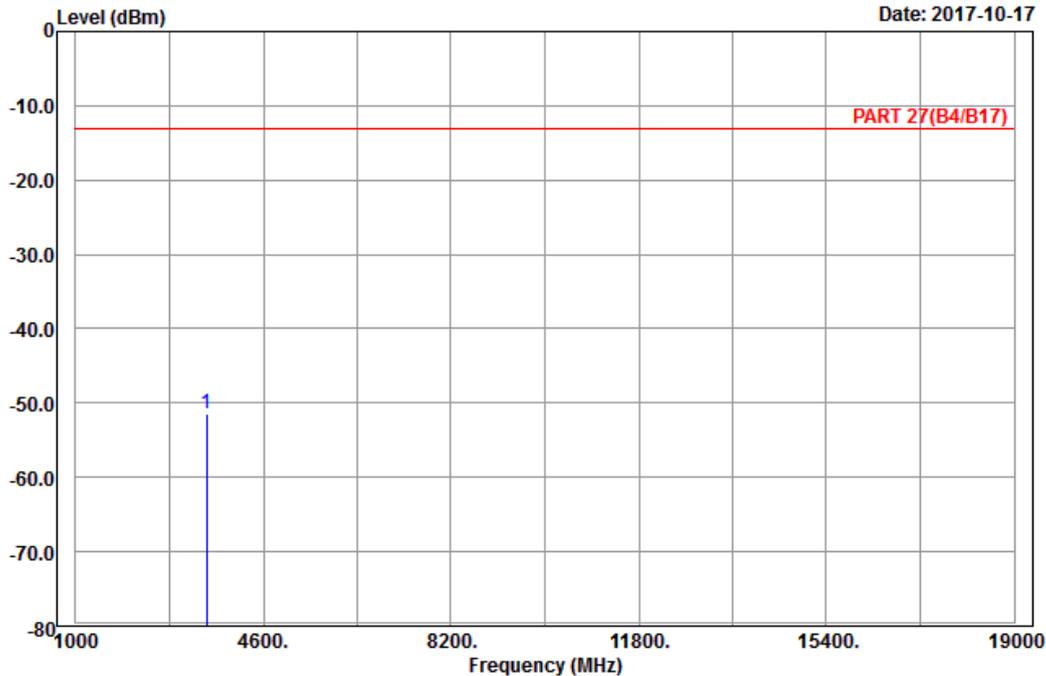

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Horizontal  
 Remark : Band IV\_Link\_CH1513  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3505.20	-51.43	-65.71	-13.00	-38.43	14.28	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2017-10-17

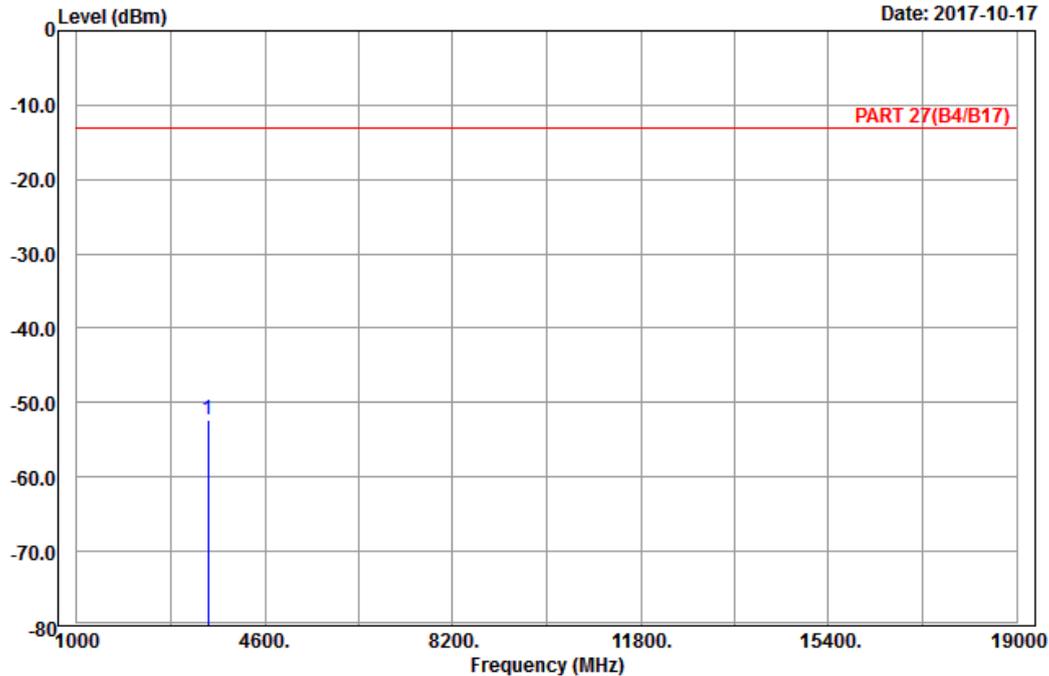

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Vertical  
 Remark : Band IV\_Link\_CH1513  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3505.20	-52.29	-66.57	-13.00	-39.29	14.28	Peak

LTE Band 4  
 Channel Bandwidth: 20 MHz / QPSK  
 Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-10-17

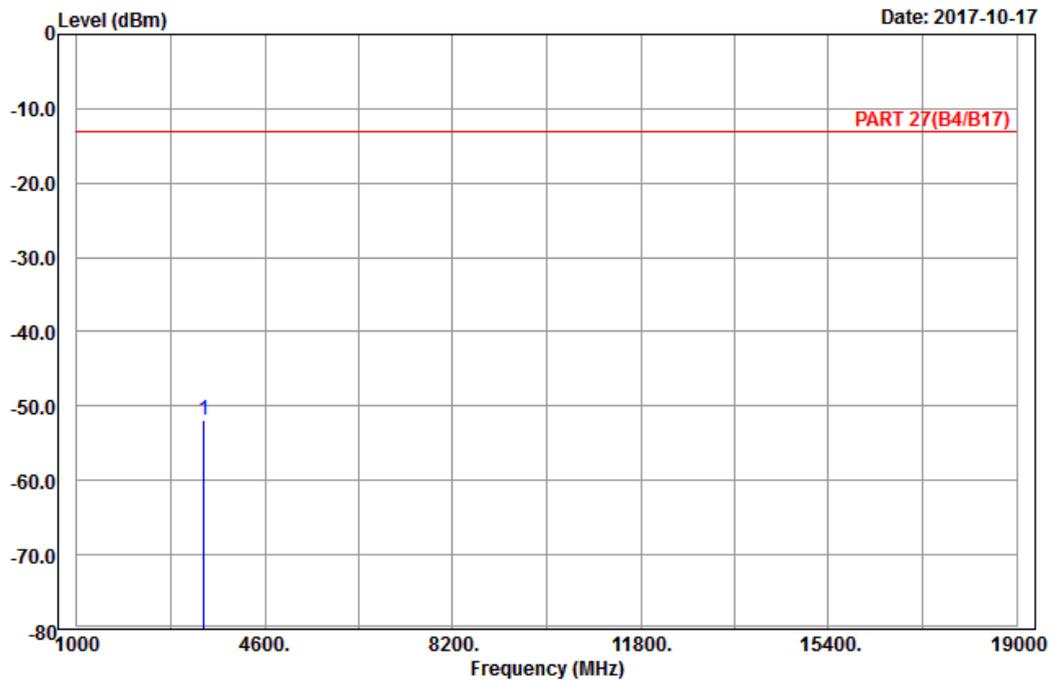

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Horizontal  
 Remark : LTE\_Band 4\_Link\_CH20050  
 Tested by: Charles Hsiao

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3440.00	-51.88	-66.23	-13.00	-38.88	14.35	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2017-10-17

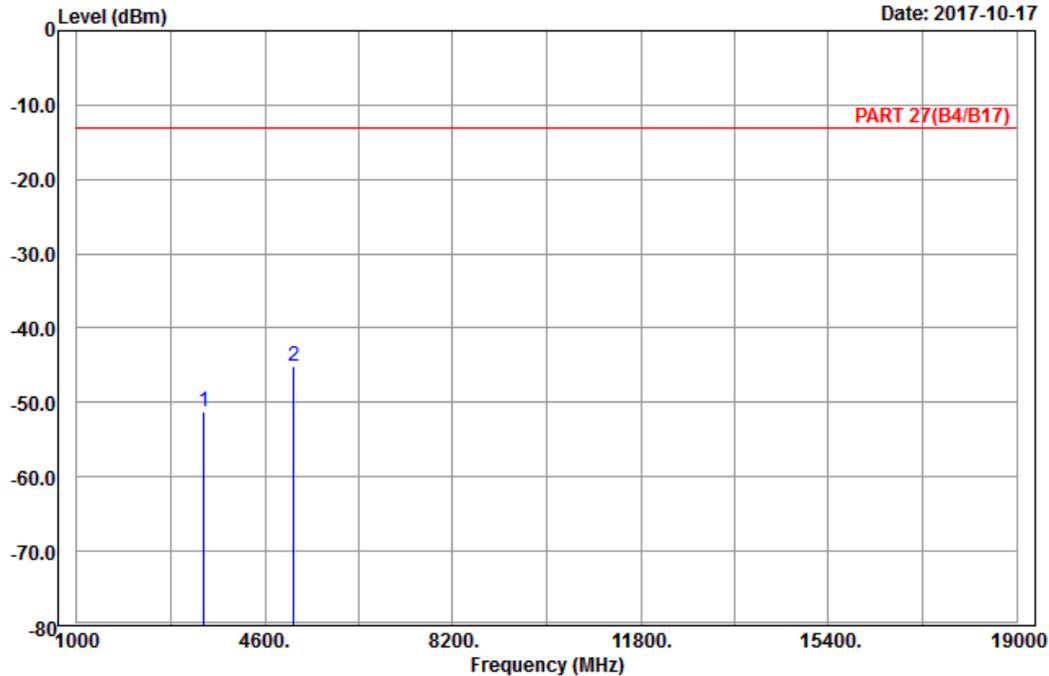

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Vertical  
 Remark : LTE\_Band 4\_Link\_CH20050  
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3440.00	-51.33	-65.68	-13.00	-38.33	14.35	Peak
2 pp	5160.00	-45.14	-65.06	-13.00	-32.14	19.92	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-10-17

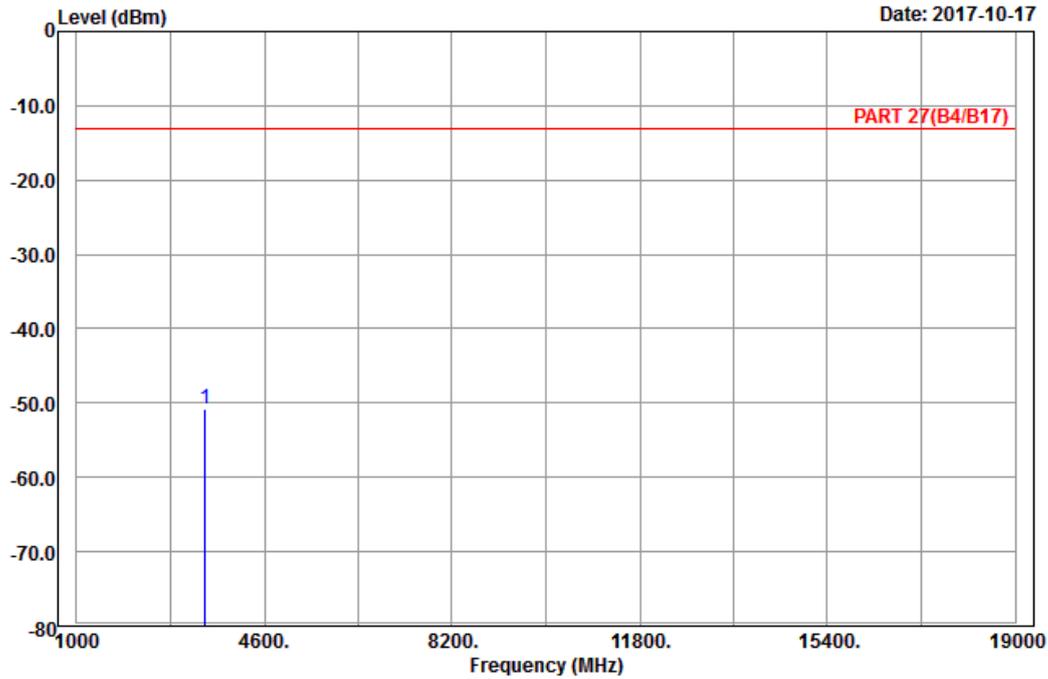

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Horizontal  
 Remark : LTE\_Band 4\_Link\_CH20175  
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit	Over	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3465.00	-50.72	-65.06	-13.00	-37.72	14.34	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2017-10-17

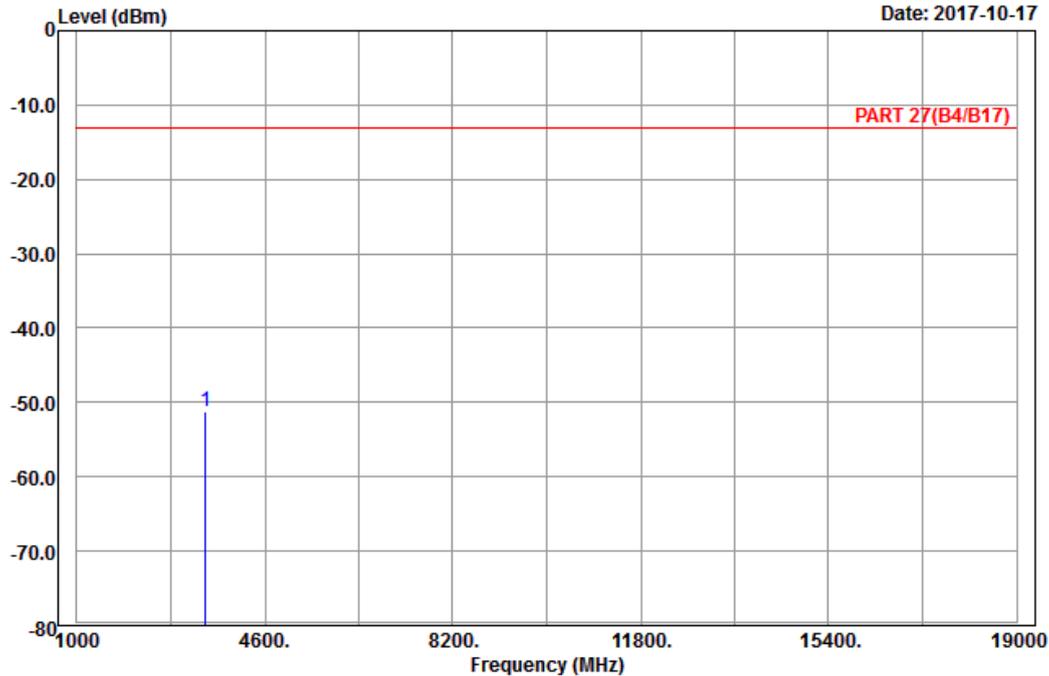

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Vertical  
 Remark : LTE\_Band 4\_Link\_CH20175  
 Tested by: Charles Hsiao

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3465.00	-51.33	-65.67	-13.00	-38.33	14.34	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

Date: 2017-10-17

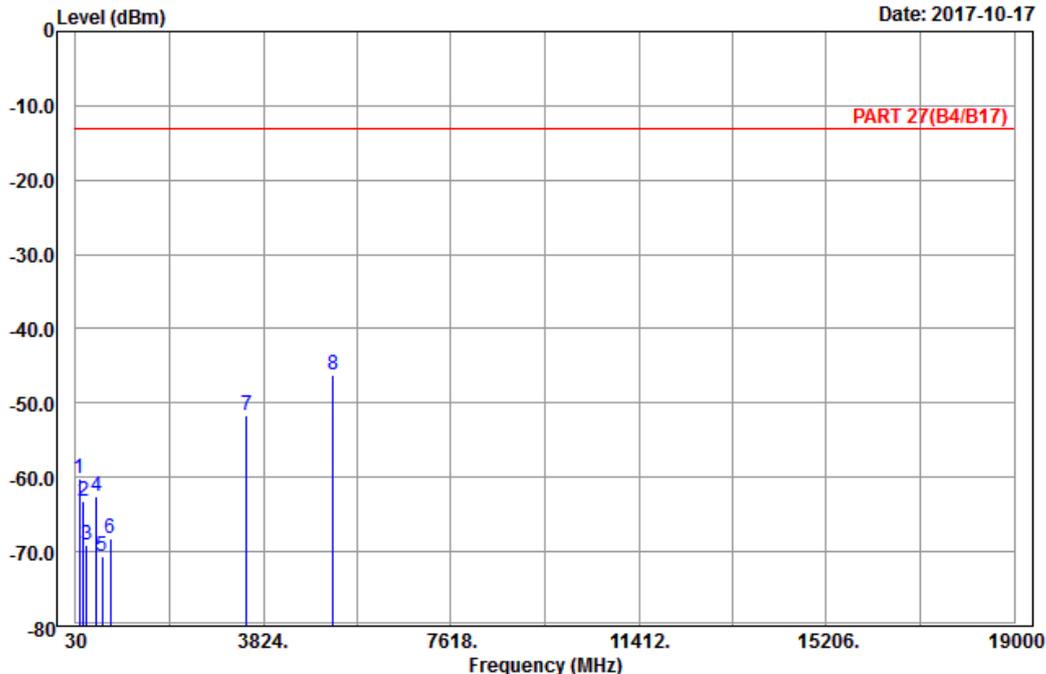

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Horizontal  
 Remark : LTE\_Band 4\_Link\_CH20300  
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	111.81	-60.16	-51.34	-13.00	-47.16	-8.82	Peak
2	192.00	-63.14	-57.32	-13.00	-50.14	-5.82	Peak
3	249.78	-69.18	-63.67	-13.00	-56.18	-5.51	Peak
4	456.10	-62.55	-58.54	-13.00	-49.55	-4.01	Peak
5	563.20	-70.63	-69.53	-13.00	-57.63	-1.10	Peak
6	734.00	-68.25	-67.23	-13.00	-55.25	-1.02	Peak
7	3490.00	-51.72	-66.03	-13.00	-38.72	14.31	Peak
8 pp	5235.00	-46.11	-66.27	-13.00	-33.11	20.16	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

Date: 2017-10-17

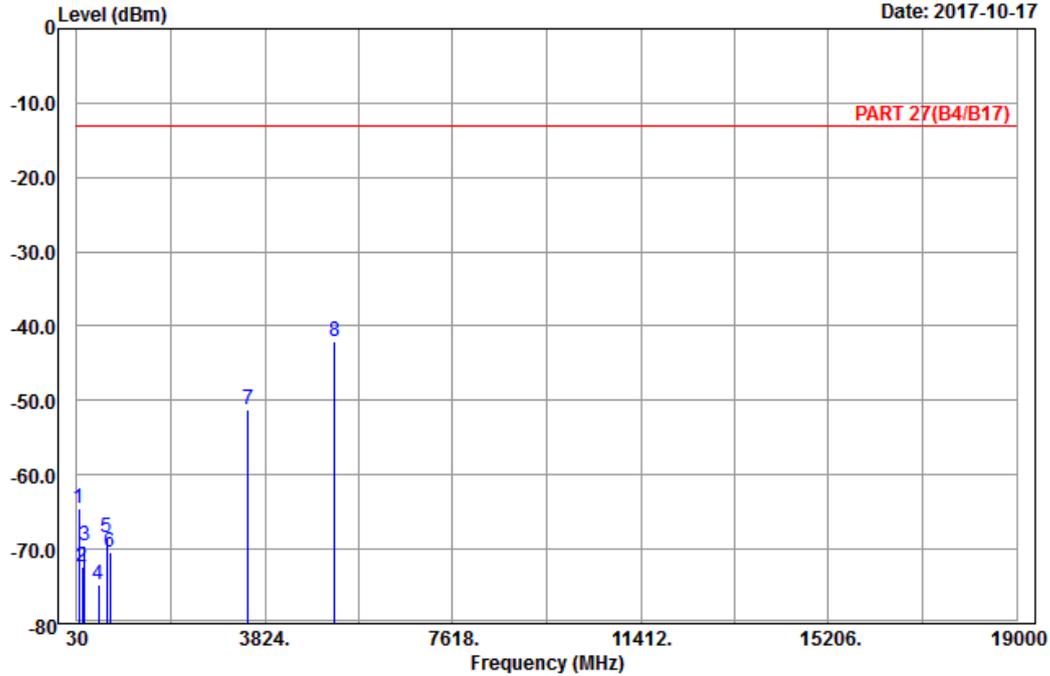

Site : 966 chamber 1  
 Condition: PART 27(B4/B17) Vertical  
 Remark : LTE\_Band 4\_Link\_CH20300  
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	63.48	-64.45	-50.94	-13.00	-51.45	-13.51	Peak
2	145.29	-72.46	-64.63	-13.00	-59.46	-7.83	Peak
3	187.95	-69.49	-63.79	-13.00	-56.49	-5.70	Peak
4	474.30	-74.87	-70.33	-13.00	-61.87	-4.54	Peak
5	631.10	-68.51	-68.58	-13.00	-55.51	0.07	Peak
6	696.90	-70.49	-70.13	-13.00	-57.49	-0.36	Peak
7	3490.00	-51.26	-65.57	-13.00	-38.26	14.31	Peak
8 pp	5235.00	-42.00	-62.16	-13.00	-29.00	20.16	Peak

LTE Band 12  
 Channel Bandwidth: 10 MHz / QPSK  
 Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2017-10-17

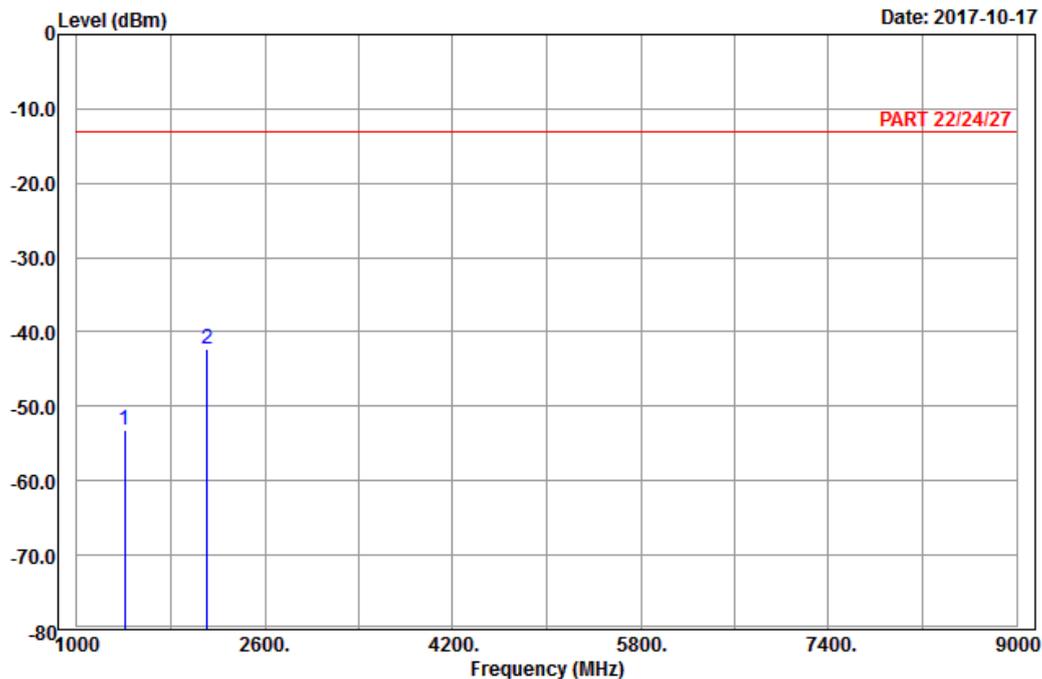

Site : 966 chamber 1  
 Condition: PART 22/24/27 Horizontal  
 Remark : LTE\_Band 12\_Link\_CH23060  
 Tested by: Charles Hsiao

		Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor Remark
	MHz	dBm	dBm	dBm	dB	dB
1	1408.00	-53.16	-59.52	-13.00	-40.16	6.36 Peak
2 pp	2112.00	-42.24	-53.35	-13.00	-29.24	11.11 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2017-10-17

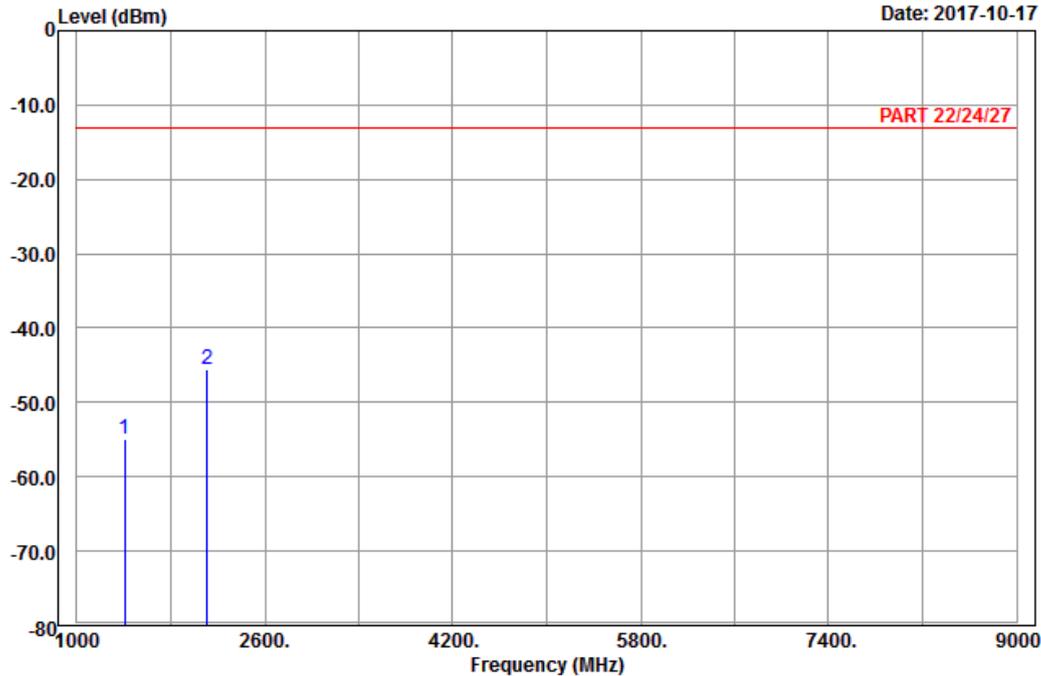

Site : 966 chamber 1  
 Condition: PART 22/24/27 Vertical  
 Remark : LTE\_Band 12\_Link\_CH23060  
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1408.00	-55.00	-61.36	-13.00	-42.00	6.36	Peak
2 pp	2112.00	-45.66	-56.77	-13.00	-32.66	11.11	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-10-17

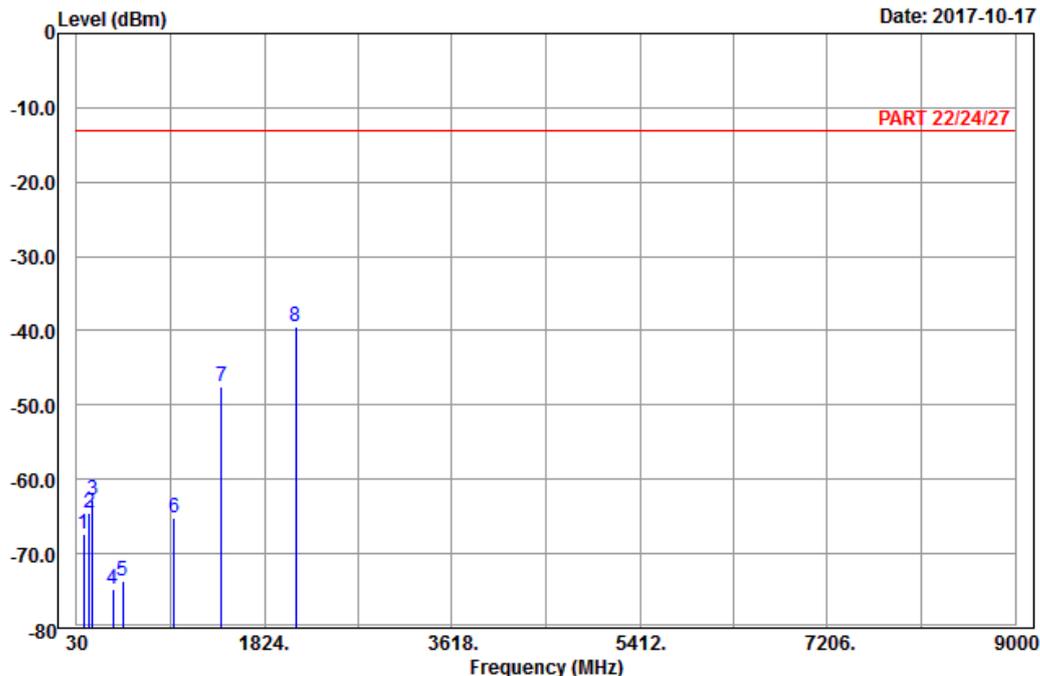

Site : 966 chamber 1  
 Condition: PART 22/24/27 Horizontal  
 Remark : LTE\_Band 12\_Link\_CH23095  
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	98.04	-67.41	-57.18	-13.00	-54.41	-10.23	Peak
2	153.12	-64.58	-56.72	-13.00	-51.58	-7.86	Peak
3	183.36	-62.80	-57.18	-13.00	-49.80	-5.62	Peak
4	377.70	-74.82	-70.89	-13.00	-61.82	-3.93	Peak
5	469.40	-73.64	-69.24	-13.00	-60.64	-4.40	Peak
6	961.50	-65.12	-70.26	-13.00	-52.12	5.14	Peak
7	1415.00	-47.42	-53.78	-13.00	-34.42	6.36	Peak
8 pp	2122.50	-39.52	-50.63	-13.00	-26.52	11.11	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2017-10-17

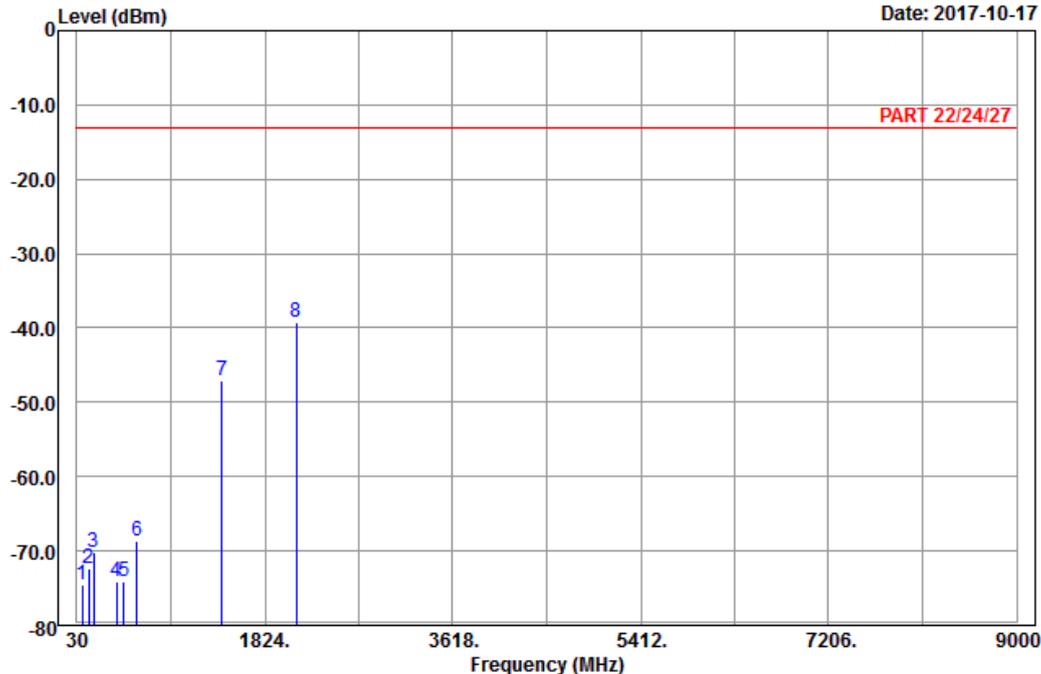

Site : 966 chamber 1  
 Condition: PART 22/24/27 Vertical  
 Remark : LTE\_Band 12\_Link\_CH23095  
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	84.27	-74.59	-63.26	-13.00	-61.59	-11.33	Peak
2	145.29	-72.46	-64.63	-13.00	-59.46	-7.83	Peak
3	190.65	-70.25	-64.47	-13.00	-57.25	-5.78	Peak
4	412.00	-74.02	-71.00	-13.00	-61.02	-3.02	Peak
5	479.20	-74.12	-69.44	-13.00	-61.12	-4.68	Peak
6	601.70	-68.65	-69.07	-13.00	-55.65	0.42	Peak
7	1415.00	-47.19	-53.55	-13.00	-34.19	6.36	Peak
8 pp	2122.50	-39.29	-50.40	-13.00	-26.29	11.11	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2017-10-17

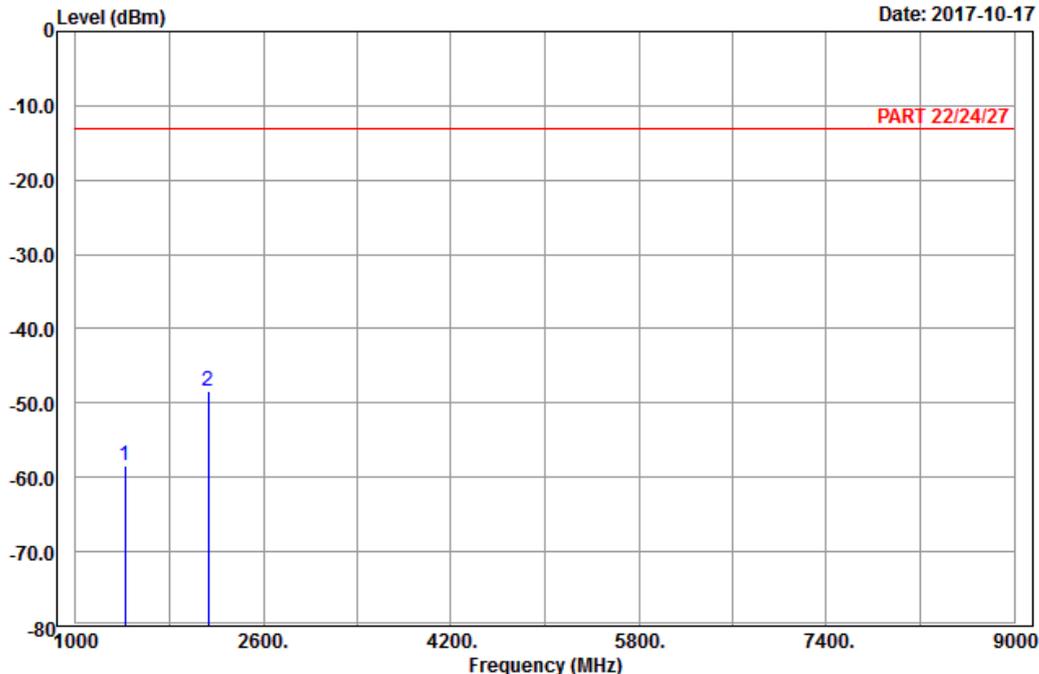


Site : 966 chamber 1  
 Condition: PART 22/24/27 Horizontal  
 Remark : LTE\_Band 12\_Link\_CH23130  
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1422.00	-58.42	-64.78	-13.00	-45.42	6.36	Peak
2	2133.00	-48.41	-59.69	-13.00	-35.41	11.28	Peak



A D T

Data: 6

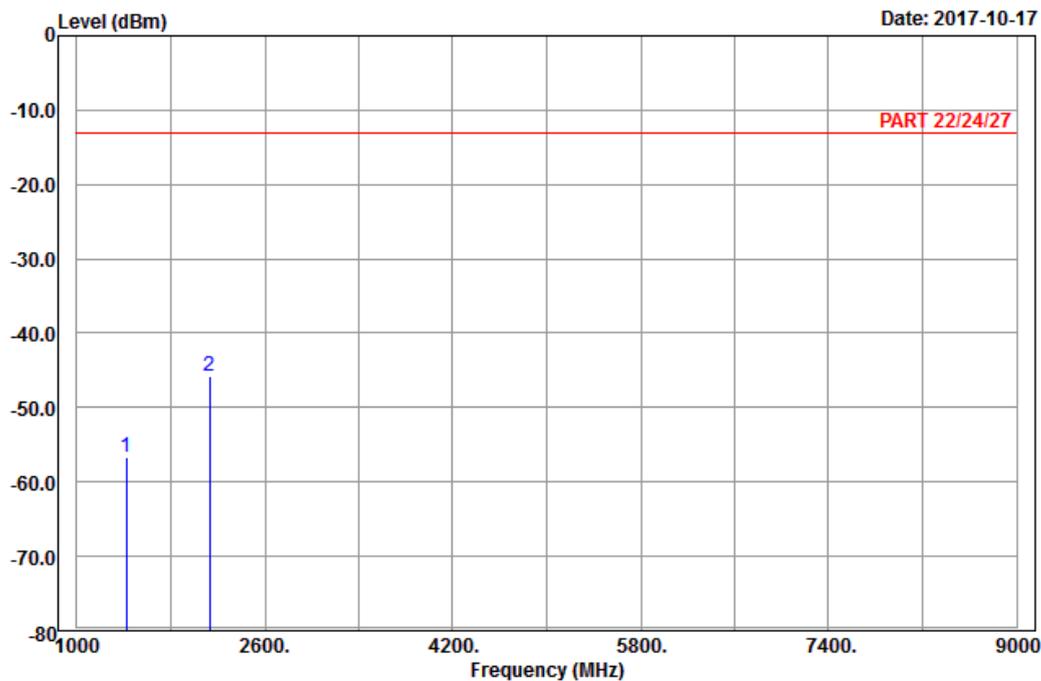

Site : 966 chamber 1  
 Condition: PART 22/24/27 Vertical  
 Remark : LTE\_Band 12\_Link\_CH23130  
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1422.00	-56.63	-62.99	-13.00	-43.63	6.36	Peak
2 pp	2133.00	-45.85	-57.13	-13.00	-32.85	11.28	Peak

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---