
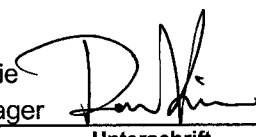


Prüfbericht - Nr.: 16010811 001		Seite 1 von 34 Page 1 of 34	
<i>Test Report No.:</i>			
Auftraggeber: <i>Client:</i>	UNI-ART PRECISE PRODUCTS LTD 11-12/F., YUE XIU IND'L BLDG. 87 HUNG TO ROAD, KWUN TONG, KOWLOON HONG KONG		
Gegenstand der Prüfung: <i>Test item:</i>	Bluetooth Dongle		
Bezeichnung: <i>Identification:</i>	BH201	Certificate Number: <i>Certificate Number</i>	FCC ID: MVABH201 IC: N/A
Wareneingangs-Nr.: <i>Receipt No.:</i>	173032717	Eingangsdatum: <i>Date of receipt:</i>	19.09.2007
Prüfart: <i>Testing location:</i>	TÜV Rheinland (Guangdong) Ltd. EMC Laboratory Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China	Listed test laboratory according to FCC rules section 2.948 and RSS- Gen, for measuring devices.	
Prüfgrundlage: <i>Test specification:</i>	ANSI C63.4: 2003 FCC Part 15: 20, Sep. 2007, Subpart C section 15.207, 15.209 and 15.247 RSS-GEN Issue 2, June 2007 RSS-210 Issue 7, June 2007 RSS-102 Issue 2, November 2005		
Prüfresultat: <i>Test Result:</i>	Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). <i>The test item passed the test specification(s).</i>		
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland (Guangdong) Ltd.		
geprüft/ tested by:	kontrolliert/ reviewed by:		
<i>28. Oct. 2008</i>	Ricky Liu Project Manager	<i>30. Oct. 2008</i>	Liangdong Xie Project Manager
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>
			
			Name/Stellung <i>Name/Position</i>
			Unterschrift <i>Signature</i>
Sonstiges/ Other Aspects:			
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet		Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested	
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>			

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 2 von 34
Page 2 of 34

Test Summary

FCC and IC test specification		Test items	Result
Paragraph	Released Date		
Part 15 Per Section 15.207(a)	20. Sep, 2007	Conducted Emission	Pass
RSS-Gen Per Section 7.2.2	June 2007		
Part 15 Per Section 15.209(a)	20. Sep, 2007	Transmitter Radiated Spurious Emission	Pass
RSS-210 Issue 7 Section 2.6	June 2007		
RSS-210 Issue 7 Section 2.3	June 2007	Receiver Radiated Spurious Emission	Pass
Part 15 Per Section 15.203	20. Sep, 2007	Antenna Requirement	Pass
Part 15 Per Section 15.247(b)(1)	20. Sep, 2007	Maximum Peak Conducted Output Power	Pass
RSS-210 Issue 7 Section A8.4 (2)	June 2007		
Part 15 Per Section 15.247(a)(1)	20. Sep, 2007	20dB Bandwidth	Pass
RSS-210 Issue 7 Section A8.1 (b)	June 2007		
Part 15 Per Section 15.247(a)(1)	20. Sep, 2007	Hopping Channel Carrier Frequency Separation	Pass
RSS-210 Issue 7 Section A8.1 (b)	June 2007		

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 3 von 34
Page 3 of 34

Part 15 Per Section 15.247(a)(1)(iii)	20. Sep, 2007	Number of Hopping Frequency Used	Pass
RSS-210 Issue 7 Section A8.1 (d)	June 2007		
Part 15 Per Section 15.247(a)(1)(iii)	20. Sep, 2007	Time of Occupancy (Dwell Time)	Pass
RSS-210 Issue 7 Section A8.1 (d)	June 2007		
Part 15 Per Section 15.247(d)	20. Sep, 2007	Out-Of-Band Emission measurement	Pass
RSS-210 Issue 7 A8.5	June 2007		
RSS-102 Issue 2 Section 2.5.2	November 2005	Exemption from Routine Evaluation Limits – RF Exposure Evaluation	Pass

Contents

1	GENERAL REMARKS.....	6
1.1	COMPLEMENTARY MATERIALS.....	6
2	TEST SITES.....	6
2.1	TEST FACILITIES.....	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.3	TRACEABILITY.....	7
2.4	CALIBRATION.....	8
2.5	MEASUREMENT UNCERTAINTY.....	8
2.6	LOCATION OF ORIGINAL DATA.....	8
2.7	STATUS OF FACILITY USED FOR TESTING.....	8
3	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE.....	9
3.2	RATINGS AND SYSTEM DETAILS.....	9
3.3	INDEPENDENT OPERATION MODES.....	10
3.4	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODE.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
4.5	TEST SET-UP.....	12
5	TEST RESULTS EMISSION.....	14
5.1	CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.207(A).....	14
5.2	TRANSMITTER RADIATED SPURIOUS EMISSION.....	16
5.3	RECEIVER RADIATED SPURIOUS EMISSION.....	19
5.4	ANTENNA REQUIREMENT.....	20
5.5	MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	21
5.6	20dB BANDWIDTH.....	22
5.7	HOPPING CHANNEL CARRIER FREQUENCY SEPARATION.....	23
5.8	NUMBER OF HOPPING FREQUENCY USED.....	25
5.9	TIME OF OCCUPANCY (DWELL TIME).....	26

Prüfbericht - Nr.:
*Test Report No.:***16010811 001****Seite 5 von 34**
Page 5 of 34

5.10	OUT-OF-BAND EMISSION	28
5.11	EXEMPTION FROM ROUTINE EVALUATION LIMITS – RF EXPOSURE EVALUATION	30
6	PHOTOGRAPHS OF THE TEST SET-UP	31
7	LIST OF TABLES.....	34
8	LIST OF PHOTOGRAPHS.....	34

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 6 von 34
Page 6 of 34

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

Guangzhou Auto Market, Yuan Gang Section of Guangshan Road
Guangzhou 510650

P. R. China

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
EMI Test Receiver	ESCI-3	Rohde & Schwarz	100216	26.Nov.2008	1 year
Spectrum Analyzer	FSP30	Rohde & Schwarz	100286	27.Aug.2009	1 year
Trilog-Broadband Antenna	VULB9168	SCHWARZBECK MESS-ELEKTRONIK	210	08.May.2009	2 year
Double-Ridged Waveguide Horn Antenna	HF906	Rohde & Schwarz	100385	18.Jul.2009	2 year
Double-Ridged Waveguide Horn Antenna	HF906	Rohde & Schwarz	100407	08.May.2009	2 year
Pre-amplifier	AFS42- 00101800- 25-S-42	MITEQ	1101599	31.Jul.2009	2 year
Band Reject Filter	BRM50702	Micro-Tronics	023	14.Mar.2010	2 year
Standard Gain Horn Antenna	3160-09	EMCO	21642	N/A	N/A
Standard Gain Horn Antenna	3160-09	EMCO	21645	N/A	N/A
Pre-amplifier	AFS33- 18002650- 30-8P-44	MITEQ	1108282	31.Jul.2009	2 year
3m Anechoic Chamber	N/A	Albatross Project GmbH	N/A	16.Apr.2009	3 year
EMI Test Receiver	ESCS30	Rohde & Schwarz	100316	27.Mar.2009	1 year
Two-Line V-Network	ESH3-Z5	Rohde & Schwarz	100308	27.Mar.2009	1 year
Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100701	27.Mar.2009	1 year

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 8 von 34
Page 8 of 34

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Uncertainty for conducted emissions measurements is ± 2.51 dB.

Uncertainty for radiated emissions measurements is ± 4.9 dB (30MHz-1GHz), ± 4.84 dB (>1GHz).

The reported expanded uncertainty is based on a standard uncertainty multiply by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

2.6 Location of original data

The original copies of test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangdong) file for certification follow-up purposes.

2.7 Status of facility used for testing

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements, the register no. 833845

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China is listed on Certification and Engineering Bureau of Canada, whose file number is IC 2932C.

3 General Product Information

The EUT is a Bluetooth V2.0 class II dongle powered by integral rechargeable battery.

3.1 Product Function and Intended Use

Following function is provided:

1. Transfer the audio signal input from the 3.5mm audio plug to Bluetooth Headphone.
2. Transfer the audio stream input from the host computer to Bluetooth Headphone.
3. Picking up Internet calls by switching at VoIP mode.
4. Transfer/receiver files from the host computer to any Bluetooth enable devices.

Refer to user manual for more information.

3.2 Ratings and System Details

Frequency range	:	2402.0MHz – 2480MHz (unlicensed ISM band)
Number of employed channels	:	79 channels
Total Number of channels	:	79 channels
Modulation Type	:	Frequency Hopping Spread Spectrum (Bluetooth V2.0 Class II product with QDID: B013009)
Mode of RF Operation (Simplex/ Duplex)	:	Duplex
Category of equipment	:	Low-power License-exempt Radiocommunication Devices(All Frequency Bands):Category I equipment (refer to RSS-Gen, clause 2)
Type of antenna	:	Integral antenna
Power supply	:	3.7V DC (by integral rechargeable lithium battery) DC 5V via mini-USB for charging.
Ports	:	3.5mm audio Plug; Mini USB port
Protection Class	:	III

Refer to the Technical Documentation for further information

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 10 von 34
Page 10 of 34

3.3 Independent Operation Modes

Off

Charge

On: Audio Streaming / HCI / VoIP mode

The basic operation modes for the Bluetooth Function:
Operating: Transmitting and receiving

For further information refer to User Manual

3.4 Submitted Documents

Operation Description

Block Diagram

Schematics

FCC and IC label and its location

User Manual

Internal Photos

External Photos

Application form

Prüfbericht - Nr.: 16010811 001
Test Report No.:

Seite 11 von 34
Page 11 of 34

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following auxiliary equipment.

1. Switching mode AC/DC Adaptor for charging with mini-USB output:

Type designation: PS15A-0500400E
Rating input: AC 100-240V; 50-60Hz
Rating output: DC 5V; 400mA
Protection Class: Class II

2. Laptop PC:

Manufacturer: IBM
Model Number: R40e
Serial Number: 99-CYY55

3. Test software:

Manufacturer: CSR
Model Number: Bluetest (of Bluesuit)
Version: 1.22

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

4.5 Test set-up

Diagram 1 of Configuration for Testing Radiated Emission below 1 GHz

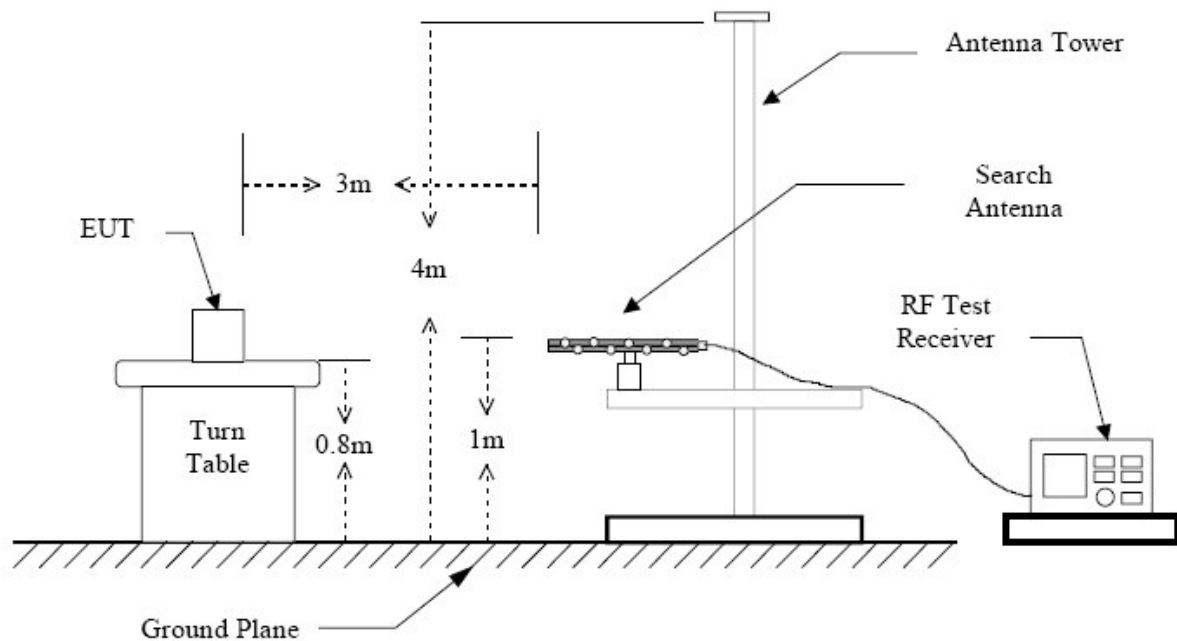


Diagram 2 of Configuration for Testing Radiated Emission above 1 GHz

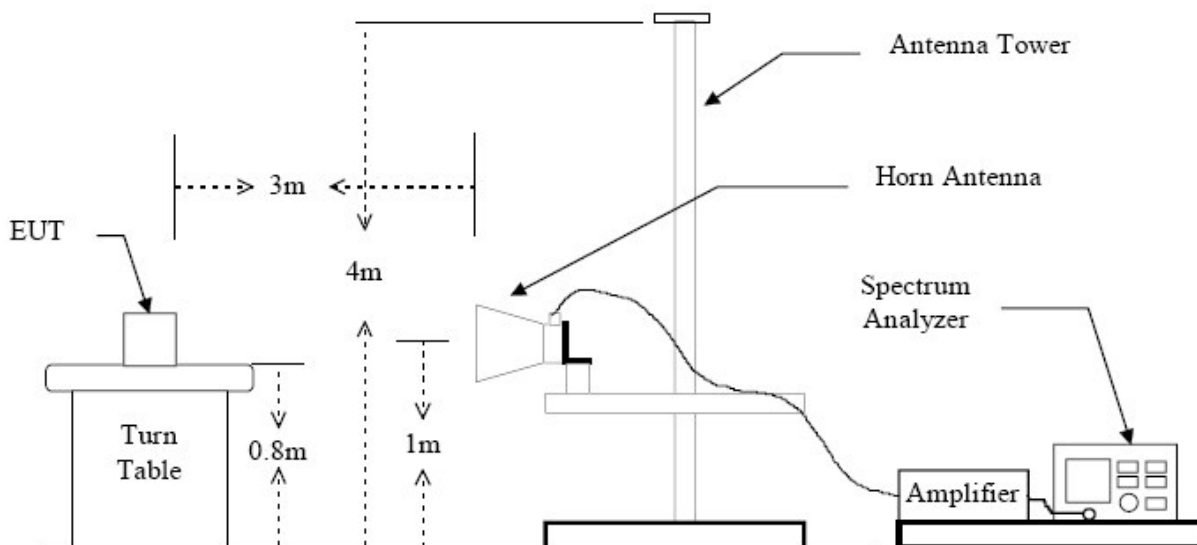


Diagram 3 of Measurement Equipment Configuration for Testing Conducted Emission


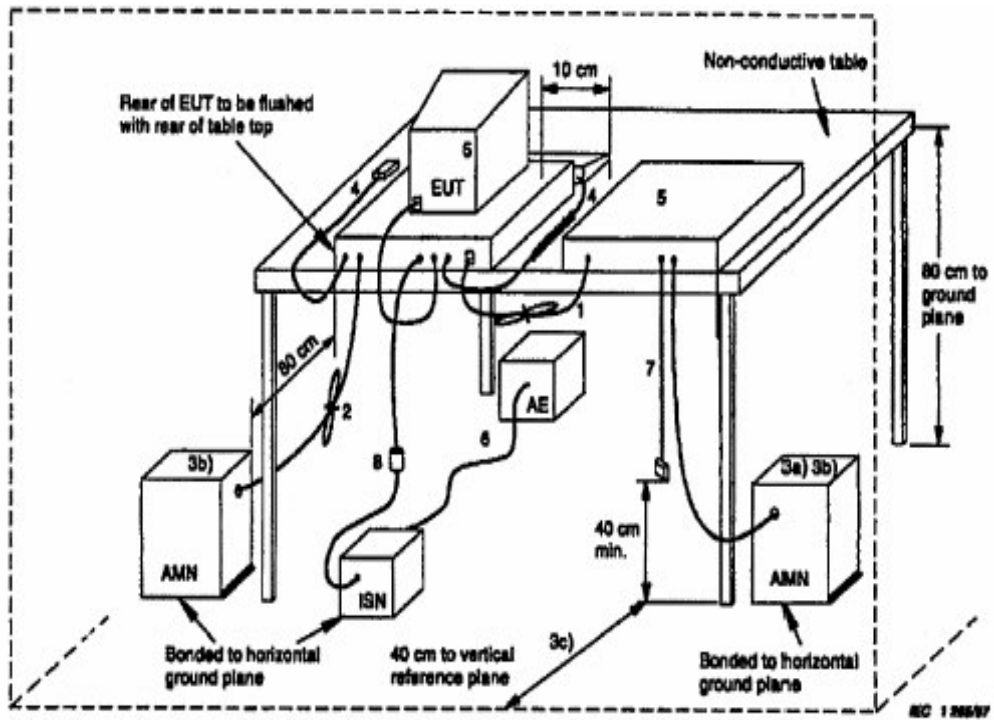


Diagram 4 of Configuration for Testing other test items

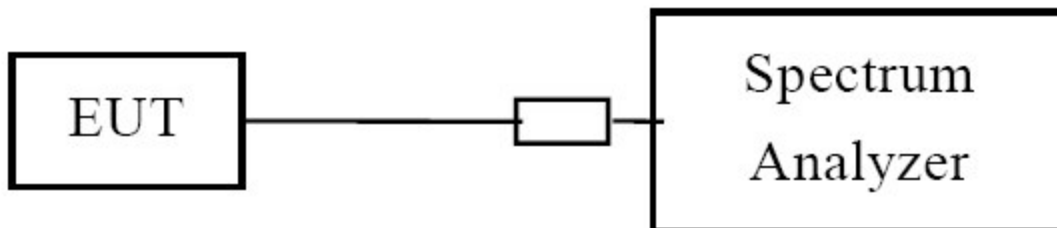

Prüfbericht - Nr.:

16010811 001

Seite 14 von 34

Test Report No.:

Page 14 of 34

5 Test Results EMISSION

5.1 Conducted Emission for FCC Part 15 Per Section 15.207(a)

RESULT:

Pass

Date of testing	:	21.02.2008
Test specification	:	FCC Part 15 Per Section 15.207(a) RSS-Gen Per Section 7.2.2
Limits	:	FCC Part 15 Per Section 15.207(a) RSS-Gen Per Section 7.2.2, table 2
Test procedure	:	Procedure specified in ANSI C63.4/RSS-Gen were followed
Deviations from Standard Test procedures	:	None
Kind of test site	:	Shielded room
Operation mode	:	Charging
Power supply	:	AC 120V;60Hz to the AC/DC adaptor
Temperature	:	21°C
Humidity	:	50%

Test procedure:

1. Place the EUT as specified in ANSI C63.4 Clause 7.2.1
2. Plug the LISN to a correct power source (pay attention to: AC/DC, voltage, frequency).
4. Connect the EUT to LISN and choose N or L1 on the LISN.
5. Connect ESCS30 and LISN via a 50-ohm coaxial cable and a pulse limiter then begin exploratory measurement as specified in ANSI C63.4 Clause 7.2.3
6. Make final measurement as specified in ANSI C63.4 Clause 7.2.4
7. Switch to the other line on the LISN and repeat step 4 to 6.

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 15 von 34
Page 15 of 34

Table 2: Disturbance Voltage on AC Mains

Frequency [MHz]	Line L/N	QP [dB μ V]	AV [dB μ V]	Quasi Peak Limit [dB μ V]	Average Limit [dB μ V]
0.170	L	48.3	42.2	65.0	55.0
0.205	L	42.9	35.0	63.4	53.4
0.665	L	34.0	27.0	56.0	46.0
1.635	L	33.5	26.9	56.0	46.0
3.025	L	33.7	27.1	56.0	46.0
7.105	L	35.2	30.4	60.0	50.0
0.170	N	52.2	46.8	65.0	55.0
0.205	N	50.4	47.0	63.4	53.4
0.280	N	47.7	44.4	60.8	60.8
0.665	N	34.6	28.4	56.0	46.0
3.030	N	34.3	26.2	56.0	46.0
7.315	N	35.1	30.8	60.0	50.0
*)					

*) Measurement is made from 150 kHz to 30 MHz. Disturbances other than those mentioned above are small or not detectable.

If the result of the measurement with the Quasi Peak detector is below the Average limit, the measurement with Average Detector may be omitted.

Prüfbericht - Nr.:**16010811 001****Seite 16 von 34**

Test Report No.:

Page 16 of 34

5.2 Transmitter Radiated Spurious Emission

RESULT:**Pass**

Date of testing	:	09.10.2007
Test specification	:	FCC Part 15 Per Section 15.209(a) RSS-210 Per Section 2.6
Limits	:	FCC Part 15 Per Section 15.209(a) RSS-210 Per Section 2.6, table 2
Test procedure	:	Procedure specified in ANSI C63.4/RSS-Gen were followed
Deviations from Standard Test procedures	:	None
Kind of test site	:	3m Semi-anechoic chamber
Operation mode	:	RF transmitting
Power supply	:	DC 3.7V by battery
Temperature	:	20°C
Humidity	:	55%

Test procedure:

1. The EUT was placed on the top of a rotatable table 0.8 meters above the ground with 3-orthogonal direction and be kept close enough to the receiving antenna. The table was rotated 360 degrees to determine the suspected emission frequency and the position of the worst radiation case with both horizontal and vertical antenna polarization.
2. The EUT was then set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower.
3. For each suspected emission frequency recorded in step 1, the EUT was arranged to its worst case that the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to read the maximum emission.

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 17 von 34
Page 17 of 34

Table 3: Radiated Emission (Transmitting at channel low)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
224.100	21.0	N/A	N/A	H	43.5	N/A	N/A
236.100	23.7	N/A	N/A	H	46.0	N/A	N/A
256.000	25.6	N/A	N/A	H	46.0	N/A	N/A
272.000	28.2	N/A	N/A	H	46.0	N/A	N/A
320.050	25.4	N/A	N/A	H	46.0	N/A	N/A
384.050	25.3	N/A	N/A	H	46.0	N/A	N/A
1601.375	N/A	43.3	47.0	V	N/A	54	74
4803.750	N/A	35.8	41.4	V	N/A	54	74
9140.875	N/A	35.7	43.5	V	N/A	54	74
*)---							

Table 4: Radiated Emission (Transmitting at channel mid)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
192.000	21.9	N/A	N/A	H	43.5	N/A	N/A
228.000	22.4	N/A	N/A	H	46.0	N/A	N/A
288.000	27.1	N/A	N/A	H	46.0	N/A	N/A
308.050	26.0	N/A	N/A	H	46.0	N/A	N/A
320.050	26.3	N/A	N/A	H	46.0	N/A	N/A
336.050	25.2	N/A	N/A	H	46.0	N/A	N/A
1197.625	N/A	34.6	47.2	H	N/A	54	74
4882.375	N/A	35.5	44.2	H	N/A	54	74
9143.000	N/A	34.4	46.2	H	N/A	54	74
1193.375	N/A	34.3	48.3	V	N/A	54	74
*)---							

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 18 von 34
Page 18 of 34

Table 5: Radiated Emission (Transmitting at channel high)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
192.000	21.4	N/A	N/A	H	43.5	N/A	N/A
224.000	29.1	N/A	N/A	H	46.0	N/A	N/A
272.150	23.2	N/A	N/A	H	46.0	N/A	N/A
316.150	30.2	N/A	N/A	H	46.0	N/A	N/A
320.050	27.9	N/A	N/A	H	46.0	N/A	N/A
620.950	21.2	N/A	N/A	H	46.0	N/A	N/A
1652.375	N/A	40.9	46.5	H	N/A	54	74
4958.875	N/A	34.7	42.9	H	N/A	54	74
1535.500	N/A	42.7	47.2	V	N/A	54	74
4958.875	N/A	34.7	41.0	V	N/A	54	74
*)---							

*) Measurement is made from 30 MHz to 26 GHz. Disturbances other than those mentioned above are small or not detectable.

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 19 von 34
Page 19 of 34

5.3 Receiver Radiated Spurious Emission

RESULT:

Pass

Date of testing : 09.10.2007
 Test specification : RSS-210 Per Section 2.3
 Limits : RSS-210 Per Section 2.3
 RSS-Gen Per Section 7.2.3.2
 Test procedure : Procedure specified in ANSI C63.4/RSS-Gen
 were followed
 Deviations from Standard Test
 procedures : None
 Kind of test site : 3m Semi-anechoic chamber
 Operation mode : RF Receiving
 Power supply : DC 3.7V by battery
 Temperature : 20°C
 Humidity : 55%

Test procedure:

1. The EUT was placed on the top of a rotatable table 0.8 meters above the ground with 3-orthogonal direction and be kept close enough to the receiving antenna. The table was rotated 360 degrees to determine the suspected emission frequency and the position of the worst radiation case with both horizontal and vertical antenna polarization.
2. The EUT was then set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower.
3. For each suspected emission frequency recorded in step 1, the EUT was arranged to its worst case that the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to read the maximum emission.

Table 6: Receiver Radiated Emission (Worst Case of High, Mid, Low channel)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dBµV/m]			(H/V)	[dBµV/m]		
192.000	21.5	N/A	N/A	H	43.5	N/A	N/A
224.000	23.8	N/A	N/A	H	46.0	N/A	N/A
288.000	26.5	N/A	N/A	H	46.0	N/A	N/A
272.000	23.4	N/A	N/A	H	46.0	N/A	N/A
316.150	31.2	N/A	N/A	H	46.0	N/A	N/A
320.050	27.2	N/A	N/A	H	46.0	N/A	N/A
*)---							

*) Measurement is made from 30 MHz to 12.5 GHz. Disturbances other than those mentioned above are small or not detectable.

Prüfbericht - Nr.:
*Test Report No.:***16010811 001****Seite 20 von 34**
Page 20 of 34

5.4 Antenna requirement

RESULT:**Pass**

Date of testing : ---
Test specification : FCC Part 15 Per Section 15.203
FCC Part 15 Per Section 15.247(b)

For intentional device, according to 15.203, and intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to 15.247(b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by amount in dB than the directional gain of the antenna exceeds of 6dBi.

As the antenna is permanently mounted on RF Board, there is no consideration of replacement.

And the max gain of the antenna is 2dBi.

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 21 von 34
Page 21 of 34

5.5 Maximum Peak Conducted Output Power

RESULT:

Pass

Date of testing : 17.10.2007
 Test specification : FCC Part 15 Per Section 15.247(b)(1)
 RSS-210 Issue 7 Section A8.4 (2)
 Limits : FCC Part 15 Per Section 15.247(b)(1)
 RSS-210 Issue 7 Section A8.4 (2)

For frequency hopping systems operating in the band 2400-2483.5 MHz employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W.

Deviations from Standard Test procedures

: None
 Test procedure : Procedure specified in ANSI C63.4/RSS-Gen were followed
 Kind of test site : Shielded room
 Operation mode : Continuously transmitting on the measured channel.
 Power supply : DC 3.7V by battery
 Temperature : 22°C
 Humidity : 50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency= measured channel, RBW=1MHz, VBW≥RBW.
4. Mark the peak power output frequency and record the max reading.
5. Repeat step 2 to 4 until all the channels measured are finished.

Table 7: Peak Conducted Power

Channel	Frequency(MHz)	Power Reading (dBm)	Cable Loss (dB)	Output Power		Limit *
				(dBm)	(mW)	
Low	2402.120	1.48	0.8	2.28	1.48	1000
Mid	2441.100	1.03	0.8	1.83	1.03	1000
High	2479.880	0.33	0.8	1.13	0.33	1000

*Note: Refer to the test result of “Number of Hopping Channel Used” for the non-overlap channel number.

5.6 20dB Bandwidth

RESULT:

Pass

Date of testing : 17.10.2007
 Test specification : FCC Part 15 Per Section 15.247(a)(1)
 RSS-210 Issue 7 Section A8.1 (b)
 Limits : FCC Part 15 Per Section 15.247(b)(1)
 RSS-210 Issue 7 Section A8.1 (b)

Frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

Deviations from Standard Test procedures : None
 Test procedure : Procedure specified in ANSI C63.4/RSS-Gen were followed
 Operation mode : Continuously transmitting on the measured channel.
 Kind of test site : Shielded room
 Power supply : DC 3.7V by battery
 Temperature : 22°C
 Humidity : 50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency= measured channel, RBW=10kHz, VBW=30kHz.
4. Mark the peak power frequency point and the -20dB upper and lower frequency points.
5. Read the frequency delta value between the -20dB upper and lower frequency points.
6. Repeat step 2 to 5 until all the channels required are finished.

Table 8: 20dB Bandwidth

Channel	Frequency (GHz)	Test Result (kHz)
Low	2402.000	832
Mid	2441.000	752
High	2480.000	776

Please refer to Appendix 1 for measurement data.

5.7 Hopping Channel Carrier Frequency Separation

RESULT:**Pass**

Date of testing	:	17.10.2007
Test specification	:	FCC Part 15 Per Section 15.247(a)(1) RSS-210 Issue 7 Section A8.1 (b)
Limits	:	FCC Part 15 Per Section 15.247(a)(1) RSS-210 Issue 7 Section A8.1 (b)

Frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

Deviations from Standard Test procedures

Test procedure	:	None
Test procedure	:	Procedure specified in ANSI C63.4/RSS-Gen were followed
Kind of test site	:	Shielded room
Operation mode	:	Transmitting with hopping at the full channel set
Power supply	:	DC 3.7V by battery
Temperature	:	22°C
Humidity	:	50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 100 kHz, VBW = 100 kHz, Frequency Span = wide enough to cover the adjacent channel.
4. Mark the peak power frequency point of the measured channel and its adjacent channel(s)
5. Read the frequency delta value between the measured channel and its adjacent channel(s)
6. Repeat step 3 to 5 until all the channels measured are finished.

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 24 von 34
Page 24 of 34

Table 9: Hopping Channel Carrier Frequency Separation

Channel	Adjacent Hopping channel separation (kHz)	Limit
Low	996	At least 25kHz or tow-thirds of the 20dB bandwidth of the hopping channel, whichever is greater. Note: refer to table 7 for the value of 20dB bandwidth
Mid	996	
High	1008	

Please refer to Appendix 1 for measurement data.

5.8 Number of Hopping Frequency Used

RESULT:
Pass

Date of testing : 17.10.2007
 Test specification : FCC Part 15 Per Section 15.247(a)(1)(iii)
 RSS-210 Issue 7 Section A8.1 (d)
 Limits : FCC Part 15 Per Section 15.247(a)(1)(iii)
 RSS-210 Issue 7 Section A8.1 (d)

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels

Deviations from Standard Test

procedures : None
 Test procedure : Procedure specified in ANSI C63.4/RSS-Gen were followed
 Kind of test site : Shielded room
 Operation mode : Transmitting with hopping at the full channel set
 Power supply : DC 3.7V by battery
 Temperature : 22°C
 Humidity : 50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 300 kHz, VBW \geq RBW, Frequency Span = wide enough to cover the channels to be plotted.
4. Set the spectrum analyzer to Max-hold mode and plot the result(s) with record of all hopping channel.

Table 10: Number of hopping frequency

Number of hopping frequency (full set):	79
Number of actual employed hopping frequency:	79
Limit:	At least 15 non-overlapping channels

Please refer to Appendix 1 for measurement data.

5.9 Time of Occupancy (Dwell Time)

RESULT:**Pass**

Date of testing	:	19.10.2007
Test specification	:	FCC Part 15 Per Section 15.247(a)(1)(iii) RSS-210 Issue 7 Section A8.1 (d)
Limits	:	FCC Part 15 Per Section 15.247(a)(1)(iii) RSS-210 Issue 7 Section A8.1 (d)

For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Deviations from Standard Test procedures	:	None
Test Procedure	:	Procedure specified in ANSI C63.4/RSS-Gen were followed
Kind of test site	:	Shielded room
Operation mode	:	Transmitting with hopping at the full channel set
Power supply	:	DC 3.7V by battery
Temperature	:	22°C
Humidity	:	50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 1MHz, VBW ≥ RBW, Frequency Span = 0.
4. Set sweep time properly to capture the entire dwell time per hopping channel.
5. Set detector type to Peak and trace mode to Max Hold and make the measurement.
6. Repeat step 3-5 until all channels measured were complete.

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 27 von 34
Page 27 of 34

Table 11: Dwell Time

channel	Frequency (GHz)	Dwell time of one signal Burst (ms)	Total Dwell Time (ms)	Limit (ms)
Low	2402.000	2.99	$(2.99 \times \mathbf{106.81}) = 319.362$	400
Mid	2441.000	2.98	$(2.98 \times \mathbf{106.81}) = 318.293$	400
High	2480.000	2.97	$(2.97 \times \mathbf{106.81}) = 317.225$	400

Note:

Period of the EUT= 0.4 (seconds) x 79 (channels) = 31.6 seconds

For Bluetooth system, there are 1600 timeslots in one second. Supposed the EUT work in DH5 mode operates on a 5-slot transmission and 1-slot receiving basis which may result a maximum dwell time. Thus there are $1600 / (5+1) = 266.7$ transmission per second. In one period for each particular channel there are $(266.7/79) \times 31.6 = 106.81$ times of transmission.

Dwell Time in one period(ms) = Dwell time of one transmission(ms) multiplexes **106.81**

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 28 von 34
Page 28 of 34

5.10 Out-of-Band Emission

RESULT:

Pass

Date of testing : 19.10.2007
Test specification : FCC Part 15 Per Section 15.247(d)
RSS-210 Issue 7 A8.5
Limits : FCC Part 15 Per Section 15.247(d)
RSS-210 Issue 7 A8.5

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

In addition:

FCC Part 15 - radiated emission which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

RSS-210 Section 2.2- Unwanted emissions falling into restricted bands of Table 1 shall meet Tables 2 and 3 limits.

Deviations from Standard Test procedures

: None
Test Procedure : Procedure specified in ANSI C63.4/RSS-Gen were followed
Kind of test site : Shielded room
Operation mode : Transmitting at the highest and lowest channel (band edge)
Transmitting at low, middle and high channel (whole rang)
Power supply : DC 3.7V by battery
Temperature : 22°C
Humidity : 50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 100 kHz, VBW≥RBW.
4. Set proper frequency span respectively for out-of-band emission measurement of the band edge and the whole range (up to 10 times of the carrier frequency.)
5. Set the trace mode to Max Hold and mark the peak reading of any spurious emission recorded.

Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 29 von 34
Page 29 of 34

Table 12: Band Edges Emission

Emission	Attenuation (dB)	Limit (dB)
Lower Band Edge	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$
Upper Band Edge	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$

Table 13: Out-Of-Band Emission measurement (conducted)

Emission (Max reading among Channel low, mid and high)	Attenuation	Limit (dB)
30MHz to 25GHz	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$

Table 14: Band Edges Emission in the Restricted Bands 2483.5-2500MHz and 2310-2390MHz

Restricted band	Frequency [MHz]	dBc [dB]	PK [dB μ V/m]	Polarity (H/V)	PK limit [dB μ V/m]	AV limit [dB μ V/m]
Low band	*---				74	54
High band	*---				74	54

Remark:

1. The test result of peak carrier field strength of lowest channel and highest channel is recorded.
2. The dBc value between the carrier maximum power and band edge emission power of the frequency listed in the table is calculated from the test record showed in Appendix 1.
3. Peak value of the band edge emission listed in the table is calculated by the below formula:
PK value of band edge emission = Peak carrier field strength – dBc value described in item2

* **Note:** Disturbances other than those mentioned above are small or not detectable. Please refer to the Appendix 1 for the noise floor of the band edge emission.

5.11 Exemption from Routine Evaluation Limits – RF Exposure Evaluation

RESULT:
Pass

Date of testing : ---
 Test specification : RSS-102 Issue 2 Section 2.5.2
 Limits : RSS-102 Issue 2 Section 2.5.2

RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm, except when the device operates:

Below 1.5 GHz and its e.i.r.p. is equal to or less than 2.5 W;

At or above 1.5 GHz and the e.i.r.p. of the device is equal to or less than 5 W.

The EUT is a wireless audio transmitter which separation between it and the user is greater than 20 cm.

Table 15: e.i.r.p

Channel	Frequency	Peak Conducted Output Power	Antenna Gain	e.i.r.p		Limit
	(MHz)			(dBm)	(mW)	
Low	2402.120	2.28	2	4.28	2.68	5000
Mid	2441.100	1.83	2	3.83	2.42	5000
High	2479.880	1.13	2	3.33	2.15	5000


Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 31 von 34
Page 31 of 34

6 Photographs of the Test Set-Up

Photograph 1: Set-up for Conducted Emission Measurement

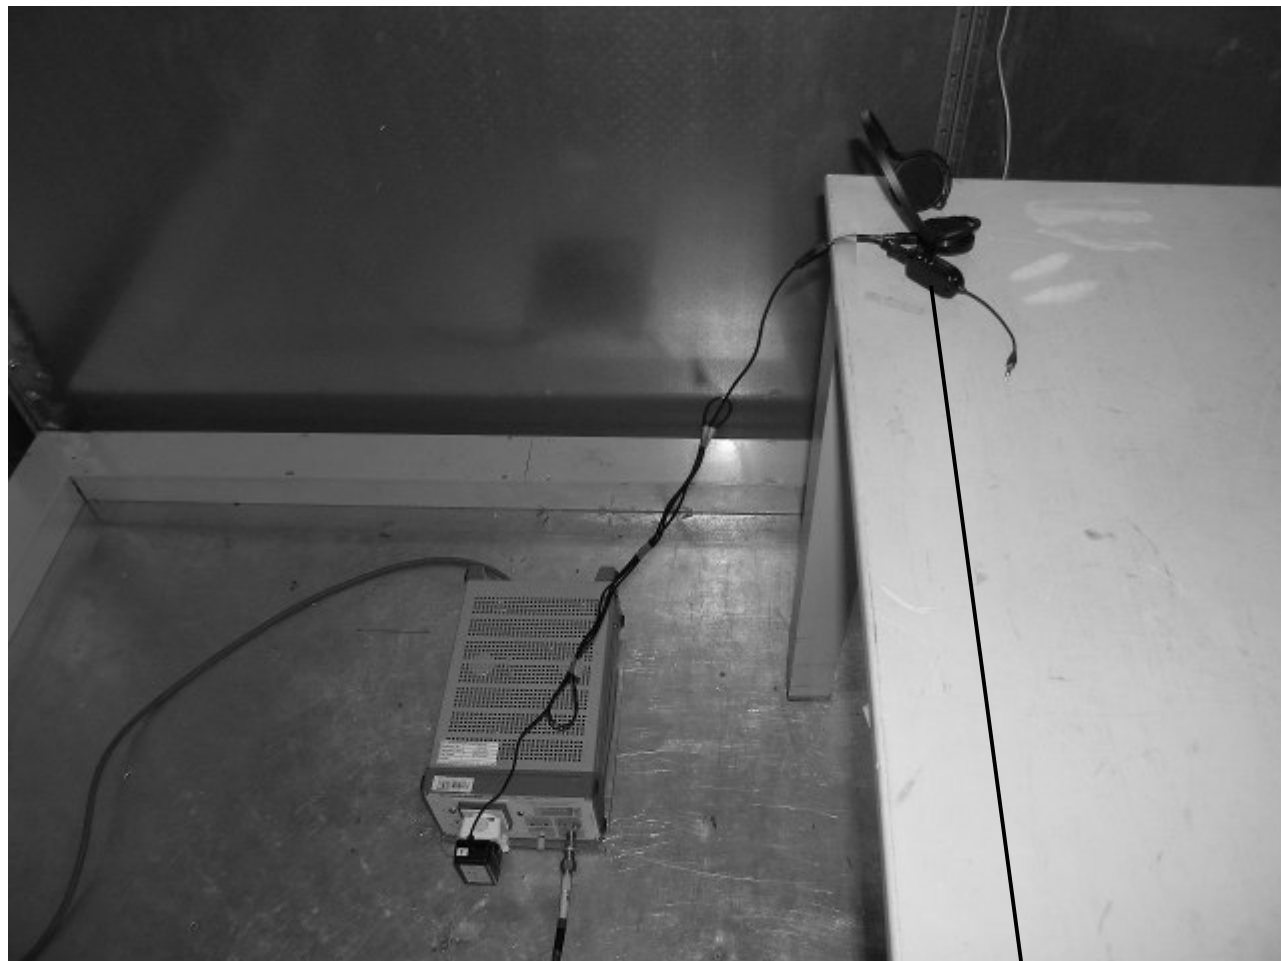

BH201


Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 32 von 34
Page 32 of 34

Photograph 2: Set-up for Radiation Measurement below 1GHz

=

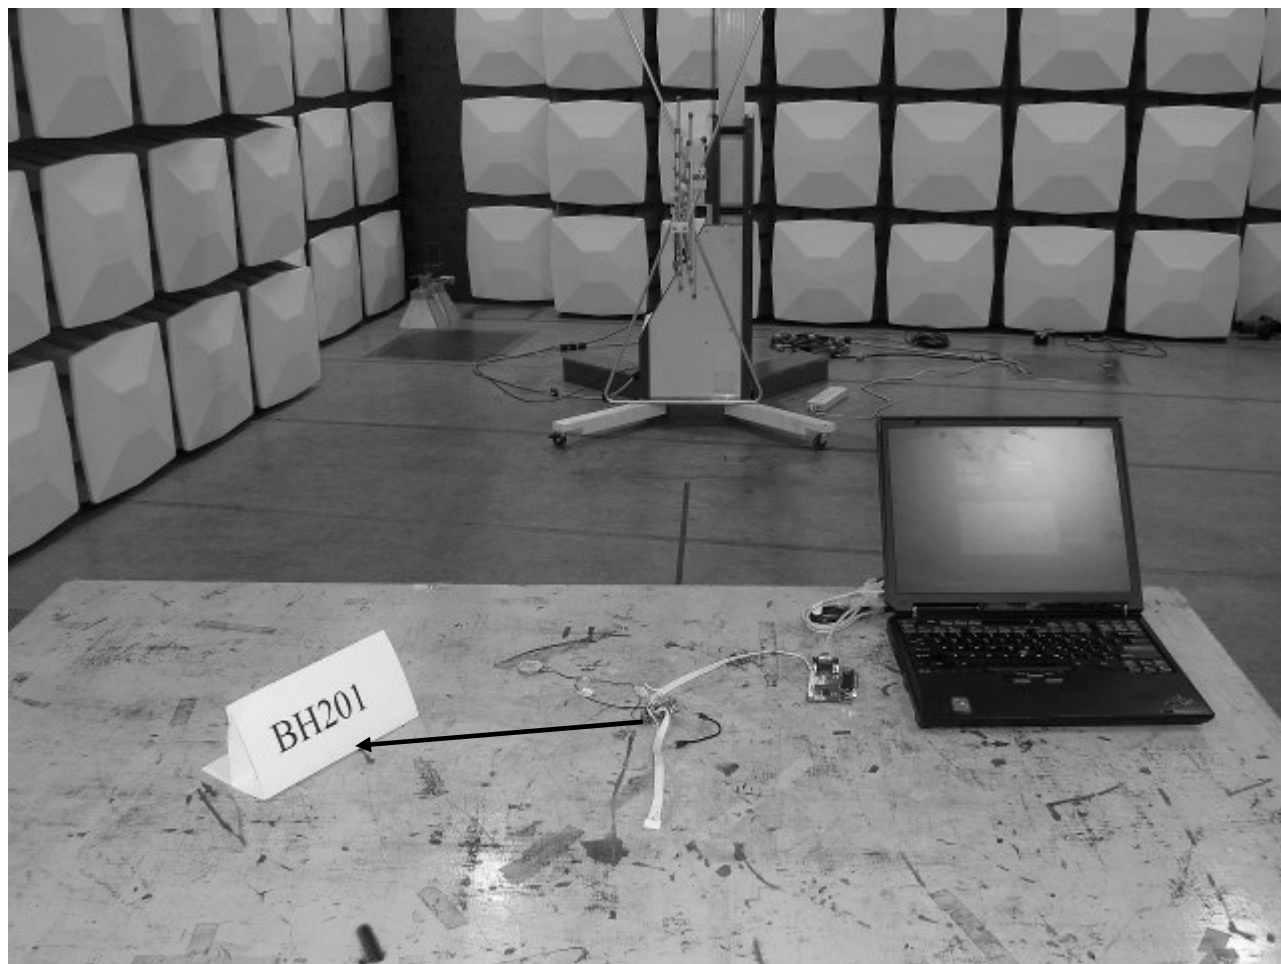


Prüfbericht - Nr.:
Test Report No.:

16010811 001

Seite 33 von 34
Page 33 of 34

Photograph 3: Set-up for Radiation Measurement above 1GHz

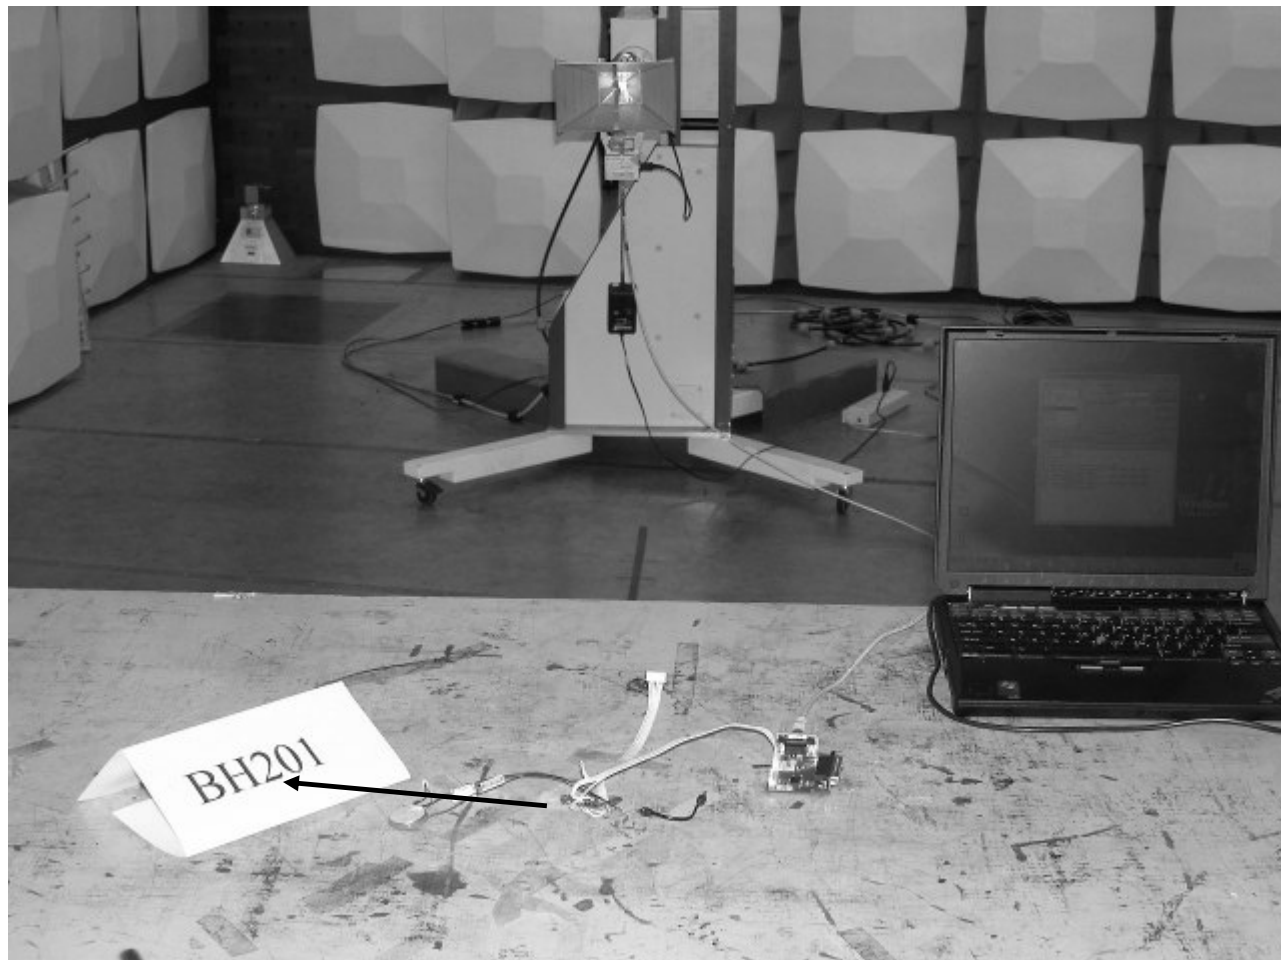

7 List of Tables

Table 1: List of Test and Measurement Equipment	7
Table 2: Disturbance Voltage on AC Mains	15
Table 3: Radiated Emission (Transmitting at channel low)	17
Table 4: Radiated Emission (Transmitting at channel mid)	17
Table 5: Radiated Emission (Transmitting at channel high)	18
Table 6: Receiver Radiated Emission (Worst Case of High, Mid, Low channel)	19
Table 7: Peak Conducted Power	21
Table 8: 20dB Bandwidth	22
Table 9: Hopping Channel Carrier Frequency Separation	24
Table 10: Number of hopping frequency	25
Table 11: Dwell Time	27
Table 12: Band Edges Emission	29
Table 13: Out-Of-Band Emission measurement (conducted)	29
Table 14: Band Edges Emission in the Restricted Bands 2483.5-2500MHz and 2310-2390MHz	29
Table 15: e.i.r.p	30

8 List of Photographs


Photograph 1: Set-up for Conducted Emission Measurement	31
Photograph 2: Set-up for Radiation Measurement below 1GHz	32
Photograph 3: Set-up for Radiation Measurement above 1GHz	33

Prüfbericht - Nr.: 16010811 001

Test Report no.:


Seite 1 von 16

Page 1 of 16

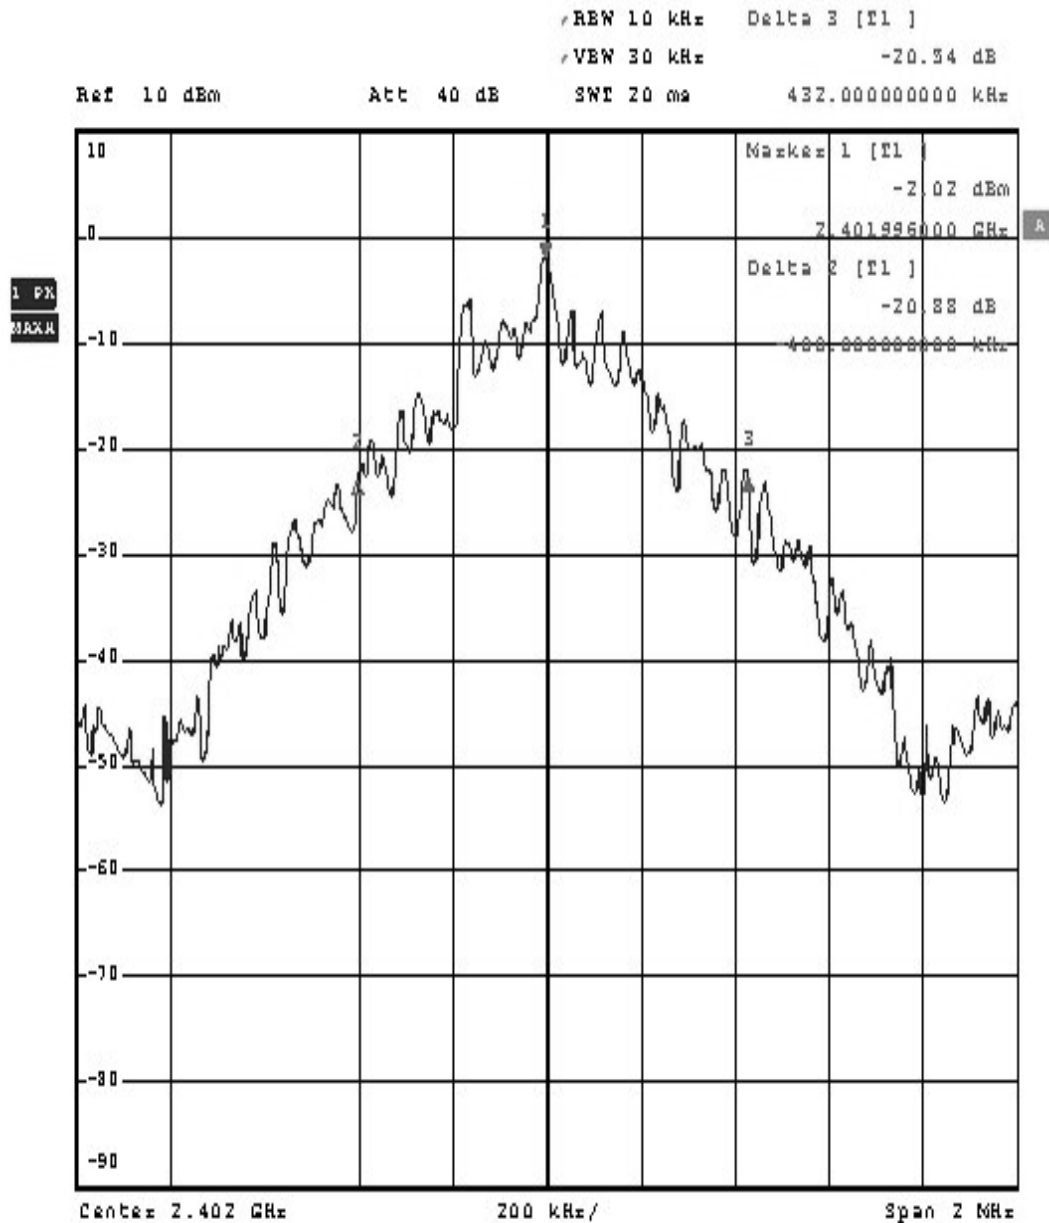20dB Bandwidth


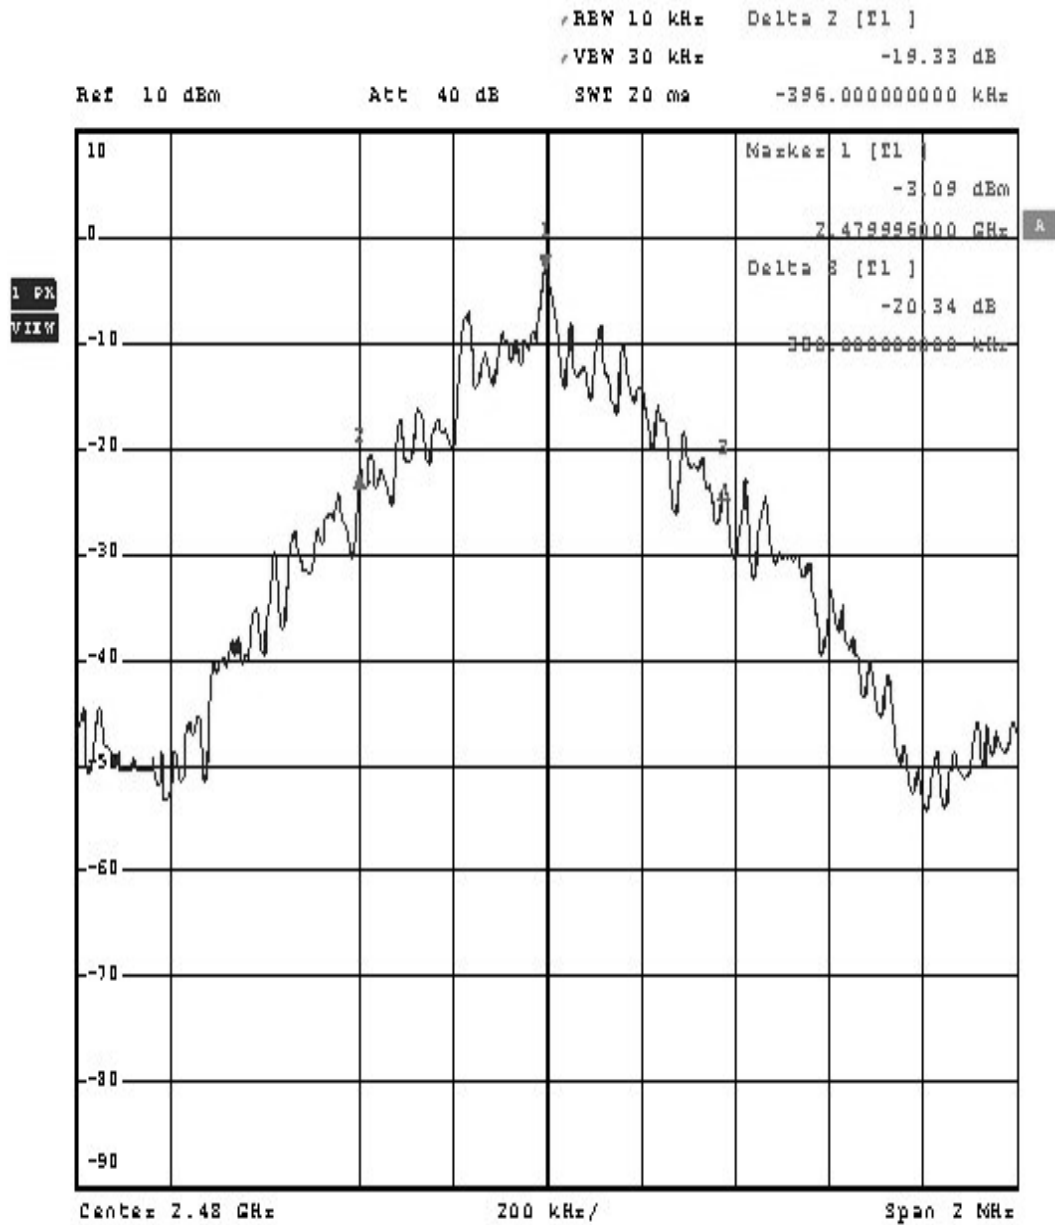
TP

Date: 17.OCT.2007 13:55:10

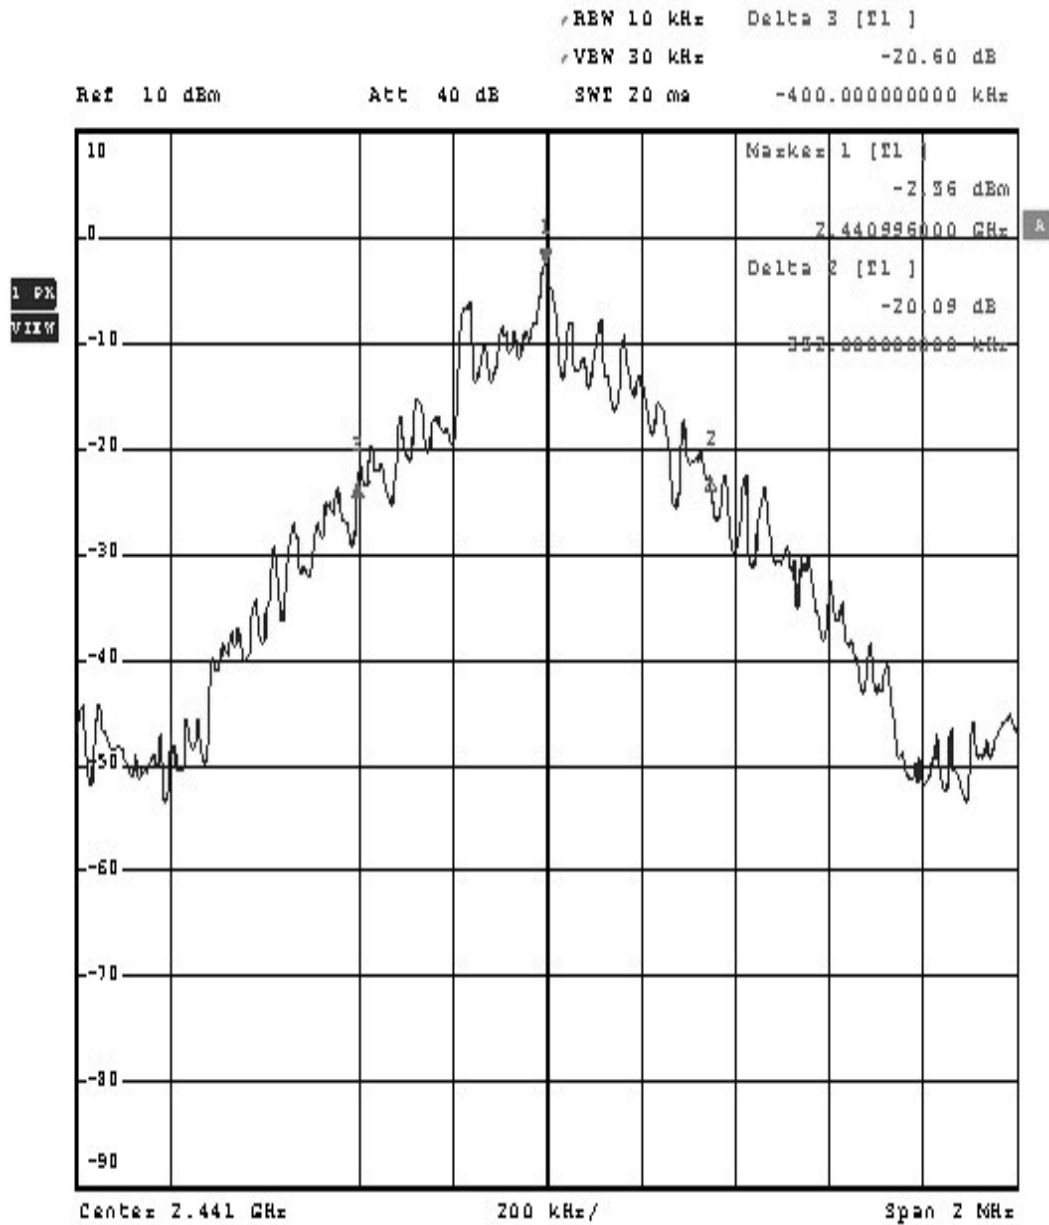Prüfbericht - Nr.: 16010811 001
Seite 2 von 16
Test Report no.:
Page 2 of 16


TP

Date: 17.OCT.2007 13:57:54

Prüfbericht - Nr.: 16010811 001
Test Report no.:
Seite 3 von 16
Page 3 of 16


TP


Date: 17.OCT.2007 13:59:32

Prüfbericht - Nr.: 16010811 001

Test Report no.:

Seite 4 von 16

Page 4 of 16

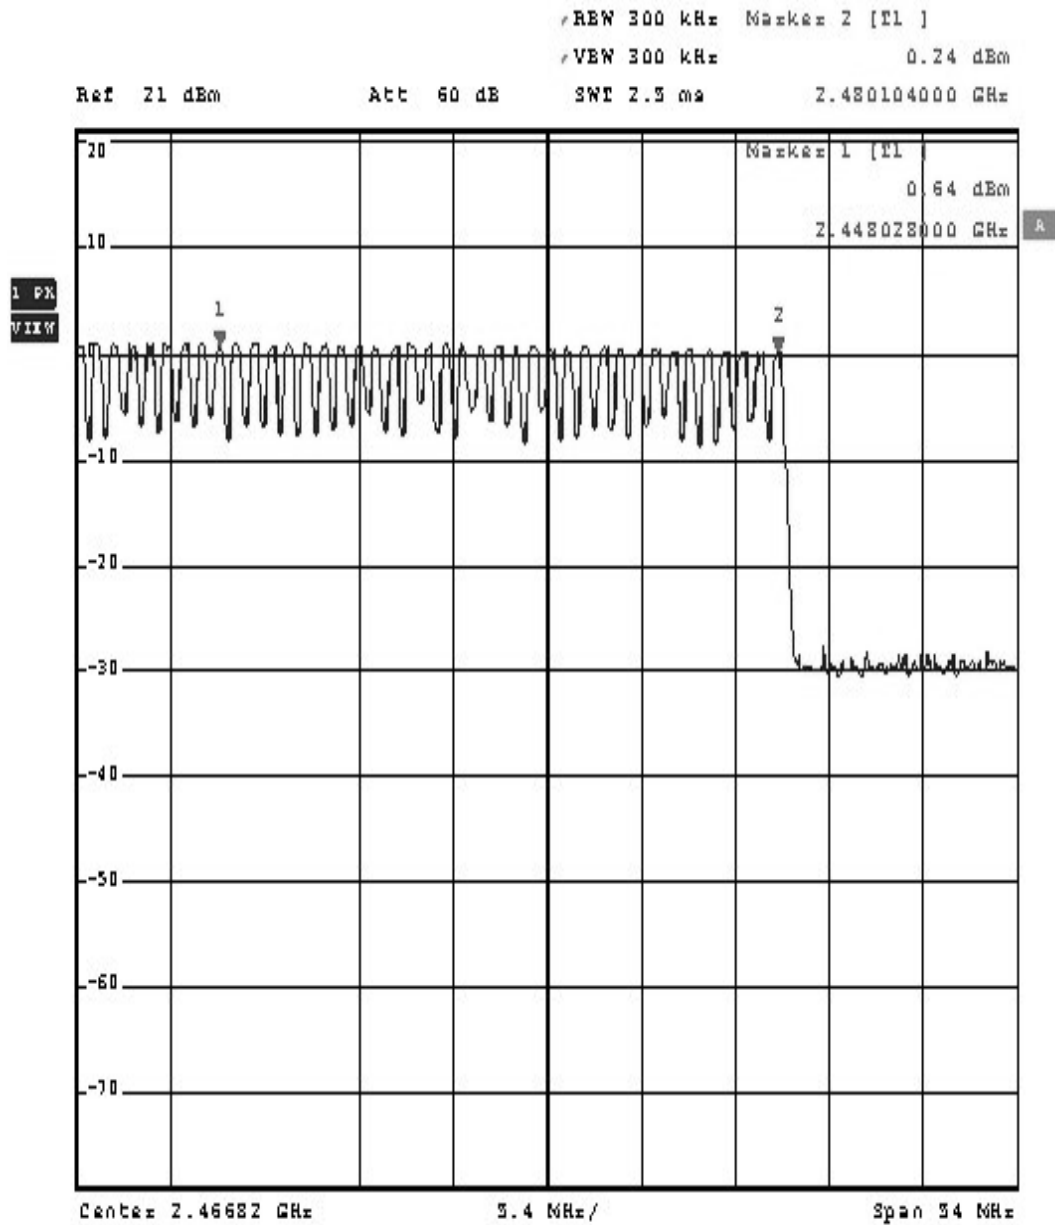Channel Number


TP


Date: 17.OCT.2007 14:10:37

Prüfbericht - Nr.: 16010811 001

Test Report no.:

Seite 5 von 16

Page 5 of 16

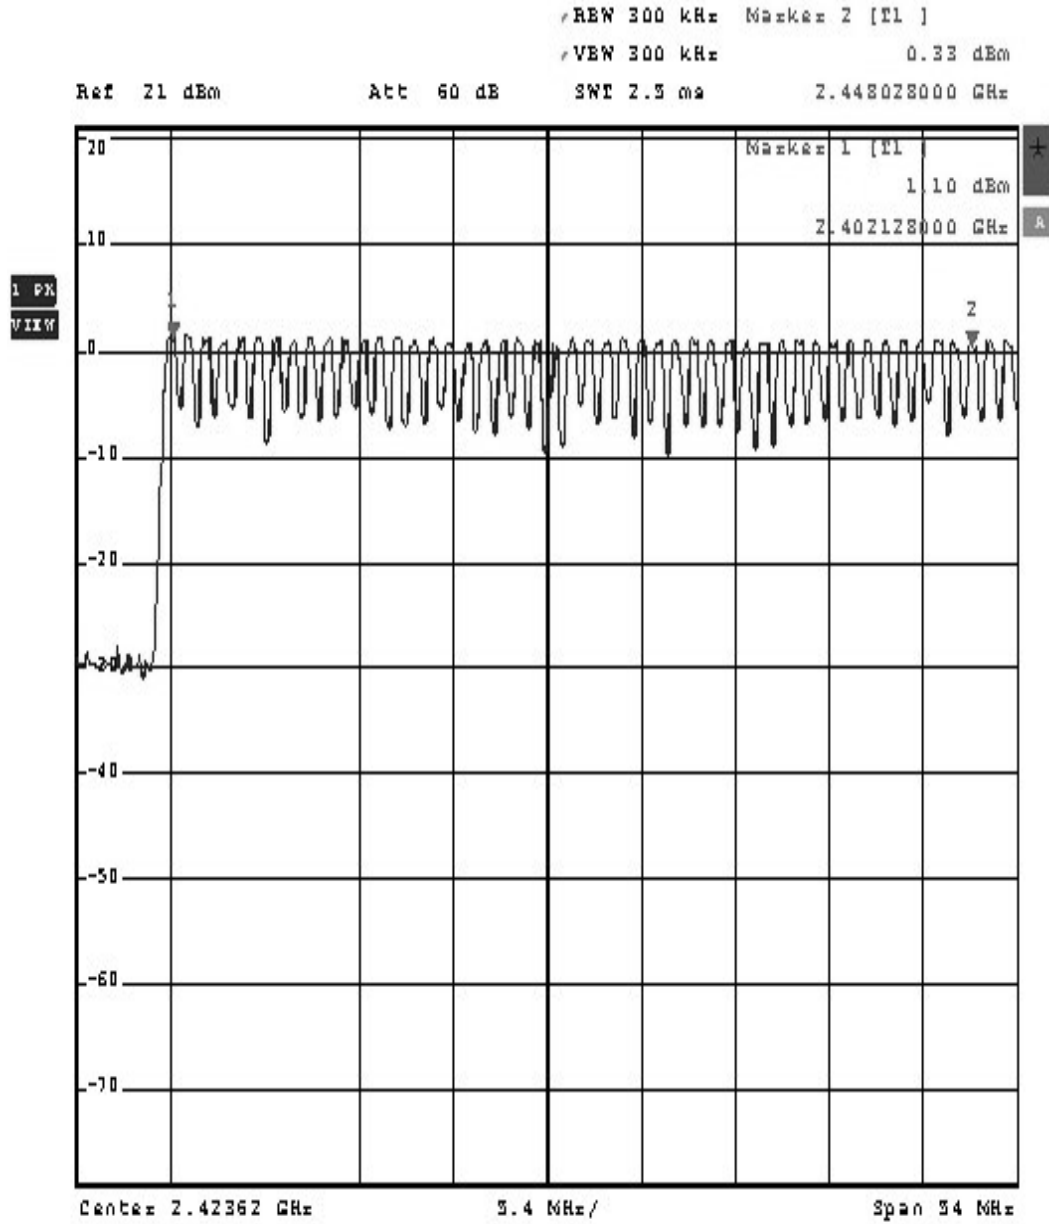

TP


Date: 17.OCT.2007 14:09:04

Prüfbericht - Nr.: 16010811 001

Test Report no.:

Seite 6 von 16

Page 6 of 16

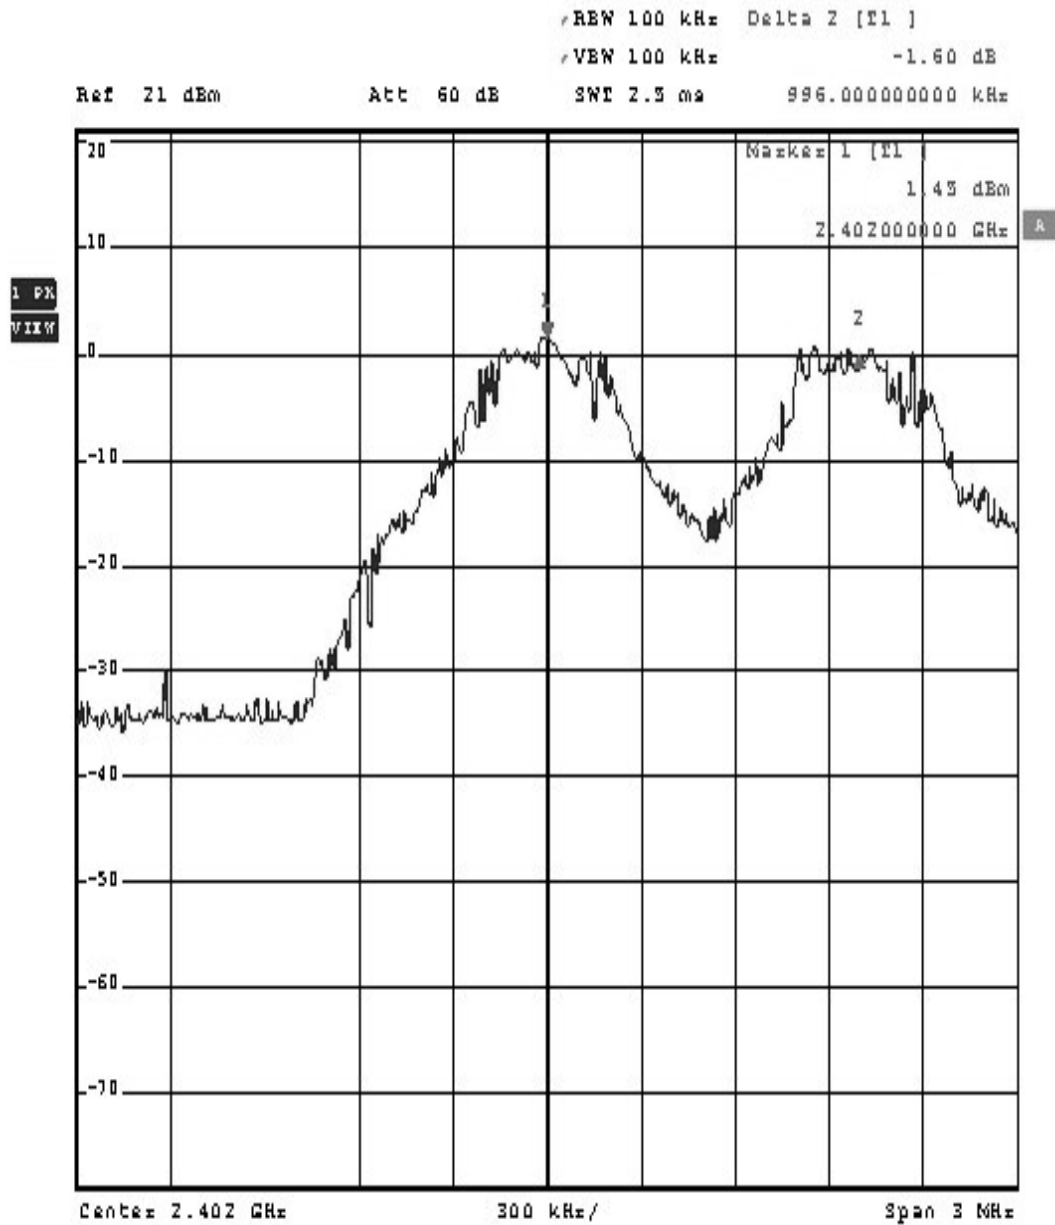Channel Separation


TP


Date: 17.OCT.2007 14:13:12

Prüfbericht - Nr.: 16010811 001

Test Report no.:

Seite 7 von 16

Page 7 of 16

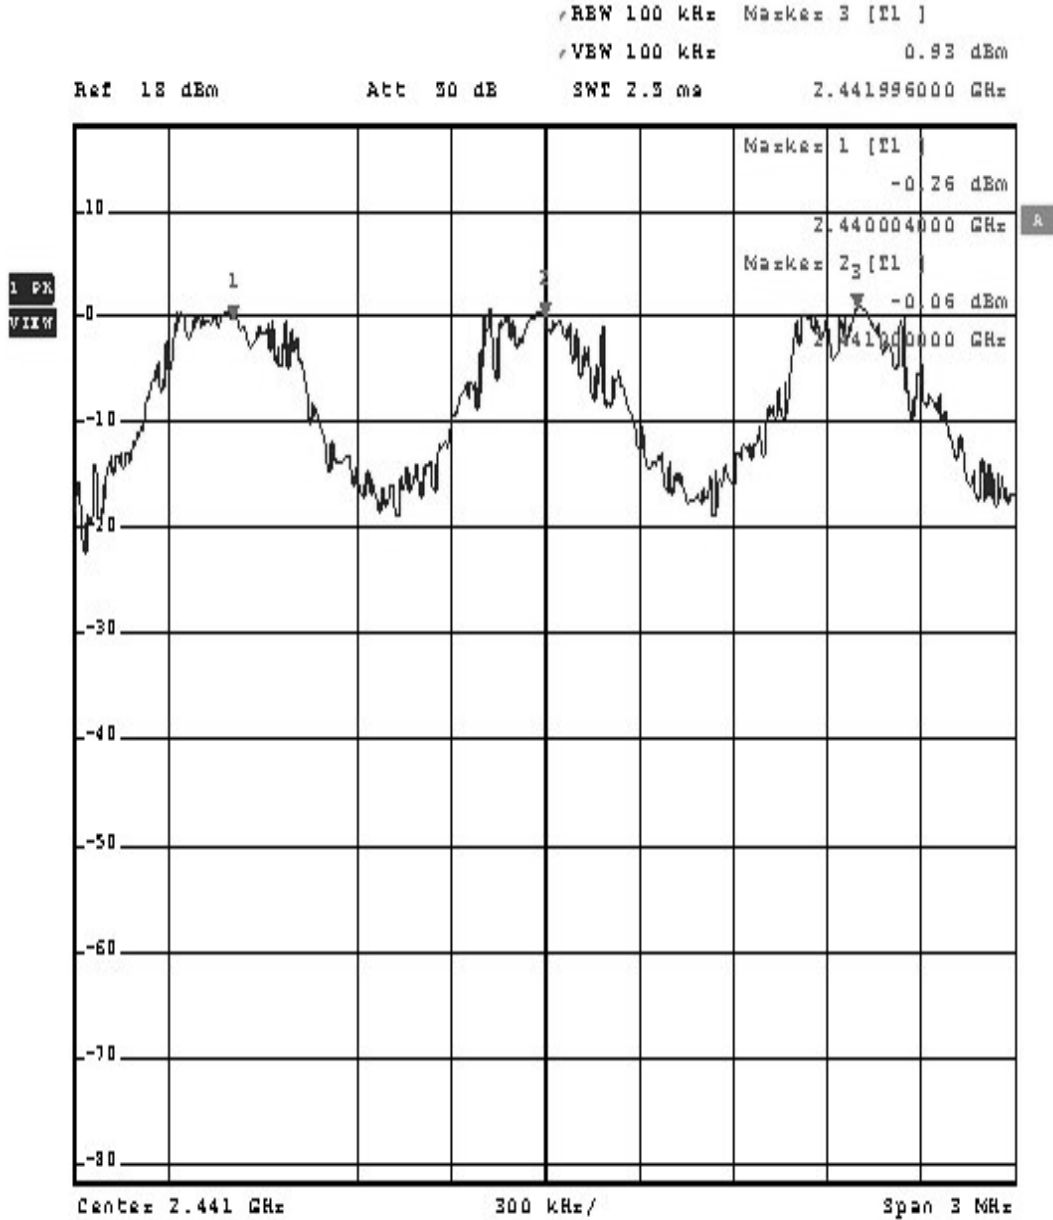

TP


Date: 17.OCT.2007 14:15:54

Prüfbericht - Nr.: 16010811 001

Test Report no.:

Seite 8 von 16

Page 8 of 16

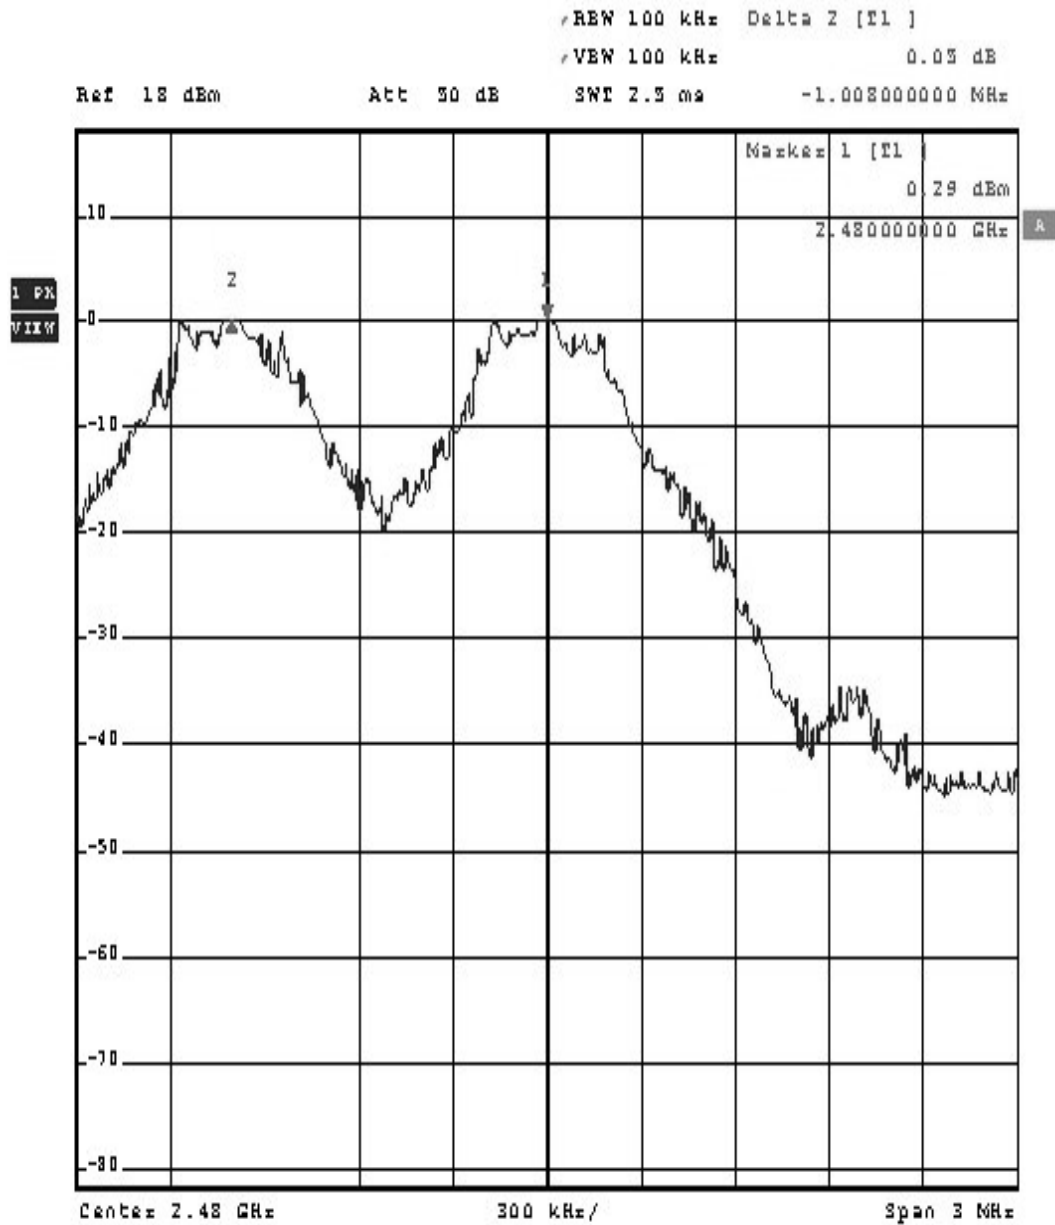

TP


Date: 17.OCT.2007 14:17:01

Prüfbericht - Nr.: 16010811 001

Test Report no.:


Seite 9 von 16

Page 9 of 16

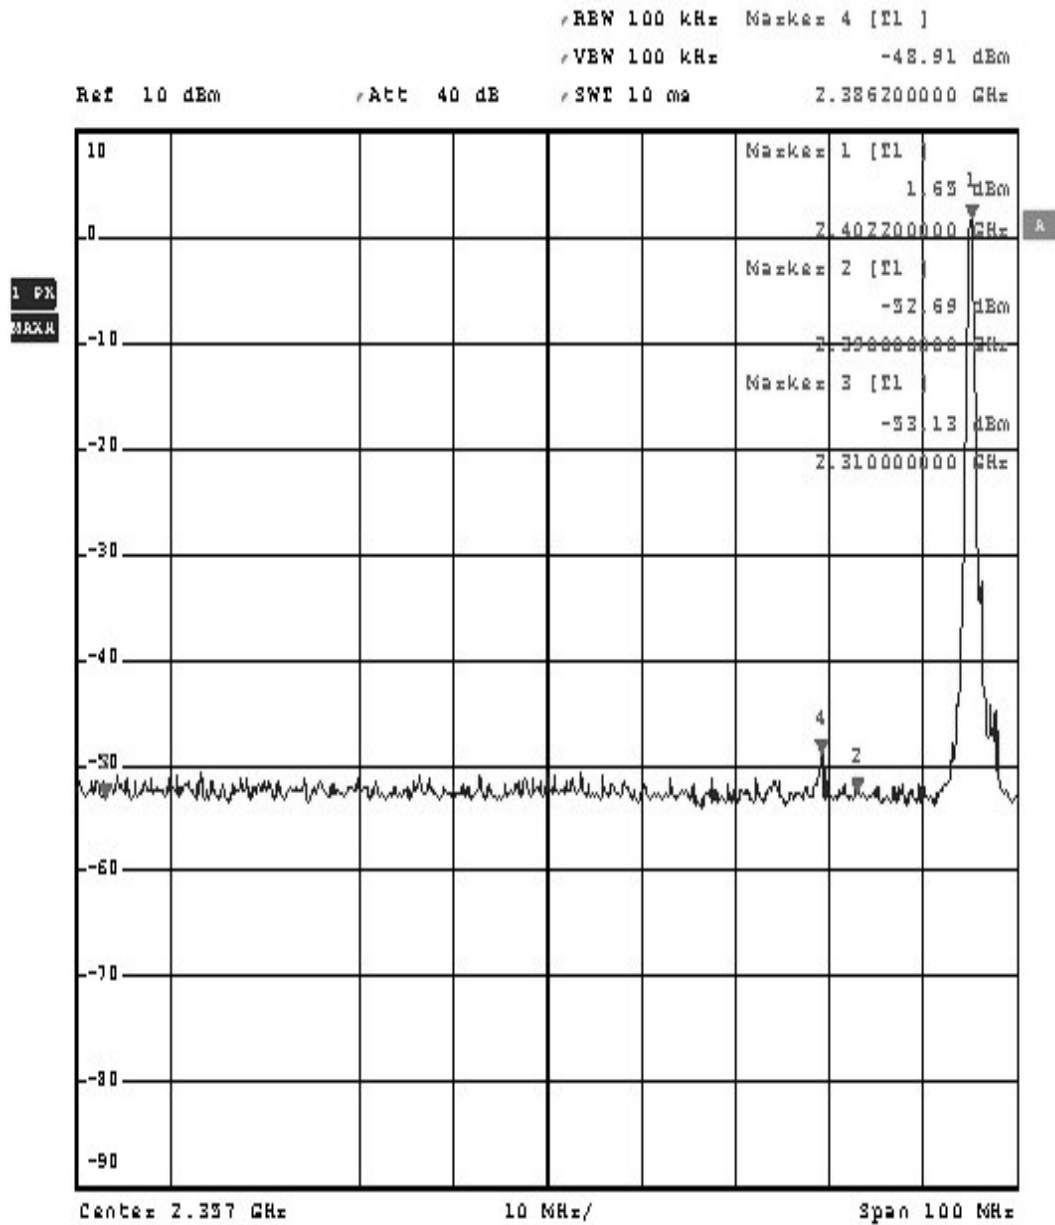Out of Band Emission


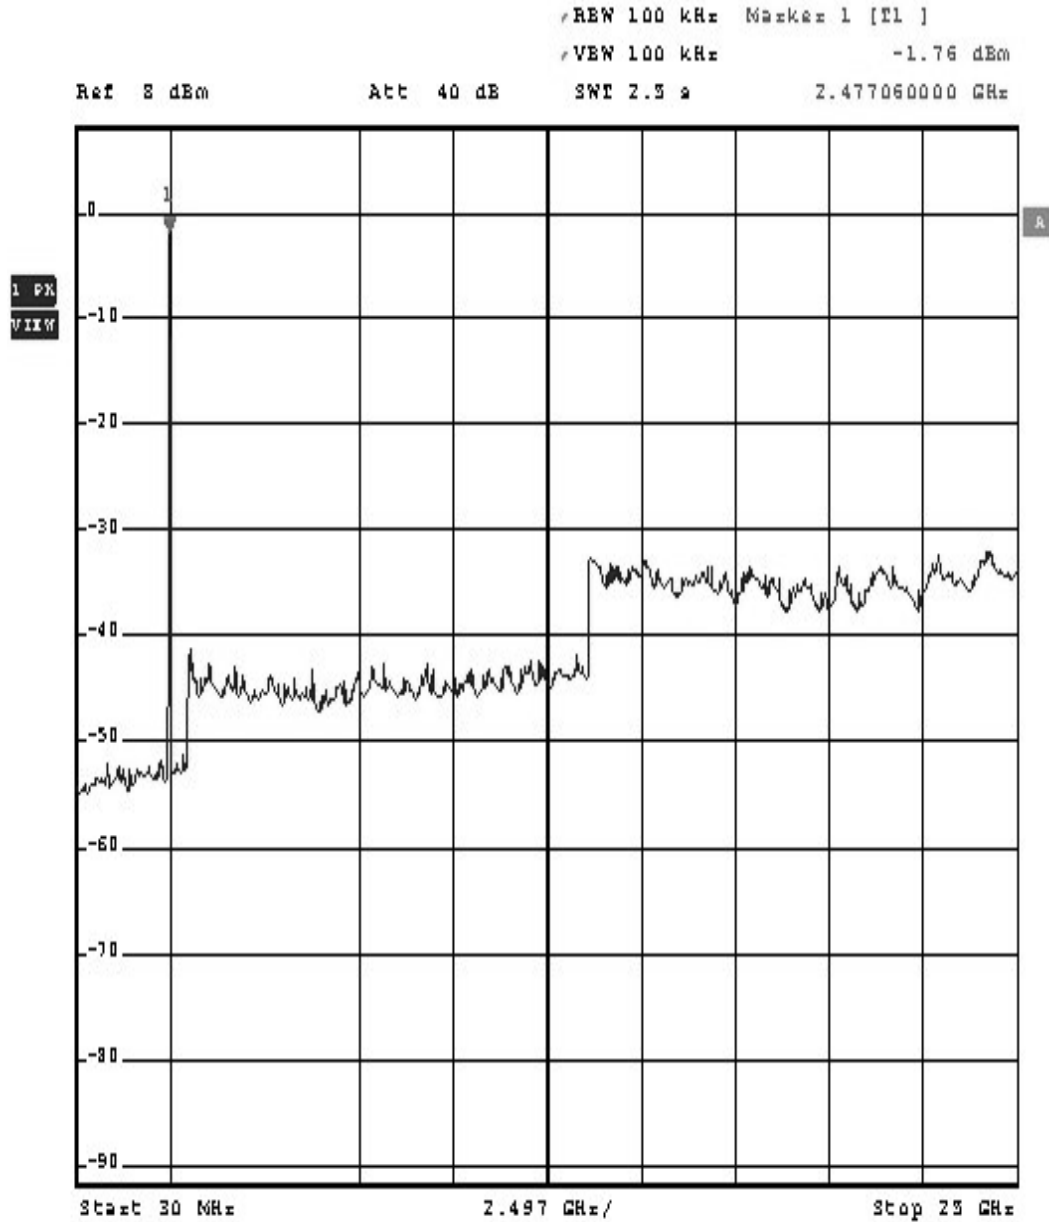
TP

Date: 17.OCT.2007 14:29:25

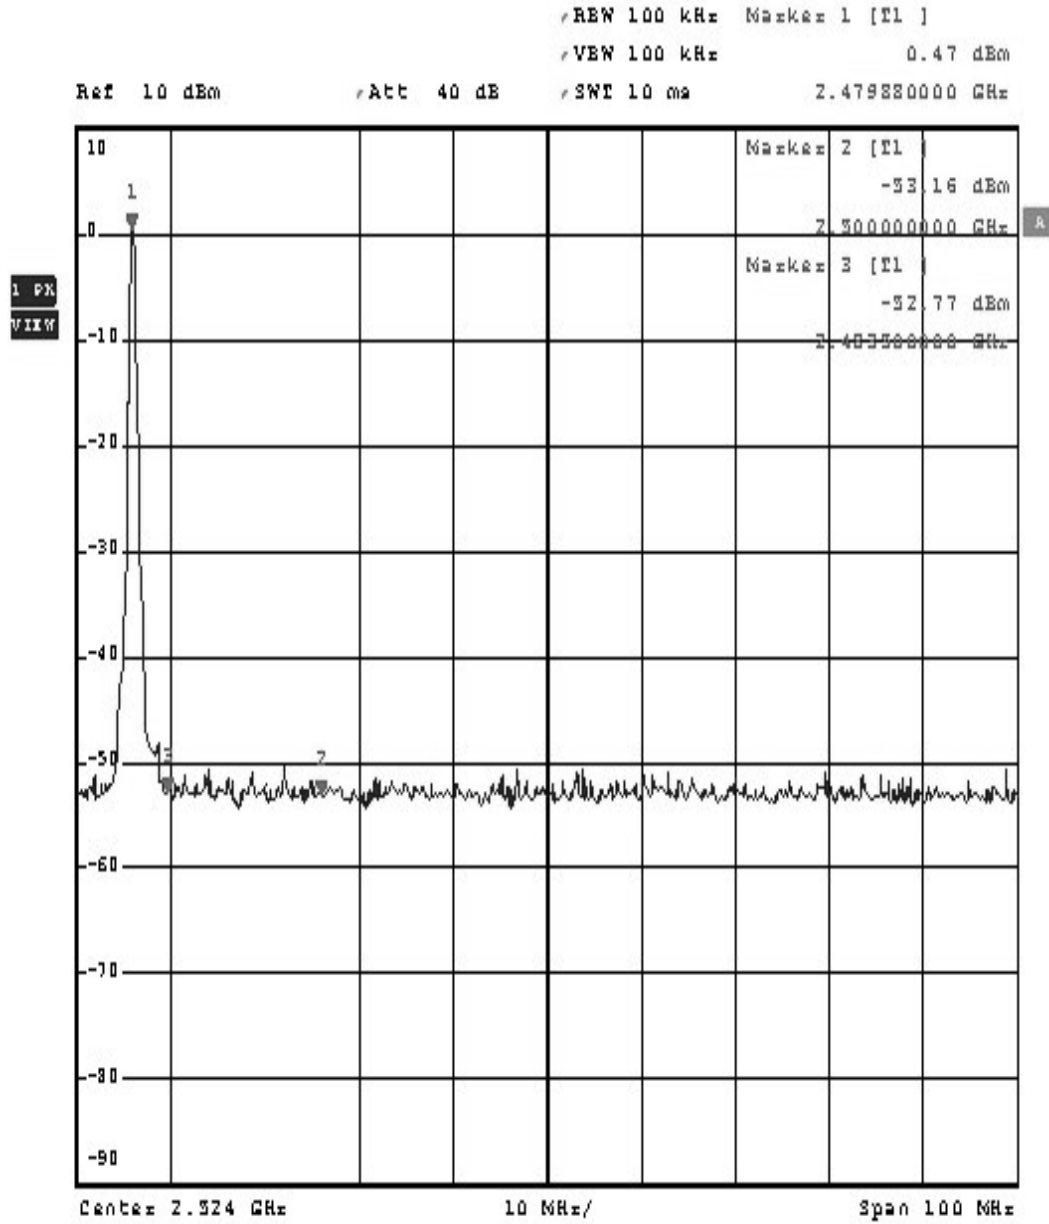Prüfbericht - Nr.: 16010811 001
Seite 10 von 16
Test Report no.:
Page 10 of 16


TP

Date: 17.OCT.2007 14:27:55

Prüfbericht - Nr.: 16010811 001
Test Report no.:
Seite 11 von 16
Page 11 of 16


TP


Date: 17.OCT.2007 15:01:44

Prüfbericht - Nr.: 16010811 001

Test Report no.:

Seite 12 von 16

Page 12 of 16

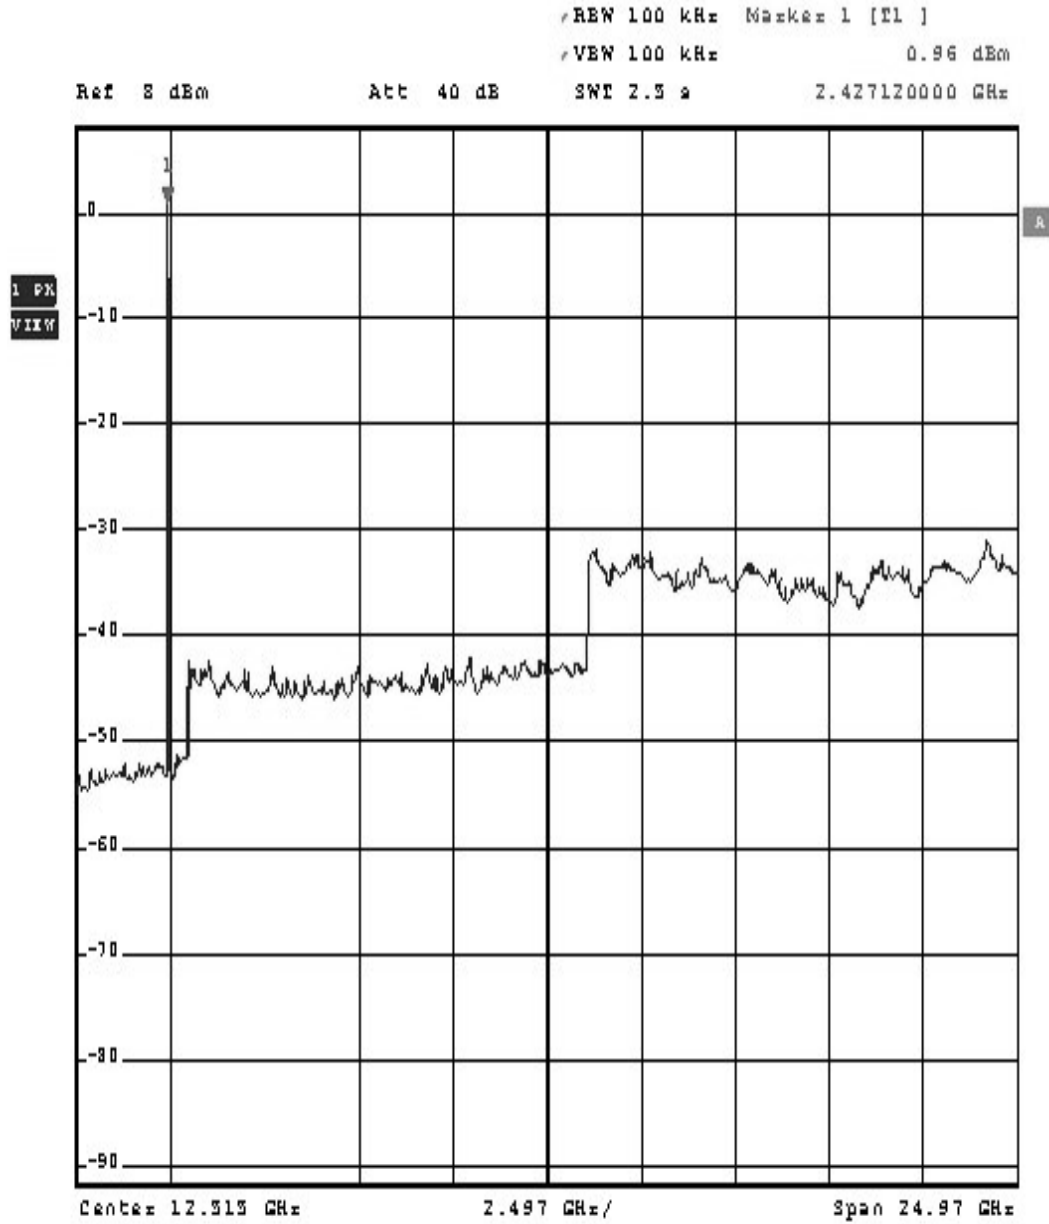

TP


Date: 17.OCT.2007 15:04:56

Prüfbericht - Nr.: 16010811 001

Test Report no.:

Seite 13 von 16

Page 13 of 16

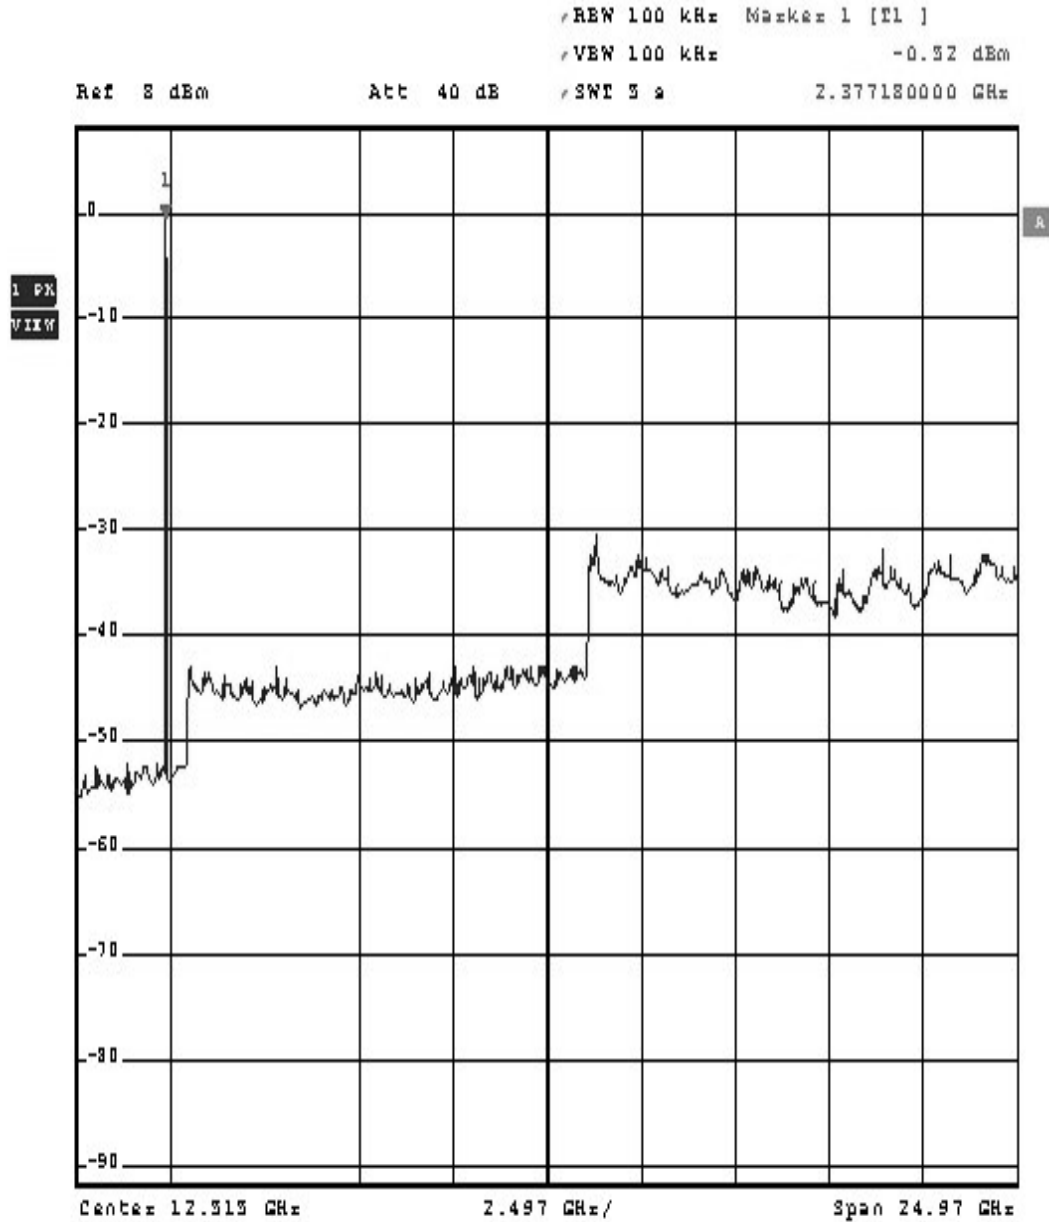

TP

Date: 17.OCT.2007 15:06:49


Dwell Time

Prüfbericht - Nr.: 16010811 001

Test Report no.:


Seite 14 von 16

Page 14 of 16

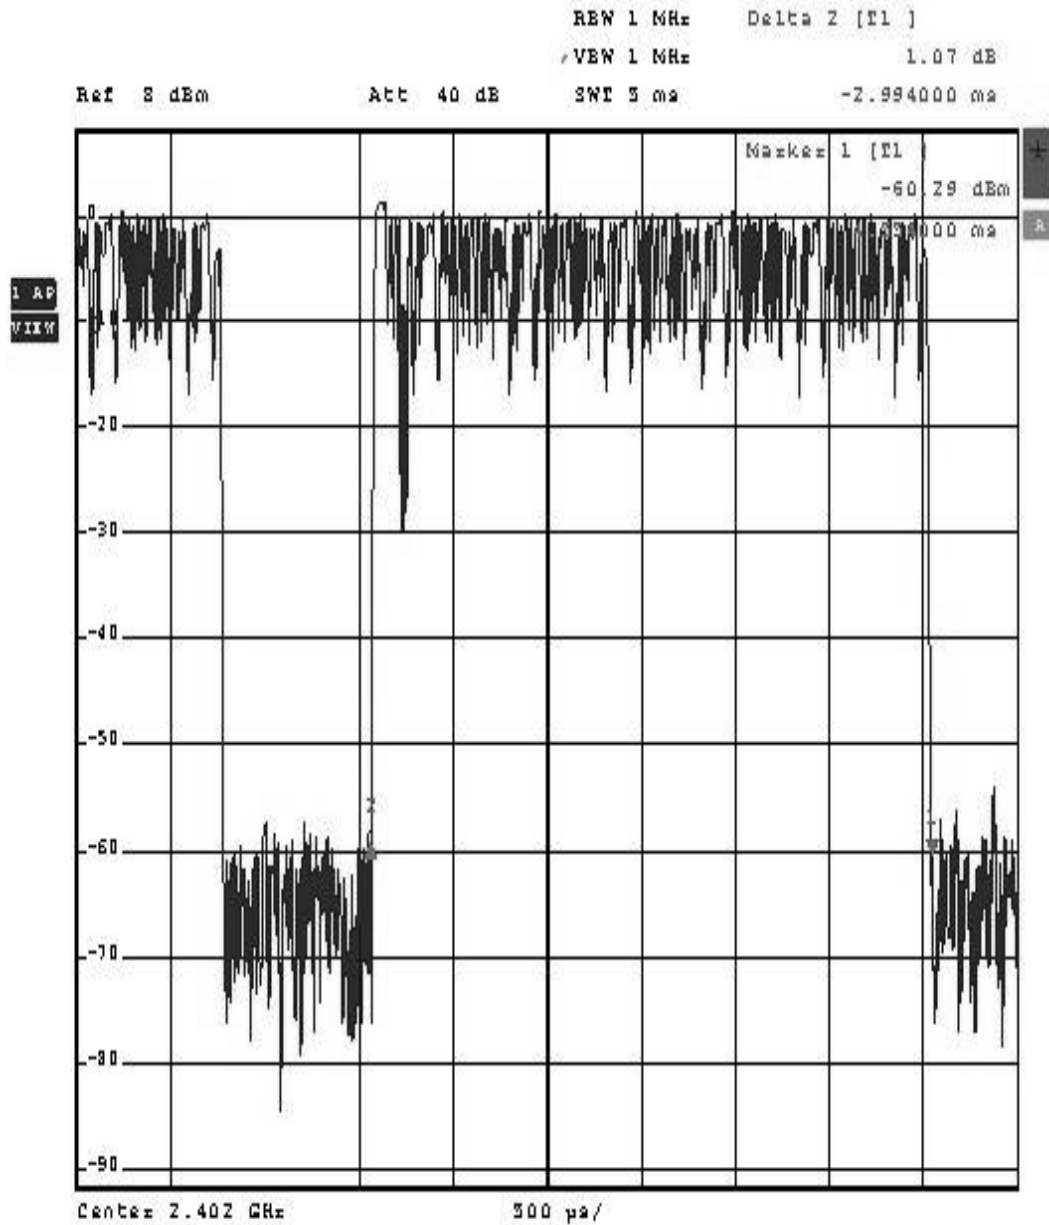

TP

Date: 17.OCT.2007 15:45:29

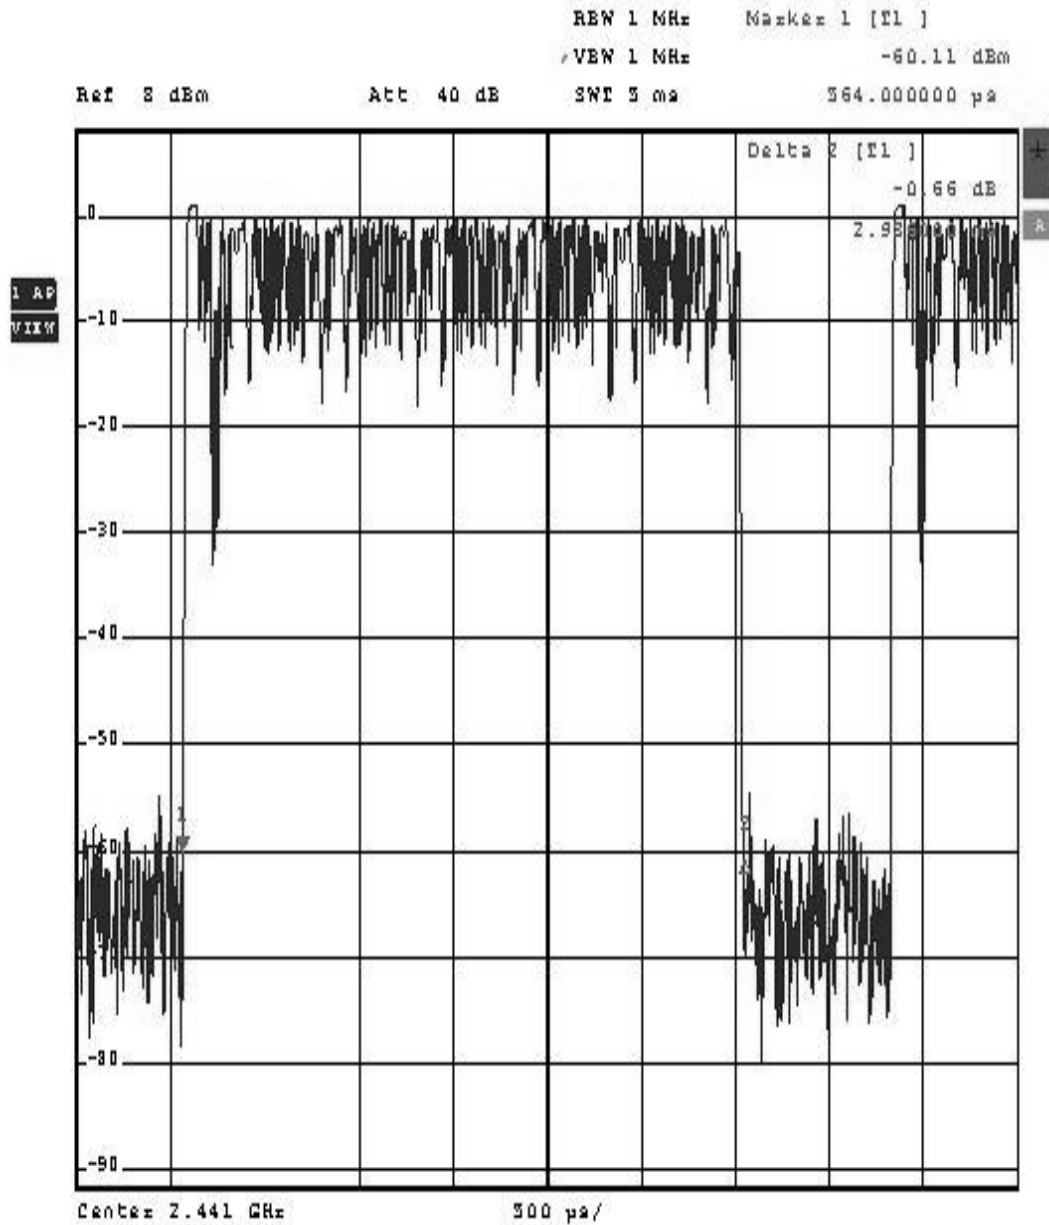Prüfbericht - Nr.: 16010811 001
Seite 15 von 16
Test Report no.:
Page 15 of 16


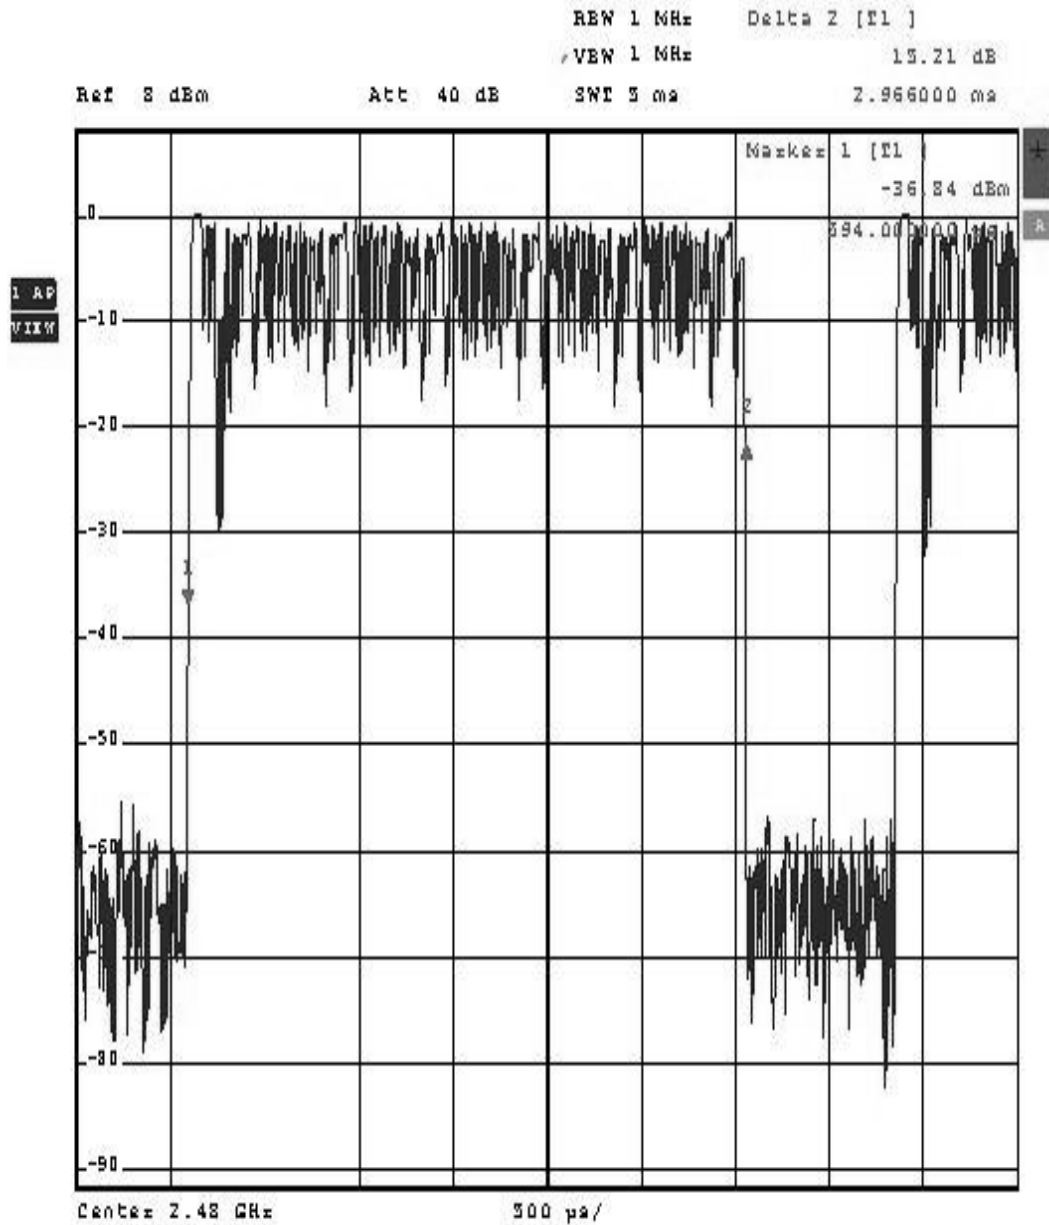
TP

Date: 17.OCT.2007 15:46:38

Prüfbericht - Nr.: 16010811 001
Seite 16 von 16

Test Report no.:

Page 16 of 16



TP

Date: 17.OCT.2007 15:48:16