



FCC 47 CFR PART 15 SUBPART C

for

900MHz Wireless Headphone

Model: HP5090A, WHP142

Brand: Arkon, RCA

Test Report Number:

C130517Z01-RP1

Issued for:

Uni-Art Precise Products Ltd

**11-12/F, Yue Xiu Industrial Building, 87 Hung To Road, Kowloon,
Hong Kong**

Issued by:

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

**No10-1, Mingkeda Logistics Park, No.18 Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China**

TEL: 86-755-28055000

FAX: 86-755-28055221

Issued Date: June 6, 2013



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C130517Z01-RP1	Initial Issue	ALL	Nancy Fu



TABLE OF CONTENTS

1 TEST CERTIFICATION	4
2 EUT DESCRIPTION.....	5
3 TEST METHODOLOGY.....	6
3.1. DESCRIPTION OF TEST MODES	6
4 TEST METHODOLOGY.....	7
4.1. EUT EXERCISE	7
4.2. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
5 INSTRUMENT CALIBRATION	8
6 SETUP OF EQUIPMENT UNDER TEST	8
6.1. DESCRIPTION OF SUPPORT UNITS.....	8
6.2. CONFIGURATION OF SYSTEM UNDER TEST	8
7 FACILITIES AND ACCREDITATIONS	9
7.1. FACILITIES	9
7.2. ACCREDITATIONS	9
7.3. MEASUREMENT UNCERTAINTY.....	9
8 FCC PART 15.249 REQUIREMENTS	10
8.1. BAND EDGES MEASUREMENT	10
8.2. POWER LINE CONDUCTED EMISSIONS MEASUREMENT	14
8.3. SPURIOUS EMISSIONS MEASUREMENT.....	19



1 TEST CERTIFICATION

Product	900MHz Wireless Headphone
Model	HP5090A, WHP142
Brand	Arkon, RCA
Tested	May 17~ June 6, 2013
Applicant	Uni-Art Precise Products Ltd 11-12/F, Yue Xiu Industrial Building, 87 Hung To Road, Kowloon, Hong Kong
Manufacturer	Uni-Art Precise Products Ltd 11-12/F, Yue Xiu Industrial Building, 87 Hung To Road, Kowloon, Hong Kong

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted
DEVIATION FROM APPLICABLE STANDARD	
None	

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.249.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Tom Gan
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Reviewed by:

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Service Inc.



2 EUT DESCRIPTION

Product	900MHz Wireless Headphone
Model Number	HP5090A, WHP142
Brand Name	Arkon, RCA
Model Discrepancy	Only their model names and brand names are different.
Identify Number	C130517Z01-RP1
EUT Power Rating	DC8V supplied by the adapter
Adapter Manufacturer / Model No.	Dongguan Yinli Electronics Co., Ltd./ YLS0041-T080020 Input: 100-240V,50/60Hz, 0.3A Output: DC8.0V, 200mA DC output cable: Un-shielded, 1.80m
Audio In Cable (TX)	Unshielded, 2.10m
DC Output Cable (TX)	Unshielded, 0.25m
Frequency Range	912.0 MHz, 912.5 MHz, 913.0 MHz
Transmit Power	89.97dBuV/m (Max.)
Modulation Technique	FM
Number of Channels	3 Channel
Antenna Specification	Linear antenna with 0 dBi gain (Max)
Temperature Range	0 ~ +55°C

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for **FCC ID: MVAHP5091A-001T** filing to comply with Section 15.207, 15.209 and 15.249 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

3.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Charge	<input type="checkbox"/>
	Mode 2: Play Music	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

Above 1G, Channel 1 (912.0MHz), Channel 2(912.5MHz) and Channel 3 (913.0MHz) were chosen for the final testing.



4 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4:2003 and FCC CFR 47 15.207, 15.209 and 15.249.

4.1. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

4.2. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



5 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6 SETUP OF EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	IPOD	D0022012POD	JQ8070LBYMV	N/A	APPLE	Unshielded 1.80m	N/A
2	900MHz Wireless Headphone (RX)	SP0590A	N/A	MVAHP5092 A-001R	Arkon	N/A	N/A

Note:

- 1) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

6.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



7 FACILITIES AND ACCREDITATIONS

7.1. FACILITIES

All measurement facilities used to collect the measurement data are located at
 No.10-1, Mingkeda Logistics Park, No.18 Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen China

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI (C-3478, R-3135, T-652, G-624)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

7.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



8 FCC PART 15.249 REQUIREMENTS

8.1. BAND EDGES MEASUREMENT

LIMIT

1. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.
3. As shown in Section 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.


MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2012	06/21/2013
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A. R. A	PLA-1030/B	1029	03/23/2013	03/23/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD		LZ-RF / CCS-SZ-3A2		

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

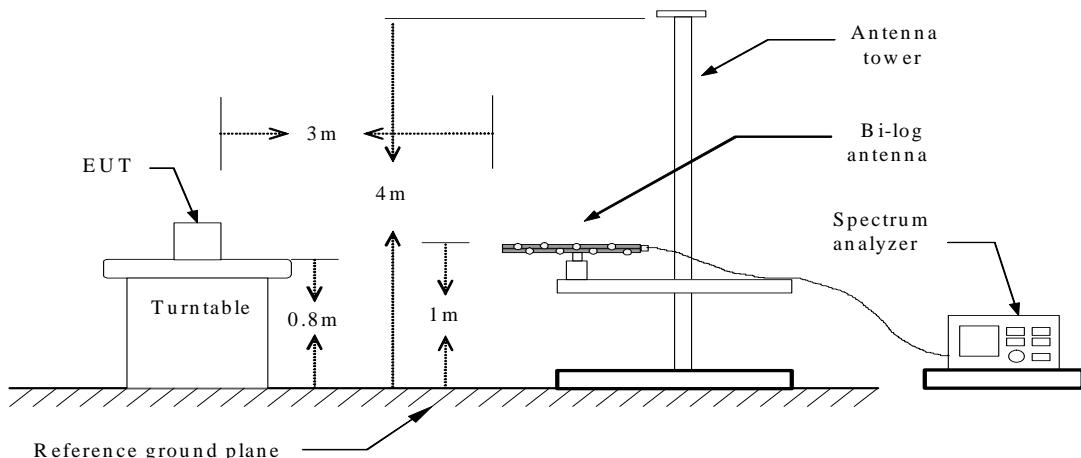

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=100kHz / VBW=300kHz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Test Data

Band Edges (TX / CH 1 912.0MHz)


Detector mode: Peak

Polarity: Vertical

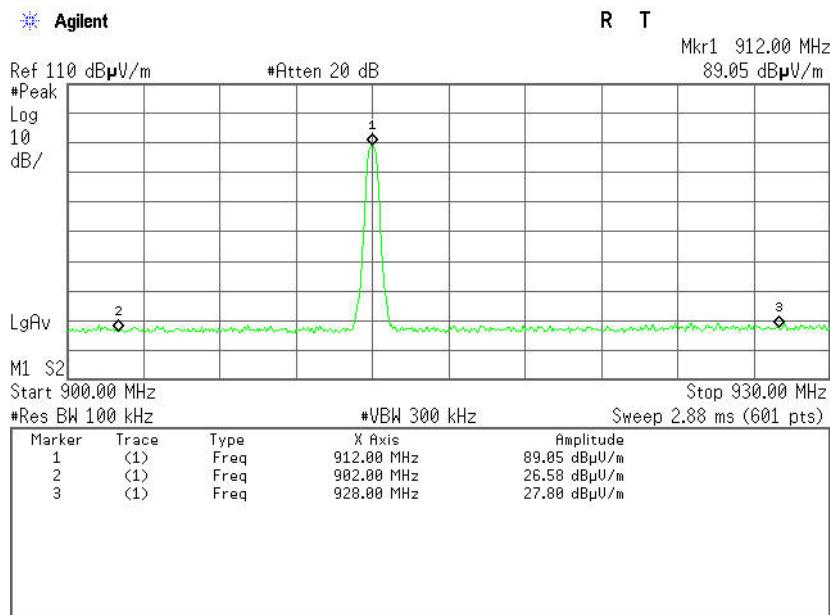

Detector mode: Peak

Polarity: Horizontal

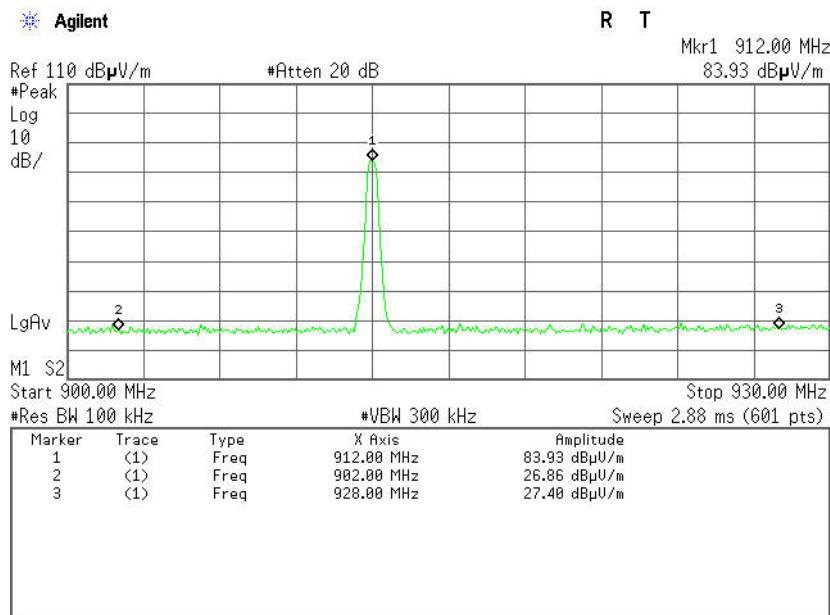




Band Edges (TX / CH 3 913.0MHz)


Detector mode: Peak

Polarity: Vertical

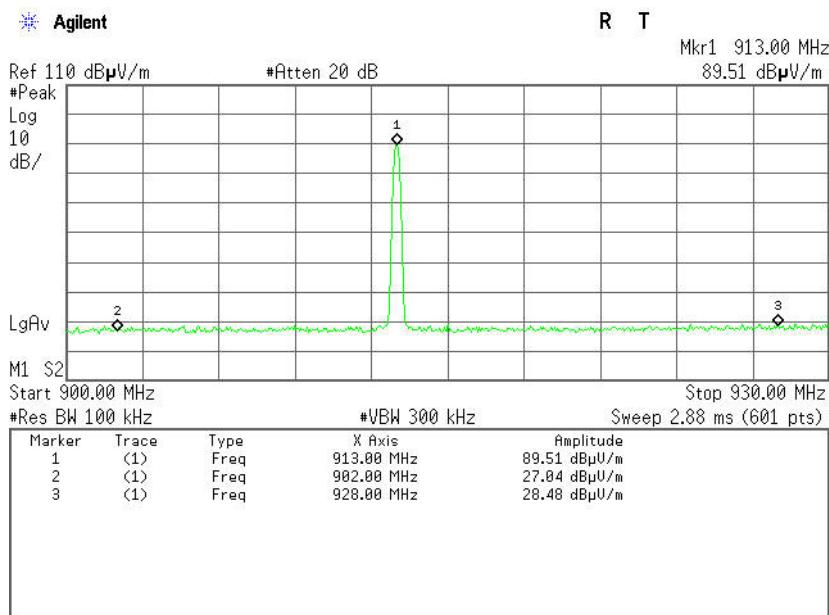

Detector mode: Peak

Polarity: Horizontal

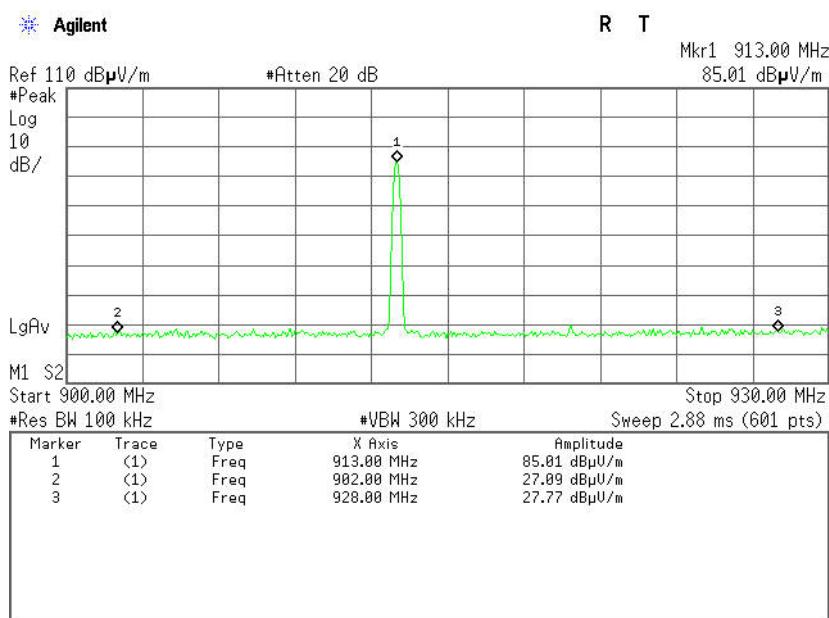



8.2. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

8.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	09/20/2012	09/20/2013
LISN	EMCO	3825/2	8901-1459	03/09/2013	03/08/2014
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2013	03/03/2014
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			


NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.



8.2.2. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

8.2.3. TEST SETUP

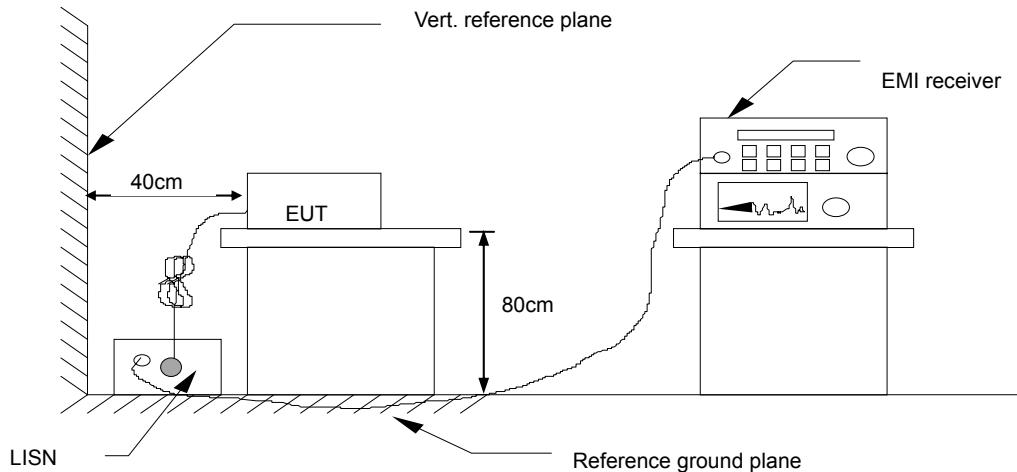

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.2.4. DATA SAMPLE

FREQ MHz	PEAK RAW dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	Note
x.xx	50.27	49.16	48.17	65.47	55.47	-16.31	-7.30	L1

Freq. = Emission frequency in MHz
RAW dBuV = Uncorrected Analyzer/Received Reading +INSERTION LOSS of LISN+CABLE LOSS+pulse limiter loss
Q.P. Limit dBuV = Limit stated in standard
AVG Limit dBuV = Limit stated in standard
Q.P. Margin dB = Q.P. RAW (dBuV) –Q.P. Limit (dBuV)
AVG Margin dB = AVG RAW (dBuV) –AVG Limit (dBuV)
Note = Current carrying line of reading
Q.P.: =Quasi-Peak



8.2.5. TEST RESULTS

Model No.	HP5090A	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Mack Li	Line	L1

(The chart below shows the highest readings taken from the final data.)

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	35.82	14.02	9.79	45.61	23.81	65.99	56.00	-20.38	-32.19	Pass
0.3660	40.23	19.63	9.65	49.88	29.28	58.59	48.59	-8.71	-19.31	Pass
0.7300	31.84	1.02	9.68	41.52	10.70	56.00	46.00	-14.48	-35.30	Pass
1.9420	30.75	7.35	9.68	40.43	17.03	56.00	46.00	-15.57	-28.97	Pass
3.7620	34.93	7.23	9.72	44.65	16.95	56.00	46.00	-11.35	-29.05	Pass
25.8779	12.45	-6.16	9.99	22.44	3.83	60.00	50.00	-37.56	-46.17	Pass

NOTE: L1 = Line One (Live Line)



Model No.	HP5090A	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Mack Li	Line	L2

(The chart below shows the highest readings taken from the final data.)

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.3660	40.47	20.91	9.66	50.13	30.57	58.59	48.59	-8.46	-18.02	Pass
0.7260	31.70	4.46	9.68	41.38	14.14	56.00	46.00	-14.62	-31.86	Pass
1.8700	32.26	13.07	9.69	41.95	22.76	56.00	46.00	-14.05	-23.24	Pass
2.7659	31.01	10.30	9.71	40.72	20.01	56.00	46.00	-15.28	-25.99	Pass
8.4900	23.74	-0.52	9.79	33.53	9.27	60.00	50.00	-26.47	-40.73	Pass
26.0020	24.46	-0.30	10.10	34.56	9.80	60.00	50.00	-25.44	-40.20	Pass

NOTE: L2 = Line Two (Neutral Line).



8.3. SPURIOUS EMISSIONS MEASUREMENT

8.3.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (μV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54



8.3.2. TEST INSTRUMENTS

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2012	06/21/2013
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A, R, A	PLA-1030/B	1029	03/23/2013	03/23/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


2. N.C.R = No Calibration Required.

8.3.3 TEST PROCEDURE (please refer to measurement standard)


1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.


8.3.2.1. TEST SETUP

Below 30 MHz

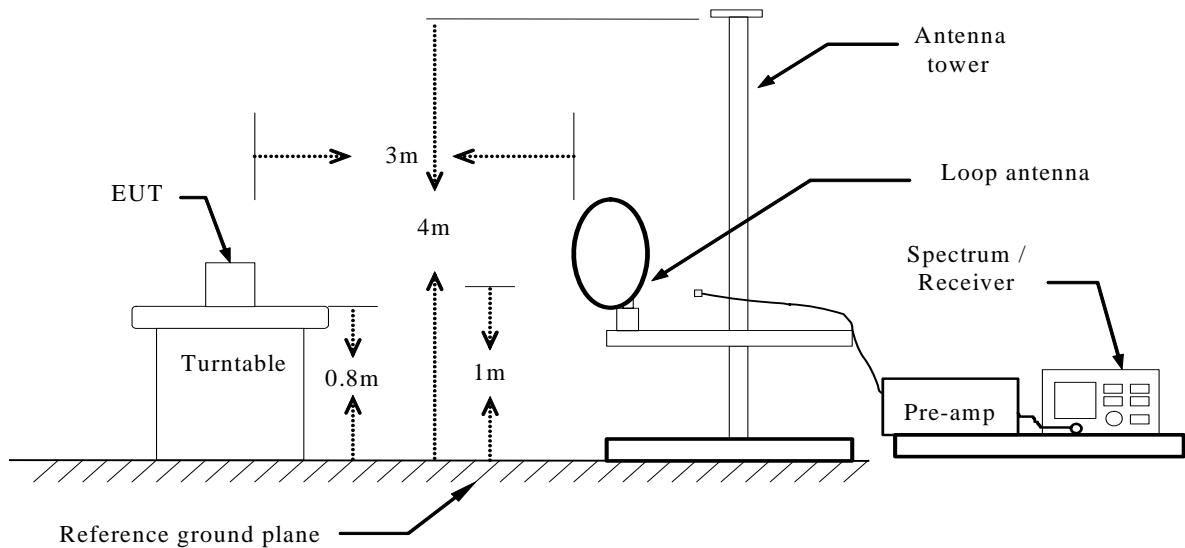

Below 1 GHz

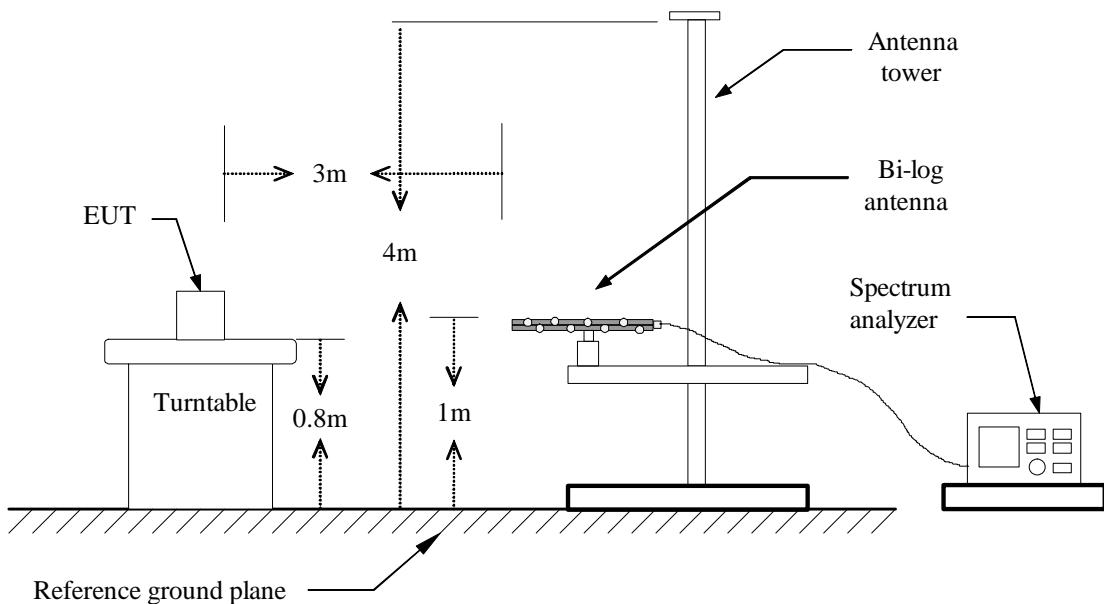

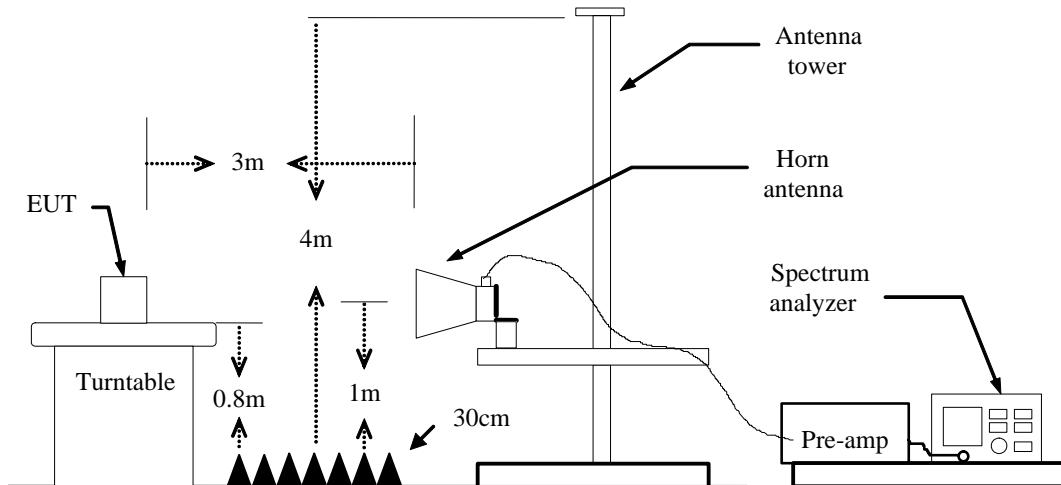Above 1 GHz


For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.3.2.2. DATA SAMPLE
Below 1 GHz

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Remark) (dBuV)	Correction Factor (dB/m)	Result (Remark) (dBuV/m)	Limit (Peak) (dBuV/m)	Margin (dB)	Remark
xxx	V	12.12	10.21	22.33	40.00	-17.67	Peak

Above 1 GHz

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
xxx	V	65.45	63.00	-11.12	54.33	51.88	74.00	54.00	-2.12	AVG

Frequency (MHz)

= Emission frequency in MHz

Ant.Pol. (H/V)

= Antenna polarization

Reading (dBuV)

= Uncorrected Analyzer / Receiver reading

Correction Factor (dB/m)

= Antenna factor + Cable loss – Amplifier gain

Result (dBuV/m)

= Reading (dBuV) + Correction Factor (dB/m)

Limit (dBuV/m)

= Limit stated in standard

Margin (dB)

= Remark Result (dBuV/m) – Limit (dBuV/m)

Peak

= Peak Reading

QP

= Quasi-peak Reading

AVG

= Average Reading



8.3.2.3. TEST RESULTS

Below 1 GHz

Operation Mode: TX / CH 1 (912.0MHz) **Test Date:** June 2, 2013
Temperature: 24°C **Tested by:** Mack Li
Humidity: 52 % RH **Polarity:** Ver. / Hor.

Fundamental

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
912.0000	92.80	-3.75	89.05	94.00	-4.95	V	QP
912.0000	87.68	-3.75	83.93	94.00	-10.07	H	QP

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
51.0167	48.25	-17.26	30.99	40.00	-9.01	V	QP
149.6333	46.86	-18.64	28.22	43.50	-15.28	V	QP
266.0333	48.30	-18.44	29.86	46.00	-16.14	V	QP
332.3167	38.26	-17.49	20.77	46.00	-25.23	V	QP
468.1167	36.40	-14.83	21.57	46.00	-24.43	V	QP
589.3667	33.30	-12.62	20.68	46.00	-25.32	V	QP
240.1667	41.64	-17.98	23.66	46.00	-22.34	H	QP
266.0333	47.35	-18.44	28.91	46.00	-17.09	H	QP
335.5500	36.99	-17.51	19.48	46.00	-26.52	H	QP
642.7167	36.16	-12.82	23.34	46.00	-22.66	H	QP
731.6332	39.29	-10.68	28.61	46.00	-17.39	H	QP
953.1167	37.51	-8.19	29.32	46.00	-16.68	H	QP

****Note:** No emission found between lowest internal used/generated frequency to 30 MHz.

REMARKS:

1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using peak/quasi-peak detector mode.
2. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m)



Operation Mode: TX / CH 2 (912.5MHz) **Test Date:** June 2, 2013
Temperature: 24°C **Tested by:** Mack Li
Humidity: 52 % RH **Polarity:** Ver. / Hor.

Fundamental

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
912.5000	93.72	-3.75	89.97	94.00	-4.03	V	QP
912.5000	89.10	-3.75	85.35	94.00	-8.65	H	QP

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
47.7833	48.14	-16.24	31.90	40.00	-8.10	V	QP
97.9000	47.24	-22.56	24.68	43.50	-18.82	V	QP
194.9000	37.84	-18.47	19.37	43.50	-24.13	V	QP
246.6333	37.68	-17.43	20.25	46.00	-25.75	V	QP
266.0333	44.54	-18.44	26.10	46.00	-19.90	V	QP
275.7333	39.95	-18.48	21.47	46.00	-24.53	V	QP
194.9000	44.36	-18.47	25.89	43.50	-17.61	H	QP
246.6333	45.30	-17.43	27.87	46.00	-18.13	H	QP
256.3333	48.82	-17.84	30.98	46.00	-15.02	H	QP
288.6666	41.13	-18.38	22.75	46.00	-23.25	H	QP
335.5500	38.03	-17.51	20.52	46.00	-25.48	H	QP
709.0000	37.25	-11.09	26.16	46.00	-19.84	H	QP

****Note:** No emission found between lowest internal used/generated frequency to 30 MHz.

REMARKS:

1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using peak/quasi-peak detector mode.
2. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m)

**Operation Mode:** TX / CH 3 (913.0MHz)**Test Date:** June 2, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52 % RH**Polarity:** Ver. / Hor.**Fundamental**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
913.0000	93.26	-3.75	89.51	94.00	-4.49	V	QP
913.0000	88.76	-3.75	85.01	94.00	-8.99	H	QP

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
47.7833	48.01	-16.24	31.77	40.00	-8.23	V	QP
97.9000	47.74	-22.56	25.18	43.50	-18.32	V	QP
196.5167	38.70	-18.54	20.16	43.50	-23.34	V	QP
256.3333	40.09	-17.84	22.25	46.00	-23.75	V	QP
288.6666	37.33	-18.38	18.95	46.00	-27.05	V	QP
642.7167	37.04	-12.82	24.22	46.00	-21.78	V	QP
186.8167	44.69	-18.64	26.05	43.50	-17.45	H	QP
248.2500	43.25	-17.60	25.65	46.00	-20.35	H	QP
257.9500	46.95	-17.90	29.05	46.00	-16.95	H	QP
278.9667	45.45	-18.54	26.91	46.00	-19.09	H	QP
335.5500	35.91	-17.51	18.40	46.00	-27.60	H	QP
594.2167	33.40	-12.76	20.64	46.00	-25.36	H	QP

****Note:** No emission found between lowest internal used/generated frequency to 30 MHz.**REMARKS:**

1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using peak/quasi-peak detector mode.
2. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m)

**Above 1 GHz**

Operation Mode: TX / CH 1 (912.0MHz) **Test Date:** June 2, 2013
Temperature: 24°C **Tested by:** Mack Li
Humidity: 52% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1345.0000	49.08	-8.08	41.00	74.00	-33.00	V	peak
2980.0000	47.16	-4.32	42.84	74.00	-31.16	V	peak
3655.0000	47.45	-2.87	44.58	74.00	-29.42	V	peak
4630.0000	44.64	-0.33	44.31	74.00	-29.69	V	peak
5320.0000	45.20	1.53	46.73	74.00	-27.27	V	peak
6145.0000	44.99	3.52	48.51	74.00	-25.49	V	peak
1825.0000	50.67	-9.67	41.00	74.00	-33.00	H	peak
2740.0000	48.47	-5.28	43.19	74.00	-30.81	H	peak
3760.0000	45.94	-2.59	43.35	74.00	-30.65	H	peak
4435.0000	45.82	-0.76	45.06	74.00	-28.94	H	peak
5065.0000	44.44	1.39	45.83	74.00	-28.17	H	peak
6115.0000	45.77	3.43	49.20	74.00	-24.80	H	peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dB μ V/m) – Average limit (dB μ V/m).



Operation Mode: TX / CH 2 (912.5MHz) **Test Date:** June 2, 2013
Temperature: 24°C **Tested by:** Mack Li
Humidity: 52% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2740.0000	48.03	-5.28	42.75	74.00	-31.25	V	peak
3655.0000	46.88	-2.87	44.01	74.00	-29.99	V	peak
4330.0000	44.73	-1.09	43.64	74.00	-30.36	V	peak
4945.0000	44.81	1.07	45.88	74.00	-28.12	V	peak
5845.0000	44.38	2.85	47.23	74.00	-26.77	V	peak
6580.0000	44.18	4.76	48.94	74.00	-25.06	V	peak
1825.0000	51.15	-9.67	41.48	74.00	-32.52	H	peak
2740.0000	47.95	-5.28	42.67	74.00	-31.33	H	peak
3385.0000	47.19	-4.01	43.18	74.00	-30.82	H	peak
4150.0000	44.98	-1.82	43.16	74.00	-30.84	H	peak
4525.0000	45.32	-0.59	44.73	74.00	-29.27	H	peak
5035.0000	44.63	1.36	45.99	74.00	-28.01	H	peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dB μ V/m) – Average limit (dB μ V/m).



Operation Mode: TX / CH 3 (913.0MHz) **Test Date:** June 2, 2013
Temperature: 24°C **Tested by:** Mack Li
Humidity: 52% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3040.0000	46.64	-4.21	42.43	74.00	-31.57	V	peak
3655.0000	47.52	-2.87	44.65	74.00	-29.35	V	peak
4300.0000	45.75	-1.20	44.55	74.00	-29.45	V	peak
4930.0000	45.09	1.00	46.09	74.00	-27.91	V	peak
5365.0000	44.94	1.53	46.47	74.00	-27.53	V	peak
6025.0000	44.59	3.16	47.75	74.00	-26.25	V	peak
2920.0000	46.73	-4.56	42.17	74.00	-31.83	H	peak
3370.0000	47.42	-4.01	43.41	74.00	-30.59	H	peak
3850.0000	46.06	-2.50	43.56	74.00	-30.44	H	peak
4585.0000	45.65	-0.49	45.16	74.00	-28.84	H	peak
5350.0000	45.14	1.53	46.67	74.00	-27.33	H	peak
5995.0000	44.99	3.08	48.07	74.00	-25.93	H	peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dB μ V/m) – Average limit (dB μ V/m).