

FCC TEST REPORT

REPORT NO.: RF941110L10

MODEL NO.: WPCB-143G

RECEIVED: Nov. 10, 2005

TESTED: Nov. 11 ~ 17, 2005

ISSUED: Nov. 18, 2005

APPLICANT : Gemtek Technology Co., Ltd.

ADDRESS : No.1, Jen Ai Road, Hsinchu Industrial Park, Hukou
Hsinchu, Taiwan, R.O.C. 303

ISSUED BY : Advance Data Technology Corporation

LAB ADDRESS : No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION : No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 116 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST.....	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
3.4	DESCRIPTION OF SUPPORT UNITS	11
4	TEST TYPES AND RESULTS.....	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS (A) - ORIGINAL VERSION.....	16
4.1.8	TEST RESULTS (B) - ALTERNATE VERSION	22
4.2	RADIATED EMISSION MEASUREMENT.....	28
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	28
4.2.2	TEST INSTRUMENTS.....	29
4.2.3	TEST PROCEDURES	30
4.2.4	DEVIATION FROM TEST STANDARD	30
4.2.5	TEST SETUP	31
4.2.6	EUT OPERATING CONDITIONS	31
4.2.7	TEST RESULTS (A) - ORIGINAL VERSION.....	32
4.2.8	TEST RESULTS (B) - ALTERNATE VERSION	40
4.3	6dB BANDWIDTH MEASUREMENT	48
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	48
4.3.2	TEST INSTRUMENTS.....	48
4.3.3	TEST PROCEDURE.....	48
4.3.4	DEVIATION FROM TEST STANDARD	48
4.3.5	TEST SETUP	49



4.3.6	EUT OPERATING CONDITIONS	49
4.3.7	TEST RESULTS (A) - ORIGINAL VERSION.....	50
4.3.8	TEST RESULTS (B) - ALTERNATE VERSION	58
4.4	MAXIMUM PEAK OUTPUT POWER.....	66
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	66
4.4.2	TEST INSTRUMENTS.....	66
4.4.3	TEST PROCEDURES	67
4.4.4	DEVIATION FROM TEST STANDARD	67
4.4.5	TEST SETUP	67
4.4.6	EUT OPERATING CONDITIONS	67
4.4.7	TEST RESULTS (A) – ORIGINAL VERSION.....	68
4.4.8	TEST RESULTS (B) – ALTERNATE VERSION.....	69
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	70
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	70
4.5.2	TEST INSTRUMENTS.....	70
4.5.3	TEST PROCEDURE.....	70
4.5.4	DEVIATION FROM TEST STANDARD	70
4.5.5	TEST SETUP	70
4.5.6	EUT OPERATING CONDITIONS	70
4.5.7	TEST RESULTS (A) – ORIGINAL VERSION.....	71
4.5.8	TEST RESULTS (B) – ALTERNATE VERSION.....	79
4.6	BAND EDGES MEASUREMENT.....	87
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	87
4.6.2	TEST INSTRUMENTS.....	87
4.6.3	TEST PROCEDURE.....	87
4.6.4	DEVIATION FROM TEST STANDARD	87
4.6.5	EUT OPERATING CONDITION.....	87
4.6.6	TEST RESULTS (A) –ORIGINAL VERSION.....	88
4.6.7	TEST RESULTS (B) –ALTERNATE VERSION	100
4.7	ANTENNA REQUIREMENT	112
4.7.1	STANDARD APPLICABLE.....	112
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	112
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	113
6	INFORMATION ON THE TESTING LABORATORIES	115
	APPENDIX-A	A-1



1 CERTIFICATION

PRODUCT: Dell Wireless 1390 802.11g ExpressCard
MODEL: WPCB-143G
BRAND: DELL
APPLICANT: Gemtek Technology Co., Ltd.
TESTED: Nov. 11 ~ 17, 2005
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Wendy Liao , **DATE:** Nov. 18, 2005
Wendy Liao

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Nov. 18, 2005
Responsible for RF Gary Chang

APPROVED BY : Cody Chang , **DATE:** Nov. 18, 2005
Cody Chang / Deputy Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.72dB at 0.232MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -3.21dB at 797.84MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Dell Wireless 1390 802.11g ExpressCard
MODEL NO.	WPCB-143G
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	CCK, QPSK, BPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 125Mbps *see Note 4)
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	71.945mW
ANTENNA TYPE	Internal Printed antenna
ANTENNA GAIN	1.5dBi
DATA CABLE	NA
I/O PORTS	NA

NOTE:

- The EUT have two versions, named "Original" and "Alternate". Both have the same hardware designation, but different component as below.

VERSION	COMPONENT MARK				
	J1	U6	U2	U2a	R56
Original	MM84302600B (Murata)	AT93C66A (Atmel)	NC7S32P5X_NL (Fairchild)	No Load	No Load
Alternate	KMC1001-F007- 7F (Foxconn)	IS93C66A-2ZLI (ISSI)	No Load	BAT54CW (Secos)	100k Ohm 5%, 0402

- The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
- The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
- This EUT is capable of providing data rates of up to 125Mbps in Turbo Mode depending upon reception quality.
- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

For 802.11b/g: Eleven channels are provided to this EUT for normal mode


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

For 802.11g: One channel is provided to this EUT for turbo mode.

Channel	Frequency
6	2437 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A & MODE B

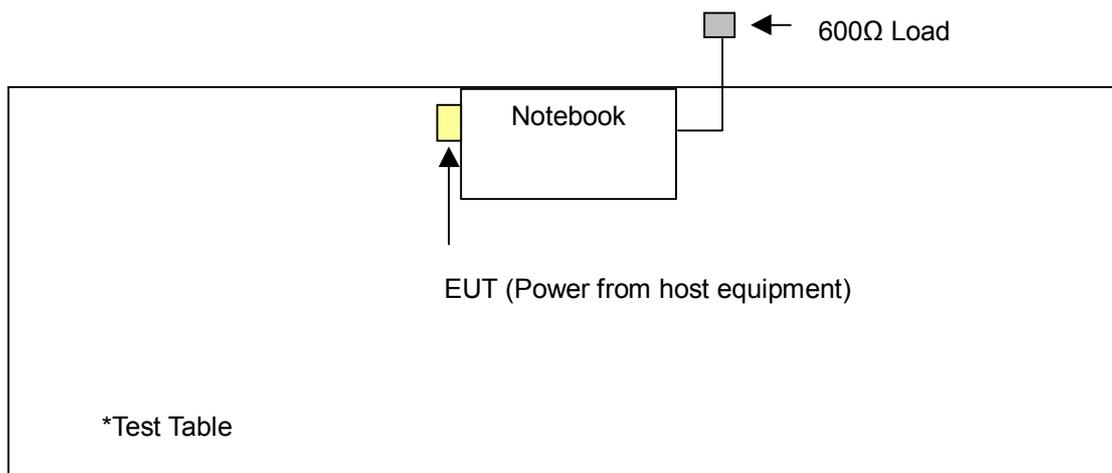



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT Configure Mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	Original Version
B	√	√	√	√	Alternate Version

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	11	OFDM	BPSK	6
B	802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	CCK	1
B	802.11b	1 to 11	1, 11	DSSS	CCK	1
A	802.11g	1 to 11	11	OFDM	BPSK	6
B	802.11g	1 to 11	11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	BPSK	12
B	802.11g Turbo	6	6	OFDM	BPSK	12



Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	CCK	1
B	802.11b	1 to 11	1, 11	DSSS	CCK	1
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6
B	802.11g	1 to 11	1, 11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	BPSK	12
B	802.11g Turbo	6	6	OFDM	BPSK	12

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	CCK	1
B	802.11b	1 to 11	1, 6, 11	DSSS	CCK	1
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	BPSK	12
B	802.11g Turbo	6	6	OFDM	BPSK	12

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)
ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	HP compaq nx6125	HP	nx6215	s/n:CND5390C MP	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 11, 2006
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

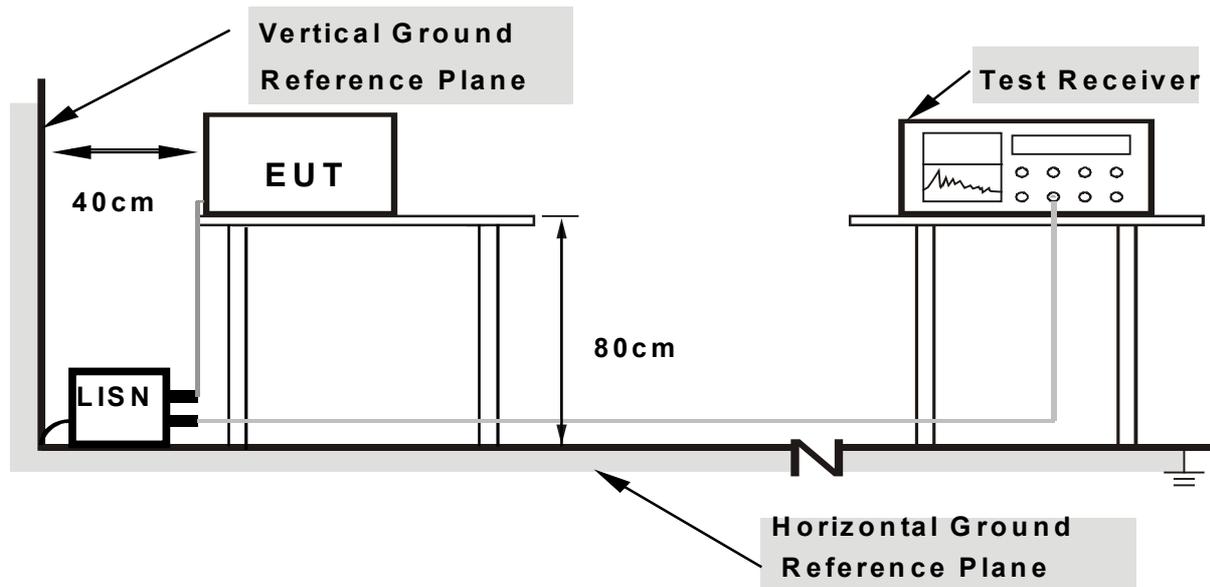

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS

- a. Plug the EUT to a Notebook system placed on a testing table.
- b. The notebook ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system show "H" messages on its screen.
- d. Step c was repeated. .




4.1.7 TEST RESULTS (A) - ORIGINAL VERSION

Conducted Worst-Case Data

EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.185	0.11	44.19	-	44.30	-	64.25
2	0.213	0.11	47.93	-	48.04	-	63.11	53.11	-15.07	-
3	0.326	0.11	39.02	-	39.13	-	59.56	49.56	-20.43	-
4	0.455	0.12	35.47	-	35.59	-	56.79	46.79	-21.20	-
5	14.570	0.55	35.79	-	36.34	-	60.00	50.00	-23.66	-
6	20.160	1.04	32.80	-	33.84	-	60.00	50.00	-26.16	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

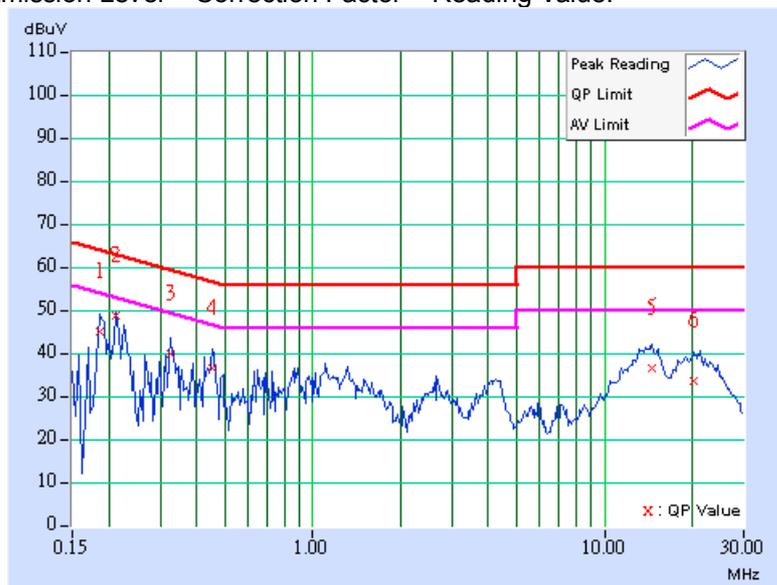




EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.154	0.11	38.97	-	39.08	-	65.79
2	0.232	0.11	47.55	-	47.66	-	62.38	52.38	-14.72	-
3	0.326	0.11	40.68	-	40.79	-	59.56	49.56	-18.77	-
4	4.207	0.39	27.91	-	28.30	-	56.00	46.00	-27.70	-
5	14.297	0.45	35.56	-	36.01	-	60.00	50.00	-23.99	-
6	20.895	0.75	32.45	-	33.20	-	60.00	50.00	-26.80	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

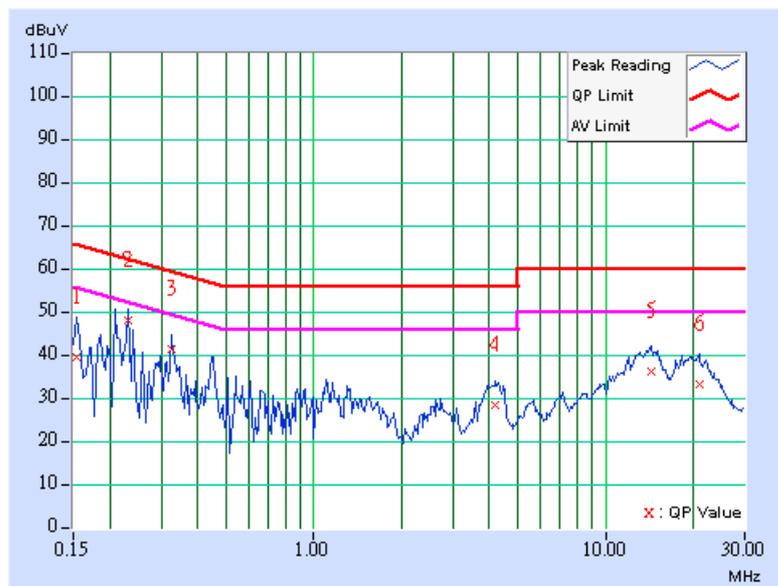




EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.11	39.11	-	39.22	-	63.91	53.91	-24.69	-
2	0.224	0.11	41.44	-	41.55	-	62.66	52.66	-21.11	-
3	0.341	0.11	32.47	-	32.58	-	59.17	49.17	-26.59	-
4	4.039	0.39	27.67	-	28.06	-	56.00	46.00	-27.94	-
5	14.746	0.55	34.50	-	35.05	-	60.00	50.00	-24.95	-
6	18.801	0.91	32.17	-	33.08	-	60.00	50.00	-26.92	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

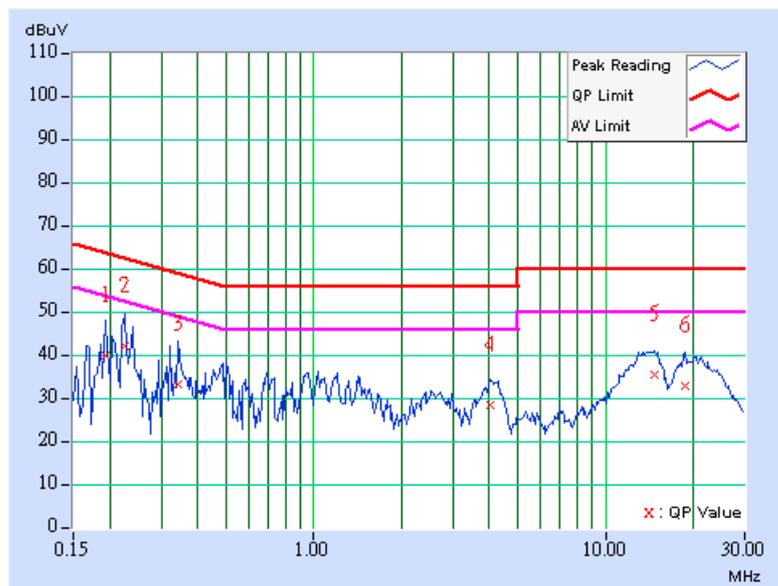




EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.11	39.77	-	39.88	-	65.38	55.38	-25.50	-
2	0.216	0.11	42.62	-	42.73	-	62.96	52.96	-20.23	-
3	0.236	0.11	46.35	-	46.46	-	62.24	52.24	-15.78	-
4	4.004	0.39	27.08	-	27.47	-	56.00	46.00	-28.53	-
5	13.793	0.45	34.66	-	35.11	-	60.00	50.00	-24.89	-
6	19.621	0.71	31.45	-	32.16	-	60.00	50.00	-27.84	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

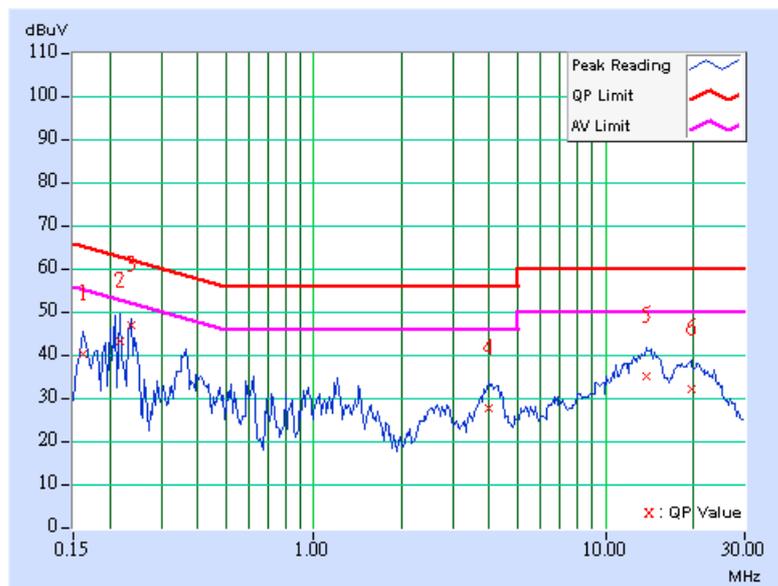




EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.185	0.11	37.34	-	37.45	-	64.25
2	0.228	0.11	43.67	-	43.78	-	62.52	52.52	-18.74	-
3	0.466	0.12	34.62	-	34.74	-	56.58	46.58	-21.83	-
4	4.254	0.40	27.46	-	27.86	-	56.00	46.00	-28.14	-
5	14.055	0.55	34.92	-	35.47	-	60.00	50.00	-24.53	-
6	19.348	0.97	31.82	-	32.79	-	60.00	50.00	-27.21	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

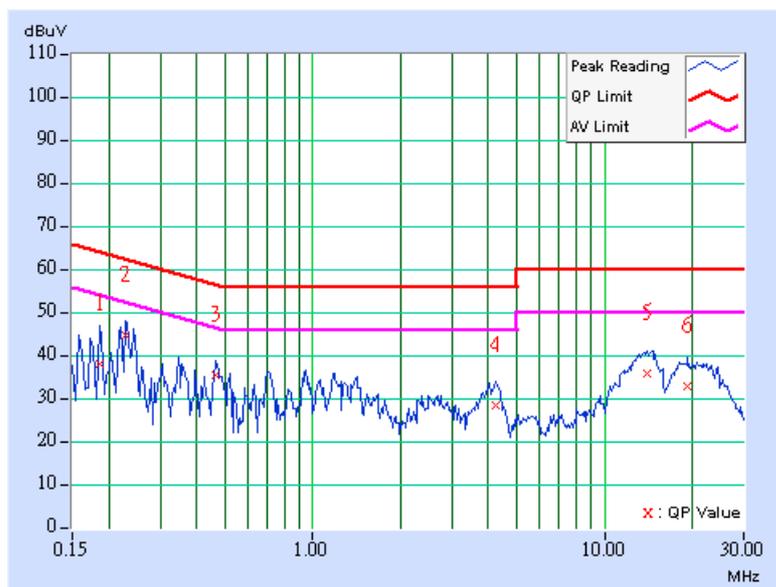




EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.224	0.11	41.58	-	41.69	-	62.66
2	0.341	0.11	33.68	-	33.79	-	59.17	49.17	-25.38	-
3	0.947	0.23	29.03	-	29.26	-	56.00	46.00	-26.74	-
4	4.152	0.39	27.52	-	27.91	-	56.00	46.00	-28.09	-
5	14.148	0.45	34.87	-	35.32	-	60.00	50.00	-24.68	-
6	20.457	0.74	31.71	-	32.45	-	60.00	50.00	-27.55	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

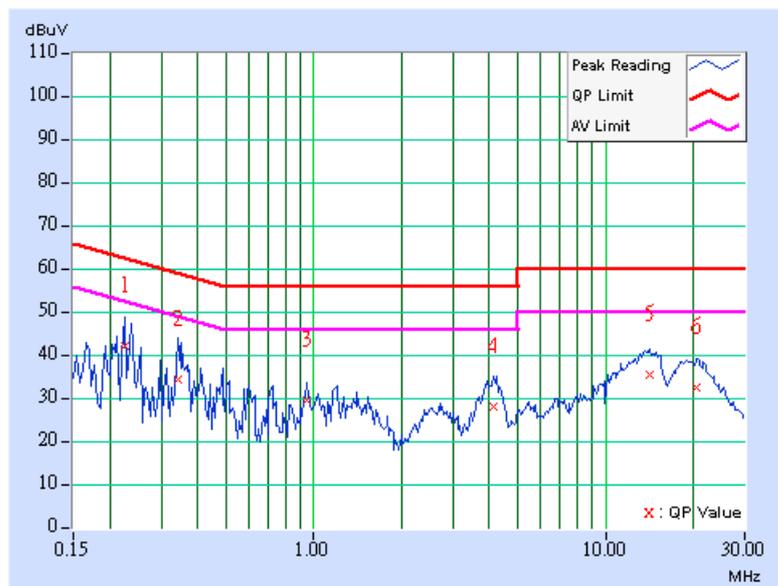




4.1.8 TEST RESULTS (B) - ALTERNATE VERSION

Conducted Worst-Case Data

EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.158	0.11	40.35	-	40.46	-	65.58
2	0.216	0.11	42.00	-	42.11	-	62.96	52.96	-20.85	-
3	0.236	0.11	46.71	-	46.82	-	62.24	52.24	-15.42	-
4	1.207	0.24	31.82	-	32.06	-	56.00	46.00	-23.94	-
5	14.383	0.55	35.18	-	35.73	-	60.00	50.00	-24.27	-
6	19.527	0.98	32.17	-	33.15	-	60.00	50.00	-26.85	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

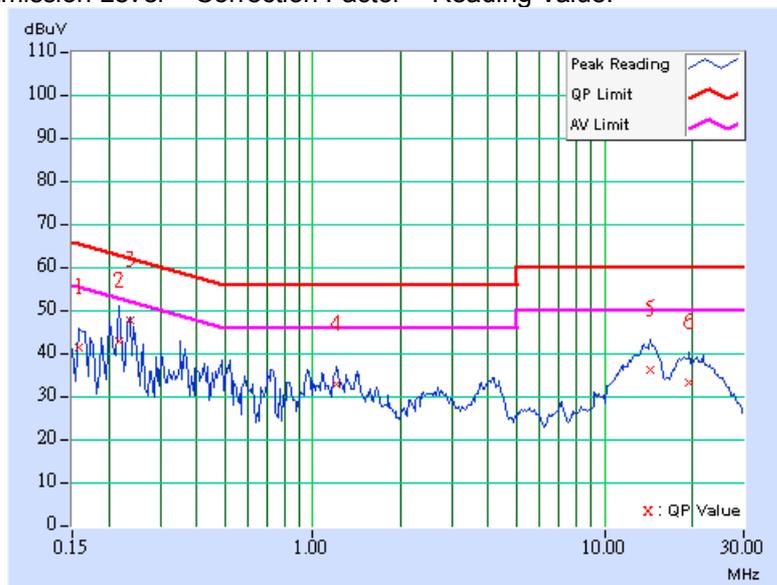




EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	B

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.154	0.11	42.32	-	42.43	-	65.79
2	0.189	0.11	39.49	-	39.60	-	64.08	54.08	-24.48	-
3	0.228	0.11	43.21	-	43.32	-	62.52	52.52	-19.20	-
4	1.160	0.24	23.91	-	24.15	-	56.00	46.00	-31.85	-
5	13.805	0.45	34.36	-	34.81	-	60.00	50.00	-25.19	-
6	20.293	0.74	31.51	-	32.25	-	60.00	50.00	-27.75	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

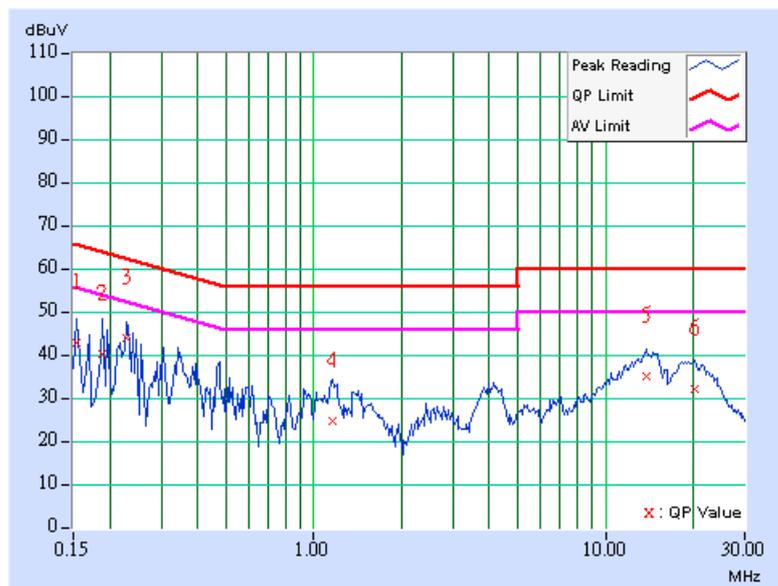




EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.11	38.59	-	38.70	-	65.18	55.18	-26.48	-
2	0.236	0.11	46.87	-	46.98	-	62.24	52.24	-15.26	-
3	0.470	0.13	34.83	-	34.96	-	56.51	46.51	-21.55	-
4	4.176	0.39	27.49	-	27.88	-	56.00	46.00	-28.12	-
5	14.059	0.55	34.84	-	35.39	-	60.00	50.00	-24.61	-
6	19.152	0.95	31.83	-	32.78	-	60.00	50.00	-27.22	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

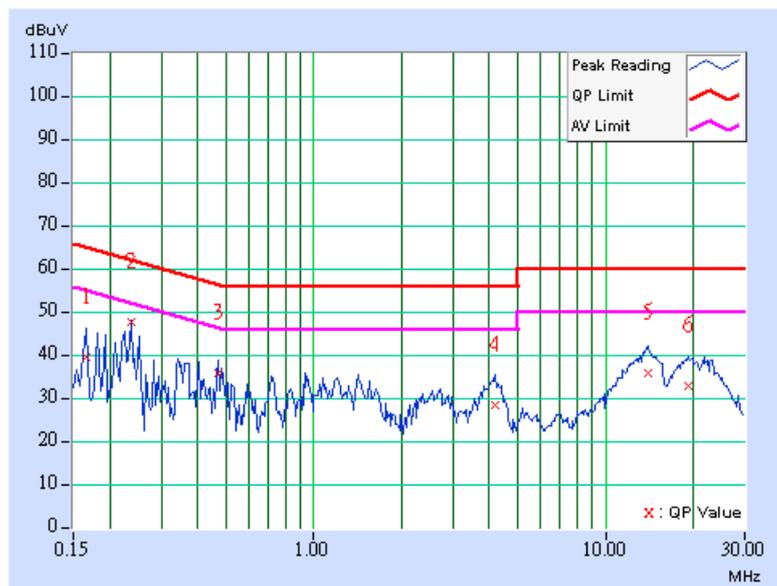




EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.11	39.41	-	39.52	-	65.18	55.18	-25.66	-
2	0.224	0.11	41.46	-	41.57	-	62.66	52.66	-21.09	-
3	0.361	0.11	38.84	-	38.95	-	58.71	48.71	-19.76	-
4	4.176	0.39	27.35	-	27.74	-	56.00	46.00	-28.26	-
5	14.984	0.45	33.61	-	34.06	-	60.00	50.00	-25.94	-
6	20.262	0.74	31.58	-	32.32	-	60.00	50.00	-27.68	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

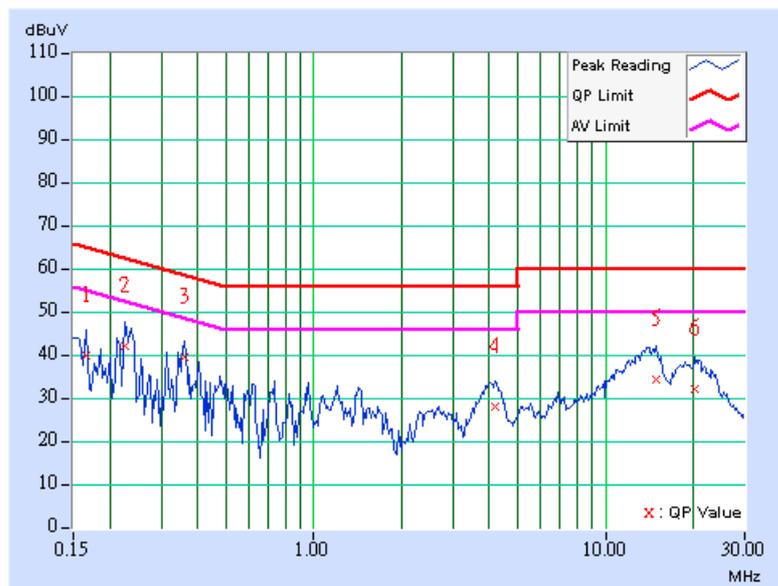




EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.11	38.47	-	38.58	-	65.18
2	0.220	0.11	41.99	-	42.10	-	62.81	52.81	-20.71	-
3	0.338	0.11	31.81	-	31.92	-	59.26	49.26	-27.34	-
4	4.262	0.40	27.30	-	27.70	-	56.00	46.00	-28.30	-
5	13.637	0.55	34.32	-	34.87	-	60.00	50.00	-25.13	-
6	18.496	0.89	31.52	-	32.41	-	60.00	50.00	-27.59	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

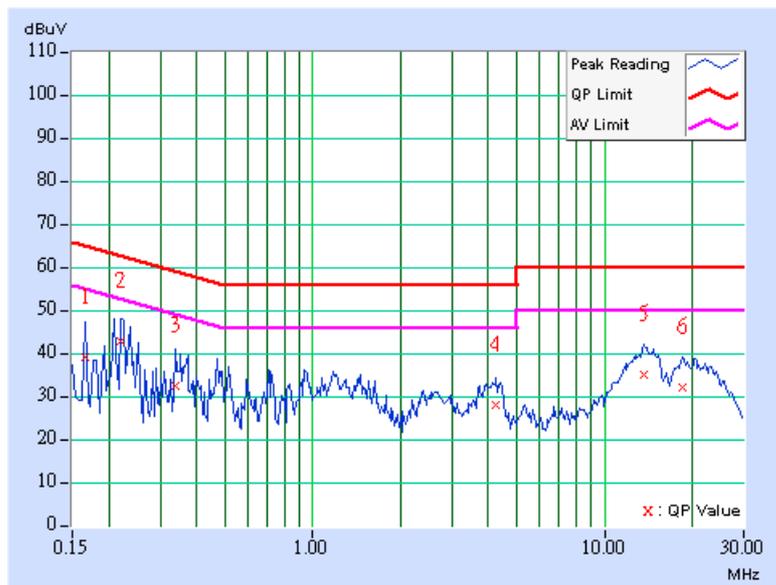




EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang	TEST MODE	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.11	41.09	-	41.20	-	63.26	53.26	-22.06	-
2	0.236	0.11	46.97	-	47.08	-	62.24	52.24	-15.16	-
3	0.373	0.11	36.57	-	36.68	-	58.44	48.44	-21.76	-
4	4.035	0.39	27.37	-	27.76	-	56.00	46.00	-28.24	-
5	13.859	0.45	34.63	-	35.08	-	60.00	50.00	-24.92	-
6	20.609	0.74	31.54	-	32.28	-	60.00	50.00	-27.72	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

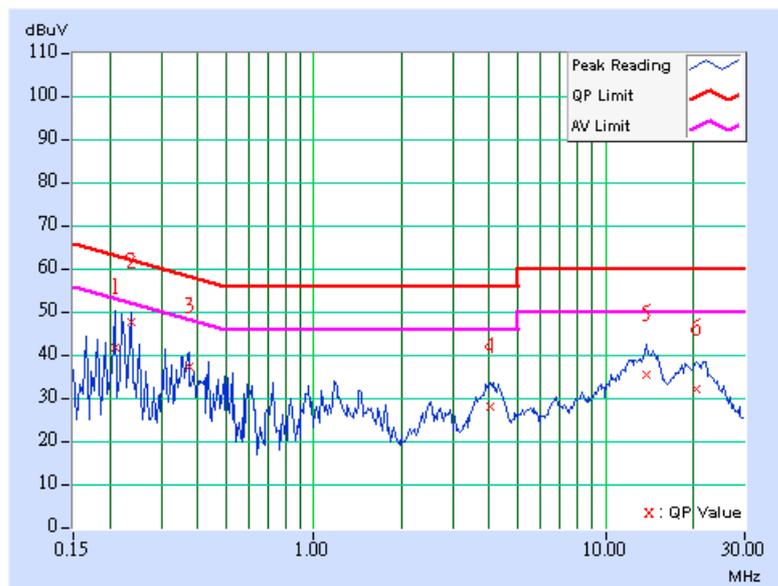

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 04, 2006
Preamplifier Agilent	8449B	3008A01964	Oct. 30, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 100 kHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

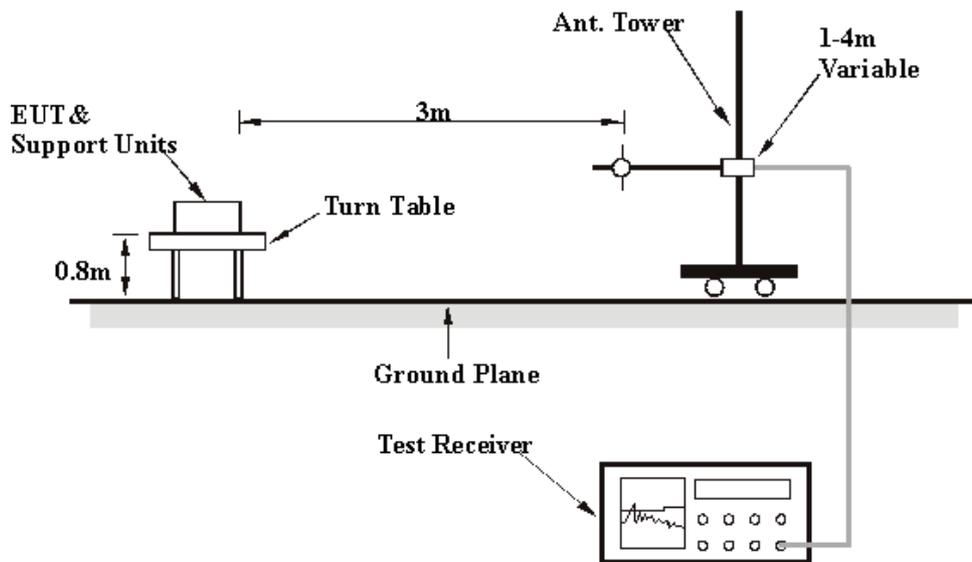

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS (A) - ORIGINAL VERSION

Below 1GHz Worst-Case Data

EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	479.04	40.30 QP	46.00	-5.70	1.50 H	355	20.54	19.76
2	521.80	40.12 QP	46.00	-5.88	1.50 H	34	19.45	20.66
3	527.64	37.43 QP	46.00	-8.57	1.50 H	79	16.66	20.77
4	753.13	34.49 QP	46.00	-11.51	1.50 H	193	8.56	25.93
5	797.84	42.09 QP	46.00	-3.91	2.00 H	259	15.83	26.26
6	902.81	33.95 QP	46.00	-12.05	1.50 H	346	6.77	27.18
7	912.53	33.53 QP	46.00	-12.47	1.50 H	46	6.21	27.32

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.77	25.91 QP	40.00	-14.09	1.00 V	196	14.05	11.86
2	191.34	27.83 QP	43.50	-15.67	1.00 V	337	16.18	11.65
3	479.04	39.59 QP	46.00	-6.41	1.00 V	313	19.83	19.76
4	521.80	34.97 QP	46.00	-11.03	1.00 V	337	14.31	20.66
5	527.64	31.60 QP	46.00	-14.40	1.00 V	91	10.83	20.77
6	601.50	30.19 QP	46.00	-15.81	1.00 V	196	7.27	22.92
7	753.13	30.79 QP	46.00	-15.21	1.00 V	169	4.87	25.93
8	795.89	41.81 QP	46.00	-4.19	1.50 V	343	15.57	26.25
9	836.71	31.80 QP	46.00	-14.20	1.00 V	337	5.19	26.62
10	875.59	31.25 QP	46.00	-14.75	1.00 V	337	4.30	26.95
11	879.48	33.05 QP	46.00	-12.95	1.00 V	91	6.07	26.98
12	912.53	32.17 QP	46.00	-13.83	1.00 V	313	4.84	27.32

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



802.11b DSSS modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	49.79 PK	74.00	-24.21	1.29 H	263	19.18	30.61
1	2390.00	46.48 AV	54.00	-7.52	1.29 H	263	15.87	30.61
2	*2412.00	108.51 PK			1.29 H	263	77.83	30.68
2	*2412.00	105.20 AV			1.29 H	263	74.52	30.68
3	4824.00	45.96 PK	74.00	-28.04	1.00 H	36	10.07	35.89
3	4824.00	40.20 AV	54.00	-13.80	1.00 H	36	4.31	35.89
4	7236.00	46.99 PK	74.00	-27.01	1.02 H	229	5.19	41.80
4	7236.00	38.49 AV	54.00	-15.51	1.02 H	229	-3.31	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	40.19 PK	74.00	-33.81	1.36 V	102	9.58	30.61
1	2390.00	37.15 AV	54.00	-16.85	1.36 V	102	6.54	30.61
2	*2412.00	98.91 PK			1.36 V	102	68.23	30.68
2	*2412.00	95.87 AV			1.36 V	102	65.19	30.68
3	4824.00	49.63 PK	74.00	-24.37	1.00 V	297	13.74	35.89
3	4824.00	44.52 AV	54.00	-9.48	1.00 V	297	8.63	35.89
4	7236.00	50.21 PK	74.00	-23.79	1.00 V	312	8.41	41.80
4	7236.00	38.60 AV	54.00	-15.40	1.00 V	312	-3.20	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.



EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.01 PK			1.34 H	263	77.24	30.77
1	*2437.00	104.89 AV			1.34 H	263	74.12	30.77
2	4874.00	46.49 PK	74.00	-27.51	1.06 H	20	10.46	36.03
2	4874.00	40.81 AV	54.00	-13.19	1.06 H	20	4.78	36.03
3	7311.00	47.51 PK	74.00	-26.49	1.00 H	2	5.55	41.96
3	7311.00	38.29 AV	54.00	-15.71	1.00 H	2	-3.67	41.96

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	99.21 PK			1.00 V	102	68.44	30.77
1	*2437.00	96.03 AV			1.00 V	102	65.26	30.77
2	4874.00	48.04 PK	74.00	-25.96	1.34 V	41	12.01	36.03
2	4874.00	44.07 AV	54.00	-9.93	1.34 V	41	8.04	36.03
3	7311.00	49.80 PK	74.00	-24.20	1.24 V	99	7.84	41.96
3	7311.00	41.80 AV	54.00	-12.20	1.24 V	99	-0.16	41.96

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.39 PK			1.10 H	186	77.54	30.85
1	*2462.00	105.44 AV			1.10 H	186	74.59	30.85
2	2483.50	52.94 PK	74.00	-21.06	1.10 H	186	22.02	30.92
2	2483.50	49.99 AV	54.00	-4.01	1.10 H	186	19.07	30.92
3	4924.00	46.66 PK	74.00	-27.34	1.09 H	14	10.48	36.17
3	4924.00	40.75 AV	54.00	-13.25	1.09 H	14	4.57	36.17
4	7386.00	48.69 PK	74.00	-25.31	1.65 H	349	6.52	42.17
4	7386.00	37.61 AV	54.00	-16.39	1.65 H	349	-4.56	42.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.64 PK			1.00 V	107	67.79	30.85
1	*2462.00	95.53 AV			1.00 V	107	64.68	30.85
2	2483.50	43.19 PK	74.00	-30.81	1.00 V	107	12.27	30.92
2	2483.50	40.08 AV	54.00	-13.92	1.00 V	107	9.16	30.92
3	4924.00	48.82 PK	74.00	-25.18	1.02 V	69	12.65	36.17
3	4924.00	45.31 AV	54.00	-8.69	1.02 V	69	9.14	36.17
4	7386.00	50.51 PK	74.00	-23.49	1.53 V	294	8.34	42.17
4	7386.00	41.61 AV	54.00	-12.39	1.53 V	294	-0.56	42.17

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



802.11g OFDM modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	45.59 PK	74.00	-28.41	1.24 H	268	14.99	30.61
1	2390.00	38.40 AV	54.00	-15.60	1.24 H	268	7.79	30.61
2	*2412.00	105.68 PK			1.24 H	268	75.00	30.68
2	*2412.00	98.49 AV			1.24 H	268	67.81	30.68
3	4824.00	41.16 PK	74.00	-32.84	1.00 H	258	5.26	35.89
3	4824.00	28.16 AV	54.00	-25.84	1.00 H	258	-7.74	35.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	36.63 PK	74.00	-37.37	1.16 V	109	6.03	30.61
1	2390.00	39.26 AV	54.00	-14.74	1.16 V	109	8.65	30.61
2	*2412.00	96.72 PK			1.16 V	109	66.04	30.68
2	*2412.00	89.35 AV			1.16 V	109	58.67	30.68
3	4824.00	42.46 PK	74.00	-31.54	1.00 V	289	6.56	35.89
3	4824.00	29.16 AV	54.00	-24.84	1.00 V	289	-6.74	35.89

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.95 PK			1.34 H	263	74.18	30.77
1	*2437.00	98.59 AV			1.34 H	263	67.82	30.77
2	4874.00	41.30 PK	74.00	-32.70	1.00 H	256	5.27	36.03
2	4874.00	29.30 AV	54.00	-24.70	1.00 H	256	-6.73	36.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	95.09 PK			1.24 V	36	64.32	30.77
1	*2437.00	88.46 AV			1.24 V	36	57.69	30.77
2	4874.00	42.30 PK	74.00	-31.70	1.00 V	46	6.27	36.03
2	4874.00	29.30 AV	54.00	-24.70	1.00 V	46	-6.73	36.03

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.07 PK			1.34 H	263	75.22	30.85
1	*2462.00	99.15 AV			1.34 H	263	68.30	30.85
2	2483.50	49.50 PK	74.00	-24.50	1.34 H	263	18.58	30.92
2	2483.50	42.58 AV	54.00	-11.42	1.34 H	263	11.66	30.92
3	4924.00	42.58 PK	74.00	-31.42	1.00 H	36	6.40	36.17
3	4924.00	30.33 AV	54.00	-23.67	1.00 H	36	-5.85	36.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.86 PK			1.63 V	112	65.01	30.85
1	*2462.00	89.23 AV			1.63 V	112	58.38	30.85
2	2483.50	39.29 PK	74.00	-34.71	1.63 V	112	8.37	30.92
2	2483.50	32.66 AV	54.00	-21.34	1.63 V	112	1.74	30.92
3	4924.00	40.66 PK	74.00	-33.34	1.26 V	238	4.48	36.17
3	4924.00	29.00 AV	54.00	-25.00	1.26 V	238	-7.18	36.17

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



802.11g Turbo OFDM modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.63 PK	74.00	-22.37	1.00 H	104	21.03	30.61
1	2390.00	41.46 AV	54.00	-12.54	1.00 H	104	10.86	30.61
2	*2437.00	106.55 PK			1.16 H	257	75.78	30.77
2	*2437.00	99.38 AV			1.16 H	257	68.61	30.77
3	2483.50	52.30 PK	74.00	-21.70	1.00 H	104	21.38	30.92
3	2483.50	42.13 AV	54.00	-11.87	1.00 H	104	11.21	30.92
4	4874.00	42.55 PK	74.00	-31.45	1.00 H	356	6.52	36.03
4	4874.00	30.30 AV	54.00	-23.70	1.00 H	356	-5.73	36.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	44.67 PK	74.00	-29.33	1.03 V	109	14.07	30.61
1	2390.00	34.39 AV	54.00	-19.61	1.03 V	109	3.79	30.61
2	*2437.00	102.59 PK			1.03 V	109	71.82	30.77
2	*2437.00	92.31 AV			1.03 V	109	61.54	30.77
3	2483.50	45.34 PK	74.00	-28.66	1.03 V	109	14.42	30.92
3	2483.50	35.06 AV	54.00	-18.94	1.03 V	109	4.14	30.92
4	4874.00	45.30 PK	74.00	-28.70	1.00 V	294	9.27	36.03
4	4874.00	34.30 AV	54.00	-19.70	1.00 V	294	-1.73	36.03

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



4.2.8 TEST RESULTS (B) - ALTERNATE VERSION

Below 1GHz Worst

EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	300.20	33.82 QP	46.00	-12.18	1.50 H	124	17.95	15.87
2	479.04	38.19 QP	46.00	-7.81	1.50 H	31	18.43	19.76
3	521.80	37.11 QP	46.00	-8.89	2.00 H	127	16.44	20.66
4	533.47	37.90 QP	46.00	-8.10	1.50 H	88	17.03	20.87
5	558.74	33.80 QP	46.00	-12.20	1.50 H	43	12.34	21.46
6	797.84	42.79 QP	46.00	-3.21	1.50 H	58	16.53	26.26
7	902.81	37.61 QP	46.00	-8.39	1.50 H	160	10.43	27.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.77	25.47 QP	40.00	-14.53	1.00 V	172	13.61	11.86
2	432.38	31.84 QP	46.00	-14.16	1.00 V	181	13.14	18.70
3	479.04	34.17 QP	46.00	-11.83	1.00 V	352	14.41	19.76
4	527.64	31.30 QP	46.00	-14.70	1.00 V	199	10.53	20.77
5	601.50	31.17 QP	46.00	-14.83	1.00 V	172	8.25	22.92
6	636.49	30.13 QP	46.00	-15.87	1.00 V	154	6.98	23.15
7	805.61	36.98 QP	46.00	-9.02	1.00 V	19	10.65	26.33
8	875.59	30.33 QP	46.00	-15.67	1.00 V	352	3.38	26.95
9	883.37	32.30 QP	46.00	-13.70	1.00 V	181	5.29	27.01
10	912.53	31.42 QP	46.00	-14.58	1.00 V	196	4.10	27.32

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



802.11b DSSS modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	49.76 PK	74.00	-24.24	1.24 H	259	19.15	30.61
1	2390.00	46.88 AV	54.00	-7.12	1.24 H	259	16.28	30.61
2	*2412.00	108.16 PK			1.24 H	259	77.48	30.68
2	*2412.00	105.28 AV			1.24 H	259	74.60	30.68
3	4824.00	45.96 PK	74.00	-28.04	1.03 H	360	10.07	35.89
3	4824.00	40.21 AV	54.00	-13.79	1.03 H	360	4.32	35.89
4	7236.00	46.83 PK	74.00	-27.17	1.00 H	267	5.03	41.80
4	7236.00	39.51 AV	54.00	-14.49	1.00 H	267	-2.29	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	40.56 PK	74.00	-33.44	1.06 V	103	9.96	30.61
1	2390.00	37.14 AV	54.00	-16.86	1.06 V	103	6.54	30.61
2	*2412.00	98.96 PK			1.06 V	103	68.28	30.68
2	*2412.00	95.54 AV			1.06 V	103	64.86	30.68
3	4824.00	50.24 PK	74.00	-23.76	1.00 V	20	14.35	35.89
3	4824.00	45.29 AV	54.00	-8.71	1.00 V	20	9.40	35.89
4	7236.00	49.66 PK	74.00	-24.34	1.09 V	26	7.86	41.80
4	7236.00	40.82 AV	54.00	-13.18	1.09 V	26	-0.98	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.



EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.61 PK			1.36 H	268	76.84	30.77
1	*2437.00	105.55 AV			1.36 H	268	74.78	30.77
2	4874.00	48.21 PK	74.00	-25.79	1.06 H	354	12.18	36.03
2	4874.00	43.50 AV	54.00	-10.50	1.06 H	354	7.47	36.03
3	7311.00	47.69 PK	74.00	-26.31	1.00 H	251	5.73	41.96
3	7311.00	37.85 AV	54.00	-16.15	1.00 H	251	-4.11	41.96

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	98.40 PK			1.10 V	107	67.63	30.77
1	*2437.00	95.07 AV			1.10 V	107	64.30	30.77
2	4874.00	50.23 PK	74.00	-23.77	1.00 V	70	14.20	36.03
2	4874.00	45.48 AV	54.00	-8.52	1.00 V	70	9.45	36.03
3	7311.00	52.42 PK	74.00	-21.58	1.10 V	96	10.46	41.96
3	7311.00	41.34 AV	54.00	-12.66	1.10 V	96	-0.62	41.96

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.81 PK			1.35 H	268	77.96	30.85
1	*2462.00	105.65 AV			1.35 H	268	74.80	30.85
2	2483.50	52.67 PK	74.00	-21.33	1.35 H	268	21.75	30.92
2	2483.50	49.51 AV	54.00	-4.49	1.35 H	268	18.59	30.92
3	4924.00	46.78 PK	74.00	-27.22	1.26 H	354	10.60	36.17
3	4924.00	41.71 AV	54.00	-12.29	1.26 H	354	5.53	36.17
4	7386.00	45.84 PK	74.00	-28.16	1.00 H	269	3.67	42.17
4	7386.00	36.29 AV	54.00	-17.71	1.00 H	269	-5.88	42.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.35 PK			1.00 V	105	67.50	30.85
1	*2462.00	95.03 AV			1.00 V	105	64.18	30.85
2	2483.50	42.21 PK	74.00	-31.79	1.00 V	105	11.29	30.92
2	2483.50	37.95 AV	54.00	-16.05	1.00 V	105	7.03	30.92
3	4924.00	49.92 PK	74.00	-24.08	1.00 V	36	13.75	36.17
3	4924.00	45.88 AV	54.00	-8.12	1.00 V	36	9.71	36.17
4	7386.00	49.35 PK	74.00	-24.65	1.56 V	317	7.18	42.17
4	7386.00	38.45 AV	54.00	-15.55	1.56 V	317	-3.72	42.17

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



802.11g OFDM modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	46.47 PK	74.00	-27.53	1.20 H	264	15.86	30.61
1	2390.00	39.59 AV	54.00	-14.41	1.20 H	264	8.99	30.61
2	*2412.00	105.39 PK			1.20 H	264	74.71	30.68
2	*2412.00	98.51 AV			1.20 H	264	67.83	30.68
3	4824.00	43.51 PK	74.00	-30.49	1.00 H	289	7.62	35.89
3	4824.00	31.02 AV	54.00	-22.98	1.00 H	289	-4.87	35.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	37.28 PK	74.00	-36.72	1.01 V	105	6.68	30.61
1	2390.00	30.62 AV	54.00	-23.38	1.01 V	105	0.02	30.61
2	*2412.00	96.20 PK			1.01 V	105	65.52	30.68
2	*2412.00	89.54 AV			1.01 V	105	58.86	30.68
3	4824.00	48.74 PK	74.00	-25.26	1.06 V	30	12.85	35.89
3	4824.00	36.53 AV	54.00	-17.47	1.06 V	30	0.64	35.89

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.88 PK			1.36 H	269	75.11	30.77
1	*2437.00	98.82 AV			1.36 H	269	68.05	30.77
2	4874.00	42.60 PK	74.00	-31.40	1.00 H	279	6.57	36.03
2	4874.00	29.94 AV	54.00	-24.06	1.00 H	279	-6.09	36.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	96.45 PK			1.00 V	102	65.68	30.77
1	*2437.00	89.61 AV			1.00 V	102	58.84	30.77
2	4874.00	47.63 PK	74.00	-26.37	1.53 V	28	11.60	36.03
2	4874.00	35.97 AV	54.00	-18.03	1.53 V	28	-0.06	36.03

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.19 PK			1.38 H	262	75.34	30.85
1	*2462.00	99.49 AV			1.38 H	262	68.64	30.85
2	2483.50	49.11 PK	74.00	-24.89	1.38 H	262	18.19	30.92
2	2483.50	42.41 AV	54.00	-11.59	1.38 H	262	11.49	30.92
3	4924.00	43.06 PK	74.00	-30.94	1.00 H	25	6.88	36.17
3	4924.00	31.99 AV	54.00	-22.01	1.00 H	25	-4.19	36.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.81 PK			1.36 V	106	64.96	30.85
1	*2462.00	89.24 AV			1.36 V	106	58.39	30.85
2	2483.50	38.73 PK	74.00	-35.27	1.36 V	106	7.81	30.92
2	2483.50	32.16 AV	54.00	-21.84	1.36 V	106	1.24	30.92
3	4924.00	47.36 PK	74.00	-26.64	1.00 V	59	11.19	36.17
3	4924.00	36.26 AV	54.00	-17.74	1.00 V	59	0.09	36.17

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

**802.11g Turbo OFDM modulation**

EUT	Dell Wireless 1390 802.11g ExpressCard	MEASUREMENT DETAIL	
MODEL	WPCB-143G	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.79 PK	74.00	-22.21	1.38 H	265	21.18	30.61
1	2390.00	42.06 AV	54.00	-11.94	1.38 H	265	11.46	30.61
2	*2437.00	106.22 PK			1.38 H	265	75.45	30.77
2	*2437.00	98.49 AV			1.38 H	265	67.72	30.77
3	2483.50	51.16 PK	74.00	-22.84	1.38 H	265	20.24	30.92
3	2483.50	41.43 AV	54.00	-12.57	1.38 H	265	10.51	30.92
4	4874.00	43.26 PK	74.00	-30.74	1.00 H	249	7.23	36.03
4	4874.00	29.30 AV	54.00	-24.70	1.00 H	249	-6.73	36.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	44.98 PK	74.00	-29.02	1.00 V	104	14.37	30.61
1	2390.00	34.34 AV	54.00	-19.66	1.00 V	104	3.74	30.61
2	*2437.00	101.41 PK			1.00 V	104	70.64	30.77
2	*2437.00	90.77 AV			1.00 V	104	60.00	30.77
3	2483.50	44.35 PK	74.00	-29.65	1.00 V	104	13.43	30.92
3	2483.50	33.71 AV	54.00	-20.29	1.00 V	104	2.79	30.92
4	4874.00	45.58 PK	74.00	-28.42	1.22 V	263	9.55	36.03
4	4874.00	34.30 AV	54.00	-19.70	1.22 V	263	-1.73	36.03

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS (A) - ORIGINAL VERSION


802.11b DSSS modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	A


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.16	0.5	PASS
6	2437	10.12	0.5	PASS
11	2462	10.16	0.5	PASS



CH1

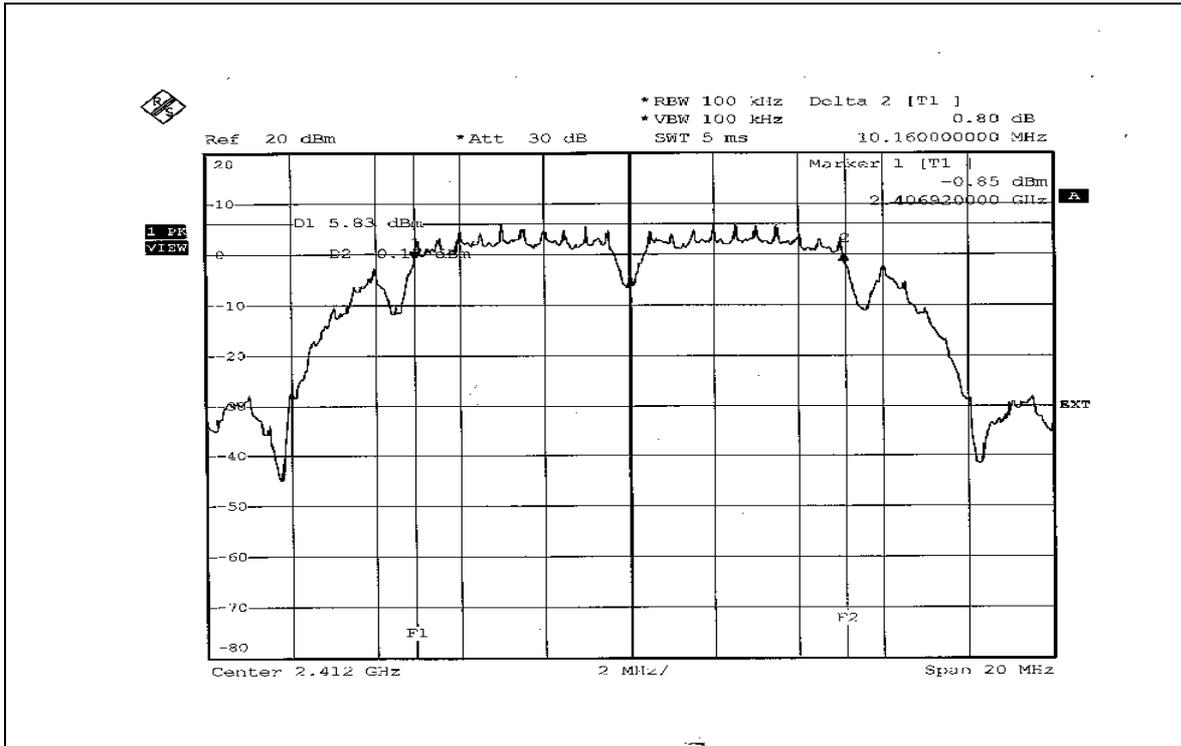


CH6

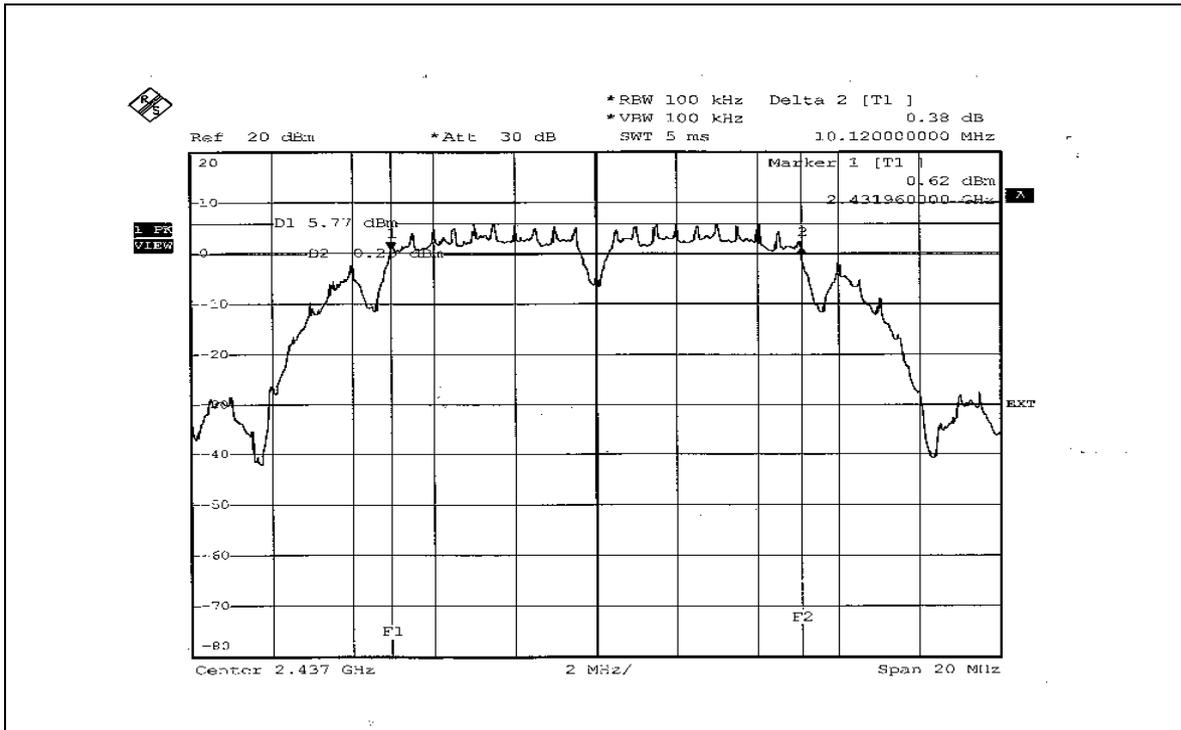



CH11

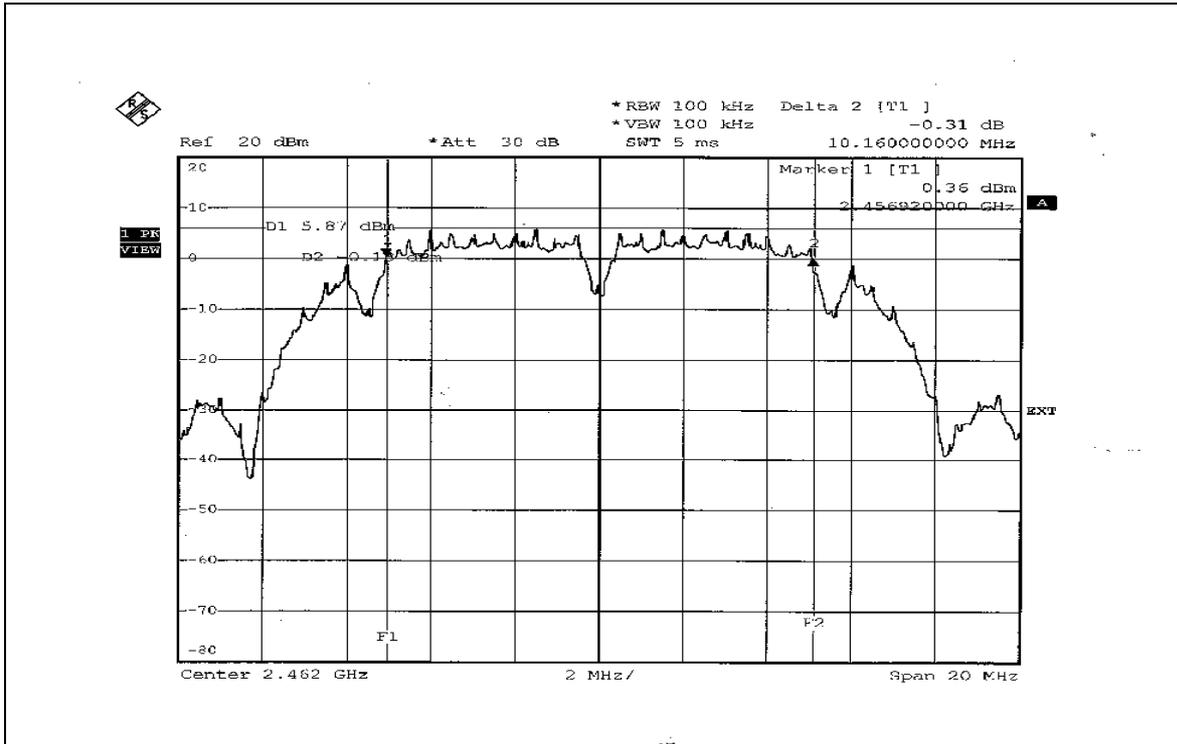


**802.11g OFDM modulation**

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	A


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.36	0.5	PASS
6	2437	16.32	0.5	PASS
11	2462	16.32	0.5	PASS



CH1

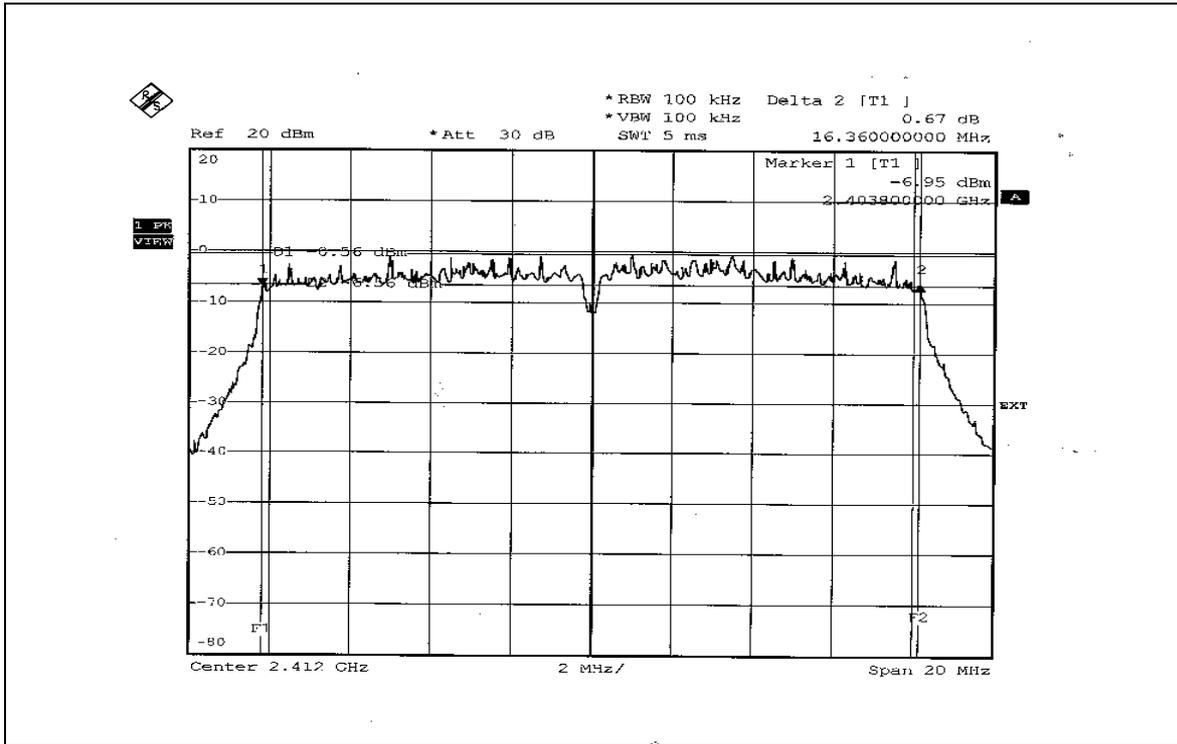


CH6

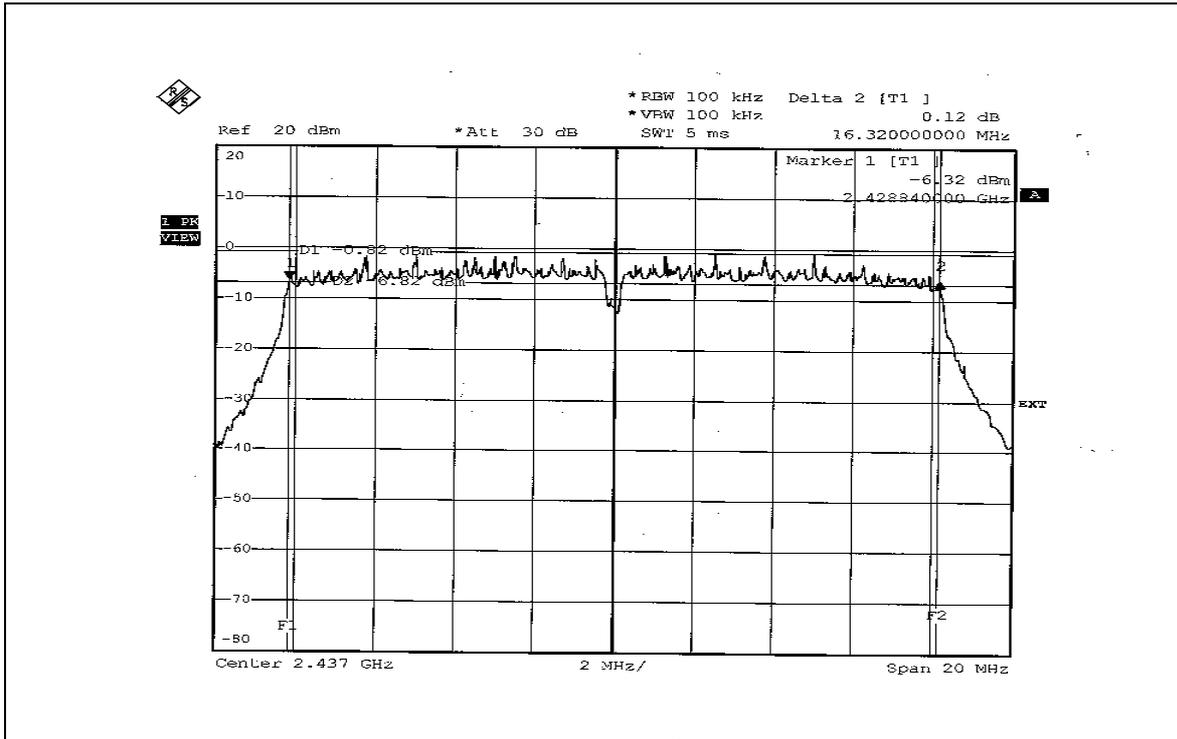



CH11

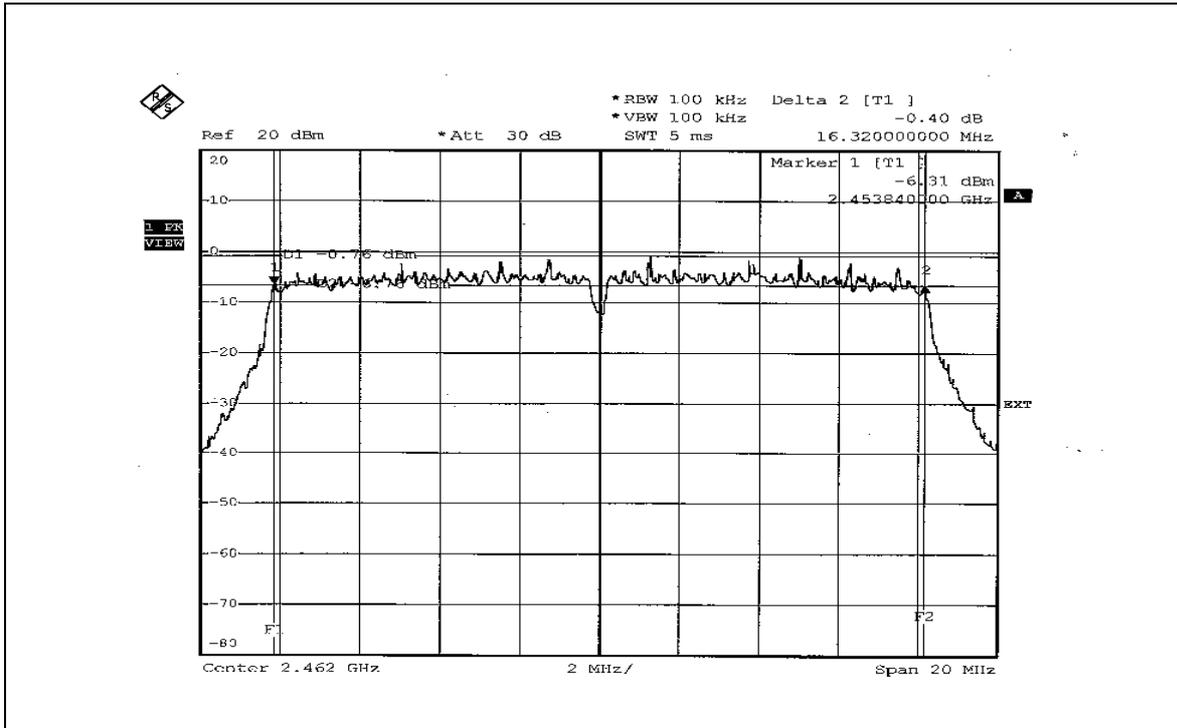


**802.11g Turbo OFDM modulation**

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	A

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	16.48	0.5	PASS



CH6

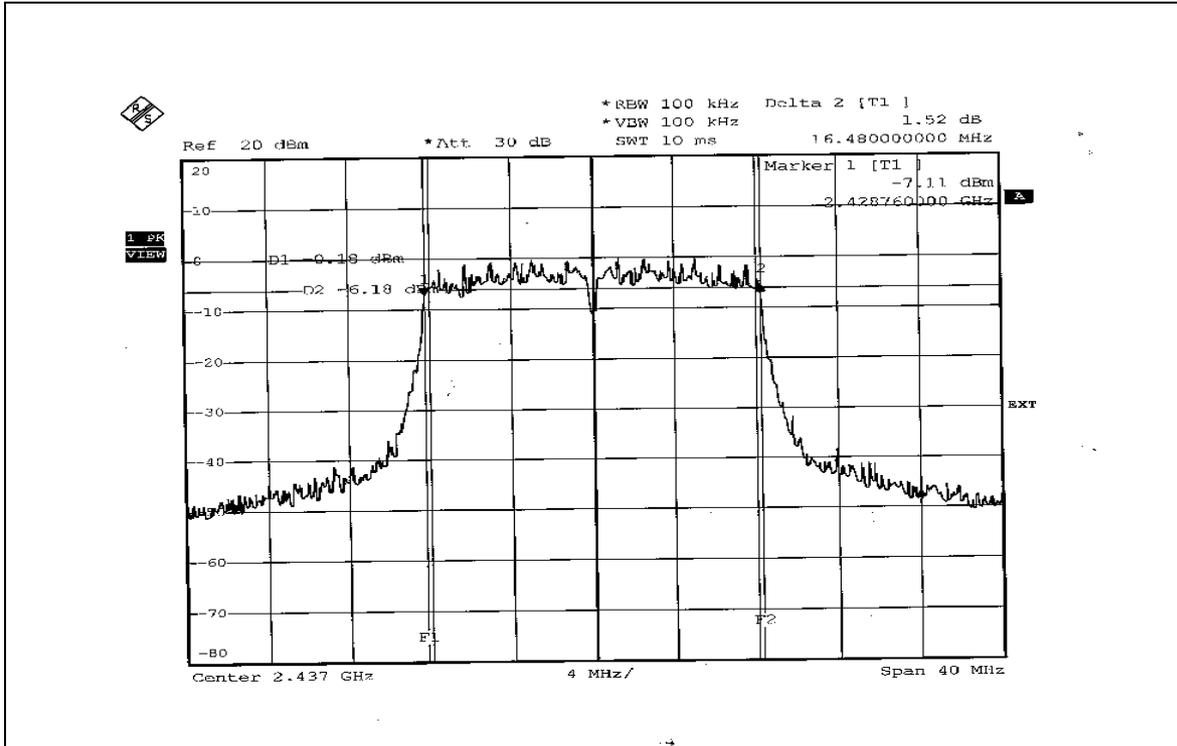



4.3.8 TEST RESULTS (B) - ALTERNATE VERSION


802.11b DSSS modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	B


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.08	0.5	PASS
6	2437	10.04	0.5	PASS
11	2462	10.04	0.5	PASS



CH1

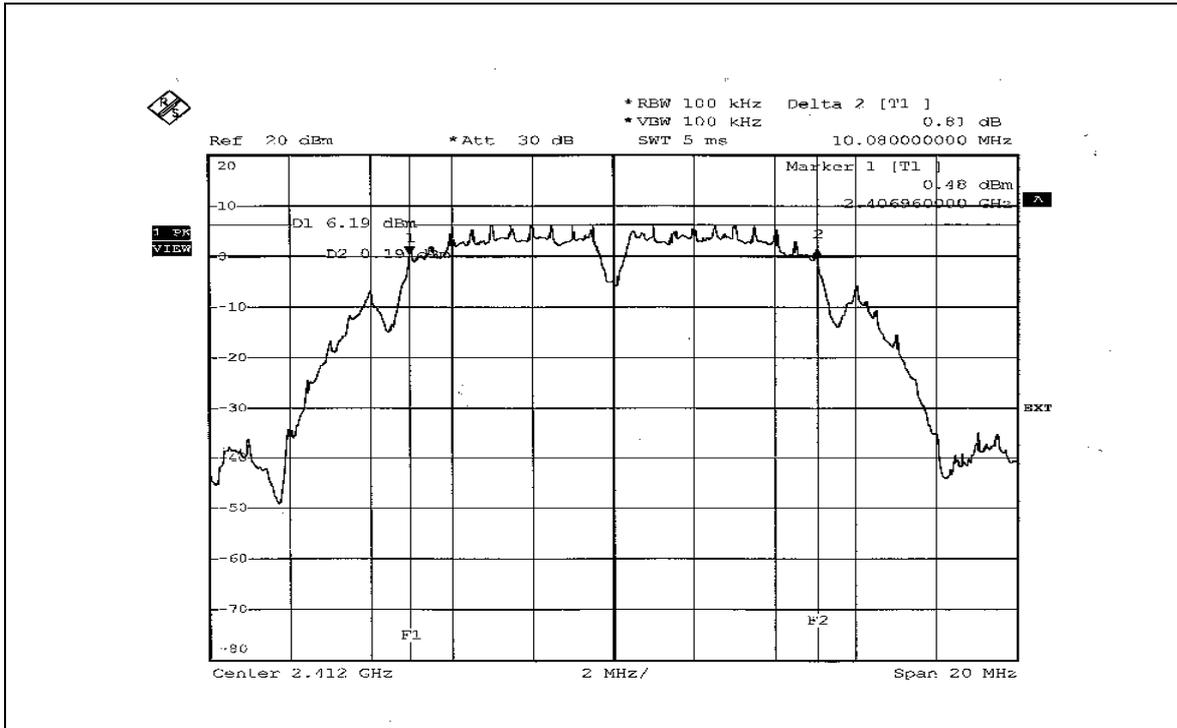


CH6

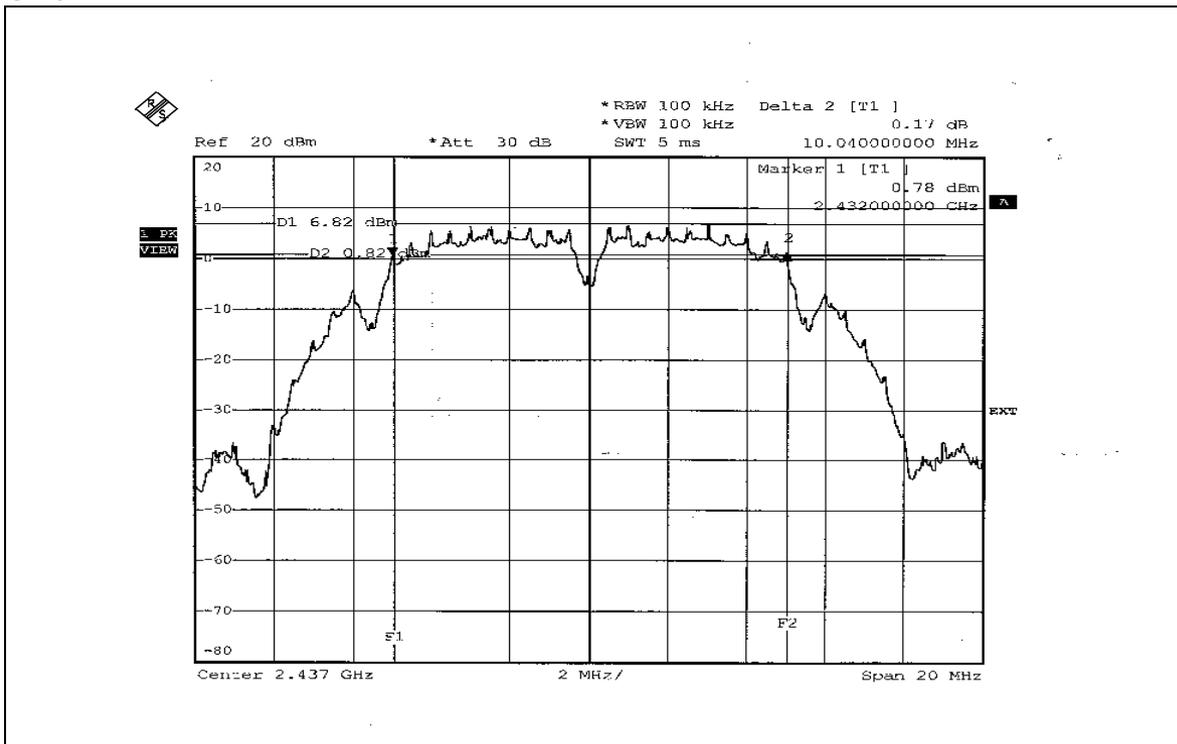



CH11

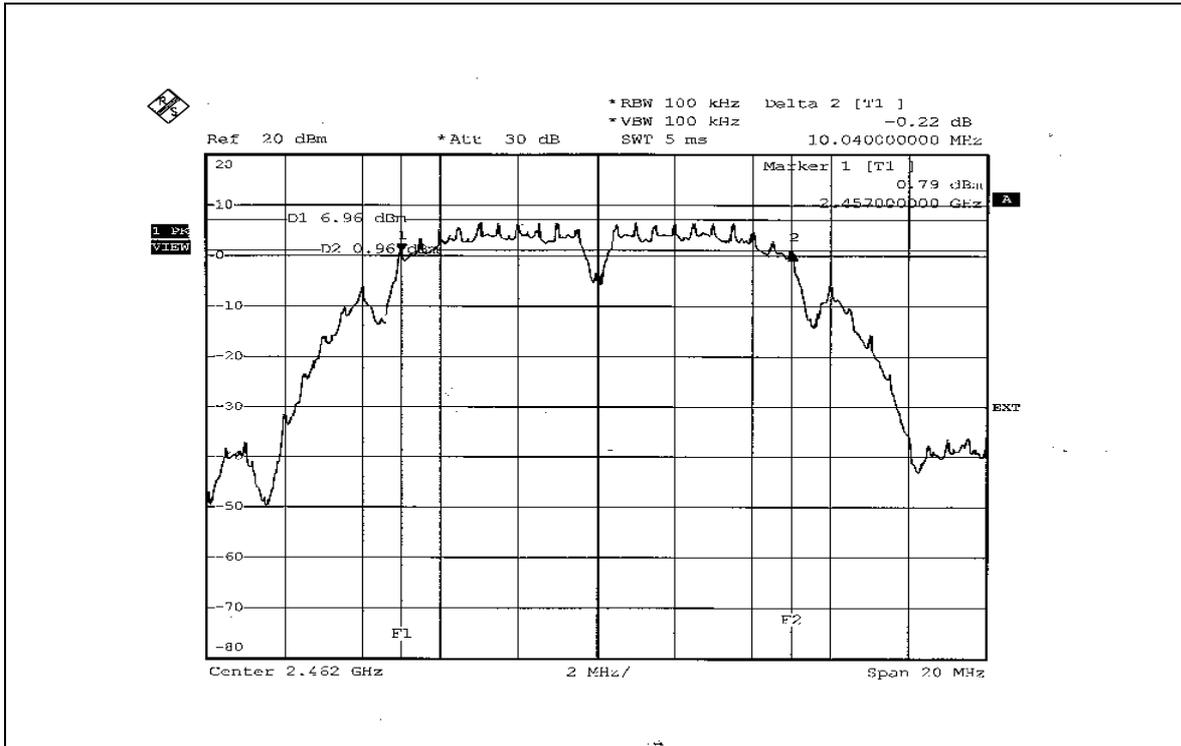




802.11g OFDM modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	B


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.36	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.32	0.5	PASS



CH1

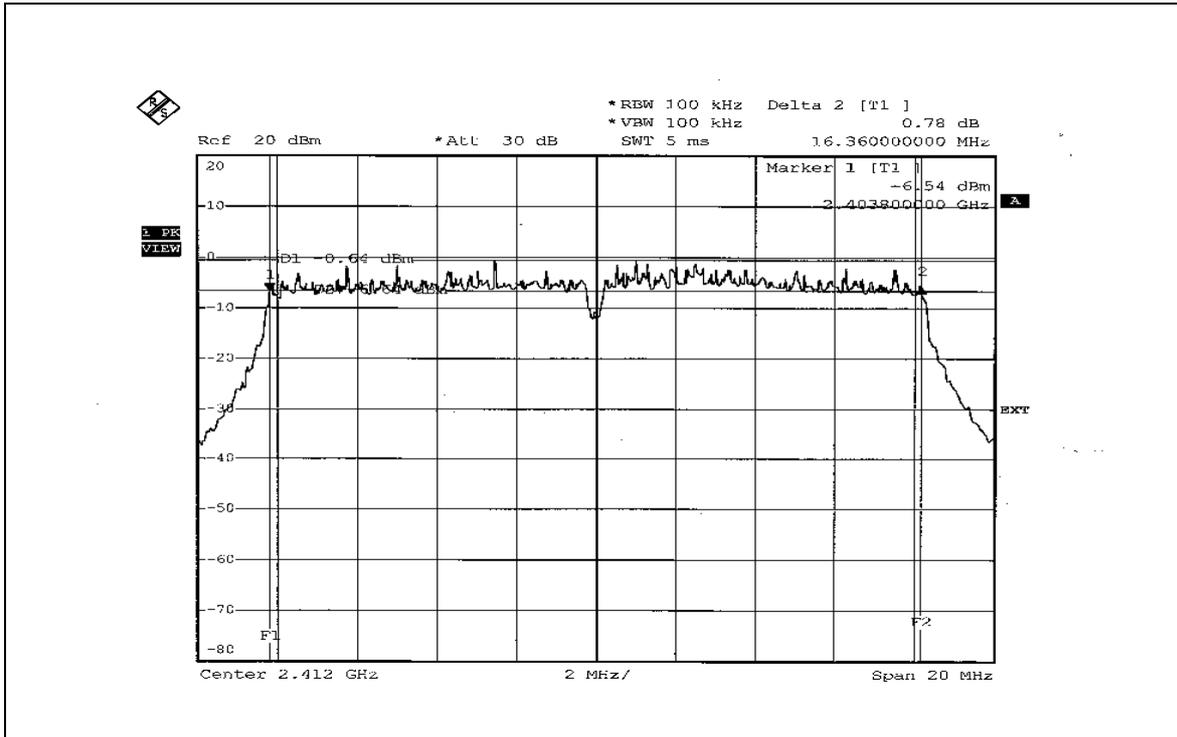


CH6

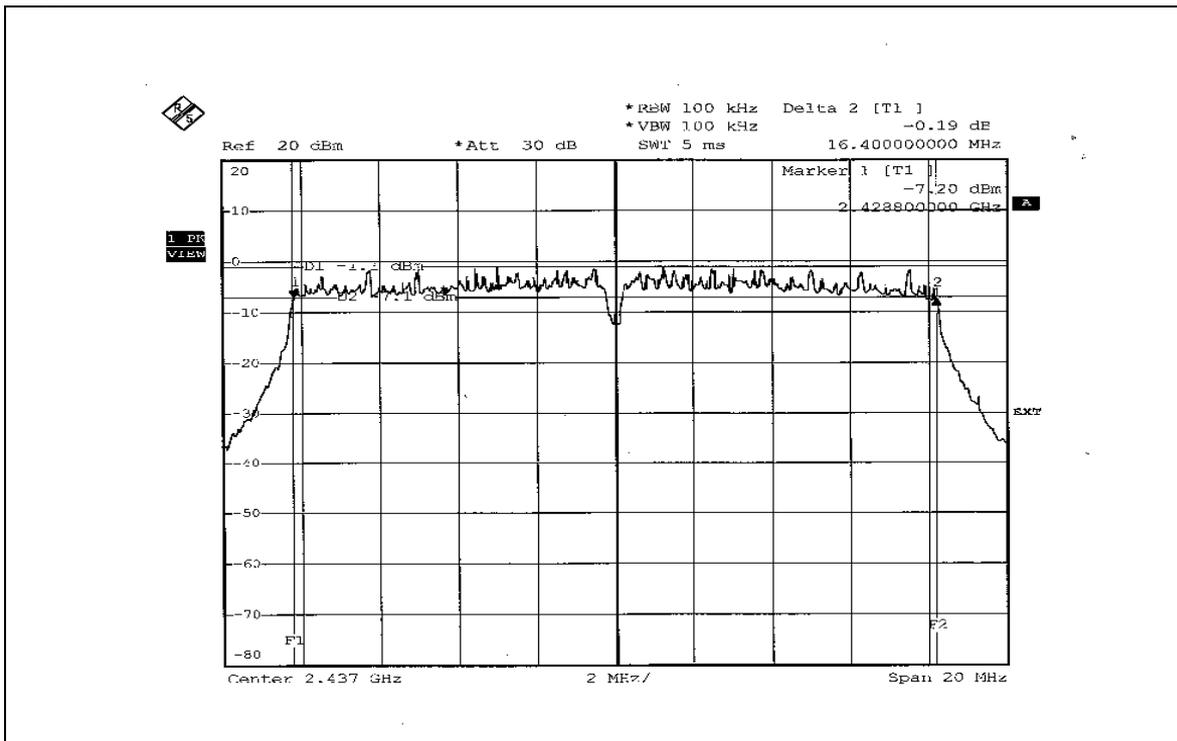



CH11

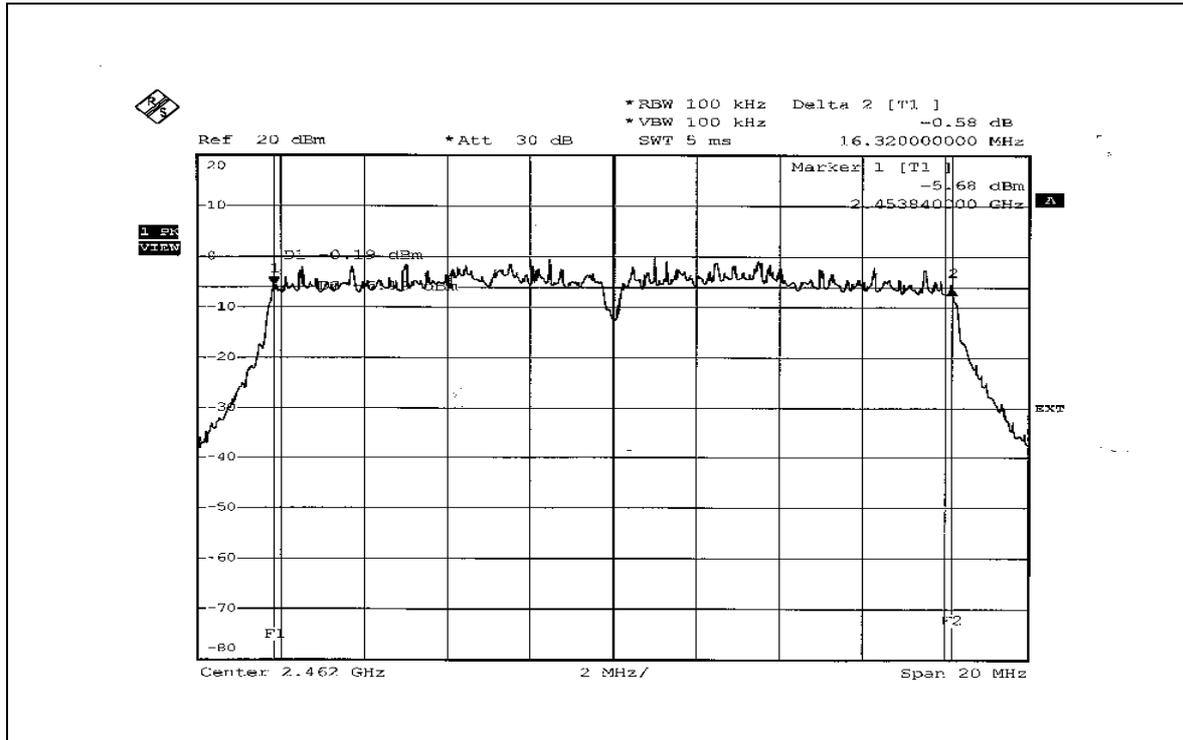




802.11g Turbo OFDM modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	B

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	16.40	0.5	PASS



CH6

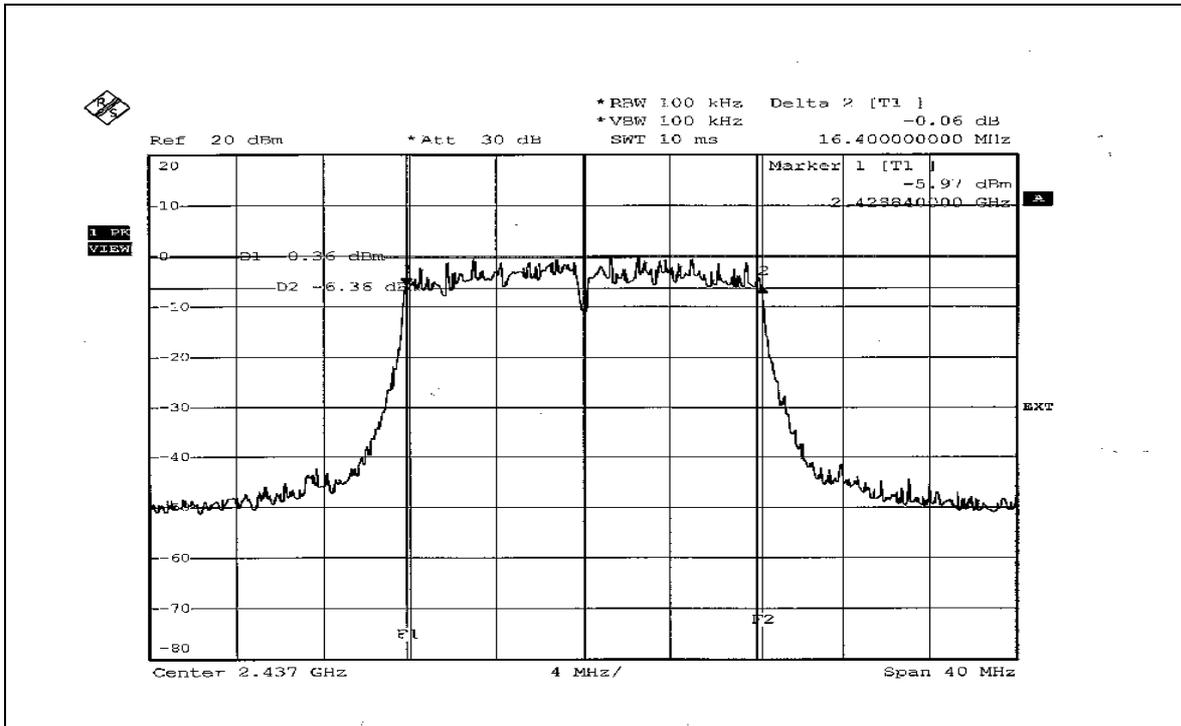



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS (A) – ORIGINAL VERSION

802.11b DSSS modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	A

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	71.121	18.52	30	PASS
6	2437	71.614	18.55	30	PASS
11	2462	71.285	18.53	30	PASS

802.11g OFDM modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	A

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	35.975	15.56	30	PASS
6	2437	36.141	15.58	30	PASS
11	2462	35.727	15.53	30	PASS

802.11g Turbo OFDM modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	A

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	35.892	15.55	30	PASS



4.4.8 TEST RESULTS (B) – ALTERNATE VERSION

802.11b DSSS modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	B

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	71.614	18.55	30	PASS
6	2437	71.945	18.57	30	PASS
11	2462	70.958	18.51	30	PASS

802.11g OFDM modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	B

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	35.645	15.52	30	PASS
6	2437	35.892	15.55	30	PASS
11	2462	35.563	15.51	30	PASS

802.11g Turbo OFDM modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	B

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	36.141	15.58	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP

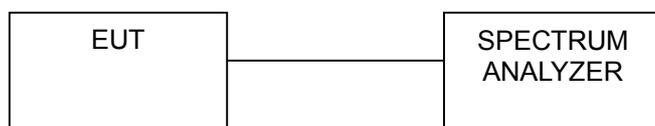

4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6.



4.5.7 TEST RESULTS (A) – ORIGINAL VERSION


802.11b DSSS modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	A


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.12	8	PASS
6	2437	-8.31	8	PASS
11	2462	-8.49	8	PASS



CH1

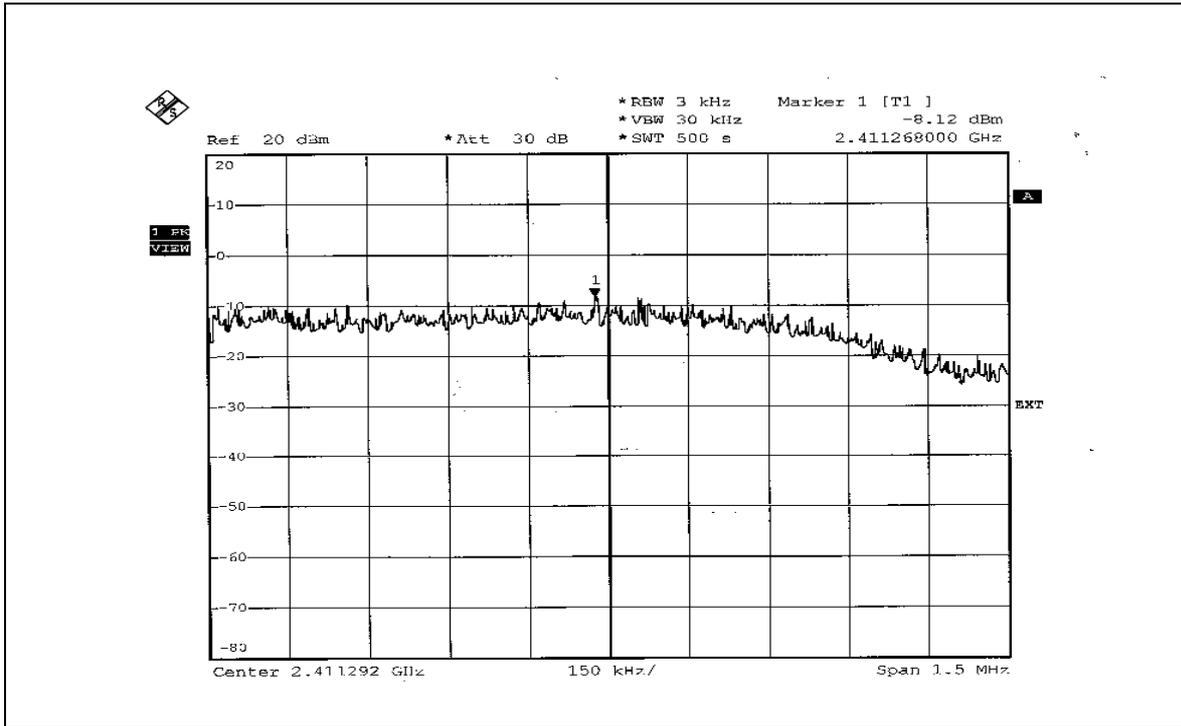


CH6

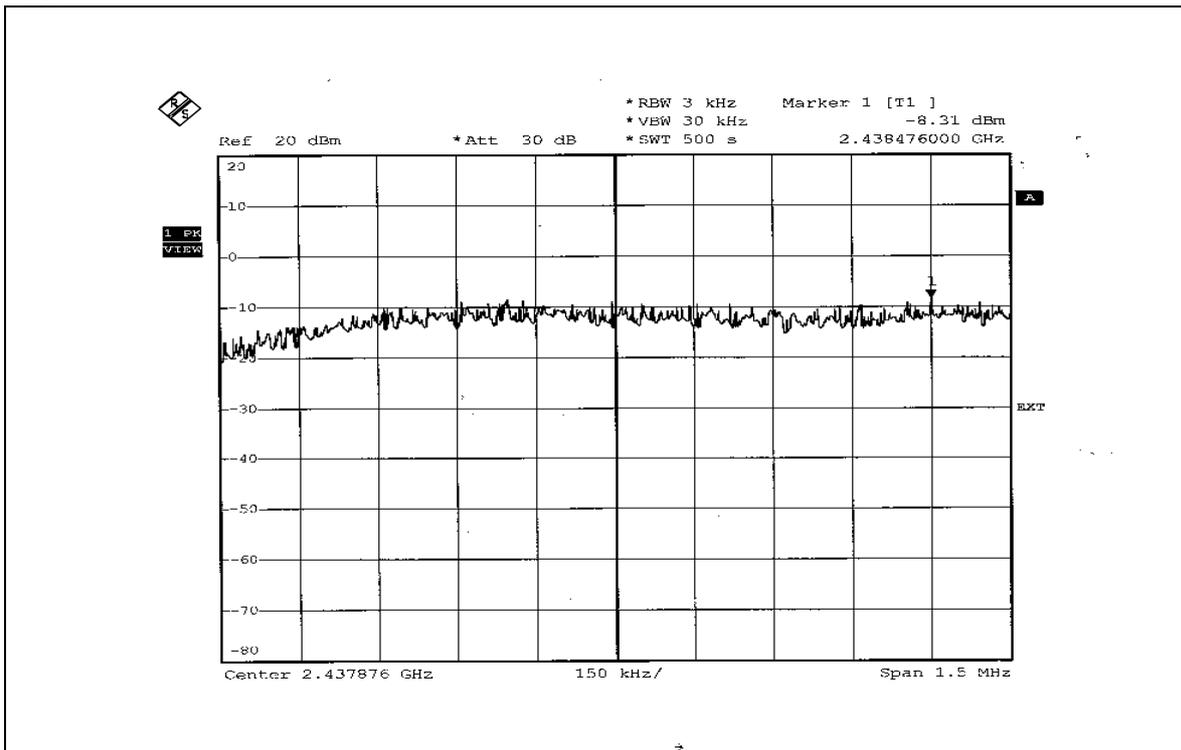



CH11

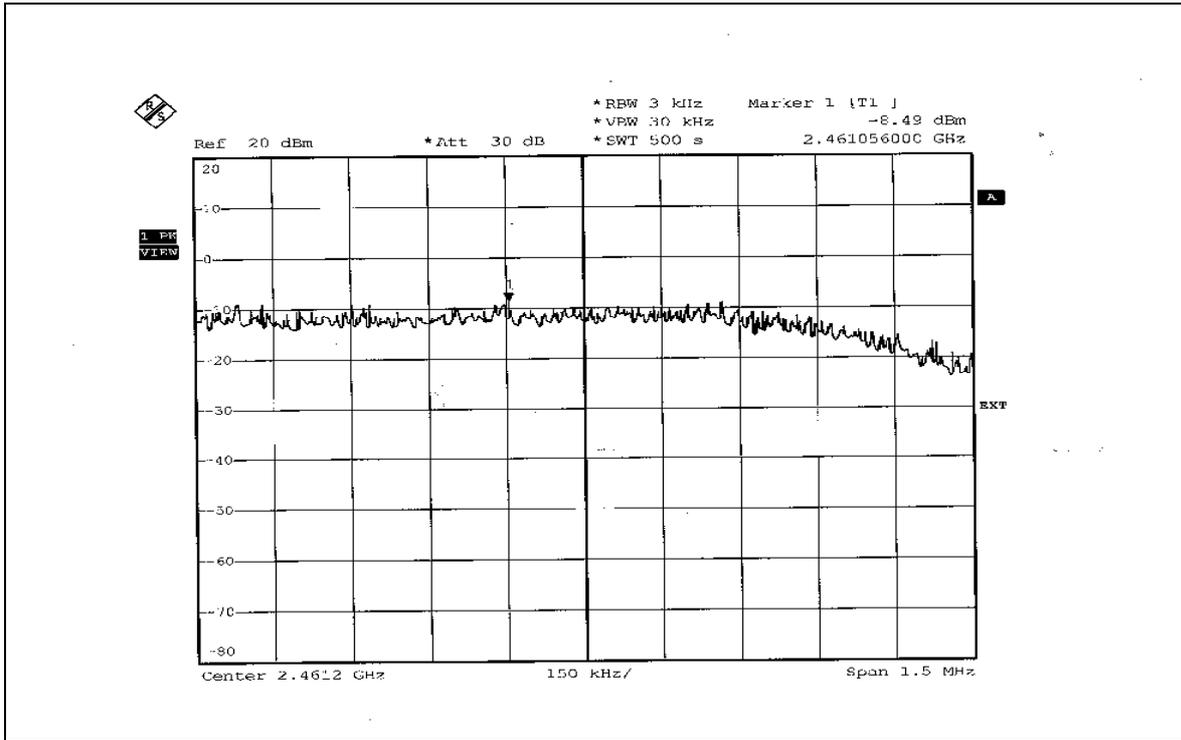




802.11g OFDM modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	A


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.21	8	PASS
6	2437	-13.41	8	PASS
11	2462	-13.45	8	PASS



CH1

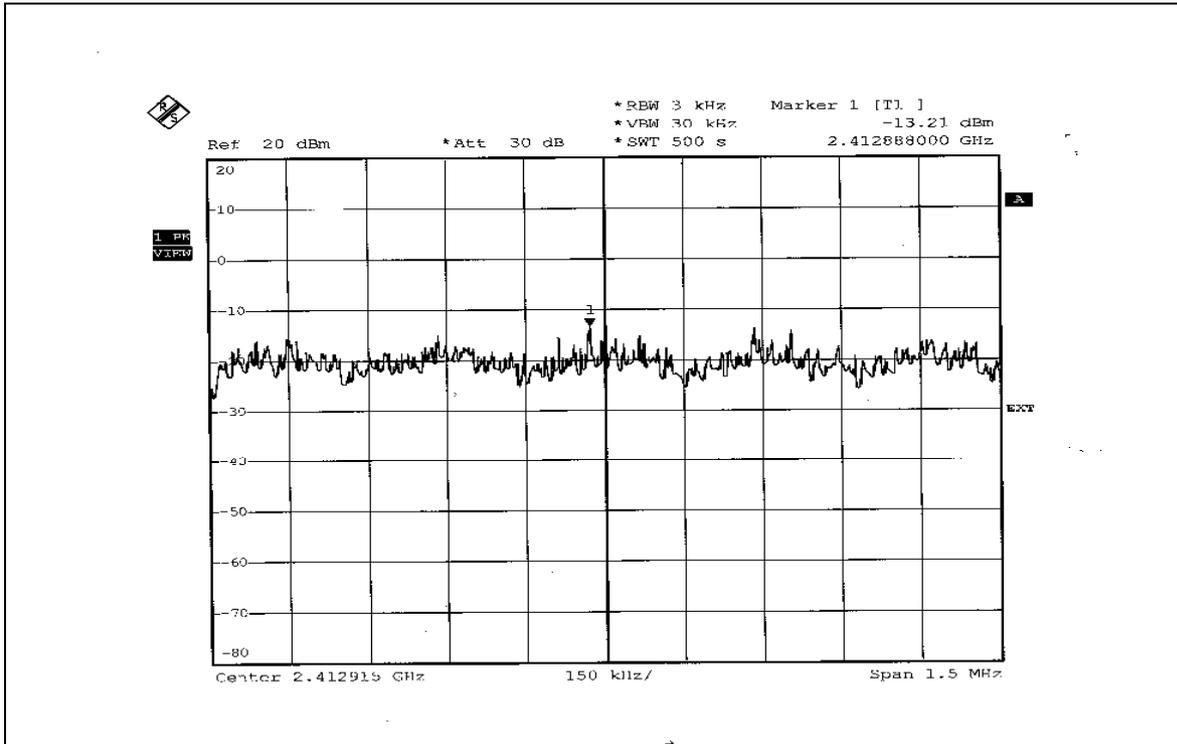


CH6

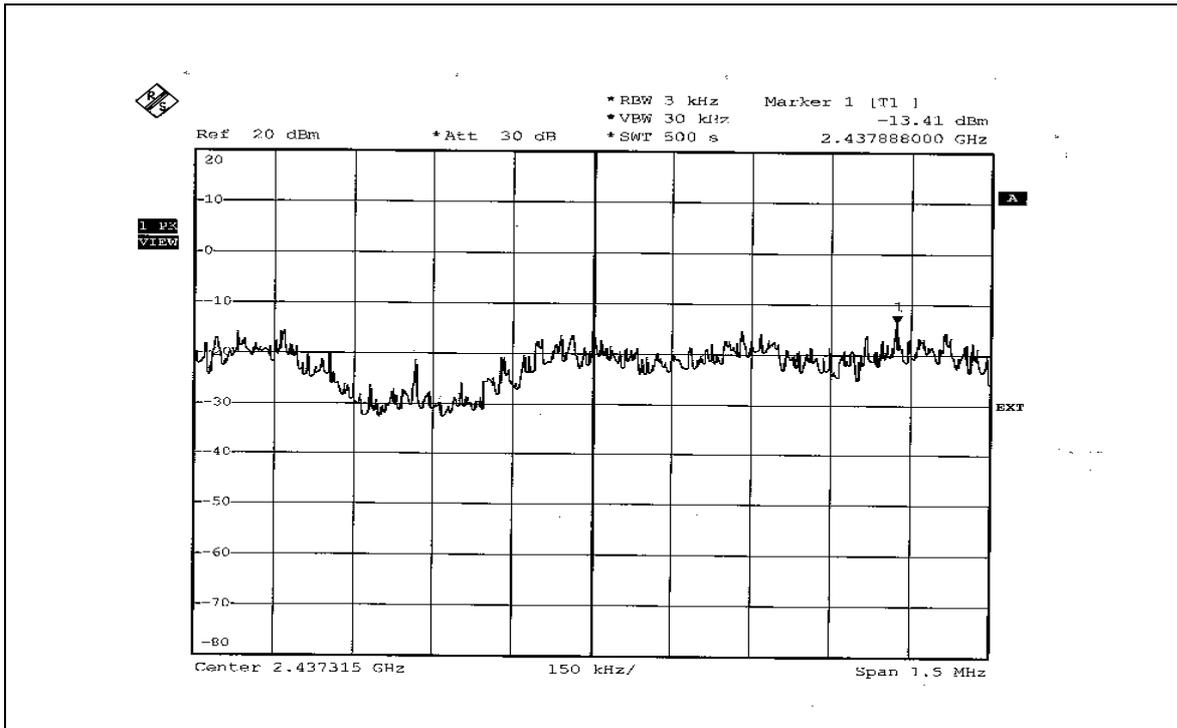



CH11

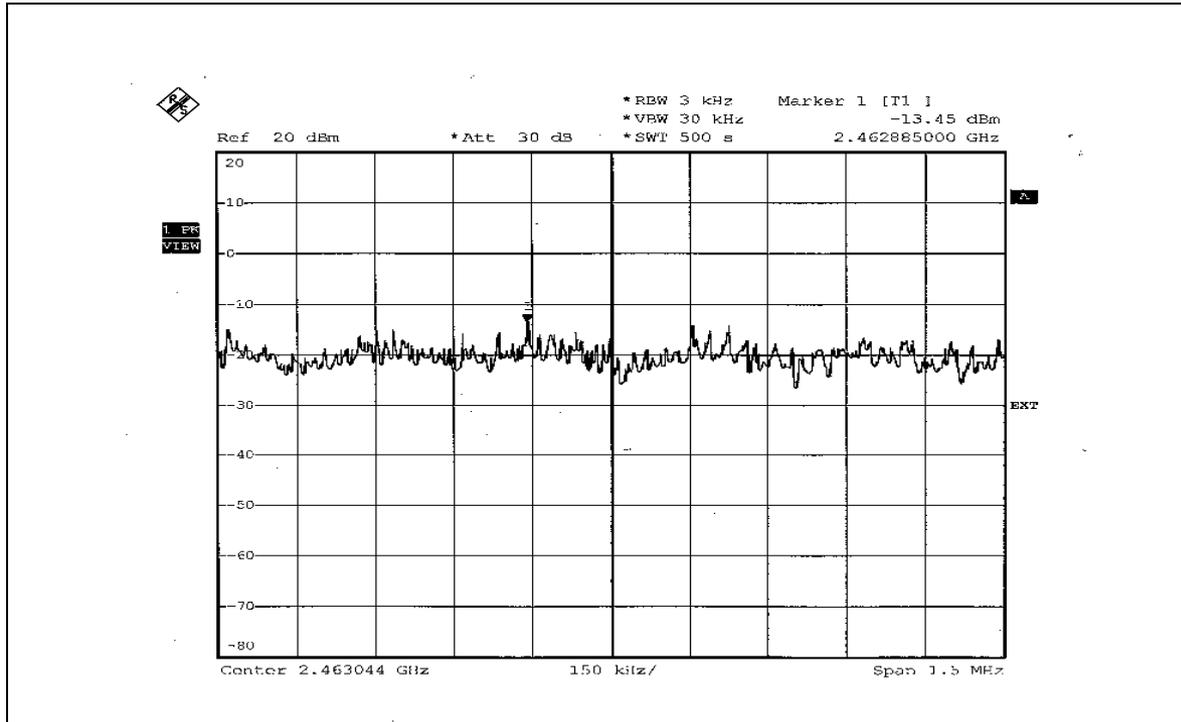


**802.11g Turbo OFDM modulation**

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	A

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-13.71	8	PASS



CH6

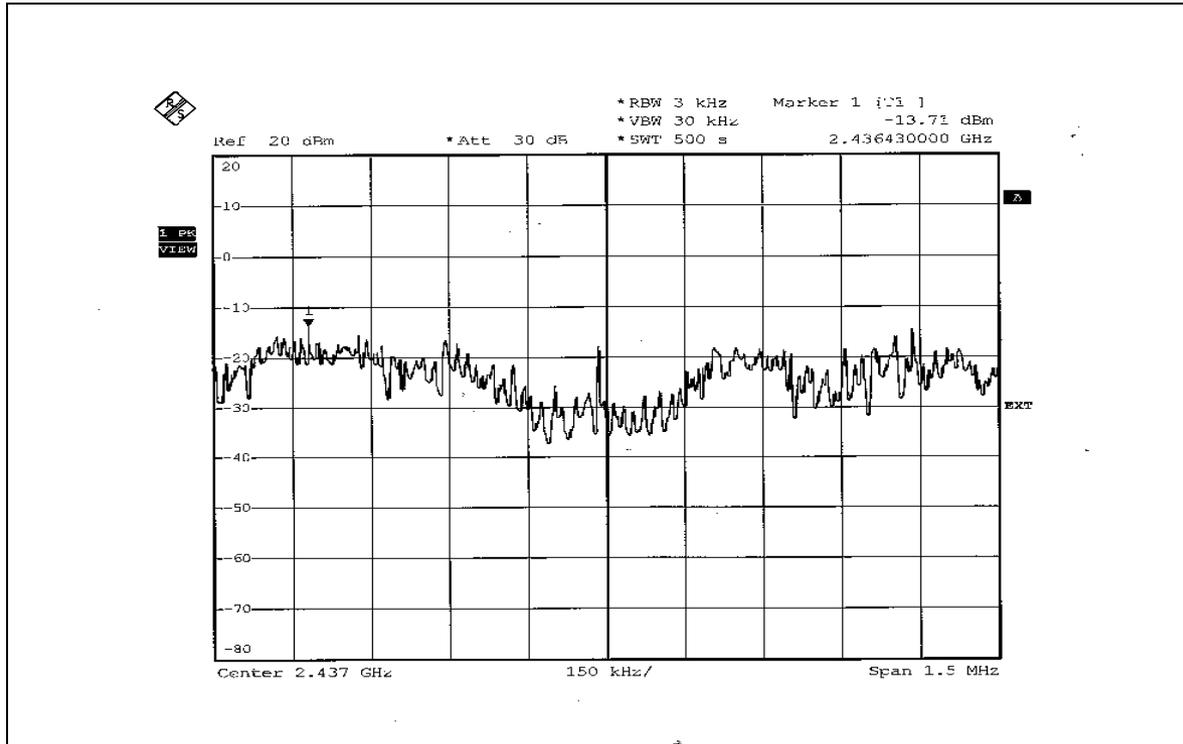



4.5.8 TEST RESULTS (B) – ALTERNATE VERSION


802.11b DSSS modulation

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	B


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.27	8	PASS
6	2437	-8.43	8	PASS
11	2462	-8.49	8	PASS



CH1

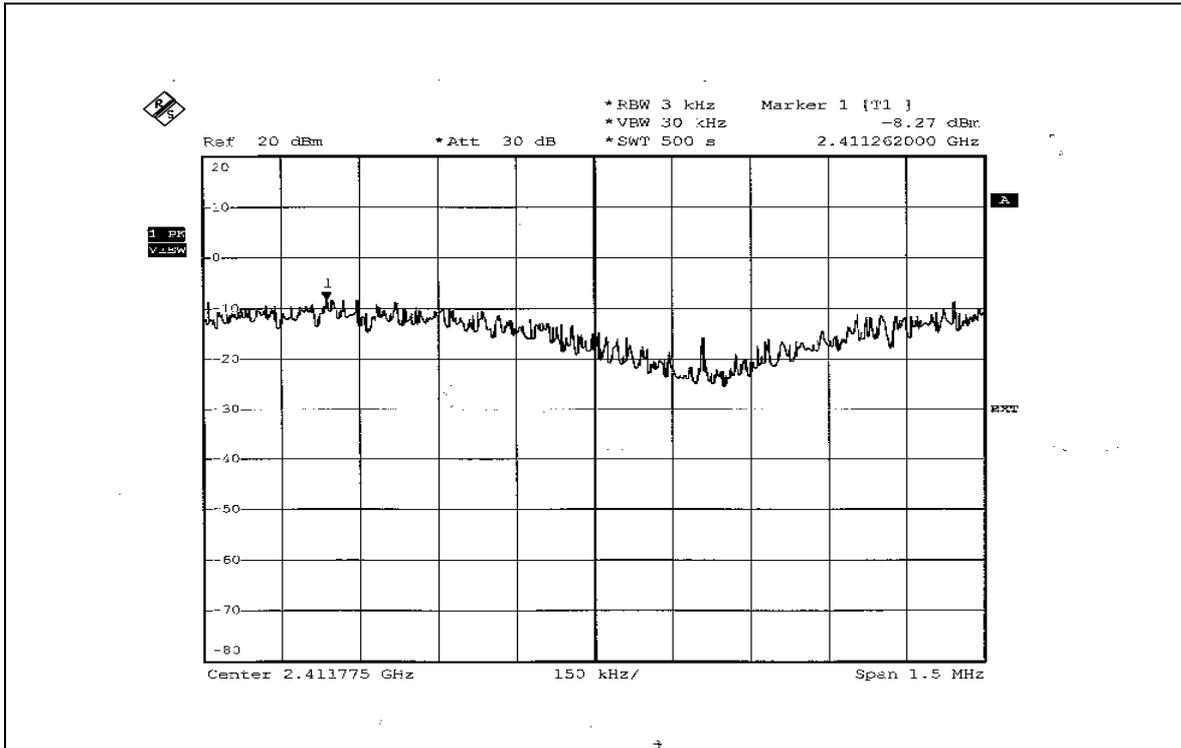


CH6

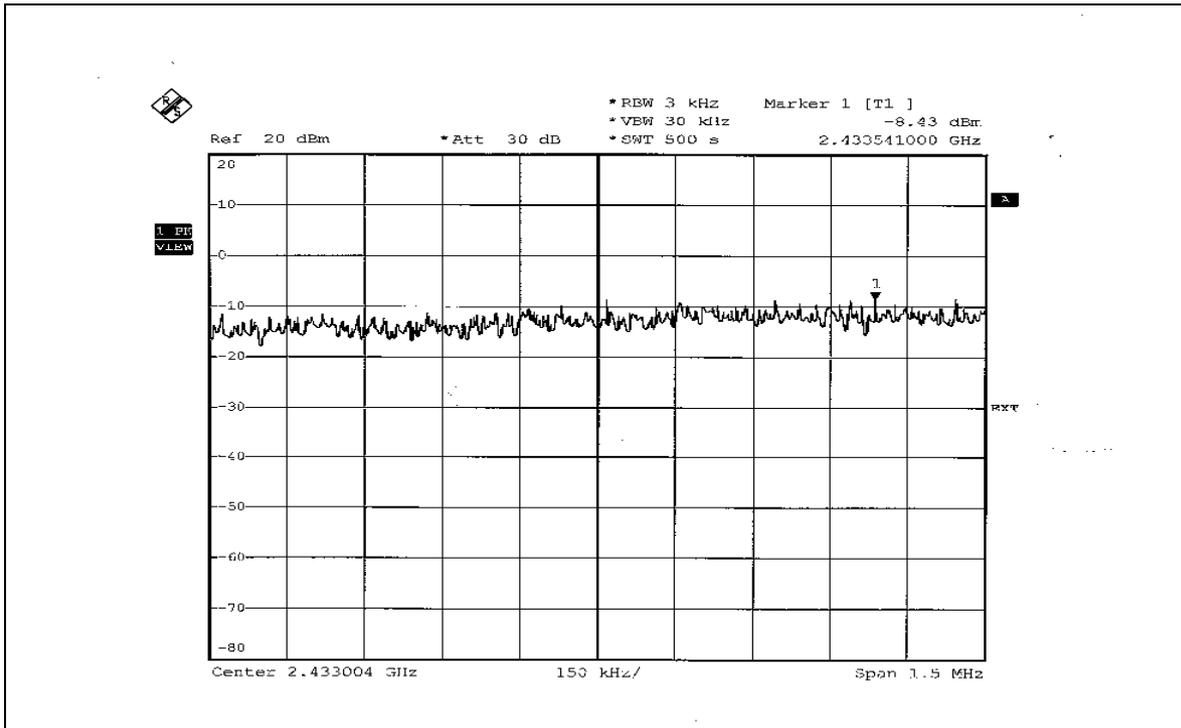



CH11

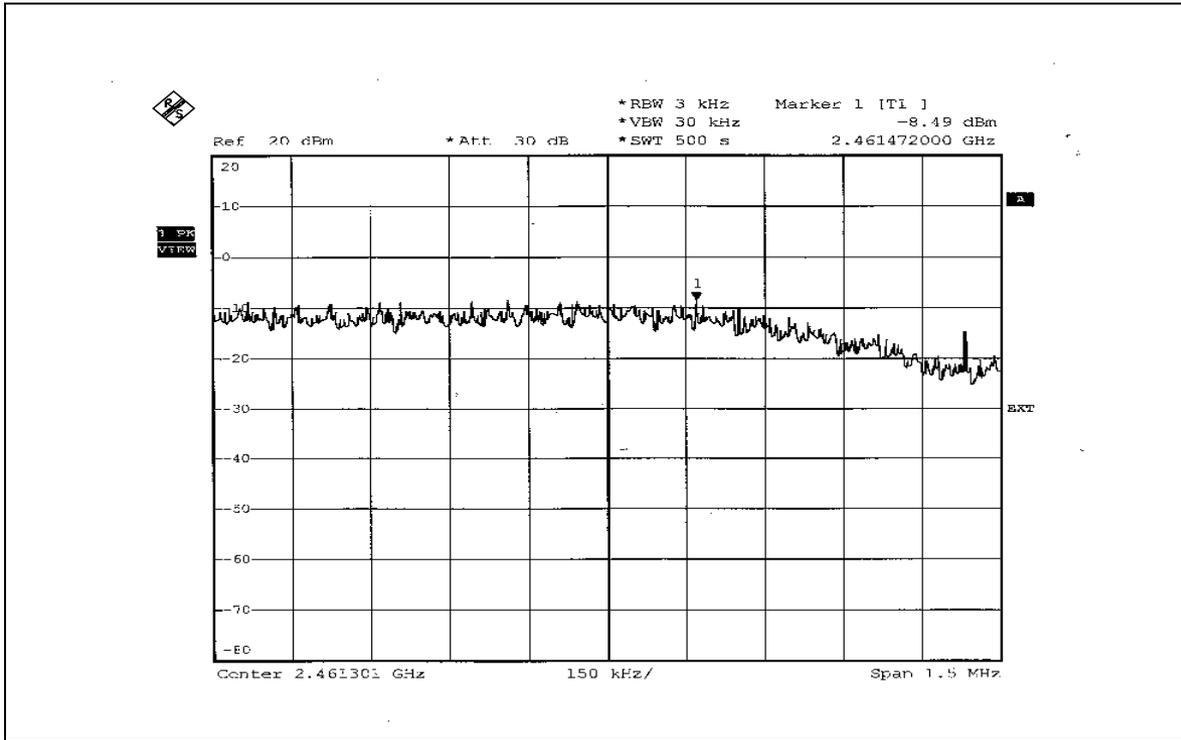


**802.11g OFDM modulation**

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	B


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.87	8	PASS
6	2437	-13.81	8	PASS
11	2462	-13.75	8	PASS



CH1

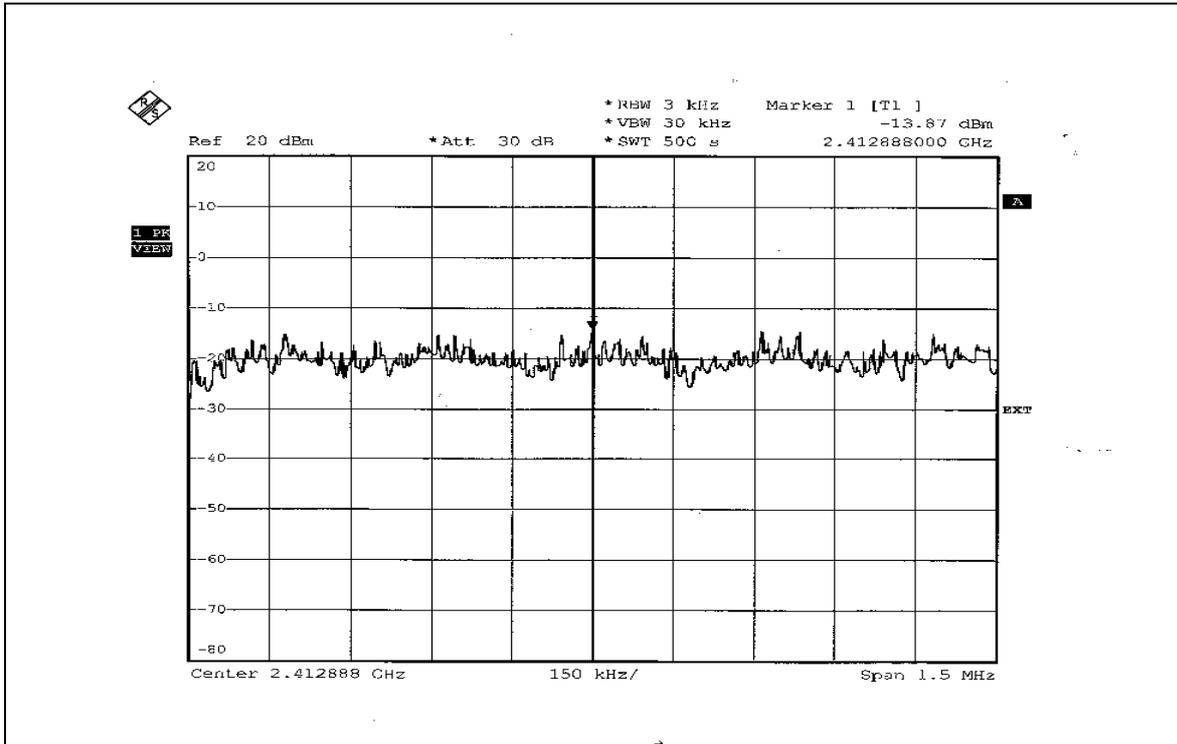


CH6

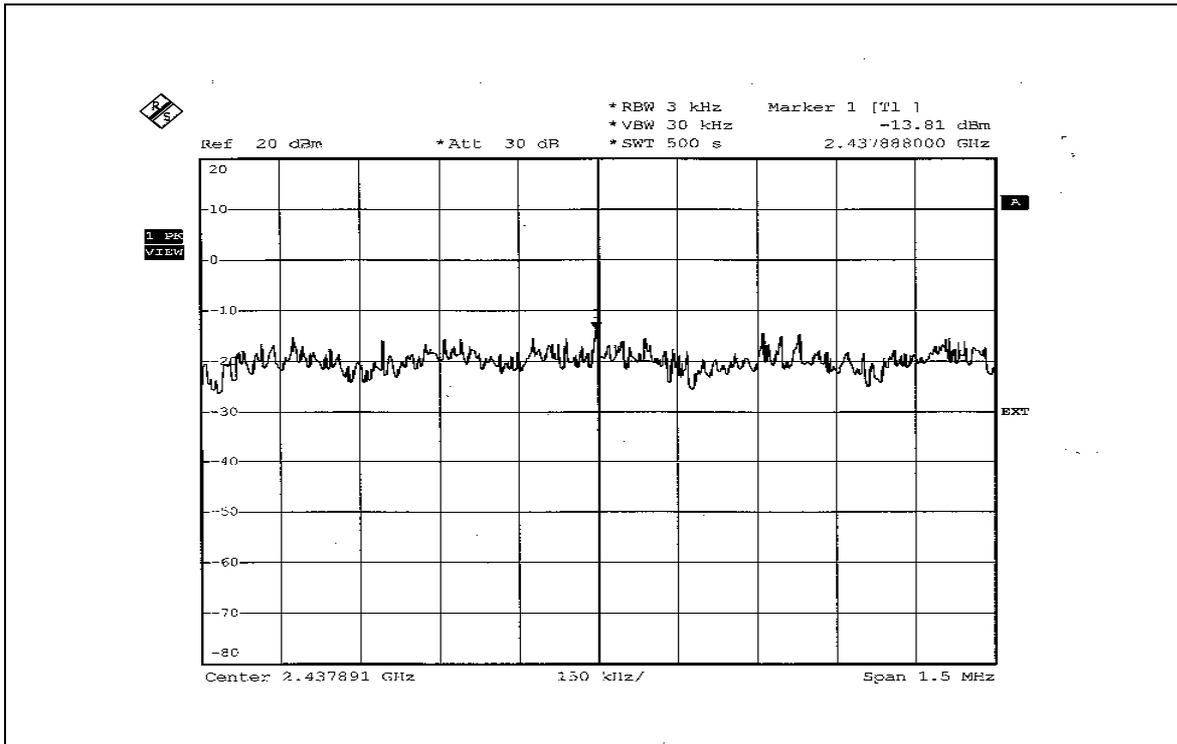



CH11

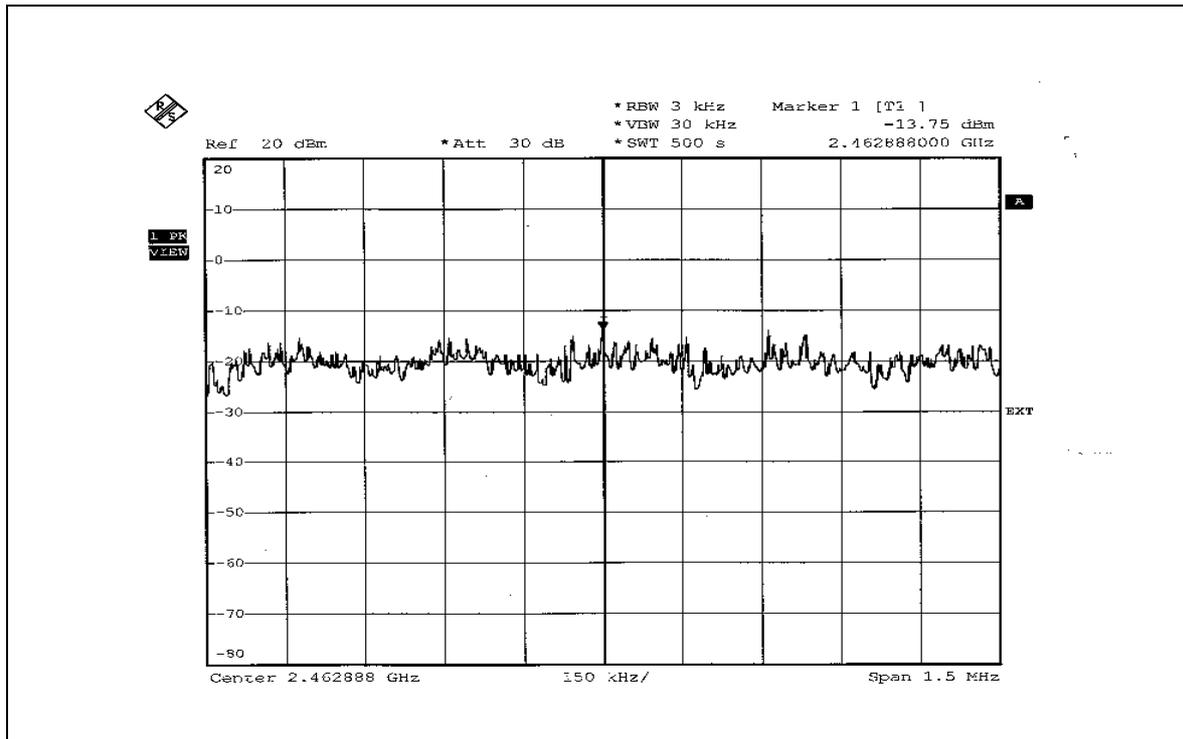


**802.11g Turbo OFDM modulation**

EUT	Dell Wireless 1390 802.11g ExpressCard	MODEL	WPCB-143G
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 991hPa
TESTED BY	Long Chen	TEST MODE	B

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-13.71	8	PASS



CH6

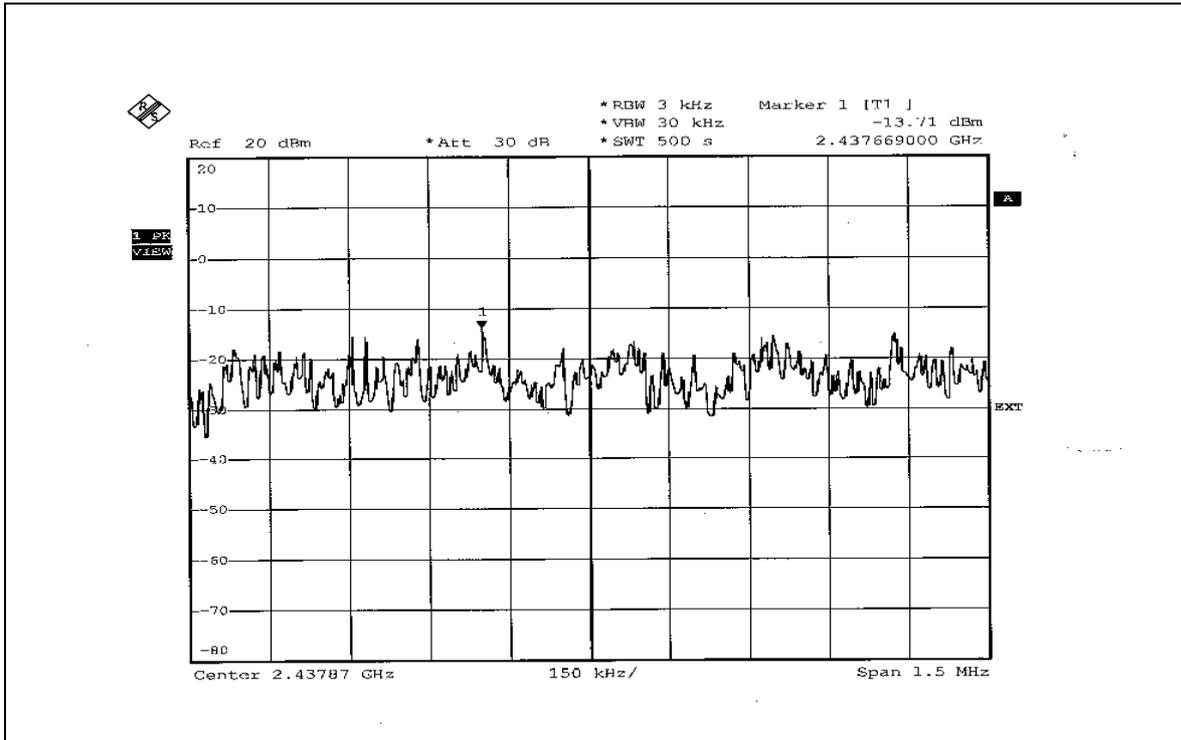



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=100Hz or 1kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.



4.6.6 TEST RESULTS (A) –ORIGINAL VERSION

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS modulation



NOTE 1: The band edge emission plot on page 89 shows 54.26dBc between carrier maximum power and local maximum emission in restrict band (2.3810GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.51dBuV/m (Peak), so the maximum field strength in restrict band is $108.51 - 54.26 = 54.25$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 89 shows 58.38dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.20dBuV/m (Average), so the maximum field strength in restrict band is $105.20 - 58.38 = 46.82$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 90 shows 53.15dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 108.39dBuV/m (Peak), so the maximum field strength in restrict band is $108.39 - 53.15 = 55.24$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 91 shows 55.93dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.44dBuV/m (Average), so the maximum field strength in restrict band is $105.44 - 55.93 = 49.51$ dBuV/m which is under 54dBuV/m limit.

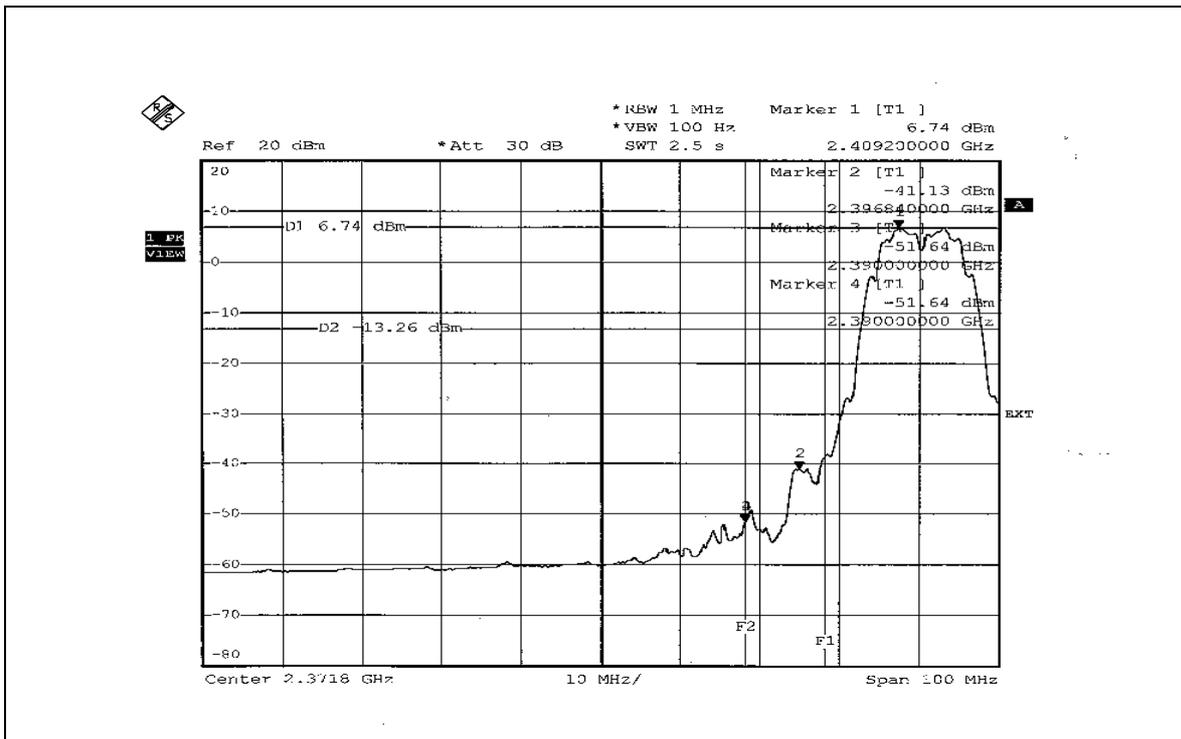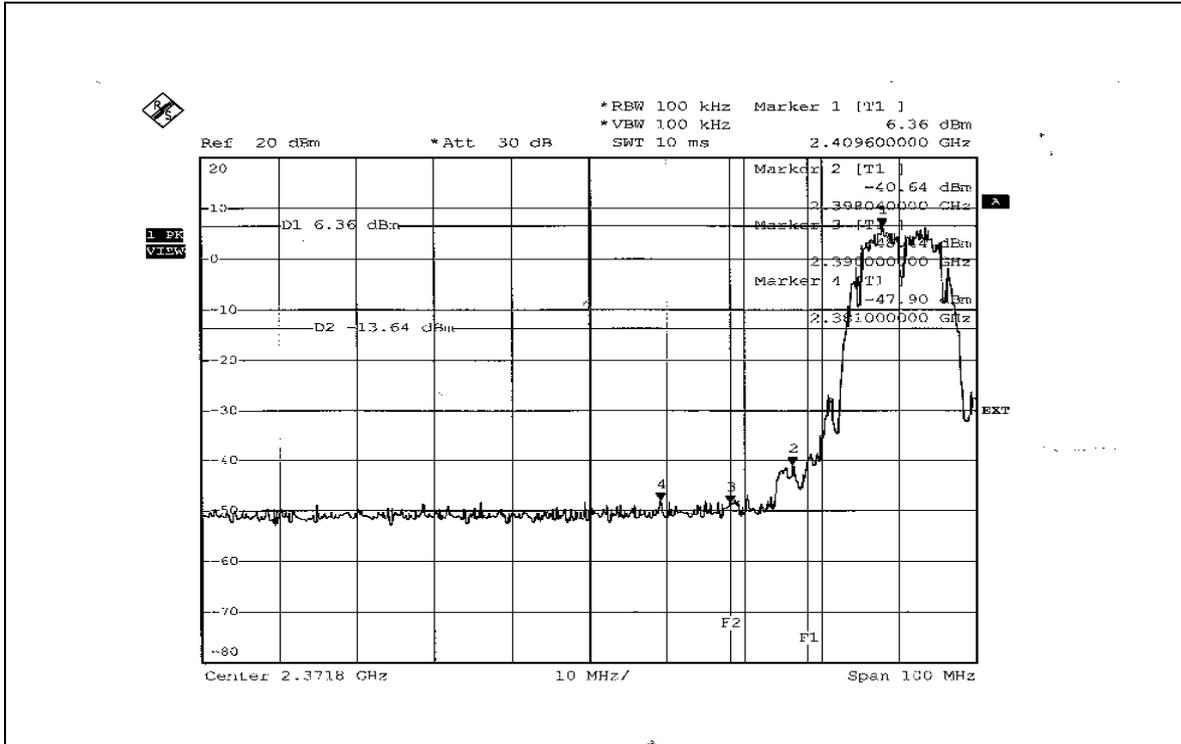

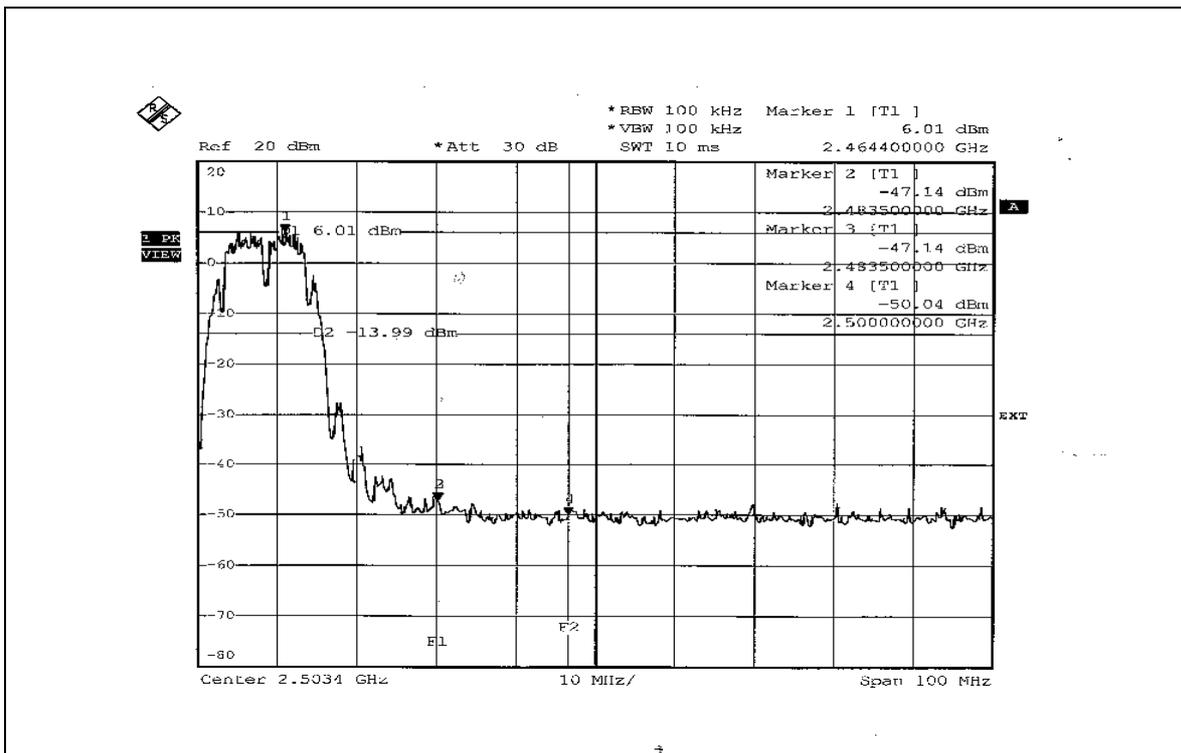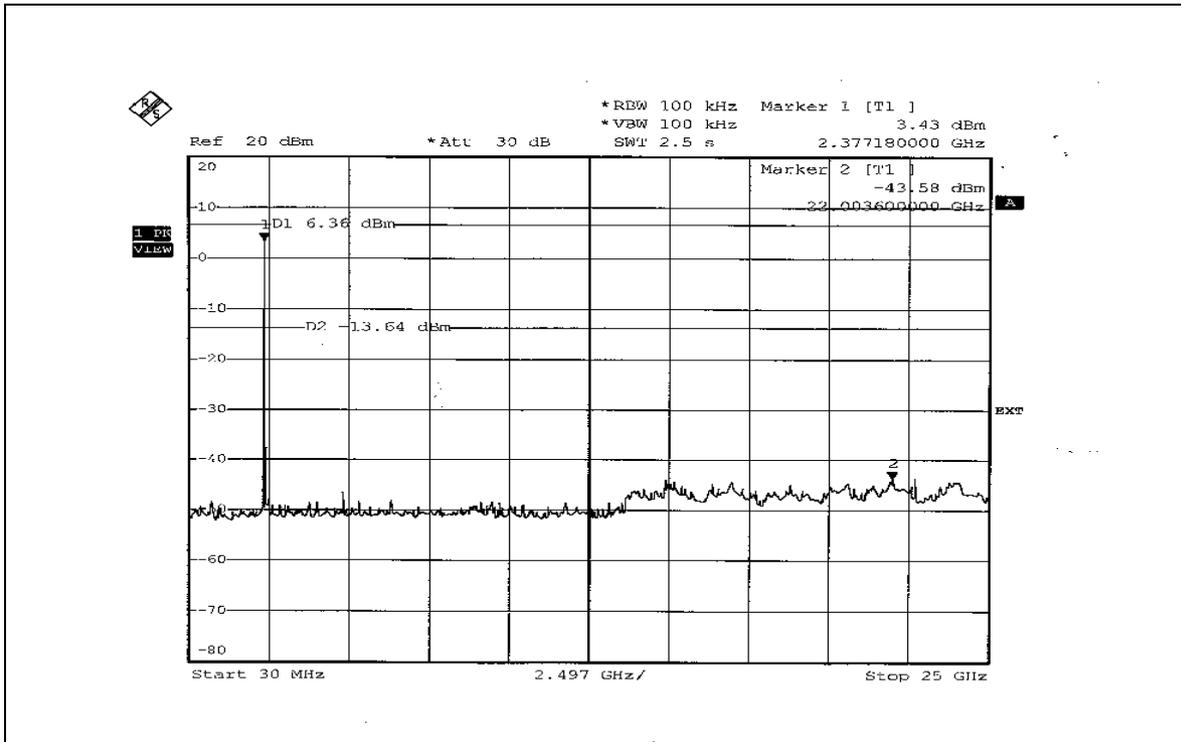

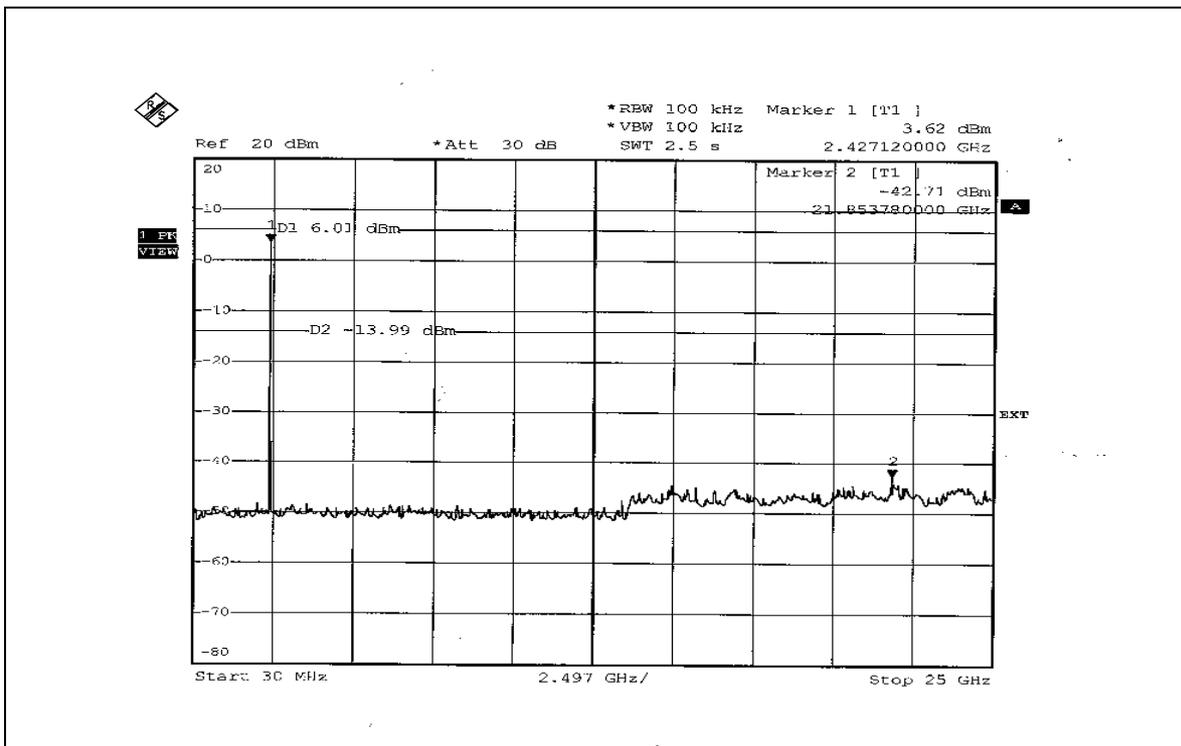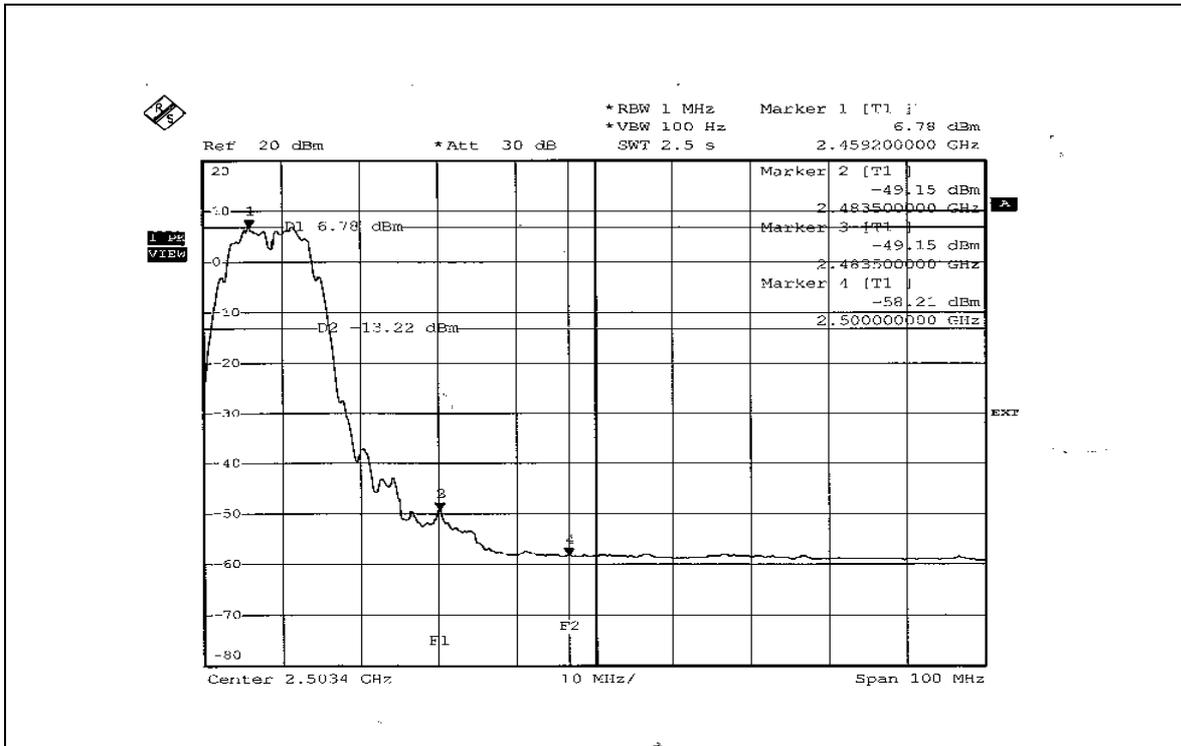





802.11g OFDM modulation



NOTE 1: The band edge emission plot on page 93 shows 47.95dBc between carrier maximum power and local maximum emission in restrict band (2.3498GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.68dBuV/m (Peak), so the maximum field strength in restrict band is $105.68 - 47.95 = 57.73$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 93 shows 58.95dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.49dBuV/m (Average), so the maximum field strength in restrict band is $98.49 - 58.95 = 39.54$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 94 shows 48.01dBc between carrier maximum power and local maximum emission in restrict band (2.4873GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.07dBuV/m (Peak), so the maximum field strength in restrict band is $106.07 - 48.01 = 58.06$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 95 shows 56.57dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.15dBuV/m (Average), so the maximum field strength in restrict band is $99.15 - 56.57 = 42.58$ dBuV/m which is under 54dBuV/m limit.

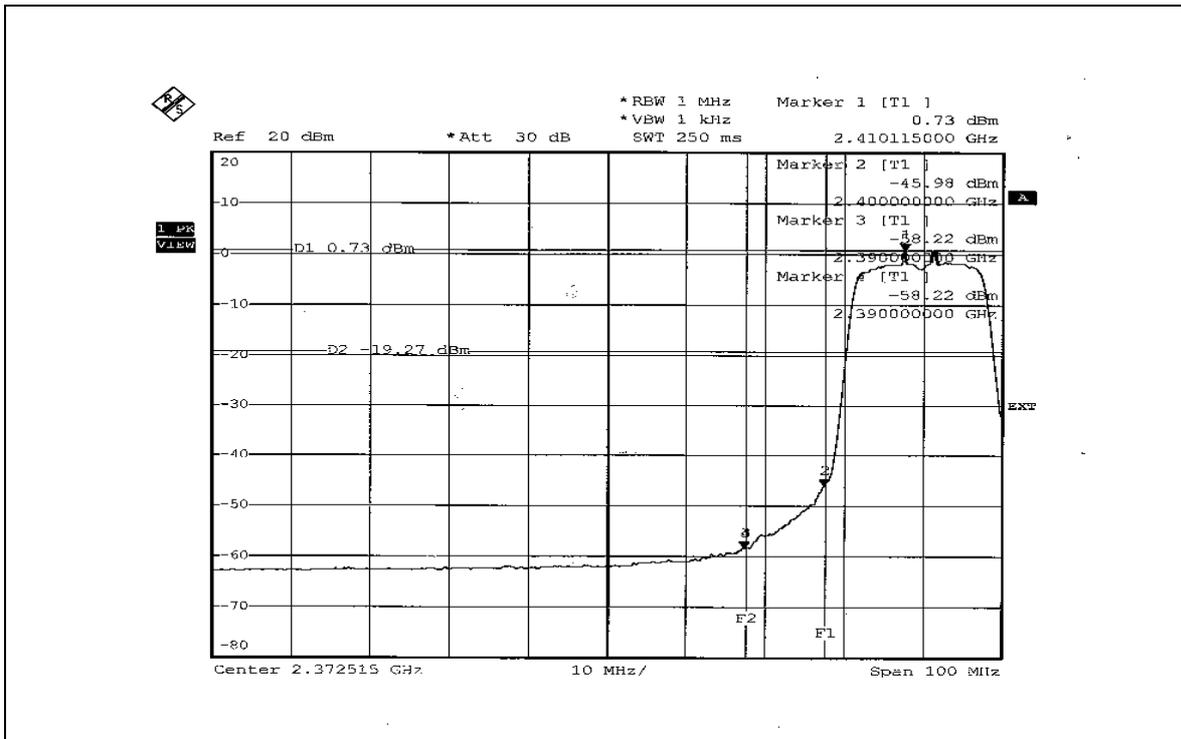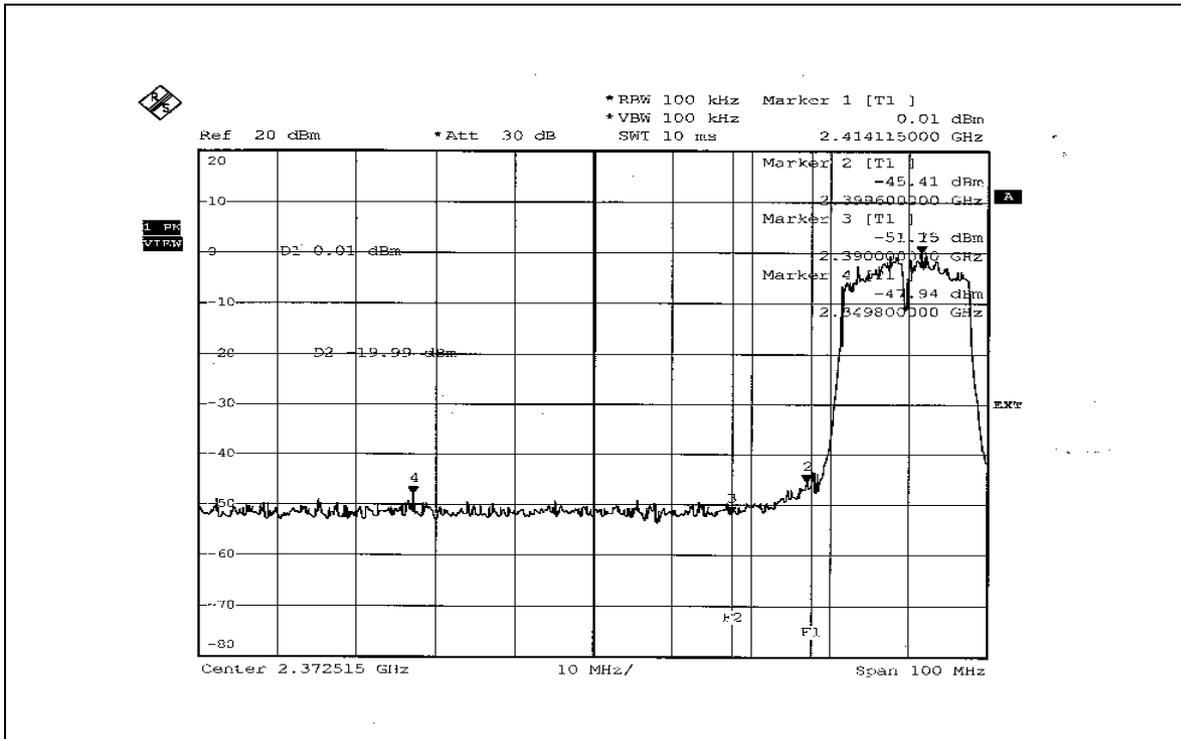

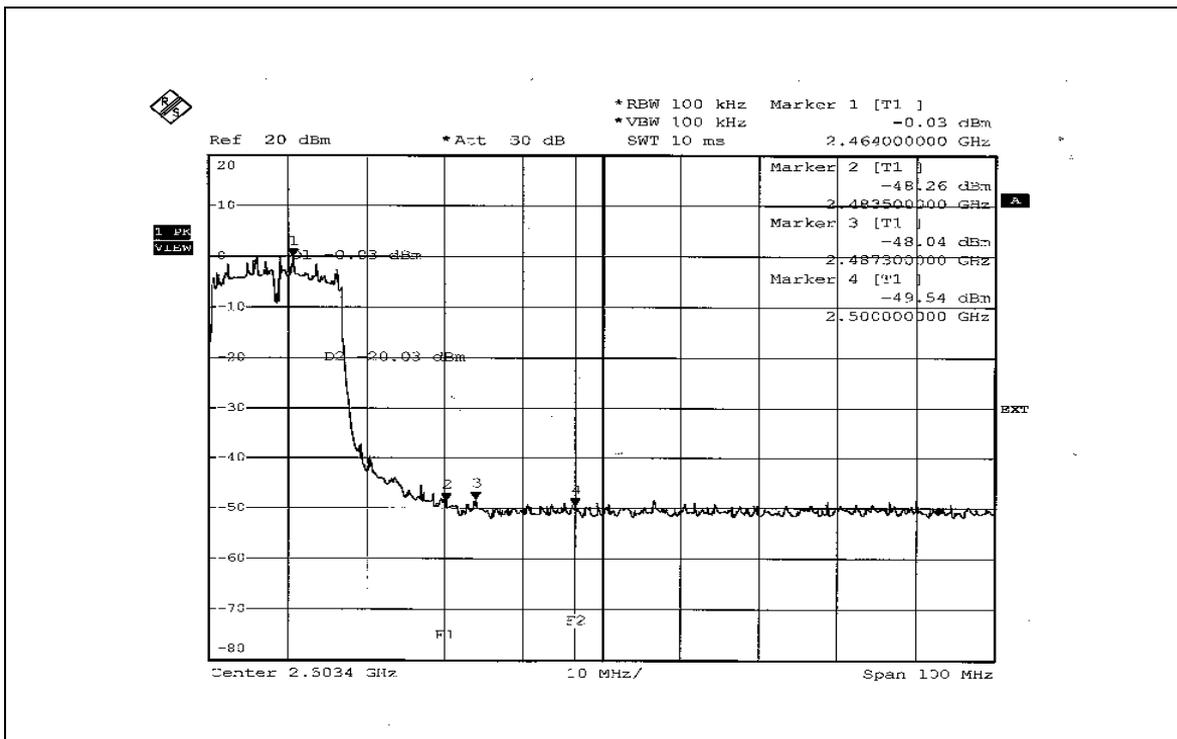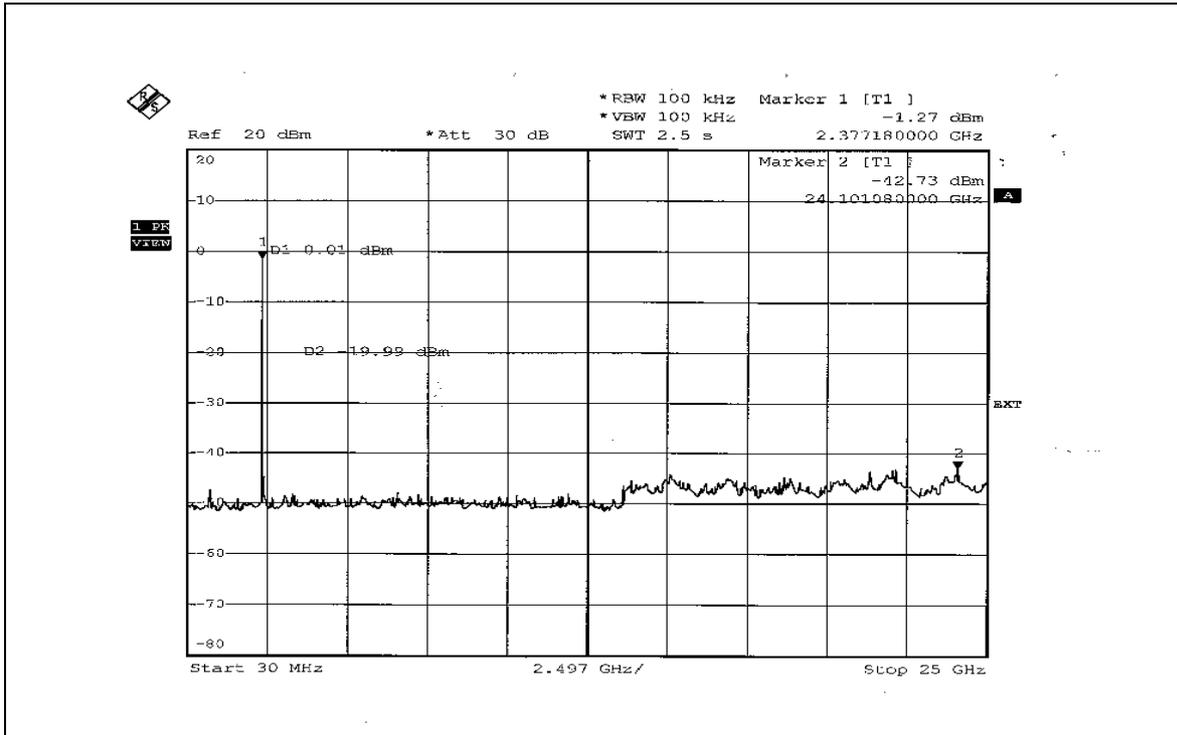

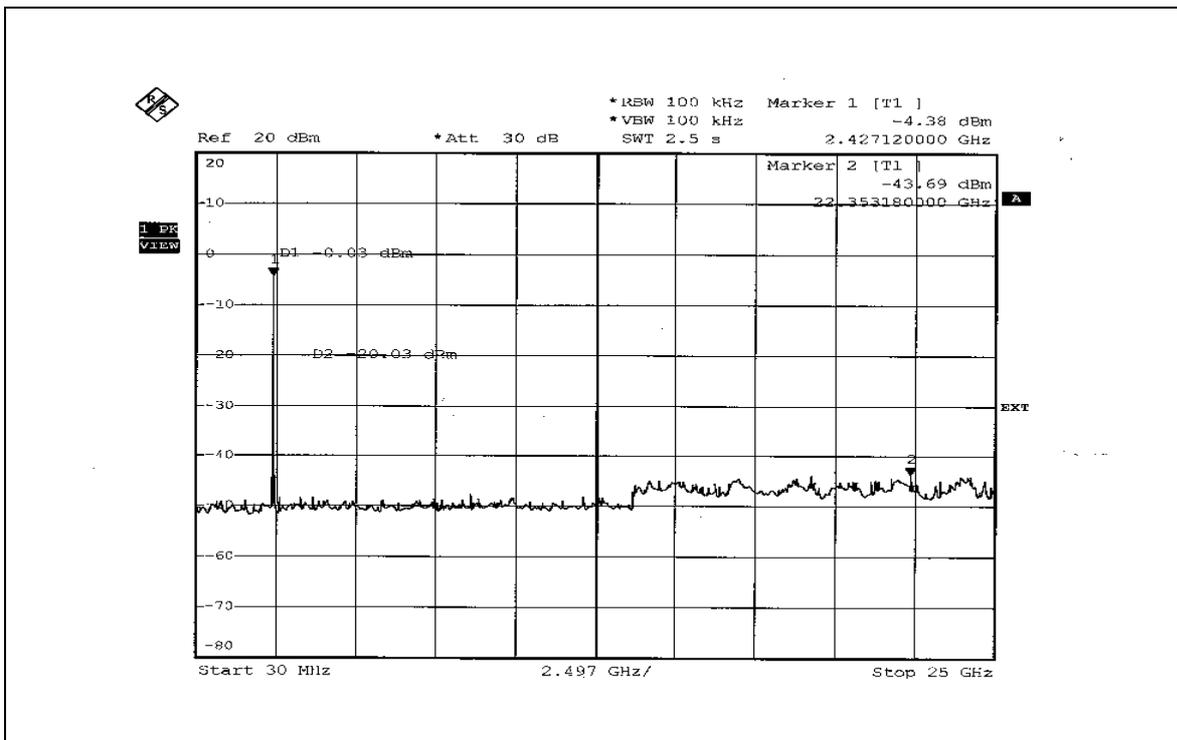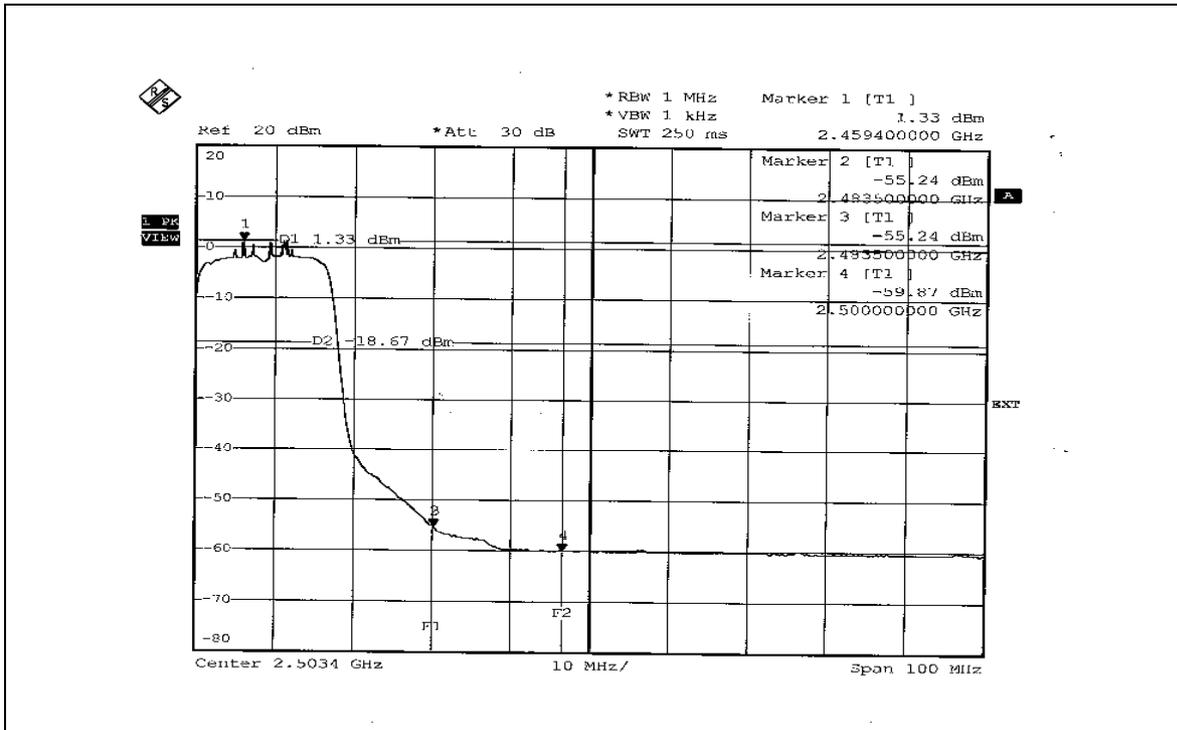





802.11g Turbo OFDM modulation



NOTE 1: The band edge emission plot on page 97 shows 49.28dBc between carrier maximum power and local maximum emission in restrict band (2.3728GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.55dBuV/m (Peak), so the maximum field strength in restrict band is $106.55 - 49.28 = 57.27$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 97 shows 61.90dBc between carrier maximum power and local maximum emission in restrict band (2.3783GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 99.38dBuV/m (Average), so the maximum field strength in restrict band is $99.38 - 61.90 = 37.48$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 98 shows 48.48dBc between carrier maximum power and local maximum emission in restrict band (2.4897GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.55dBuV/m (Peak), so the maximum field strength in restrict band is $106.55 - 48.48 = 58.07$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 99 shows 60.85dBc between carrier maximum power and local maximum emission in restrict band (2.4901GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.38dBuV/m (Average), so the maximum field strength in restrict band is $99.38 - 60.85 = 38.53$ dBuV/m which is under 54dBuV/m limit.

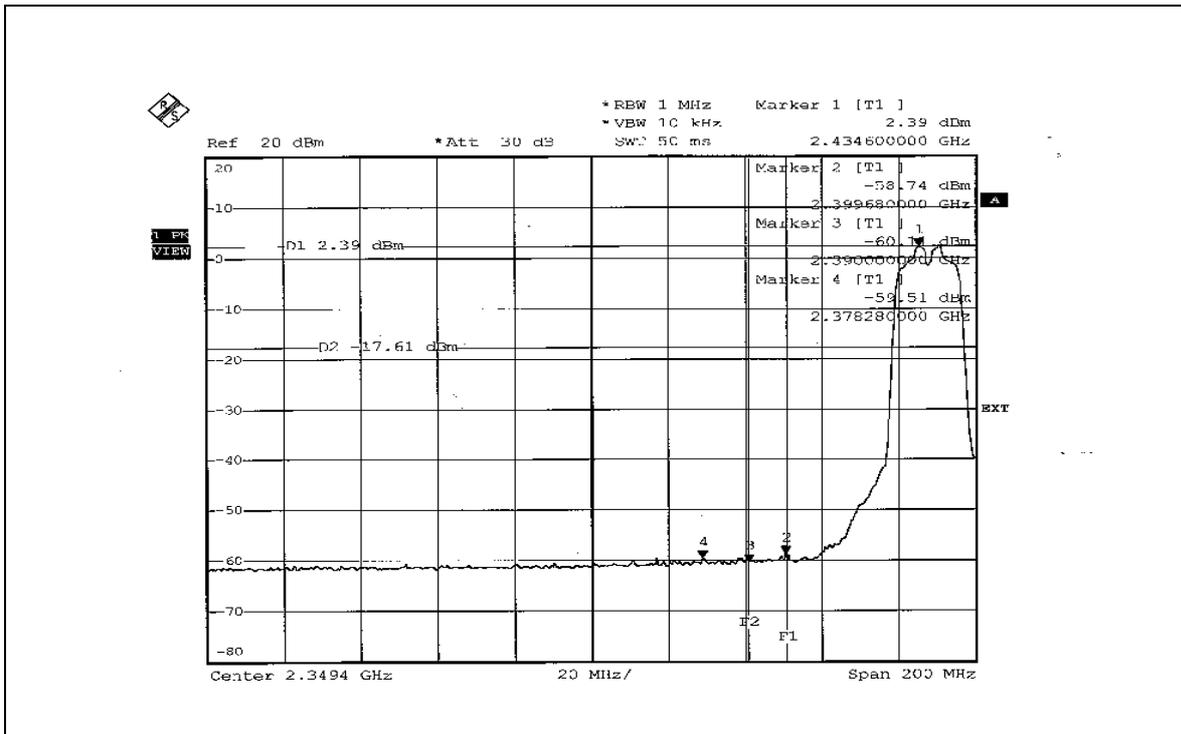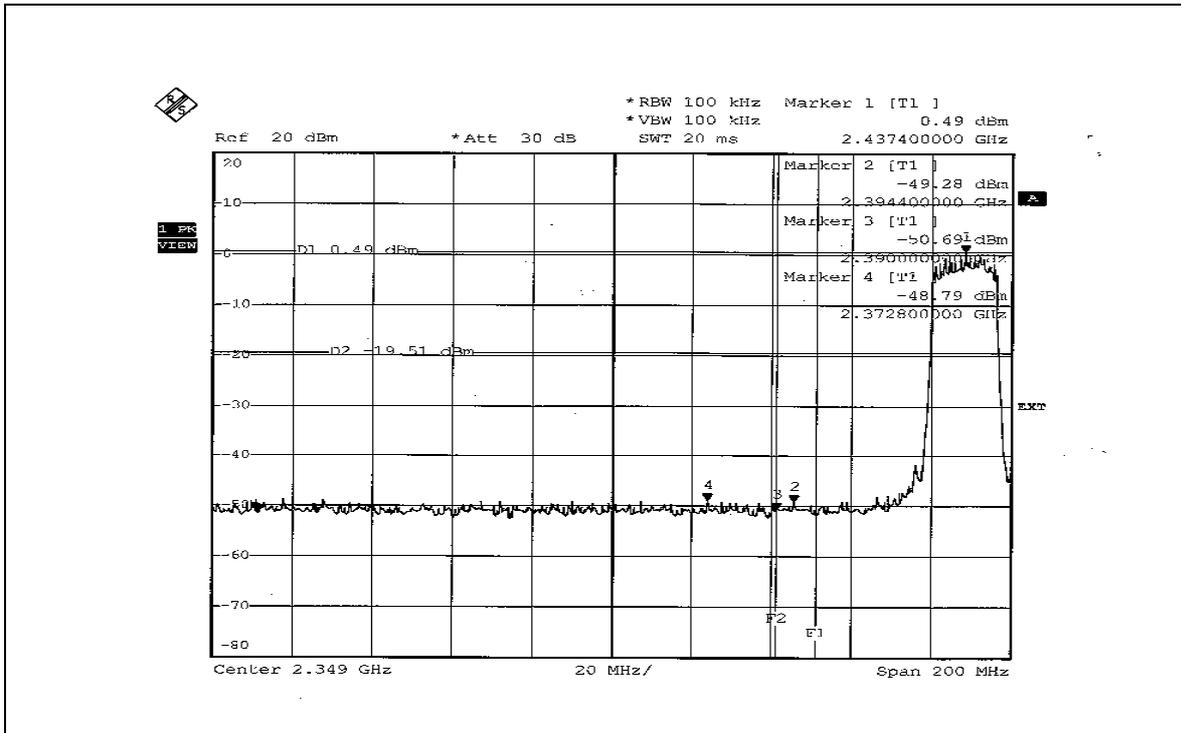

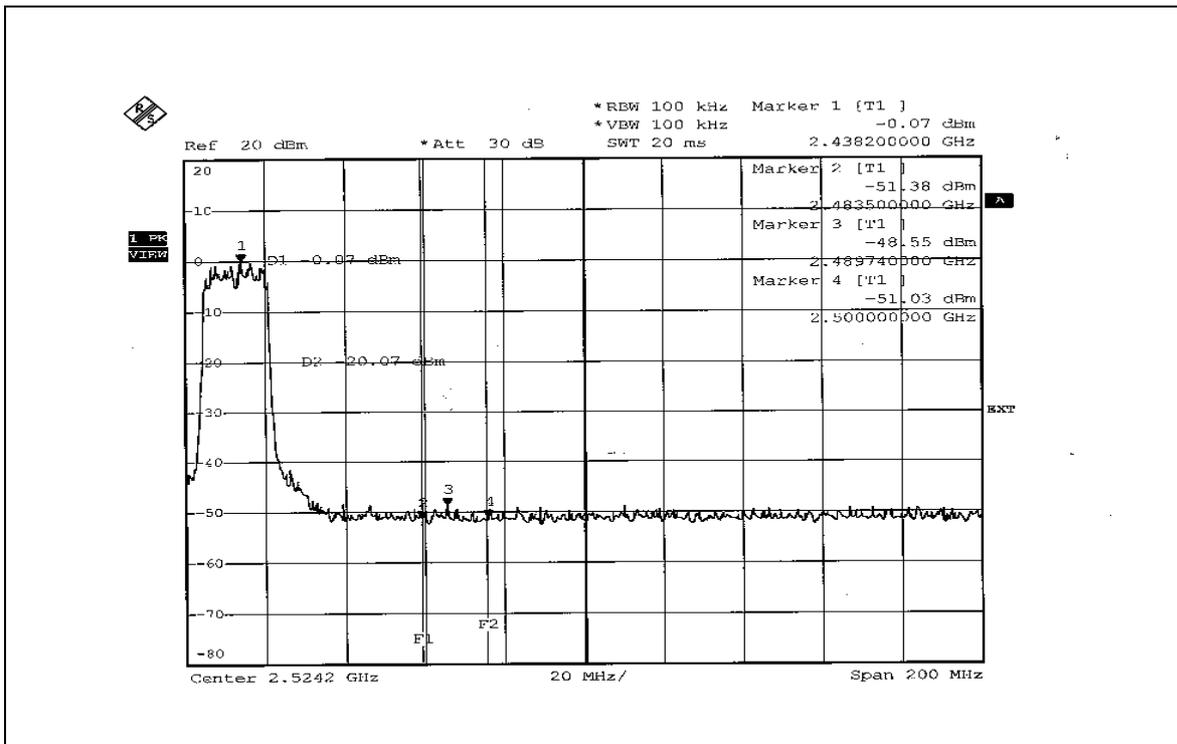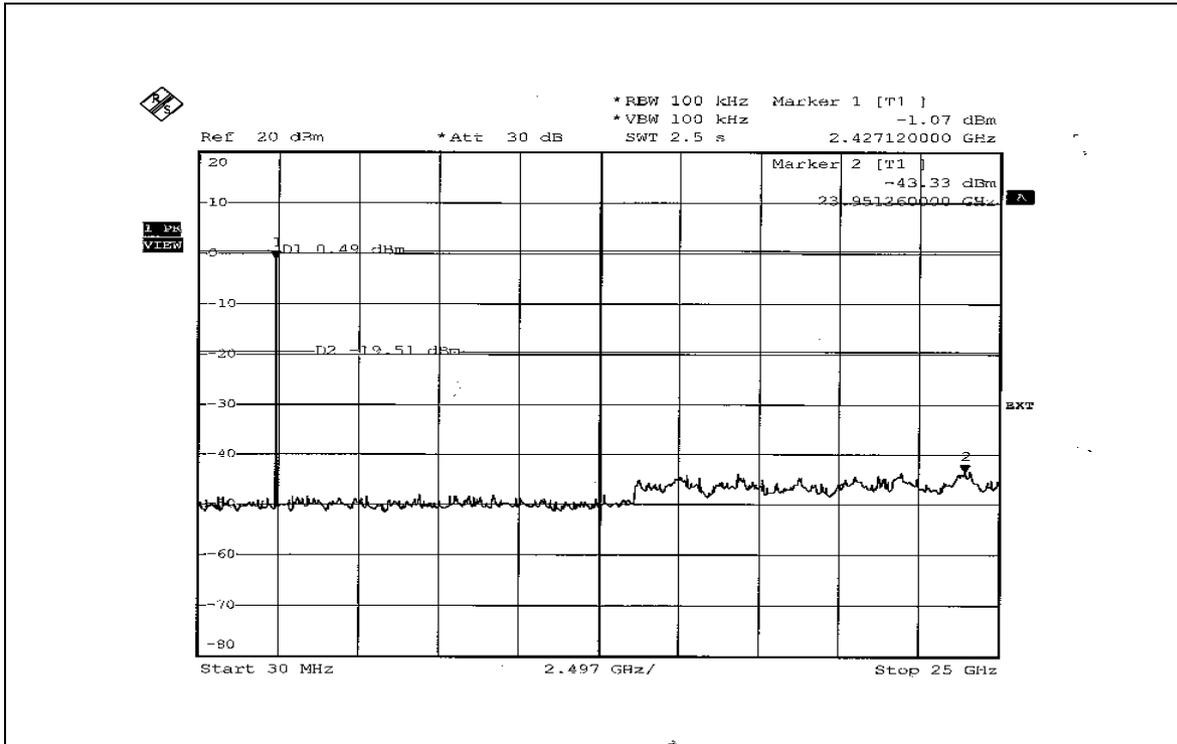

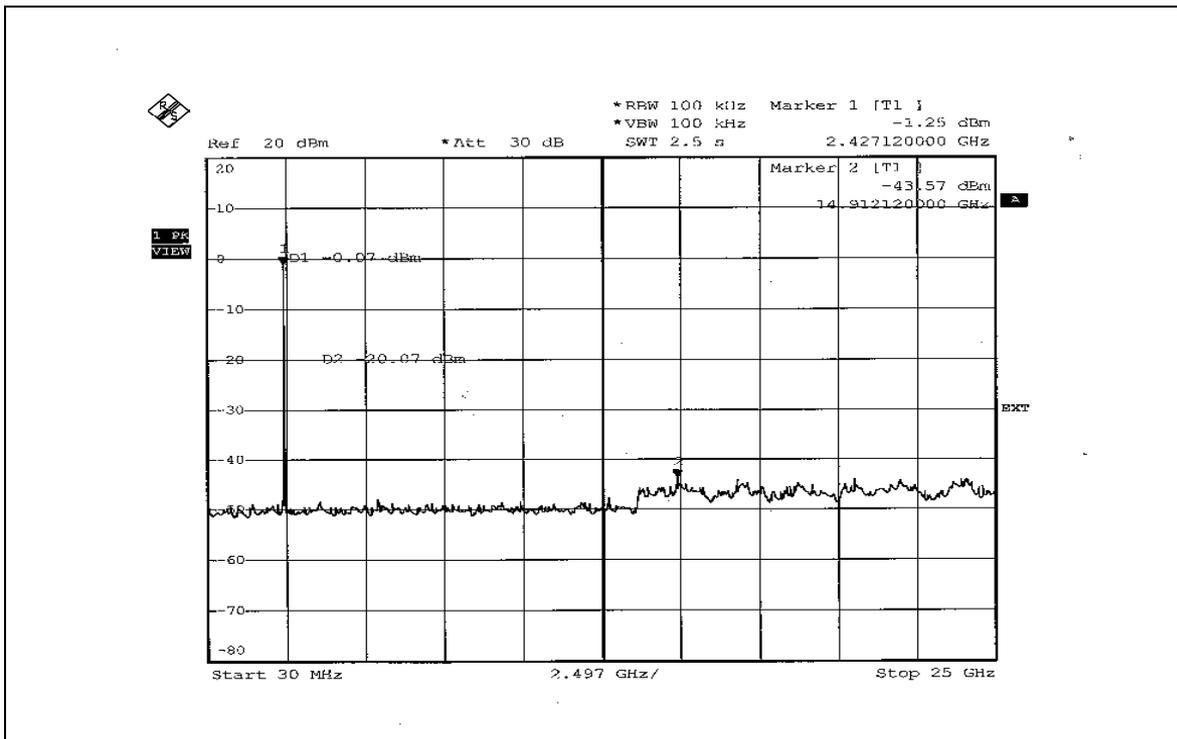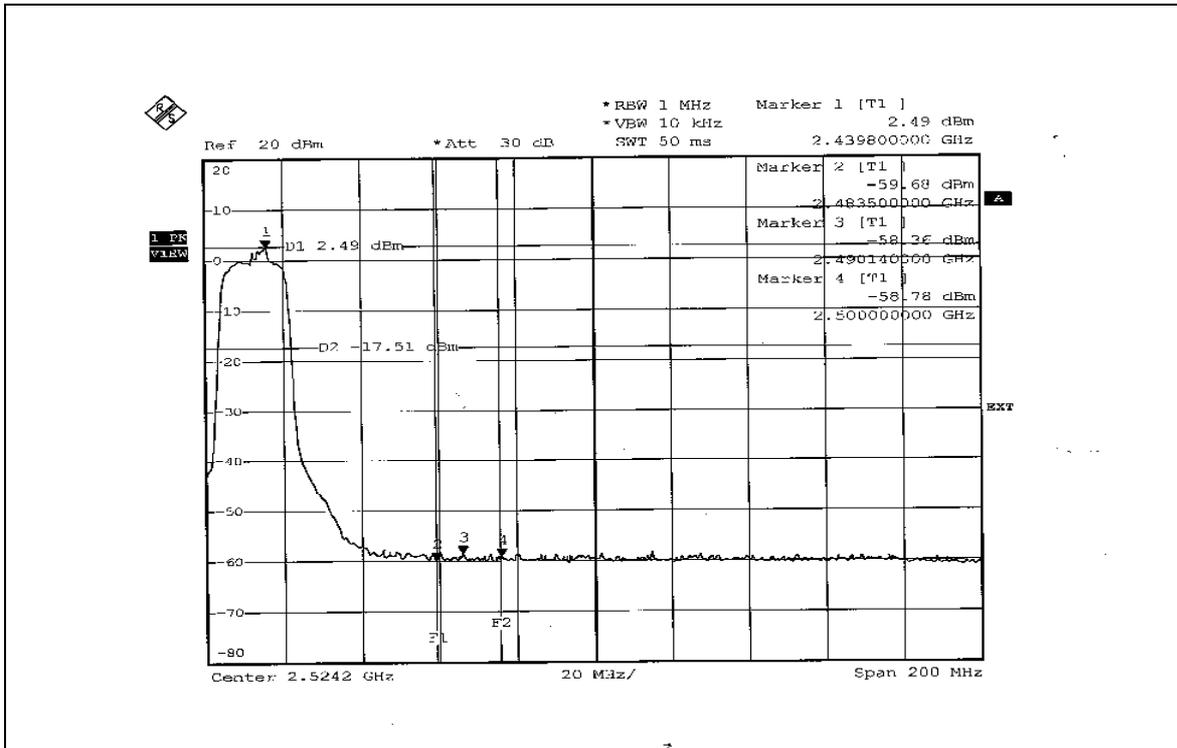



4.6.7 TEST RESULTS (B) –ALTERNATE VERSION

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS modulation



NOTE 1: The band edge emission plot on page 101 shows 54.44dBc between carrier maximum power and local maximum emission in restrict band (2.3722GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.16dBuV/m (Peak), so the maximum field strength in restrict band is $108.16 - 54.44 = 53.72$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 101 shows 58.10dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.28dBuV/m (Average), so the maximum field strength in restrict band is $105.28 - 58.10 = 47.18$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 102 shows 50.85dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 108.81dBuV/m (Peak), so the maximum field strength in restrict band is $108.81 - 50.85 = 57.96$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 103 shows 56.23dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.65dBuV/m (Average), so the maximum field strength in restrict band is $105.65 - 56.23 = 49.42$ dBuV/m which is under 54dBuV/m limit.

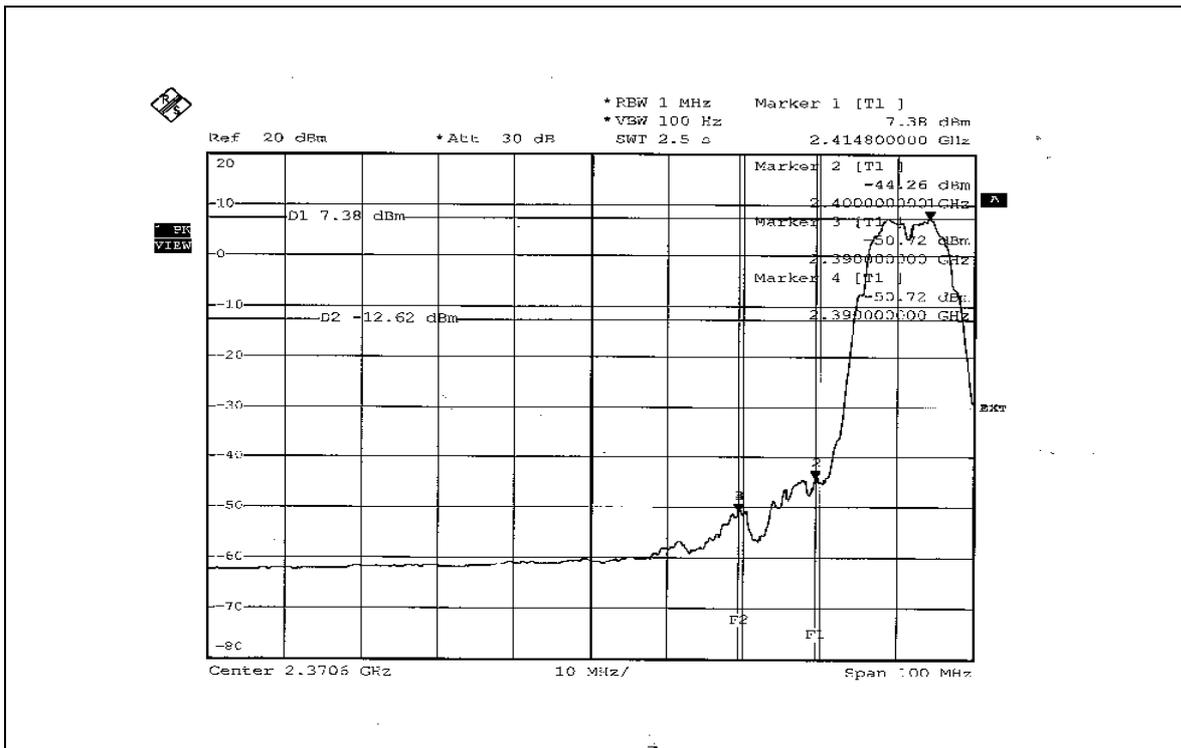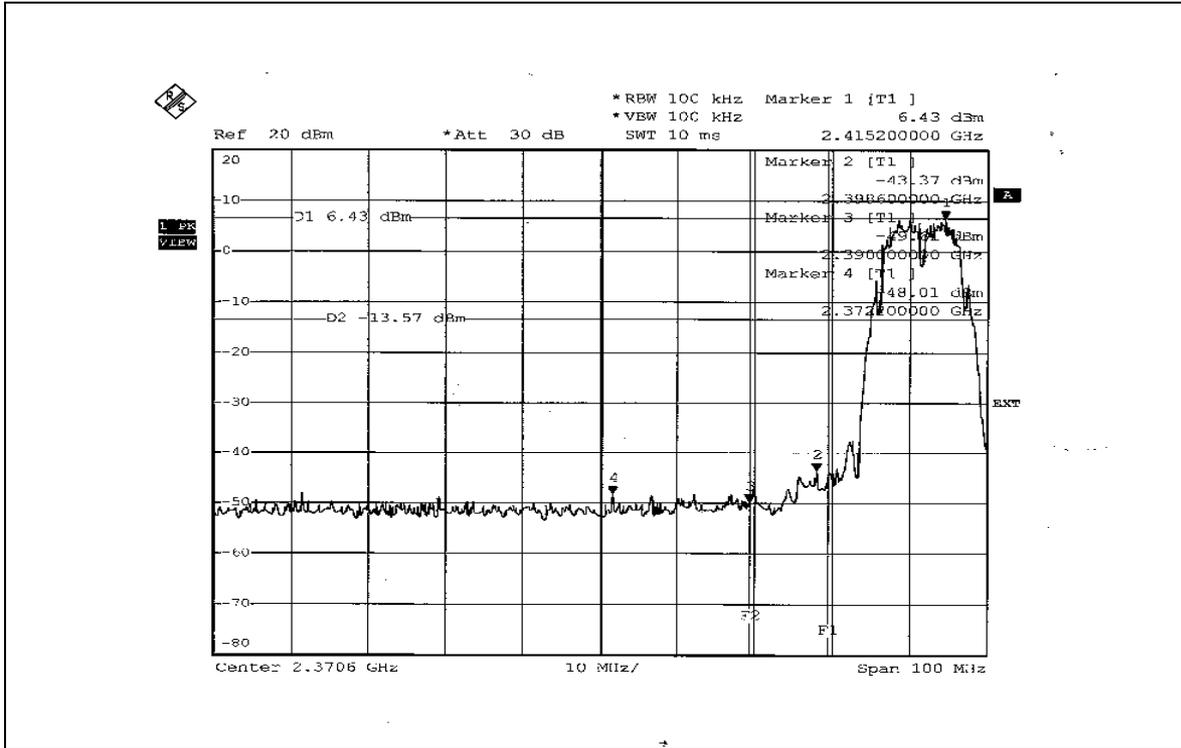

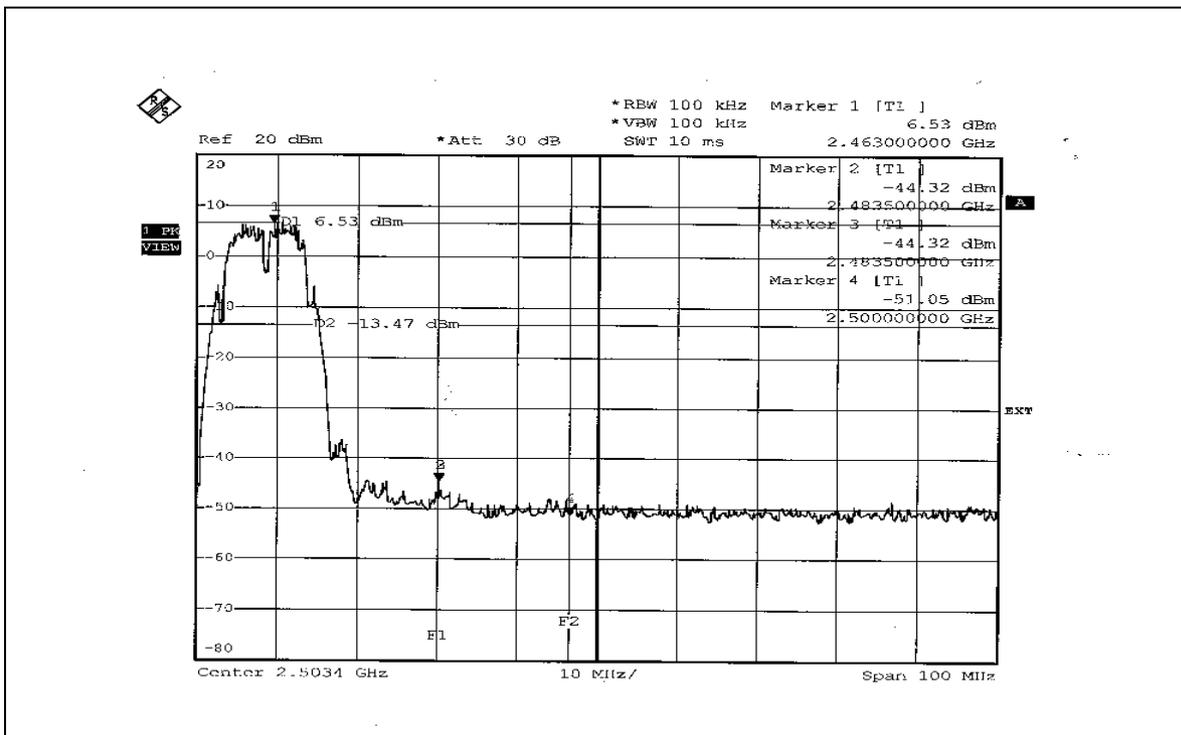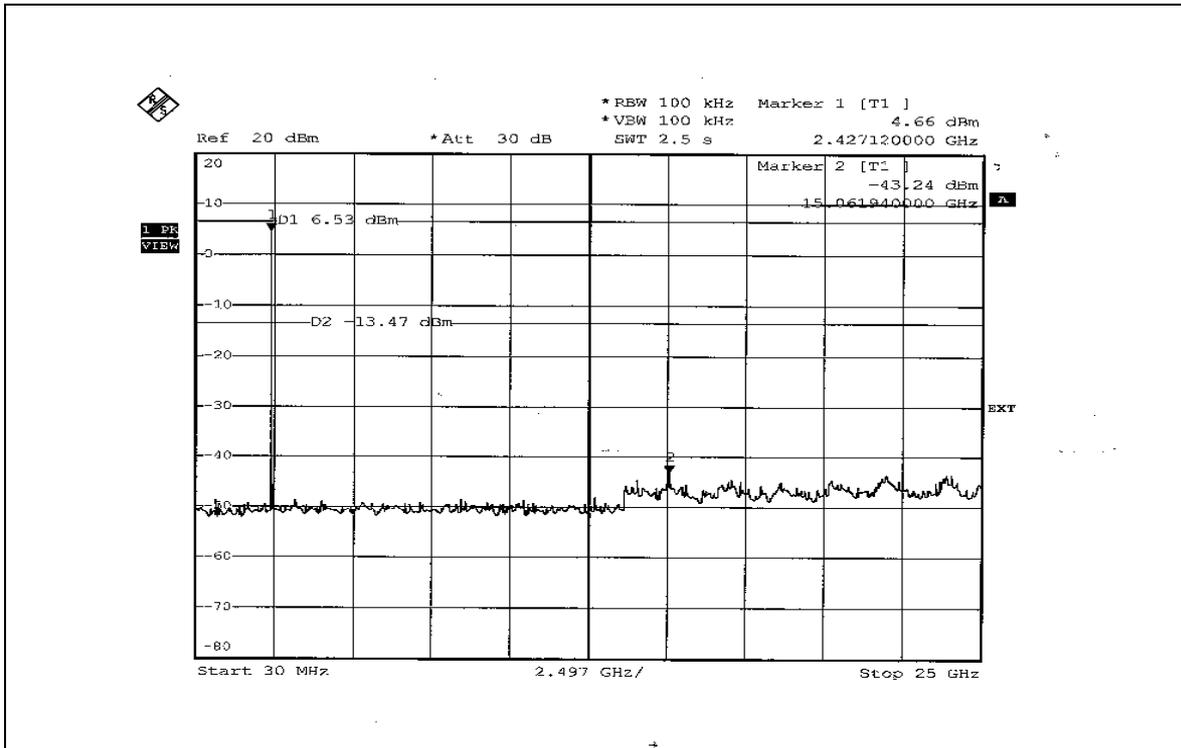

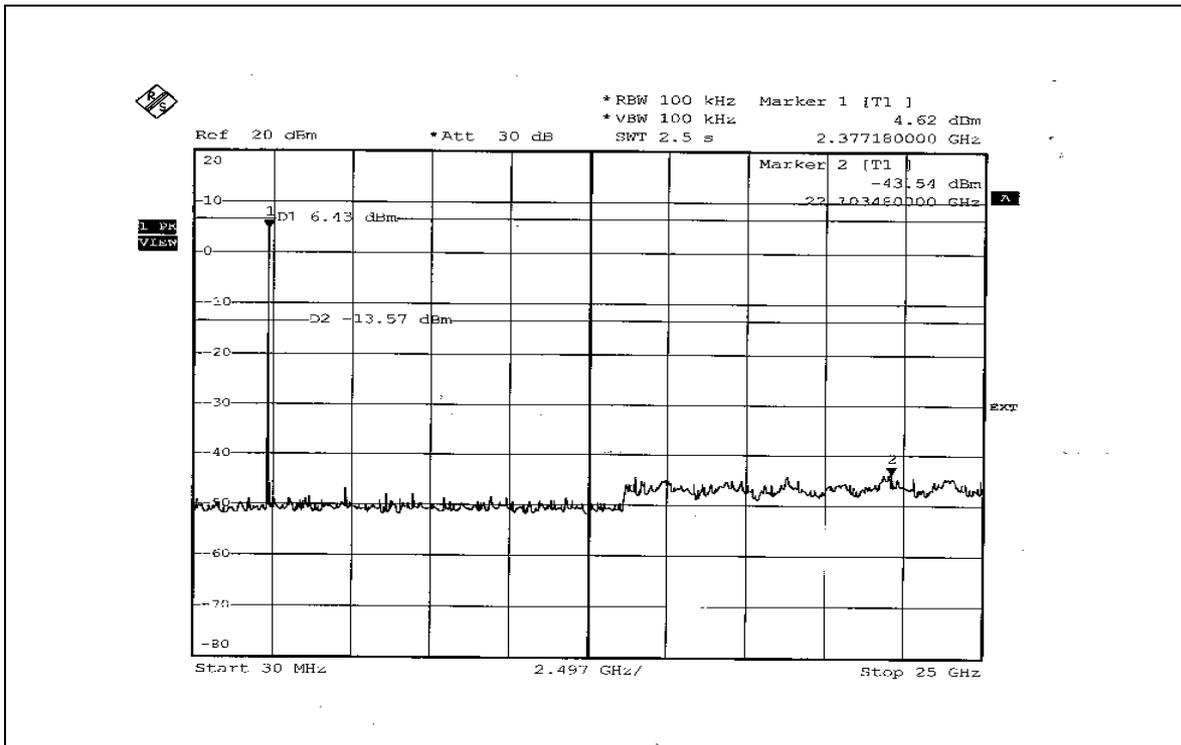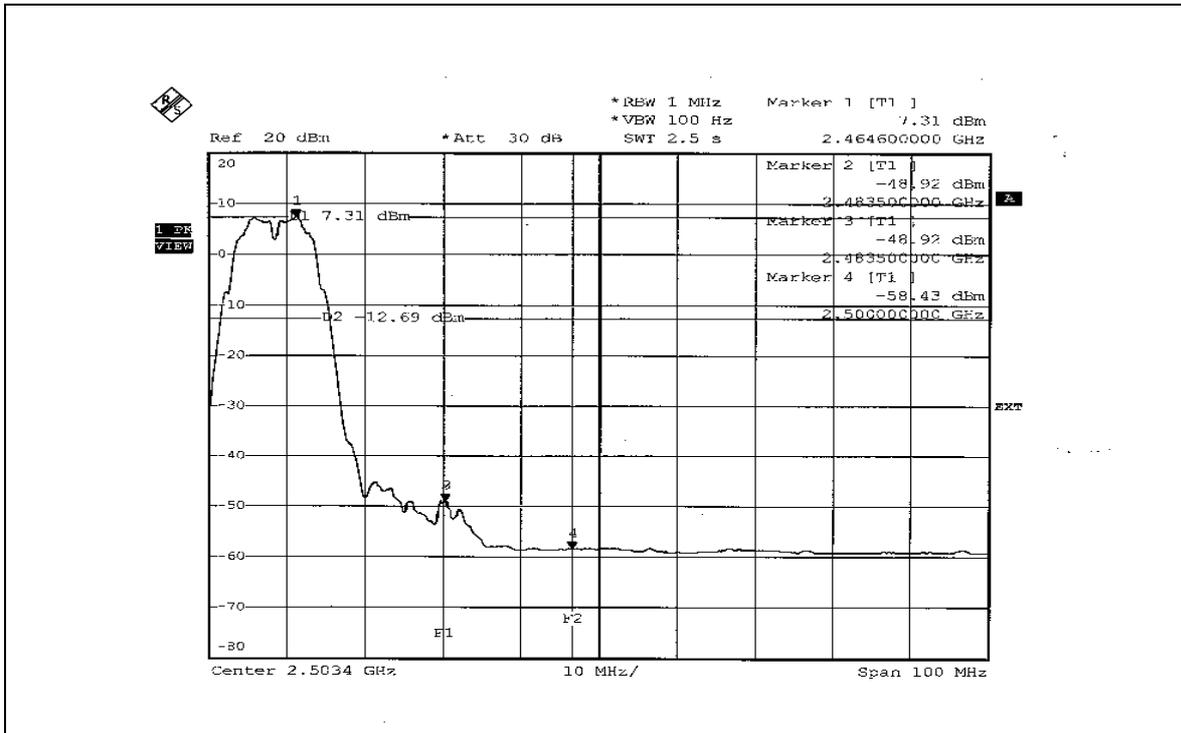





802.11g OFDM modulation



NOTE 1: The band edge emission plot on page 105 shows 47.71dBc between carrier maximum power and local maximum emission in restrict band (2.3748GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.39dBuV/m (Peak), so the maximum field strength in restrict band is $105.39 - 47.71 = 57.68$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 105 shows 56.28dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.51dBuV/m (Average), so the maximum field strength in restrict band is $98.51 - 56.28 = 42.23$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 106 shows 47.37dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.19dBuV/m (Peak), so the maximum field strength in restrict band is $106.19 - 47.37 = 58.82$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 107 shows 53.72dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.49dBuV/m (Average), so the maximum field strength in restrict band is $99.49 - 53.72 = 45.77$ dBuV/m which is under 54dBuV/m limit.

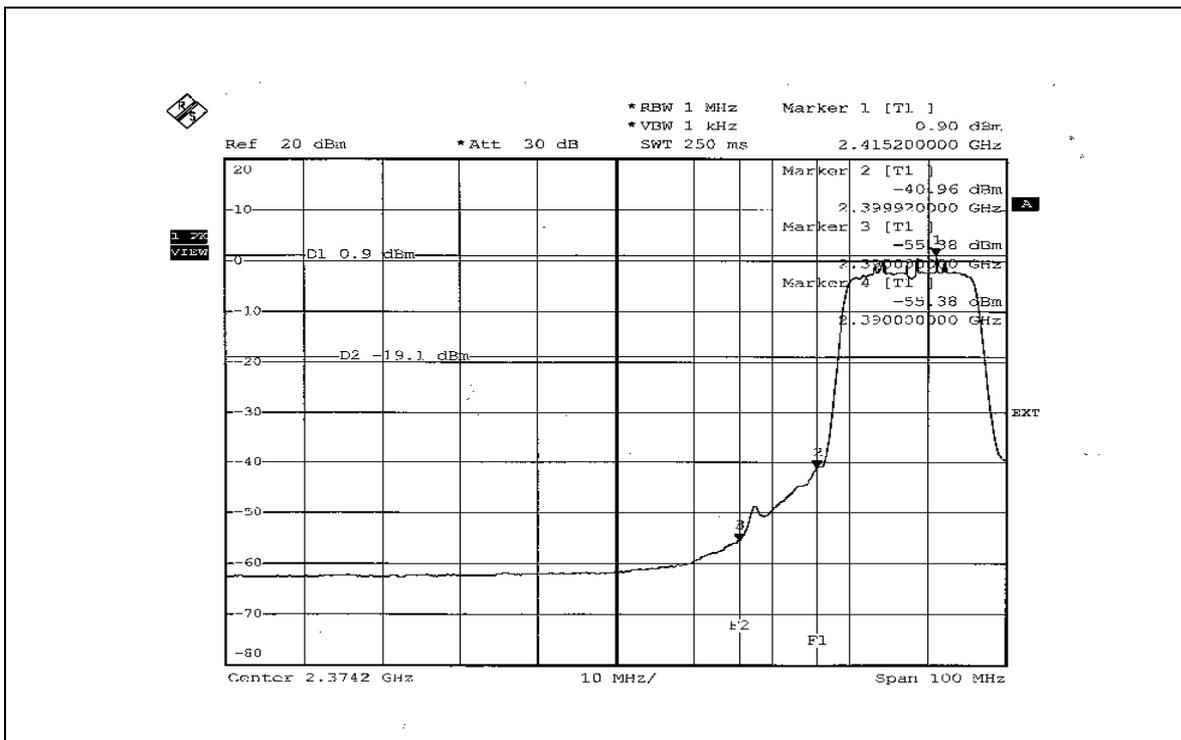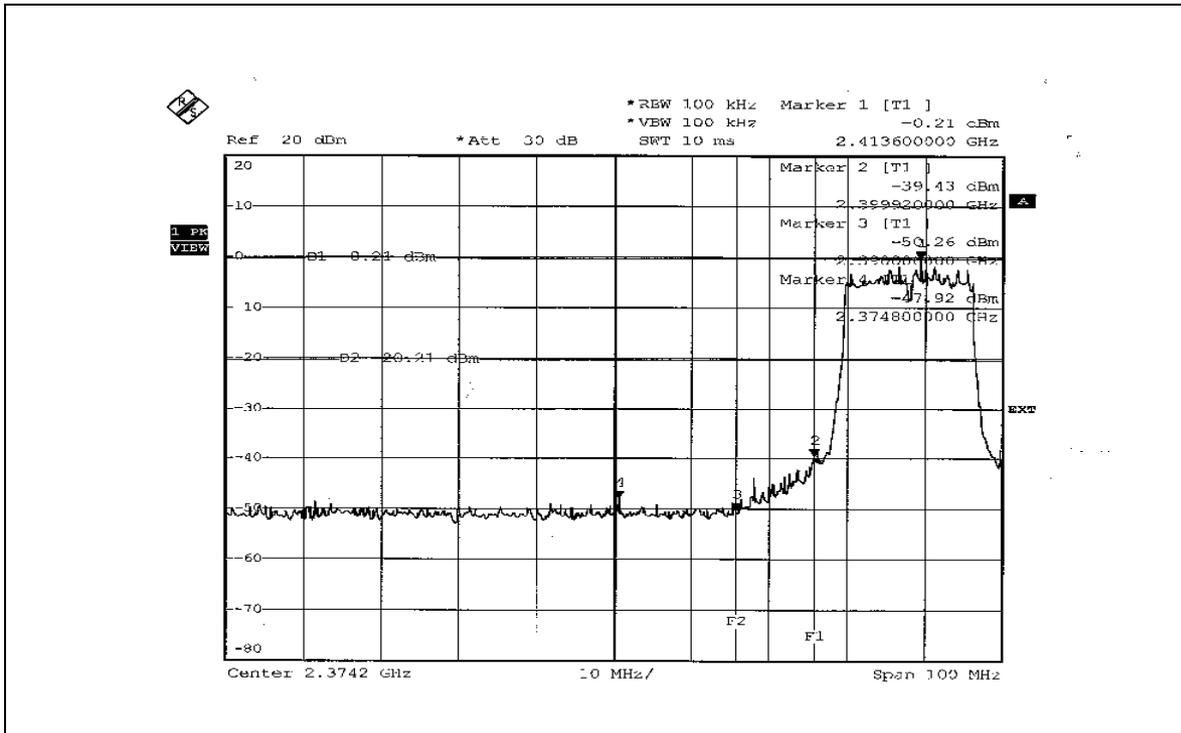

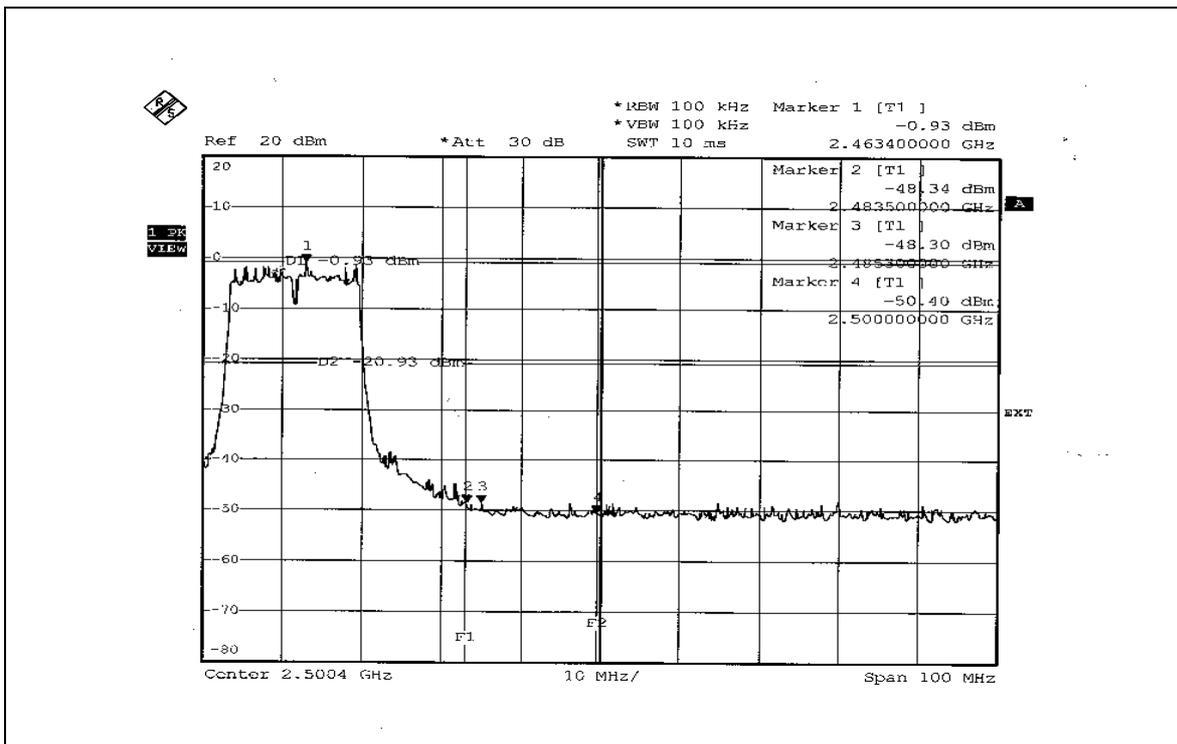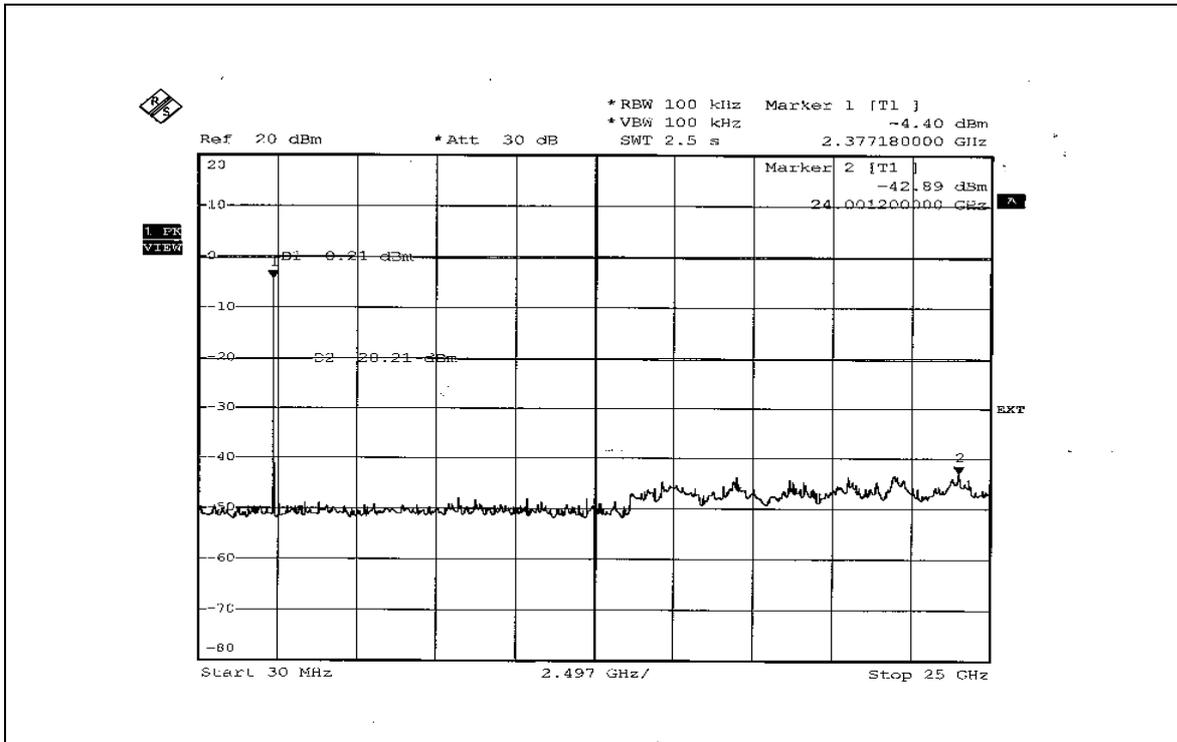





802.11g Turbo OFDM modulation



NOTE 1: The band edge emission plot on page 109 shows 51.85dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.22dBuV/m (Peak), so the maximum field strength in restrict band is $106.22 - 51.85 = 54.37$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 109 shows 61.33dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.49dBuV/m (Average), so the maximum field strength in restrict band is $98.49 - 61.33 = 37.16$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 110 shows 48.09dBc between carrier maximum power and local maximum emission in restrict band (2.4856GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.22dBuV/m (Peak), so the maximum field strength in restrict band is $106.22 - 48.09 = 58.13$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 111 shows 59.70dBc between carrier maximum power and local maximum emission in restrict band (2.4901GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.49dBuV/m (Average), so the maximum field strength in restrict band is $98.49 - 59.70 = 38.79$ dBuV/m which is under 54dBuV/m limit.

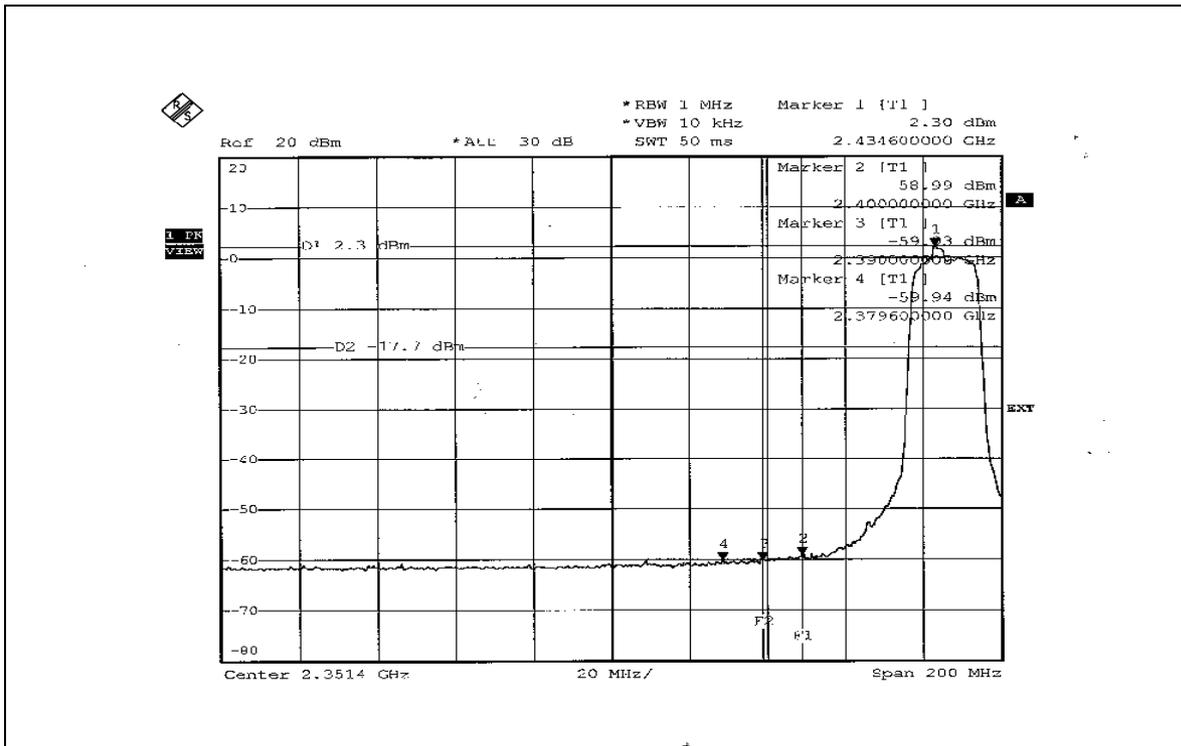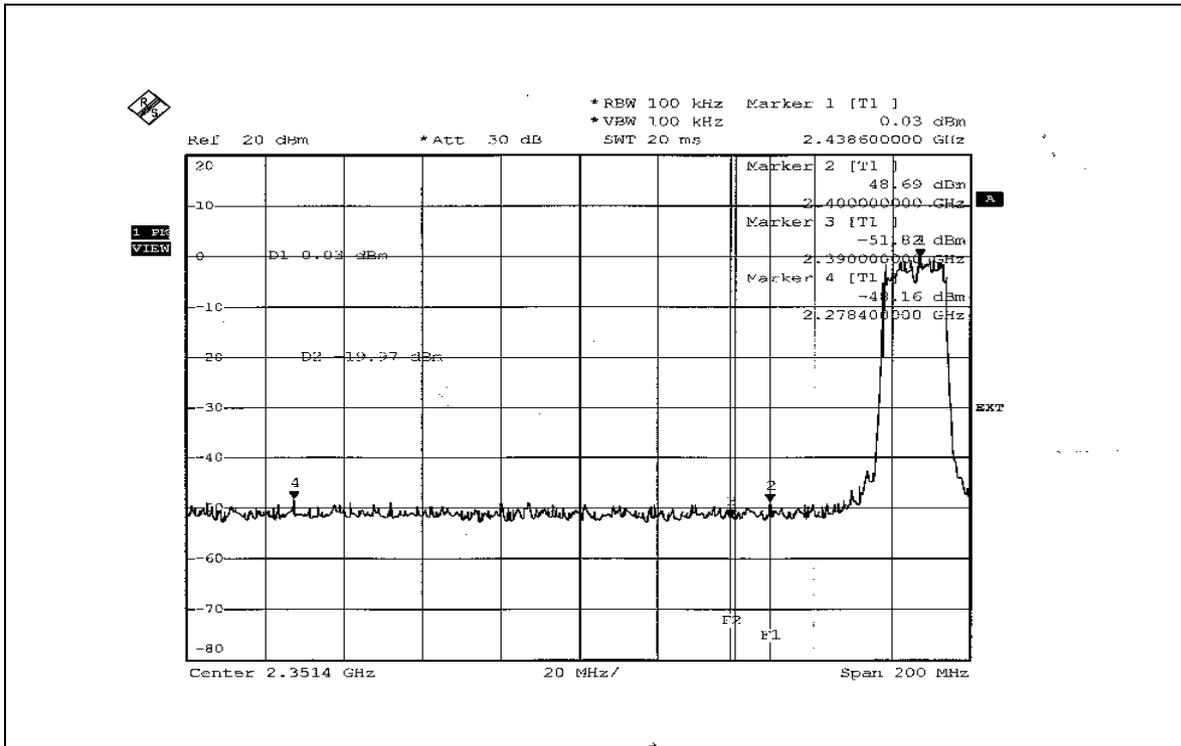

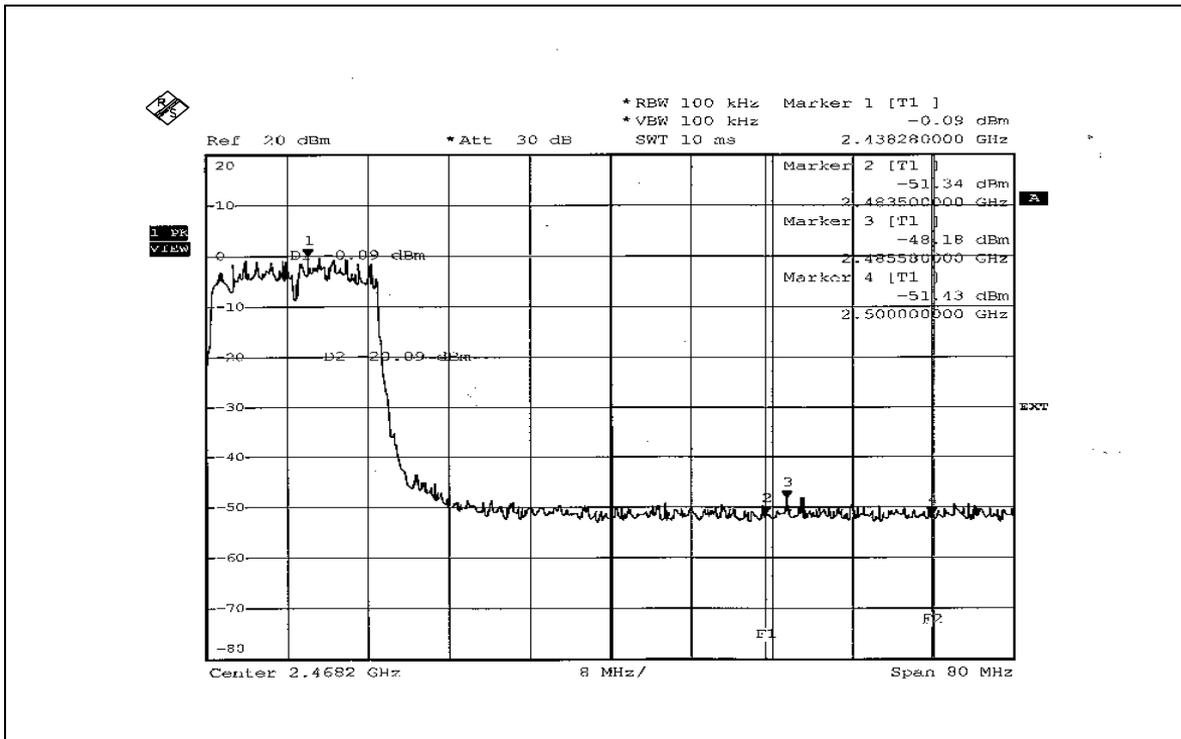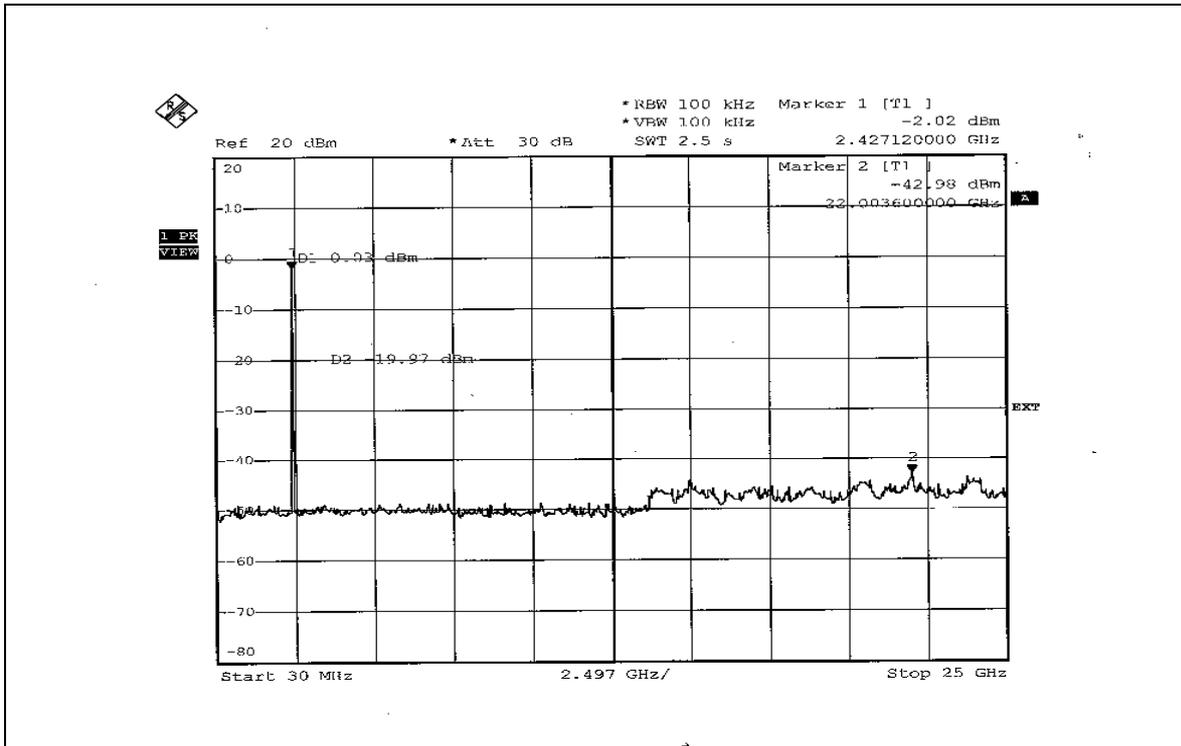

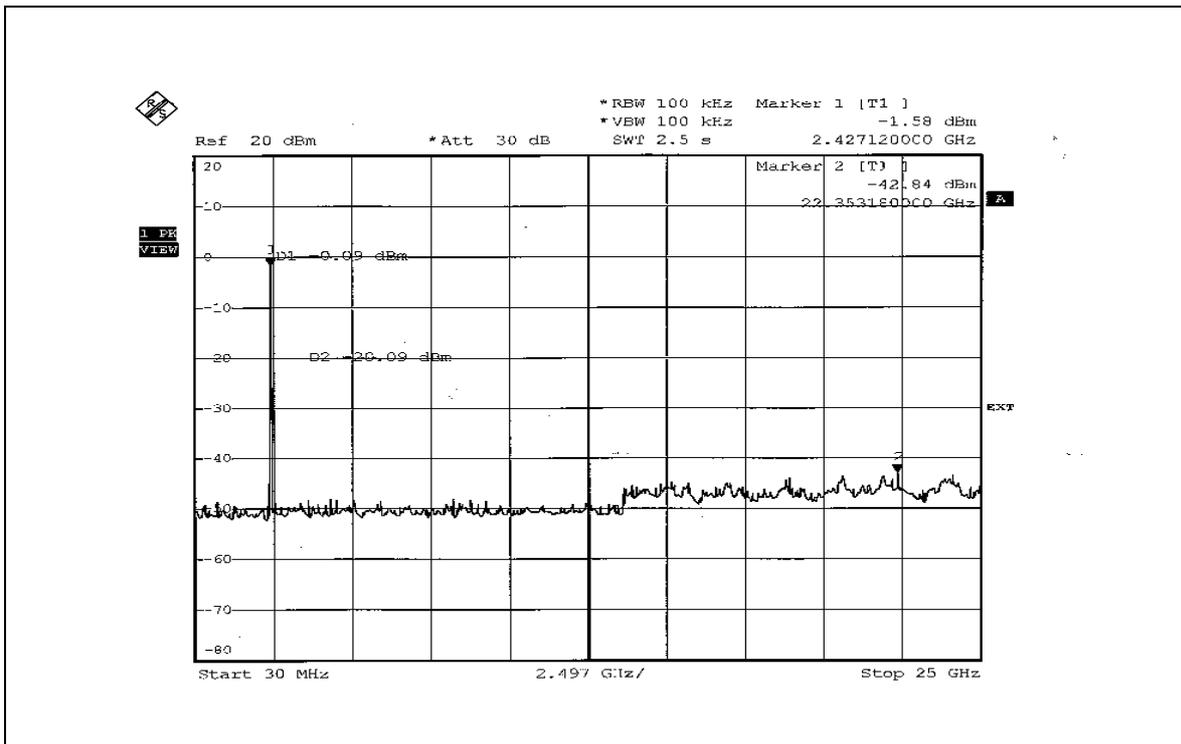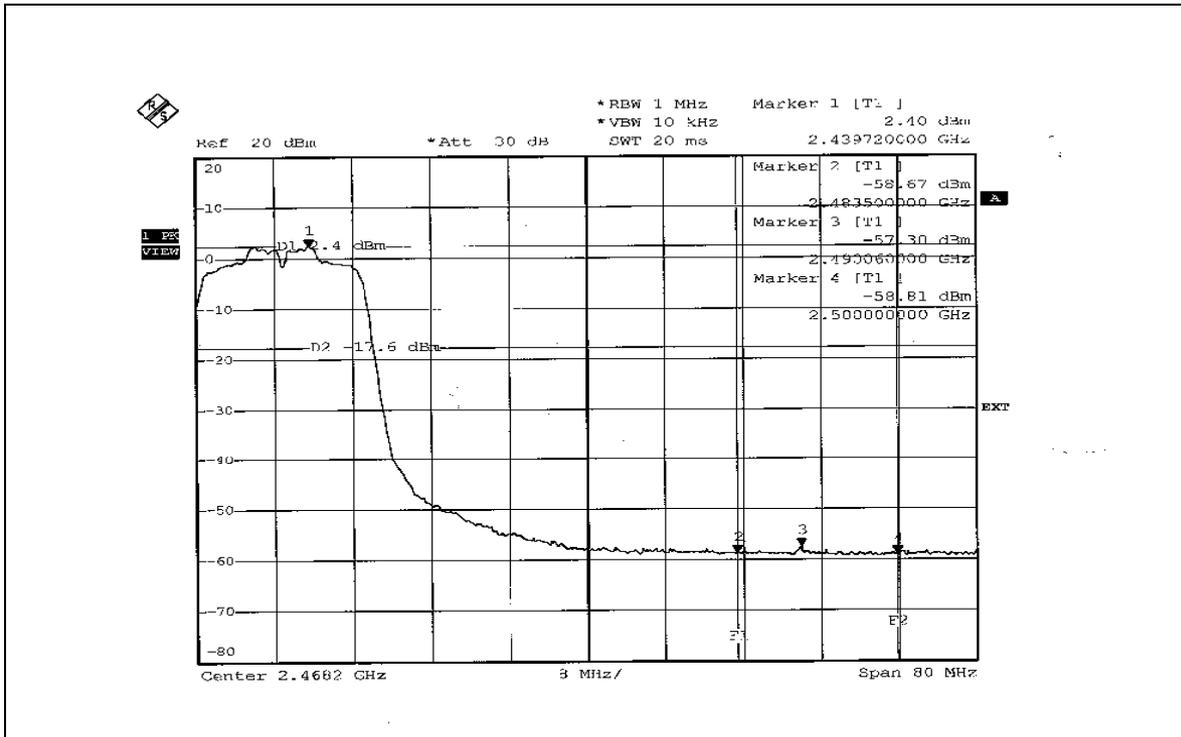



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION



The antenna type used in this product is Printed antenna without antenna connector. The maximum Gain of the antenna is 1.5dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST
(TEST MODE A & B)



RADIATED EMISSION TEST (TEST MODE A & B)

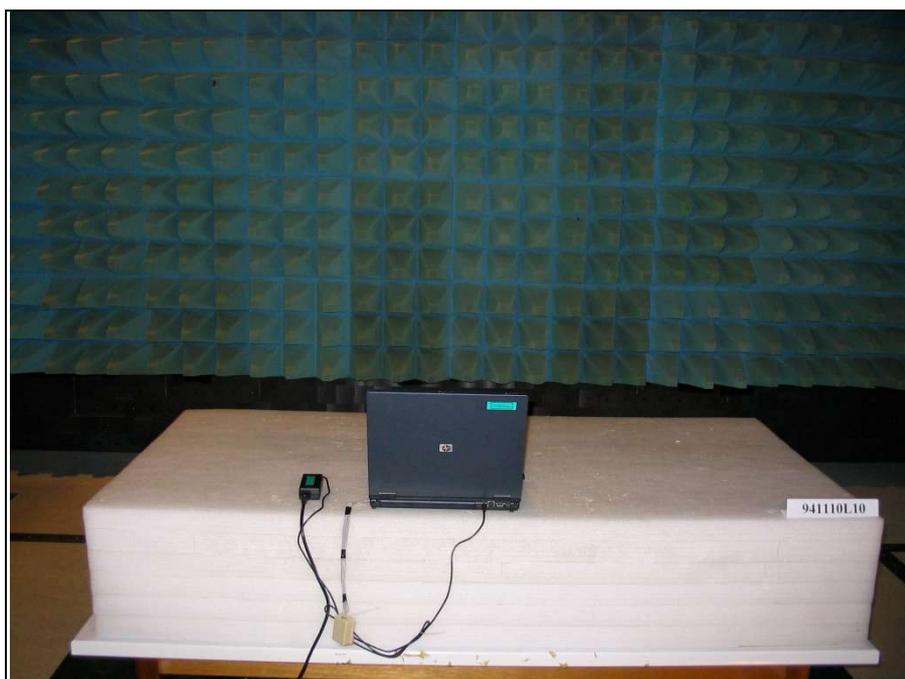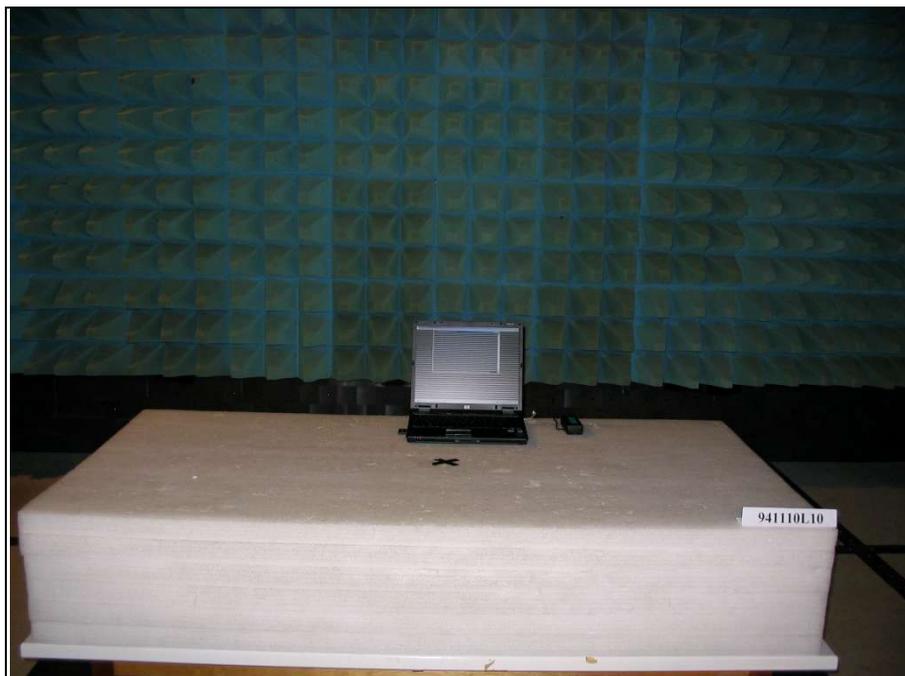



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.