



FCC TEST REPORT

REPORT NO.: RF970313L03

MODEL NO.: SBG900

RECEIVED: Mar. 13, 2008

TESTED: Apr. 24 ~ May 01, 2008

ISSUED: May 12, 2008

APPLICANT : Gemtek Technology Co., Ltd.

ADDRESS : No. 15-1, Zhonghua Rd, Hsinchu Industrial Park,
Hsinchu County, Taiwan, R.O.C. 303

ISSUED BY : Advance Data Technology Corporation

LAB ADDRESS : No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION : No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.
No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 62 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.



TESTING CERT # 2177-01

Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4	TEST TYPES AND RESULTS	11
4.1	RADIATED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	11
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD.....	14
4.1.5	TEST SETUP.....	15
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS	16
4.2	CONDUCTED EMISSION MEASUREMENT	29
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	29
4.2.2	TEST INSTRUMENTS.....	29
4.2.3	TEST PROCEDURES	30
4.2.4	DEVIATION FROM TEST STANDARD.....	30
4.2.5	TEST SETUP.....	31
4.2.6	EUT OPERATING CONDITIONS	31
4.2.7	TEST RESULTS	32
4.3	6dB BANDWIDTH MEASUREMENT.....	34
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	34
4.3.2	TEST INSTRUMENTS.....	34
4.3.3	TEST PROCEDURE.....	34
4.3.4	DEVIATION FROM TEST STANDARD.....	34
4.3.5	TEST SETUP.....	35
4.3.6	EUT OPERATING CONDITIONS	35
4.3.7	TEST RESULTS	36
4.4	MAXIMUM PEAK OUTPUT POWER.....	40
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	40
4.4.2	TEST INSTRUMENTS.....	40
4.4.3	TEST PROCEDURES	41
4.4.4	DEVIATION FROM TEST STANDARD.....	41
4.4.5	TEST SETUP.....	41
4.4.6	EUT OPERATING CONDITIONS	41
4.4.7	TEST RESULTS	42
4.5	POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.2	TEST INSTRUMENTS.....	43
4.5.3	TEST PROCEDURE.....	43
4.5.4	DEVIATION FROM TEST STANDARD.....	43
4.5.5	TEST SETUP.....	43



4.5.6	EUT OPERATING CONDITIONS	43
4.5.7	TEST RESULTS	44
4.6	BAND EDGES MEASUREMENT	48
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	48
4.6.2	TEST INSTRUMENTS.....	48
4.6.3	TEST PROCEDURE.....	48
4.6.4	DEVIATION FROM TEST STANDARD.....	48
4.6.5	EUT OPERATING CONDITION.....	48
4.6.6	TEST RESULTS	49
4.7	ANTENNA REQUIREMENT	59
4.7.1	STANDARD APPLICABLE	59
4.7.2	ANTENNA CONNECTED CONSTRUCTION	59
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	60
6	INFORMATION ON THE TESTING LABORATORIES	61
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	62



1 CERTIFICATION

PRODUCT: 802.11 B/G Dual Mode minipci adapter
MODEL: SBG900
BRAND: MOTOROLA
APPLICANT: Gemtek Technology Co., Ltd.
TESTED: Apr. 24 ~ May 01, 2008
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.4-2003

The above equipment (model: SBG900) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** May 12, 2008
Andrea Hsia / Specialist

TECHNICAL ACCEPTANCE : Long Chen , **DATE:** May 12, 2008
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE:** May 12, 2008
Gary Chang / Assistant Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.15dB at 0.173MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.80dB at 332.77MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 1000MHz	4.03 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11 B/G Dual Mode minipci adapter
MODEL NO.	SBG900
FCC ID	MXF-M970215G
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	57.544mW
ANTENNA TYPE	Refer to note as below
DATA CABLE	NA
I/O PORTS	NA
ACCESSORY DEVICES	NA

NOTE:

1. The following antennas were provided to this EUT.

NO.	ANTENNA TYPE	ANTENNA CONNECTOR	ANTENNA GAIN (dBi)
1	Dipole antenna	MMCX jack R.A	2.5
2	Dipole antenna	IPEX MHF	4.71

2. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.
3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

For Radiated Emission Test below 1GHz:

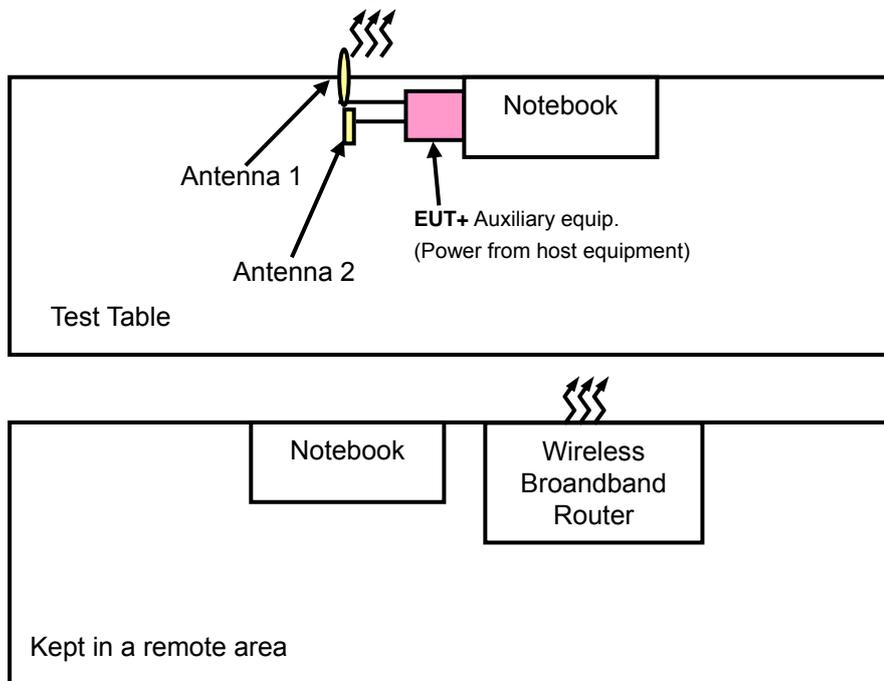

For Other Tests:

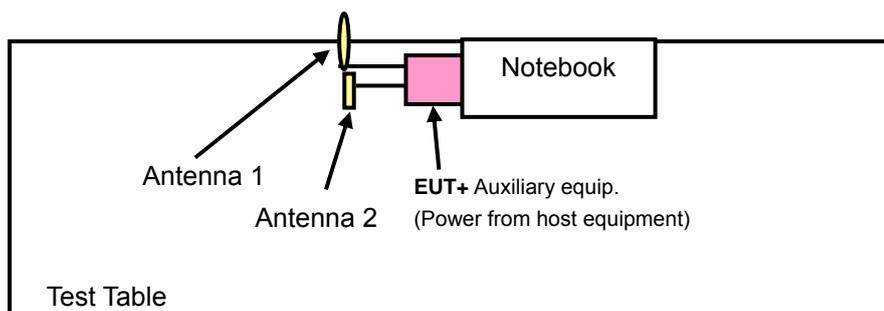

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PCL	APCM	
A	√	-	-	-	For Antenna No. 1
B	√	√	√	√	For Antenna No. 2

Where **PLC**: Power Line Conducted Emission **RE $<$ 1G**: Radiated Emission below 1GHz
RE \geq 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
NOTE: “-” means no effect.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, Ant. XYZ Axis, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	ANT. AXIS
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	Z
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	X
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	Z
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	X

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, Ant. XYZ Axis, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	ANT. AXIS
B	802.11g	1 to 11	1	OFDM	BPSK	6	X

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11g	1 to 11	1	OFDM	BPSK	6

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11b	1 to 11	1, 11	DSSS	DBPSK	1
B	802.11g	1 to 11	1, 11	OFDM	BPSK	6

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	24729091408	FCC DoC Approved
2	NOTEBOOK COMPUTER	DELL	D600	G8HBC1S	E2K24CLNS
3	NOTEBOOK COMPUTER	DELL	PP05L	19227741184	FCC DoC Approved
4	WIRELESS BROANDBAND ROUTER	BUFFALO	WBR-G54S	34074254622025	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA
4	NA

NOTE 1: All power cords of the above support units are non shielded (1.8m).

NOTE 2: Item 3 ~ 4 acted as communication partners to transfer data.

NOTE 3: Item 2 ~ 4 were tested for Radiated Emission Test below 1GHz.

4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 25, 2008
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 02, 2008
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 03, 2009
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-405	Dec. 17, 2008
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009
Preamplifier Agilent	8449B	3008A01910	Sep. 19, 2008
Preamplifier Agilent	8447D	2944A10634	Dec. 12, 2008
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274397/4	Nov. 07, 2008
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283401/4	Nov. 07, 2008
Software ADT.	ADT_Radiated_V7.6	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 4. (Above 1GHz)
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC3789B-4.



DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SCHAFFNER TEST RECEIVER	ESCI	100412	Jul. 15, 2008
CHASE BILOG Antenna	CBL6111D	21872	Jul. 05, 2008
ADT. Turn Table	TT100	0505	NA
ADT. Tower	AT100	0505	NA
Software	ADT_Radiated _V7.6.15	NA	NA
ADT RF Switches BOX	EM-H-01-1	1002	Aug. 20, 2008
TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 20, 2008

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Open Site No. 5. (Below 1GHz)
 3. The VCCI Site Registration No. R-1039.
 4. The Industry Canada Reference No. IC 3789A-5

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber and open area side. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

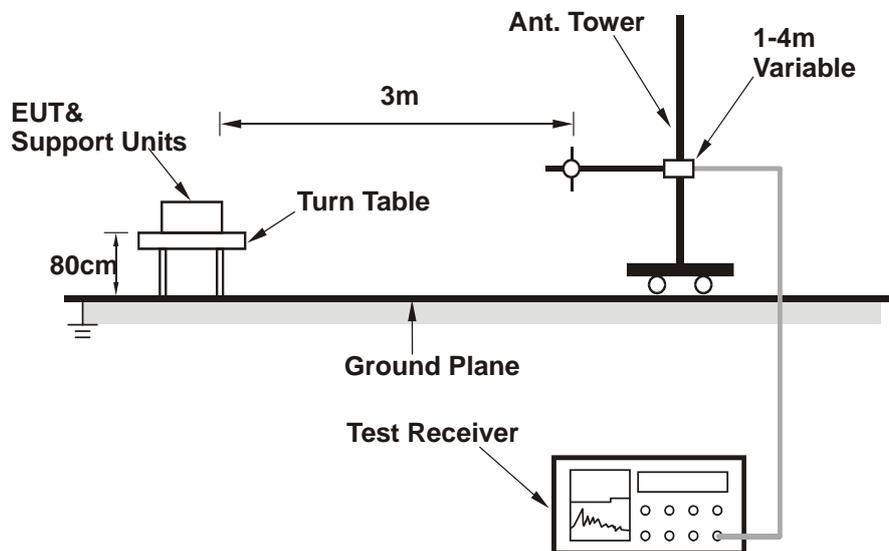

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to notebook and placed on a testing table.
- b. The notebook ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	A
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1608.00	44.79 PK	74.00	-29.21	1.01 H	77	15.45	29.34
2	1608.00	39.96 AV	54.00	-14.04	1.01 H	77	10.62	29.34
3	2390.00	56.59 PK	74.00	-17.41	1.04 H	22	25.21	31.38
4	2390.00	45.49 AV	54.00	-8.51	1.04 H	22	14.11	31.38
5	*2412.00	105.00 PK			1.04 H	22	73.54	31.46
6	*2412.00	101.02 AV			1.04 H	22	69.56	31.46
7	4824.00	53.82 PK	74.00	-20.18	1.36 H	291	16.16	37.66
8	4824.00	48.72 AV	54.00	-5.28	1.36 H	291	11.06	37.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1608.00	49.92 PK	74.00	-24.08	1.02 V	72	20.58	29.34
2	1608.00	48.42 AV	54.00	-5.58	1.02 V	72	19.08	29.34
3	2390.00	56.71 PK	74.00	-17.29	1.09 V	240	25.33	31.38
4	2390.00	45.66 AV	54.00	-8.34	1.09 V	240	14.28	31.38
5	*2412.00	105.32 PK			1.09 V	16	73.86	31.46
6	*2412.00	101.28 AV			1.09 V	16	69.82	31.46
7	4824.00	54.94 PK	74.00	-19.06	1.09 V	315	17.28	37.66
8	4824.00	50.77 AV	54.00	-3.23	1.09 V	315	13.11	37.66

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	A
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1624.00	44.81 PK	74.00	-29.19	1.06 H	155	15.45	29.36
2	1624.00	40.08 AV	54.00	-13.92	1.06 H	155	10.72	29.36
3	*2437.00	105.11 PK			1.12 H	26	73.56	31.55
4	*2437.00	100.58 AV			1.12 H	26	69.03	31.55
5	4874.00	53.37 PK	74.00	-20.63	1.28 H	91	15.58	37.79
6	4874.00	47.69 AV	54.00	-6.31	1.28 H	91	9.90	37.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1624.00	49.90 PK	74.00	-24.10	1.03 V	288	20.54	29.36
2	1624.00	48.64 AV	54.00	-5.36	1.03 V	288	19.28	29.36
3	*2437.00	105.33 PK			1.06 V	239	73.78	31.55
4	*2437.00	100.98 AV			1.06 V	239	69.43	31.55
5	4874.00	53.76 PK	74.00	-20.24	1.00 V	167	15.97	37.79
6	4874.00	49.67 AV	54.00	-4.33	1.00 V	167	11.88	37.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	A
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1641.00	44.86 PK	85.21	-40.35	1.10 H	80	15.47	29.39
2	1641.00	40.12 AV	80.34	-40.22	1.10 H	80	10.73	29.39
3	*2462.00	105.21 PK			1.05 H	10	73.57	31.64
4	*2462.00	100.34 AV			1.05 H	10	68.70	31.64
5	2483.50	58.87 PK	74.00	-15.13	1.05 H	10	27.16	31.71
6	2483.50	47.93 AV	54.00	-6.07	1.05 H	10	16.22	31.71
7	4924.00	52.88 PK	74.00	-21.12	1.10 H	261	14.96	37.92
8	4924.00	46.38 AV	54.00	-7.62	1.10 H	261	8.46	37.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1641.00	49.87 PK	85.34	-35.47	1.00 V	276	20.48	29.39
2	1641.00	48.71 AV	80.63	-31.92	1.00 V	276	19.32	29.39
3	*2462.00	105.34 PK			1.03 V	244	73.70	31.64
4	*2462.00	100.63 AV			1.03 V	244	68.99	31.64
5	2483.50	58.98 PK	74.00	-15.02	1.26 V	243	27.27	31.71
6	2483.50	48.08 AV	54.00	-5.92	1.26 V	243	16.37	31.71
7	4924.00	53.34 PK	74.00	-20.66	1.25 V	89	15.42	37.92
8	4924.00	48.40 AV	54.00	-5.60	1.25 V	89	10.48	37.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	B
TESTED BY	Kevin Liang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1608.00	57.36 PK	74.00	-16.64	1.07 H	72	28.02	29.34
2	1608.00	50.98 AV	54.00	-3.02	1.07 H	72	21.64	29.34
3	2390.00	59.11 PK	74.00	-14.89	1.38 H	265	27.73	31.38
4	2390.00	44.42 AV	54.00	-9.58	1.38 H	265	13.04	31.38
5	*2412.00	107.70 PK			1.38 H	268	76.24	31.46
6	*2412.00	102.09 AV			1.38 H	268	70.63	31.46
7	4824.00	52.77 PK	74.00	-21.23	1.39 H	303	15.11	37.66
8	4824.00	46.50 AV	54.00	-7.50	1.39 H	303	8.84	37.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1608.00	58.32 PK	74.00	-15.68	1.00 V	121	28.98	29.34
2	1608.00	51.93 AV	54.00	-2.07	1.00 V	121	22.59	29.34
3	2390.00	56.06 PK	74.00	-17.94	1.01 V	284	24.68	31.38
4	2390.00	45.58 AV	54.00	-8.42	1.01 V	284	14.20	31.38
5	*2412.00	99.09 PK			1.03 V	283	67.63	31.46
6	*2412.00	94.65 AV			1.03 V	283	63.19	31.46
7	4824.00	52.46 PK	74.00	-21.54	1.59 V	59	14.80	37.66
8	4824.00	45.37 AV	54.00	-8.63	1.59 V	59	7.71	37.66

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	B
TESTED BY	Kevin Liang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1624.00	55.72 PK	74.00	-18.28	1.24 H	160	26.36	29.36
2	1624.00	45.68 AV	54.00	-8.32	1.24 H	160	16.32	29.36
3	*2437.00	107.04 PK			1.44 H	52	75.49	31.55
4	*2437.00	101.47 AV			1.44 H	52	69.92	31.55
5	4874.00	51.08 PK	74.00	-22.92	1.03 H	156	13.29	37.79
6	4874.00	44.87 AV	54.00	-9.13	1.03 H	156	7.08	37.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1624.00	59.02 PK	74.00	-14.98	1.06 V	99	29.66	29.36
2	1624.00	51.64 AV	54.00	-2.36	1.06 V	99	22.28	29.36
3	*2437.00	98.22 PK			1.45 V	333	66.67	31.55
4	*2437.00	93.13 AV			1.45 V	333	61.58	31.55
5	4874.00	52.94 PK	74.00	-21.06	1.28 V	93	15.15	37.79
6	4874.00	47.35 AV	54.00	-6.65	1.28 V	93	9.56	37.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	B
TESTED BY	Kevin Liang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1641.00	56.74 PK	87.07	-30.33	1.22 H	78	27.35	29.39
2	1641.00	45.76 AV	81.70	-35.94	1.22 H	78	16.37	29.39
3	*2462.00	107.07 PK			1.16 H	97	75.43	31.64
4	*2462.00	101.70 AV			1.16 H	97	70.06	31.64
5	2483.50	59.01 PK	74.00	-14.99	1.16 H	97	27.30	31.71
6	2483.50	50.57 AV	54.00	-3.43	1.16 H	97	18.86	31.71
7	4924.00	49.83 PK	74.00	-24.17	1.00 H	161	11.91	37.92
8	4924.00	40.51 AV	54.00	-13.49	1.00 H	161	2.59	37.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1641.00	57.59 PK	78.24	-20.65	1.04 V	45	28.20	29.39
2	1641.00	50.59 AV	73.04	-22.45	1.04 V	45	21.20	29.39
3	*2462.00	98.24 PK			1.22 V	159	66.60	31.64
4	*2462.00	93.04 AV			1.22 V	159	61.40	31.64
5	2483.50	56.21 PK	74.00	-17.79	1.22 V	158	24.50	31.71
6	2483.50	45.83 AV	54.00	-8.17	1.22 V	158	14.12	31.71
7	4924.00	53.36 PK	74.00	-20.64	1.27 V	97	15.44	37.92
8	4924.00	47.36 AV	54.00	-6.64	1.27 V	97	9.44	37.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	A
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1608.00	45.90 PK	74.00	-28.10	1.30 H	139	16.56	29.34
2	1608.00	41.93 AV	54.00	-12.07	1.30 H	139	12.59	29.34
3	2390.00	68.54 PK	74.00	-5.46	1.22 H	62	37.16	31.38
4	2390.00	51.69 AV	54.00	-2.31	1.22 H	62	20.31	31.38
5	*2412.00	107.27 PK			1.22 H	67	75.81	31.46
6	*2412.00	96.97 AV			1.22 H	67	65.51	31.46
7	4824.00	52.65 PK	74.00	-21.35	1.22 H	293	14.99	37.66
8	4824.00	37.96 AV	54.00	-16.04	1.22 H	293	0.30	37.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1608.00	49.53 PK	74.00	-24.47	1.00 V	274	20.19	29.34
2	1608.00	46.99 AV	54.00	-7.01	1.00 V	274	17.65	29.34
3	2390.00	70.78 PK	74.00	-3.22	1.25 V	147	39.40	31.38
4	2390.00	52.09 AV	54.00	-1.91	1.25 V	147	20.71	31.38
5	*2412.00	107.86 PK			1.00 V	105	76.40	31.46
6	*2412.00	97.39 AV			1.00 V	105	65.93	31.46
7	4824.00	55.25 PK	74.00	-18.75	1.25 V	327	17.59	37.66
8	4824.00	41.30 AV	54.00	-12.70	1.25 V	327	3.64	37.66

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	A
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1624.00	46.21 PK	74.00	-27.79	1.12 H	341	16.85	29.36
2	1624.00	44.37 AV	54.00	-9.63	1.12 H	341	15.01	29.36
3	*2437.00	107.51 PK			1.01 H	60	75.96	31.55
4	*2437.00	93.76 AV			1.01 H	60	62.21	31.55
5	4874.00	49.67 PK	74.00	-24.33	1.15 H	260	11.88	37.79
6	4874.00	36.84 AV	54.00	-17.16	1.15 H	260	-0.95	37.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1624.00	50.58 PK	74.00	-23.42	1.03 V	88	21.22	29.36
2	1624.00	49.43 AV	54.00	-4.57	1.03 V	88	20.07	29.36
3	*2437.00	107.75 PK			1.00 V	122	76.20	31.55
4	*2437.00	97.28 AV			1.00 V	122	65.73	31.55
5	4874.00	51.64 PK	74.00	-22.36	1.20 V	133	13.85	37.79
6	4874.00	38.54 AV	54.00	-15.46	1.20 V	133	0.75	37.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	A
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1641.00	46.58 PK	84.70	-38.12	1.29 H	108	17.19	29.39
2	1641.00	44.55 AV	73.93	-29.38	1.29 H	108	15.16	29.39
3	*2462.00	104.70 PK			1.00 H	37	73.06	31.64
4	*2462.00	93.93 AV			1.00 H	37	62.29	31.64
5	2483.50	69.41 PK	74.00	-4.59	1.00 H	35	37.70	31.71
6	2483.50	51.96 AV	54.00	-2.04	1.00 H	35	20.25	31.71
7	4924.00	48.55 PK	74.00	-25.45	1.00 H	205	10.63	37.92
8	4924.00	35.61 AV	54.00	-18.39	1.00 H	205	-2.31	37.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1641.00	50.86 PK	84.92	-34.06	1.00 V	73	21.47	29.39
2	1641.00	49.51 AV	74.27	-24.76	1.00 V	73	20.12	29.39
3	*2462.00	104.92 PK			1.24 V	167	73.28	31.64
4	*2462.00	94.27 AV			1.24 V	167	62.63	31.64
5	2483.50	72.39 PK	74.00	-1.61	1.18 V	85	40.68	31.71
6	2483.50	52.58 AV	54.00	-1.42	1.18 V	85	20.87	31.71
7	4924.00	49.96 PK	74.00	-24.04	1.32 V	300	12.04	37.92
8	4924.00	36.34 AV	54.00	-17.66	1.32 V	300	-1.58	37.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	B
TESTED BY	Kevin Liang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1608.00	56.48 PK	74.00	-17.52	1.00 H	121	27.14	29.34
2	1608.00	46.84 AV	54.00	-7.16	1.00 H	121	17.50	29.34
3	2390.00	71.62 PK	74.00	-2.37	1.00 H	137	40.24	31.38
4	2390.00	52.38 AV	54.00	-1.62	1.00 H	137	21.00	31.38
5	*2412.00	108.93 PK			1.00 H	137	77.47	31.46
6	*2412.00	89.61 AV			1.00 H	137	58.15	31.46
7	4824.00	51.81 PK	74.00	-22.19	1.31 H	93	14.15	37.66
8	4824.00	38.02 AV	54.00	-15.98	1.31 H	93	0.36	37.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1608.00	57.34 PK	74.00	-16.66	1.07 V	98	28.00	29.34
2	1608.00	50.81 AV	54.00	-3.19	1.07 V	98	21.47	29.34
3	2390.00	65.03 PK	74.00	-8.97	1.25 V	14	33.65	31.38
4	2390.00	47.32 AV	54.00	-6.68	1.25 V	14	15.94	31.38
5	*2412.00	103.09 PK			1.25 V	15	71.63	31.46
6	*2412.00	85.11 AV			1.25 V	15	53.65	31.46
7	4824.00	52.45 PK	74.00	-21.55	1.05 V	95	14.79	37.66
8	4824.00	38.94 AV	54.00	-15.06	1.05 V	95	1.28	37.66

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	B
TESTED BY	Kevin Liang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1624.00	54.95 PK	74.00	-19.05	1.24 H	80	25.59	29.36
2	1624.00	45.37 AV	54.00	-8.63	1.24 H	80	16.01	29.36
3	*2437.00	108.72 PK			1.00 H	56	77.17	31.55
4	*2437.00	89.50 AV			1.00 H	56	57.95	31.55
5	4874.00	51.51 PK	74.00	-22.49	1.26 H	97	13.72	37.79
6	4874.00	37.49 AV	54.00	-16.51	1.26 H	97	-0.30	37.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1624.00	57.69 PK	74.00	-16.31	1.03 V	98	28.33	29.36
2	1624.00	51.36 AV	54.00	-2.64	1.03 V	98	22.00	29.36
3	*2437.00	102.85 PK			1.21 V	0	71.30	31.55
4	*2437.00	84.67 AV			1.21 V	0	53.12	31.55
5	4874.00	52.20 PK	74.00	-21.80	1.35 V	107	14.41	37.79
6	4874.00	38.14 AV	54.00	-15.86	1.35 V	107	0.35	37.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 999hPa	TEST MODE	B
TESTED BY	Kevin Liang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1641.00	55.73 PK	85.50	-29.77	1.29 H	78	26.34	29.39
2	1641.00	45.57 AV	66.25	-20.68	1.29 H	78	16.18	29.39
3	*2462.00	105.50 PK			1.12 H	77	73.86	31.64
4	*2462.00	86.25 AV			1.12 H	77	54.61	31.64
5	2483.50	71.54 PK	74.00	-2.46	1.12 H	77	39.83	31.71
6	2483.50	51.22 AV	54.00	-2.78	1.12 H	77	19.51	31.71
7	4924.00	49.03 PK	74.00	-24.97	1.02 H	226	11.11	37.92
8	4924.00	36.04 AV	54.00	-17.96	1.02 H	226	-1.88	37.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1641.00	58.85 PK	80.26	-21.41	1.02 V	67	29.46	29.39
2	1641.00	51.75 AV	61.98	-10.23	1.02 V	67	22.36	29.39
3	*2462.00	100.26 PK			1.58 V	62	68.62	31.64
4	*2462.00	81.98 AV			1.58 V	62	50.34	31.64
5	2483.50	66.41 PK	74.00	-7.59	1.42 V	62	34.70	31.71
6	2483.50	48.48 AV	54.00	-5.52	1.42 V	62	16.77	31.71
7	4924.00	49.43 PK	74.00	-24.57	1.08 V	102	11.51	37.92
8	4924.00	36.63 AV	54.00	-17.37	1.08 V	102	-1.29	37.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	18deg. C, 83%RH 999hPa	TEST MODE	B
TESTED BY	Rober Tsai		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	122.22	36.79 QP	43.50	-6.71	2.01 H	203	22.76	14.03
2	132.91	38.74 QP	43.50	-4.76	2.10 H	213	25.11	13.63
3	166.32	41.78 QP	43.50	-1.72	2.22 H	218	29.82	11.96
4	199.68	42.61 QP	43.50	-0.89	1.55 H	214	33.00	9.61
5	232.61	44.33 QP	46.00	-1.67	1.00 H	206	30.75	13.58
6	266.07	44.83 QP	46.00	-1.17	1.09 H	209	28.99	15.84
7	299.77	42.68 QP	46.00	-3.32	1.00 H	93	26.99	15.69
8	332.77	45.20 QP	46.00	-0.80	1.01 H	60	28.58	16.62
9	366.14	34.98 QP	46.00	-11.02	1.00 H	199	17.39	17.59
10	466.82	33.14 QP	46.00	-12.86	1.97 H	276	12.27	20.87
11	571.55	41.08 QP	46.00	-4.92	1.49 H	36	16.22	24.86
12	617.07	33.35 QP	46.00	-12.65	2.47 H	115	7.10	26.25
13	661.78	34.22 QP	46.00	-11.78	1.00 H	1	7.18	27.04
14	731.22	39.67 QP	46.00	-6.33	1.50 H	233	11.69	27.98
15	865.70	39.02 QP	46.00	-6.98	1.98 H	87	9.83	29.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	80.29	29.89 QP	40.00	-10.11	1.50 V	312	20.20	9.69
2	133.38	40.22 QP	43.50	-3.28	1.20 V	21	26.61	13.61
3	165.78	37.92 QP	43.50	-5.58	2.63 V	308	25.86	12.06
4	199.39	42.63 QP	43.50	-0.87	2.02 V	165	33.01	9.62
5	232.43	36.06 QP	46.00	-9.94	2.32 V	237	22.50	13.56
6	265.12	43.45 QP	46.00	-2.55	2.01 V	268	27.61	15.84
7	298.94	37.89 QP	46.00	-8.11	1.90 V	142	22.20	15.69
8	332.76	44.94 QP	46.00	-1.06	1.95 V	325	28.32	16.62
9	466.85	36.53 QP	46.00	-9.47	1.00 V	287	15.66	20.87
10	733.05	39.98 QP	46.00	-6.02	1.05 V	323	11.98	28.00
11	865.01	35.76 QP	46.00	-10.24	1.36 V	7	6.57	29.19
12	998.41	42.10 QP	54.00	-11.90	2.00 V	145	11.83	30.27

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 21, 2008
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 09, 2009
LISN SCHWARZBECK	ESH3-Z5	100311	Jan. 21, 2009
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

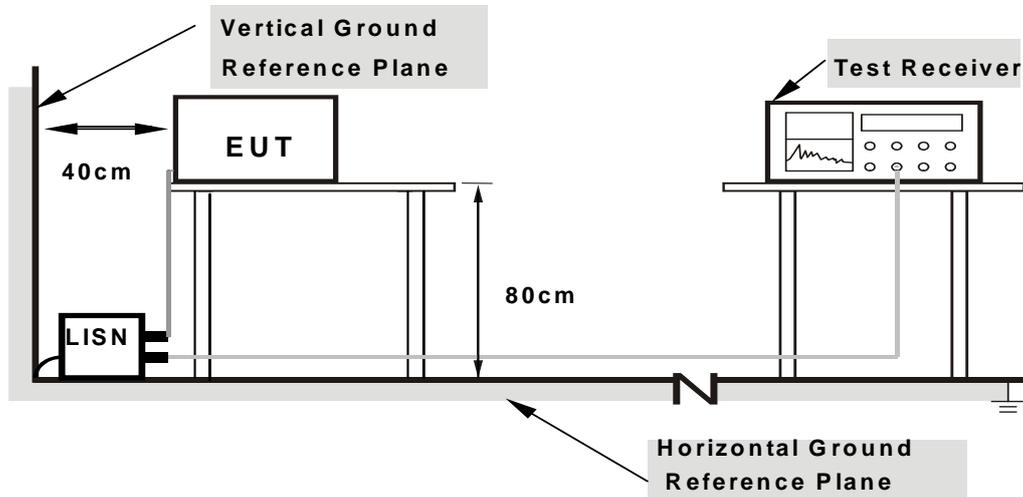

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 1022hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Mark Liao		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	51.54	-	51.64	-	64.79	54.79	-13.15	-
2	0.232	0.10	44.13	-	44.23	-	62.38	52.38	-18.15	-
3	0.290	0.10	40.90	-	41.00	-	60.53	50.53	-19.53	-
4	1.743	0.19	35.83	-	36.02	-	56.00	46.00	-19.98	-
5	3.898	0.28	41.22	-	41.50	-	56.00	46.00	-14.50	-
6	13.432	0.43	38.64	-	39.07	-	60.00	50.00	-20.93	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

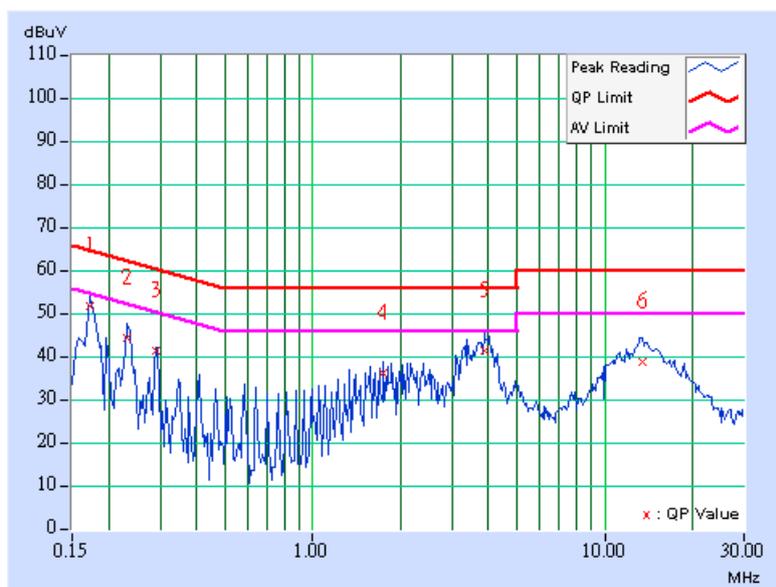

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 1022hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Mark Liao		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	51.02	-	51.12	-	64.79	54.79	-13.67	-
2	0.232	0.10	43.44	-	43.54	-	62.38	52.38	-18.84	-
3	0.291	0.10	38.10	-	38.20	-	60.51	50.51	-22.31	-
4	2.316	0.23	34.17	-	34.40	-	56.00	46.00	-21.60	-
5	3.418	0.26	37.79	-	38.05	-	56.00	46.00	-17.95	-
6	13.037	0.46	37.85	-	38.31	-	60.00	50.00	-21.69	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

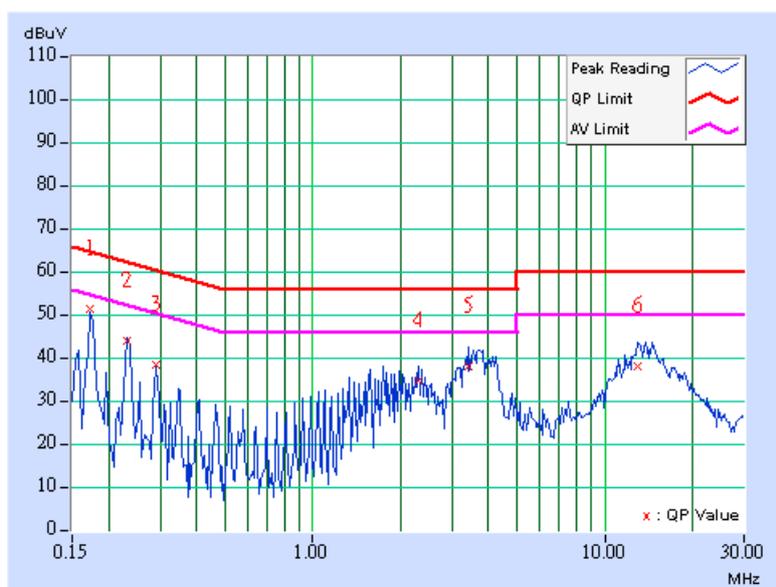

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

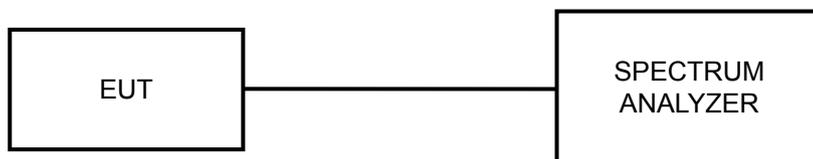

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.17	0.5	PASS
6	2437	10.17	0.5	PASS
11	2462	10.14	0.5	PASS


CH 1

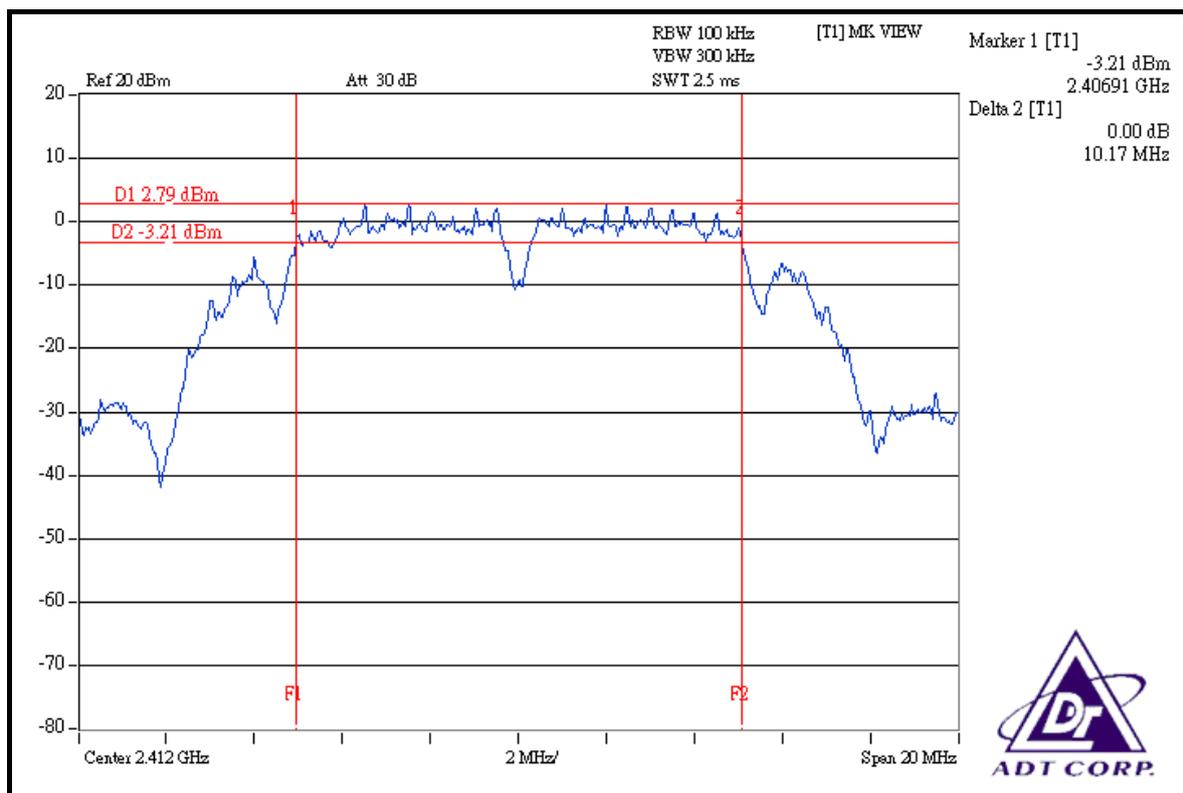

CH 6

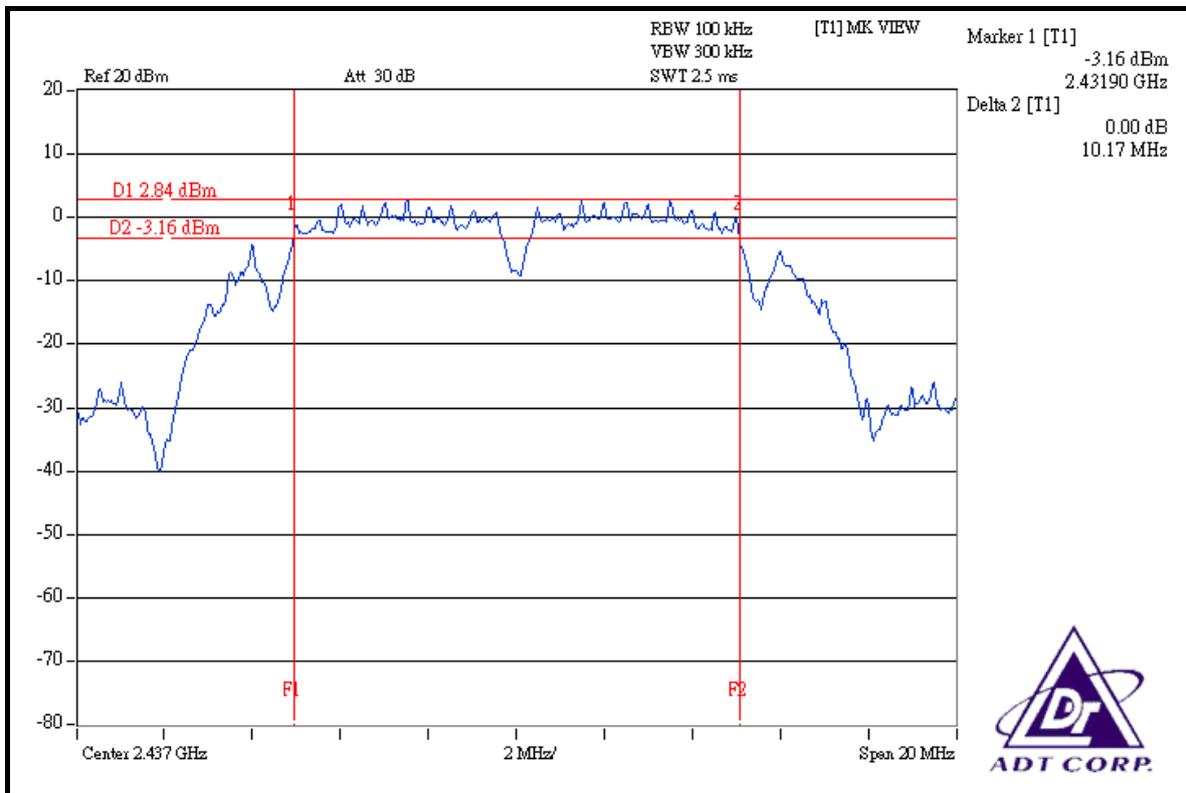

CH 11

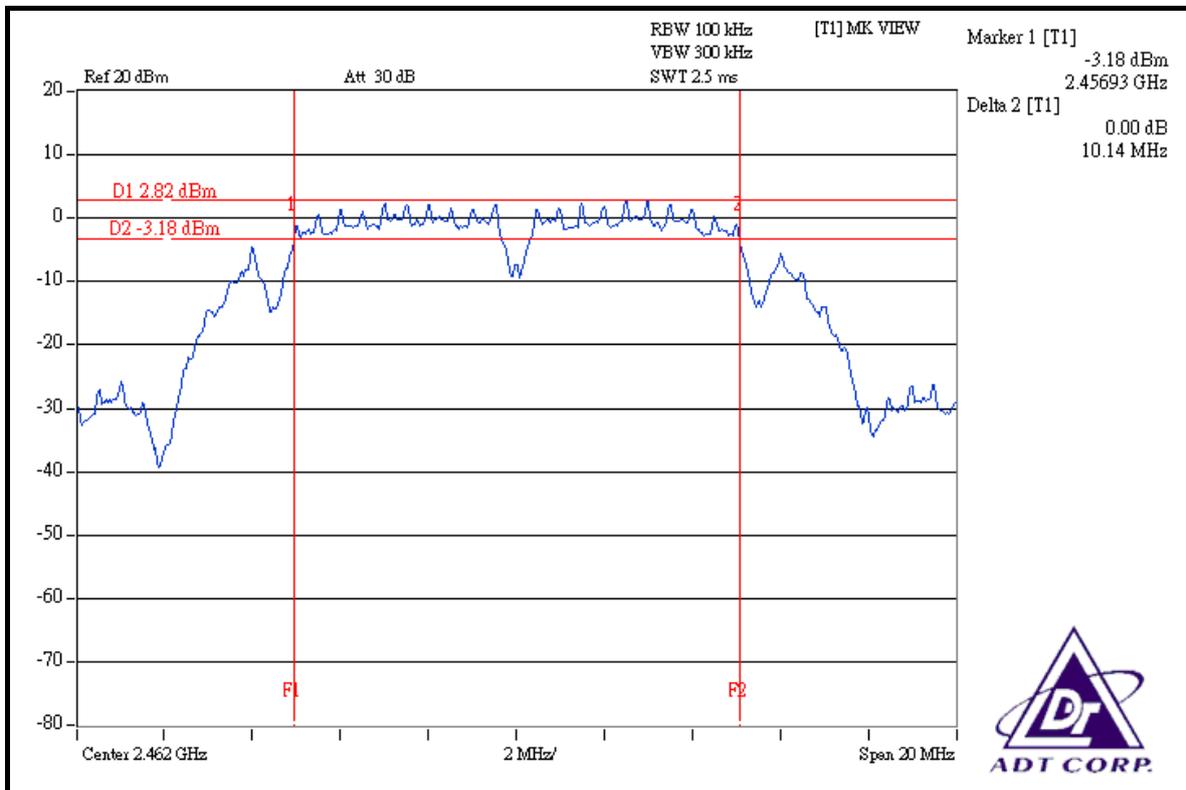


802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1005hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.43	0.5	PASS
6	2437	16.47	0.5	PASS
11	2462	16.45	0.5	PASS


CH 1

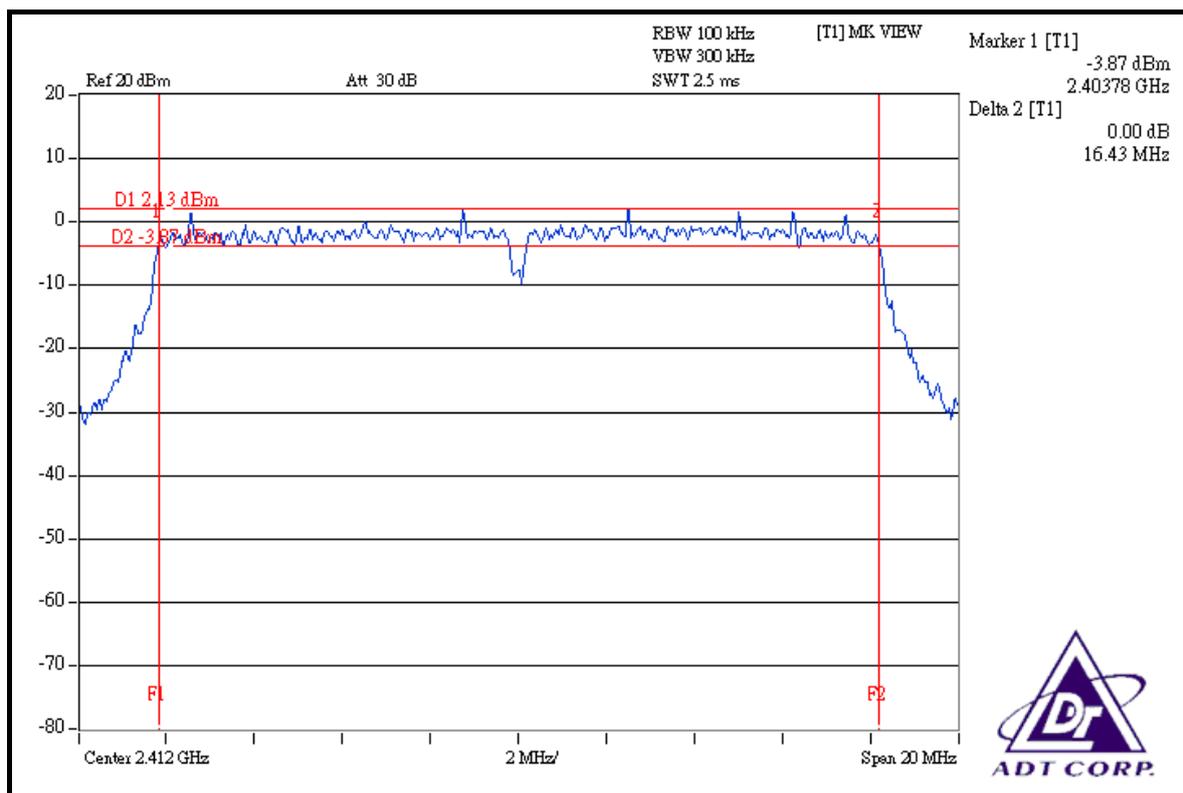

CH 6

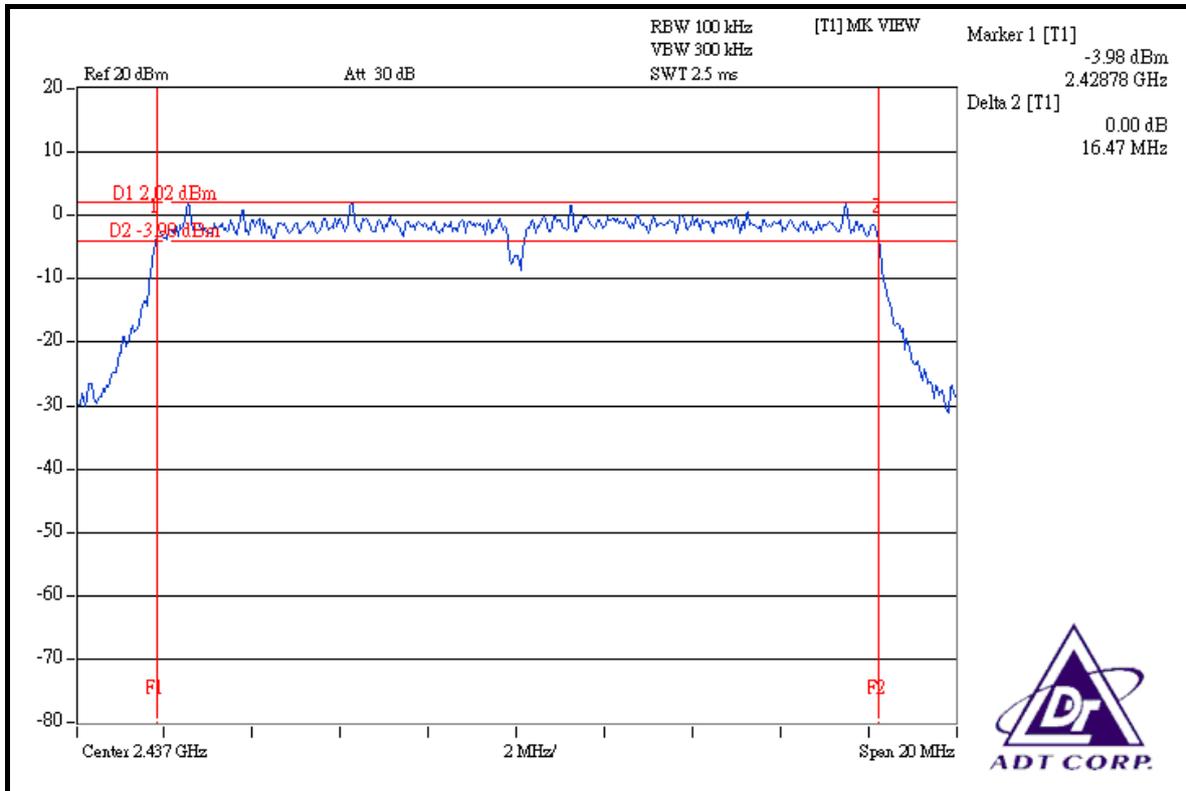

CH 11

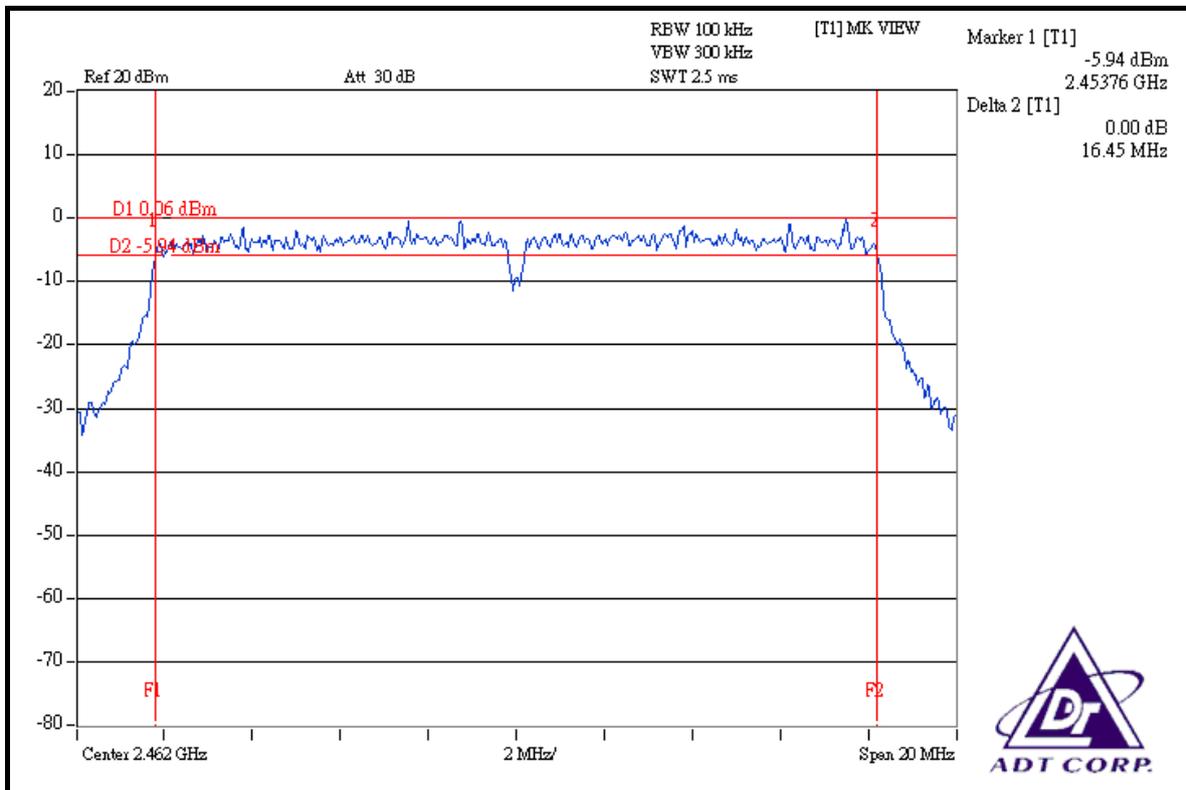

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 25, 2008
TEKTRONIX OSCILLOSCOPE	TDS1012	C037299	Nov. 21, 2008
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

- a. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
- b. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
- c. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

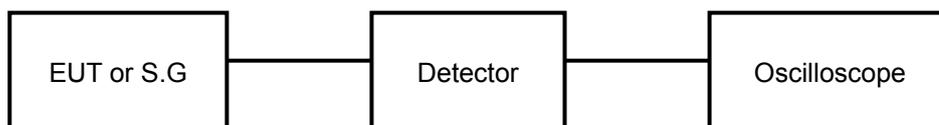

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1005hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	32.434	15.11	30	PASS
6	2437	31.769	15.02	30	PASS
11	2462	32.063	15.06	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1005hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	57.544	17.60	30	PASS
6	2437	56.885	17.55	30	PASS
11	2462	36.308	15.60	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP 40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP

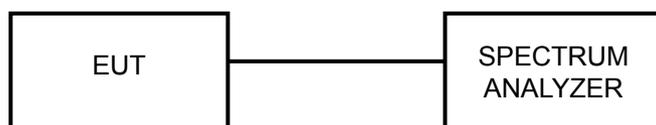

4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6.


4.5.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1005hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.87	8	PASS
6	2437	-9.73	8	PASS
11	2462	-9.87	8	PASS


CH 1

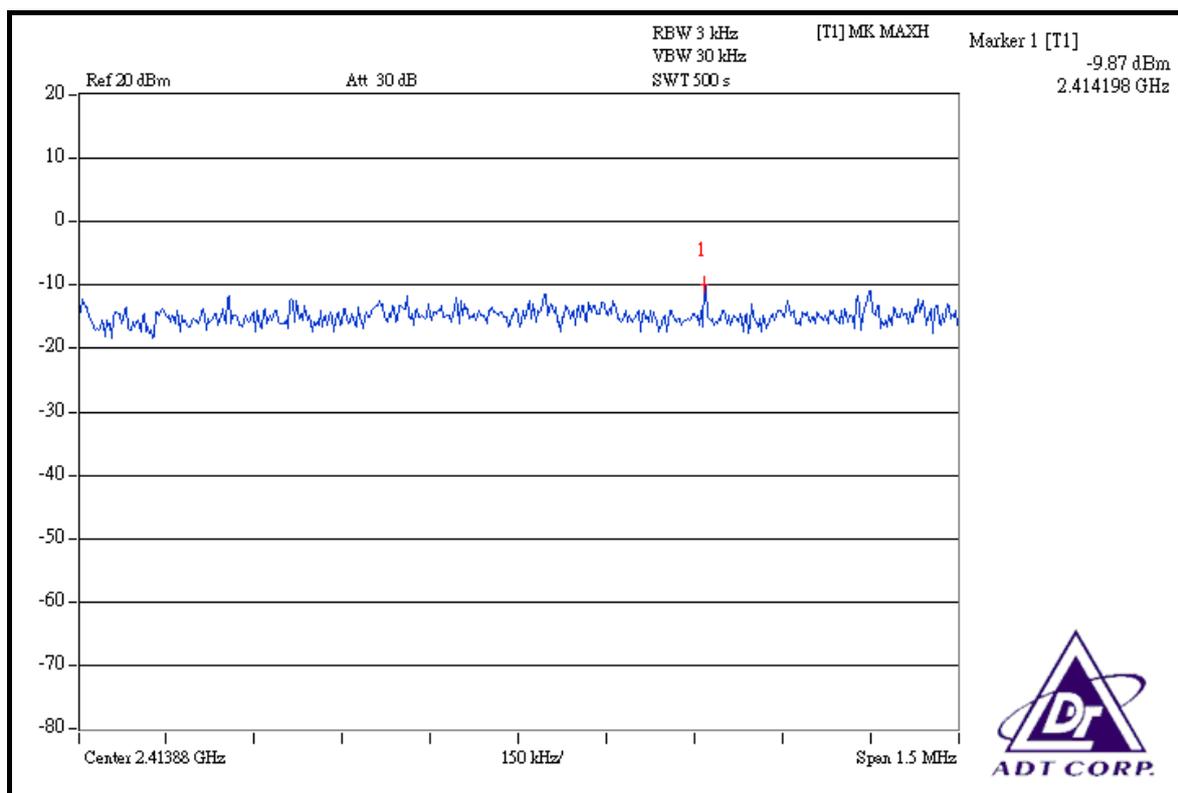

CH 6

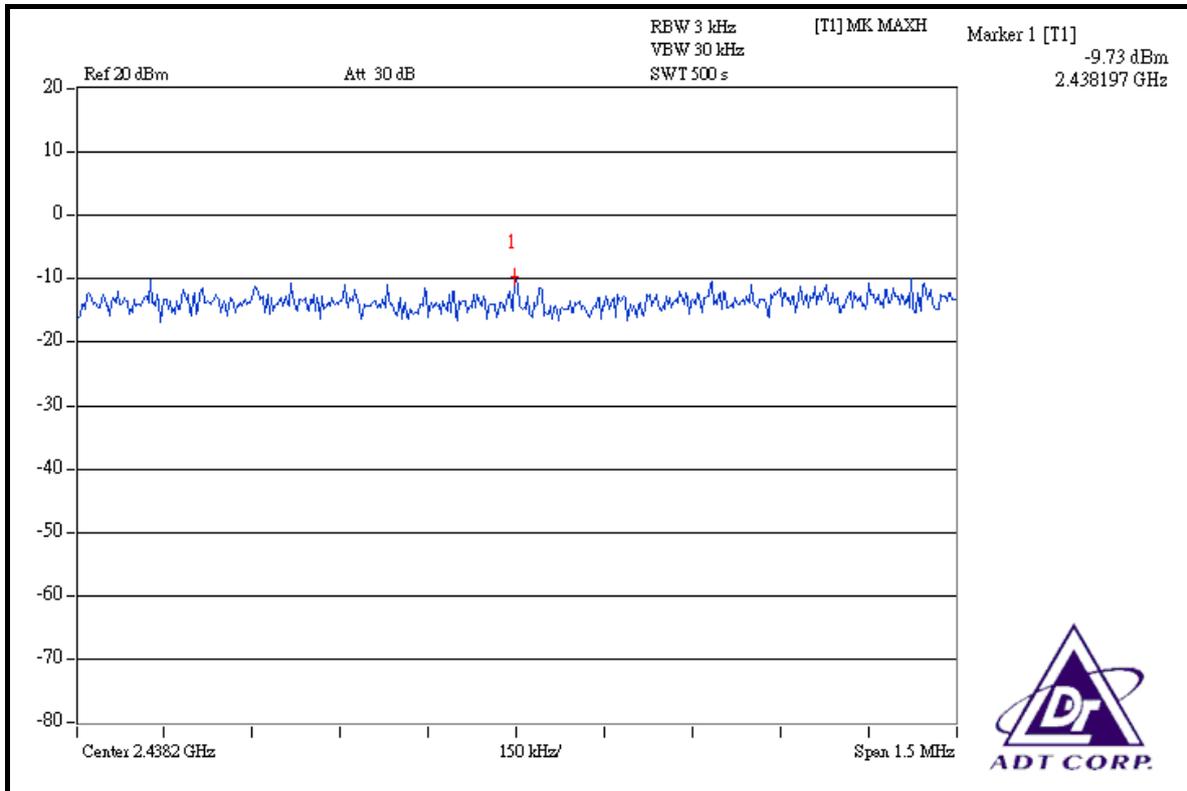

CH 11

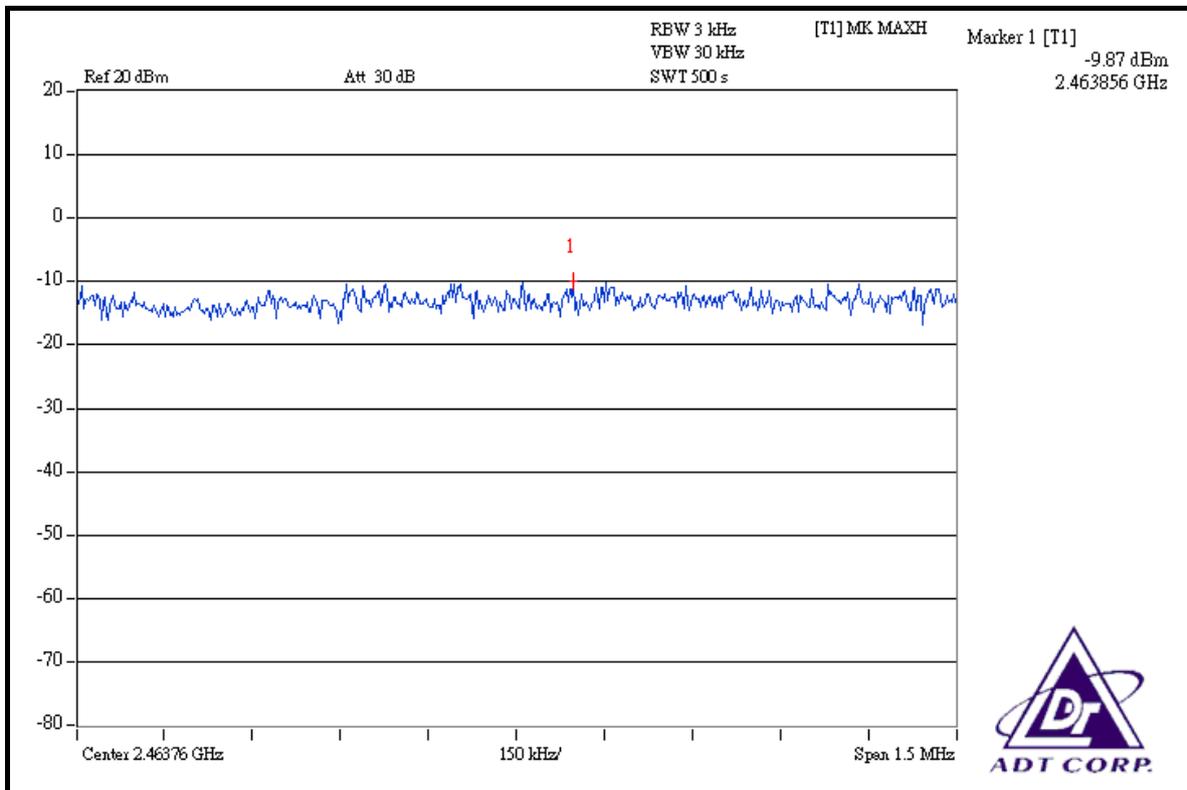


802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1005hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-11.63	8	PASS
6	2437	-11.54	8	PASS
11	2462	-13.56	8	PASS

CH 1

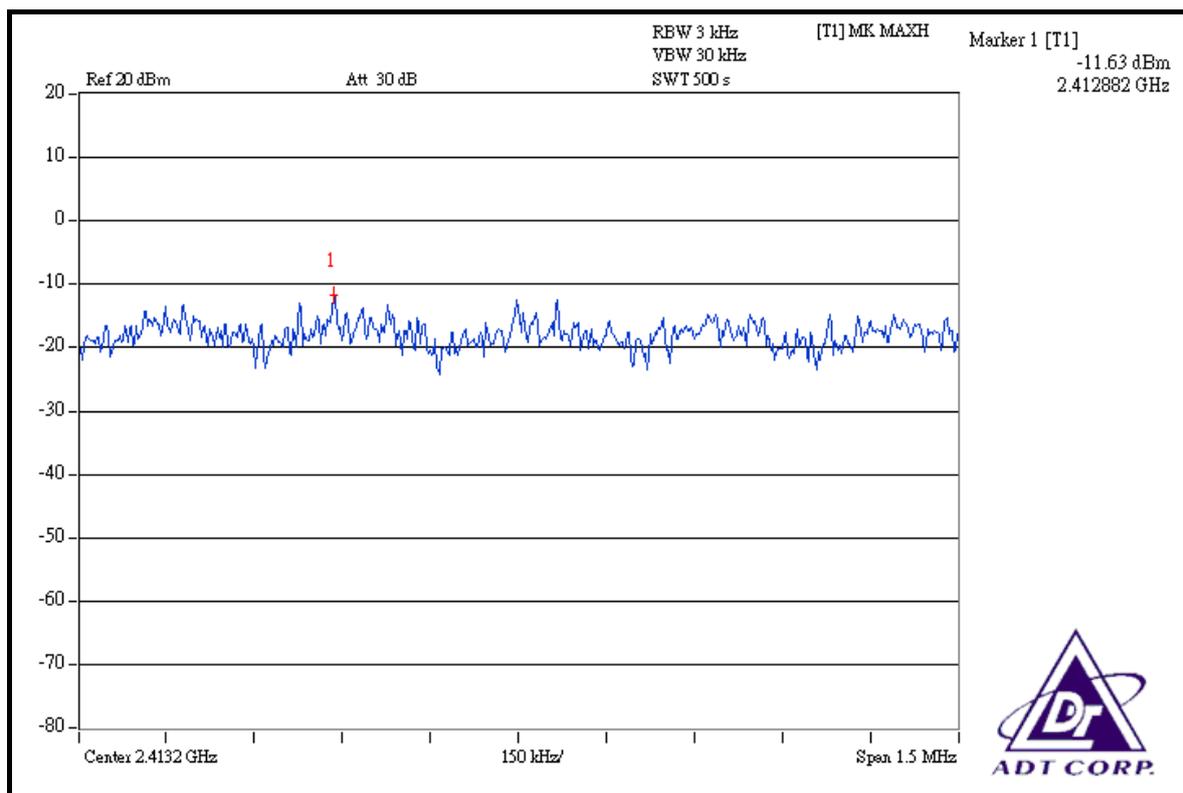

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP 40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=100kHz, VBW=300kHz; Average RBW=1MHz, VBW= 10Hz are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

TEST MODE A

NOTE 1: The band edge emission plot on the next second page shows 50.25dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.32dBuV/m (Peak), so the maximum field strength in restrict band is $105.32 - 50.25 = 55.07$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next second page shows 56.54dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 101.28dBuV/m (Peak), so the maximum field strength in restrict band is $101.28 - 56.54 = 44.74$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next third page shows 49.82dBc between carrier maximum power and local maximum emission in restrict band (2.4850GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.34dBuV/m (Peak), so the maximum field strength in restrict band is $105.34 - 49.82 = 55.52$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next fourth page shows 51.94dBc between carrier maximum power and local maximum emission in restrict band (2.4848GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 100.63dBuV/m (Peak), so the maximum field strength in restrict band is $100.63 - 51.94 = 48.69$ dBuV/m which is under 54dBuV/m limit.



TEST MODE B



NOTE 1: The band edge emission plot on the next page shows 50.25dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.70dBuV/m (Peak), so the maximum field strength in restrict band is $107.70 - 50.25 = 57.45$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 56.54dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 102.09dBuV/m (Peak), so the maximum field strength in restrict band is $102.09 - 56.54 = 45.55$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 49.82dBc between carrier maximum power and local maximum emission in restrict band (2.4850GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.07dBuV/m (Peak), so the maximum field strength in restrict band is $107.07 - 49.82 = 57.25$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 51.94dBc between carrier maximum power and local maximum emission in restrict band (2.4848GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 101.70dBuV/m (Peak), so the maximum field strength in restrict band is $101.70 - 51.94 = 49.76$ dBuV/m which is under 54dBuV/m limit.

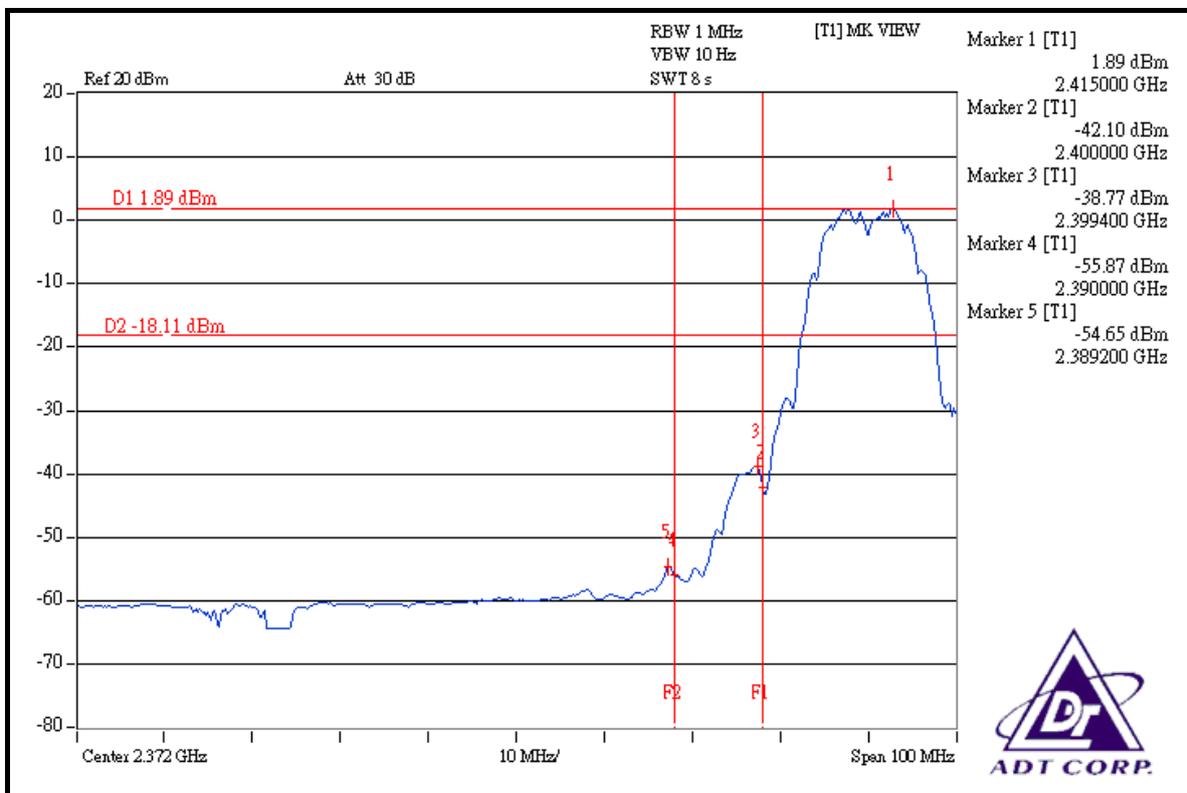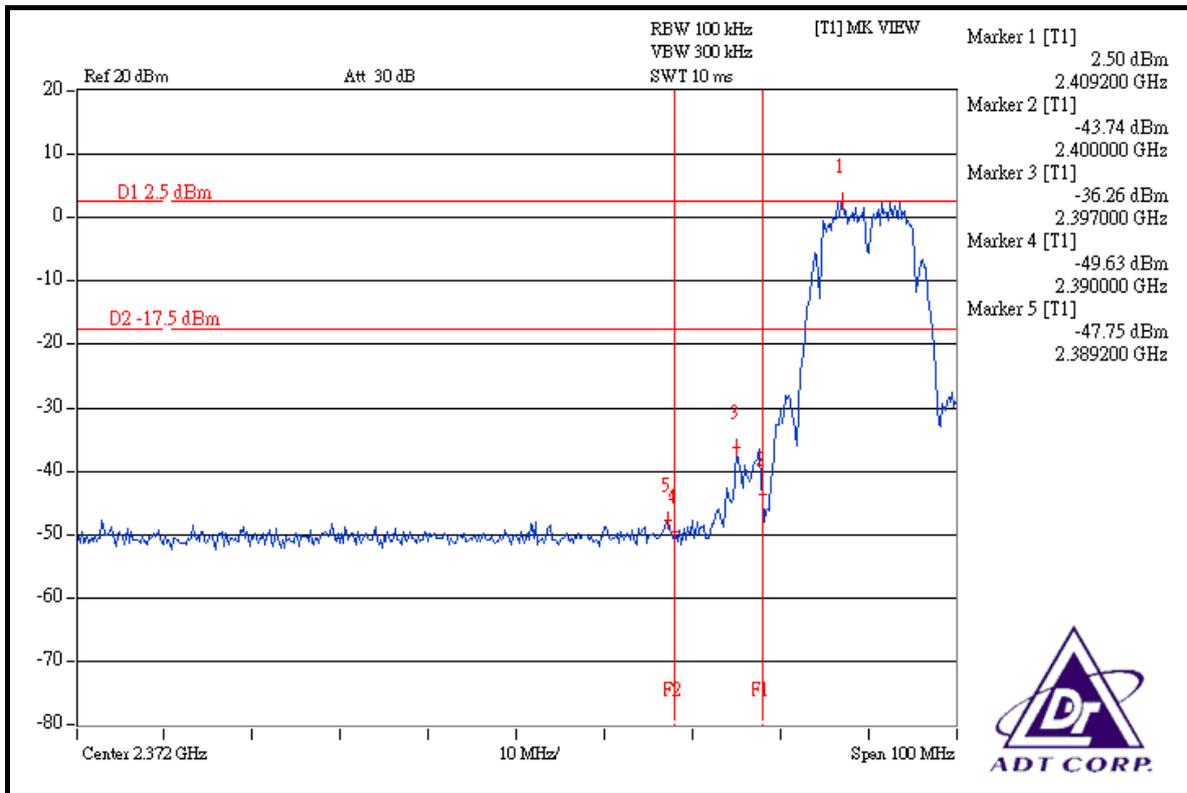

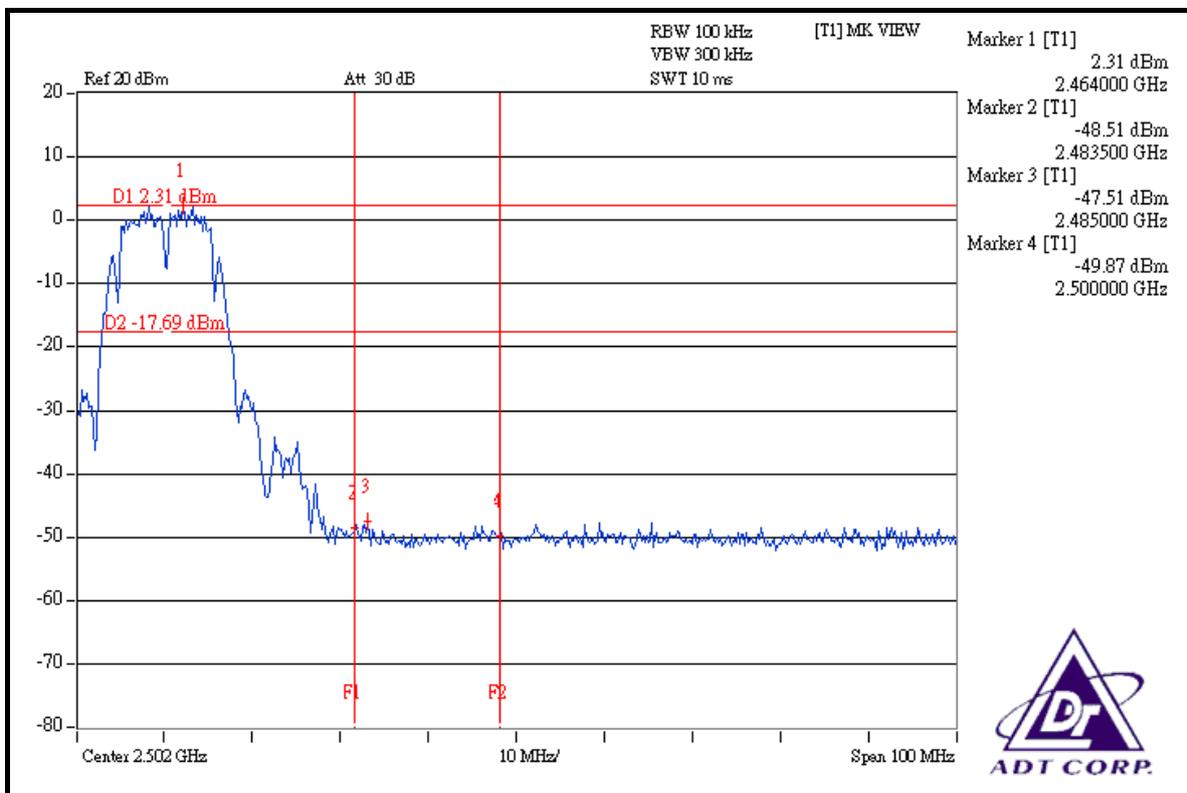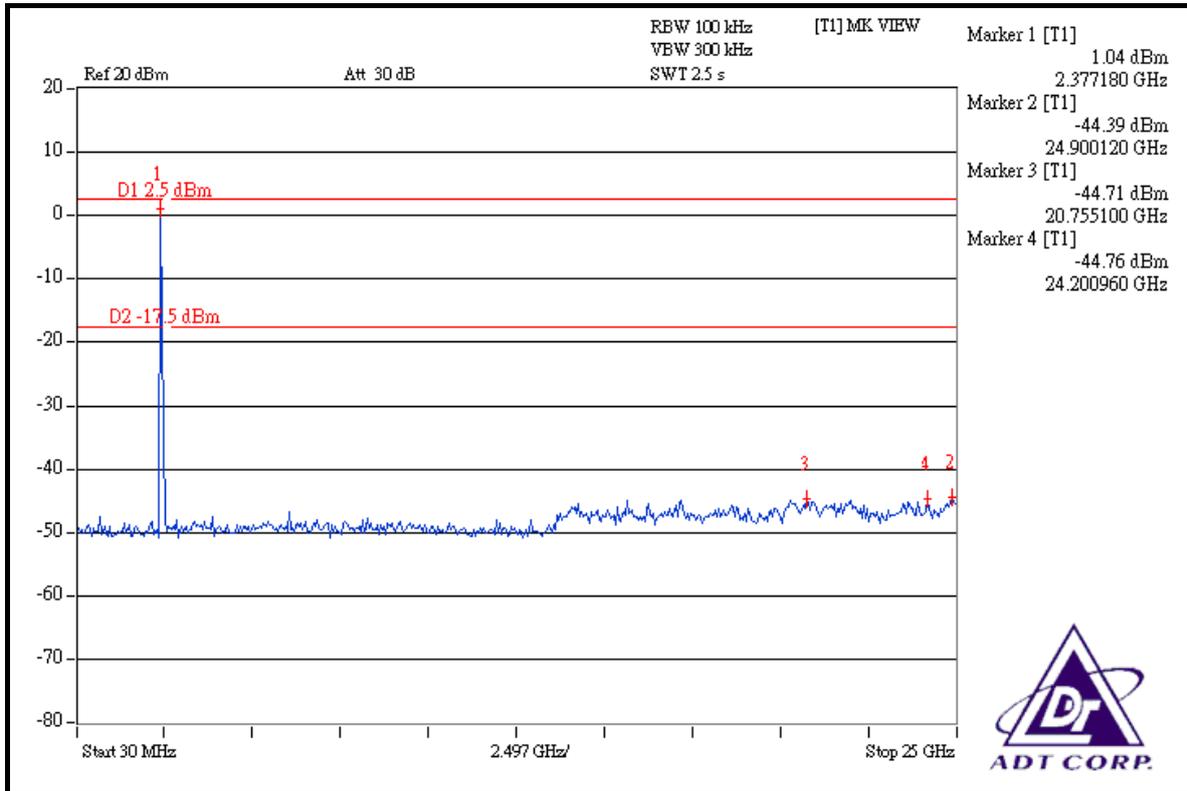

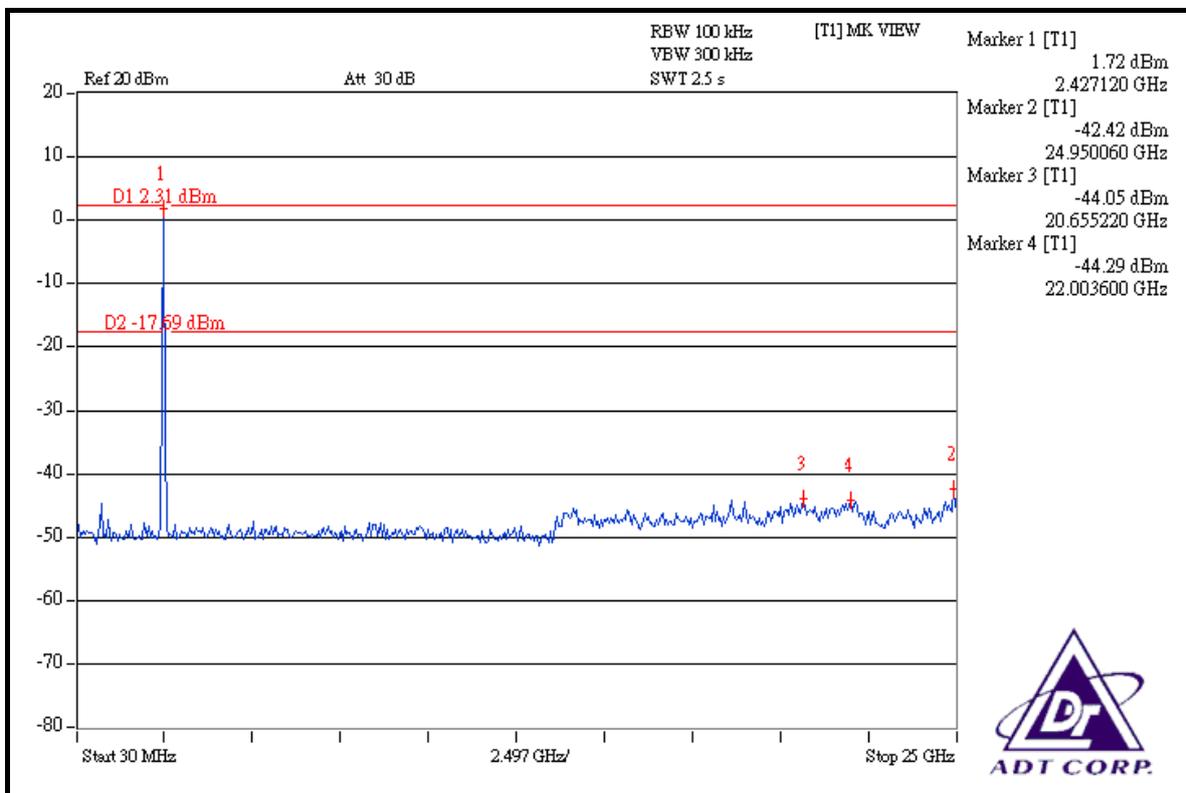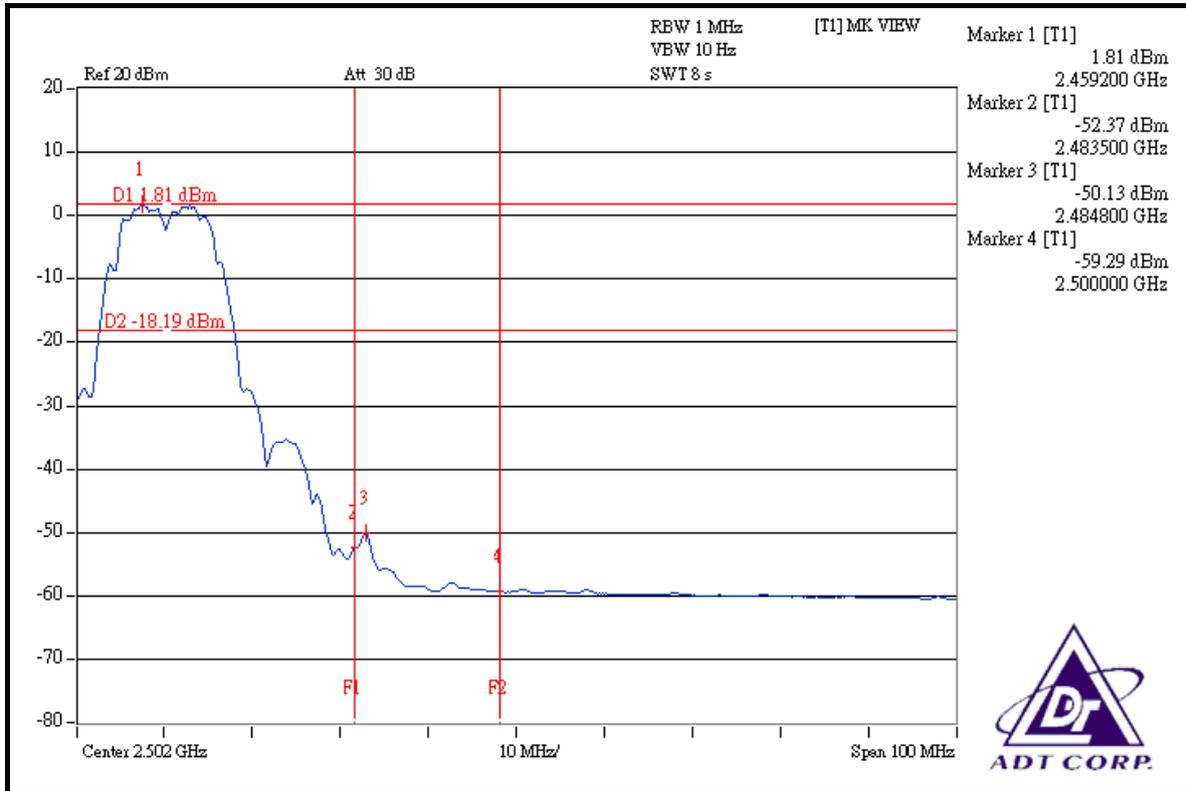

802.11g OFDM MODULATION

TEST MODE A

NOTE 1: The band edge emission plot on the next second page shows 42.63dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.86dBuV/m (Peak), so the maximum field strength in restrict band is $107.86 - 42.63 = 65.23$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next second page shows 46.64dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 97.39dBuV/m (Peak), so the maximum field strength in restrict band is $97.39 - 46.64 = 50.75$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next third page shows 42.94dBc between carrier maximum power and local maximum emission in restrict band (2.4844GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.92dBuV/m (Peak), so the maximum field strength in restrict band is $104.92 - 42.94 = 61.98$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next fourth page shows 43.78dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 94.27dBuV/m (Peak), so the maximum field strength in restrict band is $94.27 - 43.78 = 50.49$ dBuV/m which is under 54dBuV/m limit.



TEST MODE B



NOTE 1: The band edge emission plot on the next page shows 42.63dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.93dBuV/m (Peak), so the maximum field strength in restrict band is $108.93 - 42.63 = 66.30$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 46.64dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 89.61dBuV/m (Peak), so the maximum field strength in restrict band is $89.61 - 46.64 = 42.97$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 42.94dBc between carrier maximum power and local maximum emission in restrict band (2.4844GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.50dBuV/m (Peak), so the maximum field strength in restrict band is $105.50 - 42.94 = 62.56$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 43.78dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 86.25dBuV/m (Peak), so the maximum field strength in restrict band is $86.25 - 43.78 = 42.47$ dBuV/m which is under 54dBuV/m limit.

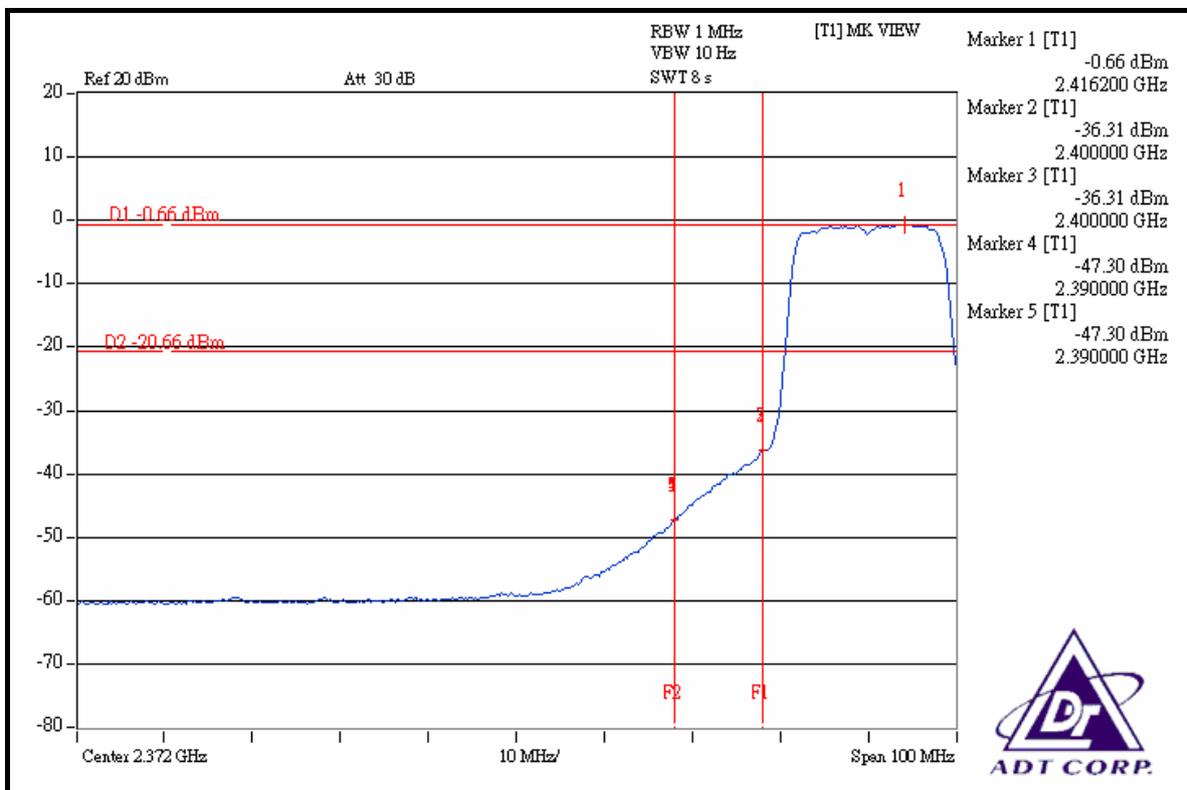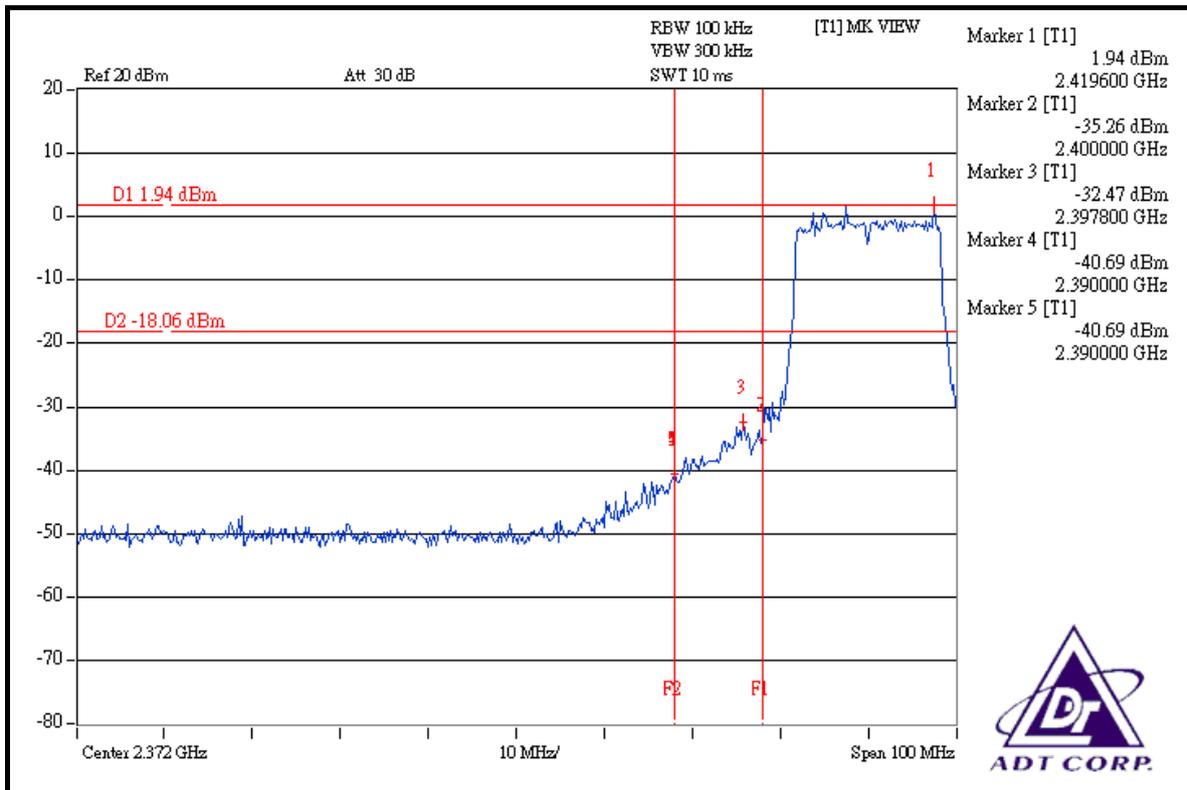

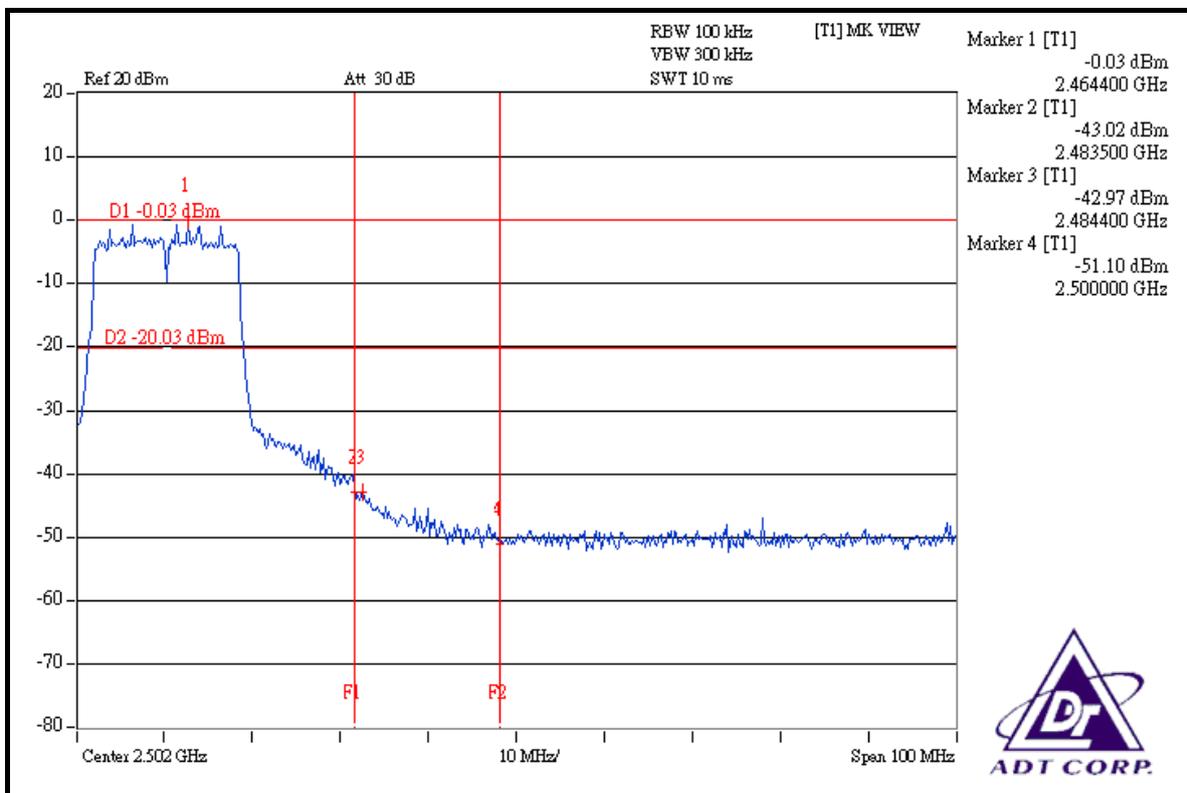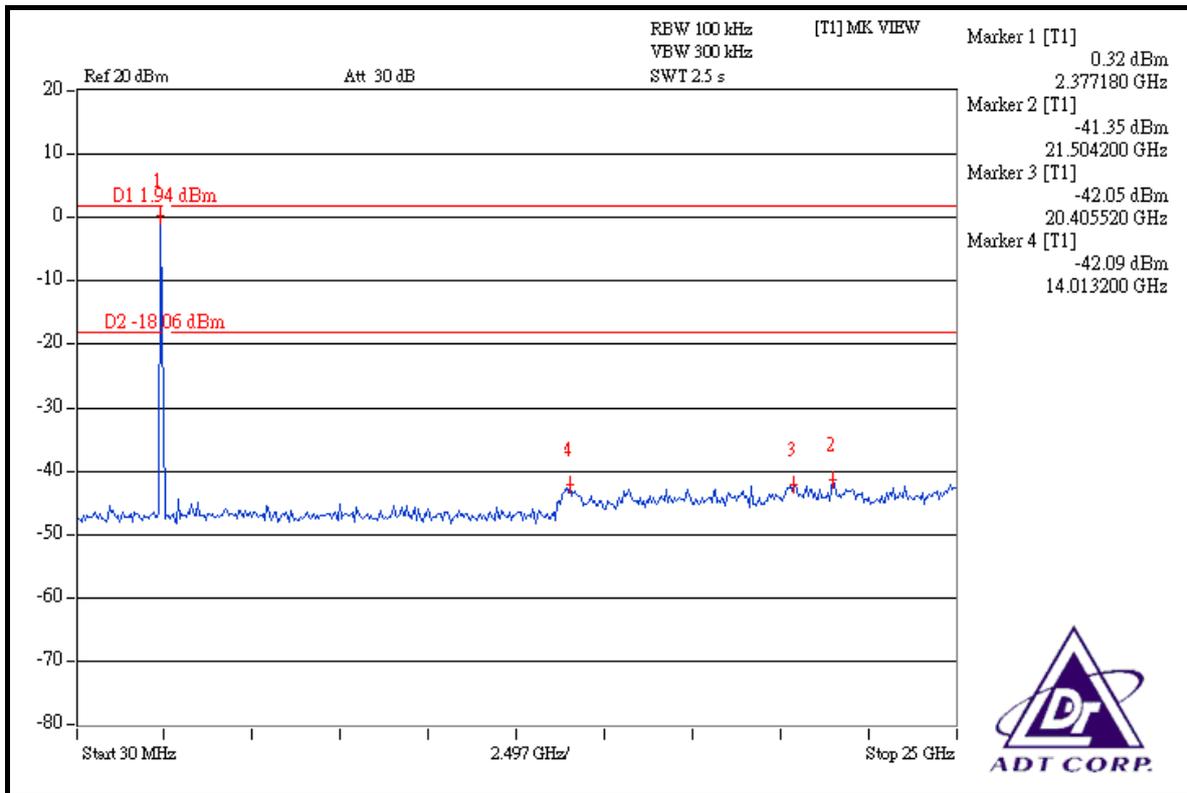

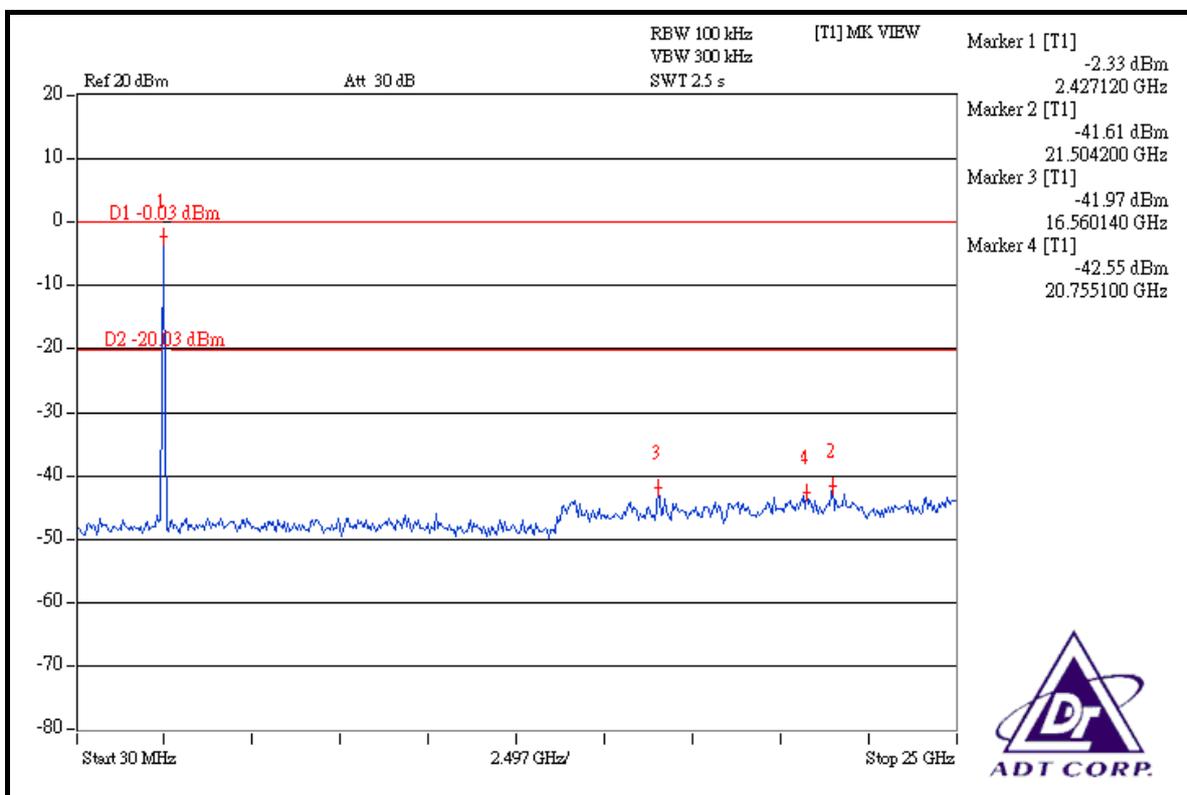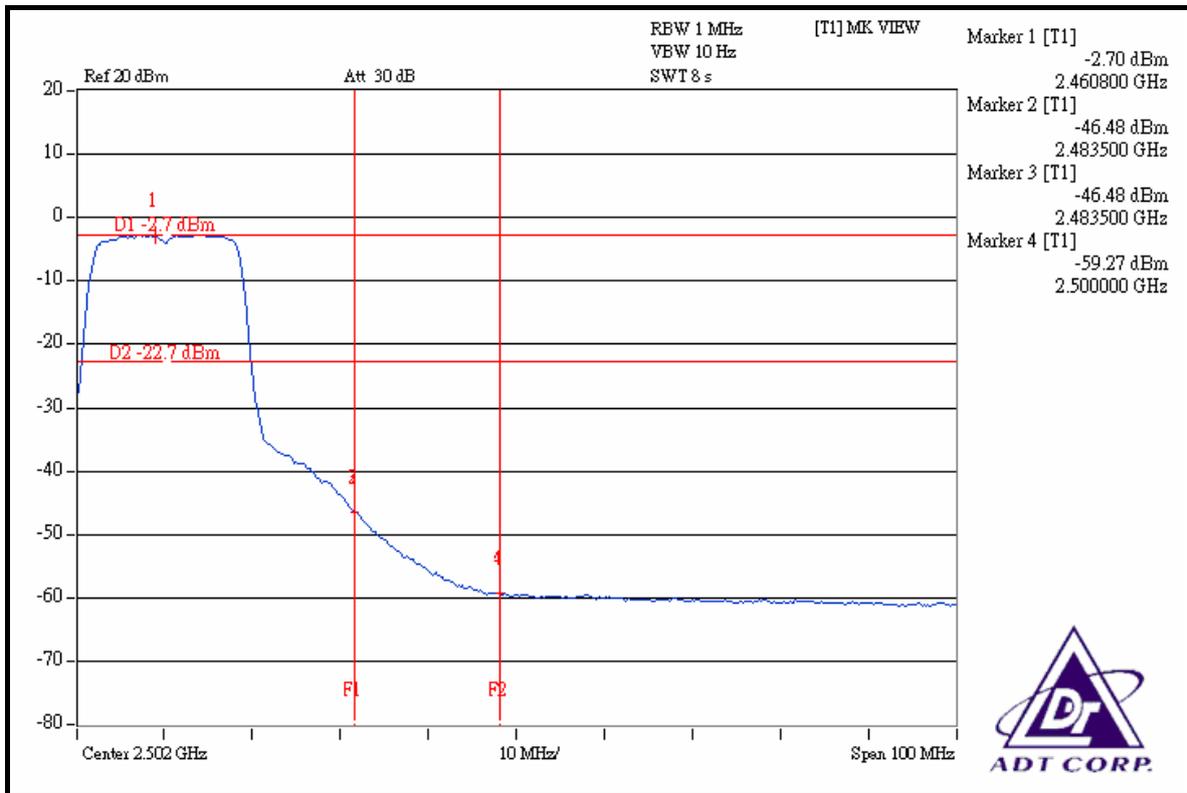

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with MMCX jack R.A. antenna connector or IPEX MHF antenna connector. The maximum Gain of the antenna is 4.71dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.