




BW: 20 MHz / Frequency: 6694 MHz

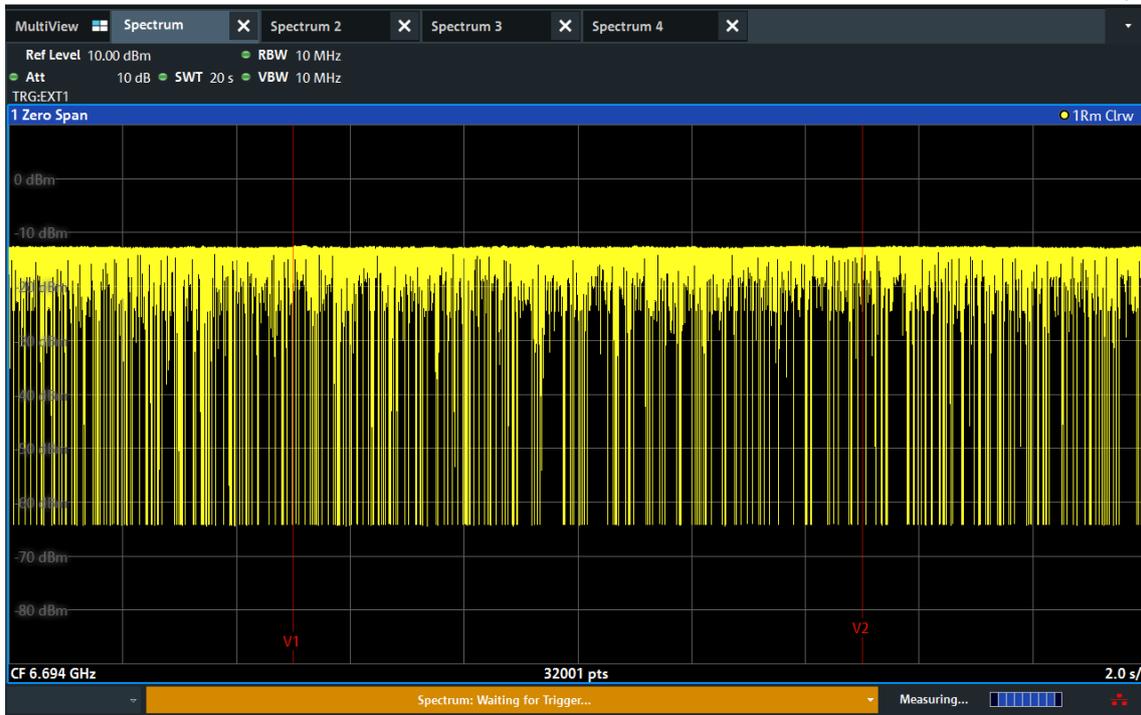


BW: 20 MHz / Frequency: 6994 MHz

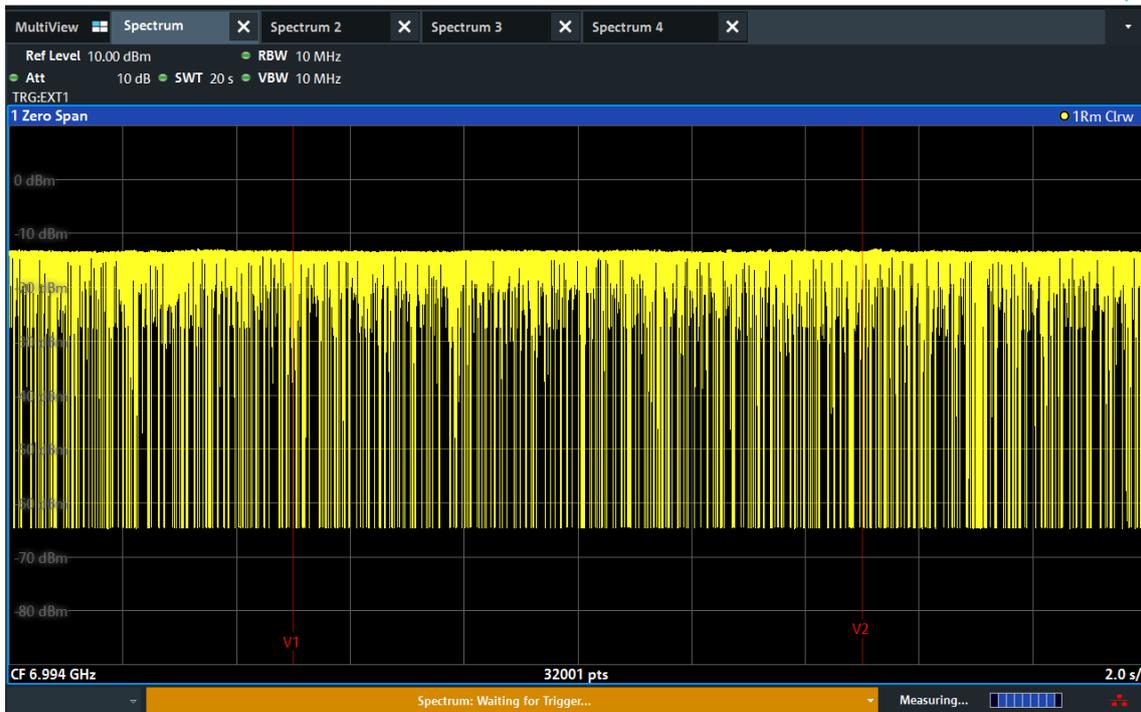


BW: 320 MHz / Frequency: 6100 MHz

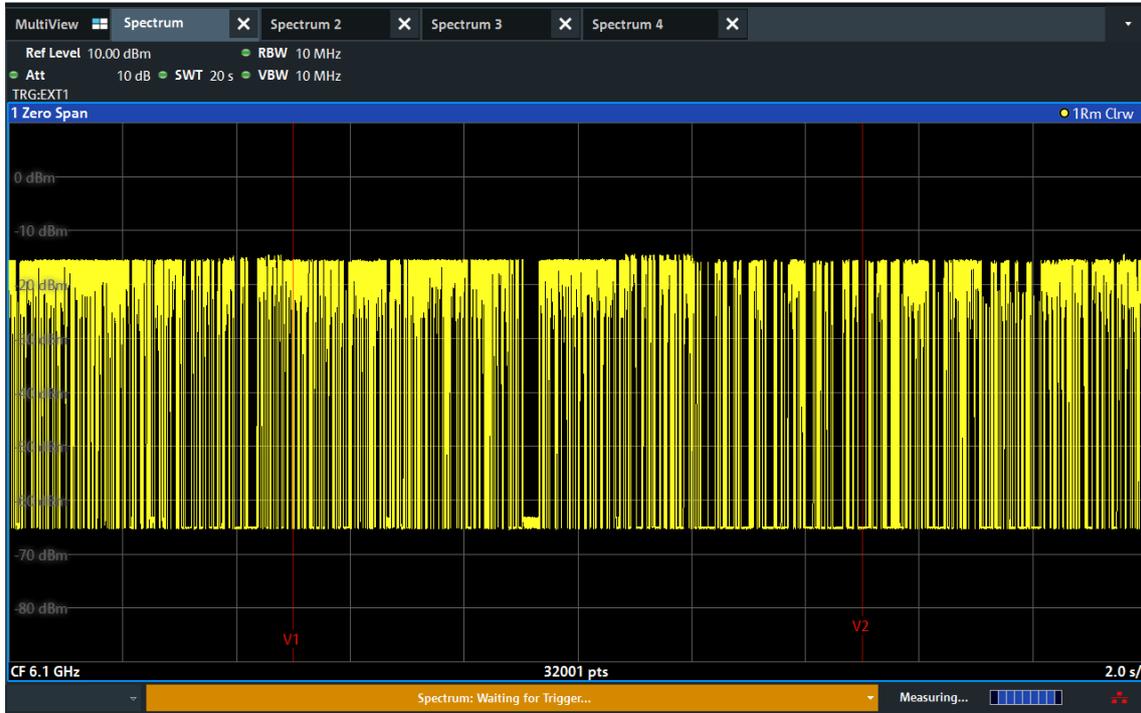

BW: 320 MHz / Frequency: 6580MHz

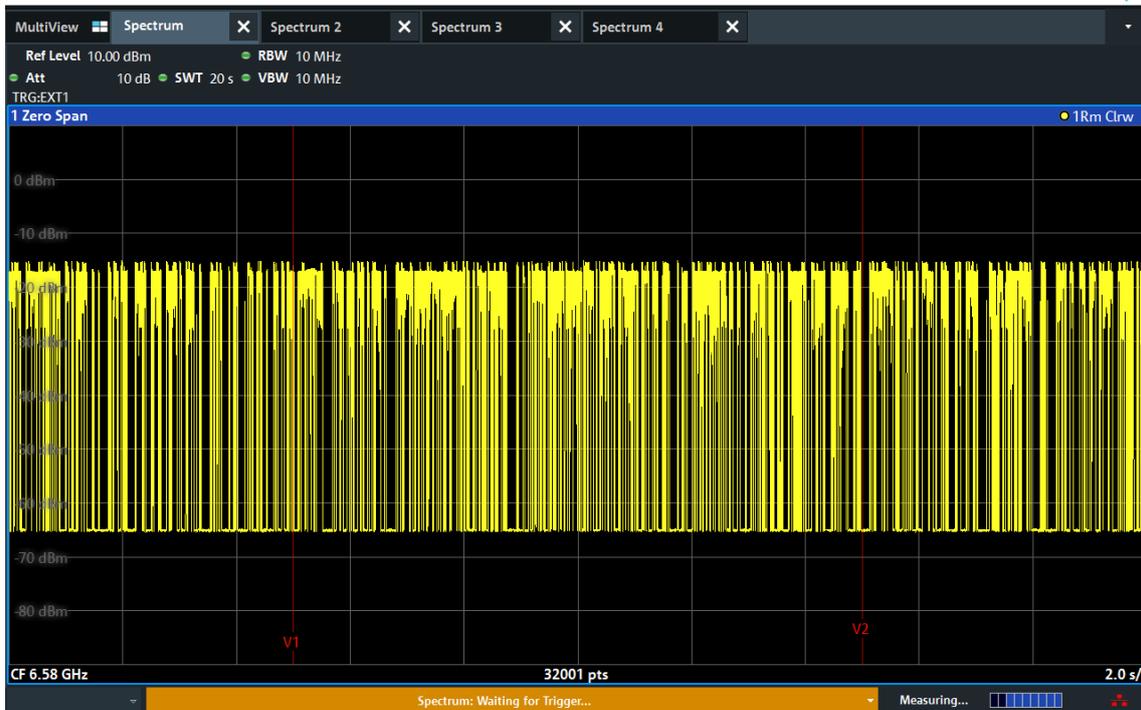

BW: 320 MHz / Frequency: 6900MHz

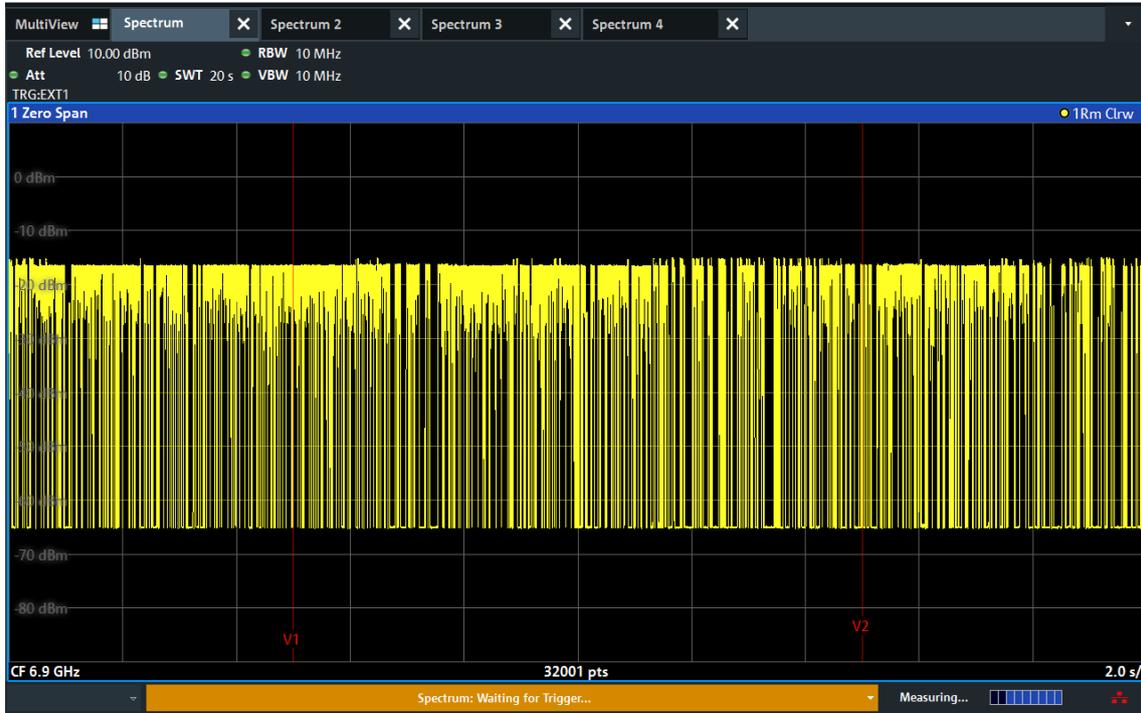

EUT Minimal transmission


BW: 20 MHz / Frequency: 6194 MHz




BW: 20 MHz / Frequency: 6474 MHz




BW: 20 MHz / Frequency: 6694 MHz

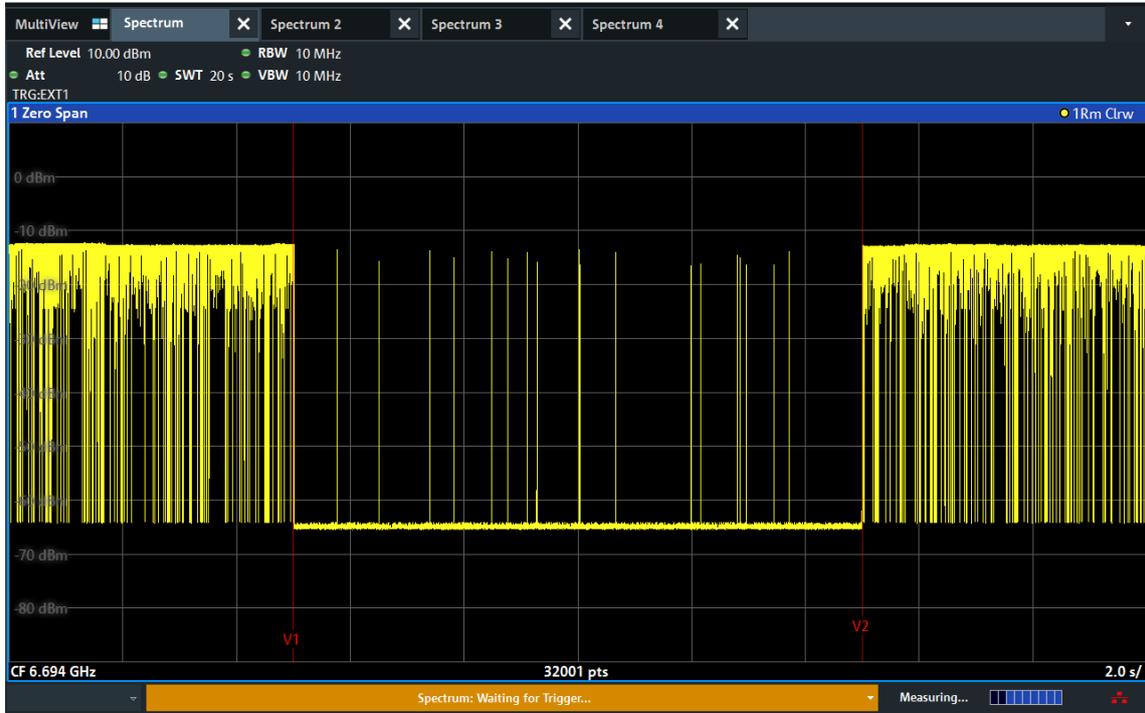


BW: 20 MHz / Frequency: 6994 MHz

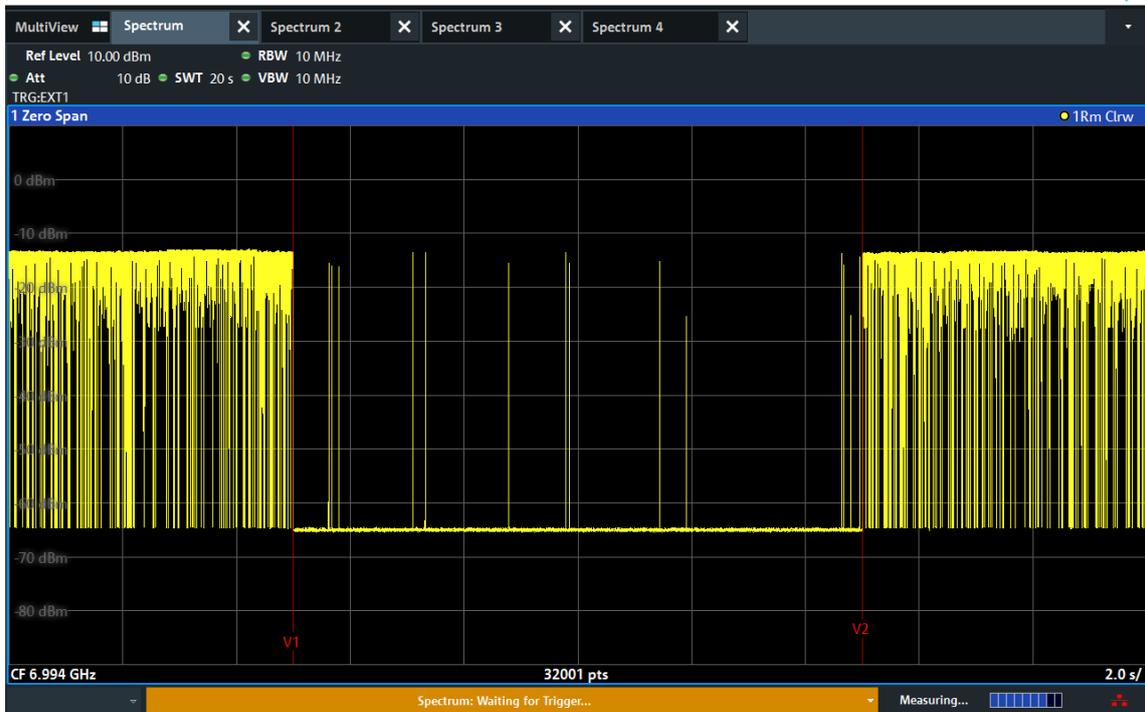


BW: 320 MHz / Frequency: 6100 MHz

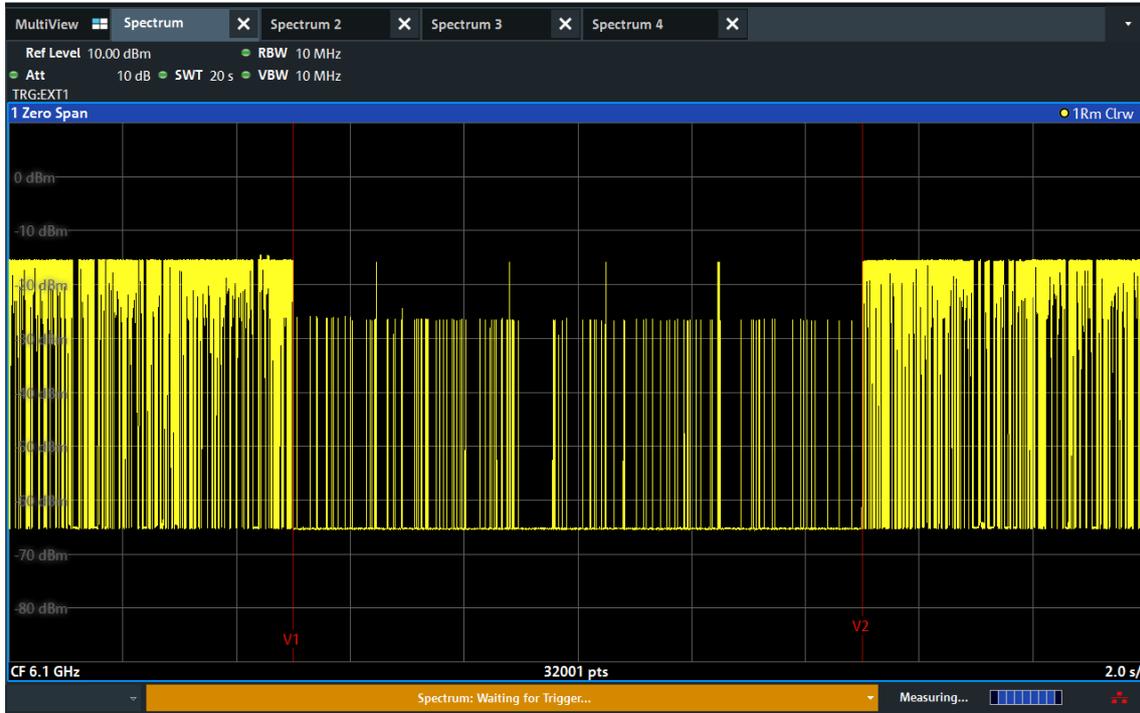

BW: 320 MHz / Frequency: 6580 MHz

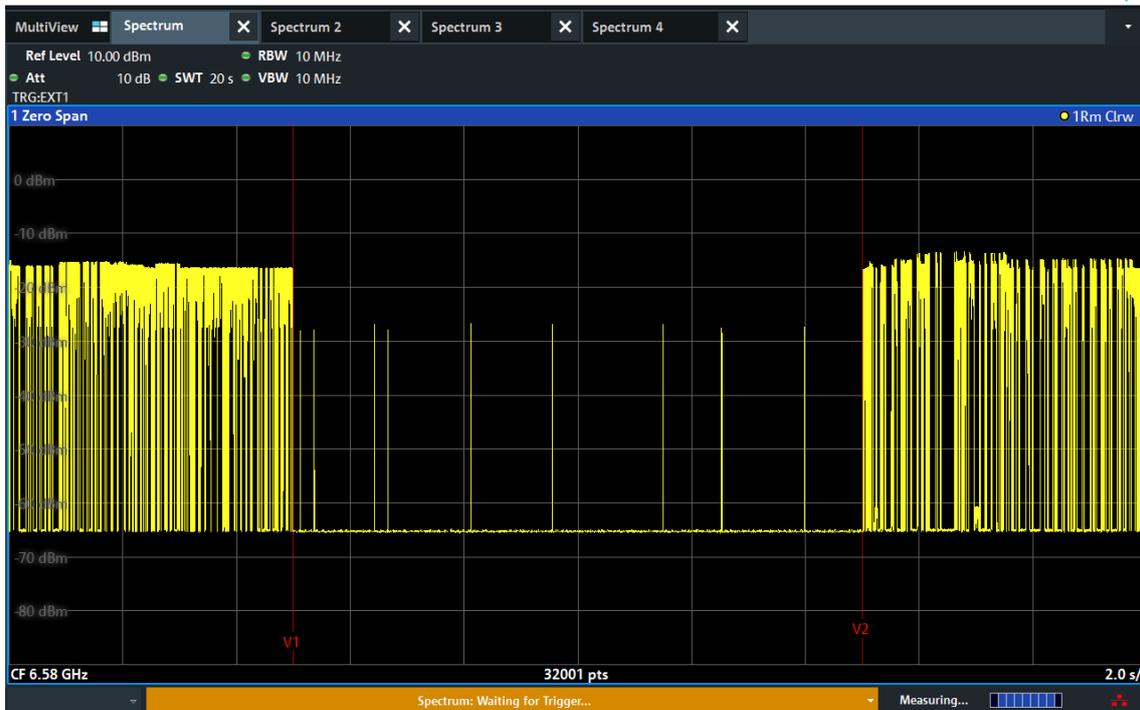


BW: 320 MHz / Frequency: 6900 MHz

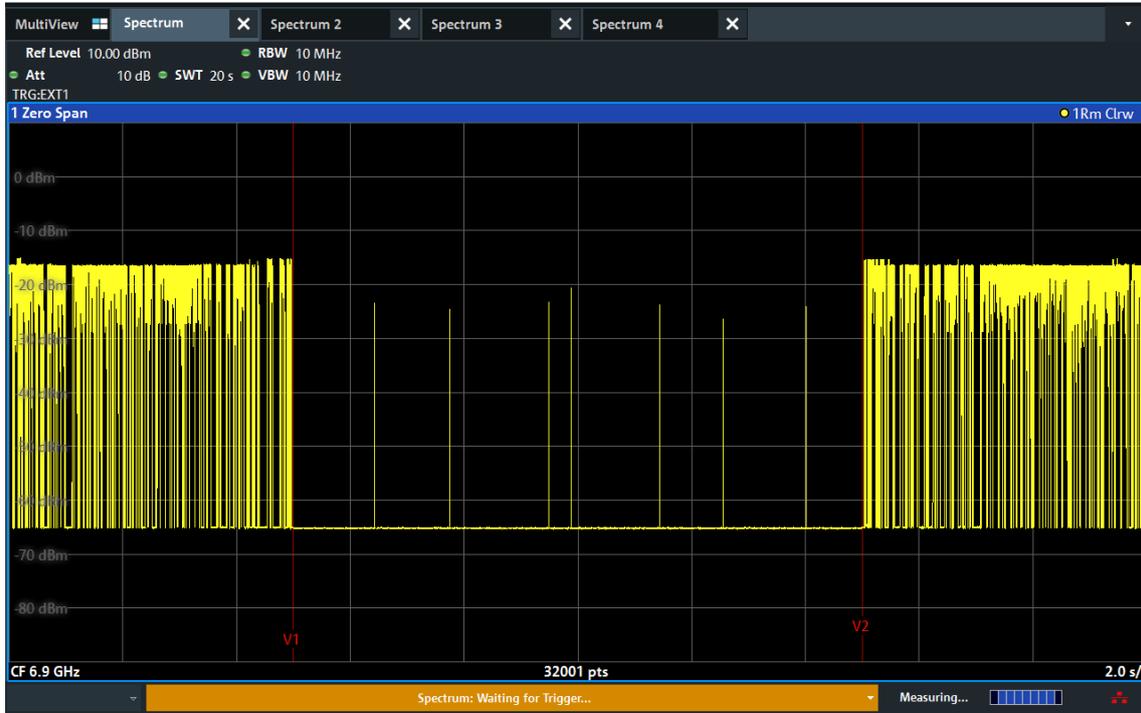


EUT ceased transmission

BW: 20 MHz / Frequency: 6194 MHz

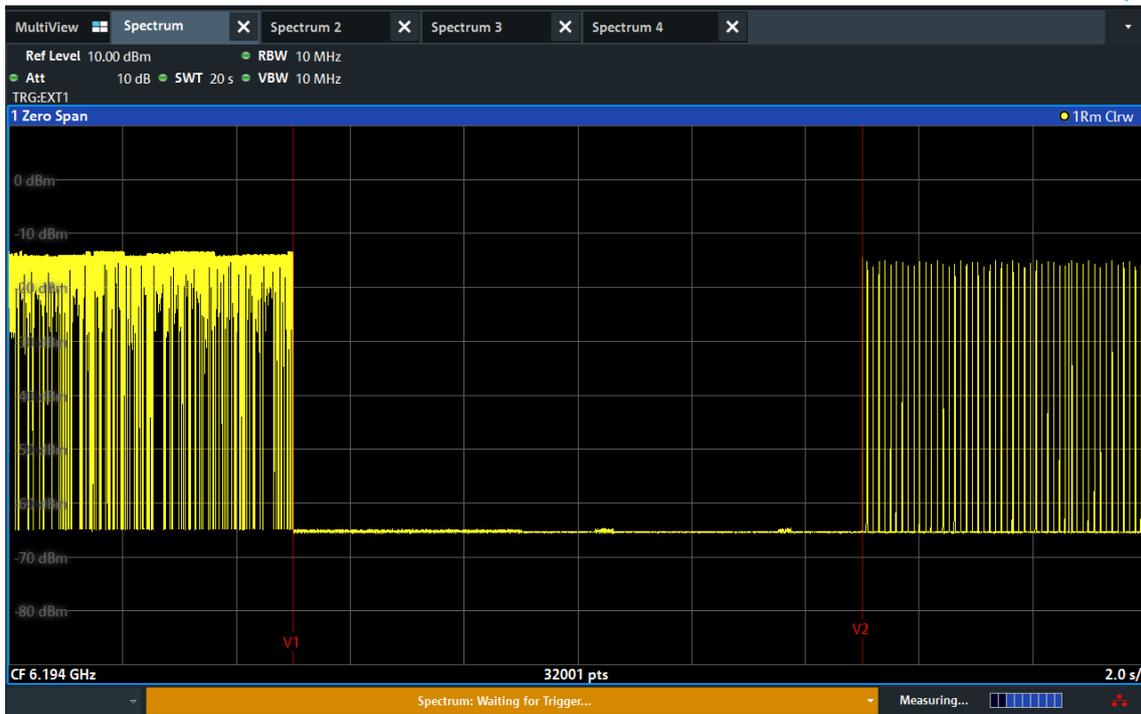


BW: 20 MHz / Frequency: 6474 MHz

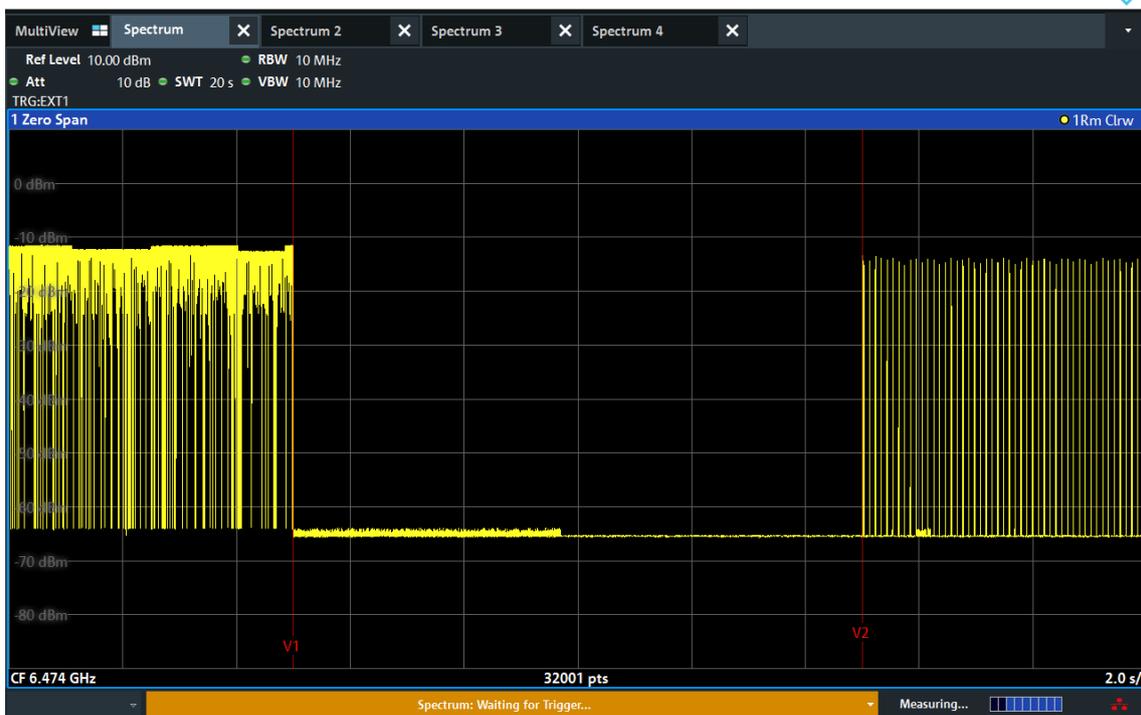


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 20 MHz / Frequency: 6694 MHz

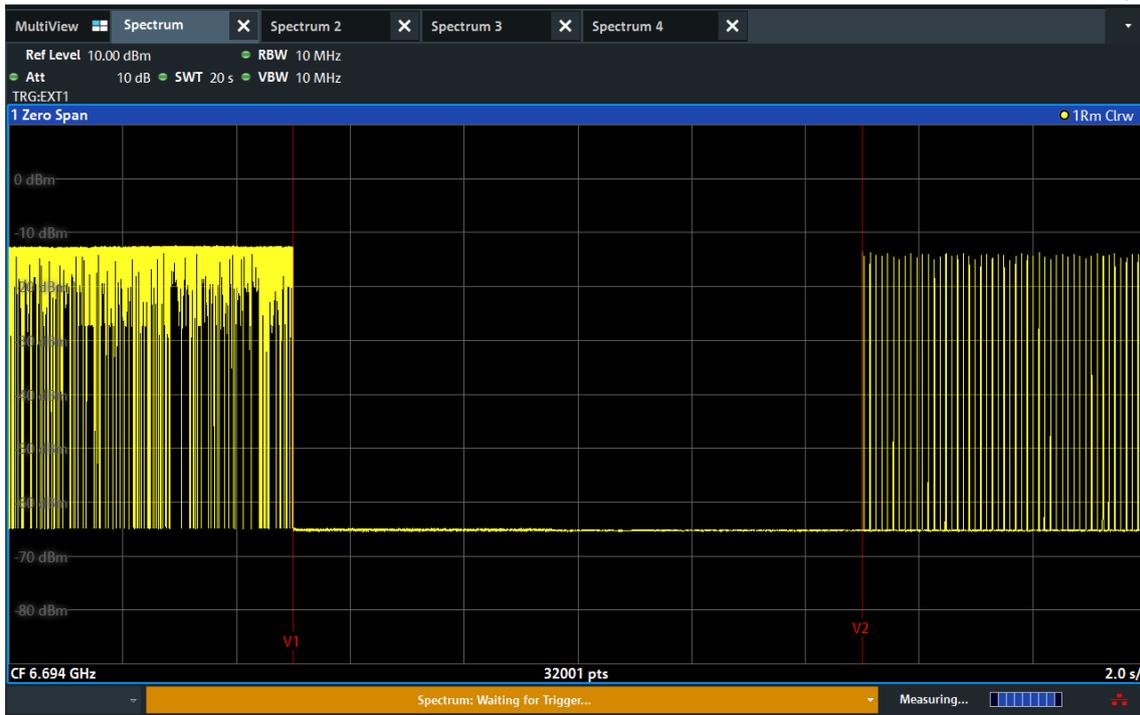


BW: 20 MHz / Frequency: 6994 MHz

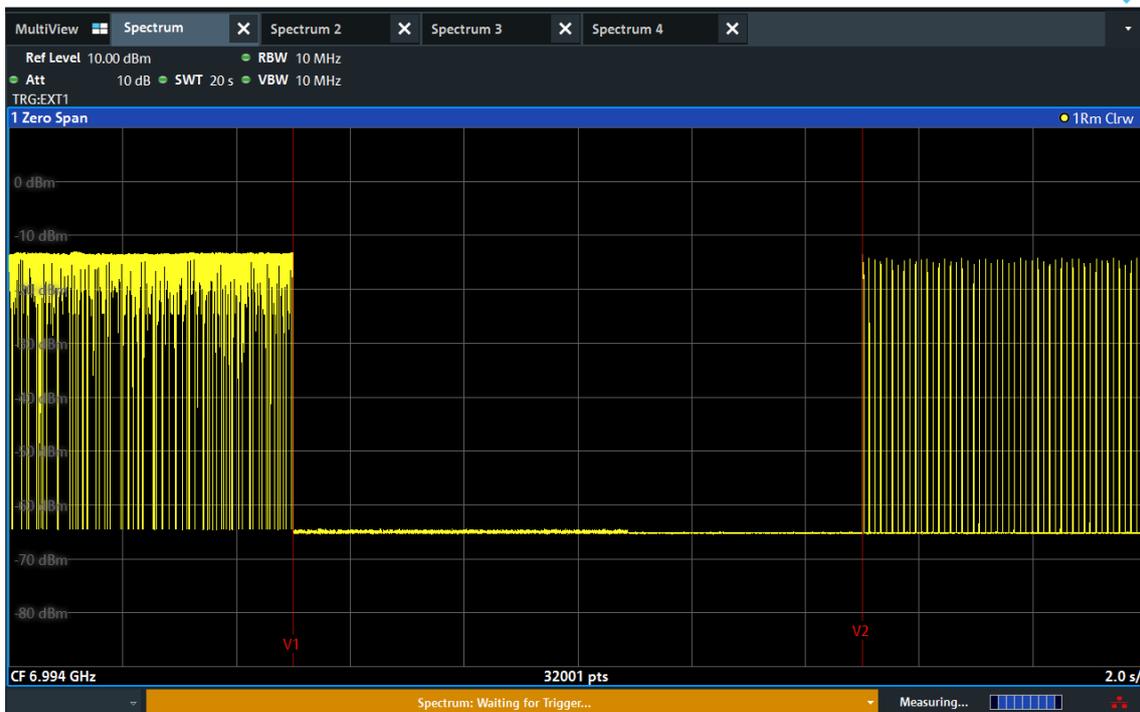

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 5950 MHz

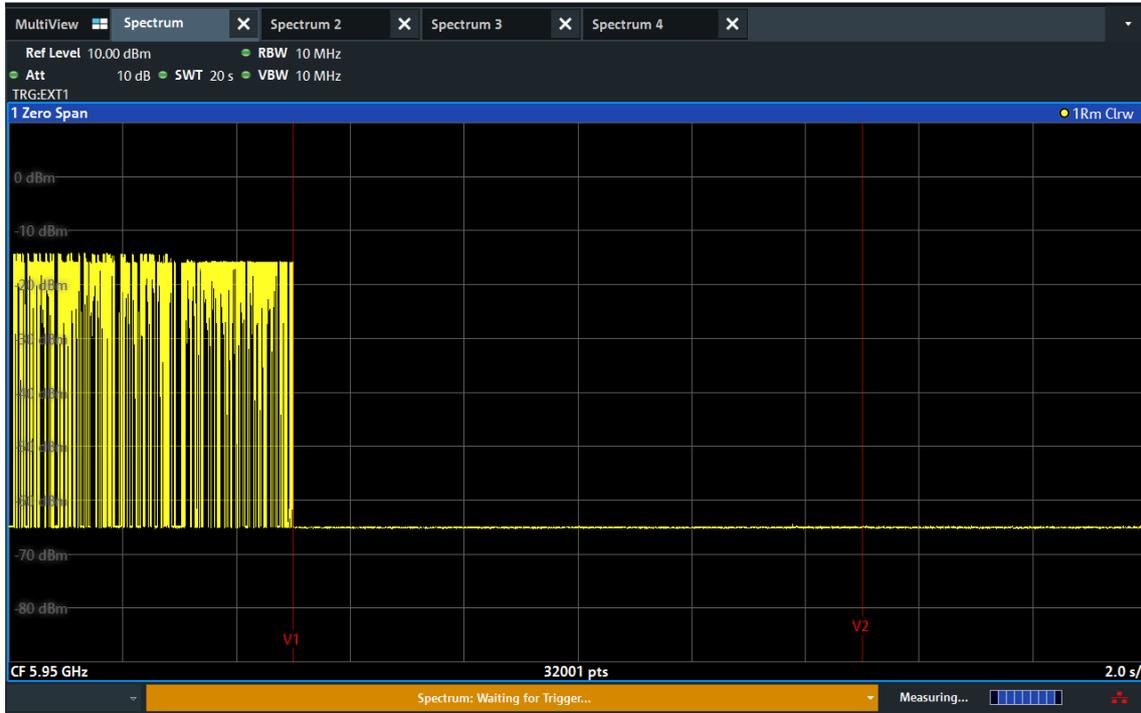


BW: 320 MHz / Frequency: 6100 MHz




Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 6260 MHz

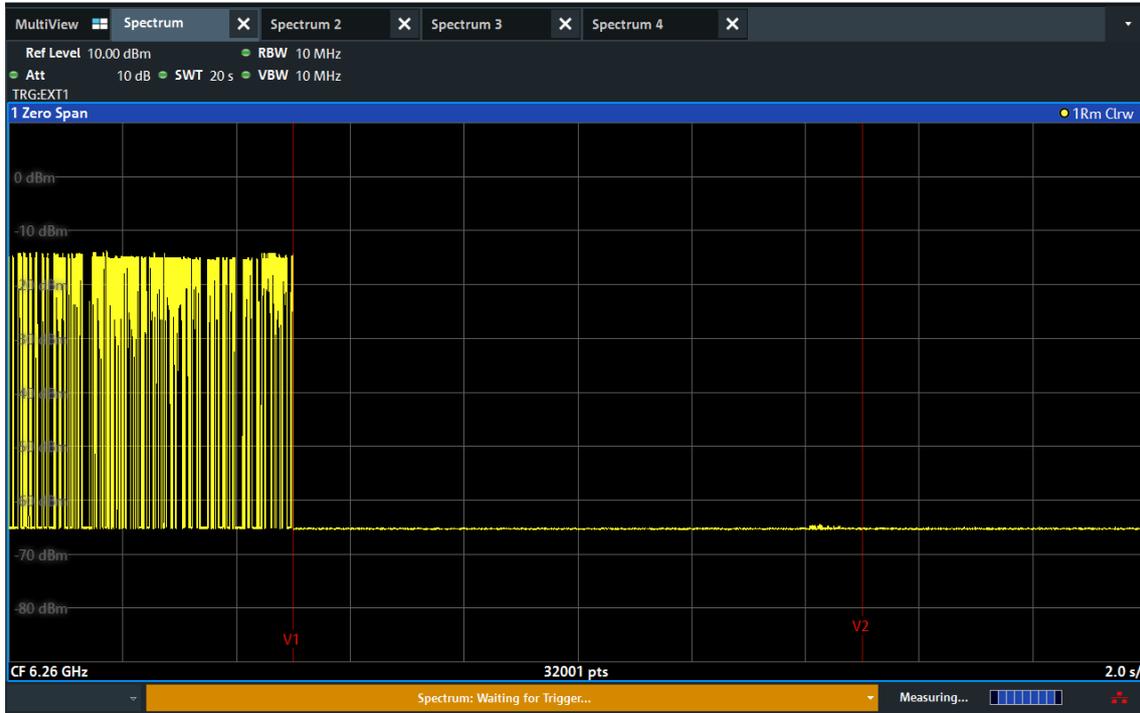


BW: 320 MHz / Frequency: 6270 MHz

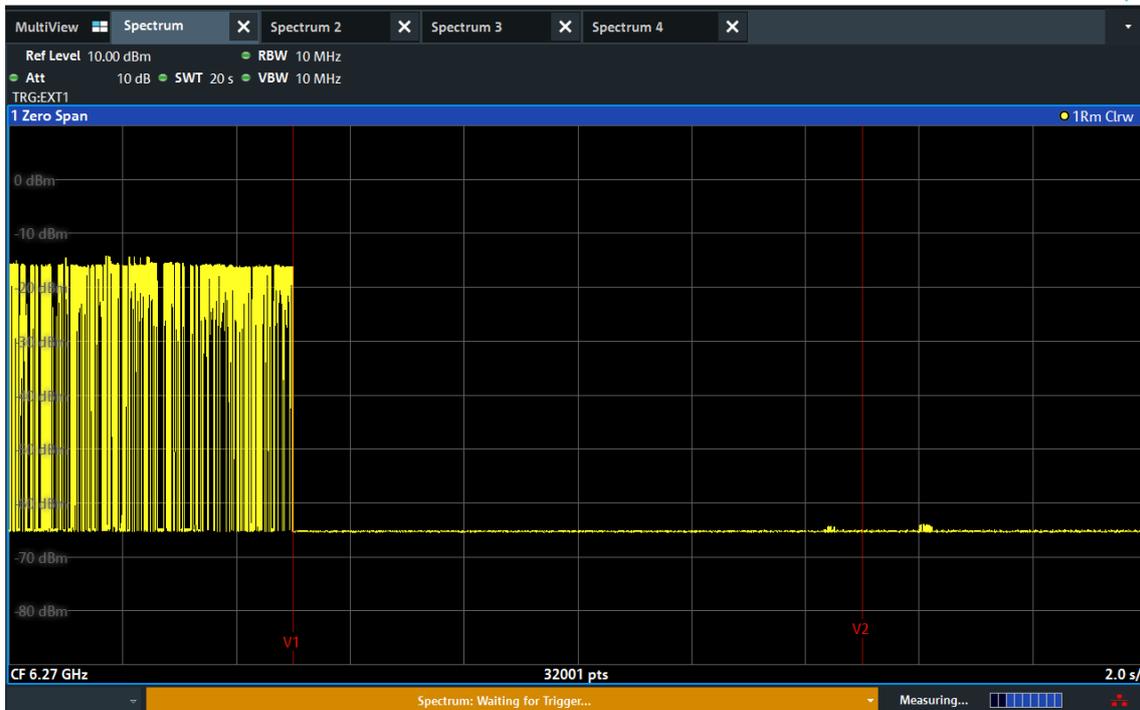


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 6420 MHz

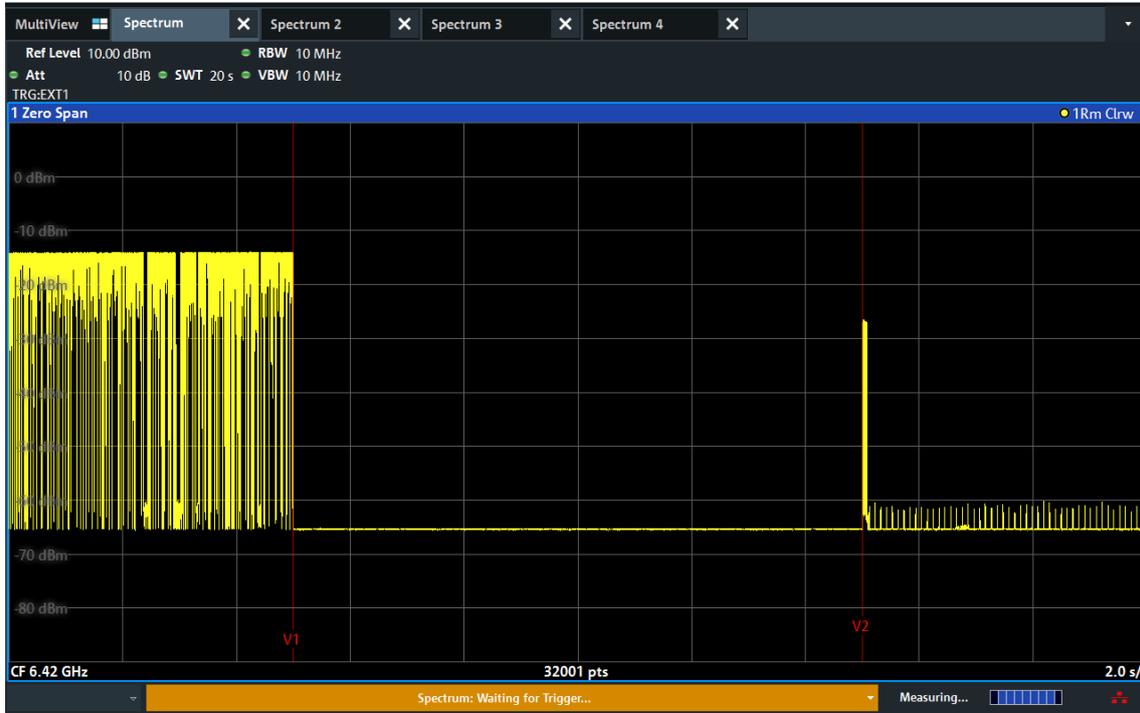


BW: 320 MHz / Frequency: 6580 MHz

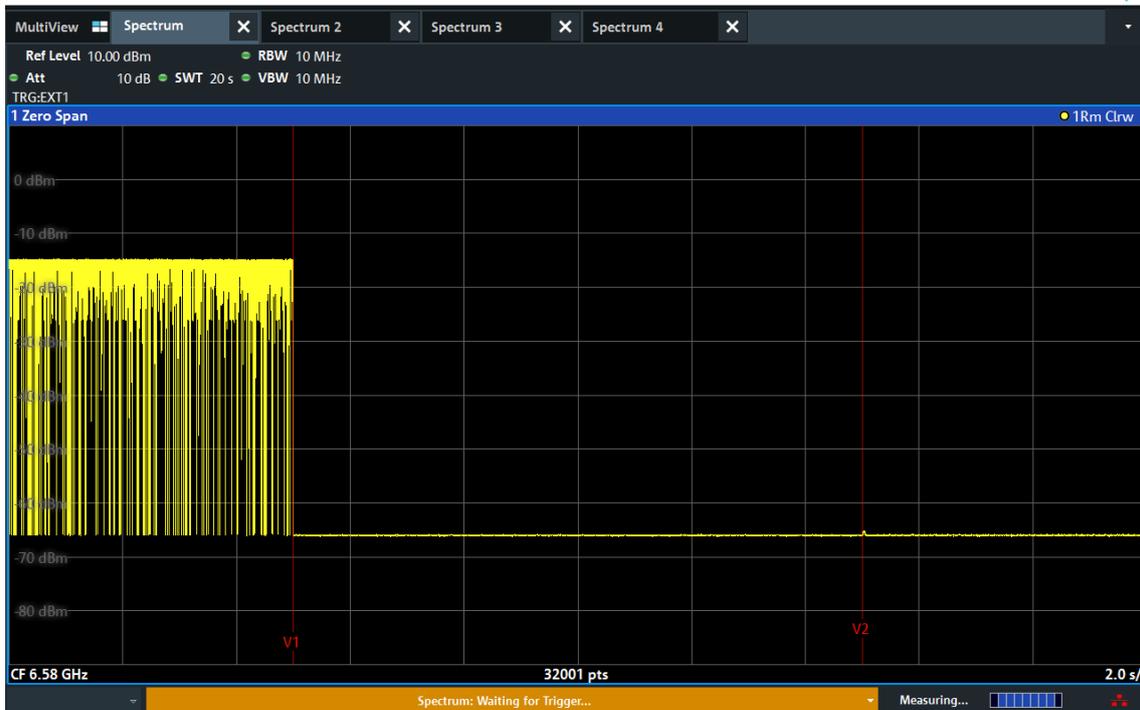


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.


BW: 320 MHz / Frequency: 6750 MHz

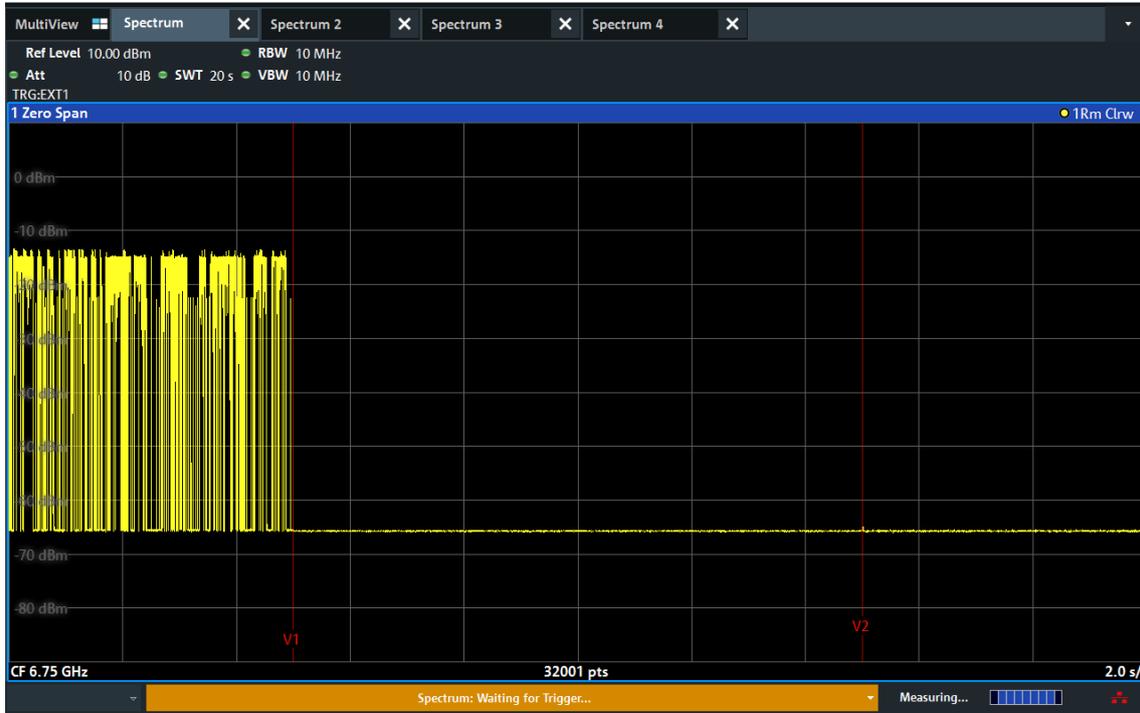

BW: 320 MHz / Frequency: 6900 MHz

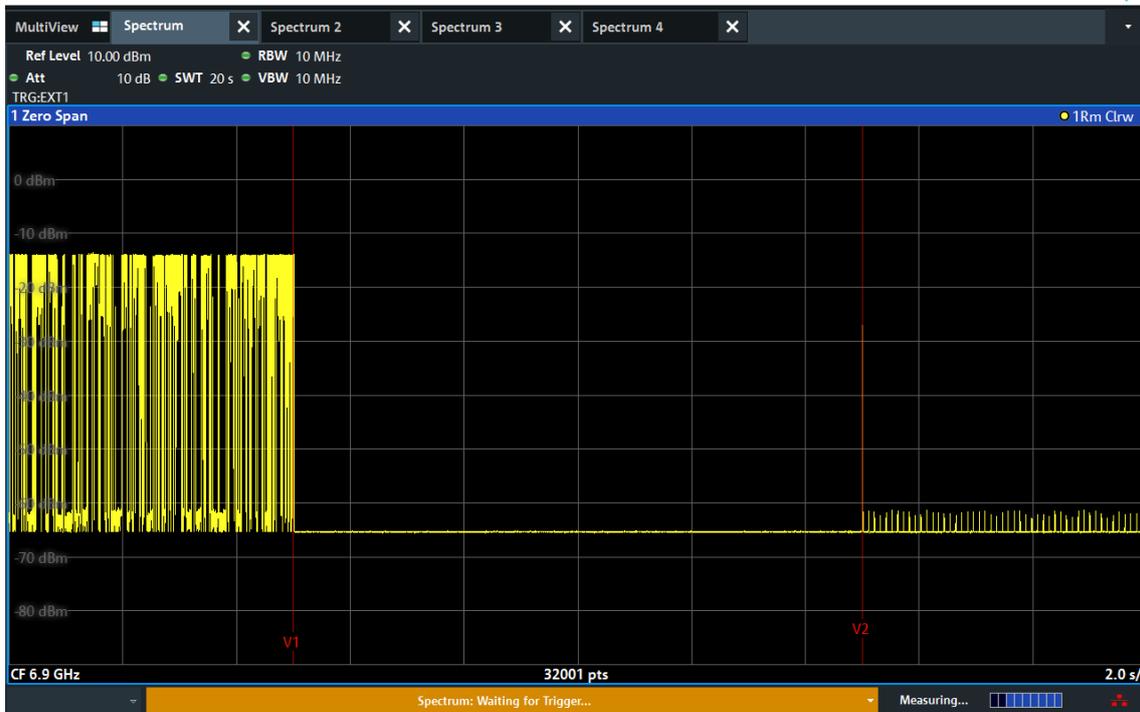

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

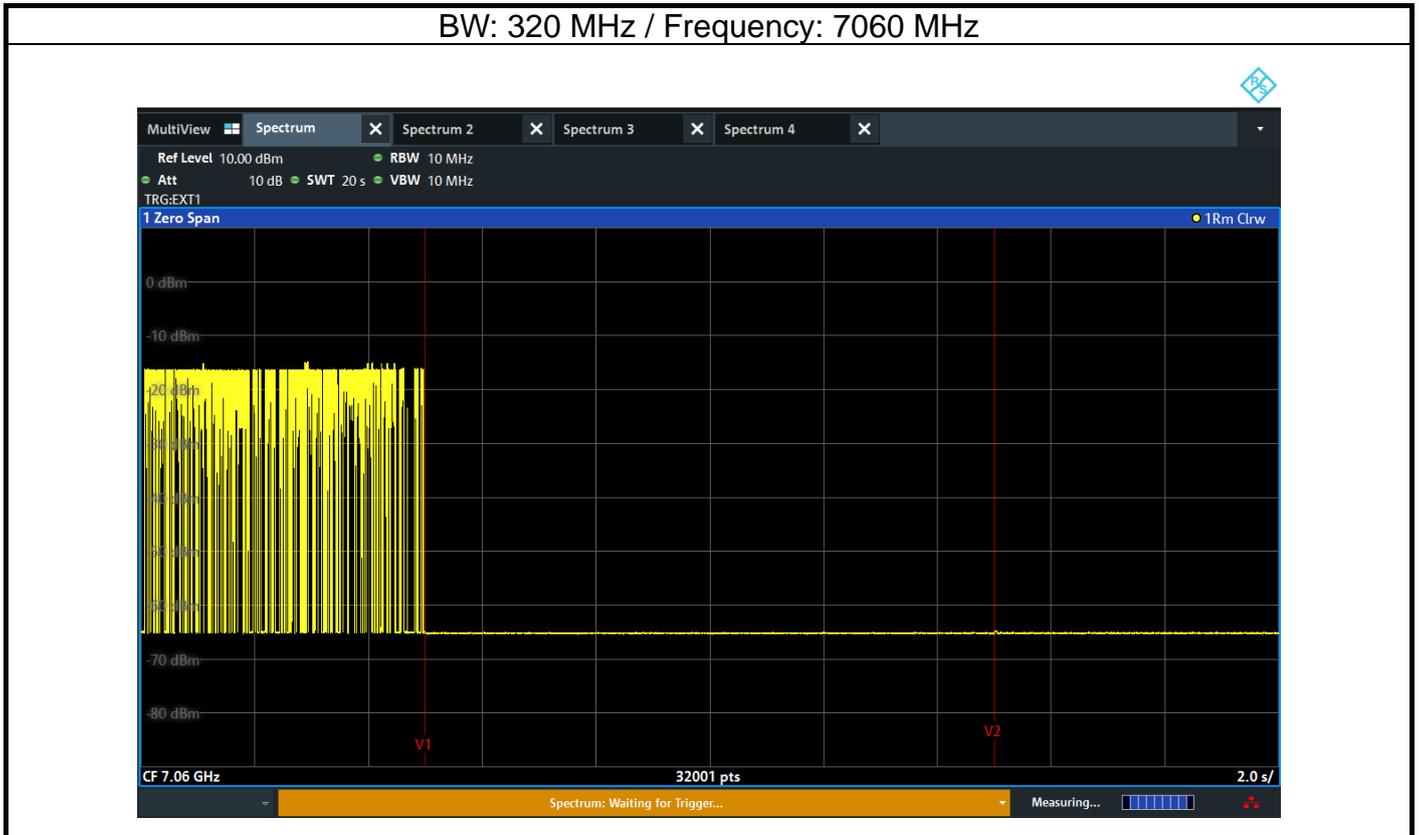


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.



Modulation Mode	be EHT320-OFDMA	Test Freq. (MHz)	6745
Power Phase	Line		

Test by : Brad Wu Temperature: 23°C Humidity: 65%

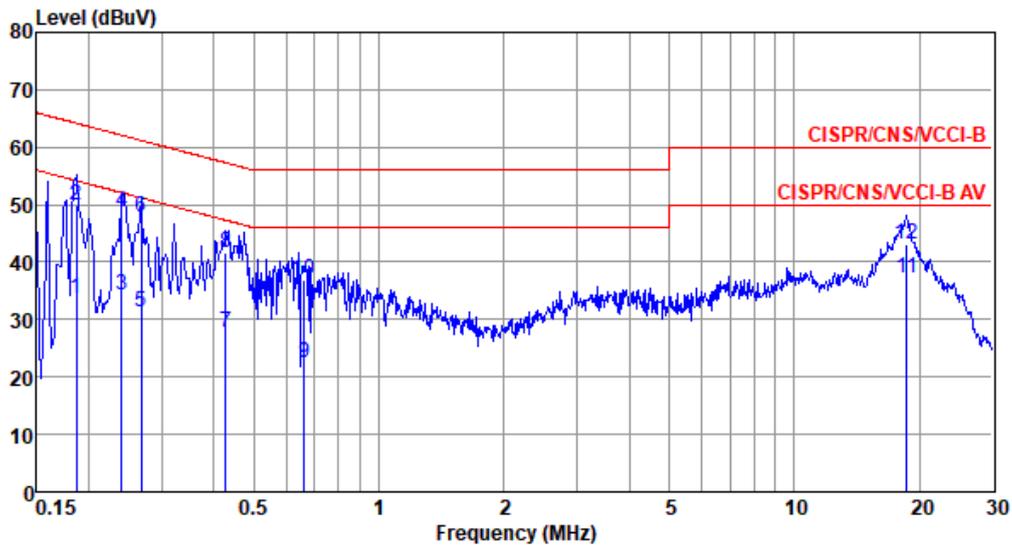


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.186	33.52	54.20	-20.68	23.55	9.64	0.08	0.25	Average
2	0.186	49.89	64.20	-14.31	39.92	9.64	0.08	0.25	QP
3	0.240	34.34	52.08	-17.74	24.34	9.64	0.08	0.28	Average
4	0.240	48.84	62.08	-13.24	38.84	9.64	0.08	0.28	QP
5	0.267	31.42	51.20	-19.78	21.41	9.64	0.08	0.29	Average
6	0.267	47.72	61.20	-13.48	37.71	9.64	0.08	0.29	QP
7	0.428	27.64	47.29	-19.65	17.58	9.64	0.09	0.33	Average
8	0.428	41.69	57.29	-15.60	31.63	9.64	0.09	0.33	QP
9	0.661	22.46	46.00	-23.54	12.35	9.65	0.10	0.36	Average
10	0.661	36.77	56.00	-19.23	26.66	9.65	0.10	0.36	QP
11*	18.622	37.32	50.00	-12.68	26.47	9.69	0.54	0.62	Average
12	18.622	43.00	60.00	-17.00	32.15	9.69	0.54	0.62	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	be EHT320-OFDMA	Test Freq. (MHz)	6745
Power Phase	Neutral		

Test by : Brad Wu Temperature: 23°C Humidity: 65%

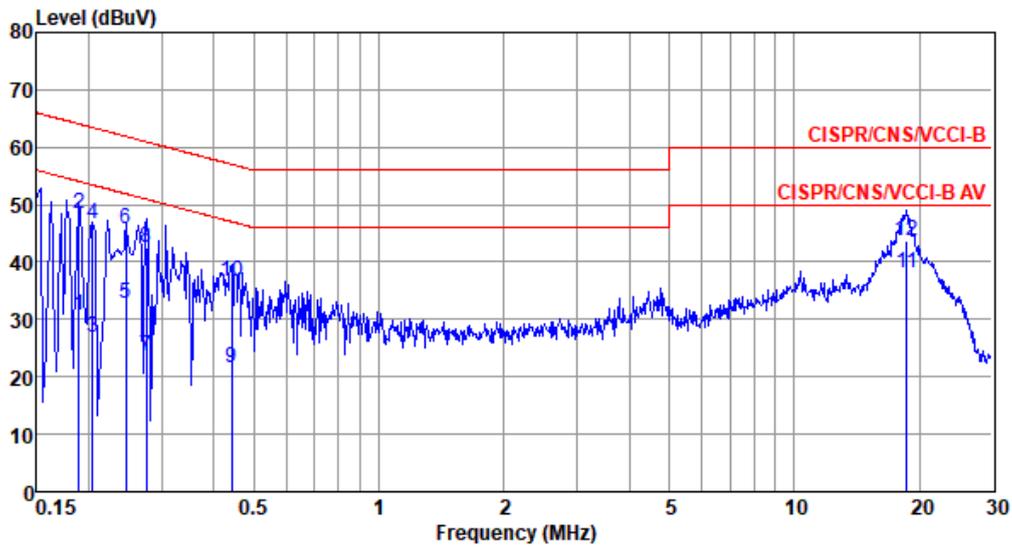

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.189	30.70	54.06	-23.36	20.79	9.64	0.08	0.19	Average
2	0.189	48.39	64.06	-15.67	38.48	9.64	0.08	0.19	QP
3	0.204	26.84	53.45	-26.61	16.92	9.64	0.08	0.20	Average
4	0.204	46.51	63.45	-16.94	36.59	9.64	0.08	0.20	QP
5	0.246	32.83	51.91	-19.08	22.89	9.64	0.08	0.22	Average
6	0.246	45.84	61.91	-16.07	35.90	9.64	0.08	0.22	QP
7	0.276	23.73	50.94	-27.21	13.78	9.64	0.08	0.23	Average
8	0.276	42.40	60.94	-18.54	32.45	9.64	0.08	0.23	QP
9	0.442	21.68	47.02	-25.34	11.69	9.63	0.09	0.27	Average
10	0.442	36.48	57.02	-20.54	26.49	9.63	0.09	0.27	QP
11*	18.622	38.12	50.00	-11.88	27.18	9.78	0.54	0.62	Average
12	18.622	43.70	60.00	-16.30	32.76	9.78	0.54	0.62	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).