



FCC TEST REPORT

(PART 90 Subpart R)

REPORT NO.: RF110418C25-1

MODEL NO.: UM1000 (refer to item 3.1 for more details)

FCC ID: MXF-WLTUBG-102

RECEIVED: Apr. 18, 2011

TESTED: Jun. 16, 2011

ISSUED: Jun. 30, 2011

APPLICANT: Gemtek Technology Co., Ltd.

ADDRESS: No.15-1, Zhonghua Rd, Hsinchu Industrial Park ,
Hsinchu County, Taiwan,R.O.C.303

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product, certification, approval or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3 GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES.....	9
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4 DESCRIPTION OF SUPPORT UNITS	13
4 TEST TYPES AND RESULTS	14
4.1 OUTPUT POWER MEASUREMENT	14
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	14
4.1.2 TEST INSTRUMENTS	15
4.1.3 TEST PROCEDURES	16
4.1.4 TEST SETUP	17
4.1.5 EUT OPERATING CONDITIONS	17
4.1.6 TEST RESULTS	18
4.2 FREQUENCY STABILITY MEASUREMENT	21
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	21
4.2.2 TEST INSTRUMENTS	21
4.2.3 TEST PROCEDURE	22
4.2.4 TEST SETUP	22
4.2.5 EUT OPERATING CONDITIONS	22
4.2.6 TEST RESULTS	23
4.3 OCCUPIED BANDWIDTH MEASUREMENT	24
4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	24
4.3.2 TEST INSTRUMENTS	24
4.3.3 TEST SETUP	24
4.3.4 TEST PROCEDURES	25
4.3.5 EUT OPERATING CONDITIONS	25
4.3.6 TEST RESULTS	26
4.4 EMISSION MASK MEASUREMENT	28
4.4.1 LIMITS OF EMISSION MASK MEASUREMENT	28
4.4.2 TEST INSTRUMENTS	28
4.4.3 TEST PROCEDURES	29
4.4.4 TEST SETUP	29
4.4.5 EUT OPERATING CONDITIONS	29
4.4.6 TEST RESULTS	30
4.5 BAND EDGE MEASUREMENT	32
4.5.1 LIMITS OF BAND EDGE MEASUREMENT	32
4.5.2 TEST INSTRUMENTS	32



A D T

4.5.3	TEST PROCEDURES	33
4.5.4	TEST SETUP	33
4.5.5	EUT OPERATING CONDITION	33
4.5.6	TEST RESULTS	34
4.6	CONDUCTED SPURIOUS EMISSIONS	36
4.6.1	LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	36
4.6.2	TEST INSTRUMENTS	36
4.6.3	TEST PROCEDURE	37
4.6.4	TEST SETUP	37
4.6.5	EUT OPERATING CONDITIONS	37
4.6.6	TEST RESULTS	38
4.7	RADIATED EMISSION MEASUREMENT	43
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	43
4.7.2	TEST INSTRUMENTS	43
4.7.3	TEST PROCEDURES	44
4.7.4	DEVIATION FROM TEST STANDARD	44
4.7.5	TEST SETUP	45
4.7.6	EUT OPERATING CONDITIONS	45
4.7.7	TEST RESULTS	46
5	INFORMATION ON THE TESTING LABORATORIES	48
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	49



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	N/A	Jun. 30, 2011

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 90.542(a)(7)	Maximum Peak Output Power Limit: max. 3 watts e.r.p peak power	PASS	Meet the requirement of limit. Minimum passing margin is 18.8dBm at 795.5MHz.
2.1055 90.539	Frequency Stability	PASS	Meet the requirement of limit.
2.1049	Occupied Bandwidth	PASS	Meet the requirement of limit.
90.210(n)	Emission Mask	PASS	Meet the requirement of limit.
90.543(e)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 90.543(e)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1051 90.543(e)(2)	Emission in the 769–775 MHz and 799–805 MHz band	PASS	Meet the requirement of limit.
2.1053 90.543(e)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -23.4dB at 2393.04MHz.
2.1053 90.543(f)	Emissions in the band 1559–1610 MHz	PASS	Meet the requirement of limit. Minimum passing margin is -6.2dB at 1595.36MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	30MHz ~ 200MHz	3.19 dB
	200MHz ~1000MHz	3.21 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	LTE USB Modem
MODEL NO.	UM1000 (refer to NOTE for more details)
FCC ID	MXF-WLTUBG-102
POWER SUPPLY	5.0Vdc
MODULATION TECHNOLOGY	LTE Band 14, QPSK, 16QAM
MULTIPLE ACCESS METHOD	FDD
DUPLEX METHOD	FDD
FREQUENCY RANGE	793-798MHz
CHANNEL BANDWIDTH	5MHz
UE CATEGORY	3
MAX. ERP POWER	18.8dBm (75.9mW)
ANTENNA TYPE	Dipole antenna with 0dBi gain
OPERATION TEMPERATURE RANGE	-10°C ~ 40°C
DATA CABLE	N/A
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	N/A

NOTE:

- All models are listed as below.

BRAND	MODEL	DESCRIPTION
Motorola	UM1000	All models are electrically identical, different brands and model names are for marketing purpose.
Gemtek	WLTUBG-102	

- After pretest of output power and spurious emission under below configurations, **QPSK with 1RB at upper edge** was found to be worst case and was selected for the final test.

MODULATION	RB SETTING
QPSK	1 RB allocated at the upper edge
QPSK	1 RB allocated at the lower edge
QPSK	50% RB allocation centered
QPSK	100% RB allocation
16QAM	1 RB allocated at the upper edge
16QAM	1 RB allocated at the lower edge
16QAM	50% RB allocation centered
16QAM	100% RB allocation

- The above EUT information is declared by manufacturer and for more detailed feature description, please refer to the manufacturer's specifications or User's Manual.


4.

3.2 DESCRIPTION OF TEST MODES

One channel had been tested.

CHANNEL BANDWIDTH	5MHz
CHANNEL	23355
FREQUENCY (MHz)	795.5

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

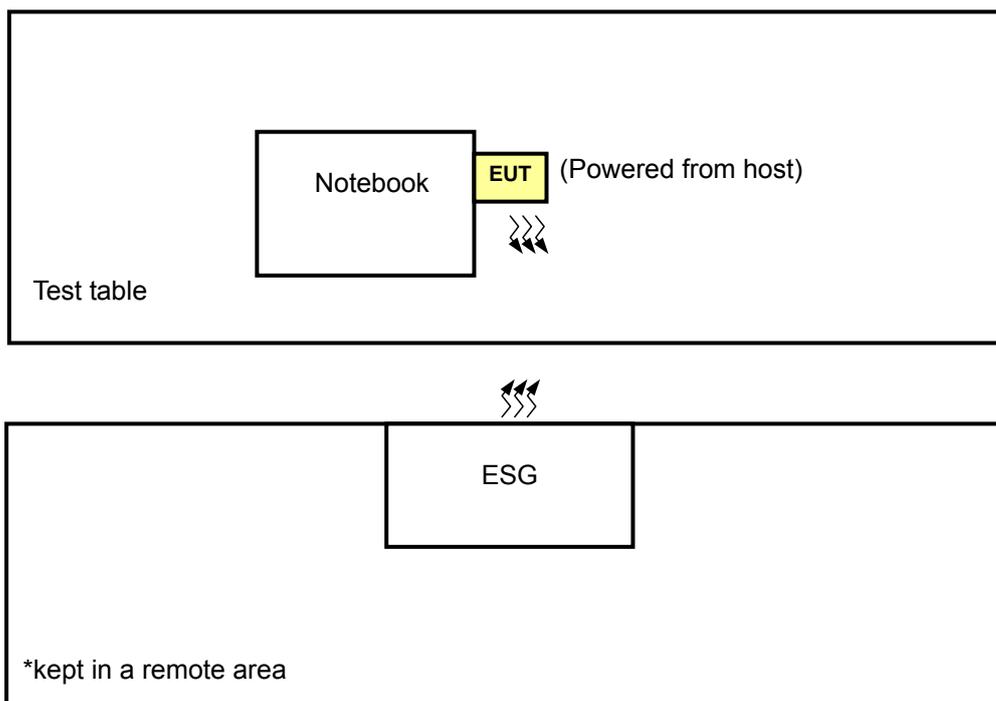

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	OB	BE	CE	RE<1G	RE≥1G	
-	V	V	V	V	V	V	V	-

Where **OP**: Output power
FS: Frequency stability
OB: Occupied bandwidth
BE: Band edge
CE: Conducted spurious emissions
RE<1G: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	OPERATING BAND	FREQUENCY BAND (MHz)	TESTED FREQUENCY (MHz)	MODULATION TECHNOLOGY
-	LTE	793-798	795.5	QPSK, 16QAM

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	OPERATING BAND	FREQUENCY BAND (MHz)	TESTED FREQUENCY (MHz)	MODULATION TECHNOLOGY
-	LTE	793-798	795.5	QPSK

OCCUPIED BANDWIDTH MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	OPERATING BAND	FREQUENCY BAND (MHz)	TESTED FREQUENCY (MHz)	MODULATION TECHNOLOGY
-	LTE	793-798	795.5	QPSK, 16QAM

BAND EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	OPERATING BAND	FREQUENCY BAND (MHz)	TESTED FREQUENCY (MHz)	MODULATION TECHNOLOGY
-	LTE	793-798	795.5	QPSK

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	OPERATING BAND	FREQUENCY BAND (MHz)	TESTED FREQUENCY (MHz)	MODULATION TECHNOLOGY
-	LTE	793-798	795.5	QPSK

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	OPERATING BAND	FREQUENCY BAND (MHz)	TESTED FREQUENCY (MHz)	MODULATION TECHNOLOGY
-	LTE	793-798	795.5	QPSK

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	OPERATING BAND	FREQUENCY BAND (MHz)	TESTED FREQUENCY (MHz)	MODULATION TECHNOLOGY
-	LTE	793-798	795.5	QPSK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
OP	23deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Long Chen
FS	23deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Long Chen
OB	23deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Long Chen
BE	23deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Long Chen
CE	23deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Long Chen
RE < 1G	23deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Long Chen
RE ≥ 1G	27deg. C, 65%RH, 1010 hPa	120Vac, 60Hz	Sun Lin

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a LTE product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 90

ANSI C63.4-2003

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	D820	21498926752	QDS-BRCM1005-D
2	SIGNAL GENERATOR	Agilent	E4438C	MY47271120	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	N/A

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 2 acted as a communication partner to transfer data.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Per FCC Part 90.542(a)(6)(7),

Control stations and mobile stations transmitting in the 763–768 MHz band and the 793–798 MHz band are limited to 30 watts ERP.

Portable stations (hand-held devices) transmitting in the 763–768 MHz band and the 793–798 MHz band are limited to 3 watts ERP.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 27, 2010	Dec. 26, 2011
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	100115	Aug. 02, 2010	Aug. 01, 2011
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Apr. 12, 2011	Apr. 11, 2012
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-408	Jan. 06, 2011	Jan. 05, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 27, 2010	Dec. 26, 2011
Preamplifier Agilent	8449B	3008A01961	Nov. 02, 2010	Nov. 01, 2011
Preamplifier Agilent	8447D	2944A10738	Nov. 02, 2010	Nov. 01, 2011
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250792/4	Sep. 03, 2010	Sep. 02, 2011
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283397/4	Sep. 03, 2010	Sep. 02, 2011
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Sep. 03, 2010	Sep. 02, 2011
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table ADT.	TT100.	TT93021704	NA	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA	NA


- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 4.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC7450F-4.

4.1.3 TEST PROCEDURES

ERP MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation. The power was measured with Angilent Spectrum Analyzer. All measurements were done at 1 channel. RWB and VBW is 5MHz for LTE
- b. E.I.R.P power measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- d. EIRP = Output power level of S.G - TX cable loss + Antenna gain of substitution horn
- e. E.R.P = E.I.R.P- 2.15 dB

4.1.4 TEST SETUP

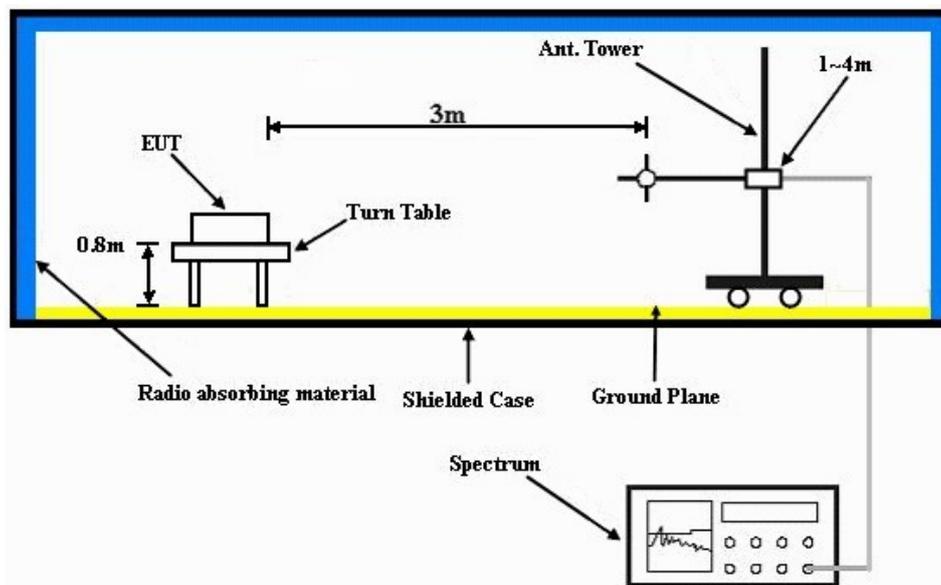

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.5 EUT OPERATING CONDITIONS

- 1) Upload test waveform to signal generator and produce test signal to link up with EUT.
- 2) Execute test tool to control EUT transmit at specific modulation, RB size, frequency and output power level continuously.

Note: Test waveform and tool are provided by client.

4.1.6 TEST RESULTS

CONDUCTED AVERAGE POWER TABLE, QPSK

CONDUCTED OUTPUT POWER (QPSK 1 RB ALLOCATED AT THE LOWER EDGE)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	mW
23355	795.5	1.21	21.00	22.21	166.3

CONDUCTED OUTPUT POWER (QPSK 1 RB ALLOCATED AT THE UPPER EDGE)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	mW
23355	795.5	1.64	21.00	22.64	183.7

CONDUCTED OUTPUT POWER (QPSK 50% RB ALLOCATION CENTERED)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	mW
23355	795.5	0.22	21.00	21.22	132.4

CONDUCTED OUTPUT POWER (QPSK 100% RB ALLOCATION)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	mW
23355	795.5	0.21	21.00	21.21	132.1

CONDUCTED AVERAGE POWER TABLE, 16QAM

CONDUCTED OUTPUT POWER (16QAM 1 RB ALLOCATED AT THE LOWER EDGE)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	mW
23355	795.5	0.53	21.00	21.53	142.2

CONDUCTED OUTPUT POWER (16QAM 1 RB ALLOCATED AT THE UPPER EDGE)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	mW
23355	795.5	0.72	21.00	21.72	148.6

CONDUCTED OUTPUT POWER (16QAM 50% RB ALLOCATION CENTERED)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	mW
23355	795.5	-0.59	21.00	20.41	109.9

CONDUCTED OUTPUT POWER (16QAM 100% RB ALLOCATION)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	mW
23355	795.5	-0.69	21.00	20.31	107.4

- REMARKS:** 1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Attenuator.



A D T

ERP

ERP POWER (QPSK 1 RB ALLOCATED AT THE LOWER EDGE)					
CHANNEL NO.	FREQUENCY (MHz)	S.G LEVEL (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	mW
23355	795.5	27.1	-8.3	18.8	75.9

- REMARKS:**
1. Output Power (dBm) = S.G Level (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Gain of Substitution horn + TX cable loss.
 3. The value in bold is the worst.



4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency stability of mobile, portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY44360124	Dec. 29, 2010	Dec. 28, 2011
Signal Generator Agilent	E4438C	MY47271120	Jul. 17, 2010	Jul. 16, 2011
RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
WIT Standard Temperature & Humidity Chamber	TH-4S-C	W981030	Jun. 28, 2010	Jun. 27, 2011


NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

- a. The oven room could control the temperatures and humidity.
- b. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- c. Laptop pc is connected the external power supply to control the AC input power. The various Volts from the minimum 126.5 Volts to 93.5 Volts. Each step shall be record the frequency error rate.
- d. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- e. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.4 TEST SETUP

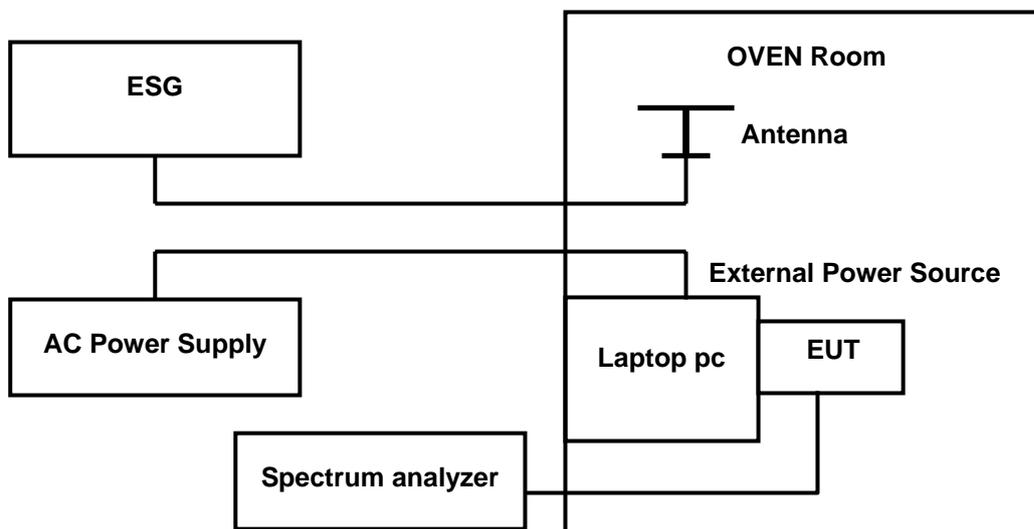

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS

AFC FREQUENCY ERROR VS. VOLTAGE		
VOLTAGE (Volts)	MEASURED ERROR (ppm)	LIMIT (ppm)
126.5	-0.502	1.25
93.5	-0.497	

AFC FREQUENCY ERROR VS. TEMP.		
TEMP. (°C)	MEASURED ERROR (ppm)	LIMIT (ppm)
50	-0.425	1.25
40	-0.464	
30	-0.468	
20	-0.481	
10	-0.509	
0	-0.517	
-10	-0.505	
-20	-0.500	
-30	-0.493	

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT


The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Mini-Circuits Power Splitter	ZAPD-4	NA	Jun. 29, 2010	Jun. 28, 2011
Hewlett Packard RF cable	8120-6192	274388	Oct. 22, 2010	Oct. 21, 2011
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Suhner RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
Agilent Spectrum Analyzer	E4446A	MY44360124	Dec. 29, 2010	Dec. 28, 2011
Signal Generator Agilent	E4438C	MY47271120	Jul. 17, 2010	Jul. 16, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SETUP

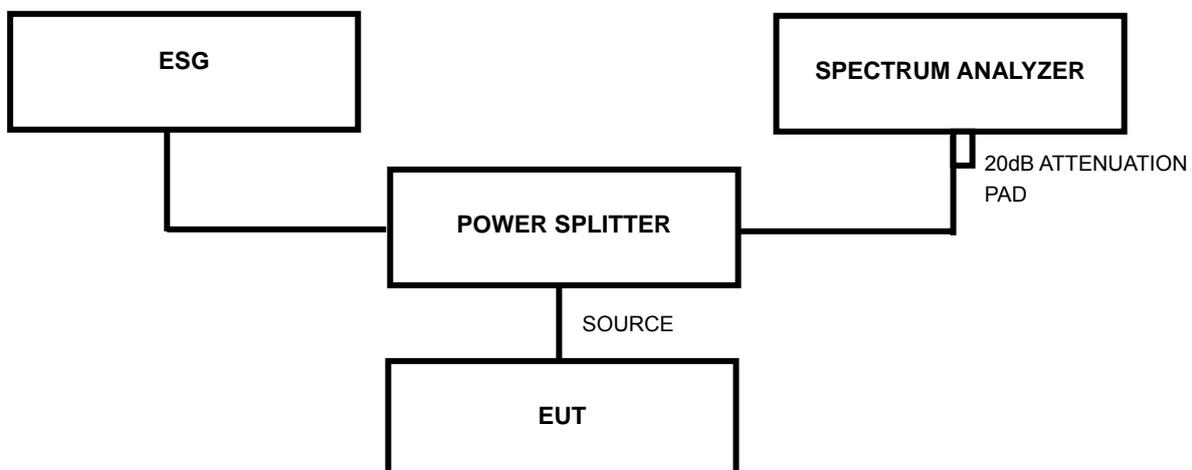

4.3.4 TEST PROCEDURES

- a. The conducted occupied bandwidth used the power splitter via EUT RF power connector between signal generator and spectrum analyzer.
- b. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.5 EUT OPERATING CONDITIONS

Same as 4.1.5.




A D T

4.3.6 TEST RESULTS

QPSK

FREQUENCY (MHz)	MAX. OUTPUT POWER -26 dBc BANDWIDTH (MHz)
795.5	4.4975

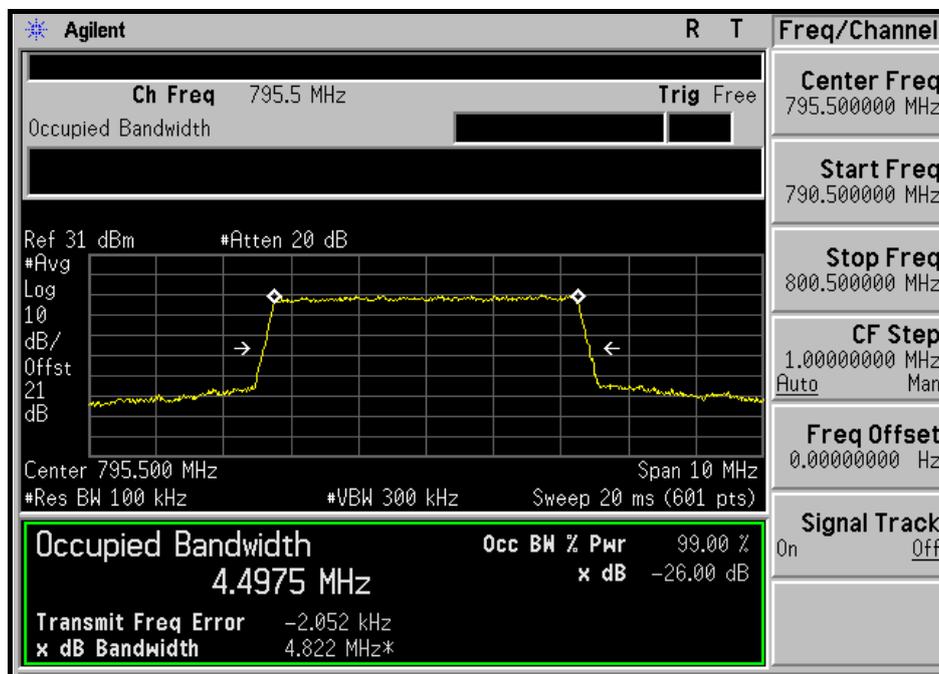




A D T

16QAM

FREQUENCY (MHz)	MAX. OUTPUT POWER -26 dBc BANDWIDTH (MHz)
795.5	4.4973

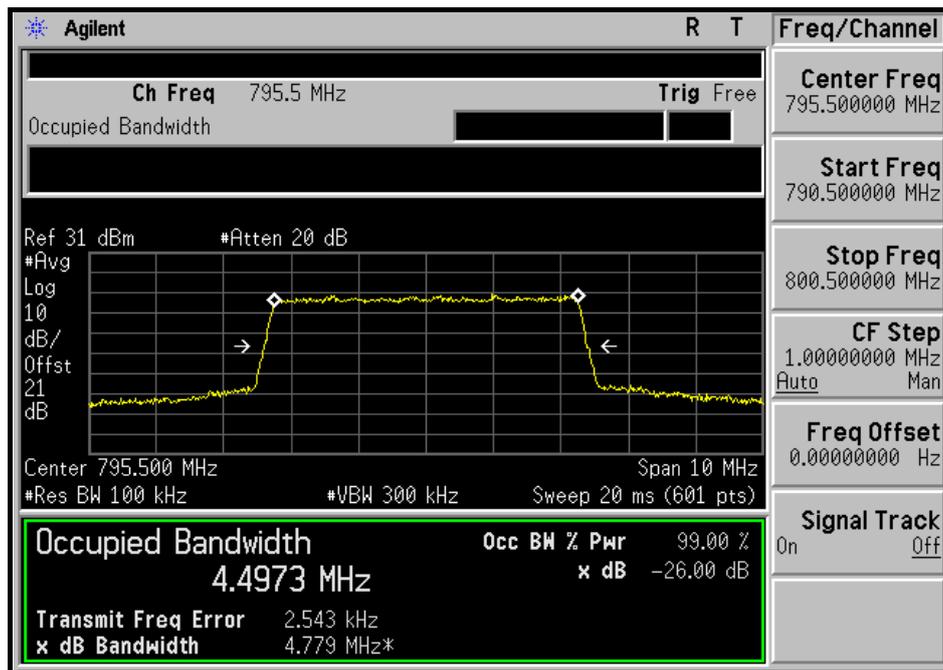

4.4 EMISSION MASK MEASUREMENT

4.4.1 LIMITS OF EMISSION MASK MEASUREMENT

Per 90.210(n), Emission mask shall comply with 90.210(b)

(1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.

(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.

(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Mini-Circuits Power Splitter	ZAPD-4	NA	Jun. 29, 2010	Jun. 28, 2011
Hewlett Packard RF cable	8120-6192	274388	Oct. 22, 2010	Oct. 21, 2011
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Suhner RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
Agilent Spectrum Analyzer	E4446A	MY44360124	Dec. 29, 2010	Dec. 28, 2011
Signal Generator Agilent	E4438C	MY47271120	Jul. 17, 2010	Jul. 16, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. The power was measured with Agilent Spectrum Analyzer. All measurements were done at 1 channel.
2. The measurement used the power splitter via EUT RF power connector between signal generator and spectrum analyzer.
3. Record the test plot.

4.4.4 TEST SETUP


Same as Item 4.3.3

4.4.5 EUT OPERATING CONDITIONS


Same as 4.1.5.

4.4.6 TEST RESULTS


1RB LOWER

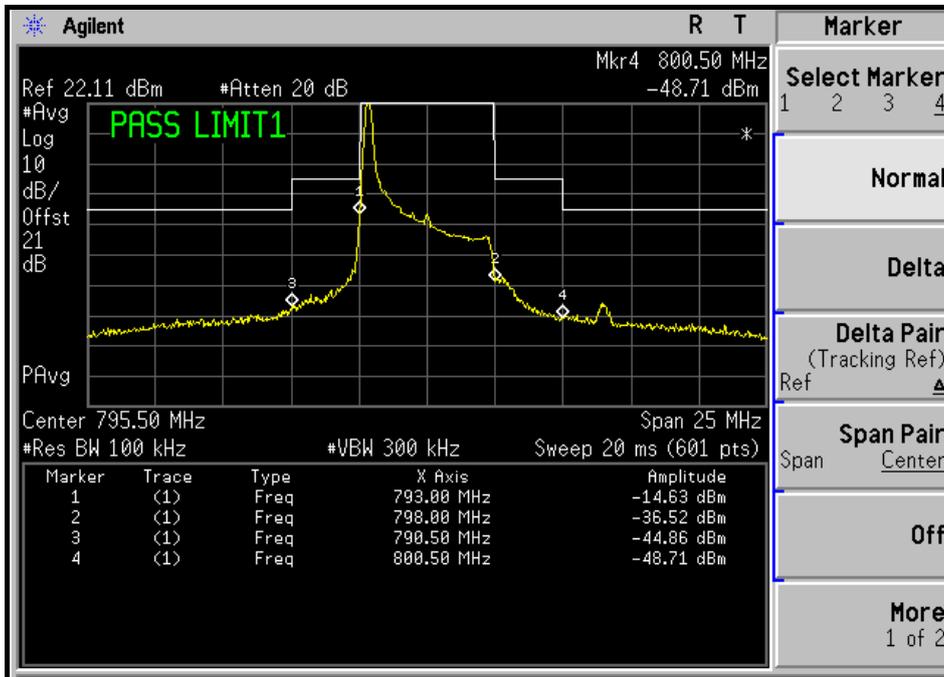


1RB UPPER

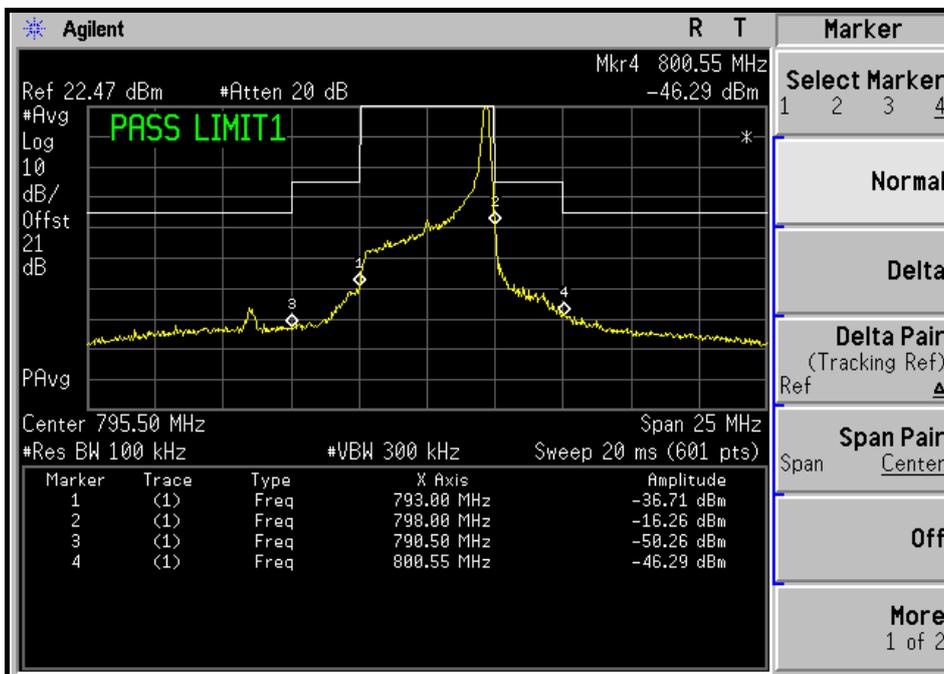

50% RB

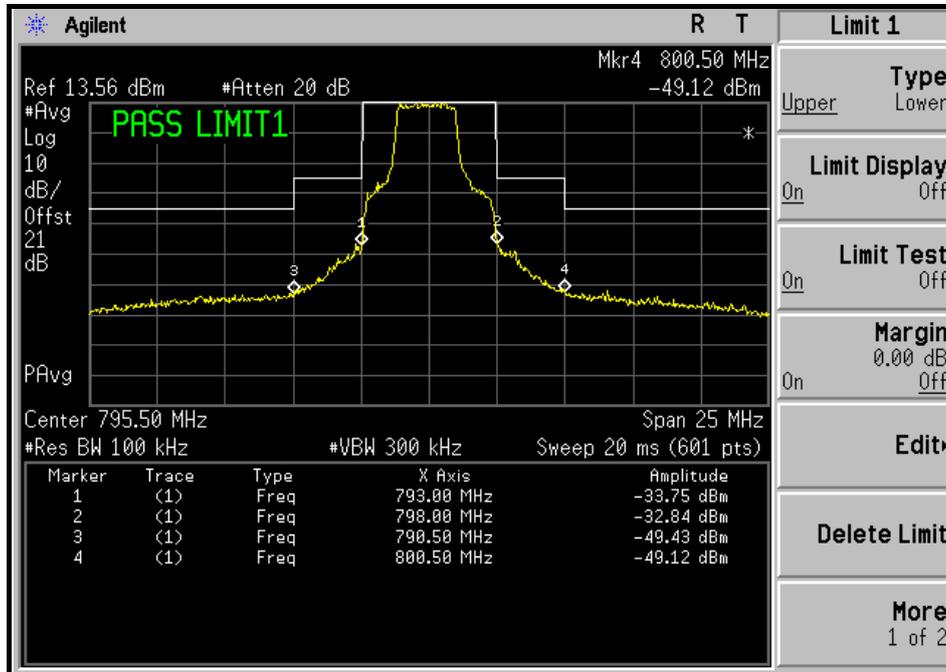

100% RB

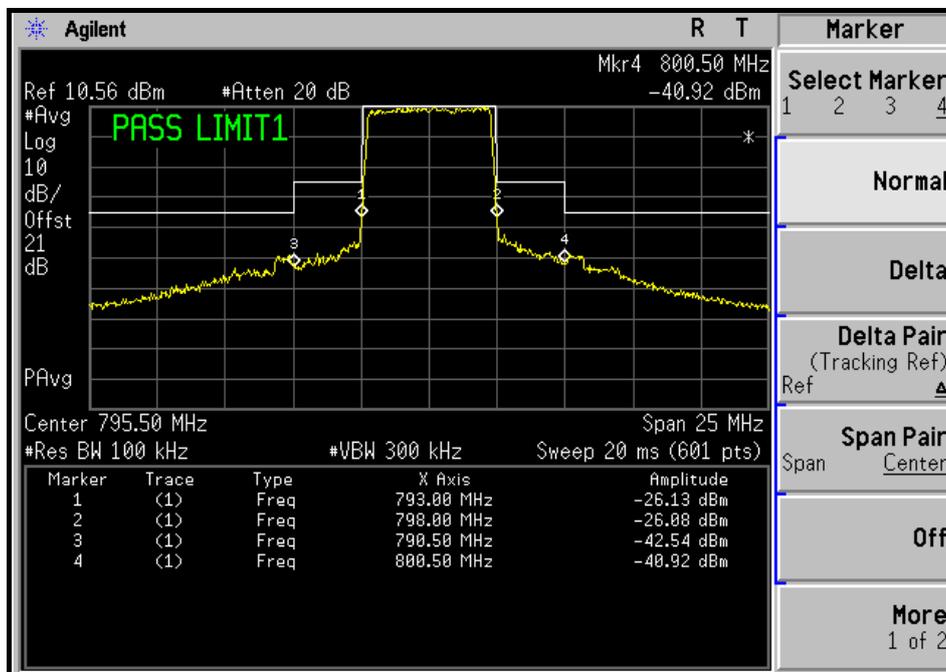

4.5 BAND EDGE MEASUREMENT

4.5.1 LIMITS OF BAND EDGE MEASUREMENT

On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10\log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1MHz bandwidth for frequencies greater than 1 GHz .

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Mini-Circuits Power Splitter	ZAPD-4	NA	Jun. 29, 2010	Jun. 28, 2011
Hewlett Packard RF cable	8120-6192	274388	Oct. 22, 2010	Oct. 21, 2011
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Suhner RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
Agilent Spectrum Analyzer	E4446A	MY44360124	Dec. 29, 2010	Dec. 28, 2011
Signal Generator Agilent	E4438C	MY47271120	Jul. 17, 2010	Jul. 16, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with Angilent Spectrum Analyzer. All measurements were done at 1 channel
- b. The band edge measurement used the power splitter via EUT RF power connector between signal generator and spectrum analyzer. This splitter loss, attenuator loss and cable loss are the worst loss 21 dB in the transmitted path track.
- c. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz.
- d. Record the max trace plot into the test report.

4.5.4 TEST SETUP

Same as Item 4.3.3


4.5.5 EUT OPERATING CONDITION

Same as 4.1.5.


4.5.6 TEST RESULTS

1RB ALLOCATED

LOWER BAND EDGE

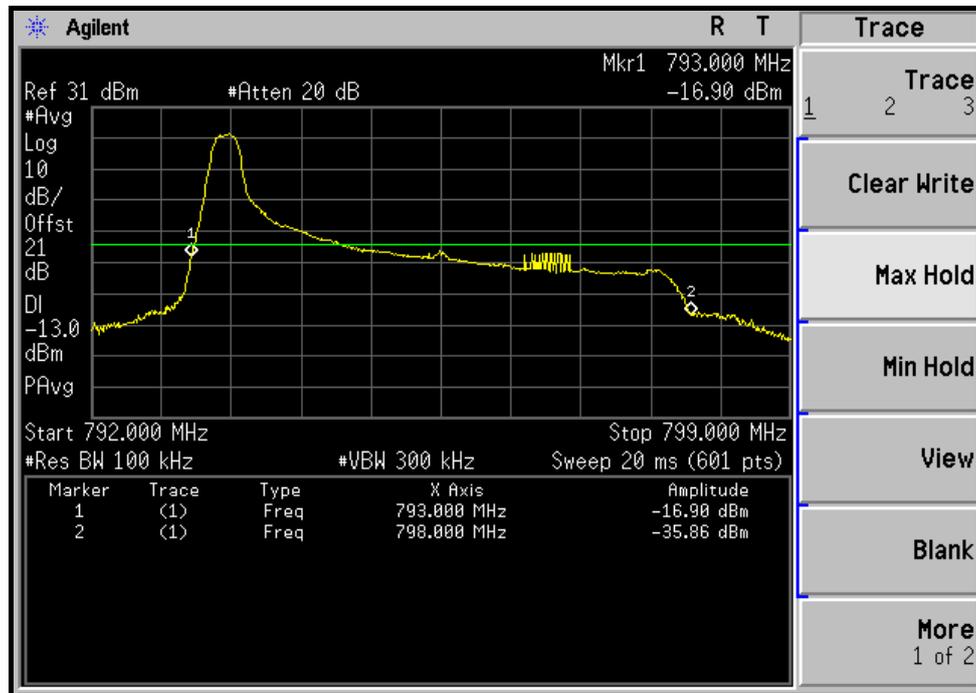


HIGHER BAND EDGE

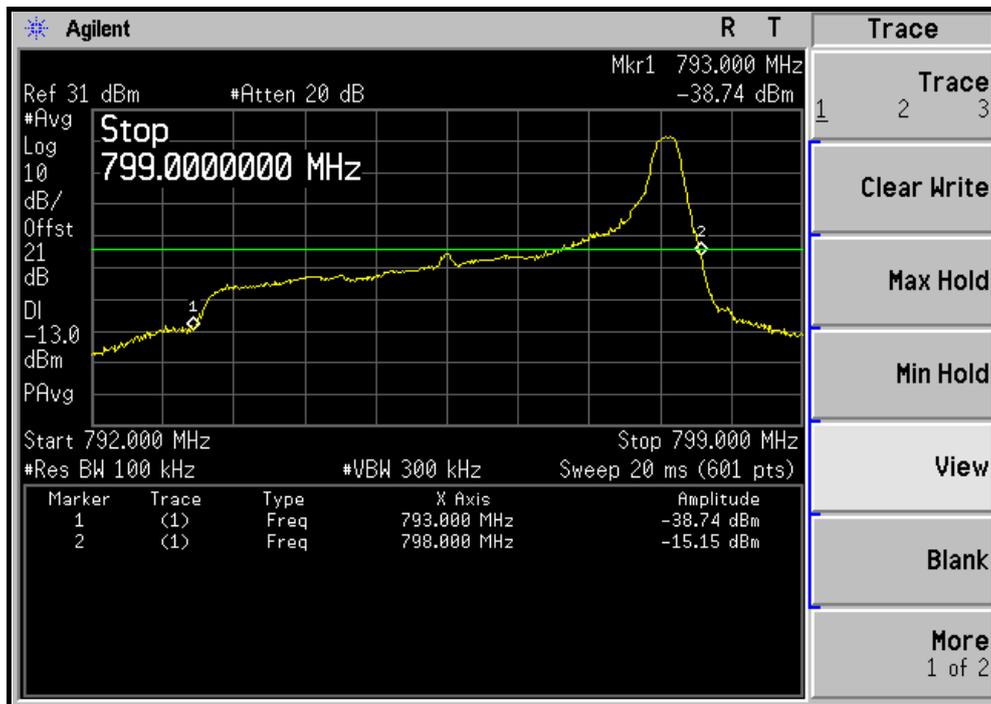



A D T

100% RB ALLOCATED

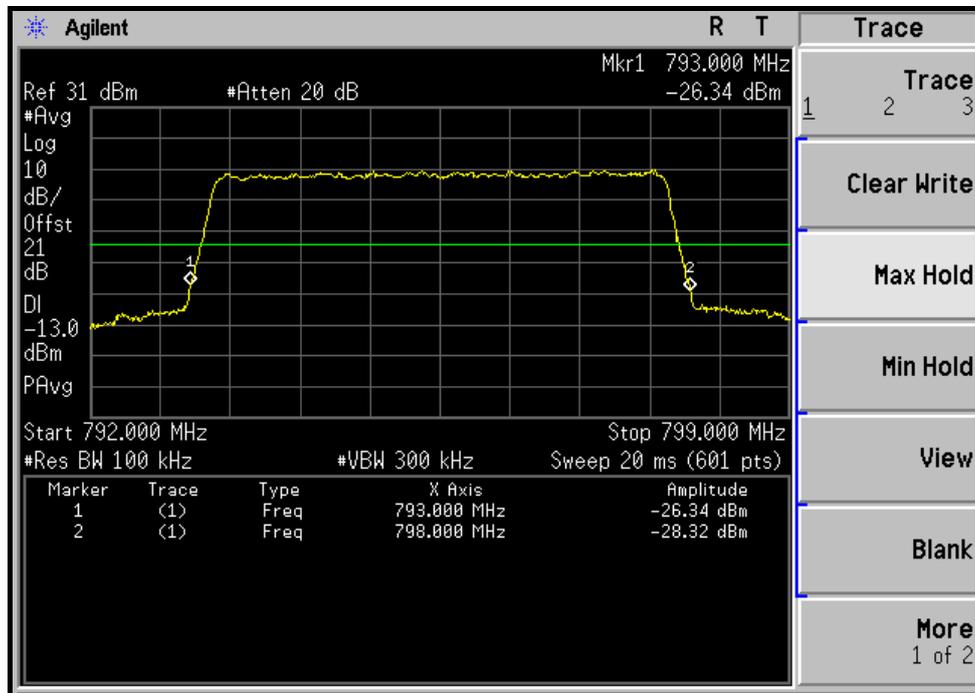



4.6 CONDUCTED SPURIOUS EMISSIONS

4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm .

On all frequencies between 769 – 775 MHz and 799 – 805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Mini-Circuits Power Splitter	ZAPD-4	NA	Jun. 29, 2010	Jun. 28, 2011
Hewlett Packard RF cable	8120-6192	274388	Oct. 22, 2010	Oct. 21, 2011
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Suhner RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
Agilent Spectrum Analyzer	E4446A	MY44360124	Dec. 29, 2010	Dec. 28, 2011
Wainwright Instruments Band Reject Filter	WHKS1000-6SS	SN1	Mar. 23, 2011	Mar. 22, 2012
Wainwright Instruments High Pass Filter	WHK3.1/18G-10SS	SN3	Jun. 29, 2010	Jun. 28, 2011
Signal Generator Agilent	E4438C	MY47271120	Jul. 17, 2010	Jul. 16, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with Angilent Spectrum Analyzer. All measurements were done at 1 channel.
- b. The conducted spurious emission used the power splitter via EUT RF power connector between signal generator and spectrum analyzer.
- c. When the spectrum scanned from 9 kHz to 8GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB=1MHz, VB=3MHz.

4.6.4 TEST SETUP

Same as 4.3.3


4.6.5 EUT OPERATING CONDITIONS

Same as 4.1.5.


4.6.6 TEST RESULTS

1 RB ALLOCATED AT THE UPPER EDGE

30MHz ~ 2GHz

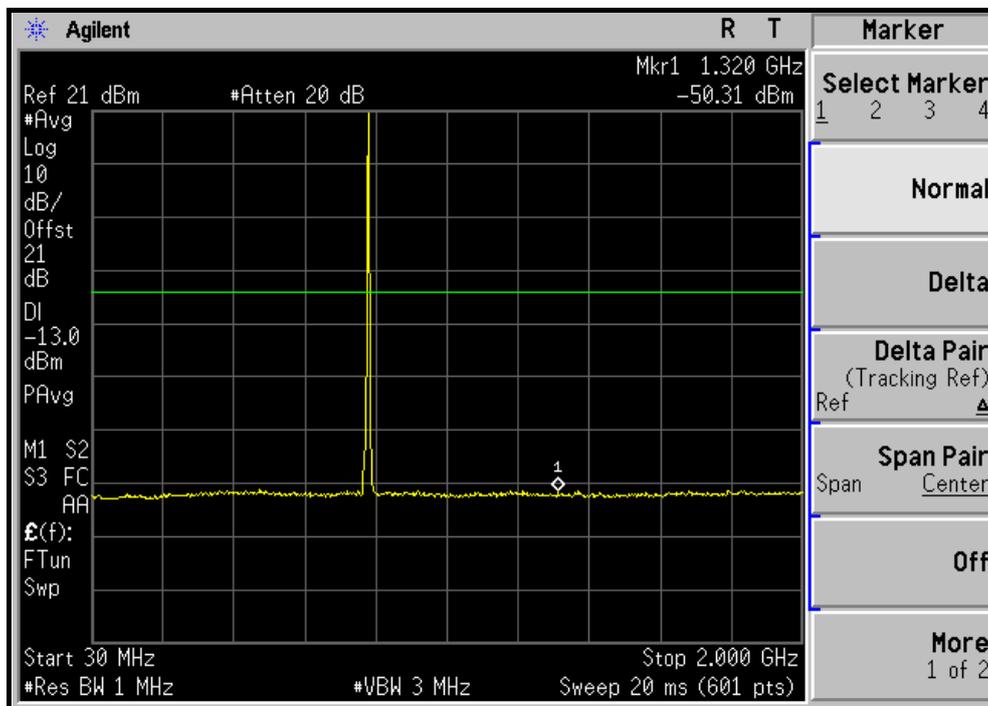

2GHz ~ 8GHz

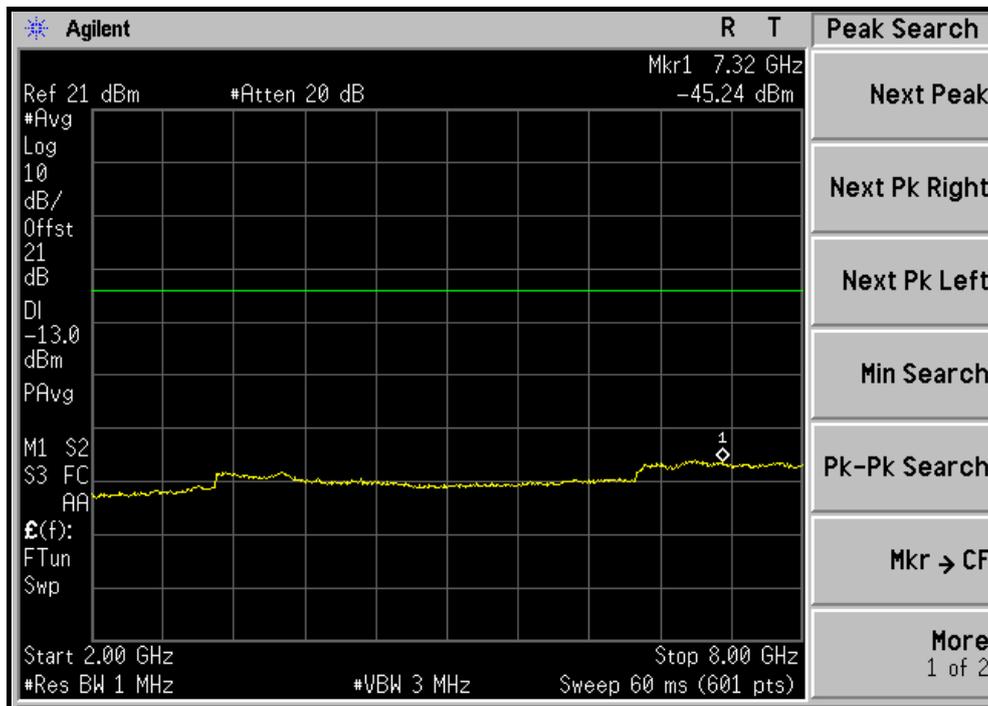




A D T

Emission in the 769–775 MHz and 799–805 MHz band


1 RB ALLOCATED AT THE LOWER EDGE

769MHz ~ 775MHz

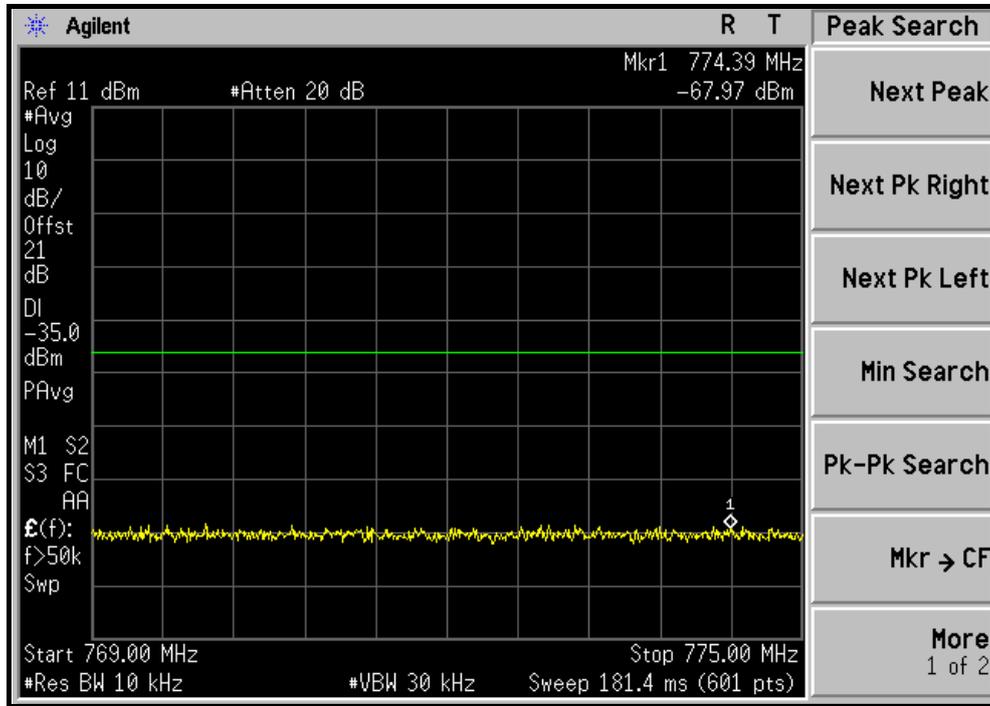

1 RB ALLOCATED AT THE UPPER EDGE


769MHz ~ 775MHz

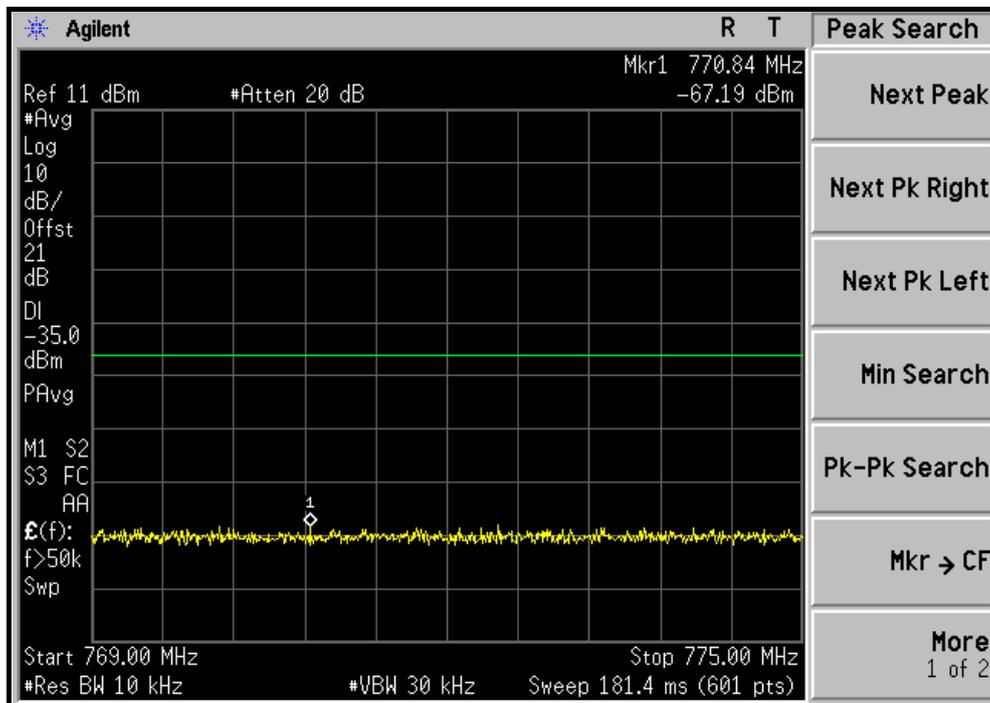



A D T

100% RB ALLOCATED
769MHz ~ 775MHz

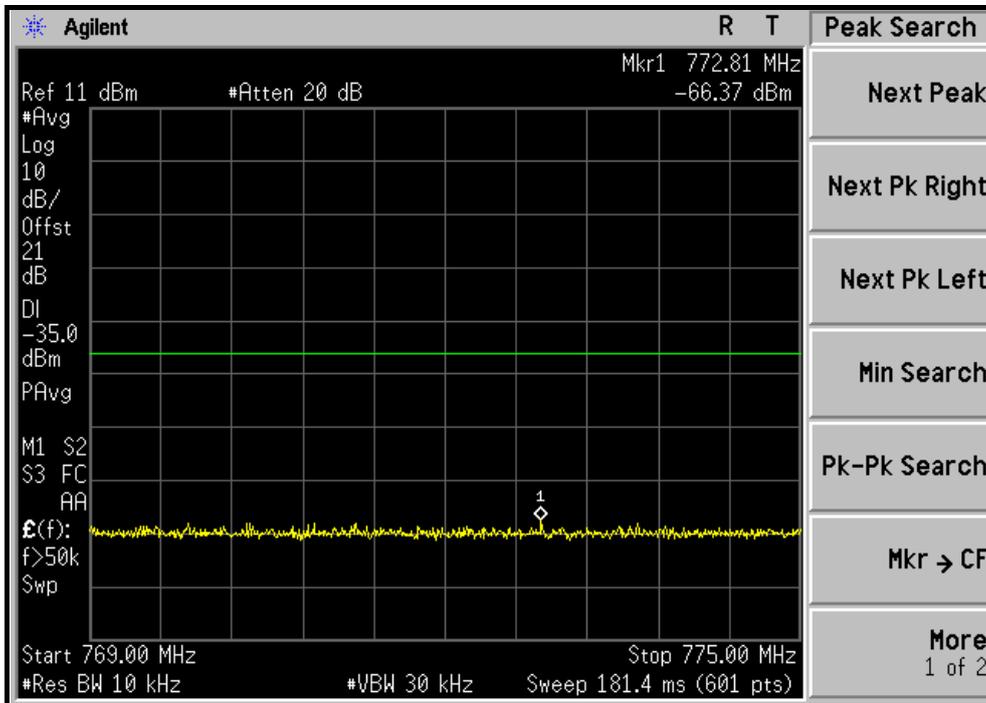




A D T


1 RB ALLOCATED AT THE LOWER EDGE

799MHz ~ 805MHz

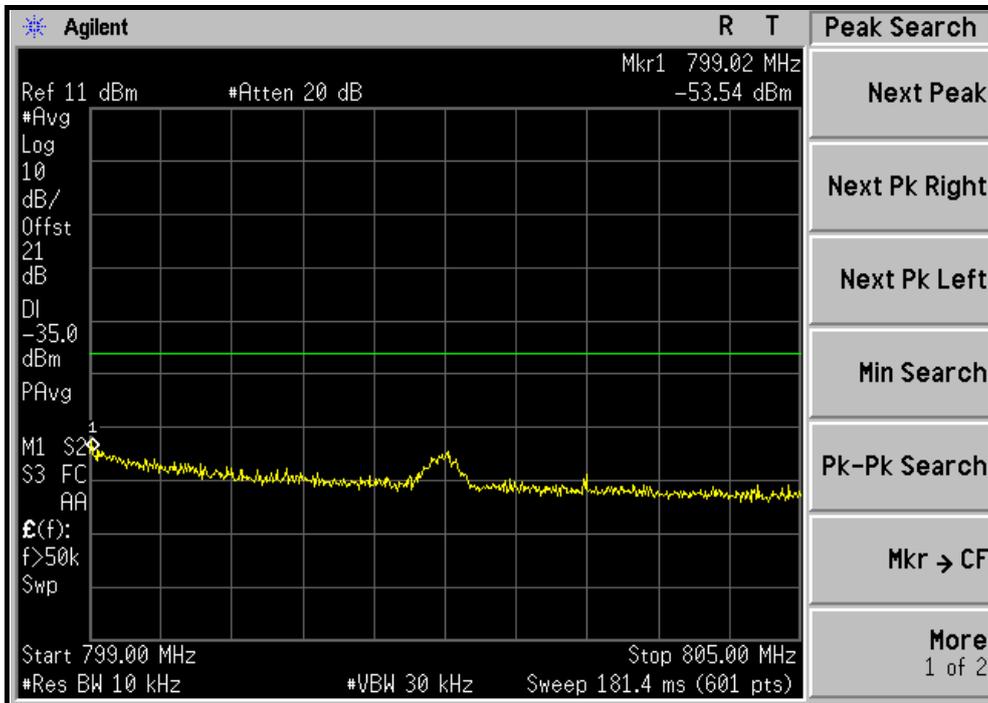

1 RB ALLOCATED AT THE UPPER EDGE

799MHz ~ 805MHz

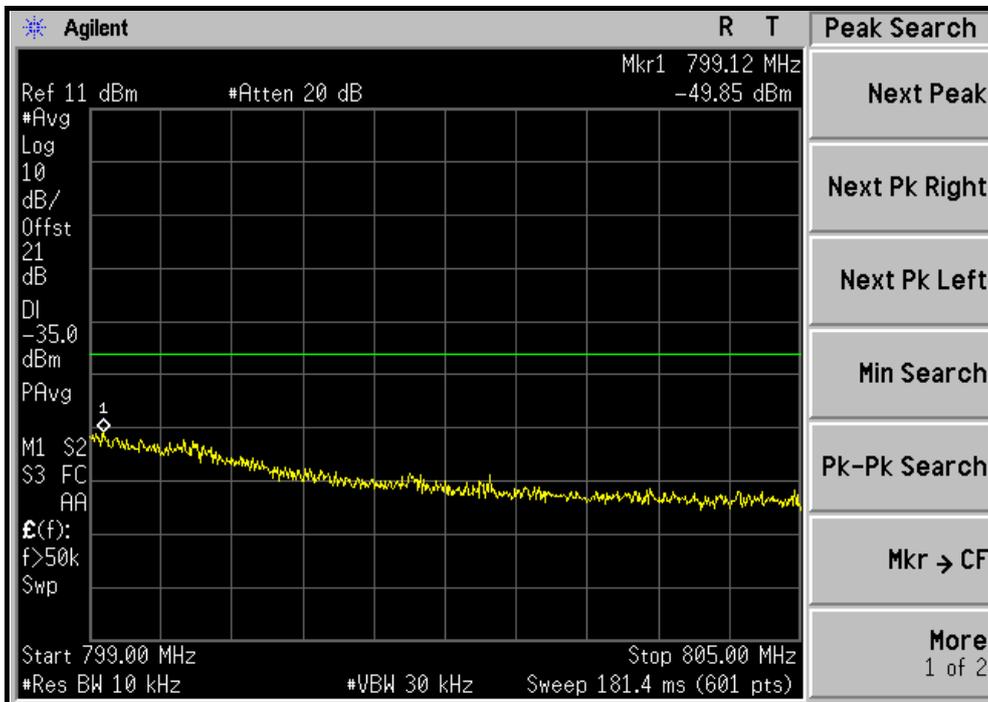




A D T

100% RB ALLOCATED

799MHz ~ 805MHz

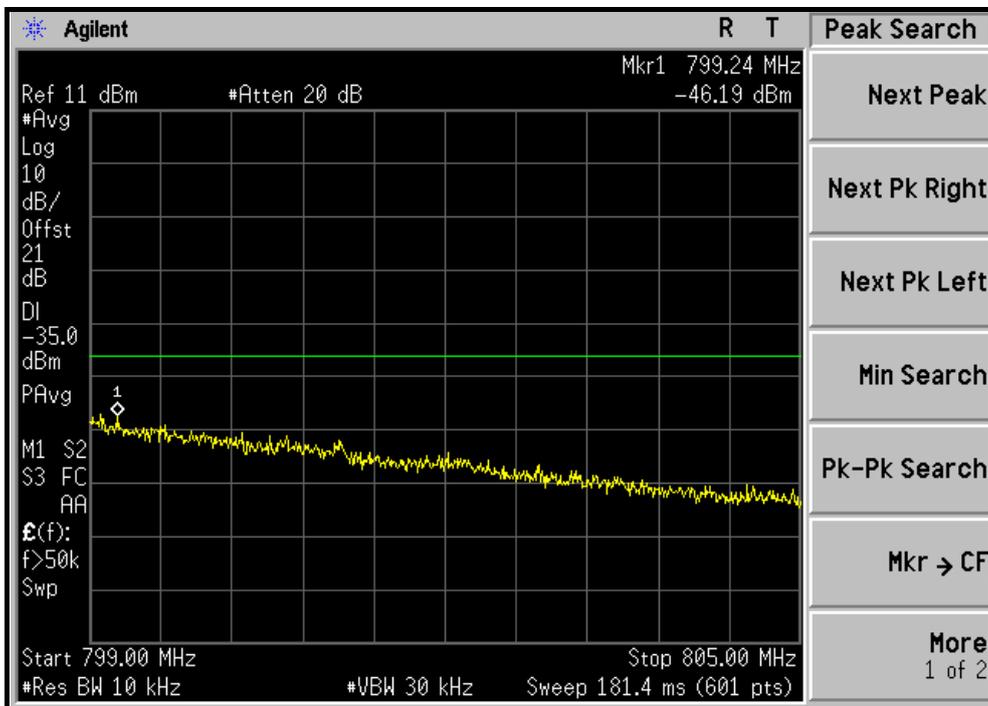

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

(1) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13 dBm

(2) For operations in the 793–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth

4.7.2 TEST INSTRUMENTS

Same as 4.1.2.

4.7.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. Repeat step a ~ c for horizontal polarization.

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

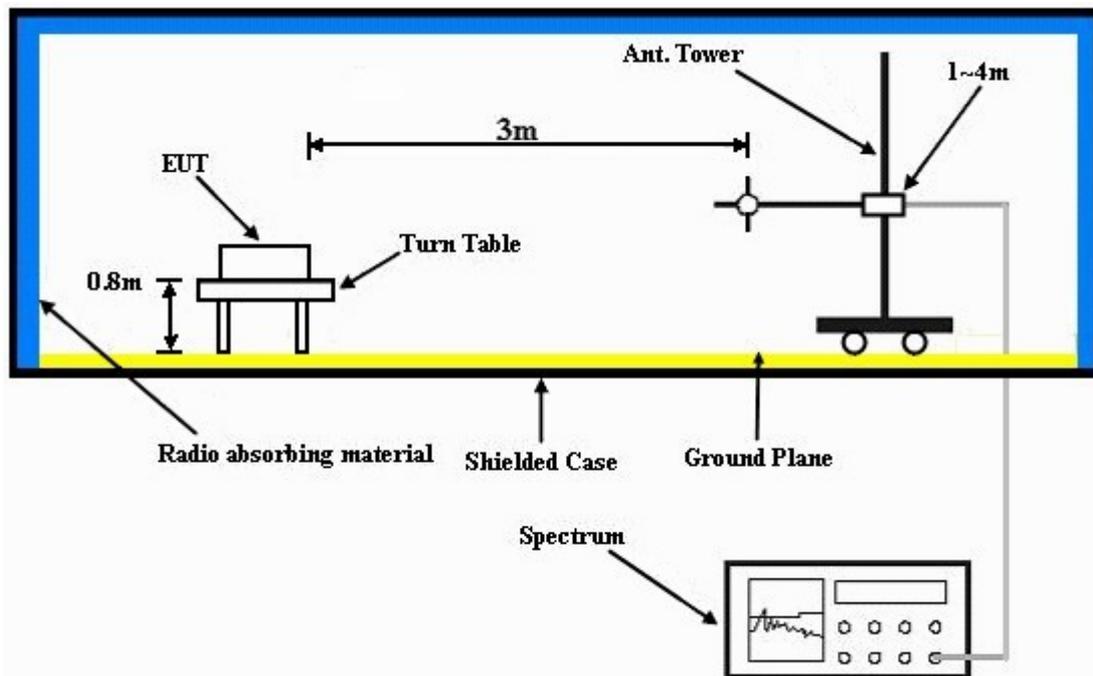

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.6 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.7.7 TEST RESULTS

FOR OUTBAND EMISSION

WORST AT QPSK, 1RB ALLOCATED AT THE UPPER EDGE

BELOW 1GHz DATA:

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	234.33	30.5	-13.0	-55.9	-7.7	-63.6
2	333.77	32.5	-13.0	-54.4	-7.8	-62.2
3	481.21	36.8	-13.0	-49.6	-7.8	-57.4
4	595.84	37.5	-13.0	-49.6	-7.8	-57.4
5	664.84	36.5	-13.0	-49.8	-7.8	-57.6
6	897.85	46.2	-13.0	-40.6	-7.9	-48.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	135.12	31.8	-13.0	-54.8	-7.7	-62.5
2	366.51	30.2	-13.0	-56.4	-7.8	-64.2
3	476.32	33.4	-13.0	-53.6	-7.8	-61.4
4	566.31	35.8	-13.0	-50.6	-7.8	-58.4
5	664.81	37.7	-13.0	-49.3	-7.8	-57.1
6	898.81	46.8	-13.0	-39.6	-7.9	-47.5

NOTE: ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
Correction Factor = gain of substitution antenna + cable loss

ABOVE 1GHz DATA:

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	2393.04	58.2	-13.0	-44.7	8.3	-36.4
2	3190.72	52.7	-13.0	-51.1	9.4	-41.7
3	3988.40	40.2	-13.0	-64.0	9.8	-54.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	2393.04	51.3	-13.0	-51.6	8.3	-43.3
2	3190.72	41.5	-13.0	-62.3	9.4	-52.9
3	3988.40	41.0	-13.0	-63.2	9.8	-53.4

NOTE: ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
Correction Factor = gain of substitution antenna + cable loss

Emissions in the band 1559–1610 MHz

FOR GPS BAND EMISSION

WORST AT QPSK, 1RB ALLOCATED AT THE UPPER EDGE

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1595.36	48.5	-40.0	-53.2	7.0	-46.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	1595.36	46.3	-40.0	-55.4	7.0	-48.4

NOTE: ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
Correction Factor = gain of substitution antenna + cable loss



5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---