



A D T

# FCC TEST REPORT (15.247)

**REPORT NO.:** RF130307C06A

**MODEL NO.:** WMTB-158N\_MHL, WMTB-158N  
(Refer to item 3.1 for more details)

**FCC ID:** MXF-WMTB-158N

**RECEIVED:** Feb. 05, 2013

**TESTED:** Mar. 07 ~ Apr. 03, 2013

**ISSUED:** Apr. 03, 2013

**APPLICANT:** Gemtek Technology Co., Ltd.

**ADDRESS:** No. 15-1, Zhonghua Rd, Hsinchu Industrial Park ,  
Hsinchu County, Taiwan, R.O.C. 303

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,  
New Taipei City, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



# TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	5
1. CERTIFICATION .....	6
2. SUMMARY OF TEST RESULTS .....	7
2.1 MEASUREMENT UNCERTAINTY .....	7
3. GENERAL INFORMATION .....	8
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.2 DESCRIPTION OF TEST MODES .....	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	11
3.3 DESCRIPTION OF SUPPORT UNITS .....	15
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST .....	15
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	16
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND) .....	17
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	17
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	17
4.1.2 TEST INSTRUMENTS .....	18
4.1.3 TEST PROCEDURES .....	19
4.1.4 DEVIATION FROM TEST STANDARD .....	19
4.1.5 TEST SETUP .....	20
4.1.6 EUT OPERATING CONDITIONS .....	20
4.1.7 TEST RESULTS .....	21
4.2 CONDUCTED EMISSION MEASUREMENT .....	35
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	35
4.2.2 TEST INSTRUMENTS .....	35
4.2.3 TEST PROCEDURES .....	36
4.2.4 DEVIATION FROM TEST STANDARD .....	36
4.2.5 TEST SETUP .....	36
4.2.6 EUT OPERATING CONDITIONS .....	36
4.2.7 TEST RESULTS .....	37
4.3 6dB BANDWIDTH MEASUREMENT .....	41
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	41
4.3.2 TEST SETUP .....	41
4.3.3 TEST INSTRUMENTS .....	41
4.3.4 TEST PROCEDURE .....	41
4.3.5 DEVIATION FROM TEST STANDARD .....	41
4.3.6 EUT OPERATING CONDITIONS .....	41
4.3.7 TEST RESULTS .....	42
4.4 CONDUCTED OUTPUT POWER .....	43
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	43
4.4.2 TEST SETUP .....	43
4.4.3 TEST INSTRUMENTS .....	43
4.4.4 TEST PROCEDURES .....	43
4.4.5 DEVIATION FROM TEST STANDARD .....	44
4.4.6 EUT OPERATING CONDITIONS .....	44
4.4.7 TEST RESULTS .....	45
4.5 POWER SPECTRAL DENSITY MEASUREMENT .....	47
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	47
4.5.2 TEST SETUP .....	47
4.5.3 TEST INSTRUMENTS .....	47
4.5.4 TEST PROCEDURE .....	47
4.5.5 DEVIATION FROM TEST STANDARD .....	47
4.5.6 EUT OPERATING CONDITION .....	47
4.5.7 TEST RESULTS .....	48



4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	49
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	49
4.6.2	TEST SETUP .....	49
4.6.3	TEST INSTRUMENTS .....	49
4.6.4	TEST PROCEDURE .....	49
4.6.5	DEVIATION FROM TEST STANDARD .....	50
4.6.6	EUT OPERATING CONDITION .....	50
4.6.7	TEST RESULTS .....	50
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND) .....	57
5.1	RADIATED EMISSION MEASUREMENT .....	57
5.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	57
5.1.2	TEST INSTRUMENTS .....	58
5.1.3	TEST PROCEDURES .....	58
5.1.4	DEVIATION FROM TEST STANDARD .....	58
5.1.5	TEST SETUP .....	58
5.1.6	EUT OPERATING CONDITIONS .....	58
5.1.7	TEST RESULTS .....	59
5.2	CONDUCTED EMISSION MEASUREMENT .....	69
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	69
5.2.2	TEST INSTRUMENTS .....	69
5.2.3	TEST PROCEDURES .....	69
5.2.4	DEVIATION FROM TEST STANDARD .....	69
5.2.5	TEST SETUP .....	69
5.2.6	EUT OPERATING CONDITIONS .....	69
5.2.7	TEST RESULTS .....	70
5.3	6dB BANDWIDTH MEASUREMENT .....	74
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	74
5.3.2	TEST SETUP .....	74
5.3.3	TEST INSTRUMENTS .....	74
5.3.4	TEST PROCEDURE .....	74
5.3.5	DEVIATION FROM TEST STANDARD .....	74
5.3.6	EUT OPERATING CONDITIONS .....	74
5.3.7	TEST RESULTS .....	75
5.4	CONDUCTED OUTPUT POWER .....	76
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	76
5.4.2	TEST SETUP .....	76
5.4.3	INSTRUMENTS .....	76
5.4.4	TEST PROCEDURES .....	76
5.4.5	DEVIATION FROM TEST STANDARD .....	76
5.4.6	EUT OPERATING CONDITIONS .....	76
5.4.7	TEST RESULTS .....	77
5.5	POWER SPECTRAL DENSITY MEASUREMENT .....	79
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	79
5.5.2	TEST SETUP .....	79
5.5.3	TEST INSTRUMENTS .....	79
5.5.4	TEST PROCEDURE .....	79
5.5.5	DEVIATION FROM TEST STANDARD .....	79
5.5.6	EUT OPERATING CONDITION .....	79
5.5.7	TEST RESULTS .....	80
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	81
5.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	81
5.6.2	TEST SETUP .....	81
5.6.3	TEST INSTRUMENTS .....	81
5.6.4	TEST PROCEDURE .....	81
5.6.5	DEVIATION FROM TEST STANDARD .....	81



**A D T**

5.6.6	EUT OPERATING CONDITION.....	81
5.6.7	TEST RESULTS .....	81
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	87
7.	INFORMATION ON THE TESTING LABORATORIES .....	88
8.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	89



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130307C06A	Original release	Apr. 03, 2013



A D T

## 1. CERTIFICATION

**PRODUCT:** Wireless Display Dongle  
**MODEL NO.:** WMTB-158N\_MHL, WMTB-158N  
(Refer to item 3.1 for more details)  
**BRAND:** Gemtek  
**APPLICANT:** Gemtek Technology Co., Ltd.  
**TESTED:** Mar. 07 ~ Apr. 03, 2013  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**STANDARDS:** **FCC Part 15, Subpart C (Section 15.247)**  
ANSI C63.10-2009

The above equipment (model: WMTB-158N\_MHL, WMTB-158N) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Celine Chou , **DATE :** Apr. 03, 2013  
Celine Chou / Specialist

**APPROVED BY :** Ken Liu , **DATE :** Apr. 03, 2013  
Ken Liu / Senior Manager



## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -2.68dB at 0.45107MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 4824.00, 4874.00, 4924.00, 7311.00, 11570.00, 11650.00 and 11490.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.19 dB
	200MHz ~1000MHz	3.21 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Wireless Display Dongle
<b>MODEL NO.</b>	WMTB-158N_MHL, WMTB-158N (Refer to NOTE for more details)
<b>POWER SUPPLY</b>	5Vdc from host equipment
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
<b>OPERATING FREQUENCY</b>	<b>2.4GHz:</b> 2412 ~ 2462MHz <b>5.0GHz:</b> 5745 ~ 5825MHz
<b>NUMBER OF CHANNEL</b>	<b>2.4GHz:</b> 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) <b>5.0GHz:</b> 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
<b>OUTPUT POWER</b>	426.313mW for 2412 ~ 2462MHz 313.787mW for 5745 ~ 5825MHz
<b>ANTENNA TYPE</b>	Refer to Note as below
<b>ANTENNA CONNECTOR</b>	NA
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	1.0m non-shielded USB cable w/o core (only for WMTB-158N)
<b>ACCESSORY DEVICES</b>	NA

**NOTE:**

1. All models are listed as below.

EUT	BRAND	MODEL	DIFFERENCE
1	Gemtek	WMTB-158N_MHL	with MHL chip
2		WMTB-158N	w/o MHL chip

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

<b>MODULATION MODE</b>	<b>TX FUNCTION</b>
<b>802.11b</b>	1TX
<b>802.11g</b>	1TX
<b>802.11a</b>	1TX
<b>802.11n (20MHz)</b>	2TX
<b>802.11n (40MHz)</b>	2TX

3. The following antenna is provided to the EUT.

<b>Antenna type</b>	<b>Antenna gain (dBi)</b>	
	<b>2.4GHz</b>	<b>5GHz</b>
Printed (Ant. 0)	1.21	2.62
Printed (Ant. 1)	1.24	1.79

\*After pre-testing, ant. 0 was the worst case for 802.11 a/b/g.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



5.

### 3.2 DESCRIPTION OF TEST MODES

#### FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

#### FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

#### FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	EUT 1
B	-	√	√	-	EUT 2

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** "-" means no effect.

#### **RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

#### **RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (20MHz)	1 to 11	6	OFDM	BPSK	7.2

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (20MHz)	1 to 11	6	OFDM	BPSK	7.2



**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	15.0

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE≥1G	26deg. C, 67%RH	120Vac, 60Hz	Chris Lin
RE<1G	23deg. C, 70%RH 25deg. C, 65%RH	120Vac, 60Hz	Chris Lin Ted Chang
PLC	24deg. C, 64%RH 25deg. C, 75%RH	120Vac, 60Hz	Match Tsui Ted Chang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Antony Lee



**FOR 5.0GHz (5745 ~ 5825MHz):**

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	EUT 1
B	-	√	√	-	EUT 2

Where **RE≥1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** "-" means no effect.

**RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

**RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (20MHz)	149 to 165	149	OFDM	BPSK	7.2

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (20MHz)	149 to 165	149	OFDM	BPSK	7.2



**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE≥1G	26deg. C, 67%RH	120Vac, 60Hz	Chris Lin
RE<1G	23deg. C, 70%RH 25deg. C, 65%RH	120Vac, 60Hz	Chris Lin Ted Chang
PLC	24deg. C, 64%RH 25deg. C, 75%RH	120Vac, 60Hz	Match Tsui Ted Chang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Antony Lee

### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	E5420	33MKMQ1	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.0m non-shielded USB Cable without core

**NOTE:**

1. All power cords of the above support units are non-shielded (1.8m).

#### 3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

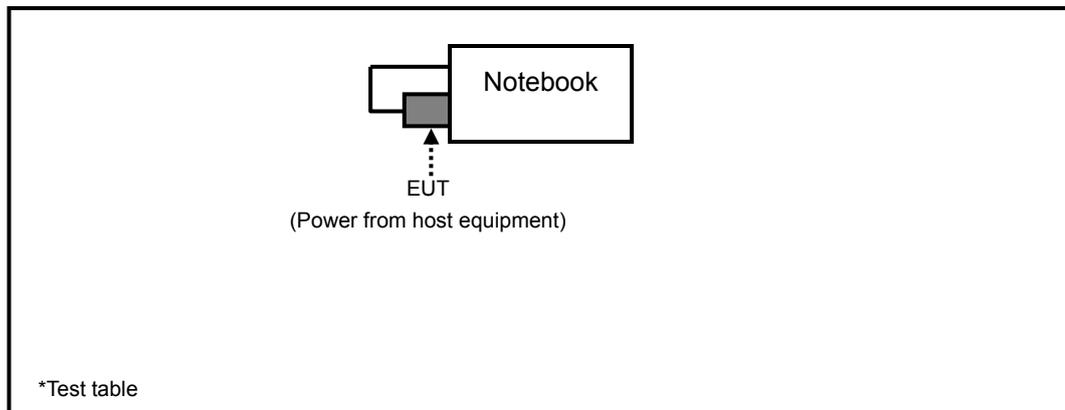



A D T

### 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v02**

**662911 D01 Multiple Transmitter Output v01 r02**

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



## 4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

### 4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



ADT

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Aug. 21, 2012	Aug. 20, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSU 43	100115	Oct. 25, 2012	Oct. 24, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Apr. 06, 2012	Apr. 05, 2013
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Dec. 22, 2012	Dec. 21, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 11, 2012	Jul. 10, 2013
Preamplifier Agilent	8449B	3008A01961	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8447D	2944A10738	Oct. 23, 2012	Oct. 22, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 28, 2012	Aug. 27, 2013
Software ADT	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table ADT	TT100.	TT93021704	NA	NA
Turn Table Controller ADT	SC100.	SC93021704	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 25, 2012	Oct. 24, 2013
High Speed Peak Power Meter	ML2495A	0842014	Apr. 28, 2012	Apr. 27, 2013
Power Sensor	MA2411B	0738404	Apr. 28, 2012	Apr. 27, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. The test was performed in HwaYa Chamber 4.
  4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  5. The FCC Site Registration No. is 460141.
  6. The IC Site Registration No. is IC7450F-4.



A D T

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 100kHz and video bandwidth is 300kHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

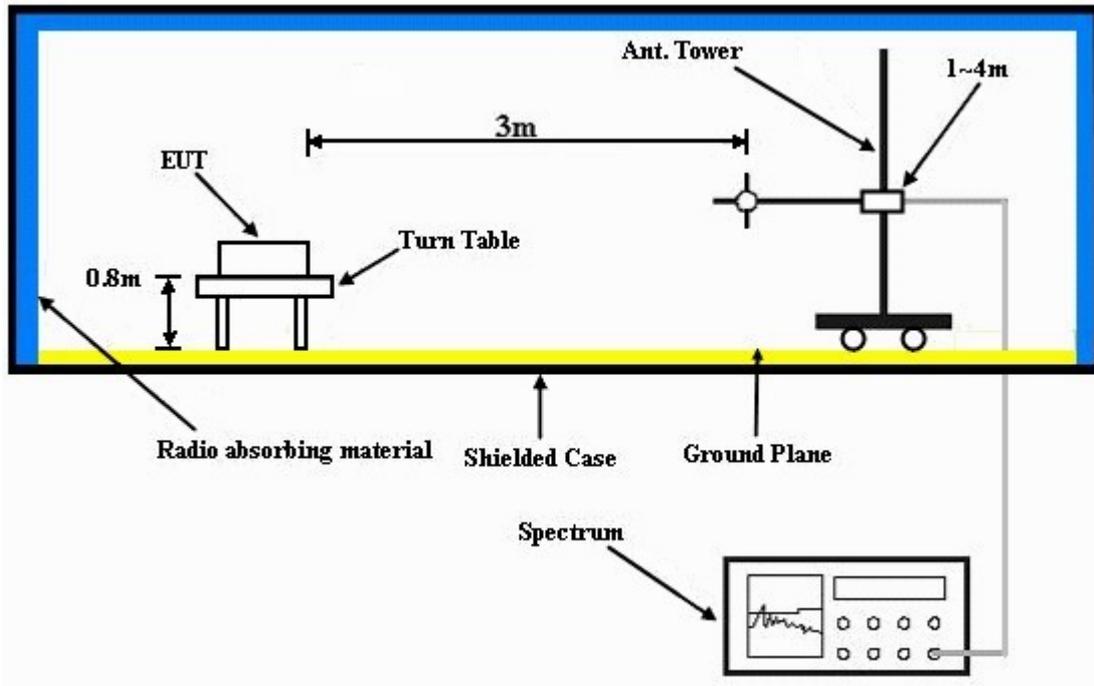

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- Plugged the EUT into the notebook and placed on a testing table.
- The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.



A D T

### 4.1.7 TEST RESULTS

#### ABOVE 1GHz DATA :

#### 802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	1.04 H	14	25.70	31.90
2	2390.00	46.2 AV	54.0	-7.8	1.04 H	14	14.30	31.90
3	*2412.00	100.6 PK			1.10 H	4	68.60	32.00
4	*2412.00	96.9 AV			1.10 H	4	64.90	32.00
5	4824.00	56.0 PK	74.0	-18.0	1.17 H	312	17.40	38.60
6	4824.00	53.0 AV	54.0	-1.0	1.17 H	312	14.40	38.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.29 V	195	25.60	31.90
2	2390.00	46.0 AV	54.0	-8.0	1.29 V	195	14.10	31.90
3	*2412.00	96.5 PK			1.39 V	205	64.50	32.00
4	*2412.00	92.8 AV			1.39 V	205	60.80	32.00
5	4824.00	49.0 PK	74.0	-25.0	1.01 V	47	10.40	38.60
6	4824.00	42.8 AV	54.0	-11.2	1.01 V	47	4.20	38.60

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.9 PK			1.38 H	337	70.80	32.10
2	*2437.00	99.3 AV			1.38 H	337	67.20	32.10
3	4874.00	55.8 PK	74.0	-18.2	1.31 H	324	17.10	38.70
4	<b>4874.00</b>	<b>53.0 AV</b>	<b>54.0</b>	<b>-1.0</b>	<b>1.31 H</b>	<b>324</b>	<b>14.30</b>	<b>38.70</b>
5	7311.00	55.9 PK	74.0	-18.1	1.16 H	61	10.60	45.30
6	7311.00	48.2 AV	54.0	-5.8	1.16 H	61	2.90	45.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	95.5 PK			1.36 V	204	63.40	32.10
2	*2437.00	91.7 AV			1.36 V	204	59.60	32.10
3	4874.00	48.0 PK	74.0	-26.0	1.43 V	21	9.30	38.70
4	4874.00	42.2 AV	54.0	-11.8	1.43 V	21	3.50	38.70
5	7311.00	56.0 PK	74.0	-18.0	1.76 V	195	10.70	45.30
6	7311.00	48.4 AV	54.0	-5.6	1.76 V	195	3.10	45.30

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.3 PK			1.06 H	7	69.10	32.20
2	*2462.00	97.6 AV			1.06 H	7	65.40	32.20
3	2483.50	58.3 PK	74.0	-15.7	1.00 H	17	26.10	32.20
4	2483.50	46.5 AV	54.0	-7.5	1.00 H	17	14.30	32.20
5	4924.00	55.7 PK	74.0	-18.3	1.01 H	218	16.90	38.80
6	4924.00	53.0 AV	54.0	-1.0	1.01 H	218	14.20	38.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	90.9 PK			1.07 V	136	58.70	32.20
2	*2462.00	87.1 AV			1.07 V	136	54.90	32.20
3	2483.50	58.1 PK	74.0	-15.9	1.00 V	126	25.90	32.20
4	2483.50	46.3 AV	54.0	-7.7	1.00 V	126	14.10	32.20
5	4924.00	53.7 PK	74.0	-20.3	1.61 V	206	14.90	38.80
6	4924.00	50.5 AV	54.0	-3.5	1.61 V	206	11.70	38.80

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	1.10 H	10	35.20	31.90
2	2390.00	52.5 AV	54.0	-1.5	1.10 H	10	20.60	31.90
3	*2412.00	104.1 PK			1.09 H	360	72.10	32.00
4	*2412.00	94.1 AV			1.09 H	360	62.10	32.00
5	4824.00	56.0 PK	74.0	-18.0	1.17 H	315	17.40	38.60
6	4824.00	41.3 AV	54.0	-12.7	1.17 H	315	2.70	38.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.2 PK	74.0	-12.8	1.28 V	196	29.30	31.90
2	2390.00	48.4 AV	54.0	-5.6	1.28 V	196	16.50	31.90
3	*2412.00	100.5 PK			1.38 V	206	68.50	32.00
4	*2412.00	89.5 AV			1.38 V	206	57.50	32.00
5	4824.00	47.3 PK	74.0	-26.7	1.29 V	50	8.70	38.60
6	4824.00	33.7 AV	54.0	-20.3	1.29 V	50	-4.90	38.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.8 PK			1.36 H	339	78.70	32.10
2	*2437.00	100.9 AV			1.36 H	339	68.80	32.10
3	4874.00	61.5 PK	74.0	-12.5	1.31 H	324	22.80	38.70
4	4874.00	47.6 AV	54.0	-6.4	1.31 H	324	8.90	38.70
5	7311.00	64.3 PK	74.0	-9.7	1.17 H	61	19.00	45.30
6	7311.00	50.5 AV	54.0	-3.5	1.17 H	61	5.20	45.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.4 PK			1.00 V	98	65.30	32.10
2	*2437.00	87.7 AV			1.00 V	98	55.60	32.10
3	4874.00	50.5 PK	74.0	-23.5	1.00 V	30	11.80	38.70
4	4874.00	37.9 AV	54.0	-16.1	1.00 V	30	-0.80	38.70
5	7311.00	66.8 PK	74.0	-7.2	1.64 V	203	21.50	45.30
6	7311.00	52.9 AV	54.0	-1.1	1.64 V	203	7.60	45.30

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.6 PK			1.06 H	7	73.40	32.20
2	*2462.00	95.4 AV			1.06 H	7	63.20	32.20
3	2483.50	70.6 PK	74.0	-3.4	1.33 H	338	38.40	32.20
4	2483.50	52.4 AV	54.0	-1.6	1.33 H	338	20.20	32.20
5	4924.00	57.0 PK	74.0	-17.0	1.29 H	324	18.20	38.80
6	4924.00	43.0 AV	54.0	-11.0	1.29 H	324	4.20	38.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	94.9 PK			1.06 V	137	62.70	32.20
2	*2462.00	84.5 AV			1.06 V	137	52.30	32.20
3	2483.50	58.6 PK	74.0	-15.4	1.00 V	127	26.40	32.20
4	2483.50	46.6 AV	54.0	-7.4	1.00 V	127	14.40	32.20
5	4924.00	54.3 PK	74.0	-19.7	1.95 V	204	15.50	38.80
6	4924.00	40.7 AV	54.0	-13.3	1.95 V	204	1.90	38.80

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.11 H	9	33.40	31.90
2	2390.00	52.5 AV	54.0	-1.5	1.11 H	9	20.60	31.90
3	*2412.00	103.4 PK			1.38 H	46	71.40	32.00
4	*2412.00	91.5 AV			1.38 H	46	59.50	32.00
5	4824.00	46.7 PK	74.0	-27.3	1.00 H	162	8.10	38.60
6	4824.00	36.1 AV	54.0	-17.9	1.00 H	162	-2.50	38.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.2 PK	74.0	-15.8	1.00 V	100	26.30	31.90
2	2390.00	47.0 AV	54.0	-7.0	1.00 V	100	15.10	31.90
3	*2412.00	96.0 PK			1.40 V	117	64.00	32.00
4	*2412.00	85.1 AV			1.40 V	117	53.10	32.00
5	4824.00	45.5 PK	74.0	-28.5	1.00 V	245	6.90	38.60
6	4824.00	34.5 AV	54.0	-19.5	1.00 V	245	-4.10	38.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.8 PK			1.07 H	9	78.70	32.10
2	*2437.00	99.8 AV			1.07 H	9	67.70	32.10
3	4874.00	53.5 PK	74.0	-20.5	1.05 H	43	14.80	38.70
4	4874.00	40.4 AV	54.0	-13.6	1.05 H	43	1.70	38.70
5	7311.00	67.7 PK	74.0	-6.3	1.17 H	62	22.40	45.30
6	7311.00	53.0 AV	54.0	-1.0	1.17 H	62	7.70	45.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.2 PK			1.00 V	96	68.10	32.10
2	*2437.00	88.8 AV			1.00 V	96	56.70	32.10
3	4874.00	51.4 PK	74.0	-22.6	1.45 V	213	12.70	38.70
4	4874.00	38.6 AV	54.0	-15.4	1.45 V	213	-0.10	38.70
5	7311.00	66.1 PK	74.0	-7.9	1.53 V	163	20.80	45.30
6	7311.00	51.7 AV	54.0	-2.3	1.53 V	163	6.40	45.30

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.8 PK			1.34 H	222	78.60	32.20
2	*2462.00	98.2 AV			1.34 H	222	66.00	32.20
3	2483.50	70.5 PK	74.0	-3.5	1.05 H	8	38.30	32.20
4	2483.50	52.4 AV	54.0	-1.6	1.05 H	8	20.20	32.20
5	4924.00	60.2 PK	74.0	-13.8	1.14 H	226	21.40	38.80
6	4924.00	46.5 AV	54.0	-7.5	1.14 H	226	7.70	38.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.0 PK			1.67 V	154	68.80	32.20
2	*2462.00	89.3 AV			1.67 V	154	57.10	32.20
3	2483.50	57.8 PK	74.0	-16.2	1.00 V	246	25.60	32.20
4	2483.50	45.5 AV	54.0	-8.5	1.00 V	246	13.30	32.20
5	4924.00	52.8 PK	74.0	-21.2	1.00 V	299	14.00	38.80
6	4924.00	38.9 AV	54.0	-15.1	1.00 V	299	0.10	38.80

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.5 PK	74.0	-6.5	1.11 H	4	35.60	31.90
2	2390.00	52.6 AV	54.0	-1.4	1.11 H	4	20.70	31.90
3	*2422.00	99.2 PK			1.39 H	6	67.20	32.00
4	*2422.00	87.1 AV			1.39 H	6	55.10	32.00
5	4844.00	50.6 PK	74.0	-23.4	1.00 H	154	11.90	38.70
6	4844.00	37.7 AV	54.0	-16.3	1.00 H	154	-1.00	38.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.00 V	105	25.60	31.90
2	2390.00	46.0 AV	54.0	-8.0	1.00 V	105	14.10	31.90
3	*2422.00	90.1 PK			1.41 V	114	58.10	32.00
4	*2422.00	78.6 AV			1.41 V	114	46.60	32.00
5	4844.00	45.1 PK	74.0	-28.9	1.00 V	217	6.40	38.70
6	4844.00	35.0 AV	54.0	-19.0	1.00 V	217	-3.70	38.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.5 PK			1.10 H	10	69.40	32.10
2	*2437.00	89.5 AV			1.10 H	10	57.40	32.10
3	4874.00	52.3 PK	74.0	-21.7	1.00 H	237	13.60	38.70
4	4874.00	40.1 AV	54.0	-13.9	1.00 H	237	1.40	38.70
5	7311.00	66.9 PK	74.0	-7.1	1.16 H	62	21.60	45.30
6	7311.00	52.9 AV	54.0	-1.1	1.16 H	62	7.60	45.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	89.7 PK			1.00 V	98	57.60	32.10
2	*2437.00	78.2 AV			1.00 V	98	46.10	32.10
3	4874.00	49.8 PK	74.0	-24.2	1.00 V	165	11.10	38.70
4	4874.00	37.1 AV	54.0	-16.9	1.00 V	165	-1.60	38.70
5	7311.00	63.9 PK	74.0	-10.1	1.00 V	178	18.60	45.30
6	7311.00	50.5 AV	54.0	-3.5	1.00 V	178	5.20	45.30

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.9 PK			1.08 H	10	72.80	32.10
2	*2452.00	92.2 AV			1.08 H	10	60.10	32.10
3	2483.50	69.5 PK	74.0	-4.5	1.32 H	8	37.30	32.20
4	2483.50	52.8 AV	54.0	-1.2	1.32 H	8	20.60	32.20
5	4904.00	55.6 PK	74.0	-18.4	1.02 H	220	16.80	38.80
6	4904.00	42.4 AV	54.0	-11.6	1.02 H	220	3.60	38.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	93.4 PK			1.00 V	98	61.30	32.10
2	*2452.00	80.7 AV			1.00 V	98	48.60	32.10
3	2483.50	58.0 PK	74.0	-16.0	1.08 V	78	25.80	32.20
4	2483.50	45.8 AV	54.0	-8.2	1.08 V	78	13.60	32.20
5	4904.00	49.9 PK	74.0	-24.1	1.00 V	328	11.10	38.80
6	4904.00	37.3 AV	54.0	-16.7	1.00 V	328	-1.50	38.80

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	TESTED BY	Chris Lin
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	124.98	34.3 QP	43.5	-9.2	2.00 H	210	22.30	12.00
2	179.31	37.9 QP	43.5	-5.6	1.50 H	329	25.40	12.50
3	249.17	33.7 QP	46.0	-12.3	1.25 H	350	20.90	12.80
4	398.58	38.4 QP	46.0	-7.6	1.00 H	297	21.40	17.00
5	598.44	32.8 QP	46.0	-13.2	1.25 H	9	11.30	21.50
6	732.32	30.2 QP	46.0	-15.8	1.00 H	14	6.80	23.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	132.74	33.8 QP	43.5	-9.7	1.99 V	15	21.00	12.80
2	249.17	31.5 QP	46.0	-14.5	1.99 V	48	18.70	12.80
3	398.58	41.9 QP	46.0	-4.1	1.49 V	181	24.90	17.00
4	456.79	32.1 QP	46.0	-13.9	1.00 V	259	13.70	18.40
5	584.85	31.8 QP	46.0	-14.2	1.00 V	348	10.60	21.20
6	732.32	29.7 QP	46.0	-16.3	1.49 V	145	6.30	23.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	142.44	33.4 QP	43.5	-10.1	1.25 H	195	19.80	13.60
2	231.70	29.8 QP	46.0	-16.2	1.25 H	114	17.80	12.00
3	336.48	31.9 QP	46.0	-14.1	1.00 H	195	16.40	15.50
4	431.56	30.9 QP	46.0	-15.1	1.00 H	109	13.10	17.80
5	664.41	33.6 QP	46.0	-12.4	1.25 H	7	11.20	22.40
6	825.46	36.1 QP	46.0	-9.9	1.00 H	82	11.20	24.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	101.69	24.0 QP	43.5	-19.5	1.00 V	41	14.60	9.40
2	165.73	27.8 QP	43.5	-15.7	1.25 V	297	14.30	13.50
3	365.59	28.5 QP	46.0	-17.5	1.24 V	40	12.30	16.20
4	431.56	30.5 QP	46.0	-15.5	1.25 V	62	12.70	17.80
5	664.41	31.4 QP	46.0	-14.6	1.50 V	195	9.00	22.40
6	825.46	34.5 QP	46.0	-11.5	1.00 V	339	9.60	24.90

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.  
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 09, 2012	Nov. 08, 2013
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 28, 2012	Dec. 27, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 21, 2012	Dec. 20, 2013
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 06, 2012	Jul. 05, 2013
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Shielded Room 2.  
3. The VCCI Site Registration No. is C-2047.

#### 4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP

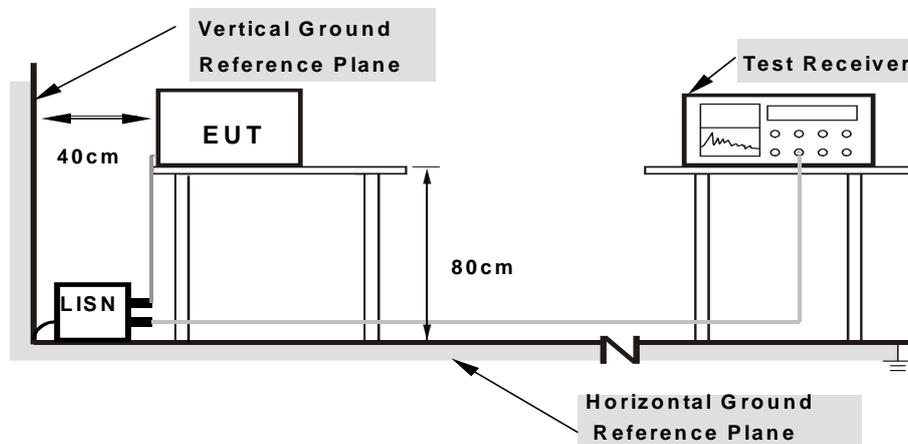

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

### 4.2.7 TEST RESULTS


**CONDUCTED WORST-CASE DATA : 802.11n (20MHz)**

<b>PHASE</b>	Line 1	<b>6dB BANDWIDTH</b>	9kHz
<b>TEST MODE</b>	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.12	54.25	41.09	54.37	41.21	65.38	55.38	-11.00	-14.16
2	0.34940	0.14	45.70	33.31	45.84	33.45	58.98	48.98	-13.13	-15.52
3	0.52518	0.16	46.53	32.34	46.69	32.50	56.00	46.00	-9.31	-13.50
4	0.67734	0.18	44.98	30.75	45.16	30.93	56.00	46.00	-10.84	-15.07
5	0.96641	0.21	44.32	30.84	44.53	31.05	56.00	46.00	-11.47	-14.95
6	9.62500	0.63	33.14	27.93	33.77	28.56	60.00	50.00	-26.23	-21.44

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

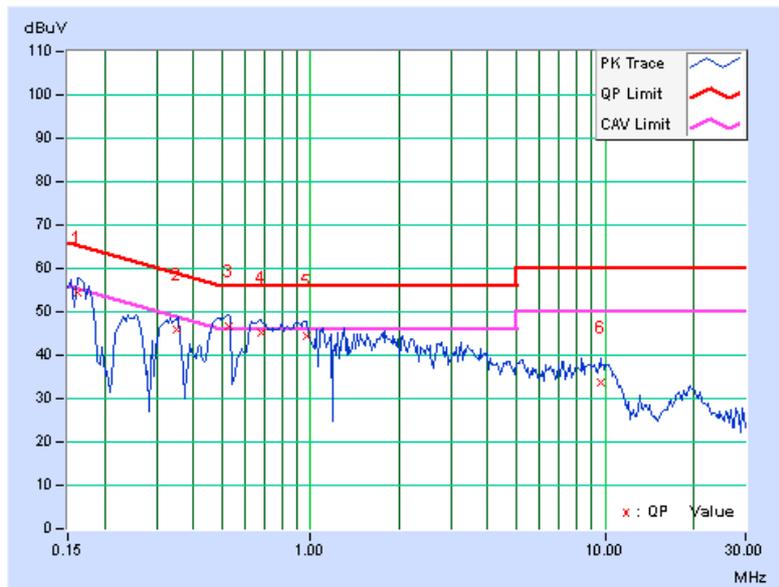




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23203	0.18	45.65	37.10	45.83	37.28	62.38	52.38	-16.55	-15.10
2	0.47031	0.21	46.82	37.25	47.03	37.46	56.51	46.51	-9.47	-9.04
3	0.64219	0.23	47.06	33.96	47.29	34.19	56.00	46.00	-8.71	-11.81
4	0.93206	0.25	45.41	35.29	45.66	35.54	56.00	46.00	-10.34	-10.46
5	1.51953	0.27	42.17	35.60	42.44	35.87	56.00	46.00	-13.56	-10.13
6	10.38281	0.60	34.59	29.62	35.19	30.22	60.00	50.00	-24.81	-19.78

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

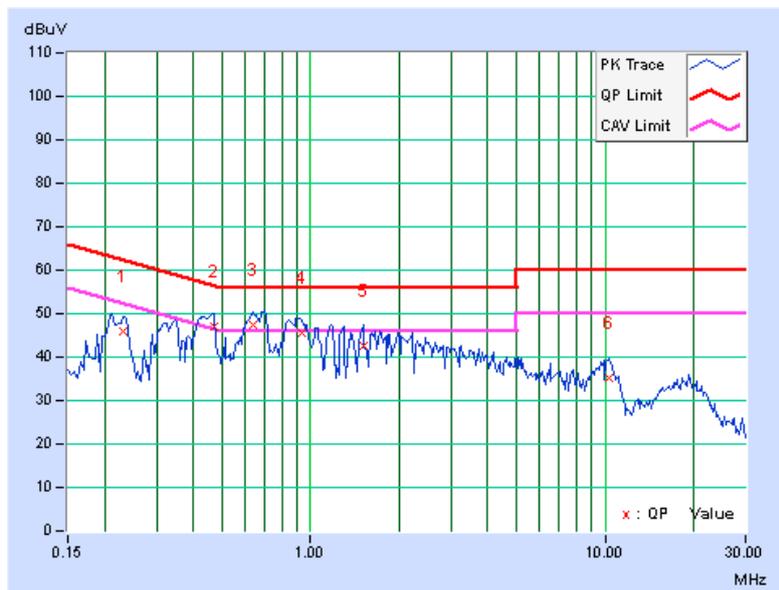


PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	0.13	54.16	36.88	54.29	37.01	64.98	54.98	-10.69	-17.97
2	0.55625	0.19	32.43	29.87	32.62	30.06	56.00	46.00	-23.38	-15.94
3	0.94297	0.22	31.04	21.29	31.26	21.51	56.00	46.00	-24.74	-24.49
4	1.53125	0.24	30.19	22.92	30.43	23.16	56.00	46.00	-25.57	-22.84
5	6.08984	0.46	23.12	15.41	23.58	15.87	60.00	50.00	-36.42	-34.13
6	20.57422	1.15	25.57	18.86	26.72	20.01	60.00	50.00	-33.28	-29.99

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

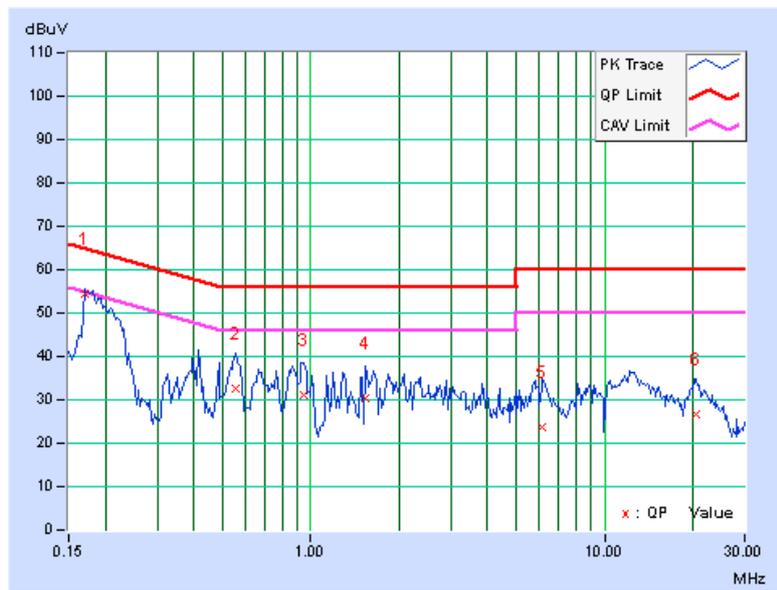




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15128	0.15	47.27	33.47	47.42	33.62	65.93	55.93	-18.51	-22.31
2	0.49709	0.20	39.64	25.19	39.84	25.39	56.05	46.05	-16.21	-20.66
3	0.92344	0.22	33.73	26.63	33.95	26.85	56.00	46.00	-22.05	-19.15
4	1.25391	0.24	33.12	23.21	33.36	23.45	56.00	46.00	-22.64	-22.55
5	6.40625	0.43	22.45	14.17	22.88	14.60	60.00	50.00	-37.12	-35.40
6	17.99609	0.81	27.59	20.63	28.40	21.44	60.00	50.00	-31.60	-28.56

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

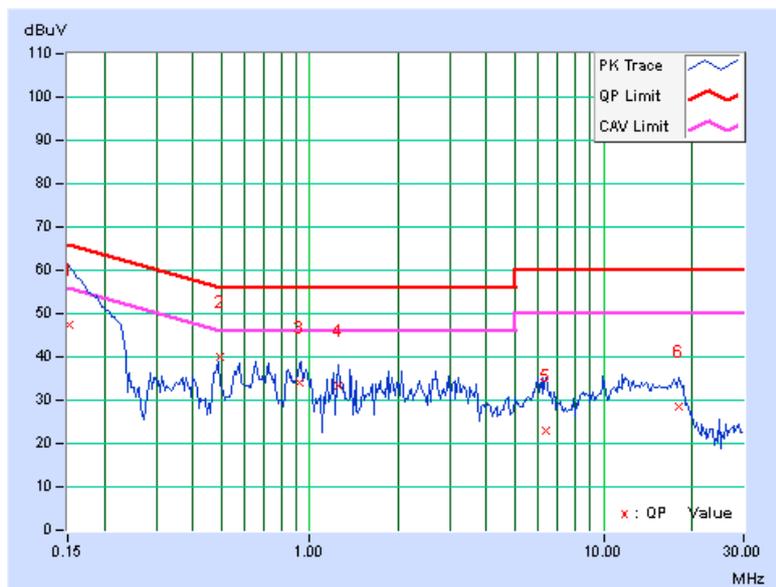


### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST SETUP



#### 4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 4.3.7 TEST RESULTS

#### 802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	8.61	0.5	PASS
6	2437	8.14	0.5	PASS
11	2462	8.55	0.5	PASS

#### 802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.15	0.5	PASS
6	2437	14.46	0.5	PASS
11	2462	14.48	0.5	PASS

#### 802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	15.11	15.12	0.5	PASS
6	2437	14.54	15.60	0.5	PASS
11	2462	14.48	16.95	0.5	PASS

#### 802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.46	36.57	0.5	PASS
6	2437	35.23	36.09	0.5	PASS
9	2452	35.87	36.46	0.5	PASS

## 4.4 CONDUCTED OUTPUT POWER

### 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

### 4.4.2 TEST SETUP

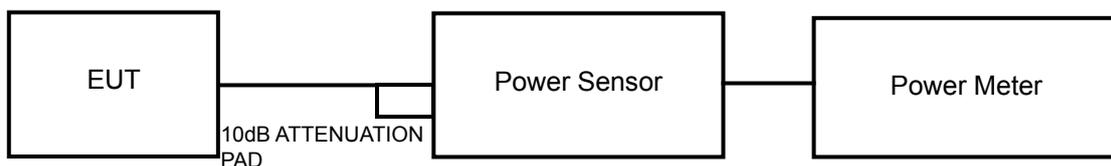

### 4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 TEST PROCEDURES

A peak / average power sensor were used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.



A D T

#### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



A D T

#### 4.4.7 TEST RESULTS

##### FOR PEAK POWER

##### 802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	38.107	15.81	30	PASS
6	2437	44.566	16.49	30	PASS
11	2462	61.518	17.89	30	PASS

##### 802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	146.218	21.65	30	PASS
6	2437	225.944	23.54	30	PASS
11	2462	193.642	22.87	30	PASS

##### 802.11n (20MHz)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	19.71	19.08	174.451	22.42	30	PASS
6	2437	22.60	23.88	<b>426.313</b>	26.30	30	PASS
11	2462	22.84	21.99	350.434	25.45	30	PASS

##### 802.11n (40MHz)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	18.31	17.67	126.243	21.01	30	PASS
6	2437	18.92	19.43	165.683	22.19	30	PASS
9	2452	20.70	21.40	255.528	24.07	30	PASS



A D T

**FOR AVERAGE POWER**

**802.11b**

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	16.069	12.06
6	2437	19.231	12.84
11	2462	26.792	14.28

**802.11g**

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	21.478	13.32
6	2437	73.621	18.67
11	2462	38.548	15.86

**802.11n (20MHz)**

CHAN.	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	11.39	10.59	25.227	14.02
6	2437	16.05	15.77	78.029	18.92
11	2462	15.33	14.51	62.368	17.95

**802.11n (40MHz)**


CHAN.	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
3	2422	9.79	9.99	19.505	12.90
6	2437	11.05	10.94	25.152	14.01
9	2452	13.91	13.50	46.991	16.72

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST SETUP



### 4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

- Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

#### 4.5.7 TEST RESULTS

##### 802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-11.35	8	PASS
6	2437	-10.06	8	PASS
11	2462	-8.88	8	PASS

##### 802.11g

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-12.25	8	PASS
6	2437	-6.71	8	PASS
11	2462	-9.74	8	PASS

##### 802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-15.21	3.01	-12.20	8	PASS
	6	2437	-9.03	3.01	-6.02	8	PASS
	11	2462	-9.75	3.01	-6.74	8	PASS
1	1	2412	-13.78	3.01	-10.77	8	PASS
	6	2437	-9.98	3.01	-6.97	8	PASS
	11	2462	-11.13	3.01	-8.12	8	PASS

**NOTE:** Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 4.24 < 6\text{dBi}$ , so the limit no need to reduced.

##### 802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-18.89	3.01	-15.88	8	PASS
	6	2437	-18.05	3.01	-15.04	8	PASS
	9	2452	-14.33	3.01	-11.32	8	PASS
1	3	2422	-19.31	3.01	-16.30	8	PASS
	6	2437	-17.30	3.01	-14.29	8	PASS
	9	2452	-15.12	3.01	-12.11	8	PASS


**NOTE:** Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 4.24 < 6\text{dBi}$ , so the limit no need to reduced.

## 4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST SETUP



### 4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 TEST PROCEDURE

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



A D T

## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6


### 4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b


CH 1

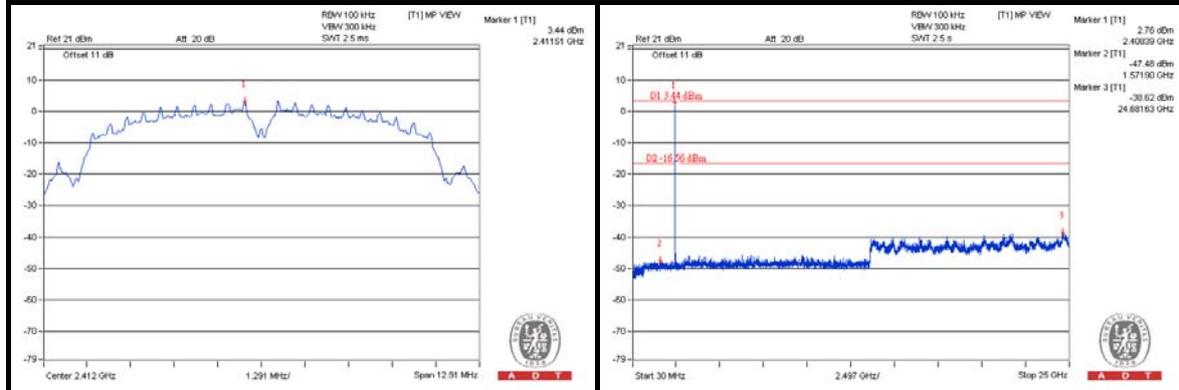

CH 6

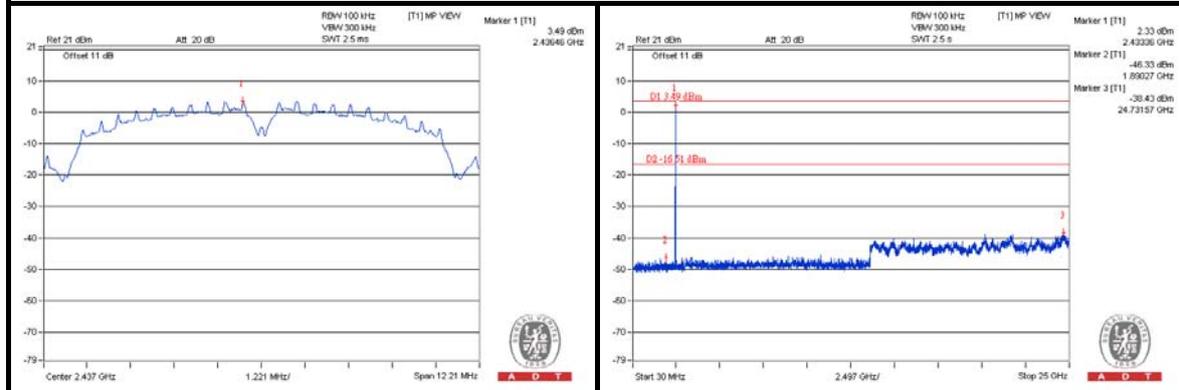


CH 11

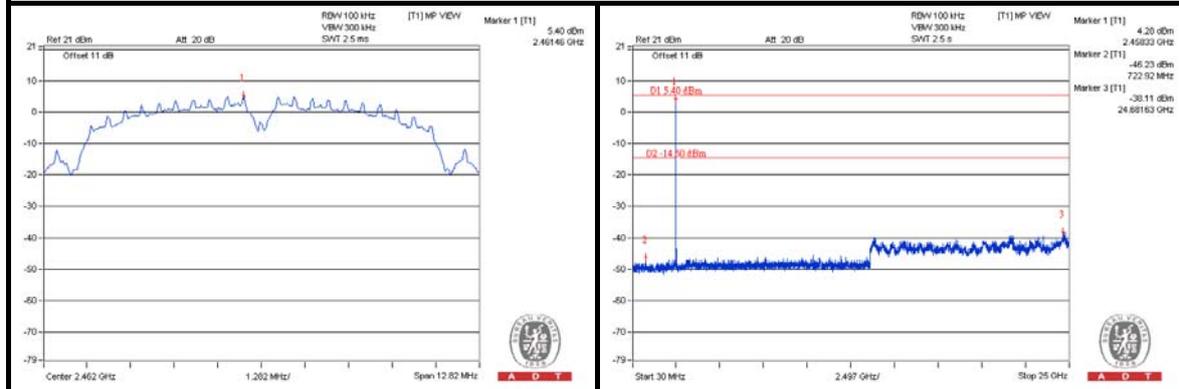


802.11g


CH 1

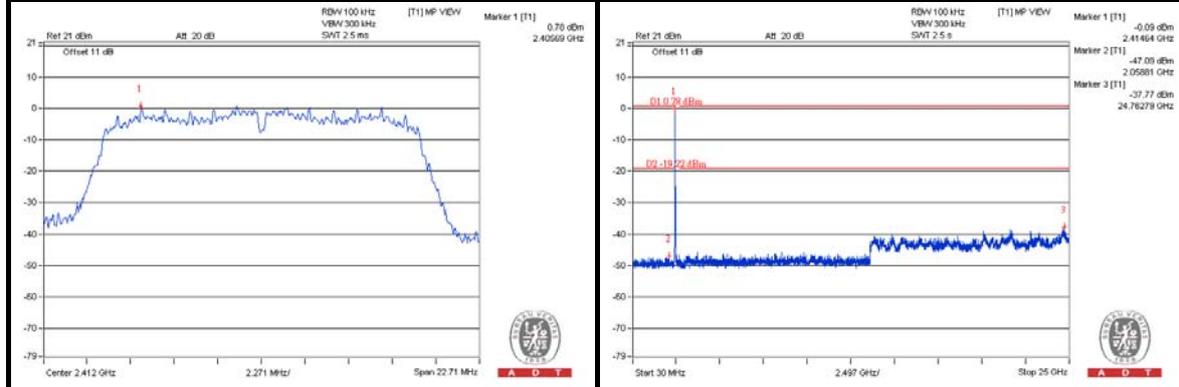

CH 6

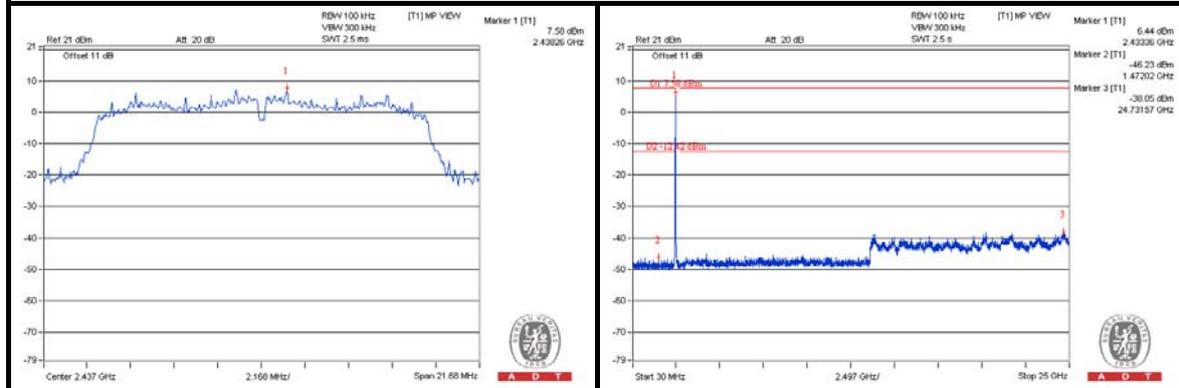

CH 11


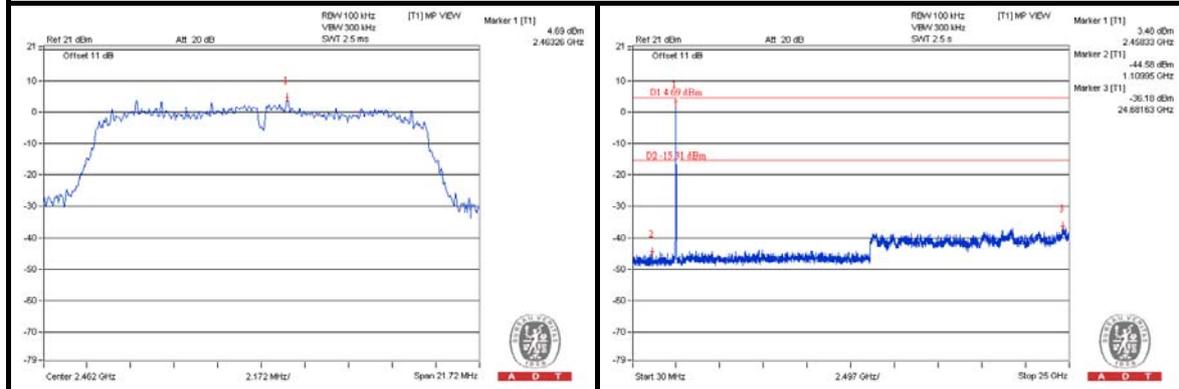






A D T

# 802.11n (20MHz) CHAIN 0



## CH 1

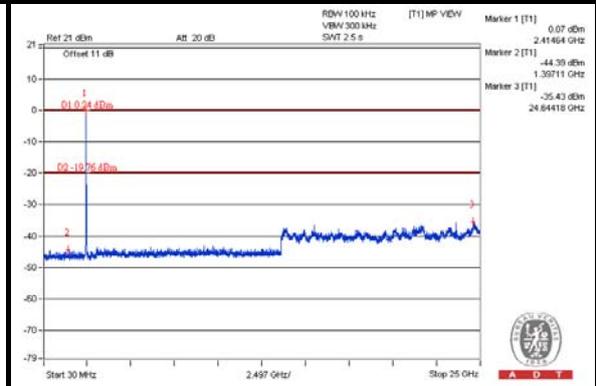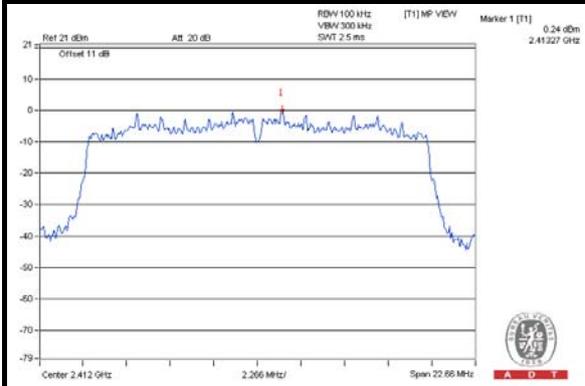

## CH 6

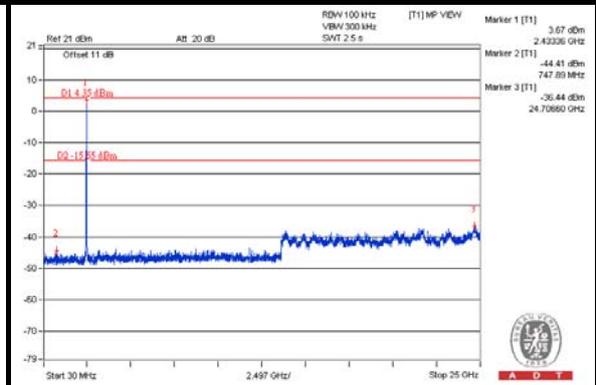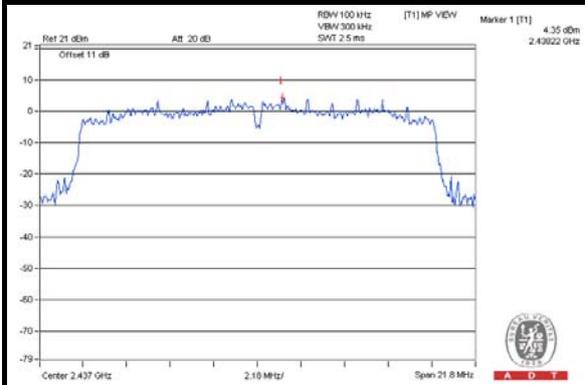

## CH 11

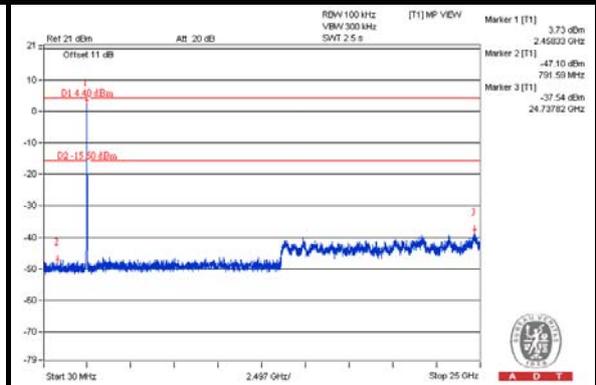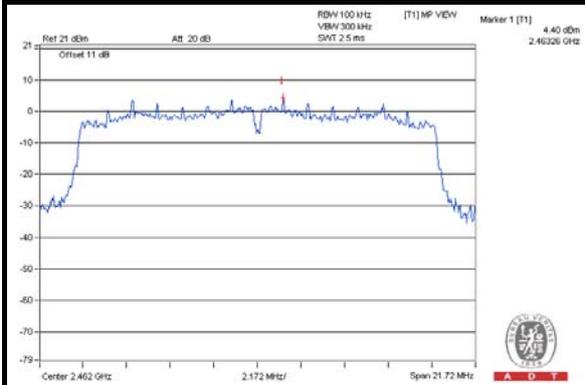





A D T

### CHAIN 1


#### CH 1

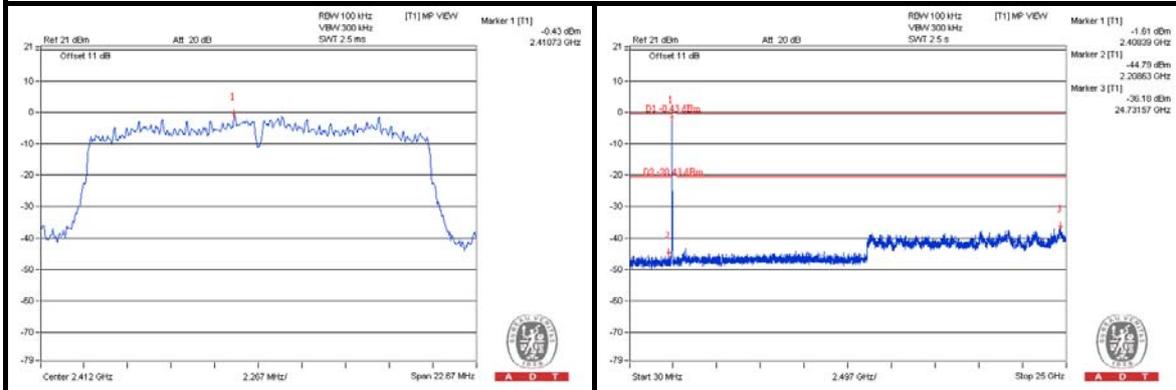

#### CH 6

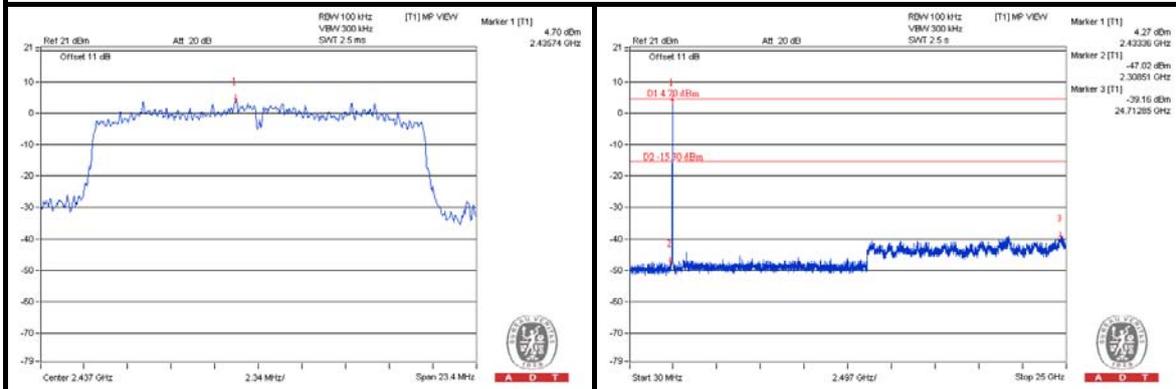

#### CH 11


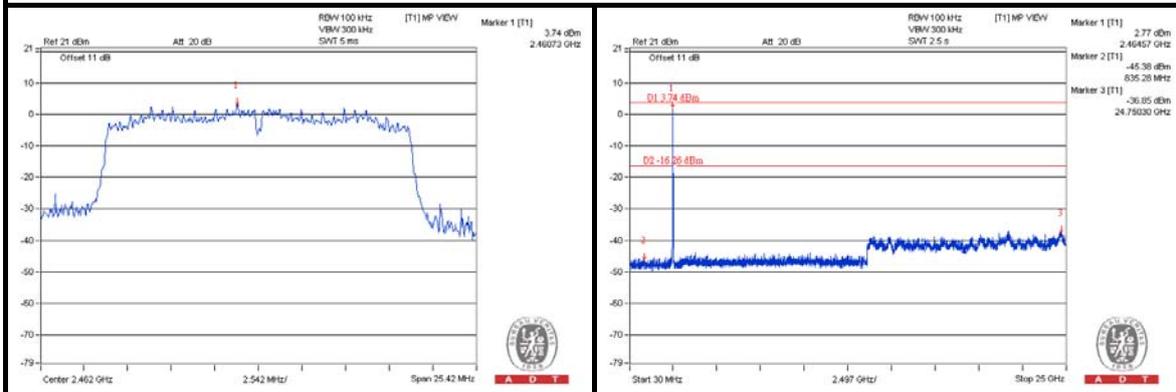






A D T

# 802.11n (40MHz) CHAIN 0



## CH 3

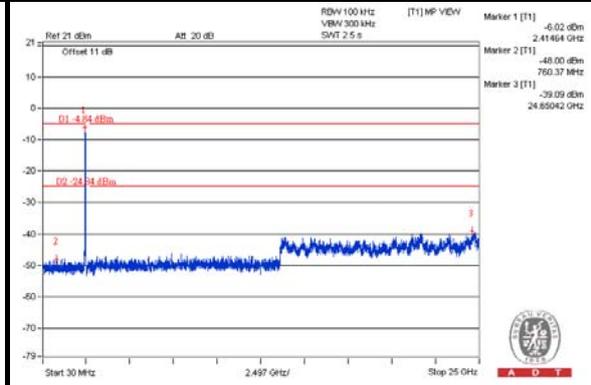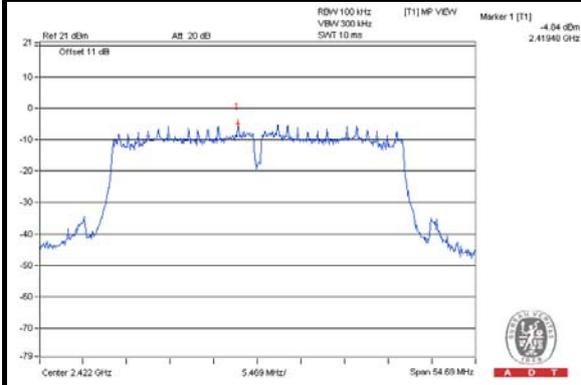

## CH 6

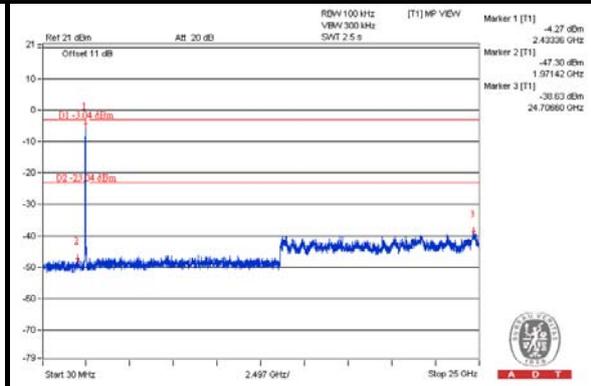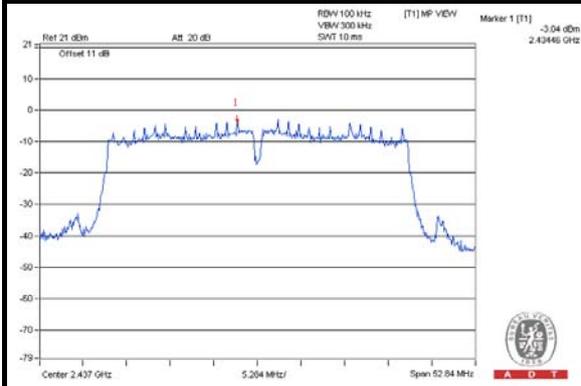


## CH 9

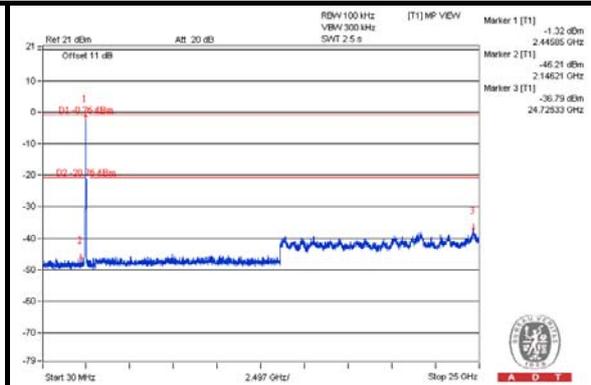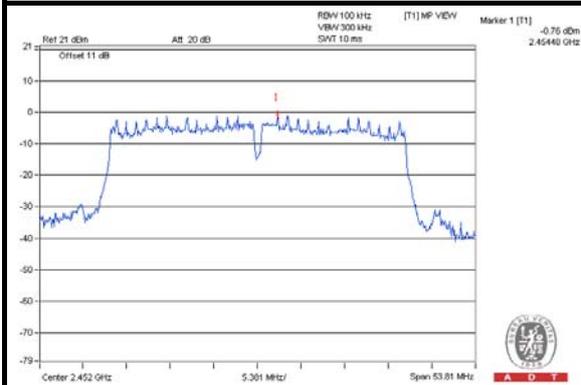


CHAIN 1


CH 3

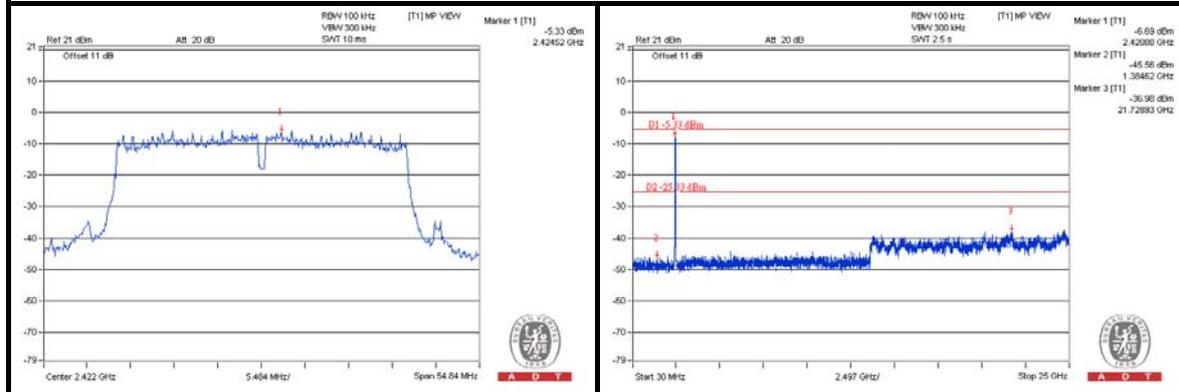

CH 6

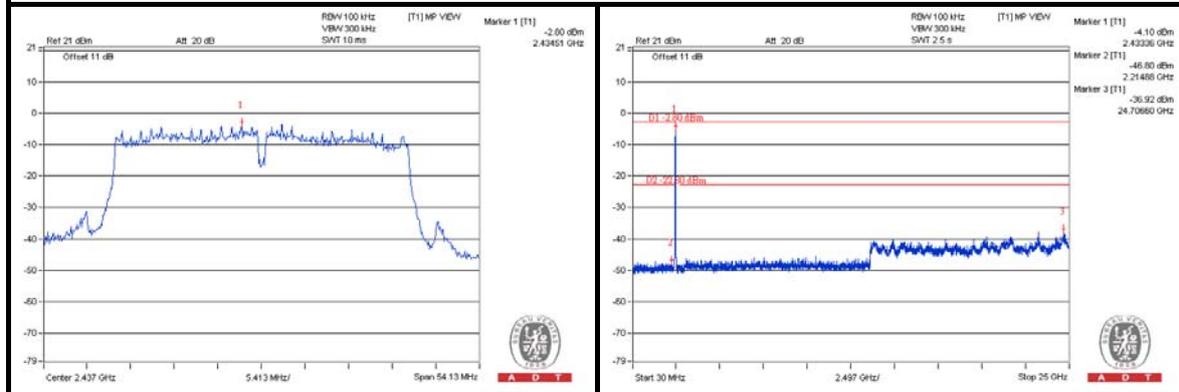

CH 9

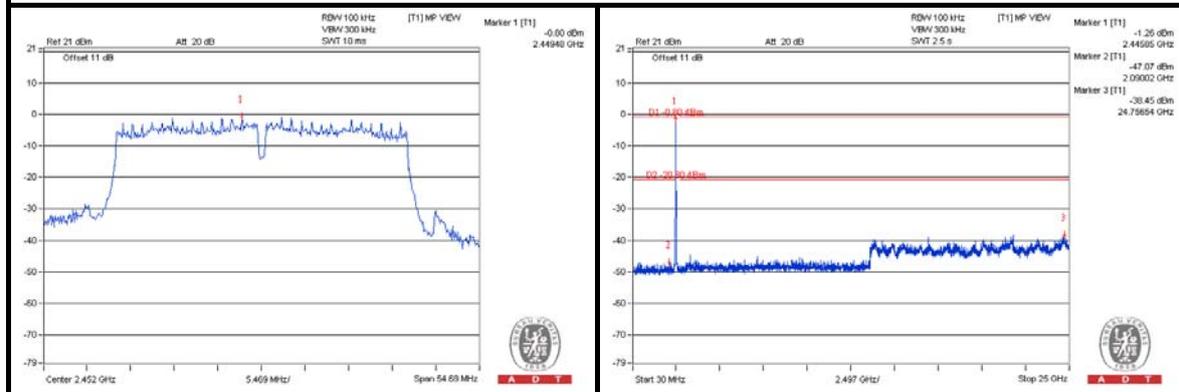



A D T

## 5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

### 5.1 RADIATED EMISSION MEASUREMENT

#### 5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

#### 5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

#### 5.1.3 TEST PROCEDURES

Same as item 4.1.3.

#### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 5.1.5 TEST SETUP

Same as item 4.1.5.

#### 5.1.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



A D T

### 5.1.7 TEST RESULTS

#### ABOVE 1GHz DATA :

#### 802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	79.9 PK	91.7	-11.8	1.00 H	356	39.80	40.10
2	#5725.00	68.3 AV	80.1	-11.8	1.00 H	356	28.20	40.10
3	*5745.00	111.7 PK			1.00 H	356	71.50	40.20
4	*5745.00	100.1 AV			1.00 H	356	59.90	40.20
5	11490.00	66.0 PK	74.0	-8.0	1.00 H	254	13.20	52.80
6	11490.00	52.8 AV	54.0	-1.2	1.00 H	254	0.00	52.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	77.0 PK	88.8	-11.8	1.00 V	256	36.90	40.10
2	#5725.00	66.4 AV	78.2	-11.8	1.00 V	256	26.30	40.10
3	*5745.00	108.8 PK			1.19 V	102	68.60	40.20
4	*5745.00	98.2 AV			1.19 V	102	58.00	40.20
5	11490.00	64.8 PK	74.0	-9.2	1.00 V	360	12.00	52.80
6	11490.00	50.3 AV	54.0	-3.7	1.00 V	360	-2.50	52.80

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	109.5 PK			1.00 H	355	69.20	40.30
2	*5785.00	99.0 AV			1.00 H	355	58.70	40.30
3	11570.00	67.9 PK	74.0	-6.1	1.79 H	188	15.30	52.60
4	11570.00	53.0 AV	54.0	-1.0	1.79 H	188	0.40	52.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	107.5 PK			1.19 V	101	67.20	40.30
2	*5785.00	96.5 AV			1.19 V	101	56.20	40.30
3	11570.00	67.5 PK	74.0	-6.5	1.63 V	180	14.90	52.60
4	11570.00	52.4 AV	54.0	-1.6	1.63 V	180	-0.20	52.60

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	109.2 PK			1.00 H	9	68.80	40.40
2	*5825.00	98.5 AV			1.00 H	9	58.10	40.40
3	#5850.00	63.2 PK	89.2	-26.0	1.00 H	9	22.70	40.50
4	#5850.00	52.5 AV	78.5	-26.0	1.00 H	9	12.00	40.50
5	11650.00	68.3 PK	74.0	-5.7	1.46 H	182	15.80	52.50
6	11650.00	52.6 AV	54.0	-1.4	1.46 H	182	0.10	52.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	107.0 PK			1.19 V	105	66.60	40.40
2	*5825.00	95.3 AV			1.19 V	105	54.90	40.40
3	#5850.00	61.0 PK	87.0	-26.0	1.00 V	9	20.50	40.50
4	#5850.00	49.3 AV	75.3	-26.0	1.00 V	9	8.80	40.50
5	11650.00	67.3 PK	74.0	-6.7	1.81 V	184	14.80	52.50
6	11650.00	51.6 AV	54.0	-2.4	1.81 V	184	-0.90	52.50

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	77.9 PK	91.2	-13.3	1.00 H	354	37.80	40.10
2	#5725.00	66.3 AV	79.6	-13.3	1.00 H	354	26.20	40.10
3	*5745.00	111.2 PK			1.00 H	8	71.00	40.20
4	*5745.00	99.6 AV			1.00 H	8	59.40	40.20
5	11490.00	67.1 PK	74.0	-6.9	1.45 H	246	14.30	52.80
6	11490.00	53.0 AV	54.0	-1.0	1.45 H	246	0.20	52.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	76.1 PK	89.4	-13.3	1.19 V	103	36.00	40.10
2	#5725.00	64.6 AV	77.9	-13.3	1.19 V	103	24.50	40.10
3	*5745.00	109.4 PK			1.19 V	103	69.20	40.20
4	*5745.00	97.9 AV			1.19 V	103	57.70	40.20
5	11490.00	66.0 PK	74.0	-8.0	1.21 V	184	13.20	52.80
6	11490.00	51.9 AV	54.0	-2.1	1.21 V	184	-0.90	52.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	109.3 PK			1.00 H	219	69.00	40.30
2	*5785.00	98.2 AV			1.00 H	219	57.90	40.30
3	11570.00	68.0 PK	74.0	-6.0	1.13 H	293	15.40	52.60
4	11570.00	53.0 AV	54.0	-1.0	1.13 H	293	0.40	52.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	108.6 PK			1.19 V	101	68.30	40.30
2	*5785.00	97.1 AV			1.19 V	101	56.80	40.30
3	11570.00	64.7 PK	74.0	-9.3	1.77 V	187	12.10	52.60
4	11570.00	50.7 AV	54.0	-3.3	1.77 V	187	-1.90	52.60

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	110.8 PK			1.00 H	201	70.40	40.40
2	*5825.00	98.8 AV			1.00 H	201	58.40	40.40
3	#5850.00	67.9 PK	90.8	-22.9	1.00 H	0	27.40	40.50
4	#5850.00	55.9 AV	78.8	-22.9	1.00 H	0	15.40	40.50
5	11650.00	68.7 PK	74.0	-5.3	1.55 H	34	16.20	52.50
6	11650.00	53.0 AV	54.0	-1.0	1.55 H	34	0.50	52.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	106.4 PK			1.21 V	108	66.00	40.40
2	*5825.00	95.0 AV			1.21 V	108	54.60	40.40
3	#5850.00	63.5 PK	86.4	-22.9	1.00 V	0	23.00	40.50
4	#5850.00	52.1 AV	75.0	-22.9	1.00 V	0	11.60	40.50
5	11650.00	64.6 PK	74.0	-9.4	1.45 V	184	12.10	52.50
6	11650.00	50.2 AV	54.0	-3.8	1.45 V	184	-2.30	52.50

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	80.7 PK	88.3	-7.6	1.00 H	353	40.60	40.10
2	#5725.00	68.3 AV	75.9	-7.6	1.00 H	353	28.20	40.10
3	*5755.00	108.3 PK			1.00 H	7	68.10	40.20
4	*5755.00	95.9 AV			1.00 H	7	55.70	40.20
5	11510.00	66.3 PK	74.0	-7.7	1.73 H	34	13.60	52.70
6	11510.00	52.6 AV	54.0	-1.4	1.73 H	34	-0.10	52.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	79.1 PK	86.7	-7.6	1.00 V	353	39.00	40.10
2	#5725.00	66.7 AV	74.3	-7.6	1.00 V	353	26.60	40.10
3	*5755.00	106.7 PK			1.20 V	104	66.50	40.20
4	*5755.00	94.3 AV			1.20 V	104	54.10	40.20
5	11510.00	62.7 PK	74.0	-11.3	1.00 V	191	10.00	52.70
6	11510.00	49.3 AV	54.0	-4.7	1.00 V	191	-3.40	52.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* ”: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	109.2 PK			1.00 H	218	68.90	40.30
2	*5795.00	96.4 AV			1.00 H	218	56.10	40.30
3	#5850.00	69.2 PK	89.2	-20.0	1.00 H	12	28.70	40.50
4	#5850.00	56.4 AV	76.4	-20.0	1.00 H	12	15.90	40.50
5	11590.00	65.8 PK	74.0	-8.2	1.44 H	188	13.30	52.50
6	11590.00	52.5 AV	54.0	-1.5	1.44 H	188	0.00	52.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	104.5 PK			1.73 V	199	64.20	40.30
2	*5795.00	92.1 AV			1.73 V	199	51.80	40.30
3	#5850.00	64.5 PK	84.5	-20.0	1.00 V	12	24.00	40.50
4	#5850.00	52.1 AV	72.1	-20.0	1.00 V	12	11.60	40.50
5	11590.00	63.4 PK	74.0	-10.6	1.00 V	196	10.90	52.50
6	11590.00	49.9 AV	54.0	-4.1	1.00 V	196	-2.60	52.50

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

**BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	TESTED BY	Chris Lin
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	123.04	34.7 QP	43.5	-8.8	2.00 H	189	22.90	11.80
2	185.13	37.3 QP	43.5	-6.2	1.49 H	2	25.30	12.00
3	249.17	33.6 QP	46.0	-12.4	1.24 H	346	20.80	12.80
4	398.58	40.8 QP	46.0	-5.2	1.00 H	289	23.80	17.00
5	596.50	33.4 QP	46.0	-12.6	1.24 H	99	11.90	21.50
6	961.29	34.8 QP	54.0	-19.2	1.49 H	327	8.40	26.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	124.98	31.5 QP	43.5	-12.0	1.00 V	102	19.50	12.00
2	175.43	30.2 QP	43.5	-13.3	1.50 V	273	17.30	12.90
3	249.17	29.9 QP	46.0	-16.1	1.50 V	70	17.10	12.80
4	398.58	41.4 QP	46.0	-4.6	1.00 V	103	24.40	17.00
5	579.03	31.2 QP	46.0	-14.8	1.00 V	99	10.10	21.10
6	728.44	30.0 QP	46.0	-16.0	1.50 V	81	6.70	23.30

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	TESTED BY	Ted Chang
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	74.53	30.0 QP	40.0	-10.0	1.25 H	100	18.90	11.10
2	190.95	33.0 QP	43.5	-10.5	1.00 H	7	21.60	11.40
3	297.68	32.6 QP	46.0	-13.4	1.50 H	56	18.10	14.50
4	449.03	26.2 QP	46.0	-19.8	1.50 H	72	8.00	18.20
5	598.44	30.0 QP	46.0	-16.0	1.00 H	209	8.50	21.50
6	829.34	28.5 QP	46.0	-17.5	2.00 H	35	3.50	25.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.72	31.6 QP	40.0	-8.4	1.00 V	281	19.00	12.60
2	128.86	29.2 QP	43.5	-14.3	1.25 V	220	16.80	12.40
3	262.75	33.0 QP	46.0	-13.0	1.00 V	5	19.70	13.30
4	449.03	33.3 QP	46.0	-12.7	2.00 V	18	15.10	18.20
5	524.70	38.8 QP	46.0	-7.2	1.00 V	219	18.80	20.00
6	666.35	28.0 QP	46.0	-18.0	1.50 V	251	5.60	22.40

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

## 5.2 CONDUCTED EMISSION MEASUREMENT

### 5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

### 5.2.3 TEST PROCEDURES

Same as item 4.2.3.

### 5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

### 5.2.5 TEST SETUP

Same as item 4.2.5.

### 5.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.

### 5.2.7 TEST RESULTS


**CONDUCTED WORST-CASE DATA : 802.11n (20MHz)**

<b>PHASE</b>	Line 1	<b>6dB BANDWIDTH</b>	9kHz
<b>TEST MODE</b>	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.12	46.46	36.33	46.58	36.45	63.74	53.74	-17.16	-17.29
2	0.43125	0.15	47.94	37.14	48.09	37.29	57.23	47.23	-9.14	-9.94
3	0.64219	0.17	48.29	36.01	48.46	36.18	56.00	46.00	-7.54	-9.82
4	0.84141	0.19	45.78	26.71	45.97	26.90	56.00	46.00	-10.03	-19.10
5	1.28906	0.22	43.71	33.03	43.93	33.25	56.00	46.00	-12.07	-12.75
6	9.82813	0.64	34.62	29.77	35.26	30.41	60.00	50.00	-24.74	-19.59

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

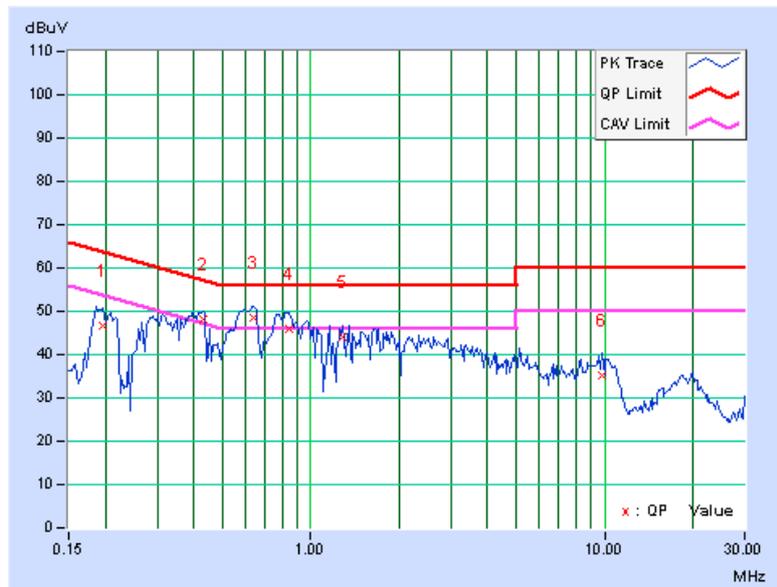




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	0.17	50.60	43.63	50.77	43.80	64.43	54.43	-13.66	-10.63
2	0.35703	0.20	50.38	45.85	50.58	46.05	58.80	48.80	-8.22	-2.75
<b>3</b>	<b>0.45107</b>	<b>0.21</b>	<b>45.84</b>	<b>43.96</b>	<b>46.05</b>	<b>44.17</b>	<b>56.86</b>	<b>46.86</b>	<b>-10.80</b>	<b>-2.68</b>
4	0.54453	0.22	44.46	39.09	44.68	39.31	56.00	46.00	-11.32	-6.69
5	0.98947	0.25	46.85	38.99	47.10	39.24	56.00	46.00	-8.90	-6.76
6	10.28516	0.60	34.99	29.67	35.59	30.27	60.00	50.00	-24.41	-19.73

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

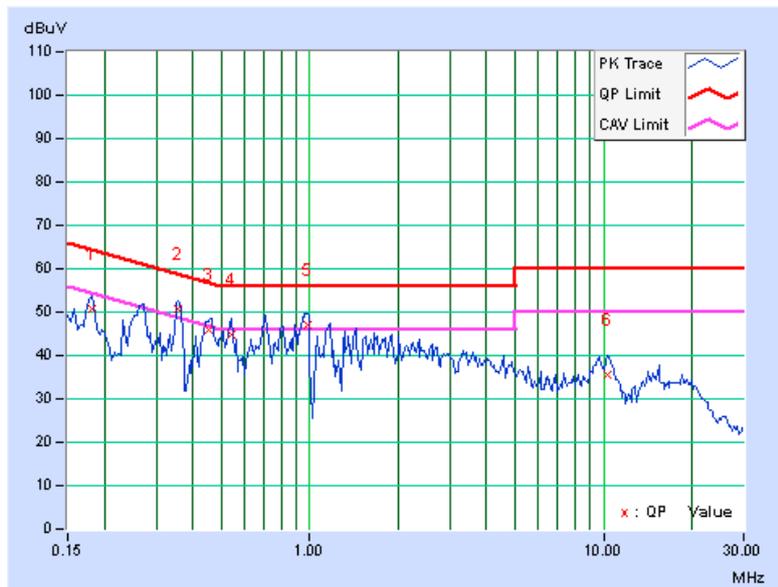




A D T

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.13	48.62	36.62	48.75	36.75	66.00	56.00	-17.25	-19.25
2	0.18516	0.14	51.78	41.10	51.92	41.24	64.25	54.25	-12.34	-13.02
3	0.72422	0.20	33.05	17.97	33.25	18.17	56.00	46.00	-22.75	-27.83
4	1.97266	0.25	28.70	19.74	28.95	19.99	56.00	46.00	-27.05	-26.01
5	7.95313	0.55	29.33	22.08	29.88	22.63	60.00	50.00	-30.12	-27.37
6	22.08594	1.19	23.61	16.75	24.80	17.94	60.00	50.00	-35.20	-32.06

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

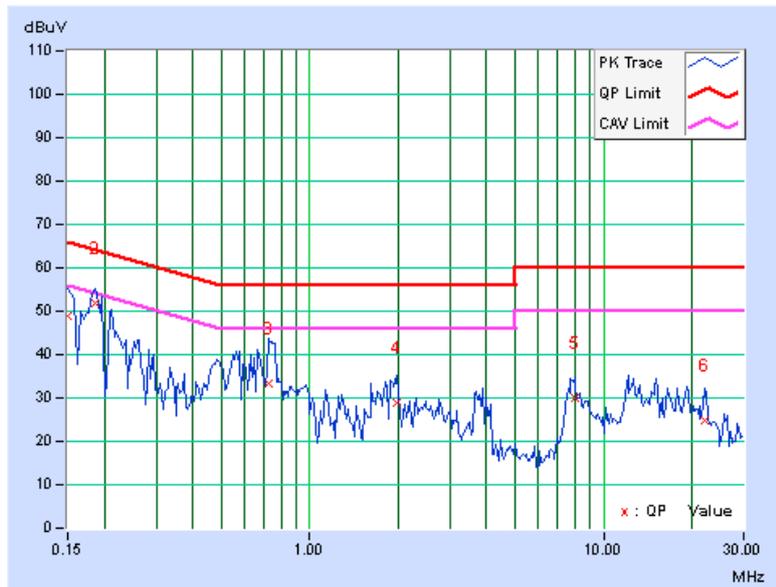




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.14	48.52	35.87	48.66	36.01	66.00	56.00	-17.34	-19.99
2	0.18125	0.15	51.12	39.66	51.27	39.81	64.43	54.43	-13.16	-14.62
3	0.72813	0.21	33.94	20.28	34.15	20.49	56.00	46.00	-21.85	-25.51
4	2.60547	0.29	28.83	20.26	29.12	20.55	56.00	46.00	-26.88	-25.45
5	8.08203	0.49	28.88	21.26	29.37	21.75	60.00	50.00	-30.63	-28.25
6	12.85156	0.64	27.09	20.61	27.73	21.25	60.00	50.00	-32.27	-28.75

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

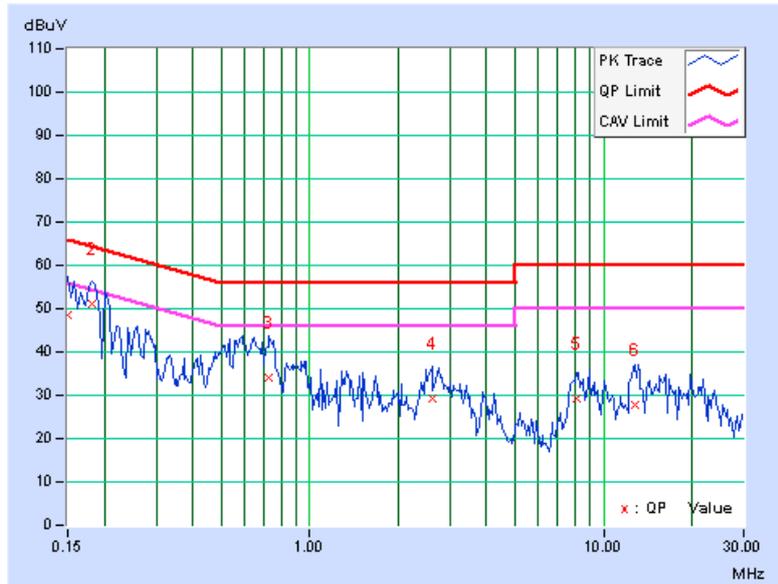



A D T

### **5.3 6dB BANDWIDTH MEASUREMENT**

#### **5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT**

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

#### **5.3.2 TEST SETUP**

Same as item 4.3.2.

#### **5.3.3 TEST INSTRUMENTS**

Refer to section 4.1.2 to get information of above instrument.

#### **5.3.4 TEST PROCEDURE**

Same as item 4.3.4.

#### **5.3.5 DEVIATION FROM TEST STANDARD**

No deviation.

#### **5.3.6 EUT OPERATING CONDITIONS**

Same as item 4.3.6.



### 5.3.7 TEST RESULTS

#### 802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	15.34	0.5	PASS
157	5785	15.39	0.5	PASS
165	5825	15.40	0.5	PASS

#### 802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	15.34	16.34	0.5	PASS
157	5785	15.21	16.31	0.5	PASS
165	5825	15.38	15.35	0.5	PASS

#### 802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	36.34	36.35	0.5	PASS
159	5795	36.48	36.53	0.5	PASS



A D T

## 5.4 CONDUCTED OUTPUT POWER

### 5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

### 5.4.2 TEST SETUP

Same as Item 4.4.2.

### 5.4.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 5.4.4 TEST PROCEDURES

Same as Item 4.4.4.

### 5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



## 5.4.7 TEST RESULTS

### FOR PEAK POWER

#### 802.11a

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	165.577	22.19	30	PASS
157	5785	156.315	21.94	30	PASS
165	5825	151.705	21.81	30	PASS

#### 802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	21.86	22.05	<b>313.787</b>	24.97	30	PASS
157	5785	21.46	21.95	296.634	24.72	30	PASS
165	5825	21.57	21.66	290.104	24.63	30	PASS

#### 802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	21.38	21.84	290.161	24.63	30	PASS
159	5795	21.83	21.96	309.441	24.91	30	PASS



**FOR AVERAGE POWER**

**802.11a**

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
149	5745	44.157	16.45
157	5785	33.420	15.24
165	5825	30.620	14.86

**802.11n (20MHz)**

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
149	5745	15.54	14.57	64.452	18.09
157	5785	14.40	13.93	52.259	17.18
165	5825	14.76	14.06	55.391	17.43

**802.11n (40MHz)**

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
151	5755	14.94	14.59	59.963	17.78
159	5795	16.57	16.10	86.132	19.35



A D T

## **5.5 POWER SPECTRAL DENSITY MEASUREMENT**

### **5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT**

The Maximum of Power Spectral Density Measurement is 8dBm.

### **5.5.2 TEST SETUP**

Same as item 4.5.2.

### **5.5.3 TEST INSTRUMENTS**

Refer to section 4.1.2 to get information of above instrument.

### **5.5.4 TEST PROCEDURE.**

Same as item 4.5.4.

### **5.5.5 DEVIATION FROM TEST STANDARD**

No deviation.

### **5.5.6 EUT OPERATING CONDITION**

Same as item 4.3.6.



### 5.5.7 TEST RESULTS

#### 802.11a

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	-7.43	8	PASS
157	5785	-9.11	8	PASS
165	5825	-7.47	8	PASS

#### 802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-7.40	3.01	-4.39	8	PASS
	157	5785	-9.70	3.01	-6.69	8	PASS
	165	5825	-8.45	3.01	-5.44	8	PASS
1	149	5745	-9.04	3.01	-6.03	8	PASS
	157	5785	-9.18	3.01	-6.17	8	PASS
	165	5825	-9.68	3.01	-6.67	8	PASS

**NOTE:** Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 5.23 < 6\text{dBi}$ , so the limit no need to reduced.

#### 802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	-11.51	3.01	-8.50	8	PASS
	159	5795	-8.81	3.01	-5.80	8	PASS
1	151	5755	-12.23	3.01	-9.22	8	PASS
	159	5795	-9.93	3.01	-6.92	8	PASS

**NOTE:** Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 5.23 < 6\text{dBi}$ , so the limit no need to reduced.



A D T

## **5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT**

### **5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT**

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### **5.6.2 TEST SETUP**

Same as Item 4.6.2

### **5.6.3 TEST INSTRUMENTS**

Refer to section 4.1.2 to get information of above instrument.

### **5.6.4 TEST PROCEDURE**

Same as Item 4.6.4

### **5.6.5 DEVIATION FROM TEST STANDARD**

No deviation.

### **5.6.6 EUT OPERATING CONDITION**

Same as Item 4.3.6

### **5.6.7 TEST RESULTS**

The conducted emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a


CH 149

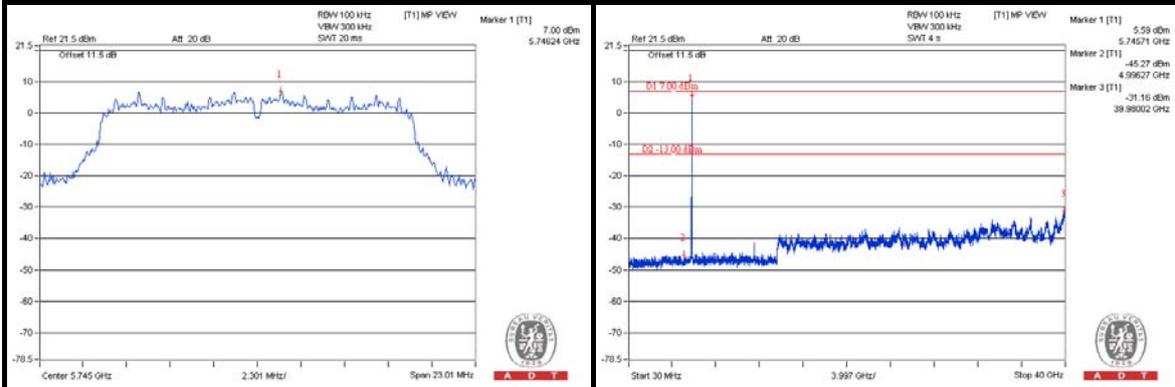

CH 157

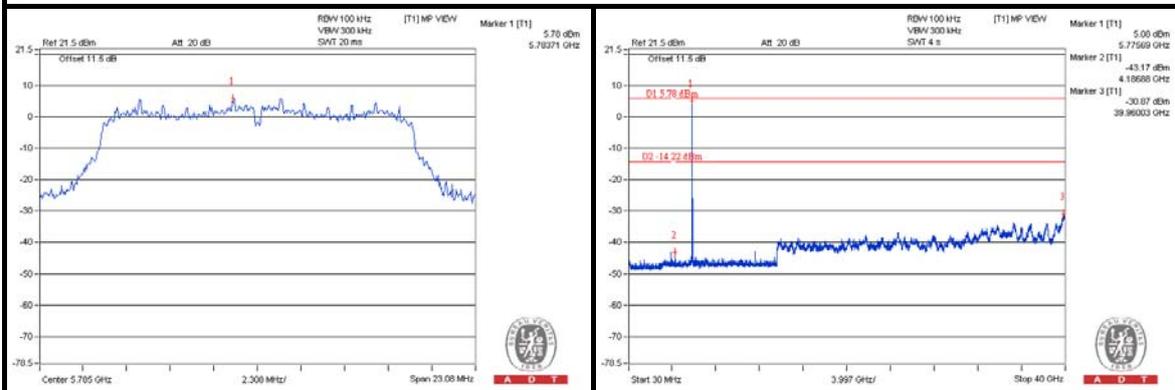

CH 165


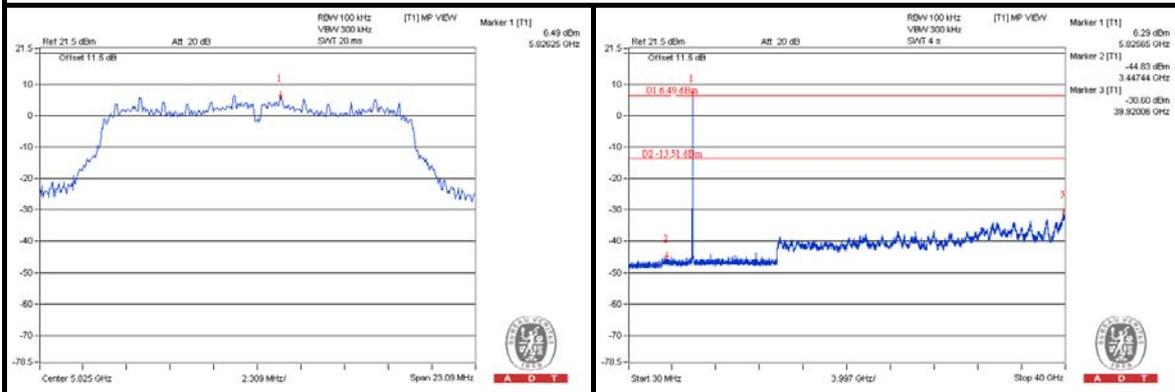






A D T

# 802.11n (20MHz) CHAIN 0



## CH 149

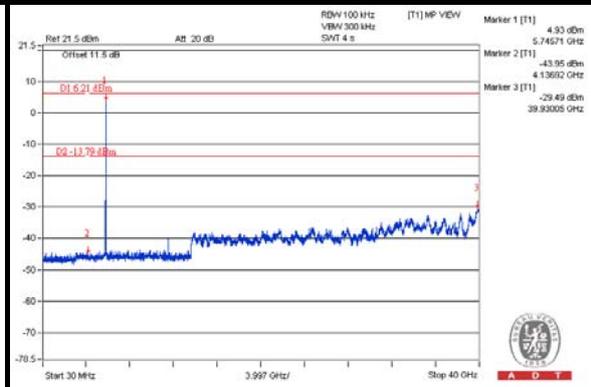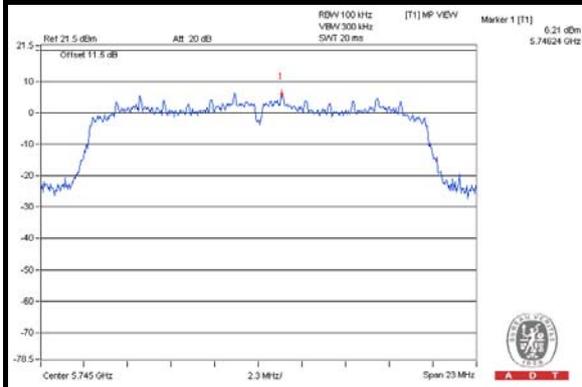

## CH 157

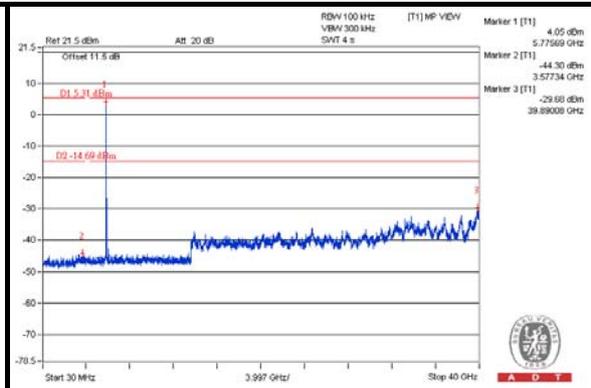
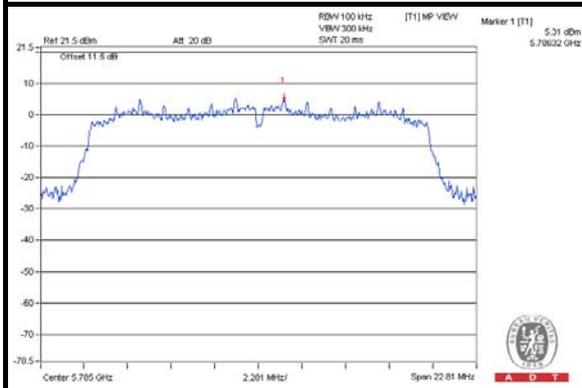


## CH 165

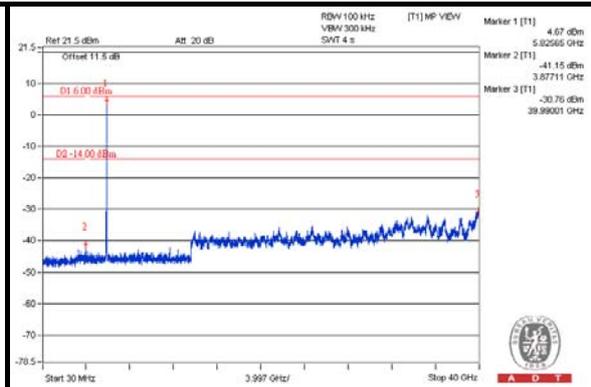
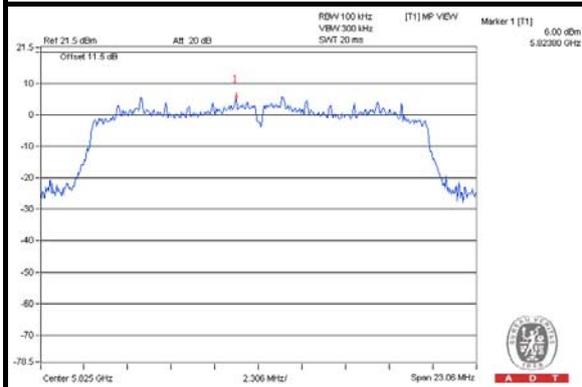


CHAIN 1



CH 149

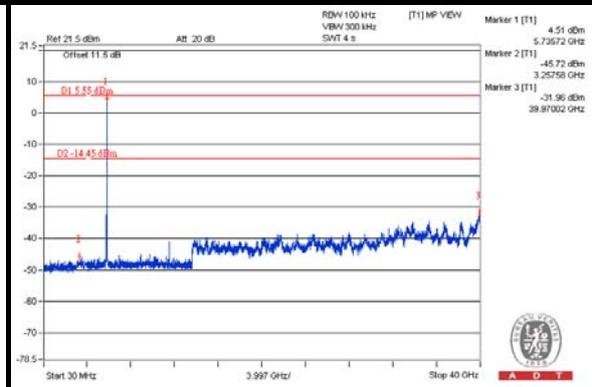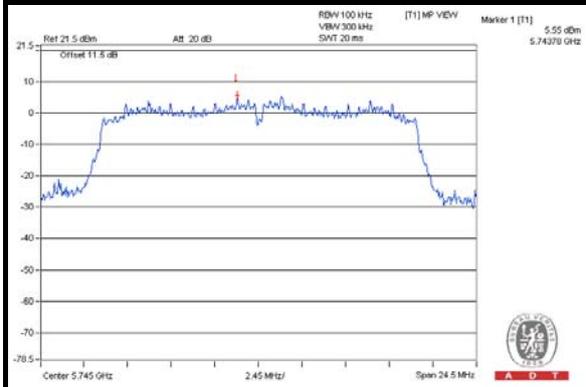

CH 157

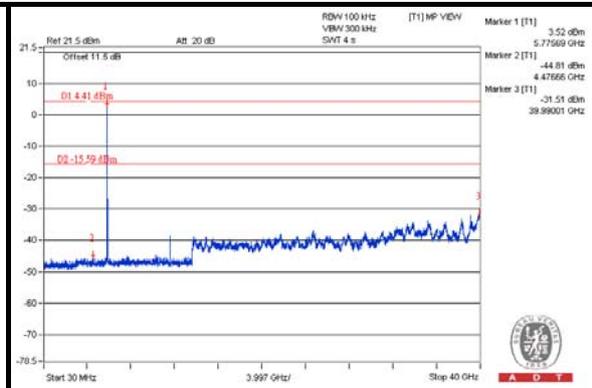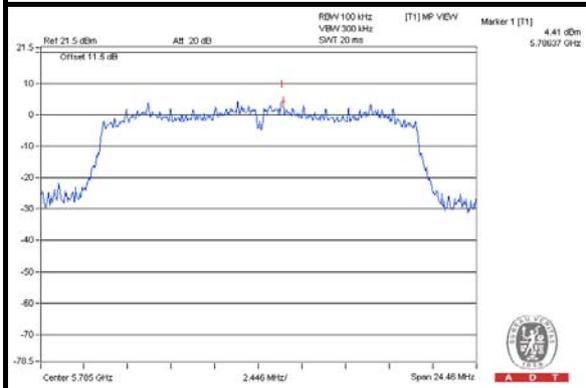

CH 165

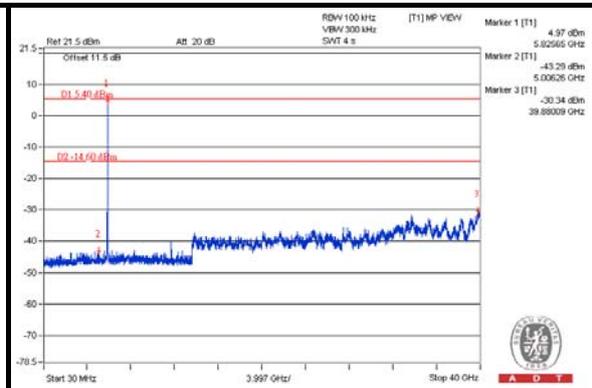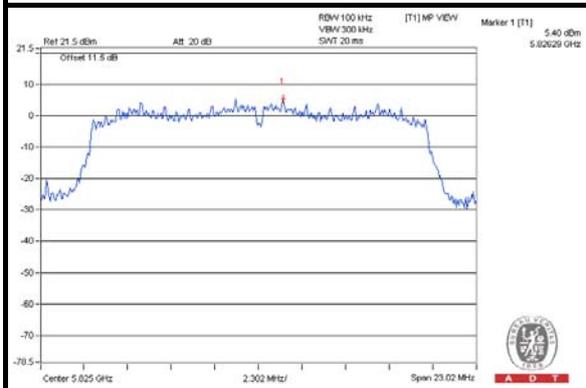





A D T

802.11n (40MHz)  
CHAIN 0

CH 151

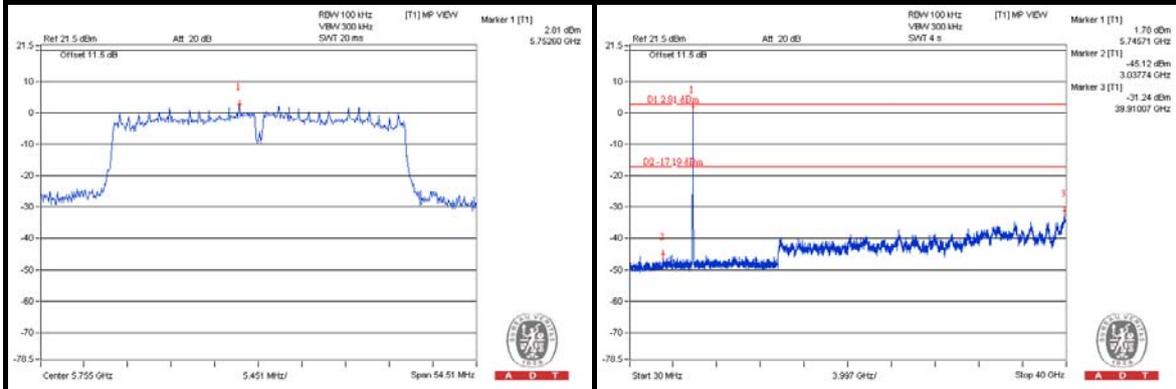

CH 159

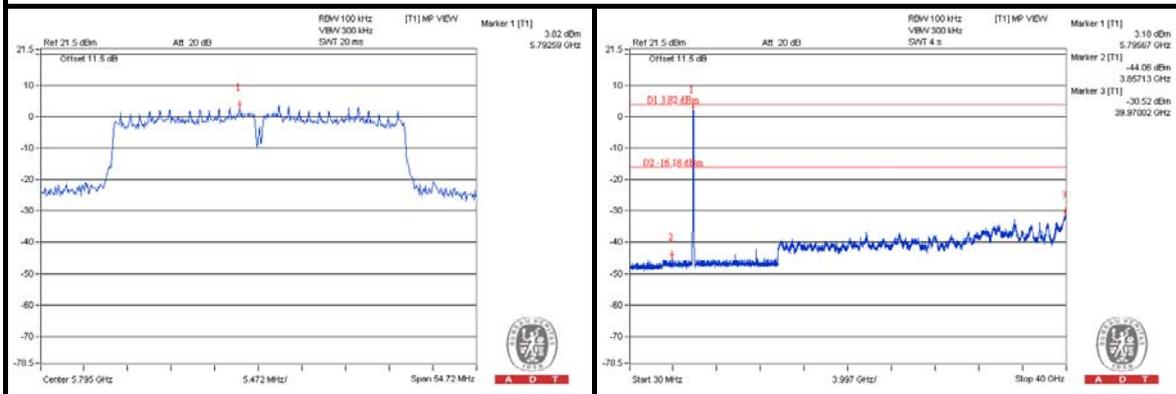





A D T

## CHAIN 1

### CH 151

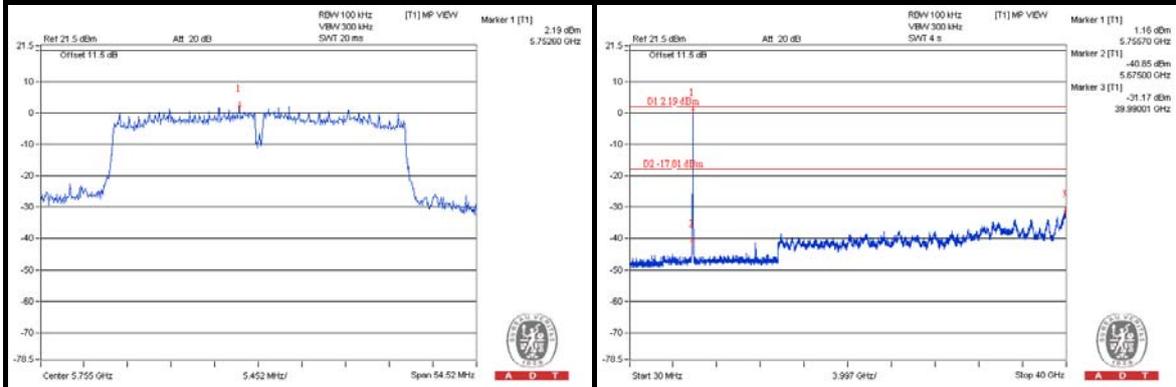

### CH 159

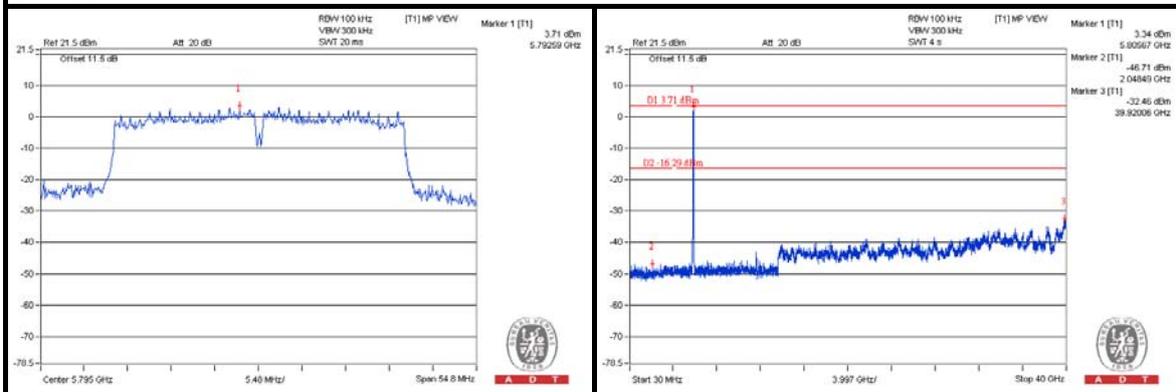



A D T

## 6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

## 7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.



A D T

## 8. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---