



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

FCC Test Report

FCC ID : MXF-WRTB283N
Equipment : Dual band Router
Model No. : WRTB-283N
Brand Name : Gemtek
Applicant : Gemtek Technology Co., Ltd.
Address : No. 15-1 Zhanghua Road, Hsinchu Industrial Park, Hukou, Hsinchu, Taiwan, 30352.
Standard : 47 CFR FCC Part 15.247
Received Date : Feb. 08, 2013
Tested Date : Feb. 20 ~ Apr. 02, 2013

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:


Gary Chang / Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Test Setup Chart	7
1.3	Local Support Equipment List	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	12
3.1	Conducted Emissions.....	12
3.2	6dB Bandwidth	17
3.3	RF Output Power.....	19
3.4	Power Spectral Density	21
3.5	Unwanted Emissions into Restricted Frequency Bands	23
3.6	Unwanted Emissions into Non-Restricted Frequency Bands	65



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Release Record

Report No.	Version	Description	Issued Date
FR320801AC	Rev. 01	Initial issue	Apr. 16, 2013



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.162MHz 50.42 (Margin 4.96dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 4874, 2390, 2483.5MHz 53.00 (Margin 1.00dB) - AV	Pass
15.247(b)(3)	Fundamental Emission Output Power	Power [dBm]: 11b: 23.20 11g: 25.90 HT20: 28.91 HT40: 24.50	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	1	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 8-15
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 8-15

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	Printed	0.48	---	---
2	Embedded	3.76	UFL	---

1.1.3 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input type="checkbox"/> Battery



1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC Adapter 1	Brand Name: DVE Model Name: DSA-26PFA-15 FUS 120200 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.8A O/P: 12Vdc, 2.0A Power Line: 1.5m non-shielded cable w/o core
2	AC Adapter 2	Brand Name: CWT Model Name: SAG024F 4 US Power Rating: I/P: 100-240Vac, 47-63Hz, 0.8A O/P: 12Vdc, 2.0A Power Line: 1m non-shielded cable w/o core
3	RJ45 cable	RJ45 2m shielded w/o core.

1.1.5 Channel List


Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2462
8	2447		
9	2452		
10	2457		
11	2462		

1.1.6 Test Tool and Duty Cycle

Test tool	Hyperterminal 5.1
-----------	-------------------



1.2 Test Setup Chart

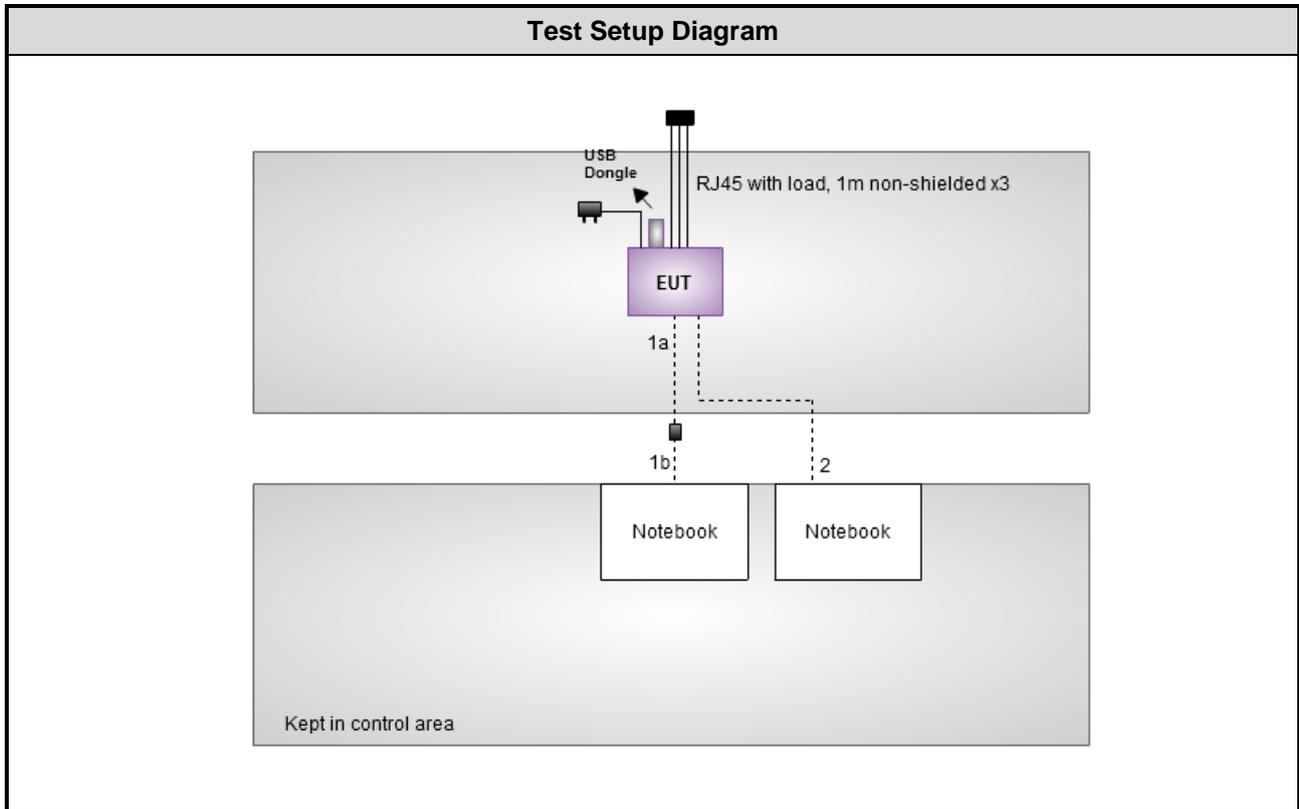

1.3 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Length (m)
1	Notebook	DELL	E5420	---	DoC	a. RJ45 2m shielded w/o core. b. RJ45 10m non-shielded w/o core.
2	Notebook	DELL	E5420	---	DoC	RJ45 10m non-shielded w/o core.
3	USB Dongle	Transend	JetFlash V85	---	---	---

Note: Item 1a was provided by client.



1.4 The Equipment List

EMI	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Dec. 12, 2012	Dec. 11, 2013
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Dec. 04, 2012	Dec. 03, 2013
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2012	Dec. 03, 2013
ISN	TESEQ	ISN T800	23342	Feb. 17, 2013	Feb. 16, 2014
ISN	TESEQ	ISN T400	21653	Jun. 22, 2012	Jun. 21, 2013
ISN	TESEQ	ISN T8-Cat6	27262	Sep. 17, 2012	Sep. 16, 2013
ISN	TESEQ	ISN ST08	22589	Jan. 24, 2013	Jan. 23, 2014
RF Current Probe	FCC	F-33-4	121630	Dec. 04, 2012	Dec. 03, 2013
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 25, 2012	Dec. 24, 2013
ESH3-Z6 V-Network	R&S	ESH3-Z6	100920	Nov. 21, 2012	Nov. 20, 2013

Note: Calibration Interval of instruments listed above is one year.

EMI	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
3m semi-anechoic chamber	RIKEN	SAC-03	03CH01-WS	Jan. 04, 2013	Jan. 03, 2014
Amplifier	Burgeon	BPA-530	100219	Nov. 28, 2012	Nov. 27, 2013
Amplifier	Agilent	83017A	MY39501308	Dec. 18, 2012	Dec. 17, 2013
Bilog Antenna	Schwarzbeck	VULB9168	VULB9168-522	Jan. 11, 2013	Jan. 10, 2014
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 18, 2013	Feb. 17, 2014
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-001	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-002	Dec. 25, 2012	Dec. 24, 2013
Spectrum Analyzer	R&S	FSV40	101498	Jan. 24, 2013	Jan. 23, 2014
Receiver	ROHDE&SCHWARZ	ESR3	101658	Jan. 30, 2013	Jan. 29, 2013
control	EM Electronics	EM1000	60612	N/A	N/A

Note: Calibration Interval of instruments listed above is one year.



RF	RF Conducted				
Test Site	RF Conducted (TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101486	Nov. 14, 2012	Nov. 13, 2013
Spectrum Analyzer	R&S	FSP 40	100593	Aug. 14, 2012	Aug. 13, 2013
DC Power Source	G.W.	GPC-6030D	C671845	Jun. 19, 2012	Jun. 18, 2013
AC Power Source	G.W.	APS-9102	EL920581	Jul. 02, 2012	Jul. 01, 2013
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	Nov. 21, 2012	Nov. 20, 2013
Signal Generator	R&S	SMR40	100116	Jun. 26, 2012	Jun. 25, 2013
Power Sensor	Anritsu	MA2411B	1027452	Sep. 08, 2012	Sep. 07, 2013
Power Meter	Anritsu	ML2495A	1124009	Sep. 08, 2012	Sep. 07, 2013
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	NA	NA
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	NA	NA

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2009

FCC KDB 558074 D01 DTS Meas Guidance v02

FCC KDB 789033 D01 General UNII Test procedures v01r02

FCC KDB 662911 D01 Multiple Transmitter Output v01r02

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±35.286 Hz
Conducted power	±0.536 dB
Frequency error	±35.286 Hz
Temperature	±0.3 °C
Conducted emission	±2.946 dB
AC conducted emission	±2.43 dB
Radiated emission	±2.49 dB



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	20°C / 53%	Skys Huang
Radiated Emissions	03CH01-WS	25°C / 65%	Aska Huang Haru Yang
RF Conducted	TH01-WS	24°C / 63%	Felix Sung

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

The Worst Test Modes and Channel Details	
Test Item(s)	Conducted Emissions
Modulation, Data rate	HT20/MCS 8
Test channel (MHz)	2437
Test Mode	Operating Mode Description
A	DVE adapter
B	CWT adapter

The Worst Test Modes and Channel Details	
Test Item(s)	Fundamental Emission Output Power 6dB bandwidth Power spectral density
Modulation, Data rate	11b/1Mbps, 11g/6Mbps
Test channel (MHz)	2412, 2437, 2462
Test Mode	Operating Mode Description
-	DVE adapter, ANT1 (chain 0)
-	DVE adapter, ANT2 (chain 1)
The EUT was pretested with ANT1 and ANT2, and found that ANT1 was the worst case for final test and only its data was record in this report.	
Modulation, Data rate	HT20/MCS 8, HT40/MCS 8
Test channel (MHz)	HT20: 2412, 2437, 2462 HT40: 2422, 2437, 2462
Test Mode	Operating Mode Description
-	DVE adapter, ANT1+ANT2 (chain 0+chain 1)



The Worst Test Modes and Channel Details	
Test Item(s)	Radiated emission (below 1GHz)
Modulation, Data rate	HT20/MCS 8
Test channel (MHz)	2437
Test Mode	Operating Mode Description
A	DVE adapter
B	CWT adapter
Test Item(s)	Radiated emission (above 1GHz)
Modulation, Data rate	11b/1Mbps, 11g/6Mbps
Test channel (MHz)	11b, 11g: 2412, 2437, 2462
Test Mode	Operating Mode Description
A1	DVE adapter, ANT1 (chain 0)
A2	DVE adapter, ANT2 (chain 1)
Modulation, Data rate	HT20/MCS 8, HT40/MCS 8
Test channel (MHz)	HT20: 2412, 2437, 2462 HT40: 2422, 2437, 2462
Test Mode	Operating Mode Description
A1	DVE adapter, ANT1+ANT2 (chain 0+chain 1)



3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.

3.1.3 Test Setup

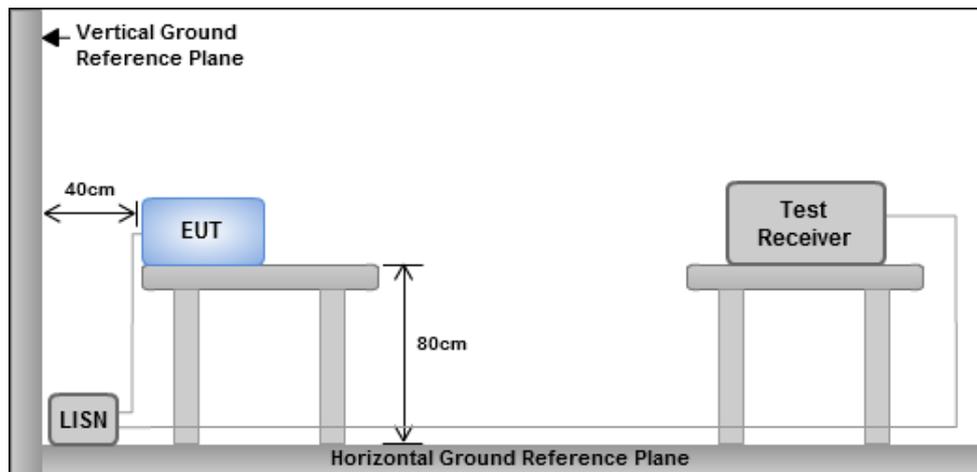

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes




3.1.4 Test Result of Conducted Emissions

Power Phase	Line	Test Freq. (MHz)	2437																																																																																																																																																																																																																																																																					
Test Mode	A																																																																																																																																																																																																																																																																							
<table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>LISN</th> <th>cable</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>factor</th> <th>loss</th> <th></th> </tr> <tr> <th></th> <th></th> <th></th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.162</td><td>34.47</td><td>55.34</td><td>-20.87</td><td>34.37</td><td>0.03</td><td>0.09</td><td>Average</td></tr> <tr><td>2</td><td>0.162</td><td>54.39</td><td>65.34</td><td>-10.95</td><td>54.29</td><td>0.03</td><td>0.09</td><td>QP</td></tr> <tr><td>3</td><td>0.297</td><td>39.17</td><td>50.32</td><td>-11.15</td><td>39.06</td><td>0.03</td><td>0.11</td><td>Average</td></tr> <tr><td>4</td><td>0.297</td><td>48.61</td><td>60.32</td><td>-11.71</td><td>48.50</td><td>0.03</td><td>0.11</td><td>QP</td></tr> <tr><td>5</td><td>0.312</td><td>34.99</td><td>49.93</td><td>-14.94</td><td>34.89</td><td>0.03</td><td>0.10</td><td>Average</td></tr> <tr><td>6</td><td>0.312</td><td>49.70</td><td>59.93</td><td>-10.23</td><td>49.60</td><td>0.03</td><td>0.10</td><td>QP</td></tr> <tr><td>7</td><td>0.426</td><td>33.63</td><td>47.33</td><td>-13.70</td><td>33.59</td><td>0.03</td><td>0.05</td><td>Average</td></tr> <tr><td>8</td><td>0.426</td><td>44.23</td><td>57.33</td><td>-13.10</td><td>44.19</td><td>0.03</td><td>0.05</td><td>QP</td></tr> <tr><td>9</td><td>0.469</td><td>32.81</td><td>46.54</td><td>-13.73</td><td>32.78</td><td>0.03</td><td>0.05</td><td>Average</td></tr> <tr><td>10</td><td>0.469</td><td>43.25</td><td>56.54</td><td>-13.29</td><td>43.22</td><td>0.03</td><td>0.05</td><td>QP</td></tr> <tr><td>11</td><td>0.589</td><td>33.72</td><td>46.00</td><td>-12.28</td><td>33.71</td><td>0.03</td><td>0.05</td><td>Average</td></tr> <tr><td>12</td><td>0.589</td><td>44.10</td><td>56.00</td><td>-11.90</td><td>44.09</td><td>0.03</td><td>0.05</td><td>QP</td></tr> <tr><td>13</td><td>0.948</td><td>29.46</td><td>46.00</td><td>-16.54</td><td>29.50</td><td>0.03</td><td>0.04</td><td>Average</td></tr> <tr><td>14</td><td>0.948</td><td>42.34</td><td>56.00</td><td>-13.66</td><td>42.38</td><td>0.03</td><td>0.04</td><td>QP</td></tr> <tr><td>15</td><td>1.949</td><td>30.78</td><td>46.00</td><td>-15.22</td><td>30.74</td><td>0.05</td><td>0.16</td><td>Average</td></tr> <tr><td>16</td><td>1.949</td><td>42.55</td><td>56.00</td><td>-13.45</td><td>42.51</td><td>0.05</td><td>0.16</td><td>QP</td></tr> <tr><td>17</td><td>3.140</td><td>31.54</td><td>46.00</td><td>-14.46</td><td>31.39</td><td>0.06</td><td>0.21</td><td>Average</td></tr> <tr><td>18</td><td>3.140</td><td>42.95</td><td>56.00</td><td>-13.05</td><td>42.80</td><td>0.06</td><td>0.21</td><td>QP</td></tr> <tr><td>19</td><td>3.759</td><td>32.30</td><td>46.00</td><td>-13.70</td><td>32.12</td><td>0.06</td><td>0.23</td><td>Average</td></tr> <tr><td>20</td><td>3.759</td><td>43.26</td><td>56.00</td><td>-12.74</td><td>43.08</td><td>0.06</td><td>0.23</td><td>QP</td></tr> <tr><td>21</td><td>4.202</td><td>32.60</td><td>46.00</td><td>-13.40</td><td>32.42</td><td>0.06</td><td>0.23</td><td>Average</td></tr> <tr><td>22</td><td>4.202</td><td>44.74</td><td>56.00</td><td>-11.26</td><td>44.56</td><td>0.06</td><td>0.23</td><td>QP</td></tr> <tr><td>23</td><td>4.696</td><td>32.84</td><td>46.00</td><td>-13.16</td><td>32.71</td><td>0.06</td><td>0.22</td><td>Average</td></tr> <tr><td>24</td><td>4.696</td><td>44.52</td><td>56.00</td><td>-11.48</td><td>44.39</td><td>0.06</td><td>0.22</td><td>QP</td></tr> <tr><td>25</td><td>6.319</td><td>34.20</td><td>50.00</td><td>-15.80</td><td>34.19</td><td>0.07</td><td>0.18</td><td>Average</td></tr> <tr><td>26</td><td>6.319</td><td>42.33</td><td>60.00</td><td>-17.67</td><td>42.32</td><td>0.07</td><td>0.18</td><td>QP</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	LISN	cable	Remark		MHz	dBuV	Line	Limit	Level	factor	loss					dBuV	dB	dBuV	dB	dB		1	0.162	34.47	55.34	-20.87	34.37	0.03	0.09	Average	2	0.162	54.39	65.34	-10.95	54.29	0.03	0.09	QP	3	0.297	39.17	50.32	-11.15	39.06	0.03	0.11	Average	4	0.297	48.61	60.32	-11.71	48.50	0.03	0.11	QP	5	0.312	34.99	49.93	-14.94	34.89	0.03	0.10	Average	6	0.312	49.70	59.93	-10.23	49.60	0.03	0.10	QP	7	0.426	33.63	47.33	-13.70	33.59	0.03	0.05	Average	8	0.426	44.23	57.33	-13.10	44.19	0.03	0.05	QP	9	0.469	32.81	46.54	-13.73	32.78	0.03	0.05	Average	10	0.469	43.25	56.54	-13.29	43.22	0.03	0.05	QP	11	0.589	33.72	46.00	-12.28	33.71	0.03	0.05	Average	12	0.589	44.10	56.00	-11.90	44.09	0.03	0.05	QP	13	0.948	29.46	46.00	-16.54	29.50	0.03	0.04	Average	14	0.948	42.34	56.00	-13.66	42.38	0.03	0.04	QP	15	1.949	30.78	46.00	-15.22	30.74	0.05	0.16	Average	16	1.949	42.55	56.00	-13.45	42.51	0.05	0.16	QP	17	3.140	31.54	46.00	-14.46	31.39	0.06	0.21	Average	18	3.140	42.95	56.00	-13.05	42.80	0.06	0.21	QP	19	3.759	32.30	46.00	-13.70	32.12	0.06	0.23	Average	20	3.759	43.26	56.00	-12.74	43.08	0.06	0.23	QP	21	4.202	32.60	46.00	-13.40	32.42	0.06	0.23	Average	22	4.202	44.74	56.00	-11.26	44.56	0.06	0.23	QP	23	4.696	32.84	46.00	-13.16	32.71	0.06	0.22	Average	24	4.696	44.52	56.00	-11.48	44.39	0.06	0.22	QP	25	6.319	34.20	50.00	-15.80	34.19	0.07	0.18	Average	26	6.319	42.33	60.00	-17.67	42.32	0.07	0.18	QP
	Freq	Level	Limit	Over	Read	LISN	cable	Remark																																																																																																																																																																																																																																																																
	MHz	dBuV	Line	Limit	Level	factor	loss																																																																																																																																																																																																																																																																	
			dBuV	dB	dBuV	dB	dB																																																																																																																																																																																																																																																																	
1	0.162	34.47	55.34	-20.87	34.37	0.03	0.09	Average																																																																																																																																																																																																																																																																
2	0.162	54.39	65.34	-10.95	54.29	0.03	0.09	QP																																																																																																																																																																																																																																																																
3	0.297	39.17	50.32	-11.15	39.06	0.03	0.11	Average																																																																																																																																																																																																																																																																
4	0.297	48.61	60.32	-11.71	48.50	0.03	0.11	QP																																																																																																																																																																																																																																																																
5	0.312	34.99	49.93	-14.94	34.89	0.03	0.10	Average																																																																																																																																																																																																																																																																
6	0.312	49.70	59.93	-10.23	49.60	0.03	0.10	QP																																																																																																																																																																																																																																																																
7	0.426	33.63	47.33	-13.70	33.59	0.03	0.05	Average																																																																																																																																																																																																																																																																
8	0.426	44.23	57.33	-13.10	44.19	0.03	0.05	QP																																																																																																																																																																																																																																																																
9	0.469	32.81	46.54	-13.73	32.78	0.03	0.05	Average																																																																																																																																																																																																																																																																
10	0.469	43.25	56.54	-13.29	43.22	0.03	0.05	QP																																																																																																																																																																																																																																																																
11	0.589	33.72	46.00	-12.28	33.71	0.03	0.05	Average																																																																																																																																																																																																																																																																
12	0.589	44.10	56.00	-11.90	44.09	0.03	0.05	QP																																																																																																																																																																																																																																																																
13	0.948	29.46	46.00	-16.54	29.50	0.03	0.04	Average																																																																																																																																																																																																																																																																
14	0.948	42.34	56.00	-13.66	42.38	0.03	0.04	QP																																																																																																																																																																																																																																																																
15	1.949	30.78	46.00	-15.22	30.74	0.05	0.16	Average																																																																																																																																																																																																																																																																
16	1.949	42.55	56.00	-13.45	42.51	0.05	0.16	QP																																																																																																																																																																																																																																																																
17	3.140	31.54	46.00	-14.46	31.39	0.06	0.21	Average																																																																																																																																																																																																																																																																
18	3.140	42.95	56.00	-13.05	42.80	0.06	0.21	QP																																																																																																																																																																																																																																																																
19	3.759	32.30	46.00	-13.70	32.12	0.06	0.23	Average																																																																																																																																																																																																																																																																
20	3.759	43.26	56.00	-12.74	43.08	0.06	0.23	QP																																																																																																																																																																																																																																																																
21	4.202	32.60	46.00	-13.40	32.42	0.06	0.23	Average																																																																																																																																																																																																																																																																
22	4.202	44.74	56.00	-11.26	44.56	0.06	0.23	QP																																																																																																																																																																																																																																																																
23	4.696	32.84	46.00	-13.16	32.71	0.06	0.22	Average																																																																																																																																																																																																																																																																
24	4.696	44.52	56.00	-11.48	44.39	0.06	0.22	QP																																																																																																																																																																																																																																																																
25	6.319	34.20	50.00	-15.80	34.19	0.07	0.18	Average																																																																																																																																																																																																																																																																
26	6.319	42.33	60.00	-17.67	42.32	0.07	0.18	QP																																																																																																																																																																																																																																																																
<p>Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).</p> <p>Note 2: Over Limit (dBuV) = Limit Line (dBuV) – Level (dBuV).</p>																																																																																																																																																																																																																																																																								



Power Phase	Neutral	Test Freq. (MHz)	2437
Test Mode	A		

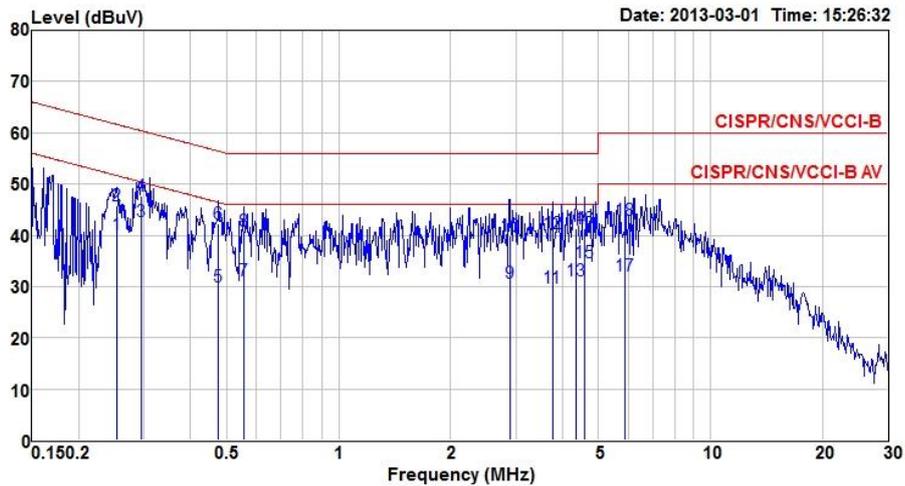


	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.253	40.16	51.64	-11.48	40.03	0.02	0.14	Average
2	0.253	45.86	61.64	-15.78	45.73	0.02	0.14	QP
3	0.294	42.70	50.41	-7.71	42.61	0.02	0.11	Average
4	0.294	47.70	60.41	-12.71	47.61	0.02	0.11	QP
5	0.476	30.09	46.41	-16.32	30.08	0.02	0.05	Average
6	0.476	42.30	56.41	-14.11	42.29	0.02	0.05	QP
7	0.555	31.21	46.00	-14.79	31.22	0.02	0.05	Average
8	0.555	40.82	56.00	-15.18	40.83	0.02	0.05	QP
9	2.884	30.68	46.00	-15.32	30.56	0.04	0.20	Average
10	2.884	39.87	56.00	-16.13	39.75	0.04	0.20	QP
11	3.759	29.73	46.00	-16.27	29.55	0.05	0.23	Average
12	3.759	40.43	56.00	-15.57	40.25	0.05	0.23	QP
13	4.338	31.07	46.00	-14.93	30.90	0.05	0.23	Average
14	4.338	41.31	56.00	-14.69	41.14	0.05	0.23	QP
15	4.598	34.68	46.00	-11.32	34.54	0.05	0.22	Average
16	4.598	41.22	56.00	-14.78	41.08	0.05	0.22	QP
17	5.898	32.22	50.00	-17.78	32.18	0.06	0.19	Average
18	5.898	43.06	60.00	-16.94	43.02	0.06	0.19	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dBuV) = Limit Line (dBuV) - Level (dBuV).



Power Phase	Line	Test Freq. (MHz)	2437
Test Mode	B		

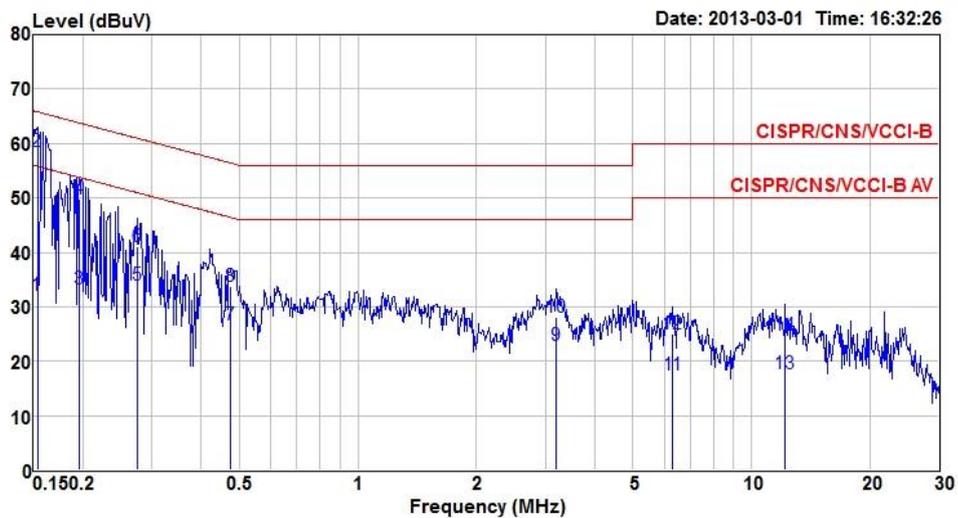


	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.153	32.12	55.82	-23.70	32.04	0.03	0.07	Average
2	0.153	58.51	65.82	-7.31	58.43	0.03	0.07	QP
3	0.197	33.32	53.76	-20.44	33.14	0.03	0.17	Average
4	0.197	49.85	63.76	-13.91	49.67	0.03	0.17	QP
5	0.274	33.88	50.98	-17.10	33.76	0.03	0.12	Average
6	0.274	41.05	60.98	-19.93	40.93	0.03	0.12	QP
7	0.476	26.79	46.41	-19.62	26.76	0.03	0.05	Average
8	0.476	33.85	56.41	-22.56	33.82	0.03	0.05	QP
9	3.190	22.84	46.00	-23.16	22.69	0.06	0.21	Average
10	3.190	28.18	56.00	-27.82	28.03	0.06	0.21	QP
11	6.319	17.54	50.00	-32.46	17.53	0.07	0.18	Average
12	6.319	24.96	60.00	-35.04	24.95	0.07	0.18	QP
13	12.188	17.77	50.00	-32.23	18.10	0.16	0.12	Average
14	12.188	24.89	60.00	-35.11	25.22	0.16	0.12	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dBUV) = Limit Line (dBUV) – Level (dBUV).



Power Phase	Neutral	Test Freq. (MHz)	2437
Test Mode	B		

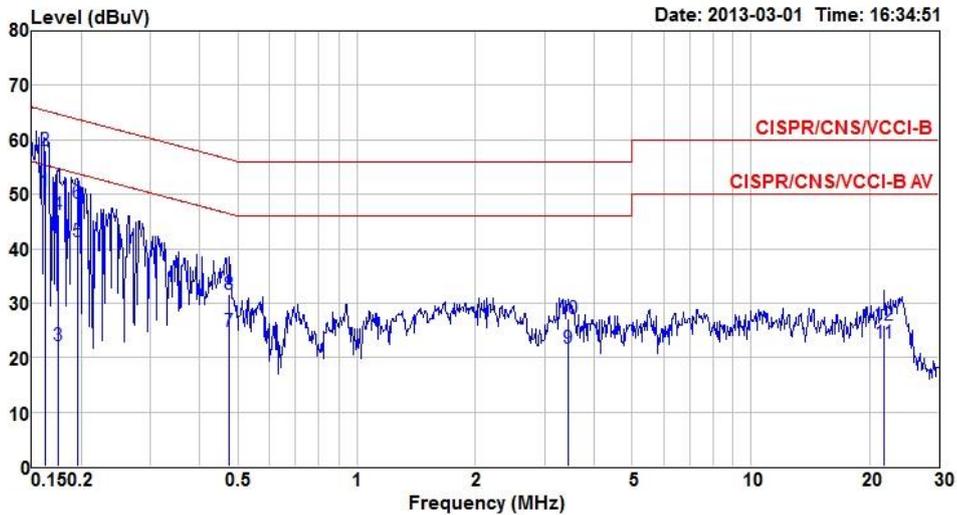

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.162	50.42	55.38	-4.96	50.33	0.02	0.09	Average
2	0.162	58.16	65.38	-7.22	58.07	0.02	0.09	QP
3	0.175	22.23	54.72	-32.49	22.11	0.02	0.12	Average
4	0.175	46.32	64.72	-18.40	46.20	0.02	0.12	QP
5	0.195	41.24	53.80	-12.56	41.07	0.02	0.17	Average
6	0.195	48.33	63.80	-15.47	48.16	0.02	0.17	QP
7	0.476	24.82	46.41	-21.59	24.81	0.02	0.05	Average
8	0.476	31.52	56.41	-24.89	31.51	0.02	0.05	QP
9	3.454	21.71	46.00	-24.29	21.54	0.05	0.22	Average
10	3.454	27.24	56.00	-28.76	27.07	0.05	0.22	QP
11	21.830	22.56	50.00	-27.44	23.51	0.14	0.31	Average
12	21.830	26.01	60.00	-33.99	26.96	0.14	0.31	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dBUV) = Limit Line (dBUV) – Level (dBUV).



3.2 6dB Bandwidth


3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.


3.2.3 Test Setup

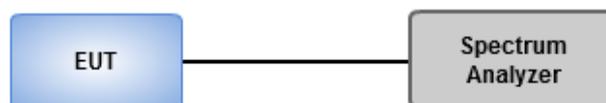



3.2.4 Test Result of Emission Bandwidth

Modulation Mode	N _{TX}	Freq. (MHz)	6dB Bandwidth (MHz)				Limit (kHz)
			Chain 0	Chain 1	Chain 2	Chain 3	
11b	1	2412	7.59	---	---	---	500
11b	1	2437	8.06	---	---	---	500
11b	1	2462	8.06	---	---	---	500
11g	1	2412	15.36	---	---	---	500
11g	1	2437	15.07	---	---	---	500
11g	1	2462	15.13	---	---	---	500
HT20	2	2412	15.13	15.07	---	---	500
HT20	2	2437	15.07	15.07	---	---	500
HT20	2	2462	15.07	15.13	---	---	500
HT40	2	2422	35.36	35.59	---	---	500
HT40	2	2437	35.25	35.71	---	---	500
HT40	2	2462	35.59	35.71	---	---	500

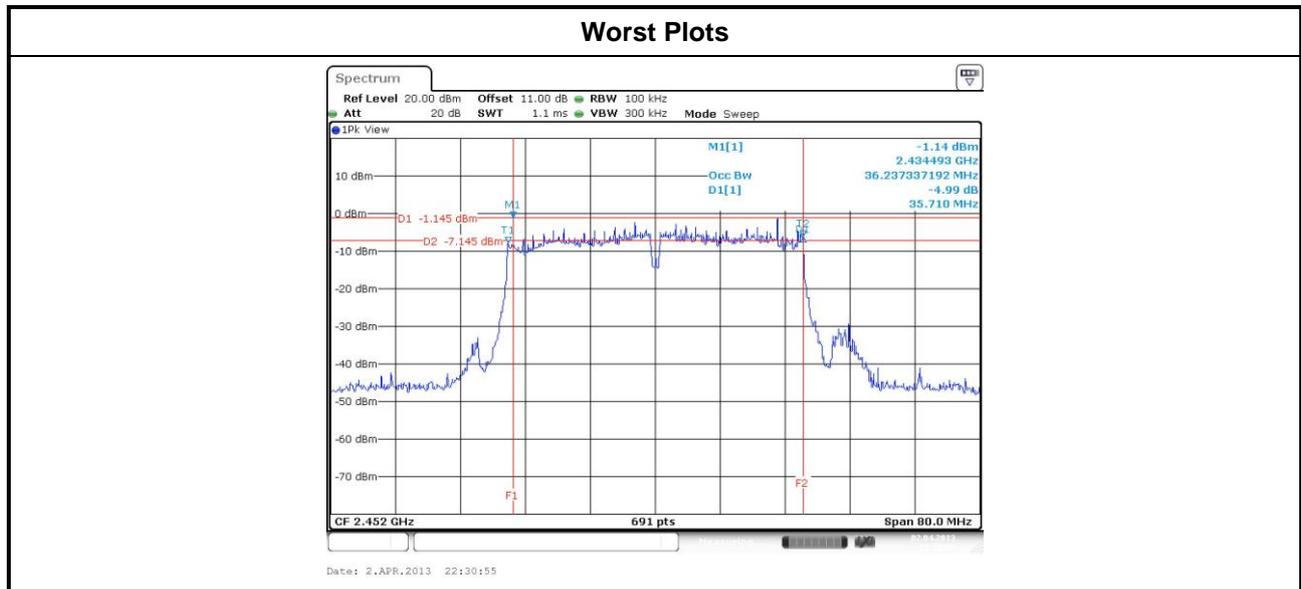



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

- Antenna gain \leq 6dBi, no any corresponding reduction is in output power limit.
- Antenna gain $>$ 6dBi
 - Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
 - Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power


3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
 - Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
 - Power meter**
 1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than 6dB bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power
 - Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = RMS.
 2. Set the sweep time to: $\geq 10 \times$ (number of measurement points in sweep) \times (maximum data rate per stream).
 3. Perform the measurement over a single sweep.
 4. Use the spectrum analyzer's band power measurement function with band limits set equal to the EBW(26dBc) band edges.
 - Power meter**
 1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than 6dB bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.




3.3.3 Test Setup

RF Output Power (Spectrum Analyzer)

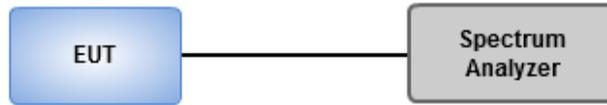

RF Output Power (Power Meter)

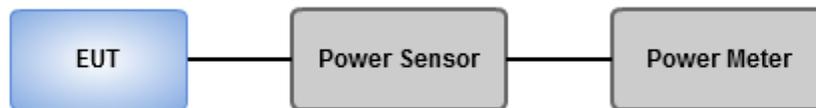

3.3.4 Test Result of Maximum Output Power

Modulation Mode	N _{TX}	Freq. (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11b	1	2412	23.20	---	---	---	208.930	23.20	30
11b	1	2437	21.90	---	---	---	154.882	21.90	30
11b	1	2462	22.00	---	---	---	158.489	22.00	30
11g	1	2412	22.70	---	---	---	186.209	22.70	30
11g	1	2437	25.90	---	---	---	389.045	25.90	30
11g	1	2462	22.90	---	---	---	194.984	22.90	30
HT20	2	2412	21.00	20.90	---	---	248.919	23.96	30
HT20	2	2437	26.00	25.80	---	---	778.297	28.91	30
HT20	2	2462	21.20	20.80	---	---	252.052	24.01	30
HT40	2	2422	18.86	18.79	---	---	152.596	21.84	30
HT40	2	2437	22.00	20.90	---	---	281.516	24.50	30
HT40	2	2462	20.12	19.18	---	---	185.596	22.69	30



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 3kHz, VBW = 10kHz.
 2. Detector = Peak, Sweep time = auto couple.
 3. Trace mode = max hold, allow trace to fully stabilize.
 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 100kHz, VBW = 300 kHz.
 2. Detector = RMS, Sweep time = auto couple.
 3. Set the sweep time to: $\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{maximum data rate per stream})$.
 4. Perform the measurement over a single sweep.
 5. Use the peak marker function to determine the maximum amplitude level.\

3.4.3 Test Setup

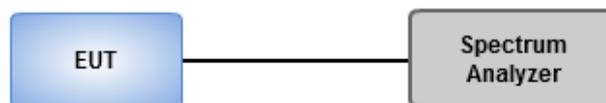




3.4.4 Test Result of Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	1	2412	-3.25	8
11b	1	2437	-4.48	8
11b	1	2462	-4.93	8
11g	1	2412	-11.15	8
11g	1	2437	-5.42	8
11g	1	2462	-12.12	8
HT20	2	2412	-10.91	8
HT20	2	2437	-4.74	8
HT20	2	2462	-10.72	8
HT40	2	2422	-14.65	8
HT40	2	2437	-12.05	8
HT40	2	2462	-14.31	8

Worst Plots

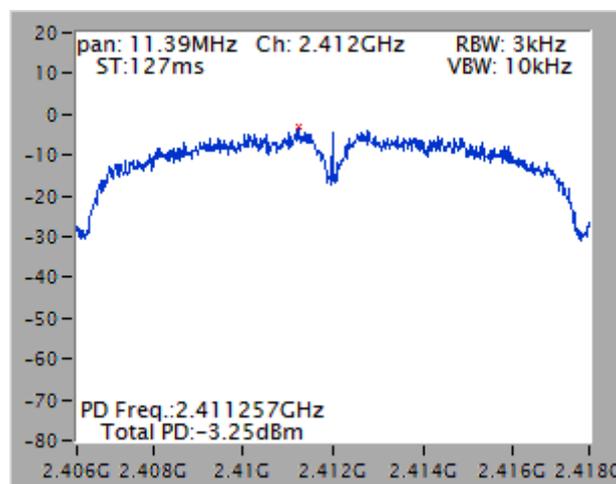



3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=3MHz and RMS detector is for average measured value of radiated emission above 1GHz.




3.5.3 Test Setup

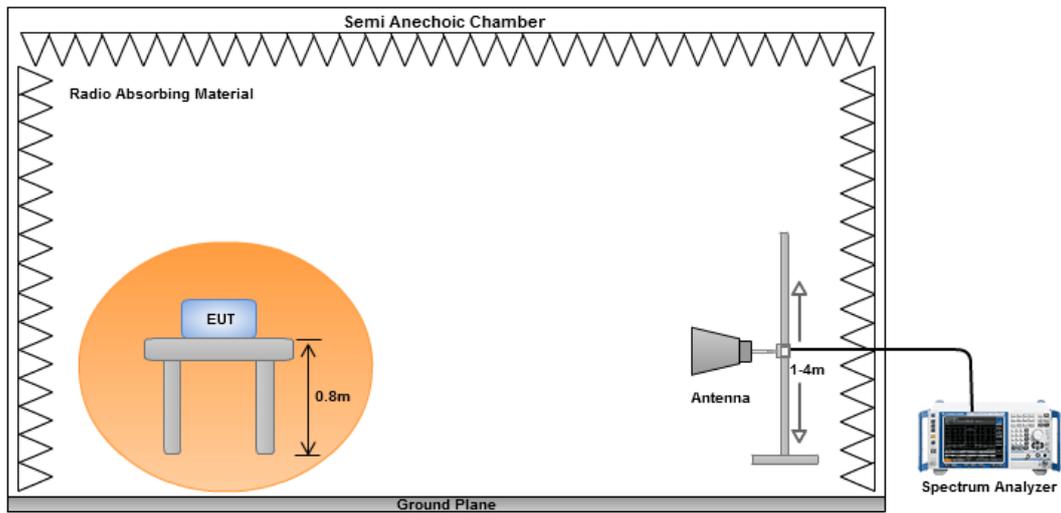



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Polarization	Horizontal	Test Freq. (MHz)	2437
Test Mode	A		

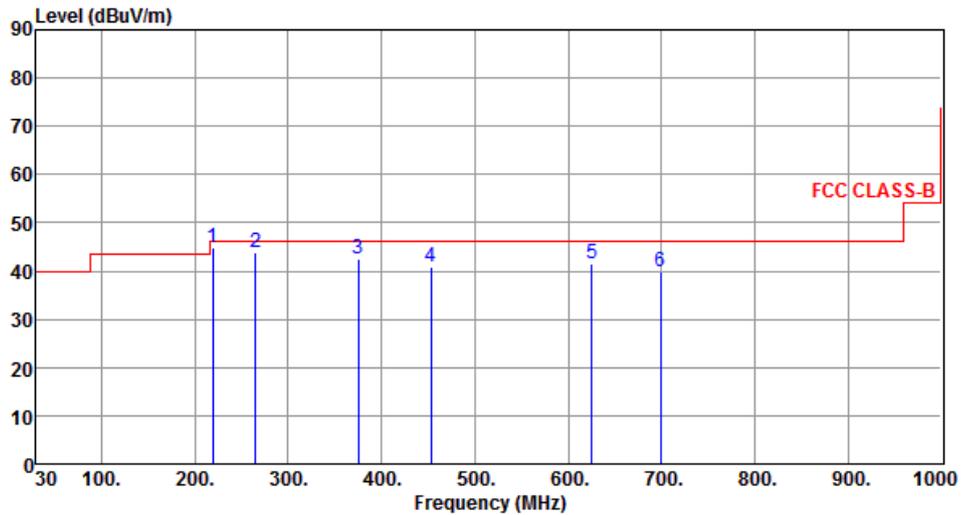


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	219.15	44.80	46.00	-1.20	64.18	-19.38	QP	-----	-----
2	264.74	43.76	46.00	-2.24	61.09	-17.33	QP	-----	-----
3	375.32	42.43	46.00	-3.57	56.70	-14.27	Peak	-----	-----
4	452.92	40.96	46.00	-5.04	53.36	-12.40	Peak	-----	-----
5	625.58	41.41	46.00	-4.59	50.78	-9.37	Peak	-----	-----
6	699.30	39.81	46.00	-6.19	48.07	-8.26	Peak	-----	-----

Note 1: Level (dBuV/m) = Read Level (dBuV/m) + Antenna Factor (dB) + Cable Loss (dB) - Preamp Factor (dB).
 2: Over Limit (dBuV/m) = Limit Line (dBuV/m) – Level (dBuV/m).



Polarization	Vertical	Test Freq. (MHz)	2437
Test Mode	A		

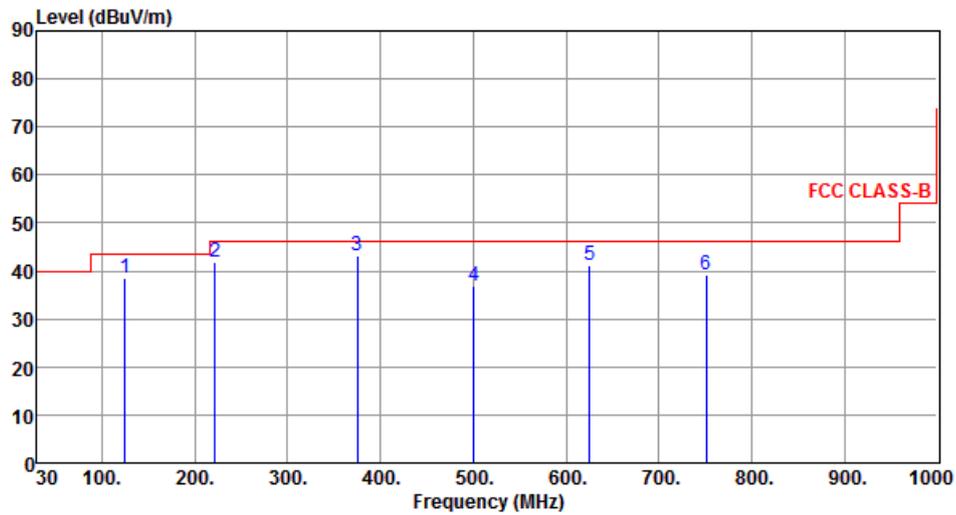


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	125.06	38.63	43.50	-4.87	57.25	-18.62	Peak	-----	-----
2	222.06	41.90	46.00	-4.10	61.17	-19.27	Peak	-----	-----
3	375.32	43.14	46.00	-2.86	57.41	-14.27	QP	-----	-----
4	500.45	36.93	46.00	-9.07	48.49	-11.56	Peak	-----	-----
5	625.58	41.02	46.00	-4.98	50.39	-9.37	Peak	-----	-----
6	750.71	39.13	46.00	-6.87	46.34	-7.21	Peak	-----	-----

Note 1: Level (dBUV/m) = Read Level (dBUV/m) + Antenna Factor (dB) + Cable Loss (dB) - Preamp Factor (dB).
 2: Over Limit (dBUV/m) = Limit Line (dBUV/m) – Level (dBUV/m).



Polarization	Horizontal	Test Freq. (MHz)	2437
Test Mode	B		

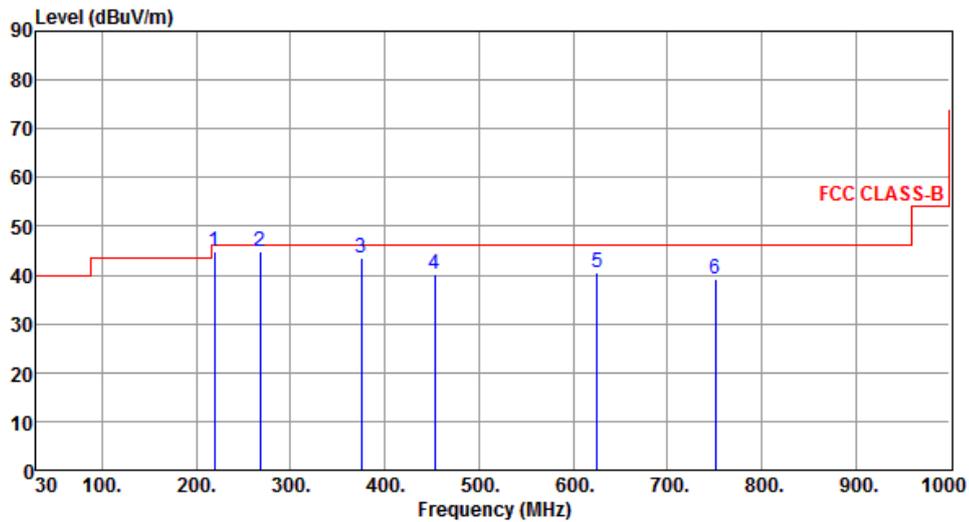


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	219.15	44.85	46.00	-1.15	64.23	-19.38	QP	-----	-----
2	267.65	44.71	46.00	-1.29	61.90	-17.19	QP	-----	-----
3	375.32	43.52	46.00	-2.48	57.79	-14.27	QP	-----	-----
4	452.92	40.14	46.00	-5.86	52.54	-12.40	Peak	-----	-----
5	625.58	40.43	46.00	-5.57	49.80	-9.37	Peak	-----	-----
6	750.71	39.29	46.00	-6.71	46.50	-7.21	Peak	-----	-----

Note 1: Level (dBuV/m) = Read Level (dBuV/m) + Antenna Factor (dB) + Cable Loss (dB) - Preamp Factor (dB).
 2: Over Limit (dBuV/m) = Limit Line (dBuV/m) – Level (dBuV/m).



Polarization	Vertical	Test Freq. (MHz)	2437
Test Mode	B		

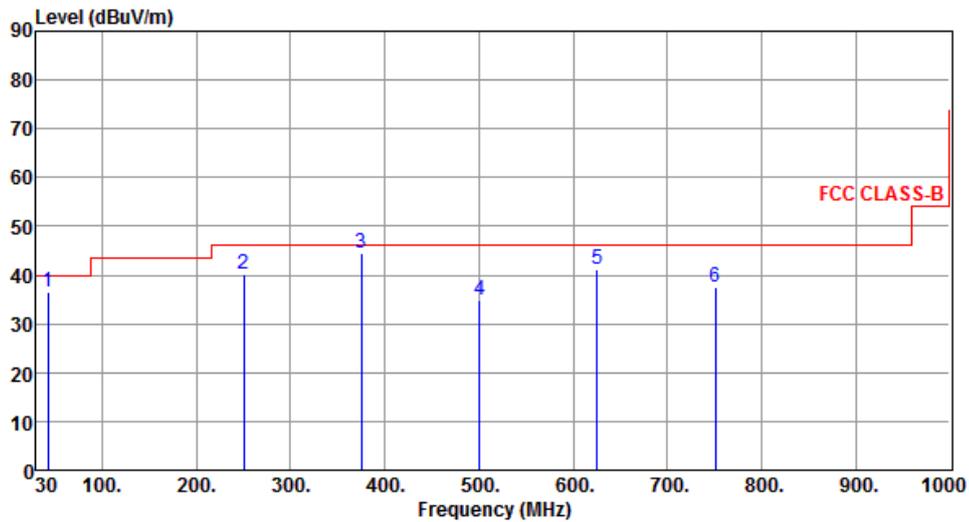


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.61	36.52	40.00	-3.48	53.35	-16.83	QP	-----	-----
2	250.19	40.26	46.00	-5.74	58.13	-17.87	Peak	-----	-----
3	375.32	44.38	46.00	-1.62	58.65	-14.27	QP	-----	-----
4	500.45	34.91	46.00	-11.09	46.47	-11.56	Peak	-----	-----
5	625.58	41.08	46.00	-4.92	50.45	-9.37	Peak	-----	-----
6	750.71	37.58	46.00	-8.42	44.79	-7.21	Peak	-----	-----

Note 1: Level (dBuV/m) = Read Level (dBuV/m) + Antenna Factor (dB) + Cable Loss (dB) - Preamp Factor (dB).
 2: Over Limit (dBuV/m) = Limit Line (dBuV/m) – Level (dBuV/m).



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

Polarization	Horizontal	Test Freq. (MHz)	2412
Test Mode	A1		

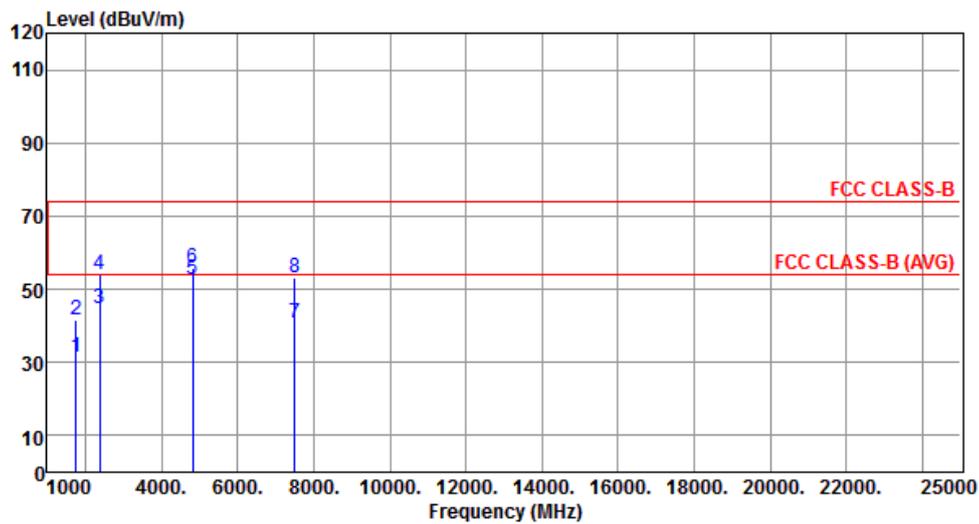


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	31.53	54.00	-22.47	37.18	-5.65	Average	-----	-----
2	1750.00	41.68	74.00	-32.32	47.33	-5.65	Peak	-----	-----
3	2390.00	44.61	54.00	-9.39	47.83	-3.22	Average	-----	-----
4	2390.00	53.89	74.00	-20.11	57.11	-3.22	Peak	-----	-----
5	4824.00	52.52	54.00	-1.48	48.21	4.31	Average	-----	-----
6	4824.00	55.75	74.00	-18.25	51.44	4.31	Peak	-----	-----
7	7500.00	40.55	54.00	-13.45	31.23	9.32	Average	-----	-----
8	7500.00	53.35	74.00	-20.65	44.03	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2412
Test Mode	A1		

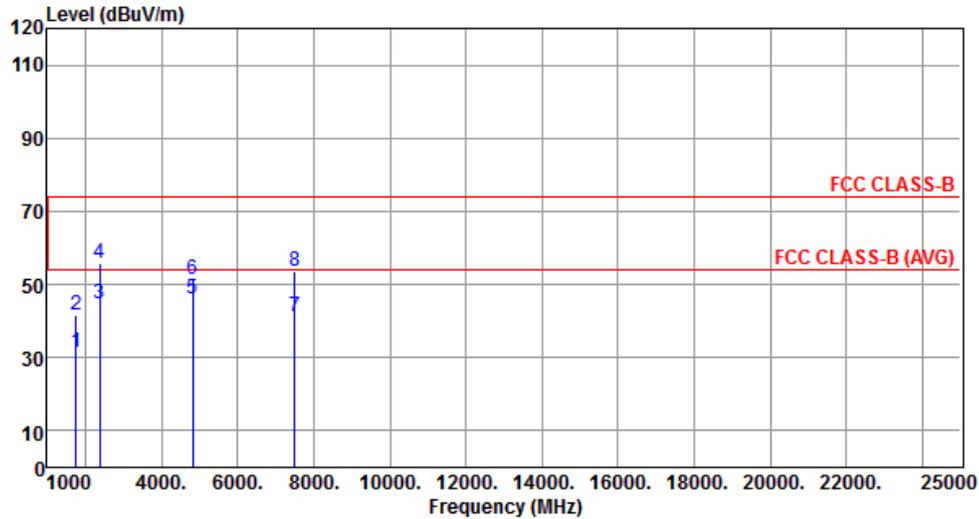


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	31.63	54.00	-22.37	37.28	-5.65	Average	-----	-----
2	1750.00	41.57	74.00	-32.43	47.22	-5.65	Peak	-----	-----
3	2390.00	44.57	54.00	-9.43	47.79	-3.22	Average	-----	-----
4	2390.00	55.86	74.00	-18.14	59.08	-3.22	Peak	-----	-----
5	4824.00	45.97	54.00	-8.03	41.66	4.31	Average	-----	-----
6	4824.00	51.21	74.00	-22.79	46.90	4.31	Peak	-----	-----
7	7500.00	41.27	54.00	-12.73	31.95	9.32	Average	-----	-----
8	7500.00	53.55	74.00	-20.45	44.23	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2437
Test Mode	A1		

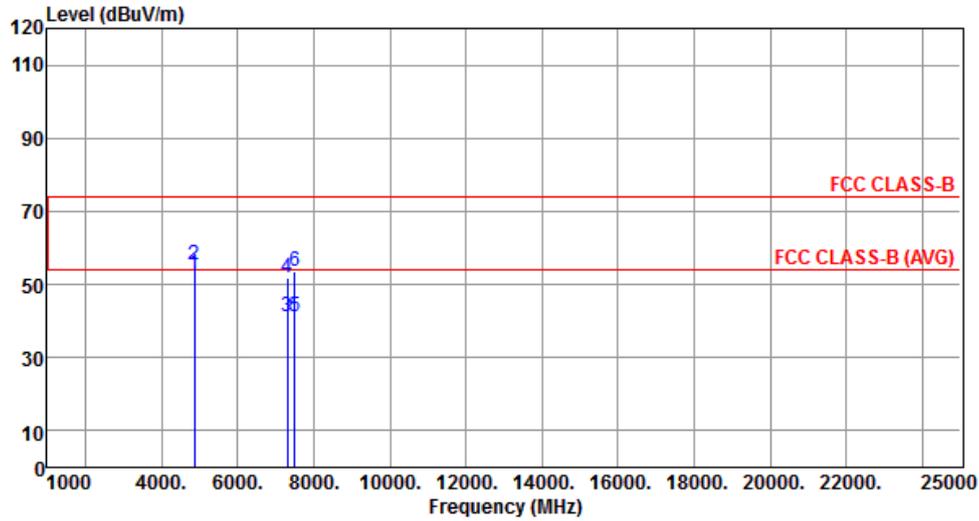


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4874.00	52.53	54.00	-1.47	48.14	4.39	Average	-----	-----
2	4874.00	55.35	74.00	-18.65	50.96	4.39	Peak	-----	-----
3	7311.00	41.21	54.00	-12.79	32.29	8.92	Average	-----	-----
4	7311.00	51.95	74.00	-22.05	43.03	8.92	Peak	-----	-----
5	7500.00	41.26	54.00	-12.74	31.94	9.32	Average	-----	-----
6	7500.00	53.44	74.00	-20.56	44.12	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2437
Test Mode	A1		

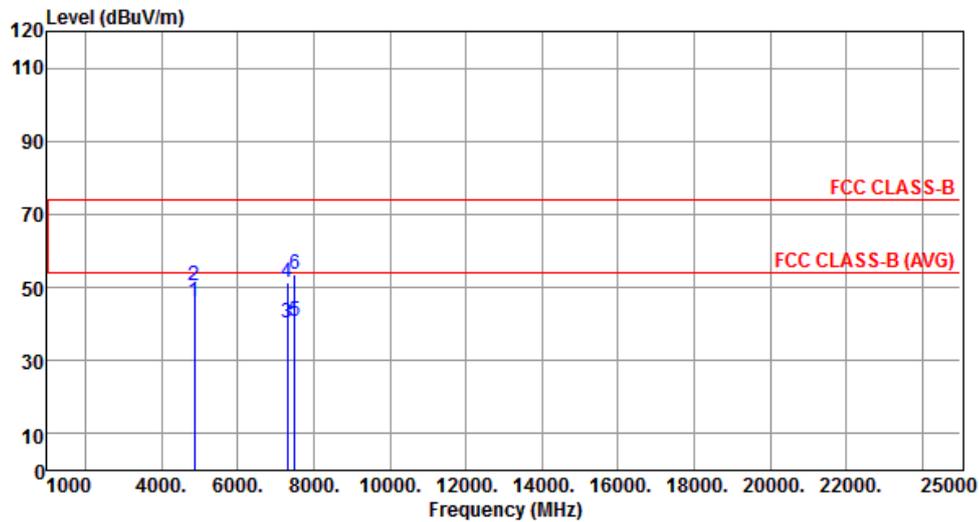


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4874.00	46.07	54.00	-7.93	41.68	4.39	Average	-----	-----
2	4874.00	50.51	74.00	-23.49	46.12	4.39	Peak	-----	-----
3	7311.00	40.33	54.00	-13.67	31.41	8.92	Average	-----	-----
4	7311.00	51.17	74.00	-22.83	42.25	8.92	Peak	-----	-----
5	7500.00	40.59	54.00	-13.41	31.27	9.32	Average	-----	-----
6	7500.00	53.58	74.00	-20.42	44.26	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2462
Test Mode	A1		

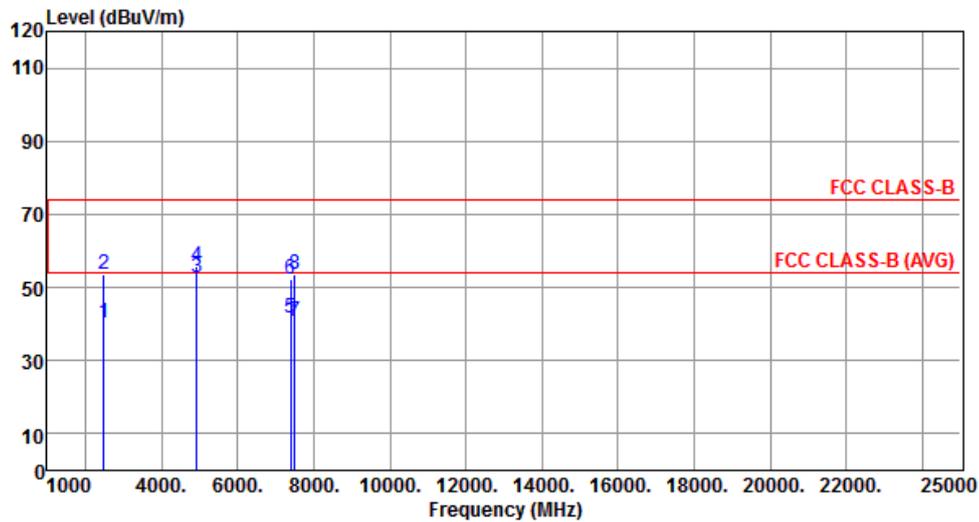


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	40.39	54.00	-13.61	43.22	-2.83	Average	-----	-----
2	2483.50	53.57	74.00	-20.43	56.40	-2.83	Peak	-----	-----
3	4924.00	52.58	54.00	-1.42	48.10	4.48	Average	-----	-----
4	4924.00	55.62	74.00	-18.38	51.14	4.48	Peak	-----	-----
5	7386.00	41.43	54.00	-12.57	32.45	8.98	Average	-----	-----
6	7386.00	52.27	74.00	-21.73	43.29	8.98	Peak	-----	-----
7	7500.00	40.69	54.00	-13.31	31.37	9.32	Average	-----	-----
8	7500.00	53.76	74.00	-20.24	44.44	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2462
Test Mode	A1		

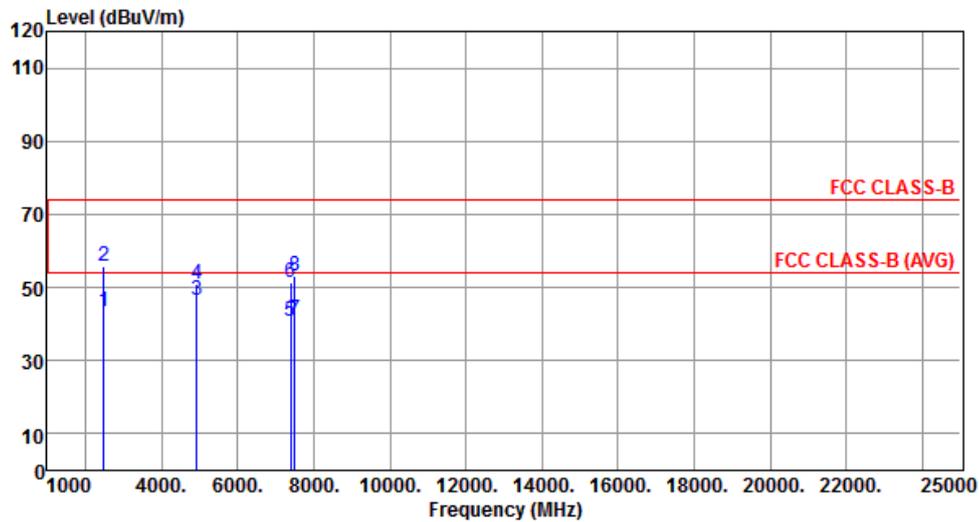


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	43.60	54.00	-10.40	46.43	-2.83	Average	-----	-----
2	2483.50	55.75	74.00	-18.25	58.58	-2.83	Peak	-----	-----
3	4924.00	46.45	54.00	-7.55	41.97	4.48	Average	-----	-----
4	4924.00	50.86	74.00	-23.14	46.38	4.48	Peak	-----	-----
5	7386.00	40.58	54.00	-13.42	31.60	8.98	Average	-----	-----
6	7386.00	51.52	74.00	-22.48	42.54	8.98	Peak	-----	-----
7	7500.00	41.26	54.00	-12.74	31.94	9.32	Average	-----	-----
8	7500.00	53.28	74.00	-20.72	43.96	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2412
Test Mode	A2		

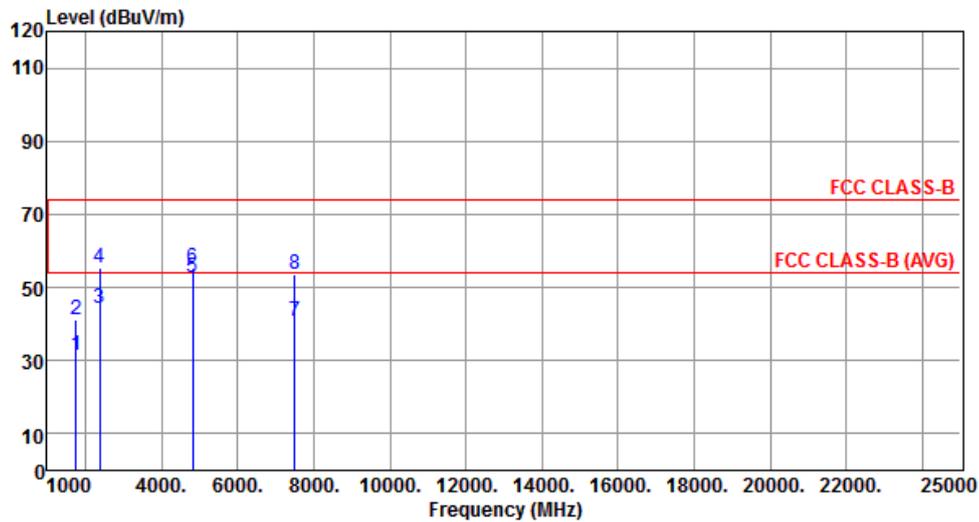


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	31.53	54.00	-22.47	37.18	-5.65	Average	-----	-----
2	1750.00	41.38	74.00	-32.62	47.03	-5.65	Peak	-----	-----
3	2390.00	44.38	54.00	-9.62	47.60	-3.22	Average	-----	-----
4	2390.00	55.32	74.00	-18.68	58.54	-3.22	Peak	-----	-----
5	4824.00	52.86	54.00	-1.14	48.55	4.31	Average	-----	-----
6	4824.00	55.39	74.00	-18.61	51.08	4.31	Peak	-----	-----
7	7500.00	40.63	54.00	-13.37	31.31	9.32	Average	-----	-----
8	7500.00	53.38	74.00	-20.62	44.06	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2412
Test Mode	A2		

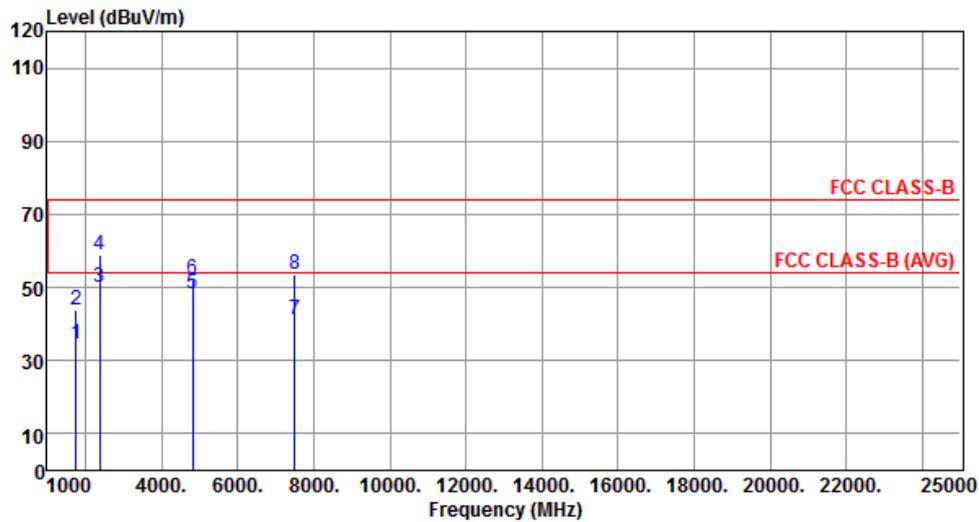


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.55	54.00	-19.45	40.20	-5.65	Average	-----	-----
2	1750.00	43.82	74.00	-30.18	49.47	-5.65	Peak	-----	-----
3	2390.00	50.18	54.00	-3.82	53.40	-3.22	Average	-----	-----
4	2390.00	58.88	74.00	-15.12	62.10	-3.22	Peak	-----	-----
5	4824.00	48.12	54.00	-5.88	43.81	4.31	Average	-----	-----
6	4824.00	52.16	74.00	-21.84	47.85	4.31	Peak	-----	-----
7	7500.00	41.36	54.00	-12.64	32.04	9.32	Average	-----	-----
8	7500.00	53.64	74.00	-20.36	44.32	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2437
Test Mode	A2		

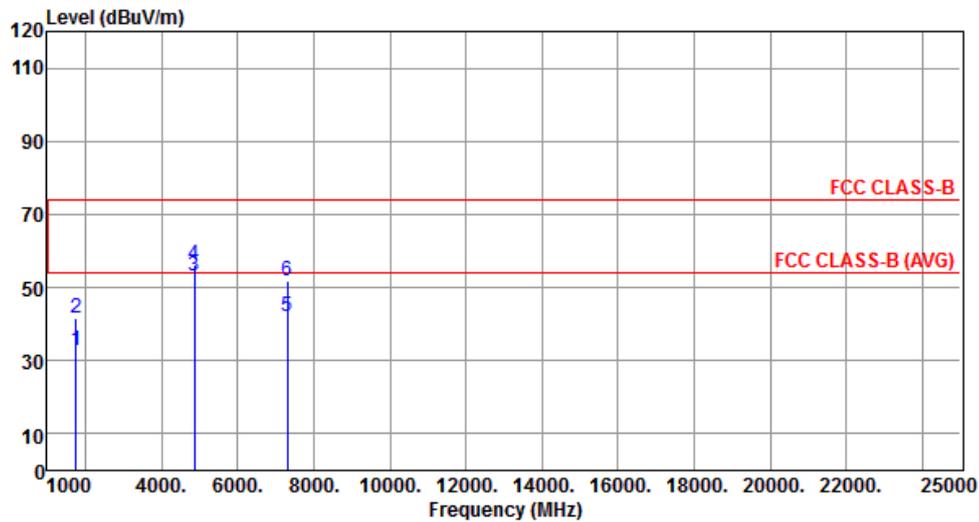


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.55	54.00	-21.45	38.20	-5.65	Average	-----	-----
2	1750.00	41.67	74.00	-32.33	47.32	-5.65	Peak	-----	-----
3	4874.00	53.00	54.00	-1.00	48.61	4.39	Average	-----	-----
4	4874.00	56.17	74.00	-17.83	51.78	4.39	Peak	-----	-----
5	7311.00	42.12	54.00	-11.88	33.20	8.92	Average	-----	-----
6	7311.00	51.88	74.00	-22.12	42.96	8.92	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2437
Test Mode	A2		

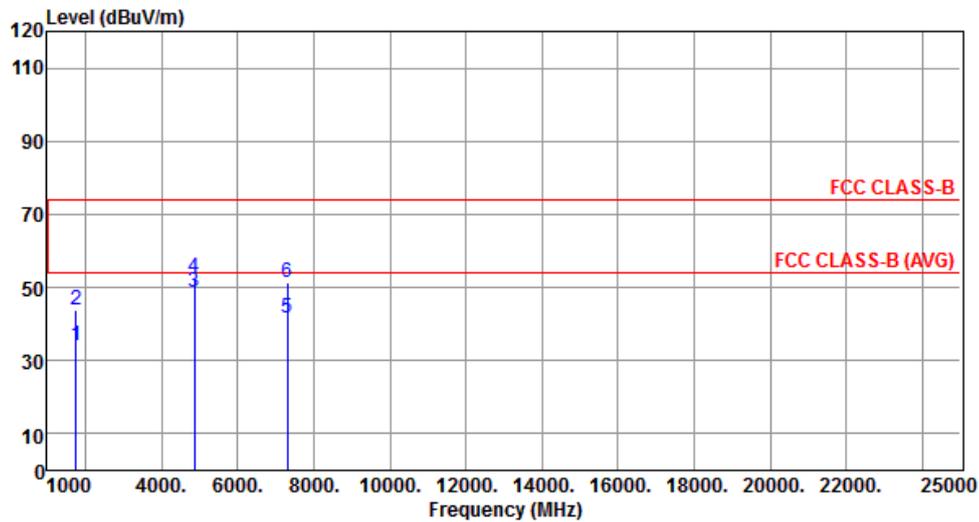


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.25	54.00	-19.75	39.90	-5.65	Average	-----	-----
2	1750.00	43.68	74.00	-30.32	49.33	-5.65	Peak	-----	-----
3	4874.00	48.54	54.00	-5.46	44.15	4.39	Average	-----	-----
4	4874.00	52.59	74.00	-21.41	48.20	4.39	Peak	-----	-----
5	7311.00	41.60	54.00	-12.40	32.68	8.92	Average	-----	-----
6	7311.00	51.36	74.00	-22.64	42.44	8.92	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2462
Test Mode	A2		

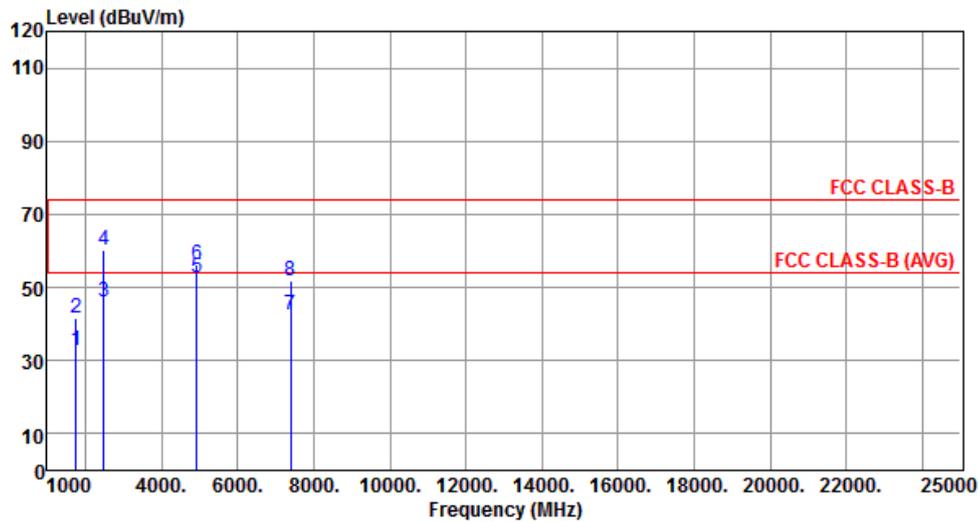


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.61	54.00	-21.39	38.26	-5.65	Average	-----	-----
2	1750.00	41.57	74.00	-32.43	47.22	-5.65	Peak	-----	-----
3	2483.50	45.88	54.00	-8.12	48.71	-2.83	Average	-----	-----
4	2483.50	60.21	74.00	-13.79	63.04	-2.83	Peak	-----	-----
5	4924.00	52.82	54.00	-1.18	48.34	4.48	Average	-----	-----
6	4924.00	56.02	74.00	-17.98	51.54	4.48	Peak	-----	-----
7	7386.00	42.32	54.00	-11.68	33.34	8.98	Average	-----	-----
8	7386.00	51.96	74.00	-22.04	42.98	8.98	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2462
Test Mode	A2		

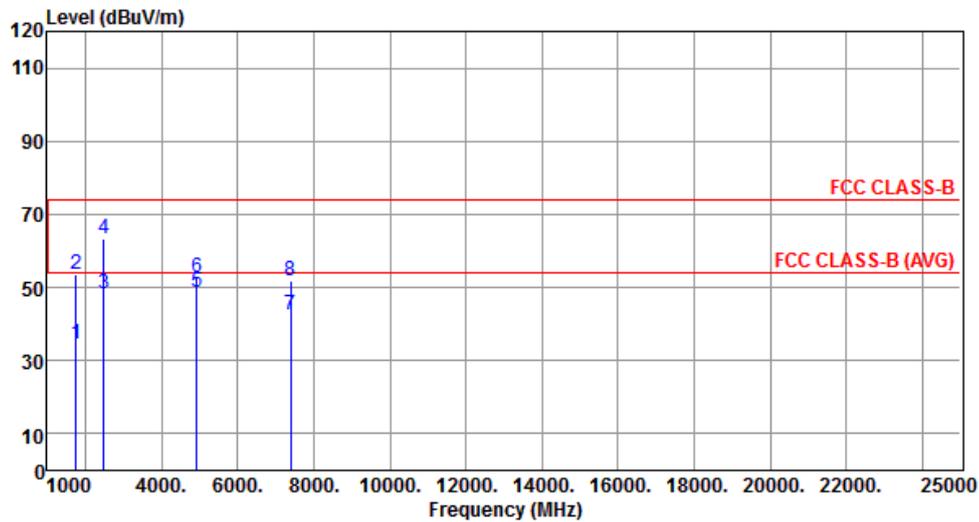


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.55	54.00	-19.45	40.20	-5.65	Average	-----	-----
2	1750.00	53.68	74.00	-20.32	59.33	-5.65	Peak	-----	-----
3	2483.50	48.26	54.00	-5.74	51.09	-2.83	Average	-----	-----
4	2483.50	63.45	74.00	-10.55	66.28	-2.83	Peak	-----	-----
5	4924.00	48.57	54.00	-5.43	44.09	4.48	Average	-----	-----
6	4924.00	52.65	74.00	-21.35	48.17	4.48	Peak	-----	-----
7	7386.00	42.35	54.00	-11.65	33.37	8.98	Average	-----	-----
8	7386.00	51.63	74.00	-22.37	42.65	8.98	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Polarization	Horizontal	Test Freq. (MHz)	2412
Test Mode	A1		

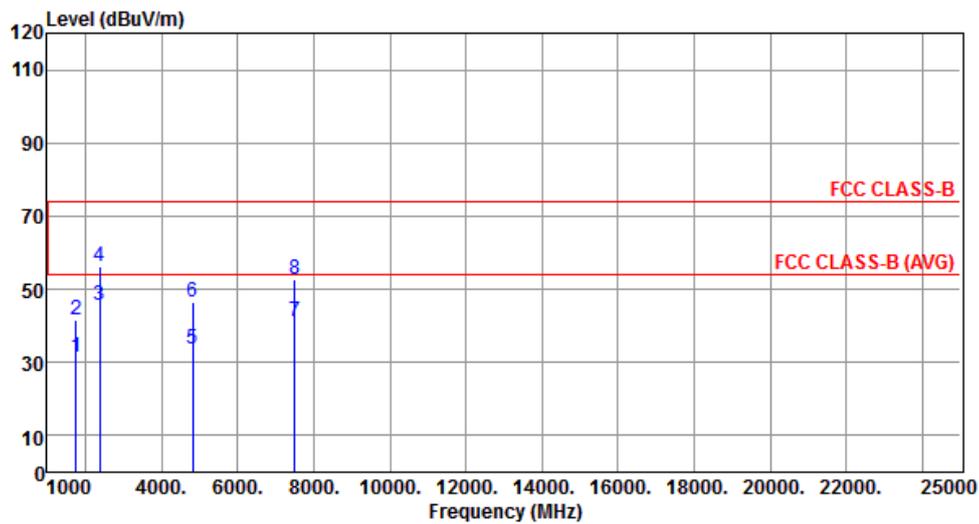


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	31.52	54.00	-22.48	37.17	-5.65	Average	-----	-----
2	1750.00	41.43	74.00	-32.57	47.08	-5.65	Peak	-----	-----
3	2390.00	45.68	54.00	-8.32	48.90	-3.22	Average	-----	-----
4	2390.00	56.43	74.00	-17.57	59.65	-3.22	Peak	-----	-----
5	4824.00	33.77	54.00	-20.23	29.46	4.31	Average	-----	-----
6	4824.00	46.58	74.00	-27.42	42.27	4.31	Peak	-----	-----
7	7500.00	41.32	54.00	-12.68	32.00	9.32	Average	-----	-----
8	7500.00	52.86	74.00	-21.14	43.54	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2412
Test Mode	A1		

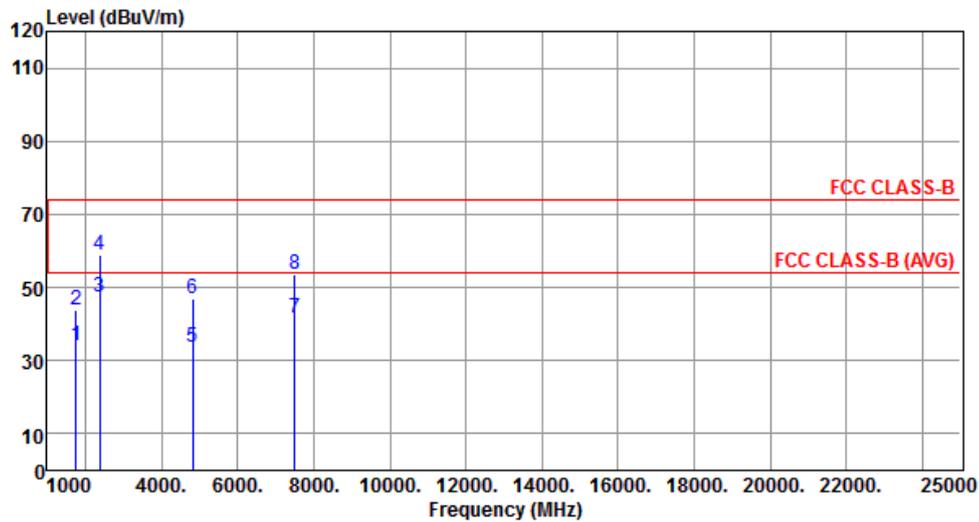


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.29	54.00	-19.71	39.94	-5.65	Average	-----	-----
2	1750.00	43.62	74.00	-30.38	49.27	-5.65	Peak	-----	-----
3	2390.00	47.51	54.00	-6.49	50.73	-3.22	Average	-----	-----
4	2390.00	58.78	74.00	-15.22	62.00	-3.22	Peak	-----	-----
5	4824.00	33.82	54.00	-20.18	29.51	4.31	Average	-----	-----
6	4824.00	46.73	74.00	-27.27	42.42	4.31	Peak	-----	-----
7	7500.00	41.41	54.00	-12.59	32.09	9.32	Average	-----	-----
8	7500.00	53.42	74.00	-20.58	44.10	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2437
Test Mode	A1		

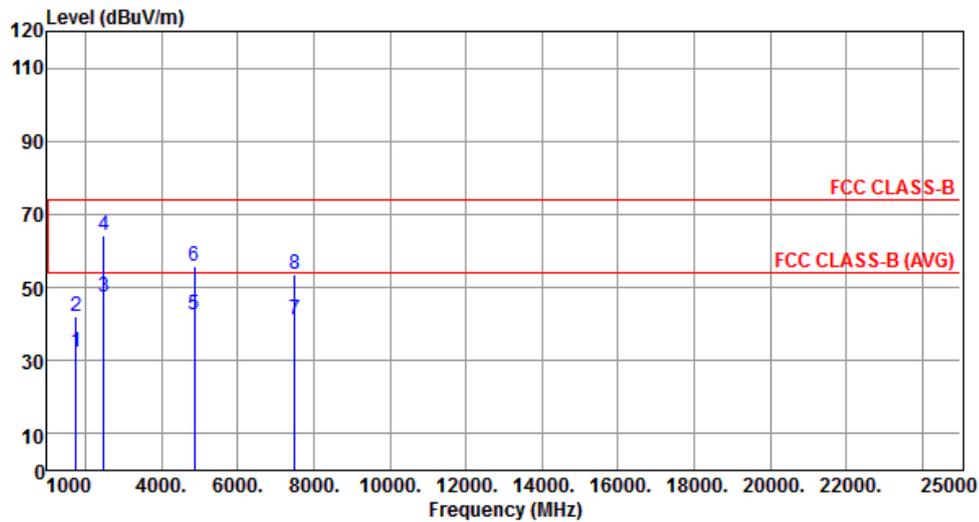


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.51	54.00	-21.49	38.16	-5.65	Average	-----	-----
2	1750.00	41.86	74.00	-32.14	47.51	-5.65	Peak	-----	-----
3	2483.50	47.55	54.00	-6.45	50.38	-2.83	Average	-----	-----
4	2483.50	64.31	74.00	-9.69	67.14	-2.83	Peak	-----	-----
5	4874.00	42.35	54.00	-11.65	37.96	4.39	Average	-----	-----
6	4874.00	55.79	74.00	-18.21	51.40	4.39	Peak	-----	-----
7	7500.00	41.38	54.00	-12.62	32.06	9.32	Average	-----	-----
8	7500.00	53.52	74.00	-20.48	44.20	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2437
Test Mode	A1		

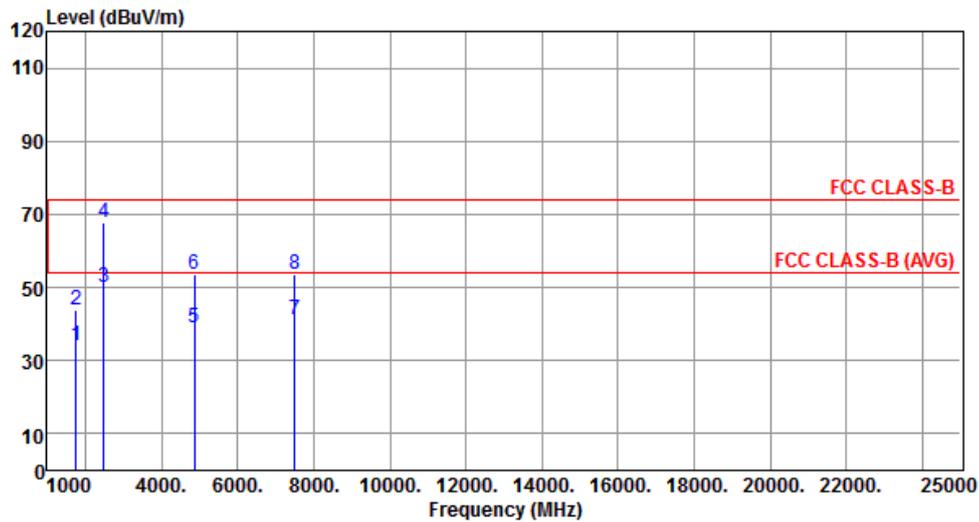


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.27	54.00	-19.73	39.92	-5.65	Average	-----	-----
2	1750.00	43.88	74.00	-30.12	49.53	-5.65	Peak	-----	-----
3	2483.50	50.11	54.00	-3.89	52.94	-2.83	Average	-----	-----
4	2483.50	67.81	74.00	-6.19	70.64	-2.83	Peak	-----	-----
5	4874.00	38.92	54.00	-15.08	34.53	4.39	Average	-----	-----
6	4874.00	53.47	74.00	-20.53	49.08	4.39	Peak	-----	-----
7	7500.00	41.38	54.00	-12.62	32.06	9.32	Average	-----	-----
8	7500.00	53.78	74.00	-20.22	44.46	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2462
Test Mode	A1		

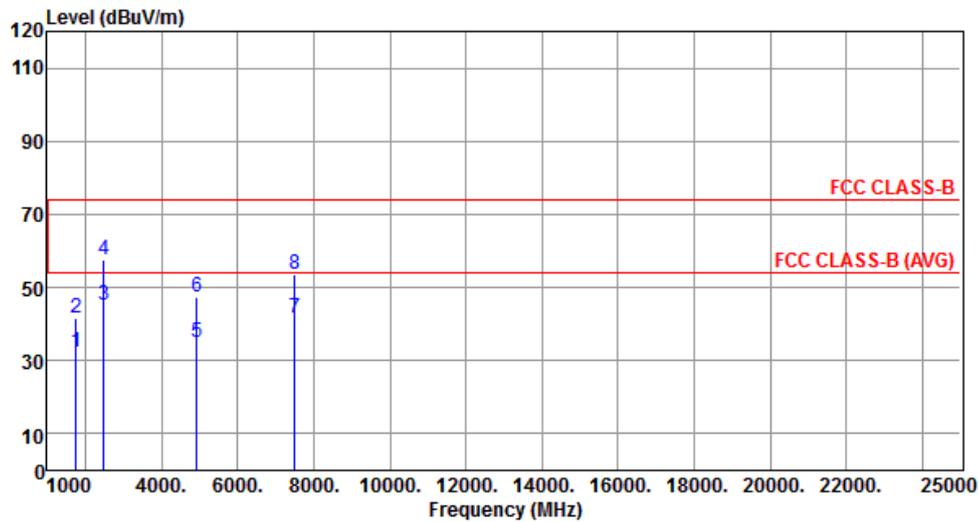


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.45	54.00	-21.55	38.10	-5.65	Average	-----	-----
2	1750.00	41.66	74.00	-32.34	47.31	-5.65	Peak	-----	-----
3	2483.50	44.96	54.00	-9.04	47.79	-2.83	Average	-----	-----
4	2483.50	57.38	74.00	-16.62	60.21	-2.83	Peak	-----	-----
5	4924.00	34.96	54.00	-19.04	30.48	4.48	Average	-----	-----
6	4924.00	47.48	74.00	-26.52	43.00	4.48	Peak	-----	-----
7	7500.00	41.55	54.00	-12.45	32.23	9.32	Average	-----	-----
8	7500.00	53.48	74.00	-20.52	44.16	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2462
Test Mode	A1		

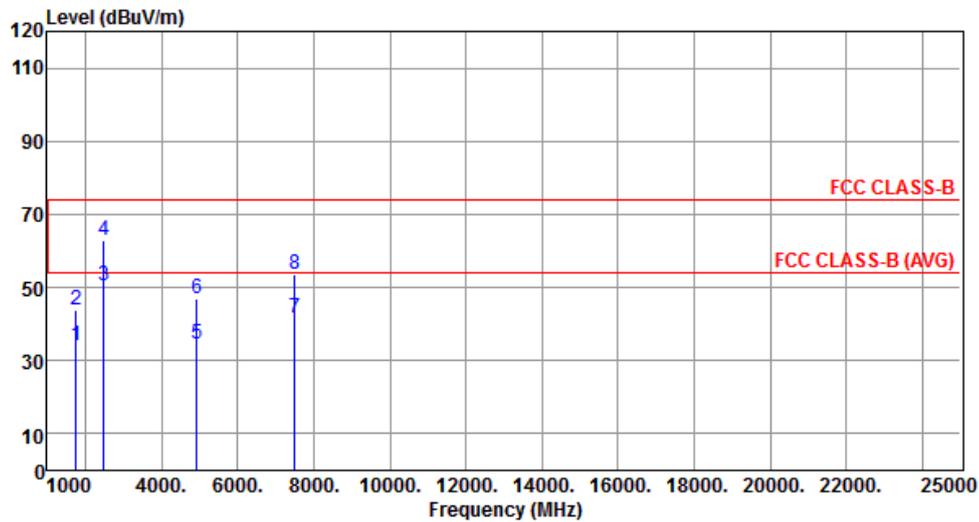


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.29	54.00	-19.71	39.94	-5.65	Average	-----	-----
2	1750.00	43.92	74.00	-30.08	49.57	-5.65	Peak	-----	-----
3	2483.50	50.30	54.00	-3.70	53.13	-2.83	Average	-----	-----
4	2483.50	62.85	74.00	-11.15	65.68	-2.83	Peak	-----	-----
5	4924.00	34.48	54.00	-19.52	30.00	4.48	Average	-----	-----
6	4924.00	46.79	74.00	-27.21	42.31	4.48	Peak	-----	-----
7	7500.00	41.82	54.00	-12.18	32.50	9.32	Average	-----	-----
8	7500.00	53.52	74.00	-20.48	44.20	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2412
Test Mode	A2		

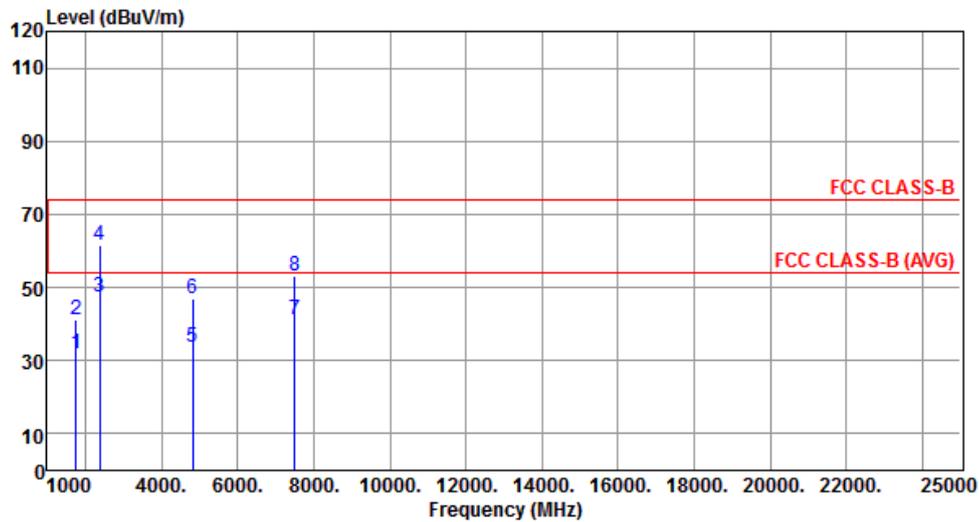


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	31.68	54.00	-22.32	37.33	-5.65	Average	-----	-----
2	1750.00	41.38	74.00	-32.62	47.03	-5.65	Peak	-----	-----
3	2390.00	47.42	54.00	-6.58	50.64	-3.22	Average	-----	-----
4	2390.00	61.46	74.00	-12.54	64.68	-3.22	Peak	-----	-----
5	4824.00	33.85	54.00	-20.15	29.54	4.31	Average	-----	-----
6	4824.00	46.87	74.00	-27.13	42.56	4.31	Peak	-----	-----
7	7500.00	41.25	54.00	-12.75	31.93	9.32	Average	-----	-----
8	7500.00	52.94	74.00	-21.06	43.62	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2412
Test Mode	A2		

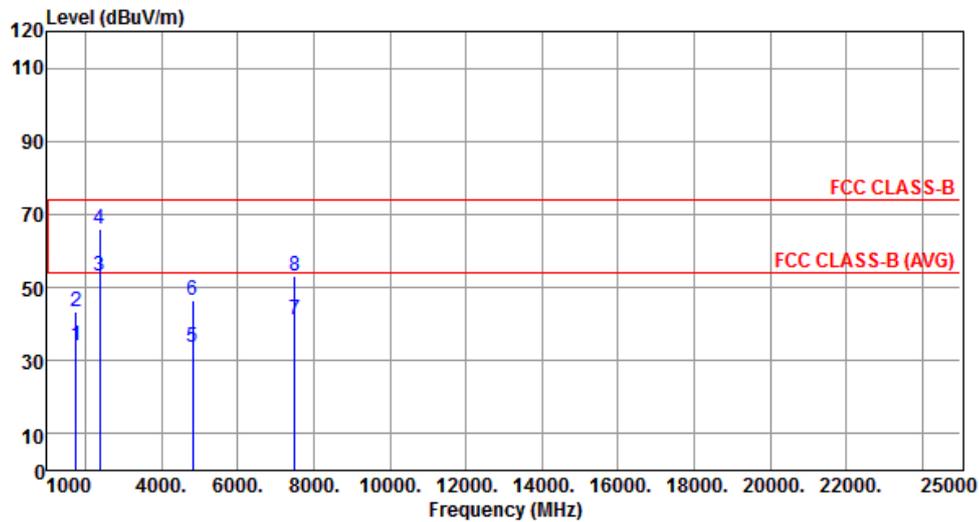


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.25	54.00	-19.75	39.90	-5.65	Average	-----	-----
2	1750.00	43.55	74.00	-30.45	49.20	-5.65	Peak	-----	-----
3	2390.00	53.00	54.00	-1.00	56.22	-3.22	Average	-----	-----
4	2390.00	66.07	74.00	-7.93	69.29	-3.22	Peak	-----	-----
5	4824.00	33.76	54.00	-20.24	29.45	4.31	Average	-----	-----
6	4824.00	46.57	74.00	-27.43	42.26	4.31	Peak	-----	-----
7	7500.00	41.25	54.00	-12.75	31.93	9.32	Average	-----	-----
8	7500.00	53.24	74.00	-20.76	43.92	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2437
Test Mode	A2		

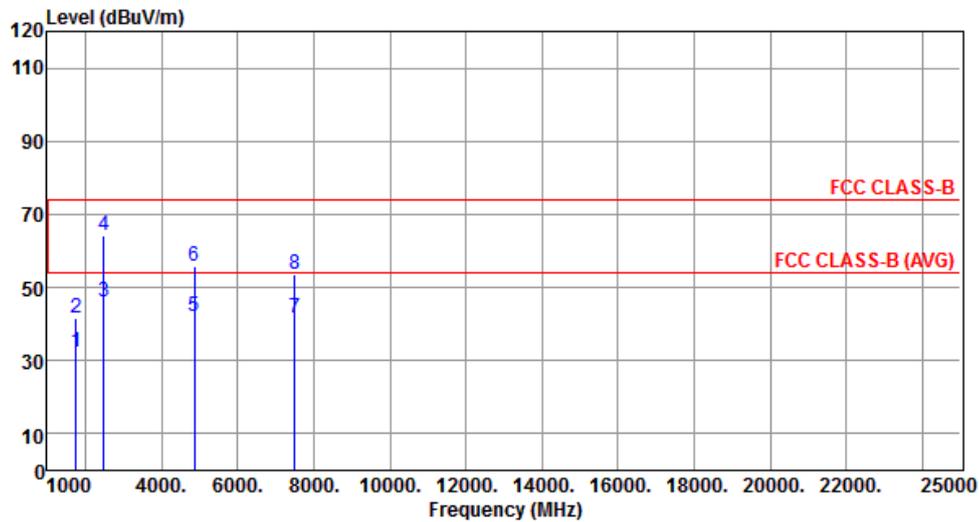


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.41	54.00	-21.59	38.06	-5.65	Average	-----	-----
2	1750.00	41.74	74.00	-32.26	47.39	-5.65	Peak	-----	-----
3	2483.50	45.86	54.00	-8.14	48.69	-2.83	Average	-----	-----
4	2483.50	64.31	74.00	-9.69	67.14	-2.83	Peak	-----	-----
5	4874.00	42.25	54.00	-11.75	37.86	4.39	Average	-----	-----
6	4874.00	55.75	74.00	-18.25	51.36	4.39	Peak	-----	-----
7	7500.00	41.55	54.00	-12.45	32.23	9.32	Average	-----	-----
8	7500.00	53.38	74.00	-20.62	44.06	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2437
Test Mode	A2		

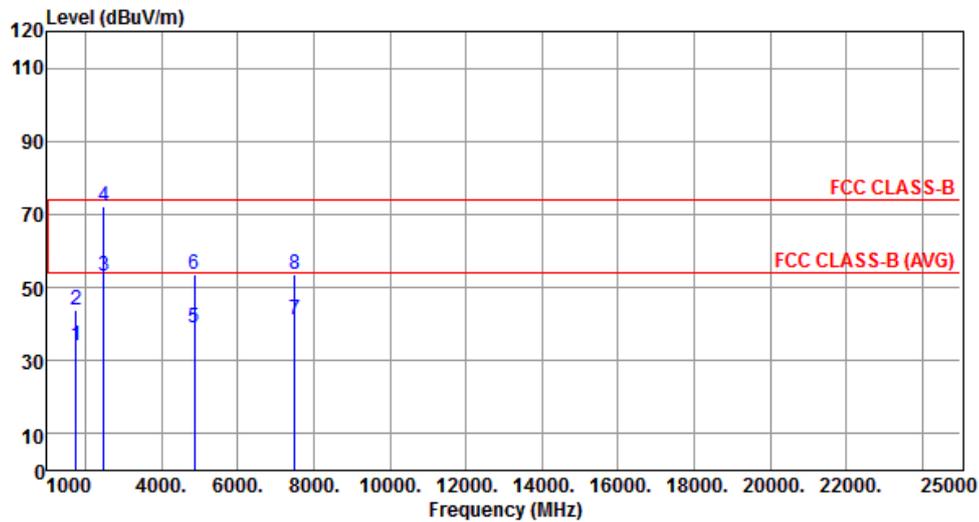


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.11	54.00	-19.89	39.76	-5.65	Average	-----	-----
2	1750.00	43.92	74.00	-30.08	49.57	-5.65	Peak	-----	-----
3	2483.50	53.00	54.00	-1.00	55.83	-2.83	Average	-----	-----
4	2483.50	72.38	74.00	-1.62	75.21	-2.83	Peak	-----	-----
5	4874.00	38.83	54.00	-15.17	34.44	4.39	Average	-----	-----
6	4874.00	53.55	74.00	-20.45	49.16	4.39	Peak	-----	-----
7	7500.00	41.35	54.00	-12.65	32.03	9.32	Average	-----	-----
8	7500.00	53.62	74.00	-20.38	44.30	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2462
Test Mode	A2		

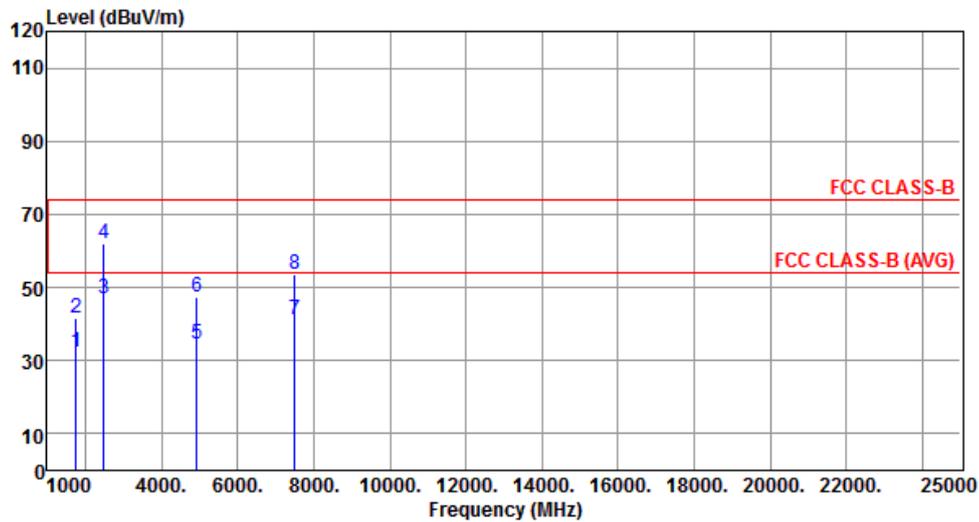


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.41	54.00	-21.59	38.06	-5.65	Average	-----	-----
2	1750.00	41.59	74.00	-32.41	47.24	-5.65	Peak	-----	-----
3	2483.50	46.77	54.00	-7.23	49.60	-2.83	Average	-----	-----
4	2483.50	61.87	74.00	-12.13	64.70	-2.83	Peak	-----	-----
5	4924.00	34.55	54.00	-19.45	30.07	4.48	Average	-----	-----
6	4924.00	47.43	74.00	-26.57	42.95	4.48	Peak	-----	-----
7	7500.00	41.26	54.00	-12.74	31.94	9.32	Average	-----	-----
8	7500.00	53.41	74.00	-20.59	44.09	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2462
Test Mode	A2		

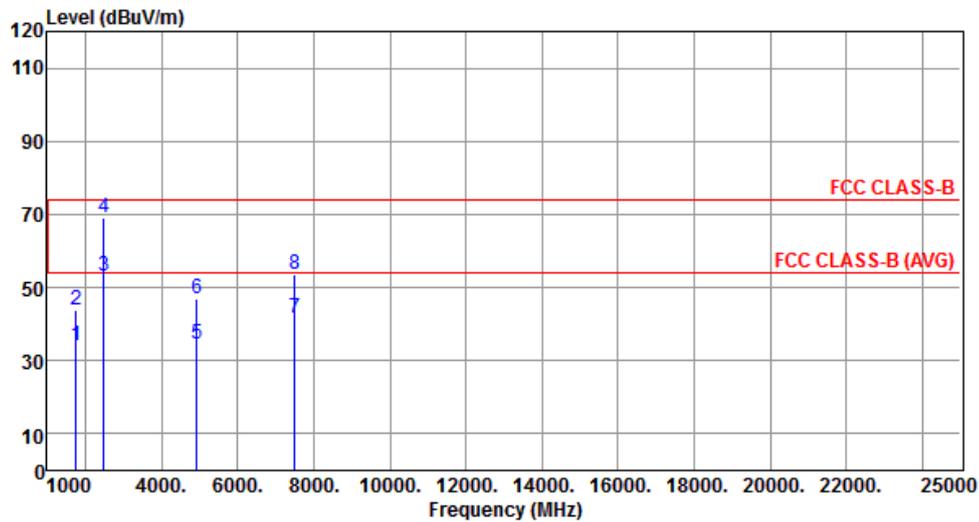


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.25	54.00	-19.75	39.90	-5.65	Average	-----	-----
2	1750.00	43.86	74.00	-30.14	49.51	-5.65	Peak	-----	-----
3	2483.50	53.00	54.00	-1.00	55.83	-2.83	Average	-----	-----
4	2483.50	68.97	74.00	-5.03	71.80	-2.83	Peak	-----	-----
5	4924.00	34.41	54.00	-19.59	29.93	4.48	Average	-----	-----
6	4924.00	46.75	74.00	-27.25	42.27	4.48	Peak	-----	-----
7	7500.00	41.63	54.00	-12.37	32.31	9.32	Average	-----	-----
8	7500.00	53.44	74.00	-20.56	44.12	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

Polarization	Horizontal	Test Freq. (MHz)	2412
Test Mode	A1		

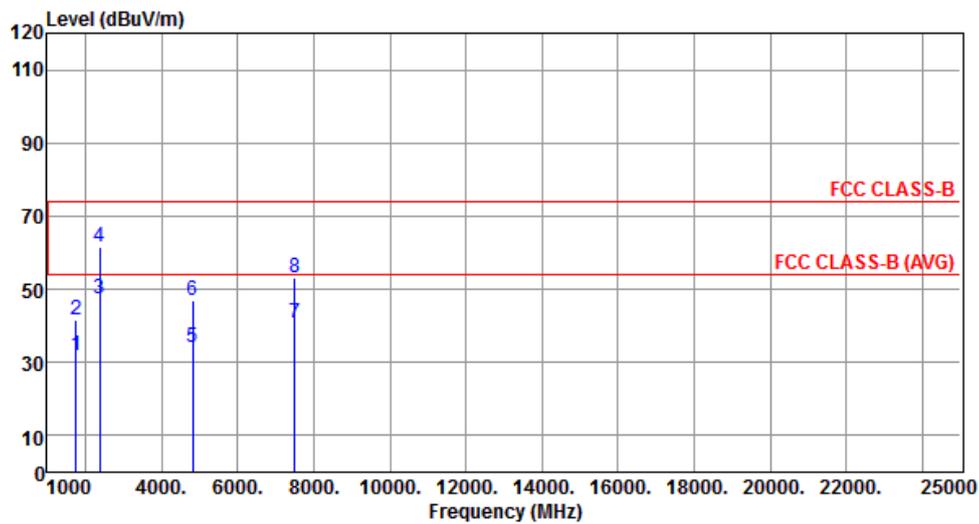

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	31.97	54.00	-22.03	37.62	-5.65	Average	-----	-----
2	1750.00	41.51	74.00	-32.49	47.16	-5.65	Peak	-----	-----
3	2390.00	47.23	54.00	-6.77	50.45	-3.22	Average	-----	-----
4	2390.00	61.35	74.00	-12.65	64.57	-3.22	Peak	-----	-----
5	4824.00	33.96	54.00	-20.04	29.65	4.31	Average	-----	-----
6	4824.00	46.84	74.00	-27.16	42.53	4.31	Peak	-----	-----
7	7500.00	40.85	54.00	-13.15	31.53	9.32	Average	-----	-----
8	7500.00	52.96	74.00	-21.04	43.64	9.32	Peak	-----	-----


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2412
Test Mode	A1		

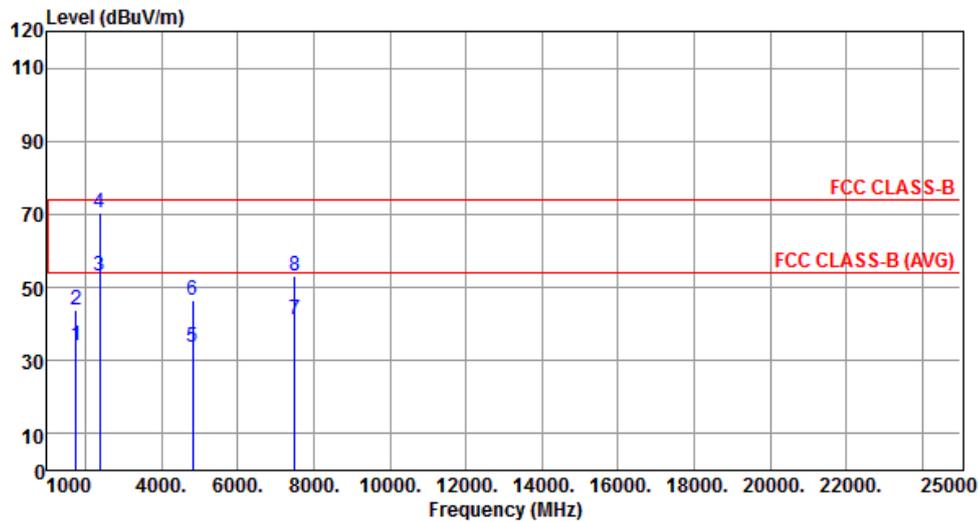


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	33.95	54.00	-20.05	39.60	-5.65	Average	-----	-----
2	1750.00	43.65	74.00	-30.35	49.30	-5.65	Peak	-----	-----
3	2390.00	52.98	54.00	-1.02	56.20	-3.22	Average	-----	-----
4	2390.00	70.24	74.00	-3.76	73.46	-3.22	Peak	-----	-----
5	4824.00	33.85	54.00	-20.15	29.54	4.31	Average	-----	-----
6	4824.00	46.62	74.00	-27.38	42.31	4.31	Peak	-----	-----
7	7500.00	41.12	54.00	-12.88	31.80	9.32	Average	-----	-----
8	7500.00	53.15	74.00	-20.85	43.83	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2437
Test Mode	A1		

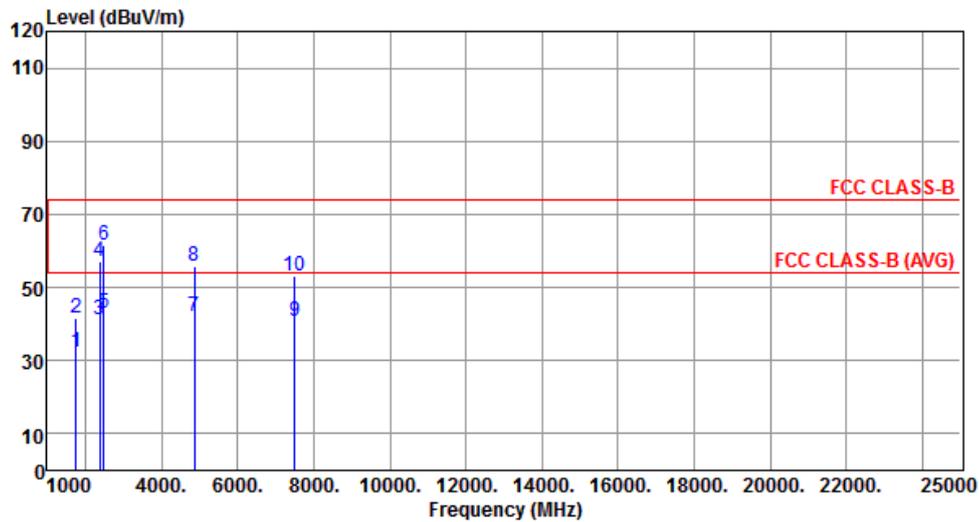


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.14	54.00	-21.86	37.79	-5.65	Average	-----	-----
2	1750.00	41.68	74.00	-32.32	47.33	-5.65	Peak	-----	-----
3	2390.00	41.14	54.00	-12.86	44.36	-3.22	Average	-----	-----
4	2390.00	57.31	74.00	-16.69	60.53	-3.22	Peak	-----	-----
5	2483.50	42.85	54.00	-11.15	45.68	-2.83	Average	-----	-----
6	2483.50	61.52	74.00	-12.48	64.35	-2.83	Peak	-----	-----
7	4874.00	42.25	54.00	-11.75	37.86	4.39	Average	-----	-----
8	4874.00	55.71	74.00	-18.29	51.32	4.39	Peak	-----	-----
9	7500.00	40.95	54.00	-13.05	31.63	9.32	Average	-----	-----
10	7500.00	53.11	74.00	-20.89	43.79	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2437
Test Mode	A1		

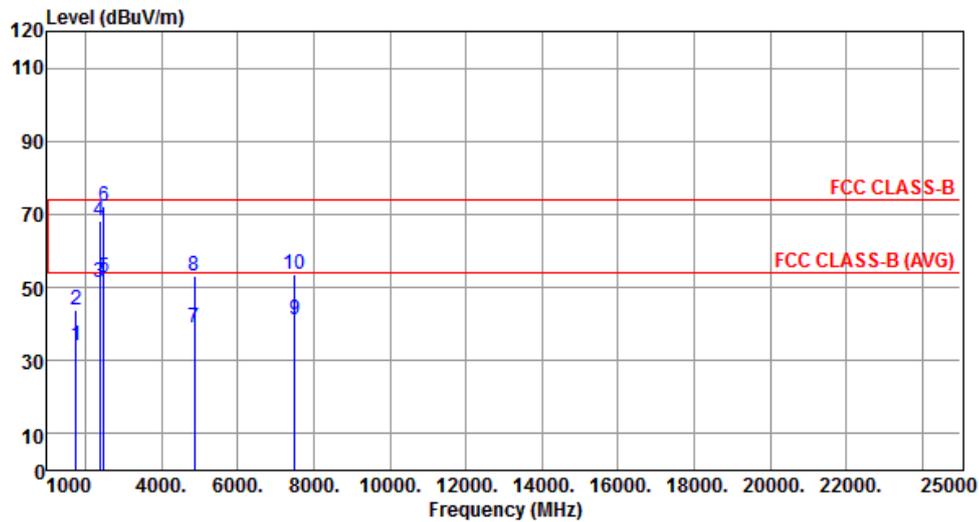


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.11	54.00	-19.89	39.76	-5.65	Average	-----	-----
2	1750.00	43.92	74.00	-30.08	49.57	-5.65	Peak	-----	-----
3	2390.00	51.16	54.00	-2.84	54.38	-3.22	Average	-----	-----
4	2390.00	68.26	74.00	-5.74	71.48	-3.22	Peak	-----	-----
5	2483.50	52.76	54.00	-1.24	55.59	-2.83	Average	-----	-----
6	2483.50	72.09	74.00	-1.91	74.92	-2.83	Peak	-----	-----
7	4874.00	38.95	54.00	-15.05	34.56	4.39	Average	-----	-----
8	4874.00	53.24	74.00	-20.76	48.85	4.39	Peak	-----	-----
9	7500.00	41.35	54.00	-12.65	32.03	9.32	Average	-----	-----
10	7500.00	53.62	74.00	-20.38	44.30	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2462
Test Mode	A1		

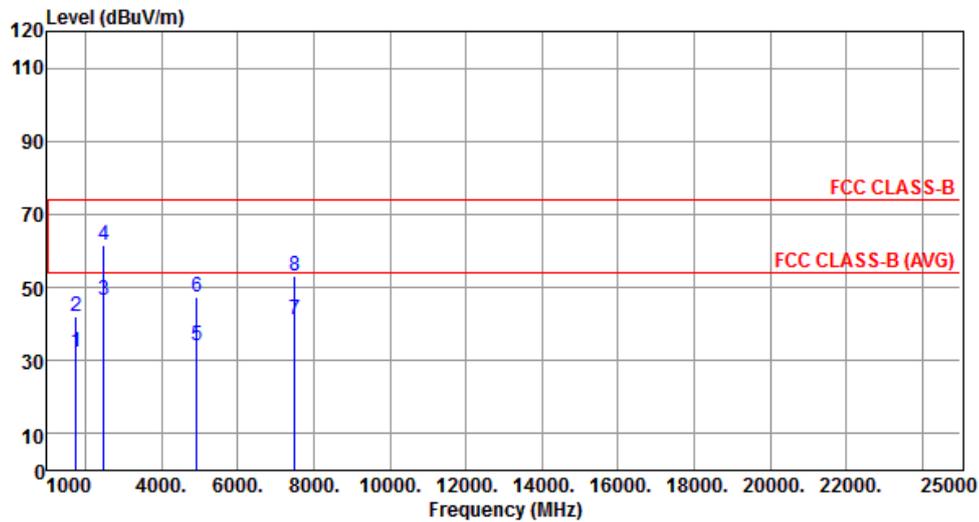


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.13	54.00	-21.87	37.78	-5.65	Average	-----	-----
2	1750.00	41.86	74.00	-32.14	47.51	-5.65	Peak	-----	-----
3	2483.50	46.56	54.00	-7.44	49.39	-2.83	Average	-----	-----
4	2483.50	61.43	74.00	-12.57	64.26	-2.83	Peak	-----	-----
5	4924.00	34.25	54.00	-19.75	29.77	4.48	Average	-----	-----
6	4924.00	47.16	74.00	-26.84	42.68	4.48	Peak	-----	-----
7	7500.00	41.11	54.00	-12.89	31.79	9.32	Average	-----	-----
8	7500.00	53.29	74.00	-20.71	43.97	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2462
Test Mode	A1		

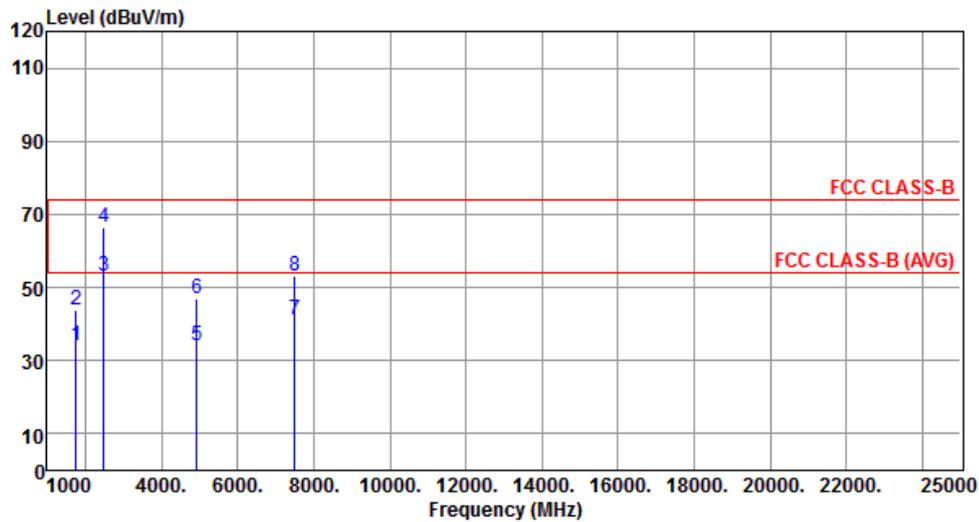


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.05	54.00	-19.95	39.70	-5.65	Average	-----	-----
2	1750.00	43.82	74.00	-30.18	49.47	-5.65	Peak	-----	-----
3	2483.50	52.99	54.00	-1.01	55.82	-2.83	Average	-----	-----
4	2483.50	66.53	74.00	-7.47	69.36	-2.83	Peak	-----	-----
5	4924.00	34.21	54.00	-19.79	29.73	4.48	Average	-----	-----
6	4924.00	46.85	74.00	-27.15	42.37	4.48	Peak	-----	-----
7	7500.00	41.24	54.00	-12.76	31.92	9.32	Average	-----	-----
8	7500.00	53.31	74.00	-20.69	43.99	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

Polarization	Horizontal	Test Freq. (MHz)	2422
Test Mode	A1		

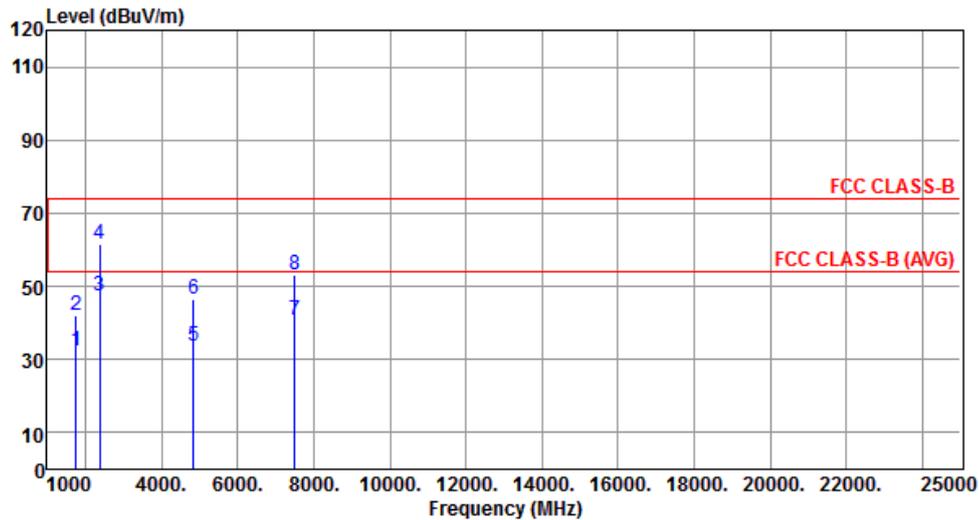


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.45	54.00	-21.55	38.10	-5.65	Average	-----	-----
2	1750.00	41.88	74.00	-32.12	47.53	-5.65	Peak	-----	-----
3	2390.00	47.55	54.00	-6.45	50.77	-3.22	Average	-----	-----
4	2390.00	61.68	74.00	-12.32	64.90	-3.22	Peak	-----	-----
5	4844.00	33.85	54.00	-20.15	29.51	4.34	Average	-----	-----
6	4844.00	46.63	74.00	-27.37	42.29	4.34	Peak	-----	-----
7	7500.00	40.95	54.00	-13.05	31.63	9.32	Average	-----	-----
8	7500.00	53.04	74.00	-20.96	43.72	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2422
Test Mode	A1		

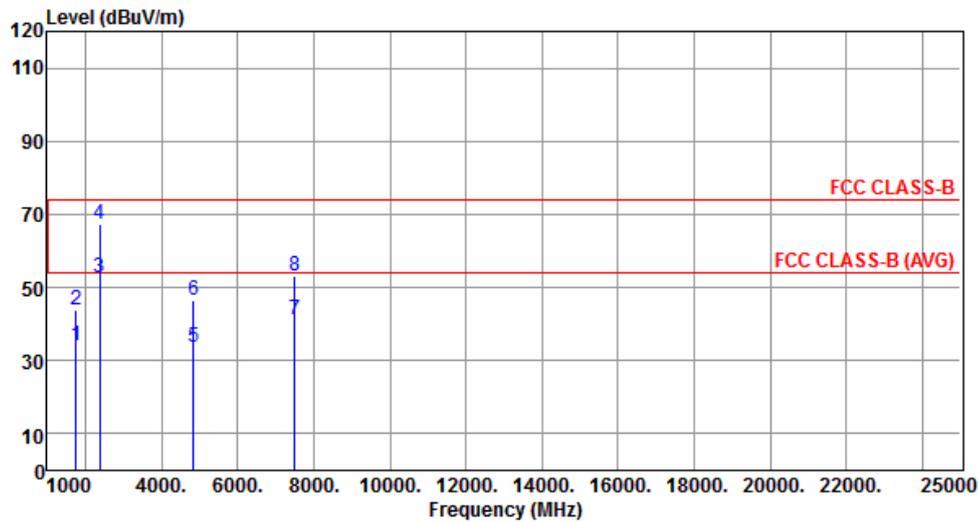


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	33.94	54.00	-20.06	39.59	-5.65	Average	-----	-----
2	1750.00	43.81	74.00	-30.19	49.46	-5.65	Peak	-----	-----
3	2390.00	52.91	54.00	-1.09	56.13	-3.22	Average	-----	-----
4	2390.00	67.14	74.00	-6.86	70.36	-3.22	Peak	-----	-----
5	4844.00	33.69	54.00	-20.31	29.35	4.34	Average	-----	-----
6	4844.00	46.53	74.00	-27.47	42.19	4.34	Peak	-----	-----
7	7500.00	41.25	54.00	-12.75	31.93	9.32	Average	-----	-----
8	7500.00	53.19	74.00	-20.81	43.87	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2437
Test Mode	A1		

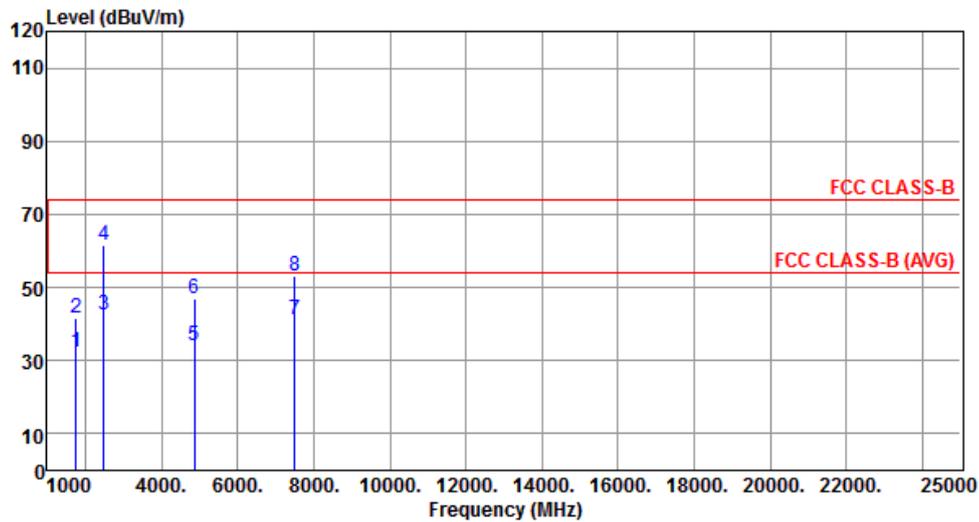


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.14	54.00	-21.86	37.79	-5.65	Average	-----	-----
2	1750.00	41.83	74.00	-32.17	47.48	-5.65	Peak	-----	-----
3	2483.50	42.55	54.00	-11.45	45.38	-2.83	Average	-----	-----
4	2483.50	61.38	74.00	-12.62	64.21	-2.83	Peak	-----	-----
5	4874.00	34.22	54.00	-19.78	29.83	4.39	Average	-----	-----
6	4874.00	47.15	74.00	-26.85	42.76	4.39	Peak	-----	-----
7	7500.00	41.16	54.00	-12.84	31.84	9.32	Average	-----	-----
8	7500.00	53.24	74.00	-20.76	43.92	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2437
Test Mode	A1		

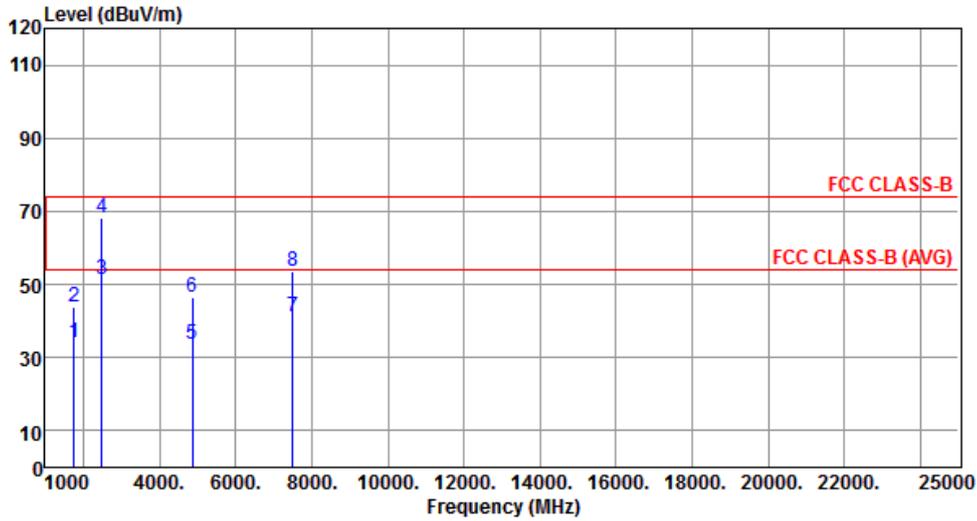


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.21	54.00	-19.79	39.86	-5.65	Average	-----	-----
2	1750.00	43.92	74.00	-30.08	49.57	-5.65	Peak	-----	-----
3	2483.50	51.20	54.00	-2.80	54.03	-2.83	Average	-----	-----
4	2483.50	68.29	74.00	-5.71	71.12	-2.83	Peak	-----	-----
5	4874.00	33.62	54.00	-20.38	29.23	4.39	Average	-----	-----
6	4874.00	46.51	74.00	-27.49	42.12	4.39	Peak	-----	-----
7	7500.00	41.39	54.00	-12.61	32.07	9.32	Average	-----	-----
8	7500.00	53.46	74.00	-20.54	44.14	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal	Test Freq. (MHz)	2462
Test Mode	A1		

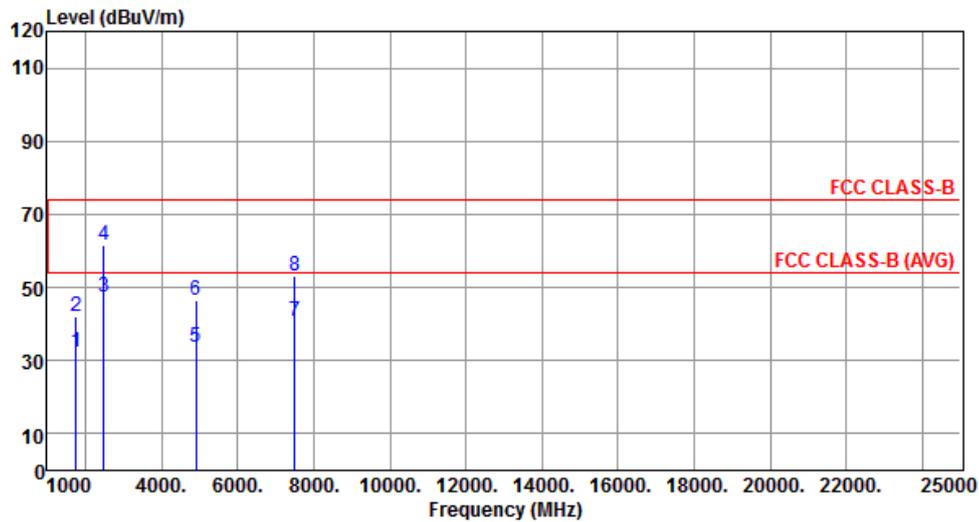


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	32.24	54.00	-21.76	37.89	-5.65	Average	-----	-----
2	1750.00	41.87	74.00	-32.13	47.52	-5.65	Peak	-----	-----
3	2483.50	47.35	54.00	-6.65	50.18	-2.83	Average	-----	-----
4	2483.50	61.58	74.00	-12.42	64.41	-2.83	Peak	-----	-----
5	4904.00	33.81	54.00	-20.19	29.36	4.45	Average	-----	-----
6	4904.00	46.69	74.00	-27.31	42.24	4.45	Peak	-----	-----
7	7500.00	40.91	54.00	-13.09	31.59	9.32	Average	-----	-----
8	7500.00	53.24	74.00	-20.76	43.92	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Vertical	Test Freq. (MHz)	2462
Test Mode	A1		

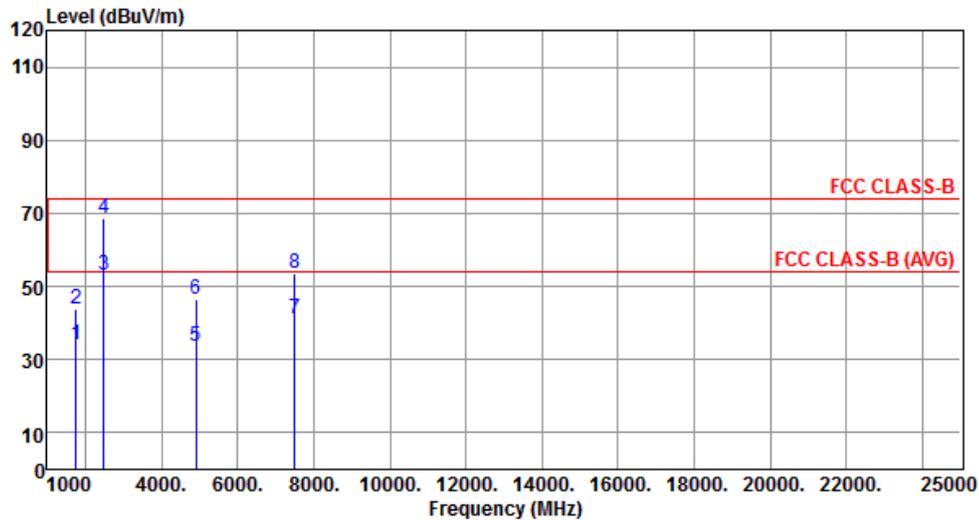

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1750.00	34.03	54.00	-19.97	39.68	-5.65	Average	-----	-----
2	1750.00	43.81	74.00	-30.19	49.46	-5.65	Peak	-----	-----
3	2483.50	52.96	54.00	-1.04	55.79	-2.83	Average	-----	-----
4	2483.50	68.54	74.00	-5.46	71.37	-2.83	Peak	-----	-----
5	4904.00	33.61	54.00	-20.39	29.16	4.45	Average	-----	-----
6	4904.00	46.35	74.00	-27.65	41.90	4.45	Peak	-----	-----
7	7500.00	41.24	54.00	-12.76	31.92	9.32	Average	-----	-----
8	7500.00	53.36	74.00	-20.64	44.04	9.32	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6 Unwanted Emissions into Non-Restricted Frequency Bands

3.6.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

- The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.
- The peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement

1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

3.6.3 Test Setup

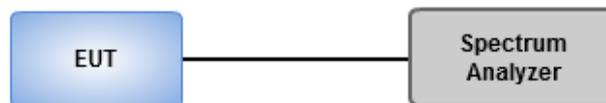



3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands for 11b

Transmitter Radiated Bandedge Emissions Result								
Modulation	11b, chain 0			N _{TX}	1			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	102.59	2400	63.99	38.60	20	PK	H
2390-2400	2412	105.19	2400	67.97	37.22	20	PK	V
2500-2690	2462	102.15	2507.5	43.55	58.60	20	PK	H
2500-2690	2462	105.76	2505.9	46.78	58.98	20	PK	V
Low Bandedge - H				Up Bandedge - H				
Low Bandedge - V				Up Bandedge - V				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								



Transmitter Radiated Bandedge Emissions Result

Modulation	11b, chain 1			N _{TX}	1			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	103.46	2400	67.54	35.92	20	PK	H
2390-2400	2412	111.07	2400	76.99	34.08	20	PK	V
2500-2690	2462	102.3	2500	41.31	60.99	20	PK	H
2500-2690	2462	109.6	2542.9	49.85	59.75	20	PK	V
Low Bandedge - H				Up Bandedge - H				
Low Bandedge - V				Up Bandedge - V				
<p>Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)</p>								



3.6.5 Unwanted Emissions into Non-Restricted Frequency Bands for 11g

Transmitter Radiated Bandedge Emissions Result								
Modulation	11g, chain 0			N _{TX}	1			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	93.16	2392.1	51.38	41.78	20	PK	H
2390-2400	2412	96.13	2391.4	54.93	41.20	20	PK	V
2500-2690	2462	92.00	2500.0	44.77	47.23	20	PK	H
2500-2690	2462	98.25	2500.4	45.70	52.55	20	PK	V
Low Bandedge - H				Up Bandedge - H				
Low Bandedge - V				Up Bandedge - V				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								



Transmitter Radiated Bandedge Emissions Result

Modulation	11g, chain 1			N _{TX}	1			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	92.66	2400.0	55.35	37.31	20	PK	H
2390-2400	2412	100.39	2399.8	63.46	36.93	20	PK	V
2500-2690	2462	94.66	2522.1	45.96	48.70	20	PK	H
2500-2690	2462	103.56	2543.0	49.07	54.49	20	PK	V
Low Bandedge - H				Up Bandedge - H				
Low Bandedge - V				Up Bandedge - V				
<p>Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)</p>								



3.6.6 Unwanted Emissions into Non-Restricted Frequency Bands for HT20

Transmitter Radiated Bandedge Emissions Result								
Modulation	HT20			N _{TX}	2			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	94.88	2398.20	53.87	41.01	20	PK	H
2390-2400	2412	100.17	2392.65	59.70	40.47	20	PK	V
2500-2690	2462	96.43	2506.20	46.72	49.71	20	PK	H
2500-2690	2462	100.86	2500.10	46.30	54.56	20	PK	V
Low Bandedge - H				Up Bandedge - H				
Low Bandedge - V				Up Bandedge - V				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								



3.6.7 Unwanted Emissions into Non-Restricted Frequency Bands for HT40

Transmitter Radiated Bandedge Emissions Result								
Modulation	HT40			N _{TX}	2			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2422	91.60	2399.52	57.58	34.02	20	PK	H
2390-2400	2422	96.48	2400.00	63.93	32.55	20	PK	V
2500-2690	2452	92.97	2502.92	45.98	46.99	20	PK	H
2500-2690	2452	98.04	2500.04	49.40	48.64	20	PK	V
Low Bandedge - H				Up Bandedge - H				
Low Bandedge - V				Up Bandedge - V				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

==END==