

Report on the Radio Testing

For

Texecom Ltd

on

Ricochet High Power Node (DTM Module)

Report no. TRA-026255-CO0025-47-01B

7<sup>th</sup> July 2016

RF916 6.0



Report Number: TRA-026255-C0025-47-01B  
Issue: B

REPORT ON THE RADIO TESTING OF A  
Texecom Ltd  
Ricochet High Power Node (DTM Module)  
WITH RESPECT TO SPECIFICATION  
FCC 47CFR 15.247 & IC RSS-247

TEST DATE: 01-06-2016 to 22-06-2016

Written by: Daniel Winstanley

Daniel Winstanley  
Senior Radio Engineer

Approved by:

John Charters  
Department Manager- Radio

Date:

7th July 2016

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

---

RF916 6.0



## 1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	7 <sup>th</sup> July 2016	Original
B	12 <sup>th</sup> October 2016	Plot resized

## 2 Summary

TEST REPORT NUMBER:	TRA-026255-CO0025-47-01B
WORKS ORDER NUMBER	TRA-026255-00 CO0025
PURPOSE OF TEST:	<p>USA: Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J.</p> <p>Canada: Testing of radio apparatus for TAC (technical acceptance certificate) per subsections 4(2) of the Radio communication Act and 21(1) of the Radio communication Regulations.</p>
FCC IDENTIFIER:	MYJLAHA5001 and MYJLAHA5002
TEST SPECIFICATION(S):	47CFR15.247 & RSS-247
EQUIPMENT UNDER TEST (EUT):	Ricochet High Power Node (DTM Module)
EUT SERIAL NUMBER:	<p>SMP-00000099-FCC-RADIO Sample 1</p> <p>SMP-00000099-FCC-RADIO Sample 3</p>
MANUFACTURER/AGENT:	Texecom Ltd
ADDRESS:	<p>Bradwood Court</p> <p>St Crispin Way</p> <p>Haslingden</p> <p>Rossendale</p> <p>Lancashire</p> <p>BB4 4PW</p>
CLIENT CONTACT:	<p>Hugh Devereux</p> <p>☎ 01706 234 853</p> <p>✉ hdevereux@texe.com</p>
ORDER NUMBER:	CO0025
TEST DATE:	01-06-2016 to 22-06-2016
TESTED BY:	<p>Daniel Winstanley</p> <p>Element</p>

## 2.1 Test Summary

<b>Test Method and Description</b>	<b>Requirement Clause</b>		<b>Applicable to this equipment</b>	<b>Result / Note</b>
	<b>RSS</b>	<b>47CFR15</b>		
Radiated spurious emissions (restricted bands of operation and cabinet radiation)	Gen, 8.10	15.205	<input checked="" type="checkbox"/>	PASS
Radiated spurious emissions (Unintentional radiators)	Gen, 7.1	15.109	<input checked="" type="checkbox"/>	PASS
AC power line conducted emissions	Gen, 8.8	15.207	<input checked="" type="checkbox"/>	PASS
Carrier frequency separation	247, 5.1 (2)	15.247(a)(1)	<input checked="" type="checkbox"/>	PASS
Number of hopping channels	247, 5.1 (3), (4) and (5)	15.247(a)(1) (i), (ii) and (iii)	<input checked="" type="checkbox"/>	PASS
Average time of occupancy	247, 5.1 (3), (4) and (5)	15.247(a)(1) (i), (ii) and (iii)	<input checked="" type="checkbox"/>	PASS
Maximum peak conducted output power	247, 5.4 (1), (2) and (3)	15.247 (a)(1), (b)(1) and (b)(2)	<input checked="" type="checkbox"/>	PASS
20dB emission bandwidth	247, 5.1 (1)	15.247(a)(1) (i) and (ii)	<input checked="" type="checkbox"/>	PASS
Out-of-band emissions	247, 5.5	15.247(d)	<input checked="" type="checkbox"/>	PASS

### Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

### 3 Contents

1	Revision Record.....	3
2	Summary.....	4
2.1	Test Summary.....	5
3	Contents.....	6
4	Introduction .....	8
5	Test Specifications.....	9
5.1	Normative References .....	9
5.2	Deviations from Test Standards .....	9
6	Glossary of Terms.....	10
7	Equipment Under Test .....	11
7.1	EUT Identification.....	11
7.2	System Equipment.....	11
7.3	EUT Mode of Operation .....	11
7.3.1	Transmission.....	11
7.3.2	Reception .....	11
7.4	EUT Radio Parameters .....	12
7.4.1	General .....	12
7.4.2	Antennas .....	12
7.4.3	Product specific declarations.....	13
7.5	EUT Description .....	13
8	Modifications .....	14
9	EUT Test Setup .....	14
9.1	Block Diagram.....	14
9.2	General Set-up Photograph .....	15
10	General Technical Parameters.....	16
10.1	Normal Conditions.....	16
10.2	Varying Test Conditions .....	16
11	Radiated emissions.....	17
11.1	Definitions .....	17
11.2	Test Parameters.....	17
11.3	Test Limit.....	17
11.4	Test Method .....	18
11.5	Test Set-up Photograph .....	19
11.6	Test Equipment.....	19
11.7	Test Results .....	20
12	Radiated emissions – unintentional radiation / receiver emissions .....	24
12.1	Definitions .....	24
12.2	Test Parameters.....	24
12.3	Test Limit.....	24
12.4	Test Method .....	25
12.5	Test Set-up Photograph .....	25
12.6	Test Equipment.....	26
12.7	Test Results .....	27
13	AC power-line conducted emissions .....	31
13.1	Definition .....	31
13.2	Test Parameters.....	31
13.3	Test Method .....	32
13.4	Test Set-up Photograph .....	32
13.5	Test Equipment.....	32
13.6	Test Results .....	33
14	Carrier frequency separation.....	41
14.1	Definition .....	41
14.2	Test Parameters.....	41
14.3	Test Limit.....	41
14.4	Test Method .....	42
14.5	Test Equipment.....	42
14.6	Test Results .....	42
15	Number of hopping frequencies .....	43
15.1	Definition .....	43
15.2	Test Parameters.....	43
15.3	Test Limit.....	43
15.4	Test Method .....	44
15.5	Test Equipment.....	44

15.6	Test Results .....	44
16	Average channel occupancy .....	45
16.1	Definition .....	45
16.2	Test Parameters.....	45
16.3	Test Limit.....	45
16.4	Test Method .....	46
16.5	Test Equipment.....	46
16.6	Test Results .....	46
17	Maximum peak conducted output power.....	48
17.1	Definition .....	48
17.2	Test Parameters.....	48
17.3	Test Limit.....	48
17.4	Test Method .....	49
17.5	Test Equipment.....	49
17.6	Test Results .....	50
18	Occupied Bandwidth .....	51
18.1	Definition .....	51
18.2	Test Parameters.....	51
18.3	Test Limit.....	51
18.4	Test Method .....	52
18.5	Test Equipment.....	52
18.6	Test Results .....	52
19	Out-of-band and conducted spurious emissions .....	55
19.1	Definition .....	55
19.2	Test Parameters.....	55
19.3	Test Limits.....	55
19.4	Test Method .....	56
19.5	Test Equipment.....	56
19.6	Test Results .....	57
20	Measurement Uncertainty .....	60

## 4 Introduction

This report TRA-026255-CO0025-47-01B presents the results of the Radio testing on a Texecom Ltd, DTM Module to specification 47CFR15 Radio Frequency Devices and RSS-247 Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment.

The testing was carried out for Texecom Ltd by Element, at the address (es) detailed below.

<input type="checkbox"/> Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	<input checked="" type="checkbox"/> Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK
--	--

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

### FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

### IC Registration Number(s):

Element Hull	3483A
Element North West	3930B

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

## 5 Test Specifications

### 5.1 *Normative References*

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- Industry Canada RSS-247, Issue 1, May 2015 – Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
- Industry Canada RSS-Gen, Issue 4, November 2014 – General Requirements for Compliance of Radio Apparatus.

### 5.2 *Deviations from Test Standards*

There were no deviations from the test standard.

## 6 Glossary of Terms

<b>§</b>	denotes a section reference from the standard, not this document
<b>AC</b>	Alternating Current
<b>ANSI</b>	American National Standards Institute
<b>BW</b>	bandwidth
<b>C</b>	Celsius
<b>CFR</b>	Code of Federal Regulations
<b>CW</b>	Continuous Wave
<b>dB</b>	decibel
<b>dBm</b>	dB relative to 1 milliwatt
<b>DC</b>	Direct Current
<b>DSSS</b>	Direct Sequence Spread Spectrum
<b>EIRP</b>	Equivalent Isotropically Radiated Power
<b>ERP</b>	Effective Radiated Power
<b>EUT</b>	Equipment Under Test
<b>FCC</b>	Federal Communications Commission
<b>FHSS</b>	Frequency Hopping Spread Spectrum
<b>Hz</b>	hertz
<b>IC</b>	Industry Canada
<b>ITU</b>	International Telecommunication Union
<b>LBT</b>	Listen Before Talk
<b>m</b>	metre
<b>max</b>	maximum
<b>MIMO</b>	Multiple Input and Multiple Output
<b>min</b>	minimum
<b>MRA</b>	Mutual Recognition Agreement
<b>N/A</b>	Not Applicable
<b>PCB</b>	Printed Circuit Board
<b>PDF</b>	Portable Document Format
<b>Pt-mpt</b>	Point-to-multipoint
<b>Pt-pt</b>	Point-to-point
<b>RF</b>	Radio Frequency
<b>RH</b>	Relative Humidity
<b>RMS</b>	Root Mean Square
<b>Rx</b>	receiver
<b>s</b>	second
<b>SVSWR</b>	Site Voltage Standing Wave Ratio
<b>Tx</b>	transmitter
<b>UKAS</b>	United Kingdom Accreditation Service
<b>V</b>	volt
<b>W</b>	watt
<b>Ω</b>	ohm

## 7 Equipment Under Test

### 7.1 EUT Identification

- Name: Ricochet High Power Node (DTM Module)
- Serial Number: SMP-00000099-FCC-RADIO Sample 1 and SMP-00000099-FCC-RADIO Sample 3
- Model Number: LAHA5001 and LAHA5002
- Software Revision: Modified 1.1.0
- Build Level / Revision Number: A0533-02-01C

### 7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

*Not Applicable – No support/monitoring equipment required.*

### 7.3 EUT Mode of Operation

#### 7.3.1 Transmission

The mode of operation for Tx tests was as follows: The unit was continuously transmitting on top, middle and bottom channel or normal hopping as required for testing.

#### 7.3.2 Reception

The mode of operation for Rx tests was as follows: The unit was continuously receiving on top, middle and bottom channel as required for testing.

## 7.4 EUT Radio Parameters

### 7.4.1 General

<b>Frequency of operation:</b>	920 MHz - 925MHz
<b>Modulation type(s):</b>	FHSS
<b>Occupied channel bandwidth(s):</b>	100 kHz
<b>Channel spacing:</b>	100 kHz
<b>ITU emission designator(s):</b>	F1D
<b>Declared output power(s):</b>	250 mW
<b>Warning against use of alternative antennas in user manual (yes/no):</b>	Not applicable
<b>Nominal Supply Voltage:</b>	3 V
<b>Location of notice for license exempt use:</b>	Label / user manual / both.
<b>Method of prevention of use on non-US / non-Canadian frequencies:</b>	Programmed firmware
<b>Duty cycle:</b>	Less than 1%

### 7.4.2 Antennas

<b>Type:</b>	Onboard Monopole
<b>Frequency range:</b>	920 MHz - 925MHz
<b>Impedance:</b>	50 Ohms
<b>Polarisation:</b>	Omni
<b>Connector type:</b>	Not Applicable

<b>Type:</b>	Omnidirectional
<b>Frequency range:</b>	824 MHz to 960 MHz
<b>Impedance:</b>	50 Ohms
<b>SWR:</b>	Unknown
<b>Gain:</b>	2 dBi
<b>Polarisation:</b>	Linear
<b>Connector type:</b>	SMA or FME
<b>Length:</b>	87mm
<b>Mounting:</b>	Magnetic Mount

#### 7.4.3 Product specific declarations

<b>Multiple antenna configuration(s), e.g. MIMO:</b>	<b>No</b>
<b>Fixed pt-pt operations (yes/no):</b>	<b>No</b>
<b>Installation manual advice on pt-pt operational restrictions (yes/no):</b>	<b>No</b>
<b>Fixed pt-mpt operations (yes/no):</b>	<b>No</b>
<b>Simultaneous tx (yes/no):</b>	<b>No</b>

#### 7.5 EUT Description

The EUT is 920 to 925 MHz FHSS module with two different variants integral and external antenna connector.



SMP-00000099-FCC-RADIO Sample 1(Integral Antenna)



SMP-00000099-FCC-RADIO Sample 3 (External Antenna Connector)


## 8 Modifications

No modifications were performed during this assessment.

## 9 EUT Test Setup


### 9.1 *Block Diagram*

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:



## 9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:

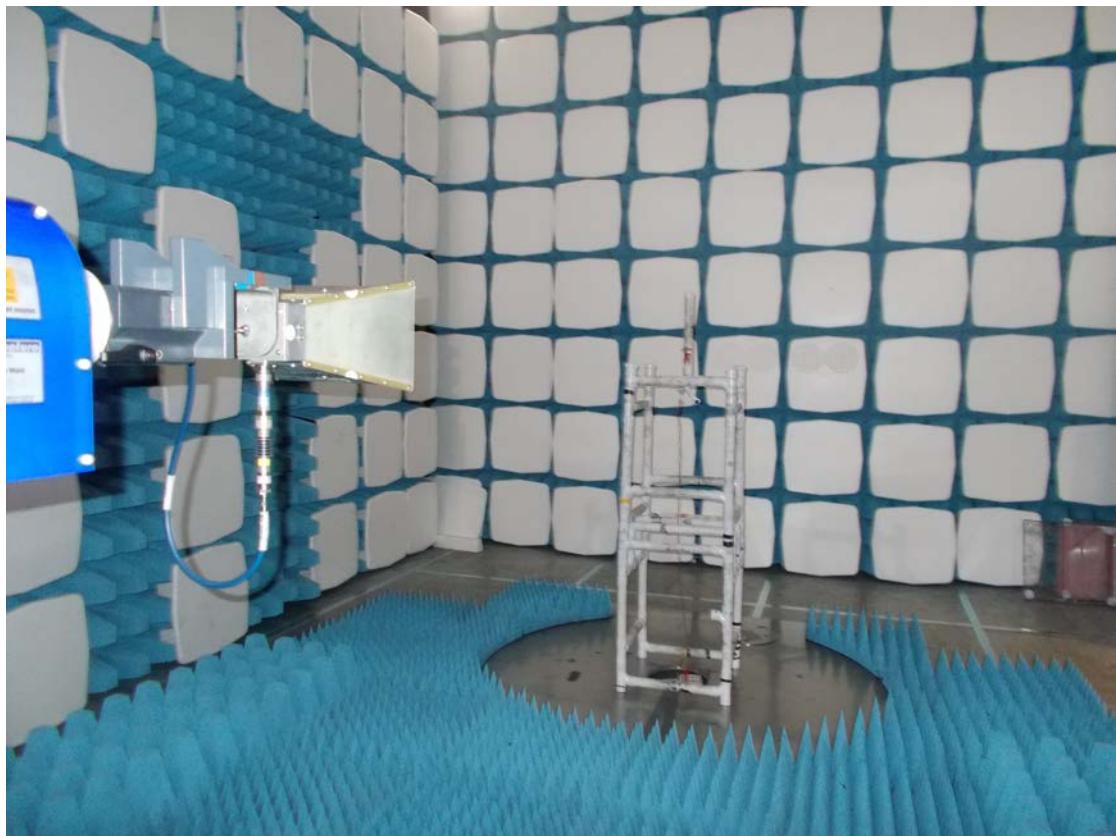

## 10 General Technical Parameters

### 10.1 Normal Conditions

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was approx. 3 V dc from the adaptor from the mains.

### 10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band and the manufacturer has declared sufficient frequency stability (refer to section 7.4).

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	<i>Category</i>	<i>Nominal</i>	<i>Variation</i>
<input type="checkbox"/>	Mains	110 V ac +/- 2 %	85 % and 115 %
<input checked="" type="checkbox"/>	Battery	New battery	N/A

## 11 Radiated emissions

### 11.1 Definitions

#### *Spurious emissions*

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

#### *Restricted bands*

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

### 11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Channels / Frequencies Measured:	920 MHz / 924.8 MHz High
EUT Channel Bandwidths:	100 kHz
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: RMS average and Peak

### Environmental Conditions (Normal Environment)

Temperature: 25 °C	+15 °C to +35 °C (as declared)
Humidity: 30 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	3 V dc ±10 % (as declared)

### 11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

#### General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

#### 11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB $\mu$ V/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dB $\mu$ V;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);


CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

**Figure i Test Setup**

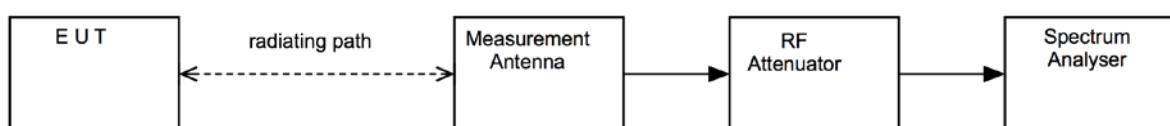

### 11.5 Test Set-up Photograph

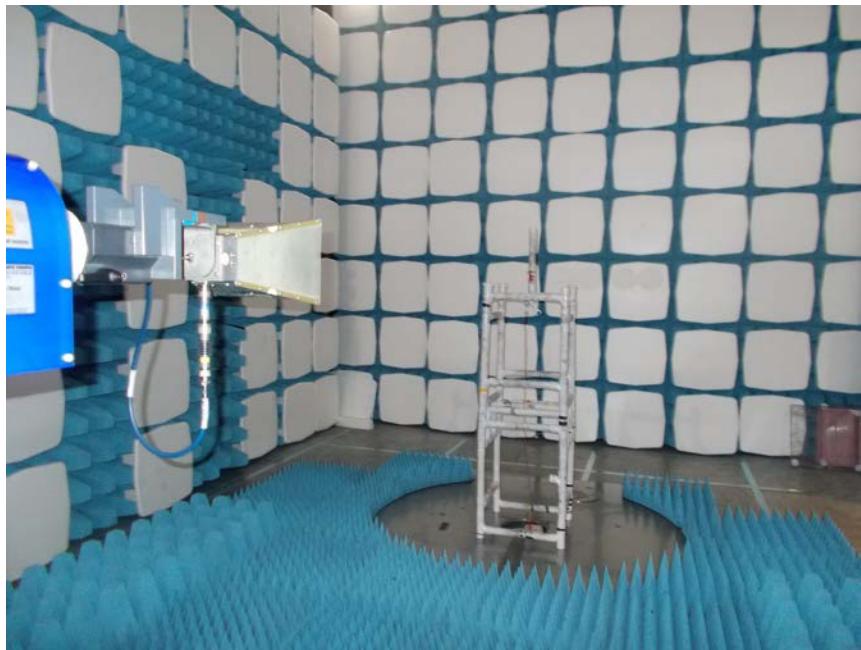

### 11.6 Test Equipment

Type of Equipment	Maker/Supplier	Model Number	Element Number	Calibration Due Date	Calibration Interval
Bilog	Chase	CBL611/A	UH191	26/02/2017	24
ESVS10	R&S	ESVS10	L352	07/08/2016	12
Spectrum analyser	R&S	FSU26	REF909	26/04/2017	12
Horn Antenna	EMCO	3115	TRL139	25/09/2017	24
Pre-Amplifier	Agilent	8449B	TRL572	16/02/2017	12

## 11.7 Test Results

### Integral antenna

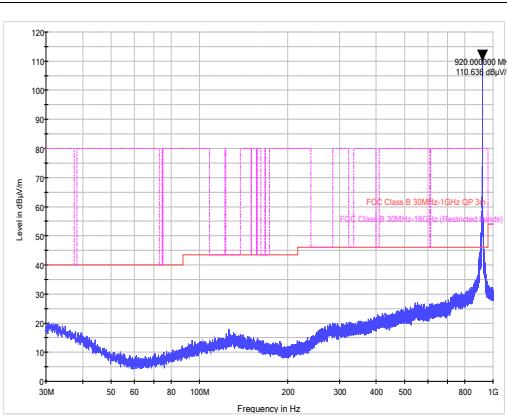


Figure 1 – Radiated Emissions Plot (30 MHz to 1 GHz).

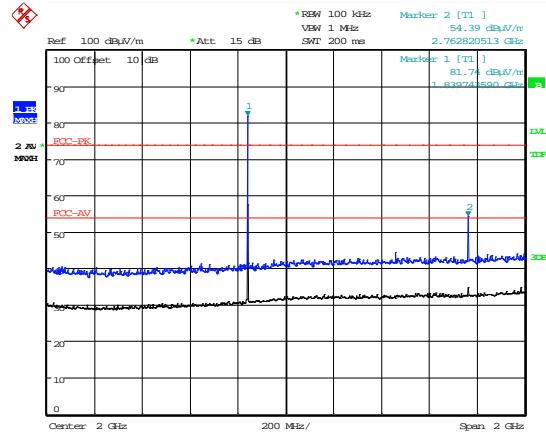


Figure 2 – Radiated Emissions Plot (1 GHz to 3 GHz).

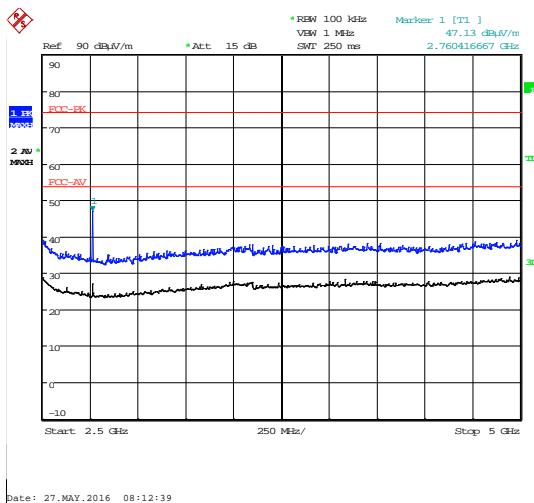


Figure 3 – Radiated Emissions Plot (3 GHz to 5 GHz).

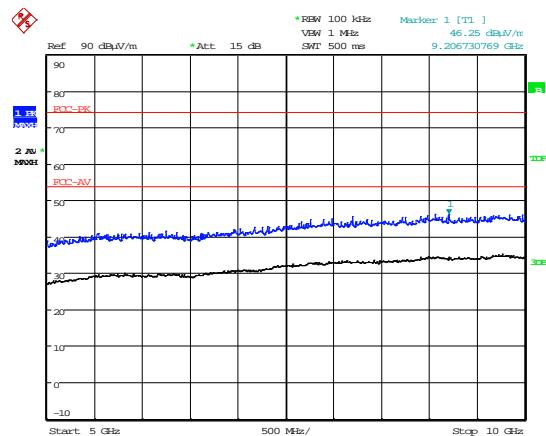


Figure 4 – Radiated Emissions Plot (5 GHz to 10 GHz).

High Power; Channel: 920 MHz										
Detector	Freq. (MHz)	Meas'd Emission (dB $\mu$ V)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dB $\mu$ V/m)	Field Strength ( $\mu$ V/m)	Limit ( $\mu$ V/m)
Pk	2759.92	55.58	3.90	29.10	36.07	0.00	0.00	52.51	422.18	5012
Av	2759.92	51.90	3.90	29.10	36.07	0.00	0.00	48.83	276.38	500
Pk	9199.95	50.46	6.30	37.80	36.50	0.00	0.00	58.06	799.83	5012
Av	9199.95	41.20	6.30	37.80	36.50	0.00	0.00	48.80	275.42	500

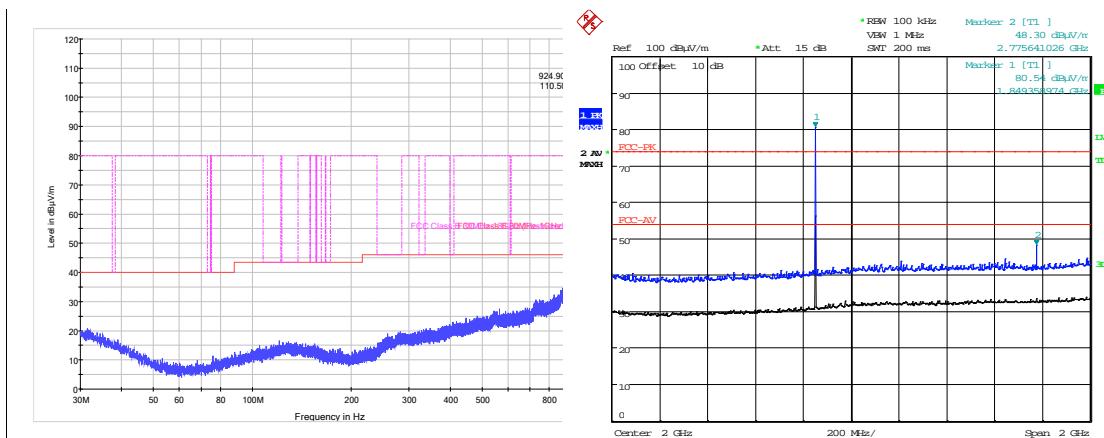


Figure 1 – Radiated Emissions Plot (30 MHz to 1 GHz).

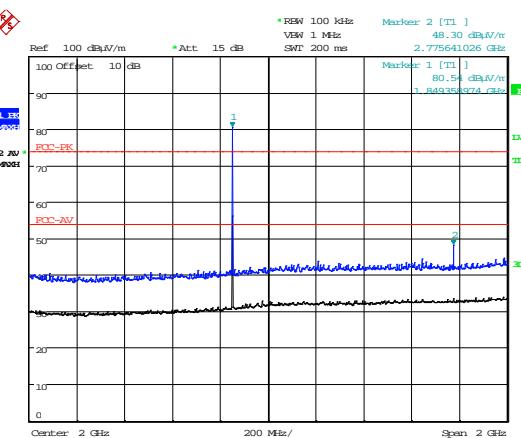


Figure 2 – Radiated Emissions Plot (1 GHz to 3 GHz).

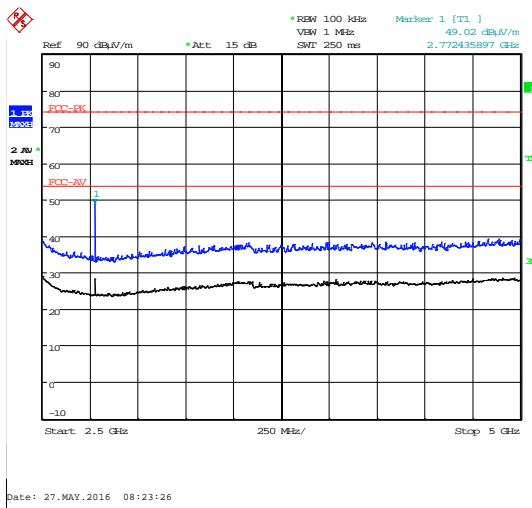


Figure 3 – Radiated Emissions Plot (3 GHz to 5 GHz).

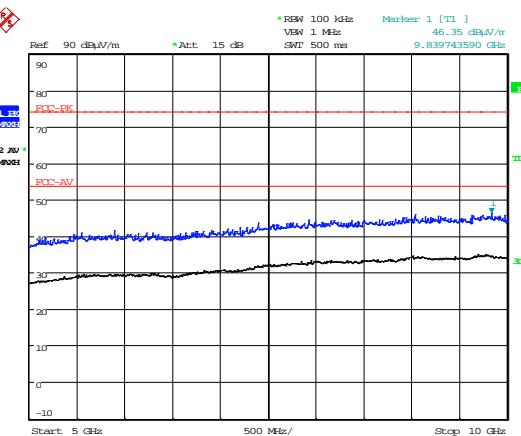
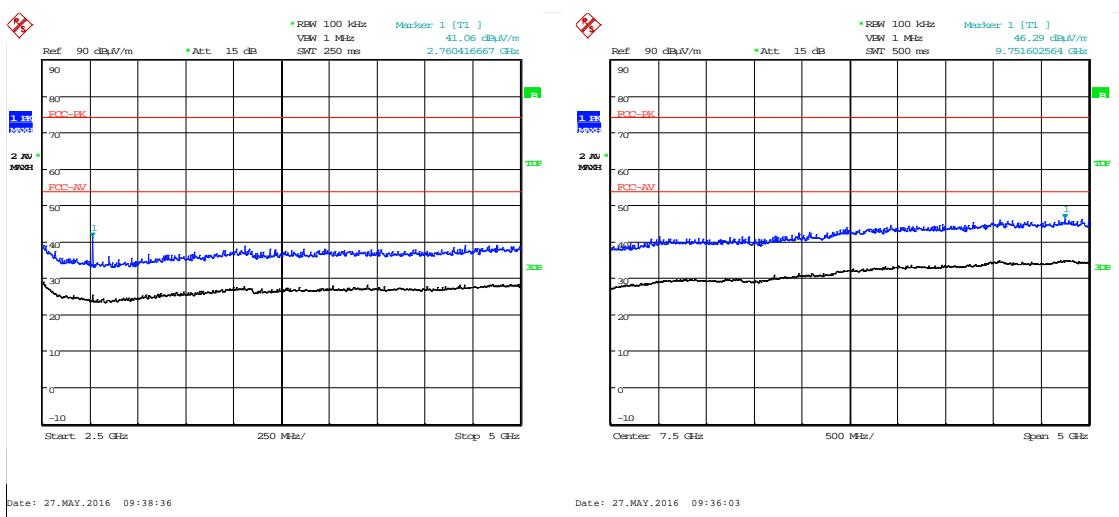
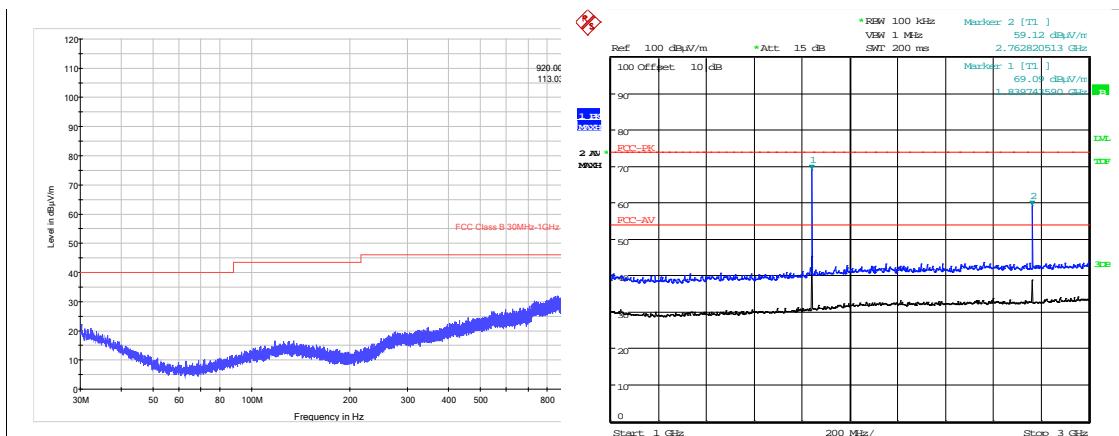


Figure 4 – Radiated Emissions Plot (5 GHz to 10 GHz).

High Power; Channel: 924.8 MHz										
Detector	Freq. (MHz)	Meas'd Emission (dBµV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBµV/m)	Field Strength (µV/m)	Limit (µV/m)
Pk	2759.92	55.58	3.90	29.10	36.07	0.00	0.00	52.51	422.18	5012
Av	2759.92	51.90	3.90	29.10	36.07	0.00	0.00	48.83	276.38	500
Pk	9248.87	51.72	6.20	37.80	36.52	0.00	0.00	59.20	912.01	5012
Av	9248.87	42.19	6.20	37.80	36.52	0.00	0.00	49.67	304.44	500

*External antenna*

High Power; Channel: 920 MHz										
Detector	Freq. (MHz)	Meas'd Emission (dB $\mu$ V)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrapol'n Factor (dB)	Field Strength (dB $\mu$ V/m)	Field Strength ( $\mu$ V/m)	Limit ( $\mu$ V/m)
Pk	2759.94	51.81	3.90	29.10	36.07	0.00	0.00	48.74	273.53	5012
Av	2759.94	43.82	3.90	29.10	36.07	0.00	0.00	40.75	109.02	500
Pk	6439.98	48.12	5.40	34.60	35.92	0.00	0.00	52.20	407.38	5012
Av	6439.98	36.70	5.40	34.60	35.92	0.00	0.00	40.78	109.40	500

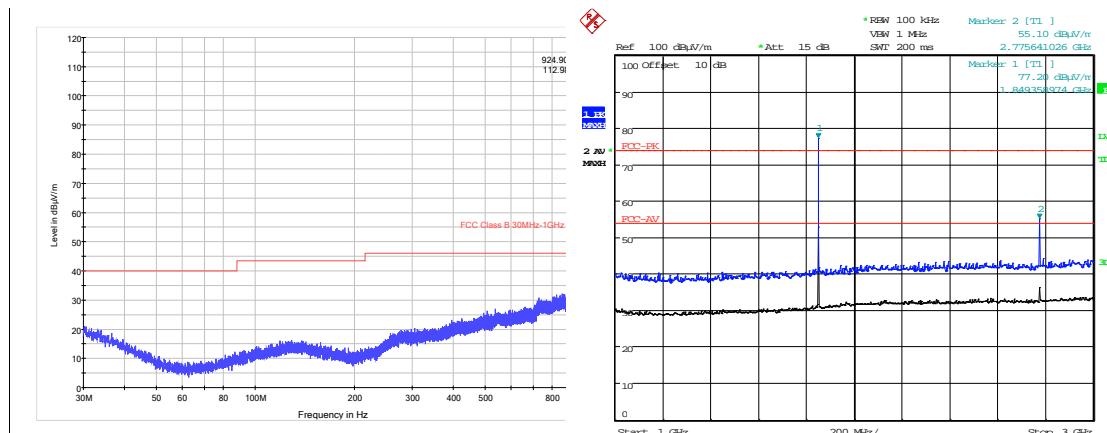



Figure 1 – Radiated Emissions Plot (30 MHz to 1 GHz).

Date: 27.MAY.2016 09:12:01

Figure 2 – Radiated Emissions Plot (1 GHz to 3 GHz).

Date: 27.MAY.2016 09:12:01

Figure 2 – Radiated Emissions Plot (1 GHz to 3 GHz).

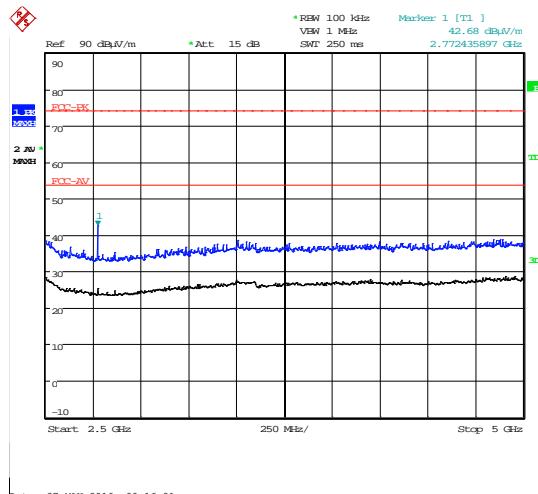

Date: 27.MAY.2016 09:16:01

Figure 3 – Radiated Emissions Plot (3 GHz to 5 GHz).

Date: 27.MAY.2016 09:17:27

Figure 4 – Radiated Emissions Plot (5 GHz to 10 GHz).

Figure 4 – Radiated Emissions Plot (5 GHz to 10 GHz).

High Power; Channel: 924.8 MHz										
Detector	Freq. (MHz)	Meas'd Emission (dBµV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBµV/m)	Field Strength (µV/m)	Limit (µV/m)
Pk	2774.71	52.81	3.90	29.10	36.07	0.00	0.00	49.74	306.90	5012
Av	2774.71	45.75	3.90	29.10	36.07	0.00	0.00	42.68	136.14	500

## 12 Radiated emissions – unintentional radiation / receiver emissions

### 12.1 Definitions

*Receiver spurious emissions*

The radio frequency signals generated within the receiver, which may cause interference to other equipment. This includes the period during which the equipment is scanning or switching channels.

*Unintentional radiator*

A device that generates RF energy which is not intended to be radiated for reception by a radio receiver.

### 12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Channels / Frequencies Measured:	920 MHz / 924.9MHz
EUT Channel Bandwidths:	100 kHz
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: Peak

### Environmental Conditions (Normal Environment)

Temperature: 25 °C	+15 °C to +35 °C (as declared)
Humidity: 30 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	3 V dc ±10 % (as declared)

### 12.3 Test Limit

Note:

Only radio communication receivers operating in stand-alone mode within the band 30 to 960 MHz, as well as scanner receivers, are subject to requirements, as described above. All other receivers are exempted from any certification, testing, labelling and reporting requirements.

However, all receivers in all frequency bands shall comply with the limits set forth in FCC 47CFR15B / IC RSS-Gen even in cases where testing, reporting and/or certification are not required.

### Receiver Radiated Limits

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500


#### 12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure viii, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver. The EUT was rotated in three orthogonal planes and the measurement antenna height scanned (below 1 GHz, from 1 to 4 m; above 1 GHz as necessary) in order to maximise emissions.


The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration at each frequency.

Pre-scan plots are shown with a peak detector and 100 kHz RBW.

**Figure viii Test Setup**

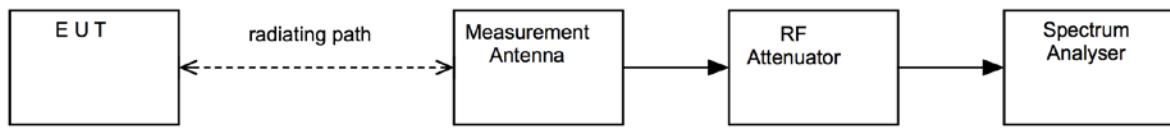

**12.5 Test Set-up Photograph**

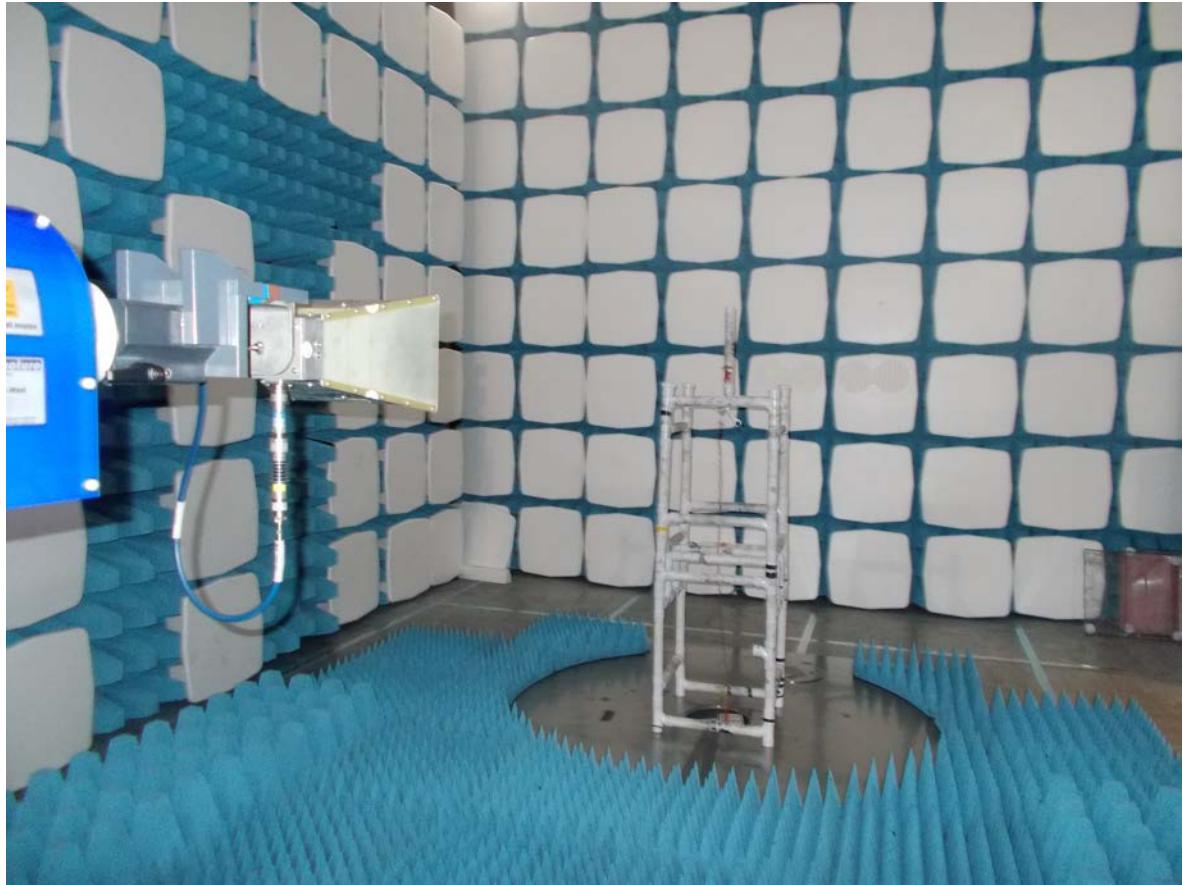



## 12.6 Test Equipment

Type of Equipment	Maker/Supplier	Model Number	Element Number	Calibration Due Date	Calibration Interval
Bilog	Chase	CBL611/A	UH191	26/02/2017	24
ESVS10	R&S	ESVS10	L352	07/08/2016	12
Spectrum analyser	R&S	FSU26	REF909	26/04/2017	12
Horn Antenna	EMCO	3115	TRL139	25/09/2017	24
Pre-Amplifier	Agilent	8449B	TRL572	16/02/2017	12

## 12.7 Test Results

### Integral antenna

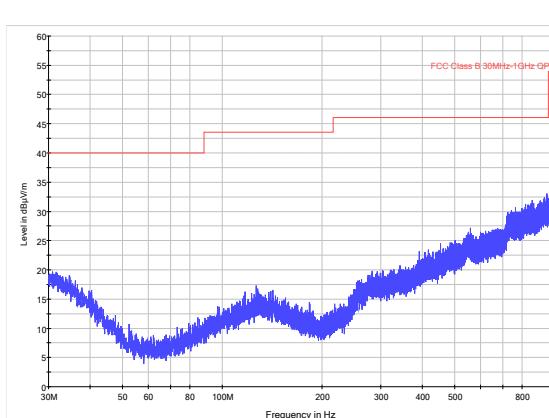


Figure 1 – Radiated Emissions Plot (30 MHz to 1 GHz).


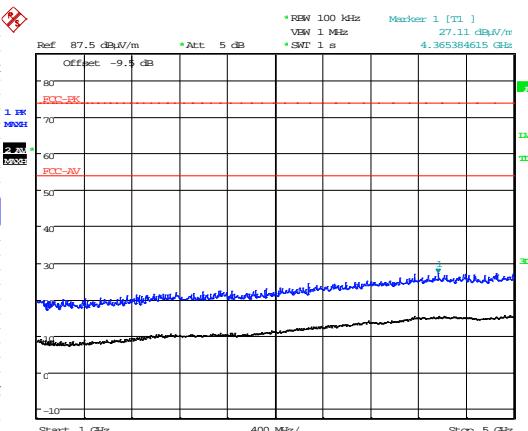


Figure 2 – Radiated Emissions Plot (1 GHz to 5 GHz).

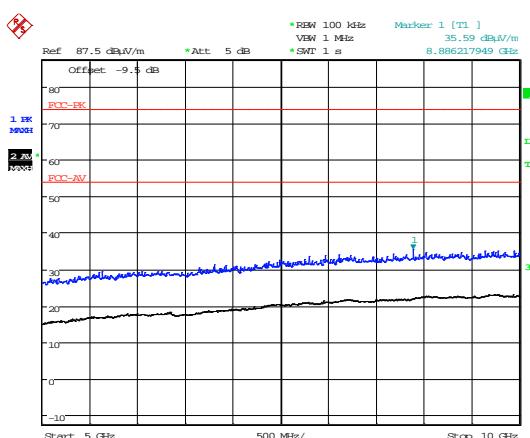

Date: 1.JUN.2016 19:57:29

Figure 3 – Radiated Emissions Plot (5 GHz to 10 GHz).

High Power; Channel: 920 MHz									
Detector	Freq. (MHz)	Measured Emission (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Field Strength (dB $\mu$ V/m)	Extrap'n Factor (dB)	Field Strength ( $\mu$ V/m)	Limit ( $\mu$ V/m)
No emissions found within 20 dB of the limit									


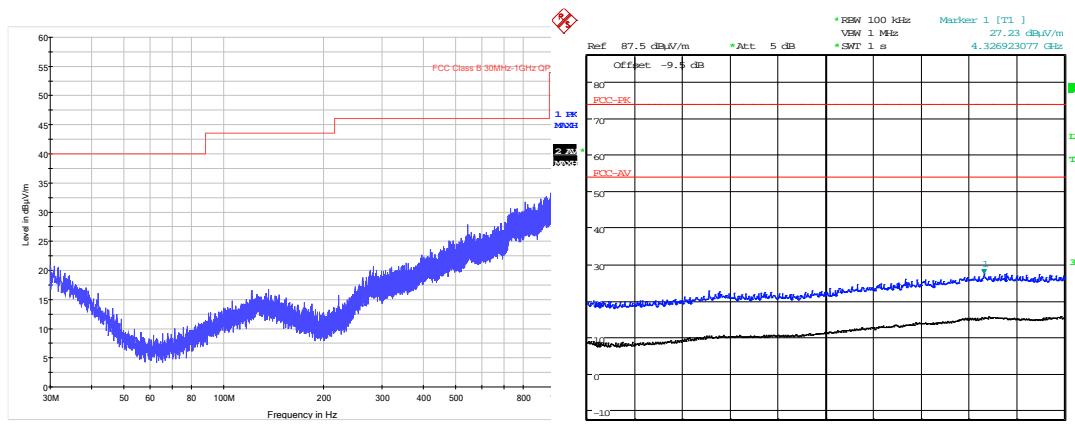


Figure 1 – Radiated Emissions Plot (30 MHz to 1 GHz).

Date: 1.JUN.2016 19:59:54

Figure 2 – Radiated Emissions Plot (1 GHz to 5 GHz).

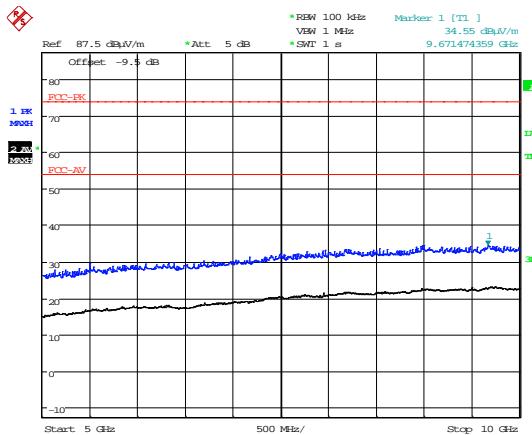

Date: 1.JUN.2016 20:01:31

Figure 3 – Radiated Emissions Plot (5 GHz to 10 GHz).

High Power; Channel: 924.8 MHz									
Detector	Freq. (MHz)	Measured Emission (dBµV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Field Strength (dBµV/m)	Extrap'n Factor (dB)	Field Strength (µV/m)	Limit (µV/m)
No emissions found within 20 dB of the limit									

## External antenna

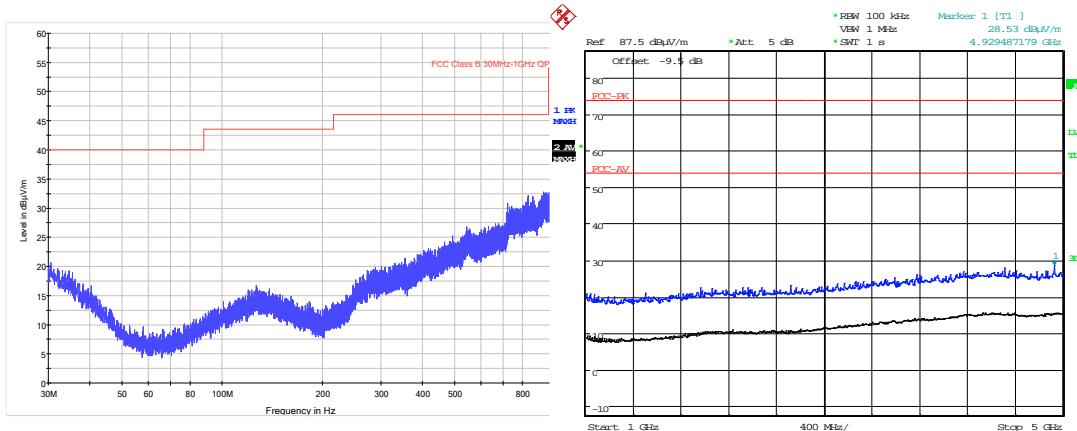


Figure 1 – Radiated Emissions Plot (30 MHz to 1 GHz).

Figure 2 – Radiated Emissions Plot (1 GHz to 5 GHz).

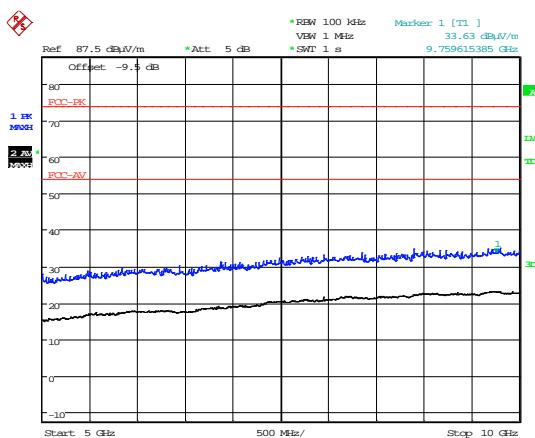


Figure 3 – Radiated Emissions Plot (5 GHz to 10 GHz).

High Power; Channel: 920 MHz									
Detector	Freq. (MHz)	Measured Emission (dBµV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Field Strength (dBµV/m)	Extrap'n Factor (dB)	Field Strength (µV/m)	Limit (µV/m)
No emissions found within 20 dB of the limit									


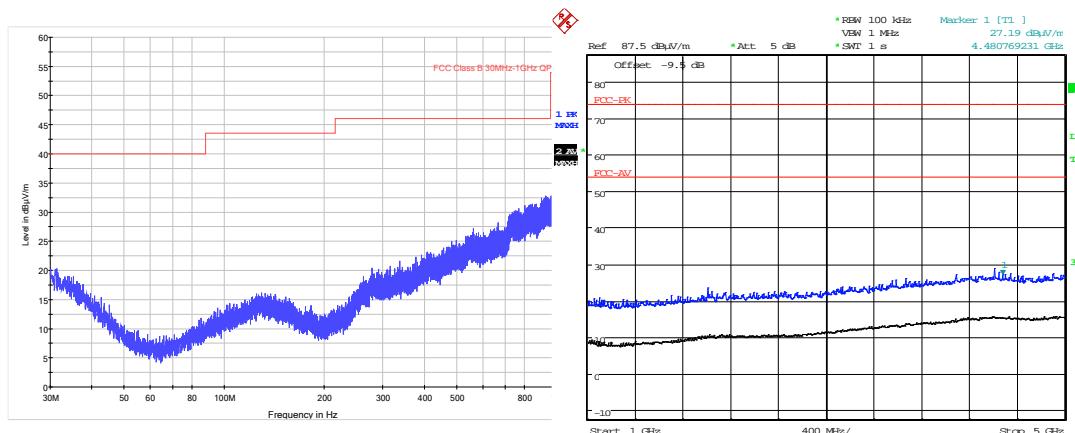


Figure 1 – Radiated Emissions Plot (30 MHz to 1 GHz).

Date: 1.JUN.2016 19:40:45

Figure 2 – Radiated Emissions Plot (1 GHz to 5 GHz).

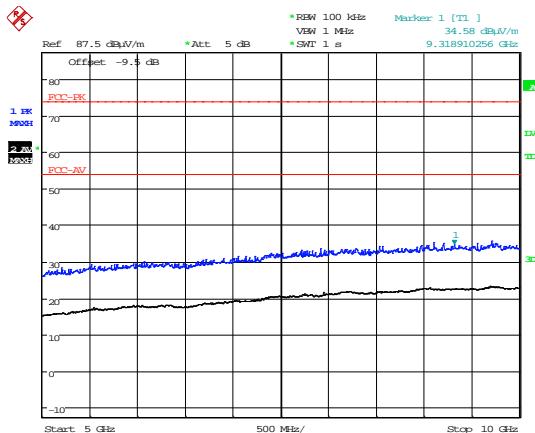

Date: 1.JUN.2016 19:44:47

Figure 3 – Radiated Emissions Plot (5 GHz to 10 GHz).

High Power; Channel: 924.9 MHz									
Detector	Freq. (MHz)	Measured Emission (dBµV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Field Strength (dBµV/m)	Extrap'n Factor (dB)	Field Strength (µV/m)	Limit (µV/m)
No emissions found within 20 dB of the limit									

## 13 AC power-line conducted emissions

### 13.1 Definition

Line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network.

### 13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Transient laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.2
EUT Channels / Frequencies Measured:	Mid
EUT Channel Bandwidths:	100 kHz
EUT Modulation:	GFSK
Deviations From Standard:	None
Measurement Detectors:	Quasi-Peak and Average, RMS

### Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 35 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	3 V dc ±10 % (as declared)

### Test Limit

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in Table 3.

**Table 3 – AC Power Line Conducted Emission Limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-Peak	Average <sup>**</sup>
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

\*The level decreases linearly with the logarithm of the frequency.

\*\*A linear average detector is required.


### 13.3 Test Method

With the EUT setup in a screened room, as per section 9 of this report and connected as per Figure ii, the power line emissions were measured on a spectrum analyzer / EMI receiver.

AC power line conducted emissions from the EUT are checked first by preview scans with peak and average detectors covering both live and neutral lines. A spectrum analyzer is used to determine if any periodic emissions are present.

Formal measurements using the correct detector(s) and bandwidth are made on frequencies identified from the preview scans. Final measurements were performed with EUT set at its maximum duty in transmit and receive modes.

**Figure ii Test Setup**

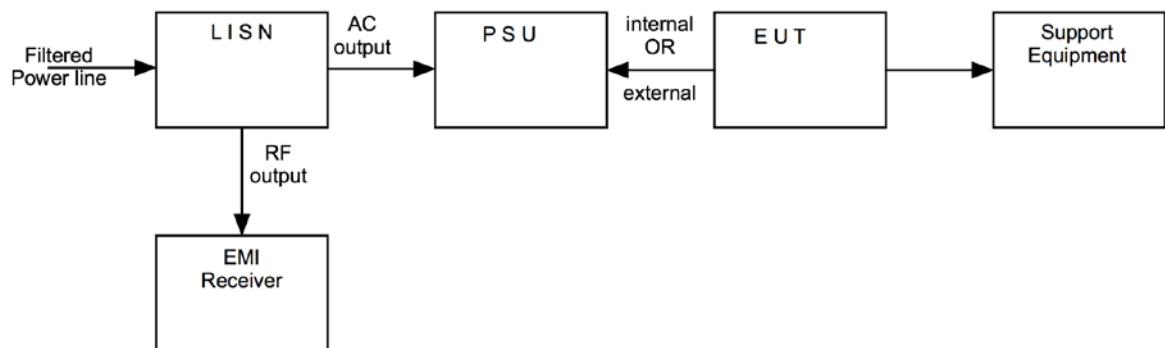

### 13.4 Test Set-up Photograph




### 13.5 Test Equipment

Type of Equipment	Maker/Supplier	Model Number	Element Number	Calibration Due Date	Calibration Period
LISN	R&S	ENV216	UH396	01/07/2016	12
EMI Receiver	R&S	ESHS10	U003	25/06/2016	12

### 13.6 Test Results

Integral antenna


Conducted emissions on Mains 9kHz-30MHz ESHS10 + UH396

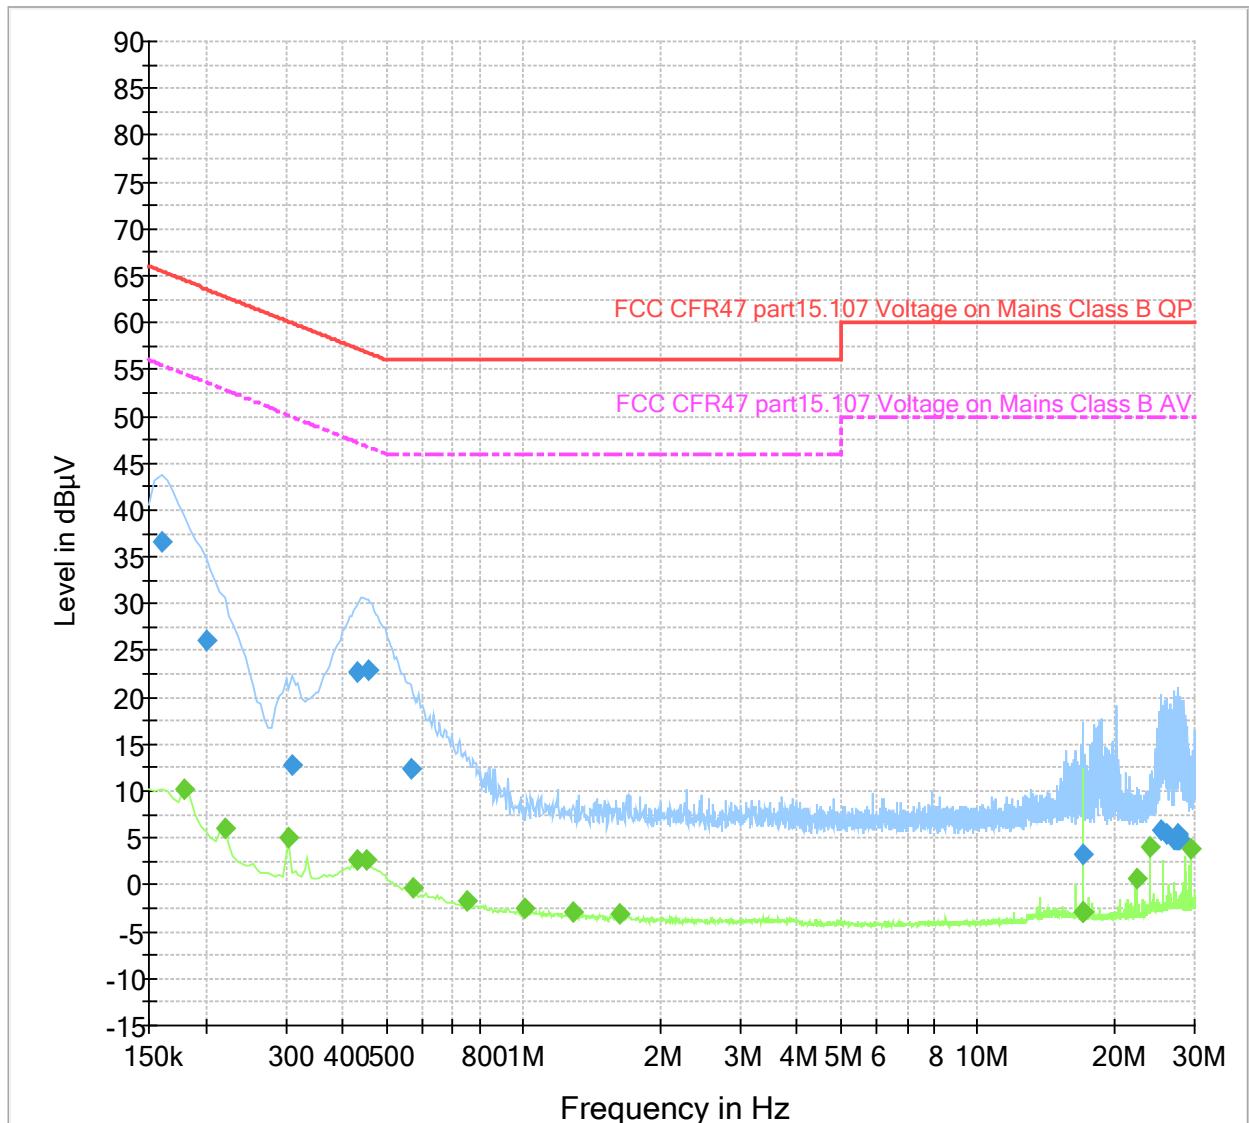

AC power-line conducted emissions, Transmit mode									
Results measured using the average detector									
Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.180000	10.2	2000.0	10.000	On	N	9.5	44.2	54.5	PASS
0.220000	6.0	2000.0	10.000	On	N	9.5	46.8	52.8	PASS
0.305000	5.1	2000.0	10.000	On	N	9.5	45.0	50.1	PASS
0.430000	2.6	2000.0	10.000	On	N	9.5	44.6	47.3	PASS
0.450000	2.6	2000.0	10.000	On	L1	9.5	44.2	46.9	PASS
0.570000	-0.4	2000.0	10.000	On	L1	9.6	46.4	46.0	PASS
0.755000	-1.8	2000.0	10.000	On	L1	9.6	47.8	46.0	PASS
1.005000	-2.5	2000.0	10.000	On	N	9.6	48.5	46.0	PASS
1.285000	-2.9	2000.0	10.000	On	N	9.6	48.9	46.0	PASS
1.635000	-3.1	2000.0	10.000	On	N	9.6	49.1	46.0	PASS
17.040000	-2.8	2000.0	10.000	On	L1	9.8	52.8	50.0	PASS
17.040000	-2.9	2000.0	10.000	On	L1	9.8	52.9	50.0	PASS
17.060000	-2.9	2000.0	10.000	On	N	9.8	52.9	50.0	PASS
22.450000	0.7	2000.0	10.000	On	L1	9.8	49.3	50.0	PASS
24.020000	4.0	2000.0	10.000	On	L1	9.8	46.0	50.0	PASS
29.490000	3.9	2000.0	10.000	On	N	10.0	46.1	50.0	PASS

Results measured using the quasi-peak detector									
Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.160000	36.7	2000.	10.000	On	N	9.5	28.8	65.5	PASS
0.200000	26.1	2000.	10.000	On	N	9.5	37.5	63.6	PASS
0.310000	12.9	2000.	10.000	On	N	9.5	47.1	60.0	PASS
0.430000	22.7	2000.	10.000	On	L1	9.5	34.5	57.3	PASS
0.455000	22.9	2000.	10.000	On	L1	9.5	33.9	56.8	PASS
0.565000	12.5	2000.	10.000	On	N	9.6	43.5	56.0	PASS
17.040000	3.3	2000.	10.000	On	L1	9.8	56.7	60.0	PASS
25.325000	5.9	2000.	10.000	On	L1	9.8	54.1	60.0	PASS
26.000000	5.4	2000.	10.000	On	N	9.9	54.6	60.0	PASS
27.145000	4.8	2000.	10.000	On	N	9.9	55.2	60.0	PASS
27.235000	4.8	2000.	10.000	On	N	9.9	55.2	60.0	PASS
27.525000	5.3	2000.	10.000	On	N	9.9	54.7	60.0	PASS
27.550000	5.4	2000.	10.000	On	N	9.9	54.6	60.0	PASS
27.660000	4.9	2000.	10.000	On	L1	9.8	55.1	60.0	PASS
27.685000	4.9	2000.	10.000	On	N	9.9	55.1	60.0	PASS
27.865000	4.9	2000.	10.000	On	N	9.9	55.1	60.0	PASS

## Conducted emissions on Mains 9kHz-30MHz ESHS10 + UH396

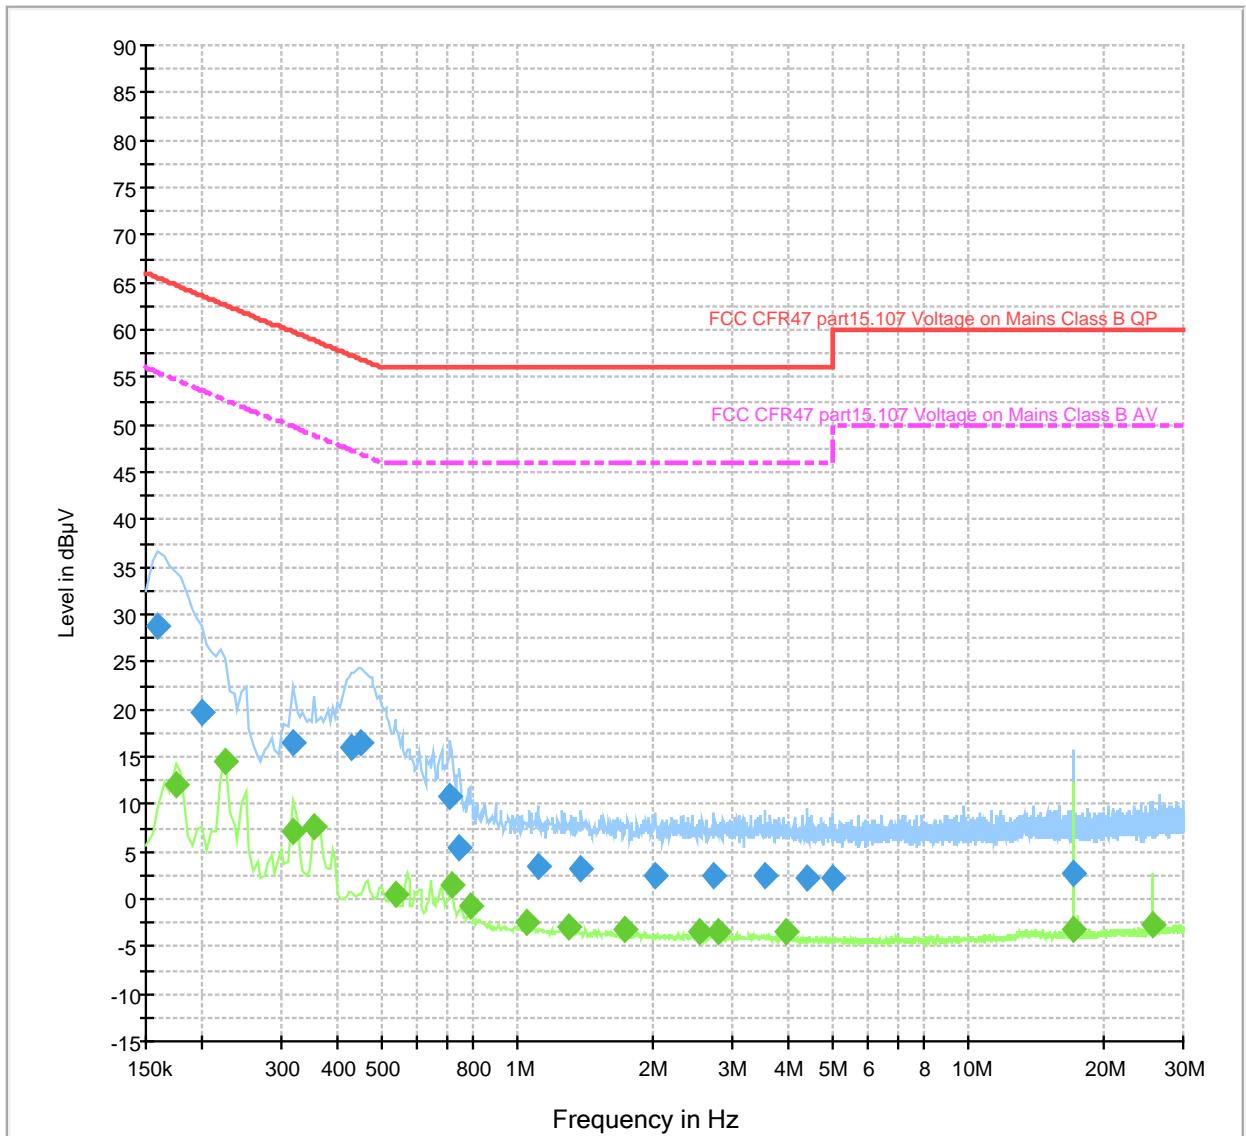


AC power-line conducted emissions, Receive mode									
Results measured using the average detector									
Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.175000	12.1	5000.0	10.000	On	N	9.6	42.6	54.7	PASS
0.225000	14.4	5000.0	10.000	On	L1	9.6	38.2	52.6	PASS
0.320000	7.2	5000.0	10.000	On	N	9.6	42.5	49.7	PASS
0.355000	7.5	5000.0	10.000	On	N	9.6	41.3	48.8	PASS
0.535000	0.4	5000.0	10.000	On	N	9.6	45.6	46.0	PASS
0.715000	1.4	5000.0	10.000	On	N	9.6	44.6	46.0	PASS
0.785000	-0.8	5000.0	10.000	On	N	9.6	46.8	46.0	PASS
1.045000	-2.6	5000.0	10.000	On	N	9.6	48.6	46.0	PASS
1.295000	-2.9	5000.0	10.000	On	N	9.6	48.9	46.0	PASS
1.725000	-3.2	5000.0	10.000	On	N	9.6	49.2	46.0	PASS
2.550000	-3.4	5000.0	10.000	On	N	9.6	49.4	46.0	PASS
2.775000	-3.4	5000.0	10.000	On	N	9.6	49.4	46.0	PASS
3.955000	-3.5	5000.0	10.000	On	N	9.7	49.5	46.0	PASS
17.085000	-3.2	5000.0	10.000	On	L1	9.9	53.2	50.0	PASS
25.620000	-2.8	5000.0	10.000	On	L1	9.9	52.8	50.0	PASS
0.175000	12.1	5000.0	10.000	On	N	9.6	42.6	54.7	PASS

Results measured using the quasi-peak detector									
Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.160000	28.9	5000.0	10.000	On	N	9.6	36.6	65.5	PASS
0.200000	19.7	5000.0	10.000	On	N	9.6	43.9	63.6	PASS
0.320000	16.6	5000.0	10.000	On	L1	9.6	43.1	59.7	PASS
0.430000	15.9	5000.0	10.000	On	L1	9.6	41.3	57.3	PASS
0.450000	16.5	5000.0	10.000	On	N	9.6	40.4	56.9	PASS
0.710000	10.7	5000.0	10.000	On	L1	9.6	45.3	56.0	PASS
0.745000	5.4	5000.0	10.000	On	N	9.6	50.6	56.0	PASS
1.110000	3.3	5000.0	10.000	On	N	9.6	52.7	56.0	PASS
1.385000	3.1	5000.0	10.000	On	L1	9.6	52.9	56.0	PASS
2.025000	2.6	5000.0	10.000	On	N	9.6	53.4	56.0	PASS
2.735000	2.5	5000.0	10.000	On	N	9.6	53.5	56.0	PASS
3.540000	2.4	5000.0	10.000	On	N	9.7	53.6	56.0	PASS
4.395000	2.2	5000.0	10.000	On	N	9.7	53.8	56.0	PASS
4.995000	2.1	5000.0	10.000	On	L1	9.7	53.9	56.0	PASS
17.085000	2.8	5000.0	10.000	On	L1	9.9	57.2	60.0	PASS
0.160000	28.9	5000.0	10.000	On	N	9.6	36.6	65.5	PASS

External antenna


Conducted emissions on Mains 9kHz-30MHz ESHS10 + UH396

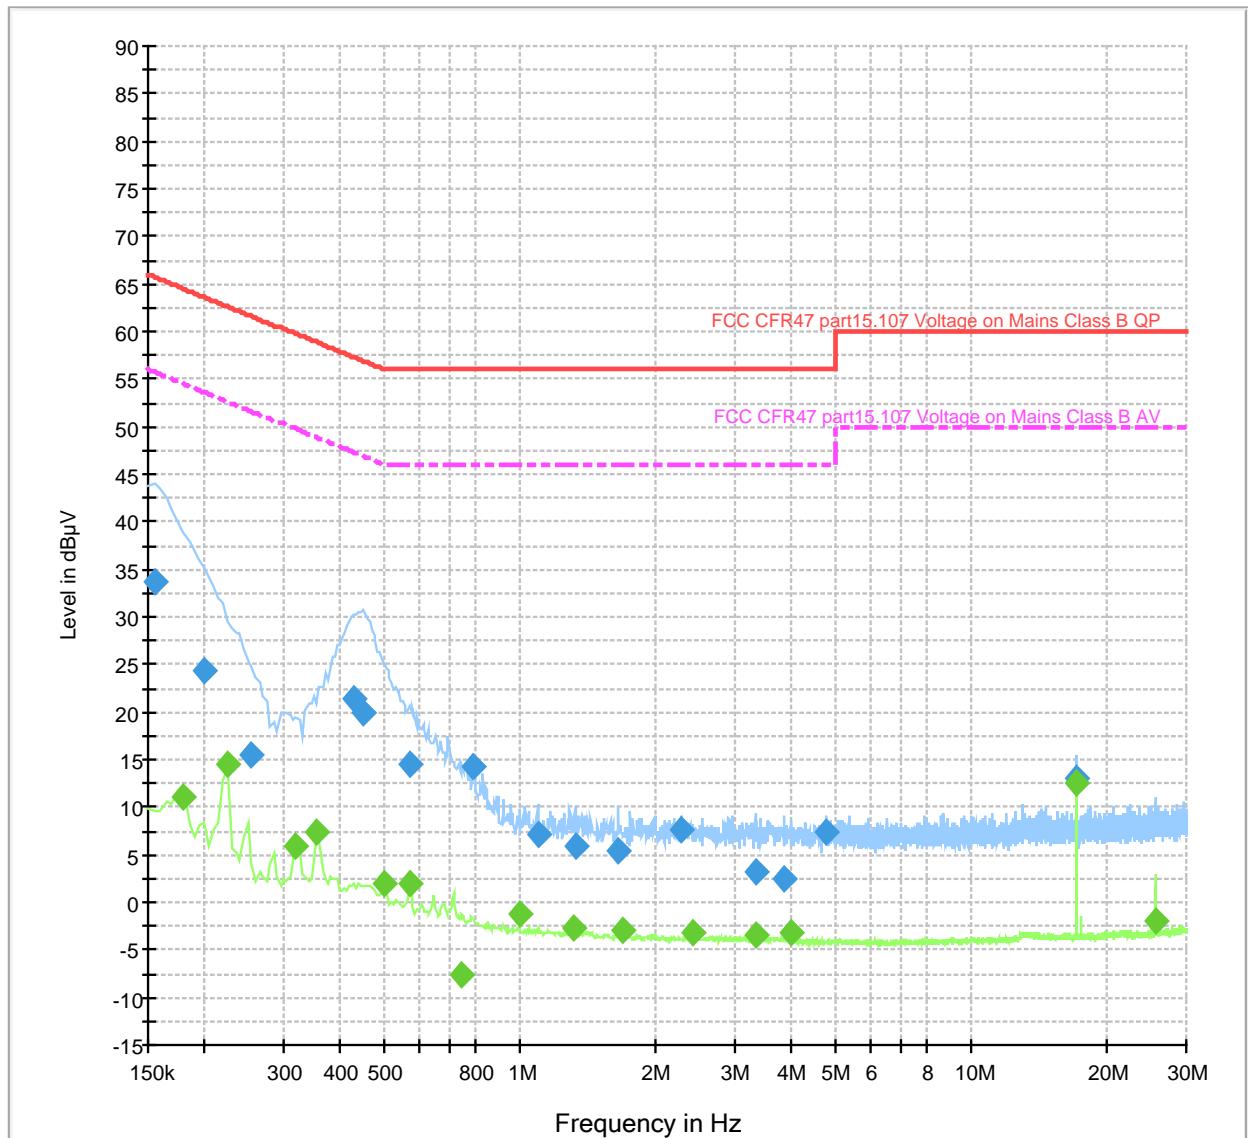

<b>AC power-line conducted emissions, Transmit mode</b>									
<b>Results measured using the average detector</b>									
Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.180000	11.0	5000.0	10.000	On	L1	9.6	43.5	54.5	PASS
0.225000	14.5	5000.0	10.000	On	N	9.6	38.1	52.6	PASS
0.320000	6.0	5000.0	10.000	On	L1	9.6	43.7	49.7	PASS
0.355000	7.4	5000.0	10.000	On	L1	9.6	41.4	48.8	PASS
0.500000	1.9	5000.0	10.000	On	L1	9.6	44.1	46.0	PASS
0.570000	2.1	5000.0	10.000	On	L1	9.6	43.9	46.0	PASS
0.745000	-7.6	5000.0	10.000	On	N	9.6	53.6	46.0	PASS
0.995000	-1.2	5000.0	10.000	On	N	9.6	47.2	46.0	PASS
1.320000	-2.7	5000.0	10.000	On	N	9.6	48.7	46.0	PASS
1.685000	-3.0	5000.0	10.000	On	N	9.6	49.0	46.0	PASS
2.410000	-3.1	5000.0	10.000	On	L1	9.6	49.1	46.0	PASS
3.335000	-3.4	5000.0	10.000	On	N	9.7	49.4	46.0	PASS
3.985000	-3.1	5000.0	10.000	On	L1	9.7	49.1	46.0	PASS
17.055000	12.4	5000.0	10.000	On	L1	9.9	37.6	50.0	PASS
25.570000	-2.0	5000.0	10.000	On	L1	9.9	52.0	50.0	PASS
0.180000	11.0	5000.0	10.000	On	L1	9.6	43.5	54.5	PASS

<b>Results measured using the quasi-peak detector</b>									
Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.155000	33.8	5000.0	10.000	On	N	9.6	31.9	65.7	PASS
0.200000	24.3	5000.0	10.000	On	N	9.6	39.3	63.6	PASS
0.255000	15.5	5000.0	10.000	On	N	9.6	46.1	61.6	PASS
0.430000	21.3	5000.0	10.000	On	L1	9.6	35.9	57.3	PASS
0.450000	20.0	5000.0	10.000	On	L1	9.6	36.8	56.9	PASS
0.570000	14.6	5000.0	10.000	On	N	9.6	41.4	56.0	PASS
0.790000	14.4	5000.0	10.000	On	L1	9.6	41.6	56.0	PASS
1.095000	7.1	5000.0	10.000	On	N	9.6	48.9	56.0	PASS
1.325000	5.9	5000.0	10.000	On	N	9.6	50.1	56.0	PASS
1.655000	5.5	5000.0	10.000	On	N	9.6	50.5	56.0	PASS
2.280000	7.5	5000.0	10.000	On	L1	9.6	48.5	56.0	PASS
3.320000	3.2	5000.0	10.000	On	L1	9.7	52.8	56.0	PASS
3.865000	2.5	5000.0	10.000	On	N	9.7	53.5	56.0	PASS
4.790000	7.3	5000.0	10.000	On	L1	9.7	48.7	56.0	PASS
17.055000	13.1	5000.0	10.000	On	L1	9.9	46.9	60.0	PASS
0.155000	33.8	5000.0	10.000	On	N	9.6	31.9	65.7	PASS

## Conducted emissions on Mains 9kHz-30MHz ESHS10 + UH396

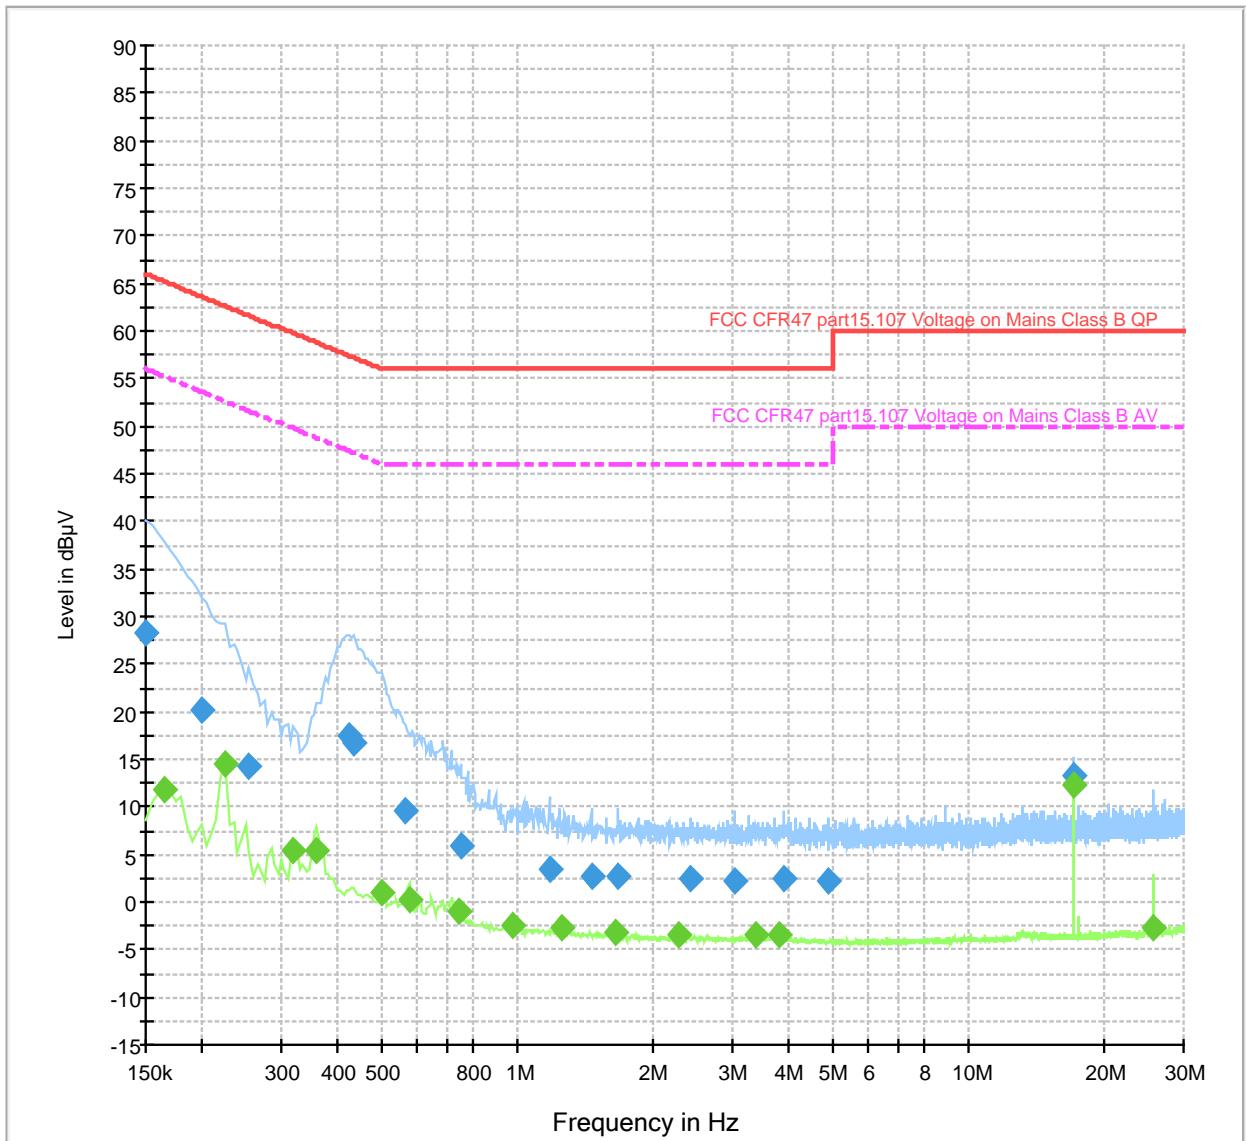

AC power-line conducted emissions, Receive mode									
Results measured using the average detector									
Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.165000	11.8	5000.0	10.000	On	L1	9.6	43.4	55.2	PASS
0.225000	14.5	5000.0	10.000	On	L1	9.6	38.1	52.6	PASS
0.320000	5.5	5000.0	10.000	On	L1	9.6	44.2	49.7	PASS
0.360000	5.5	5000.0	10.000	On	L1	9.6	43.2	48.7	PASS
0.500000	1.0	5000.0	10.000	On	L1	9.6	45.0	46.0	PASS
0.575000	0.2	5000.0	10.000	On	L1	9.6	45.8	46.0	PASS
0.745000	-0.9	5000.0	10.000	On	N	9.6	46.9	46.0	PASS
0.975000	-2.4	5000.0	10.000	On	N	9.6	48.4	46.0	PASS
1.255000	-2.8	5000.0	10.000	On	N	9.6	48.8	46.0	PASS
1.655000	-3.1	5000.0	10.000	On	L1	9.6	49.1	46.0	PASS
2.290000	-3.5	5000.0	10.000	On	N	9.6	49.5	46.0	PASS
3.360000	-3.5	5000.0	10.000	On	L1	9.7	49.5	46.0	PASS
3.800000	-3.4	5000.0	10.000	On	N	9.7	49.4	46.0	PASS
17.035000	12.3	5000.0	10.000	On	L1	9.9	37.7	50.0	PASS
25.545000	-2.7	5000.0	10.000	On	L1	9.9	52.7	50.0	PASS
0.165000	11.8	5000.0	10.000	On	L1	9.6	43.4	55.2	PASS

Results measured using the quasi-peak detector									
Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.150000	28.2	5000.0	10.000	On	L1	9.6	37.8	66.0	PASS
0.200000	20.1	5000.0	10.000	On	N	9.6	43.5	63.6	PASS
0.255000	14.3	5000.0	10.000	On	N	9.6	47.3	61.6	PASS
0.425000	17.6	5000.0	10.000	On	L1	9.6	39.8	57.3	PASS
0.435000	16.8	5000.0	10.000	On	L1	9.6	40.4	57.2	PASS
0.565000	9.5	5000.0	10.000	On	L1	9.6	46.5	56.0	PASS
0.750000	5.8	5000.0	10.000	On	N	9.6	50.2	56.0	PASS
1.180000	3.4	5000.0	10.000	On	N	9.6	52.6	56.0	PASS
1.460000	2.8	5000.0	10.000	On	N	9.6	53.2	56.0	PASS
1.675000	2.8	5000.0	10.000	On	N	9.6	53.2	56.0	PASS
2.430000	2.6	5000.0	10.000	On	L1	9.6	53.4	56.0	PASS
3.045000	2.3	5000.0	10.000	On	N	9.7	53.7	56.0	PASS
3.895000	2.4	5000.0	10.000	On	L1	9.7	53.6	56.0	PASS
4.915000	2.1	5000.0	10.000	On	L1	9.7	53.9	56.0	PASS
17.035000	13.3	5000.0	10.000	On	L1	9.9	46.8	60.0	PASS
0.150000	28.2	5000.0	10.000	On	L1	9.6	37.8	66.0	PASS

## 14 Carrier frequency separation

### 14.1 Definition

The carrier frequency separation is the frequency separation between two adjacent hopping frequencies.

### 14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.2
EUT Channels / Frequencies Measured:	All; 920 to 924.9 MHz
EUT 20dB Bandwidth:	65 kHz
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	20 kHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: 25 °C	+15 °C to +35 °C (as declared)
Humidity: 35 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	3 V dc ±10 % (as declared)

### 14.3 Test Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400 to 2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

#### 14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each nominal bandwidth.

**Figure iii Test Setup**




#### 14.5 Test Equipment

Type of Equipment	Maker/Supplier	Model Number	Element Number	Calibration Due Date	Calibration Interval
Spectrum analyser	R&S	FSU26	REF909	26/04/2017	12

#### 14.6 Test Results

Channel separation				
Data Rate	$F1_c$ (MHz)	$F2_c$ (MHz)	Channel Separation, $F2_c - F1_c$ (kHz)	Result
1Mbit/s	920.1	920	98.7179	PASS

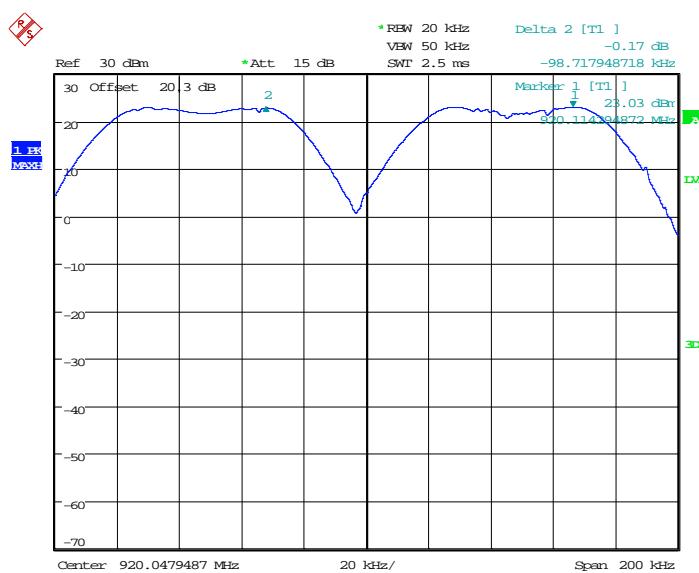

Date: 2.JUN.2016 14:31:45

## 15 Number of hopping frequencies

### 15.1 Definition

The total number of hopping frequencies (the centre frequencies defined within the hopping sequence of a FHSS equipment) which are randomly sequenced in order to spread the transmission.

### 15.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.3
EUT Channels / Frequencies Measured:	All; 920 – 924.9 MHz
EUT 20dB Bandwidth:	65 kHz
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	20 kHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: 25 °C	+15 °C to +35 °C (as declared)
Humidity: 36 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	3 V dc ±10 % (as declared)

### 15.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: if the -20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels;  
If the -20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels;
- Frequency hopping systems operating in the band 2400 to 2483.5 MHz shall use at least 15 hopping channels;
- Frequency hopping systems operating in the band 5725 to 5850 MHz shall use at least 75 hopping channels.

#### 15.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each nominal bandwidth.

**Figure iv Test Setup**




#### 15.5 Test Equipment

Type of Equipment	Maker/Supplier	Model Number	Element Number	Calibration Due Date	Calibration Interval
Spectrum analyser	R&S	FSU26	REF909	26/04/2017	12

#### 15.6 Test Results

Modulation: GFSK				
Data Rate	Lowest channel, $F_{CL}$ (MHz)	Highest channel, $F_{CH}$ (MHz)	Number of channels observed	Result
1 Mbit/s	920	924.9	50	PASS

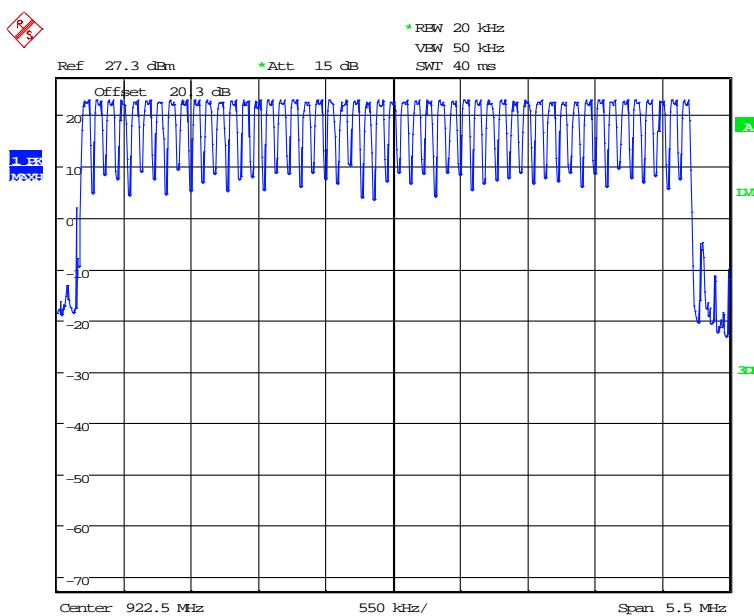

Date: 2.JUN.2016 13:33:56

## 16 Average channel occupancy

### 16.1 Definition

The channel occupancy is the total of the transmitter 'on' times, during an observation period, on a particular hopping frequency.

### 16.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.4
EUT Channels / Frequencies Measured:	922.4 MHz
EUT 20dB bandwidth:	65 kHz
EUT Number of hopping channels:	50
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	20kHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: 25 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	3 V dc ±10 % (as declared)

### 16.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: if the -20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20 second period; If the -20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10 second period;
- Frequency hopping systems operating in the band 2400 to 2483.5 MHz: The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed;
- Frequency hopping systems operating in the band 5725 to 5850 MHz: The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

#### 16.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. A number of hops were observed to confirm consistency of the dwell time / observe the worst case. All modulation schemes, data rates and power settings were used to observe the worst-case configuration.

**Figure v Test Setup**




#### 16.5 Test Equipment


Type of Equipment	Maker/Supplier	Model Number	Element Number	Calibration Due Date	Calibration Interval
Spectrum analyser	R&S	FSU26	REF909	26/04/2017	12

#### 16.6 Test Results

Modulation: GFSK					
Data Rate	Individual occupancy time (ms)	Observation period (s)	Number of hops observed	Average time of occupancy (s)	Result
1Mbit/s	394	20	1	0.394	PASS

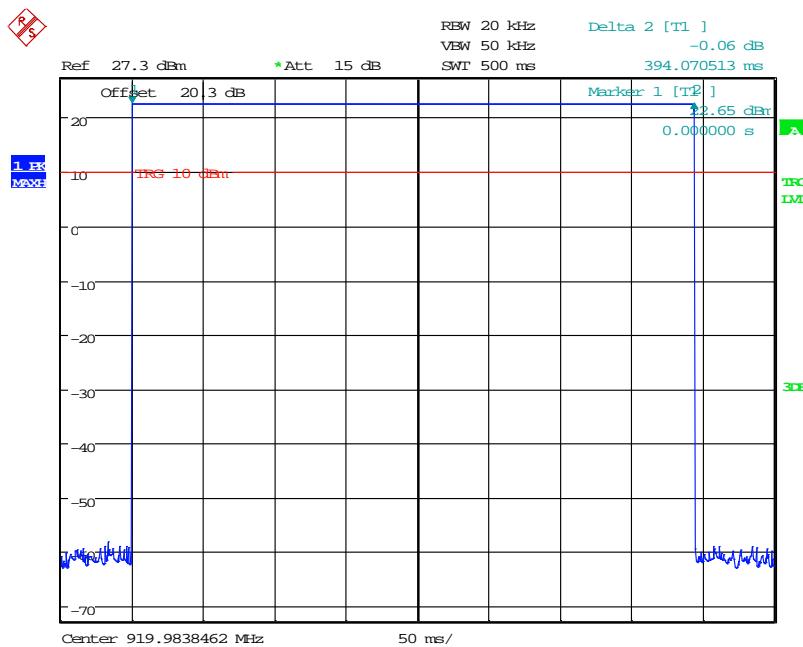

Date: 2.JUN.2016 14:18:22

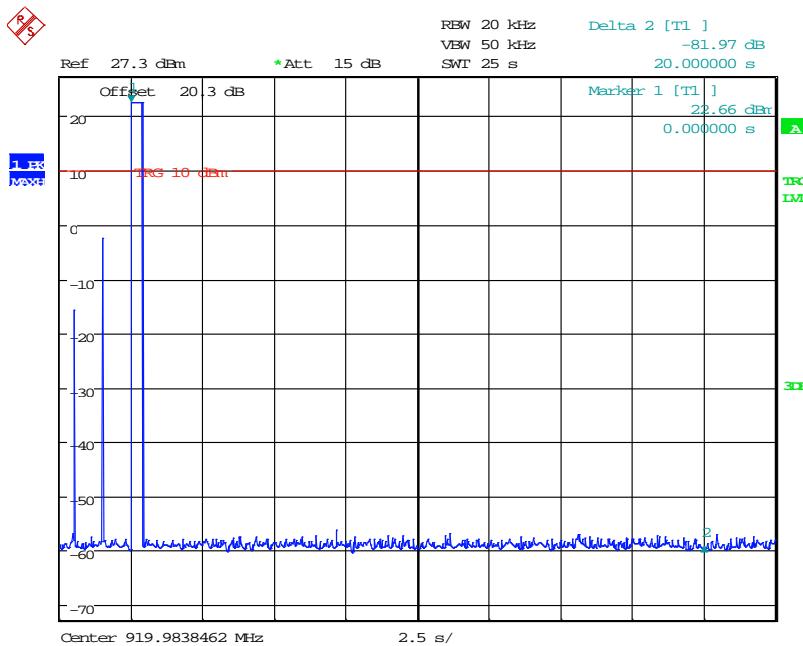

Date: 2.JUN.2016 14:21:04

## 17 Maximum peak conducted output power

### 17.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

### 17.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.5
EUT Channels / Frequencies Measured:	920 MHz / 924.9 MHz – hopping disabled.
EUT Channel Bandwidths:	100 kHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW:	300 kHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	Mains Power = 85 % and 115 % of Nominal (FCC only requirement); Battery Power = new battery.

### Environmental Conditions (Normal Environment)

Temperature: 25 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)

### 17.3 Test Limit


- For frequency hopping systems operating in the band 902 to 928 MHz, the maximum peak conducted output power shall not exceed 1 W, and the e.i.r.p. shall not exceed 4 W, if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W, and the e.i.r.p. shall not exceed 1 W, if the hopset uses less than 50 hopping channels.
- For frequency hopping systems operating in the band 2400 to 2483.5 MHz and employing at least 75 hopping channels, the power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W. The e.i.r.p. shall not exceed 4 W.
- For frequency hopping systems operating in the band 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.
- Point-to-point systems in the bands 2400-2483.5 MHz and 5725 to 5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers.

#### 17.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure vi Test Setup**

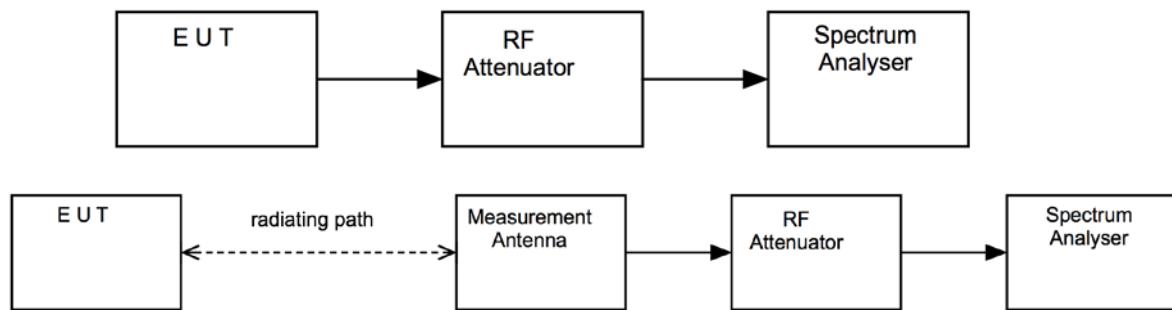

#### 17.5 Test Equipment

Type of Equipment	Maker/Supplier	Model Number	Element Number	Calibration Due Date	Calibration Interval
Bilog	Chase	CBL611/A	UH191	26/02/2017	24
ESVS10	R&S	ESVS10	L352	07/08/2016	12
Spectrum analyser	R&S	FSU26	REF909	26/04/2017	12
Horn Antenna	EMCO	3115	TRL139	25/09/2017	24
Pre-Amplifier	Agilent	8449B	TRL572	16/02/2017	12

### 17.6 Test Results

<b>Conducted sample with external antenna</b>				
<b>Channel Frequency (MHz)</b>	<b>Analyzer Level (dBm)</b>	<b>Cable loss (dB)</b>	<b>Maximum peak conducted output power (W)</b>	<b>Result</b>
920	23	22.99	0.19907	PASS
924.9	23	22.91	0.19543	PASS

## 18 Occupied Bandwidth

### 18.1 Definition

The emission bandwidth ( $x$  dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated  $x$  dB below the maximum in-band spectral density of the modulated signal.

### 18.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.9
EUT Channels / Frequencies Measured:	920 MHz / 922.4 MHz / 924.9 MHz – hopping stopped.
EUT Channel Bandwidths:	100 kHz
Deviations From Standard:	None
Measurement BW: (requirement: 1 % to 5 % OBW)	3 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 kHz
Measurement Span: (requirement 2 to 5 times OBW)	200 kHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: 25 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	3 V dc $\pm$ 10 % (as declared)

### 18.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: The maximum allowed -20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the band 5725 to 5850 MHz: The maximum -20 dB bandwidth of the hopping channel shall be 1 MHz

#### 18.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure vii Test Setup**




#### 18.5 Test Equipment

Type of Equipment	Maker/Supplier	Model Number	Element Number	Calibration Due Date	Calibration Interval
Spectrum analyser	R&S	FSU26	REF909	26/04/2017	12

#### 18.6 Test Results


Modulation: GFSK;				
Channel Frequency (MHz)	$F_L$ (MHz)	$F_H$ (MHz)	20dB Bandwidth (kHz)	Result
920	919.9605769	920.0246785	64.1016	PASS
922.4	922.3597436	922.4241667	64.4231	PASS
924.9	924.8592949	924.9237179	64.423	PASS

## 20 dB Bandwidth 920 MHz

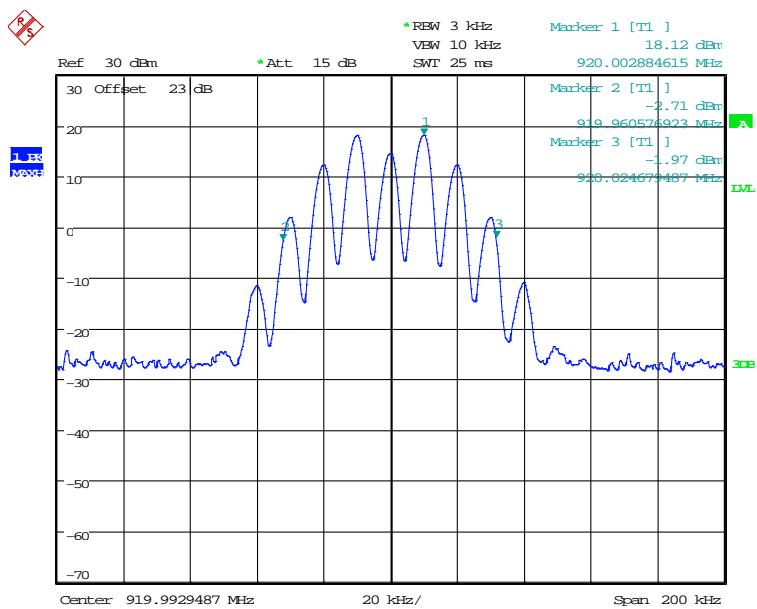


Date: 2.JUN.2016 07:26:57

## 20 dB Bandwidth 922.4 MHz

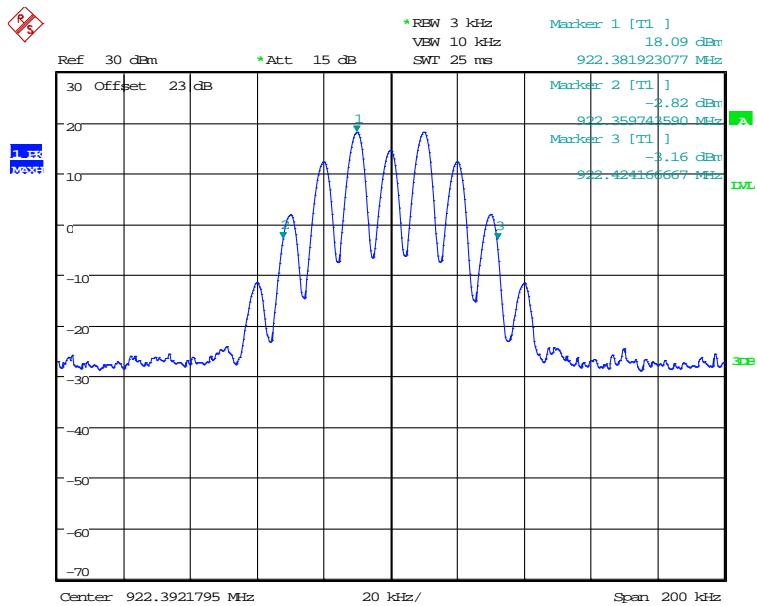

Date: 2.JUN.2016 07:28:14

## 20 dB Bandwidth 924.9 MHz

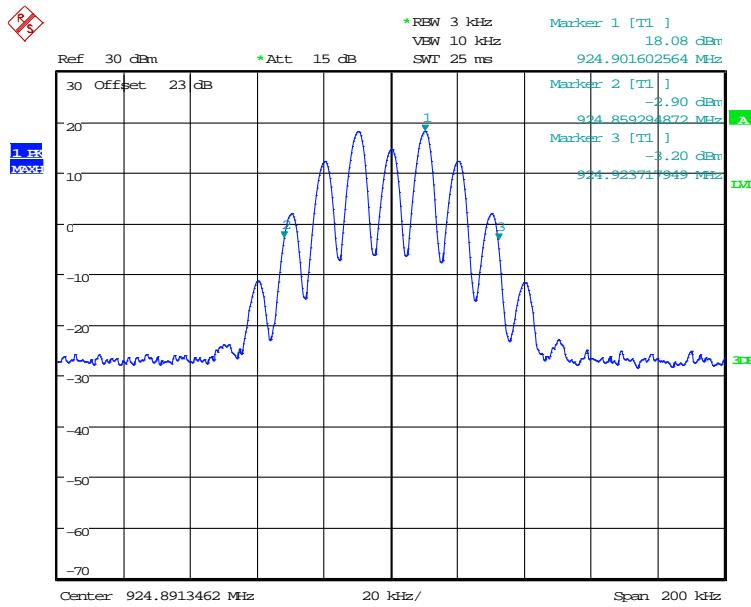

Date: 2.JUN.2016 07:25:47

## 19 Out-of-band and conducted spurious emissions

### 19.1 Definition

*Out-of-band emission.*

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

*Spurious emission.*

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

### 19.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.8
EUT Channels / Frequencies Measured:	920 MHz / 922.4 MHz / 924.9 MHz
EUT Channel Bandwidths:	100 kHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	30 MHz to 26.5 GHz

### Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	3 V dc ±10 % (as declared)

### 19.3 Test Limits


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

#### 19.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure viii, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

**Figure viii Test Setup**




#### 19.5 Test Equipment

Type of Equipment	Maker/Supplier	Model Number	Element Number	Calibration Due Date	Calibration Interval
Spectrum analyser	R&S	FSU26	REF909	26/04/2017	12


## 19.6 Test Results

### Conducted spurious emissions 920 MHz

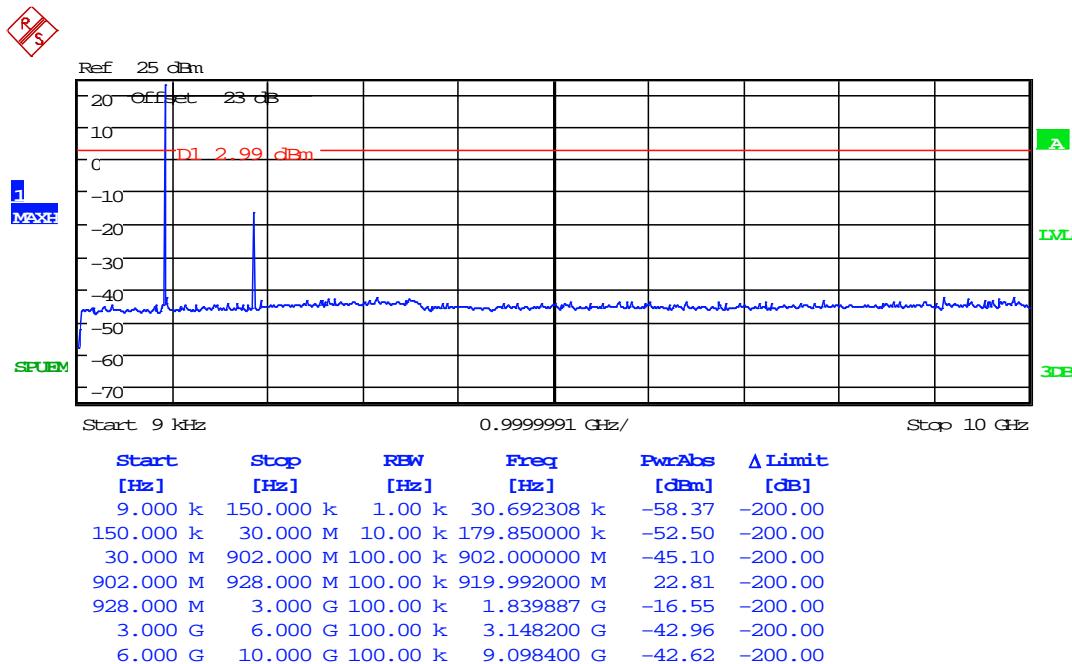


Date: 2.JUN.2016 07:37:59

## Conducted spurious emissions 922.4 MHz

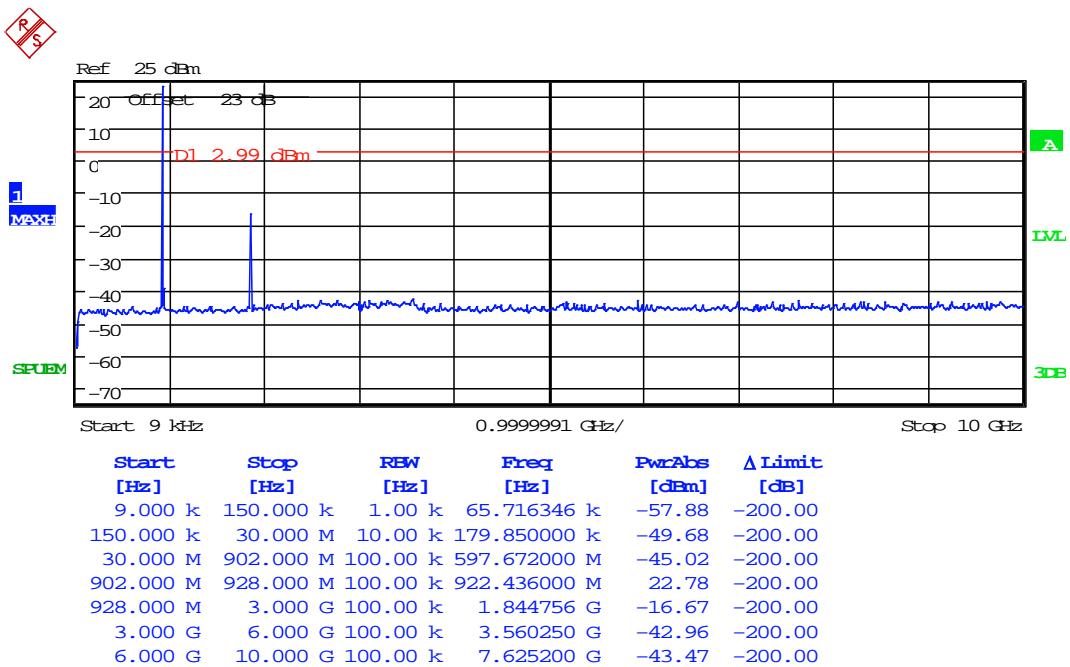

Date: 2.JUN.2016 07:38:45

## Conducted spurious emissions 924.9 MHz

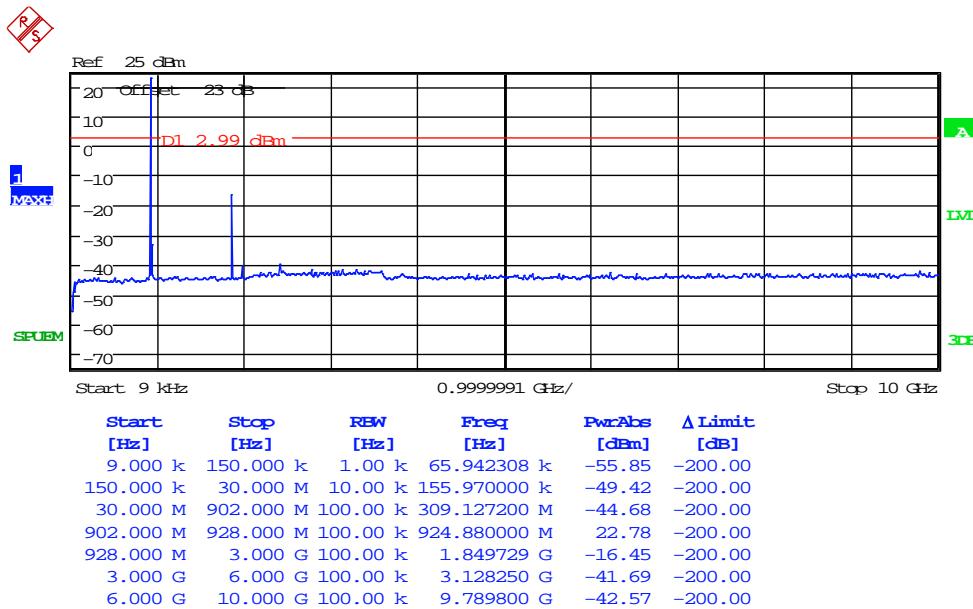

Date: 2.JUN.2016 07:51:38

## 20 Measurement Uncertainty

### Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

#### [1] Radiated spurious emissions

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**  
Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

#### [2] AC power line conducted emissions

Uncertainty in test result = **3.4 dB**

#### [3] Occupied bandwidth

Uncertainty in test result = **15.5 %**

#### [4] Conducted carrier power

Uncertainty in test result (Power Meter) = **1.08 dB**

#### [5] Conducted / radiated RF power out-of-band

Uncertainty in test result – up to 8.1 GHz = **3.31 dB**  
Uncertainty in test result – 8.1 GHz to 15.3 GHz = **4.43 dB**  
Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**  
Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

#### [6] Frequency separation

Uncertainty in test result (Spectrum Analyser) = **3.6 kHz**

#### [7] Accumulated channel occupancy time

Uncertainty in test result = **7.98 %**