

Report on the Radio Testing

For

Texecom Ltd

on

Premier Elite 32XPH-W

Report no. TRA-026255-CO0025-47-00A

3rd June 2016



Report Number: TRA-026255-CO0025-47-00A
Issue: A

REPORT ON THE RADIO TESTING OF A
Texecom Ltd
Premier Elite 32XPH-W
WITH RESPECT TO SPECIFICATION
FCC 47CFR 15.247 & IC RSS-247

TEST DATE: 24th April - 26th May 2016

Written by: D Winstanley

D Winstanley
Senior Radio Test Engineer

Approved by:

J Charters
Department Manager - Radio

Date: 3rd June 2016

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

RF916 6.0

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	3rd June 2016	Original

2 Summary

TEST REPORT NUMBER:	TRA-026255-CO0025-47-00A
WORKS ORDER NUMBER	TRA-026255-00 CO0025
PURPOSE OF TEST:	USA: Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J. Canada: Testing of radio apparatus for TAC (technical acceptance certificate) per subsections 4(2) of the Radio communication Act and 21(1) of the Radio communication Regulations.
TEST SPECIFICATION(S):	47CFR15.247 & RSS-247
EQUIPMENT UNDER TEST (EUT):	Premier Elite 32XPH-W
FCC IDENTIFIER:	MYJLAIA5000
EUT SERIAL NUMBER:	SMP-00000099 Sample 8
MANUFACTURER/AGENT:	Texecom Ltd
ADDRESS:	Bradwood Court St Crispin Way Haslingden Rossendale Lancashire BB4 4PW
CLIENT CONTACT:	Hugh Devereux ☎ 01706 234 853 ✉ hdevereux@texe.com
ORDER NUMBER:	Not Applicable
TEST DATE:	24th April - 26th May 2016
TESTED BY:	D Winstanley Element

2.1 Test Summary

Test Method and Description	Requirement Clause		Applicable to this equipment	Result / Note
	RSS	47CFR15		
Radiated spurious emissions (restricted bands of operation and cabinet radiation)	Gen, 8.10	15.205	☒	Pass
AC power line conducted emissions	Gen, 8.8	15.207	☒	Pass
Carrier frequency separation	247, 5.1 (2)	15.247(a)(1)	☒	Pass
Number of hopping channels	247, 5.1 (3), (4) and (5)	15.247(a)(1) (i), (ii) and (iii)	☒	Pass
Average time of occupancy	247, 5.1 (3), (4) and (5)	15.247(a)(1) (i), (ii) and (iii)	☒	Pass
Maximum peak conducted output power	247, 5.4 (1), (2) and (3)	15.247 (a)(1), (b)(1) and (b)(2)	☒	Pass
20dB emission bandwidth	247, 5.1 (1)	15.247(a)(1) (i) and (ii)	☒	Pass
Out-of-band emissions	247, 5.5	15.247(d)	☒	Pass

Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record	3
2	Summary	4
2.1	Test Summary	5
3	Contents	6
4	Introduction	8
5	Test Specifications	9
5.1	Normative References	9
5.2	Deviations from Test Standards	9
6	Glossary of Terms	10
7	Equipment Under Test	11
7.1	EUT Identification	11
7.2	System Equipment	11
7.3	EUT Mode of Operation	11
7.3.1	Transmission	11
7.3.2	Reception	11
7.4	EUT Radio Parameters	12
7.4.1	General	12
7.4.2	Antennas	12
7.4.3	Product specific declarations	12
7.5	EUT Description	12
8	Modifications	13
9	EUT Test Setup	14
9.1	Block Diagram	14
9.2	General Set-up Photograph	15
10	General Technical Parameters	16
10.1	Normal Conditions	16
10.2	Varying Test Conditions	16
11	Radiated emissions	17
11.1	Definitions	17
11.2	Test Parameters	17
11.3	Test Limit	17
11.4	Test Method	18
11.5	Test Equipment	18
11.6	Test Set-up Photograph	19
11.7	Test Results	20
12	AC power-line conducted emissions	24
12.1	Definition	24
12.2	Test Parameters	24
12.3	Test Method	25
12.4	Test Set-up Photograph	25
12.5	Test Equipment	25
12.6	Test Results	26
13	Carrier frequency separation	28
13.1	Definition	28
13.2	Test Parameters	28
13.3	Test Limit	28
13.4	Test Method	29
13.5	Test Equipment	29
13.6	Test Results	29
14	Number of hopping frequencies	30
14.1	Definition	30
14.2	Test Parameters	30
14.3	Test Limit	30
14.4	Test Method	31
14.5	Test Equipment	31
14.6	Test Results	31
15	Average channel occupancy	32
15.1	Definition	32
15.2	Test Parameters	32
15.3	Test Limit	32
15.4	Test Method	33
15.5	Test Equipment	33
15.6	Test Results	33
16	Maximum peak conducted output power	35
16.1	Definition	35
16.2	Test Parameters	35

16.3	Test Limit	35
16.4	Test Method	36
16.5	Test Equipment	36
16.6	Test Results	36
17	Occupied Bandwidth	38
17.1	Definition	38
17.2	Test Parameters	38
17.3	Test Limit	38
17.4	Test Method	39
17.5	Test Equipment	39
17.6	Test Results	39
18	Out-of-band and conducted spurious emissions	42
18.1	Definition	42
18.2	Test Parameters	42
18.3	Test Limits	42
18.4	Test Method	43
18.5	Test Equipment	43
18.6	Test Results	44
19	Measurement Uncertainty	52

4 Introduction

This report TRA-026255-CO0025-47-00A presents the results of the Radio testing on a Texecom Ltd, Premier Elite 32XPH-W to specification 47CFR15 Radio Frequency Devices and RSS-247 Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment.

The testing was carried out for Texecom Ltd by Element, at the address detailed below.

☐	Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	☒	Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK
--------------------------	---	-------------------------------------	--

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

IC Registration Number(s):

Element Hull	3483A
Element North West	3930B

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Test Specifications

5.1 Normative References

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- Industry Canada RSS-247, Issue 1, May 2015 – Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
- Industry Canada RSS-Gen, Issue 4, November 2014 – General Requirements for Compliance of Radio Apparatus.

5.2 Deviations from Test Standards

There were no deviations from the test standard.

6 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada
ITU	International Telecommunication Union
LBT	Listen Before Talk
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
Tx	transmitter
UKAS	United Kingdom Accreditation Service
V	volt
W	watt
Ω	ohm

7 Equipment Under Test

7.1 EUT Identification

- Name: Premier Elite 32XPH-W
- Serial Number: SMP-00000099 Sample 8
- Model Number: LAIA5000
- Software Revision: Modified 3.1.0
- Build Level / Revision Number: 01B

7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

The following equipment was only utilised for AC power line conducted emissions.

1. Description: Premier Elite 24
Make: Texecom
Model no.: CAA-0026
Serial no.: AOB1021201
2. Description: DTM Module
Make: Texecom
Model no.: DTM Module
Serial no.: A0533-02-01C
3. Description: Premier Elite LCD keypad
Make: Texecom
Model no.: DBA-0001
Serial no.: AJW1049239
4. Description: Plug type PSU
Make: ARTESYN
Model no.: DA12-120UK-M
Serial no.: N/A

7.3 EUT Mode of Operation

7.3.1 Transmission

The mode of operation for Tx tests was achieved using internal test modes and are as follows...

Modulated carrier – Top channel
Modulated carrier – Middle channel
Modulated carrier – Bottom channel

CW – Top Channel
CW – Middle Channel
CW - Bottom Channel

Normal operation in communications with a companion device to allow FHSS modes.

7.3.2 Reception

The Result for this mode of operation are covered in an additional report

7.4 EUT Radio Parameters

7.4.1 General

Frequency of operation:	920.0 MHz – 924.9 MHz
Modulation type(s):	GFSK
Occupied channel bandwidth(s):	100 kHz
Channel spacing:	100 kHz
ITU emission designator(s):	F1D
Declared output power(s):	250 mW
Warning against use of alternative antennas in user manual (yes/no):	Not Applicable
Nominal Supply Voltage:	+12Vdc
Duty cycle:	Less than 0.1%

7.4.2 Antennas

Type:	Onboard Monopole
Gain:	<0dBi
Frequency range:	920 MHz - 925MHz
Impedance:	50 Ohms
Polarisation:	Omni
Connector type:	Not Applicable

7.4.3 Product specific declarations

Multiple antenna configuration(s), e.g. MIMO:	Diversity – 2 Radio System
Fixed pt-pt operations (yes/no):	No
Installation manual advice on pt-pt operational restrictions (yes/no):	No
Fixed pt-mpt operations (yes/no):	No
Simultaneous tx (yes/no):	No

7.5 EUT Description

The EUT is a wireless expander that allows the Texecom control panel to communicate with wireless devices on the Ricochet Network.

The EUT is also capable of operating as a standalone wireless expander that communicates with wireless devices on the Ricochet Network.

The EUT is a FHSS device operating in the band 920 – 925 MHz using 50 channels.

The EUT has 2 radio sections and uses diversity.


8 Modifications

No modifications were performed during this assessment.

9 EUT Test Setup

9.1 Block Diagram

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:

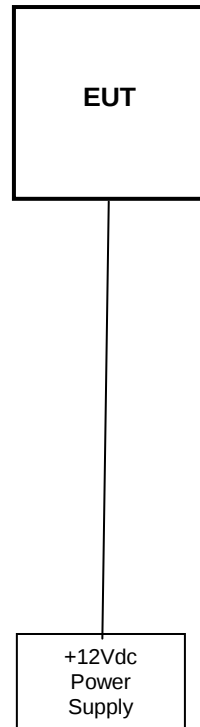

9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:



10 General Technical Parameters

10.1 Normal Conditions

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was approx. 12 V dc from the adaptor.

10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band and the manufacturer has declared sufficient frequency stability (refer to section 7.4).

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	Category	Nominal	Variation
☐	Mains	110 V ac +/-2 %	85 % and 115 %
☐	Battery	New battery	N/A
☒	Other	+12 Vdc	85 % and 115 %

11 Radiated emissions

11.1 Definitions

Spurious emissions

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Restricted bands

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber (REF940)
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Channels / Frequencies Measured:	920.0 MHz 924.9 MHz
EUT Channel Bandwidths:	100 kHz
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: RMS average and Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 41 % RH	20 % RH to 75 % RH (as declared)
Supply: +12 Vdc	+ 12Vdc (as declared)

11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

<i>Frequency (MHz)</i>	<i>Field Strength (μV/m at 3 m)</i>
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dBμV/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dBμV;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.


Figure i Test Setup

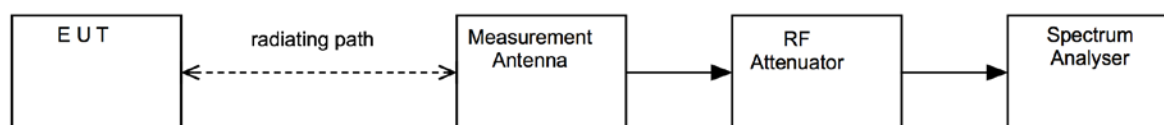



11.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
3115	EMCO	1-18GHz Horn	L139	25/09/2017
8449B	Agilent	Pre Amp	L572	16/02/2017
FSU26	R&S	Spectrum Analyser	REF909	26/04/2017
ESVS10	R&S	Receiver	L317	11/03/2017
CBL611/A	Chase	Bilog	U191	26/02/2017

11.6 Test Set-up Photograph

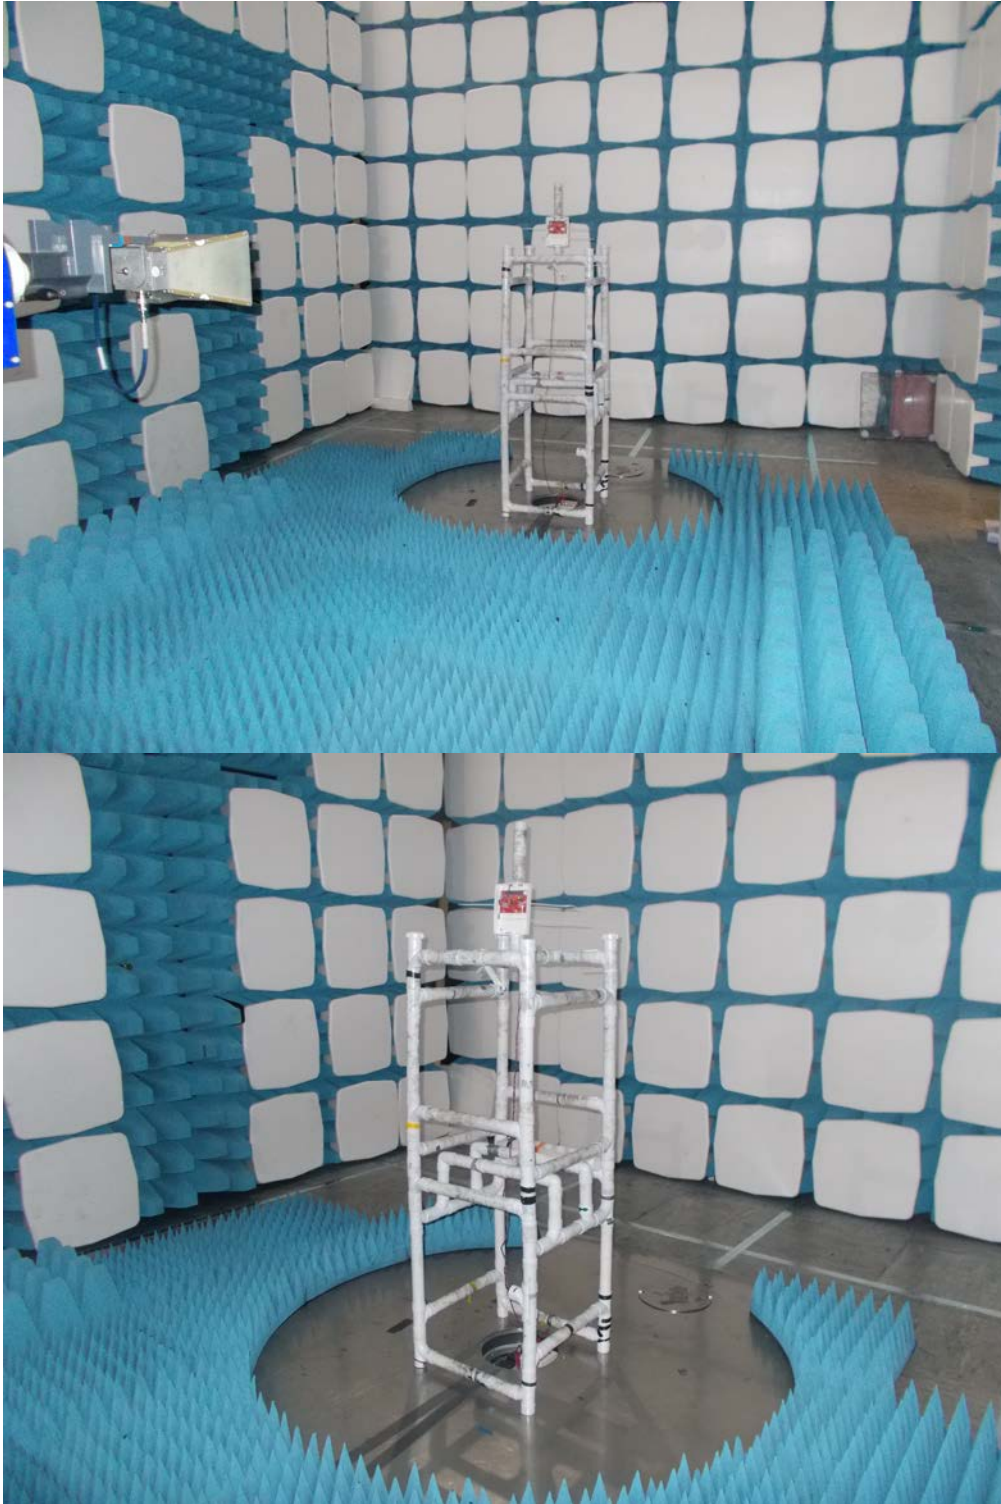


11.7 Test Results

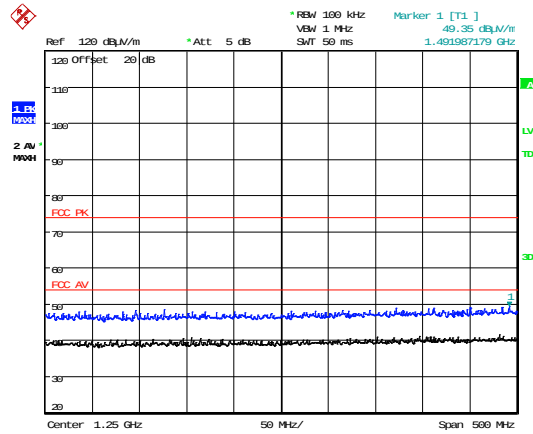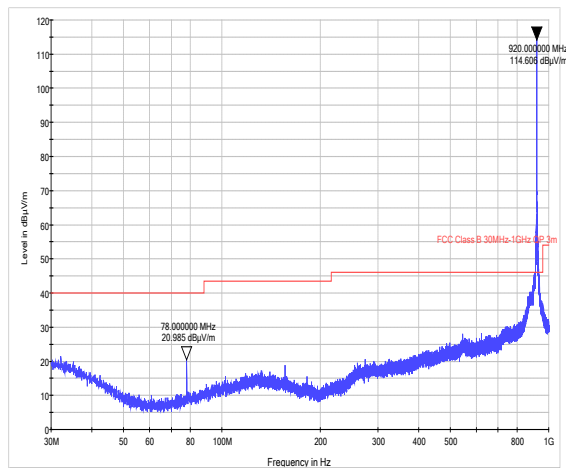

Date: 27.APR.2016 17:33:20


30 MHz – 1 GHz

1 GHz – 1.5 GHz

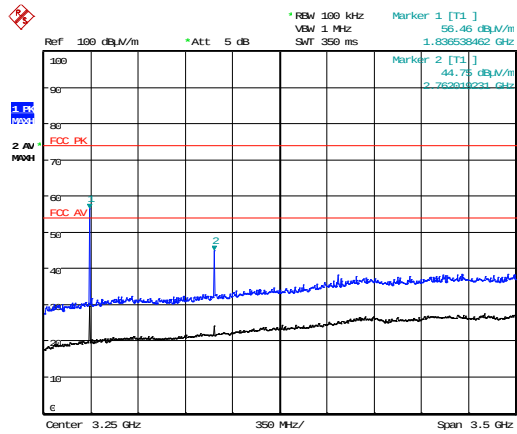

Date: 27.APR.2016 11:45:19


1.5 GHz – 5 GHz

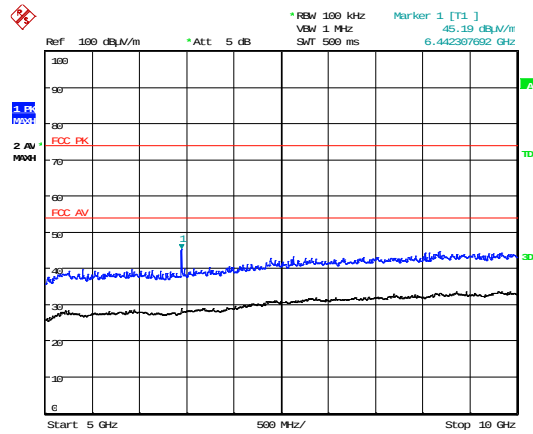


Date: 27.APR.2016 11:48:27

5GHz -10 GHz


Left hand Antenna – 920.0 MHz										
Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Pk	2759.96	55.31	3.70	30.80	36.07	0.00	0.00	53.74	486.41	5012
Av	2759.96	48.58	3.70	30.80	36.07	0.00	0.00	47.01	224.13	500
Pk	3679.85	53.02	4.30	33.90	35.70	0.00	0.00	55.52	597.04	5012
Av	3679.85	41.73	4.30	33.90	35.70	0.00	0.00	44.23	162.74	500
Pk	4600.07	53.00	5.40	35.30	35.76	0.00	0.00	57.94	788.86	5012
Av	4600.07	39.91	5.40	35.30	35.76	0.00	0.00	44.85	174.78	500

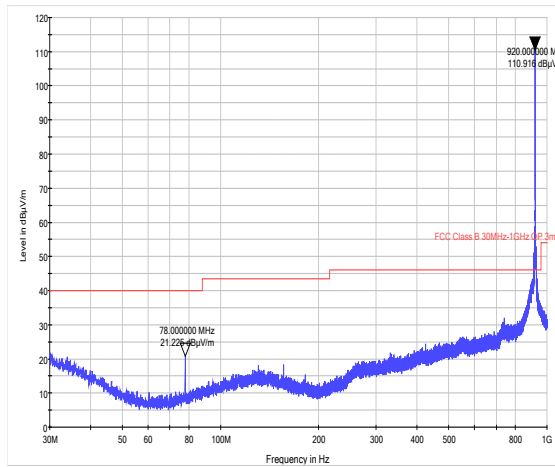


30 MHz – 1 GHz

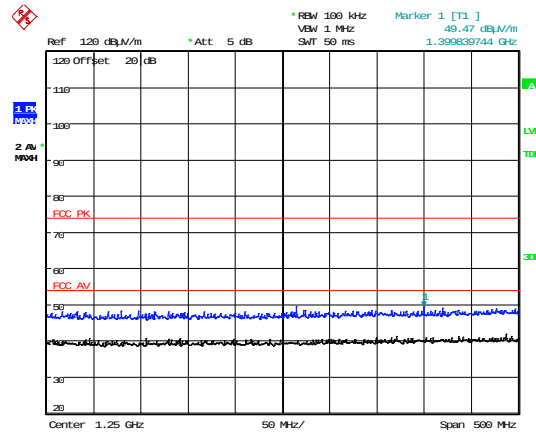

1 GHz – 1.5 GHz

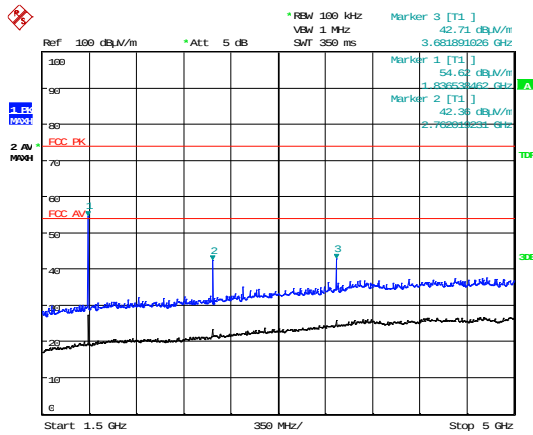


1.5 GHz – 5 GHz

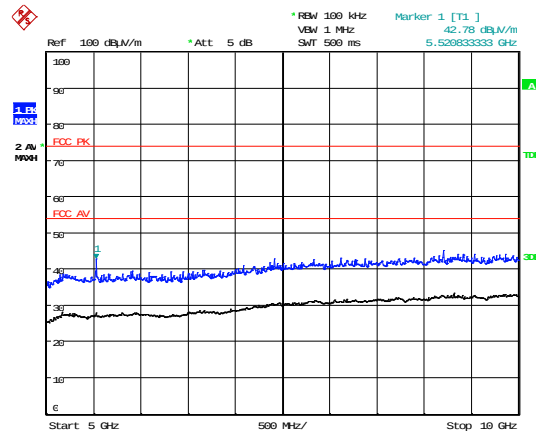


5GHz -10 GHz

Right hand Antenna – 920.0 MHz										
Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Pk	2759.91	55.29	3.70	30.80	36.07	0.00	0.00	53.72	485.29	5012
Av	2759.91	47.18	3.70	30.80	36.07	0.00	0.00	45.61	190.77	500
Pk	3680.00	53.91	4.30	33.90	35.70	0.00	0.00	56.41	661.45	5012
Av	3680.00	44.35	4.30	33.90	35.70	0.00	0.00	46.85	220.04	500

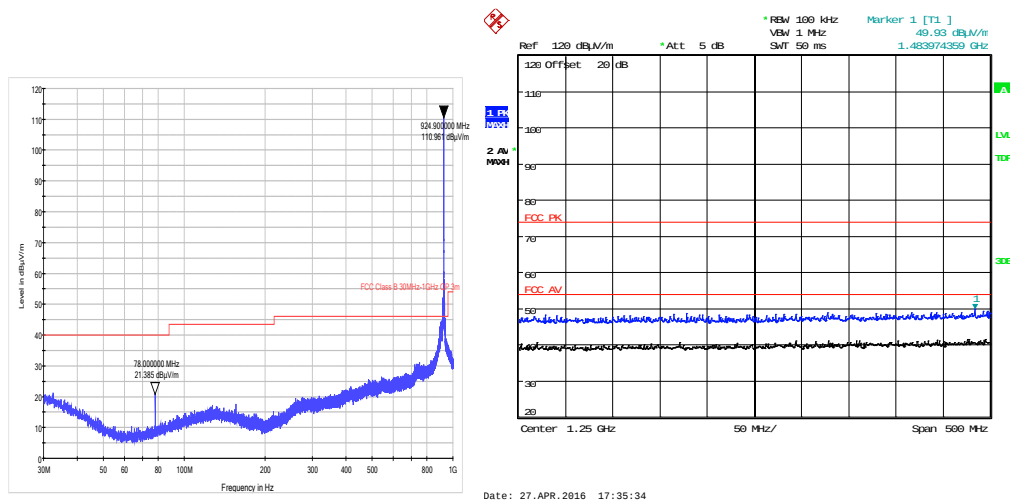

30 MHz – 1 GHz


1 GHz – 1.5 GHz

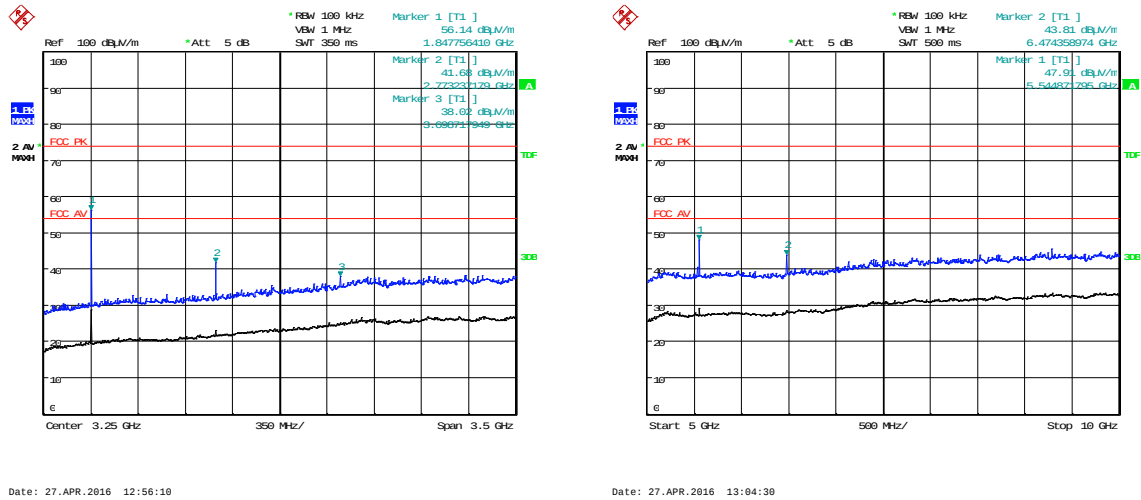


1.5 GHz – 5 GHz

5GHz -10 GHz


Left hand Antenna – 924.9 MHz										
Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Pk	2774.56	55.62	3.70	30.90	36.07	0.00	0.00	54.15	509.92	5012
Av	2774.56	47.91	3.70	30.90	36.07	0.00	0.00	46.44	209.89	500
Pk	3699.68	53.37	4.30	33.90	35.69	0.00	0.00	55.88	622.30	5012
Av	3699.68	42.35	4.30	33.90	35.69	0.00	0.00	44.86	174.98	500
Pk	2759.91	55.29	3.70	30.80	36.07	0.00	0.00	53.72	485.29	5012
Av	2759.91	47.18	3.70	30.80	36.07	0.00	0.00	45.61	190.77	500

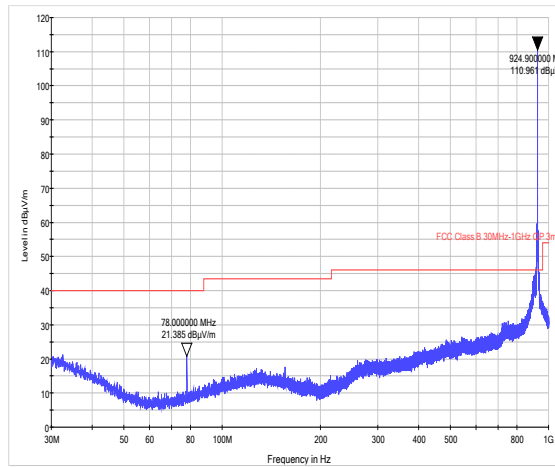


30 MHz – 1 GHz

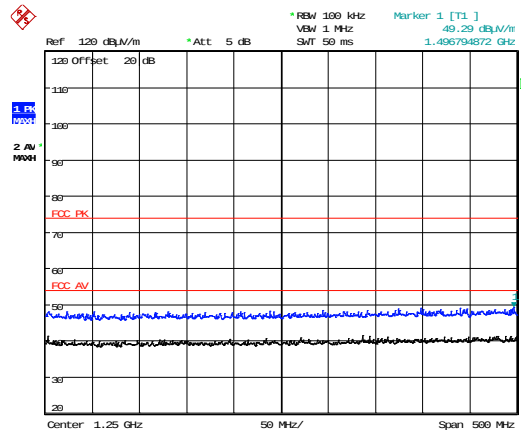

1 GHz – 1.5 GHz

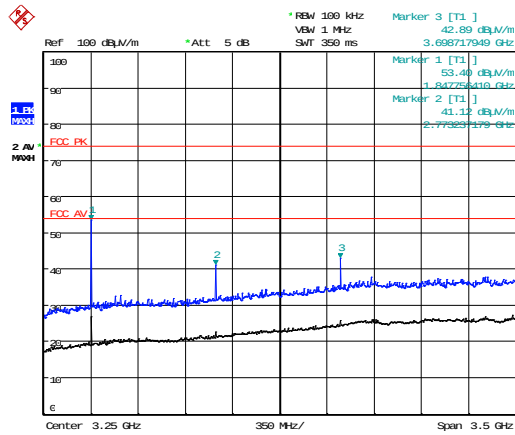

1.5 GHz – 5 GHz

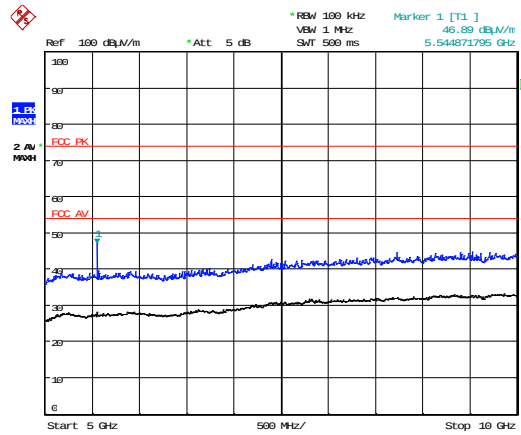

5GHz -10 GHz

Right hand Antenna – 924.9 MHz										
Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Pk	2774.65	54.29	3.70	30.90	36.07	0.00	0.00	52.82	437.52	5012
Av	2774.65	44.92	3.70	30.90	36.07	0.00	0.00	43.45	148.76	500
Pk	3699.47	53.69	4.30	33.90	35.69	0.00	0.00	56.20	645.65	5012
Av	3699.47	42.95	4.30	33.90	35.69	0.00	0.00	45.46	187.50	500
Pk	4624.49	52.51	5.60	35.30	35.77	0.00	0.00	57.64	762.08	5012
Av	4624.49	40.11	5.60	35.30	35.77	0.00	0.00	45.24	182.81	500

12 AC power-line conducted emissions

12.1 Definition

Line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network.

12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	UH404
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.2
EUT Channels / Frequencies Measured:	Mid
EUT Channel Bandwidths:	100 kHz
EUT Modulation:	GFSK
Deviations From Standard:	None
Measurement BW:	10 kHz
Measurement Detectors:	Quasi-Peak and Average, RMS

Environmental Conditions (Normal Environment)

Temperature: 21 °C	+15 °C to +35 °C (as declared)
Humidity: 23 % RH	20 % RH to 75 % RH (as declared)
Supply: +12 V dc	+12 Vdc (as declared)

Test Limit

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in Table 3.

Table 3 – AC Power Line Conducted Emission Limits

<i>Frequency (MHz)</i>	<i>Conducted limit (dBμV)</i>	
	<i>Quasi-Peak</i>	<i>Average**</i>
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

*The level decreases linearly with the logarithm of the frequency.

**A linear average detector is required.


12.3 Test Method

With the EUT setup in a screened room, as per section 9 of this report and connected as per Figure ii, the power line emissions were measured on a spectrum analyzer / EMI receiver.


AC power line conducted emissions from the EUT are checked first by preview scans with peak and average detectors covering both live and neutral lines. A spectrum analyzer is used to determine if any periodic emissions are present.

Formal measurements using the correct detector(s) and bandwidth are made on frequencies identified from the preview scans. Final measurements were performed with EUT set at its maximum duty in transmit and receive modes.

Figure ii Test Setup

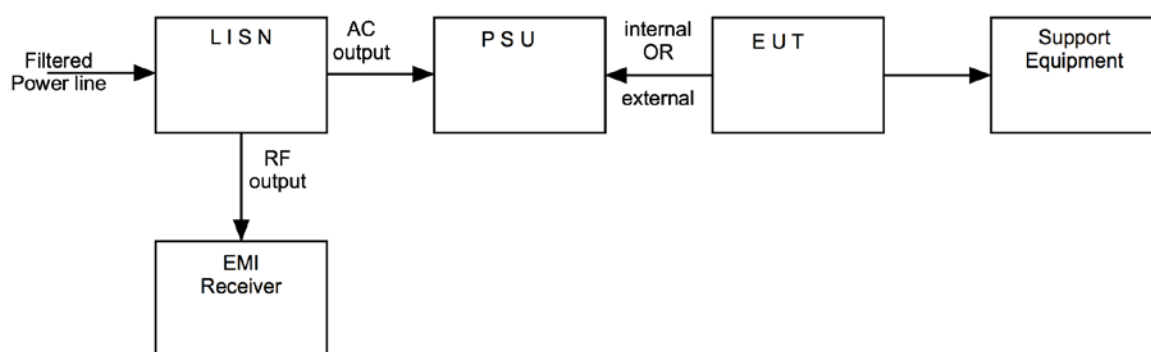

12.4 Test Set-up Photograph

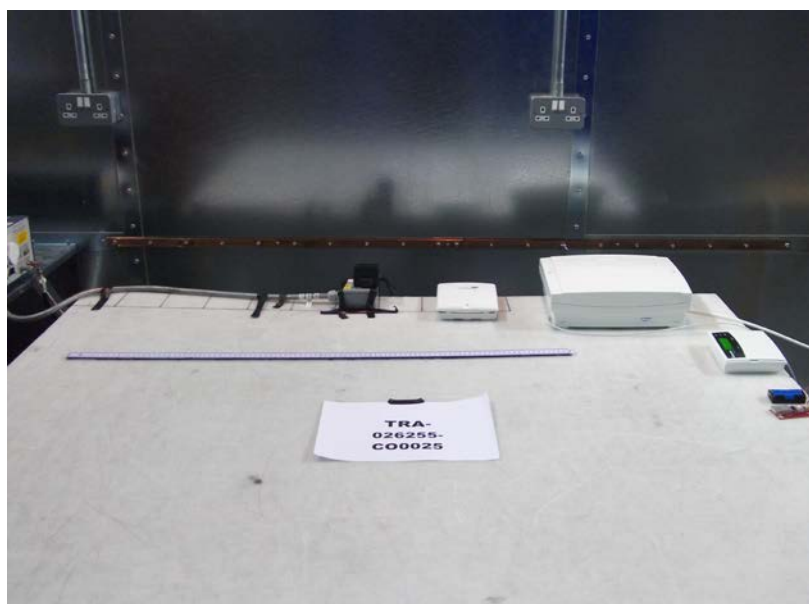


12.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
ESHS10	R&S	Receiver	U187	29/10/2016
ESH3-Z5.831.5	R&S	Lisn	U195	04/06/2016

12.6 Test Results

Conducted emissions on Mains 9kHz-30MHz ESHS10 + UH195

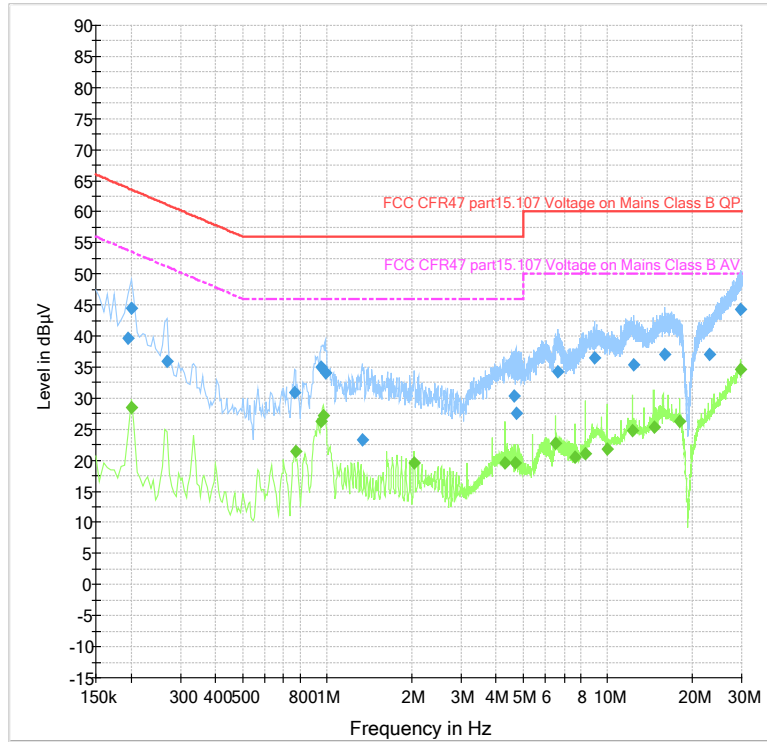


EUT powered from Controller – Quasi Peak

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Margin (dB)	Limit (dBμV)
0.195000	39.7	GND	L1	24.1	63.8
0.200000	44.6	GND	L1	19.1	63.6
0.955000	34.9	GND	N	21.1	56.0
0.985000	34.0	GND	N	22.0	56.0
8.970000	36.4	GND	N	23.6	60.0
12.385000	35.3	GND	L1	24.7	60.0
16.010000	37.0	GND	L1	23.0	60.0
23.000000	37.0	GND	L1	23.0	60.0
29.605000	44.4	GND	L1	15.6	60.0

EUT powered from Controller - Average

Frequency (MHz)	Average (dBμV)	PE	Line	Margin (dB)	Limit (dBμV)
0.770000	21.4	GND	N	24.6	46.0
0.955000	26.2	GND	L1	19.8	46.0
0.970000	27.2	GND	L1	18.8	46.0
14.585000	25.4	GND	L1	24.6	50.0
18.090000	26.3	GND	L1	23.7	50.0
29.800000	34.5	GND	L1	15.5	50.0

Conducted emissions on Mains 9kHz-30MHz ESHS10 + UH195

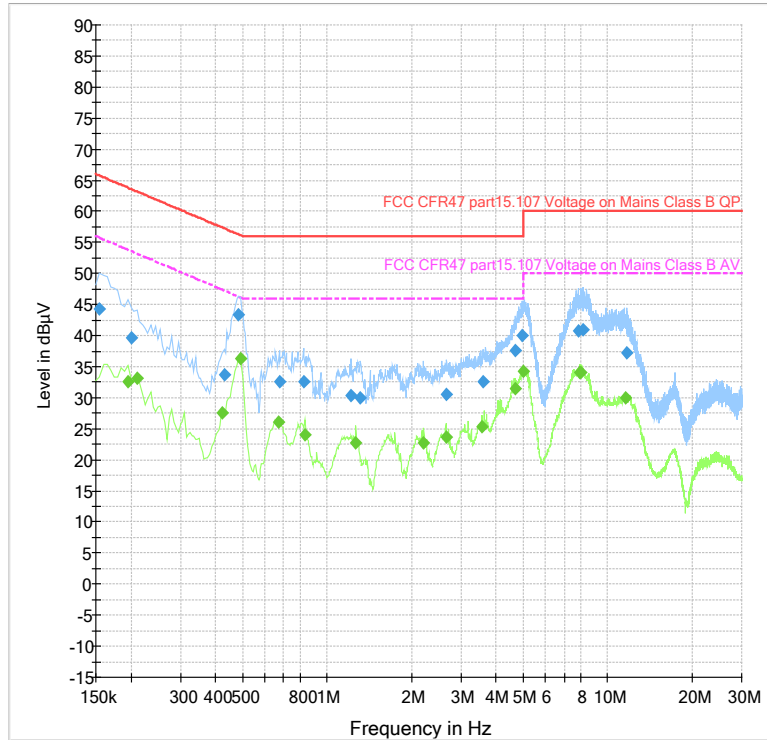

EUT powered from ARTESYN PSU DA12-120UK-M PSU - Quasi Peak

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Margin (dB)	Limit (dBμV)
0.155000	44.3	GND	N	21.4	65.7
0.200000	39.6	GND	L1	24.0	63.6
0.430000	33.6	GND	N	23.7	57.3
0.485000	43.3	GND	N	12.9	56.3
0.675000	32.6	GND	N	23.4	56.0
0.825000	32.5	GND	N	23.5	56.0
3.585000	32.6	GND	N	23.4	56.0
4.690000	37.6	GND	N	18.4	56.0
4.970000	40.0	GND	L1	16.0	56.0
7.830000	40.7	GND	N	19.3	60.0
8.135000	40.9	GND	N	19.1	60.0
11.660000	37.2	GND	N	22.8	60.0

EUT powered from ARTESYN PSU DA12-120UK-M PSU - Average

Frequency (MHz)	Average (dBμV)	PE	Line	Margin (dB)	Limit (dBμV)
0.195000	32.5	GND	L1	21.3	53.8
0.210000	33.2	GND	L1	20.0	53.2
0.425000	27.6	GND	L1	19.7	47.3
0.490000	36.2	GND	N	9.9	46.2
0.670000	26.1	GND	N	19.9	46.0
0.835000	24.0	GND	L1	22.0	46.0
1.265000	22.8	GND	L1	23.2	46.0
2.210000	22.8	GND	L1	23.2	46.0
2.650000	23.7	GND	L1	22.3	46.0
3.570000	25.3	GND	L1	20.7	46.0
4.680000	31.4	GND	L1	14.6	46.0
4.985000	34.2	GND	N	11.8	46.0
7.955000	34.1	GND	L1	15.9	50.0
7.995000	34.1	GND	L1	15.9	50.0
11.620000	30.1	GND	N	19.9	50.0

13 Carrier frequency separation

13.1 Definition

The carrier frequency separation is the frequency separation between two adjacent hopping frequencies.

13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.2
EUT Channels / Frequencies Measured:	All; 920 - 925MHz
EUT 20dB Bandwidth:	63.74 kHz
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	20 kHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 23 % RH	20 % RH to 75 % RH (as declared)
Supply: 12 V dc	+12 Vdc (as declared)

13.3 Test Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400 to 2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each nominal bandwidth.

Figure iii Test Setup




13.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration	Calibration Period
Spectrum Analyser	Rohde & Schwarz	FSW	N/A	2017-05-01	12

Hire Analyser – Serial number 101675

13.6 Test Results

$F1_c$ (MHz)	$F2_c$ (MHz)	Channel Separation, $F2_c - F1_c$ (kHz)	Result
922.38256	922.483160	100.9 kHz	PASS

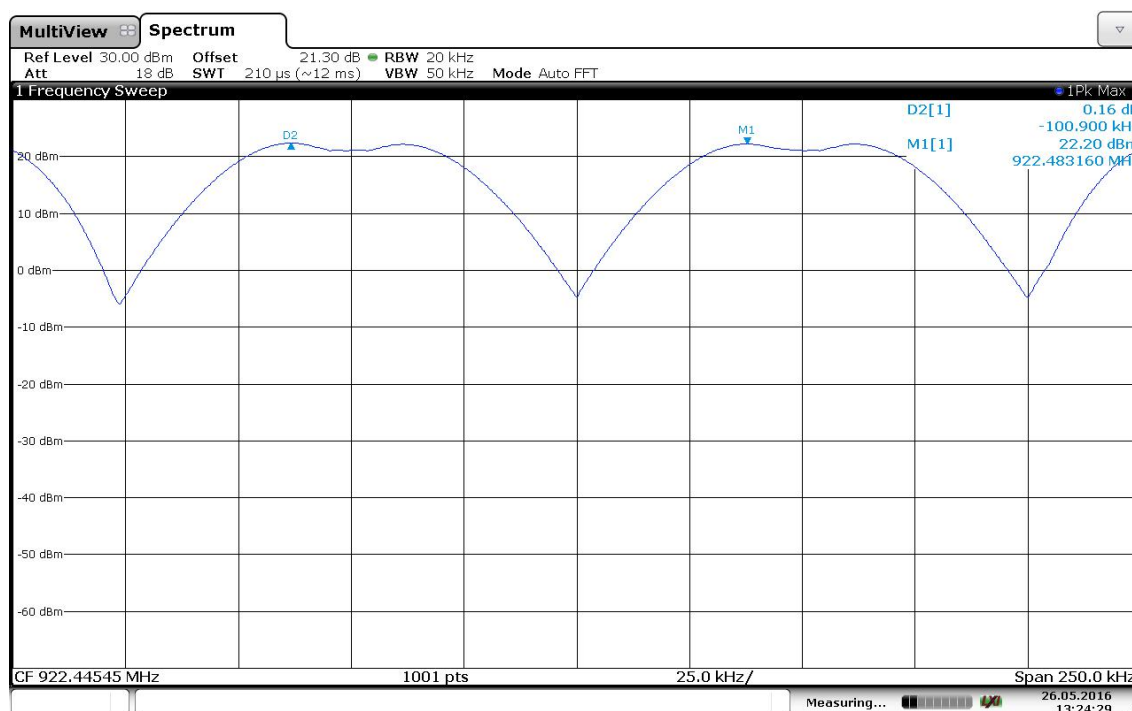

Date: 26.MAY.2016 13:24:29

14 Number of hopping frequencies

14.1 Definition

The total number of hopping frequencies (the centre frequencies defined within the hopping sequence of a FHSS equipment) which are randomly sequenced in order to spread the transmission.

14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.3
EUT Channels / Frequencies Measured:	All; 920 - 925MHz
EUT 20dB Bandwidth:	63.74 kHz
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	20 kHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 23 % RH	20 % RH to 75 % RH (as declared)
Supply: 12 V dc	+12 Vdc (as declared)

14.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: if the -20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels; If the -20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels;
- Frequency hopping systems operating in the band 2400 to 2483.5 MHz shall use at least 15 hopping channels;
- Frequency hopping systems operating in the band 5725 to 5850 MHz shall use at least 75 hopping channels.

14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each nominal bandwidth.

Figure iv Test Setup




14.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration	Calibration Period
Spectrum Analyser	Rohde & Schwarz	FSW	N/A	2017-05-01	12

Hire Analyser – Serial number 101675

14.6 Test Results

Lowest channel, F_{CL} (MHz)	Highest channel, F_{CH} (MHz)	Number of channels observed	Result
920.0	924.9	50	PASS

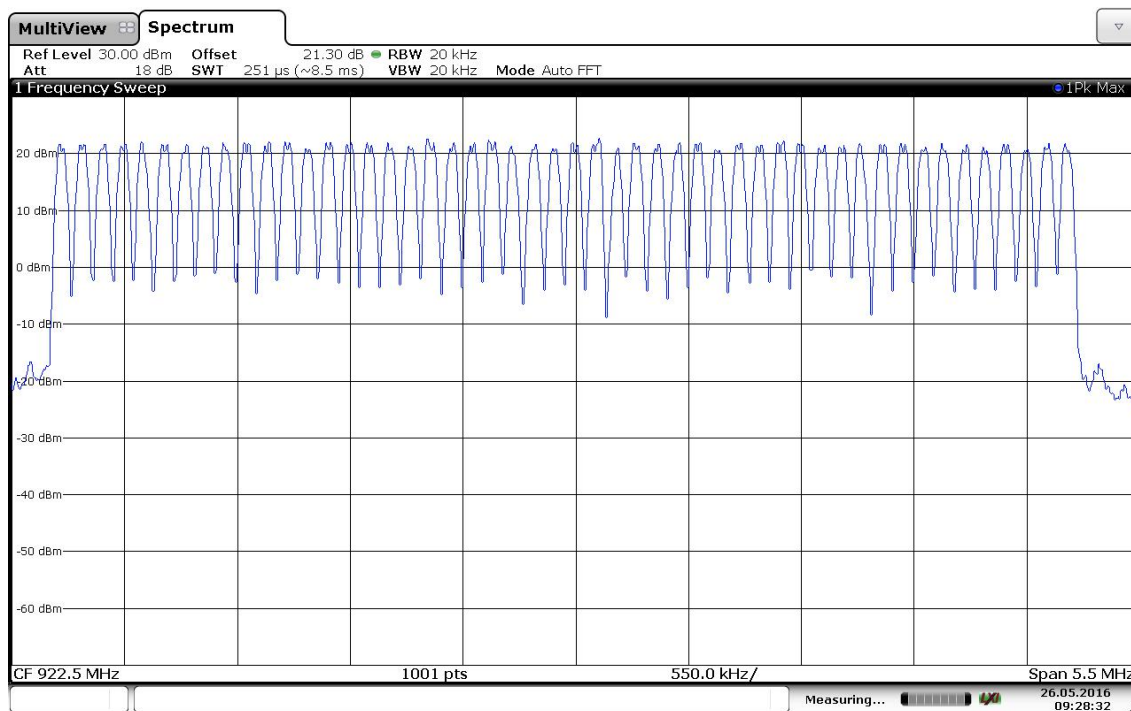

Date: 26.MAY.2016 09:28:32

15 Average channel occupancy

15.1 Definition

The channel occupancy is the total of the transmitter 'on' times, during an observation period, on a particular hopping frequency.

15.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.4
EUT Channels / Frequencies Measured:	922.5 MHz
EUT 20dB bandwidth:	63.7 kHz
EUT Number of hopping channels:	50
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	20 kHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 23 % RH	20 % RH to 75 % RH (as declared)
Supply: 12 V dc	+12 Vdc (as declared)

15.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: if the -20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20 second period;
If the -20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10 second period;
- Frequency hopping systems operating in the band 2400 to 2483.5 MHz: The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed;
- Frequency hopping systems operating in the band 5725 to 5850 MHz: The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

15.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. A number of hops were observed to confirm consistency of the dwell time / observe the worst case. All modulation schemes, data rates and power settings were used to observe the worst-case configuration.

Figure v Test Setup




15.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration	Calibration Period
Spectrum Analyser	Rohde & Schwarz	FSW	N/A	2017-05-01	12


Hire Analyser – Serial number 101675

15.6 Test Results

Modulation: ; Power setting: .				
Individual occupancy time (ms)	Observation period (s)	Number of hops observed	Average time of occupancy (s)	Result
117.29	20	1	0.11729	PASS

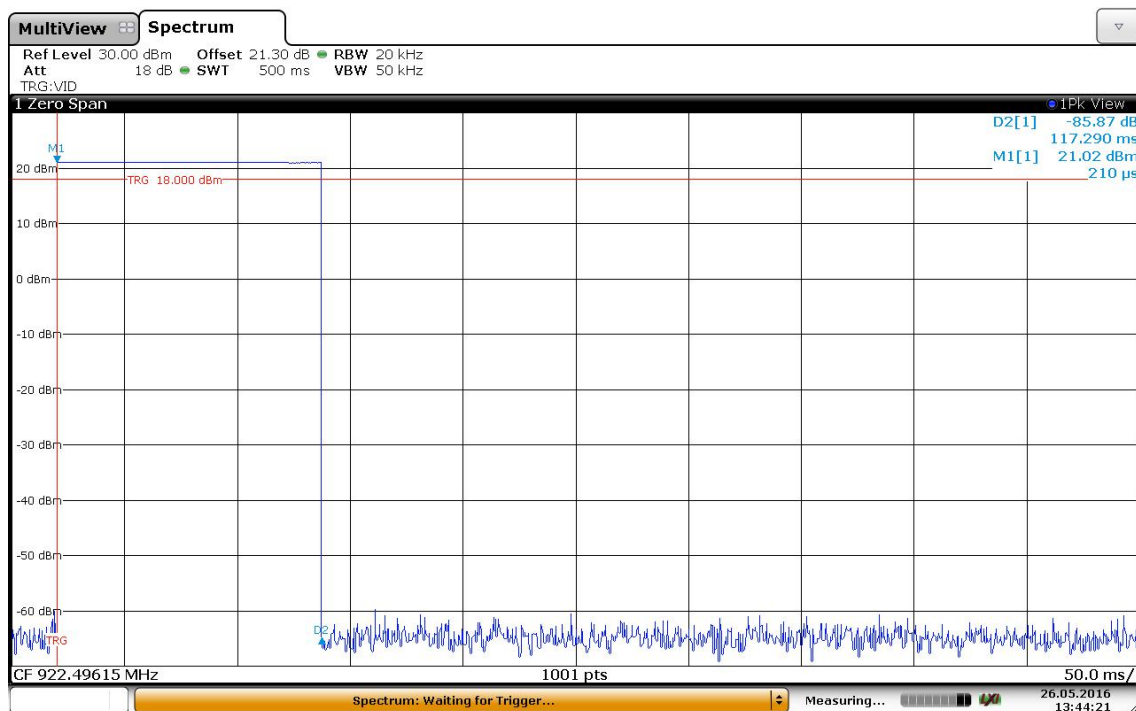

Date: 26 MAY 2016 13:44:22

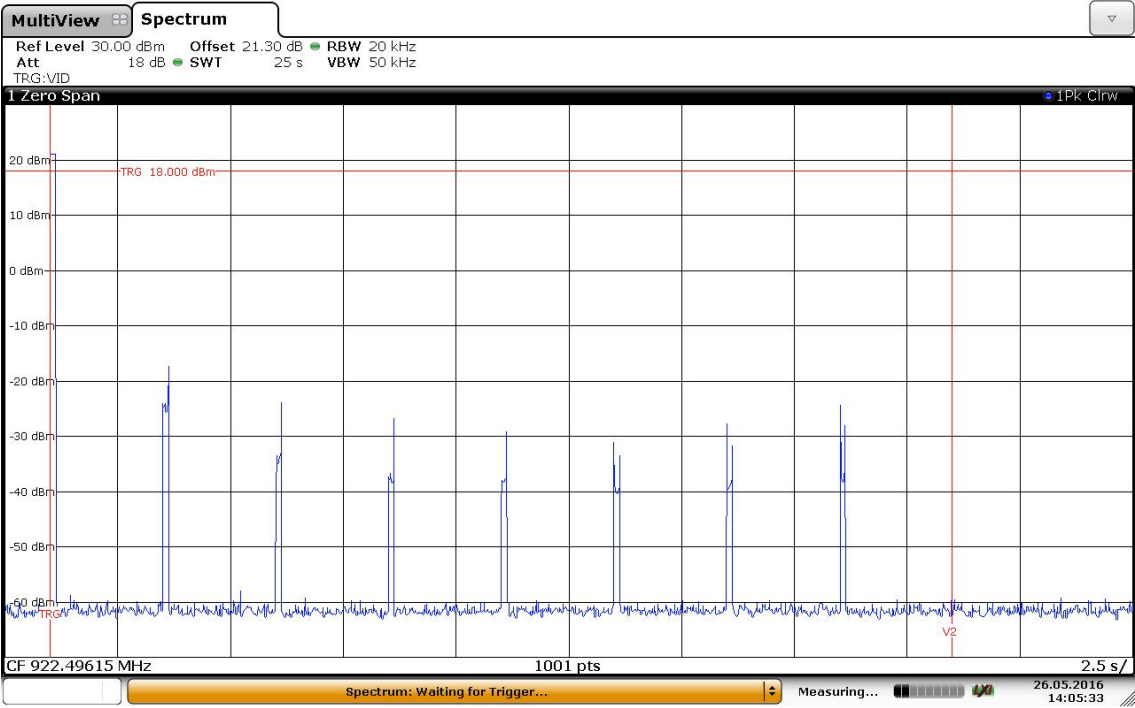

Date: 26.MAY.2016 14:05:32

16 Maximum peak conducted output power

16.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

16.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.5
EUT Channels / Frequencies Measured:	920.0 MHz / 922.4 MHz / 924.8 MHz – hopping disabled.
EUT Channel Bandwidths:	100 kHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW:	300 kHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	+12Vdc = 85 % and 115 % of Nominal (FCC only requirement);

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)

16.3 Test Limit


- For frequency hopping systems operating in the band 902 to 928 MHz, the maximum peak conducted output power shall not exceed 1 W, and the e.i.r.p. shall not exceed 4 W, if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W, and the e.i.r.p. shall not exceed 1 W, if the hopset uses less than 50 hopping channels.
- For frequency hopping systems operating in the band 2400 to 2483.5 MHz and employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W. The e.i.r.p. shall not exceed 4 W.
- For frequency hopping systems operating in the band 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.
- Point-to-point systems in the bands 2400-2483.5 MHz and 5725 to 5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers.

16.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure vi Test Setup



16.5 Test Equipment


Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration	Calibration Period
Spectrum Analyser	Rohde & Schwarz	FSW	N/A	2017-05-01	12

Hire Analyser – Serial number 101675

16.6 Test Results

<i>Antenna 0</i>						
<i>Channel Frequency (MHz)</i>	<i>Analyzer Level (dBm)</i>	<i>Cable loss (dB)</i>	<i>Maximum peak conducted output power (dBm)</i>	<i>Maximum peak conducted output power (W)</i>	<i>Limit (W)</i>	<i>Result</i>
920.0	-1.45	23	21.55	0.14289	1	PASS
922.4	-1.64	23	21.36	0.13677	1	PASS
924.9	-1.81	23	21.19	0.13152	1	PASS

<i>Antenna 1</i>						
<i>Channel Frequency (MHz)</i>	<i>Analyzer Level (dBm)</i>	<i>Cable loss (dB)</i>	<i>Maximum peak conducted output power (dBm)</i>	<i>Maximum peak conducted output power (W)</i>	<i>Limit (W)</i>	<i>Result</i>
920.0	-1.05	23	21.95	0.15668	1	PASS
922.4	-1.21	23	21.79	0.15101	1	PASS
924.9	-1.45	23	21.55	0.14289	1	PASS

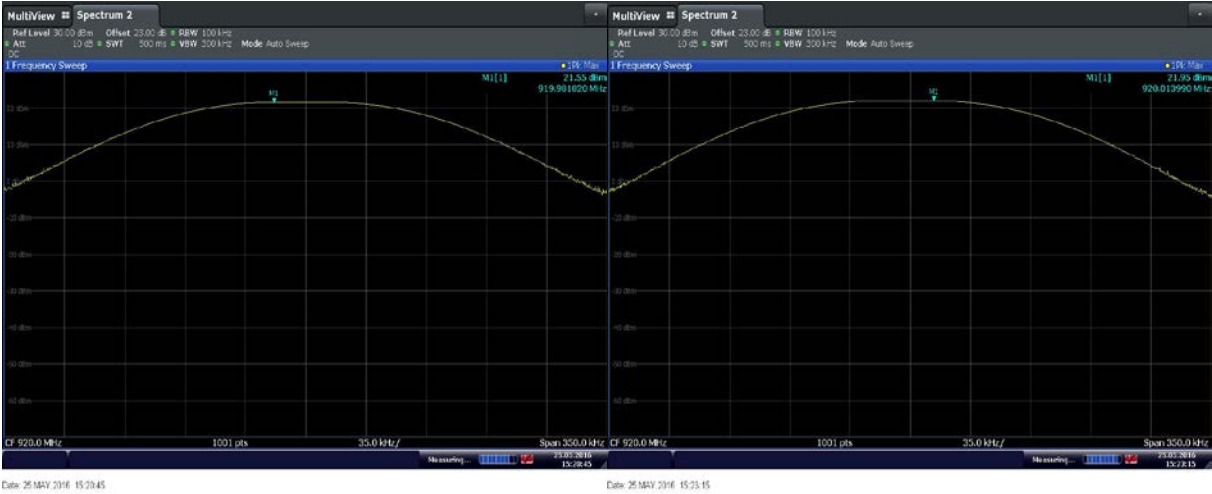

Antenna 1 Bottom Antenna 2



Antenna 1 Middle Antenna 2



Antenna 1 Top Antenna 2

17 Occupied Bandwidth

17.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

17.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.9
EUT Channels / Frequencies Measured:	Low / Mid / High – hopping stopped.
EUT Channel Bandwidths:	920.0 MHz / 922.4 MHz / 924.8 MHz – hopping disabled.
EUT Test Modulations:	GFSK
Deviations From Standard:	None
Measurement BW:	3 kHz
(requirement: 1 % to 5 % OBW)	
Spectrum Analyzer Video BW:	10 kHz
(requirement at least 3x RBW)	
Measurement Span:	200kHz
(requirement 2 to 5 times OBW)	
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)
Supply: 12 V ac/dc	Via adaptor (as declared)

17.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: The maximum allowed -20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the band 5725 to 5850 MHz: The maximum -20 dB bandwidth of the hopping channel shall be 1 MHz

17.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure vii Test Setup




17.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration	Calibration Period
Spectrum Analyser	Rohde & Schwarz	FSW	N/A	2017-05-01	12


Hire Analyser – Serial number 101675

17.6 Test Results


Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	20dB Bandwidth (kHz)	Result
920	919.96303	920.02677	63.74	PASS
922.4	922.36174	922.42527	63.53	PASS
924.9	924.86044	924.92418	63.74	PASS

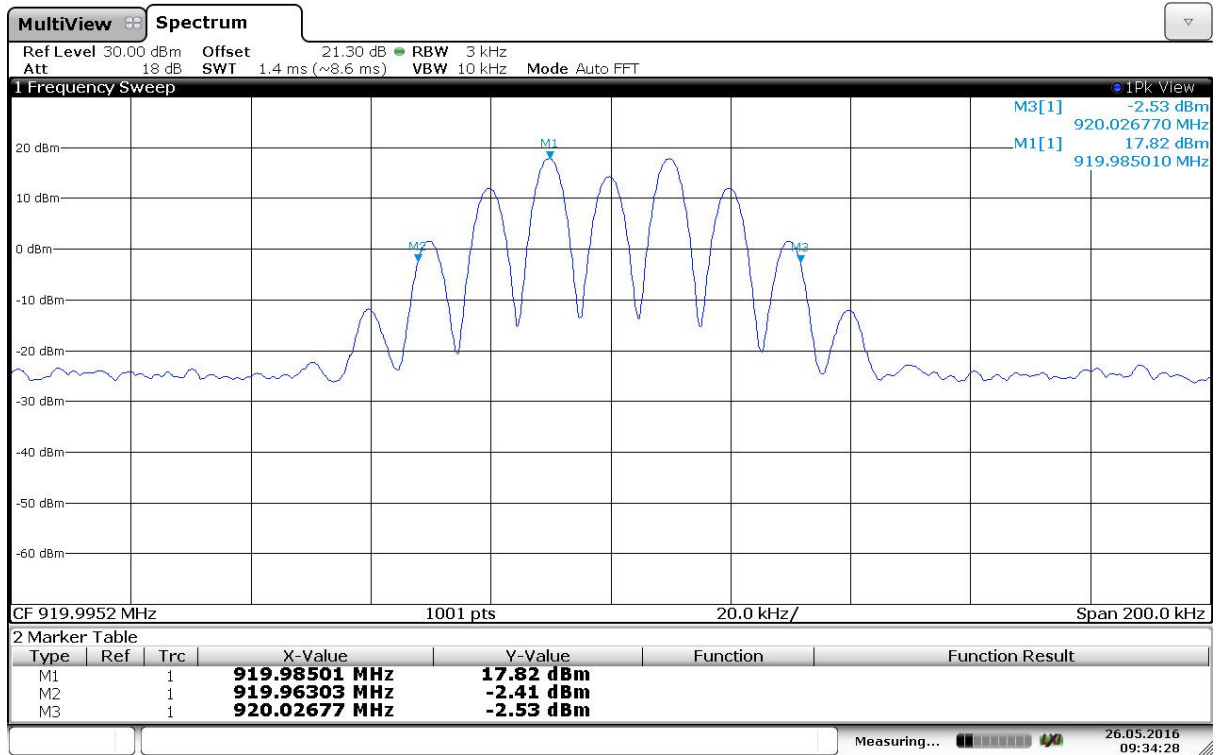

Date: 26.MAY.2016 09:34:28

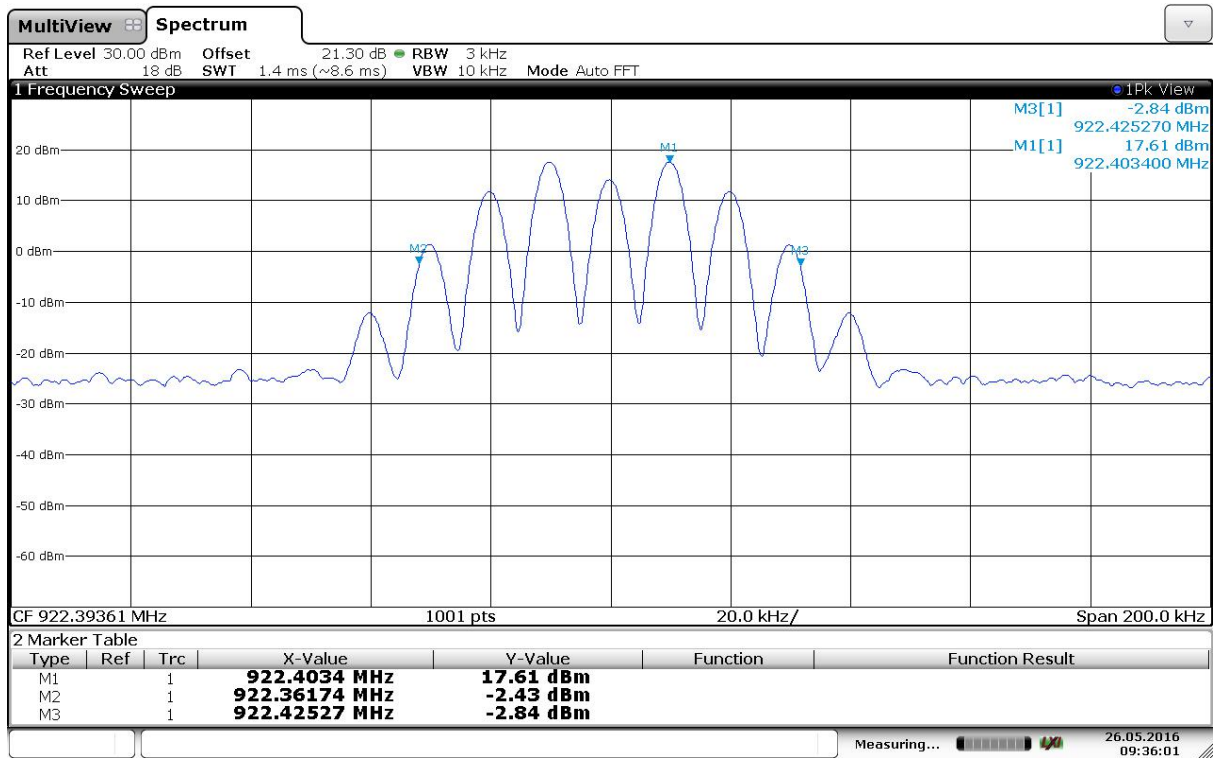

Date: 26.MAY.2016 09:36:01

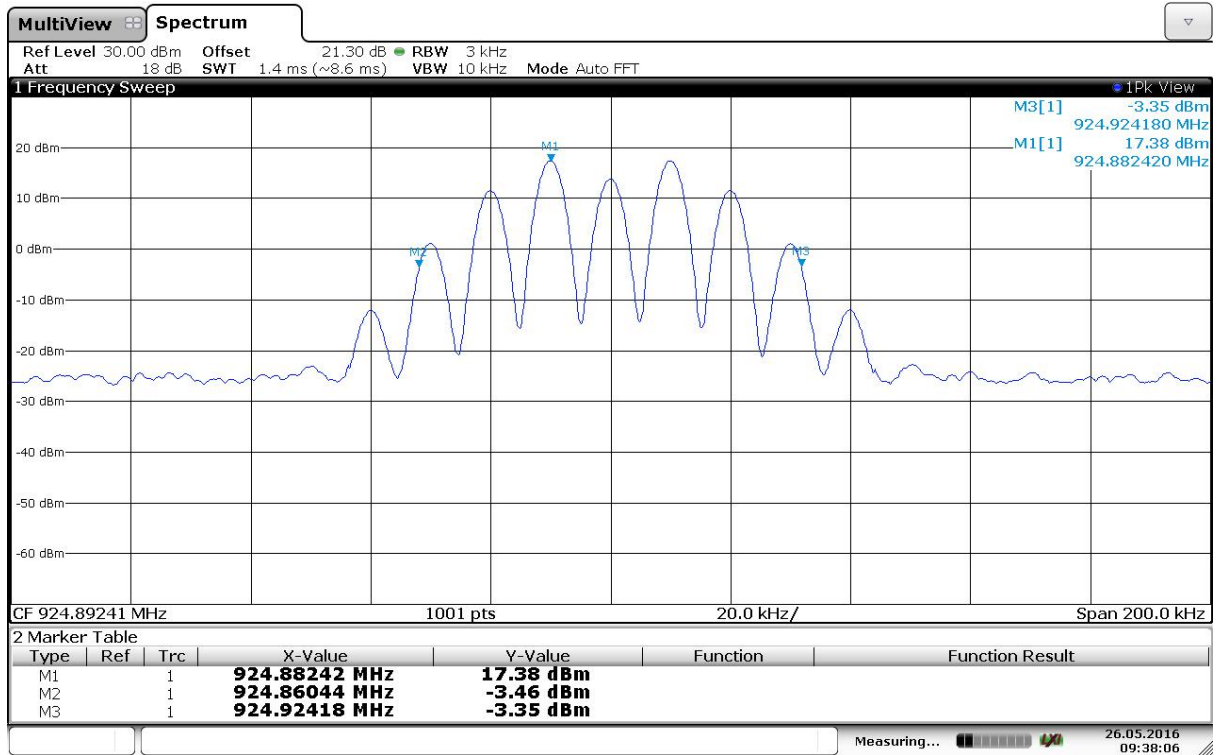

Date: 26.MAY.2016 09:38:06

18 Out-of-band and conducted spurious emissions

18.1 Definition

Out-of-band emission.

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

Spurious emission.

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

18.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Chamber 3
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.8
EUT Channels / Frequencies Measured:	920.0 MHz / 922.4 MHz / 924.8 MHz – hopping disabled.
EUT Channel Bandwidths:	100 kHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	30 MHz to 10 GHz

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)
Supply: 12 V dc	+12 Vdc (as declared)

18.3 Test Limits


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

18.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure viii, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure viii Test Setup




18.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration	Calibration Period
Spectrum Analyser	Rohde & Schwarz	FSW	N/A	2017-05-01	12


Hire Analyser – Serial number 101675

18.6 Test Results

Antenna 0, 920.0 MHz						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions						PASS

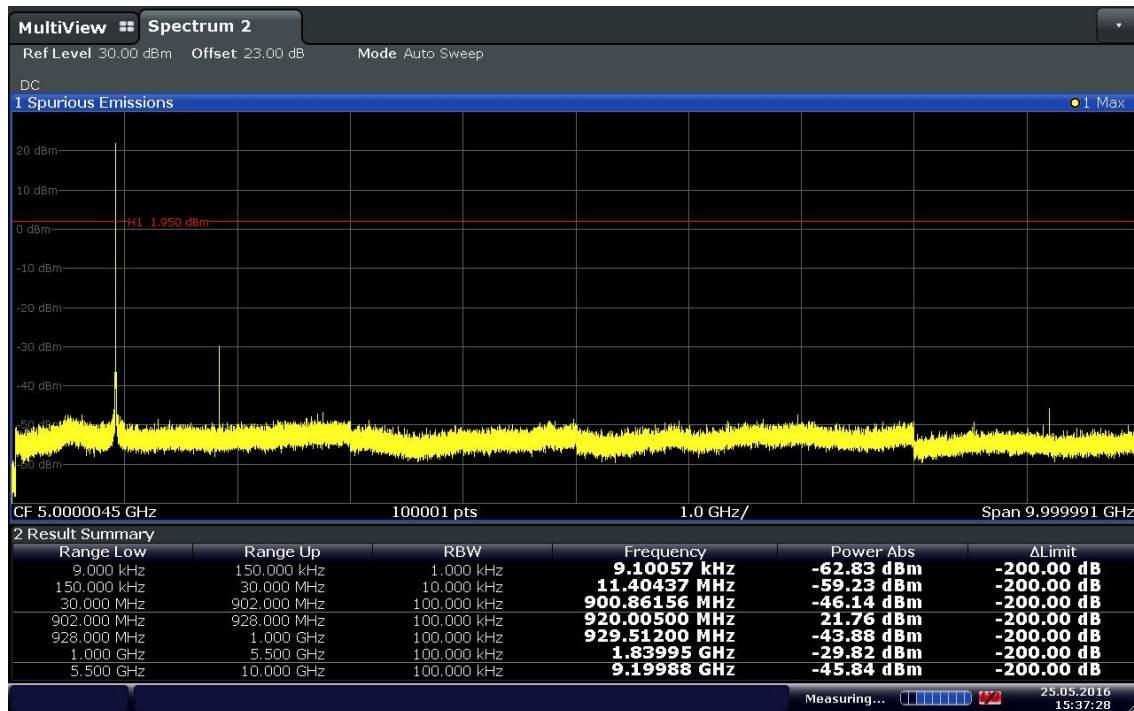


Date: 25.MAY.2016 15:37:27

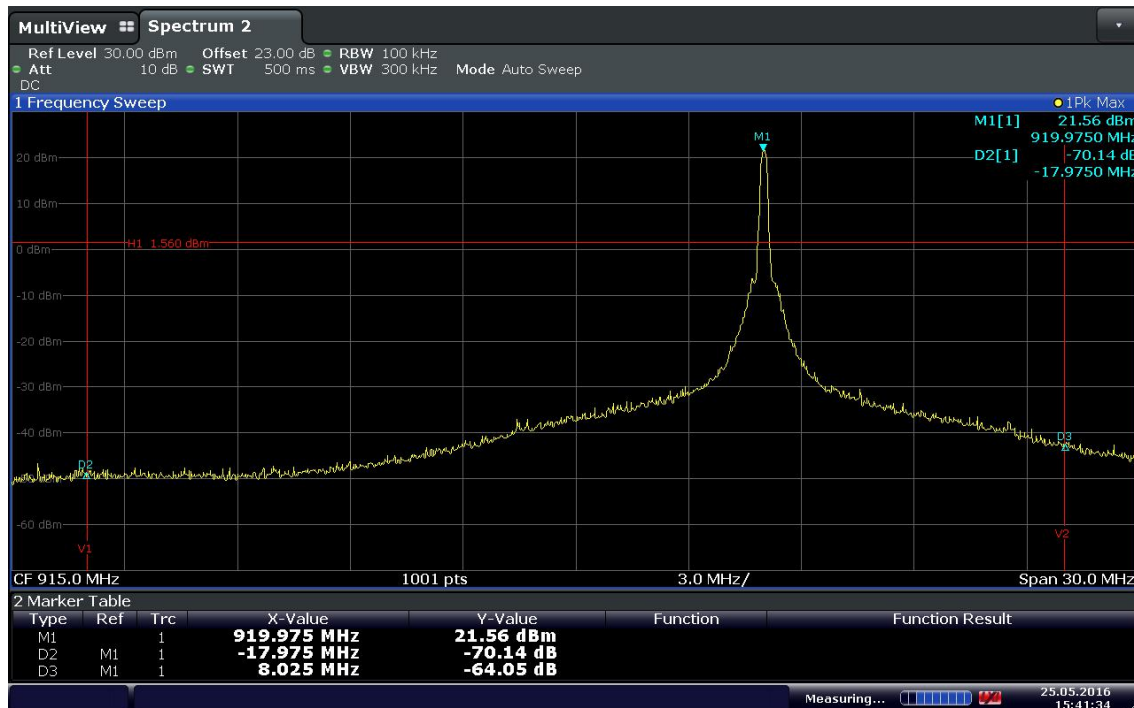


Date: 25.MAY.2016 15:41:34

Antenna 0, 922.4 MHz						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions						PASS

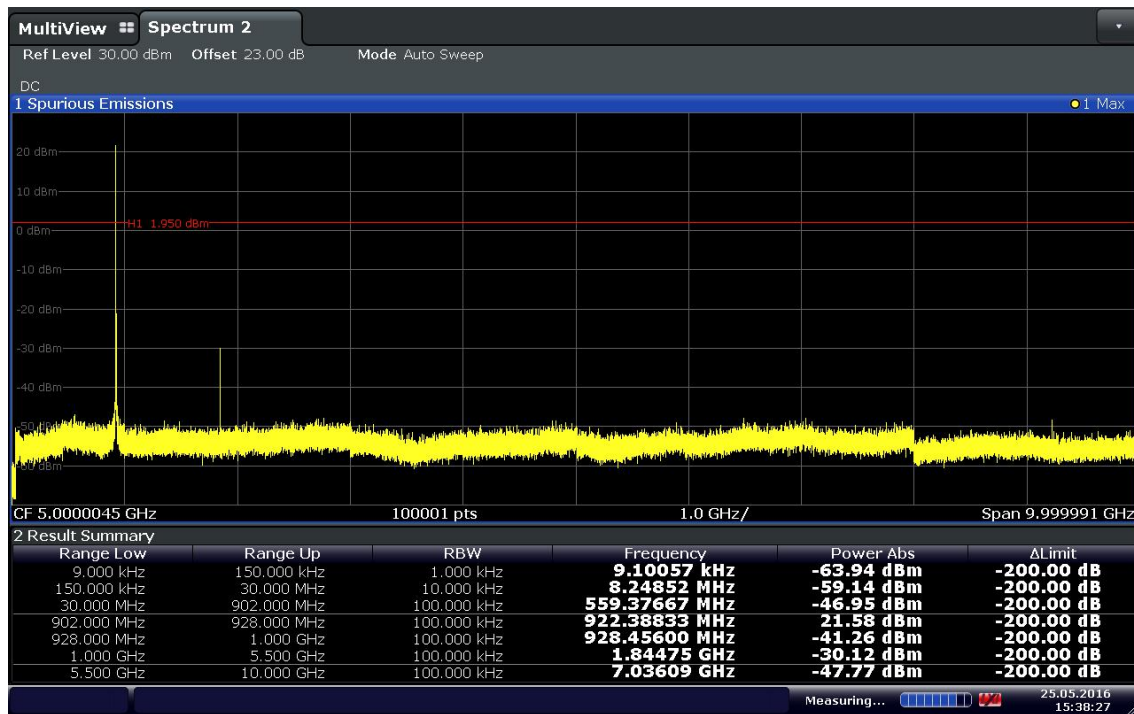

Date: 25.MAY.2016 15:38:27

Antenna 0, 924.9 MHz						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions						PASS

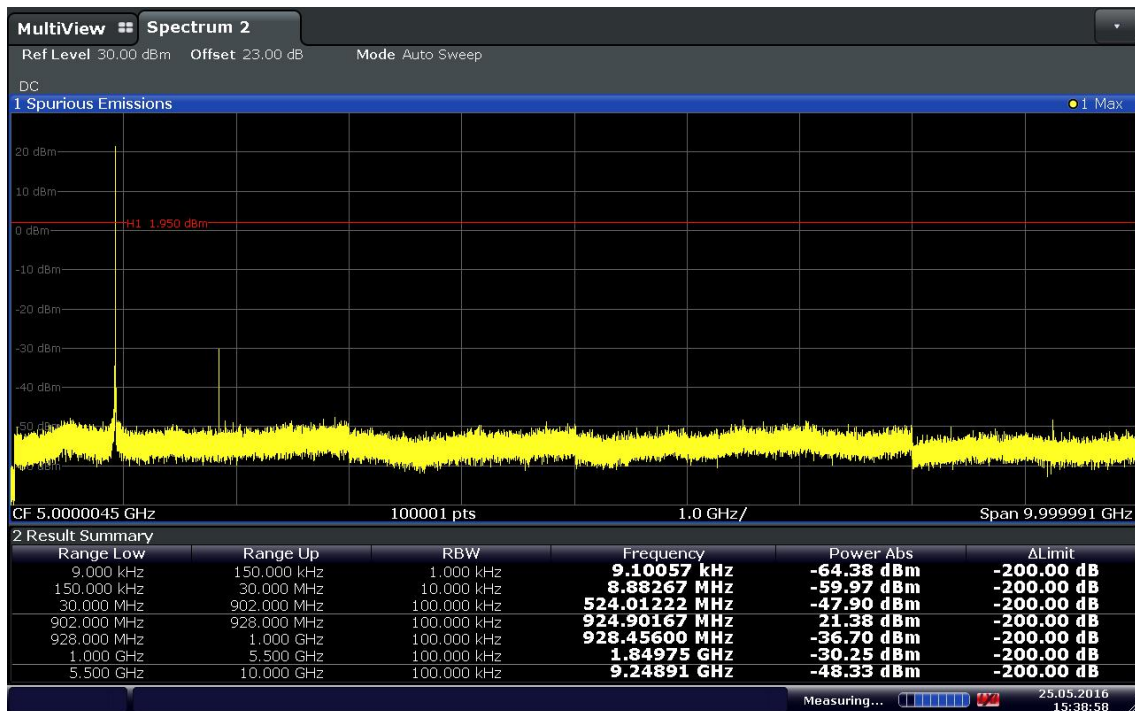


Date: 25.MAY.2016 15:38:58




Date: 25.MAY.2016 15:40:38



Antenna 1, 920.0 MHz						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions						PASS

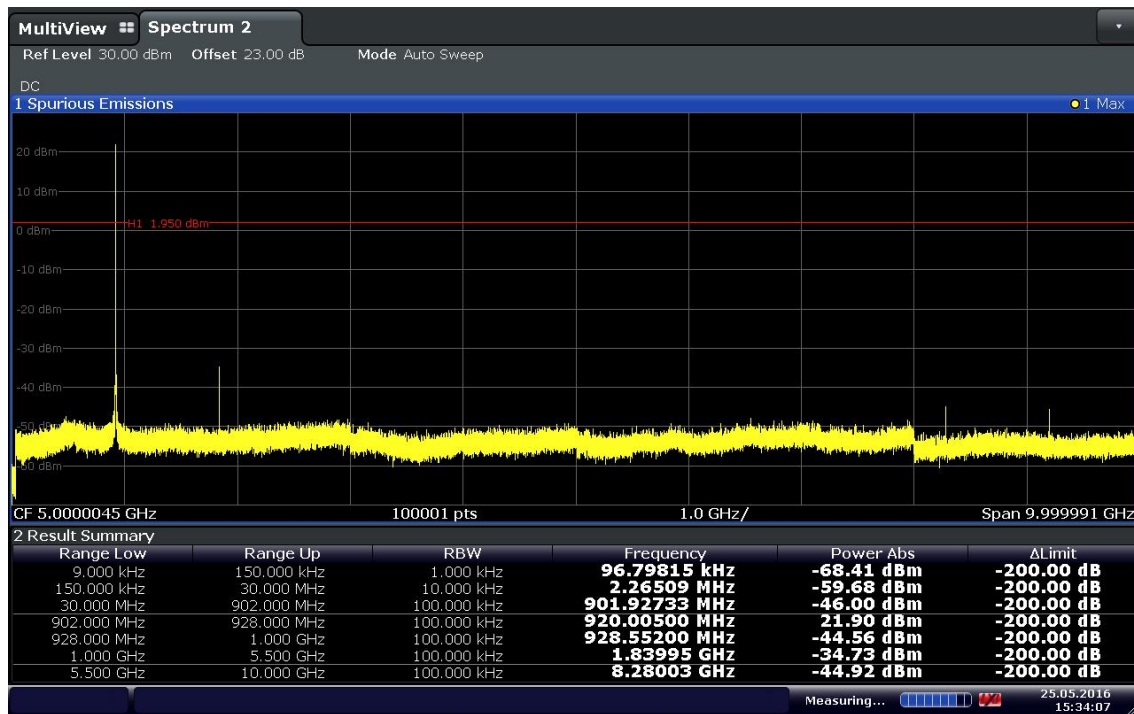


Date: 25.MAY.2016 15:34:07

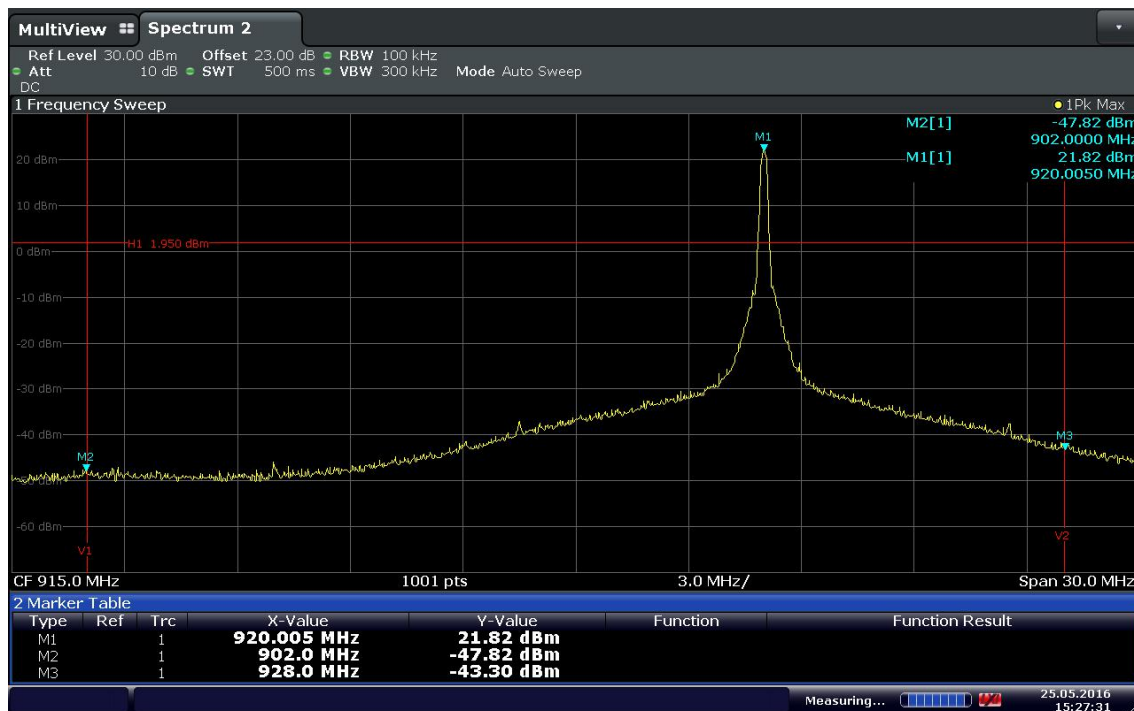


Date: 25.MAY.2016 15:27:31

Antenna 1, 922.4 MHz						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions						PASS

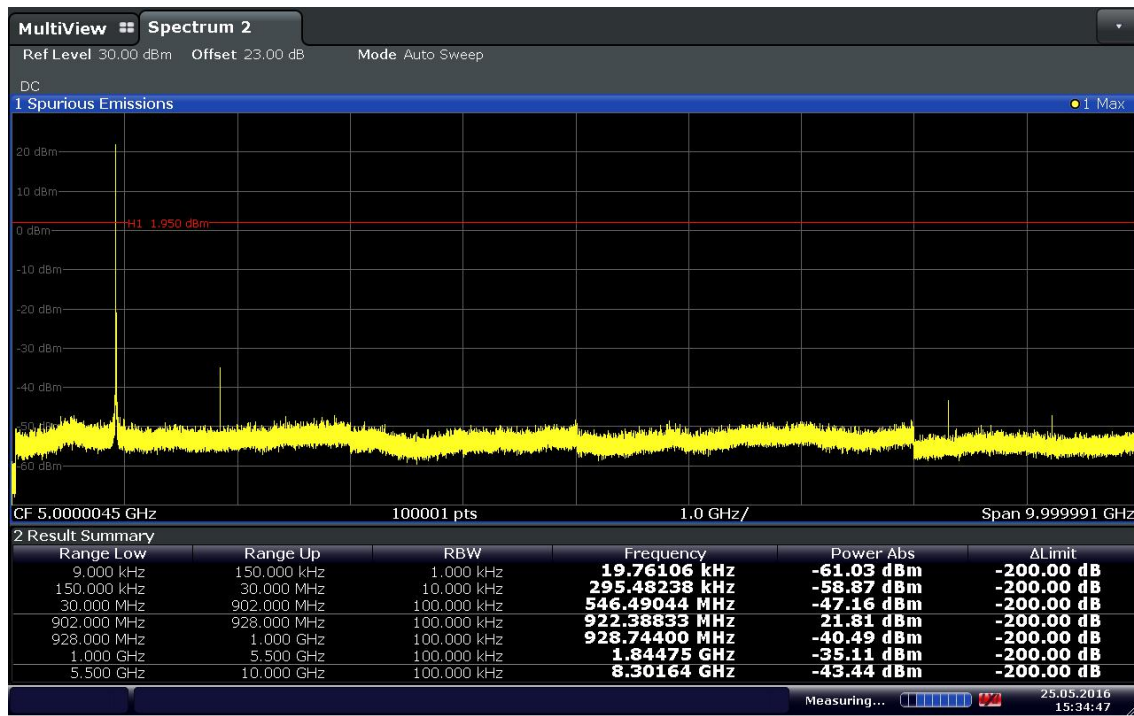

Date: 25.MAY.2016 15:34:48


Antenna 1, 924.9 MHz						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions						PASS

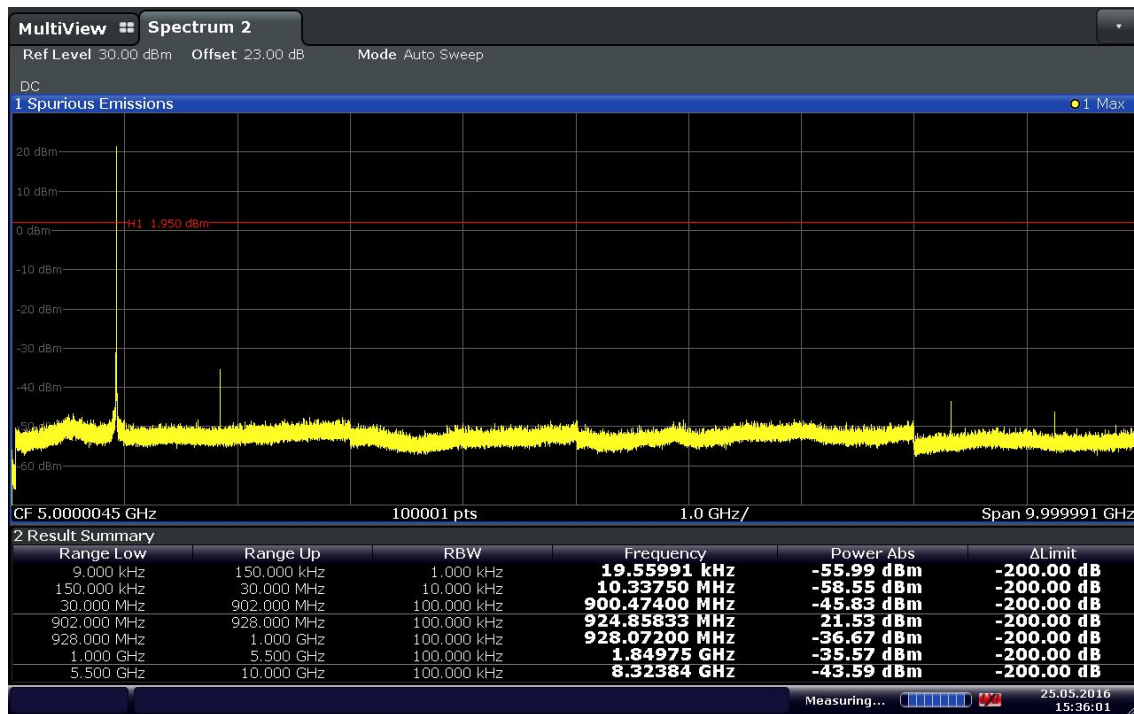

Date: 25.MAY.2016 15:36:02



Date: 25.MAY.2016 15:26:11

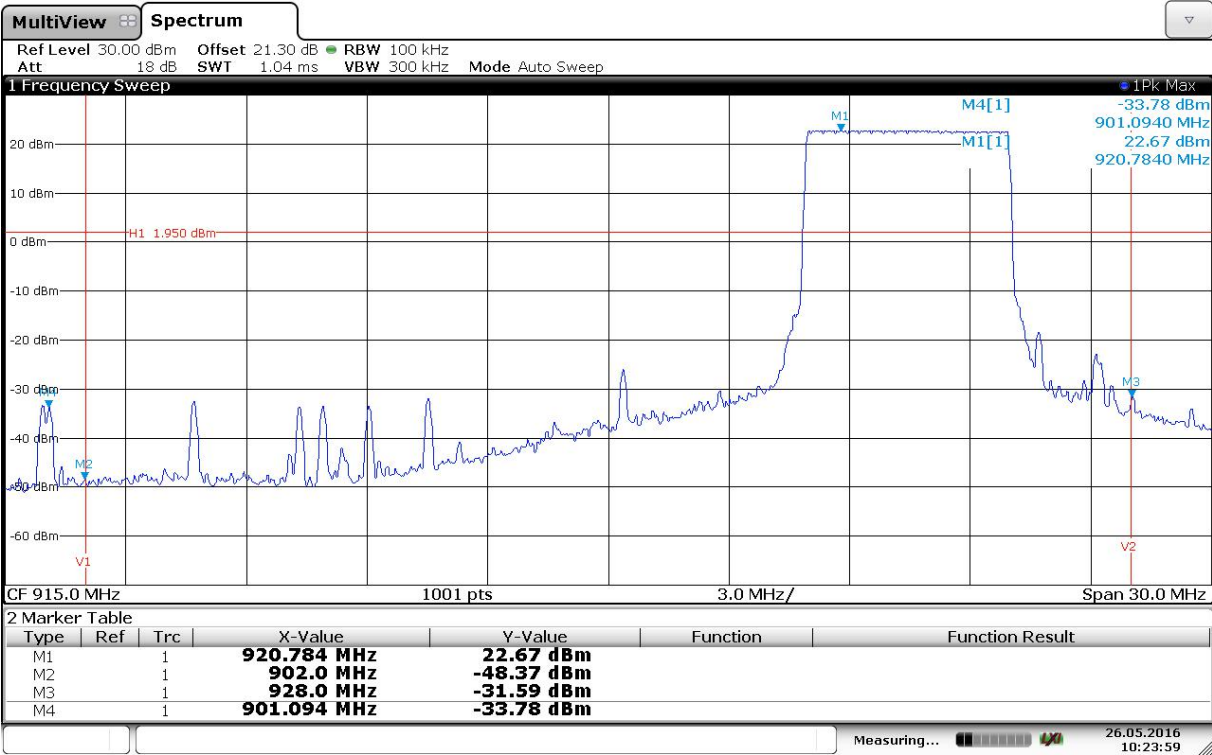

Date: 26.MAY.2016 10:23:59

19 Measurement Uncertainty

Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

[1] Radiated spurious emissions

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**

Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

[2] AC power line conducted emissions

Uncertainty in test result = **3.4 dB**

[3] Occupied bandwidth

Uncertainty in test result = **15.5 %**

[4] Conducted carrier power

Uncertainty in test result (Power Meter) = **1.08 dB**

[5] Conducted / radiated RF power out-of-band

Uncertainty in test result – up to 8.1 GHz = **3.31 dB**

Uncertainty in test result – 8.1 GHz to 15.3 GHz = **4.43 dB**

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**

Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

[6] Frequency separation

Uncertainty in test result (Spectrum Analyser) = **3.6 kHz**

[7] Accumulated channel occupancy time

Uncertainty in test result = **7.98 %**