



Measurement of RF Interference from Part Nos. 6400 and 6401 High Security Padlock Transceiver

| | |
|----------------|--|
| For | Master Lock Company PO Box 927 Oak Creek, WI 53154 |
| P.O. Number | 319615 |
| Date Tested | October 18-21, 2019 |
| Test Personnel | Richard King |
| Specification | FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Digital Modulation Intentional Radiators Operating within the band 2400-2483.5MHz FCC "Code of Federal Regulations" Title 47, Part15, Subpart 15B, Section 15.107 and 15.109 for Receivers Innovation, Science, and Economic Development Canada RSS-247 Innovation, Science, and Economic Development Canada RSS-GEN |

Test Report By:

Richard E. King

Richard King
EMC Engineer

Requested By:

Timothy Brennan
Master Lock Company

Approved By:

Raymond J. Klouda

Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

TABLE OF CONTENTS

| PARAGRAPH | DESCRIPTION OF CONTENTS | PAGE NO. |
|--|-------------------------|----------|
| 1. INTRODUCTION | | 5 |
| 1.1 Scope of Tests | | 5 |
| 1.2 Purpose | | 5 |
| 1.3 Deviations, Additions and Exclusions | | 5 |
| 1.4 EMC Laboratory Identification | | 5 |
| 1.5 Laboratory Conditions | | 5 |
| 2. APPLICABLE DOCUMENTS | | 5 |
| 3. EUT SETUP AND OPERATION | | 6 |
| 3.1 General Description | | 6 |
| 3.1.1 Power Input | | 6 |
| 3.1.2 Peripheral Equipment | | 6 |
| 3.1.3 Interconnect Cables | | 6 |
| 3.1.4 Grounding | | 6 |
| 3.2 Software | | 6 |
| 3.3 Operational Mode | | 6 |
| 3.4 EUT Modifications | | 6 |
| 4. TEST FACILITY AND TEST INSTRUMENTATION | | 6 |
| 4.1 Shielded Enclosure | | 6 |
| 4.2 Test Instrumentation | | 7 |
| 4.3 Calibration Traceability | | 7 |
| 4.4 Measurement Uncertainty | | 7 |
| 5. TEST PROCEDURES | | 7 |
| 5.1 Receiver | | 7 |
| 5.2 Transmitter | | 7 |
| 5.2.1 Powerline Conducted Emissions | | 7 |
| 5.2.1.1 Requirements | | 7 |
| 5.2.2 6dB Bandwidth | | 8 |
| 5.2.2.1 Requirements | | 8 |
| 5.2.2.2 Procedures | | 8 |
| 5.2.2.3 Results | | 8 |
| 5.2.3 Peak Conducted Output Power | | 8 |
| 5.2.3.1 Requirements | | 8 |
| 5.2.3.2 Procedures | | 8 |
| 5.2.3.3 Results | | 8 |
| 5.2.4 Peak EIRP | | 8 |
| 5.2.4.1 Requirements | | 8 |
| 5.2.4.2 Procedures | | 8 |
| 5.2.4.3 Results | | 9 |
| 5.2.5 Radiated Spurious Emissions Measurements | | 9 |
| 5.2.5.1 Requirements | | 9 |
| 5.2.5.2 Procedures | | 9 |
| 5.2.5.3 Results | | 11 |
| 5.2.6 Band Edge Compliance | | 11 |
| 5.2.6.1 Requirements | | 11 |
| 5.2.6.2 Procedures | | 11 |
| 5.2.6.2.1 Low Band Edge | | 11 |
| 5.2.6.2.2 High Band Edge | | 11 |
| 5.2.6.3 Results | | 12 |

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

| | | |
|---------------------------------------|-------------------------------------|----|
| 5.2.7 | Power Spectral Density | 12 |
| 5.2.7.1 | Requirement | 12 |
| 5.2.7.2 | Procedures | 12 |
| 5.2.7.3 | Results | 12 |
| 6. | CONCLUSIONS | 13 |
| 7. | CERTIFICATION | 13 |
| 8. | ENDORSEMENT DISCLAIMER | 13 |
| 9. | EQUIPMENT LIST | 14 |
| Table 9-1 Equipment List | | 14 |

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

REVISION HISTORY

| Revision | Date | Description |
|----------|-------------|-----------------|
| — | 20 DEC 2019 | Initial release |

Measurement of RF Emissions from the High Security Padlock Transceiver, Part Nos. 6400 and 6401

1. INTRODUCTION

1.1 Scope of Tests

This document represents the results of the series of radio interference measurements performed on a Master Lock Company High Security Padlock Transceiver, Part Nos. 6400 and 6401 (hereinafter referred to as the EUT). The EUT is a digital modulation transceiver. The transceiver was designed to transmit and receive in the 2400-2483.5 MHz band using a PCB chip antenna with 0.5dBi gain. The EUT was manufactured and submitted for testing by Master Lock Company located in Oak Creek, WI.

Part No. 6401 is electrically identical to Part No. 6400 but includes a metal shroud over the shackle portion of the padlock. Testing on Part No. 6401 was limited to spot checks of the spurious emissions.

1.2 Purpose

The test series was performed to determine if the EUT meets the conducted RF emission requirements, radiated RF emissions requirements, and additional provisions of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109, for receivers and Subpart C, Sections 15.207 and 15.247 for Intentional Radiators Operating within the 2400-2483.5 MHz band.

The test series was also performed to determine if the EUT meets the conducted RF emission requirements, radiated RF emissions requirements, and additional provisions of the Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen Section 8.8 and Section 7.1.2 for receivers and Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen Section 8.8 and Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-247 for Transmitters.

Testing was performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

1.3 Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series

1.4 EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the American Association for Laboratory Accreditation (A2LA), A2LA Lab Code: 1786-01.

1.5 Laboratory Conditions

The temperature at the time of the test was 23.1C° and the relative humidity was 39%.

2. APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subparts B and C, dated 1 October 2019
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"

- Federal Communications Commission Office of Engineering and Technology Laboratory Division, Guidance For Performing Compliance Measurements On Digital Transmissions Systems (DTS) Operating Under §15.247
April 2, 2019
- Innovation, Science, and Economic Development Canada RSS-247, Issue 2, February 2017, "Spectrum Management and Telecommunications Radio Standards Specification, Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs), and License-Exempt Local Area Network (LE-LAN) Devices"
- Innovation, Science, and Economic Development Canada RSS-Gen, Issue 5, Amendment 1, March 2019, "Spectrum Management and Telecommunications Radio Standards Specification, General Requirements for Compliance of Radio Apparatus"

3. EUT SETUP AND OPERATION

3.1 General Description

The EUT is a High Security Padlock Transceiver, Part No. 6400. A block diagram of the EUT setup is shown as Figure 1 and Figure 2. A photograph of the EUT is shown as Figure 3.

3.1.1 Power Input

The EUT was powered by 3VDC from a CR123A Lithium battery.

3.1.2 Peripheral Equipment

No peripheral equipment was submitted with the EUT.

3.1.3 Interconnect Cables

No interconnect cables were submitted with the EUT.

3.1.4 Grounding

The EUT was not grounded during testing.

3.2 Software

For all tests, the EUT had firmware version 2.4 loaded prior to each test.

3.3 Operational Mode

The EUT was energized. The EUT was programmed to continuously transmit separately at each of the following channels:

- Transmit at 2402MHz
- Transmit at 2440MHz
- Transmit at 2480MHz

3.4 EUT Modifications

No modifications were required for compliance.

4. TEST FACILITY AND TEST INSTRUMENTATION

4.1 Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the

ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

4.2 Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1.

Conducted and radiated emission tests were performed with an EMI receiver utilizing the bandwidths and detectors specified by the FCC.

4.3 Calibration Traceability

Test equipment is maintained and calibrated on a regular basis with a calibration interval not greater than two years. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

4.4 Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty for these tests is presented below:

| Conducted Emissions Measurements | | | |
|---------------------------------------|--|------|-------|
| Combined Standard Uncertainty | | 1.06 | -1.06 |
| Expanded Uncertainty (95% confidence) | | 2.12 | -2.12 |

| Radiated Emissions Measurements | | | |
|---------------------------------------|--|------|-------|
| Combined Standard Uncertainty | | 2.09 | -2.09 |
| Expanded Uncertainty (95% confidence) | | 4.19 | -4.19 |

5. TEST PROCEDURES

5.1 Receiver

Per the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Section 15.101(b), receivers operating above 960MHz are exempt from complying with the technical provisions of part 15.

Per the Innovation, Science, and Economic Development Canada RSS-Gen, Section 5.3, only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz are subject to Industry Canada requirements, as described above. All other receivers are exempted from any Industry Canada certification, testing, labeling and reporting requirements.

5.2 Transmitter

5.2.1 Powerline Conducted Emissions

5.2.1.1 Requirements

Since the EUT is powered by a 3V Lithium battery and has no connections for AC mains, no conducted emission measurements are required.

5.2.2 6dB Bandwidth

5.2.2.1 Requirements

Per 15.247(a)(2), the minimum 6dB bandwidth shall be at least 500kHz for all systems using digital modulation techniques.

5.2.2.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 10dB of attenuation or the EUT was placed on a 1.5 meter high, non-conductive stand and set to transmit. A double ridged waveguide antenna was placed at a test distance of 3 meters from the EUT.

The EUT was allowed to transmit continuously. The transmit channel was set separately to low, middle, and high channels. The resolution bandwidth (RBW) was set to 100kHz, the video bandwidth (VBW) was set to the same as or 3 times greater than the RBW, and the span was set to 3 times the RBW.

The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.

5.2.2.3 Results

The plots on pages 21 through 23 show that the minimum 6 dB bandwidth was 831.68kHz which is greater than the minimum allowable 6dB bandwidth requirement of 500kHz for systems using digital modulation techniques. The plots on pages 24 through 26 show the 99% bandwidth measurements. The 99% bandwidth was measured to be 1.01MHz.

5.2.3 Peak Conducted Output Power

5.2.3.1 Requirements

Per section 15.247(b)(3), for systems using digital modulation, the maximum peak output conducted power shall not be greater than 1.0W (30dBm).

5.2.3.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 10dB of attenuation. The EUT was set to transmit separately at the low, middle, and high channels. The resolution bandwidth (RBW) was set to greater than the 6dB bandwidth. The 'Max-Hold' function was engaged. The maximum meter reading was recorded. The peak power output was calculated for the low, middle and high channels.

5.2.3.3 Results

The results are presented on pages 27 through 29. The maximum peak conducted output power from the transmitter was 0.64mW (-1.9dBm) which is below the 1 Watt limit.

5.2.4 Peak EIRP

5.2.4.1 Requirements

Per section 15.247(b)(3), for systems using digital modulation the maximum peak output conducted power shall not be greater than 1.0W (30dBm). Per section 15.247(b)(4), this limit is based on the use of antennas with directional gains that do not exceed 6dBi. Since the limit allows for a 6dBi antenna gain, the maximum EIRP can be increased by 6dB to 4 Watt (36dBm).

5.2.4.2 Procedures

The EUT was placed on a 1.5 meter high, non-conductive stand and set to transmit. A double ridged waveguide antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 6dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak

power output was measured for the low, middle and high channels.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a double ridged waveguide antenna was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss (and antenna gain for all measurements above 1GHz), as required. The peak power output was calculated for low, middle, and high hopping frequencies.

5.2.4.3 Results

The results are presented on pages 30 through 32. The maximum EIRP measured from the transmitter was -9.38 dBm or 0.115 mW which is below the 4 Watt limit.

5.2.5 Radiated Spurious Emissions Measurements

5.2.5.1 Requirements

Per section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated emissions measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Paragraph 15.209(a) has the following radiated emission limits:

| Frequency MHz | Field Strength (microvolts/meter) | Measurement distance (meters) |
|------------------|--------------------------------------|----------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 3 |
| 30.0-88.0 | 100 | 3 |
| 88.0-216.0 | 150 | 3 |
| 216.0-960.0 | 200 | 3 |
| Above 960 | 500 | 3 |

5.2.5.2 Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 25GHz was investigated using a peak detector function.

The final emission tests were then manually performed over the frequency range of 30MHz to 25GHz.

- 1) For all harmonics not in the restricted bands, the following procedure was used:
 - a) The field strength of the fundamental was measured using a double ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-

ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.

- c) To ensure that maximum or worst case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axes to ensure the maximum readings were recorded for the EUT.
- d) All harmonics not in the restricted bands must be at least 20 dB below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.

2) For all emissions in the restricted bands, the following procedure was used:

- a) The field strengths of all emissions below 1 GHz were measured using a bilog antenna. The bilog antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axes to ensure the maximum readings were recorded for the EUT.
- d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).
- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average

detector. An average reading was taken.

5.2.5.3 Results

Preliminary radiated emissions plots with the EUT transmitting at 2402MHz, 2440MHz, and 2480MHz are shown on pages 33 through 56. Final radiated emissions data are presented on data pages 57 through 71. As can be seen from the data, all emissions measured from the EUT were within the specification limits. See data pages 57 through 71 for details.

Photographs of the test configuration which yielded the highest or worst case, radiated emission levels are shown as Figures 5 through 7.

5.2.6 Band Edge Compliance

5.2.6.1 Requirements

Per section 15.247(d), the emissions at the band edges must be at least 20dB below the highest level measured within the band but attenuation below the general limits listed in 15.209(a) is not required. In addition, the radiated emissions which fall in the restricted band beginning at 2483.5 MHz must meet the general limits of 15.209(a).

5.2.6.2 Procedures

5.2.6.2.1 Low Band Edge

- 1) The antenna port of the EUT was connected to the spectrum analyzer through 10dB of attenuation.
- 2) The EUT was set to transmit continuously at the channel closest to the low band-edge.
- 3) To determine the band edge compliance, the following spectrum analyzer settings were used:
 - a. Center frequency = low band edge frequency.
 - b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
 - c. Resolution bandwidth (RBW) = 100kHz, Video bandwidth (VBW) = 300kHz.
 - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
 - e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band edge) must be below the display line.)
 - f. The analyzer's display was plotted using a 'screen dump' utility.

5.2.6.2.2 High Band Edge

- 1) The EUT was set to transmit continuously at the channel closest to the high band-edge.
- 2) A double ridged waveguide was placed 3 meters away from the EUT. The antenna was connected to the input of a spectrum analyzer.
- 3) The center frequency of the analyzer was set to the high band edge (2483.5MHz)
- 4) The resolution bandwidth was set to 1MHz.
- 5) To ensure that the maximum or worst case emission level was measured, the following steps were taken:
 - a. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - b. Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - c. The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 6) The highest measured peak reading was recorded.

- 7) The highest measured average reading was recorded.

5.2.6.3 Results

Page 72 shows the low band edge antenna port conducted emissions compliance results. Pages 73 and 74 show the radiated band edge compliance results. As can be seen from these plots, the emissions at the low end band edge are within the 20 dB down limits. The radiated emissions at the high end band edge are within the general limits.

5.2.7 Power Spectral Density

5.2.7.1 Requirement

Per section 15.247(e), the peak power spectral density from the intentional radiator shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2.7.2 Procedures

- 1) The antenna port of the EUT was connected to the spectrum analyzer through a 10dB pad.
- 2) The EUT was set to transmit continuously at the lowest channel.
- 3) To determine the power spectral density, the following spectrum analyzer settings were used:
 - a. Center frequency = transmit frequency
 - b. Span = 1.5 times the DTS (6 dB) bandwidth
 - c. Resolution bandwidth (RBW): $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
 - d. Sweep time = auto
 - e. The peak detector and 'Max-Hold' function was engaged.
 - f. The display line represents the 8 dBm limit.
 - g. The analyzer's display was plotted using a 'screen dump' utility.
- 4) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.
- 5) Steps 1) through 4) were repeated separately for the mid channel and the high channel.
- 6) The EUT was placed on the non-conductive stand and set to transmit at the mid channel.
- 7) At the high channel, a broadband measuring antenna was placed near the EUT.
- 8) To determine the power spectral density, the following spectrum analyzer settings were used:
 - a. Center frequency = transmit frequency
 - b. Resolution bandwidth (RBW) greater than the 20dB bandwidth.
 - c. Sweep time = auto
 - d. The peak detector and 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
 - e. The analyzer's display was plotted using a 'screen dump' utility.
- 9) This reading corresponds to the peak EIRP measured for the mid channel.
- 10) Turn on Display Line 1 and place it at the peak of the measured level. Turn on Display Line 2 and place it at the corresponding +8dBm level (e.g. if the peak output power is +18dBm then the +8dBm level will be 10dB down from the radiated level and if the peak output power is +6dBm then the +8dBm level will be 2dB above the radiated level.)
- 11) To determine the power spectral density, the following spectrum analyzer settings were used:
 - a. Center frequency = transmit frequency
 - b. Span = 1.5 times the channel bandwidth
 - c. Resolution bandwidth (RBW) $\geq 3\text{kHz}$
 - d. Video bandwidth (VBW) $\geq 3 \times \text{RBW}$
 - e. Sweep time = auto couple
 - f. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The peak detector and 'Max-Hold' function was engaged.
- 12) The analyzer's display was plotted using a 'screen dump' utility.

5.2.7.3 Results

Pages 75 through 77 show the power spectral density results. As can be seen from these plots, the peak power

spectral density is less than 8dBm in a 10kHz band during any time interval of continuous transmission.

6. CONCLUSIONS

It was determined that the Master Lock Company High Security Padlock Transceiver, Part No. 6400 and 6401, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109 for receivers and Subpart C, Sections 15.207 and 15.247 for Intentional Radiators Operating within the 2400-2483.5 MHz band, when tested per ANSI C63.4-2014 and ANSI C63.10-2013.

It was also determined that the Master Lock Company High Security Padlock Transceiver, Part No. 6400 and 6401, did fully meet the conducted and radiated RF emission requirements of the Innovation, Science, and Economic Development Canada Radio Standards Specification, RSS-Gen, Section 8.8 and Section 7.1.2 for receivers and the Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen Section 8.8 and Radio Standards Specification RSS-247 for transmitters, when tested per ANSI C63.4-2014 and ANSI C63.10-2013.

7. CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test date. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

8. ENDORSEMENT DISCLAIMER

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST or any agency of the Federal Government.


9. EQUIPMENT LIST

Table 9-1 Equipment List

| Eq ID | Equipment Description | Manufacturer | Model No. | Serial No. | Frequency Range | Cal Date | Due Date |
|-------|---------------------------------|----------------------|--------------------------|-------------|-------------------|------------|------------|
| ACU1 | BROADBAND POWER AMPLIFIER | AMPLIFIER RESEARCH | 500W1000M5 | 19833 | 80-1000MHZ | NOTE 1 | |
| APW0 | PREAMPLIFIER | PLANAR ELECTRONICS | PE2-30-20G20R6G | PL2926/0646 | 20GHZ-26.5GHZ | 10/2/2019 | 10/2/2020 |
| APW3 | PREAMPLIFIER | PLANAR ELECTRONICS | PE2-35-120-5R0-10-12 | PL2924 | 1GHZ-20GHZ | 4/8/2019 | 4/8/2020 |
| AWF4 | RF POWER AMPLIFIER | OPHIR | 5295FE | 1001 | .7-6GHZ | NOTE 1 | |
| CDY0 | WORKSTATION | ELITE | WORKSTATION | | WINDOWS 7 | N/A | |
| GRE0 | SIGNAL GENERATOR | AGILENT TECHNOLOGIES | E4438C | MY42083127 | 250KHZ-6GHZ | 5/2/2019 | 5/2/2020 |
| GSFB | OSP120 BASE UNIT | ROHDE & SCHWARZ | OSP120 | 101246 | --- | 4/1/2019 | 4/1/2020 |
| GSFE | OSP120 | ROHDE & SCHWARZ | OSP120 | 101288 | .01-40GHZ | 5/2/2019 | 5/2/2020 |
| MPC2 | DUAL POWER METER | HEWLETT PACKARD | EPM-442A | US37480150 | 0.1MHZ-50GHZ | 8/19/2019 | 8/19/2020 |
| MPI6 | POWER SENSOR | KEYSIGHT | E9304A | MY56210005 | 9KHZ-6GHZ | 5/3/2018 | 5/3/2020 |
| MPI7 | POWER SENSOR | KEYSIGHT | E9304A | MY56200002 | 9KHZ-6GHZ | 5/3/2018 | 5/3/2020 |
| NCB0 | 48" CUBE ANTENNA | ELITE | 48IN/170T | 1 | DC-400HZ | NOTE 1 | |
| NHG0 | STANDARD GAIN HORN ANTENNA | NARDA | 638 | --- | 18-26.5GHZ | NOTE 1 | |
| NSA7 | LOG PERIODIC ANTENNA | AMPLIFIER RESEARCH | AT1080 | 14239 | 80-1000MHZ | NOTE 1 | |
| NTA2 | BILOG ANTENNA | TESEQ | 6112D | 28040 | 25-1000MHz | 12/20/2018 | 12/20/2019 |
| NWQ0 | DOUBLE RIDGED WAVEGUIDE ANTENNA | ETS LINDGREN | 3117 | 66657 | 1GHZ-18GHZ | 5/31/2018 | 5/31/2020 |
| NWV0 | DOUBLE RIDGED WAVEGUIDE ANTENNA | ETS LINDGREN | 3119 | 164466 | 400MHZ-6GHZ | 7/15/2018 | 7/15/2020 |
| RBG0 | EMI ANALYZER | ROHDE & SCHWARZ | ESW44 | 101533 | 10HZ-44GHZ | 12/5/2018 | 1/5/2020 |
| RBG3 | EMI ANALYZER | ROHDE & SCHWARZ | ESW44 | 101592 | 2HZ-44GHZ | 2/20/2019 | 2/20/2020 |
| SHC2 | Power Supplies | HENG FU | HF60W-SL-24 | A11372702 | 24V | NOTE 1 | |
| VBV2 | CISPR EN FCC ICES RE.EXE | ELITE | CISPR EN FCC ICES RE.EXE | --- | --- | N/A | |
| WKA1 | SOFTWARE, UNIVERSAL RCV EMI | ELITE | UNIV_RCV_EMI | 1 | --- | I/O | |
| XDW0 | DUAL DIRECTIONAL COUPLER (50DB) | AMPLIFIER RESEARCH | DC6180 | 303349 | 80-1000MHZ (600W) | 9/4/2019 | 9/4/2020 |
| XLZ8 | 50 OHM TERMINATION | PASTERNACK | PE6009 | 004 | DC-18GHZ | 4/16/2018 | 4/16/2020 |
| XPQ4 | HIGH PASS FILTER | K&L MICROWAVE | 11SH10-4800/X20000-O/O | 1 | 4.8-20GHZ | 9/6/2019 | 9/6/2021 |
| XTR6 | ESD SIMULATOR | NOISEKEN | ESS-S3011 | ESS15Y2245 | --- | 4/13/2019 | 4/13/2020 |
| XTRV | ESD GUN | NOISEKEN | GT-30RA | ESS1766229 | --- | 5/31/2019 | 5/31/2020 |

I/O: Initial Only N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

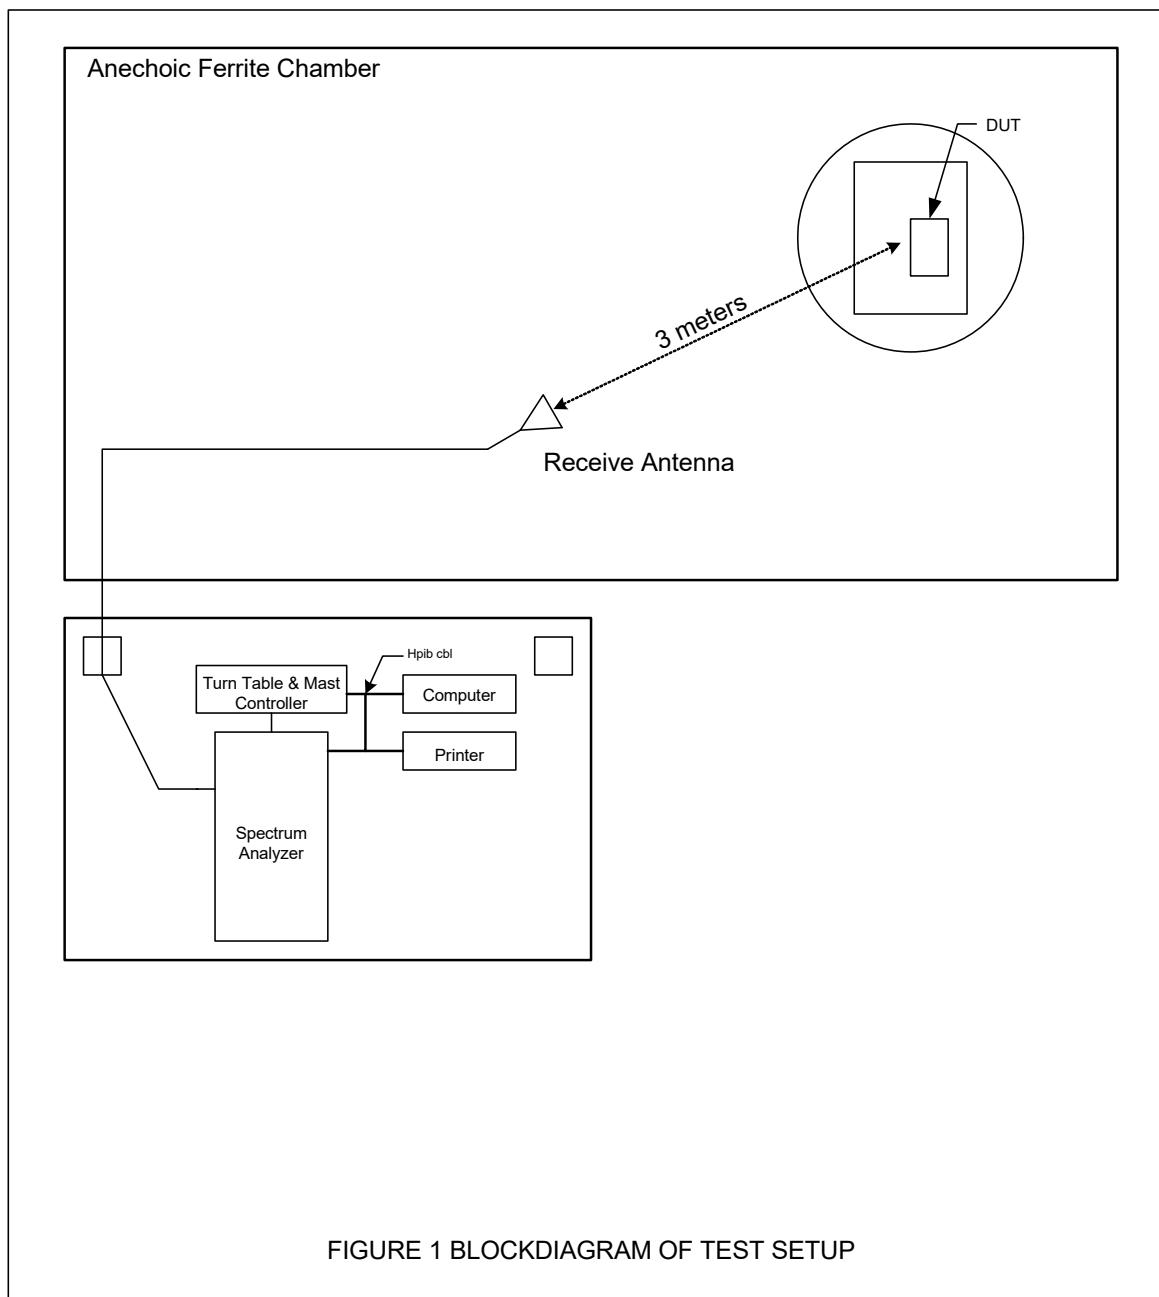

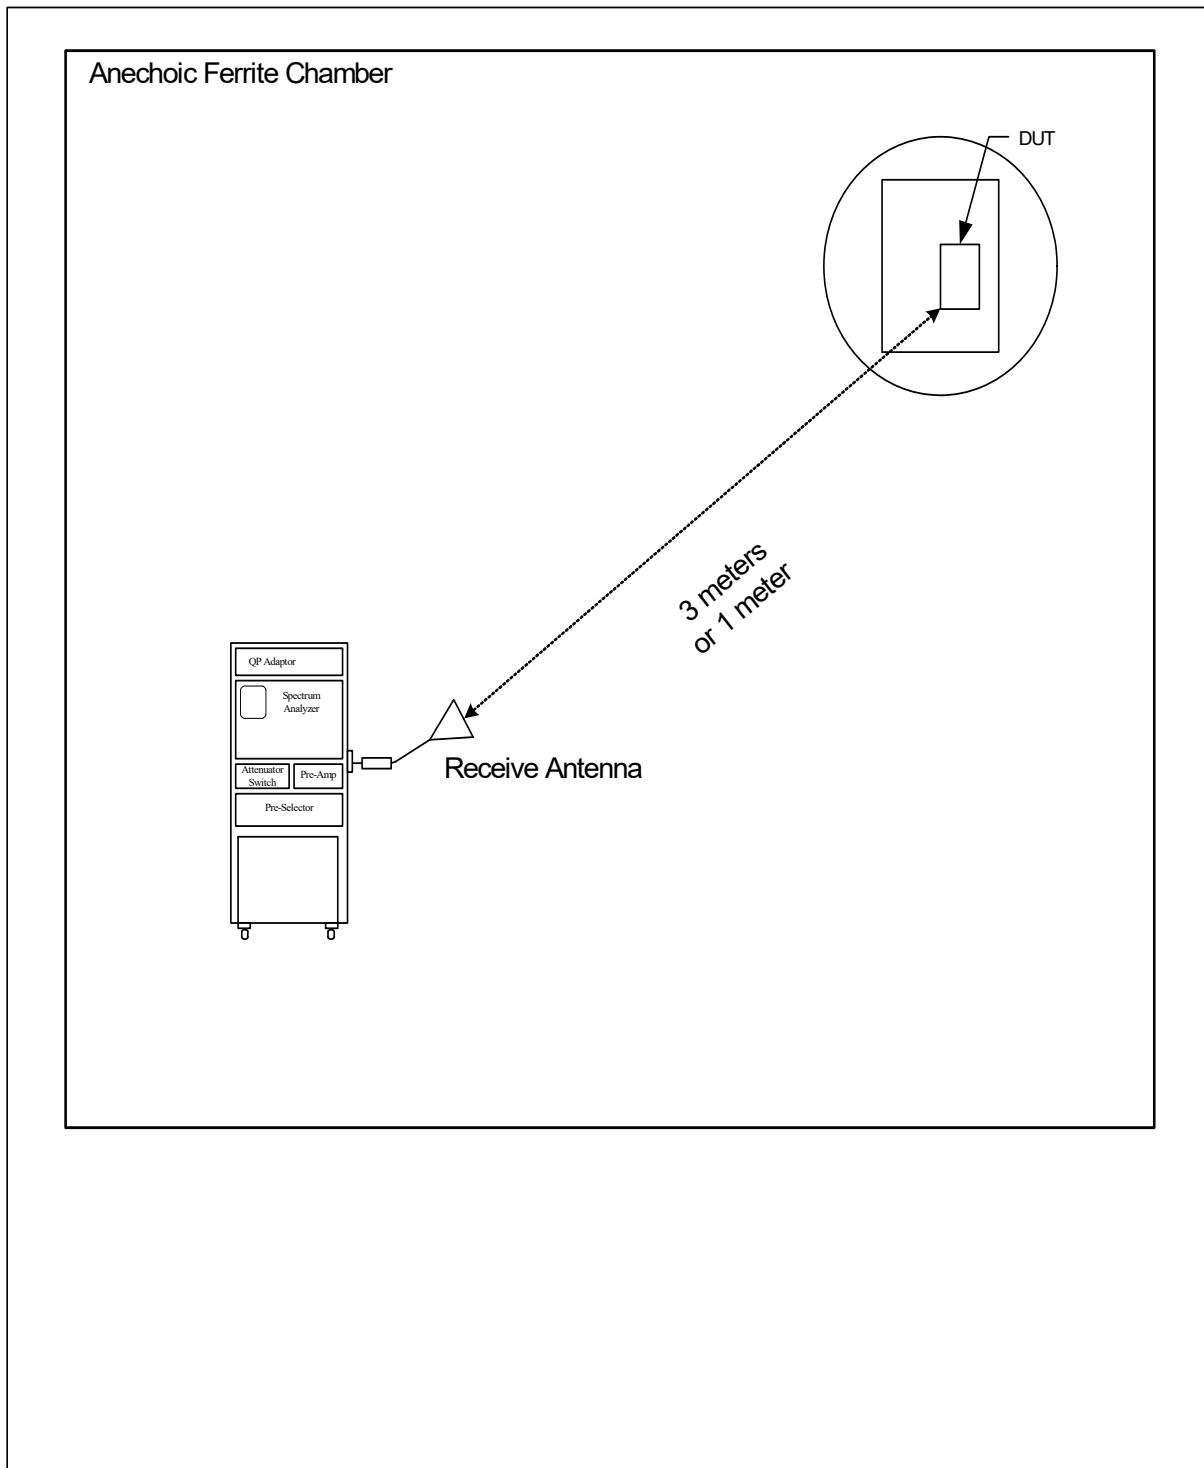


Figure 2: BLOCK DIAGRAM OF TEST SETUP FOR RADIATED EMISSIONS ABOVE 18GHZ

Figure 3



Photograph of EUT

Figure 5



Test Setup for Radiated Emissions – 30MHz to 1GHz, Horizontal Polarization



Test Setup for Radiated Emissions – 30MHz to 1GHz, Vertical Polarization

Figure 6



Test Setup for Radiated Emissions – 1GHz to 18GHz, Horizontal Polarization



Test Setup for Radiated Emissions – 1GHz to 18GHz, Vertical Polarization


Figure 7




Test Setup for Radiated Emissions – 18GHz to 25GHz, Horizontal Polarization




Test Setup for Radiated Emissions – 18GHz to 25GHz, Vertical Polarization

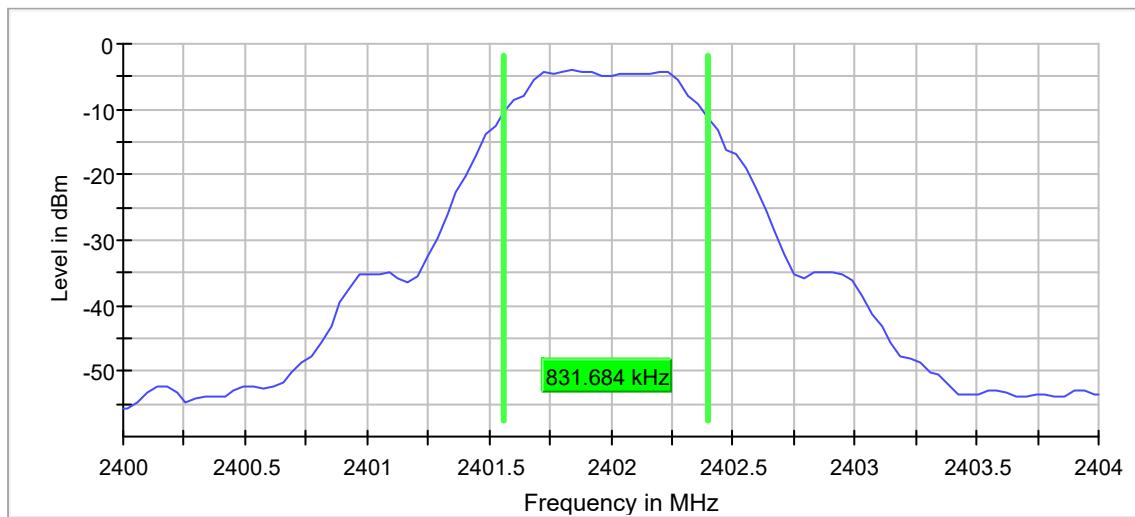**6dB Bandwidth**


MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2402MHz
TEST DATE : October 29, 2019
NOTES : 6dB bandwidth = 831.68kHz
EQUIPMENT USED : GSFE, GSFB, RBG0

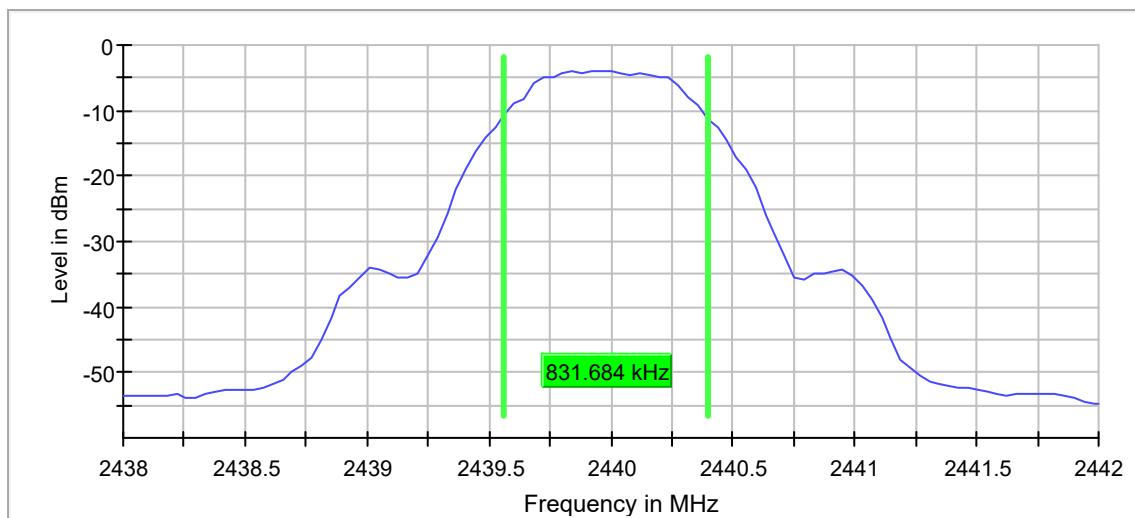**6dB Bandwidth**


MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2440MHz
TEST DATE : October 29, 2019
NOTES : 6dB bandwidth = 831.68kHz
EQUIPMENT USED : GSFE, GSFB, RBG0

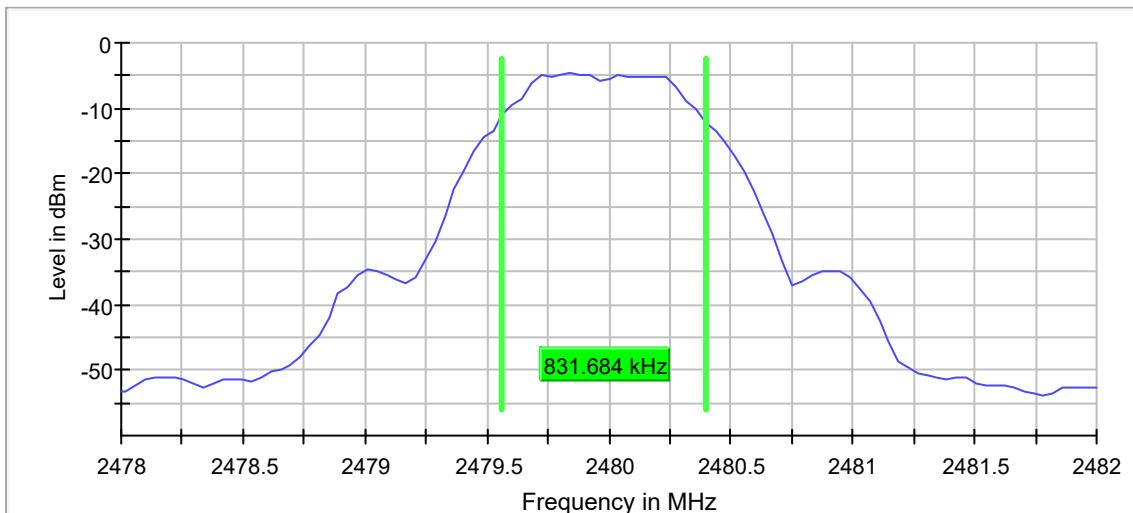**6dB Bandwidth**


MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2480MHz
TEST DATE : October 29, 2019
NOTES : 6dB bandwidth = 831.68kHz
EQUIPMENT USED : GSFE, GSFB, RBG0

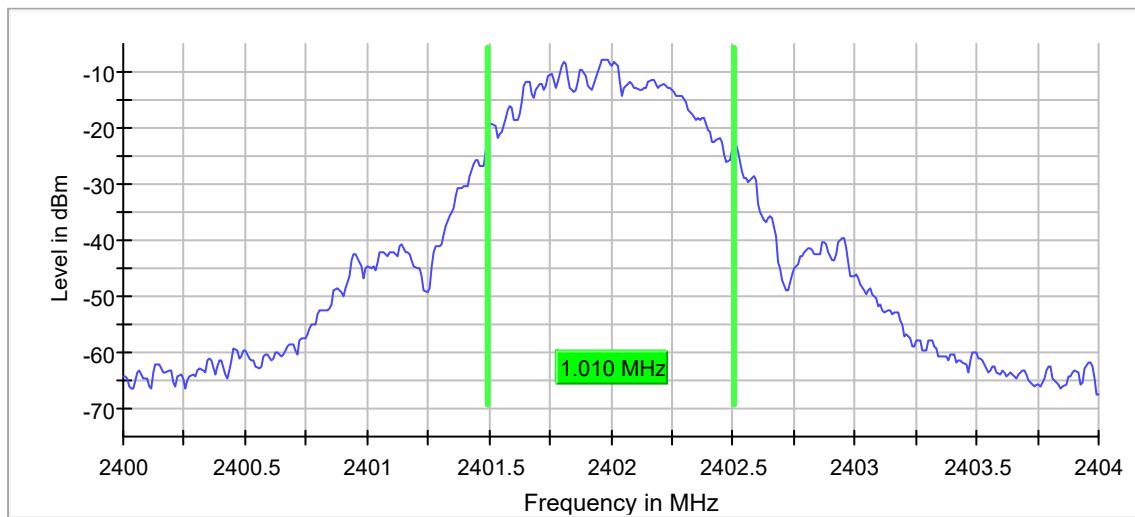**99% Bandwidth**


MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2402MHz
TEST DATE : October 29, 2019
NOTES : 99% bandwidth = 1.01MHz
EQUIPMENT USED : GSFE, GSFB, RBG0

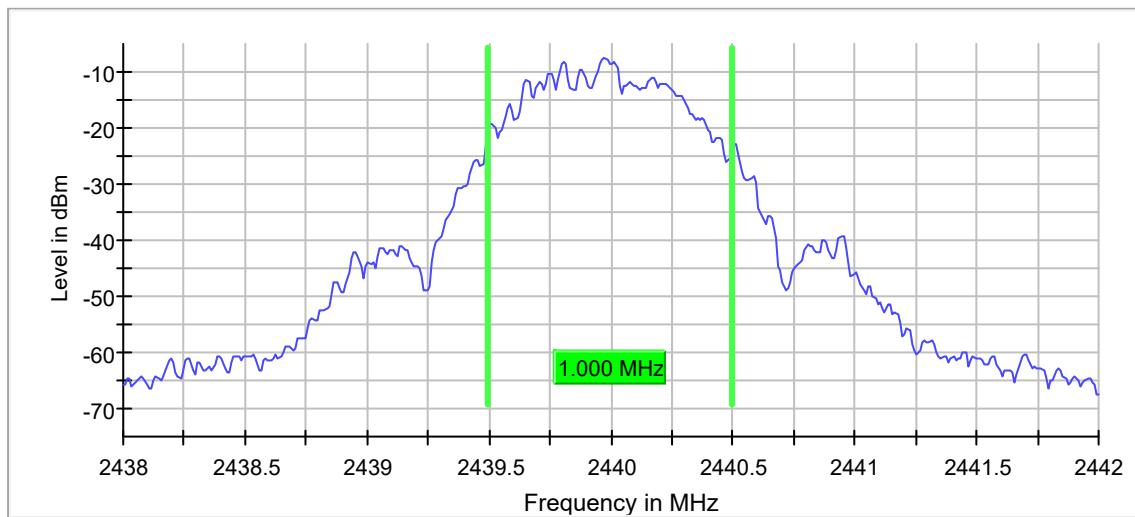**99% Bandwidth**


MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2440MHz
TEST DATE : October 29, 2019
NOTES : 99% bandwidth = 1.00MHz
EQUIPMENT USED : GSFE, GSFB, RBG0

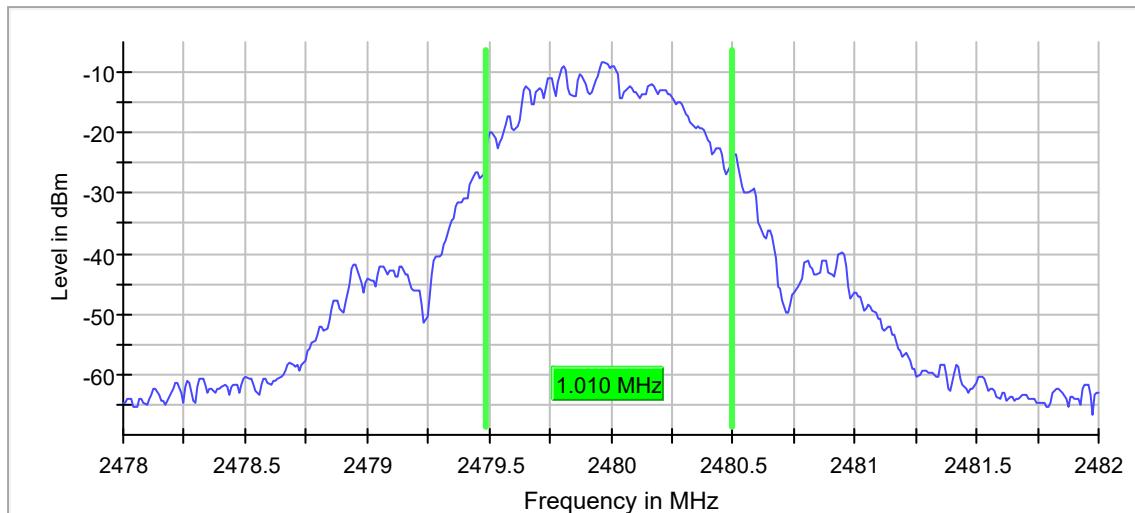**99% Bandwidth**


MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2480MHz
TEST DATE : October 29, 2019
NOTES : 99% bandwidth = 1.01MHz
EQUIPMENT USED : GSFE, GSFB, RBG0

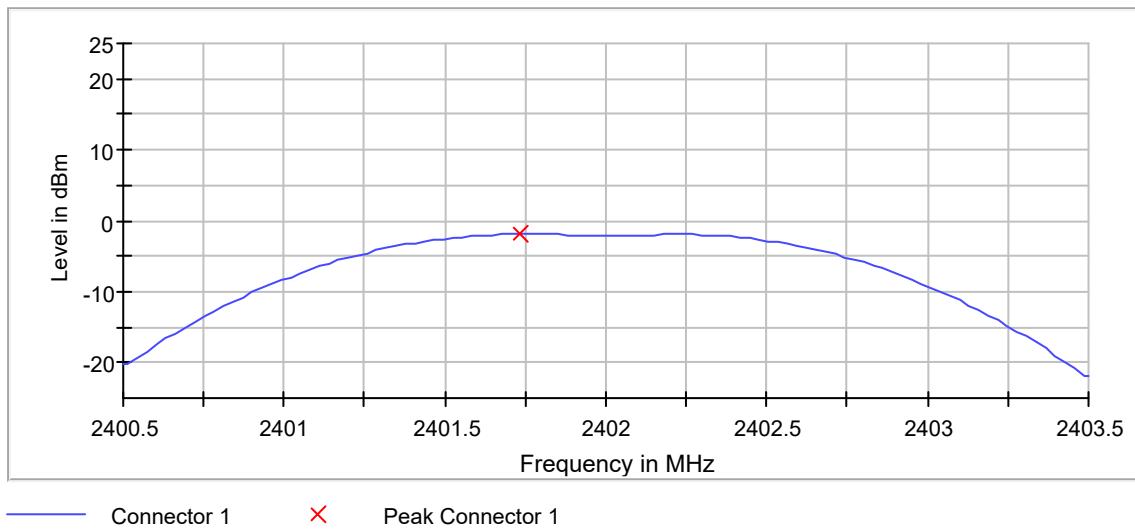**FCC 15.247 Antenna Conducted Peak Output Power**

MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2402MHz
TEST DATE : October 29, 2019
NOTES : Antenna Conducted Output Power = -1.9dBm
EQUIPMENT USED : GSFE, GSFB, RBG0

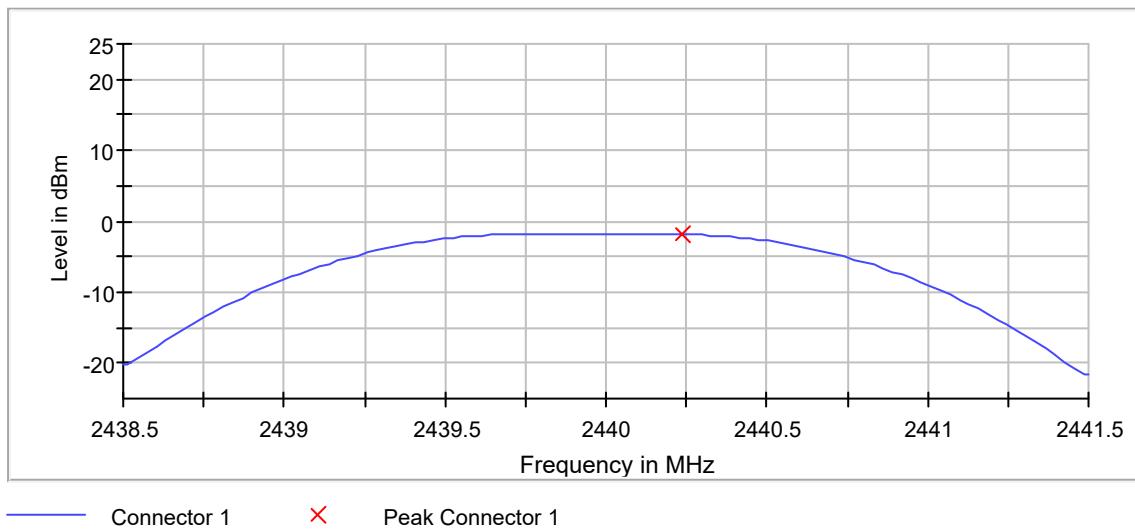**FCC 15.247 Antenna Conducted Peak Output Power**

MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2440MHz
TEST DATE : October 29, 2019
NOTES : Antenna Conducted Output Power = -1.9dBm
EQUIPMENT USED : GSFE, GSFB, RBG0

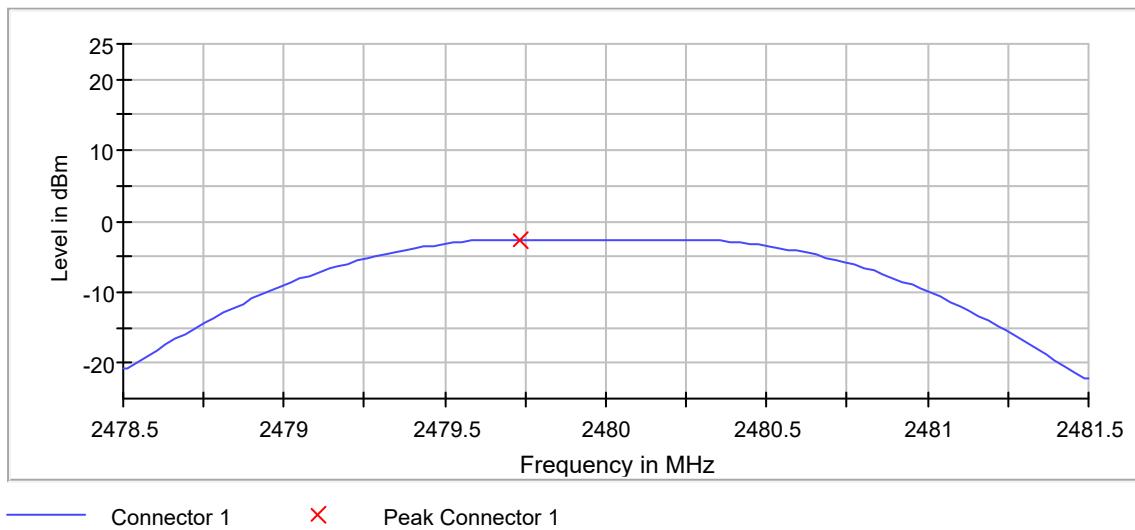**FCC 15.247 Antenna Conducted Peak Output Power**

MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2480MHz
TEST DATE : October 29, 2019
NOTES : Antenna Conducted Output Power = -2.6dBm
EQUIPMENT USED : GSFE, GSFB, RBG0

Manufacturer : Master Lock Company
Test Item : High Security Padlock Transceiver
Model No. : 6400
Mode : Transmit at 2402MHz
Test Specification : FCC-15.247, RSS-247 Peak Output Power
Date : October 31, 2019
Test Distance : 3 meters
Notes :

| Freq. (MHz) | Ant Pol | Wide BW Meter Reading (dBuV) | Matched Sig. Gen. Reading (dBm) | Equivalent Antenna Gain (dB) | Cable Loss (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|----------------|------------|--|--|---------------------------------------|-----------------------|---------------|----------------|----------------|
| 2402.00 | H | 53.20 | -12.00 | 4.20 | 2.75 | -10.54 | 36.00 | -46.54 |
| 2402.00 | V | 50.20 | -14.20 | 4.20 | 2.75 | -12.74 | 36.00 | -48.74 |

EIRP = Sig. Gen. Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)

Checked BY

RICHARD E. KING

Richard E. King

Manufacturer : Master Lock Company
Test Item : High Security Padlock Transceiver
Model No. : 6400
Mode : Transmit at 2440MHz
Test Specification : FCC-15.247, RSS-247 Peak Output Power
Date : October 31, 2019
Test Distance : 3 meters
Notes :

| Freq. (MHz) | Ant Pol | Wide BW Meter Reading (dBuV) | Matched Sig. Gen. Reading (dBm) | Equivalent Antenna Gain (dB) | Cable Loss (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|----------------|------------|--|--|---------------------------------------|-----------------------|---------------|----------------|----------------|
| 2440.00 | H | 53.74 | -11.00 | 4.39 | 2.77 | -9.38 | 36.00 | -45.38 |
| 2440.00 | V | 50.43 | -13.00 | 4.39 | 2.77 | -11.38 | 36.00 | -47.38 |

EIRP = Sig. Gen. Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)

Checked BY

RICHARD E. KING

Richard E. King


Manufacturer : Master Lock Company
Test Item : High Security Padlock Transceiver
Model No. : 6400
Mode : Transmit at 2480MHz
Test Specification : FCC-15.247, RSS-247 Peak Output Power
Date : October 31, 2019
Test Distance : 3 meters
Notes :


| Freq. (MHz) | Ant Pol | Wide BW Meter Reading (dBuV) | Matched Sig. Gen. Reading (dBm) | Equivalent Antenna Gain (dB) | Cable Loss (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|----------------|------------|--|--|---------------------------------------|-----------------------|---------------|----------------|----------------|
| 2480.00 | H | 51.69 | -13.00 | 4.46 | 2.80 | -11.34 | 36.00 | -47.34 |
| 2480.00 | V | 47.57 | -16.00 | 4.46 | 2.80 | -14.34 | 36.00 | -50.34 |


EIRP = Sig. Gen. Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)


Checked BY *RICHARD E. KING* :


Richard E. King

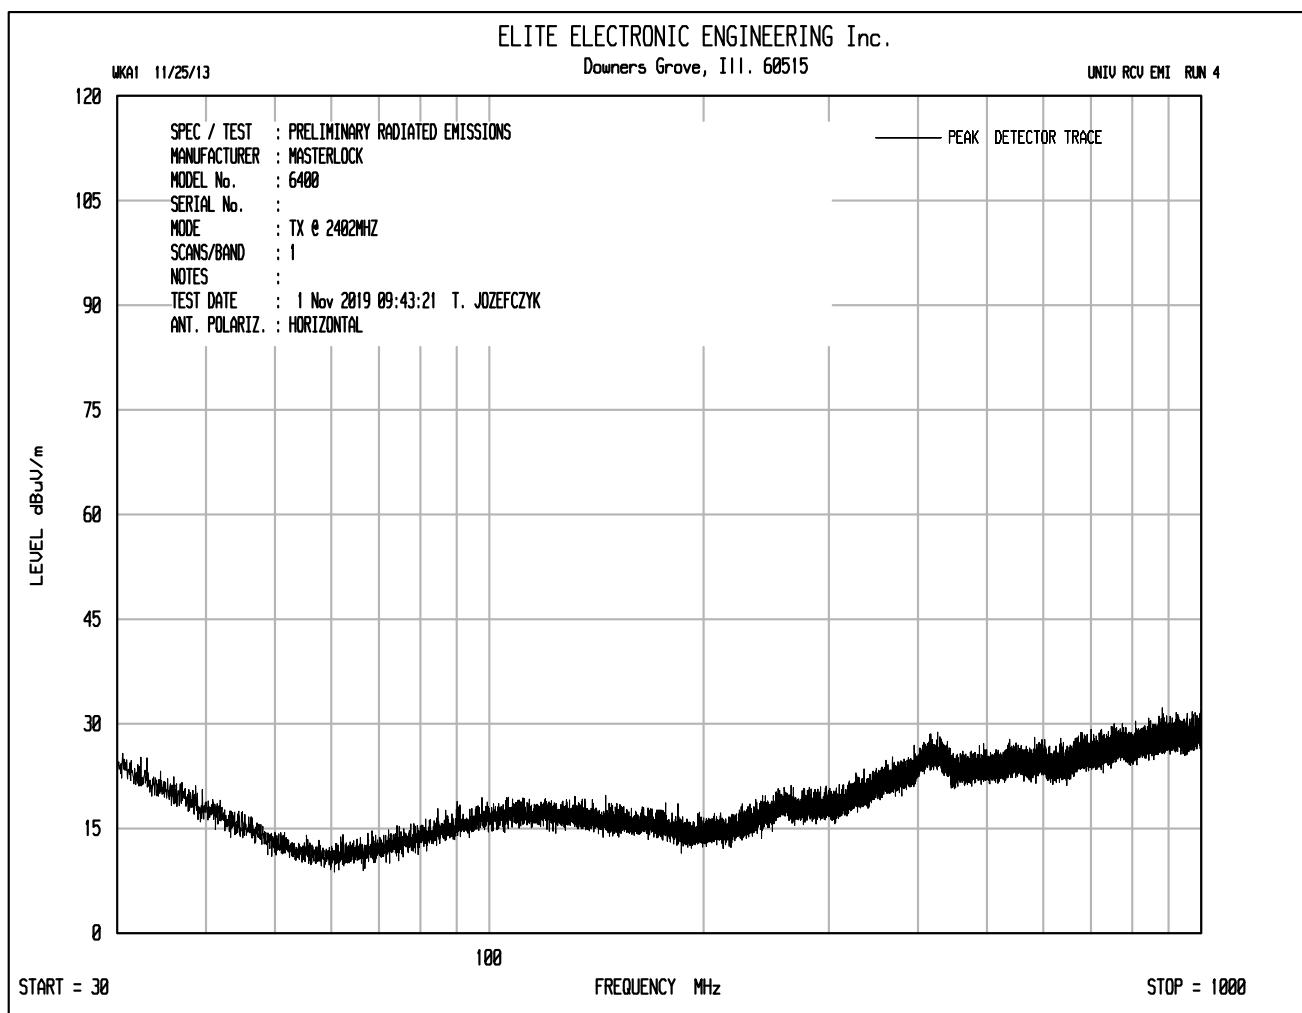


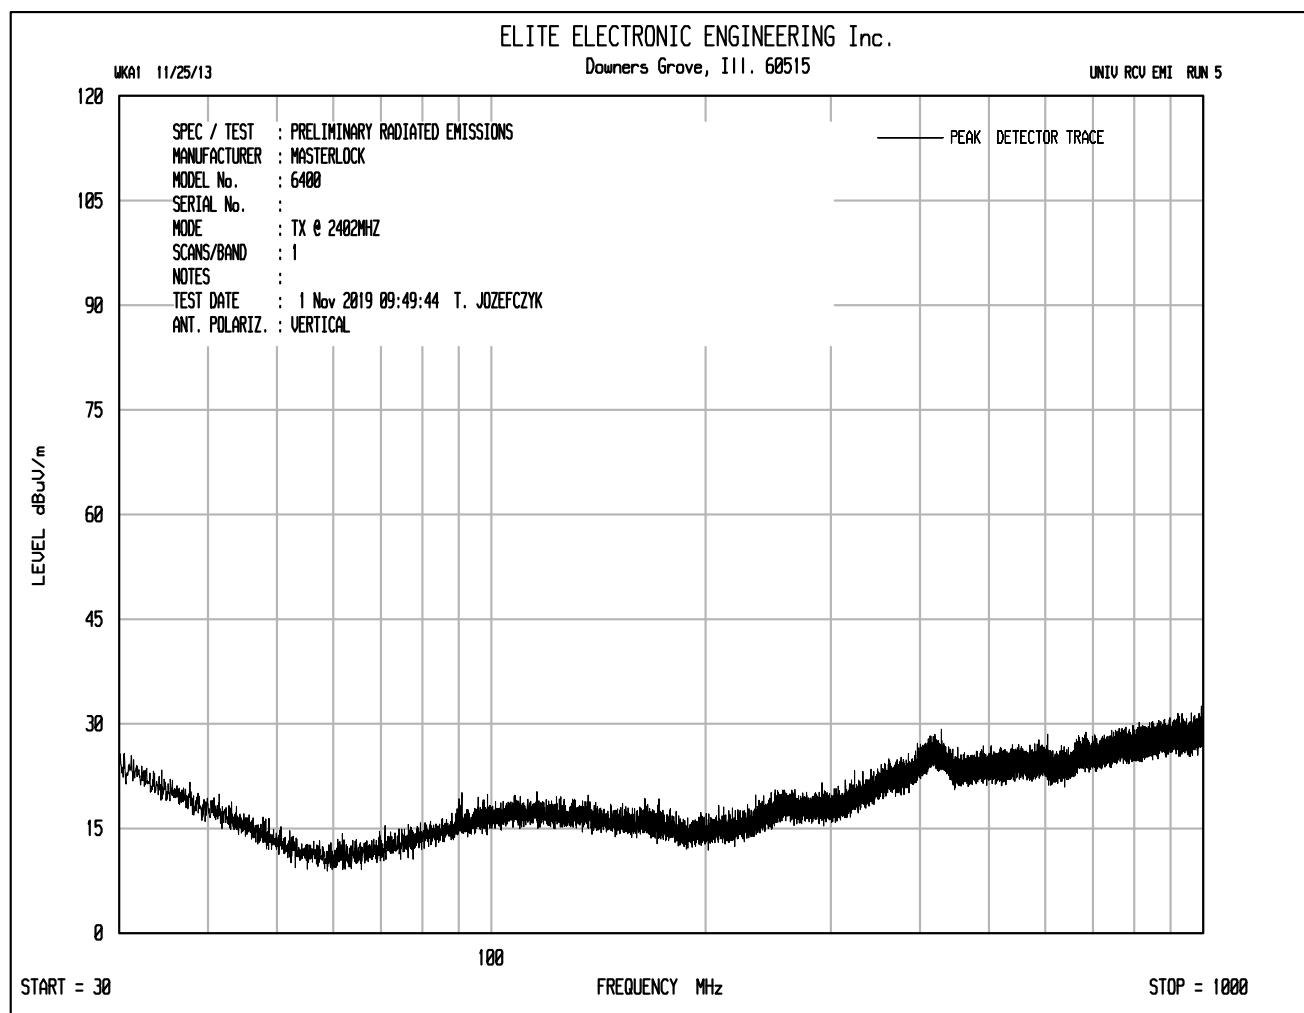


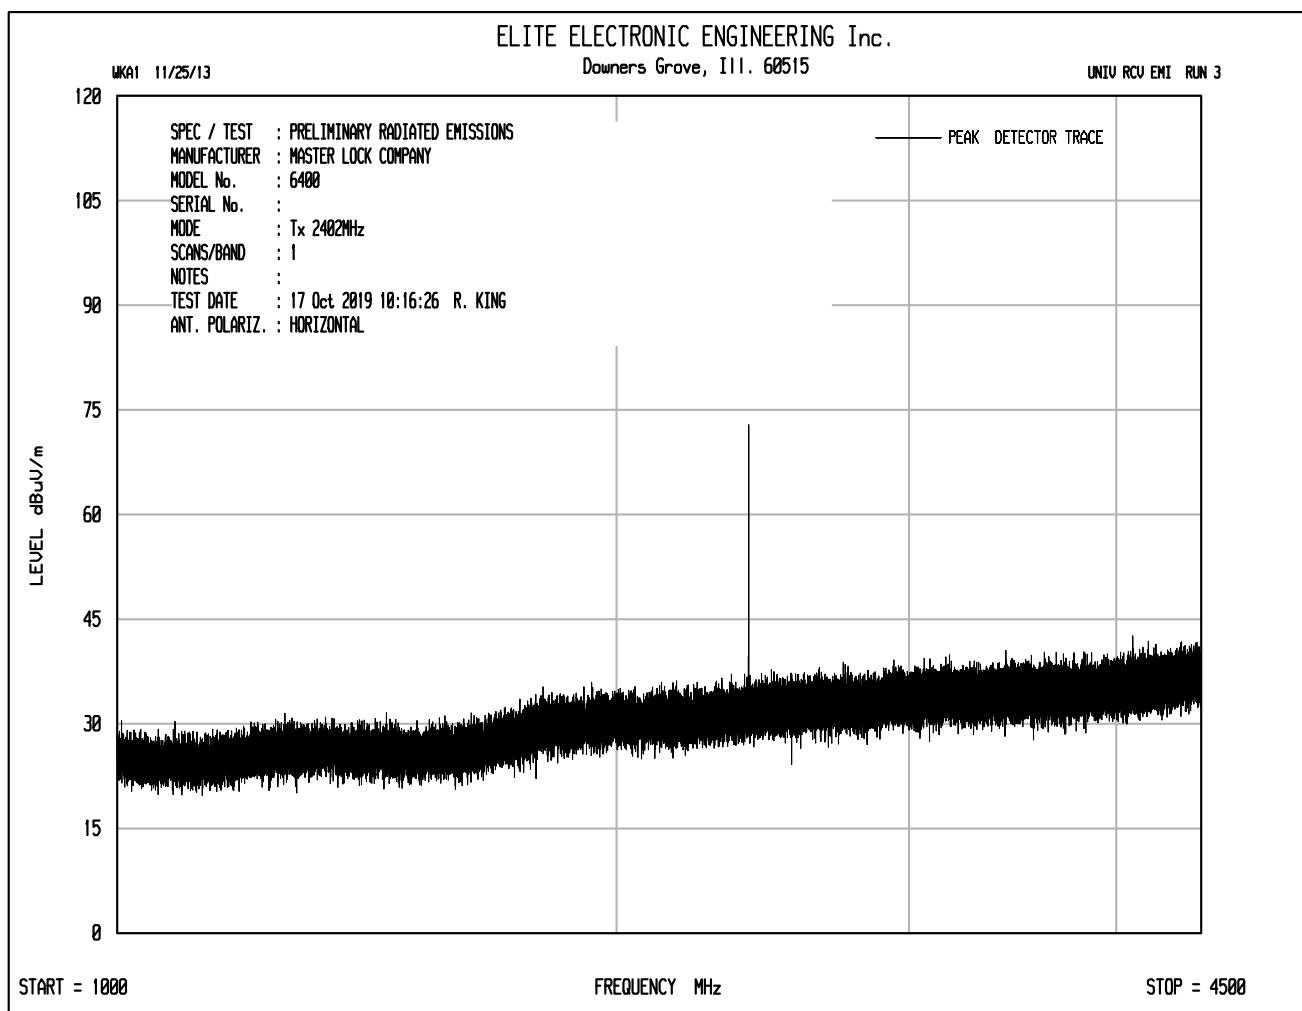


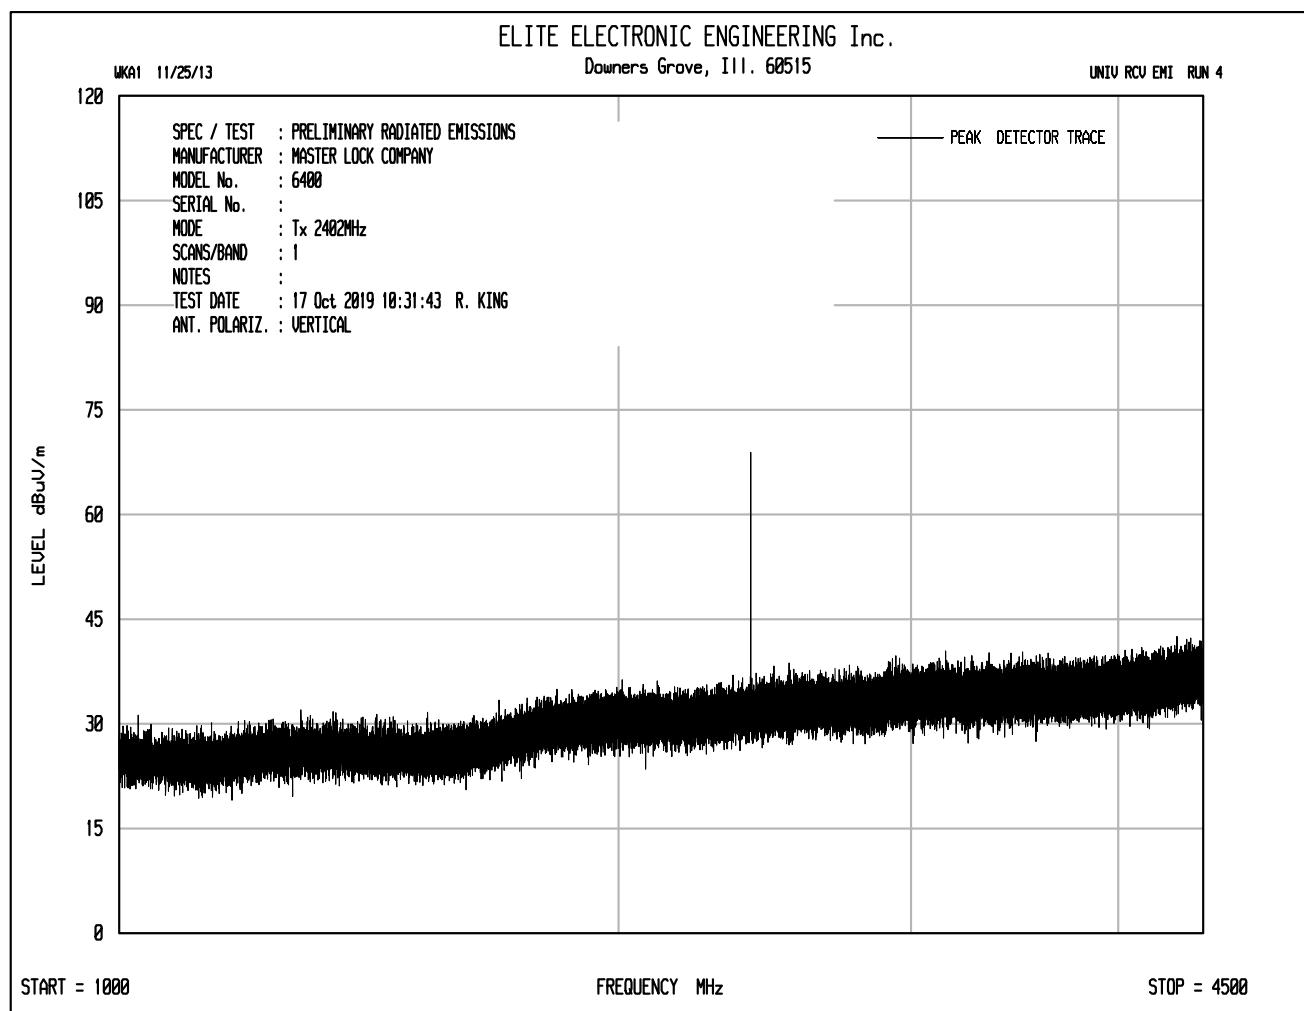


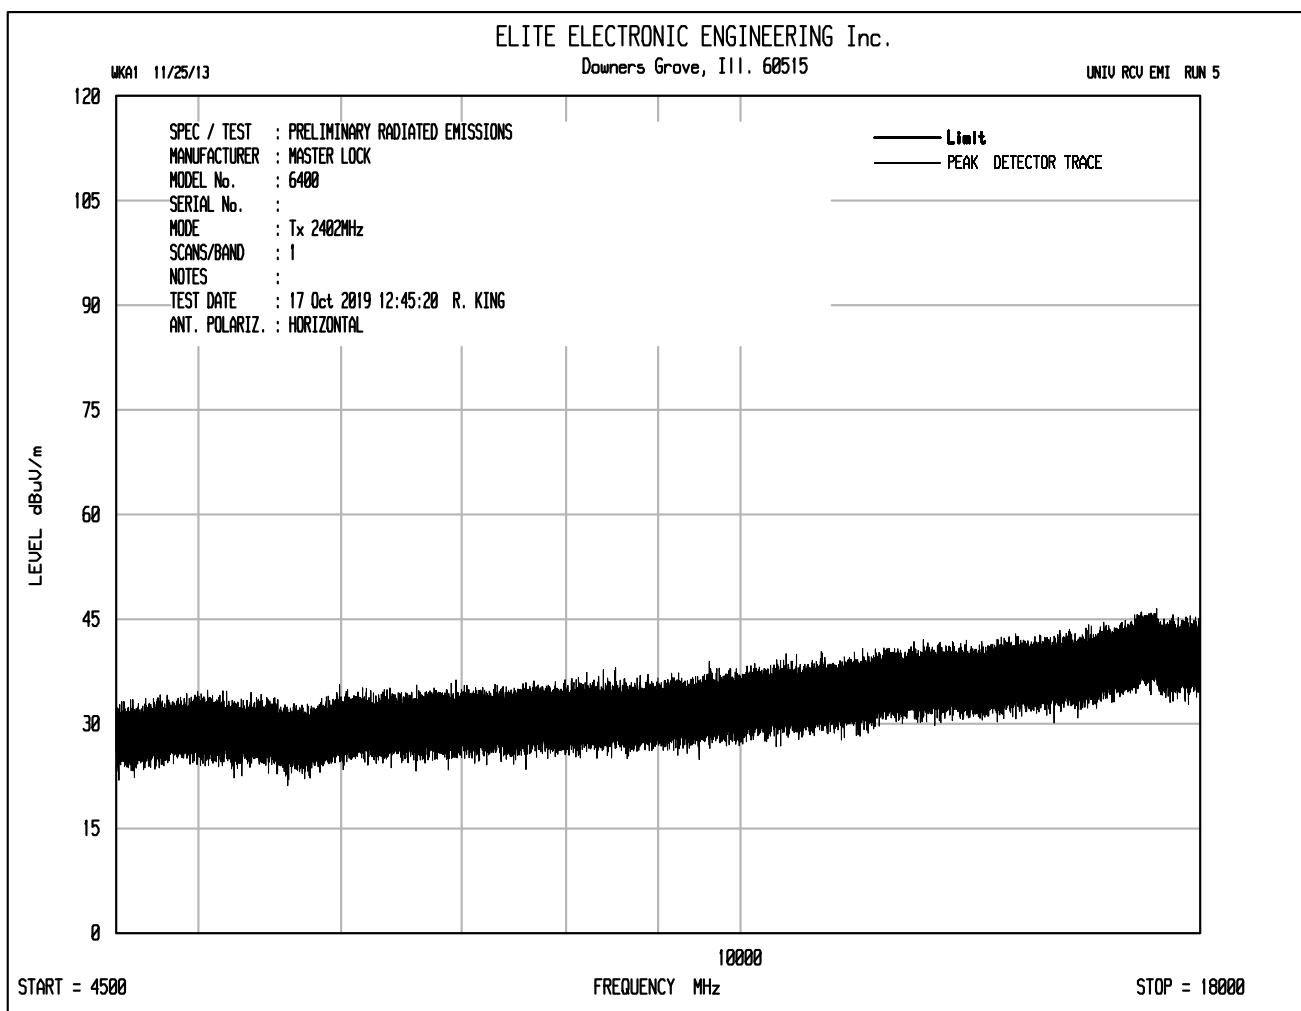


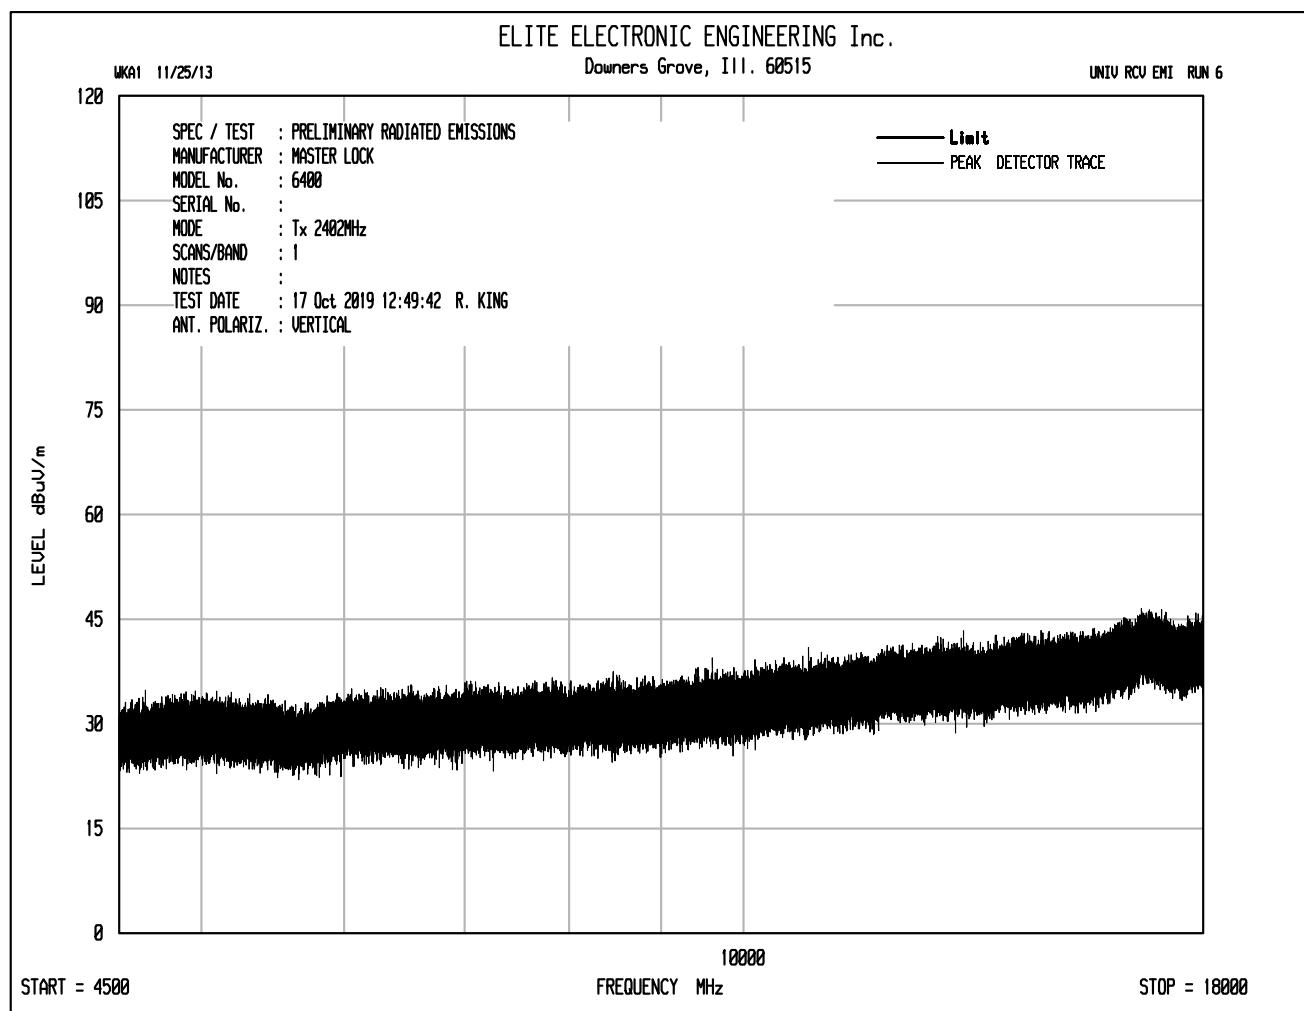


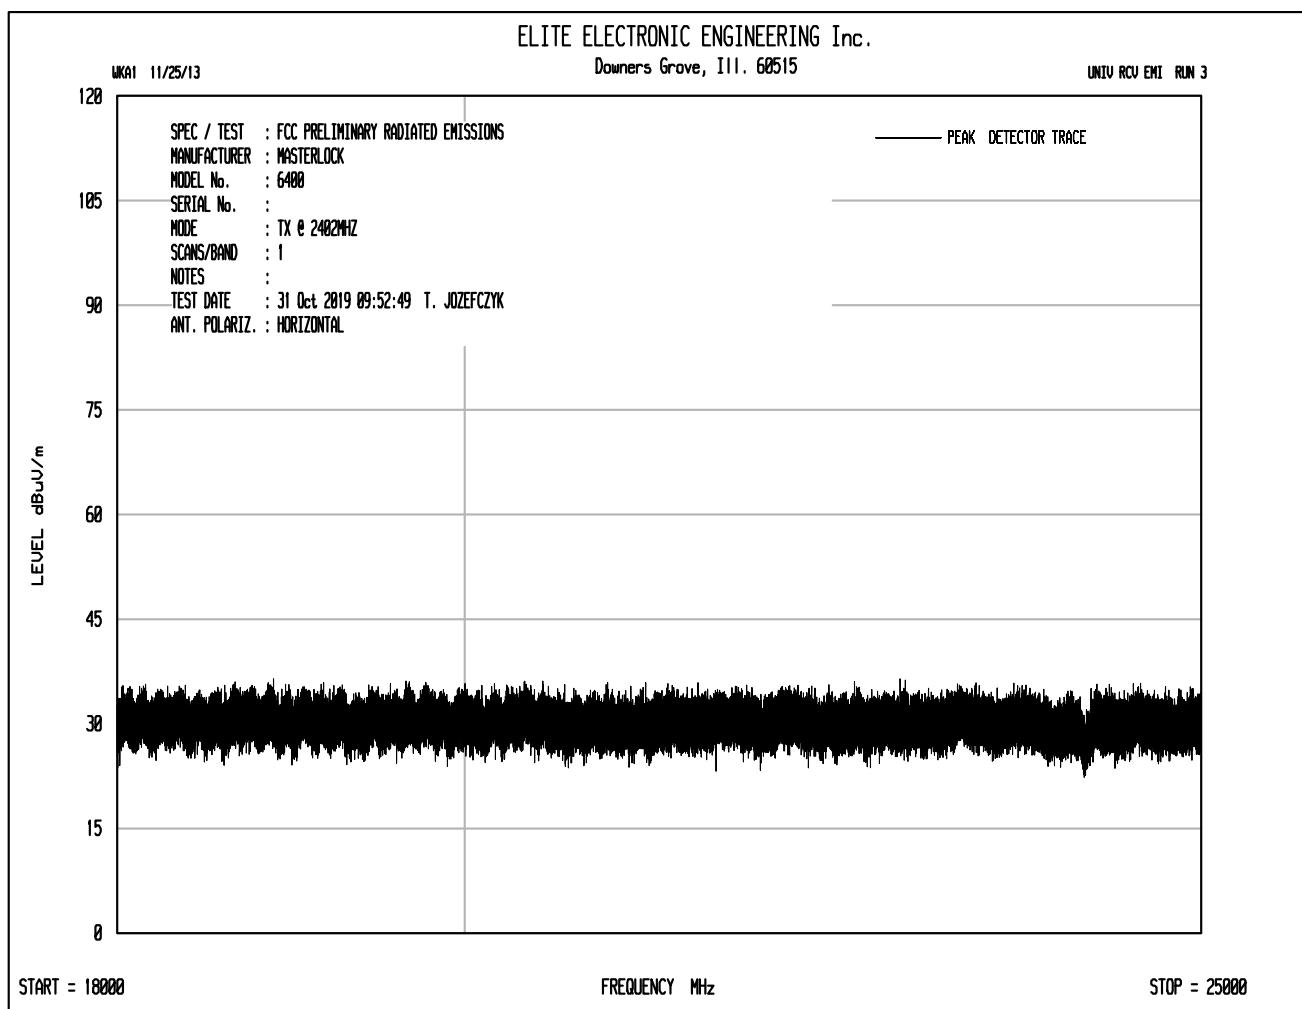


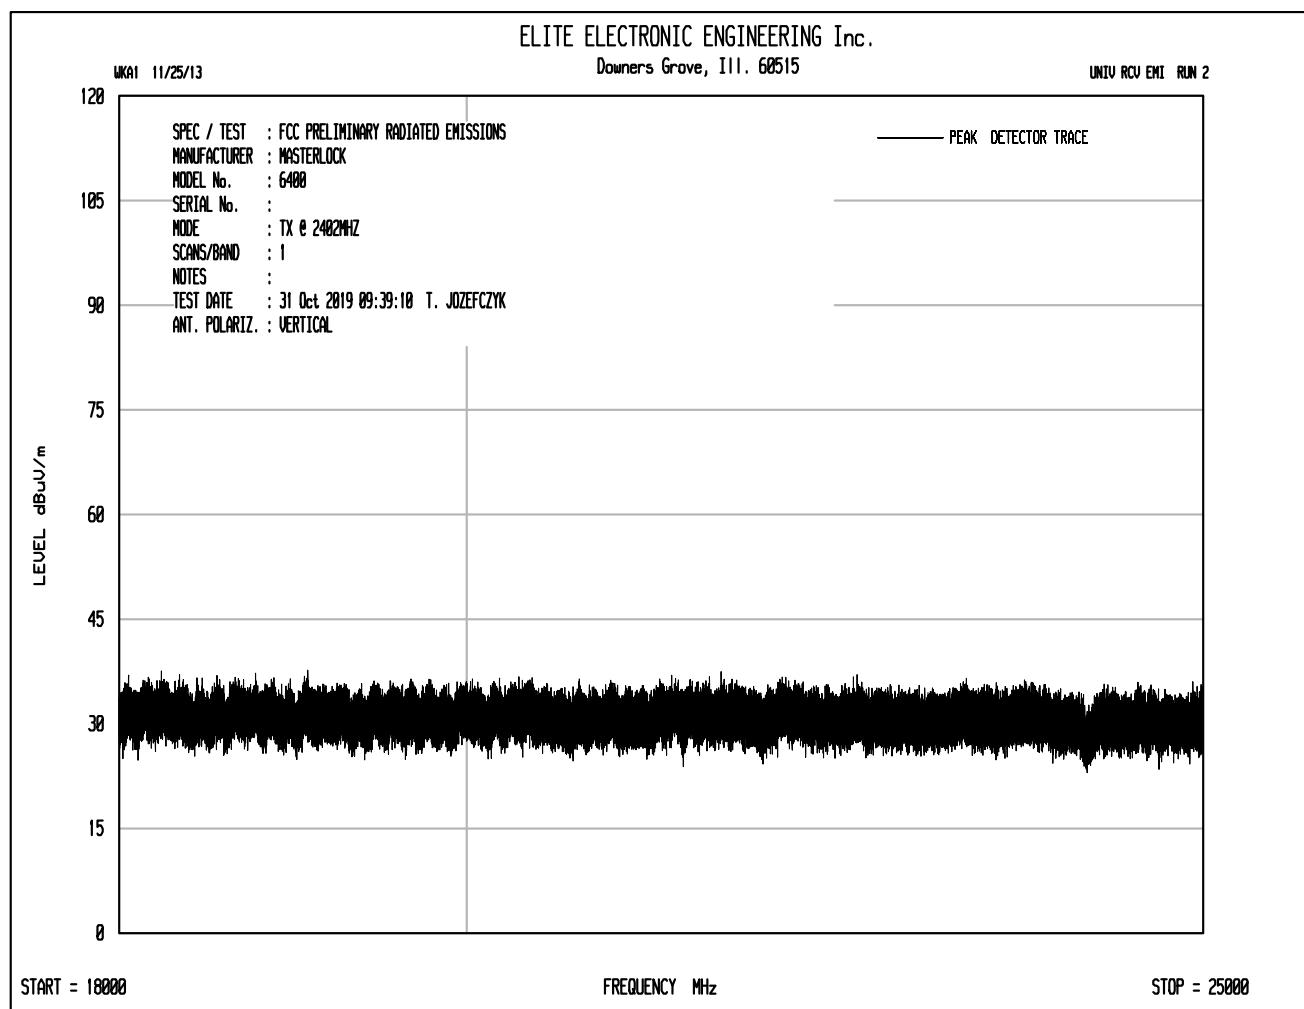


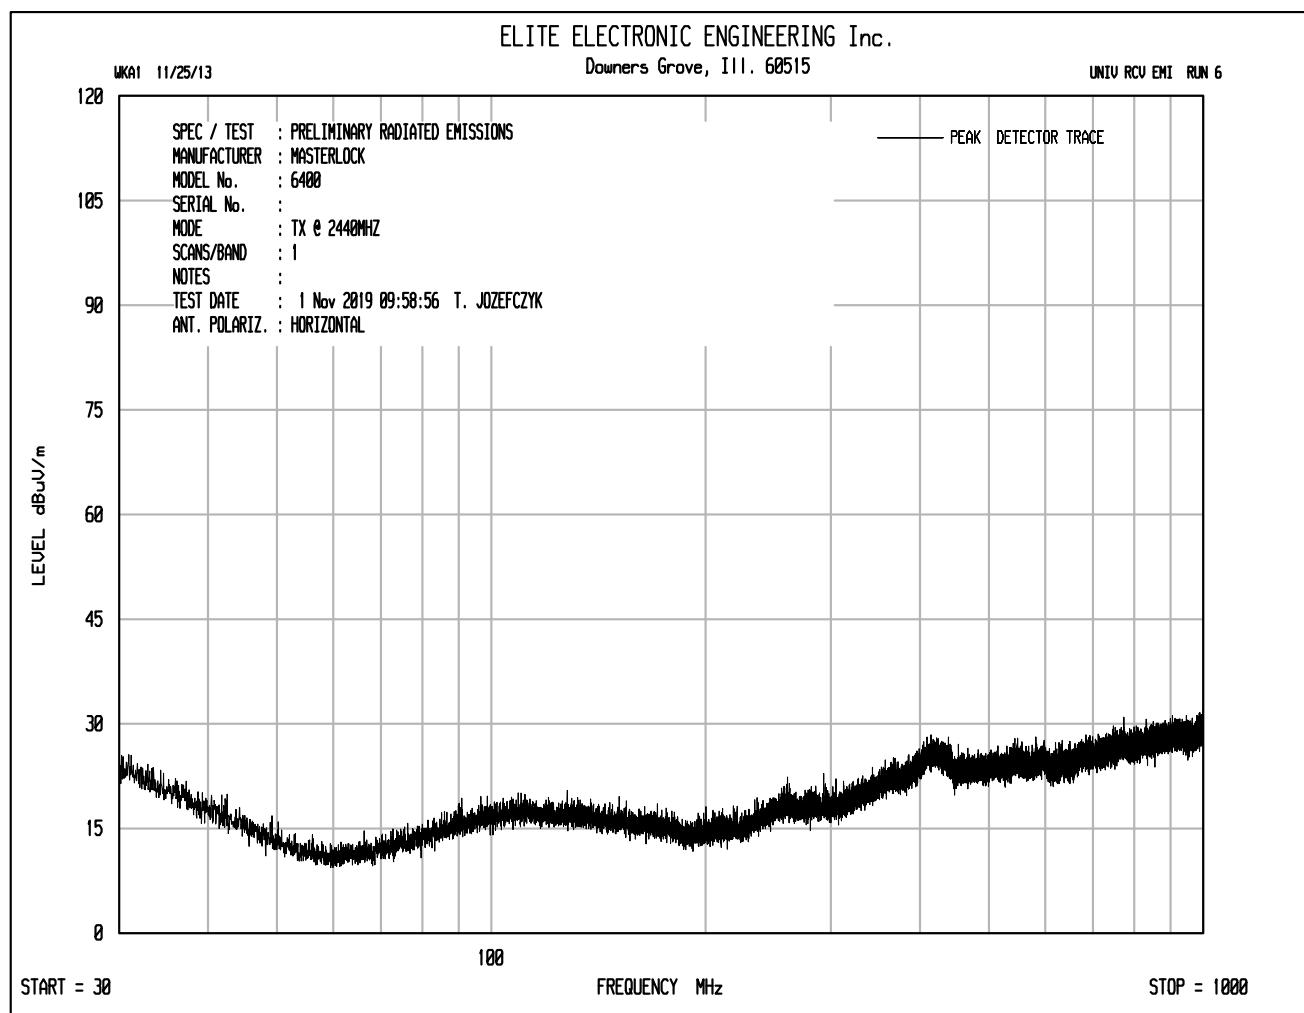


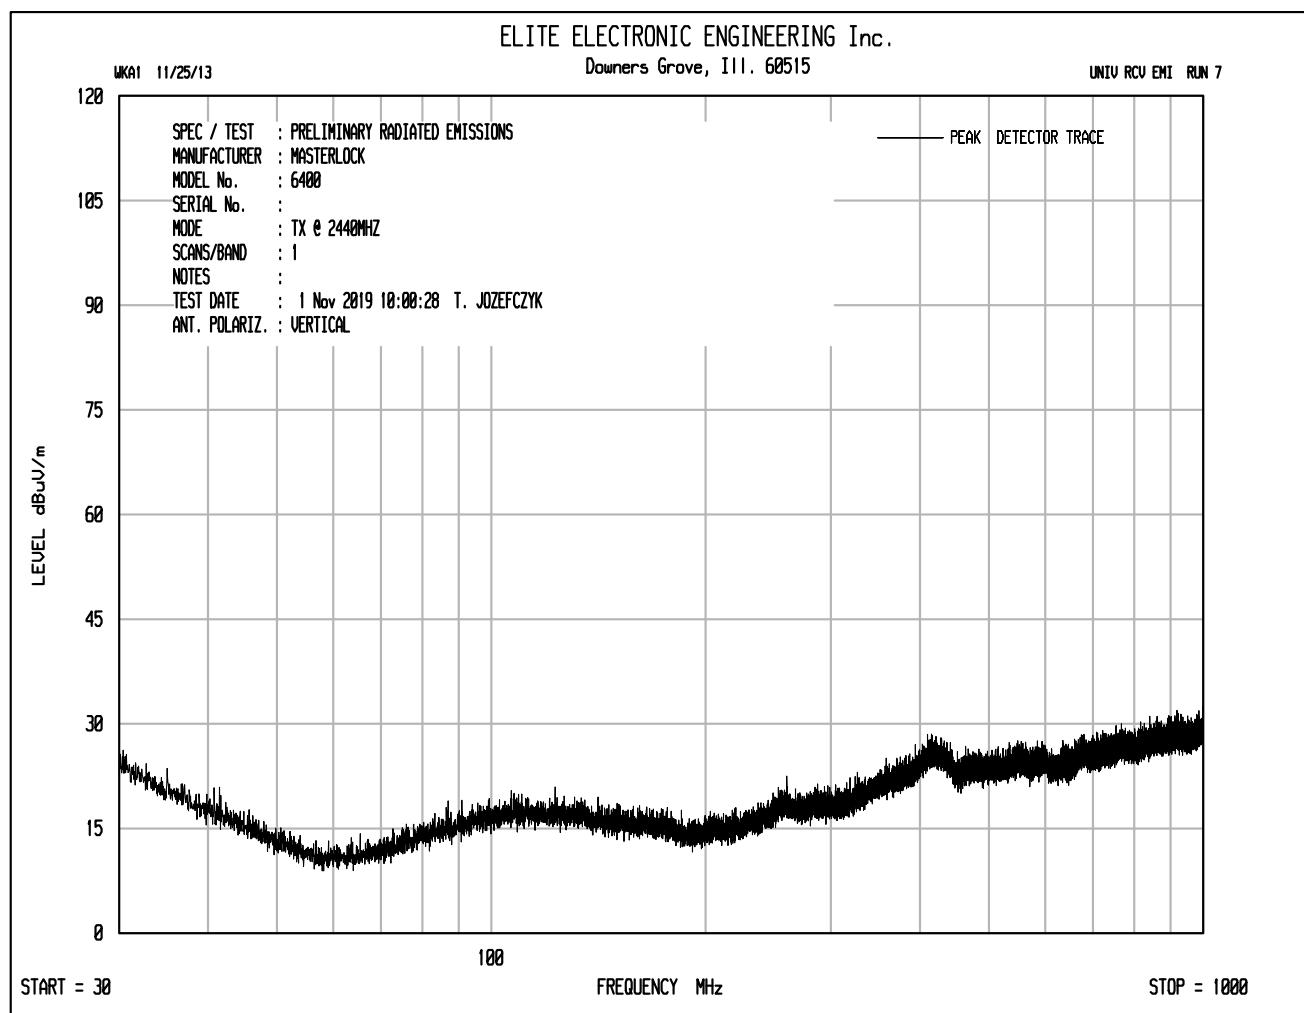


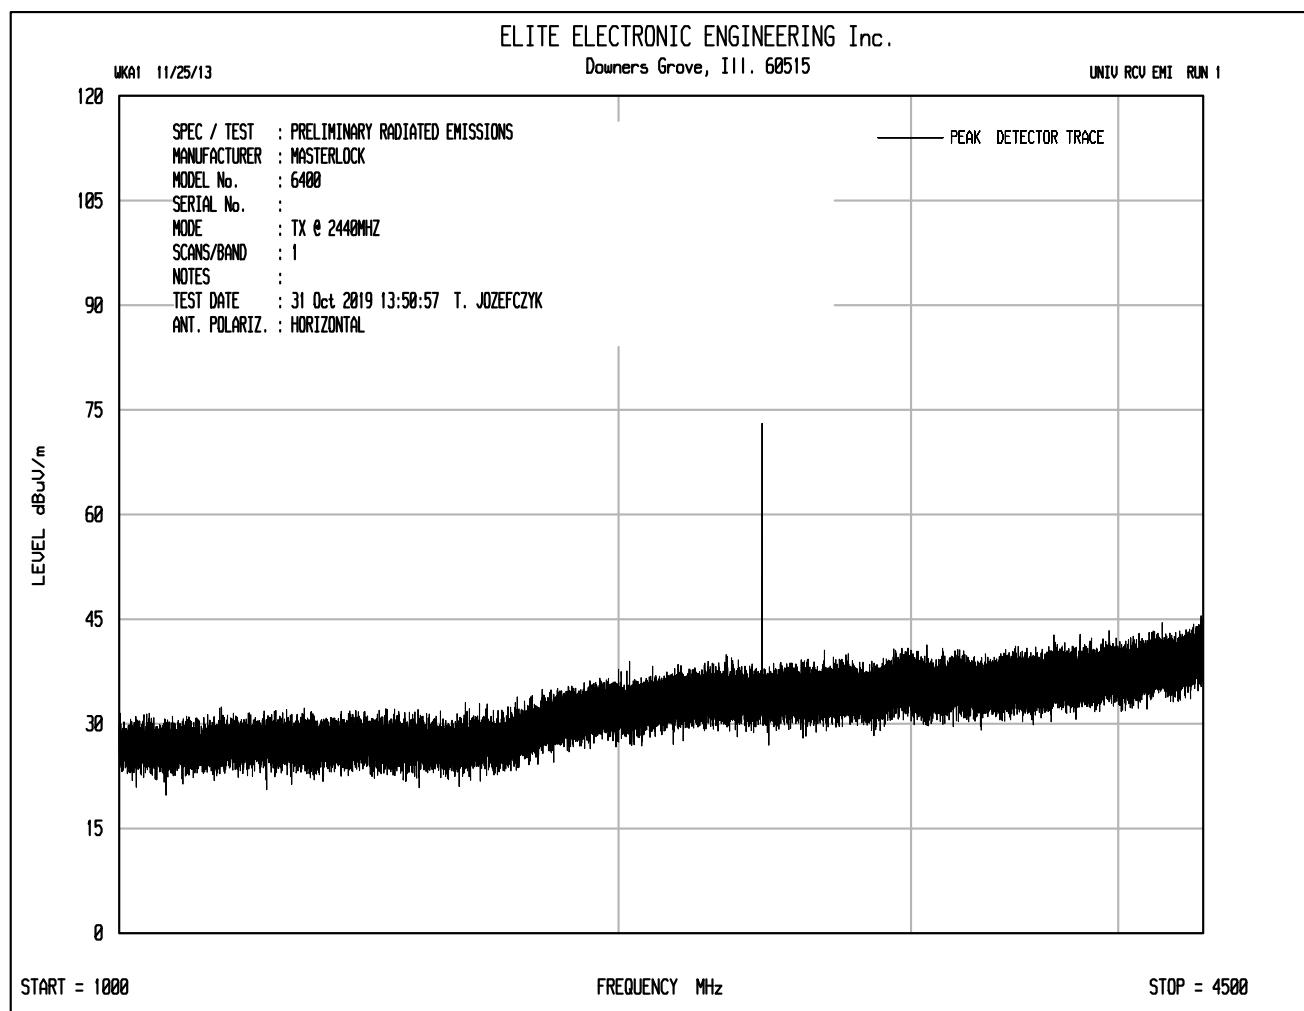


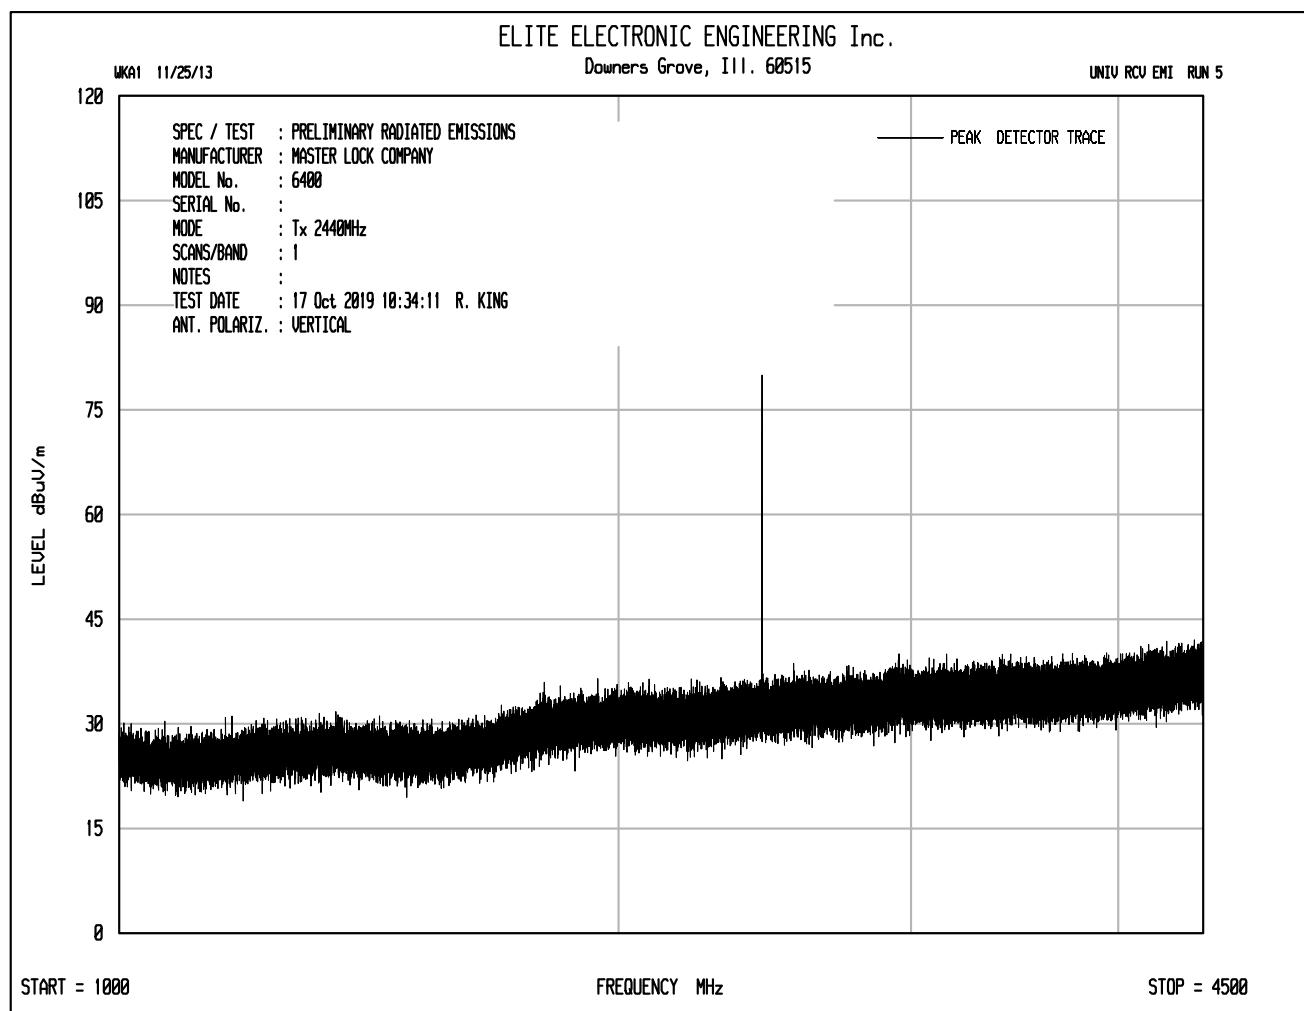


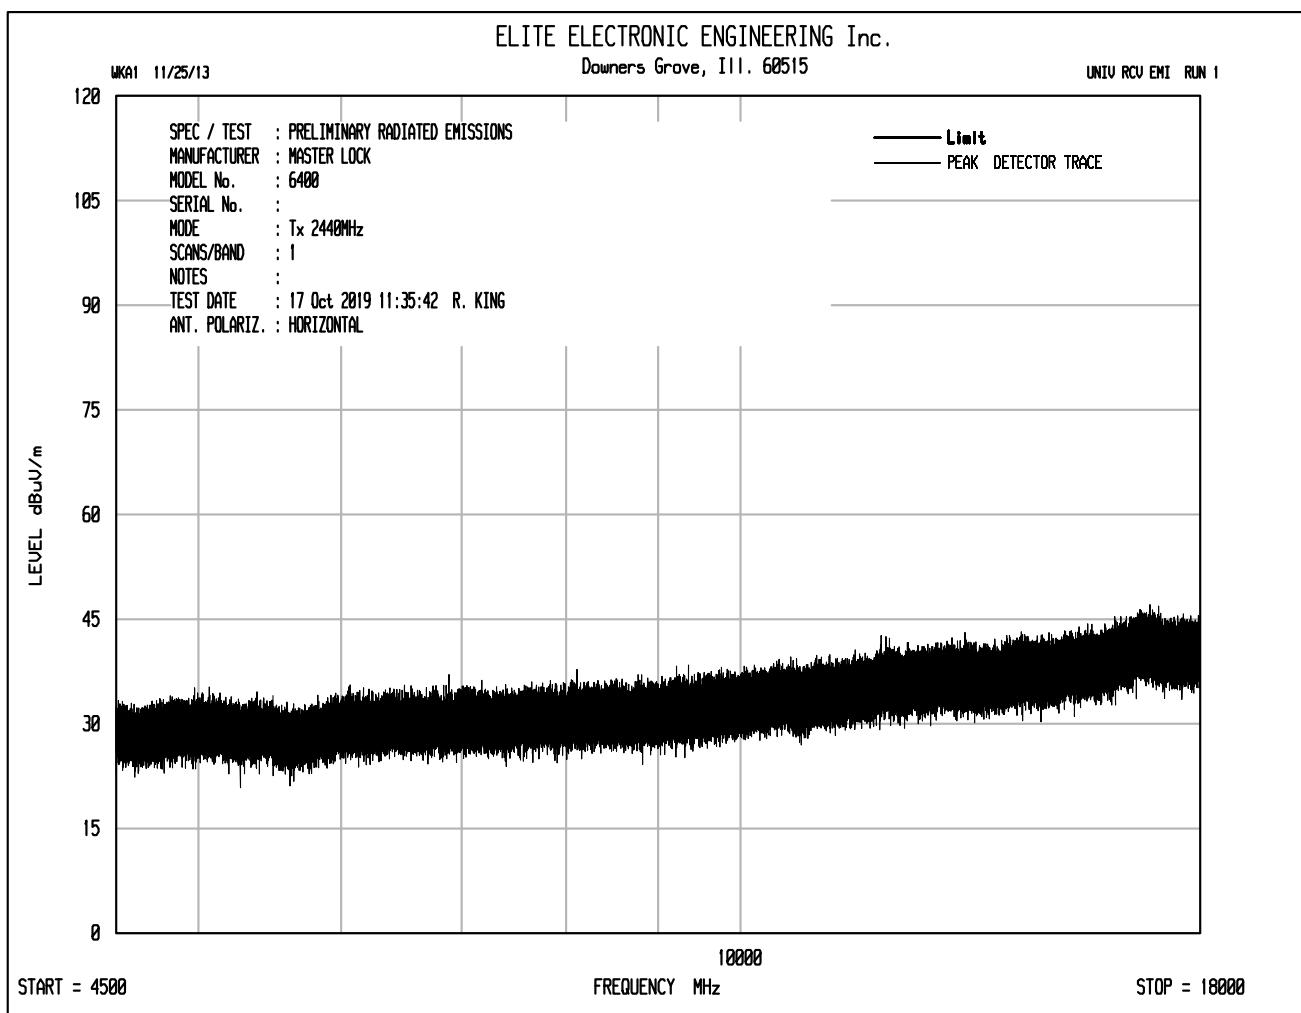


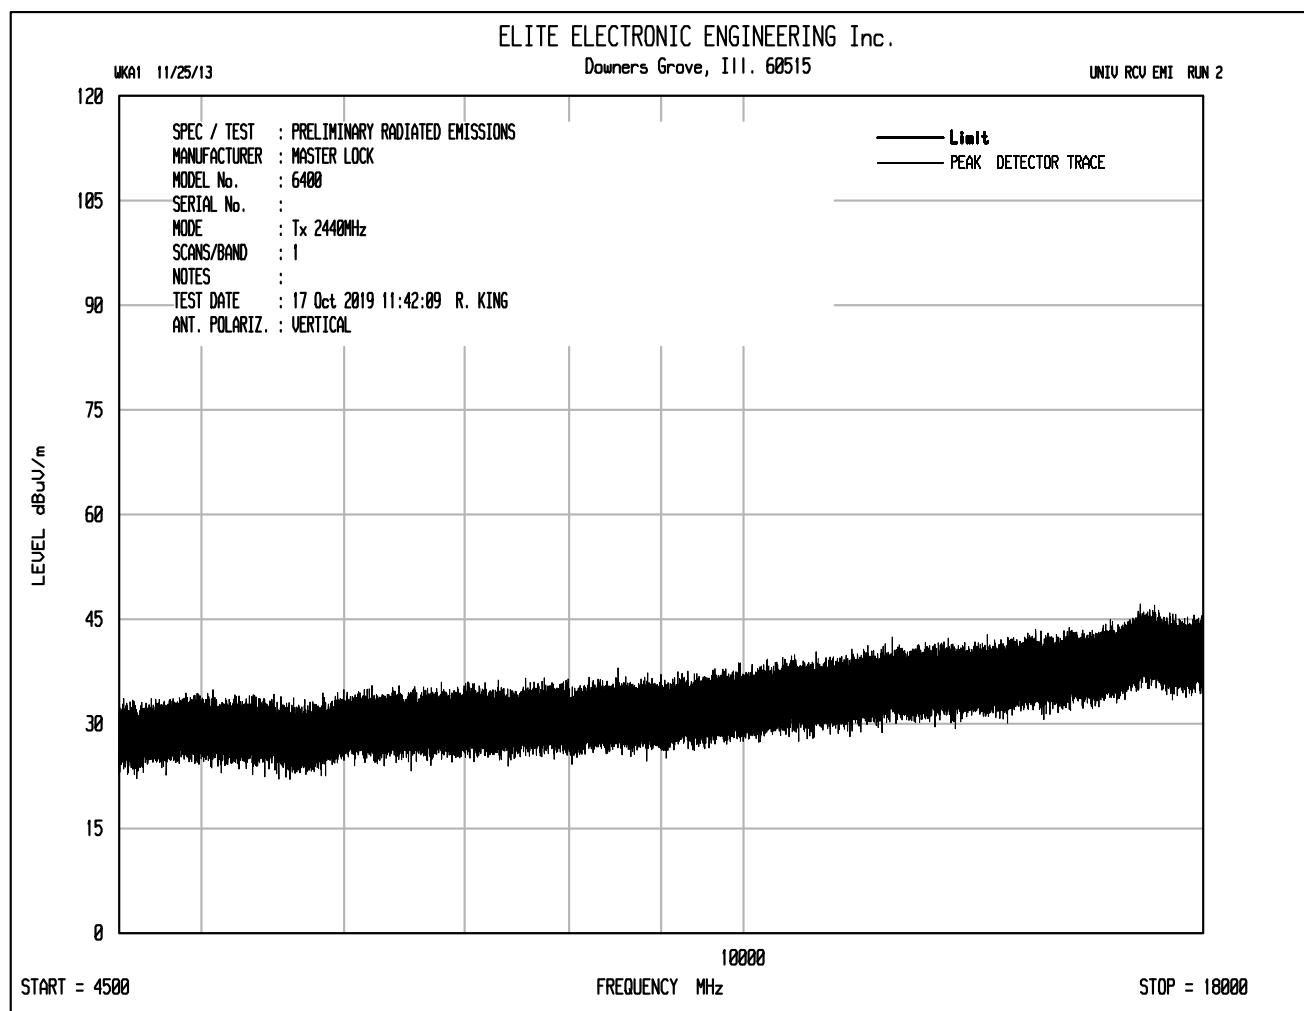


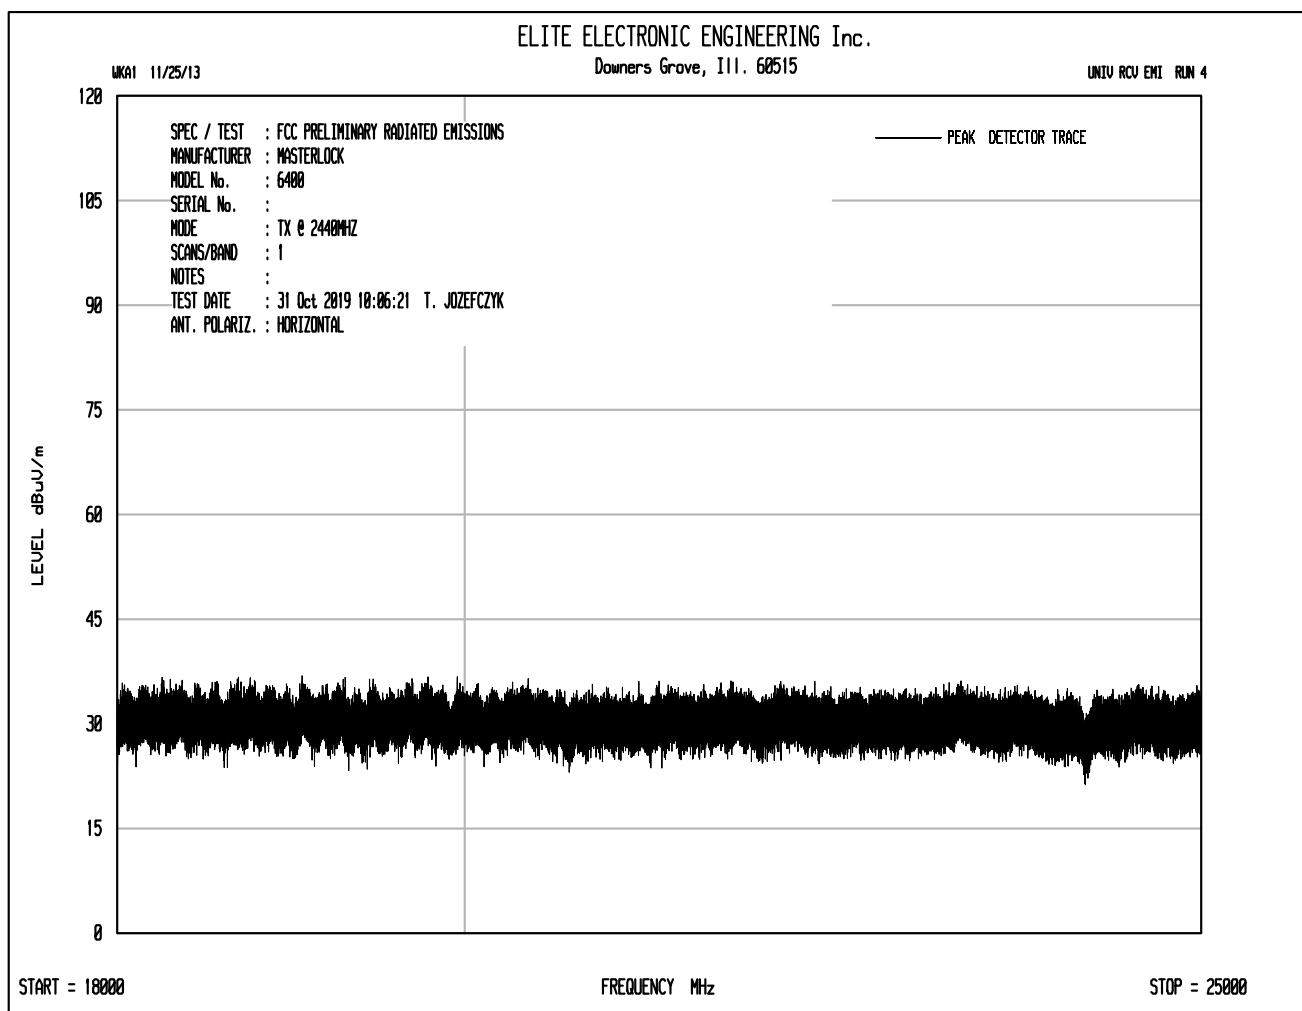


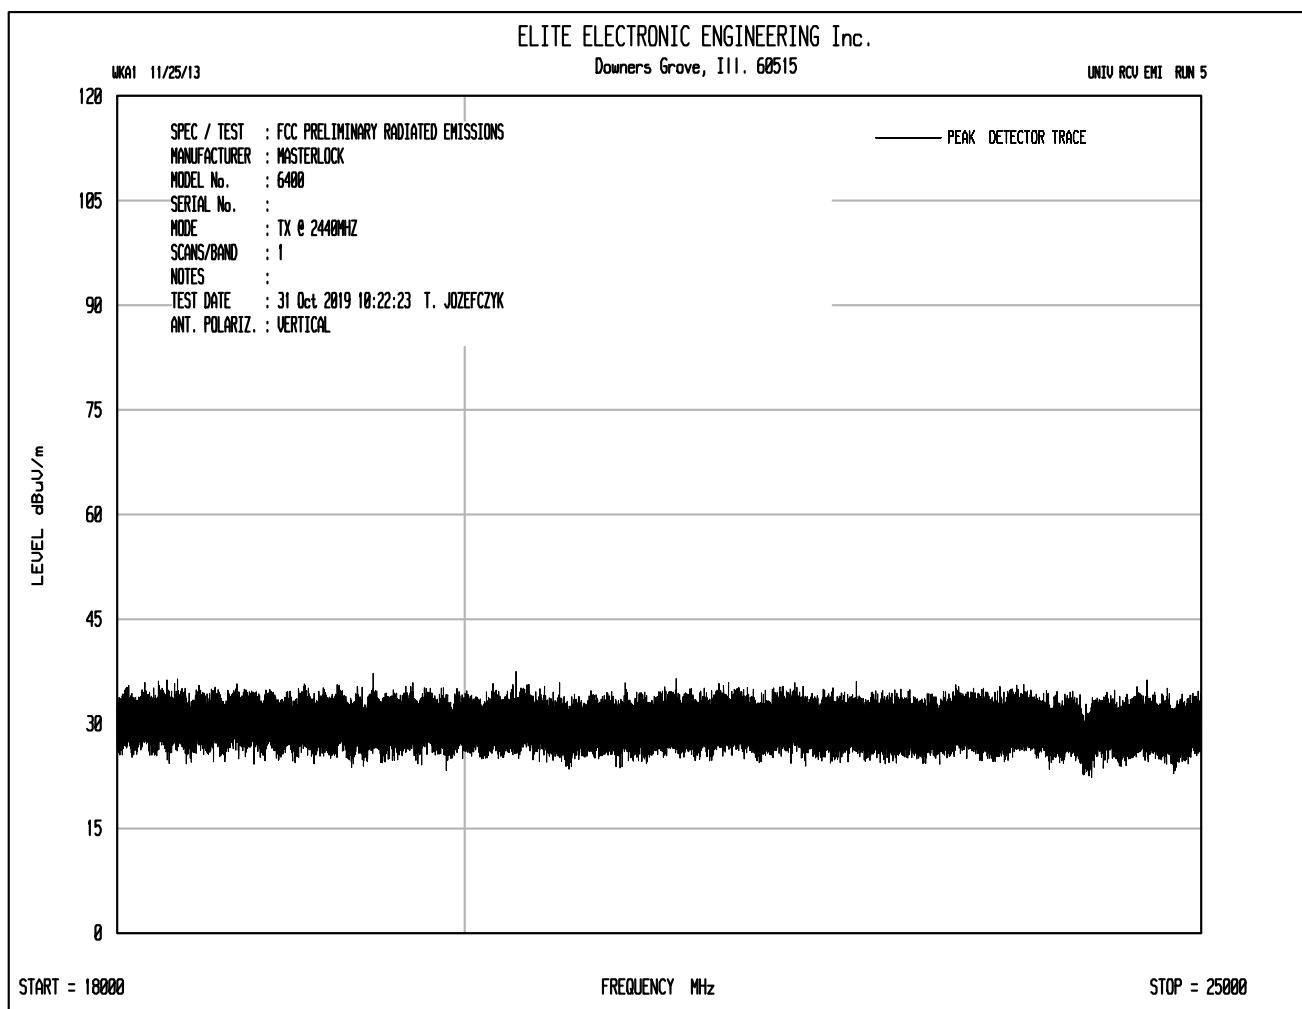


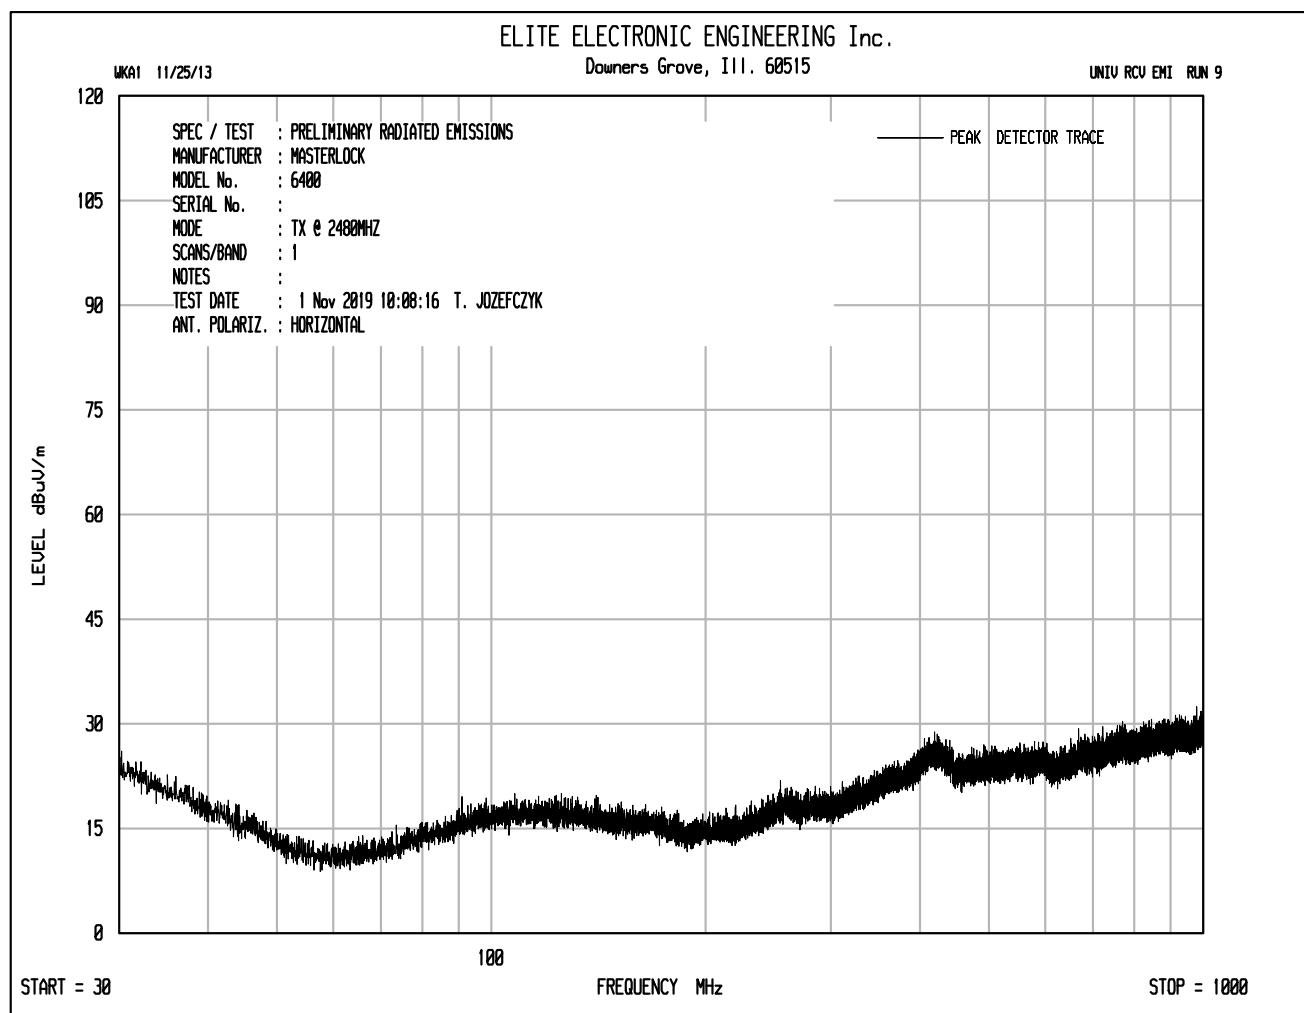


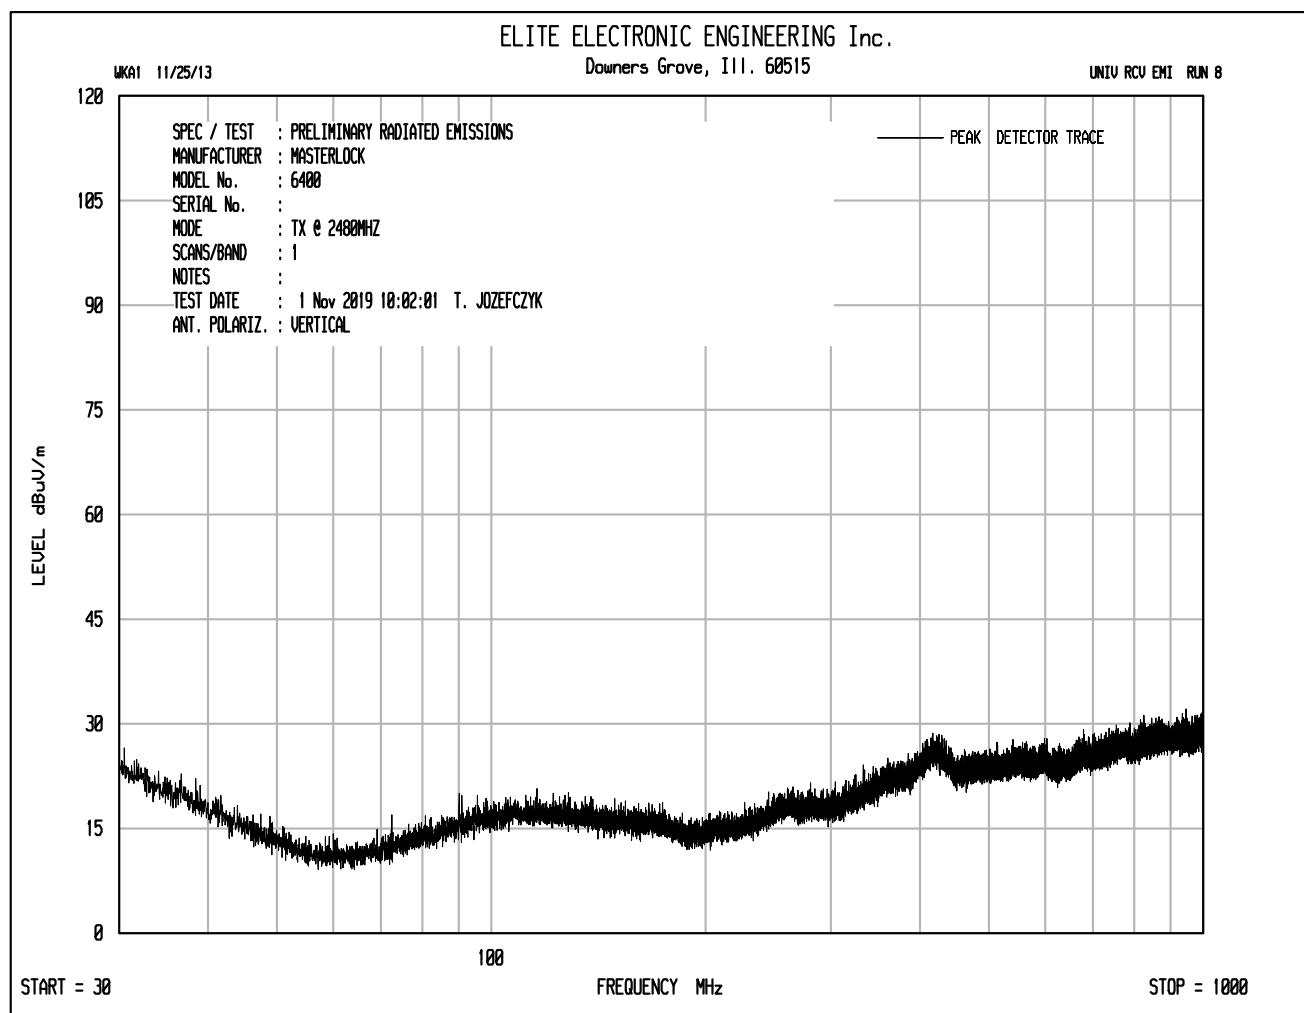


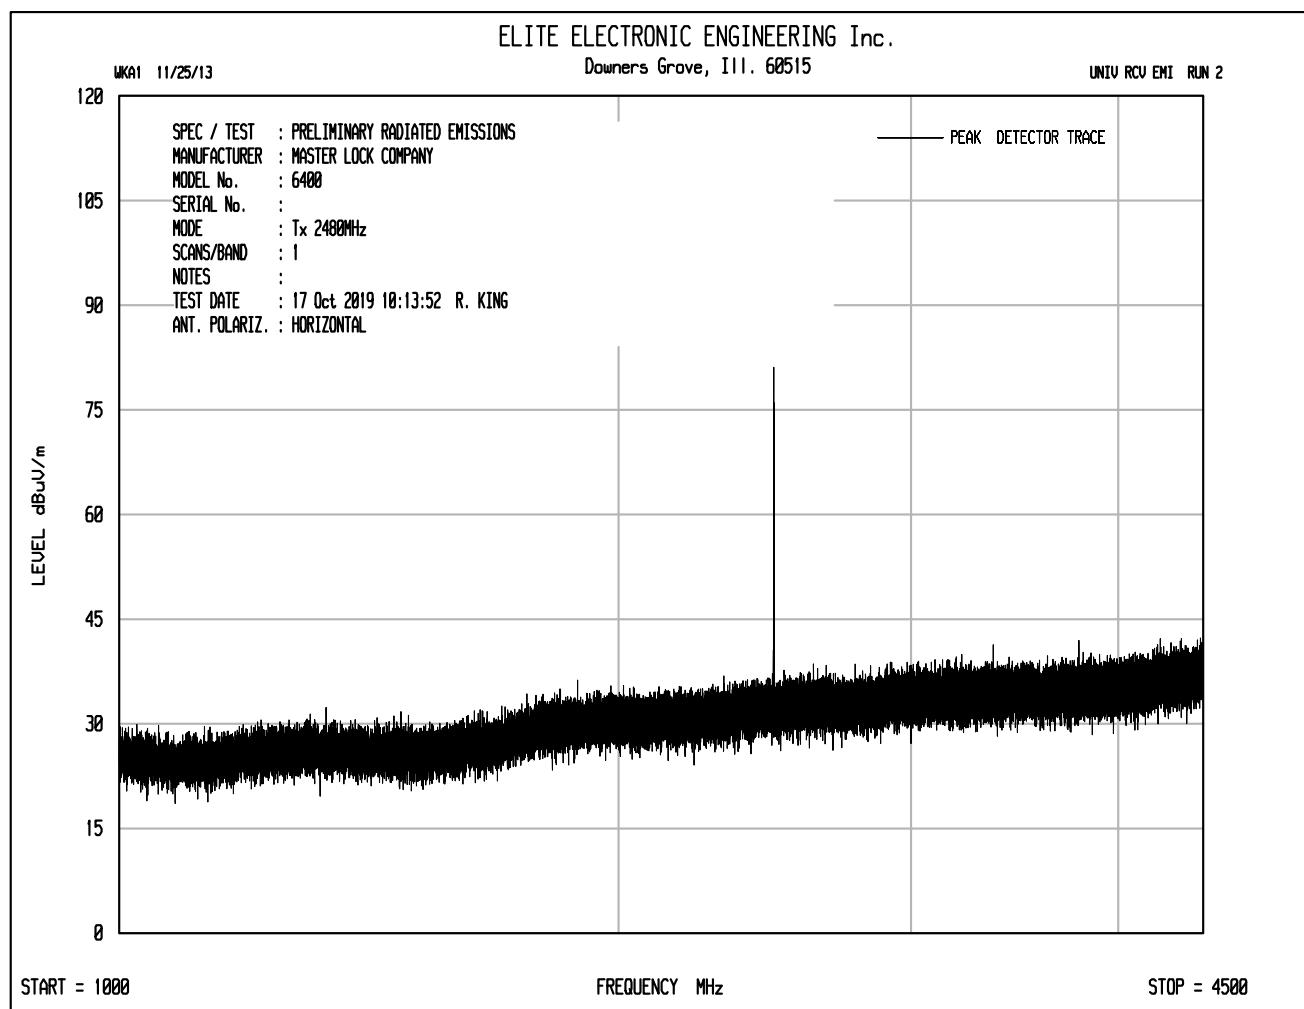


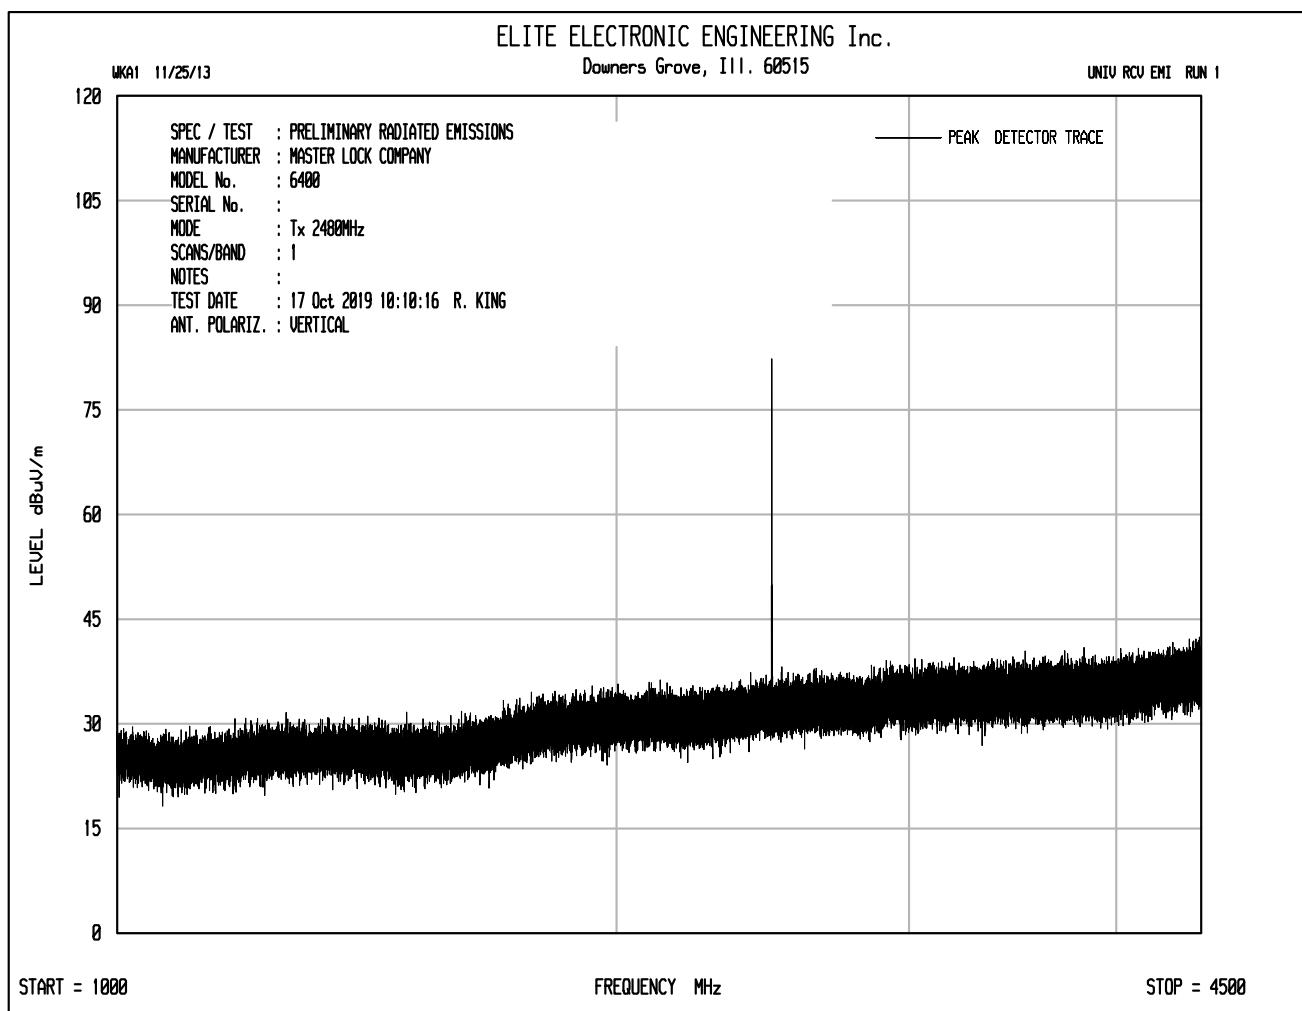

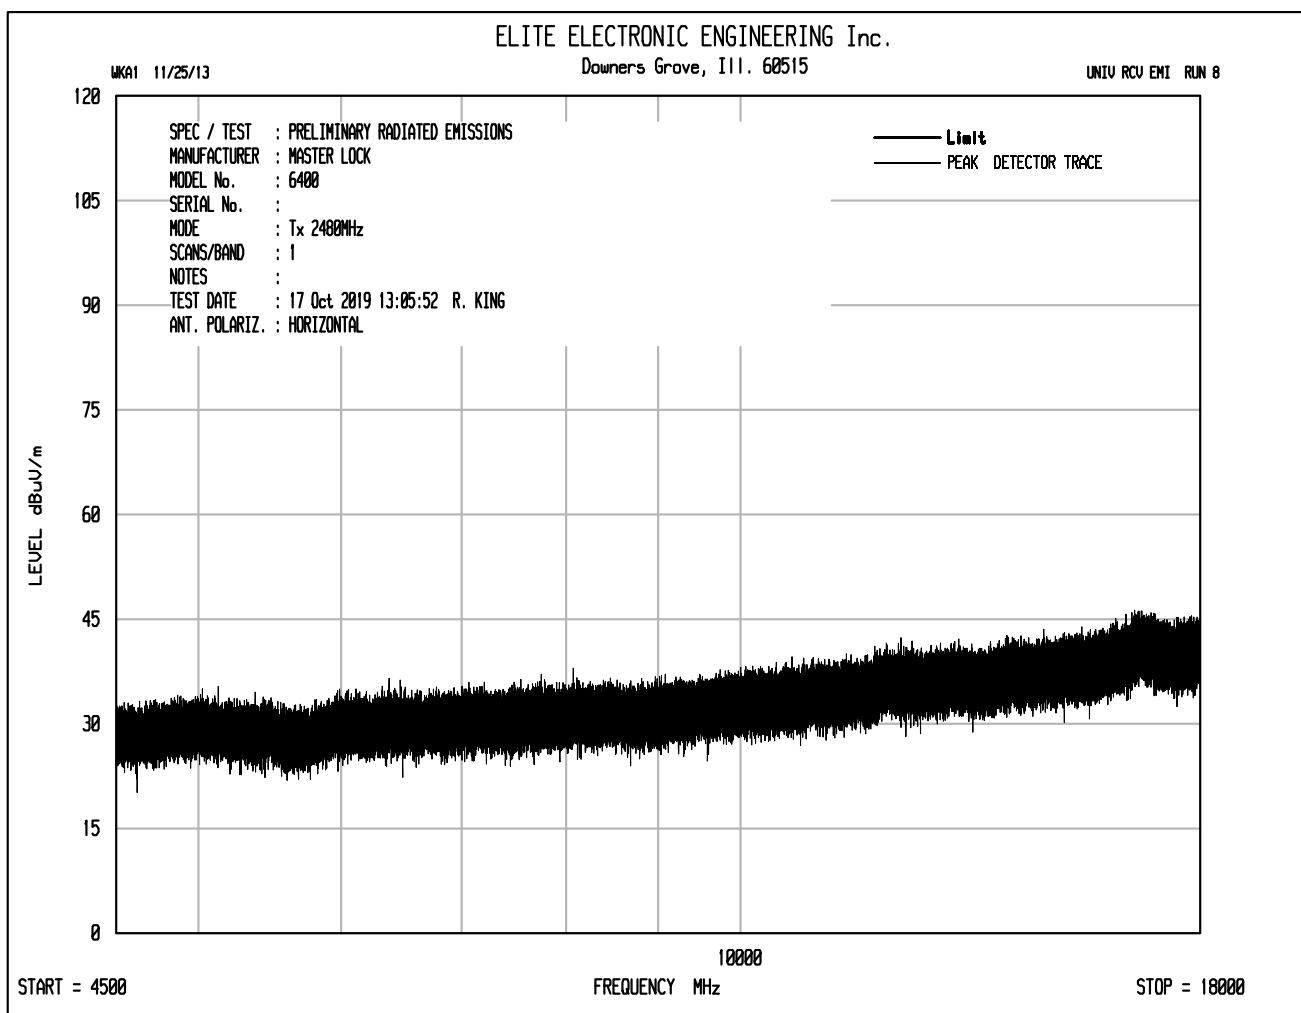

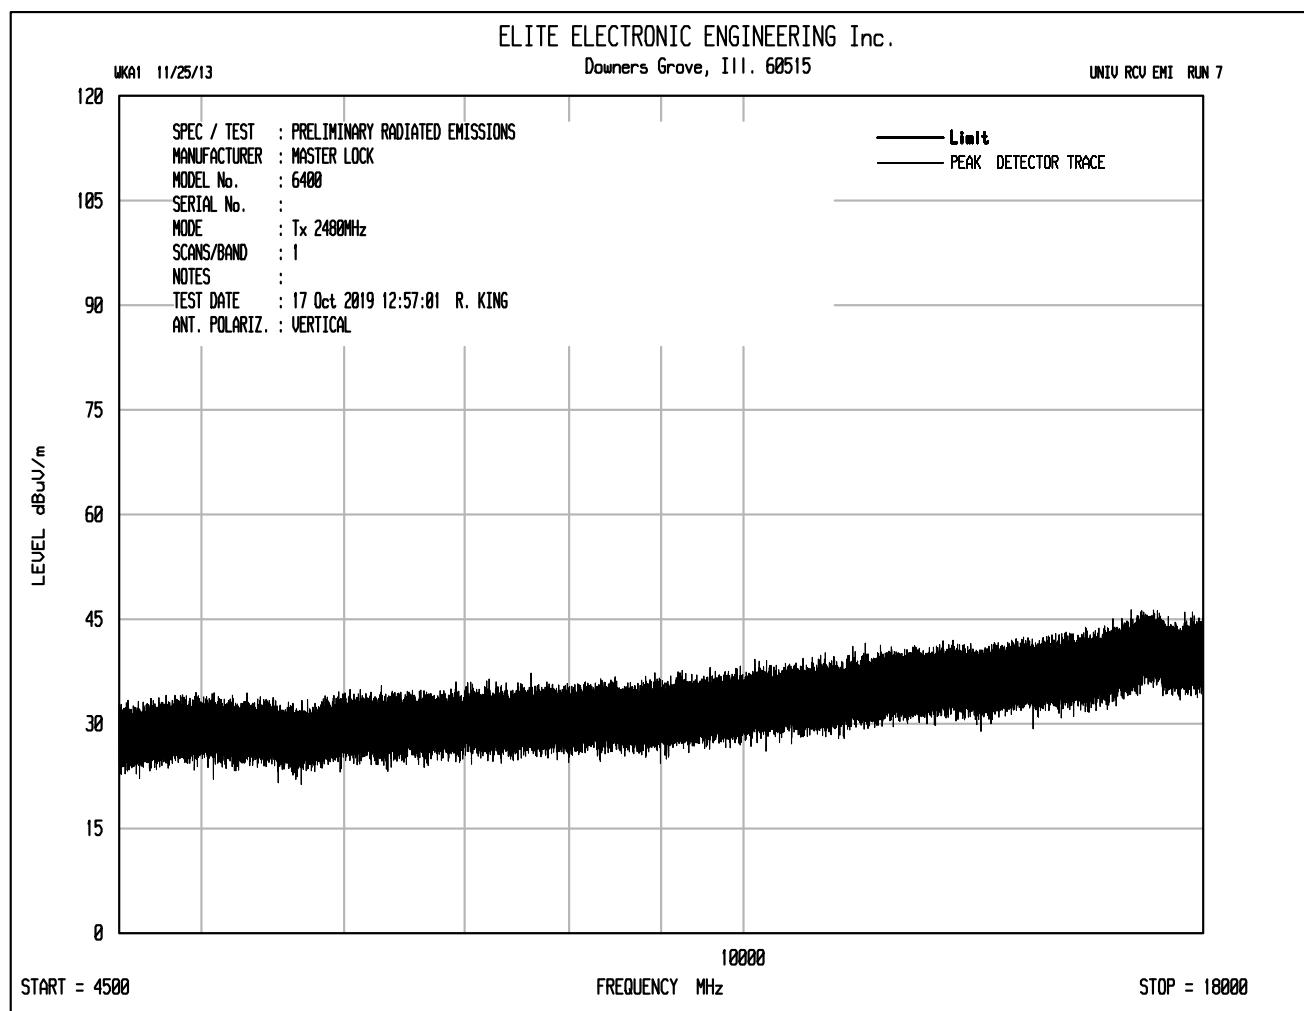

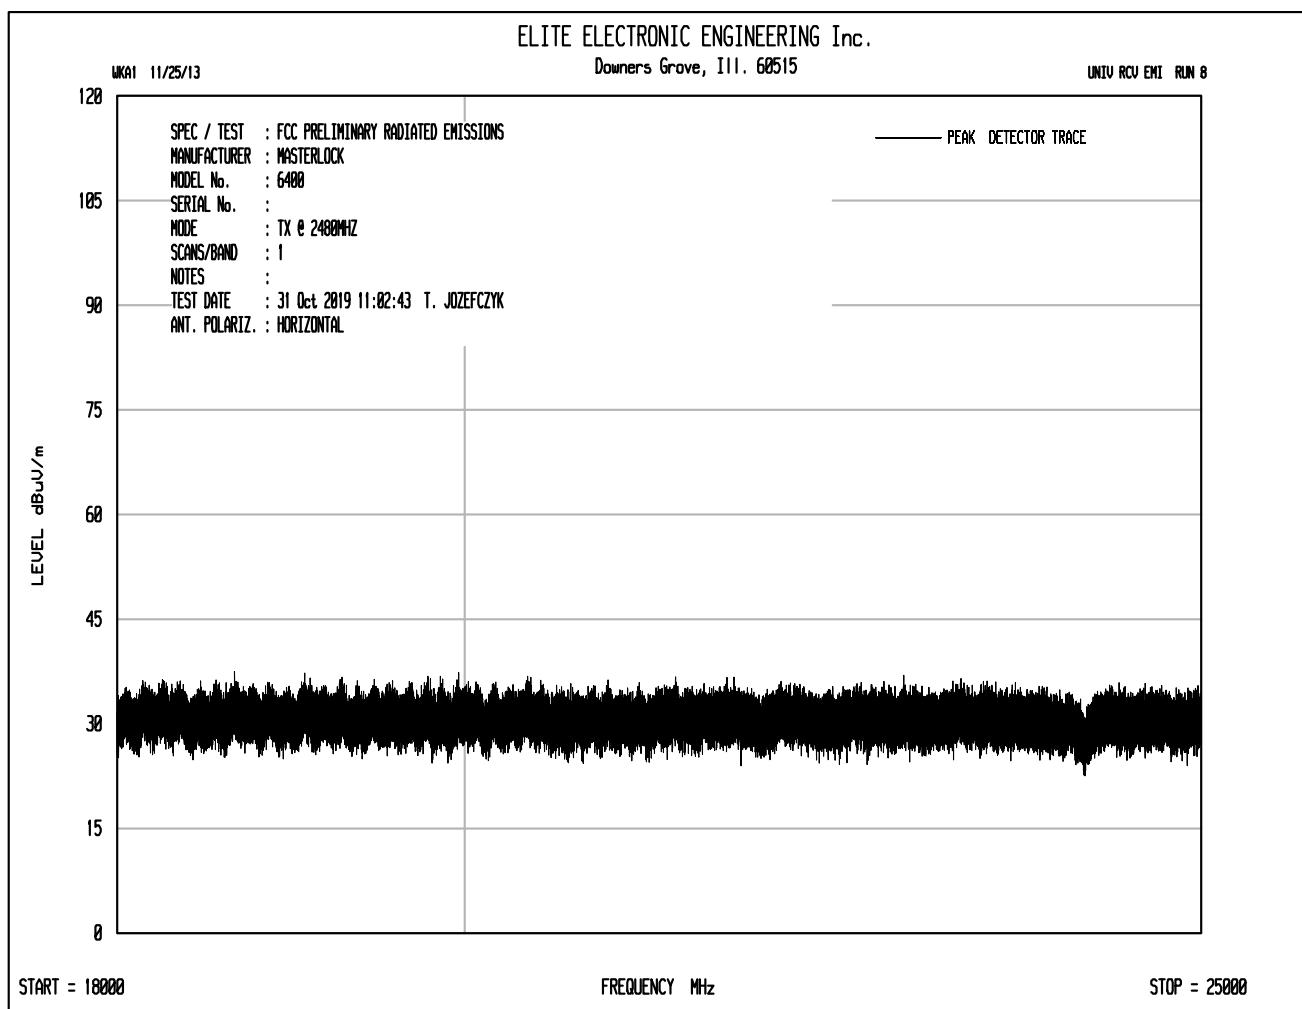

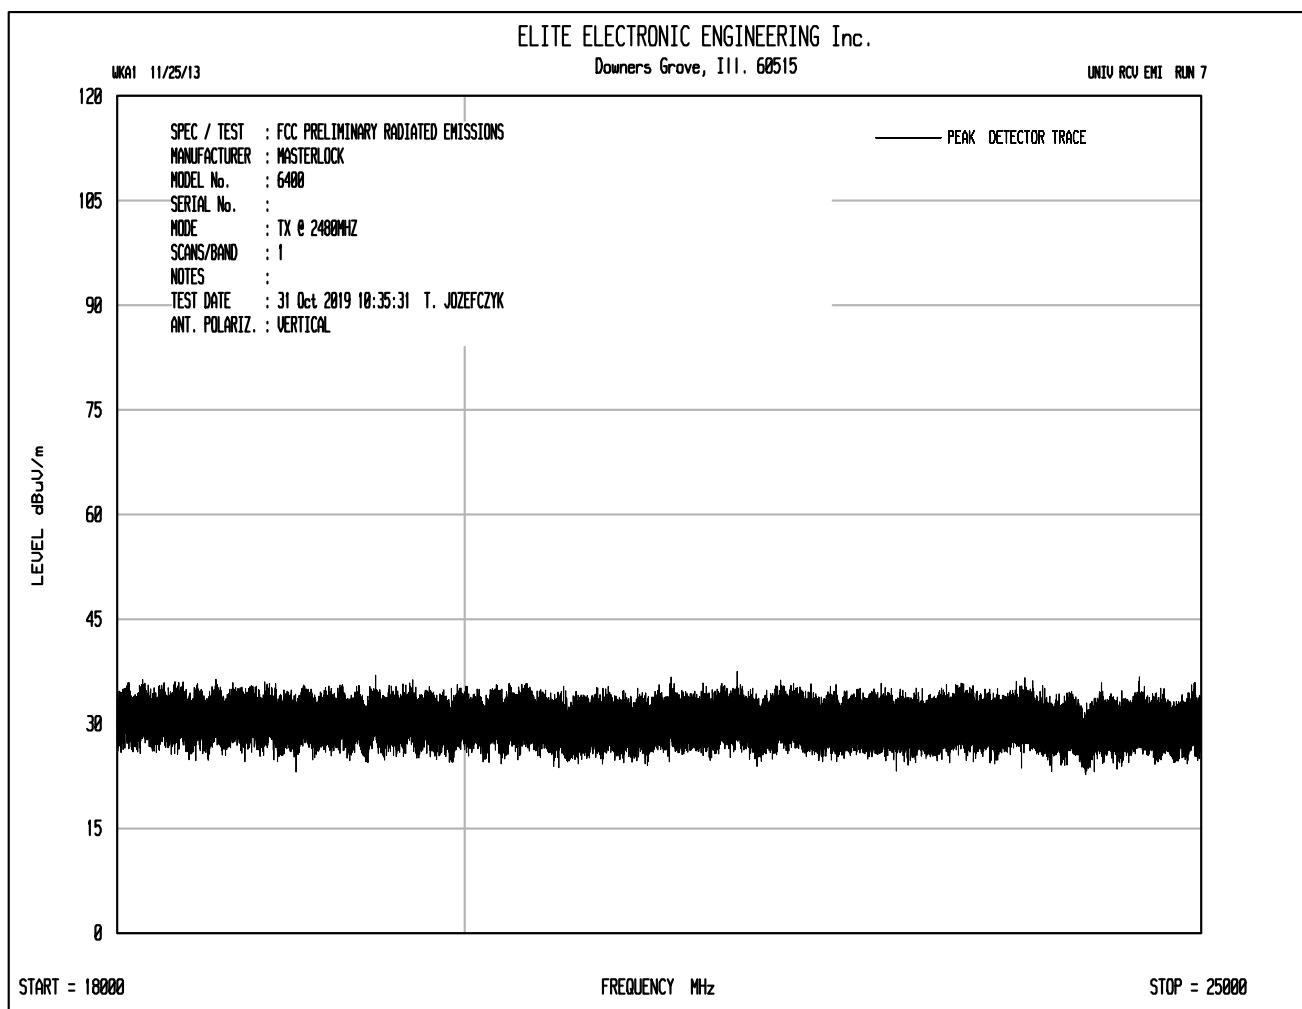

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6400
 Mode : Transmit at 2402MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Peak Total dBuV/m at 3m | Peak Total uV/m at 3 m | Peak Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|----------------------------------|---------------------------------|---------------------------------|----------------|
| 4804.00 | H | 51.28 | | 3.68 | 34.52 | -40.24 | 49.25 | 289.91 | 5000.00 | -24.73 |
| 4804.00 | V | 52.07 | | 3.68 | 34.52 | -40.24 | 50.04 | 317.51 | 5000.00 | -23.94 |
| 12010.00 | H | 50.00 | * | 6.08 | 38.53 | -39.88 | 54.72 | 544.77 | 5000.00 | -19.26 |
| 12010.00 | V | 49.84 | * | 6.08 | 38.53 | -39.88 | 54.56 | 534.83 | 5000.00 | -19.42 |
| 19216.00 | H | 33.85 | * | 2.21 | 40.38 | -28.22 | 48.21 | 257.45 | 5000.00 | -25.77 |
| 19216.00 | V | 34.60 | * | 2.21 | 40.38 | -28.22 | 48.96 | 280.66 | 5000.00 | -25.02 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY

RICHARD E. KING

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6400
 Mode : Transmit at 2402MHz
 Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Average Total dBuV/m at 3m | Average Total uV/m at 3 m | Average Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 4804.00 | H | 40.44 | | 3.68 | 34.52 | -40.24 | 0.00 | 38.41 | 83.23 | 500.00 |
| 4804.00 | V | 43.66 | | 3.68 | 34.52 | -40.24 | 0.00 | 41.63 | 120.57 | 500.00 |
| 12010.00 | H | 34.07 | * | 6.08 | 38.53 | -39.88 | 0.00 | 38.79 | 87.04 | 500.00 |
| 12010.00 | V | 32.24 | * | 6.08 | 38.53 | -39.88 | 0.00 | 36.96 | 70.50 | 500.00 |
| 19216.00 | H | 19.11 | * | 2.21 | 40.38 | -28.22 | 0.00 | 33.47 | 47.17 | 500.00 |
| 19216.00 | V | 19.38 | * | 2.21 | 40.38 | -28.22 | 0.00 | 33.74 | 48.66 | 500.00 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY

RICHARD E. KING

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6400
 Mode : Transmit at 2402MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions not in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Peak Detector with 100kHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Peak Total dBuV/m at 3m | Peak Total uV/m at 3 m | Peak Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|----------------------------------|---------------------------------|---------------------------------|----------------|
| 2402.00 | H | 52.63 | | 2.61 | 32.16 | | 87.40 | 23439.95 | | |
| 2402.00 | V | 49.27 | | 2.61 | 32.16 | | 84.04 | 15920.50 | | |
| 7206.00 | H | 40.07 | | 4.64 | 35.56 | -40.30 | 39.97 | 99.62 | 2344.00 | -27.43 |
| 7206.00 | V | 39.64 | | 4.64 | 35.56 | -40.30 | 39.54 | 94.81 | 2344.00 | -27.86 |
| 9608.00 | H | 47.03 | | 5.18 | 36.53 | -40.27 | 48.46 | 264.98 | 2344.00 | -18.94 |
| 9608.00 | V | 43.24 | | 5.18 | 36.53 | -40.27 | 44.67 | 171.28 | 2344.00 | -22.73 |
| 14412.00 | H | 39.06 | * | 6.62 | 39.40 | -39.56 | 45.51 | 188.68 | 2344.00 | -21.88 |
| 14412.00 | V | 39.01 | * | 6.62 | 39.40 | -39.56 | 45.46 | 187.59 | 2344.00 | -21.93 |
| 16814.00 | H | 40.69 | * | 7.15 | 42.10 | -39.19 | 50.75 | 344.74 | 2344.00 | -16.65 |
| 16814.00 | V | 40.05 | * | 7.15 | 42.10 | -39.19 | 50.11 | 320.26 | 2344.00 | -17.29 |
| 21618.00 | H | 24.47 | * | 2.25 | 40.56 | -28.59 | 38.68 | 85.92 | 2344.00 | -28.72 |
| 21618.00 | V | 25.36 | * | 2.25 | 40.56 | -28.59 | 39.57 | 95.19 | 2344.00 | -27.83 |
| 24020.00 | H | 25.08 | * | 2.24 | 40.62 | -28.80 | 39.14 | 90.61 | 2344.00 | -28.26 |
| 24020.00 | V | 25.63 | * | 2.24 | 40.62 | -28.80 | 39.69 | 96.53 | 2344.00 | -27.71 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY *Richard E. King* :

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6400
 Mode : Transmit at 2440MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Peak Total dBuV/m at 3m | Peak Total uV/m at 3 m | Peak Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|----------------------------------|---------------------------------|---------------------------------|----------------|
| 4880.00 | H | 51.57 | | 3.70 | 34.45 | -40.13 | 49.59 | 301.67 | 5000.00 | -24.39 |
| 4880.00 | V | 49.46 | * | 3.70 | 34.45 | -40.13 | 47.48 | 236.61 | 5000.00 | -26.50 |
| 7320.00 | H | 49.15 | * | 4.69 | 35.65 | -40.32 | 49.17 | 287.32 | 5000.00 | -24.81 |
| 7320.00 | V | 49.39 | * | 4.69 | 35.65 | -40.32 | 49.41 | 295.37 | 5000.00 | -24.57 |
| 12200.00 | H | 48.57 | * | 6.08 | 38.67 | -39.93 | 53.39 | 467.22 | 5000.00 | -20.59 |
| 12200.00 | V | 50.00 | * | 6.08 | 38.67 | -39.93 | 54.82 | 550.84 | 5000.00 | -19.16 |
| 19520.00 | H | 34.25 | * | 2.22 | 40.39 | -28.17 | 48.69 | 272.03 | 5000.00 | -25.29 |
| 19520.00 | V | 34.31 | * | 2.22 | 40.39 | -28.17 | 48.75 | 273.91 | 5000.00 | -25.23 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY *RICHARD E. KING* :

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6400
 Mode : Transmit at 2440MHz
 Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Average Total dBuV/m at 3m | Average Total uV/m at 3 m | Average Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 4880.00 | H | 41.37 | | 3.70 | 34.45 | -40.13 | 39.39 | 93.23 | 500.00 | -14.59 |
| 4880.00 | V | 38.17 | | 3.70 | 34.45 | -40.13 | 36.19 | 64.50 | 500.00 | -17.79 |
| 7320.00 | H | 35.82 | | 4.69 | 35.65 | -40.32 | 35.84 | 61.92 | 500.00 | -18.14 |
| 7320.00 | V | 35.47 | | 4.69 | 35.65 | -40.32 | 35.49 | 59.48 | 500.00 | -18.49 |
| 12200.00 | H | 33.64 | * | 6.08 | 38.67 | -39.93 | 38.46 | 83.76 | 500.00 | -15.52 |
| 12200.00 | V | 33.99 | * | 6.08 | 38.67 | -39.93 | 38.81 | 87.20 | 500.00 | -15.17 |
| 19520.00 | H | 19.05 | * | 2.22 | 40.39 | -28.17 | 33.49 | 47.27 | 500.00 | -20.49 |
| 19520.00 | V | 18.86 | * | 2.22 | 40.39 | -28.17 | 33.30 | 46.25 | 500.00 | -20.68 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY *RICHARD E. KING* :

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6400
 Mode : Transmit at 2440MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions not in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Peak Detector with 100kHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Peak Total dBuV/m at 3m | Peak Total uV/m at 3 m | Peak Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|----------------------------------|---------------------------------|---------------------------------|----------------|
| 2440.00 | H | 53.17 | | 2.64 | 32.41 | | 88.21 | 25743.16 | | |
| 2440.00 | V | 49.84 | | 2.64 | 32.41 | | 84.88 | 17545.34 | | |
| 9760.00 | H | 47.62 | | 5.23 | 36.73 | -40.26 | 49.32 | 292.34 | 2574.32 | -18.90 |
| 9760.00 | V | 42.16 | * | 5.23 | 36.73 | -40.26 | 43.86 | 155.91 | 2574.32 | -24.36 |
| 14640.00 | H | 39.30 | * | 6.71 | 39.55 | -39.58 | 45.98 | 199.06 | 2574.32 | -22.23 |
| 14640.00 | V | 38.60 | * | 6.71 | 39.55 | -39.58 | 45.28 | 183.64 | 2574.32 | -22.93 |
| 17080.00 | H | 39.04 | * | 7.25 | 41.56 | -39.28 | 48.57 | 268.25 | 2574.32 | -19.64 |
| 17080.00 | V | 39.04 | * | 7.25 | 41.56 | -39.28 | 48.57 | 268.25 | 2574.32 | -19.64 |
| 21960.00 | H | 24.06 | * | 2.20 | 40.58 | -28.86 | 37.98 | 79.29 | 2574.32 | -30.23 |
| 21960.00 | V | 23.91 | * | 2.20 | 40.58 | -28.86 | 37.83 | 77.93 | 2574.32 | -30.38 |
| 24400.00 | H | 25.52 | * | 2.22 | 40.63 | -29.13 | 39.25 | 91.68 | 2574.32 | -28.97 |
| 24400.00 | V | 24.25 | * | 2.22 | 40.63 | -29.13 | 37.98 | 79.21 | 2574.32 | -30.24 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY *RICHARD E. KING* :

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6400
 Mode : Transmit at 2480MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Peak Total dBuV/m at 3m | Peak Total uV/m at 3 m | Peak Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|----------------------------------|---------------------------------|---------------------------------|----------------|
| 4960.00 | H | 50.77 | * | 3.73 | 34.33 | -40.02 | 48.81 | 275.79 | 5000.00 | -25.17 |
| 4960.00 | V | 50.37 | * | 3.73 | 34.33 | -40.02 | 48.41 | 263.38 | 5000.00 | -25.57 |
| 7440.00 | H | 49.37 | * | 4.73 | 35.65 | -40.33 | 49.42 | 295.90 | 5000.00 | -24.56 |
| 7440.00 | V | 49.16 | * | 4.73 | 35.65 | -40.33 | 49.21 | 288.83 | 5000.00 | -24.77 |
| 12400.00 | H | 49.09 | * | 6.08 | 38.76 | -39.98 | 53.95 | 498.10 | 5000.00 | -20.03 |
| 12400.00 | V | 48.67 | * | 6.08 | 38.76 | -39.98 | 53.53 | 474.59 | 5000.00 | -20.45 |
| 19840.00 | H | 34.48 | * | 2.23 | 40.40 | -28.39 | 48.73 | 273.19 | 5000.00 | -25.25 |
| 19840.00 | V | 33.58 | * | 2.23 | 40.40 | -28.39 | 47.83 | 246.30 | 5000.00 | -26.15 |
| 22320.00 | H | 35.15 | * | 2.23 | 40.59 | -29.00 | 48.96 | 280.63 | 5000.00 | -25.02 |
| 22320.00 | V | 34.75 | * | 2.23 | 40.59 | -29.00 | 48.56 | 268.00 | 5000.00 | -25.42 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY *RICHARD E. KING* :

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6400
 Mode : Transmit at 2480MHz
 Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Average Total dBuV/m at 3m | Average Total uV/m at 3 m | Average Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 4960.00 | H | 34.97 | * | 3.73 | 34.33 | -40.02 | 33.01 | 44.73 | 500.00 | -20.97 |
| 4960.00 | V | 34.95 | * | 3.73 | 34.33 | -40.02 | 32.99 | 44.63 | 500.00 | -20.99 |
| 7440.00 | H | 33.52 | * | 4.73 | 35.65 | -40.33 | 33.57 | 47.71 | 500.00 | -20.41 |
| 7440.00 | V | 33.52 | * | 4.73 | 35.65 | -40.33 | 33.57 | 47.71 | 500.00 | -20.41 |
| 12400.00 | H | 33.48 | * | 6.08 | 38.76 | -39.98 | 38.34 | 82.57 | 500.00 | -15.64 |
| 12400.00 | V | 33.00 | * | 6.08 | 38.76 | -39.98 | 37.86 | 78.13 | 500.00 | -16.12 |
| 19840.00 | H | 18.97 | * | 2.23 | 40.40 | -28.39 | 33.22 | 45.81 | 500.00 | -20.76 |
| 19840.00 | V | 18.62 | * | 2.23 | 40.40 | -28.39 | 32.87 | 44.00 | 500.00 | -21.11 |
| 22320.00 | H | 19.60 | * | 2.23 | 40.59 | -29.00 | 33.41 | 46.84 | 500.00 | -20.57 |
| 22320.00 | V | 19.48 | * | 2.23 | 40.59 | -29.00 | 33.29 | 46.20 | 500.00 | -20.69 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY *RICHARD E. KING* :

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6400
 Mode : Transmit at 2480MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions not in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Peak Detector with 100kHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Peak Total dBuV/m at 3m | Peak Total uV/m at 3 m | Peak Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|----------------------------------|---------------------------------|---------------------------------|----------------|
| 2480.00 | H | 50.89 | | 2.66 | 32.49 | 0.00 | 86.04 | 20049.42 | | |
| 2480.00 | V | 47.27 | | 2.66 | 32.49 | 0.00 | 82.42 | 13216.05 | | |
| 9920.00 | H | 43.65 | | 5.29 | 36.72 | -40.25 | 45.41 | 186.32 | 2004.94 | -20.64 |
| 9920.00 | V | 39.15 | | 5.29 | 36.72 | -40.25 | 40.91 | 110.98 | 2004.94 | -25.14 |
| 14880.00 | H | 38.37 | * | 6.80 | 39.66 | -39.60 | 45.23 | 182.50 | 2004.94 | -20.82 |
| 14880.00 | V | 38.46 | * | 6.80 | 39.66 | -39.60 | 45.32 | 184.41 | 2004.94 | -20.73 |
| 17360.00 | H | 37.70 | * | 7.36 | 41.05 | -39.41 | 46.70 | 216.21 | 2004.94 | -19.34 |
| 17360.00 | V | 38.21 | * | 7.36 | 41.05 | -39.41 | 47.21 | 229.28 | 2004.94 | -18.83 |
| 24800.00 | H | 25.31 | * | 2.21 | 40.64 | -29.19 | 38.97 | 88.84 | 2004.94 | -27.07 |
| 24800.00 | V | 24.44 | * | 2.21 | 40.64 | -29.19 | 38.10 | 80.37 | 2004.94 | -27.94 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY RICHARD E. KING :

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6401
 Mode : Transmit at 2402MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Peak Total dBuV/m at 3m | Peak Total uV/m at 3 m | Peak Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|----------------------------------|---------------------------------|---------------------------------|----------------|
| 4804.00 | H | 50.47 | | 5.69 | 36.87 | -40.22 | 52.80 | 436.43 | 5000.00 | -21.18 |
| 4804.00 | V | 50.51 | | 5.69 | 36.87 | -40.22 | 52.84 | 438.44 | 5000.00 | -21.14 |
| 7206.00 | H | 38.37 | * | 6.86 | 38.13 | -40.07 | 43.29 | 146.04 | 2022.87 | -22.83 |
| 7206.00 | V | 38.19 | * | 6.86 | 38.13 | -40.07 | 43.11 | 143.04 | 2022.87 | -23.01 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY

RICHARD E. KING

Richard E. King

Manufacturer : Master Lock Company
Test Item : High Security Padlock Transceiver
Model No. : 6401
Mode : Transmit at 2402MHz
Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
Date : October 31, 2019
Test Distance : 3 meters
Notes : Average Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Average Total dBuV/m at 3m | Average Total uV/m at 3 m | Average Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 4804.00 | H | 35.23 | | 5.69 | 36.87 | -40.22 | 0.00 | 37.56 | 75.49 | 500.00 |
| 4804.00 | V | 34.65 | | 5.69 | 36.87 | -40.22 | 0.00 | 36.98 | 70.62 | 500.00 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY RICHARD E. KING :

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6401
 Mode : Transmit at 2440MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Peak Total dBuV/m at 3m | Peak Total uV/m at 3 m | Peak Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|----------------------------------|---------------------------------|---------------------------------|----------------|
| 4880.00 | H | 50.51 | * | 5.74 | 36.66 | -40.25 | 52.65 | 429.07 | 5000.00 | -21.33 |
| 4880.00 | V | 49.93 | * | 5.74 | 36.66 | -40.25 | 52.07 | 401.35 | 5000.00 | -21.91 |
| 7320.00 | H | 48.70 | * | 6.88 | 38.12 | -40.06 | 53.65 | 481.16 | 5000.00 | -20.33 |
| 7320.00 | V | 48.40 | * | 6.88 | 38.12 | -40.06 | 53.35 | 464.82 | 5000.00 | -20.63 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY

RICHARD E. KING

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6401
 Mode : Transmit at 2440MHz
 Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient (dB) | CBL Fac | Ant Fac (dB) | Pre Amp (dB) | Average Total dBuV/m at 3m | Average Total uV/m at 3 m | Average Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|-----------------|------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 4880.00 | H | 34.64 | * | 5.74 | 36.66 | -40.25 | 0.00 | 36.78 | 69.03 | 500.00 |
| 4880.00 | V | 34.61 | * | 5.74 | 36.66 | -40.25 | 0.00 | 36.75 | 68.79 | 500.00 |
| 7320.00 | H | 33.61 | * | 6.88 | 38.12 | -40.06 | 0.00 | 38.56 | 84.68 | 500.00 |
| 7320.00 | V | 33.58 | * | 6.88 | 38.12 | -40.06 | 0.00 | 38.53 | 84.39 | 500.00 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY

RICHARD E. KING

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6401
 Mode : Transmit at 2480MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Peak Total dBuV/m at 3m | Peak Total uV/m at 3 m | Peak Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|----------------------------------|---------------------------------|---------------------------------|----------------|
| 4960.00 | H | 49.71 | * | 5.79 | 36.97 | -40.28 | 52.18 | 406.42 | 5000.00 | -21.80 |
| 4960.00 | V | 49.48 | * | 5.79 | 36.97 | -40.28 | 51.95 | 395.80 | 5000.00 | -22.03 |
| 7440.00 | H | 48.84 | * | 6.91 | 38.16 | -40.05 | 53.87 | 493.50 | 5000.00 | -20.11 |
| 7440.00 | V | 48.26 | * | 6.91 | 38.16 | -40.05 | 53.29 | 461.62 | 5000.00 | -20.69 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY

Richard E. King

Richard E. King

Manufacturer : Master Lock Company
 Test Item : High Security Padlock Transceiver
 Model No. : 6401
 Mode : Transmit at 2480MHz
 Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
 Date : October 31, 2019
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth


| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Average Total dBuV/m at 3m | Average Total uV/m at 3 m | Average Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 4960.00 | H | 34.29 | * | 5.79 | 36.97 | -40.28 | 0.00 | 36.76 | 68.86 | 500.00 |
| 4960.00 | V | 34.30 | * | 5.79 | 36.97 | -40.28 | 0.00 | 36.77 | 68.94 | 500.00 |
| 7440.00 | H | 33.67 | * | 6.91 | 38.16 | -40.05 | 0.00 | 38.70 | 86.06 | 500.00 |
| 7440.00 | V | 33.70 | * | 6.91 | 38.16 | -40.05 | 0.00 | 38.73 | 86.36 | 500.00 |

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Checked BY

RICHARD E. KING

Richard E. King

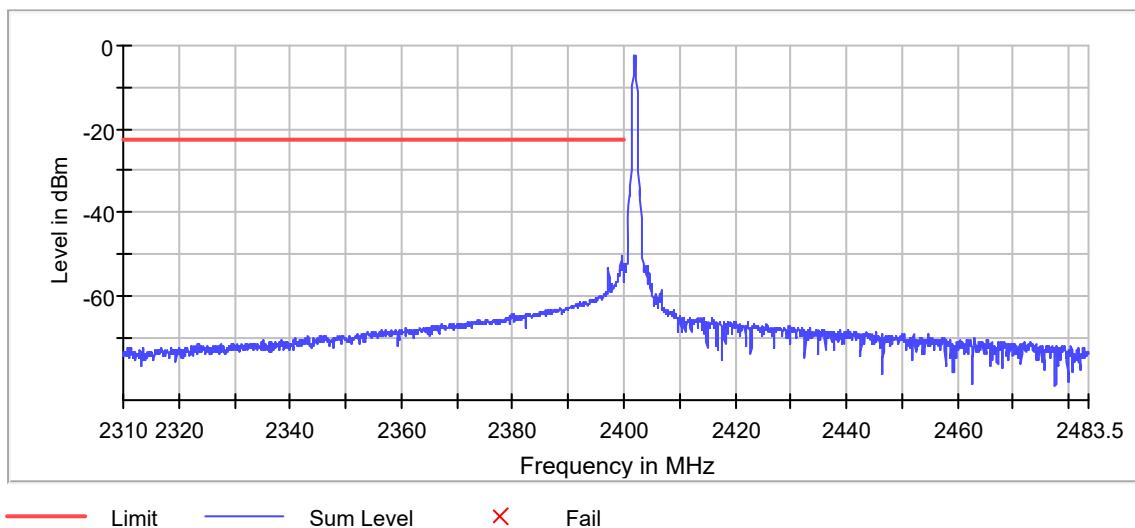**FCC 15.247 Low Frequency Band Edge Compliance**

MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2402MHz
NOTES : The trace represents the highest power measured inside the band with a 100kHz bandwidth. The red lines represents the 20dB down level from the peak in a 100kHz bandwidth and the low frequency band edge.
TEST DATE : October 29, 2019
EQUIPMENT USED : GSFE, GSFB, RBG0

Manufacturer : Master Lock Company
Test Item : High Security Padlock Transceiver
Model No. : 6400
Mode : Transmit at 2480MHz
Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions at High Band Edge
Date : October 31, 2019
Test Distance : 3 meters

Notes : Peak Detector with 1MHz Resolution Bandwidth

| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Peak Total dBuV/m at 3m | Peak Total uV/m at 3 m | Peak Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|----------------------------------|---------------------------------|---------------------------------|----------------|
| 2483.50 | H | 18.53 | | 2.66 | 32.49 | 0.00 | 53.69 | 483.41 | 5000.00 | -20.29 |
| 2483.50 | V | 16.58 | | 2.66 | 32.49 | 0.00 | 51.74 | 386.21 | 5000.00 | -22.24 |

Checked BY *RICHARD E. KING* :


Richard E. King

Manufacturer : Master Lock Company
Test Item : High Security Padlock Transceiver
Model No. : 6400
Mode : Transmit at 2480MHz
Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions at High Band Edge
Date : October 31, 2019
Test Distance : 3 meters
Notes : Average Detector with 1MHz Resolution Bandwidth


| Freq. MHz | Ant Pol | Meter Reading (dBuV) | Ambient | CBL Fac (dB) | Ant Fac (dB) | Pre Amp (dB) | Average Total dBuV/m at 3m | Average Total uV/m at 3 m | Average Limit uV/m at 3 m | Margin (dB) |
|--------------|------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------------------|------------------------------------|------------------------------------|----------------|
| 2483.50 | H | 0.75 | | 2.66 | 32.49 | 0.00 | 35.91 | 62.42 | 500 | -18.07 |
| 2483.50 | V | 0.66 | | 2.66 | 32.49 | 0.00 | 35.82 | 61.78 | 500 | -18.16 |

Checked BY *RICHARD E. KING* :


Richard E. King

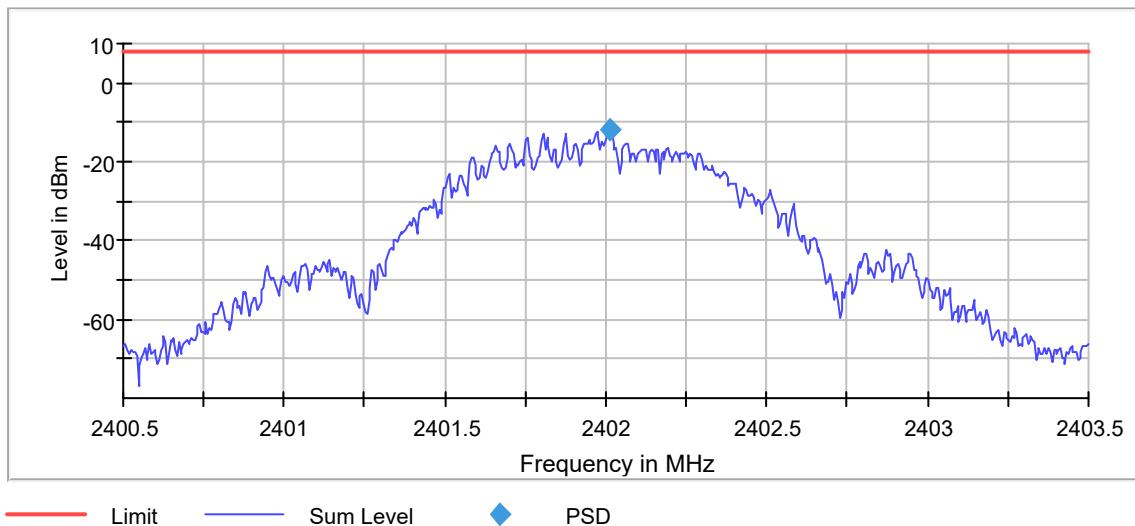**FCC 15.247 Power Spectral Density**

| | | |
|----------------|---|---|
| MANUFACTURER | : | Master Lock Company |
| MODEL NUMBER | : | 6400 |
| TEST MODE | : | Transmit at 2402MHz |
| NOTES | : | Power Spectral Density = -12.4 dBm in a 10kHz RBW |
| TEST DATE | : | October 29, 2019 |
| EQUIPMENT USED | : | GSFE, GSFB, RBG0 |

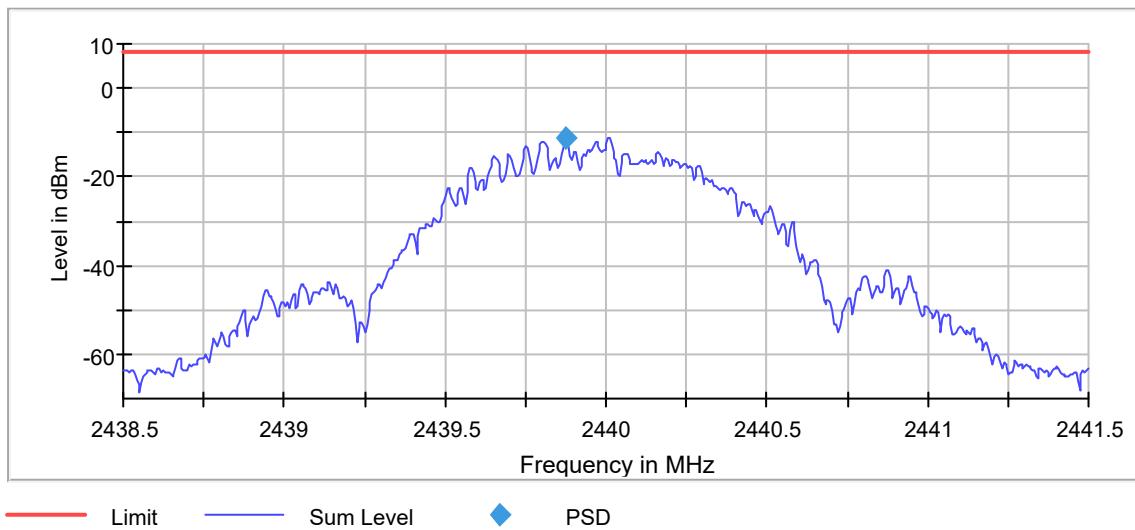**FCC 15.247 Power Spectral Density**

MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2440MHz
NOTES : Power Spectral Density = -11.4dBm in a 10kHz RBW
TEST DATE : October 29, 2019
EQUIPMENT USED : GSFE, GSFB, RBG0

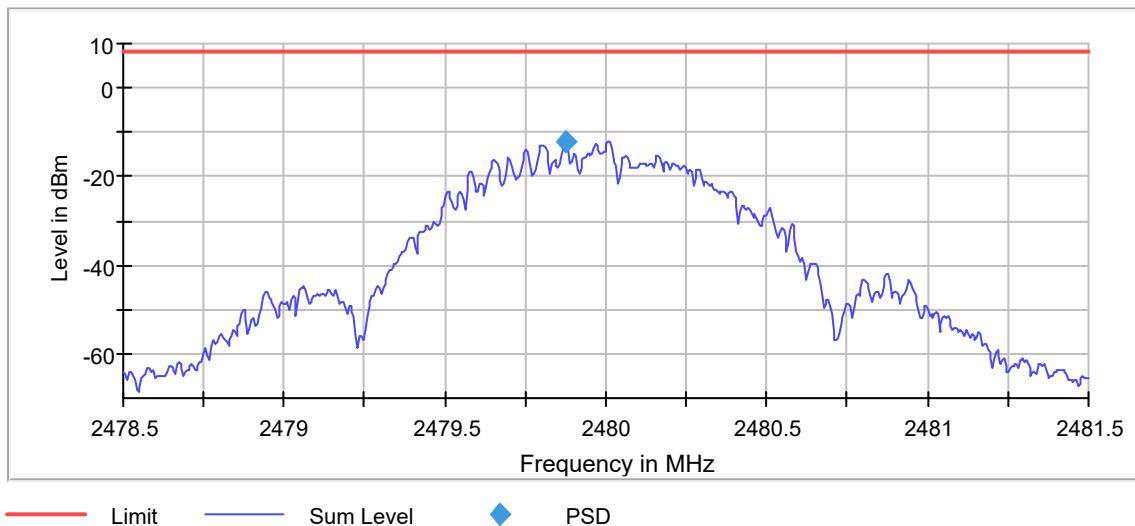**FCC 15.247 Power Spectral Density**

MANUFACTURER : Master Lock Company
MODEL NUMBER : 6400
TEST MODE : Transmit at 2480MHz
NOTES : Power Spectral Density = -12.5dBm in a 10kHz RBW
TEST DATE : October 29, 2019
EQUIPMENT USED : GSFE, GSFB, RBG0