

F C C - TEST REPORT

REPORT NO.: 26143/1/400F

FCC – Test Report

Date: 2001-07-12

No. 26143/1/400F

Page 2 of 14

**FCC listed testlab
acc. to Section 2.948 of the FCC - Rules
in compliance with the requirements of
ANSI C63.4 - 1992**

Product : Base Station

Product Class : Low Power Transceiver, Rx Certified

Model : WT9140A

Importer : LEAVES INDUSTRIES LTD

Manufacturer : BOXER TOYS CO LTD

FCC – Test Report

No. 26143/1/400F

Date: 2001-07-12

Page 3 of 14

TABLE OF CONTENTS

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Summary of Testresults
6. Test Equipment List
7. Radiated Emission Testprocedure (> 30MHz)
8. Radiated Emission Testprocedure (9kHz - 30MHz)
9. Interference Radiation (Datasheet)
10. Interference Radiation (Datasheet)
11. Cohere Plot at Fundamental Frequency
12. Notes for Radiation Measurement (acc. to ANSI C63.4 - 1992)
13. Measurement of Emissions within Band Edges (Datasheet)
14. Notes for Measurement of Emissions within Band Edges

FCC – Test Report

Date: 2001-07-12

No. 26143/1/400F

Page 4 of 14

LABORATORY - REPORT

APPLICANT: LEAVES INDUSTRIES LTD
ADDRESS: Unit 1006, 10/F, Eastern Centre
1065 King's Road
HONG KONG

DATE OF SAMPLE RECEIVED: 2001-04-19

DATE OF TESTING: 2001-06-21

DESCRIPTION OF SAMPLE:

Product: Base Station
Product class: Low Power Transceiver, Rx Certified
Manufacturer: BOXER TOYS CO LTD
Model number: WT9140A
Rating: DC 9V ('6F22' Size Battery x 1)
Country of Origin: P.R. CHINA

INVESTIGATIONS REQUESTED: Measurements to the relevant clauses of F.C.C. Rules and Regulations Part 15 Subpart B -- 'Unintentional Radiators' and Subpart C -- 'Intentional Radiators'

RESULTS: See the attached test sheets

CONCLUSIONS From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Authorized Signature

Remark: Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests

FCC – Test Report

No. 26143/1/400F

Date: 2001-07-12

Page 5 of 14

Summary of Test Results

TRANSMITTING

Interference Radiation:

Test result: O.K.
Test data: See attached data sheet

Interference Voltage:

Test result: N.A.
Test data: N.A.

Measurement of Emissions within Band Edges

Test result : O.K.
Test data : See attached data sheet

RECEIVING

Interference Radiation:

Test result: O.K.
Test data: See attached data sheet

Interference Voltage:

Test result: N.A.
Test data: N.A.

PHOTOGRAPH OF THE SAMPLE



FCC – Test Report

Date: 2001-07-12

No. 26143/1/400F

Page 6 of 14

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,300 MHz
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50μH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Antenna Mast System	Schwarzbeck	AM9104	--	Max. 4 meters height
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	9KHz – 1.8GHz
Interface for Spectrum 2712	Tektronix	TD3F14A	--	
Loop Antenna	Rohde & Schwarz	HFH2-Z2	871336/48	9KHz-30MHz
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,300 MHz
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2	--	
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Signal Generator	Rohde & Schwarz	SWS 2	879113/42	100KHz – 1040 MHz
Digital Multimeter	Tektronix	DM2510G	DM- 2510GTW105 55	10KHz – 30MHz
Turntable with Controller	Drehtisch	DT312	--	φ120 cm


FCC – Test Report

No. 26143/1/400F

Date: 2001-07-12

Page 7 of 14

Radiated Emission Testprocedure (> 30MHz)

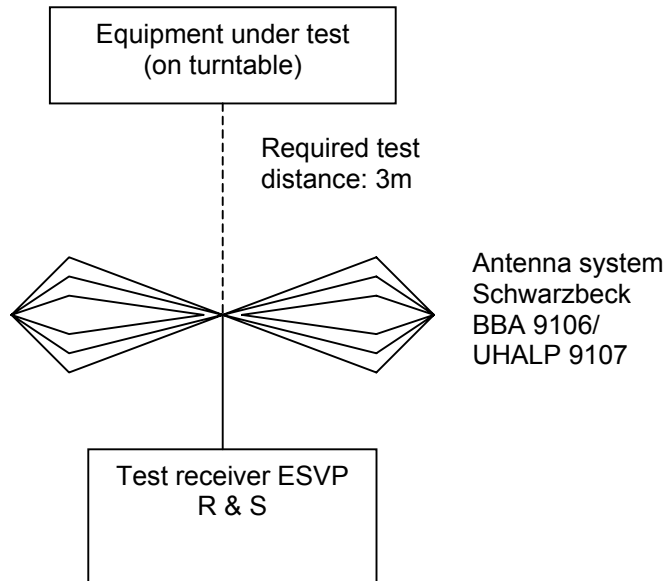


FCC – Test Report

No. 26143/1/400F

Date: 2001-07-12

Page 8 of 14

Radiated Emission Test Procedure (9kHz - 30MHz)

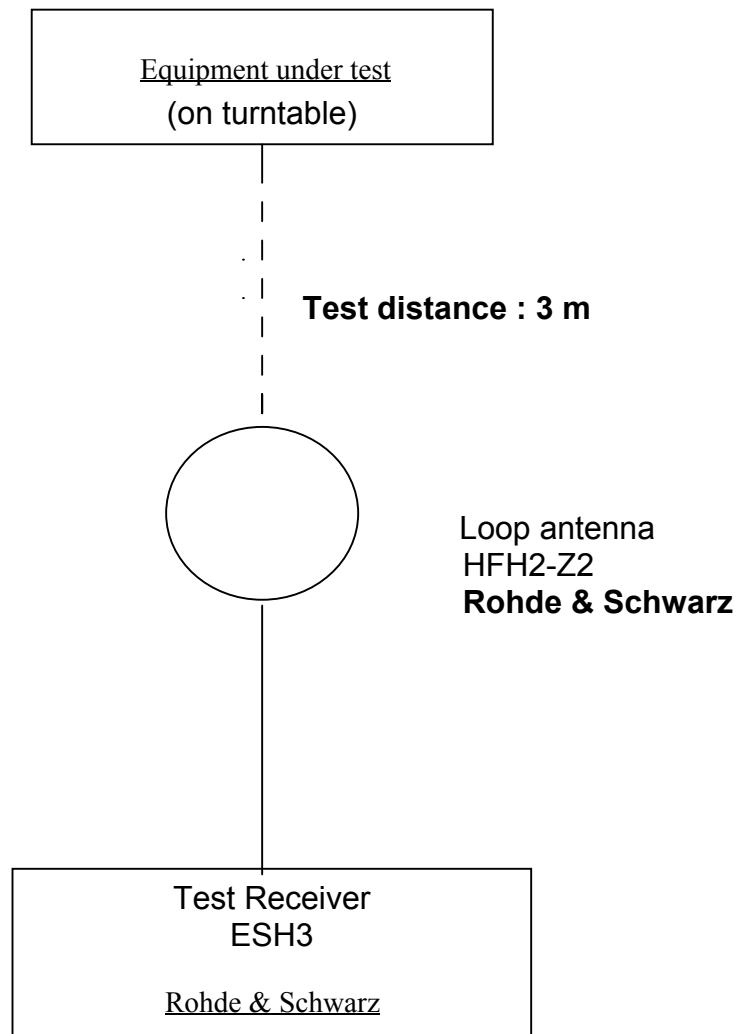

Interference Radiation

Date: 2001-07-12

Page 9 of 14

Measurement of Radiated Emissions
Acc.: FCC Part 15 Subpart C

Application no.: 26143/1/400F
Model: WT9140A
Applicant: LEAVES INDUSTRIES LTD
Sample no.: 1
Set under test: Base Station
Connected sets: -
Operating mode: Transmitter - Power "On" (Tested with morse code)

Test Equipment
Receiver: ESVP Rohde & Schwarz
Antenna: - Schwarzbeck BBA 9106
- Schwarzbeck UHALP 9107
- Rohde & Schwarz HFH2-Z2

	Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result dB(μV/m)	Vert. Test Result dB(μV/m)	Limit dB(μV/m)
Peak	49.86	56	58	11.7	67.7	69.7	100
Av.	49.86	50	52	11.7	61.7	63.7	80
Harm. 2	99.72	< 16	< 16	10.3	< 26.3	< 26.3	43.5
Harm. 3	149.58	< 16	< 16	15.0	< 31.0	< 31.0	43.5
Harm. 4	199.44	< 16	< 16	16.5	< 32.5	< 32.5	43.5
Harm. 5	249.3	< 16	< 16	17.7	< 33.7	< 33.7	46.0
Harm. 6	299.16	< 16	< 16	20.0	< 36.0	< 36.0	46.0
Harm. 7	349.02	< 16	< 16	17.4	< 33.4	< 33.4	46.0
Harm. 8	398.88	< 16	< 16	18.3	< 34.3	< 34.3	46.0
Harm. 9	448.74	< 16	< 16	19.0	< 35.0	< 35.0	46.0
Harm. 10	498.6	< 16	< 16	19.7	< 35.7	< 35.7	46.0
Harm. 11	548.46	< 16	< 16	20.2	< 36.2	< 36.2	46.0
Harm. 12	598.32	< 16	< 16	20.9	< 36.9	< 36.9	46.0
Harm. 13	648.18	< 16	< 16	21.6	< 37.6	< 37.6	46.0
Harm. 14	698.04	< 16	< 16	22.4	< 38.4	< 38.4	46.0
Harm. 15	747.9	< 16	< 16	23.0	< 39.0	< 39.0	46.0
Harm. 16	797.76	< 16	< 16	23.7	< 39.7	< 39.7	46.0
Harm. 17	847.62	< 16	< 16	24.3	< 40.3	< 40.3	46.0
Harm. 18	897.48	< 16	< 16	25.0	< 41.0	< 41.0	46.0
Harm. 19	947.34	< 16	< 16	25.7	< 41.7	< 41.7	46.0

Remark: All frequencies in the required range have been scanned and only those significant and representative readings are reported above.
All emissions not reported above are all well below the limit.

Unintentional Radiators

Date: 2001-07-12

Page 10 of 14

Measurement of Radiated Emissions

Acc: FCC Part 15 Subpart B

Application no.: 26143/1/400F
 Model: WT9140A
 Applicant: LEAVES INDUSTRIES LTD
 Sample no.: 1
 Set under test: Base Station
 Connected sets: -
 Operating mode: Receiver - Power "On"

Test Equipment

Receiver: ESVP Rohde & Schwarz
 Antenna: - Schwarzbeck BBA 9106
 - Schwarzbeck UHALP 9107
 - Rohde & Schwarz HFH2-Z2

Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result dB(μV/m)	Vert. Test Result dB(μV/m)	Limit dB(μV/m)
30	< 16	< 16	18.4	< 34.4	< 34.4	40.0
50	< 16	< 16	11.7	< 27.7	< 27.7	40.0
100	< 16	< 16	10.3	< 26.3	< 26.3	43.5
300	< 16	< 16	20.0	< 36.0	< 36.0	46.0
500	< 16	< 16	19.7	< 35.7	< 35.7	46.0
700	< 16	< 16	22.4	< 38.4	< 38.4	46.0
1000	< 16	< 16	26.5	< 42.5	< 42.5	54.0

Remark:

All frequencies in the required range have been scanned and only those significant and representative readings are reported above.
 All emissions not reported above are all well below the limit.

FCC – Test Report

Date: 2001-07-12


No. 26143/1/400F

Page 11 of 14

Cohere Plot at fundamental frequency

Sample location: Less than 0.5m from the measuring antenna
Applied signal: 40dB μ V (non-modulated, 49.86 MHz)

Tek
2712

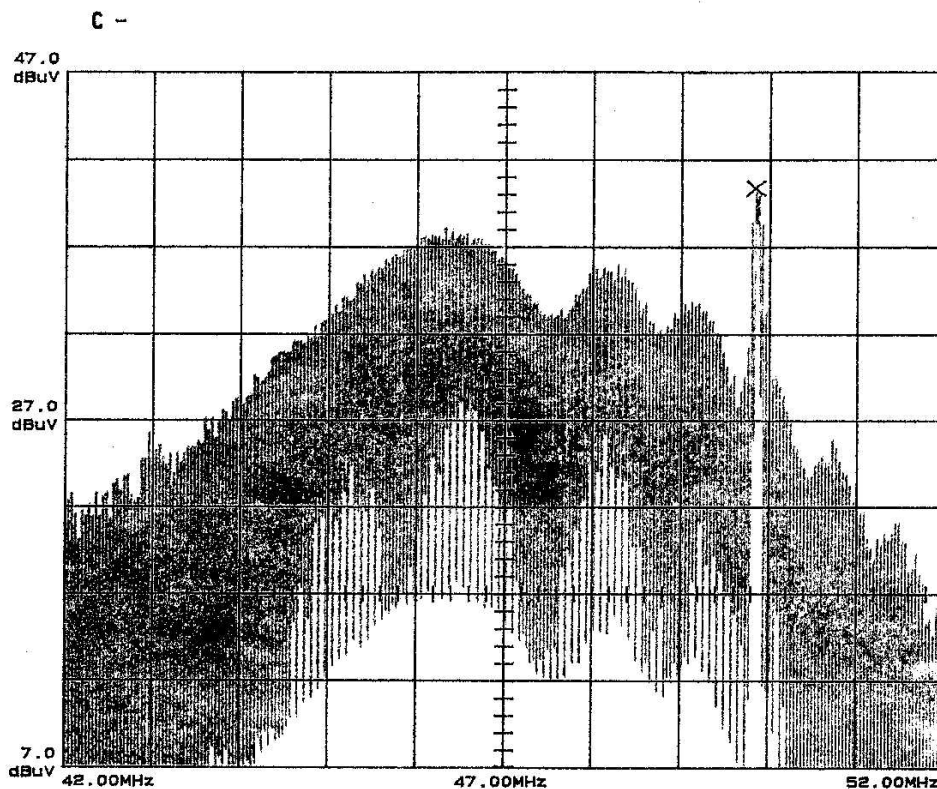

47.00MHz
47.0dBuV
1.0000MHz/
120KHz RBW

ATTN 0dB
VF 300kHz
5 dB/
M 49.84MHz
M 40.7dBuV

TIME: 50 ms/DIV

X -- MARKER 1

MAX/MIN MODE

Note: Readouts
correspond to
waveform 'C'

Notes for Radiation Measurement

1. Measurement facility:

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Distance between the EUT and measuring antenna:

3 meters.

3. Measuring instrumentations:

Rohde & Schwarz ESVP Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

Loop antenna for the frequency range 9KHz – 30MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the measurement data. The center of the loop 1 m above the ground plane, positioned with its plane vertical at the specified distance and rotated about its vertical axis and placed horizontal for maximum response at each azimuth about the EUT.

In the frequency range above 1 GHz, horn-antenna RGA 50/60 is used.

5. Frequency range scanned:

The frequency range 30 - 1000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions. To find the maximum emission, the antenna was raised from 1 to 4 meters and was stopped at the maximum emission point.

7. Measuring Procedure:

In **accordance** with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.


FCC – Test Report

Date: 2001-07-12

No. 26143/1/400F

Page 13 of 14

Measurement Data of Emissions within Band Edges

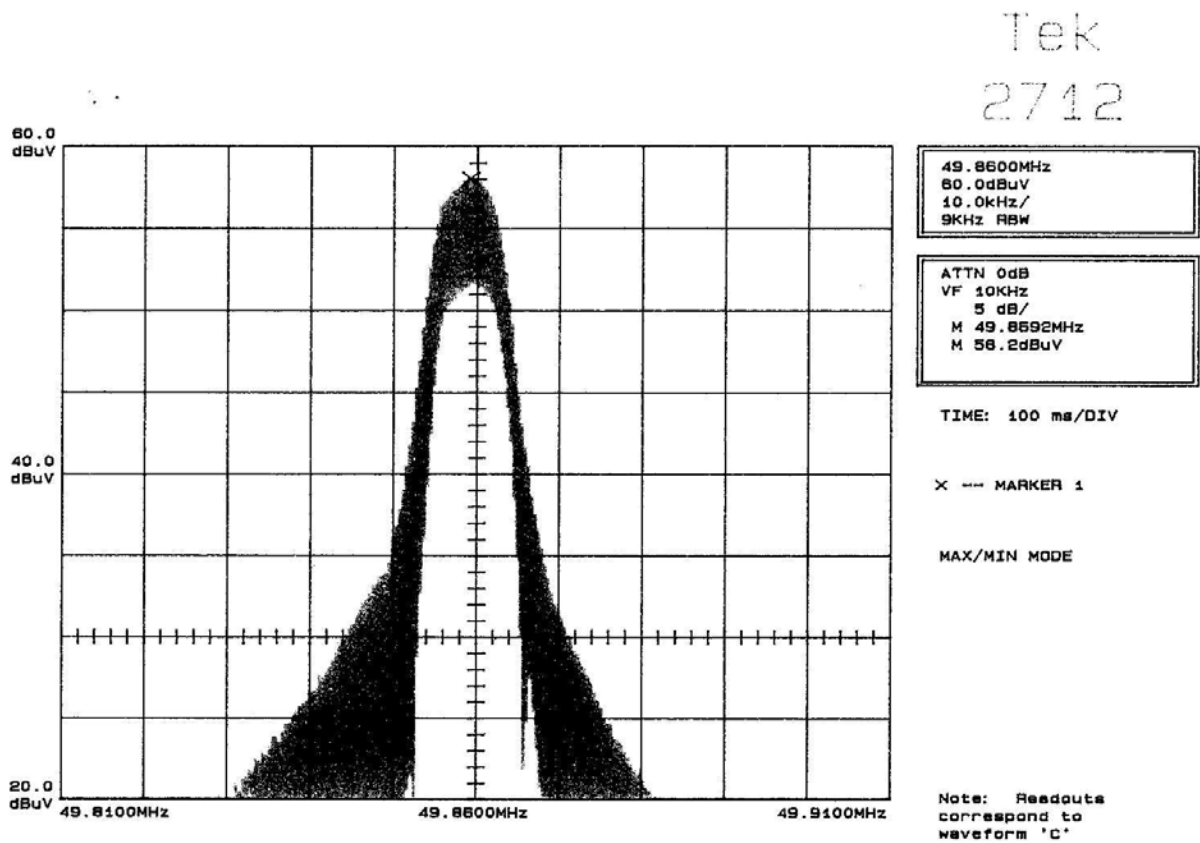

Notes for Measurement of Emissions within Band Edges

1. **Measurement facility:**
Measurement facility located at Fanling (Hong Kong) placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.
2. **Measuring instrumentations:**
Spectrum Analyzer: Tektronix 2712
3. **Frequency range scanned:**
The frequency range acc. to FCC rules and regulations part 15 subpart C - Intentional Radiators.
4. **Arrangement of EUT:**
During the test, the sample was operated.
5. **Measuring Procedure:**
In accordance with the relevant sections of American National Standards Institute (ANSI) C63.4 - 1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz'.