

F C C -

# TEST REPORT

REPORT NO.: 26142/1/400F

# **FCC – Test Report**

Date: 2001-07-12

**No. 26142/1/400F**

Page 2 of 14

**FCC listed testlab**  
acc. to Section 2.948 of the FCC - Rules

in compliance with the requirements of  
ANSI C63.4 - 1992

**Product** : Walkie Talkie

**Product Class** : Low Power Transceiver, Rx Certified

**Model** : WT9140B

**Importer** : LEAVES INDUSTRIES LTD

**Manufacturer** : BOXER TOYS CO LTD

# FCC – Test Report

Date: 2001-07-12

No. 26142/1/400F

Page 3 of 14

## TABLE OF CONTENTS

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Summary of Testresults
6. Test Equipment List
7. Radiated Emission Testprocedure (> 30MHz)
8. Radiated Emission Testprocedure (9kHz - 30MHz)
9. Interference Radiation (Datasheet)
10. Interference Radiation (Datasheet)
11. Cohere Plot at Fundamental Frequency
12. Notes for Radiation Measurement (acc. to ANSI C63.4 - 1992)
13. Measurement of Emissions within Band Edges (Datasheet)
14. Notes for Measurement of Emissions within Band Edges

# FCC – Test Report

Date: 2001-07-12

No. 26142/1/400F

Page 4 of 14

## LABORATORY - REPORT

**APPLICANT:** LEAVES INDUSTRIES LTD  
**ADDRESS:** Unit 1006, 10/F, Eastern Centre  
1065 King's Road  
HONG KONG

**DATE OF SAMPLE RECEIVED:** 2001-04-19

**DATE OF TESTING:** 2001-06-20

**DESCRIPTION OF SAMPLE:**

Product: Walkie Talkie  
Product class: Low Power Transceiver, Rx Certified  
Manufacturer: BOXER TOYS CO LTD  
Model number: WT9140B  
Rating: DC 9V ('6F22' Size Battery x 1)  
Country of Origin: P.R. CHINA

**INVESTIGATIONS REQUESTED:** Measurements to the relevant clauses of F.C.C. Rules and Regulations  
Part 15 Subpart B -- 'Unintentional Radiators' and Subpart C –  
'Intentional Radiators'

**RESULTS:** See the attached test sheets

**CONCLUSIONS**

From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

---

Authorized Signature

**Remark:** Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests

# FCC – Test Report

Date: 2001-07-12

No. 26142/1/400F

Page 5 of 14

## Summary of Test Results

### TRANSMITTING

#### Interference Radiation:

Test result: O.K.  
Test data: See attached data sheet

#### Interference Voltage:

Test result: N.A.  
Test data: N.A.

#### Measurement of Emissions within Band Edges

Test result : O.K.  
Test data : See attached data sheet

### RECEIVING

#### Interference Radiation:

Test result: O.K.  
Test data: See attached data sheet

#### Interference Voltage:

Test result: N.A.  
Test data: N.A.

#### PHOTOGRAPH OF THE SAMPLE



# FCC – Test Report

Date: 2001-07-12

No. 26142/1/400F

Page 6 of 14

## TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,300 MHz
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50µH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Antenna Mast System	Schwarzbeck	AM9104	--	Max. 4 meters height
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	9KHz – 1.8GHz
Interface for Spectrum 2712	Tektronix	TD3F14A	--	
Loop Antenna	Rohde & Schwarz	HFH2-Z2	871336/48	9KHz-30MHz
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,300 MHz
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2	--	
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Signal Generator	Rohde & Schwarz	SWS 2	879113/42	100KHz – 1040 MHz
Digital Multimeter	Tektronix	DM2510G	DM-2510GTW105 55	10KHz – 30MHz
Turntable with Controller	Drehtisch	DT312	--	φ120 cm


# FCC – Test Report

Date: 2001-07-12

No. 26142/1/400F

Page 7 of 14

## Radiated Emission Testprocedure (> 30MHz)

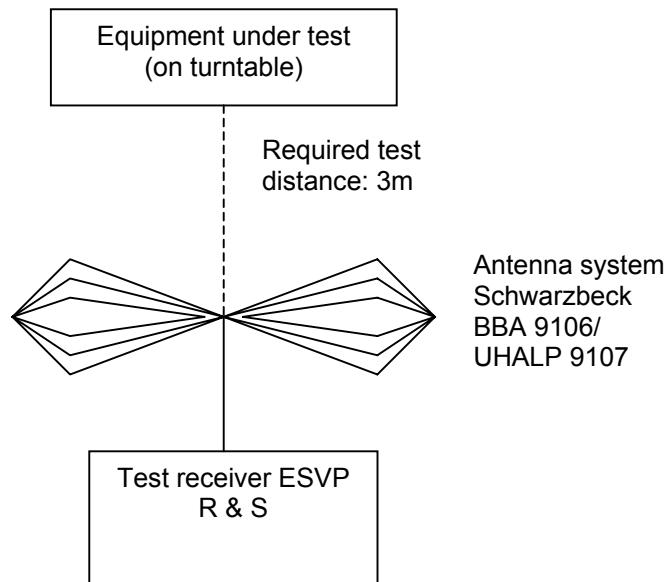


# FCC – Test Report

Date: 2001-07-12

No. 26142/1/400F

Page 8 of 14

## Radiated Emission Test Procedure (9kHz - 30MHz)

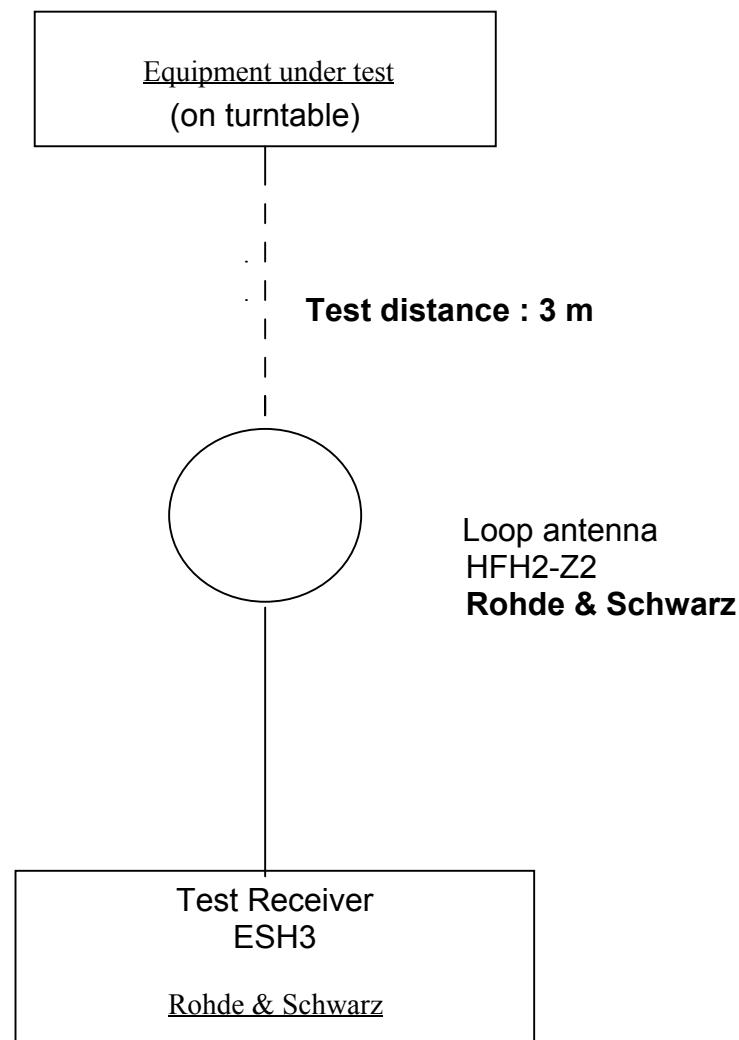

# Interference Radiation

Date: 2001-07-12  
Page 9 of 14

Measurement of Radiated Emissions  
Acc.: FCC Part 15 Subpart C

Application no.:	26142/1/400F
Model:	WT9140B
Applicant:	LEAVES INDUSTRIES LTD
Sample no.:	1
Set under test:	Walkie Talkie
Connected sets:	-
Operating mode:	Transmitter - Power "On" (Tested with morse code)

**Test Equipment**  
Receiver: ESVP Rohde & Schwarz  
Antenna: - Schwarzbeck BBA 9106  
- Schwarzbeck UHALP 9107  
- Rohde & Schwarz HFH2-Z2

	Frequency (MHz)	Horz. Reading dB(µV)	Vert. Reading dB(µV)	Antenna Factor (dB)	Horiz. Test Result dB(µV/m)	Vert. Test Result dB(µV/m)	Limit dB(µV/m)
Peak	49.86	54	60	11.7	65.7	71.7	100
Av.	49.86	47	53	11.7	58.7	64.7	80
Harm. 2	99.72	< 16	< 16	10.3	< 26.3	< 26.3	43.5
Harm. 3	149.58	< 16	< 16	15.0	< 31.0	< 31.0	43.5
Harm. 4	199.44	< 16	< 16	16.5	< 32.5	< 32.5	43.5
Harm. 5	249.3	< 16	< 16	17.7	< 33.7	< 33.7	46.0
Harm. 6	299.16	< 16	< 16	20.0	< 36.0	< 36.0	46.0
Harm. 7	349.02	< 16	< 16	17.4	< 33.4	< 33.4	46.0
Harm. 8	398.88	< 16	< 16	18.3	< 34.3	< 34.3	46.0
Harm. 9	448.74	< 16	< 16	19.0	< 35.0	< 35.0	46.0
Harm. 10	498.6	< 16	< 16	19.7	< 35.7	< 35.7	46.0
Harm. 11	548.46	< 16	< 16	20.2	< 36.2	< 36.2	46.0
Harm. 12	598.32	< 16	< 16	20.9	< 36.9	< 36.9	46.0
Harm. 13	648.18	< 16	< 16	21.6	< 37.6	< 37.6	46.0
Harm. 14	698.04	< 16	< 16	22.4	< 38.4	< 38.4	46.0
Harm. 15	747.9	< 16	< 16	23.0	< 39.0	< 39.0	46.0
Harm. 16	797.76	< 16	< 16	23.7	< 39.7	< 39.7	46.0
Harm. 17	847.62	< 16	< 16	24.3	< 40.3	< 40.3	46.0
Harm. 18	897.48	< 16	< 16	25.0	< 41.0	< 41.0	46.0
Harm. 19	947.34	< 16	< 16	25.7	< 41.7	< 41.7	46.0

**Remark:** All frequencies in the required range have been scanned and only those significant and representative readings are reported above.  
All emissions not reported above are all well below the limit.

# Unintentional Radiators

Date: 2001-07-12

Page 10 of 14

Measurement of Radiated Emissions  
Acc: FCC Part 15 Subpart B

**Application no.:** 26142/1400F  
**Model:** WT9140B  
**Applicant:** LEAVES INDUSTRIES LTD  
  
**Sample no.:** 1  
**Set under test:** Walkie Talkie  
**Connected sets:** -  
**Operating mode:** Receiver - Power "On"

## Test Equipment

Receiver: ESDP Rohde & Schwarz

Antenna: - Schwarzbeck BBA 9106

- Schwarzbeck UHALP 9107

- Rohde & Schwarz HFH2-Z2

Frequency (MHz)	Horz. Reading dB(µV)	Vert. Reading dB(µV)	Antenna Factor (dB)	Horiz. Test Result dB(µV/m)	Vert. Test Result dB(µV/m)	Limit dB(µV/m)
30	< 16	< 16	18.4	< 34.4	< 34.4	40.0
51.5	< 16	20	11.2	< 27.2	31.2	40.0
52	< 16	22	11.0	< 27.0	33.0	40.0
52.5	< 16	22	10.8	< 26.8	32.8	40.0
100	< 16	< 16	10.3	< 26.3	< 26.3	43.5
300	< 16	< 16	20.0	< 36.0	< 36.0	46.0
500	< 16	< 16	19.7	< 35.7	< 35.7	46.0
700	< 16	< 16	22.4	< 38.4	< 38.4	46.0
1000	< 16	< 16	26.5	< 42.5	< 42.5	54.0

## Remark:

All frequencies in the required range have been scanned and only those significant and representative readings are reported above.  
All emissions not reported above are all well below the limit.

# FCC – Test Report


Date: 2001-07-12

No. 26142/1/400F

Page 11 of 14

## Cohere Plot at fundamental frequency

**Sample location:** Less than 0.5m from the measuring antenna  
**Applied signal:** 30dB $\mu$ V (non-modulated, 49.86 MHz)

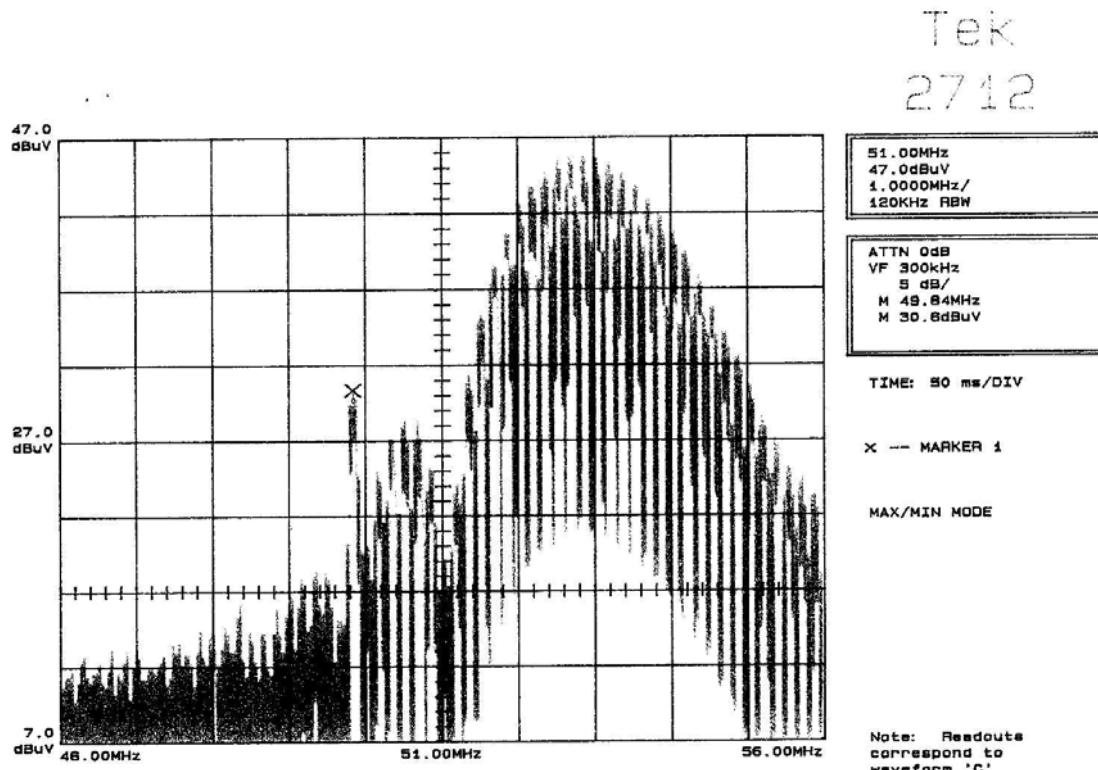

# FCC – Test Report

Date: 2001-07-12

No. 26142/1/400F

Page 12 of 14

## Notes for Radiation Measurement

### 1. Measurement facility:

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

### 2. Distance between the EUT and measuring antenna:

3 meters.

### 3. Measuring instrumentations:

Rohde & Schwarz E5032B Test Receiver ( 20 - 1300 MHz ) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

### 4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

Loop antenna for the frequency range 9KHz – 30MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the measurement data. The center of the loop 1 m above the ground plane, positioned with its plane vertical at the specified distance and rotated about its vertical axis and placed horizontal for maximum response at each azimuth about the EUT.

In the frequency range above 1 GHz, horn-antenna RGA 50/60 is used.

### 5. Frequency range scanned:

The frequency range 30 - 1000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

### 6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions. To find the maximum emission, the antenna was raised from 1 to 4 meters and was stopped at the maximum emission point.

### 7. Measuring Procedure:

In accordance with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.


# FCC – Test Report

Date: 2001-07-12

No. 26142/1/400F

Page 13 of 14

## Measurement Data of Emissions within Band Edges

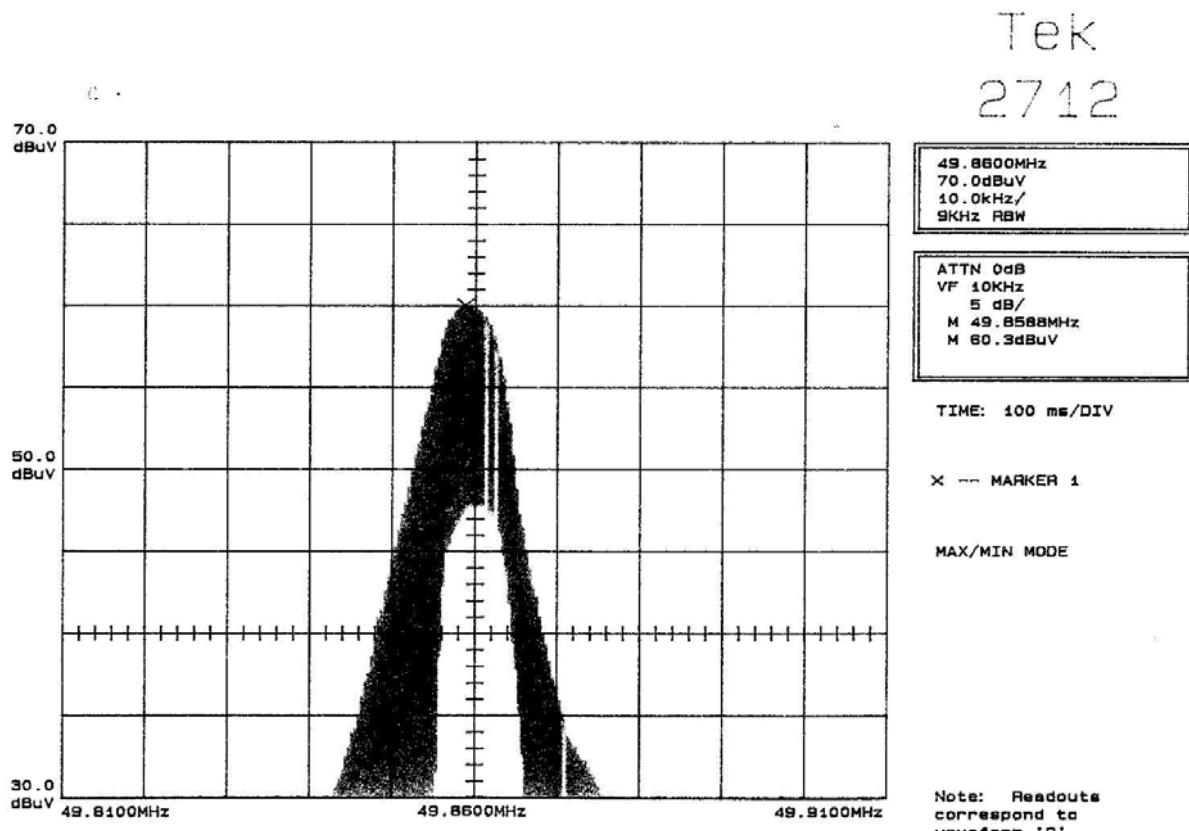

# FCC – Test Report

Date: 2001-07-12

No. 26142/1/400F

Page 14 of 14

## Notes for Measurement of Emissions within Band Edges

### 1. Measurement facility:

Measurement facility located at Fanling (Hong Kong) placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

### 2. Measuring instruments:

Spectrum Analyzer: Tektronix 2712

### 3. Frequency range scanned:

The frequency range acc. to FCC rules and regulations part 15 subpart C - Intentional Radiators.

### 4. Arrangement of EUT:

During the test, the sample was operated.

### 5. Measuring Procedure:

In accordance with the relevant sections of American National Standards Institute (ANSI) C63.4 - 1992 'Methods of Measurement od Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz'.